


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00001.EMI

Date: 2022-06-02

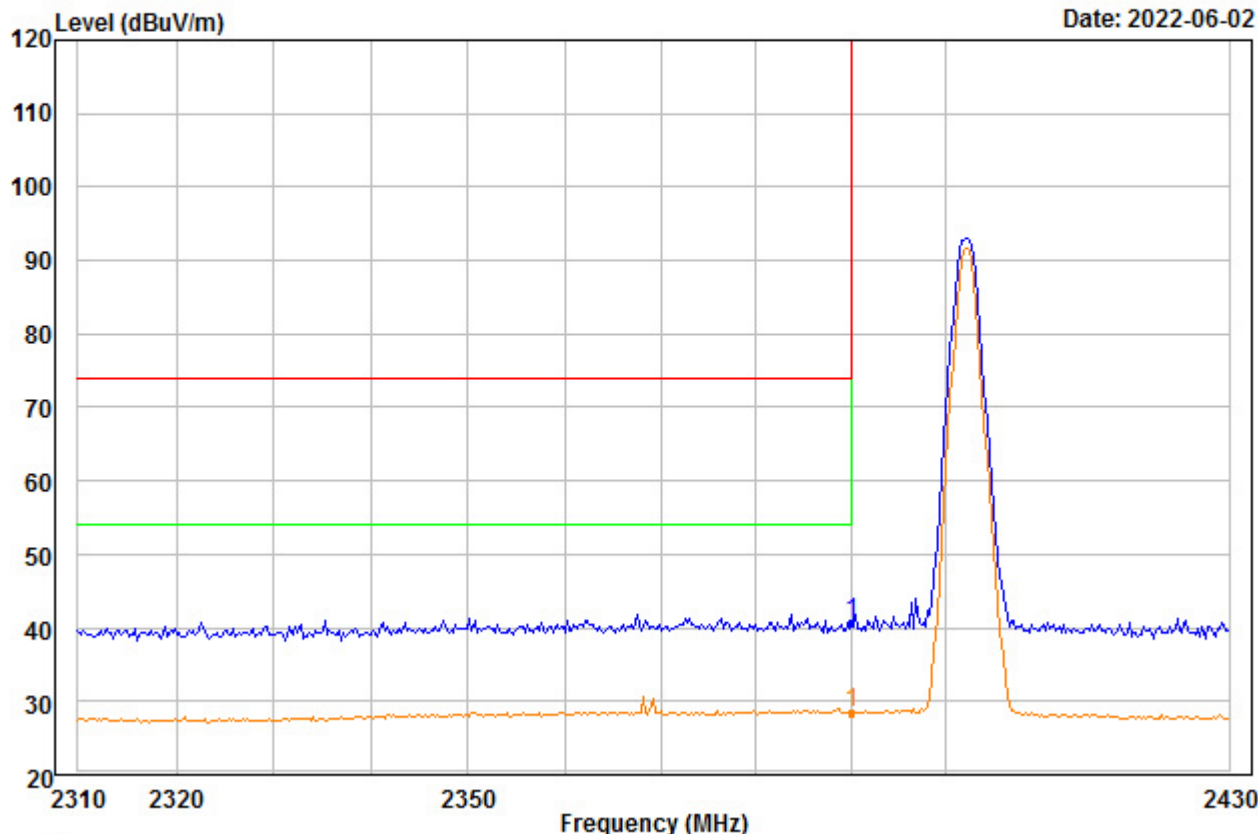

Trace: 1


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	49.02	32.69	48.03	0.00	6.90	40.58	74.00	-33.42	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00002.EMI

Date: 2022-06-02

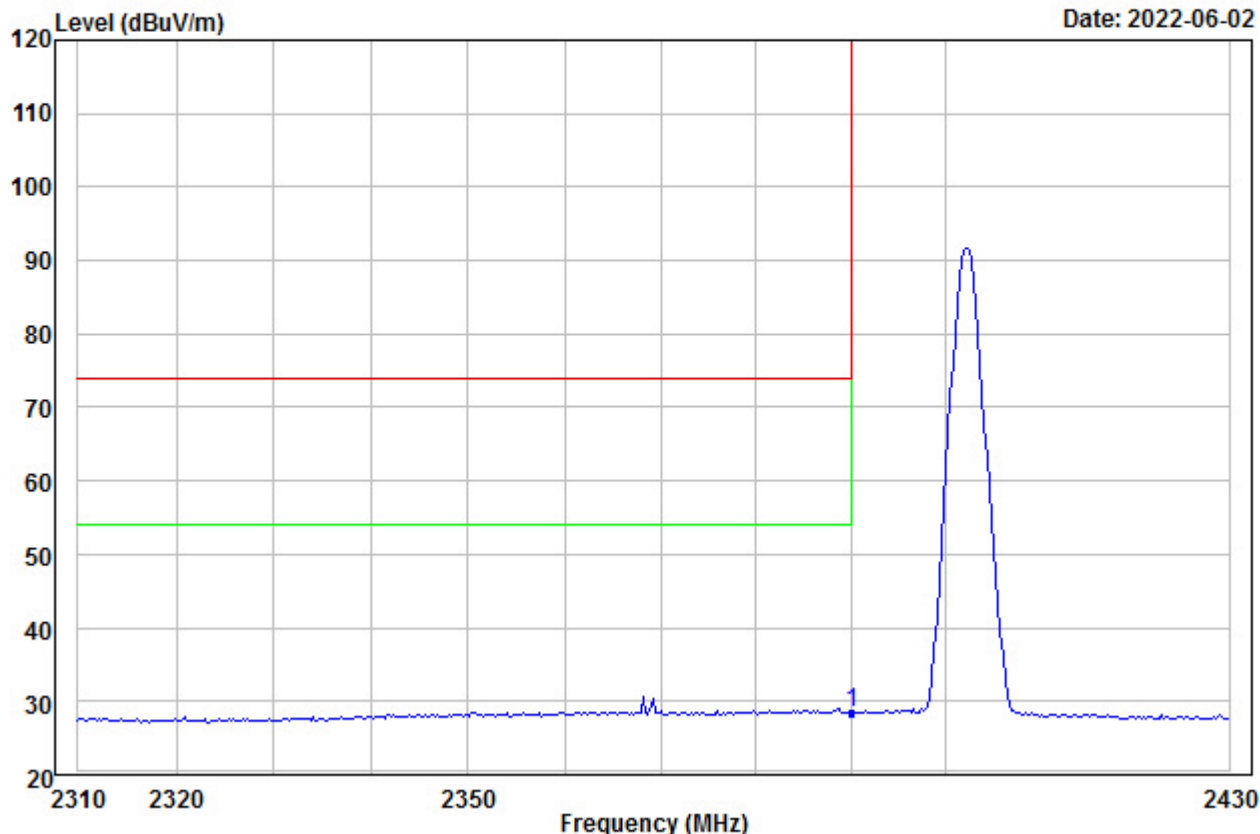


Condition : Horizontal
 Temp.(C)/Hum.(%) : 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	2390.000	36.86	32.69	48.03	0.00	6.90	28.42	54.00	-25.58	---	---	Average

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00003.EMI

Date: 2022-06-02

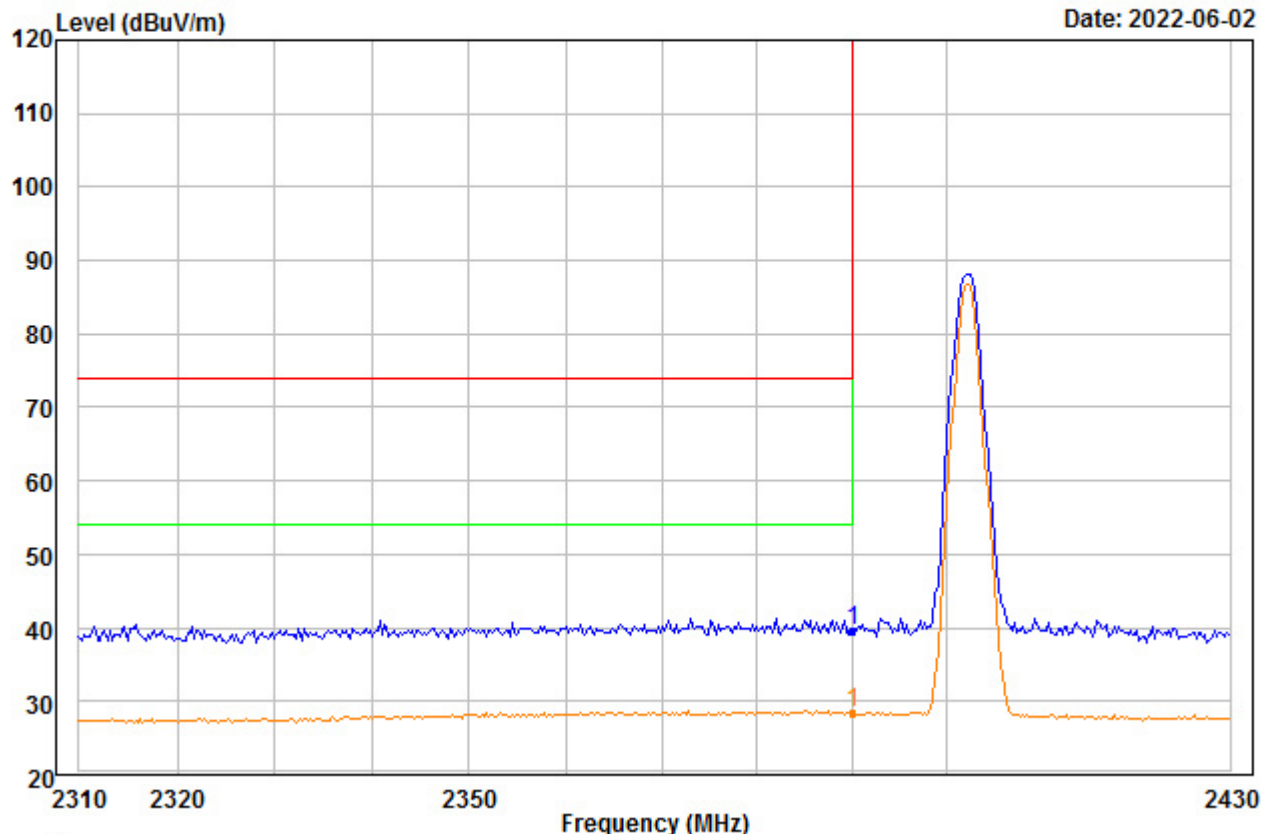

Trace: 1


Condition : Vertical
Temp.(C)/Hum.(%) : 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2402
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	47.94	32.69	48.03	0.00	6.90	39.50	74.00	-34.50	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00004.EMI

Date: 2022-06-02

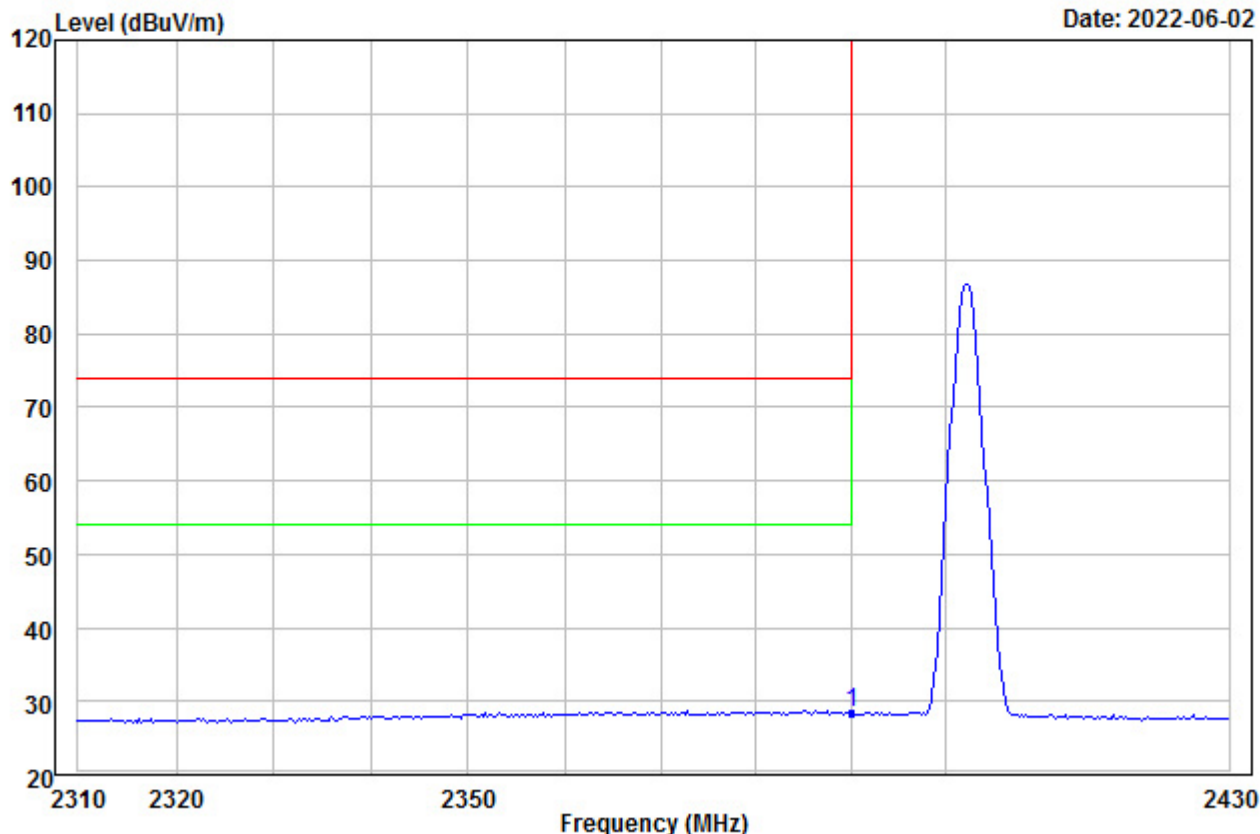


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	2390.000	36.80	32.69	48.03	0.00	6.90	28.36	54.00	-25.64	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00005.EMI

Date: 2022-06-02

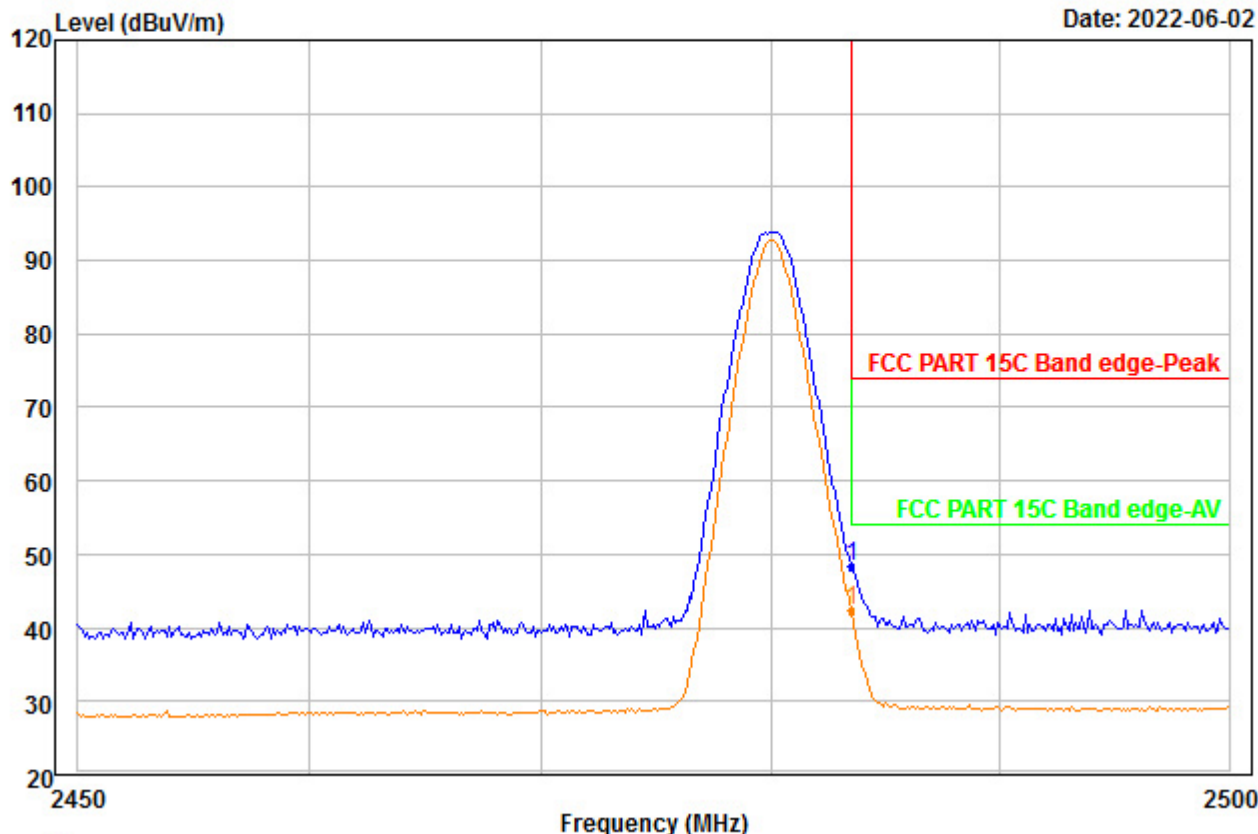

Trace: 1


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2483.500	56.55	32.95	48.09	0.00	7.03	48.44	74.00	-25.56	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00006.EMI

Date: 2022-06-02

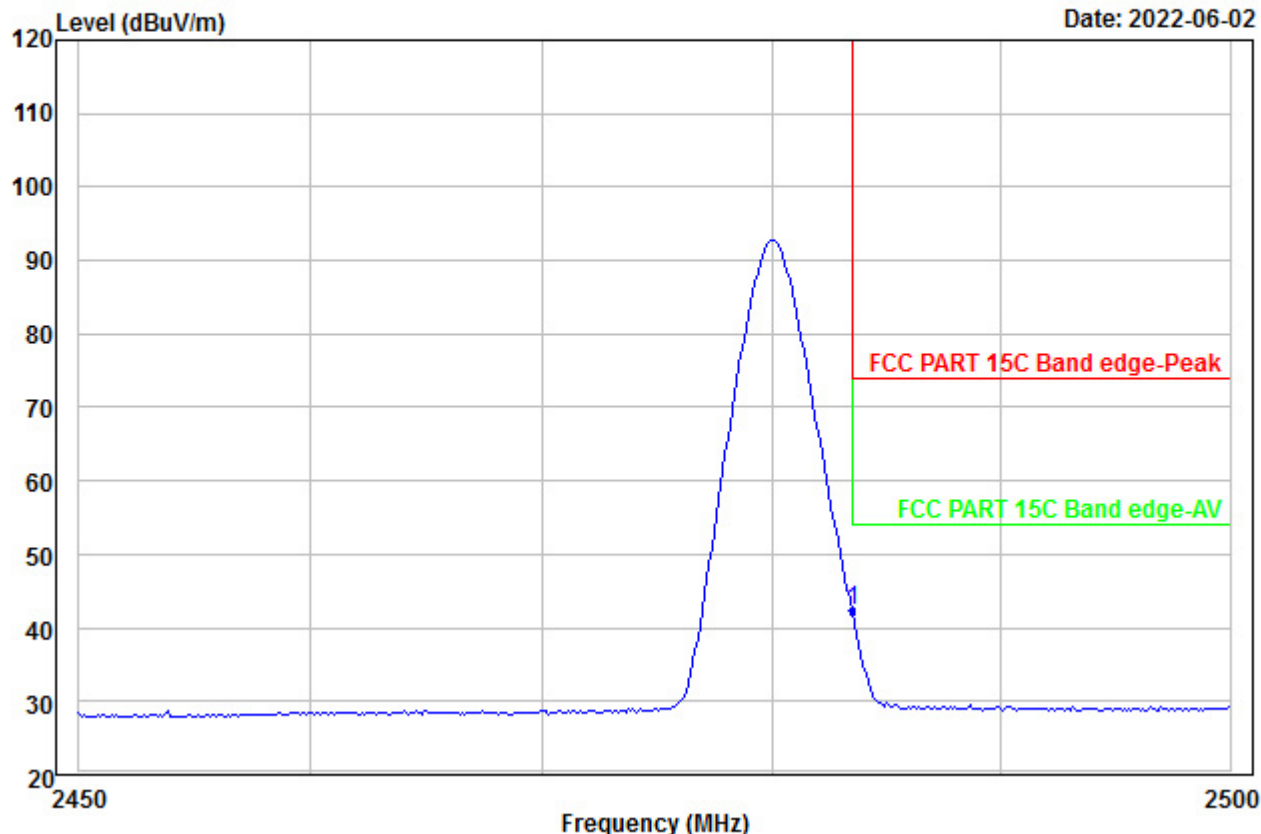


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2483.500	50.42	32.95	48.09	0.00	7.03	42.31	54.00	-11.69	---	---

Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00007.EMI

Date: 2022-06-02

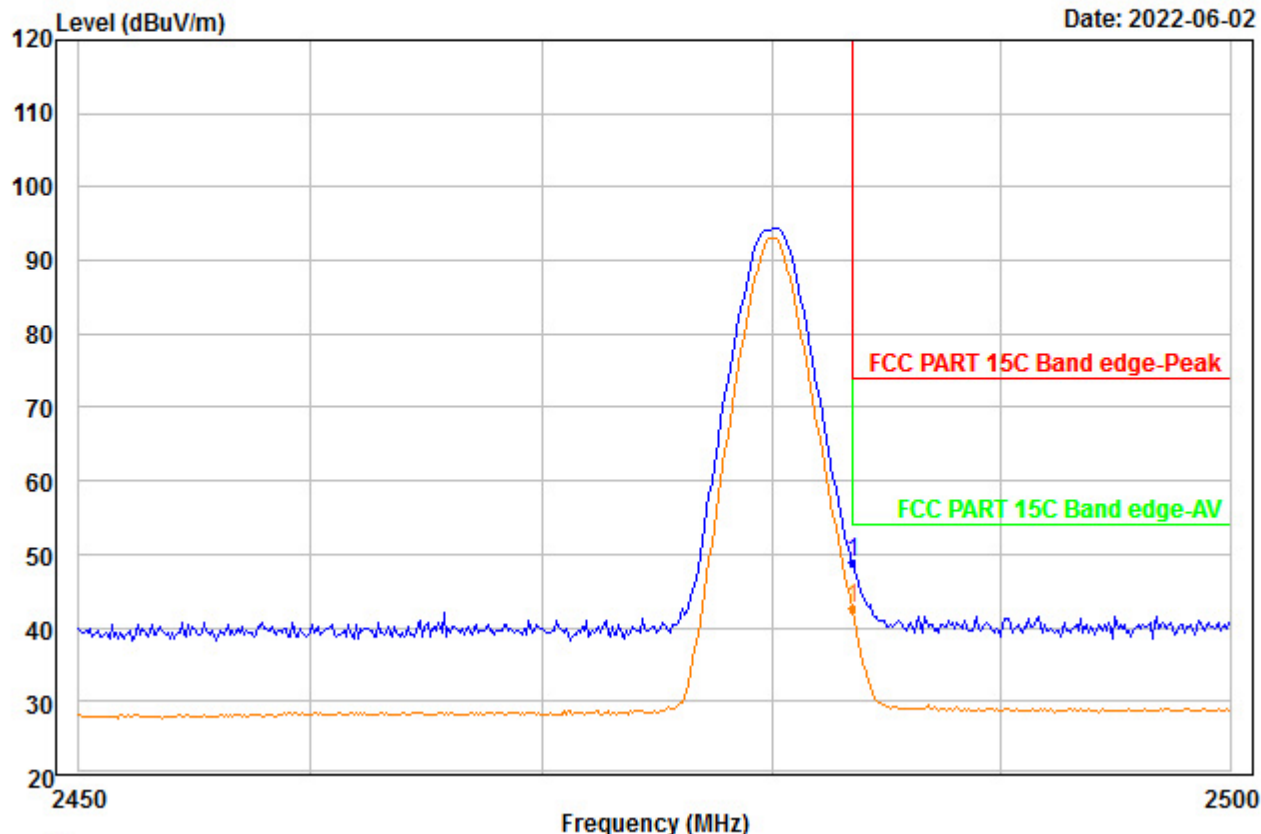

Trace: 1


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : BLE_2480
Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			Rem:
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2483.500	56.87	32.95	48.09	0.00	7.03	48.76	74.00	-25.24	---	---

Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BT\BE\4_00008.EMI

Date: 2022-06-02

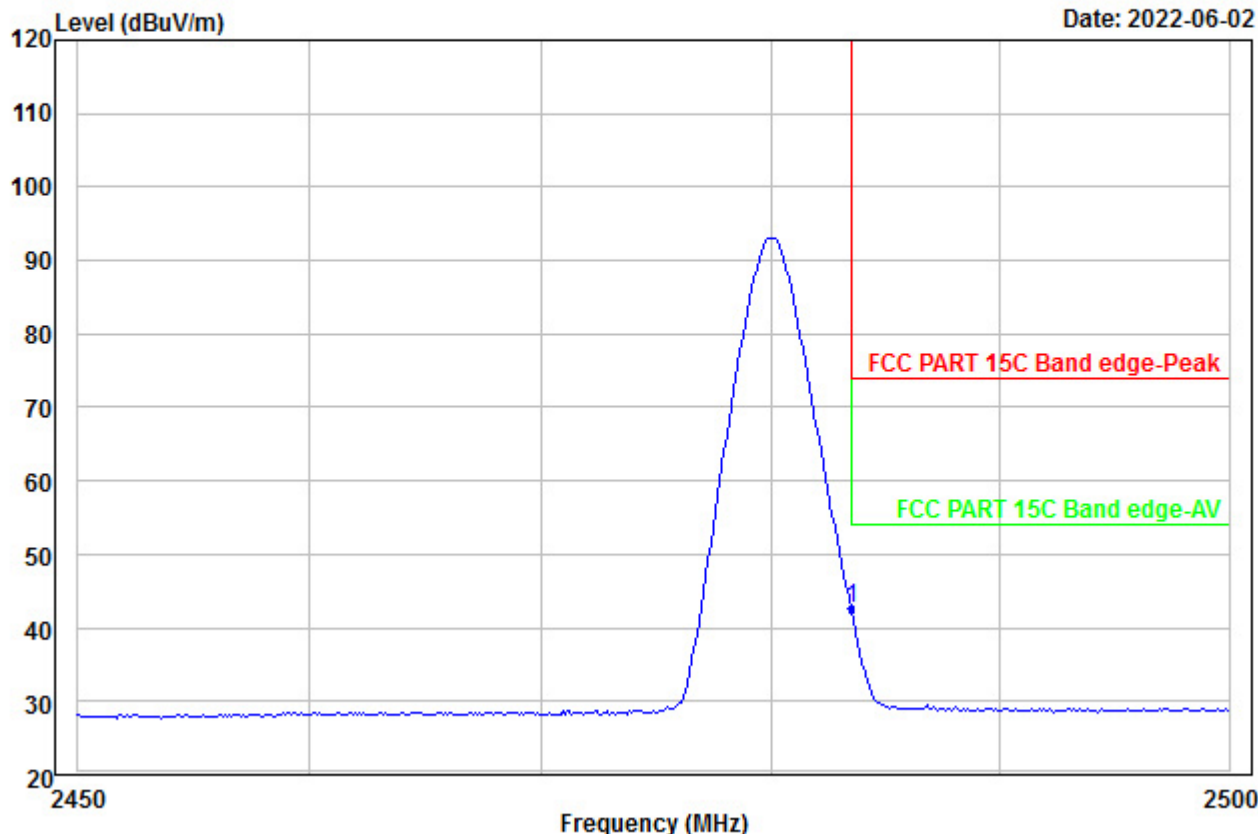

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2483.500	50.72	32.95	48.09	0.00	7.03	42.61	54.00	-11.39	---	---
										Aver