




Test Mode : 2TX 11ac40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

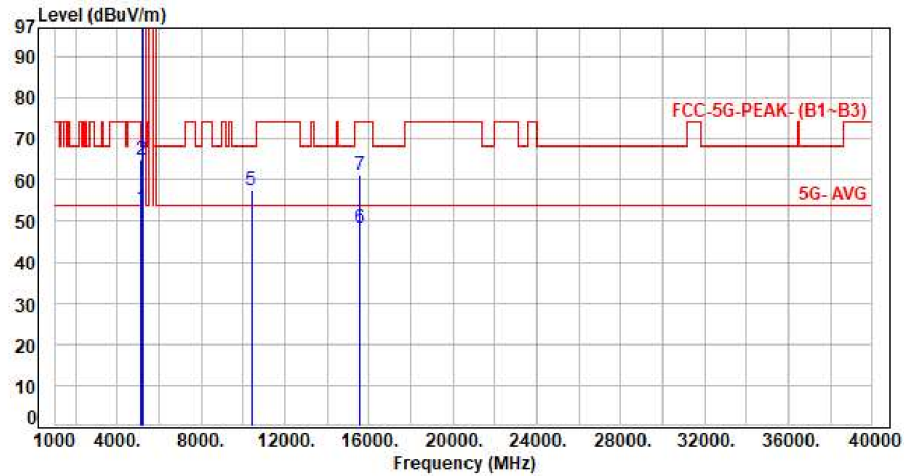


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	46.25	52.95	54.00	-1.05	Average	116	132	P
2	5150.00	6.70	58.12	64.82	74.00	-9.18	Peak	116	132	P
3	5190.00	6.90	94.65	101.55	200.00	-98.45	Average	116	132	P
4	5190.00	6.90	104.99	111.89	200.00	-88.11	Peak	116	132	P
5	10380.00	14.66	42.92	57.58	68.20	-10.62	Peak	100	188	P
6	15570.00	18.33	30.06	48.39	54.00	-5.61	Average	100	114	P
7	15570.00	18.33	42.91	61.24	74.00	-12.76	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

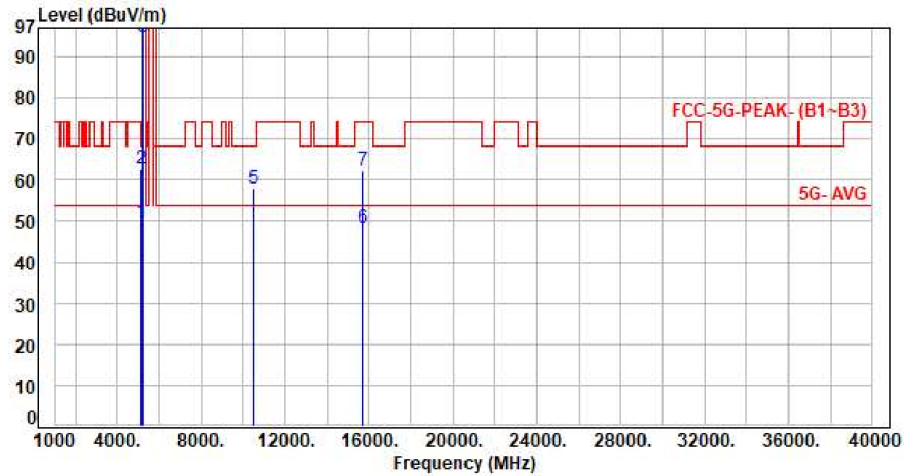


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	42.97	49.67	54.00	-4.33	Average	100	126	P
2	5150.00	6.70	56.09	62.79	74.00	-11.21	Peak	100	126	P
3	5230.00	6.99	87.82	94.81	200.00	-105.19	Average	100	126	P
4	5230.00	6.99	97.59	104.58	200.00	-95.42	Peak	100	126	P
5	10460.00	14.63	43.35	57.98	68.20	-10.22	Peak	100	154	P
6	15690.00	18.12	30.22	48.34	54.00	-5.66	Average	100	119	P
7	15690.00	18.12	44.04	62.16	74.00	-11.84	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

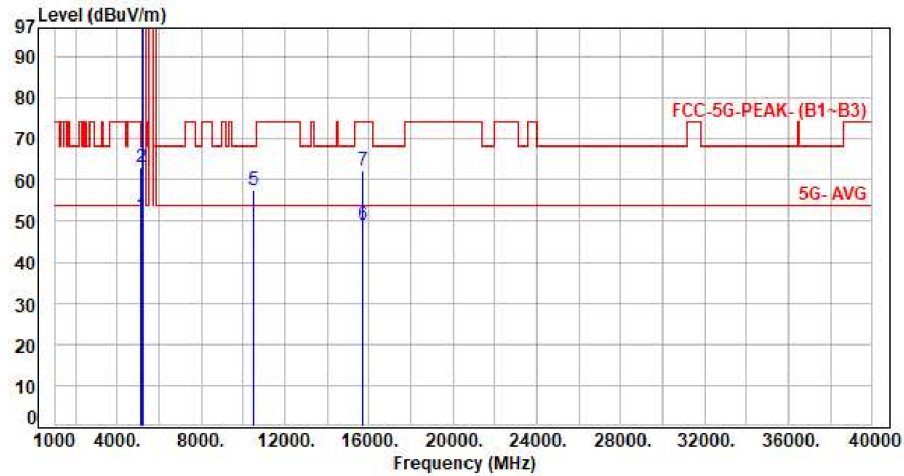


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	44.66	51.36	54.00	-2.64	Average	115	133	P
2	5150.00	6.70	56.25	62.95	74.00	-11.05	Peak	115	133	P
3	5230.00	6.99	94.83	101.82	200.00	-98.18	Average	115	133	P
4	5230.00	6.99	104.75	111.74	200.00	-88.26	Peak	115	133	P
5	10460.00	14.63	43.07	57.70	68.20	-10.50	Peak	100	149	P
6	15690.00	18.12	30.92	49.04	54.00	-4.96	Average	100	115	P
7	15690.00	18.12	44.09	62.21	74.00	-11.79	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

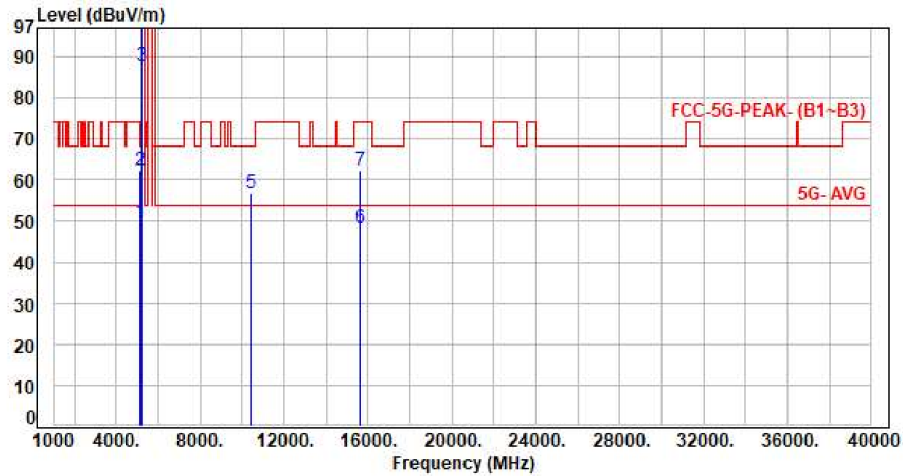


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	43.09	49.79	54.00	-4.21	Average	100	323	P
2	5150.00	6.70	55.74	62.44	74.00	-11.56	Peak	100	323	P
3	5210.00	6.97	80.91	87.88	200.00	-112.12	Average	100	323	P
4	5210.00	6.97	90.25	97.22	200.00	-102.78	Peak	100	323	P
5	10420.00	14.60	42.30	56.90	68.20	-11.30	Peak	100	152	P
6	15630.00	18.25	29.99	48.24	54.00	-5.76	Average	100	166	P
7	15630.00	18.25	44.11	62.36	74.00	-11.64	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

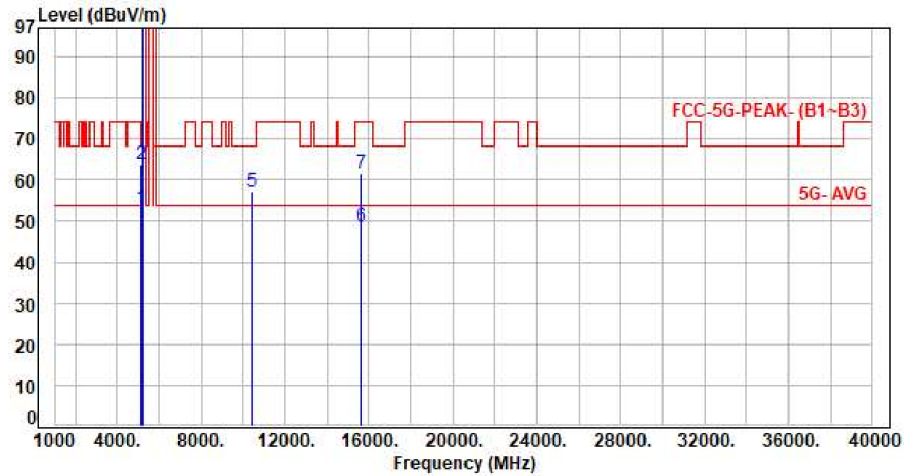


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	46.28	52.98	54.00	-1.02	Average	112	132	P
2	5150.00	6.70	57.22	63.92	74.00	-10.08	Peak	112	132	P
3	5210.00	6.97	88.44	95.41	200.00	-104.59	Average	112	132	P
4	5210.00	6.97	99.75	106.72	200.00	-93.28	Peak	112	132	P
5	10420.00	14.60	42.72	57.32	68.20	-10.88	Peak	100	159	P
6	15630.00	18.25	30.53	48.78	54.00	-5.22	Average	100	119	P
7	15630.00	18.25	43.40	61.65	74.00	-12.35	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

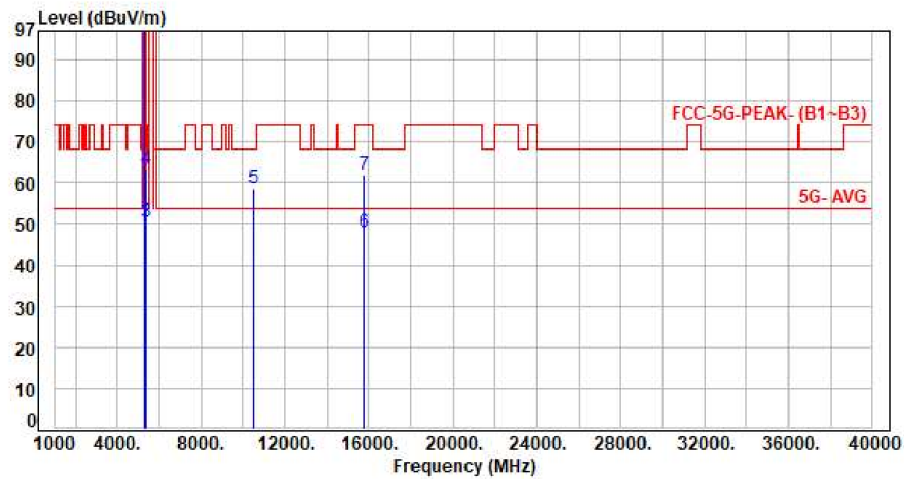


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.04	92.31	99.35	200.00	-100.65	Average	100	130	P
2	5260.00	7.04	102.38	109.42	200.00	-90.58	Peak	100	130	P
3	5350.00	7.22	43.15	50.37	54.00	-3.63	Average	100	130	P
4	5350.00	7.22	56.37	63.59	74.00	-10.41	Peak	100	130	P
5	10520.00	14.87	43.81	58.68	68.20	-9.52	Peak	100	156	P
6	15780.00	17.48	30.64	48.12	54.00	-5.88	Average	100	175	P
7	15780.00	17.48	44.63	62.11	74.00	-11.89	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

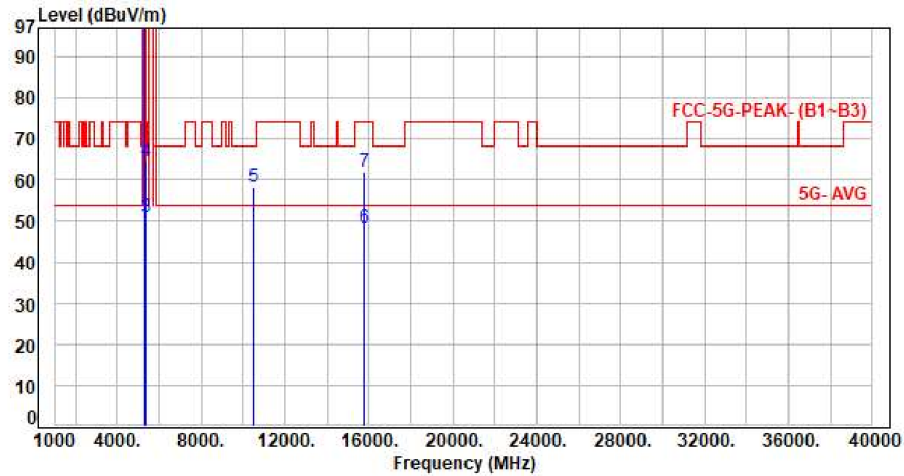


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.04	98.45	105.49	200.00	-94.51	Average	108	134	P
2	5260.00	7.04	108.52	115.56	200.00	-84.44	Peak	108	134	P
3	5350.00	7.22	43.66	50.88	54.00	-3.12	Average	108	134	P
4	5350.00	7.22	57.19	64.41	74.00	-9.59	Peak	108	134	P
5	10520.00	14.87	43.26	58.13	68.20	-10.07	Peak	100	176	P
6	15780.00	17.48	30.96	48.44	54.00	-5.56	Average	100	156	P
7	15780.00	17.48	44.56	62.04	74.00	-11.96	Peak	100	156	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

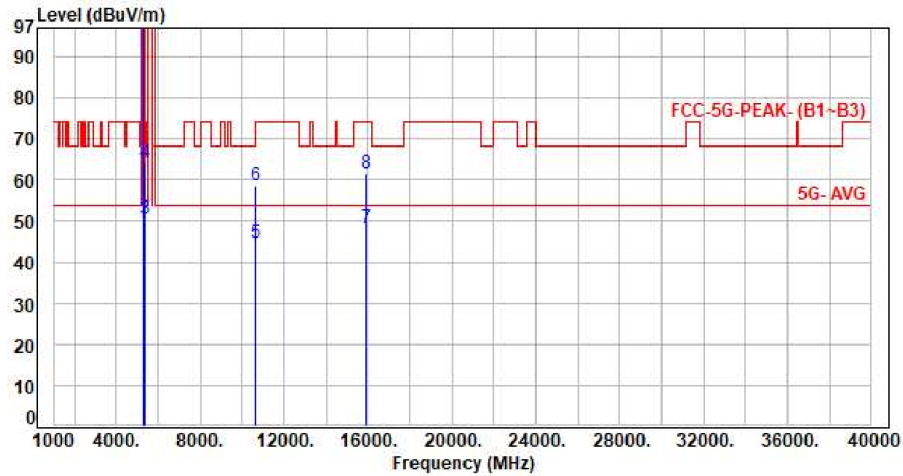

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.17	92.67	99.84	200.00	-100.16	Average	103	144	P
2	5300.00	7.17	102.87	110.04	200.00	-89.96	Peak	103	144	P
3	5350.00	7.22	43.34	50.56	54.00	-3.44	Average	103	144	P
4	5350.00	7.22	56.82	64.04	74.00	-9.96	Peak	103	144	P
5	10600.00	14.98	29.66	44.64	54.00	-9.36	Average	100	187	P
6	10600.00	14.98	43.57	58.55	74.00	-15.45	Peak	100	187	P
7	15900.00	17.53	30.73	48.26	54.00	-5.74	Average	100	165	P
8	15900.00	17.53	43.98	61.51	74.00	-12.49	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

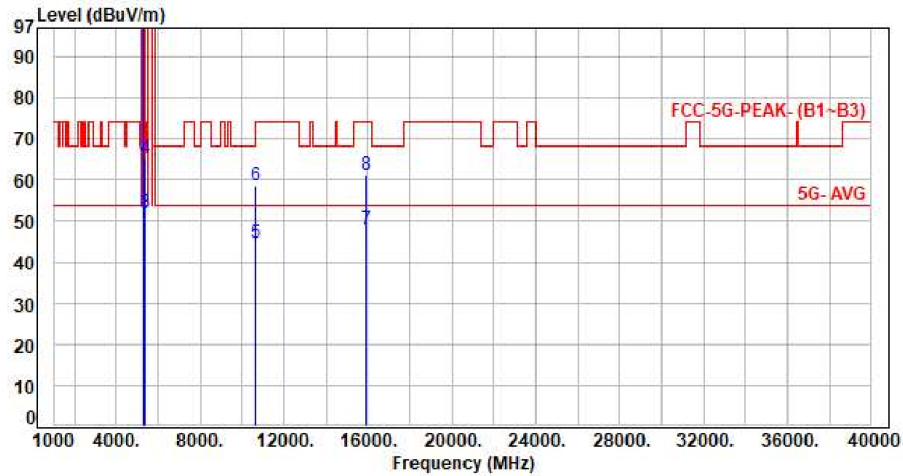

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.17	98.81	105.98	200.00	-94.02	Average	112	134	P
2	5300.00	7.17	108.74	115.91	200.00	-84.09	Peak	112	134	P
3	5350.00	7.22	44.75	51.97	54.00	-2.03	Average	112	134	P
4	5350.00	7.22	57.91	65.13	74.00	-8.87	Peak	112	134	P
5	10600.00	14.98	29.61	44.59	54.00	-9.41	Average	100	241	P
6	10600.00	14.98	43.56	58.54	74.00	-15.46	Peak	100	241	P
7	15900.00	17.53	30.53	48.06	54.00	-5.94	Average	100	241	P
8	15900.00	17.53	43.63	61.16	74.00	-12.84	Peak	100	241	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

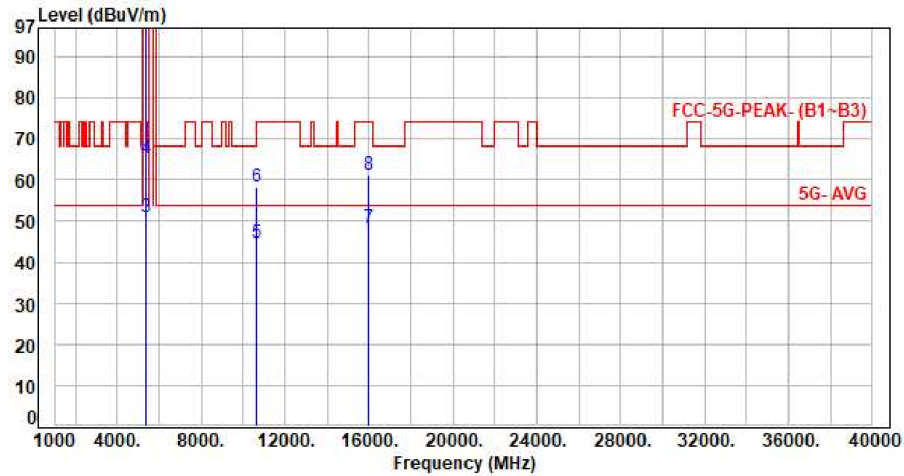

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.19	93.09	100.28	200.00	-99.72	Average	100	126	P
2	5320.00	7.19	102.57	109.76	200.00	-90.24	Peak	100	126	P
3	5350.00	7.22	43.67	50.89	54.00	-3.11	Average	100	126	P
4	5350.00	7.22	58.13	65.35	74.00	-8.65	Peak	100	126	P
5	10640.00	15.10	29.56	44.66	54.00	-9.34	Average	100	169	P
6	10640.00	15.10	43.15	58.25	74.00	-15.75	Peak	100	169	P
7	15960.00	17.56	30.85	48.41	54.00	-5.59	Average	100	185	P
8	15960.00	17.56	43.62	61.18	74.00	-12.82	Peak	100	185	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

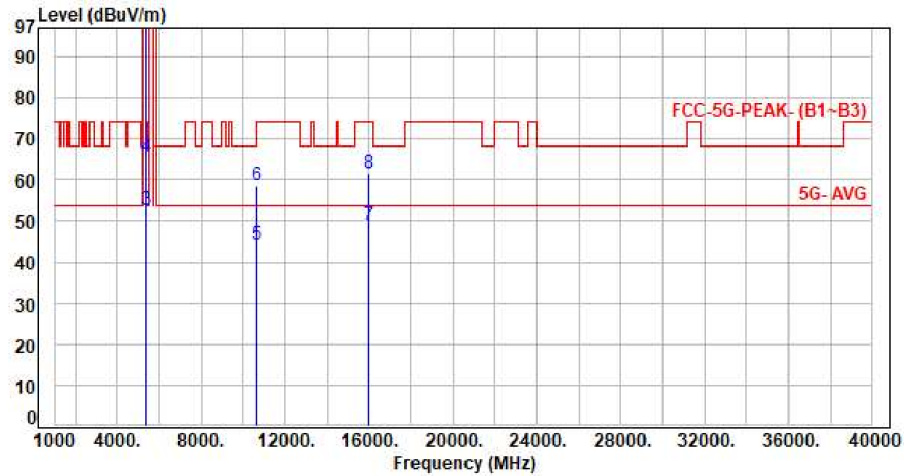

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.19	98.64	105.83	200.00	-94.17	Average	100	133	P
2	5320.00	7.19	108.86	116.05	200.00	-83.95	Peak	100	133	P
3	5350.00	7.22	45.36	52.58	54.00	-1.42	Average	100	133	P
4	5350.00	7.22	58.41	65.63	74.00	-8.37	Peak	100	133	P
5	10640.00	15.10	29.19	44.29	54.00	-9.71	Average	100	189	P
6	10640.00	15.10	43.45	58.55	74.00	-15.45	Peak	100	189	P
7	15960.00	17.56	31.51	49.07	54.00	-4.93	Average	100	116	P
8	15960.00	17.56	44.15	61.71	74.00	-12.29	Peak	100	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

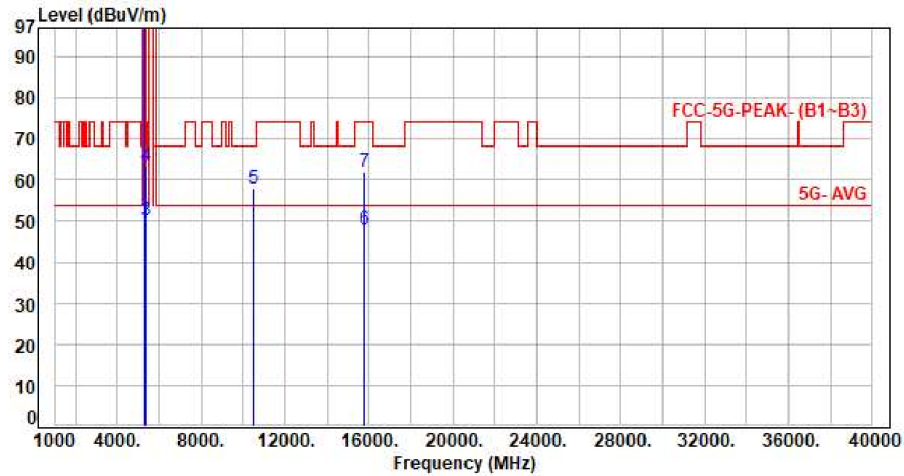


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.04	91.26	98.30	200.00	-101.70	Average	100	130	P
2	5260.00	7.04	100.98	108.02	200.00	-91.98	Peak	100	130	P
3	5350.00	7.22	43.10	50.32	54.00	-3.68	Average	100	130	P
4	5350.00	7.22	56.31	63.53	74.00	-10.47	Peak	100	130	P
5	10520.00	14.87	42.86	57.73	68.20	-10.47	Peak	100	115	P
6	15780.00	17.48	30.65	48.13	54.00	-5.87	Average	100	183	P
7	15780.00	17.48	44.43	61.91	74.00	-12.09	Peak	100	183	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

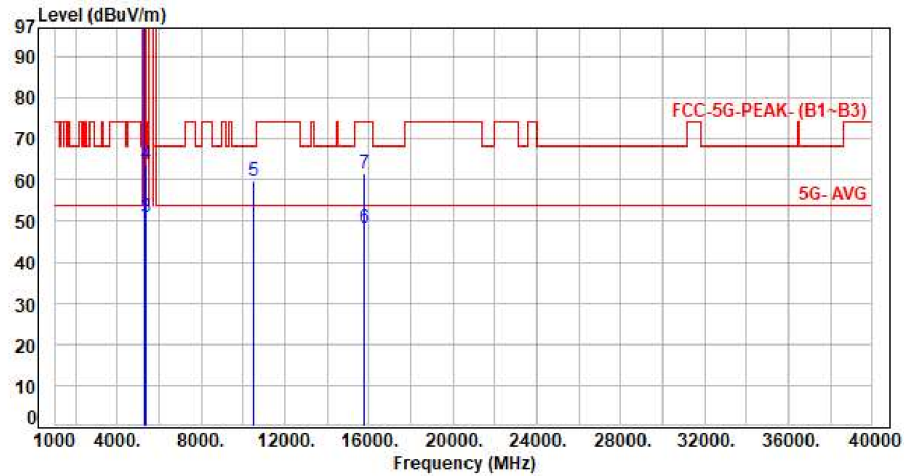


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.04	97.26	104.30	200.00	-95.70	Average	112	131	P
2	5260.00	7.04	107.08	114.12	200.00	-85.88	Peak	112	131	P
3	5350.00	7.22	43.70	50.92	54.00	-3.08	Average	112	131	P
4	5350.00	7.22	56.58	63.80	74.00	-10.20	Peak	112	131	P
5	10520.00	14.87	44.73	59.60	68.20	-8.60	Peak	100	114	P
6	15780.00	17.48	30.76	48.24	54.00	-5.76	Average	100	162	P
7	15780.00	17.48	44.17	61.65	74.00	-12.35	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

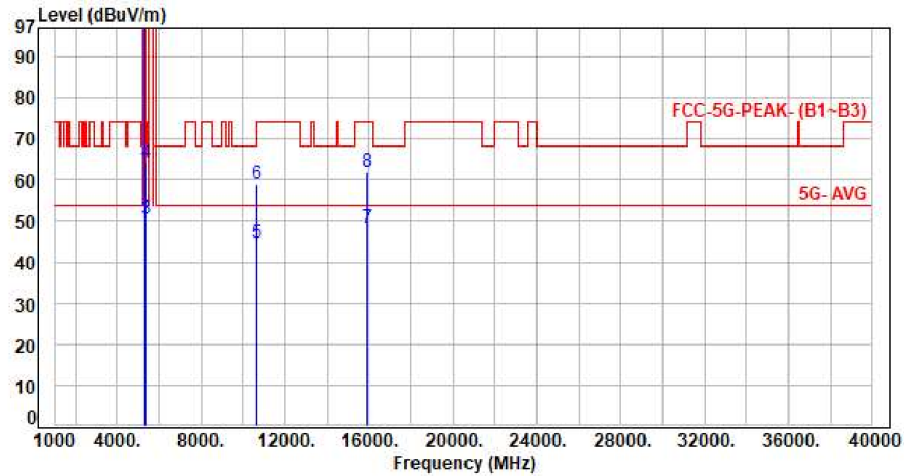

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.17	91.48	98.65	200.00	-101.35	Average	100	293	P
2	5300.00	7.17	101.97	109.14	200.00	-90.86	Peak	100	293	P
3	5350.00	7.22	43.47	50.69	54.00	-3.31	Average	100	293	P
4	5350.00	7.22	56.96	64.18	74.00	-9.82	Peak	100	293	P
5	10600.00	14.98	29.61	44.59	54.00	-9.41	Average	100	182	P
6	10600.00	14.98	44.06	59.04	74.00	-14.96	Peak	100	182	P
7	15900.00	17.53	30.81	48.34	54.00	-5.66	Average	100	331	P
8	15900.00	17.53	44.27	61.80	74.00	-12.20	Peak	100	331	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

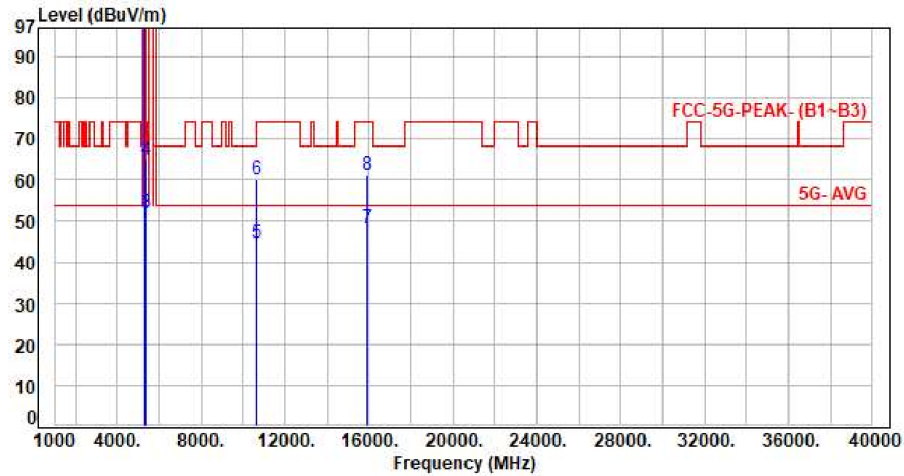

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.17	97.69	104.86	200.00	-95.14	Average	113	133	P
2	5300.00	7.17	107.96	115.13	200.00	-84.87	Peak	113	133	P
3	5350.00	7.22	44.81	52.03	54.00	-1.97	Average	113	133	P
4	5350.00	7.22	57.51	64.73	74.00	-9.27	Peak	113	133	P
5	10600.00	14.98	29.52	44.50	54.00	-9.50	Average	100	196	P
6	10600.00	14.98	45.32	60.30	74.00	-13.70	Peak	100	196	P
7	15900.00	17.53	30.69	48.22	54.00	-5.78	Average	100	215	P
8	15900.00	17.53	43.78	61.31	74.00	-12.69	Peak	100	215	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

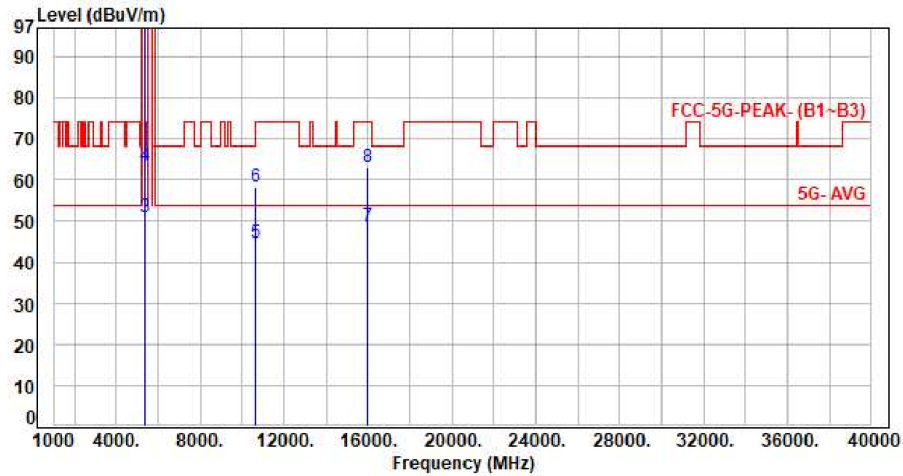

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.19	92.18	99.37	200.00	-100.63	Average	100	127	P
2	5320.00	7.19	101.96	109.15	200.00	-90.85	Peak	100	127	P
3	5350.00	7.22	43.57	50.79	54.00	-3.21	Average	100	127	P
4	5350.00	7.22	56.13	63.35	74.00	-10.65	Peak	100	127	P
5	10640.00	15.10	29.55	44.65	54.00	-9.35	Average	100	204	P
6	10640.00	15.10	43.30	58.40	74.00	-15.60	Peak	100	204	P
7	15960.00	17.56	31.01	48.57	54.00	-5.43	Average	100	115	P
8	15960.00	17.56	45.35	62.91	74.00	-11.09	Peak	100	115	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor