

RF EXPOSURE Test Report

Product: Power bank

Trade Mark: INIU

Model Number: P76-P1

FCC ID: 2A2ND-P76

Prepared for

Shenzhen Topstar Industry Co., Ltd.
Jiaxiye Plaza 931, 328 Minzhi Avenue, Longhua District, Shenzhen City,
Guangdong Province, China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 DESCRIPTION OF EUT 5

1.2 TEST MODE..... 5

1.3 TEST SETUP 6

1.4 ANCILLARY EQUIPMENT 6

2 TEST FACILITIES AND ACCREDITATIONS 7

2.1 TEST LABORATORY 7

2.2 ENVIRONMENTAL CONDITIONS 7

2.3 MEASUREMENT UNCERTAINTY 7

2.4 TEST SOFTWARE 7

3 LIST OF TEST EQUIPMENT 8

4 RF EXPOSURE..... 9

4.1 MAXIMUM PERMISSIBLE EXPOSURE 9

4.1.1. *Limit* 9

4.1.2. *Test Procedures* 9

4.1.3. *Test Setup*..... 9

4.1.4. *Test Result* 10

5 PHOTOGRAPHS OF THE TEST SETUP..... 12

TEST RESULT CERTIFICATION

Applicant's Name : Shenzhen Topstar Industry Co., Ltd.
Address : Jiaxiye Plaza 931, 328 Minzhi Avenue, Longhua District,
Shenzhen City, Guangdong Province, China
Manufacturer's Name : Shenzhen Topstar Industry Co., Ltd.
Address : Jiaxiye Plaza 931, 328 Minzhi Avenue, Longhua District,
Shenzhen City, Guangdong Province, China

Product description

Product name : Power bank
Model Number : P76-P1

Standards : FCC CFR 47 PART 1 , 1.1310

Test procedure : KDB 680106 D01 Wireless Power Transfer v04

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test :


Date (s) of performance of tests : Dec. 25, 2024~ Jan. 10, 2025

Test Result : **Pass**


Testing Engineer :


(Z o e S u)

Technical Manager :


(M i n g L i u)

Authorized Signatory :


(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Power bank
Model name:	P76-P1
Series Model:	P73
Different of series model:	Except for differences in appearance color, model, and individual components in the battery display area, all models have the same RF circuits and modules.
Operation frequency:	115kHz-205kHz, 360kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Antenna gain:	0dBi
Battery:	10000mAh/3.87V/38.7Wh
Power supply:	IN(C1): DC 5V/3A, DC 9V/3A, DC 12V/2.25A IN(C2): DC 5V/3A, DC 9V/3A, DC 12V/2.25A OUT(C1): DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/3A OUT(C2): DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/3A Battery Capacity: 10000mAh/3.87V/38.7Wh Output Capacity: 7000mAh/5V/35Wh Wireless output: 5W, 7.5W, 10W, 15W
Adapter information:	N/A

Note: The individual components in the power display area of the model P73 listed in the report are different from those of the model P76-P1, but the RF circuit and electronic structure have not changed. In response to this, we conducted a difference test on the model P73, and the final report only reflects the difference test data under the worst case.

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	AC/DC Adapter + Wireless Output: 3W
2	Wireless Output: 5W
3	Wireless Output: 7.5W
4	Wireless Output: 15W

Note: This EUT can only support 3W wireless power transmission when charging with an AC/DC adapter.

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer	Maximum charging power	Software version
Phone	iPhone 12 pro Max	FF2LDX4T60D5H	Apple Inc	15W	17.6.1
Phone	iPhone 12pro	DNPF9UL20D9L	Apple Inc.	7.5W	16.6.1
Phone	LE2120	860284056441073	Shenzhen Oneplus Technology Co., Ltd	30W	LE2120_14.0.0.211(C N01)
Adapter	CD289	35810	Ugreen Group Limited	140W	/

2 Test Facilities and Accreditations

2.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

2.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
E-field	± 2.5 dB	
H-field	± 4.2 dB	
Temperature	± 1 degree	
Humidity	± 5 %	

2.4 Test Software

Software name	Manufacturer	Model	Version
MAGPy V2.6	Schmid & Partner Engineering AG	MAGPy V2.6	V2.6

3 List of Test Equipment

Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E077	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy -8H3D+E3D	3107	2024-03-15	2025-03-14
2	HB-E078	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy-DAS	3097	2024-03-15	2025-03-14

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4 RF Exposure

4.1 Maximum Permissible Exposure

4.1.1. Limit


Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm ²)	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0 6	6
300-1500	/	/	f/300	6
1500-100000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100000	/	/	1	30

f = frequency in MHz * = Plane-wave equivalent power density

4.1.2. Test Procedures

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of TCB Workshop "41-Part-18-&-Wireless-Power-Transfer - April 27, 2022"

4.1.3. Test Setup

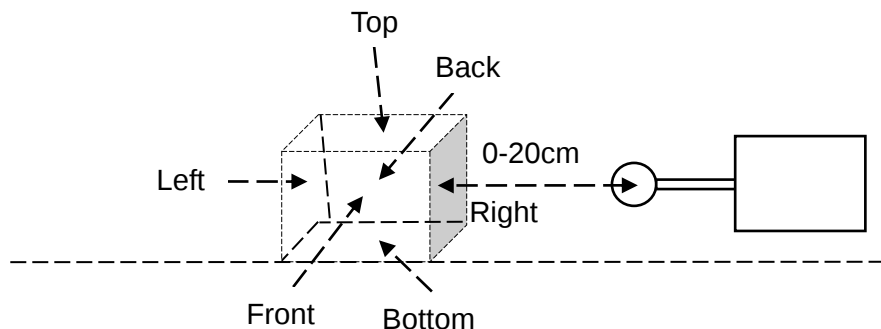

4.1.4. Test Result

For portable exposure condition:

Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions. The report reflects data for the worst 0 cm test distance mode only.

Model: P76-P1

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device).
Measurement results directly tested using MAGPy.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	13.7	0.09
<1%	Left	0	2.23	0.27
<1%	Right	0	7.08	0.26
<1%	Front	0	10.5	0.22
<1%	Back	0	4.19	0.05
<1%	Bottom	0	22.8	0.07
Limit			614	1.63
Margin Limit (%)			3.71%	16.56%

When setting MAGPy to select compliance location as probe tip, the measured value is extrapolated to 0mm as the result.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	16	0.21
<1%	Left	0	2.39	1.12
<1%	Right	0	7.45	1.11
<1%	Front	0	12.7	1.03
<1%	Back	0	5.34	0.14
<1%	Bottom	0	25.7	0.14
Limit			614	1.63
Margin Limit (%)			4.19%	68.71%

Model: P73

Test condition 1: Mode 5 operating mode with client device (1 % battery status of client device).

Measurement results directly tested using MAGPy.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<1%	Top	0	44.5	0.08
<1%	Left	0	10.5	0.15
<1%	Right	0	12.9	0.49
<1%	Front	0	16.5	0.25
<1%	Back	0	4.2	0.04
<1%	Bottom	0	16.9	0.08
Limit			614	1.63
Margin Limit (%)			7.25%	30.06%

When setting MAGPy to select compliance location as probe tip, the measured value is extrapolated to 0mm as the result.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<1%	Top	0	48.6	0.15
<1%	Left	0	11.4	0.41
<1%	Right	0	14.3	1.02
<1%	Front	0	19.5	0.66
<1%	Back	0	5.05	0.1
<1%	Bottom	0	22.8	0.13
Limit			614	1.63
Margin Limit (%)			7.92%	62.58%

5 Photographs of the Test Setup

Model: P76-P1

Photo 1



Photo 2

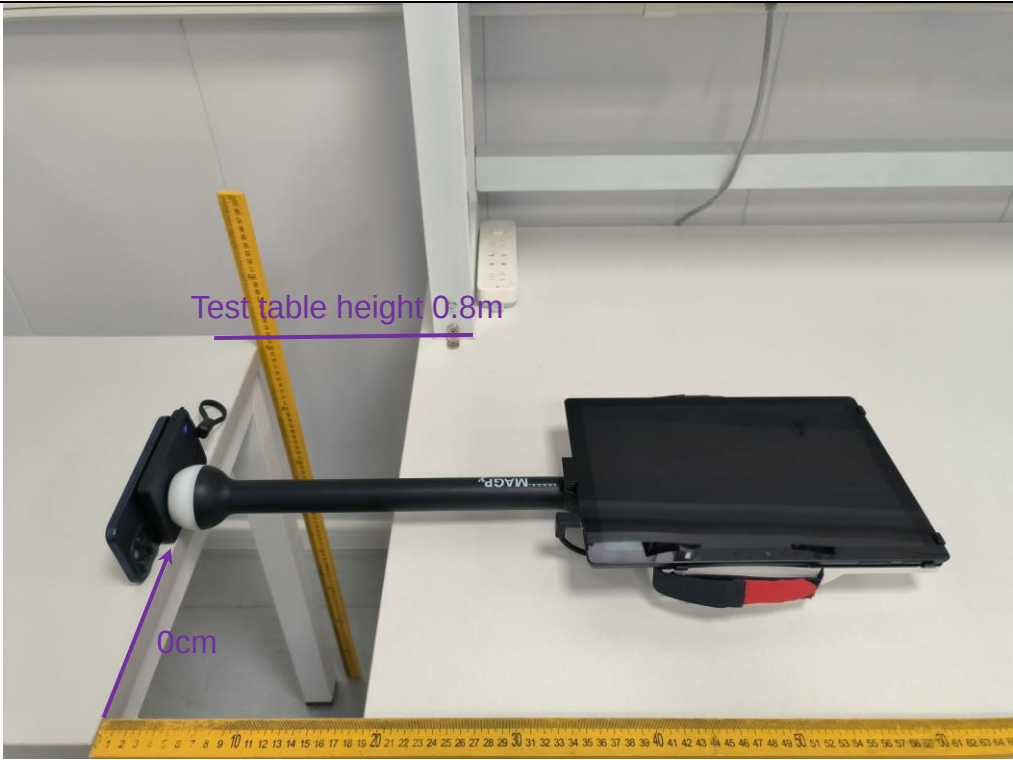


Photo 3



Photo 4



Photo 5


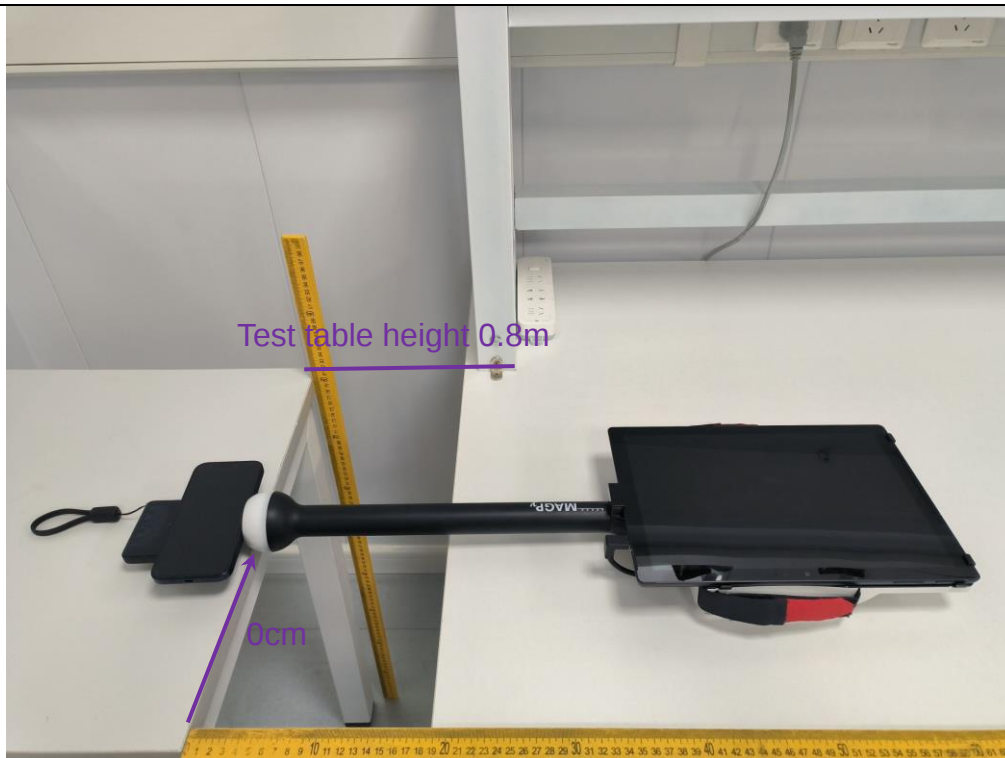


Photo 6

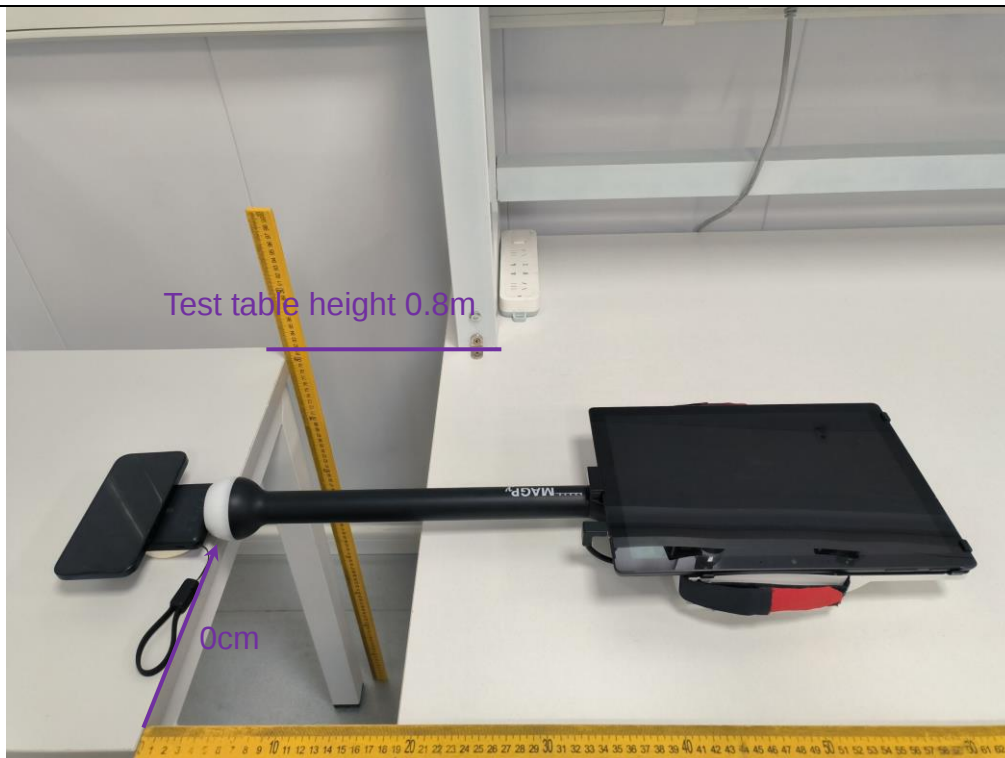

Model: P73

Photo 7



Photo 8

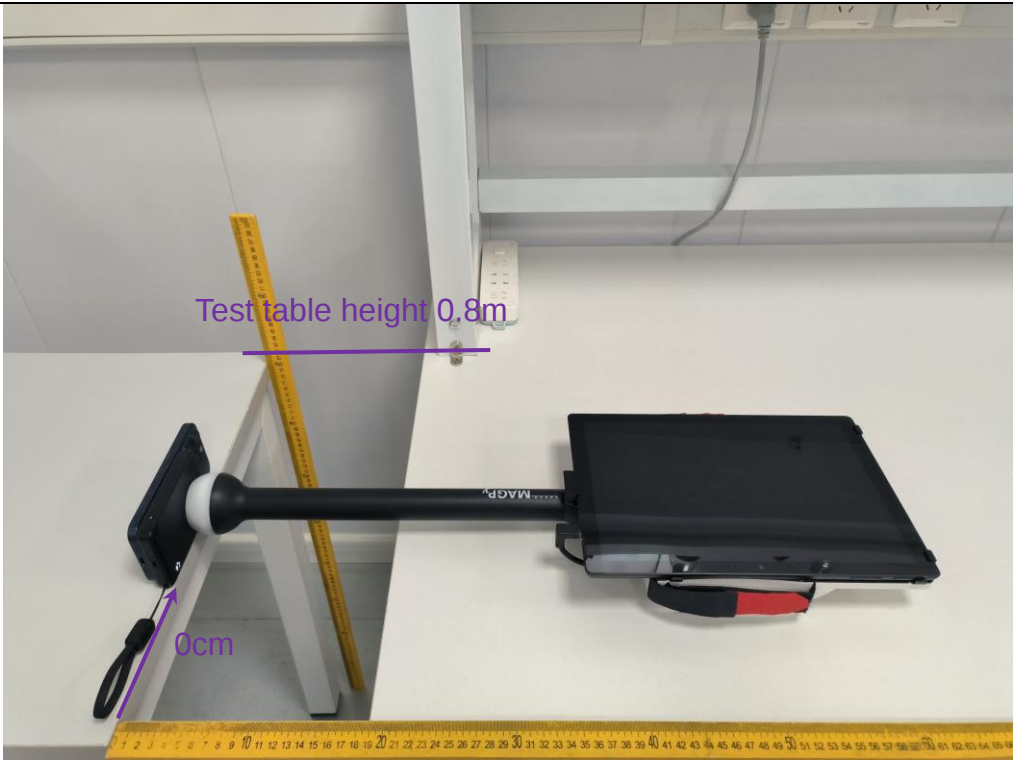


Photo 9

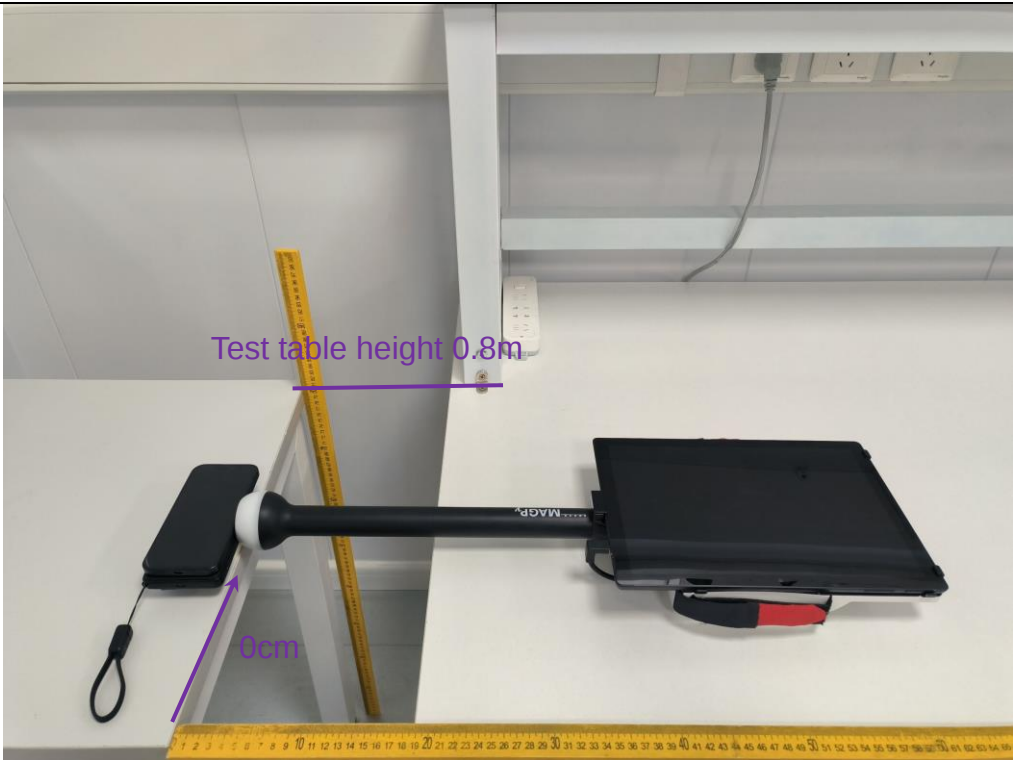


Photo 10



Photo 11

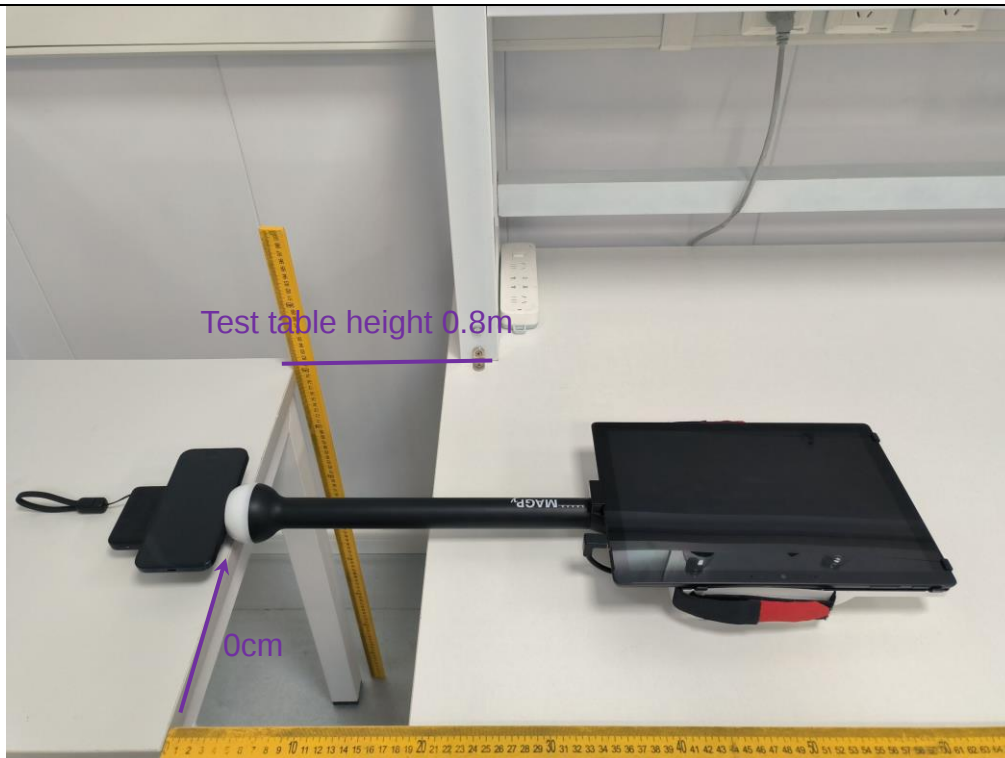


Photo 12



***** END OF REPORT *****