

FCC Test Report

Applicant : Shanghai Catlink Intelligent Technology Co.,Ltd

Address : No.800 Naxian road, Pudong new district, Shanghai, China

Product Name : CATLINK Automatic Feeder- FRESH 2

Report Date : Aug. 30, 2024

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Configuration	6
1.5. Description Of Test Setup	7
1.6. Test Equipment List	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	9
1.9. Disclaimer	10
2. Summary of Test Results	11
3. Conducted Emission Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Radiation Spurious Emission	15
4.1. Test Standard and Limit	15
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	16
5. 20DB Occupy Bandwidth Test	23
5.1. Test Standard and Limit	23
5.2. Test Setup	23
5.3. Test Procedure	23
5.4. Test Data	23
6. Antenna Requirement	24
6.1. Test Standard and Requirement	24
6.2. Antenna Connected Construction	24
APPENDIX I -- TEST SETUP PHOTOGRAPH	25
APPENDIX II -- EXTERNAL PHOTOGRAPH	25
APPENDIX III -- INTERNAL PHOTOGRAPH	25



TEST REPORT

Applicant : Shanghai Catlink Intelligent Technology Co.,Ltd

Manufacturer : Shanghai Catlink Intelligent Technology Co.,Ltd

Product Name : CATLINK Automatic Feeder- FRESH 2

Test Model No. : CL-FD-02

Reference Model No. : CL-FD-01, CL-FD-03, CL-FD-04, CL-FD-05, CL-FD-06, CL-FD-07,
CL-FD-08, CL-FD-09

Trade Mark : CATLINK

Rating(s) : Input: 5V= 1A (via adapter input: 100-240V~ 50/60Hz 0.3A; with DC 6V with
"AA*2" battery inside)

Test Standard(s) : 47 CFR Part 15 Subpart C

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

May 20, 2024

Date of Test

May 20 ~ Jun. 05, 2024

Prepared By

Ella Liang

(Ella Liang)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 30, 2024



1. General Information

1.1. Client Information

Applicant	:	Shanghai Catlink Intelligent Technology Co.,Ltd
Address	:	No.800 Naxian road, Pudong new district, Shanghai, China
Manufacturer	:	Shanghai Catlink Intelligent Technology Co.,Ltd
Address	:	No.800 Naxian road, Pudong new district, Shanghai, China
Factory	:	Shanghai Catlink Intelligent Technology Co.,Ltd
Address	:	No.800 Naxian road, Pudong new district, Shanghai, China

1.2. Description of Device (EUT)

Product Name	:	CATLINK Automatic Feeder- FRESH 2
Test Model No.	:	CL-FD-02
Reference Model No.	:	CL-FD-01, CL-FD-03, CL-FD-04, CL-FD-05, CL-FD-06, CL-FD-07, CL-FD-08, CL-FD-09 (Note: All samples are the same except the model number, so we prepare "CL-FD-02" for test only.)
Trade Mark	:	CATLINK
Test Power Supply	:	DC 5V from adapter input AC 120/60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Hardware Version	:	X2.1
Software Version	:	Catlink_F04_v1.07
Adapter	:	Model: GQ07-050100-DX Input: 100-240V~50/60Hz 0.3A Max Output: 5.0V= 1.0A 5.0W
RF Specification		
Operation Frequency	:	125KHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
--	--

1.4. Description of Test Configuration



Channel	Freq. (KHz)	Channel	Freq. (KHz)	Channel	Freq. (KHz)	Channel	Freq. (KHz)	Channel	Freq. (KHz)
01	125								

Note:

1. During the test, the EUT was keeping continuous transmission.



1.5. Description Of Test Setup

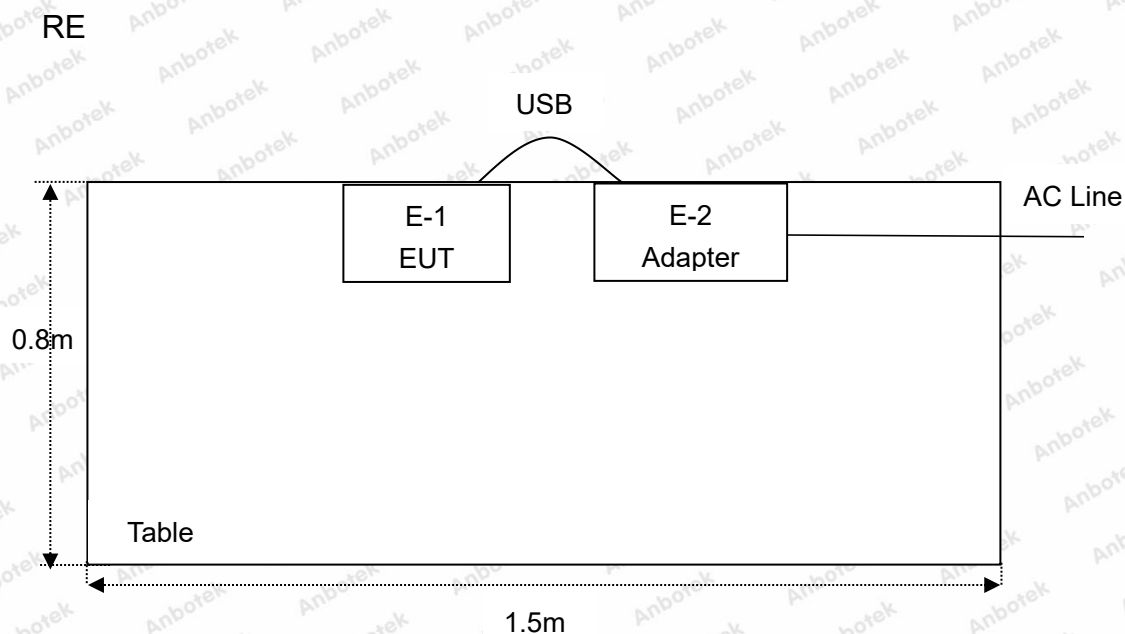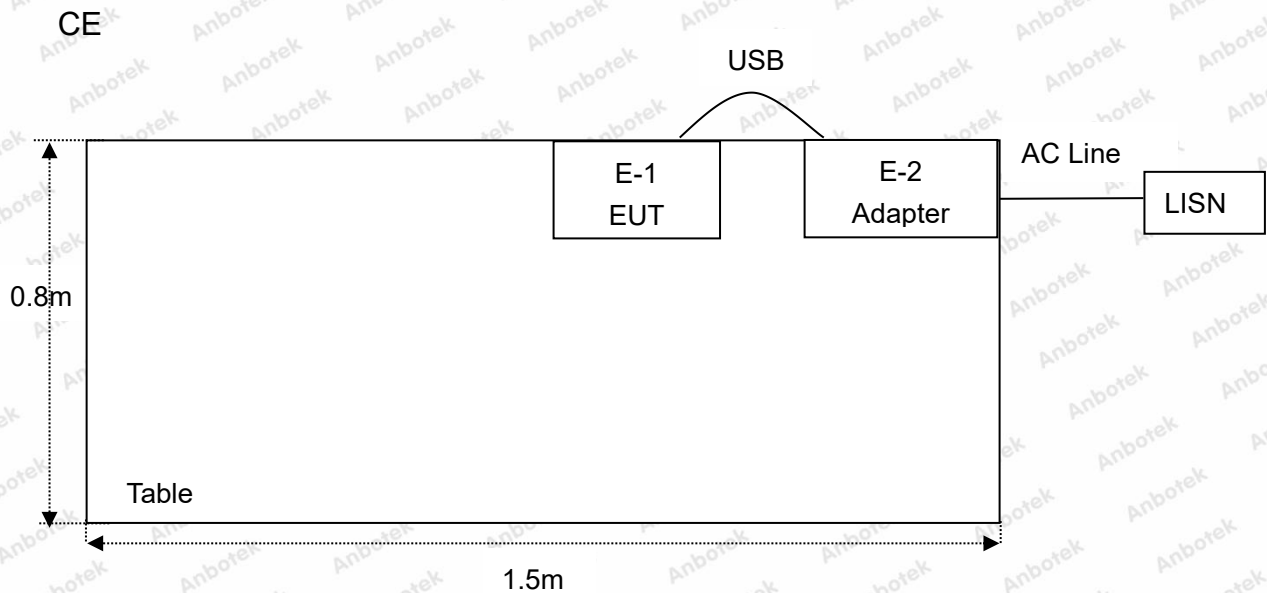

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 12, 2023	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2023	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 12, 2023	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 12, 2023	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 12, 2023	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 12, 2023	1 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Oct. 12, 2023	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 12, 2023	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 12, 2023	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 12, 2023	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 12, 2023	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 20, 2023	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 16, 2023	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	101792	May. 06, 2024	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS
15.215(c)	20dB Occupied Bandwidth	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

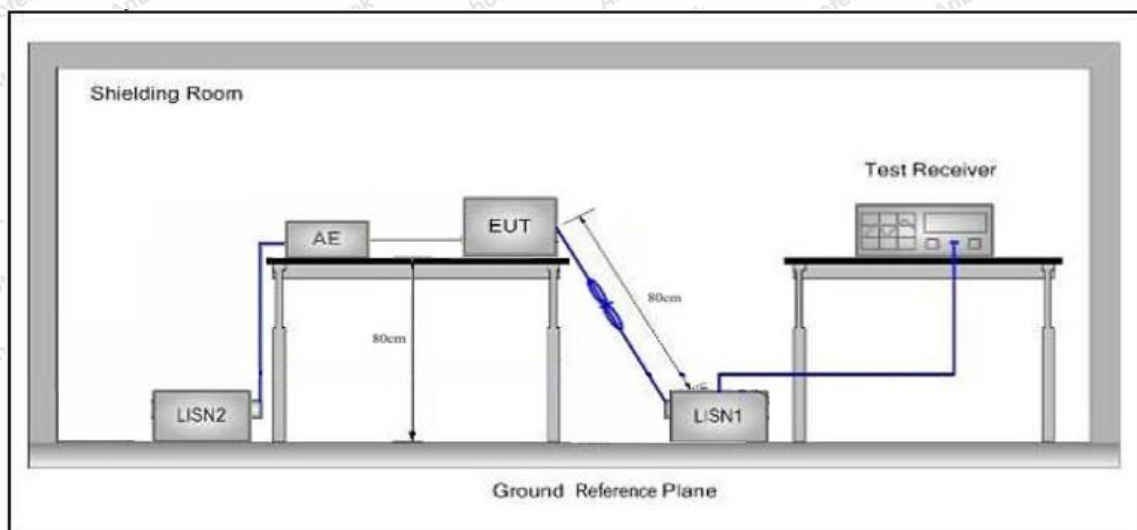

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz

Please to see the following pages.



Conducted Emission Test Data


Test Site: 1# Shielded Room

Operating Condition: Mode 1

Test Specification: DC 5V from adapter input AC 120/60Hz

Comment: Live Line

Temp.(°C)/Hum.(%RH): 23.4°C/65%RH

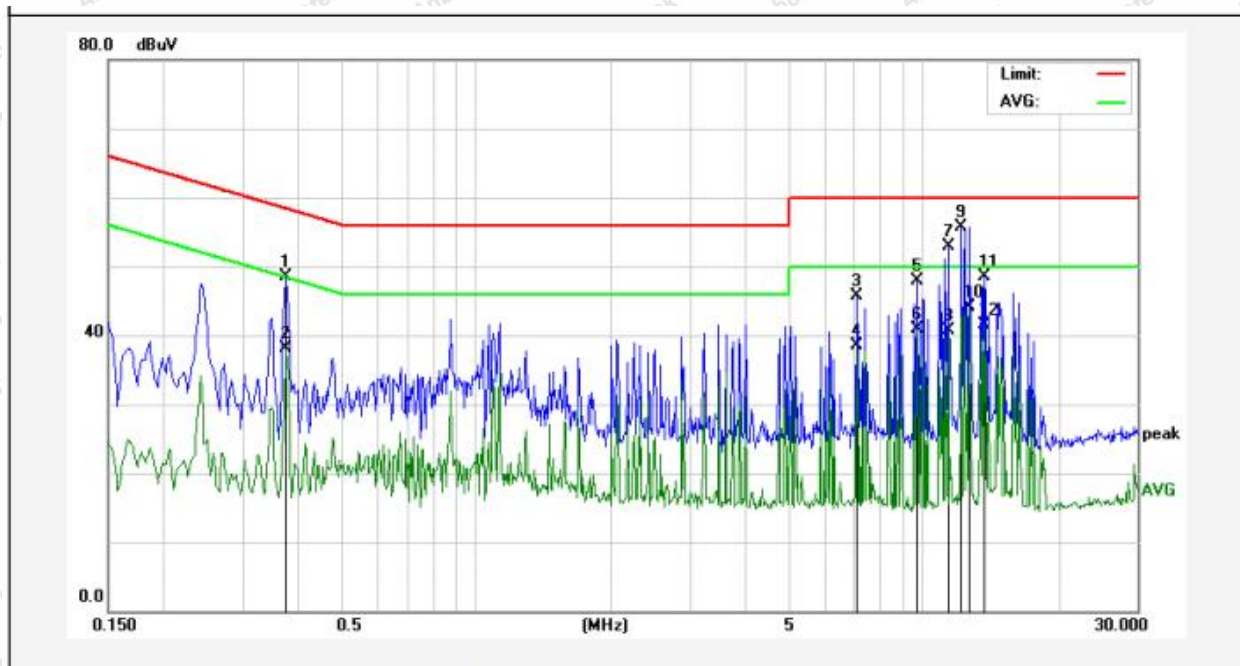


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3740	29.49	18.96	48.45	58.41	-9.96	QP	
2	0.3740	19.18	18.96	38.14	48.41	-10.27	AVG	
3	7.0980	26.87	18.74	45.61	60.00	-14.39	QP	
4	7.0980	19.82	18.74	38.56	50.00	-11.44	AVG	
5	9.6780	29.18	18.79	47.97	60.00	-12.03	QP	
6	9.6780	22.06	18.79	40.85	50.00	-9.15	AVG	
7	11.3580	34.05	18.81	52.86	60.00	-7.14	QP	
8	11.3580	21.96	18.81	40.77	50.00	-9.23	AVG	
9	12.1300	36.89	18.82	55.71	60.00	-4.29	QP	
10	12.6459	25.29	18.83	44.12	50.00	-5.88	AVG	
11	13.6780	29.67	18.84	48.51	60.00	-11.49	QP	
12	13.6780	22.69	18.84	41.53	50.00	-8.47	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: DC 5V from adapter input AC 120/60Hz
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 23.4°C/65%RH

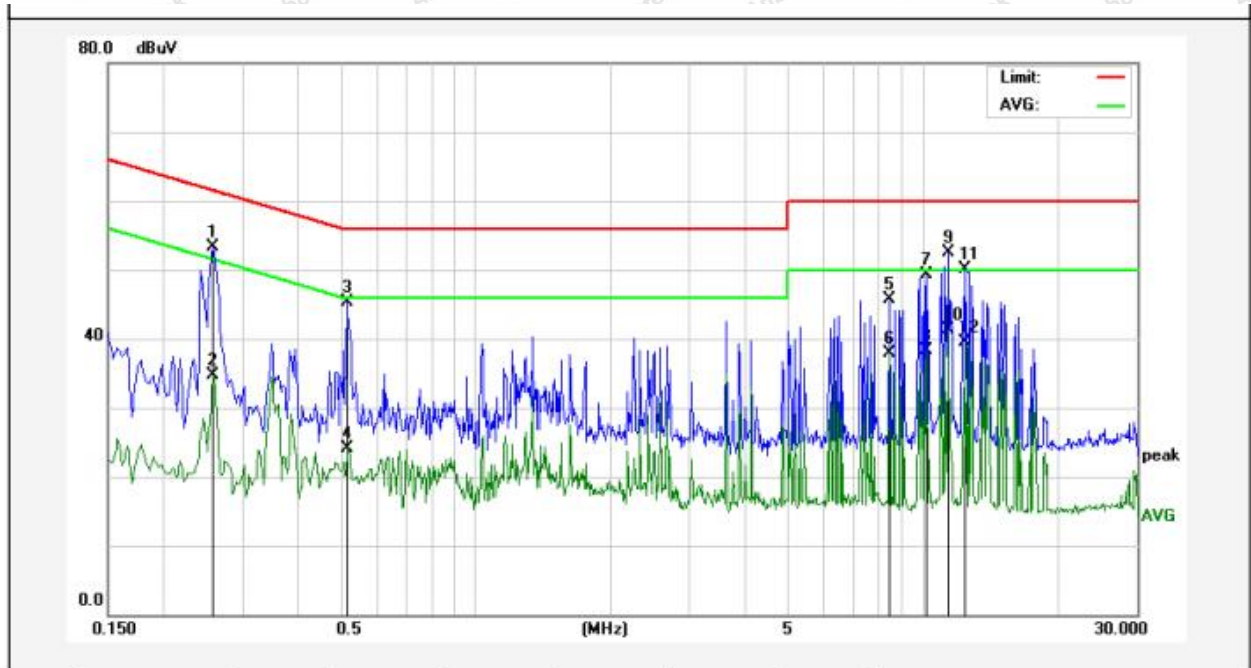

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2580	34.18	19.05	53.23	61.49	-8.26	QP	
2	0.2580	15.67	19.05	34.72	51.49	-16.77	AVG	
3	0.5140	26.28	19.10	45.38	56.00	-10.62	QP	
4	0.5180	5.09	19.09	24.18	46.00	-21.82	AVG	
5	8.3900	26.96	18.77	45.73	60.00	-14.27	QP	
6	8.3900	19.17	18.77	37.94	50.00	-12.06	AVG	
7	10.1260	30.47	18.79	49.26	60.00	-10.74	QP	
8	10.1260	19.55	18.79	38.34	50.00	-11.66	AVG	
9	11.3540	33.76	18.81	52.57	60.00	-7.43	QP	
10	11.3540	22.41	18.81	41.22	50.00	-8.78	AVG	
11	12.3860	31.20	18.82	50.02	60.00	-9.98	QP	
12	12.3860	20.59	18.82	39.41	50.00	-10.59	AVG	



4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

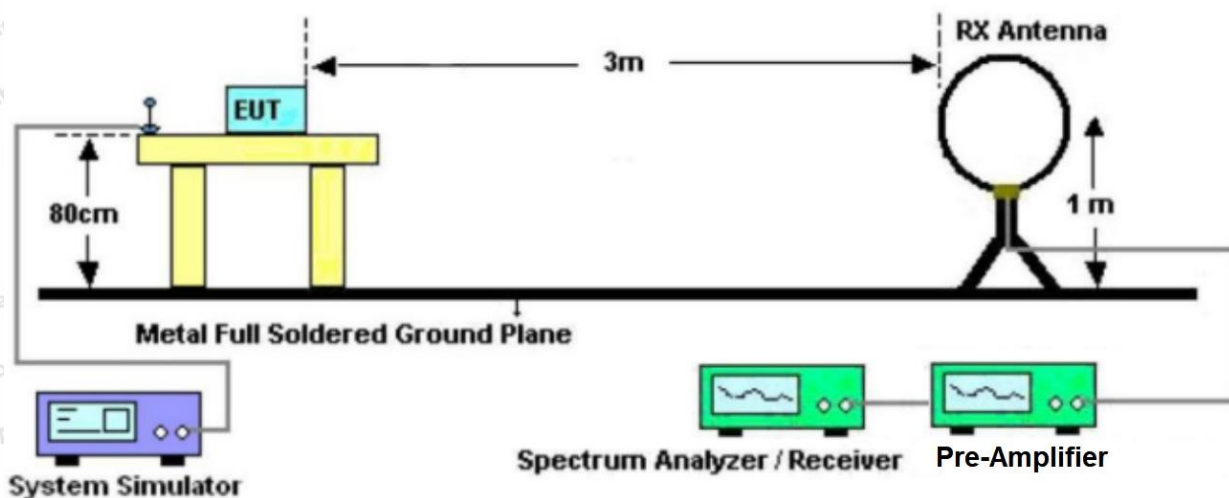


Figure 1. Below 30MHz



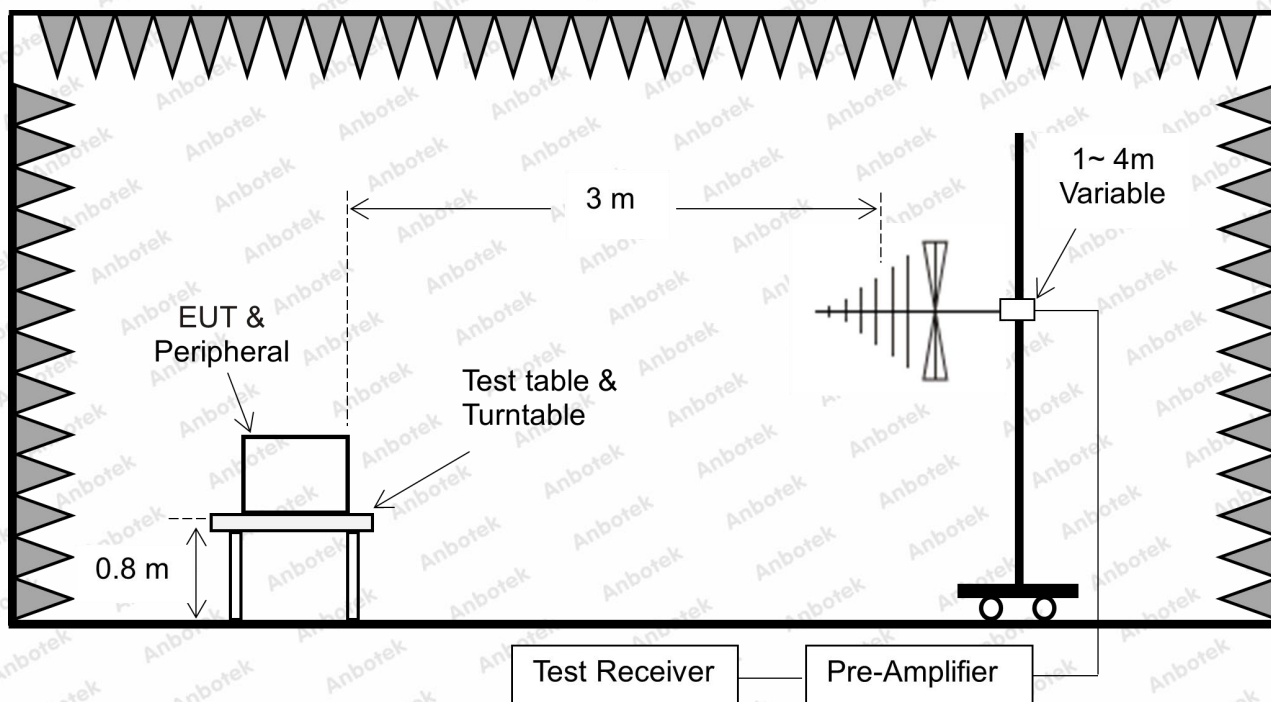


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.



Report No.: 182514C400003103

FCC ID: 2A8WK-CLFD02

Page 17 of 25

Test Results (Between 9KHz – 150KHz)


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 23.5°C/49%RH

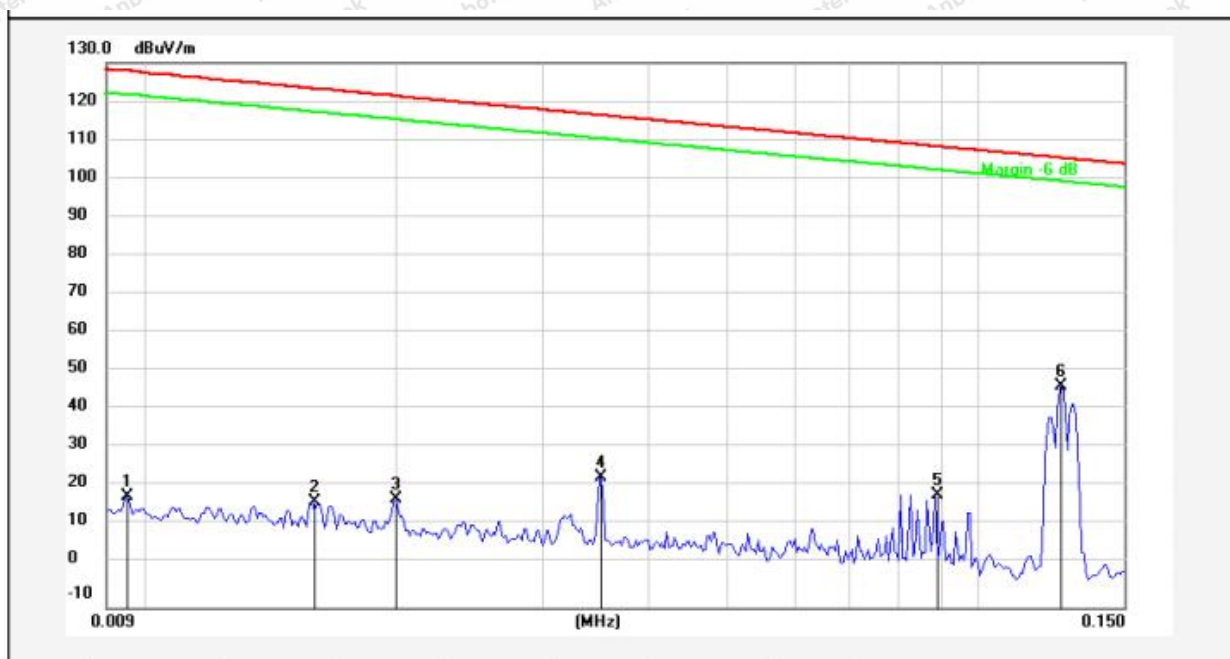

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0095	-1.74	20.11	18.37	127.84	-109.47	QP			
2	0.0159	-3.30	20.30	17.00	123.39	-106.39	QP			
3	0.0200	-2.57	20.29	17.72	121.41	-103.69	QP			
4	0.0353	3.10	20.47	23.57	116.51	-92.94	QP			
5	0.0889	-1.43	20.37	18.94	108.53	-89.59	QP			
6	0.1259	26.63	20.34	46.97	105.53	-58.56	QP			



Report No.: 182514C400003103

FCC ID: 2A8WK-CLFD02

Page 18 of 25

Test Results (Between 9KHz – 150KHz)


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 23.5°C/49%RH

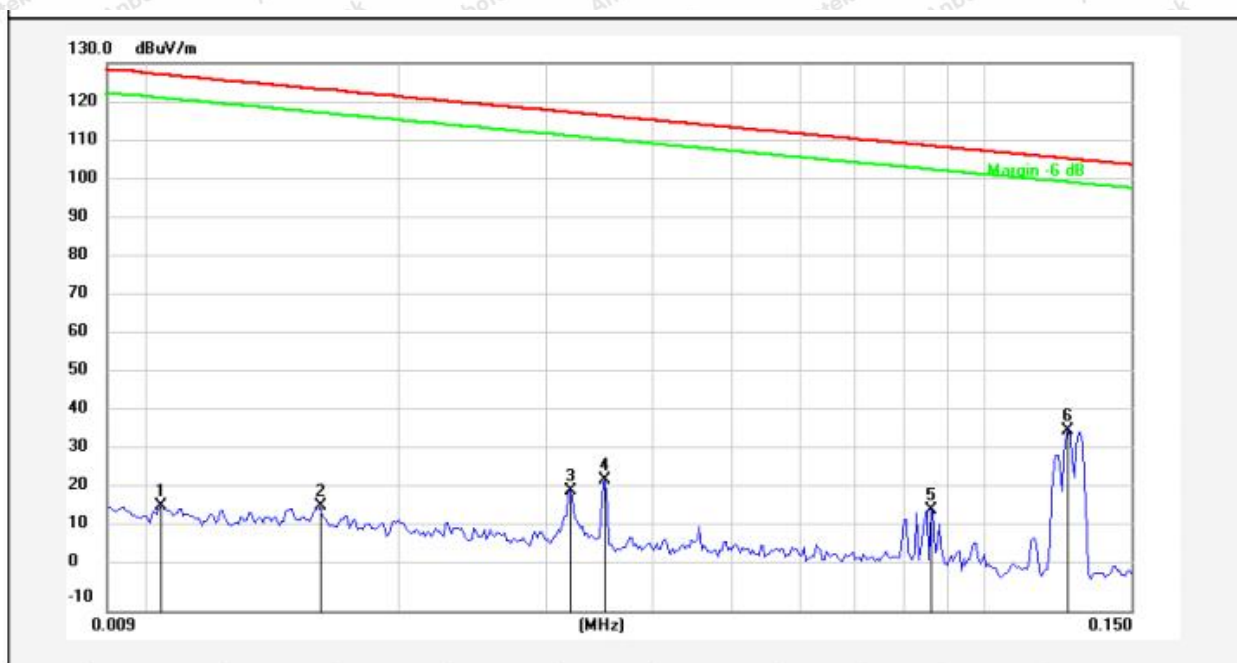

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0104	-3.38	20.07	16.69	127.06	-110.37	QP			
2	0.0161	-3.61	20.28	16.67	123.29	-106.62	QP			
3	0.0321	0.01	20.56	20.57	117.33	-96.76	QP			
4	0.0353	2.80	20.47	23.27	116.51	-93.24	QP			
5	0.0864	-4.59	20.38	15.79	108.78	-92.99	QP			
6	0.1259	15.60	20.34	35.94	105.53	-69.59	QP			



Report No.: 182514C400003103

FCC ID: 2A8WK-CLFD02

Page 19 of 25

Test Results (Between 0.15MHz – 30MHz)


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 23.5°C/49%RH

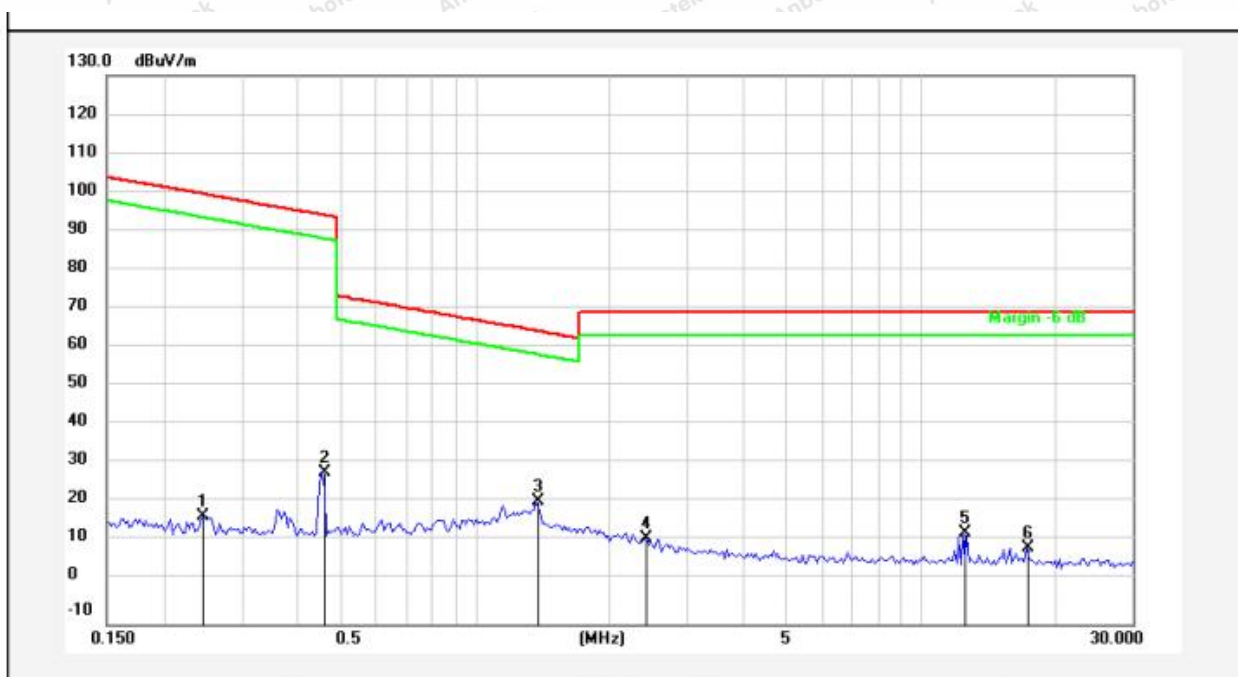

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.2468	-2.79	20.30	17.51	99.74	-82.23	QP			
2	0.4564	8.42	20.27	28.69	94.41	-65.72	QP			
3	1.3738	1.16	20.26	21.42	64.87	-43.45	QP			
4	2.4346	-8.45	20.29	11.84	69.50	-57.66	QP			
5	12.4495	-7.38	20.53	13.15	69.50	-56.35	QP			
6	17.2908	-11.07	20.56	9.49	69.50	-60.01	QP			



Test Results (Between 0.15MHz – 30MHz)


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 23.5°C/49%RH

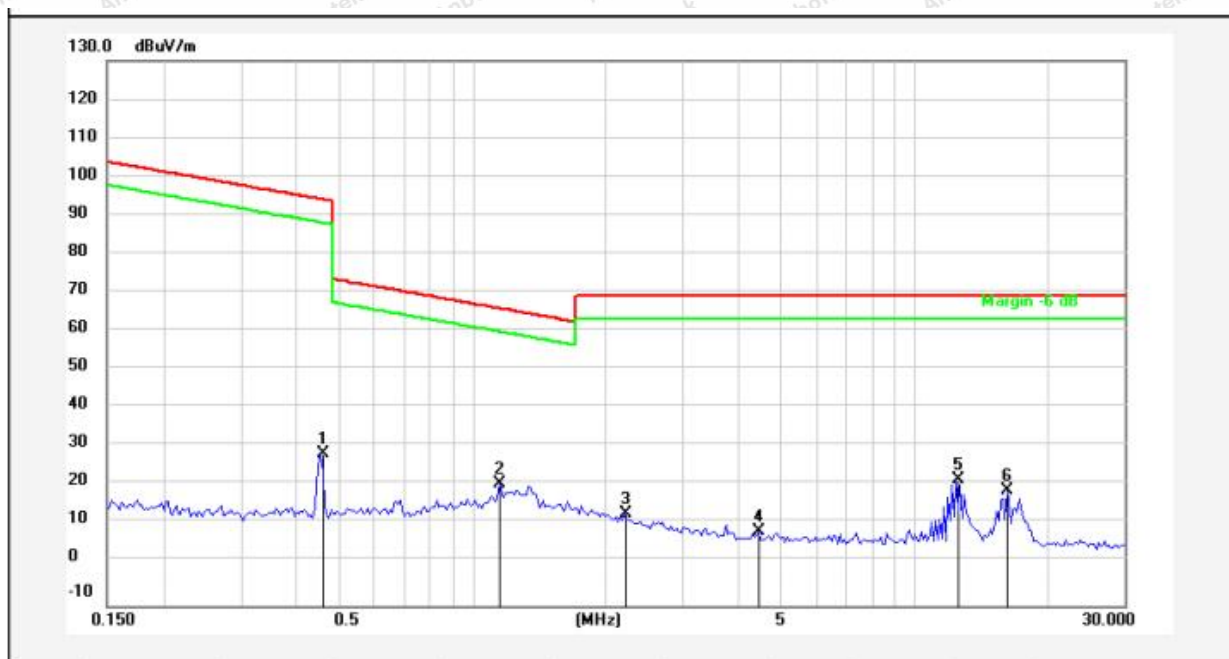

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.



Report No.: 182514C400003103

FCC ID: 2A8WK-CLFD02

Page 21 of 25

Test Results (Between 30MHz –1000 MHz)


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 20.3°C/46%RH

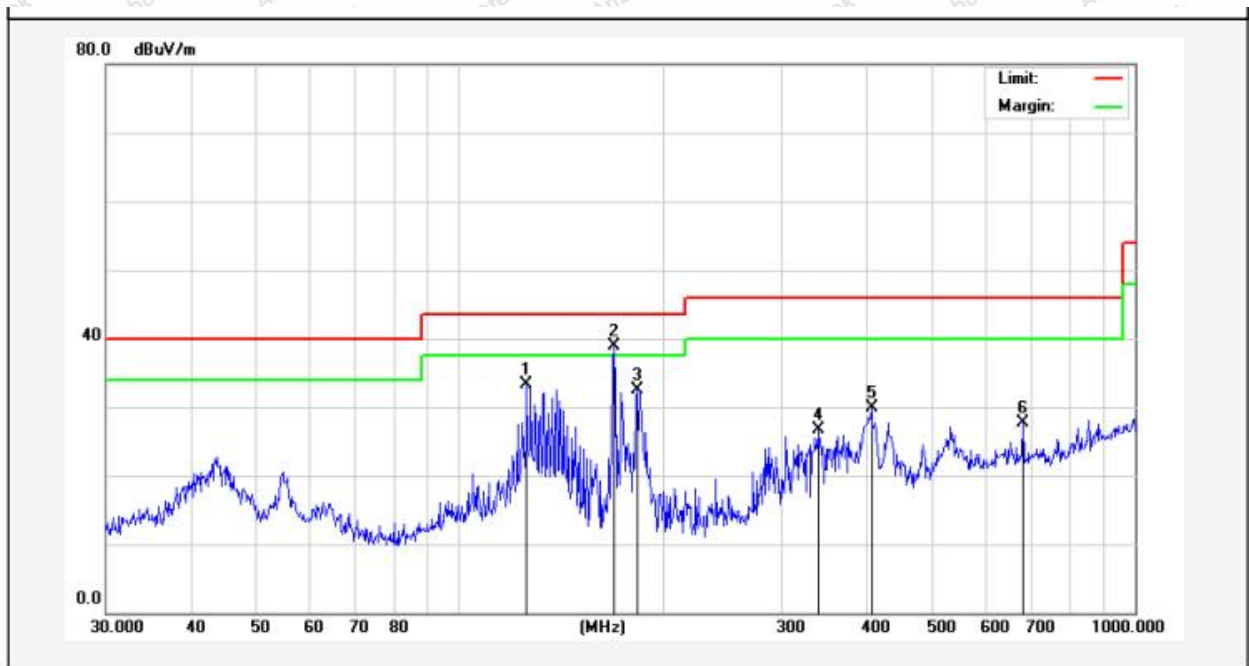

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	125.8863	56.45	-23.10	33.35	43.50	-10.15	QP			
2	169.5989	62.58	-23.63	38.95	43.50	-4.55	QP			
3	183.8439	55.55	-23.02	32.53	43.50	-10.97	QP			
4	339.5887	42.97	-16.25	26.72	46.00	-19.28	QP			
5	407.5144	45.96	-16.04	29.92	46.00	-16.08	QP			
6	682.3484	37.83	-10.18	27.65	46.00	-18.35	QP			



Report No.: 182514C400003103

FCC ID: 2A8WK-CLFD02

Page 22 of 25


Test Mode: Mode 1

Distance: 3m

Power Source: DC 5V from adapter input AC 120/60Hz

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 20.3°C/46%RH

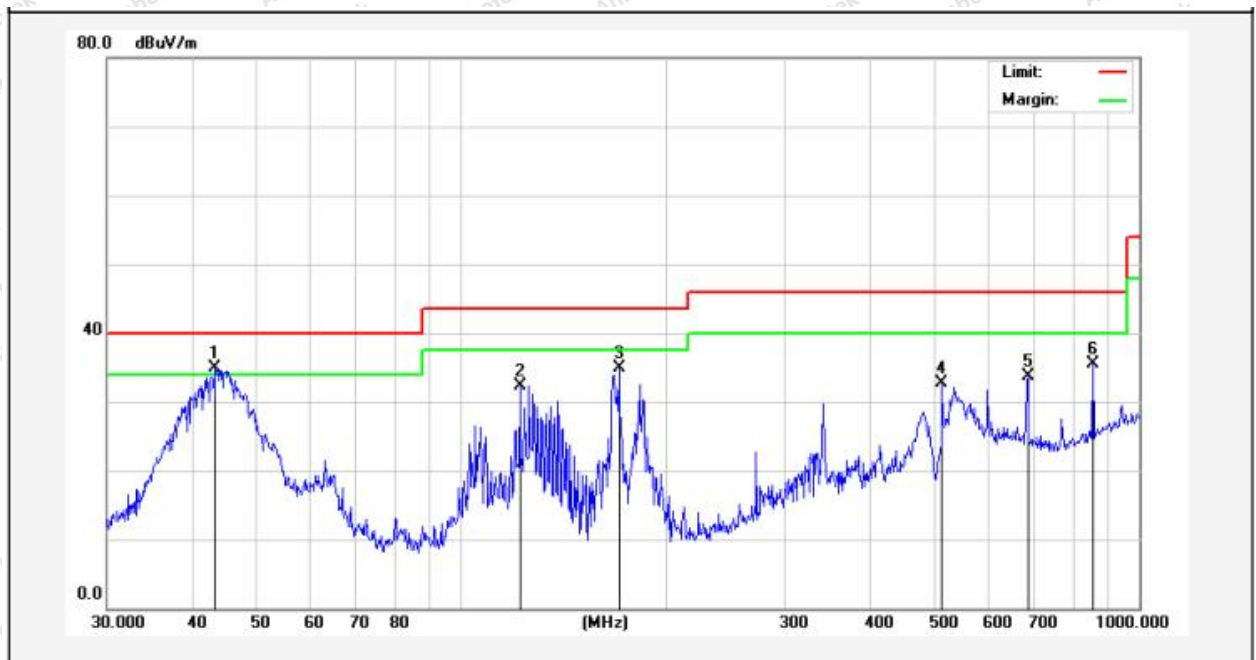

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.3534	49.74	-14.89	34.85	40.00	-5.15	QP			
2	121.9755	52.59	-20.23	32.36	43.50	-11.14	QP			
3	170.7926	55.95	-21.09	34.86	43.50	-8.64	QP			
4	511.8352	44.87	-12.11	32.76	46.00	-13.24	QP			
5	684.7454	43.82	-10.14	33.68	46.00	-12.32	QP			
6	854.0247	42.89	-7.39	35.50	46.00	-10.50	QP			




5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.215(c)
Test Limit	N/A

5.2. Test Setup



5.3. Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3kHz RBW and VBW $\geq$ 3*RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: Continuously transmitting
Test Voltage	: DC 5V from adapter input AC 120/60Hz	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH

Freq. (MHz)	Bandwidth (kHz)	Results
175		PASS



6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

