



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, between the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

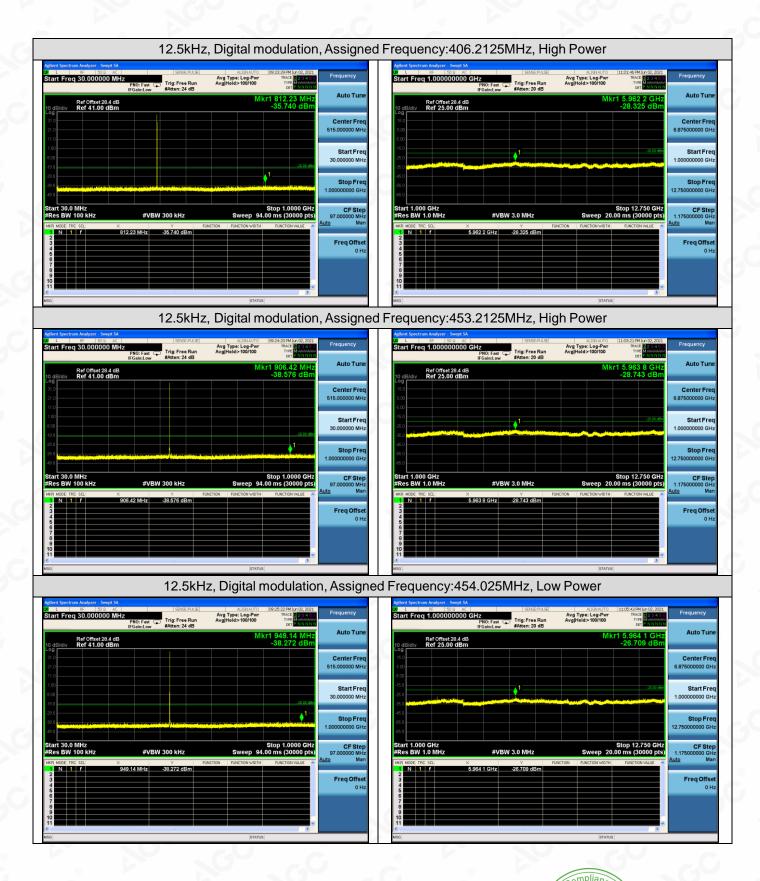

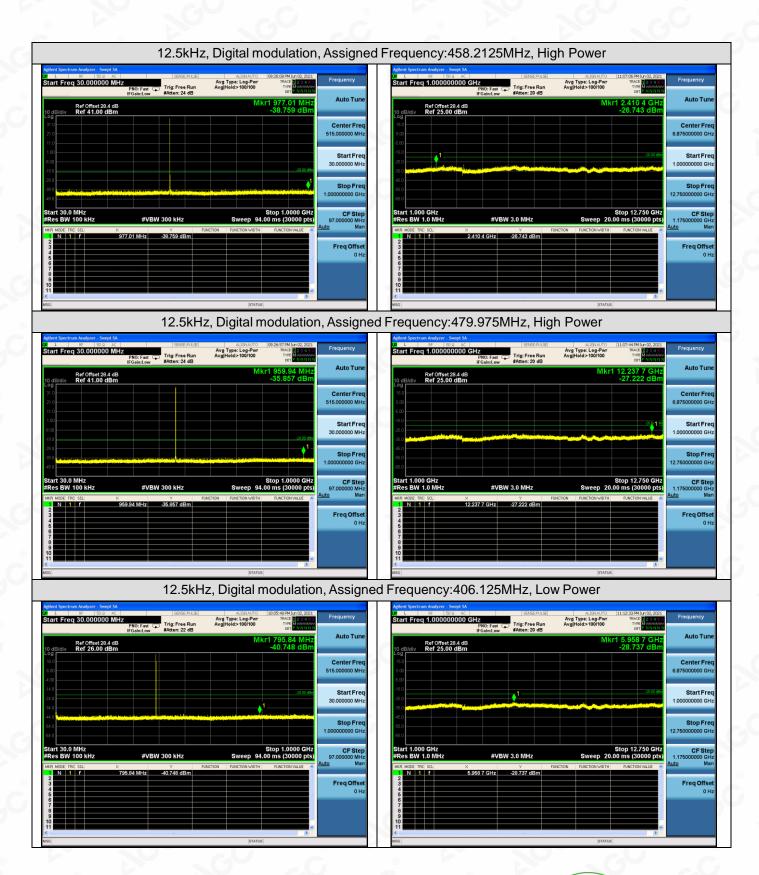


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



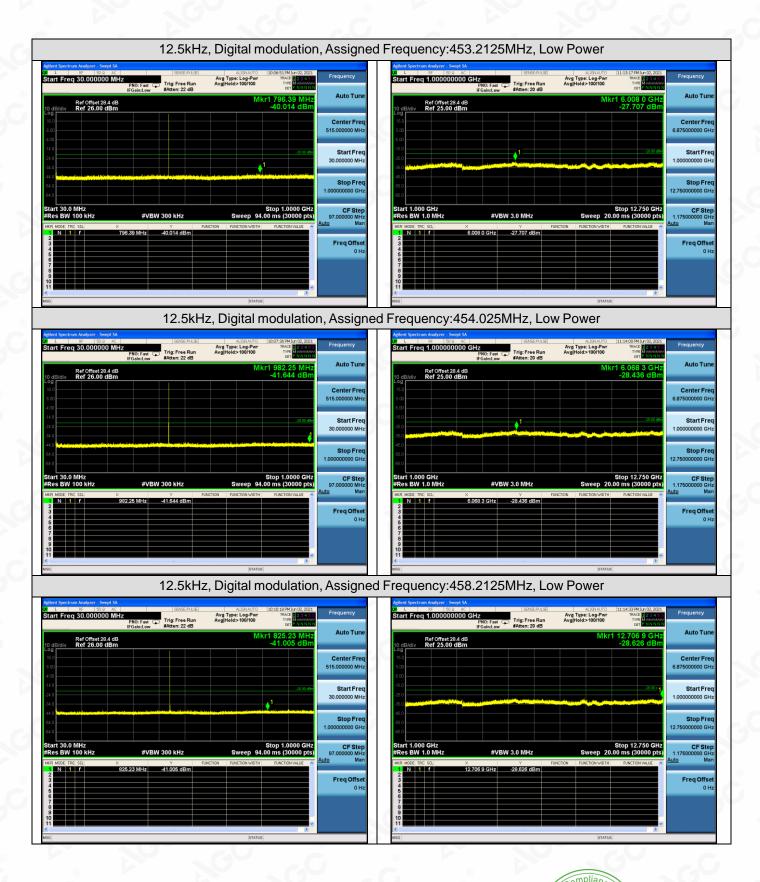

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



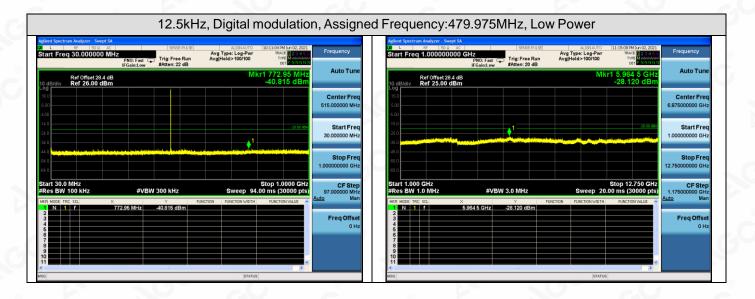

- Note: 1. In this case, Part 22 (-13 dBm) is less than the limit of Part 90 (-20 dBm), so we do not need to test Part 22, which meets the spurious limits of PART 90+22.
 - 2. All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated frame/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da/Castra the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



12.TRANSMITTER FREQUENCY BEHAVIOR

12.1 PROVISIONS APPLICABLE

FCC §90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment			
		150 to 174 MHz	421 to 512 MHz		
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels					
t ₁ 4 t ₂ t ₃ 4	± 25.0 kHz ± 12.5 kHz ± 25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms		
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels					
$\begin{array}{c} t_1 \ 4 \ \dots \\ t_2 \ \dots \\ t_3 \ 4 \ \dots \\ \end{array}$	± 12.5 kHz ± 6.25 kHz ± 12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms		
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels					
$t_1 \stackrel{4}{-} \dots \\ t_2 \dots \\ t_3 \stackrel{4}{-} \dots \\ \dots $	± 6.25 kHz ± 3.125 kHz ± 6.25 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms		

 $^{1}t_{on}$ is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing. t_{1} is the time period immediately following t_{on} .


t2 is the time period immediately following t1.

 t_3 is the time period from the instant when the transmitter is turned off until t_{off} . t_{off} is the instant when the 1 kHz test signal starts to rise. ² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in


§90.213

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.
⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

13.2 MEASUREMENT SETUP

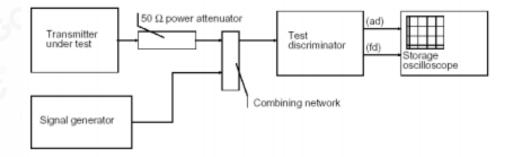

Compliance Dedicated Fe Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the /Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apphorization of AGE he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day he test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





12.3 MEASUREMENT METHOD

According to TIA/EIA-603 2.2.19 requirement, as for the product different from PTT, we use test steps as follows:

1. Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;

2. Input 1kHz signal into DUT;

3. Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;

4. Keep DUT in OFF state and Key the PTT;

5. Observe the stored oscilloscope of modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t1 and t2, and shall also remain within limits following t2;

6. Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.

7. Keep the digital portable radio in ON state and unkey the PTT;

8. Observe the stored oscilloscope of modulation domain analyzer, The signal trace shall be maintained within the allowable limits during the period t3.

9. Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at \pm 12.5 kHz deviation and set its output level to -100dBm.

10. Turn on the transmitter.

11. Supply sufficient attenuation via the RF attenuator to provide an input level to the stored oscilloscope 12. that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the stored oscilloscope as P0.

13. Turn off the transmitter.

14. Adjust the RF level of the signal generator to provide RF power equal to P0. This signal generator RF level shall be maintained throughout the rest of the measurement.

15. Remove the attenuation, so the input power to the stored oscilloscope is increased by 30 dB when the transmitter is turned on.

16. Adjust the vertical amplitude control of the stored oscilloscope to display the 1000 Hz at \pm 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "tiger offset" to -10ms for turn on and -15ms for turn off.

17. Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be ton. The trace should be maintained within the allowed divisions during the period t1 and t2.

18. Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum 19. Analyzer. The trace should be maintained within the allowed divisions during the period t3.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR:


ton: The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

t1: period of time starting at ton and finishing according to above 11.1

t2: period of time starting at the end of t1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

t3: period of time that finishing at toff and starting according to above 11.1

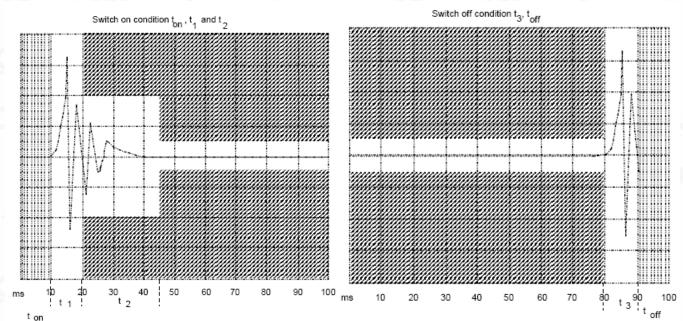

on

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Particular Partic




12.4 MEASURET RESULTS

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency:136.025MHz-Turn On


01:25:07 AM Jun 03, 2021 LPF: 15 kHz HPF: 50 Hz Channel BW: 25 kHz Avg|Hold: 1/1 De-emphasis: Off Frequency Center: 136.025 MHz Trig: RF Burst Center Freq 136.025000 MHz #Atten: 24 dB BPF: Off Demod Waveform .13 kHz/dv Ref 0 Hz **Center Freq** 136.025000 MHz CF Step 7.500 kHz <u>Auto</u> Mar **AF Start Freq** 0 HzAF Stop Freq 20.000000 kHz Center 136 MHz Sweep 100 ms

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency:136.025MHz-Turn Off

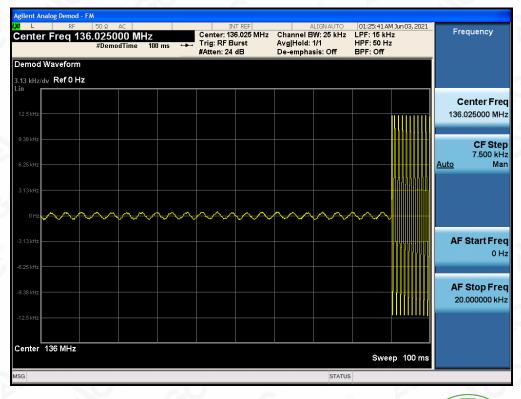


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



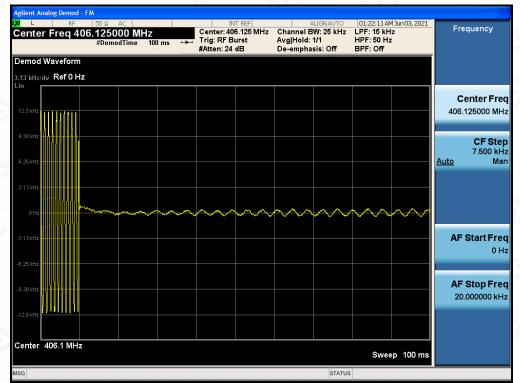

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency:406.125MHz-Turn On

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency: 406.125MHz-Turn Off

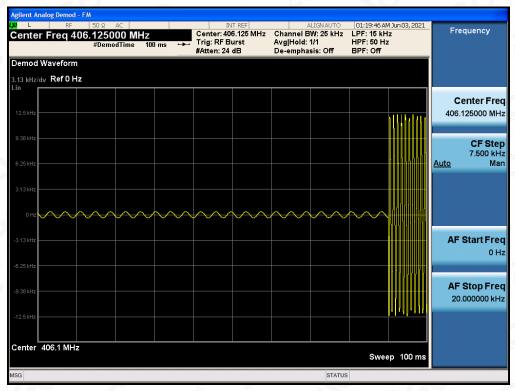

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day Safter the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




13. AUDIO LOW PASS FILTER RESPONSE

13.1 PROVISIONS APPLICABLE

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

ANSI TIA/EIA 603-E:2016 3.2.15: Recommended audio filter attenuation characteristics are given below:

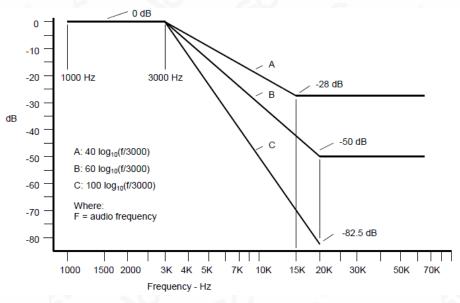

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 40 log10 (f / 3000) dB where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB. b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz: At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater

than the attenuation at 1000 Hz by at least: 60 log10 (f / 3000) dB where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.

c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 100 log10 (f / 3000) dB where: f is the audio frequency in Hz.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



13.2 MEASUREMENT METHOD

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

13.3 MEASUREMENT SETUP




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated frame/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter aphorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



13.4 MEASURET RESULTS


12.5kHz, Analog modulation, Assigned Frequency:136.025MHz-7W			
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)	
1	0	/	
3	-2.63	0.00	
4	-8.45	-5.00	
5	-13.73	-8.87	
6	-17.00	-12.04	
7	-19.94	-14.72	
8	-23.77	-17.04	
9	-26.49	-19.08	
10	-29.17	-20.92	
15	-36.63	-28.00	
20	-37.14	-28.00	
30	-37.22	-28.00	
50	-34.63	-28.00	
70	-35.85	-28.00	

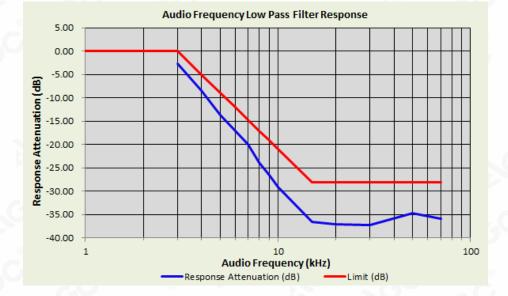

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



12.5kHz, Analog modulation, Assigned Frequency:406.125MHz-6W			
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)	
1	0	/	
3	-2.12	0.00	
4	-8.10	-5.00	
5	-14.99	-8.87	
6	-19.35	-12.04	
7	-22.27	-14.72	
8	-24.71	-17.04	
9	-26.74	-19.08	
10	-29.06	-20.92	
15	-36.24	-28.00	
20	-36.56	-28.00	
30	-36.56	-28.00	
50	-36.57	-28.00	
70	-35.85	-28.00	

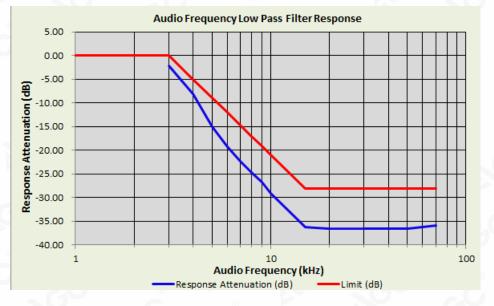

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the test results of the test results been altered in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective is not permitted without the written authorization of AGC of the test results be addressed to AGC by agc@agc~cert.com.



Report No.: AGC01284210504FE10 Page 96 of 98



APPENDIX I: PHOTOGRAPHS OF TEST SETUP RADIATED EMISSION TEST SETUP

RADIATED EMISSION ABOVE 1G TEST SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Perturg/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.