

## Nemko Korea Co., Ltd.

155 &amp; 159, Osan-Ro, Mohyeon-Eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPUBLIC OF

TEL:+82 31 330-1700

FAX:+82 31 322 2332

### FCC EVALUATION REPORT FOR CERTIFICATION

**Applicant :****ROBOMATION CO., LTD.****A-1101,1102,1103,1104, 128 Beobwon-ro,****Songpa-gu, Seoul, KOREA, REPUBLIC OF****Attn. : Sanghoon Kim****Dates of Issue : December 7, 2020****Test Report No. : NK-20-R-337****Test Site : Nemko Korea Co., Ltd.****FCC ID****2AK2Q-MDONGLE****Brand Name****ROBOMATION CO., LTD.****Contact Person****ROBOMATION CO., LTD.****A-1101,1102,1103,1104, 128 Beobwon-ro,****Songpa-gu, Seoul, KOREA, REPUBLIC OF****Sanghoon Kim****Telephone No. : +82-2-421-1652**

Applied Standard: FCC 47 CFR Part 15.247

Classification: Digital Transmission System (DTS)

EUT Type: Toy

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

 Dec. 07. 2020

Tested By : Yonghwan Kim  
Engineer

 Dec. 07. 2020

Reviewed By : Seungyong Shin  
Technical Manager

# TABLE OF CONTENTS

---

<b>1. Scope</b>	<b>4</b>
<b>2. Introduction (Site Description)</b>	<b>5</b>
2.1 Test facility	5
2.2 Accreditation and listing	6
<b>3. Test Conditions &amp; EUT Information</b>	<b>7</b>
3.1 Operation During Test	7
3.1.1 Table of test power setting	7
3.1.2 Table of test channels	7
3.1.3 Antenna information	7
3.1.4 Additional Information Related to Testing	8
3.1.5 Table of test modes	8
3.2 Support Equipment	9
3.3 Setup Drawing	9
3.4 EUT Information	10
<b>4. Summary of Test Results</b>	<b>11</b>
<b>5. Recommendation / Conclusion</b>	<b>12</b>
<b>6. Antenna Requirements</b>	<b>12</b>
<b>7. Description of Test</b>	<b>13</b>
7.1 Conducted Emissions	13
7.2 Radiated Emissions	14
7.3 6 dB Bandwidth	15
7.4 Peak Output Power	16
7.5 Peak Power Spectral Density	17
7.6 Conducted Spurious Emissions	18

<b>8. Test Data</b>	<b>19</b>
8.1 Conducted Emissions	19
8.2 Radiated Emissions	21
8.3 6 dB Bandwidth	23
8.4 Peak Output Power	27
8.5 Peak Power Spectral Density	30
8.6 Conducted Spurious Emissions	33
8.7 Radiated Spurious Emissions	38
8.8 Radiated Band Edge	42
<b>9. Test Equipment</b>	<b>44</b>
<b>10. Accuracy of Measurement</b>	<b>45</b>

## 1. SCOPE

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15*

<b>Responsible Party :</b>	ROBOMATION CO., LTD. A-1101,1102,1103,1104, 128 Beobwon-ro, Songpa-gu, Seoul, KOREA, REPUBLIC OF
<b>Contact Person :</b>	Sanghoon Kim
<b>Manufacturer :</b>	ROBOMATION CO., LTD. A-1101,1102,1103,1104, 128 Beobwon-ro, Songpa-gu, Seoul, KOREA, REPUBLIC OF

- FCC ID: 2AK2Q- MDONGLE
- Model: mDongle
- Brand Name: ROBOMATION CO., LTD.
- EUT Type: Toy
- Classification: Digital Transmission System (DTS)
- Applied Standard: FCC 47 CFR Part 15.247
- Test Procedure(s): ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02
- Dates of Test: November 23, 2020 ~ November 26, 2020
- Place of Test: Nemko Korea Co., Ltd.

## 2. INTRODUCTION

### 2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating from **ROBOMATION CO., LTD. FCC ID : 2AK2Q- MDONGLE**.


These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address 155 & 159, Osan-Ro, Mohyeon-Eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPUBLIC OF.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 km (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 km (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014 according to §2.948.

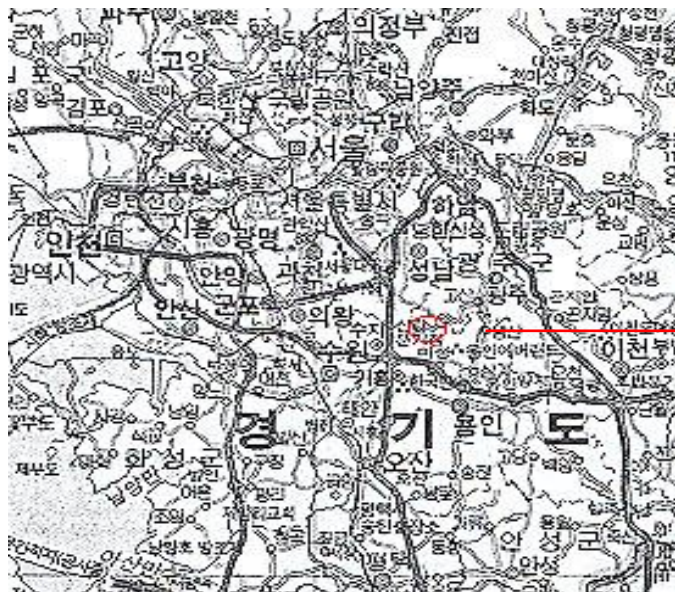







Nemko Korea Co., Ltd.  
EMC Lab.  
155 & 159, Osan-Ro, Mohyeon-Eup,  
Cheoin-Gu, Yongin-Si, Gyeonggi-Do  
16885 KOREA, REPUBLIC OF  
Tel)+82-31-330-1700  
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

## 2.2 Accreditation and listing

Accreditation type		Accreditation number
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. KT155
	Canada IC Registered site	Site No. 2040E
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	-
	KCC(RRL)Designated Lab.	Registration No. KR0026

### 3. TEST CONDITIONS & EUT INFORMATION

#### 3.1 Operation During Test

The EUT is the transceiver which is Bluetooth 4.0 module supporting LE mode.

The Laptop was used to control the EUT to transmit the wanted TX channel continuously (duty cycle< 98%) by the testing program (TeraTerm) supported by manufacturer.

The operating voltage of EUT was 5.0 Vdc supplied from connected to USB port on Laptop PC.

The EUT was tested at the lowest, middle and the highest channels with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

##### 3.1.1 Table of test power setting

Frequency	Mode	Power setting Level
2402 MHz ~ 2480 MHz	LE	Default

##### 3.1.2 Table of test channels

Frequency band	Mode	Test Channel (CH)	Frequency (MHz)
2.4 GHz	LE	0	2402
		20	2442
		39	2480

##### 3.1.3 Antenna information

Frequency band	Mode	Antenna TX mode	Support CDD	Support MIMO
2.4 GHz	LE	■ 1TX, □ 2TX	□ Yes, ■ No	□ Yes, ■ No

### 3.1.4 Additional Information Related to Testing

The cable and attenuator loss from 30MHz to 26.5GHz was reflected in spectrum analyzer with correction factor for all conducted testing.

### 3.1.5 Table of test modes


Test Items	Mode	Modulation	Test Channel (CH)
Conducted Emissions	LE	GFSK	0
Radiated Emissions			20
6 dB Bandwidth			0/20/39
Maximum Conducted Output Power			0/20/39
Power Spectral Density			0/20/39
Conducted Spurious Emission, Radiated Spurious Emission, Band edge Emission			0/20/39



### **3.2 Support Equipment**

EUT	ROBOMATION CO., LTD. Model : mDongle	S/N: N/A
Laptop Computer	HP Model : G62-355TU	FCC DOC S/N : CNF0452FN3
AC/DC Adapter	HP Model : PPP009D 1.5 m unshielded power cable	FCC DOC S/N : WBGSV0ACXZH162

### 3.3 Setup Drawing

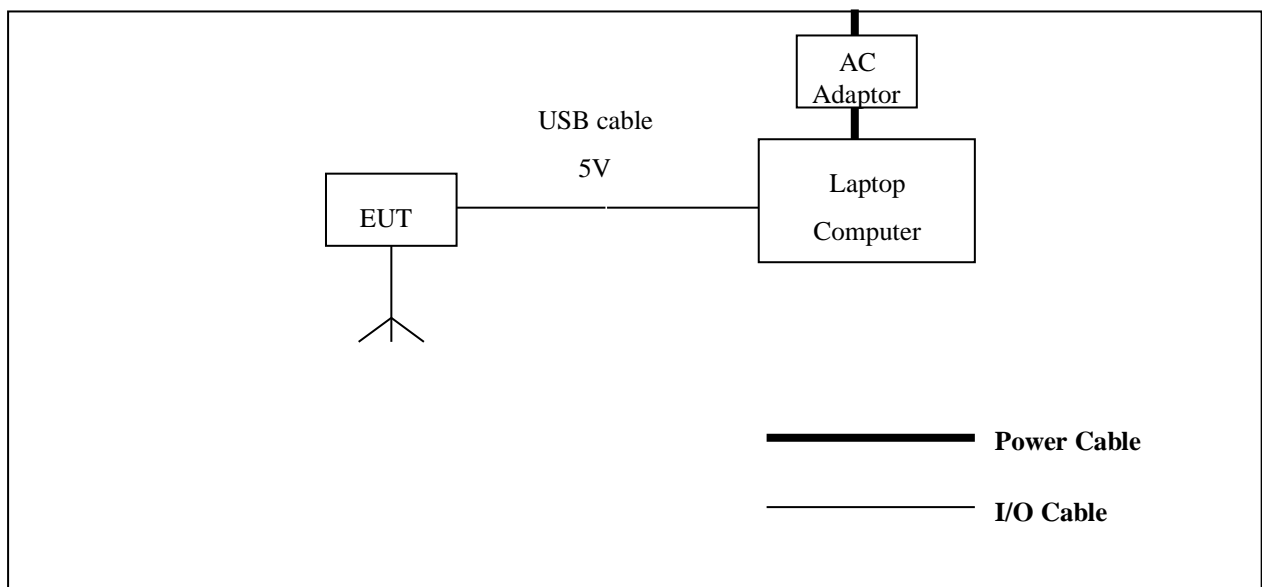

### 3.4 EUT Information

The EUT is the **ROBOMATION CO., LTD. Toy FCC ID: 2AK2Q- MDONGLE.**

Specifications:

EUT Type	Toy
Model Name	mDongle
Brand Name	ROBOMATION CO., LTD.
Frequency of Operation	2402 MHz ~ 2480 MHz
Peak Output Power (Conducted)	2.30 dBm
FCC Classification	Digital Transmission System (DTS)
Number of Channels	40 CH
Modulations	GFSK(BLE)
Antenna Gain (peak)	2.3 dBi
Antenna Setup	1TX / 1RX
Voltage	5.0 Vdc
Temperature Range	-10 °C ~ +50 °C
Size (W x H x D)	About 16.0 mm x 6.0 mm x 37.6 mm
Weight	About 3 g
Remarks	-

## 4. SUMMARY OF TEST RESULTS

---

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	Result	Remark
Conducted Emission	15.207	Complies	
Radiated Emission	15.209	Complies	
6 dB Bandwidth	15.247(a)(2)	Complies	
Peak Output Power	15.247(b)(3)	Complies	
Power Spectral Density	15.247(e)	Complies	
Conducted Spurious Emission	15.247(d)	Complies	
Radiated Spurious Emission	15.247(d)	Complies	
Maximum Permissible Exposure	1.1307(b)	Complies	

## 5. RECOMMENDATION/CONCLUSION

---

The data collected shows that the **ROBOMATION CO., LTD. Toy FCC ID: 2AK2Q- MDONGLE** is in compliance with Part 15.247 of the FCC Rule.

## 6. ANTENNA REQUIREMENTS

---

### §15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **ROBOMATION CO., LTD. Toy FCC ID: 2AK2Q- MDONGLE** is **permanently attached** and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

Used Antenna	
Model name	Max. gain (dBi)
ALA321C3	2.3

## 7. DESCRIPTION OF TESTS

### 7.1 Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure. It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6. A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room. Rohde & Schwarz (ENV216) of the 50 ohm/50  $\mu$ H Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN (ENV216). Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ". If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs, All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1 meter length. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time. The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission. Each EME reported was calibrated using the R&S signal generator.

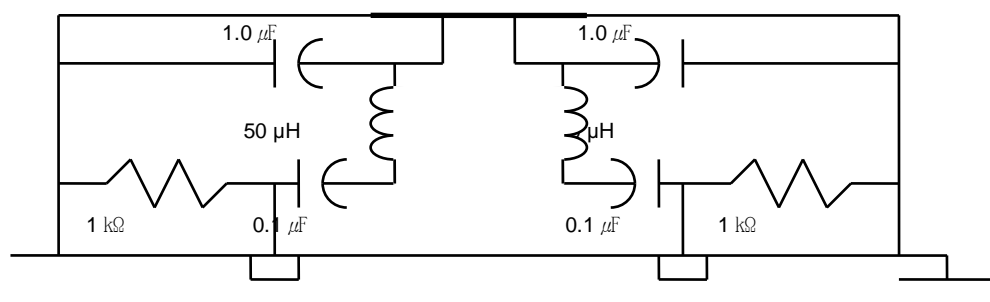


Fig. 2. LISN Schematic Diagram

## 7.2 Radiated Emissions

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013.

The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna(Rohde&Schwarz, HFH2-Z2) and 30 to 1000 MHz using Trilog broadband test antenna(Schwarzbeck, VULB 9163). Above 1 GHz, Horn antenna (Schwarzbeck BBHA 9120D: up to 18 GHz, Q-par Angus QSH20S20 : 18 to 26.5 GHz) was used.

For emissions testing at below 1GHz, The test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, The test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.


At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in ANSI 63.10-2013 section 11.12. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 10kHz, Detector = Peak, Trace mode = max hold. Allow max hold to run for at least 50 times (1/duty cycle) traces.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

Radiated Emissions Limits per 47 CFR 15.209(a) and RSS-GEN Issue 4 8.9

### **7.3 6 dB Bandwidth**

#### **Test Setup**

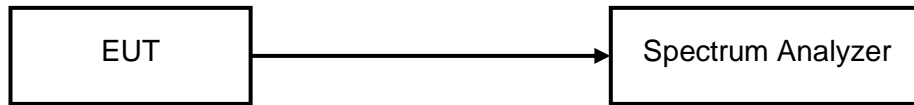

#### **Test Procedure**

EUTs 6 dB bandwidth is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

RBW = 100 kHz

VBW > 3 x RBW

Detector = Peak


Trace mode = max hold

Sweep = auto couple

The bandwidth measurement function on the spectrum analyzer is used to measure the 6 dB bandwidth.

## **7.4 Peak Output Power**

### **Test Setup**

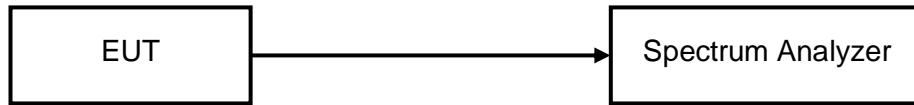

### **Test Procedure**

EUTs Maximum Peak Conducted Output Power is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW  $\geq$  DTS bandwidth

VBW  $\geq$  3 x RBW

Span  $\geq$  3 x RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold


Allow the trace to stabilize.

Use peak marker function to determine the peak amplitude level.



## **7.5 Peak Power Spectral Density**

### **Test Setup**



### **Test Procedure**

EUTs Peak Power Spectral Density is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

Center frequency = DTS channel center frequency

Span = 1.5 times the DTS channel bandwidth

$RBW \text{ to } 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$

$VBW \geq 3 \times RBW$

Detector = peak

Sweep time = auto couple


Trace mode = max hold

Allow the trace to stabilize.

The peak search function on the spectrum analyzer is used to determine the maximum amplitude level within the RBW.

## **7.6 Conducted Spurious Emissions**

### **Test Setup**

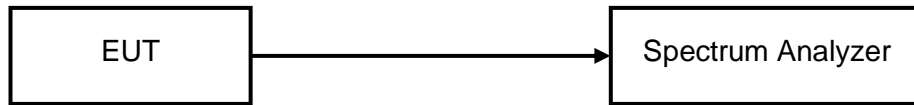

### **Test Procedure**

EUTs Conducted spurious emissions are measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

#### 1) Reference Level

Center frequency = DTS channel center frequency

Span  $\geq 1.5 \times$  DTS bandwidth

RBW = 100 kHz

VBW  $\geq 3 \times$  RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### 2) Unwanted Emissions

Set the center frequency and span to encompass frequency range to be measured.

RBW = 100 kHz

VBW  $\geq 3 \times$  RBW

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

## 8. TEST DATA

### 8.1 Conducted Emissions

#### FCC §15.207

#### Result

Frequency (MHz)	Level (dB $\mu$ V)		*) Factor (dB)	**) Line	Limit (dB $\mu$ V)		Margin (dB)	
	Q-Peak	Average			Q-Peak	Average	Q-Peak	Average
0.17	44.5	31.6	10.00	N	64.8	54.7	20.3	23.1
0.23	38.5	24.0	9.80	L	62.2	52.1	23.7	28.1
0.44	42.1	38.0	10.00	L	57.0	47.0	14.9	9.0
1.36	27.9	22.3	9.80	N	56.0	46.0	28.1	23.7
2.12	33.5	22.5	9.80	N	56.0	46.0	22.5	23.5
4.96	26.0	20.8	9.80	N	56.0	46.0	30.0	25.2


**Line Conducted Emissions Tabulated Data**

#### Notes:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. \*) Factor = LISN + Cable Loss
4. \*\*) LINE : L = Line , N = Neutral
5. The limit is on the FCC §15.207(a).

# PLOTS OF EMISSIONS

## Conducted Emission at the Mains port (Line + Neutral)

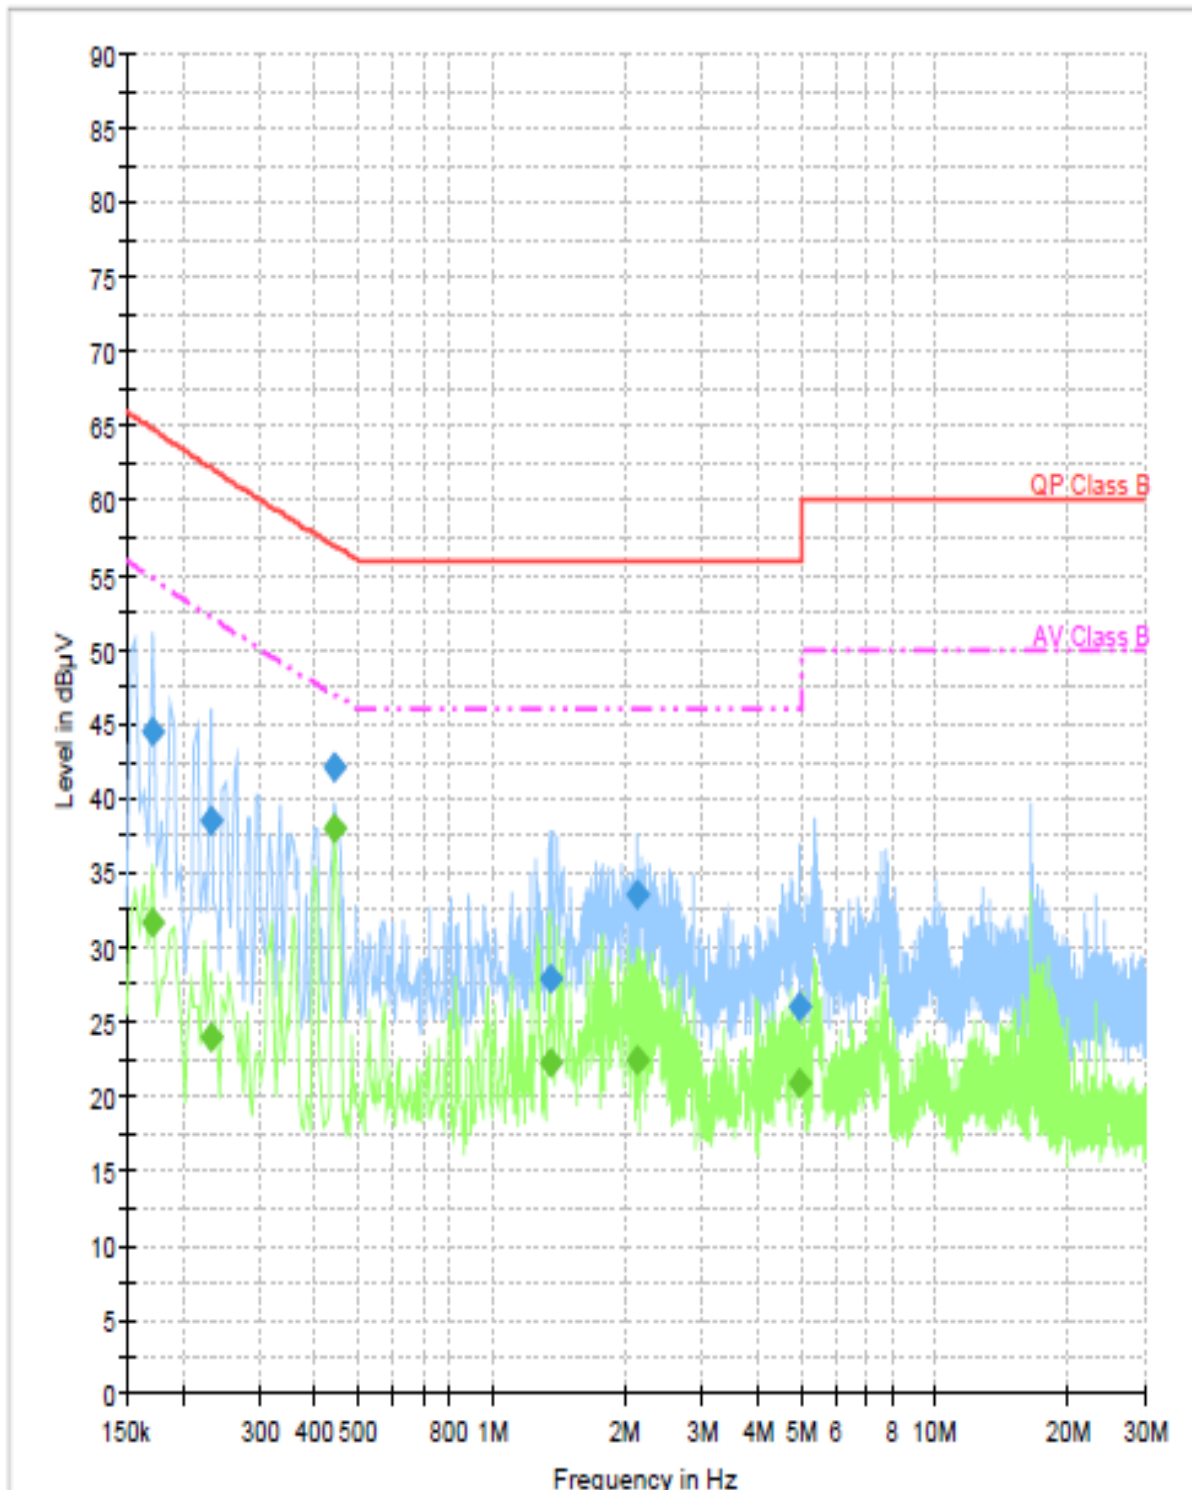

## TEST DATA

### 8.2 Radiated Emissions

#### FCC §15.209

#### Result

Frequency	Reading	Pol*	Antenna Heights	Turntable	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(cm)	Angles (°)	(dB)**	(dBμV/m)	(dBμV/m)	(dB)
50.18	49.35	V	100	240	-27.6	21.8	40.0	18.2
55.03	45.09	H	200	300	-28.2	16.9	40.0	23.1
56.43	45.03	H	200	330	-28.4	16.6	40.0	23.4
166.53	53.15	H	100	210	-32.6	20.6	43.5	22.9
232.34	54.23	H	100	240	-29.2	25.0	46.0	21.0
276.91	52.76	H	100	90	-28.2	24.6	46.0	21.4

#### Radiated Measurements at 3meters


#### Notes:

1. All modes were measured and the worst-case emission was reported.
2. \*Pol. H = Horizontal, V = Vertical
3. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
4. Measurements using CISPR quasi-peak mode below 1 GHz.
5. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded. (X-axis below 1GHz)
6. Lowest channel (2402MHz) is the worst case.
7. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
8. The limit is on the FCC §15.209.

# PLOTS OF EMISSIONS

## Worst Case

### Radiated emission below 1GHz\_2402 MHz

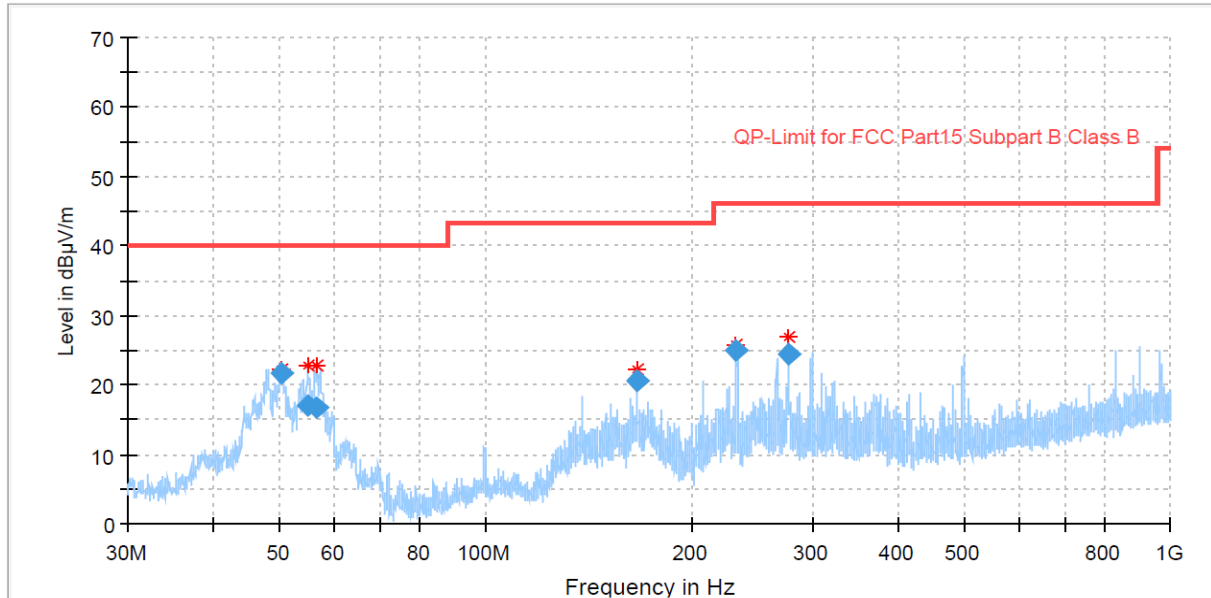

## TEST DATA

### 8.3 6 dB Bandwidth

#### FCC §15.247(a)(2)

**Test Mode : Set to Lowest channel, Middle channel and Highest channel,**

#### Result

Mode	Channel	Frequency (MHz)	6 dB modulated bandwidth (MHz)	Limit (MHz)	Margin (MHz)	99% emission bandwidth (MHz)
LE 1M	Lowest	2402	0.53	0.50	0.03	1.10
	Middle	2442	0.56	0.50	0.06	1.03
	Highest	2480	0.54	0.50	0.04	1.00

# PLOTS OF EMISSIONS

## 6 dB Bandwidth, Lowest Channel (2402 MHz)



## 99% Bandwidth, Lowest Channel (2402 MHz)






# PLOTS OF EMISSIONS

## 6 dB Bandwidth, Middle Channel (2442 MHz)



## 99% Bandwidth, Middle Channel (2442 MHz)

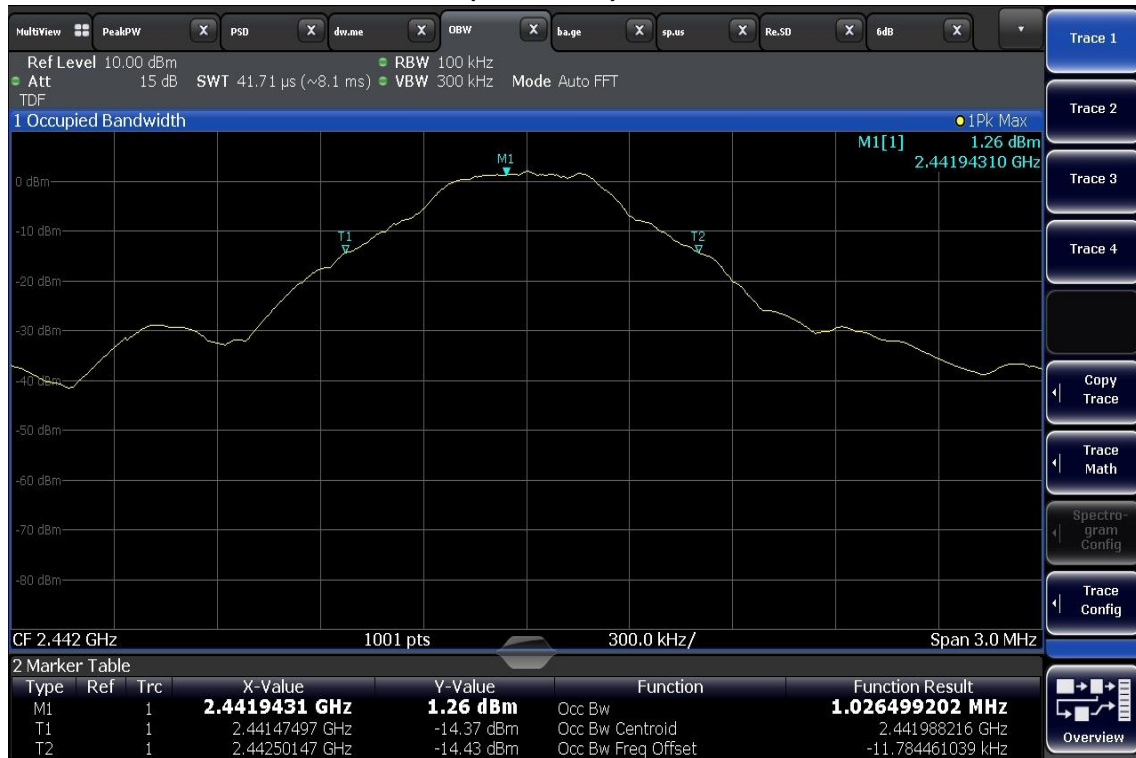

# PLOTS OF EMISSIONS

## 6 dB Bandwidth, Highest Channel (2480 MHz)



## 99% Bandwidth, Highest Channel (2480 MHz)



## TEST DATA

### 8.4 Peak Output Power

#### FCC §15.247(b)(3)

Test Mode : Set to Lowest channel, Middle channel and Highest channel,

#### Result

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
LE 1M	Lowest	2402	2.23	30.00
	Middle	2442	2.30	30.00
	Highest	2480	2.07	30.00


#### Note:

1. The following equation was used for spectrum offset:


$$\text{Spectrum offset (dB)} = \text{Attenuator (dB)} + \text{Cable Loss (dB)} + \text{SMA Type Connector Loss (dB)}$$

# PLOTS OF EMISSIONS

## Maximum Peak Output Power, Lowest Channel (2402 MHz)

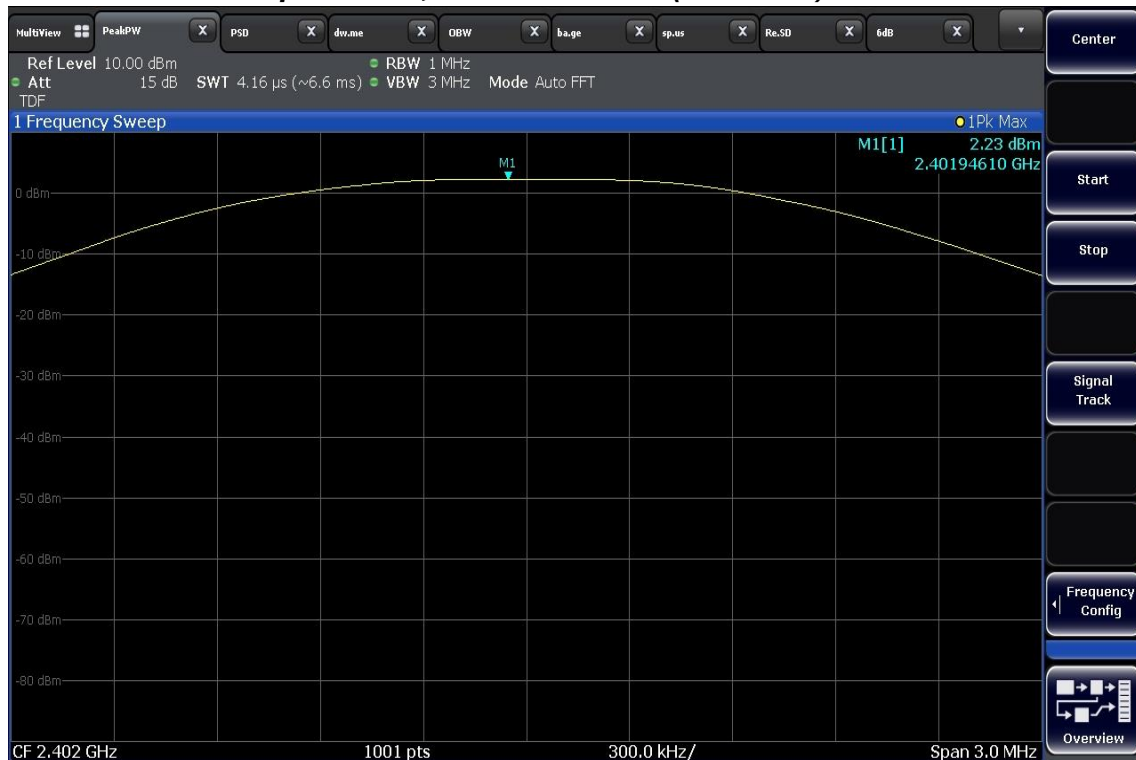


## Maximum Peak Output Power, Middle Channel (2442 MHz)

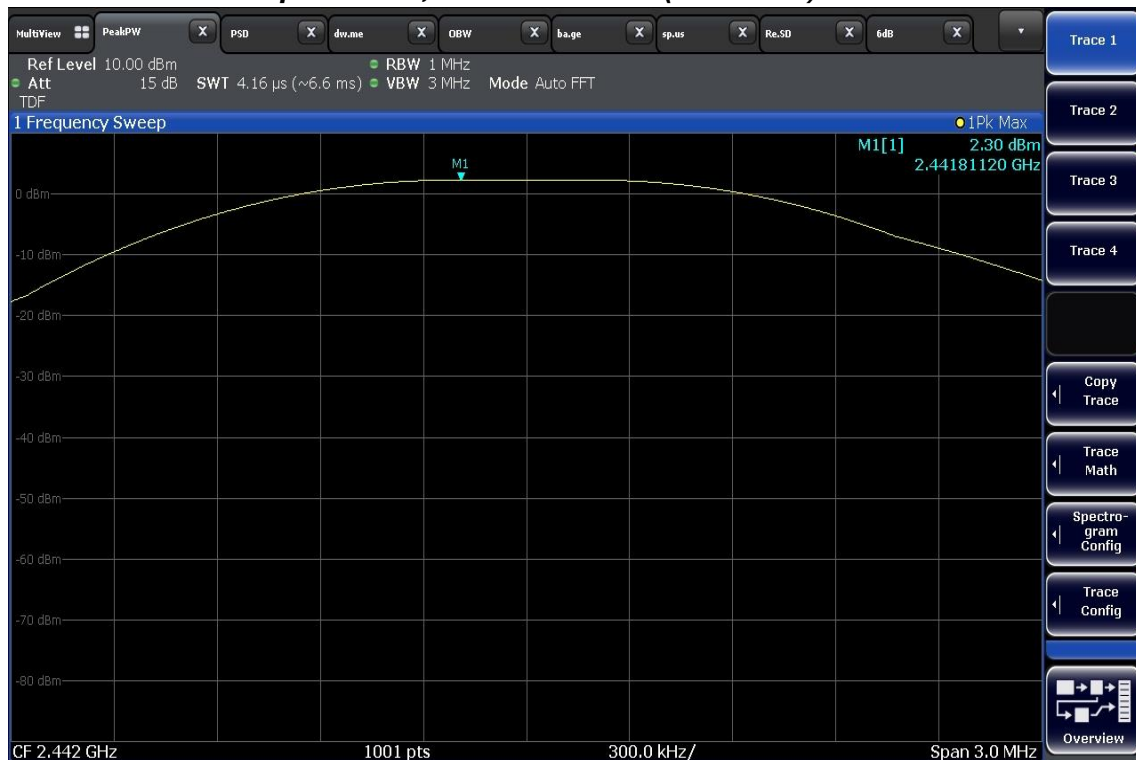

# PLOTS OF EMISSIONS

## Maximum Peak Output Power, Highest Channel (2480 MHz)

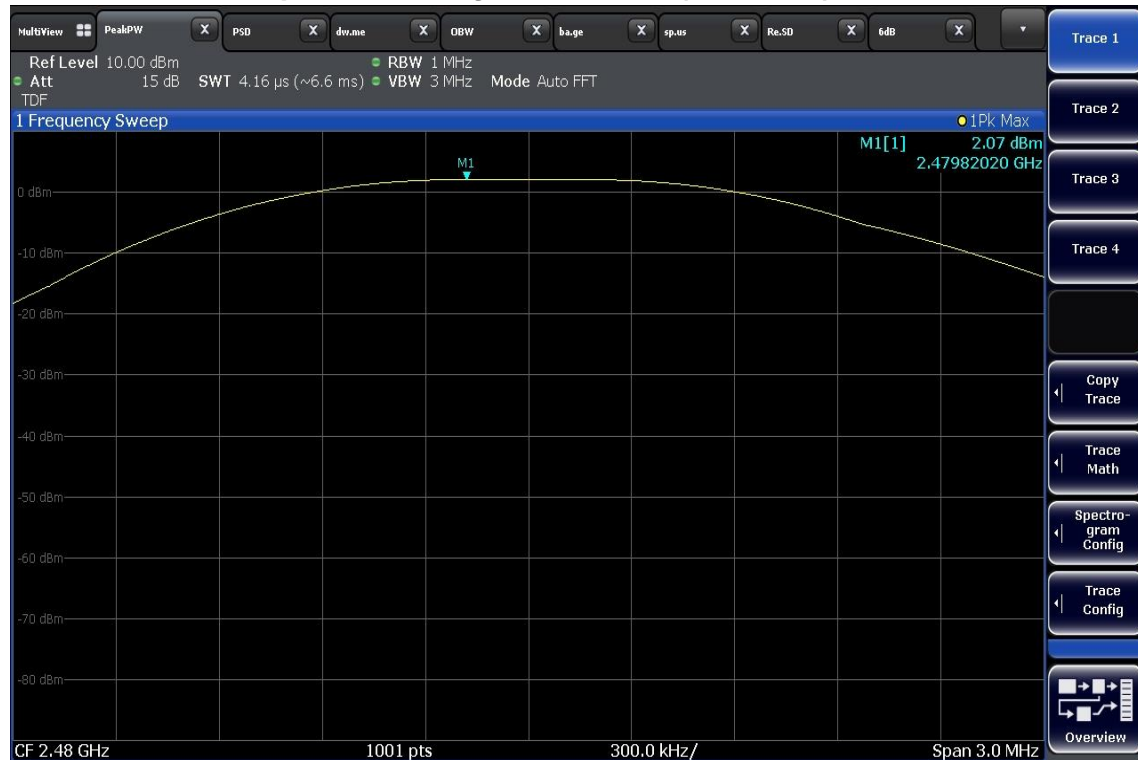

## TEST DATA

### 8.5 Peak Power Spectral Density

#### FCC §15.247(e)

Test Mode : Set to Lowest channel, Middle channel and Highest channel,

#### Result

Mode	Channel	Frequency (MHz)	Peak Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)
LE 1M	Lowest	2402	-2.89	8.00
	Middle	2442	-3.00	8.00
	Highest	2480	-2.57	8.00


#### Note:

1. The following equation was used for spectrum offset:


$$\text{Spectrum offset (dB)} = \text{Attenuator (dB)} + \text{Cable Loss (dB)} + \text{SMA Type Connector Loss (dB)}$$

# PLOTS OF EMISSIONS

**Peak Power Spectral Density, Lowest Channel (2402 MHz)**

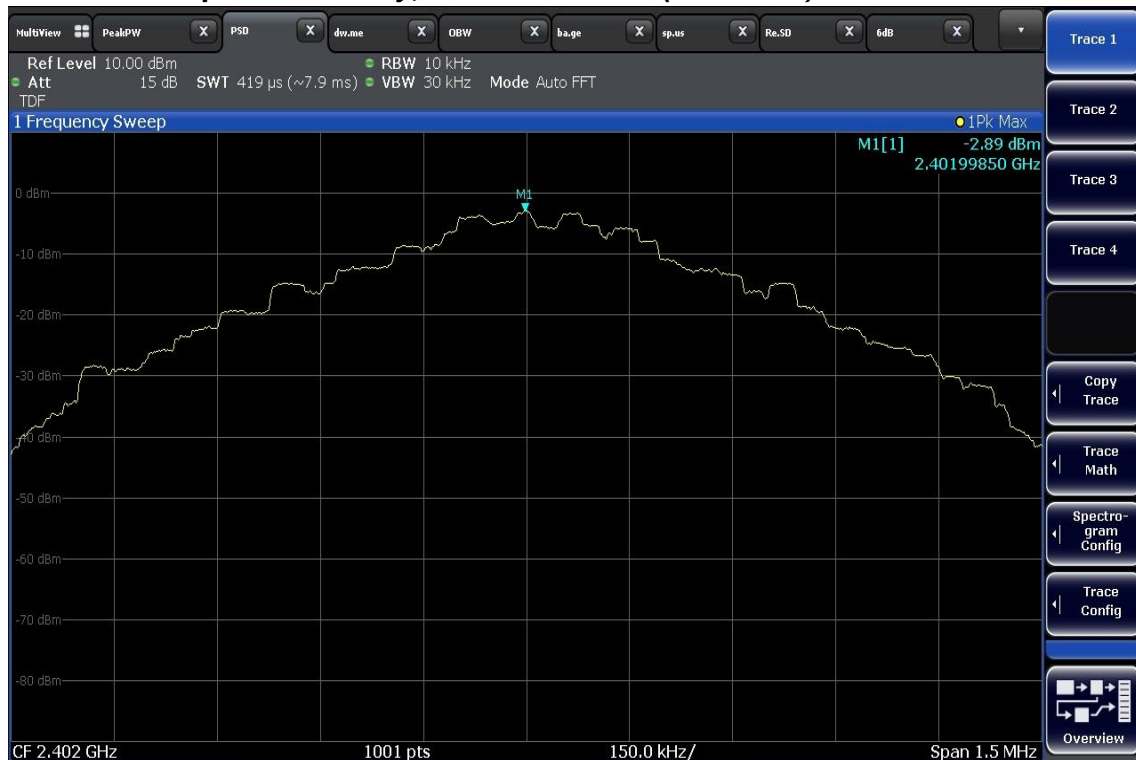


**Peak Power Spectral Density, Middle Channel (2442 MHz)**

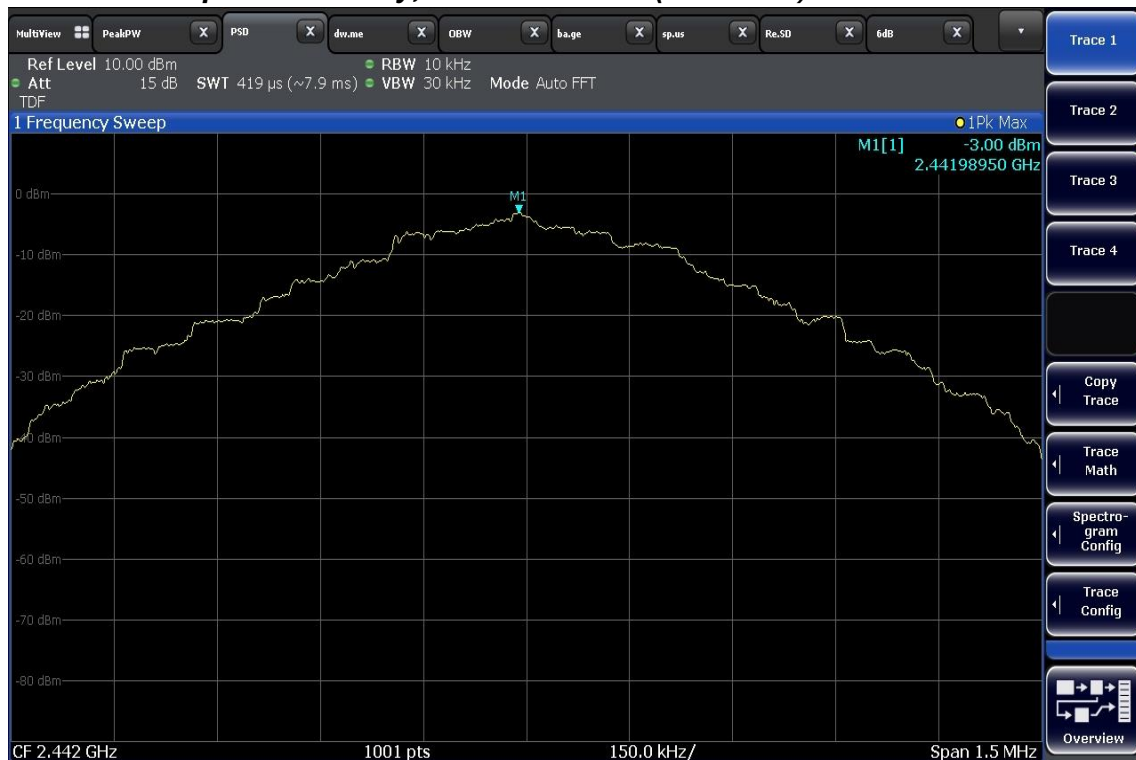

# PLOTS OF EMISSIONS

## Peak Power Spectral Density, Highest Channel (2480 MHz)

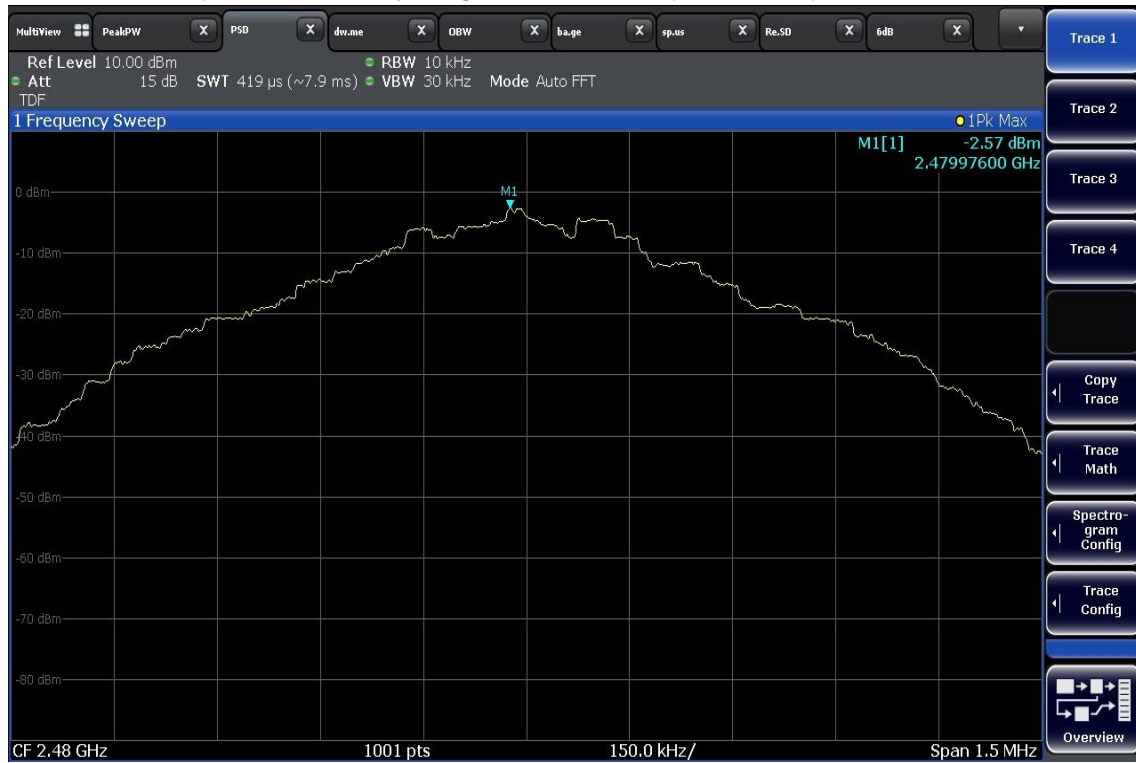



## TEST DATA

### 8.6 Conducted Spurious Emissions

#### FCC §15.247(d)

Test Mode : Set to Lowest channel, Middle channel and Highest channel,

#### Result


Mode	Channel	Frequency (MHz)	Reference Level (dBm/100kHz)	Conducted Spurious Emissions (dBc)	Limit (dBc)
LE 1M	Lowest	2402	1.56	More than 20 dBc	20
	Middle	2442	2.05	More than 20 dBc	20
	Highest	2480	1.60	More than 20 dBc	20

#### Notes:


*The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.*

# PLOTS OF EMISSIONS

Reference Power Spectral Density, Lowest Channel (2402 MHz)

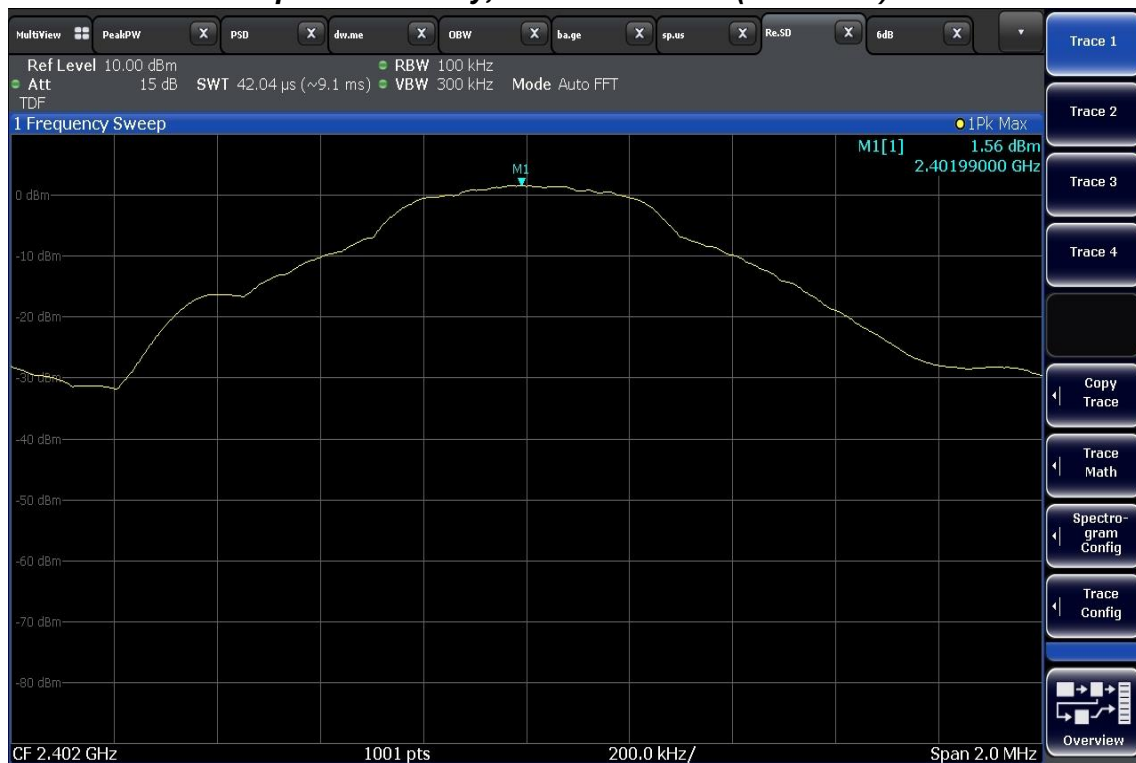


Band Edge, Lowest Channel (2402 MHz)

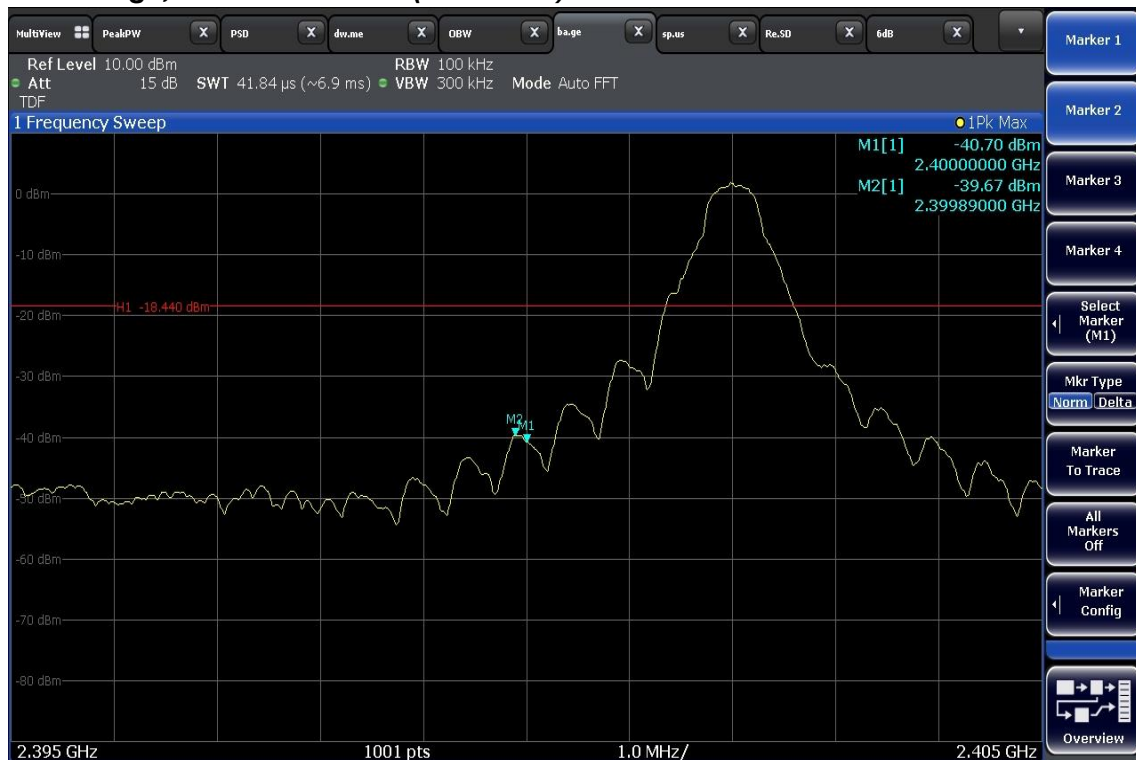


# PLOTS OF EMISSIONS

## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2402 MHz)

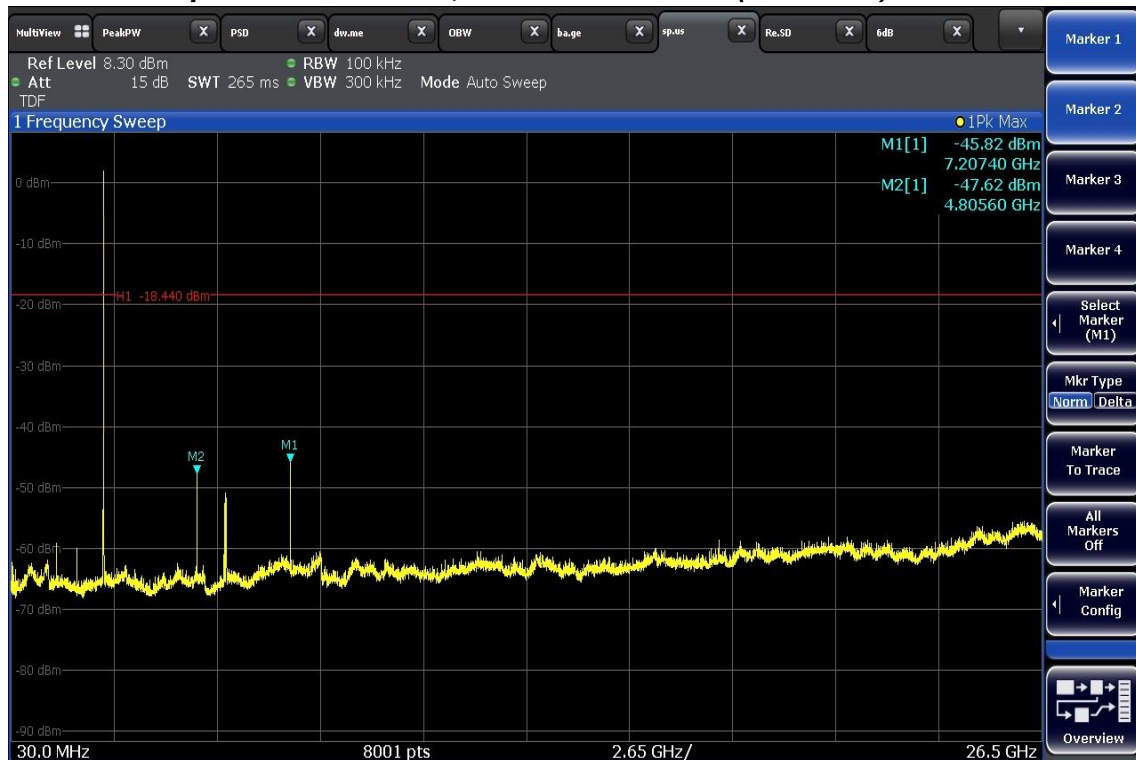


## Reference Power Spectral Density, Middle Channel (2442 MHz)

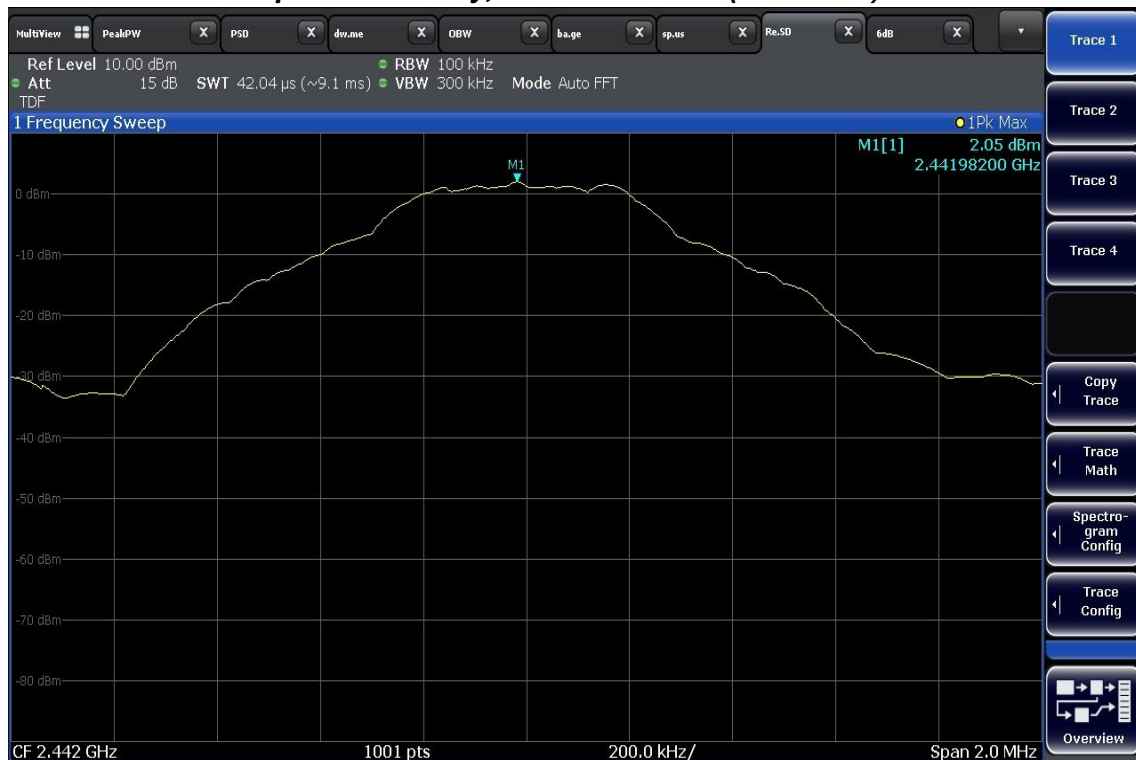

# PLOTS OF EMISSIONS

## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2442 MHz)

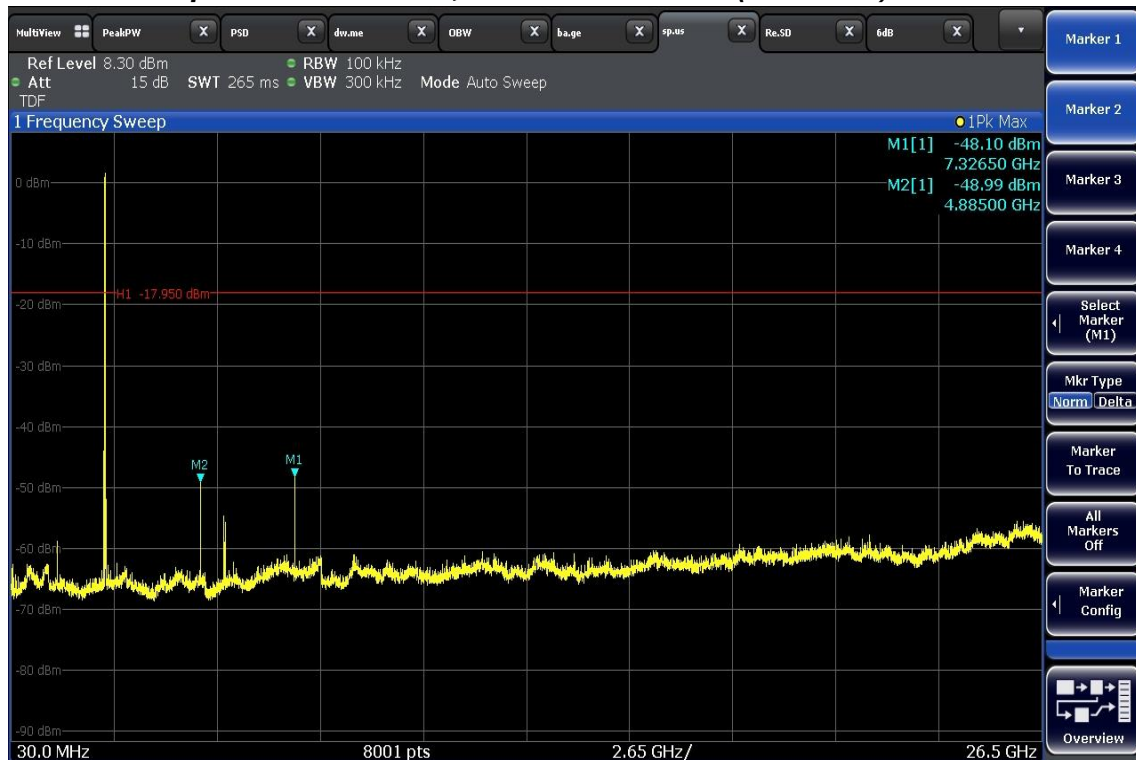

## Reference Power Spectral Density, Highest Channel (2480 MHz)



# PLOTS OF EMISSIONS

## Band Edge, Highest Channel (2480 MHz)



## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2480 MHz)



## TEST DATA

### 8.7 Radiated Spurious Emissions

#### FCC §15.247(d)

**Test Mode : Set to Lowest channel, Middle channel and Highest channel,**

#### Result

##### Lowest Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1197.47	57.4	V	peak	-11.4	46.0	74.0	28.0
1597.73	59.8	V	peak	-11.7	48.1	74.0	25.9
2361.33	61.4	H	peak	-7.9	53.5	74.0	20.5
4803.83	48.7	H	peak	1.0	49.7	74.0	24.3

##### Middle Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1617.33	62.5	V	peak	-11.6	50.9	74.0	23.1
4884.50	47.4	H	peak	1.2	48.6	74.0	25.4
7326.67	43.8	H	peak	8.1	51.9	74.0	22.1

##### Highest Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1592.80	58.9	V	peak	-11.7	47.2	74.0	26.8
4960.17	47.2	H	peak	1.6	48.8	74.0	25.2

**Note:**


1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Average measurement was not performed when peak-detected emission complies with the average limit.
4. Other spurious was under 20 dB below Fundamental.
5. Lowest channel (2402MHz) was the worst condition.
6. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded. (X-axis Above 1GHz)
7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
8. Average emissions were measured using RBW = 1 MHz, VBW = 10 kHz, Detector = Peak.
9. The spectrum was measured from 9 kHz to 10<sup>th</sup> harmonic and the worst-case emissions were reported. No significant emissions were found beyond the 3rd harmonic for this device.




# PLOTS OF EMISSIONS

## Worst Case

### Lowest channel : 1 GHz to 8 GHz\_Peak

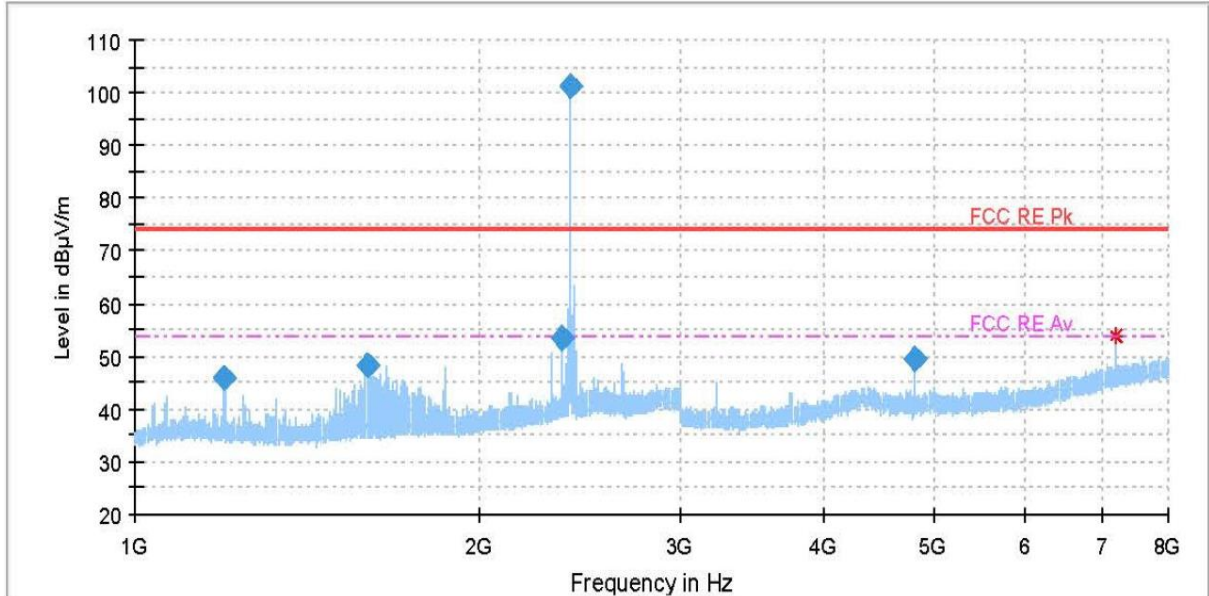


### Lowest channel : 8 GHz to 18 GHz\_Peak

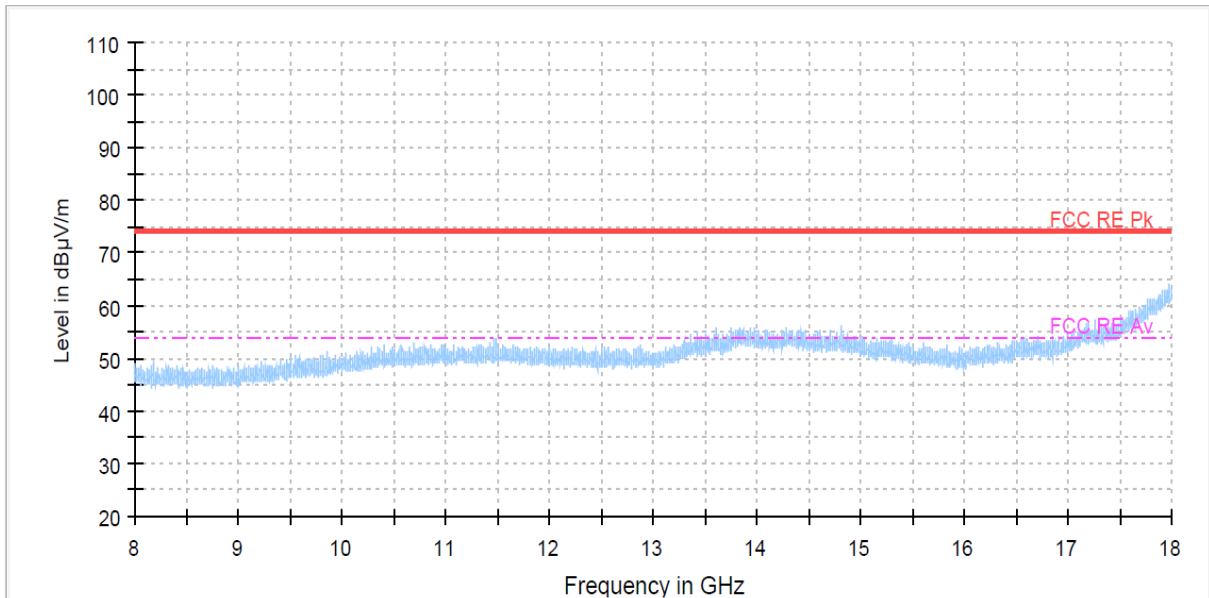




# PLOTS OF EMISSIONS

**Lowest channel : 8 GHz to 18 GHz\_ Average**

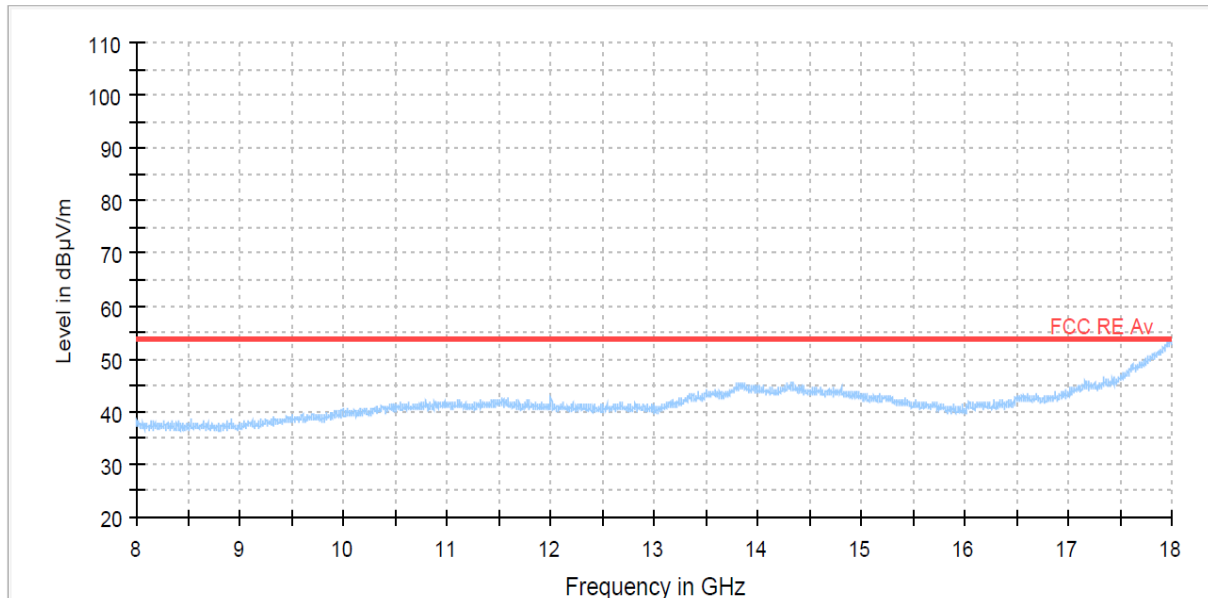

**Lowest channel : 18 GHz to 26.5 GHz\_ Peak**

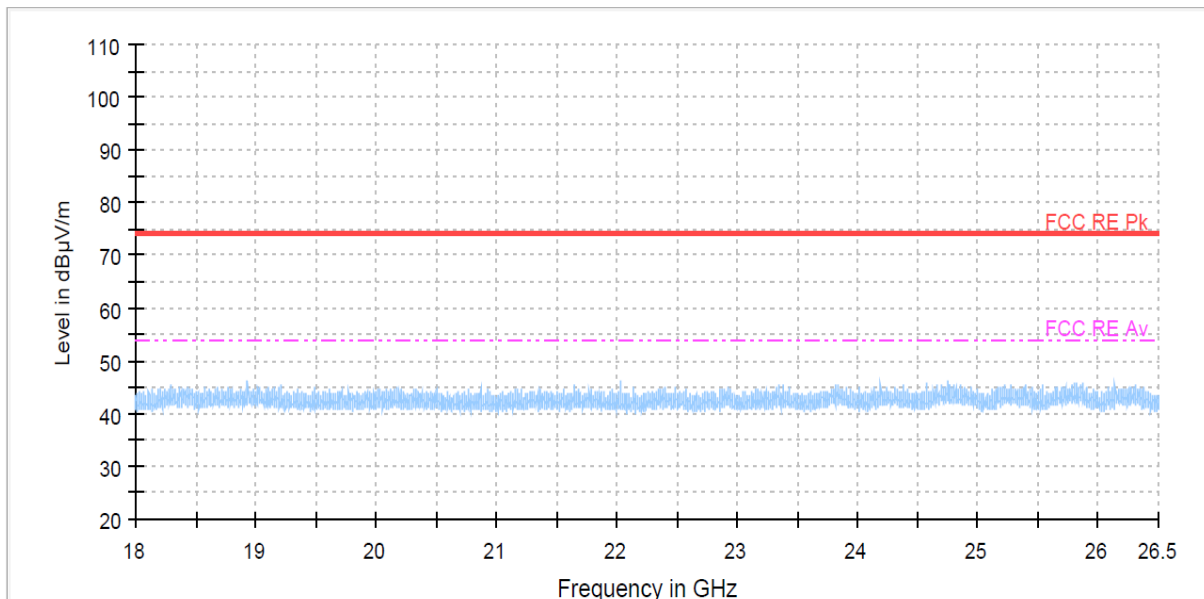

## TEST DATA

### 8.8 Radiated Band Edge

#### FCC §15.247(d)

#### Test Mode : Set to Lowest channel and Highest channel

#### Result

##### Lowest Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2389.14	67.2	H	peak	-7.8	59.4	74.0	14.6
2388.63	43.1	H	Average	-7.8	35.3	54.0	18.7
2389.47	68.0	H	peak	-7.8	60.2	74.0	13.8
2389.70	43.0	H	Average	-7.8	35.2	54.0	18.8
2390.00	58.2	H	peak	-7.8	50.4	74.0	23.6

##### Highest Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2483.50	50.9	H	peak	-7.5	43.4	74.0	30.6
2491.80	54.5	H	peak	-7.5	47.0	74.0	27.0


#### Note:

- \*Pol. H = Horizontal V = Vertical
- \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- Average measurement was not performed when peak-detected emission complies with the average limit.
- Other spurious was under 20 dB below Fundamental.
- Lowest channel (2402MHz) mode was the worst condition.
- The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded. (X-axis Above 1GHz)
- Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
- Average emissions were measured using RBW = 1 MHz, VBW = 10 kHz, Detector = Peak.


# PLOT OF TEST DATA

## Worst Case

### Lowest Channel\_Peak

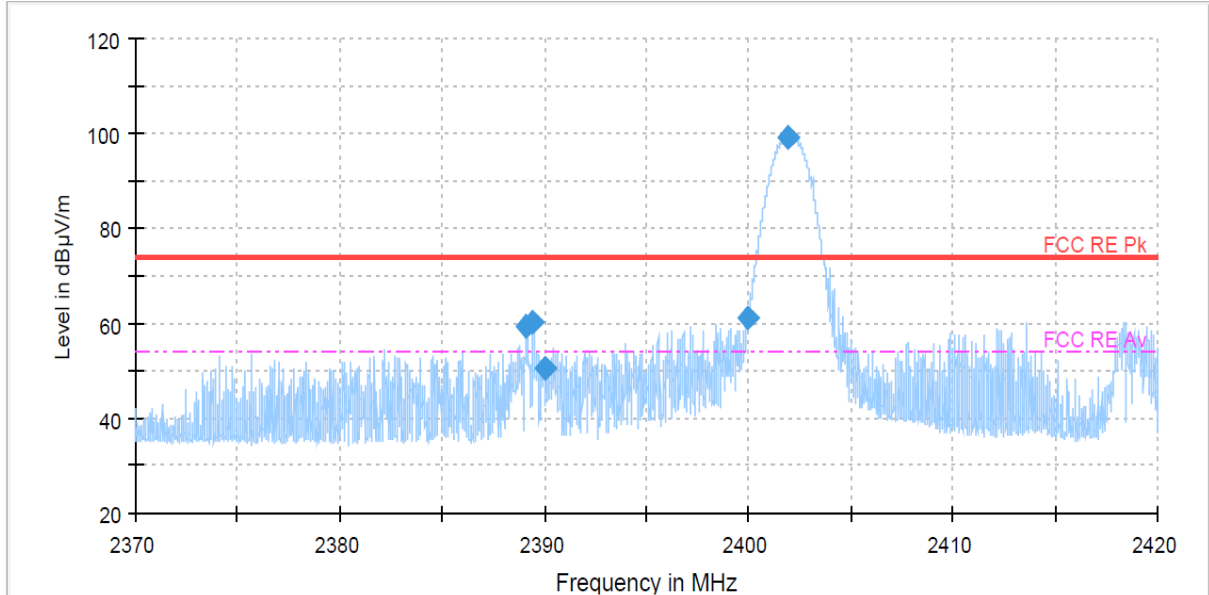

### Lowest Channel\_Average

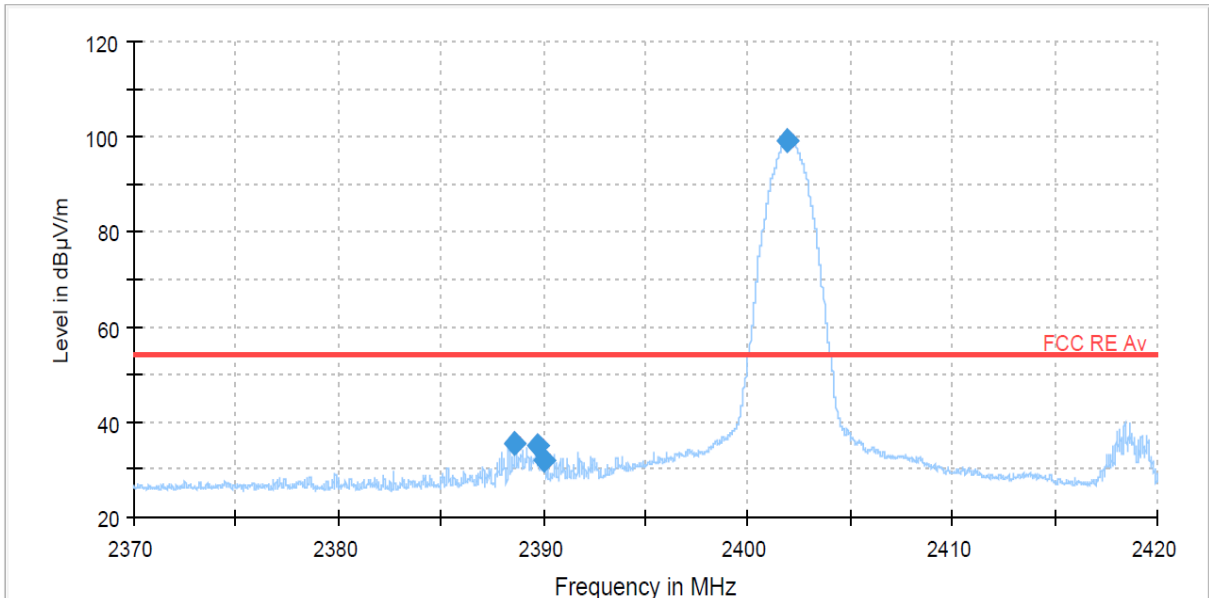

## 9. TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	*Test Receiver	R & S	ESU 40	100202	Apr. 02 2020	1 year
2	*Test Receiver	R & S	ESCI	101041	Apr. 02 2020	1 year
3	*Attenuator	FAIRVIEW	SA3N5W-06	N/A	Apr. 03 2020	1 year
4	*Attenuator	FAIRVIEW	SA3N5W-10	N/A	Jul. 13 2020	1 year
5	*Attenuator	API technologies	40A2W-10	1912	Apr. 03 2020	1 year
6	*Amplifier	R & S	SCU 01	10029	Apr. 02 2020	1 year
7	*Amplifier	R & S	SCU18F	180025	Apr. 02 2020	1 year
8	*Amplifier	R & S	SCU26	10011	Jul. 14 2020	1 year
9	Amplifier	R & S	SCU40	100380	Jul. 14 2020	1 year
10	*Spectrum Analyzer	R & S	FSW43	100732	Apr. 02 2020	1 year
11	Spectrum Analyzer	Agilent	E4440A	MY44022567	Oct. 12 2020	1 year
12	*Spectrum Analyzer	R & S	FSW43	104084	Mar. 24 2020	1 year
13	*Loop Antenna	R & S	HFH2-Z2	100279	Mar. 25 2020	2 year
14	*Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-508	Sep. 23 2020	1 year
15	*Horn Antenna	Q-par Angus	QSH20S20	8179	Sep. 22 2020	1 year
16	Horn Antenna	Q-par Angus	QSH22K20	8180	Sep. 22 2020	1 year
17	*Trilog-Broadband Antenna	SCHWARZBECK	VULB 9163	946	Jul. 11 2019	2 year
18	*LISN	R & S	ENV216	101156	Oct. 12 2020	1 year
19	*Position Controller	INNCO	CO2000	12480406/L	N/A	N/A
20	*Controller	INNCO	CO3000	CO3000/937/38330516/L	N/A	N/A
21	*Turn Table	INNCO	DS1200S	N/A	N/A	N/A
22	*Turn Table	INNCO	DT2000-2t	N/A	N/A	N/A
23	*Antenna Mast	INNCO	MA4000	N/A	N/A	N/A
24	*TILT Antenna Mast	INNCO	MA4640-XP-EP	N/A	N/A	N/A
25	*Open Switch And Control Unit	R & S	OSP-120	100081	N/A	N/A
26	*Open Switch And Control Unit	R & S	OSP-120	101766	N/A	N/A
27	*Shielded Room	Seo-Young EMC	N/A	N/A	N/A	N/A
28	*Anechoic Chamber	Seo-Young EMC	N/A	N/A	N/A	N/A
29	*WiFi Filter Bank	R & S	U083	N/A	N/A	N/A
30	WiFi Filter Bank	R & S	U082	N/A	N/A	N/A

\*) Test equipment used during the test

## 10. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

### 1. Conducted Uncertainty Calculation

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	<b>RI</b>	$\pm 0.1$	normal 1	1.000	0.1	1	0.1
Attenuation AMN-Receiver	<b>LC</b>	$\pm 0.08$	normal 2	2.000	0.04	1	0.04
AMN Voltage division factor	<b>LAMN</b>	$\pm 0.8$	normal 2	2.000	0.4	1	0.4
Sine wave voltage	<b>dVSW</b>	$\pm 2.00$	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	<b>dVPA</b>	$\pm 1.50$	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	<b>dVPR</b>	$\pm 1.50$	rectangular	1.732	0.87	1	0.87
Noise floor proximity	<b>dVNF</b>	$\pm 0.00$	-	-	0.00	1	0.00
AMN Impedance	<b>dZ</b>	$\pm 1.80$	triangular	2.449	0.73	1	0.73
Ⓐ Mismatch	<b>M</b>	+ 0.70	U-Shaped	1.414	0.49	1	0.49
Ⓑ Mismatch	<b>M</b>	- 0.80	U-Shaped	1.414	- 0.56	1	- 0.56
Measurement System Repeatability	<b>RS</b>	0.05	normal 1	1.000	0.05	1	0.05
Remark	Ⓐ: AMN-Receiver Mismatch : + Ⓑ: AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			$\pm 1.88$			
Expanded Uncertainty U	Normal ( $k = 2$ )			$\pm 3.76$			

## 2. Radiation Uncertainty Calculation

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	<b>RS</b>	0.34	normal 1	1.00	0.34	1	0.34
Receiver reading	<b>Ri</b>	$\pm 0.02$	normal 2	2.00	0.01	1	0.01
Sine wave voltage	<b>dVsw</b>	$\pm 0.17$	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	<b>dVpa</b>	$\pm 0.92$	normal 2	2.00	0.46	1	0.46
Pulse repetition rate response	<b>dVpr</b>	$\pm 0.35$	normal 2	2.00	0.18	1	0.18
Noise floor proximity	<b>dVnf</b>	$\pm 0.50$	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	<b>AF</b>	$\pm 2.00$	rectangular	$\sqrt{3}$	1.15	1	1.15
Cable Loss	<b>CL</b>	$\pm 1.00$	normal 2	2.00	0.50	1	0.50
Antenna Directivity	<b>AD</b>	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
Antenna Factor Height Dependence	<b>AH</b>	$\pm 2.00$	rectangular	$\sqrt{3}$	1.15	1	1.15
Antenna Phase Centre Variation	<b>AP</b>	$\pm 0.20$	rectangular	$\sqrt{3}$	0.12	1	0.12
Antenna Factor Frequency Interpolation	<b>Ai</b>	$\pm 0.25$	rectangular	$\sqrt{3}$	0.14	1	0.14
Site Imperfections	<b>Si</b>	$\pm 4.00$	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	<b>DV</b>	$\pm 0.60$	rectangular	$\sqrt{3}$	0.35	1	0.35
Antenna Balance	<b>Dbal</b>	$\pm 0.90$	rectangular	$\sqrt{3}$	0.52	1	0.52
Cross Polarisation	<b>DCross</b>	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.18
Mismatch	<b>M</b>	+ 0.98 - 1.11	U-Shaped	$\sqrt{2}$	0.74	1	0.74
EUT Volume Diameter	<b>Vd</b>	0.33	normal 1	1.00	0.33	1	0.11
Remark							
Combined Standard Uncertainty	Normal						
Expanded Uncertainty U	Normal ( $k = 2$ )						