


Test Mode	Channel	Polarization	Verdict
11ac VHT40	5795	Vertical	PASS

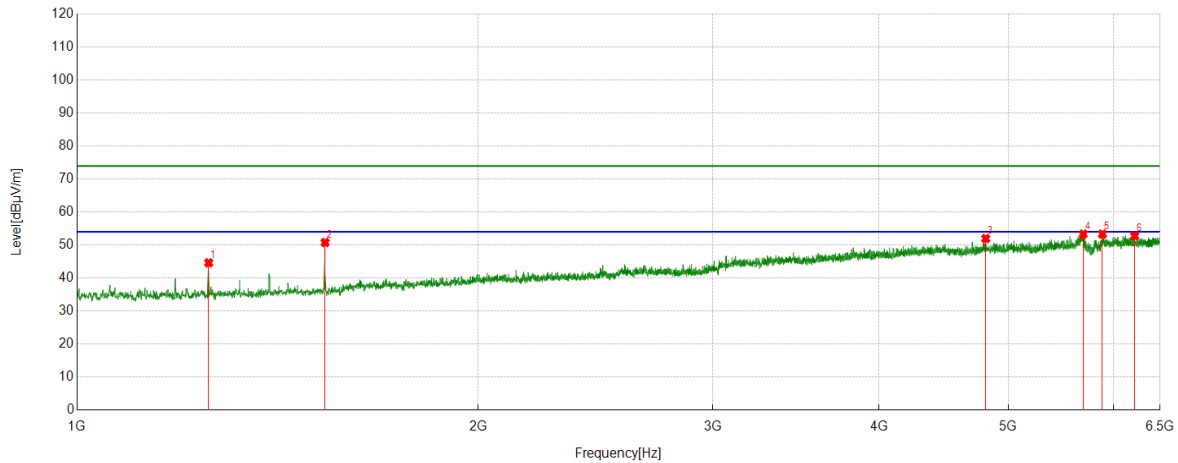


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.20	-1.59	44.61	74.00	-29.39	Vertical
2	1535.3928	51.15	-0.38	50.77	74.00	-23.23	Vertical
3	4808.8677	36.94	15.02	51.96	74.00	-22.04	Vertical
4	5691.4102	36.74	16.59	53.33	74.00	-20.67	Vertical
5	5883.9315	36.26	17.05	53.31	74.00	-20.69	Vertical
6	6220.6912	34.56	18.20	52.76	74.00	-21.24	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Horizontal	PASS

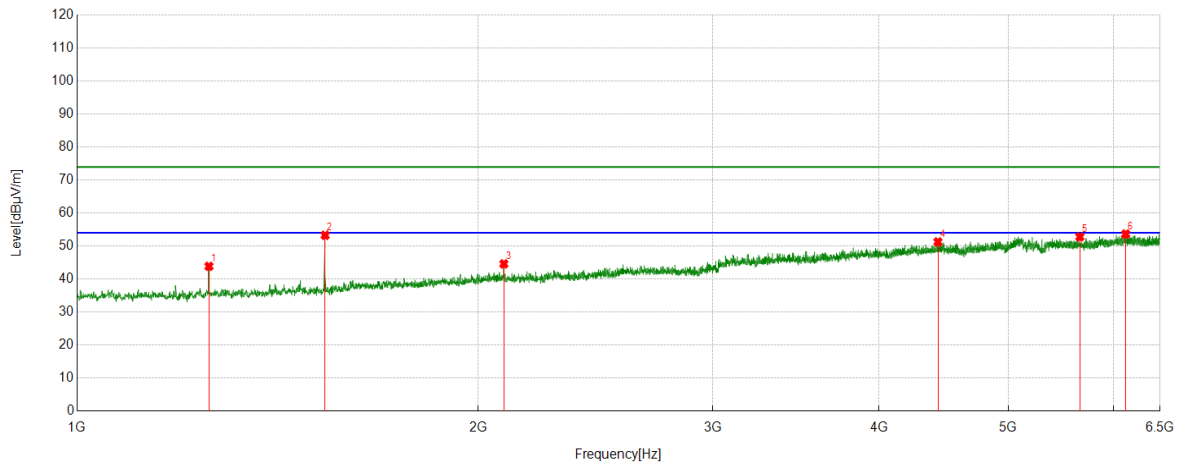

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1256.0840	45.03	-1.18	43.85	74.00	-30.15	Horizontal
2	1535.3928	53.85	-0.58	53.27	74.00	-20.73	Horizontal
3	2090.9546	40.49	4.10	44.59	74.00	-29.41	Horizontal
4	4427.4919	37.09	14.16	51.25	74.00	-22.75	Horizontal
5	5658.4065	36.26	16.53	52.79	74.00	-21.21	Horizontal
6	6125.3473	35.23	18.42	53.65	74.00	-20.35	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5180	Vertical	PASS

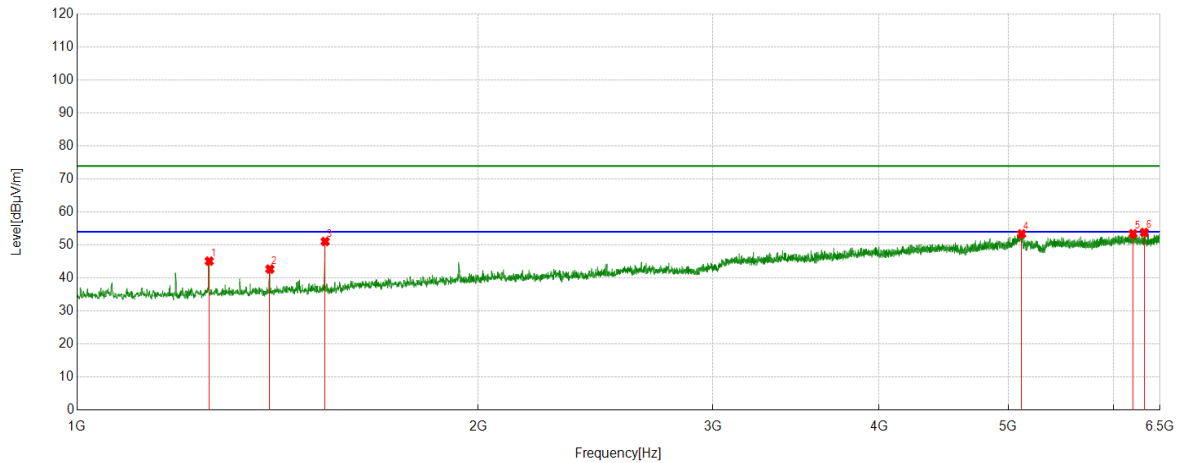


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.6952	46.32	-1.19	45.13	74.00	-28.87	Vertical
2	1395.4328	43.70	-0.99	42.71	74.00	-31.29	Vertical
3	1535.3928	51.66	-0.58	51.08	74.00	-22.92	Vertical
4	5116.9019	36.84	16.55	53.39	74.00	-20.61	Vertical
5	6202.9670	35.02	18.41	53.43	74.00	-20.57	Vertical
6	6324.5916	35.19	18.64	53.83	74.00	-20.17	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS

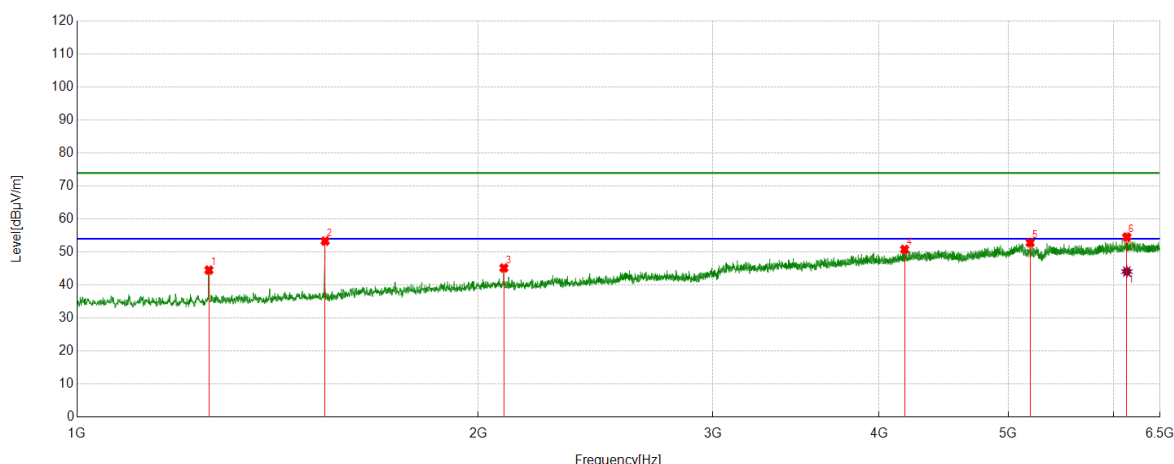

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	45.70	-1.18	44.52	74.00	-29.48	Horizontal
2	1535.3928	53.91	-0.58	53.33	74.00	-20.67	Horizontal
3	2090.9546	41.06	4.10	45.16	74.00	-28.84	Horizontal
4	4179.9644	37.52	13.29	50.81	74.00	-23.19	Horizontal
5	5192.6881	36.54	16.29	52.83	74.00	-21.17	Horizontal
6	6136.9597	36.14	18.39	54.53	74.00	-19.47	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6136.9597	25.69	18.39	44.08	54.00	-9.92	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS

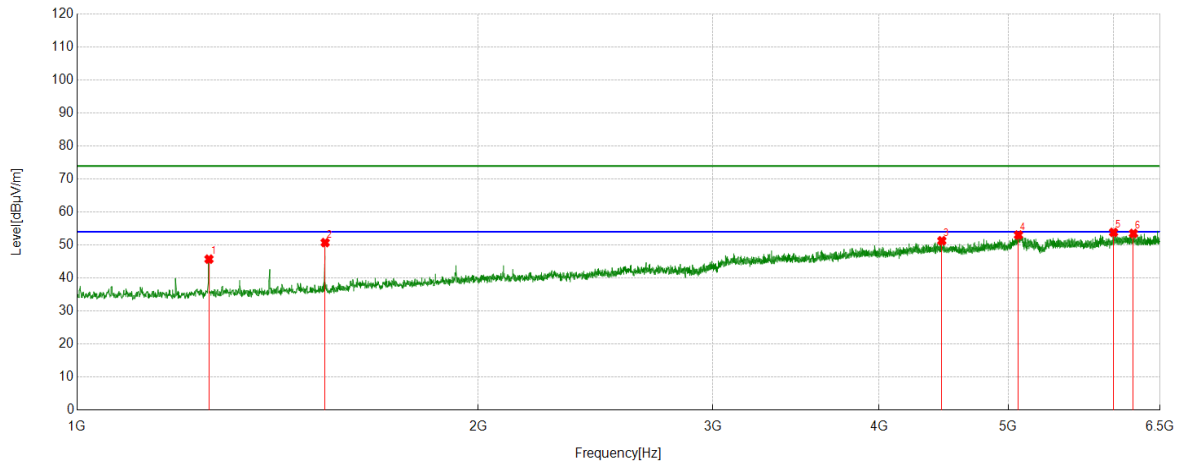


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	46.90	-1.18	45.72	74.00	-28.28	Vertical
2	1535.3928	51.32	-0.58	50.74	74.00	-23.26	Vertical
3	4457.4397	37.00	14.29	51.29	74.00	-22.71	Vertical
4	5088.7876	36.43	16.61	53.04	74.00	-20.96	Vertical
5	5997.6108	36.10	17.74	53.84	74.00	-20.16	Vertical
6	6207.2452	34.95	18.57	53.52	74.00	-20.48	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS

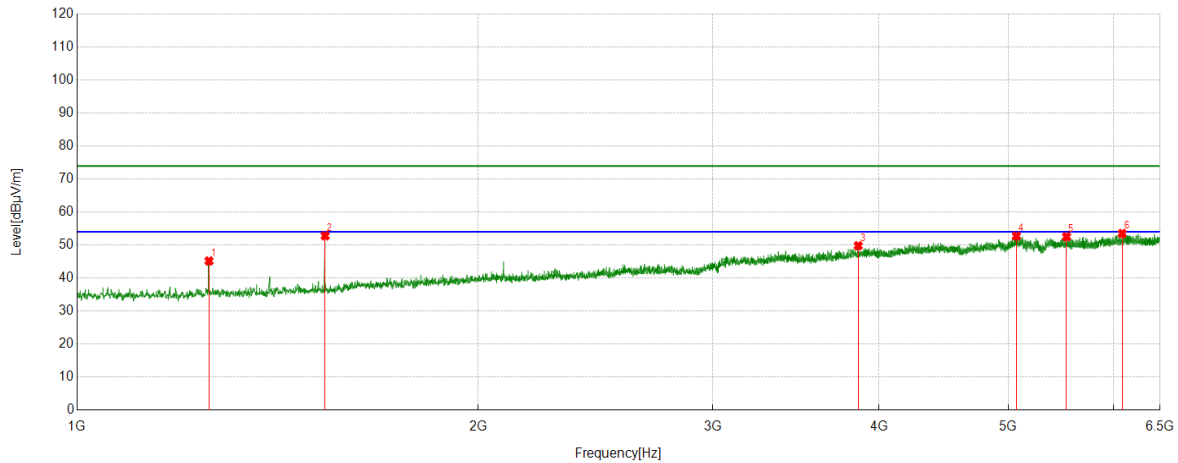


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	46.36	-1.18	45.18	74.00	-28.82	Horizontal
2	1535.3928	53.39	-0.58	52.81	74.00	-21.19	Horizontal
3	3857.8731	37.17	12.62	49.79	74.00	-24.21	Horizontal
4	5071.0635	36.26	16.46	52.72	74.00	-21.28	Horizontal
5	5530.0589	35.10	17.42	52.52	74.00	-21.48	Horizontal
6	6088.0653	35.27	18.24	53.51	74.00	-20.49	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS

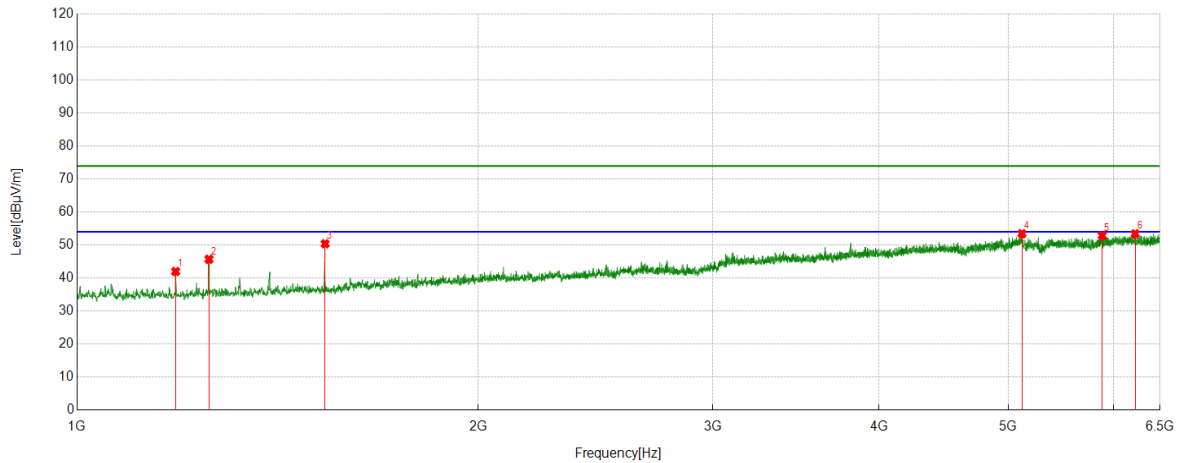


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	44.07	-2.08	41.99	74.00	-32.01	Vertical
2	1256.0840	46.88	-1.18	45.70	74.00	-28.30	Vertical
3	1535.3928	50.97	-0.58	50.39	74.00	-23.61	Vertical
4	5119.3466	36.92	16.53	53.45	74.00	-20.55	Vertical
5	5880.8757	35.51	17.37	52.88	74.00	-21.12	Vertical
6	6226.1918	34.82	18.61	53.43	74.00	-20.57	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS

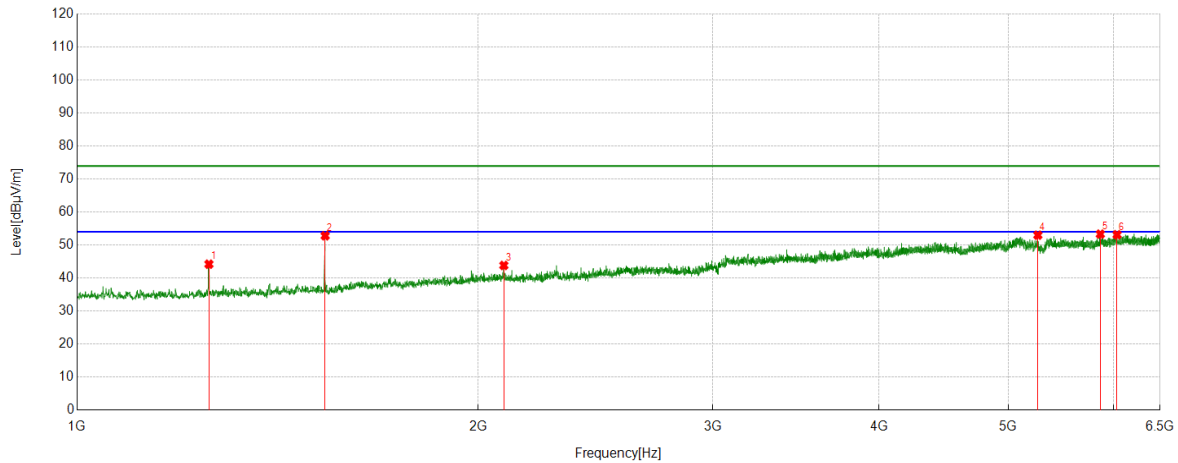


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	45.38	-1.18	44.20	74.00	-29.80	Horizontal
2	1535.3928	53.39	-0.58	52.81	74.00	-21.19	Horizontal
3	2090.9546	39.72	4.10	43.82	74.00	-30.18	Horizontal
4	5262.3625	36.64	16.36	53.00	74.00	-21.00	Horizontal
5	5862.5403	36.07	17.24	53.31	74.00	-20.69	Horizontal
6	6034.2816	35.45	17.68	53.13	74.00	-20.87	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS

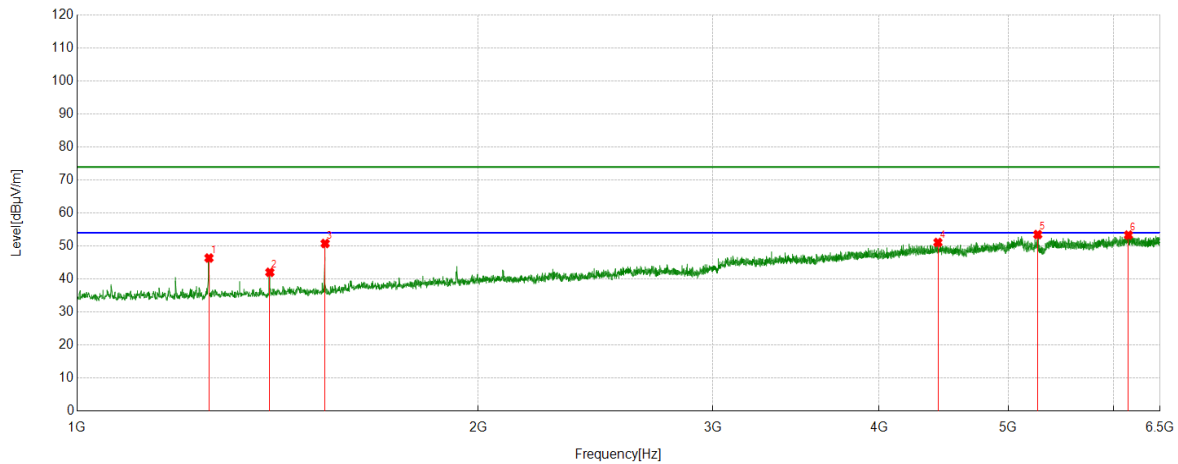


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	47.54	-1.18	46.36	74.00	-27.64	Vertical
2	1395.4328	43.02	-0.99	42.03	74.00	-31.97	Vertical
3	1535.3928	51.35	-0.58	50.77	74.00	-23.23	Vertical
4	4427.4919	36.93	14.16	51.09	74.00	-22.91	Vertical
5	5261.1401	37.13	16.35	53.48	74.00	-20.52	Vertical
6	6154.0727	35.10	18.23	53.33	74.00	-20.67	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS

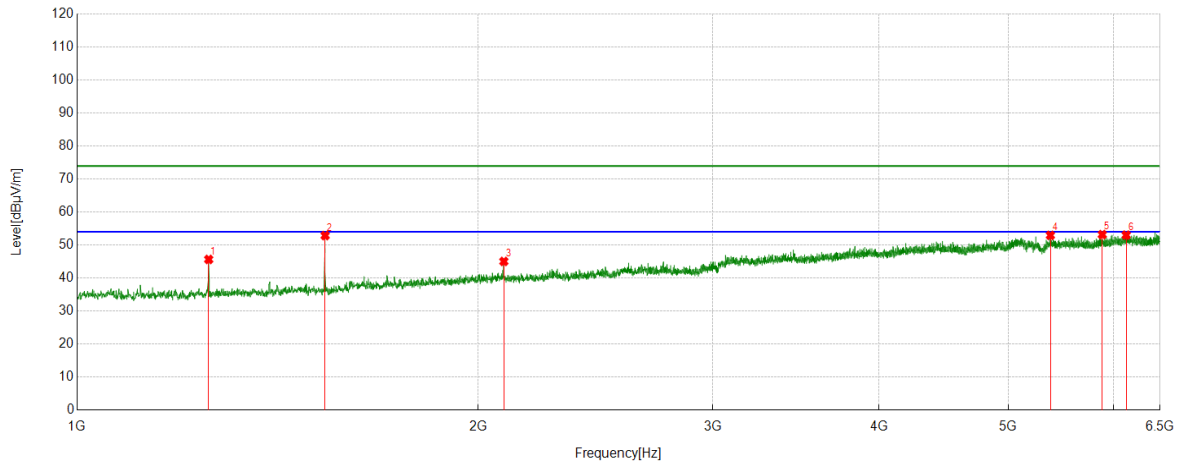


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.80	-1.16	45.64	74.00	-28.36	Horizontal
2	1535.3928	53.45	-0.58	52.87	74.00	-21.13	Horizontal
3	2090.9546	40.93	4.10	45.03	74.00	-28.97	Horizontal
4	5377.2641	36.03	16.91	52.94	74.00	-21.06	Horizontal
5	5882.0980	35.71	17.46	53.17	74.00	-20.83	Horizontal
6	6130.2367	34.51	18.50	53.01	74.00	-20.99	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS

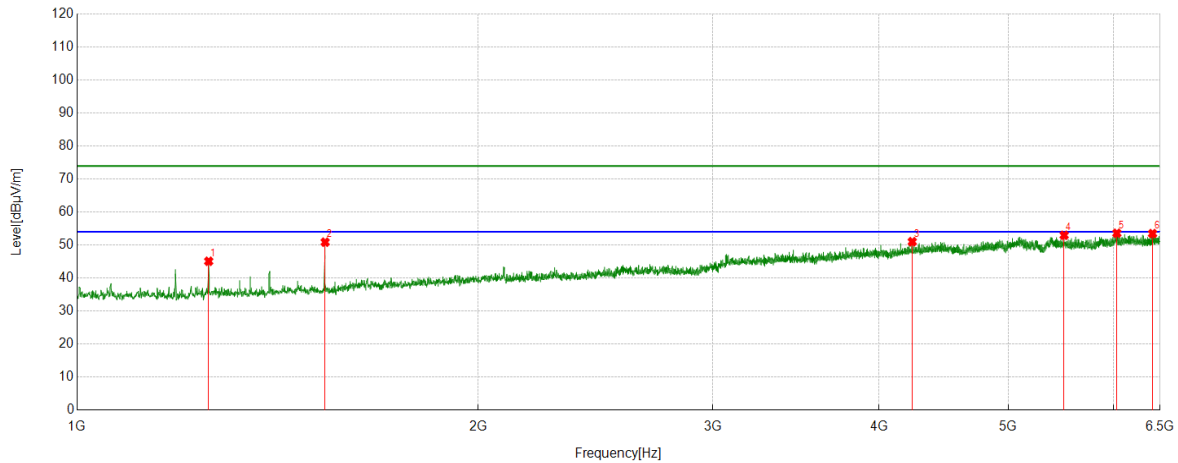


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.24	-1.16	45.08	74.00	-28.92	Vertical
2	1535.3928	51.45	-0.58	50.87	74.00	-23.13	Vertical
3	4235.5817	37.26	13.75	51.01	74.00	-22.99	Vertical
4	5506.8341	36.13	16.83	52.96	74.00	-21.04	Vertical
5	6032.4480	35.87	17.71	53.58	74.00	-20.42	Vertical
6	6415.6573	34.64	18.83	53.47	74.00	-20.53	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS

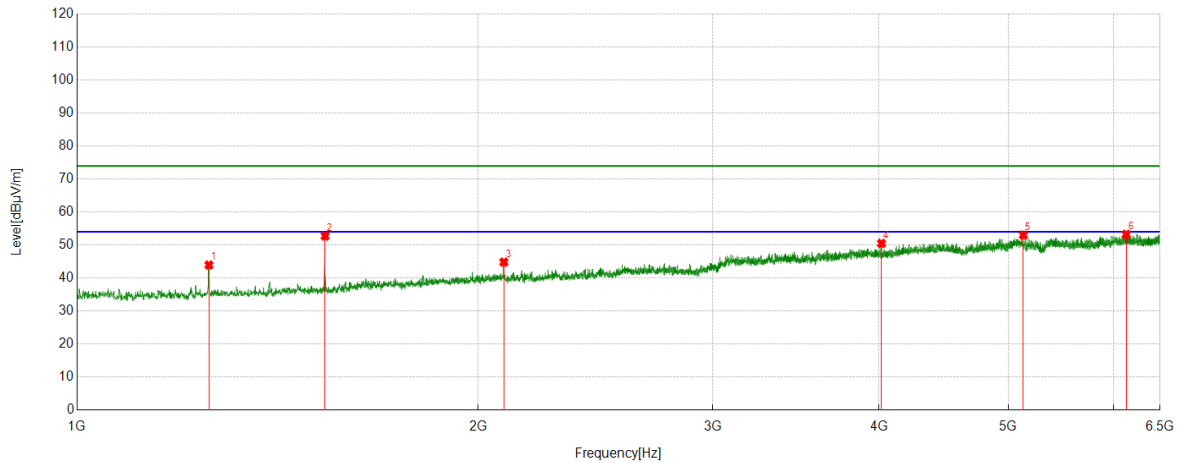


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	45.12	-1.18	43.94	74.00	-30.06	Horizontal
2	1535.3928	53.32	-0.58	52.74	74.00	-21.26	Horizontal
3	2090.9546	40.70	4.10	44.80	74.00	-29.20	Horizontal
4	4016.1685	37.85	12.65	50.50	74.00	-23.50	Horizontal
5	5132.1814	36.54	16.47	53.01	74.00	-20.99	Horizontal
6	6130.8479	34.76	18.49	53.25	74.00	-20.75	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS

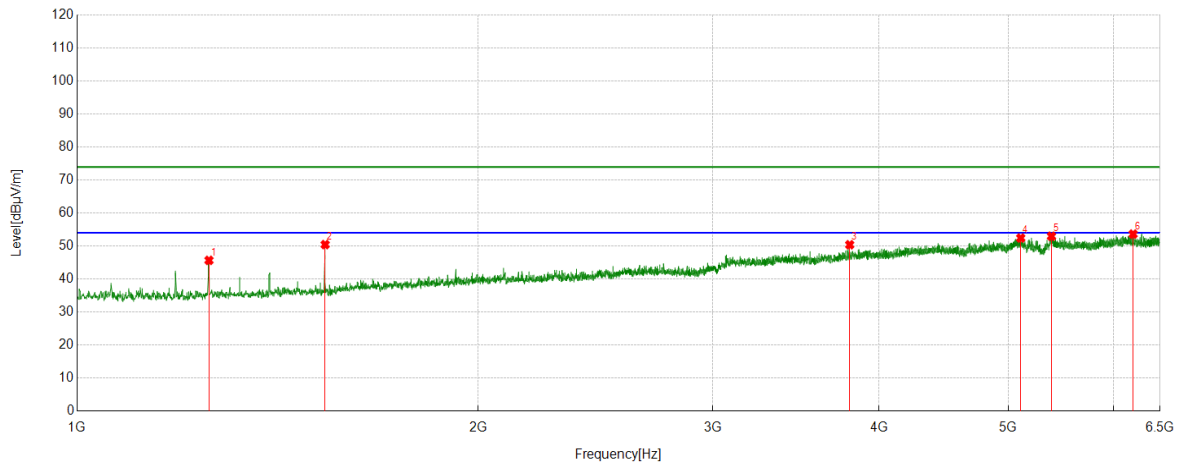


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	46.85	-1.18	45.67	74.00	-28.33	Vertical
2	1535.3928	51.02	-0.58	50.44	74.00	-23.56	Vertical
3	3801.6446	38.07	12.32	50.39	74.00	-23.61	Vertical
4	5108.9566	35.83	16.60	52.43	74.00	-21.57	Vertical
5	5387.6542	36.04	16.94	52.98	74.00	-21.02	Vertical
6	6204.1894	35.16	18.46	53.62	74.00	-20.38	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS

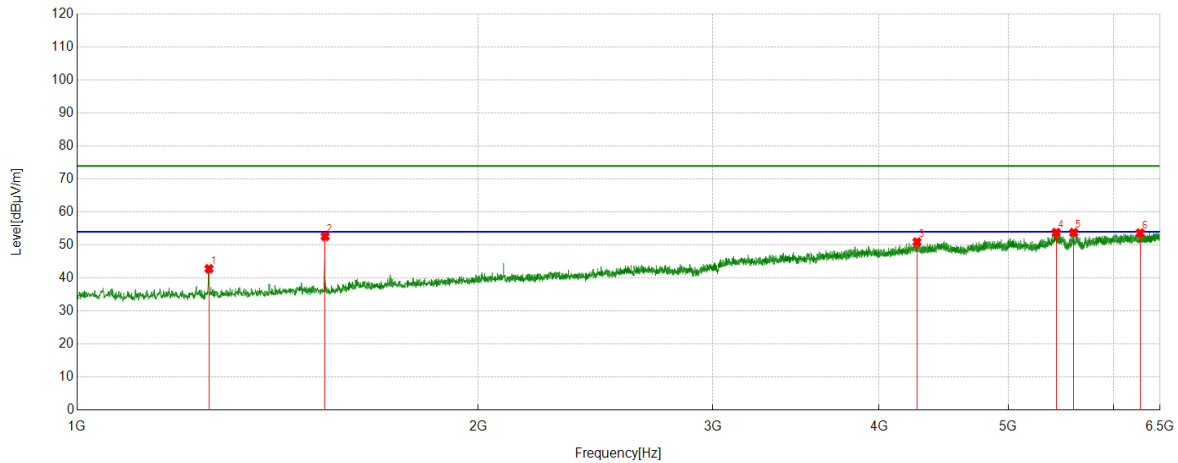


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	44.29	-1.49	42.80	74.00	-31.20	Horizontal
2	1535.3928	53.34	-0.72	52.62	74.00	-21.38	Horizontal
3	4269.8078	36.42	14.50	50.92	74.00	-23.08	Horizontal
4	5431.6591	35.89	17.91	53.80	74.00	-20.20	Horizontal
5	5597.8998	36.02	17.77	53.79	74.00	-20.21	Horizontal
6	6279.9756	34.99	18.67	53.66	74.00	-20.34	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS

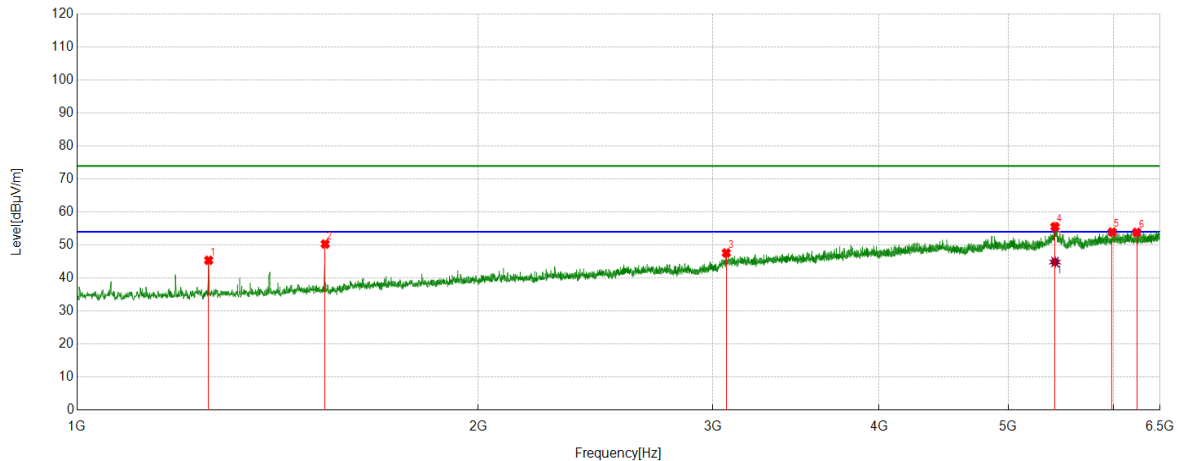

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.86	-1.48	45.38	74.00	-28.62	Vertical
2	1535.3928	51.03	-0.72	50.31	74.00	-23.69	Vertical
3	3071.2857	38.25	9.36	47.61	74.00	-26.39	Vertical
4	5420.6579	38.21	17.35	55.56	74.00	-18.44	Vertical
5	5984.1649	36.32	17.61	53.93	74.00	-20.07	Vertical
6	6243.3048	35.39	18.47	53.86	74.00	-20.14	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5420.6579	27.50	17.35	44.85	54.00	-9.15	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS

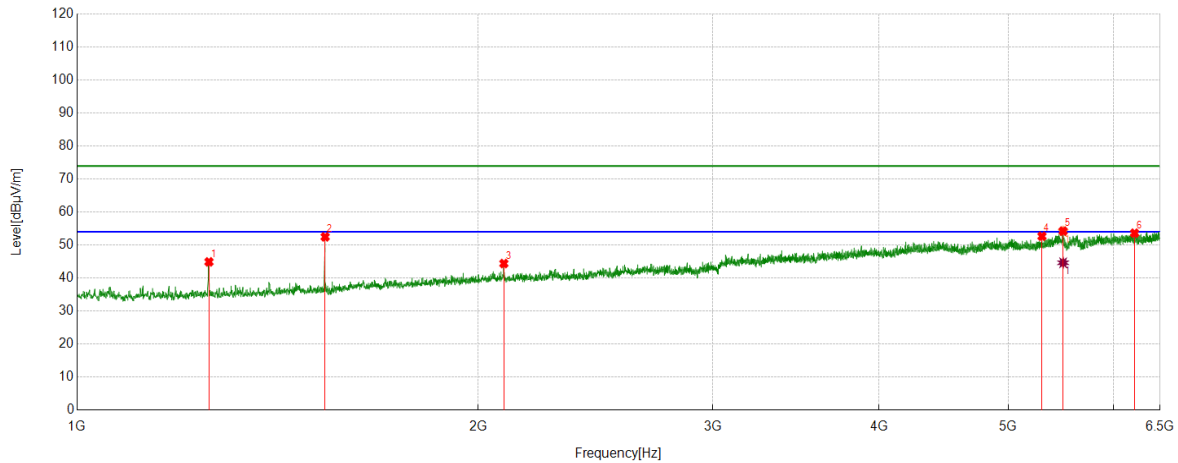

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	46.39	-1.49	44.90	74.00	-29.10	Horizontal
2	1535.3928	53.20	-0.72	52.48	74.00	-21.52	Horizontal
3	2090.9546	40.55	3.84	44.39	74.00	-29.61	Horizontal
4	5299.6444	36.77	15.90	52.67	74.00	-21.33	Horizontal
5	5497.0552	36.41	17.82	54.23	74.00	-19.77	Horizontal
6	6219.4688	35.02	18.58	53.60	74.00	-20.40	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5497.0552	26.81	17.82	44.63	54.00	-9.37	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS

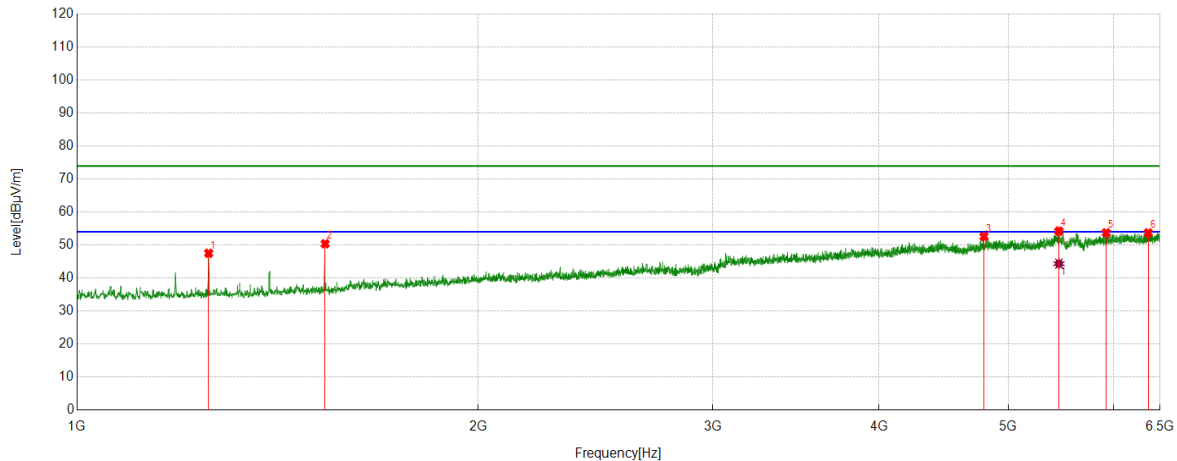

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	48.99	-1.48	47.51	74.00	-26.49	Vertical
2	1535.3928	51.11	-0.72	50.39	74.00	-23.61	Vertical
3	4794.1994	37.60	14.99	52.59	74.00	-21.41	Vertical
4	5457.3286	36.36	17.87	54.23	74.00	-19.77	Vertical
5	5921.8246	35.78	17.93	53.71	74.00	-20.29	Vertical
6	6368.5965	34.79	18.91	53.70	74.00	-20.30	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5457.3286	26.47	17.87	44.34	54.00	-9.66	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS

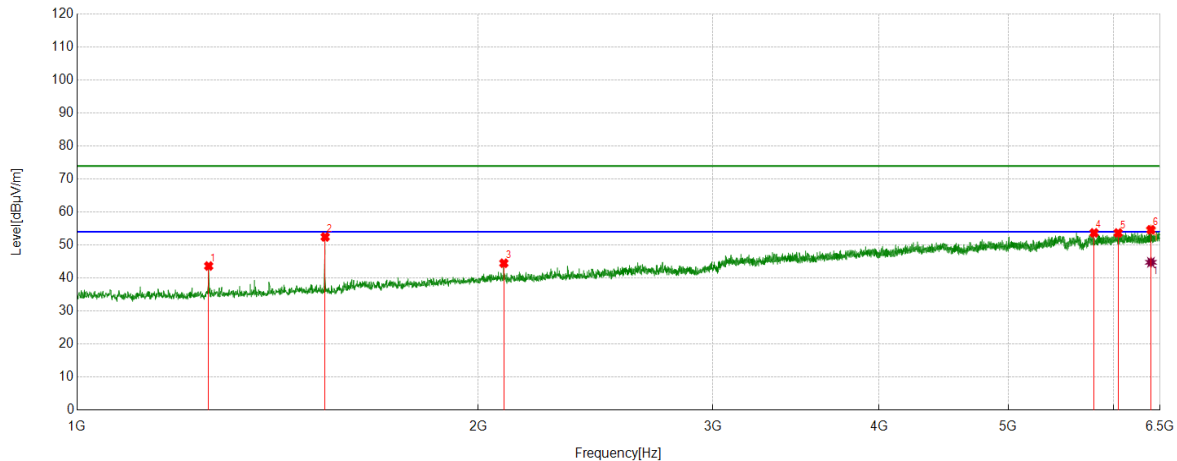

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.12	-1.48	43.64	74.00	-30.36	Horizontal
2	1535.3928	53.18	-0.72	52.46	74.00	-21.54	Horizontal
3	2090.9546	40.64	3.84	44.48	74.00	-29.52	Horizontal
4	5799.5888	36.79	16.90	53.69	74.00	-20.31	Horizontal
5	6045.2828	35.92	17.74	53.66	74.00	-20.34	Horizontal
6	6397.9331	35.56	19.06	54.62	74.00	-19.38	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6397.9331	25.71	19.06	44.77	54.00	-9.23	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS

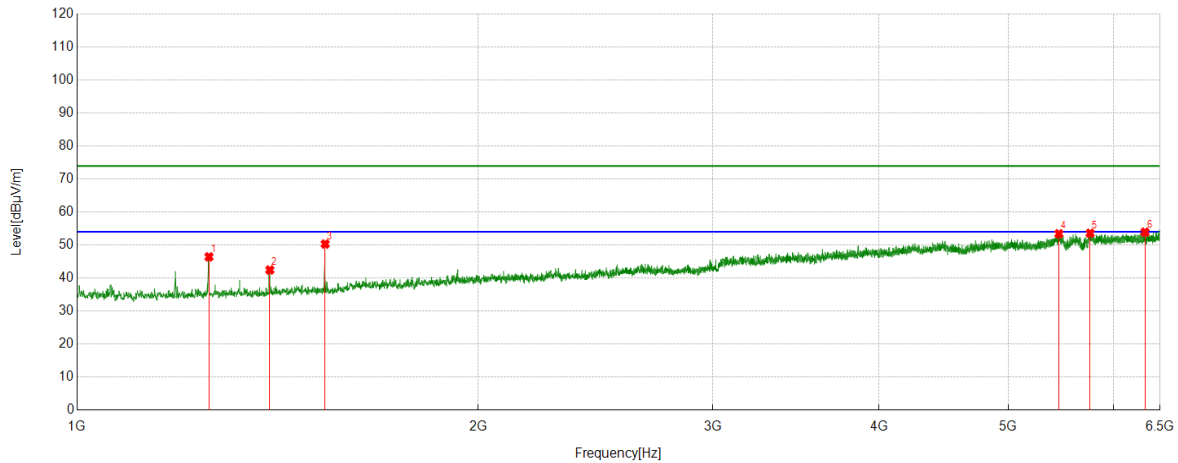


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	47.92	-1.49	46.43	74.00	-27.57	Vertical
2	1395.4328	43.59	-1.15	42.44	74.00	-31.56	Vertical
3	1535.3928	51.03	-0.72	50.31	74.00	-23.69	Vertical
4	5457.3286	35.55	17.87	53.42	74.00	-20.58	Vertical
5	5759.8622	36.47	17.11	53.58	74.00	-20.42	Vertical
6	6332.5369	35.19	18.72	53.91	74.00	-20.09	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS

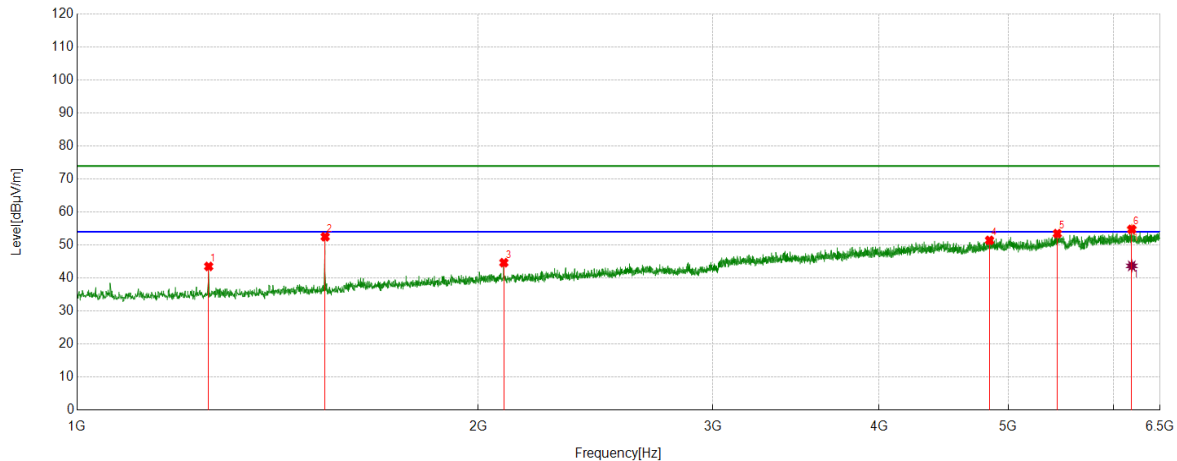

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.99	-1.48	43.51	74.00	-30.49	Horizontal
2	1535.3928	53.24	-0.72	52.52	74.00	-21.48	Horizontal
3	2090.9546	40.81	3.84	44.65	74.00	-29.35	Horizontal
4	4840.6490	35.90	15.53	51.43	74.00	-22.57	Horizontal
5	5442.0491	35.58	17.89	53.47	74.00	-20.53	Horizontal
6	6189.5211	36.31	18.45	54.76	74.00	-19.24	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6189.5211	25.23	18.45	43.68	54.00	-10.32	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS

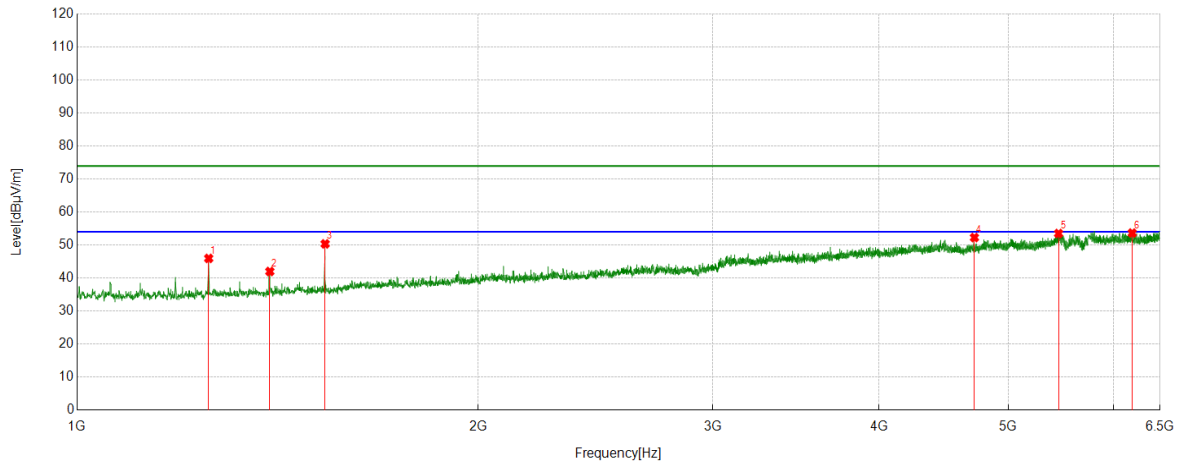


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.43	-1.48	45.95	74.00	-28.05	Vertical
2	1395.4328	43.13	-1.15	41.98	74.00	-32.02	Vertical
3	1535.3928	51.07	-0.72	50.35	74.00	-23.65	Vertical
4	4715.9684	37.71	14.56	52.27	74.00	-21.73	Vertical
5	5454.2727	35.62	17.88	53.50	74.00	-20.50	Vertical
6	6194.4105	35.11	18.53	53.64	74.00	-20.36	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS

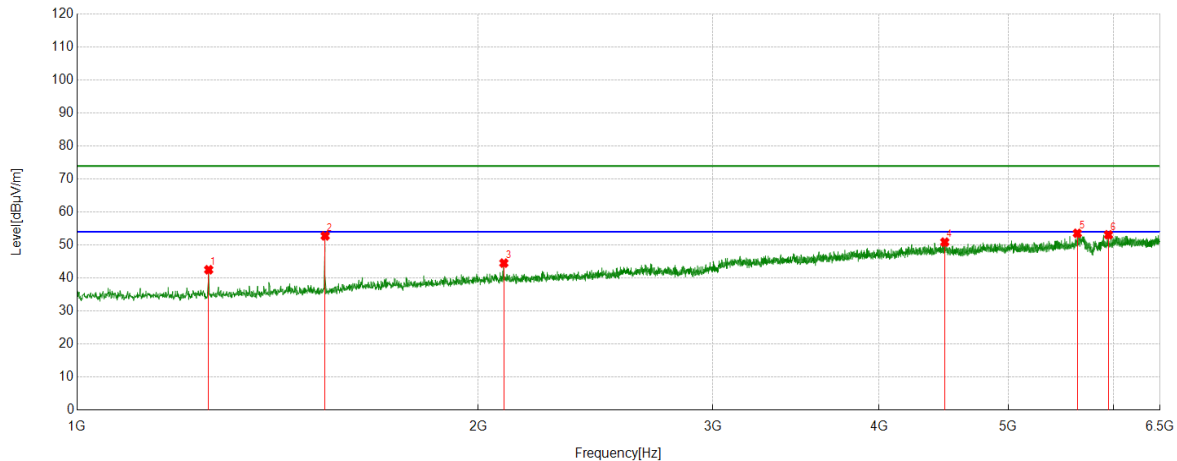


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	44.10	-1.59	42.51	74.00	-31.49	Horizontal
2	1535.3928	53.16	-0.38	52.78	74.00	-21.22	Horizontal
3	2090.9546	40.48	4.04	44.52	74.00	-29.48	Horizontal
4	4480.0533	36.83	14.06	50.89	74.00	-23.11	Horizontal
5	5633.3482	37.06	16.50	53.56	74.00	-20.44	Horizontal
6	5945.0495	35.83	17.28	53.11	74.00	-20.89	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Vertical	PASS

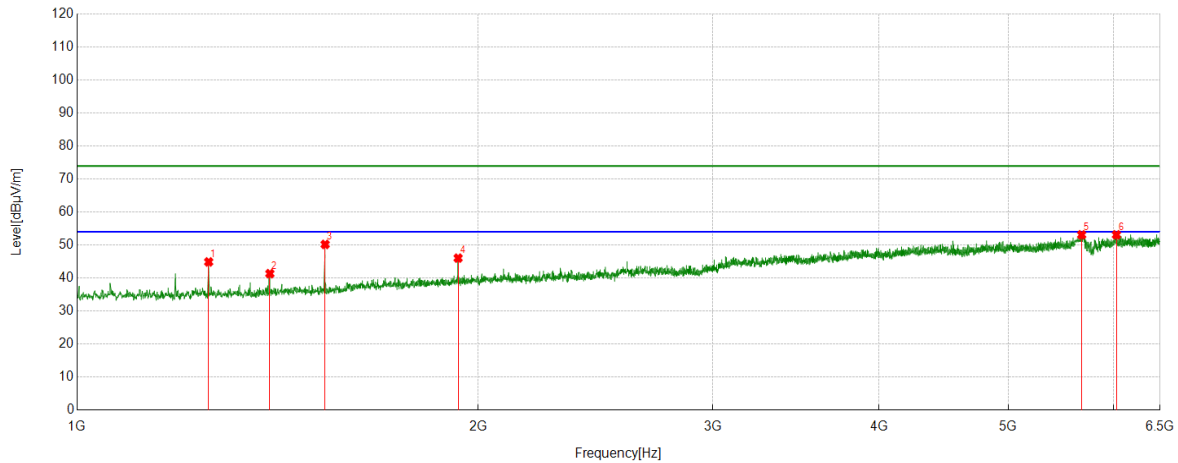


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.47	-1.59	44.88	74.00	-29.12	Vertical
2	1395.4328	42.47	-1.14	41.33	74.00	-32.67	Vertical
3	1535.3928	50.57	-0.38	50.19	74.00	-23.81	Vertical
4	1932.0480	43.52	2.52	46.04	74.00	-27.96	Vertical
5	5676.1307	36.46	16.65	53.11	74.00	-20.89	Vertical
6	6027.5586	35.46	17.64	53.10	74.00	-20.90	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Horizontal	PASS

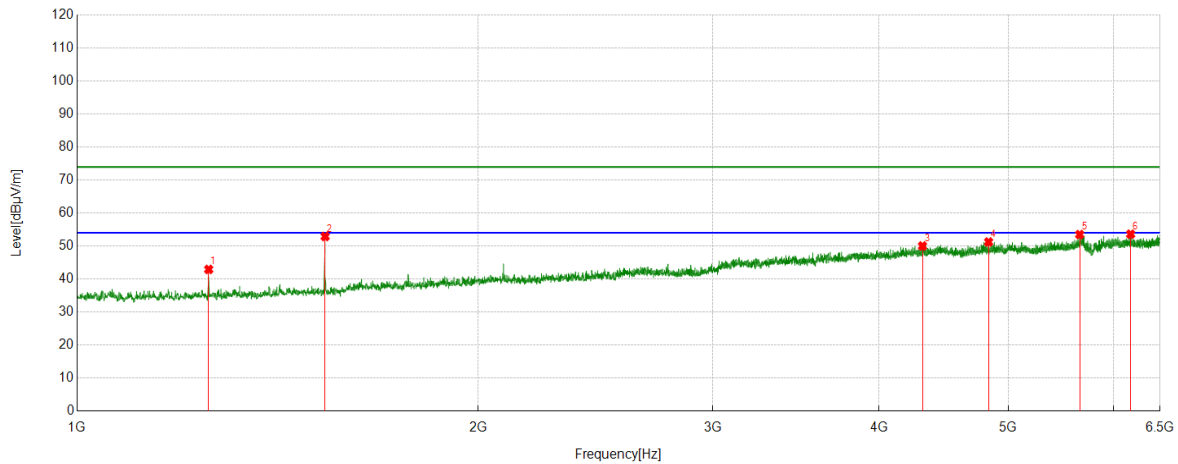


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.50	-1.59	42.91	74.00	-31.09	Horizontal
2	1535.3928	53.28	-0.38	52.90	74.00	-21.10	Horizontal
3	4310.7568	36.86	13.16	50.02	74.00	-23.98	Horizontal
4	4832.7036	36.46	14.77	51.23	74.00	-22.77	Horizontal
5	5656.5730	36.78	16.71	53.49	74.00	-20.51	Horizontal
6	6177.2975	35.58	18.02	53.60	74.00	-20.40	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Vertical	PASS

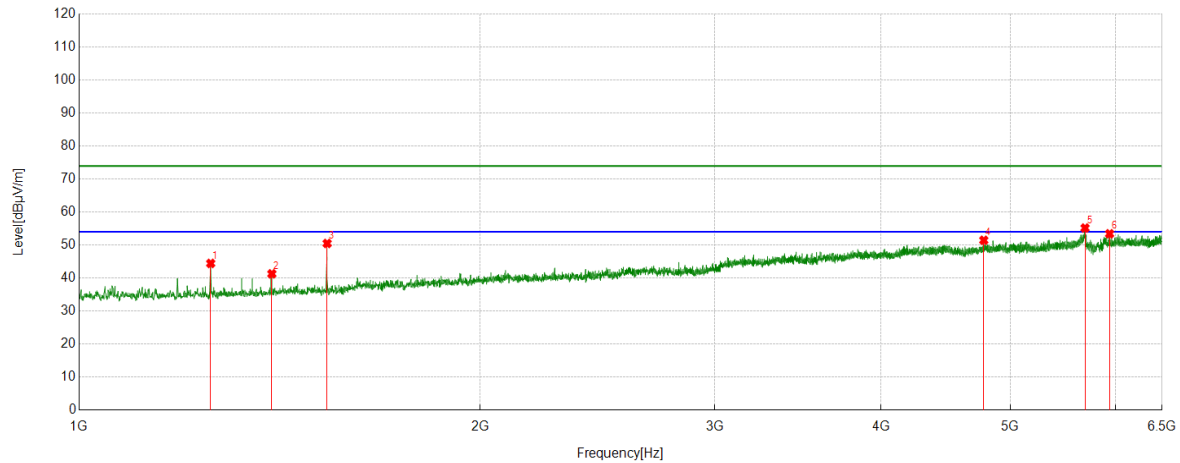


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.02	-1.59	44.43	74.00	-29.57	Vertical
2	1395.4328	42.41	-1.14	41.27	74.00	-32.73	Vertical
3	1535.3928	50.87	-0.38	50.49	74.00	-23.51	Vertical
4	4776.4752	36.63	14.82	51.45	74.00	-22.55	Vertical
5	5689.5766	38.56	16.60	55.16	74.00	-18.84	Vertical
6	5936.4929	36.14	17.28	53.42	74.00	-20.58	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Horizontal	PASS

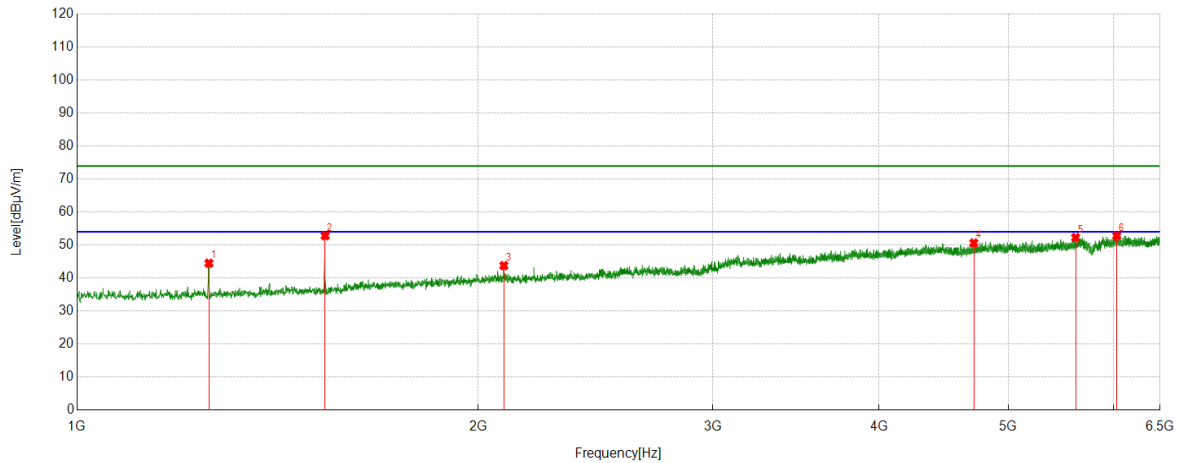


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	46.08	-1.59	44.49	74.00	-29.51	Horizontal
2	1535.3928	53.21	-0.38	52.83	74.00	-21.17	Horizontal
3	2090.9546	39.72	4.04	43.76	74.00	-30.24	Horizontal
4	4711.0790	36.55	14.08	50.63	74.00	-23.37	Horizontal
5	5617.4575	35.76	16.51	52.27	74.00	-21.73	Horizontal
6	6030.6145	35.05	17.75	52.80	74.00	-21.20	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Vertical	PASS

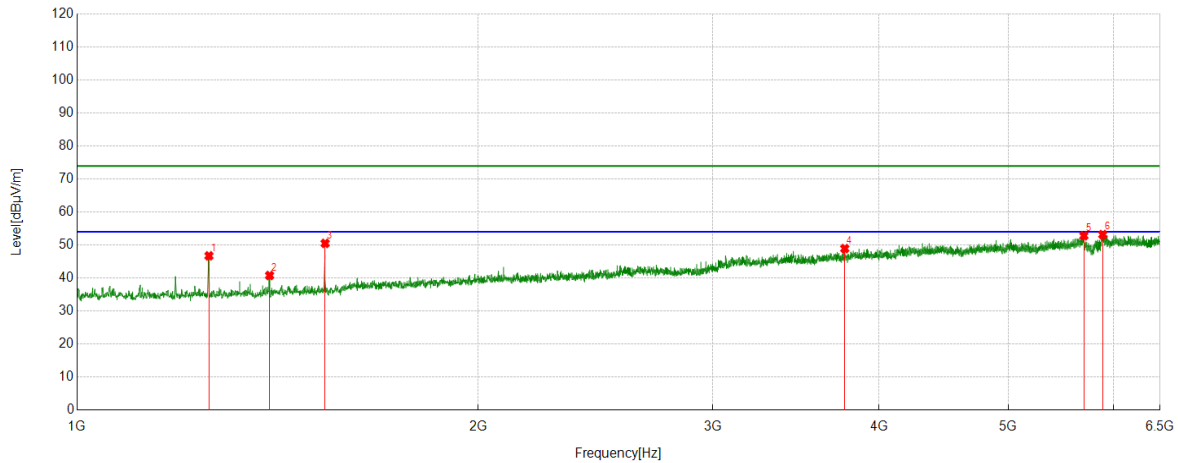


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1256.0840	48.32	-1.59	46.73	74.00	-27.27	Vertical
2	1394.8216	41.91	-1.15	40.76	74.00	-33.24	Vertical
3	1535.3928	50.89	-0.38	50.51	74.00	-23.49	Vertical
4	3769.2521	37.24	11.69	48.93	74.00	-25.07	Vertical
5	5698.1331	36.26	16.56	52.82	74.00	-21.18	Vertical
6	5886.9874	36.09	17.08	53.17	74.00	-20.83	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Horizontal	PASS

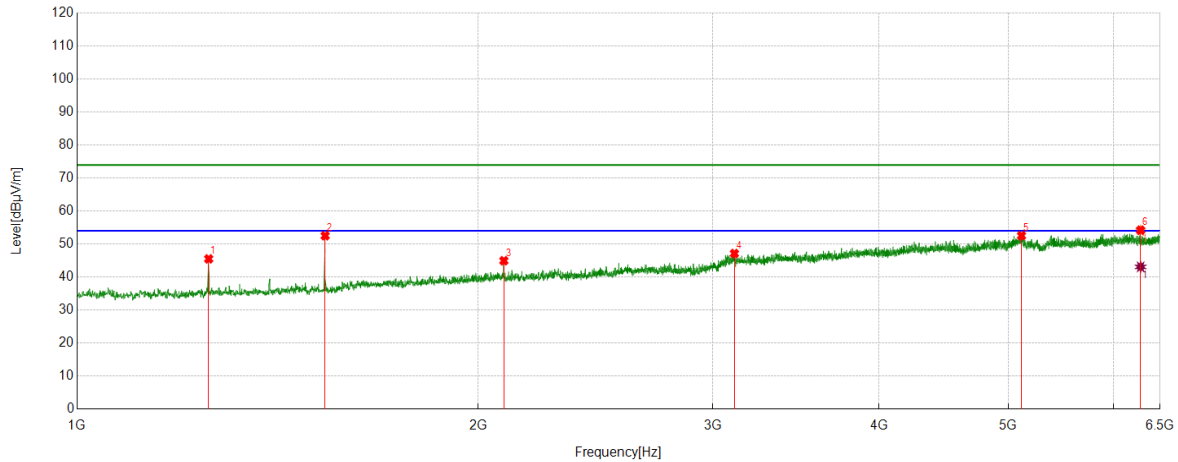

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.66	-1.16	45.50	74.00	-28.50	Horizontal
2	1535.3928	53.09	-0.58	52.51	74.00	-21.49	Horizontal
3	2090.9546	40.84	4.10	44.94	74.00	-29.06	Horizontal
4	3114.6794	36.90	10.23	47.13	74.00	-26.87	Horizontal
5	5115.6795	35.98	16.56	52.54	74.00	-21.46	Horizontal
6	6284.8650	35.49	18.71	54.20	74.00	-19.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6284.8650	24.37	18.71	43.08	54.00	-10.92	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Vertical	PASS

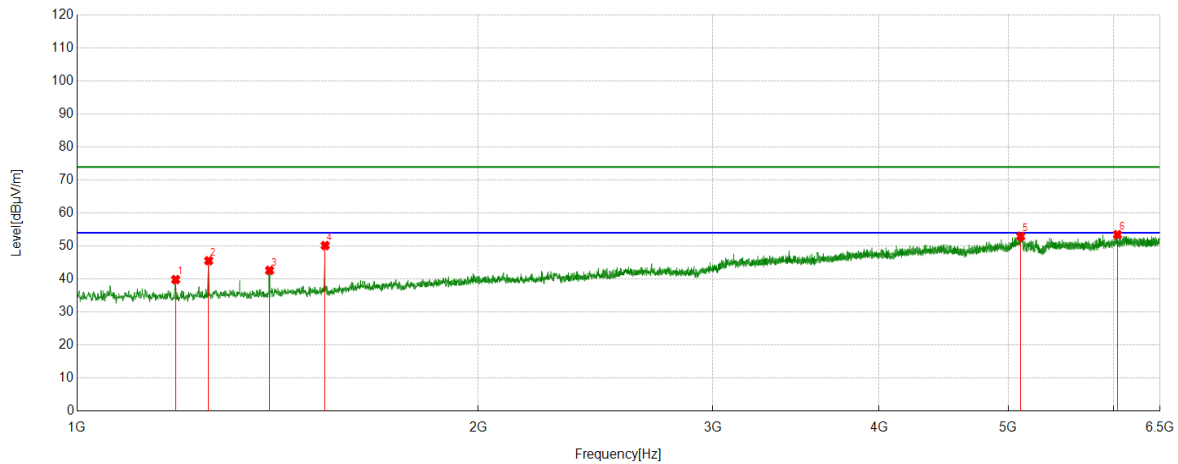

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.91	-2.08	39.83	74.00	-34.17	Vertical
2	1255.4728	46.71	-1.16	45.55	74.00	-28.45	Vertical
3	1394.8216	43.60	-0.98	42.62	74.00	-31.38	Vertical
4	1535.3928	50.73	-0.58	50.15	74.00	-23.85	Vertical
5	5107.7342	36.37	16.60	52.97	74.00	-21.03	Vertical
6	6039.1710	35.86	17.61	53.47	74.00	-20.53	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Horizontal	PASS

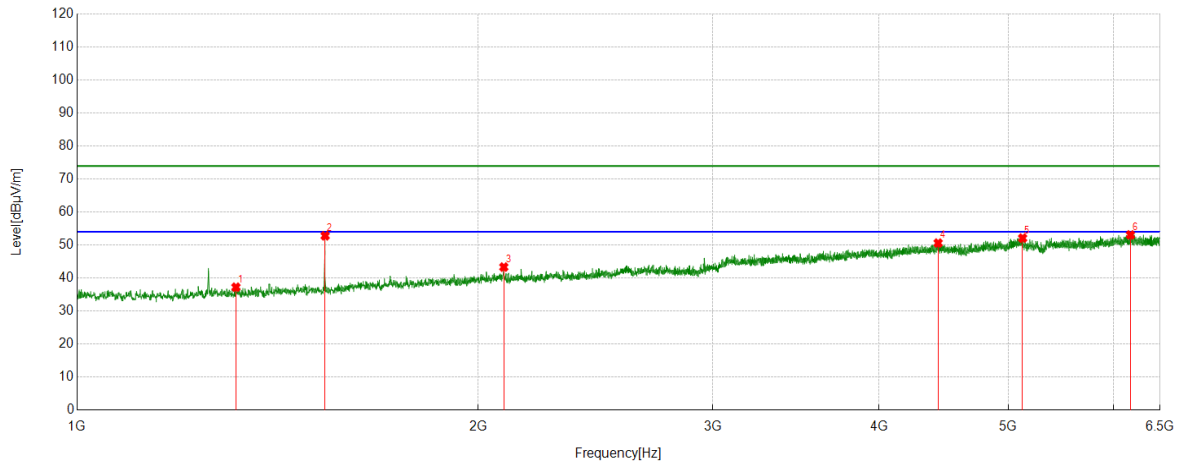


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1315.9796	38.88	-1.68	37.20	74.00	-36.80	Horizontal
2	1535.3928	53.38	-0.58	52.80	74.00	-21.20	Horizontal
3	2090.9546	39.22	4.10	43.32	74.00	-30.68	Horizontal
4	4429.3255	36.41	14.19	50.60	74.00	-23.40	Horizontal
5	5125.4584	35.60	16.50	52.10	74.00	-21.90	Horizontal
6	6175.4639	34.85	18.23	53.08	74.00	-20.92	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Vertical	PASS

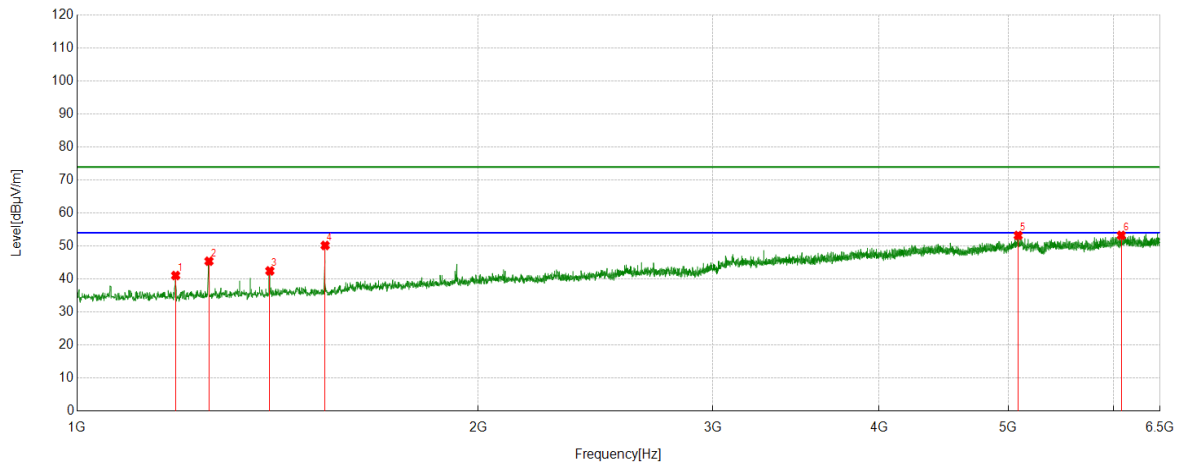


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.7984	43.14	-2.08	41.06	74.00	-32.94	Vertical
2	1256.0840	46.58	-1.18	45.40	74.00	-28.60	Vertical
3	1395.4328	43.45	-0.99	42.46	74.00	-31.54	Vertical
4	1535.3928	50.75	-0.58	50.17	74.00	-23.83	Vertical
5	5086.3429	36.68	16.53	53.21	74.00	-20.79	Vertical
6	6078.2865	35.34	17.90	53.24	74.00	-20.76	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Horizontal	PASS

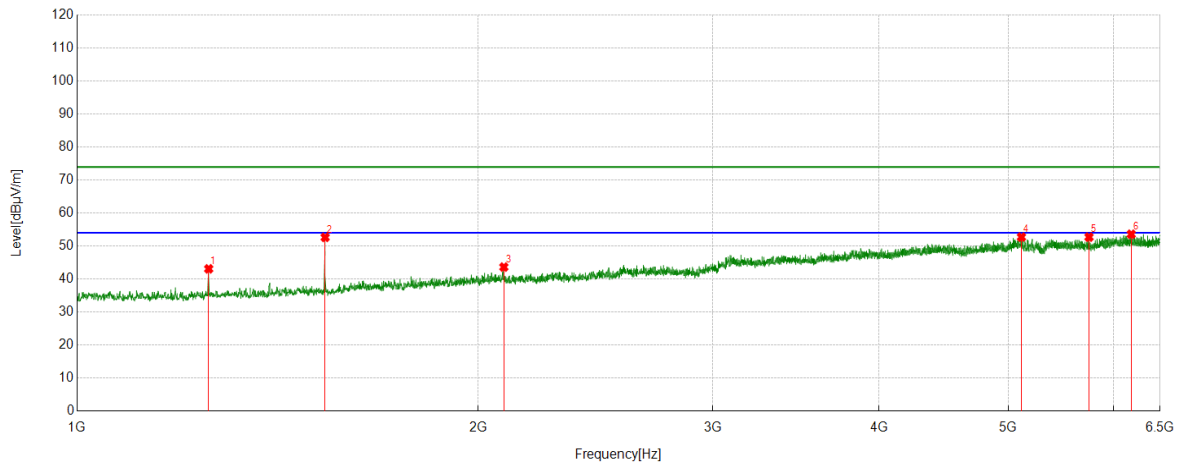


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	44.24	-1.16	43.08	74.00	-30.92	Horizontal
2	1535.3928	53.21	-0.58	52.63	74.00	-21.37	Horizontal
3	2090.9546	39.52	4.10	43.62	74.00	-30.38	Horizontal
4	5115.0683	36.16	16.56	52.72	74.00	-21.28	Horizontal
5	5748.8610	35.88	16.83	52.71	74.00	-21.29	Horizontal
6	6184.0204	35.30	18.28	53.58	74.00	-20.42	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Vertical	PASS

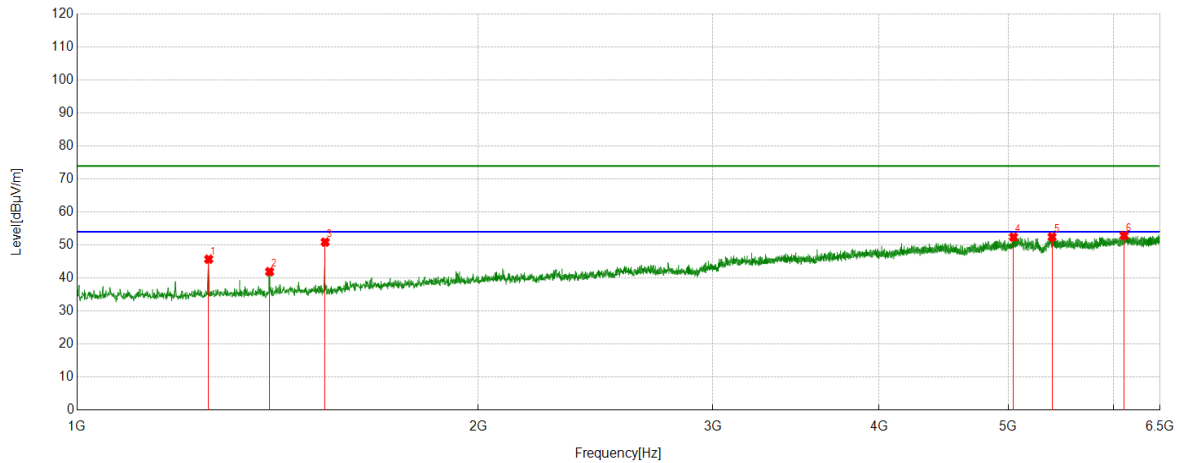


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.86	-1.16	45.70	74.00	-28.30	Vertical
2	1394.8216	42.90	-0.98	41.92	74.00	-32.08	Vertical
3	1535.3928	51.47	-0.58	50.89	74.00	-23.11	Vertical
4	5045.3939	36.43	15.97	52.40	74.00	-21.60	Vertical
5	5393.7660	35.51	16.95	52.46	74.00	-21.54	Vertical
6	6108.2342	34.48	18.40	52.88	74.00	-21.12	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Horizontal	PASS

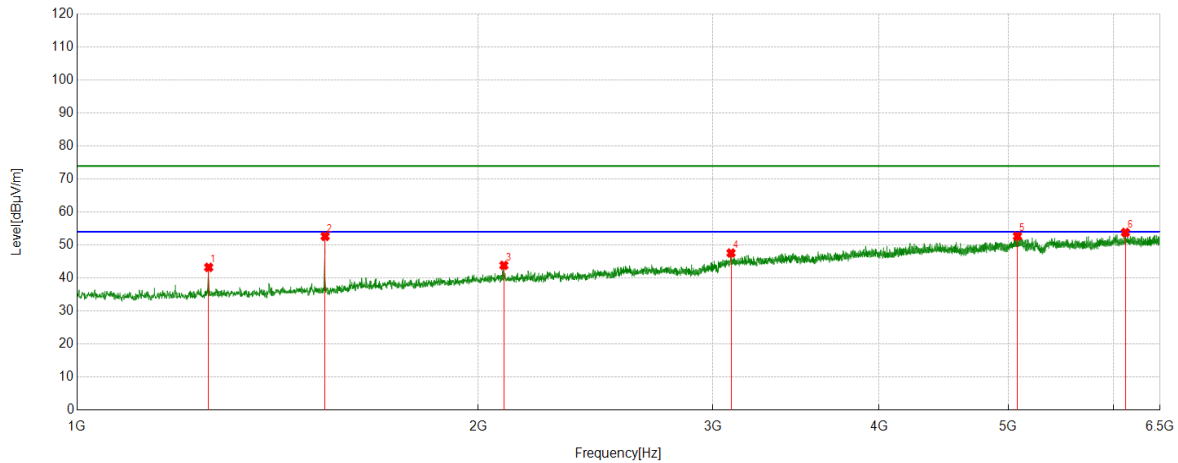


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.39	-1.16	43.23	74.00	-30.77	Horizontal
2	1535.3928	53.22	-0.58	52.64	74.00	-21.36	Horizontal
3	2090.9546	39.75	4.10	43.85	74.00	-30.15	Horizontal
4	3096.3440	37.53	10.05	47.58	74.00	-26.42	Horizontal
5	5080.2311	36.37	16.31	52.68	74.00	-21.32	Horizontal
6	6122.2914	35.45	18.37	53.82	74.00	-20.18	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Vertical	PASS

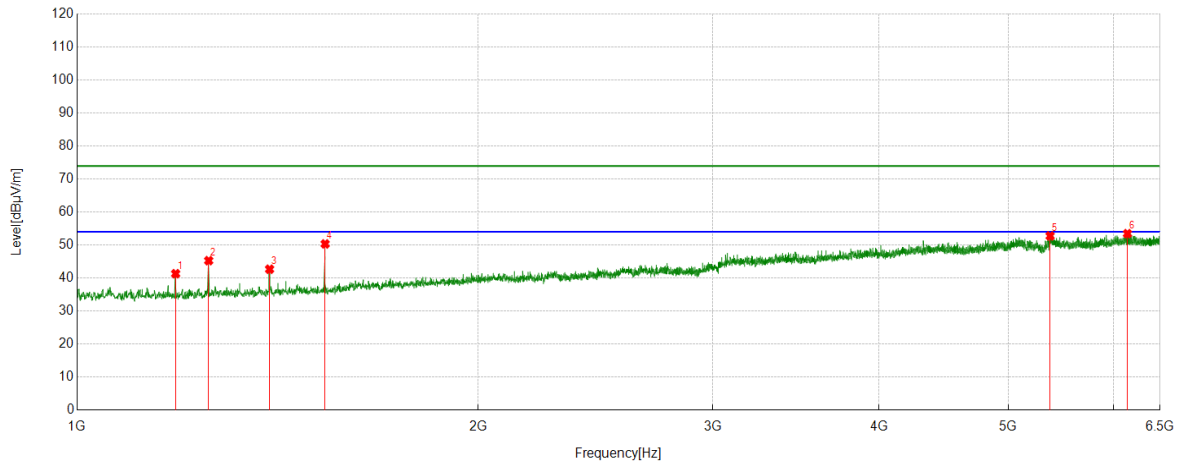


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	43.39	-2.08	41.31	74.00	-32.69	Vertical
2	1255.4728	46.43	-1.16	45.27	74.00	-28.73	Vertical
3	1394.8216	43.65	-0.98	42.67	74.00	-31.33	Vertical
4	1535.3928	50.92	-0.58	50.34	74.00	-23.66	Vertical
5	5374.8194	35.85	16.91	52.76	74.00	-21.24	Vertical
6	6143.0715	35.13	18.32	53.45	74.00	-20.55	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Horizontal	PASS

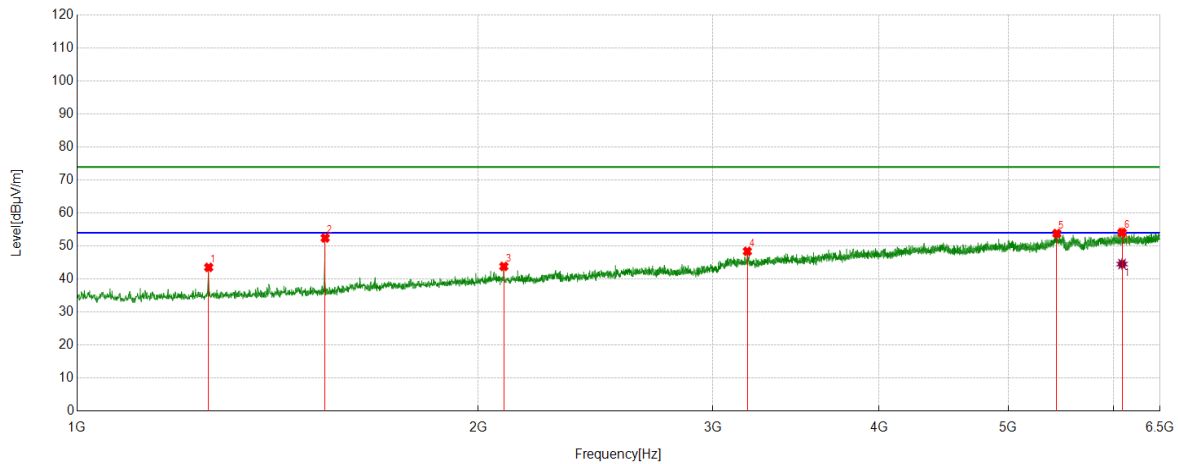

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	45.01	-1.48	43.53	74.00	-30.47	Horizontal
2	1535.3928	53.16	-0.72	52.44	74.00	-21.56	Horizontal
3	2090.9546	39.99	3.84	43.83	74.00	-30.17	Horizontal
4	3184.9650	38.53	9.87	48.40	74.00	-25.60	Horizontal
5	5437.7709	35.92	17.89	53.81	74.00	-20.19	Horizontal
6	6086.8430	35.90	18.20	54.10	74.00	-19.90	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6086.8430	26.34	18.20	44.54	54.00	-9.46	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Vertical	PASS

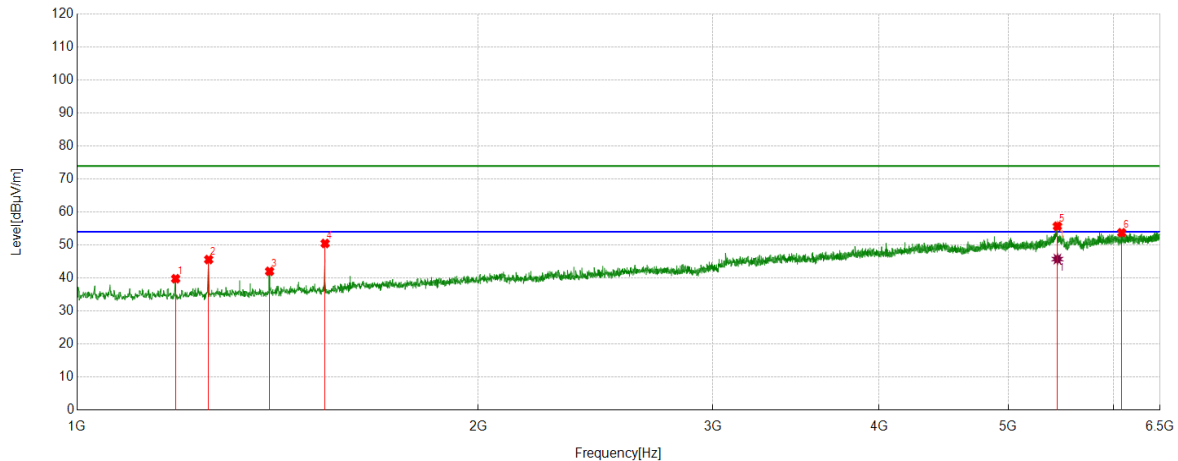

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.71	-1.93	39.78	74.00	-34.22	Vertical
2	1255.4728	47.08	-1.48	45.60	74.00	-28.40	Vertical
3	1394.8216	43.17	-1.14	42.03	74.00	-31.97	Vertical
4	1535.3928	51.20	-0.72	50.48	74.00	-23.52	Vertical
5	5443.2715	37.83	17.89	55.72	74.00	-18.28	Vertical
6	6083.1759	35.62	18.12	53.74	74.00	-20.26	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5443.2715	27.85	17.89	45.74	54.00	-8.26	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Horizontal	PASS

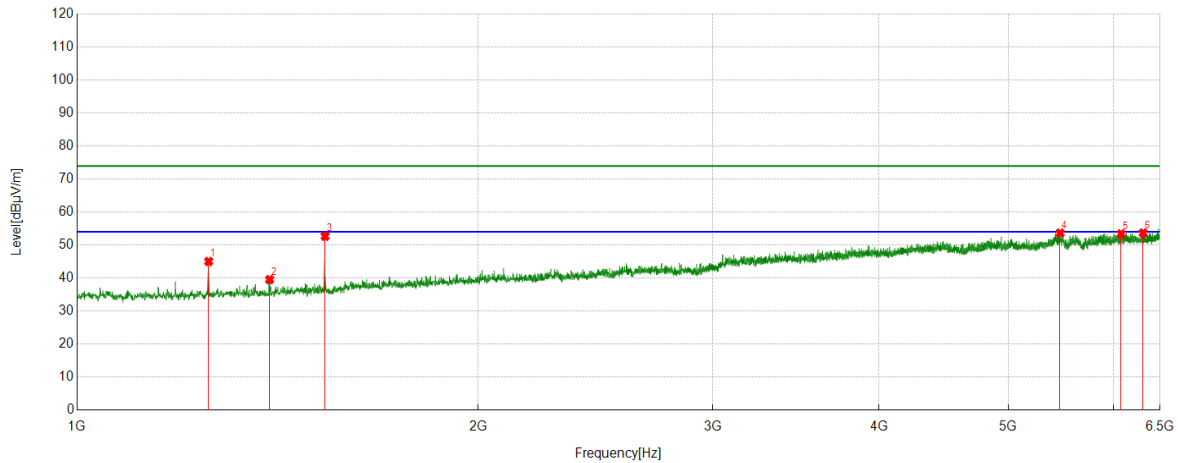


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.49	-1.48	45.01	74.00	-28.99	Horizontal
2	1394.8216	40.66	-1.14	39.52	74.00	-34.48	Horizontal
3	1535.3928	53.38	-0.72	52.66	74.00	-21.34	Horizontal
4	5468.3298	35.77	17.86	53.63	74.00	-20.37	Horizontal
5	6077.0641	35.31	18.06	53.37	74.00	-20.63	Horizontal
6	6312.3680	34.78	18.89	53.67	74.00	-20.33	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Vertical	PASS

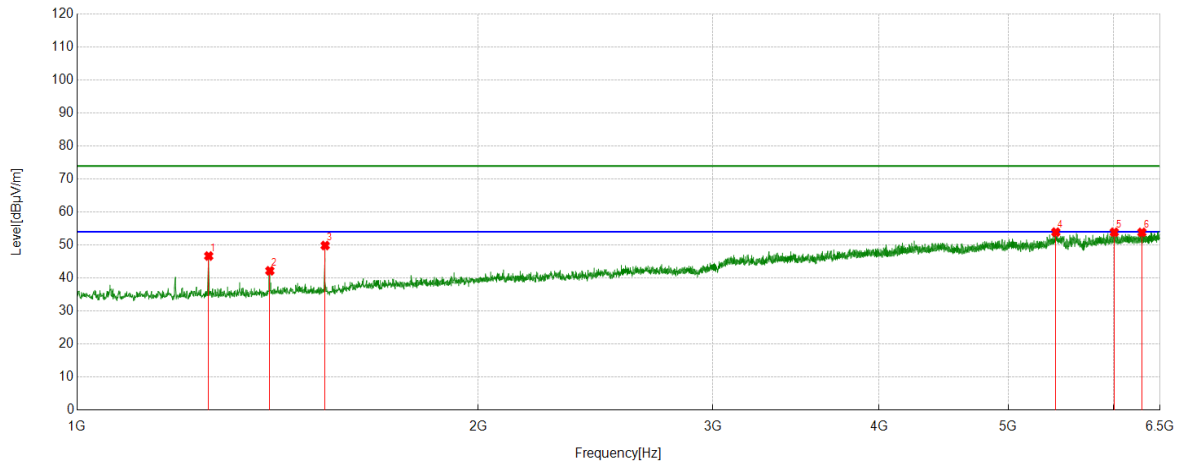


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	48.15	-1.48	46.67	74.00	-27.33	Vertical
2	1395.4328	43.34	-1.15	42.19	74.00	-31.81	Vertical
3	1535.3928	50.57	-0.72	49.85	74.00	-24.15	Vertical
4	5427.9920	36.12	17.79	53.91	74.00	-20.09	Vertical
5	6004.9450	36.08	17.80	53.88	74.00	-20.12	Vertical
6	6298.9221	34.94	18.91	53.85	74.00	-20.15	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Horizontal	PASS

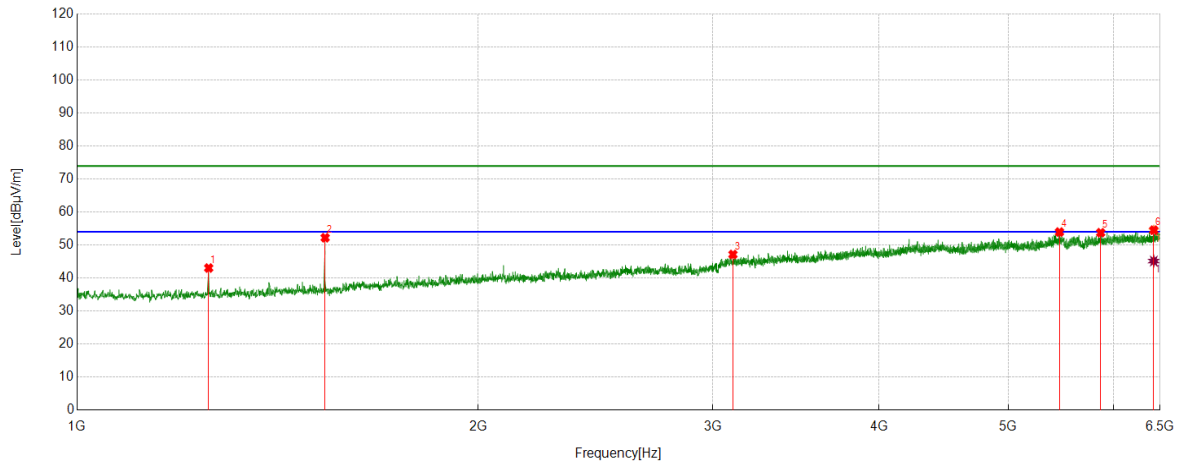

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.51	-1.48	43.03	74.00	-30.97	Horizontal
2	1535.3928	52.93	-0.72	52.21	74.00	-21.79	Horizontal
3	3106.7341	37.24	9.90	47.14	74.00	-26.86	Horizontal
4	5462.8292	36.07	17.87	53.94	74.00	-20.06	Horizontal
5	5865.5962	35.66	18.08	53.74	74.00	-20.26	Horizontal
6	6429.7144	35.26	19.25	54.51	74.00	-19.49	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6429.7144	25.89	19.25	45.14	54.00	-8.86	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 6.2.

6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.

The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Vertical	PASS

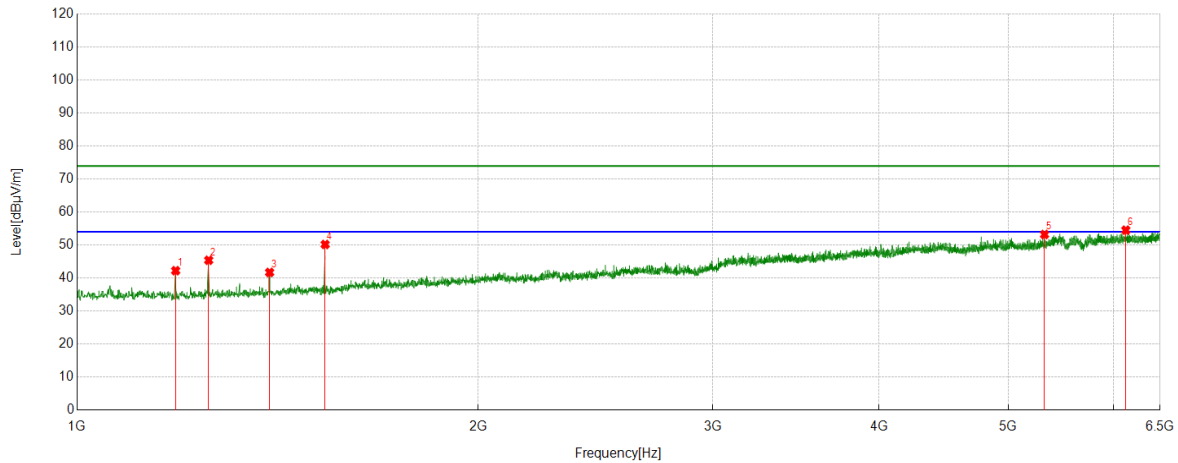


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	44.15	-1.93	42.22	74.00	-31.78	Vertical
2	1255.4728	46.87	-1.48	45.39	74.00	-28.61	Vertical
3	1394.8216	42.84	-1.14	41.70	74.00	-32.30	Vertical
4	1535.3928	50.90	-0.72	50.18	74.00	-23.82	Vertical
5	5323.4804	37.05	16.16	53.21	74.00	-20.79	Vertical
6	6125.9584	36.28	18.23	54.51	74.00	-19.49	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Horizontal	PASS

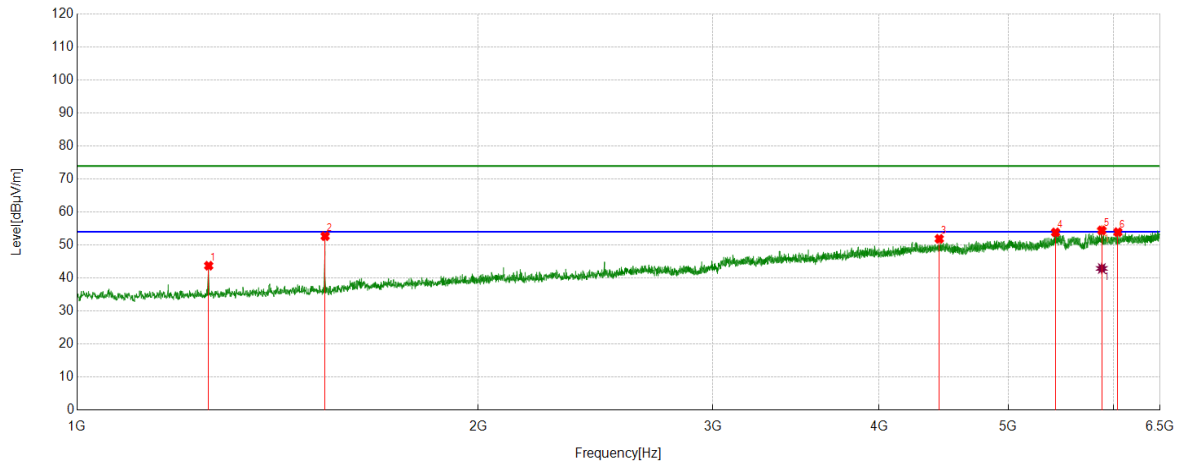

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.21	-1.48	43.73	74.00	-30.27	Horizontal
2	1535.3928	53.41	-0.72	52.69	74.00	-21.31	Horizontal
3	4437.8820	37.38	14.51	51.89	74.00	-22.11	Horizontal
4	5425.5473	36.20	17.64	53.84	74.00	-20.16	Horizontal
5	5877.2086	36.57	17.87	54.44	74.00	-19.56	Horizontal
6	6042.8381	36.22	17.70	53.92	74.00	-20.08	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5877.2086	25.03	17.87	42.90	54.00	-11.10	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Vertical	PASS

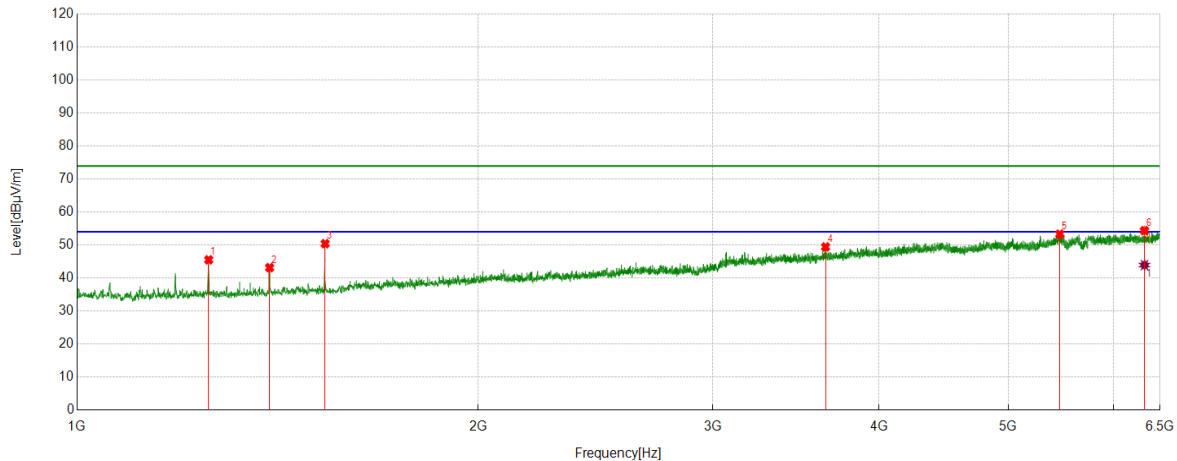

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.00	-1.48	45.52	74.00	-28.48	Vertical
2	1394.8216	44.29	-1.14	43.15	74.00	-30.85	Vertical
3	1535.3928	51.14	-0.72	50.42	74.00	-23.58	Vertical
4	3645.7940	37.94	11.49	49.43	74.00	-24.57	Vertical
5	5465.2739	35.45	17.86	53.31	74.00	-20.69	Vertical
6	6327.0363	35.54	18.83	54.37	74.00	-19.63	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6327.0363	25.09	18.83	43.92	54.00	-10.08	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Horizontal	PASS

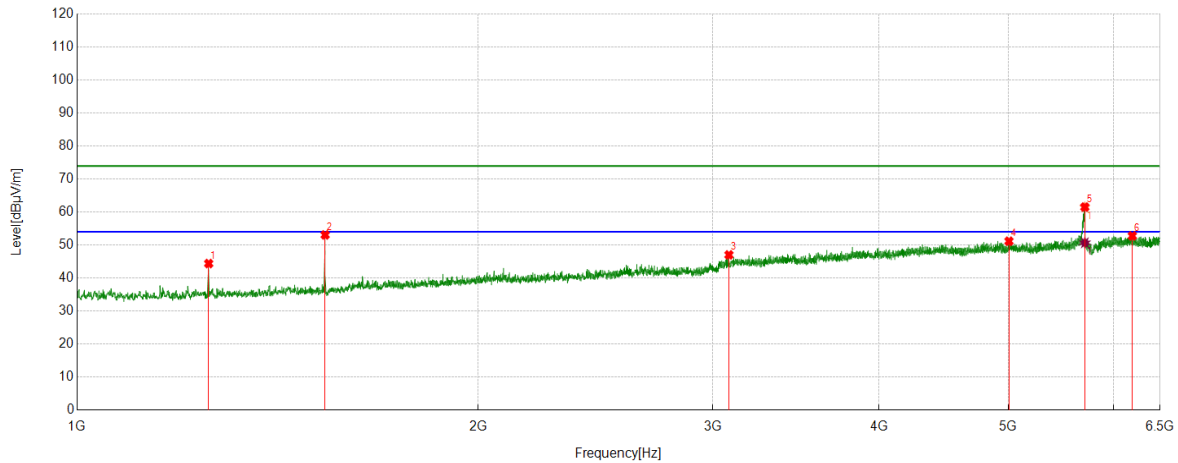


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.98	-1.59	44.39	74.00	-29.61	Horizontal
2	1535.3928	53.45	-0.38	53.07	74.00	-20.93	Horizontal
3	3085.3428	37.97	9.05	47.02	74.00	-26.98	Horizontal
4	5006.2785	36.09	15.07	51.16	74.00	-22.84	Horizontal
5	5707.3008	44.95	16.56	61.51	74.00	-12.49	Horizontal
6	6195.6328	34.55	18.22	52.77	74.00	-21.23	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Vertical	PASS

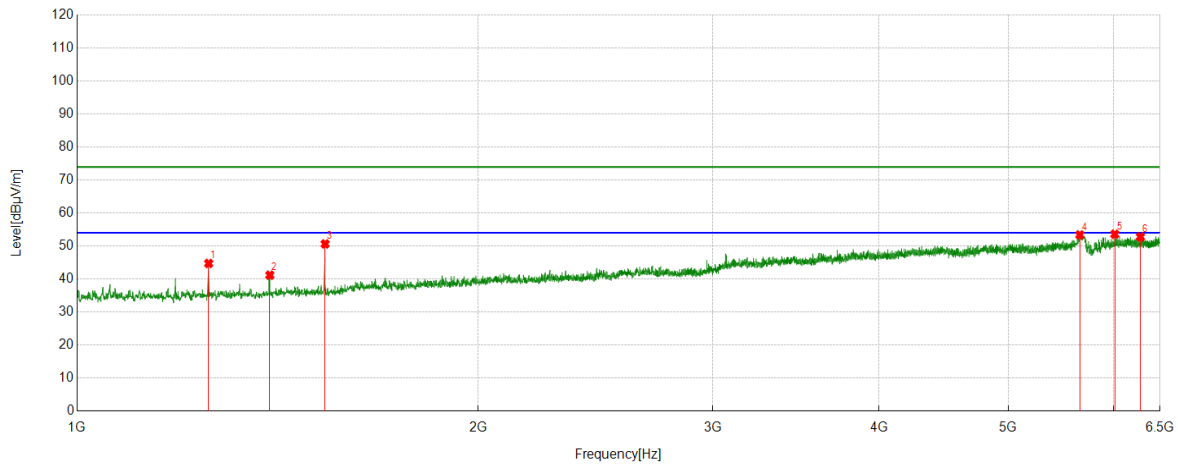


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	46.31	-1.59	44.72	74.00	-29.28	Vertical
2	1395.4328	42.30	-1.14	41.16	74.00	-32.84	Vertical
3	1535.3928	51.02	-0.38	50.64	74.00	-23.36	Vertical
4	5657.7953	36.71	16.67	53.38	74.00	-20.62	Vertical
5	6010.4456	36.27	17.33	53.60	74.00	-20.40	Vertical
6	6282.4203	34.35	18.44	52.79	74.00	-21.21	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Horizontal	PASS

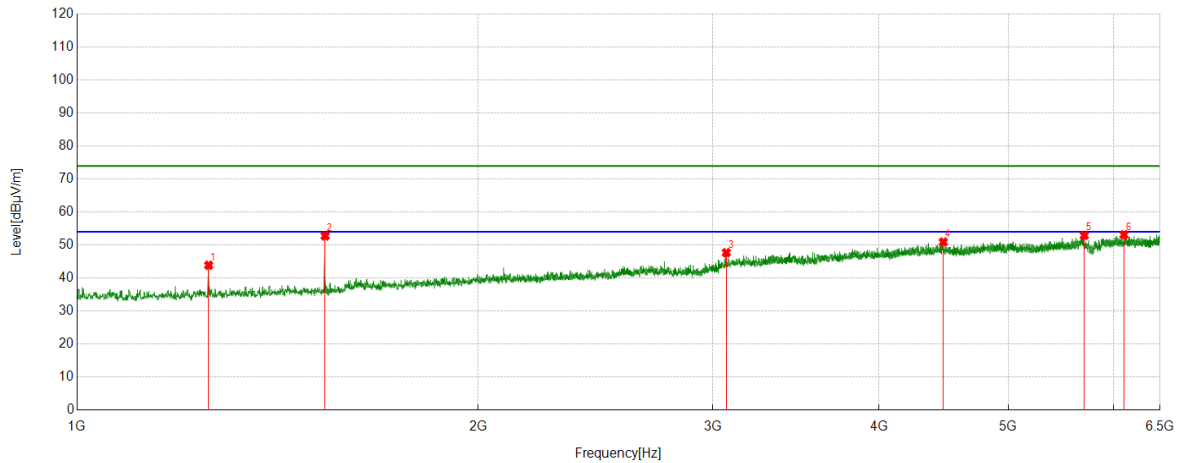


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.46	-1.59	43.87	74.00	-30.13	Horizontal
2	1535.3928	53.15	-0.38	52.77	74.00	-21.23	Horizontal
3	3071.2857	38.89	8.80	47.69	74.00	-26.31	Horizontal
4	4469.0521	36.20	14.71	50.91	74.00	-23.09	Horizontal
5	5702.4114	36.36	16.55	52.91	74.00	-21.09	Horizontal
6	6107.0119	35.47	17.66	53.13	74.00	-20.87	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Vertical	PASS

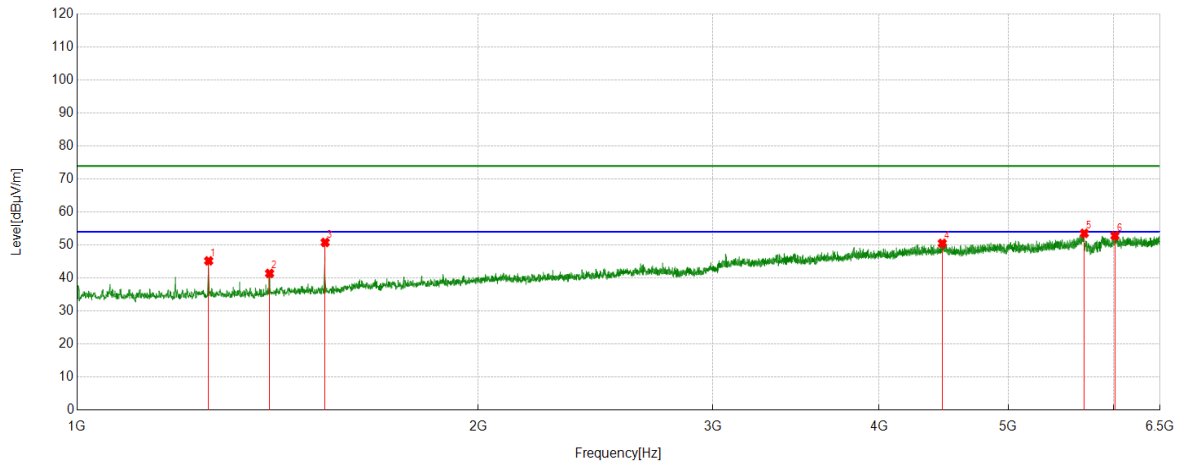


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.79	-1.59	45.20	74.00	-28.80	Vertical
2	1394.8216	42.54	-1.15	41.39	74.00	-32.61	Vertical
3	1535.3928	51.18	-0.38	50.80	74.00	-23.20	Vertical
4	4461.1068	36.40	14.12	50.52	74.00	-23.48	Vertical
5	5701.8002	37.00	16.55	53.55	74.00	-20.45	Vertical
6	6012.2791	35.51	17.32	52.83	74.00	-21.17	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

PART 2: 6.5GHz~18GHz

Test Mode	Channel	Polarization	Verdict
11a	5180	Horizontal	PASS

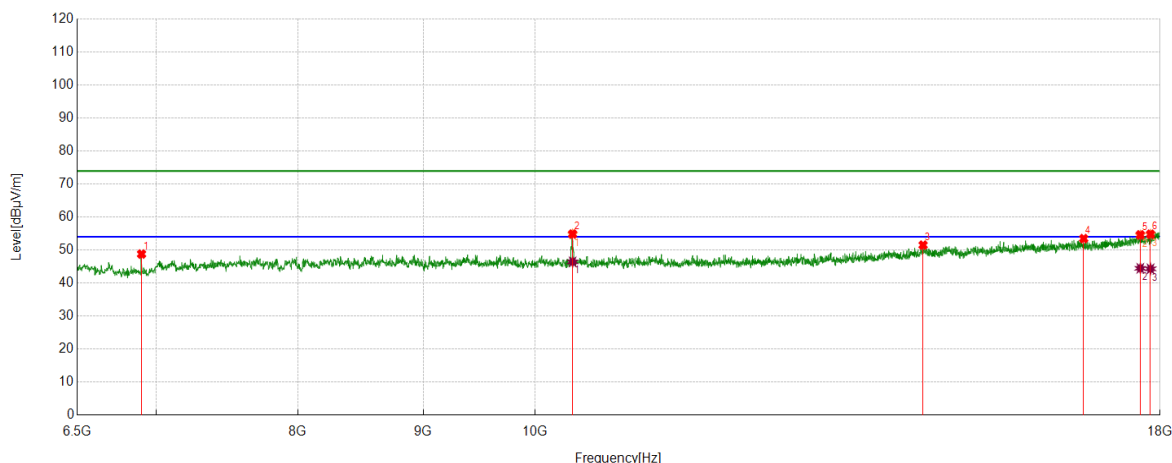

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6906.4011	45.25	3.54	48.79	74.00	-25.21	Horizontal
2	10358.8931	48.16	6.70	54.86	74.00	-19.14	Horizontal
3	14403.7340	38.71	12.79	51.50	74.00	-22.50	Horizontal
4	16752.0420	37.14	16.32	53.46	74.00	-20.54	Horizontal
5	17668.3614	36.53	18.07	54.60	74.00	-19.40	Horizontal
6	17838.9732	35.71	19.09	54.80	74.00	-19.20	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10358.8931	39.72	6.70	46.42	54.00	-7.58	Horizontal
2	17668.3614	26.39	18.07	44.46	54.00	-9.54	Horizontal
3	17838.9732	25.21	19.09	44.30	54.00	-9.70	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5180	Vertical	PASS

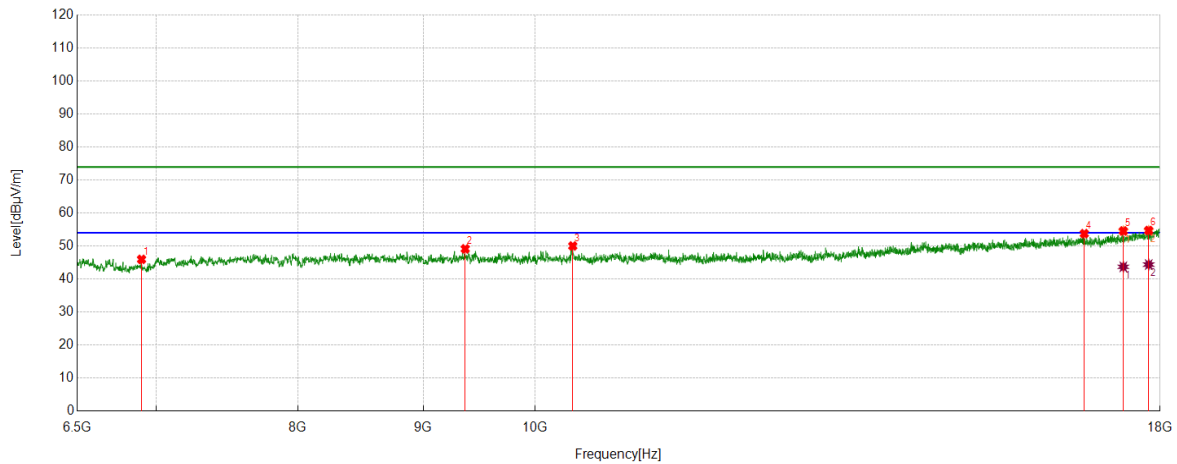

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6906.4011	42.42	3.54	45.96	74.00	-28.04	Vertical
2	9363.9773	42.68	6.47	49.15	74.00	-24.85	Vertical
3	10360.8101	43.32	6.70	50.02	74.00	-23.98	Vertical
4	16761.6269	37.70	16.06	53.76	74.00	-20.24	Vertical
5	17388.4814	37.23	17.34	54.57	74.00	-19.43	Vertical
6	17808.3014	35.80	18.92	54.72	74.00	-19.28	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17388.4814	26.36	17.34	43.70	54.00	-10.30	Vertical
2	17808.3014	25.46	18.92	44.38	54.00	-9.62	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5200	Horizontal	PASS

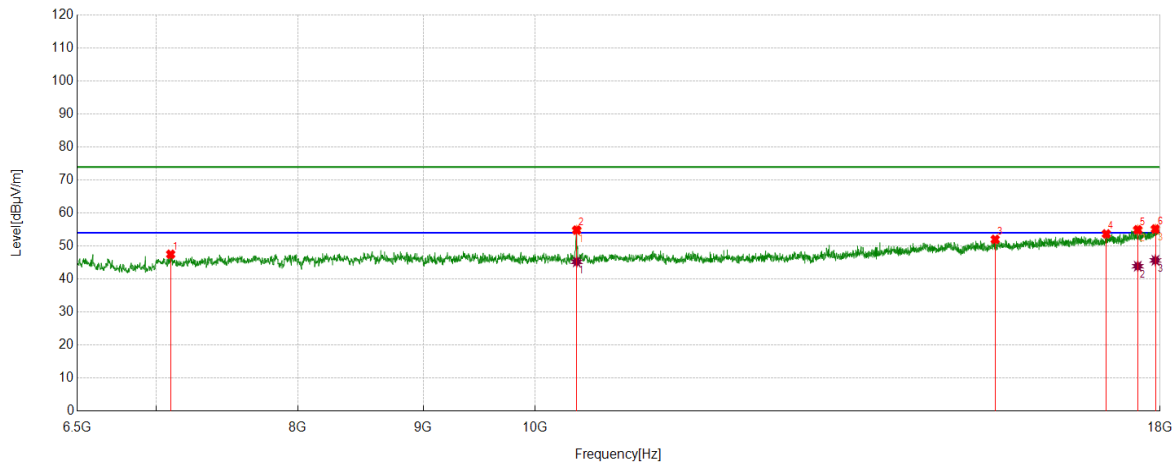

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7098.0997	43.61	3.89	47.50	74.00	-26.50	Horizontal
2	10399.1499	48.12	6.72	54.84	74.00	-19.16	Horizontal
3	15413.9857	38.31	13.70	52.01	74.00	-21.99	Horizontal
4	17112.4354	37.33	16.35	53.68	74.00	-20.32	Horizontal
5	17626.1877	36.87	18.06	54.93	74.00	-19.07	Horizontal
6	17921.4036	35.81	19.36	55.17	74.00	-18.83	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10399.1499	38.50	6.72	45.22	54.00	-8.78	Horizontal
2	17626.1877	25.83	18.06	43.89	54.00	-10.11	Horizontal
3	17921.4036	26.31	19.36	45.67	54.00	-8.33	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5200	Vertical	PASS

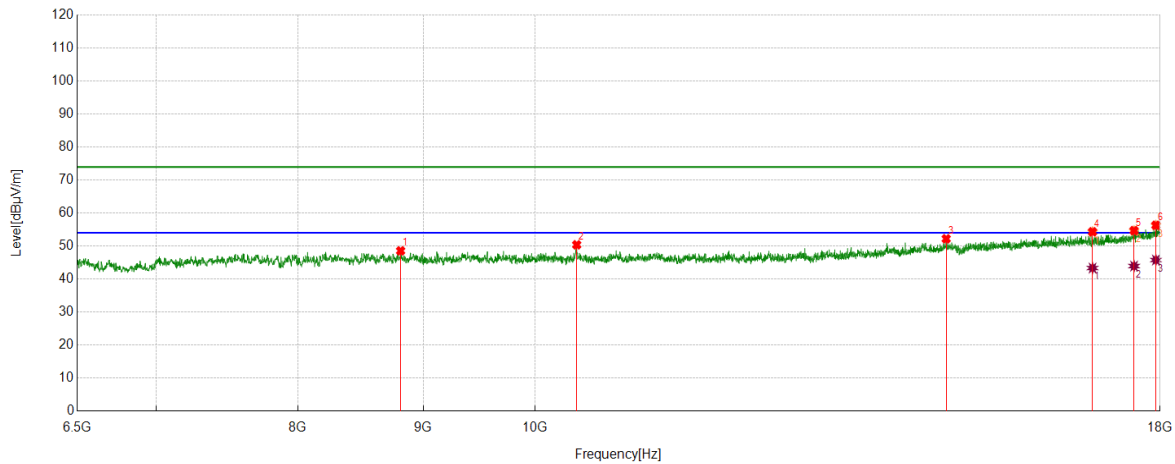

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8811.8853	42.25	6.30	48.55	74.00	-25.45	Vertical
2	10399.1499	43.65	6.72	50.37	74.00	-23.63	Vertical
3	14720.0367	39.38	12.82	52.20	74.00	-21.80	Vertical
4	16891.9820	38.18	16.14	54.32	74.00	-19.68	Vertical
5	17564.8441	36.86	17.83	54.69	74.00	-19.31	Vertical
6	17929.0715	36.93	19.37	56.30	74.00	-17.70	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	16891.9820	27.19	16.14	43.33	54.00	-10.67	Vertical
2	17564.8441	26.09	17.83	43.92	54.00	-10.08	Vertical
3	17929.0715	26.39	19.37	45.76	54.00	-8.24	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Horizontal	PASS

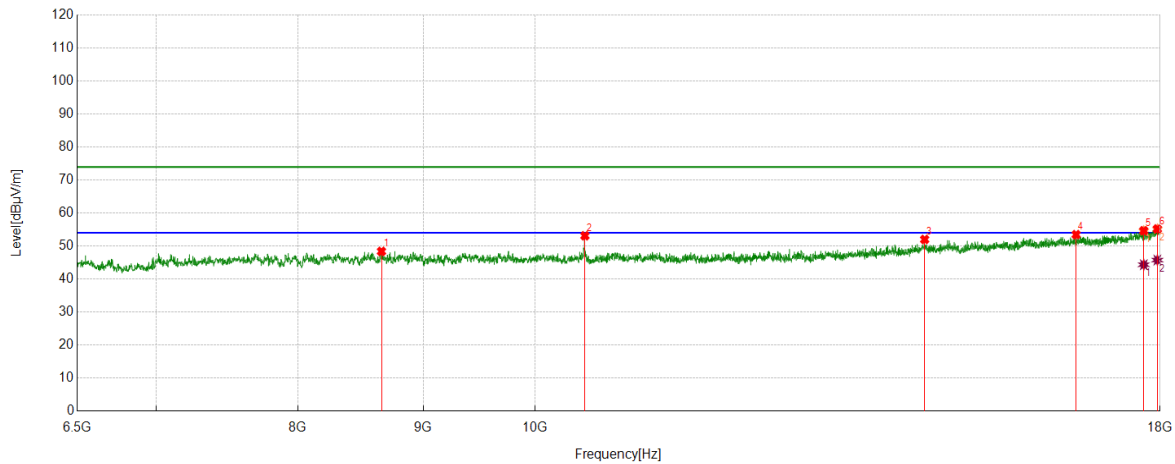

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8654.6924	42.11	6.27	48.38	74.00	-25.62	Horizontal
2	10479.6633	46.34	6.78	53.12	74.00	-20.88	Horizontal
3	14424.8208	39.10	12.89	51.99	74.00	-22.01	Horizontal
4	16633.1889	37.64	15.82	53.46	74.00	-20.54	Horizontal
5	17725.8710	36.13	18.51	54.64	74.00	-19.36	Horizontal
6	17953.9923	35.64	19.54	55.18	74.00	-18.82	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17725.8710	25.83	18.51	44.34	54.00	-9.66	Horizontal
2	17953.9923	26.20	19.54	45.74	54.00	-8.26	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Vertical	PASS

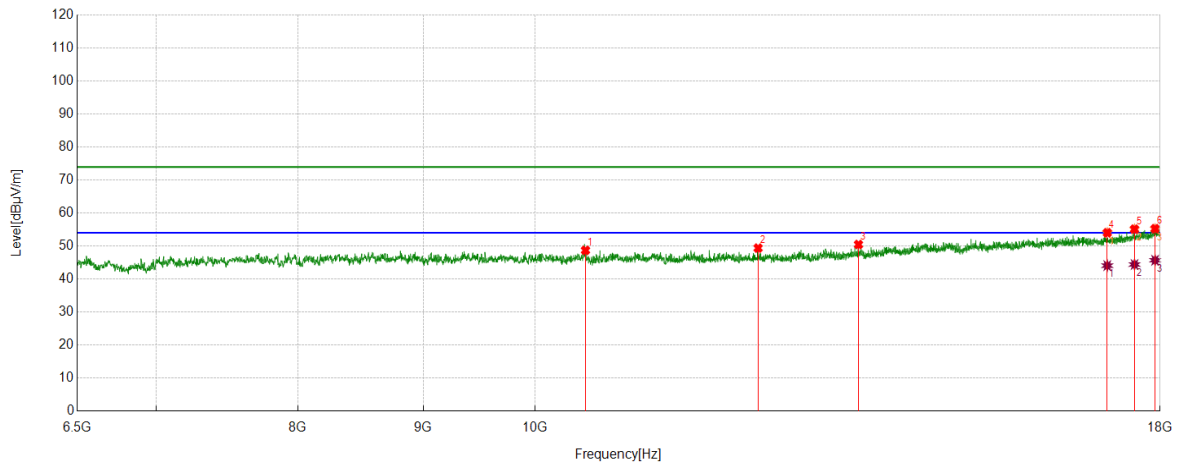

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10485.4142	41.83	6.87	48.70	74.00	-25.30	Vertical
2	12333.3889	40.85	8.53	49.38	74.00	-24.62	Vertical
3	13554.5091	39.64	10.82	50.46	74.00	-23.54	Vertical
4	17127.7713	37.44	16.59	54.03	74.00	-19.97	Vertical
5	17572.5121	37.20	17.92	55.12	74.00	-18.88	Vertical
6	17915.6526	35.95	19.32	55.27	74.00	-18.73	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17127.7713	27.47	16.59	44.06	54.00	-9.94	Vertical
2	17572.5121	26.48	17.92	44.40	54.00	-9.60	Vertical
3	17915.6526	26.37	19.32	45.69	54.00	-8.31	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Horizontal	PASS

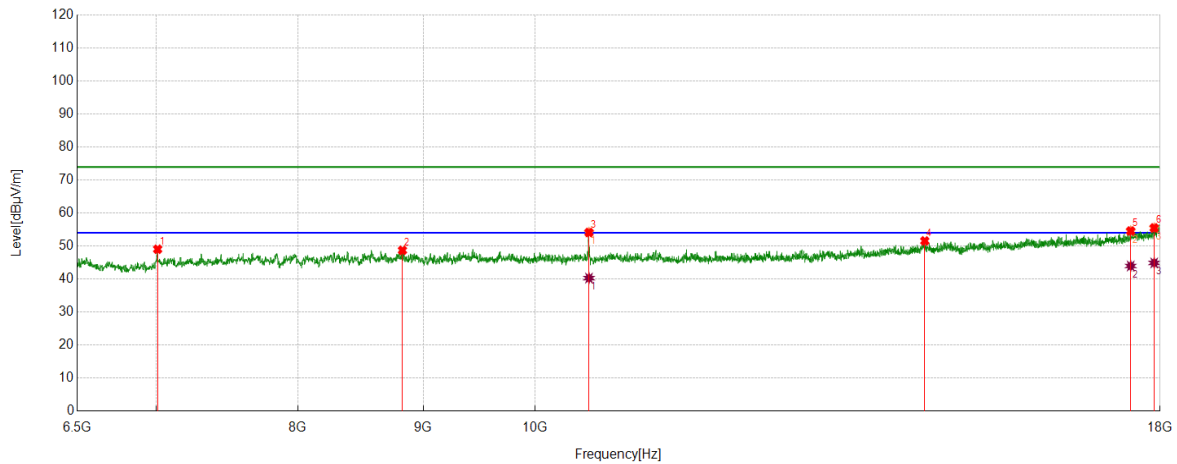

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	45.47	3.57	49.04	74.00	-24.96	Horizontal
2	8827.2212	42.45	6.25	48.70	74.00	-25.30	Horizontal
3	10519.9200	47.17	6.94	54.11	74.00	-19.89	Horizontal
4	14426.7378	38.66	12.89	51.55	74.00	-22.45	Horizontal
5	17509.2515	36.94	17.62	54.56	74.00	-19.44	Horizontal
6	17900.3167	36.32	19.18	55.50	74.00	-18.50	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10519.9200	33.34	6.94	40.28	54.00	-13.72	Horizontal
2	17509.2515	26.33	17.62	43.95	54.00	-10.05	Horizontal
3	17900.3167	25.70	19.18	44.88	54.00	-9.12	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Vertical	PASS

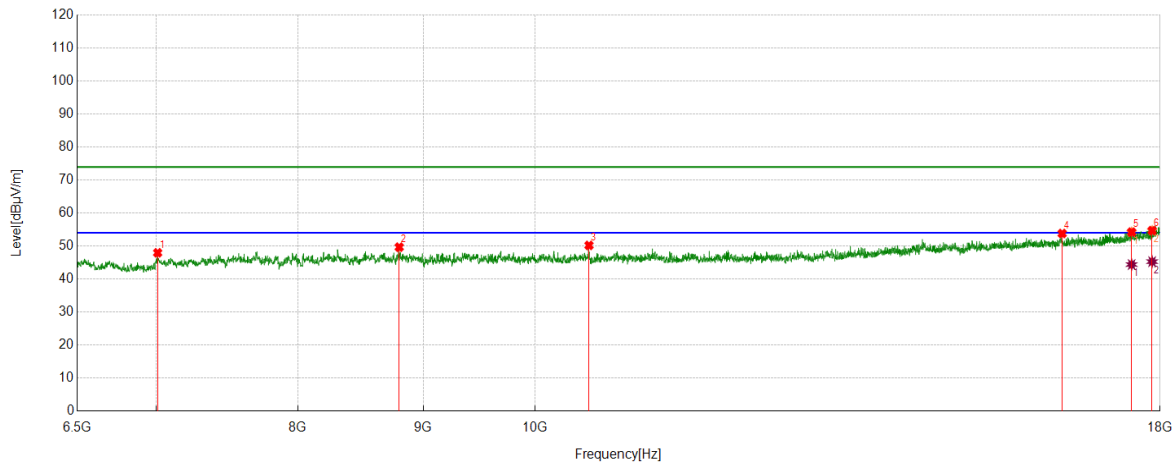

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	44.38	3.57	47.95	74.00	-26.05	Vertical
2	8800.3834	43.46	6.20	49.66	74.00	-24.34	Vertical
3	10519.9200	43.26	6.94	50.20	74.00	-23.80	Vertical
4	16416.5694	38.67	15.14	53.81	74.00	-20.19	Vertical
5	17524.5874	36.63	17.59	54.22	74.00	-19.78	Vertical
6	17865.8110	35.46	19.23	54.69	74.00	-19.31	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17524.5874	26.80	17.59	44.39	54.00	-9.61	Vertical
2	17865.8110	26.04	19.23	45.27	54.00	-8.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Horizontal	PASS

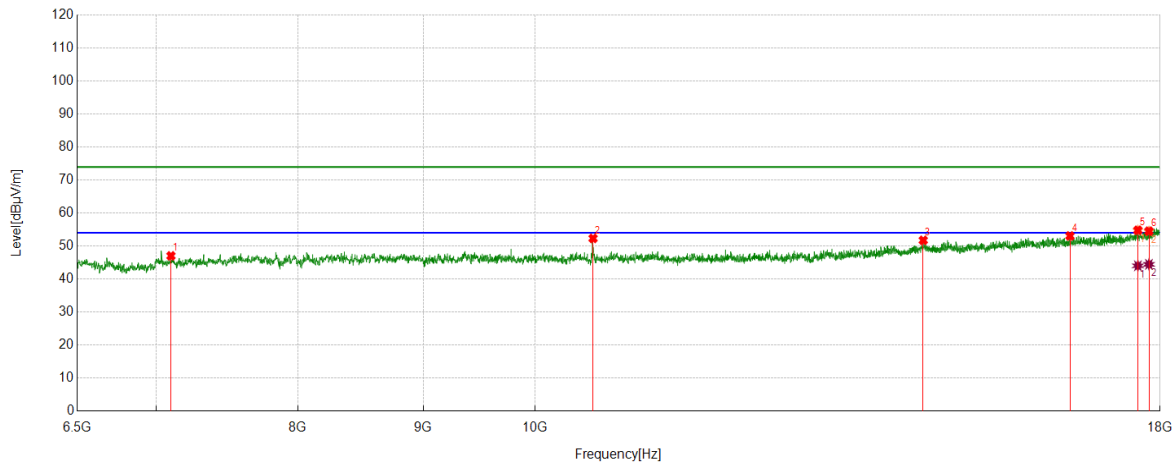

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7100.0167	43.12	3.90	47.02	74.00	-26.98	Horizontal
2	10560.1767	45.52	6.80	52.32	74.00	-21.68	Horizontal
3	14405.6509	38.92	12.82	51.74	74.00	-22.26	Horizontal
4	16537.3396	37.28	15.78	53.06	74.00	-20.94	Horizontal
5	17628.1047	36.73	18.06	54.79	74.00	-19.21	Horizontal
6	17812.1354	35.58	18.94	54.52	74.00	-19.48	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17628.1047	25.95	18.06	44.01	54.00	-9.99	Horizontal
2	17812.1354	25.51	18.94	44.45	54.00	-9.55	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Vertical	PASS

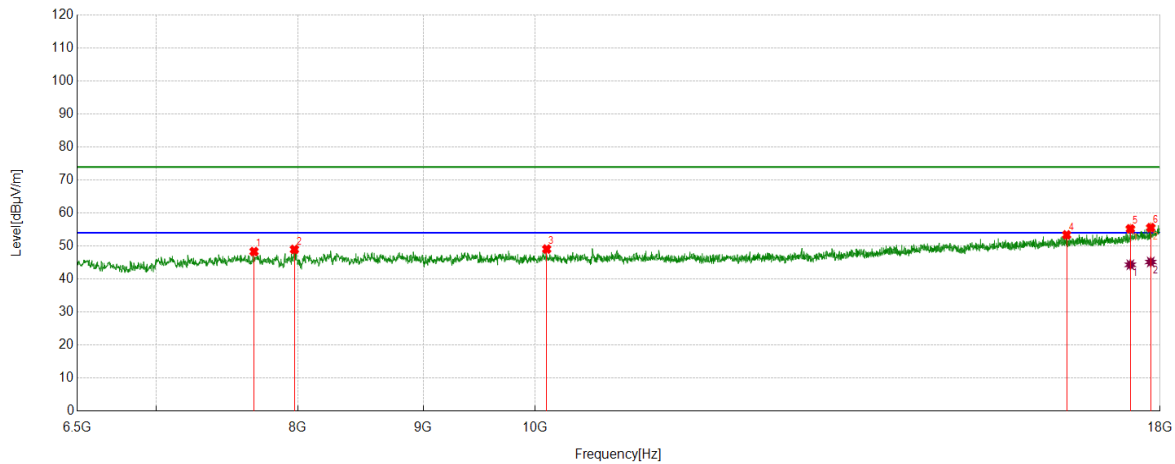

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7677.0295	43.03	5.30	48.33	74.00	-25.67	Vertical
2	7974.1624	43.59	5.38	48.97	74.00	-25.03	Vertical
3	10109.6849	42.40	6.67	49.07	74.00	-24.93	Vertical
4	16485.5809	37.49	15.89	53.38	74.00	-20.62	Vertical
5	17503.5006	37.60	17.62	55.22	74.00	-18.78	Vertical
6	17842.8071	36.48	19.10	55.58	74.00	-18.42	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17503.5006	26.70	17.62	44.32	54.00	-9.68	Vertical
2	17842.8071	26.07	19.10	45.17	54.00	-8.83	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Horizontal	PASS

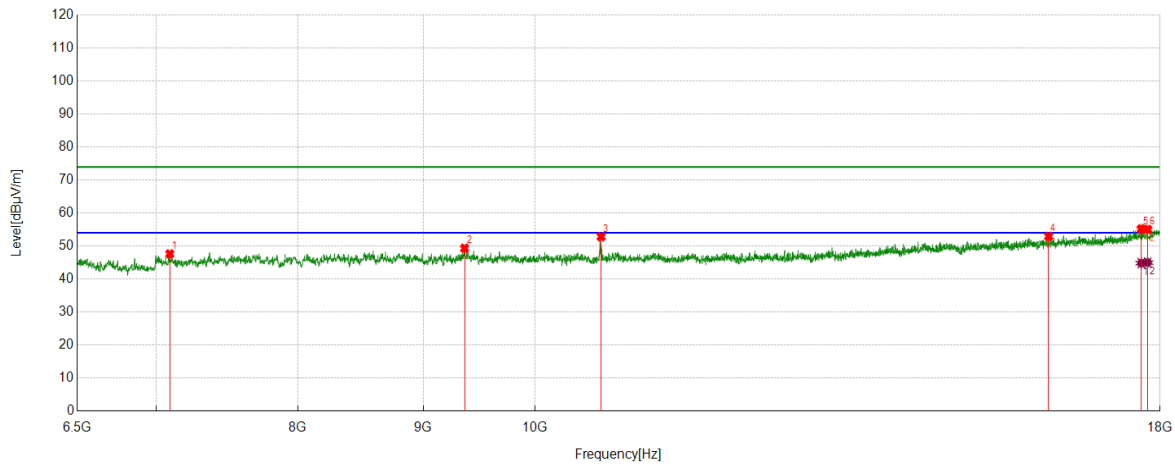

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7092.3487	43.78	3.85	47.63	74.00	-26.37	Horizontal
2	9358.2264	42.90	6.45	49.35	74.00	-24.65	Horizontal
3	10640.6901	45.98	6.85	52.83	74.00	-21.17	Horizontal
4	16209.5349	37.89	15.04	52.93	74.00	-21.07	Horizontal
5	17683.6973	37.07	18.13	55.20	74.00	-18.80	Horizontal
6	17791.0485	36.32	18.71	55.03	74.00	-18.97	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17683.6973	26.68	18.13	44.81	54.00	-9.19	Horizontal
2	17791.0485	26.28	18.71	44.99	54.00	-9.01	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Vertical	PASS

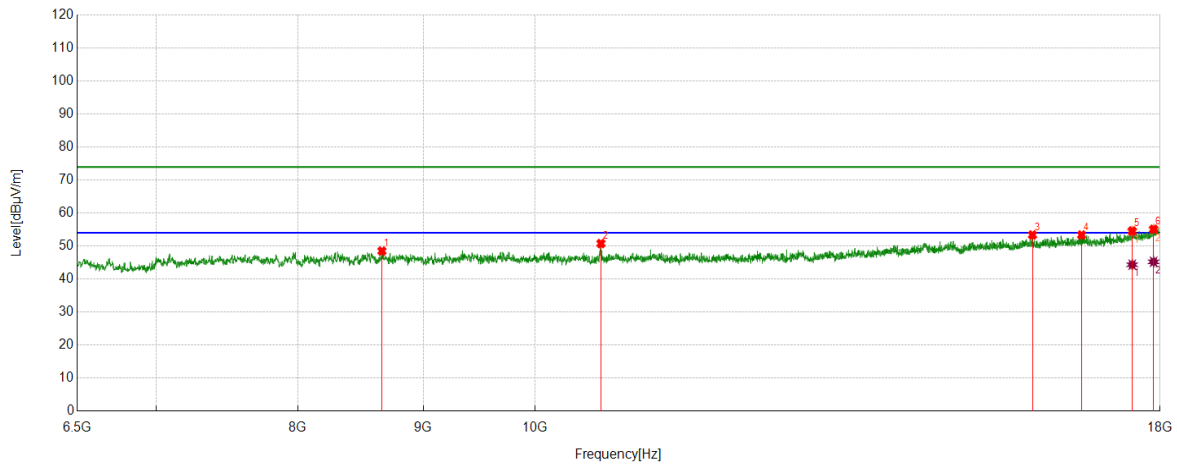

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8658.5264	42.08	6.41	48.49	74.00	-25.51	Vertical
2	10638.7731	43.89	6.87	50.76	74.00	-23.24	Vertical
3	15964.1607	38.85	14.52	53.37	74.00	-20.63	Vertical
4	16719.4532	37.05	16.30	53.35	74.00	-20.65	Vertical
5	17534.1724	36.94	17.62	54.56	74.00	-19.44	Vertical
6	17890.7318	35.80	19.30	55.10	74.00	-18.90	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17534.1724	26.71	17.62	44.33	54.00	-9.67	Vertical
2	17890.7318	25.92	19.30	45.22	54.00	-8.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Horizontal	PASS

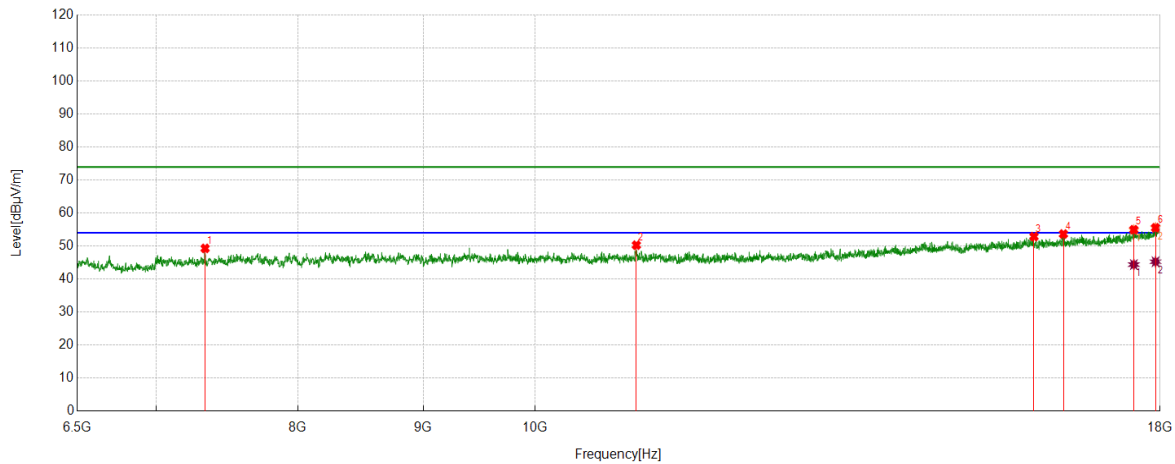

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	45.40	3.89	49.29	74.00	-24.71	Horizontal
2	10999.1665	42.99	7.28	50.27	74.00	-23.73	Horizontal
3	15987.1645	38.30	14.56	52.86	74.00	-21.14	Horizontal
4	16435.7393	38.24	15.41	53.65	74.00	-20.35	Horizontal
5	17561.0102	37.17	17.79	54.96	74.00	-19.04	Horizontal
6	17923.3206	36.19	19.36	55.55	74.00	-18.45	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17561.0102	26.59	17.79	44.38	54.00	-9.62	Horizontal
2	17923.3206	25.88	19.36	45.24	54.00	-8.76	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Vertical	PASS

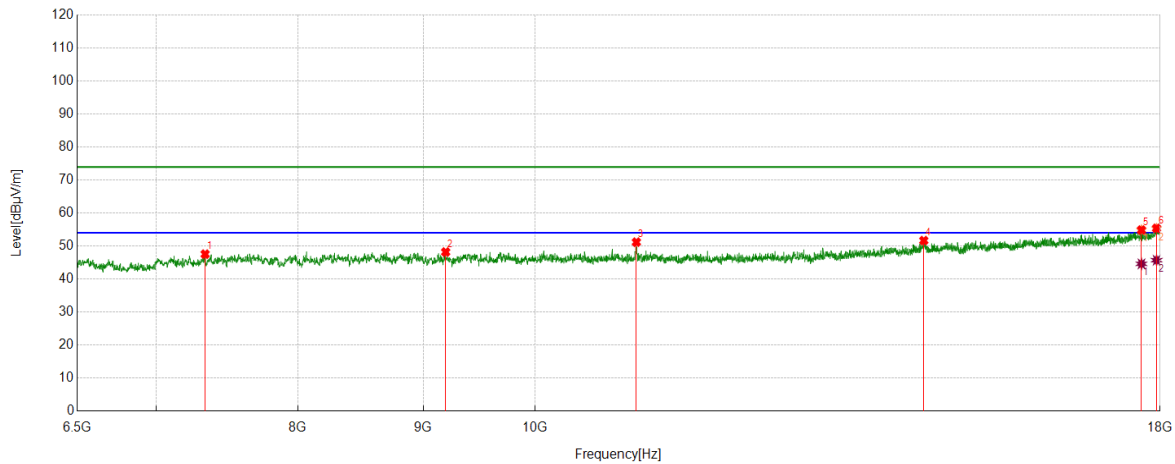

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	43.66	3.89	47.55	74.00	-26.45	Vertical
2	9193.3656	42.24	5.95	48.19	74.00	-25.81	Vertical
3	10999.1665	43.90	7.28	51.18	74.00	-22.82	Vertical
4	14413.3189	38.76	12.90	51.66	74.00	-22.34	Vertical
5	17687.5313	36.68	18.17	54.85	74.00	-19.15	Vertical
6	17940.5734	35.94	19.45	55.39	74.00	-18.61	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17687.5313	26.43	18.17	44.60	54.00	-9.40	Vertical
2	17940.5734	26.25	19.45	45.70	54.00	-8.30	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Horizontal	PASS

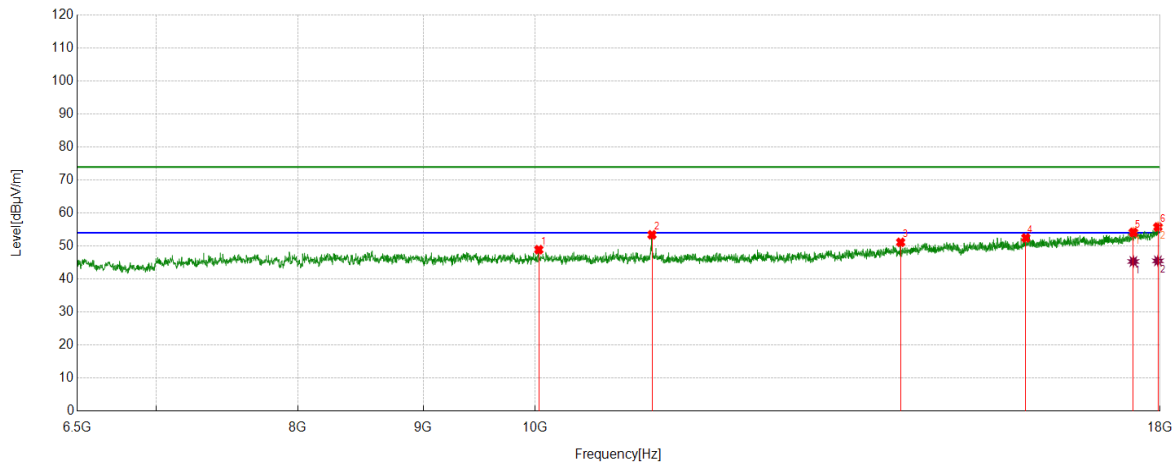

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10034.9225	42.29	6.61	48.90	74.00	-25.10	Horizontal
2	11162.1104	46.19	7.23	53.42	74.00	-20.58	Horizontal
3	14102.7671	39.08	12.05	51.13	74.00	-22.87	Horizontal
4	15864.4774	37.81	14.66	52.47	74.00	-21.53	Horizontal
5	17553.3422	36.40	17.75	54.15	74.00	-19.85	Horizontal
6	17963.5773	36.15	19.63	55.78	74.00	-18.22	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17553.3422	27.57	17.75	45.32	54.00	-8.68	Horizontal
2	17963.5773	25.88	19.63	45.51	54.00	-8.49	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Vertical	PASS

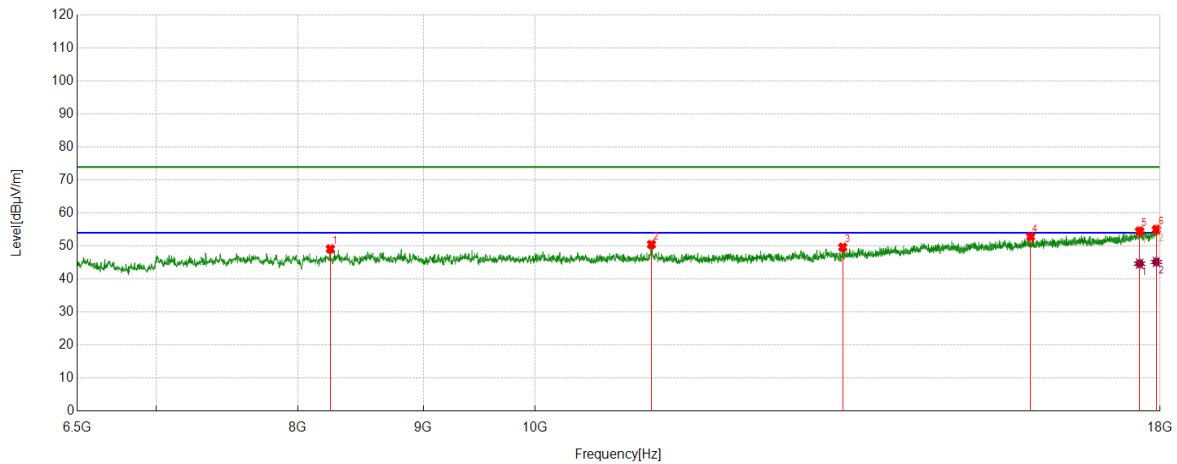

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8248.2914	42.89	6.24	49.13	74.00	-24.87	Vertical
2	11156.3594	43.21	7.27	50.48	74.00	-23.52	Vertical
3	13355.1425	39.61	10.02	49.63	74.00	-24.37	Vertical
4	15937.3229	38.30	14.55	52.85	74.00	-21.15	Vertical
5	17656.8595	36.48	18.06	54.54	74.00	-19.46	Vertical
6	17938.6564	35.59	19.44	55.03	74.00	-18.97	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17656.8595	26.60	18.06	44.66	54.00	-9.34	Vertical
2	17938.6564	25.74	19.44	45.18	54.00	-8.82	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Horizontal	PASS

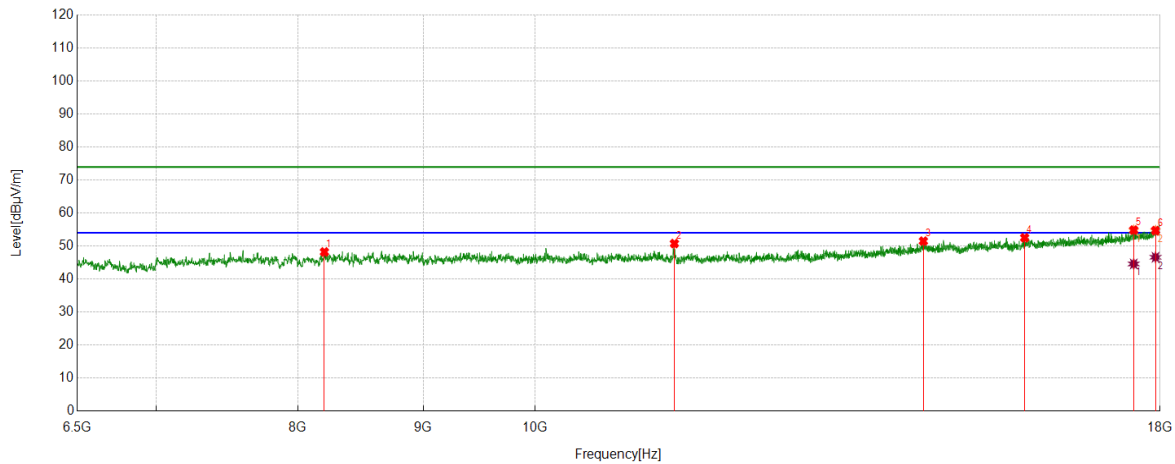

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8202.2837	42.11	6.10	48.21	74.00	-25.79	Horizontal
2	11399.8166	43.34	7.41	50.75	74.00	-23.25	Horizontal
3	14407.5679	38.65	12.85	51.50	74.00	-22.50	Horizontal
4	15847.2245	37.76	14.75	52.51	74.00	-21.49	Horizontal
5	17559.0932	37.06	17.78	54.84	74.00	-19.16	Horizontal
6	17923.3206	35.33	19.36	54.69	74.00	-19.31	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17559.0932	26.79	17.78	44.57	54.00	-9.43	Horizontal
2	17923.3206	27.24	19.36	46.60	54.00	-7.40	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Vertical	PASS

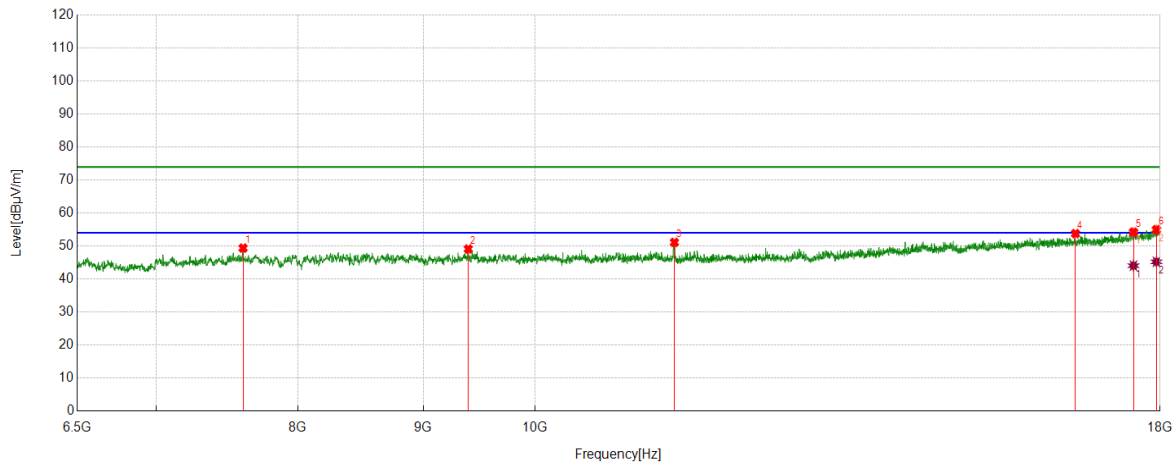

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7598.4331	44.42	4.96	49.38	74.00	-24.62	Vertical
2	9390.8151	42.56	6.55	49.11	74.00	-24.89	Vertical
3	11399.8166	43.70	7.41	51.11	74.00	-22.89	Vertical
4	16623.6039	37.93	15.86	53.79	74.00	-20.21	Vertical
5	17555.2592	36.45	17.77	54.22	74.00	-19.78	Vertical
6	17938.6564	35.54	19.44	54.98	74.00	-19.02	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17555.2592	26.27	17.77	44.04	54.00	-9.96	Vertical
2	17938.6564	25.78	19.44	45.22	54.00	-8.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Horizontal	PASS

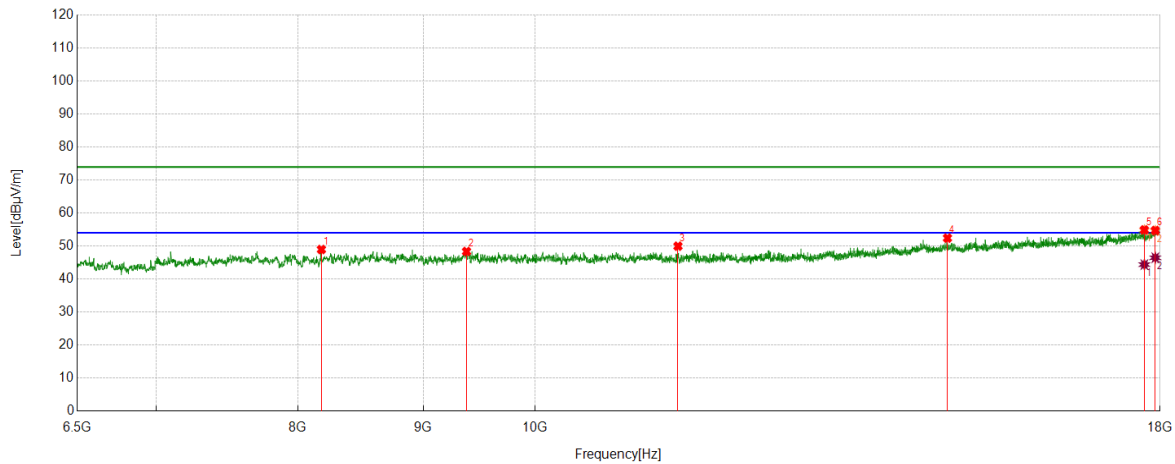

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8179.2799	43.03	5.92	48.95	74.00	-25.05	Horizontal
2	9375.4792	41.87	6.48	48.35	74.00	-25.65	Horizontal
3	11438.1564	42.56	7.40	49.96	74.00	-24.04	Horizontal
4	14737.2895	39.54	12.87	52.41	74.00	-21.59	Horizontal
5	17735.4559	36.36	18.53	54.89	74.00	-19.11	Horizontal
6	17919.4866	35.35	19.36	54.71	74.00	-19.29	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17735.4559	25.84	18.53	44.37	54.00	-9.63	Horizontal
2	17919.4866	27.09	19.36	46.45	54.00	-7.55	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Vertical	PASS

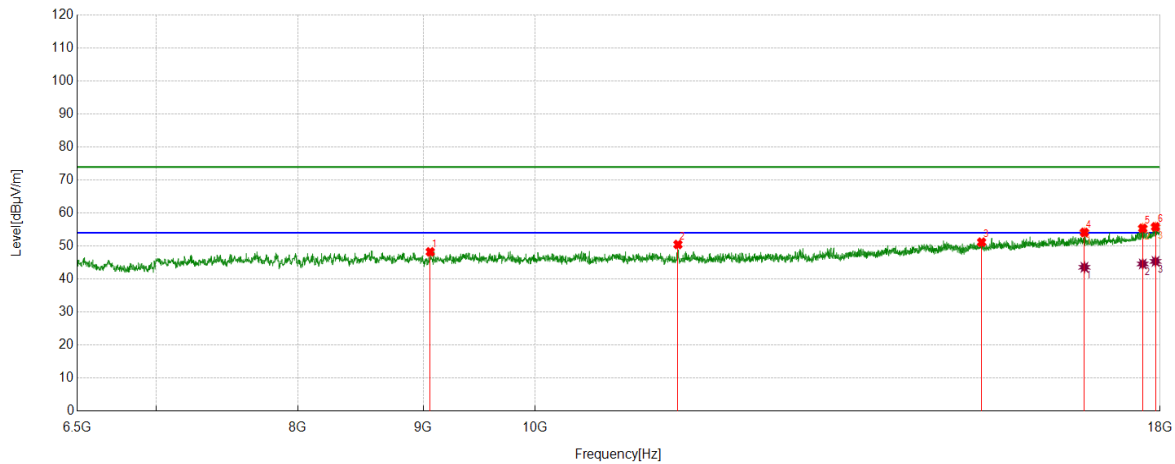

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9061.0935	42.15	6.09	48.24	74.00	-25.76	Vertical
2	11438.1564	43.07	7.40	50.47	74.00	-23.53	Vertical
3	15218.4531	37.77	13.40	51.17	74.00	-22.83	Vertical
4	16763.5439	38.10	16.04	54.14	74.00	-19.86	Vertical
5	17708.6181	37.03	18.35	55.38	74.00	-18.62	Vertical
6	17923.3206	36.47	19.36	55.83	74.00	-18.17	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	16763.5439	27.52	16.04	43.56	54.00	-10.44	Vertical
2	17708.6181	26.23	18.35	44.58	54.00	-9.42	Vertical
3	17923.3206	25.99	19.36	45.35	54.00	-8.65	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

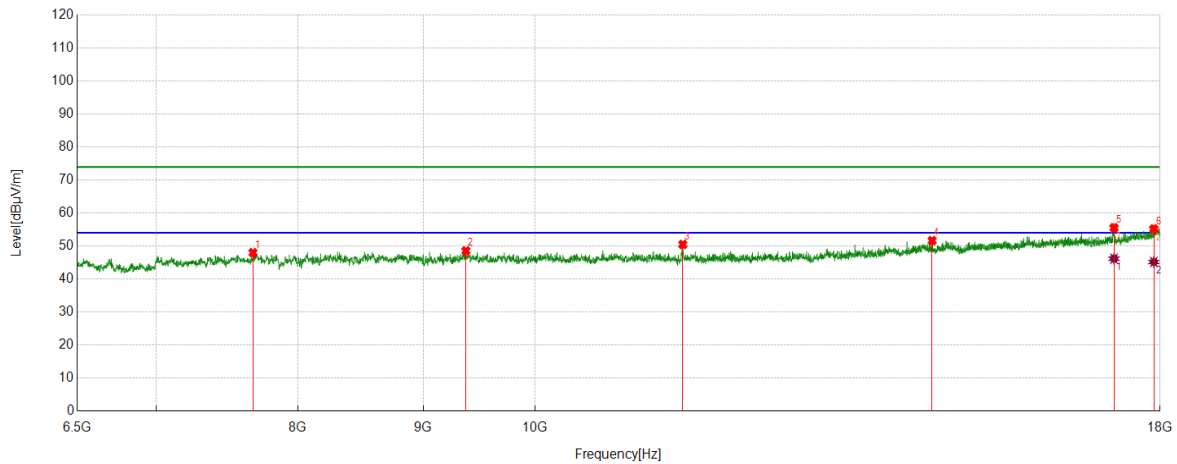

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7669.3616	42.79	5.20	47.99	74.00	-26.01	Horizontal
2	9369.7283	42.05	6.50	48.55	74.00	-25.45	Horizontal
3	11489.9150	42.96	7.53	50.49	74.00	-23.51	Horizontal
4	14526.4211	38.94	12.71	51.65	74.00	-22.35	Horizontal
5	17237.0395	38.79	16.76	55.55	74.00	-18.45	Horizontal
6	17894.5658	35.95	19.25	55.20	74.00	-18.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17237.0395	29.41	16.76	46.17	54.00	-7.83	Horizontal
2	17894.5658	25.92	19.25	45.17	54.00	-8.83	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

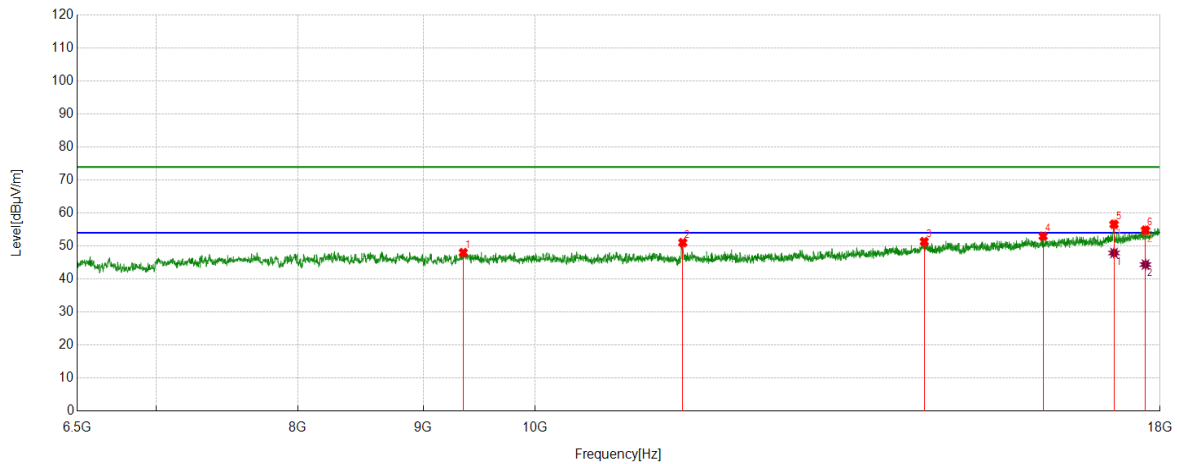

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9346.7245	41.58	6.42	48.00	74.00	-26.00	Vertical
2	11489.9150	43.51	7.53	51.04	74.00	-22.96	Vertical
3	14419.0698	38.43	12.92	51.35	74.00	-22.65	Vertical
4	16125.1875	38.19	14.80	52.99	74.00	-21.01	Vertical
5	17237.0395	39.85	16.76	56.61	74.00	-17.39	Vertical
6	17754.6258	36.25	18.56	54.81	74.00	-19.19	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17237.0395	31.13	16.76	47.89	54.00	-6.11	Vertical
2	17754.6258	25.83	18.56	44.39	54.00	-9.61	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Horizontal	PASS

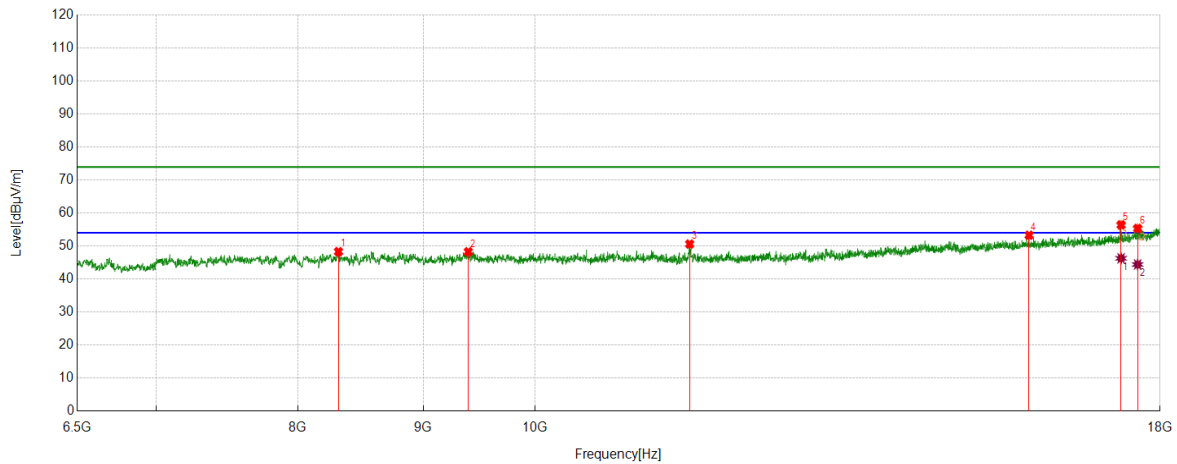

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8311.5519	42.03	6.27	48.30	74.00	-25.70	Horizontal
2	9390.8151	41.71	6.55	48.26	74.00	-25.74	Horizontal
3	11564.6774	42.88	7.72	50.60	74.00	-23.40	Horizontal
4	15914.3191	38.74	14.54	53.28	74.00	-20.72	Horizontal
5	17352.0587	39.26	17.16	56.42	74.00	-17.58	Horizontal
6	17624.2707	37.28	18.06	55.34	74.00	-18.66	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17352.0587	29.12	17.16	46.28	54.00	-7.72	Horizontal
2	17624.2707	26.35	18.06	44.41	54.00	-9.59	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.