



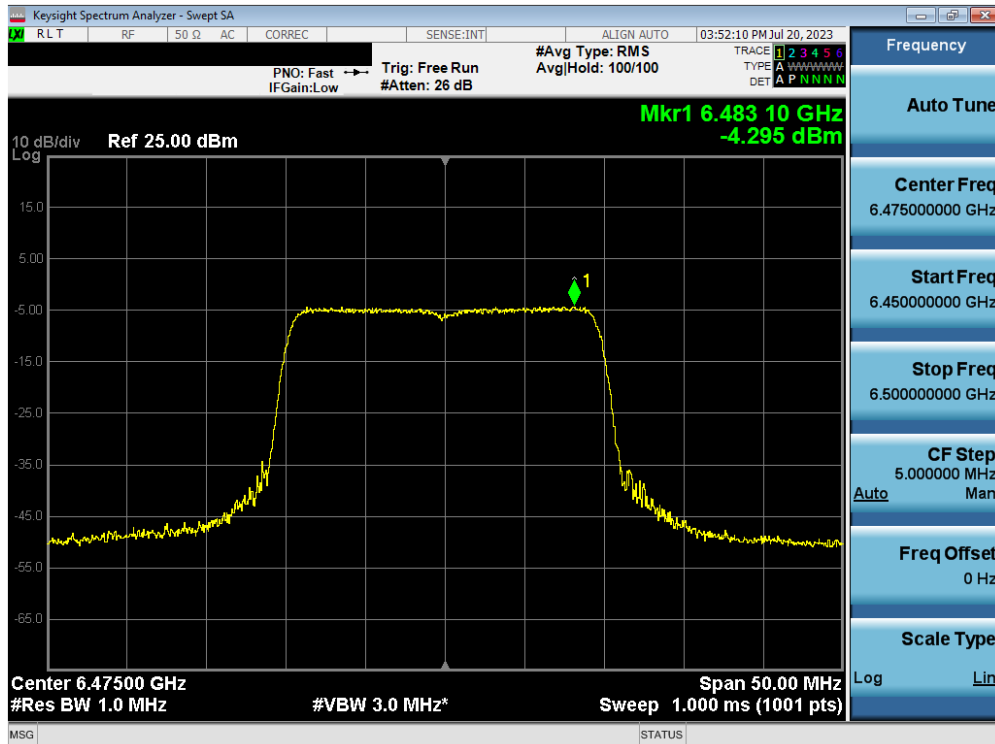


Plot 7-117. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 105)

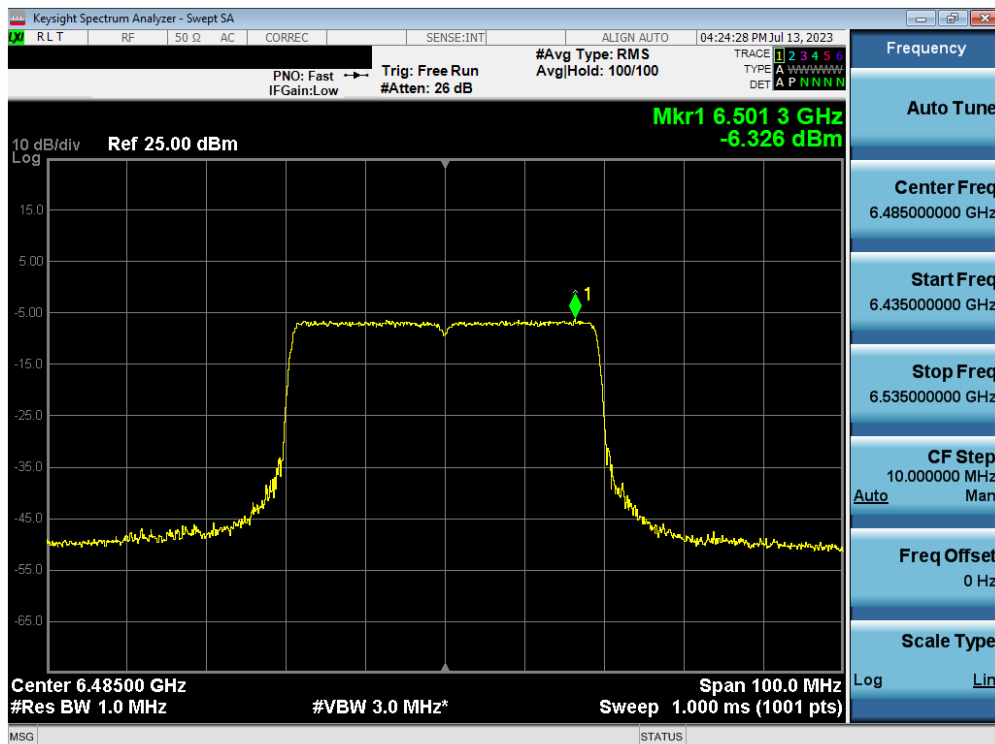


Plot 7-118. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 107)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 90 of 173

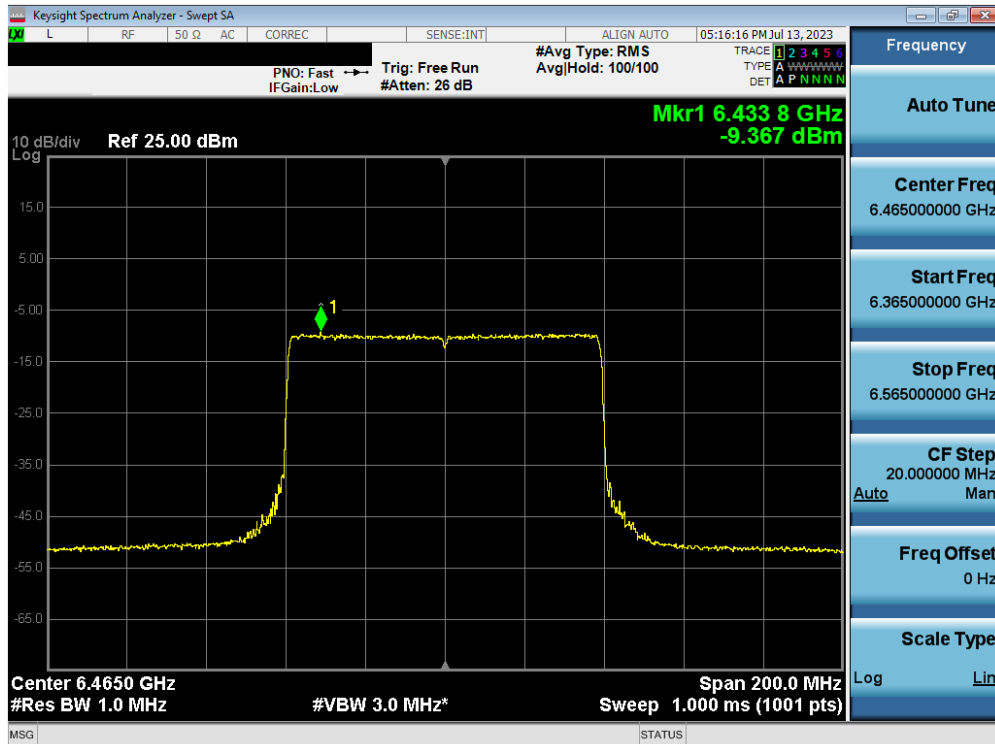


Plot 7-119. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 103)

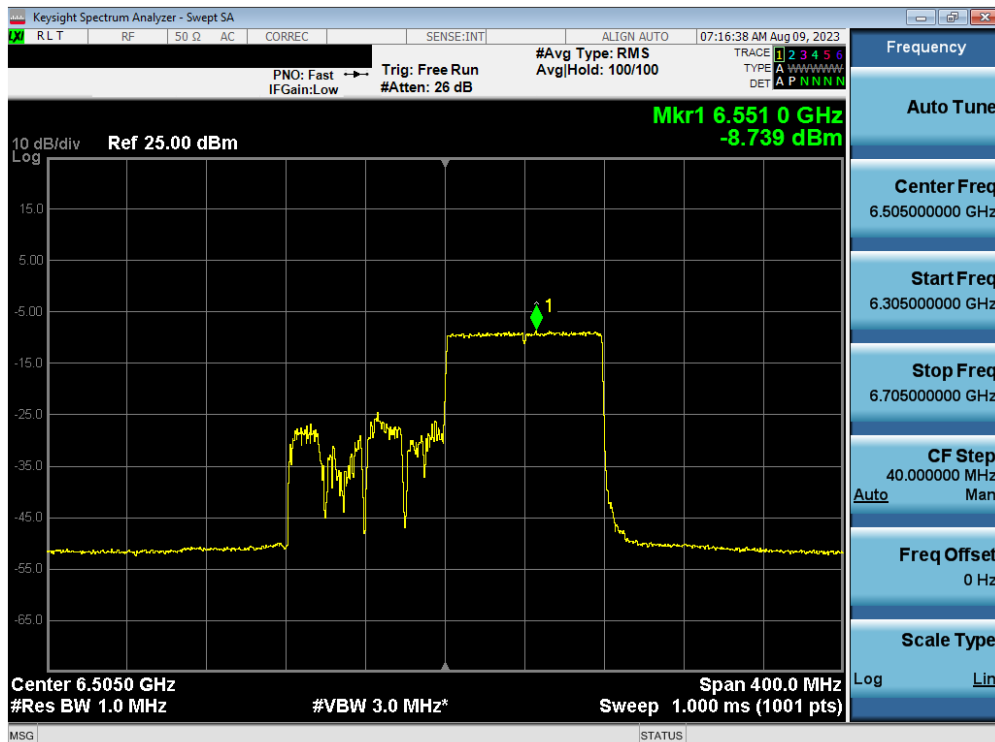


Plot 7-120. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 111)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 91 of 173

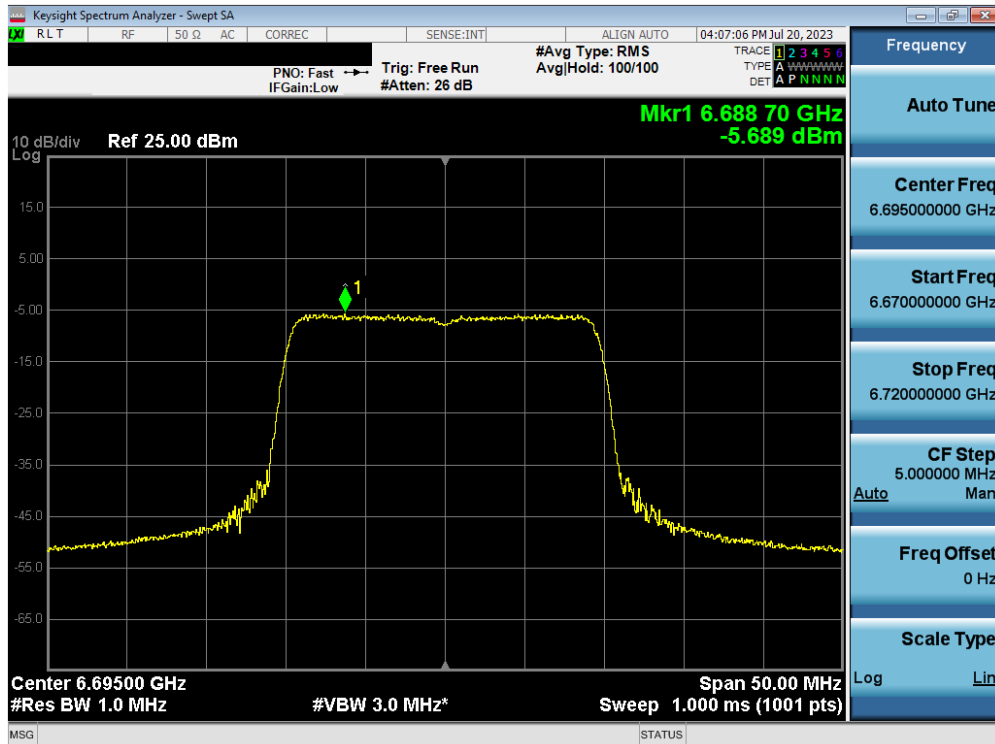


Plot 7-121. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 149)

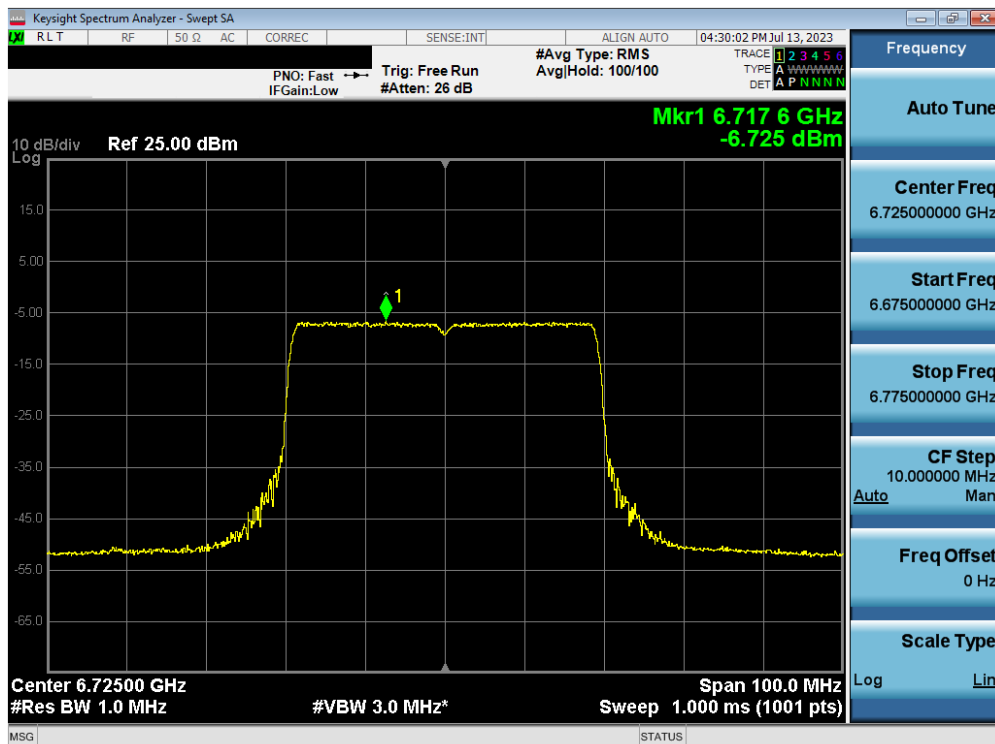


Plot 7-122. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 155)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 92 of 173

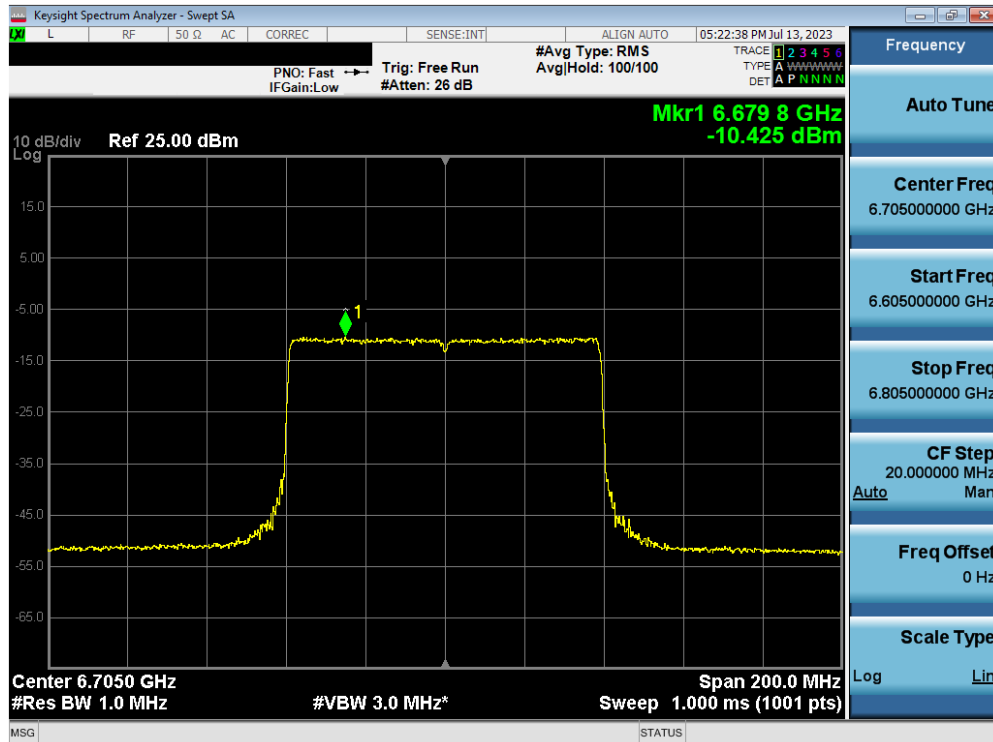


Plot 7-123. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 151)

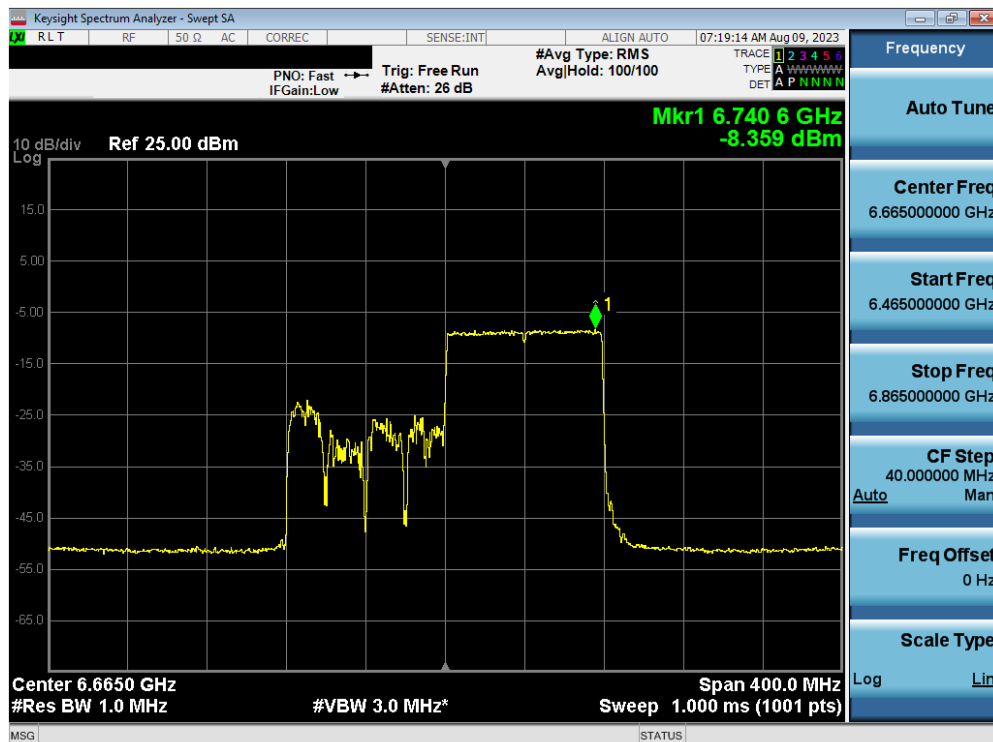


Plot 7-124. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax (996 Tone) (UNII Band 7) – Ch. 143)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 93 of 173

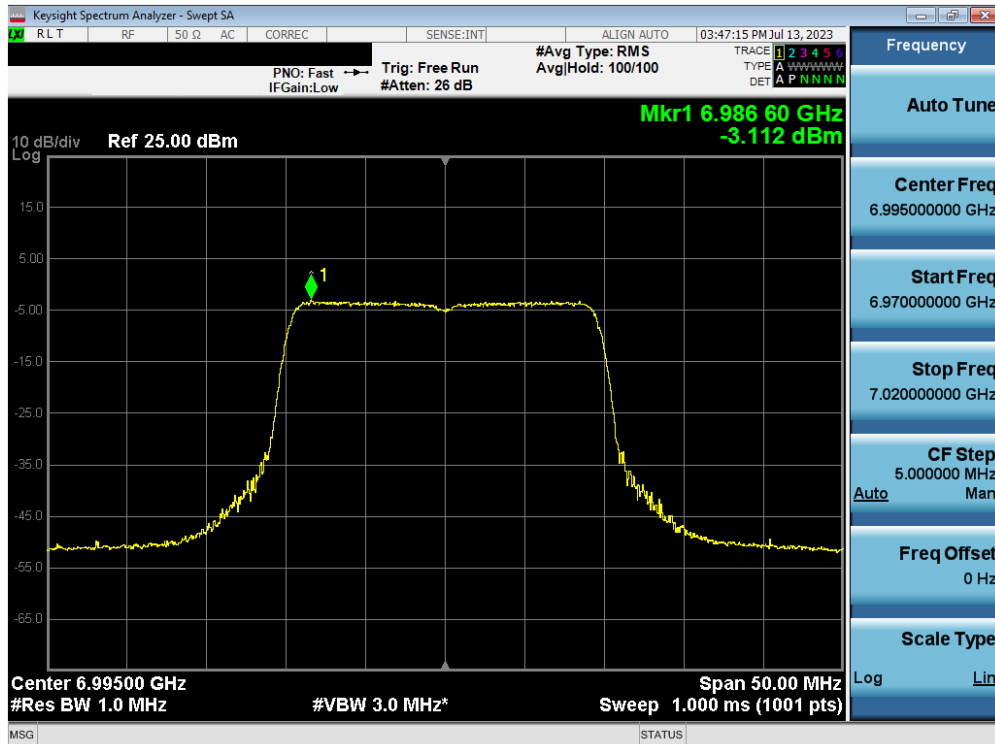


Plot 7-125. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 209)

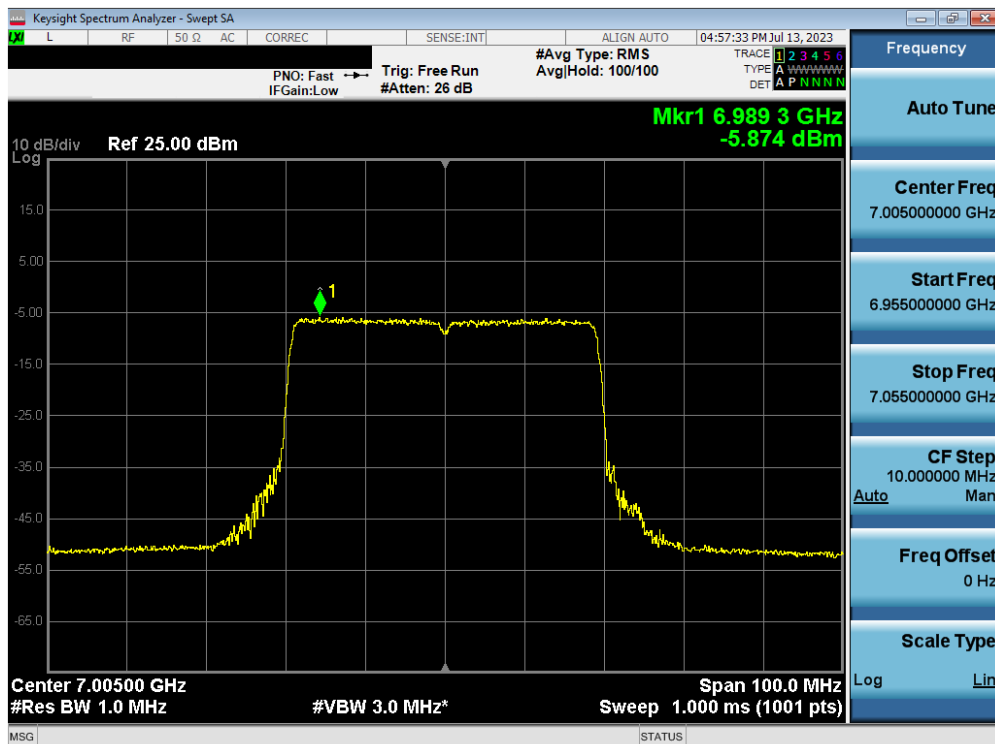


Plot 7-126. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 211)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 94 of 173

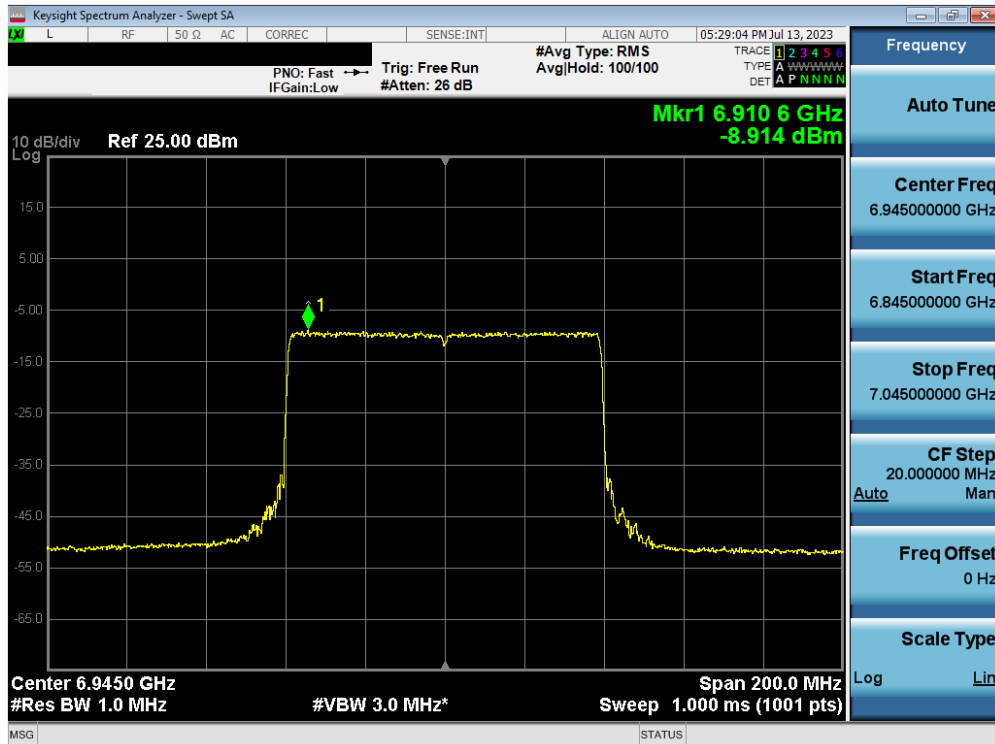

Plot 7-127. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 199)

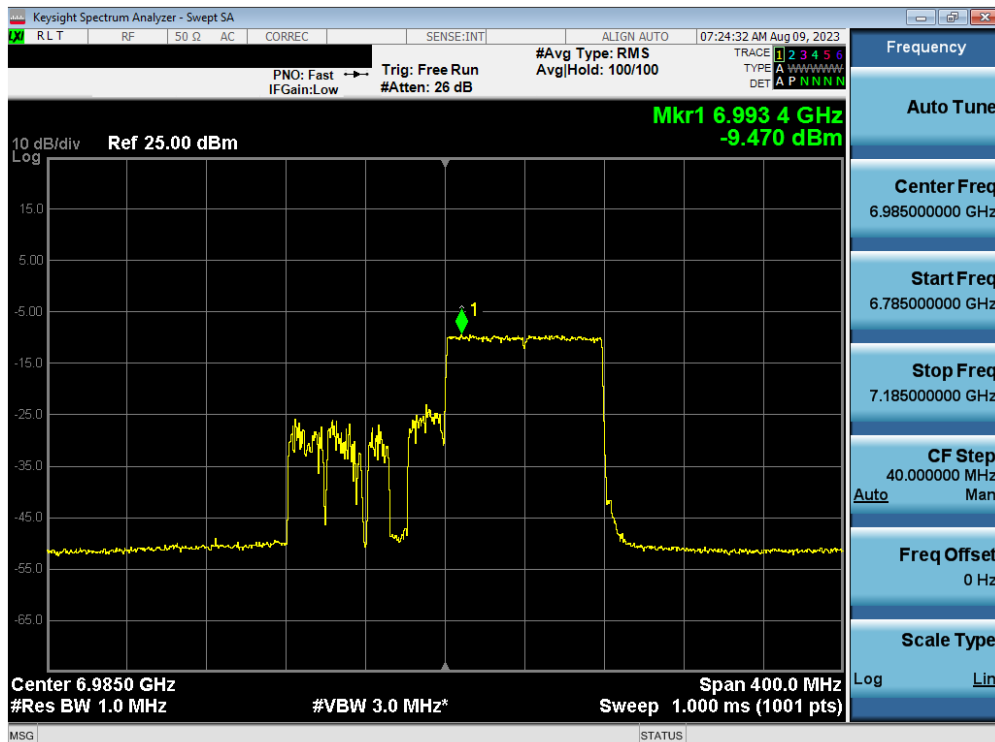

Plot 7-128. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 207)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 95 of 173

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Sample MIMO Calculation:

At 5935MHz in 802.11ax (20MHz BW) mode, the average conducted power spectral density was measured to be -4.92 dBm for Antenna-1 and -5.12 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-4.92 \text{ dBm} + -5.12 \text{ dBm}) = (0.32 \text{ mW} + 0.31 \text{ mW}) = 0.63 \text{ mW} = -2.03 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5935 MHz in 802.11ax (20MHz BW) mode, the average MIMO power density was calculated to be -2.03 dBm with directional gain of 0.02 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$-2.03 \text{ dBm} + 0.02 \text{ dBi} = -2.01 \text{ dBm}$$

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 96 of 173

7.5 In-Band Emissions

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test Procedure Used

KDB 987594 D02 v01r01

Test Settings

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 97 of 173

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 98 of 173

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Emission Mask	Antenna-2 Power Emission Mask
Band 5	5935	2	ax (20MHz)	Pass	Pass
	6175	45	ax (20MHz)	Pass	Pass
	6415	93	ax (20MHz)	Pass	Pass
	5965	3	ax (40MHz)	Pass	Pass
	6165	43	ax (40MHz)	Pass	Pass
	6405	91	ax (40MHz)	Pass	Pass
	5985	7	ax (80MHz)	Pass	Pass
	6145	39	ax (80MHz)	Pass	Pass
	6385	87	ax (80MHz)	Pass	Pass
	6025	15	ax (160MHz)	Pass	Pass
	6185	47	ax (160MHz)	Pass	Pass
	6345	79	ax (160MHz)	Pass	Pass
Band 6	6435	97	ax (20MHz)	Pass	Pass
	6475	105	ax (20MHz)	Pass	Pass
	6515	113	ax (20MHz)	Pass	Pass
	6445	99	ax (40MHz)	Pass	Pass
	6485	107	ax (40MHz)	Pass	Pass
	6525	115	ax (40MHz)	Pass	Pass
	6465	103	ax (80MHz)	Pass	Pass
Band 7	6505	111	ax (160MHz)	Pass	Pass
	6535	117	ax (20MHz)	Pass	Pass
	6695	149	ax (20MHz)	Pass	Pass
	6875	185	ax (20MHz)	Pass	Pass
	6565	123	ax (40MHz)	Pass	Pass
	6685	155	ax (40MHz)	Pass	Pass
	6845	179	ax (40MHz)	Pass	Pass
	6545	119	ax (80MHz)	Pass	Pass
	6705	151	ax (80MHz)	Pass	Pass
	6865	183	ax (80MHz)	Pass	Pass
Band 8	6665	143	ax (160MHz)	Pass	Pass
	6825	175	ax (160MHz)	Pass	Pass
	6895	189	ax (20MHz)	Pass	Pass
	6995	209	ax (20MHz)	Pass	Pass
	7115	233	ax (20MHz)	Pass	Pass
	6885	187	ax (40MHz)	Pass	Pass
	7005	211	ax (40MHz)	Pass	Pass
	7085	227	ax (40MHz)	Pass	Pass
	6945	199	ax (80MHz)	Pass	Pass
	7025	215	ax (80MHz)	Pass	Pass
	6985	207	ax (160MHz)	Pass	Pass

Table 7-13. In-Band Emission Mask Test Results – Partial Tone


sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 99 of 173

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Emission Mask	Antenna-2 Power Emission Mask
Band 5	5935	2	ax (20MHz)	Pass	Pass
	6175	45	ax (20MHz)	Pass	Pass
	6415	93	ax (20MHz)	Pass	Pass
	5965	3	ax (40MHz)	Pass	Pass
	6165	43	ax (40MHz)	Pass	Pass
	6405	91	ax (40MHz)	Pass	Pass
	5985	7	ax (80MHz)	Pass	Pass
	6145	39	ax (80MHz)	Pass	Pass
	6385	87	ax (80MHz)	Pass	Pass
	6025	15	ax (160MHz)	Pass	Pass
	6185	47	ax (160MHz)	Pass	Pass
	6345	79	ax (160MHz)	Pass	Pass
Band 6	6435	97	ax (20MHz)	Pass	Pass
	6475	105	ax (20MHz)	Pass	Pass
	6515	113	ax (20MHz)	Pass	Pass
	6445	99	ax (40MHz)	Pass	Pass
	6485	107	ax (40MHz)	Pass	Pass
	6525	115	ax (40MHz)	Pass	Pass
	6465	103	ax (80MHz)	Pass	Pass
Band 7	6505	111	ax (160MHz)	Pass	Pass
	6535	117	ax (20MHz)	Pass	Pass
	6695	149	ax (20MHz)	Pass	Pass
	6875	185	ax (20MHz)	Pass	Pass
	6565	123	ax (40MHz)	Pass	Pass
	6685	155	ax (40MHz)	Pass	Pass
	6845	179	ax (40MHz)	Pass	Pass
	6545	119	ax (80MHz)	Pass	Pass
	6705	151	ax (80MHz)	Pass	Pass
	6865	183	ax (80MHz)	Pass	Pass
Band 8	6665	143	ax (160MHz)	Pass	Pass
	6825	175	ax (160MHz)	Pass	Pass
	6895	189	ax (20MHz)	Pass	Pass
	6995	209	ax (20MHz)	Pass	Pass
	7115	233	ax (20MHz)	Pass	Pass
	6885	187	ax (40MHz)	Pass	Pass
	7005	211	ax (40MHz)	Pass	Pass
	7085	227	ax (40MHz)	Pass	Pass
	6945	199	ax (80MHz)	Pass	Pass
	7025	215	ax (80MHz)	Pass	Pass
	6985	207	ax (160MHz)	Pass	Pass


Table 7-14. In-Band Emission Mask Test Results – Full Tone

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 100 of 173

7.5.1 MIMO Antenna-1 In-Band Emission Measurements

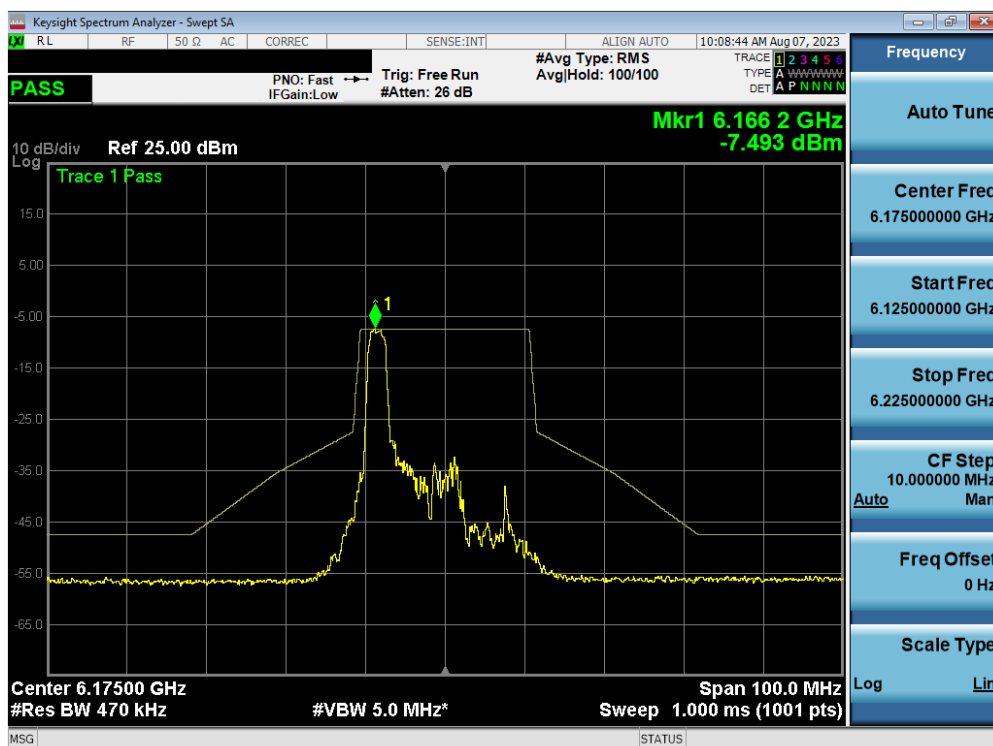


Plot 7-129. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 45)

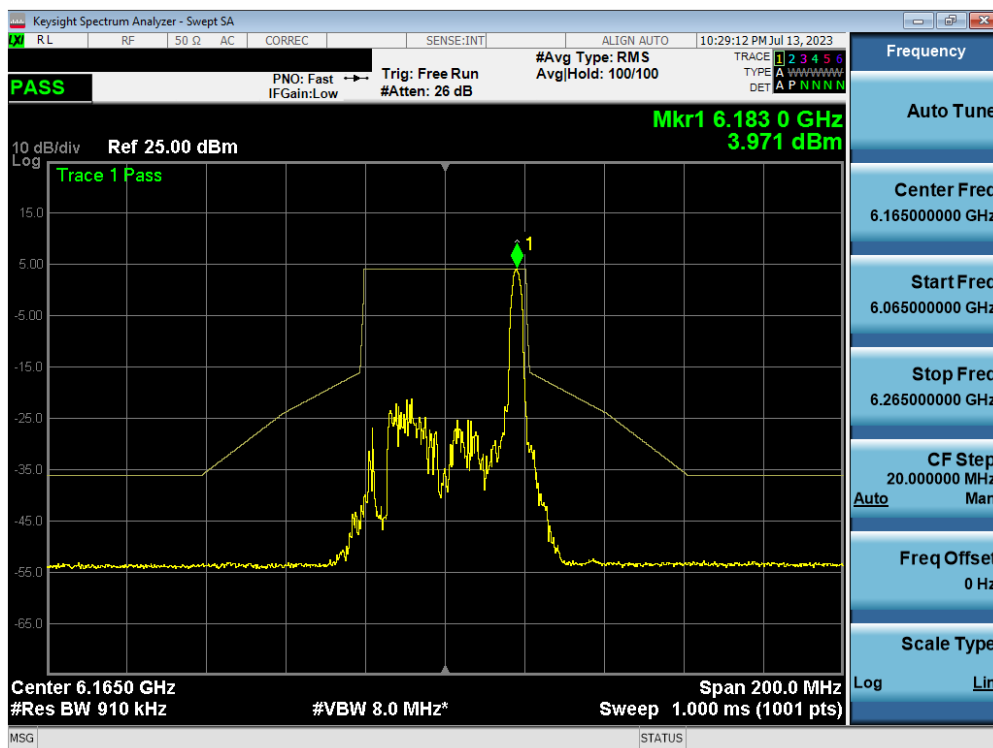


Plot 7-130. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 43)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 101 of 173

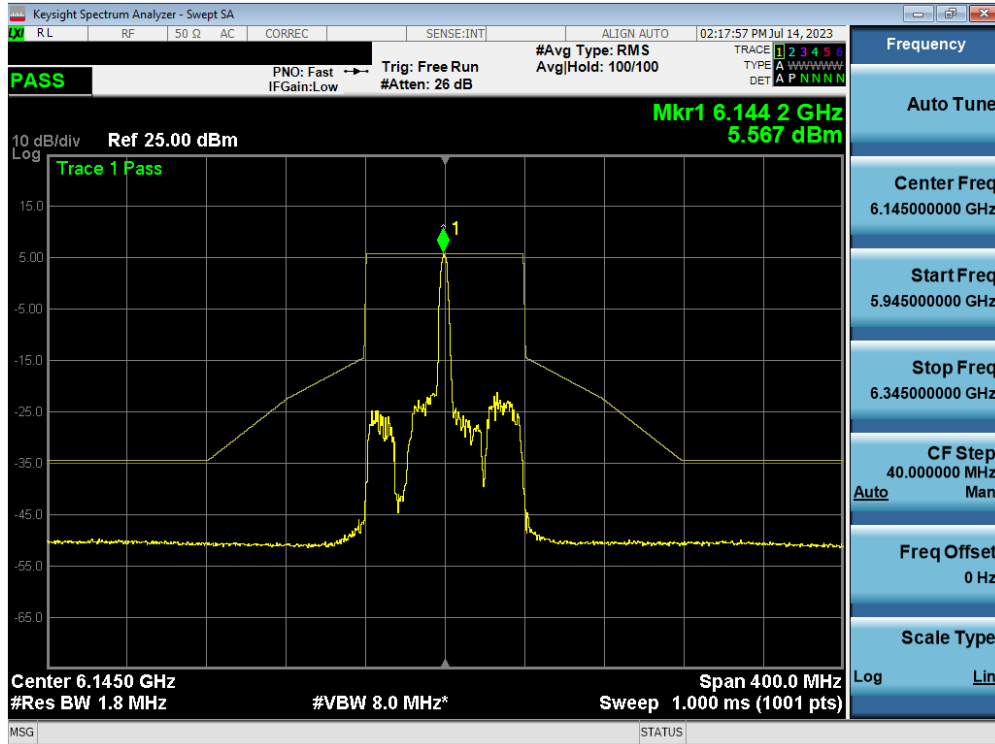


Plot 7-131. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 39)

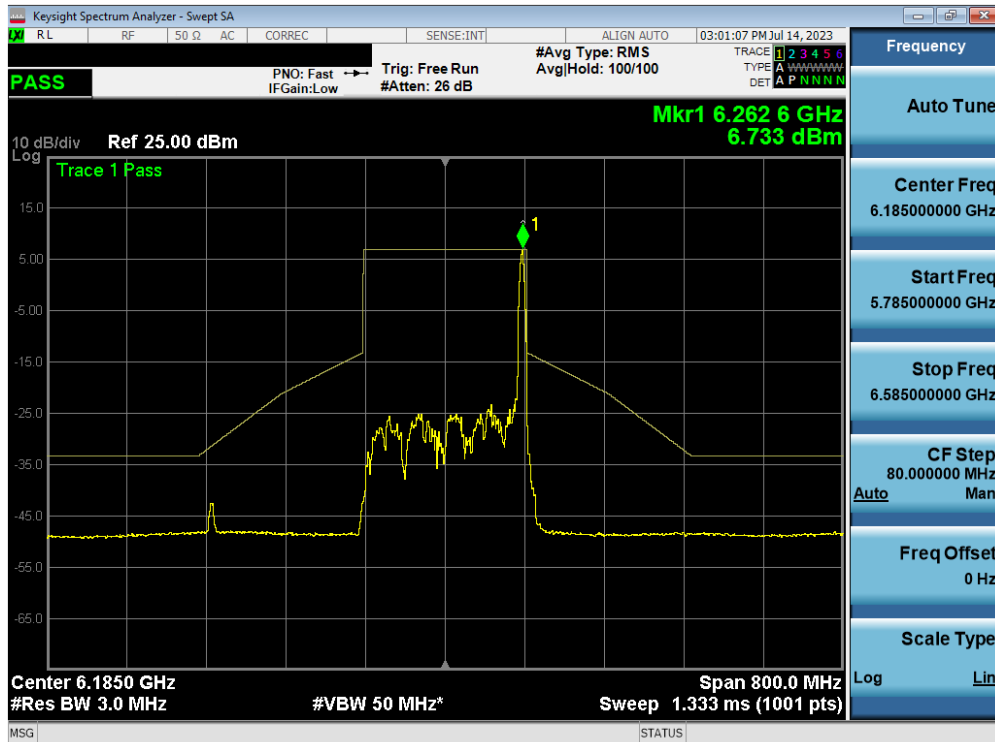


Plot 7-132. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 47)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 102 of 173

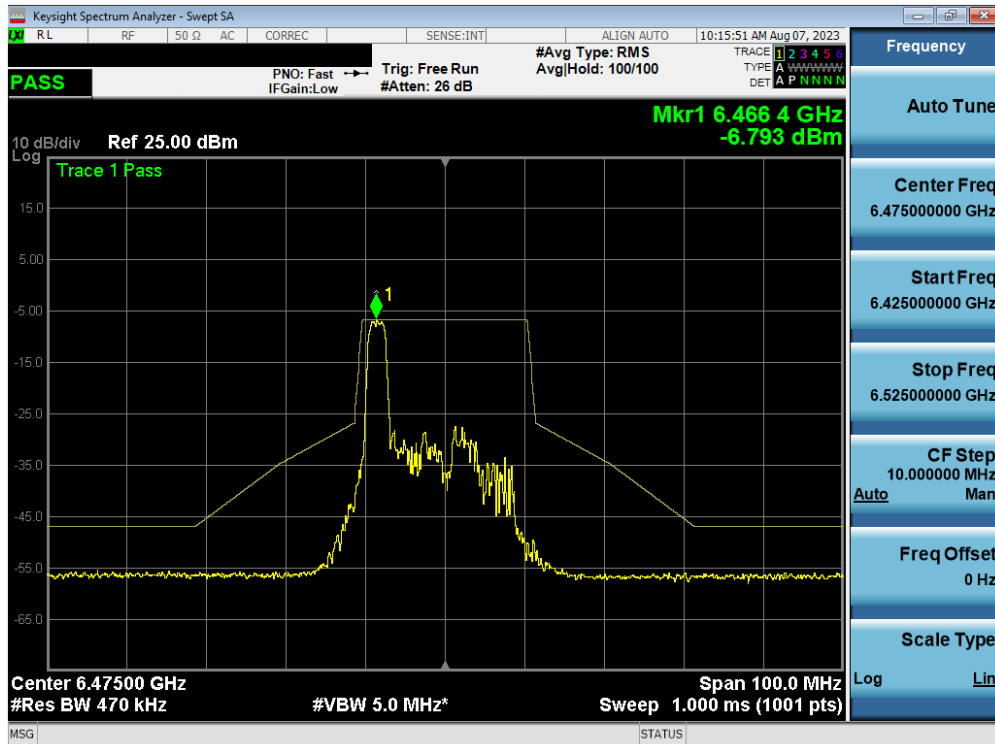


Plot 7-133. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 105)

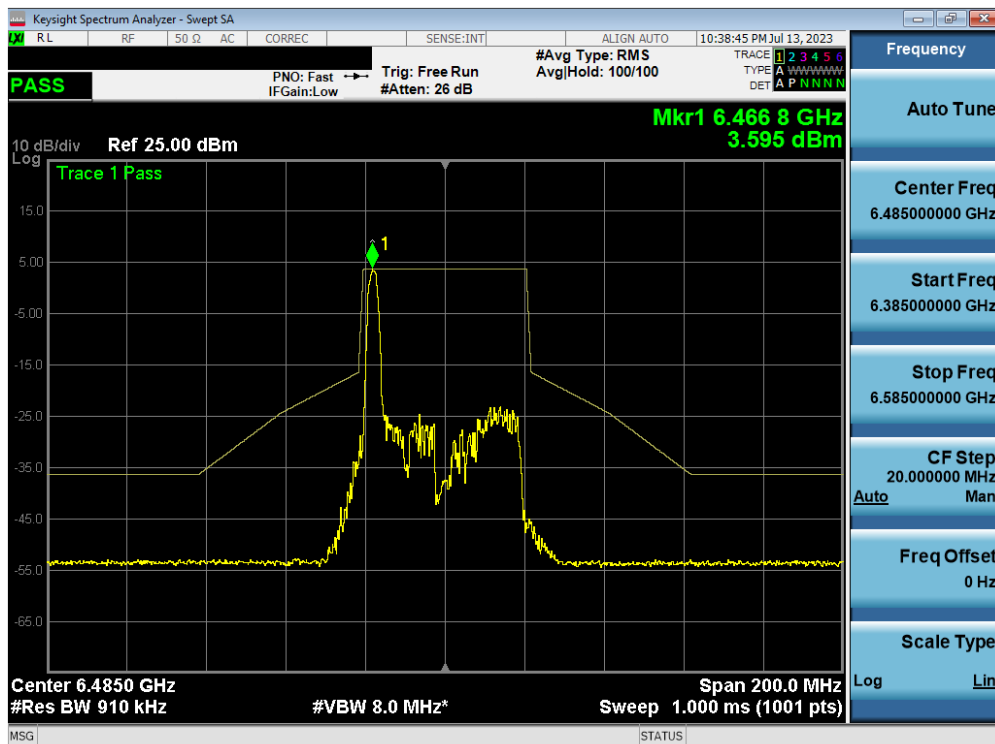


Plot 7-134. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 107)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 103 of 173

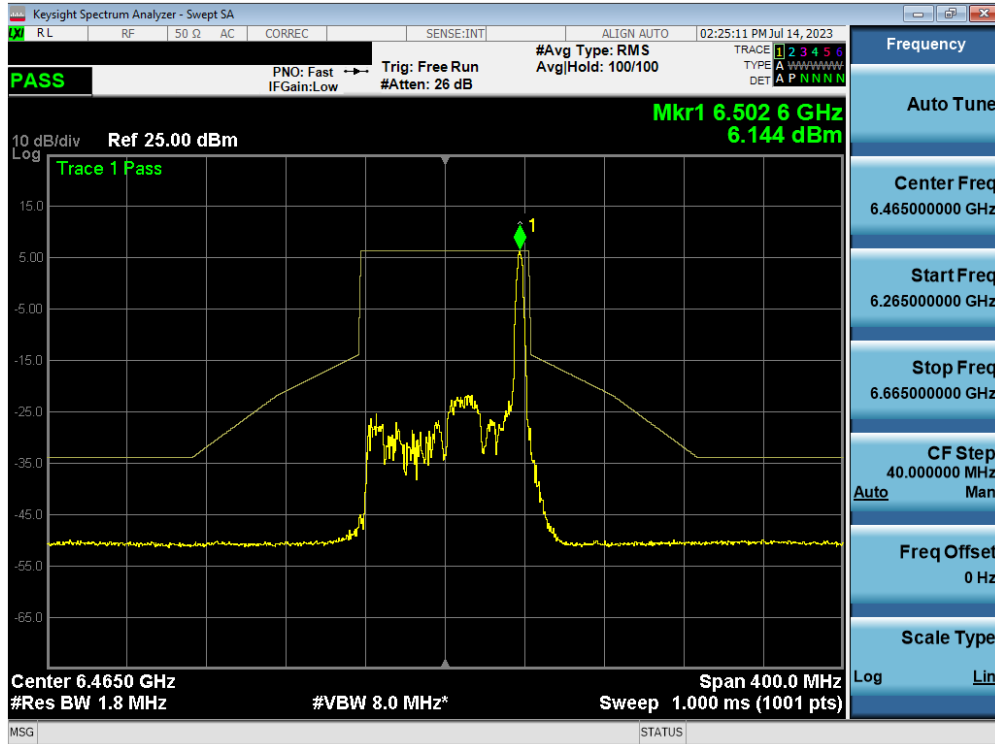


Plot 7-135. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 103)

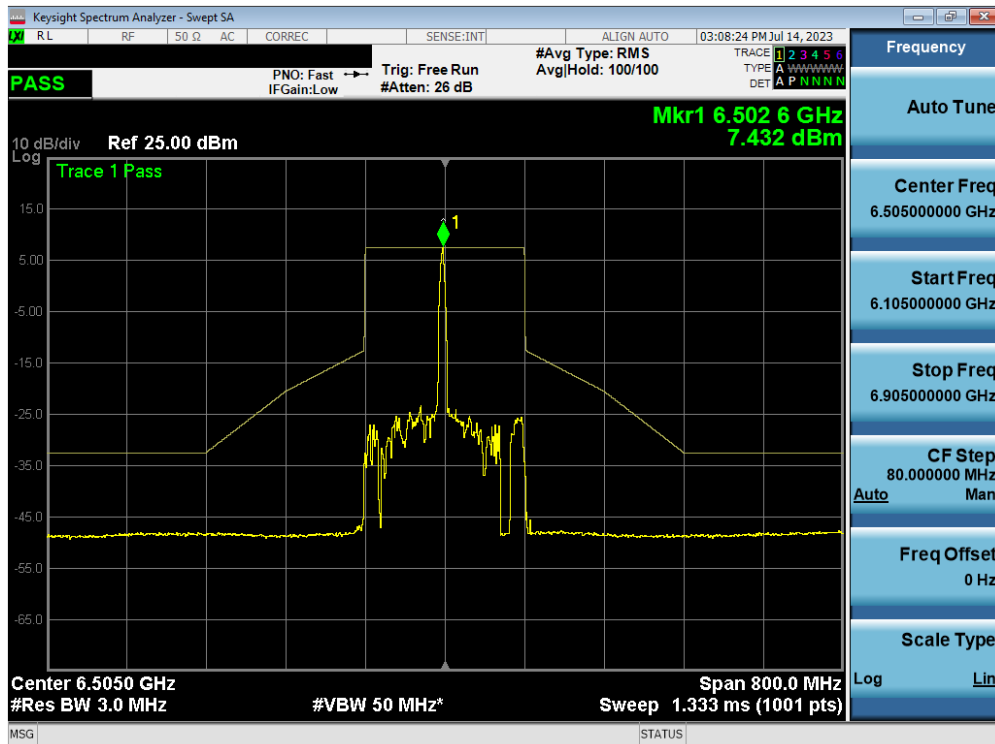


Plot 7-136. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 111)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 104 of 173

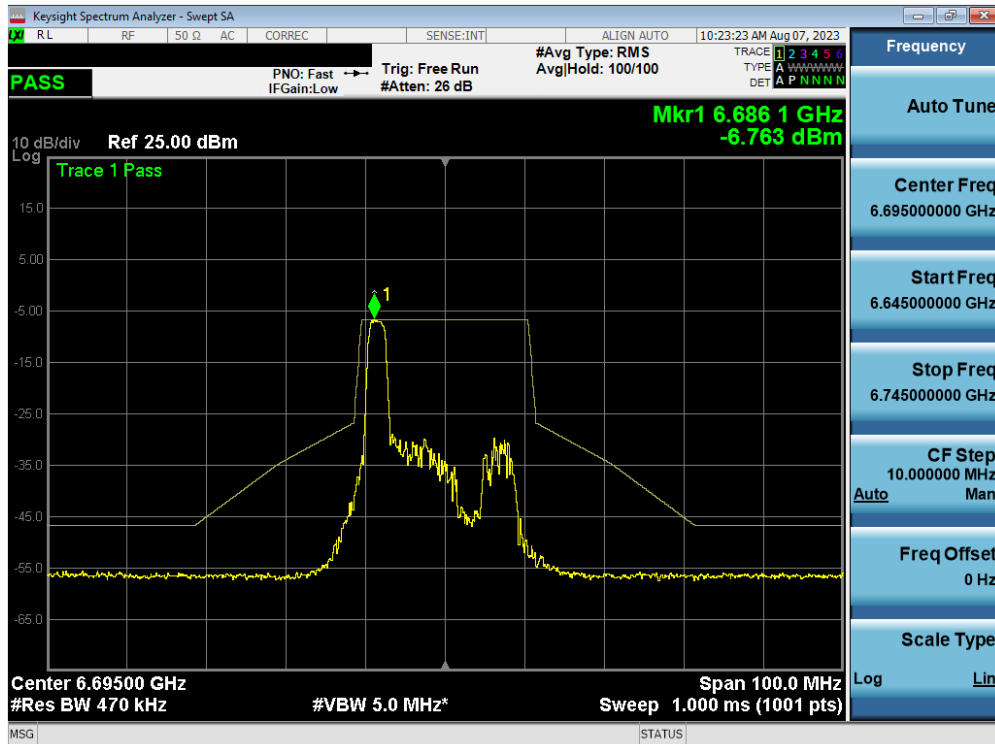


Plot 7-137. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 149)

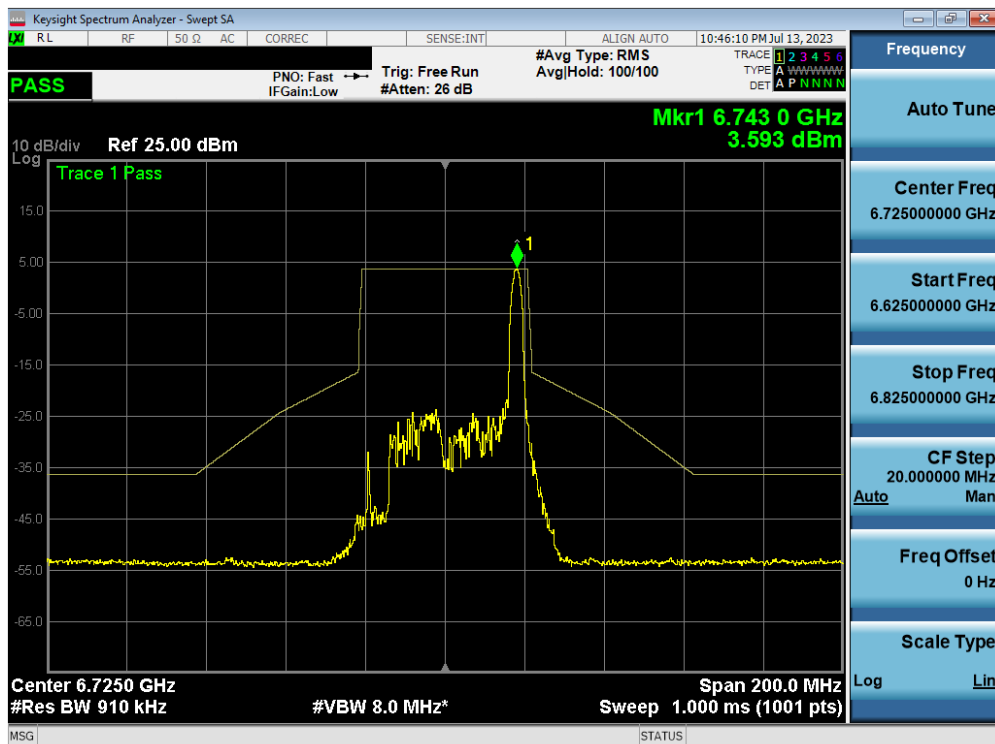


Plot 7-138. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 155)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 105 of 173

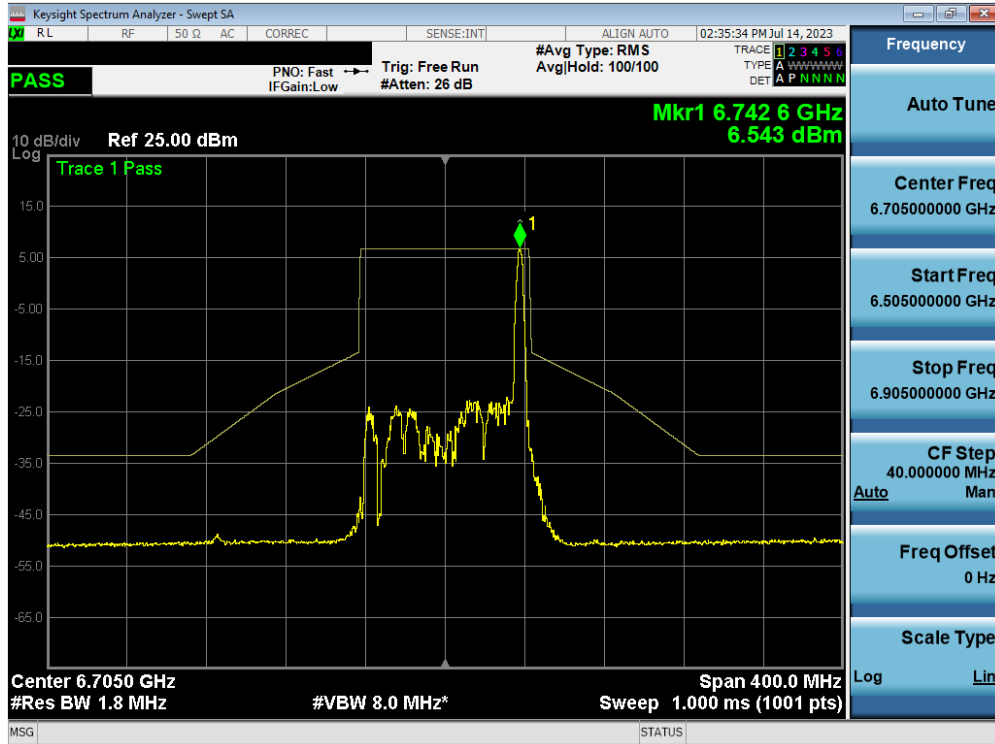


Plot 7-139. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 151)

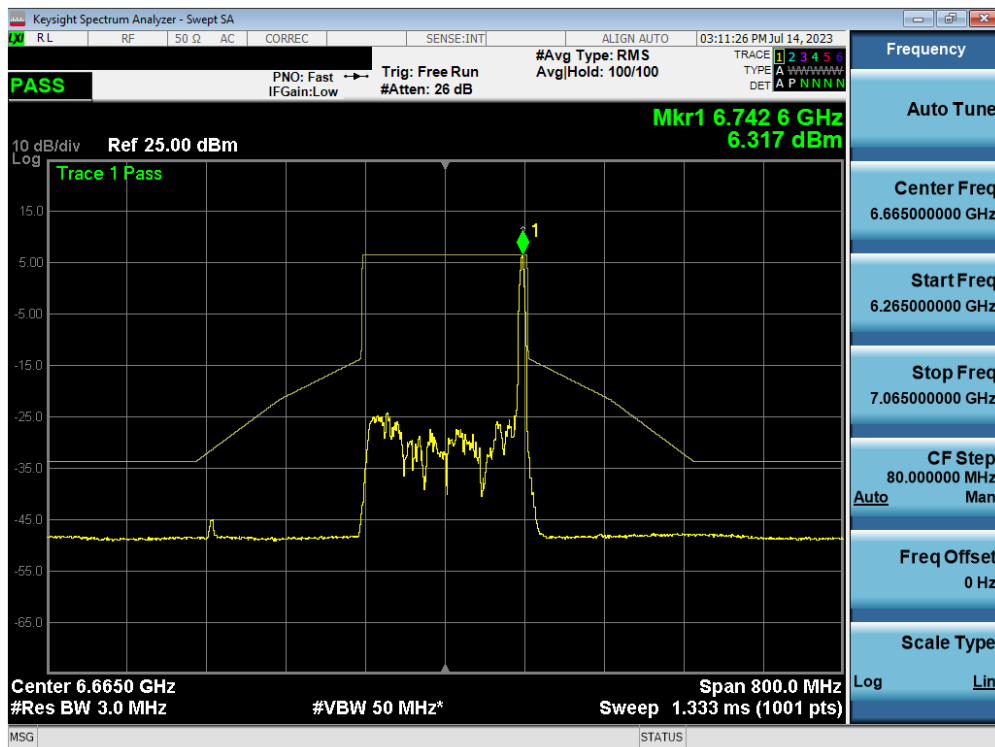


Plot 7-140. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 143)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 106 of 173

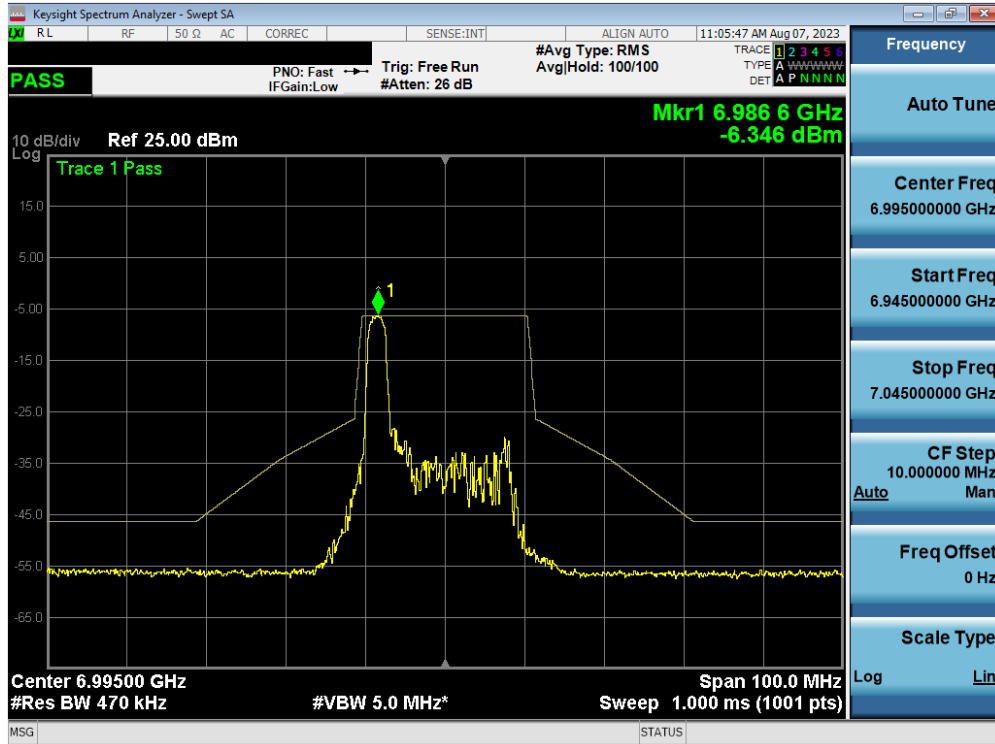


Plot 7-141. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 209)

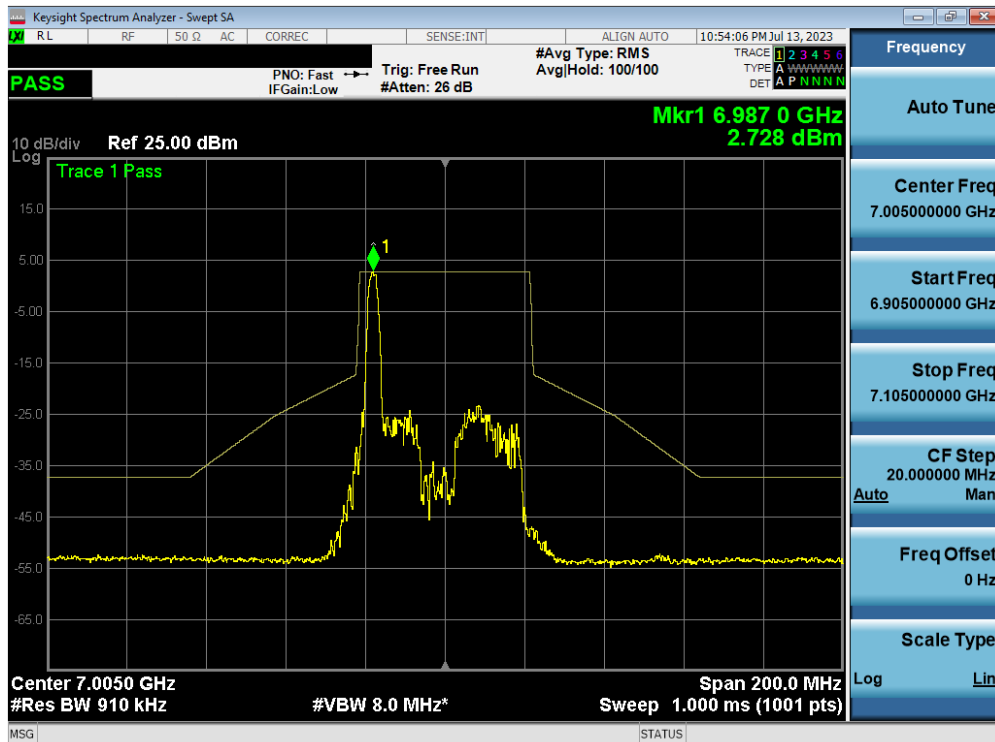


Plot 7-142. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 211)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 107 of 173

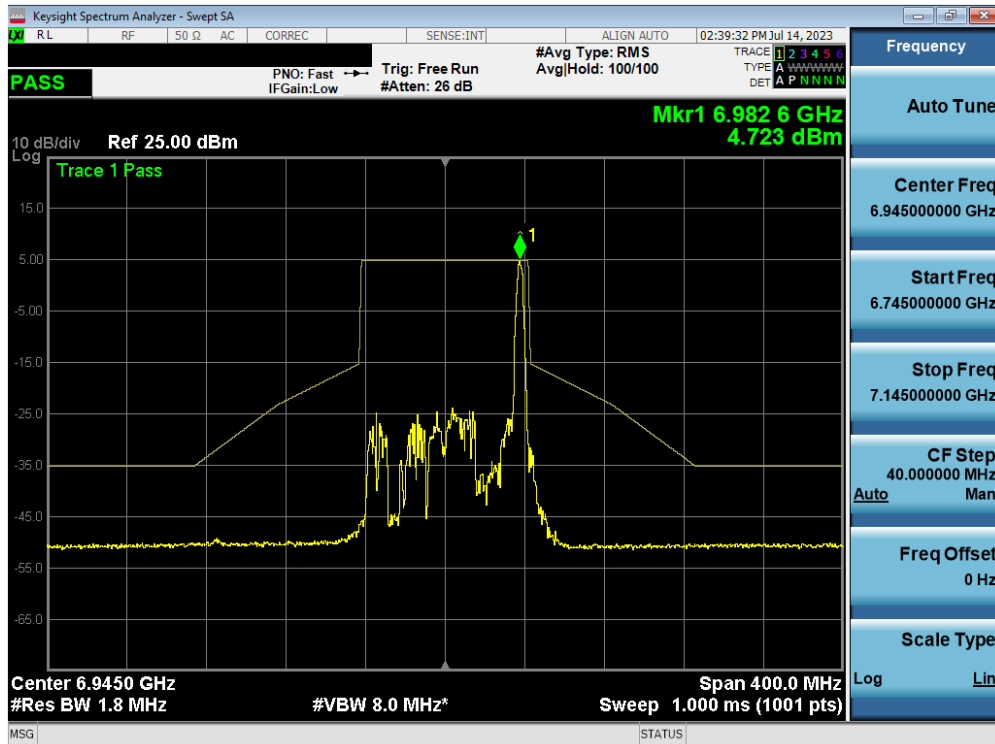


Plot 7-143. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 199)

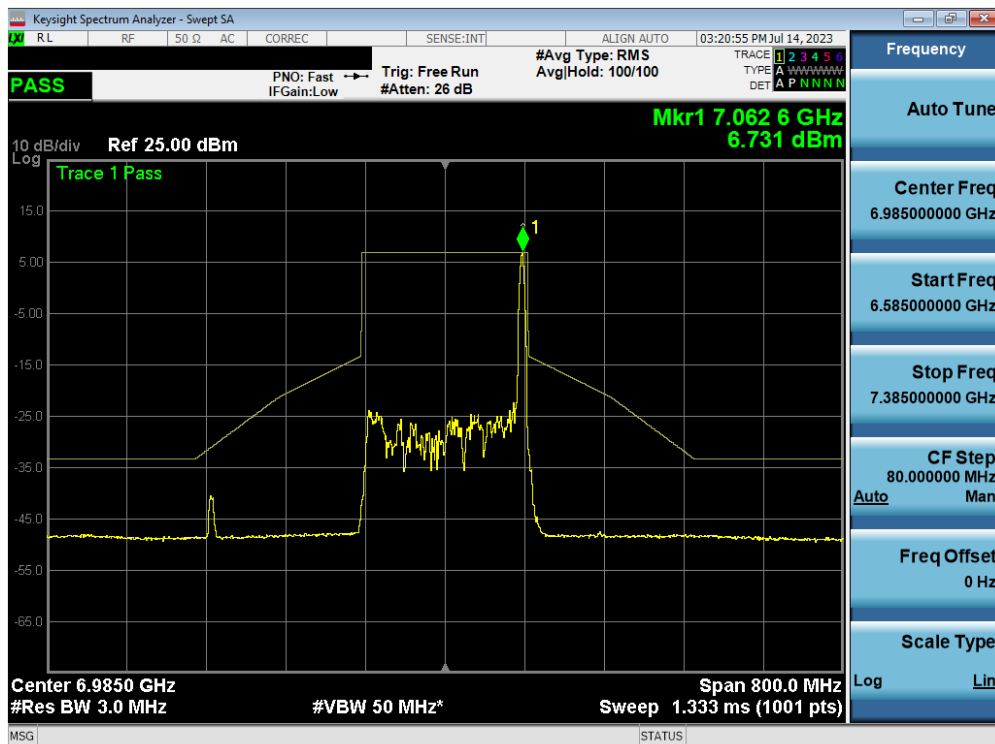


Plot 7-144. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 207)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 108 of 173

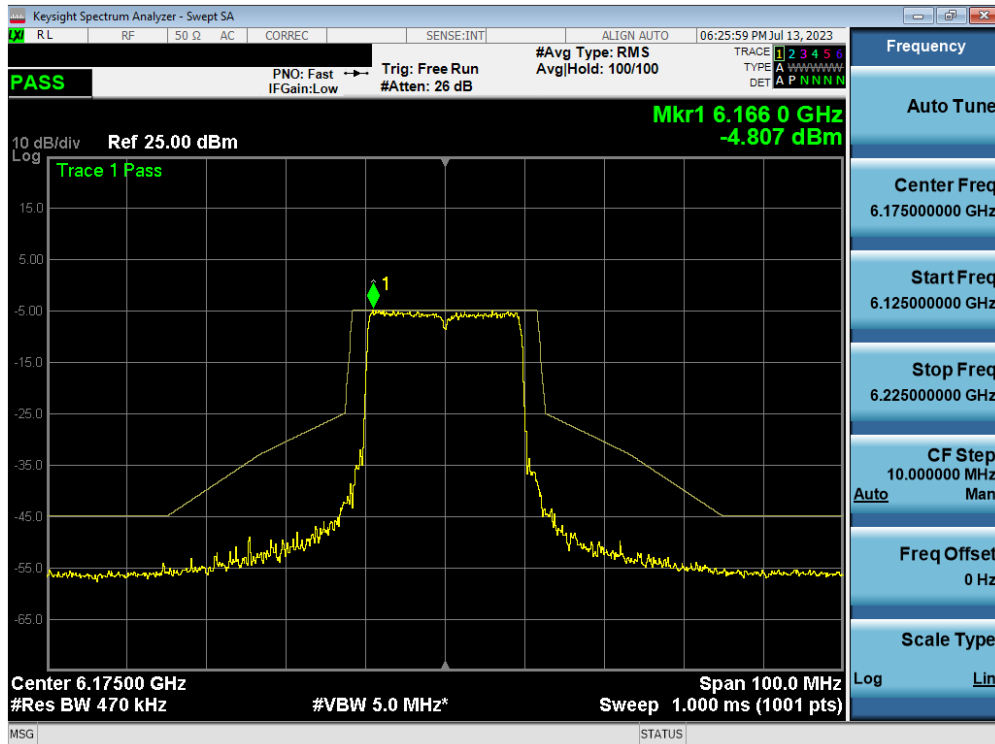


Plot 7-145. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 45)

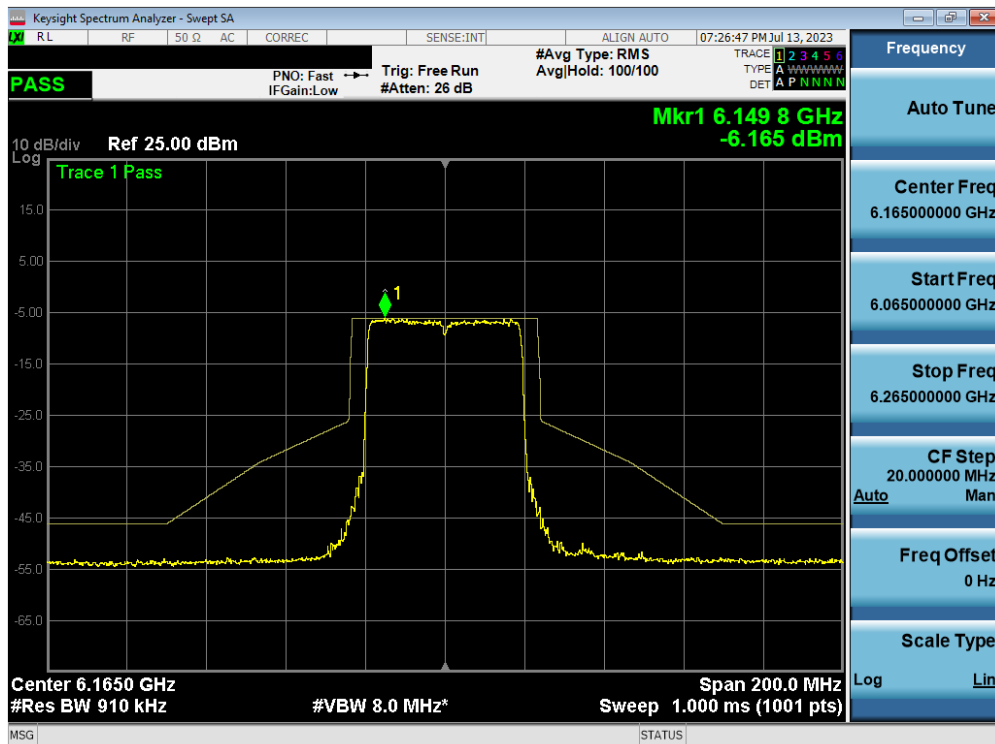


Plot 7-146. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 43)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 109 of 173

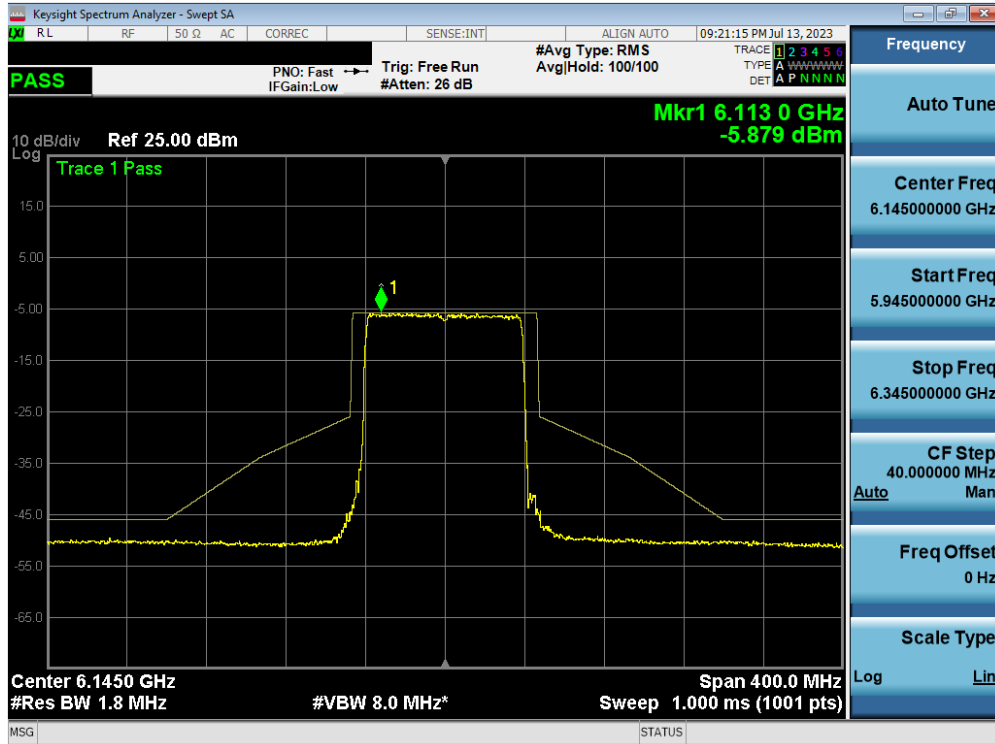


Plot 7-147. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 39)

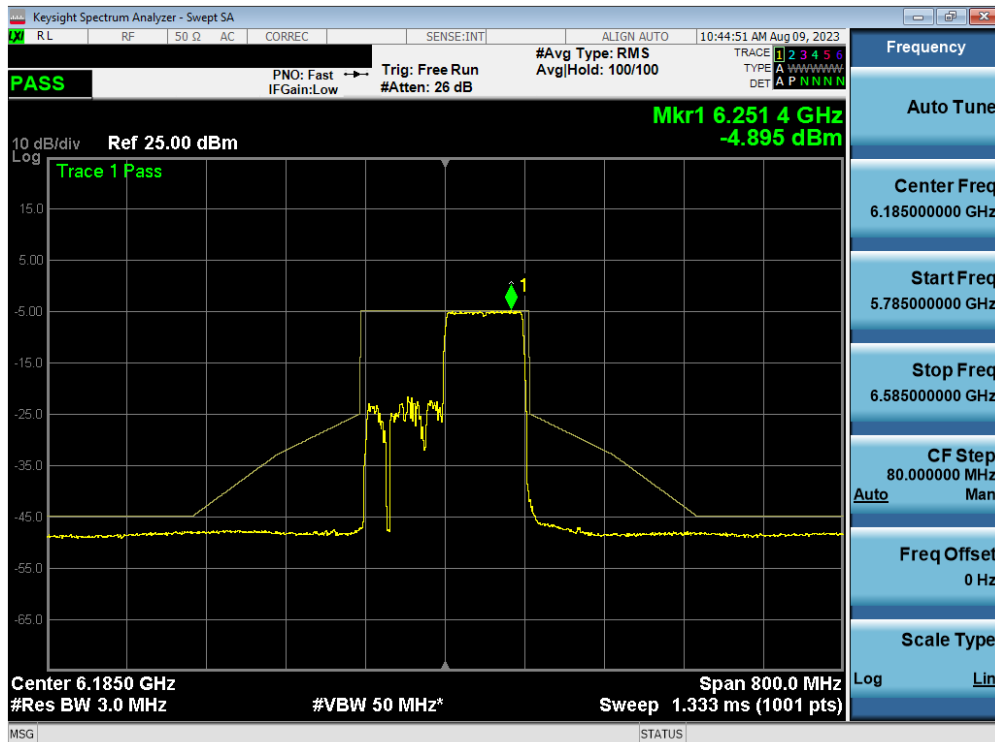


Plot 7-148. In-Band Emission Plot MIMO ANT1 160MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 47)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 110 of 173

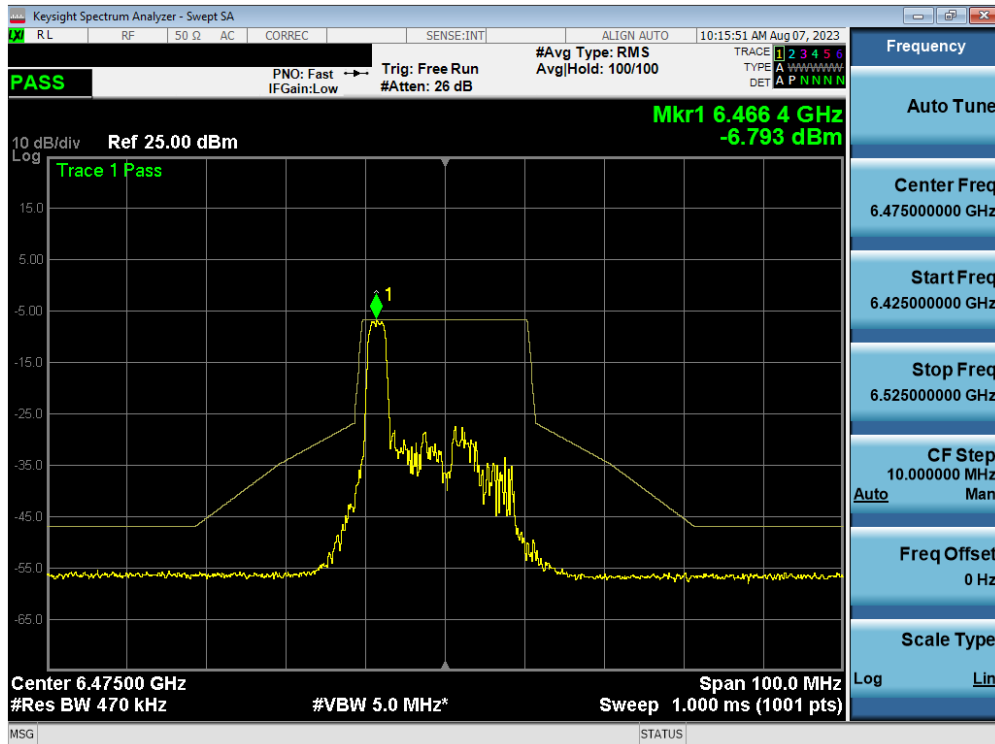


Plot 7-149. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 105)

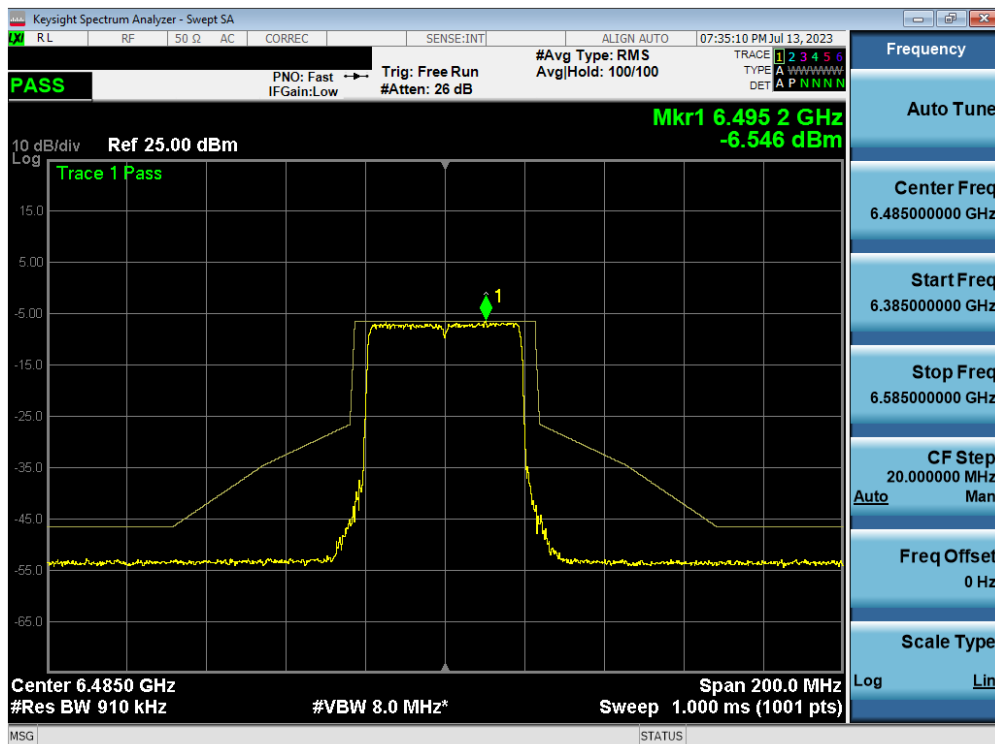


Plot 7-150. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 107)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 111 of 173

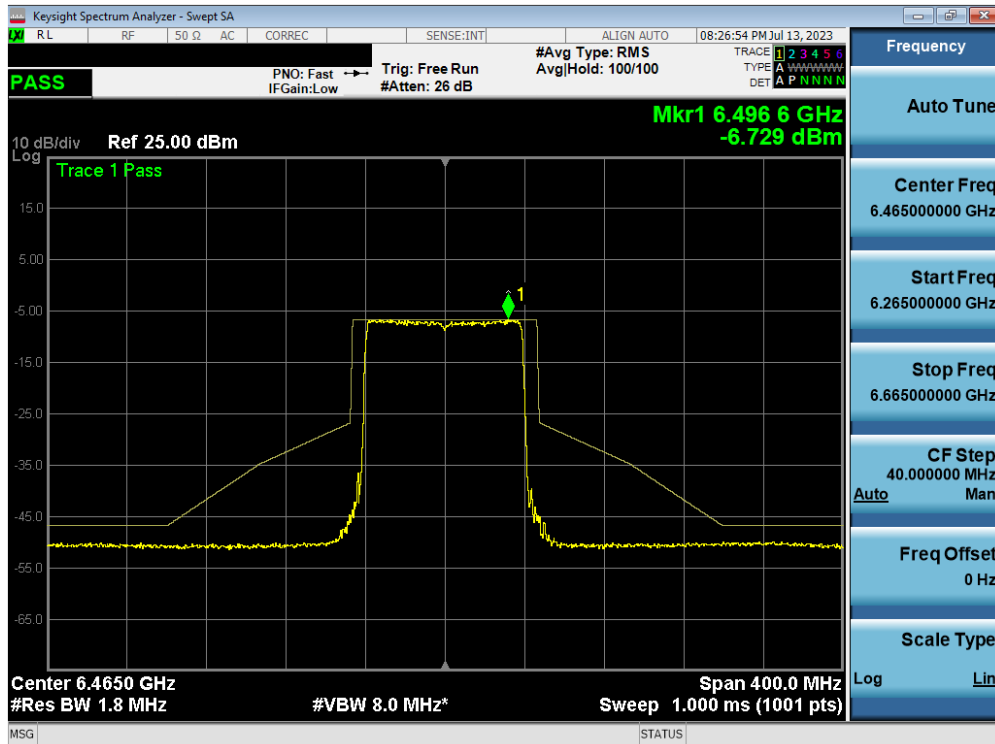


Plot 7-151. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 103)

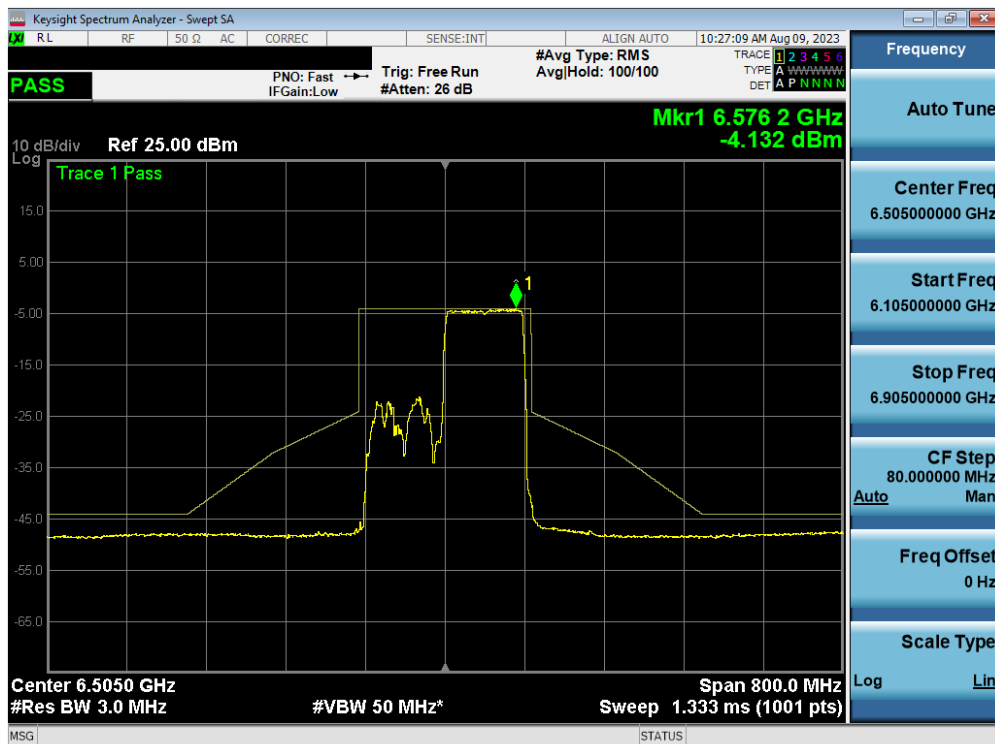


Plot 7-152. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 111)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 112 of 173

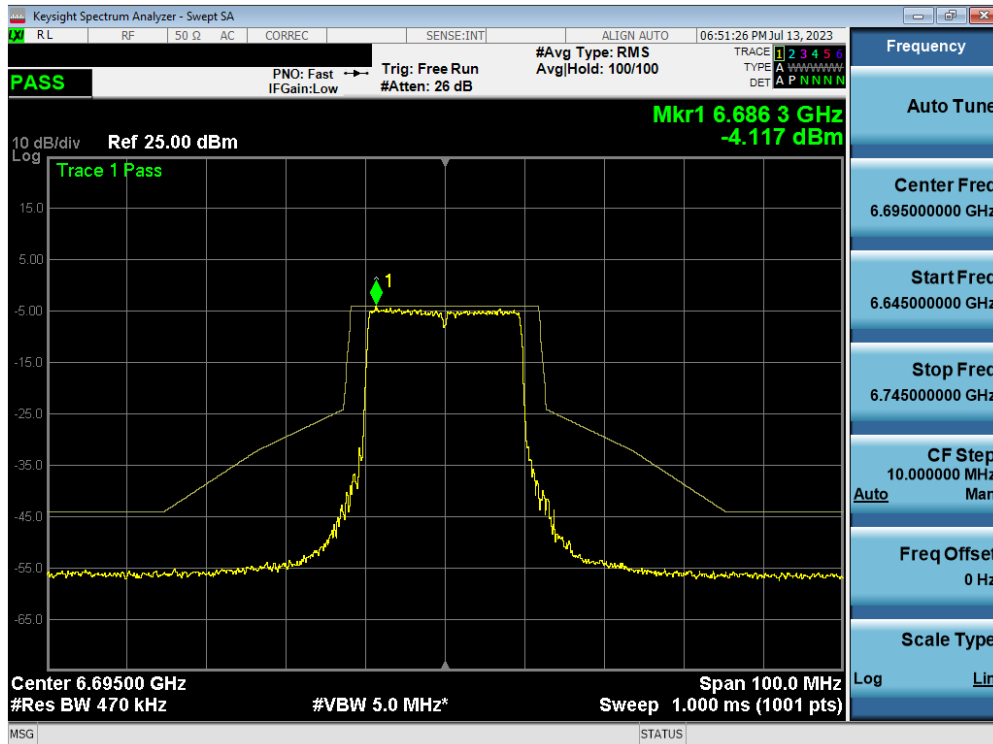


Plot 7-153. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 149)

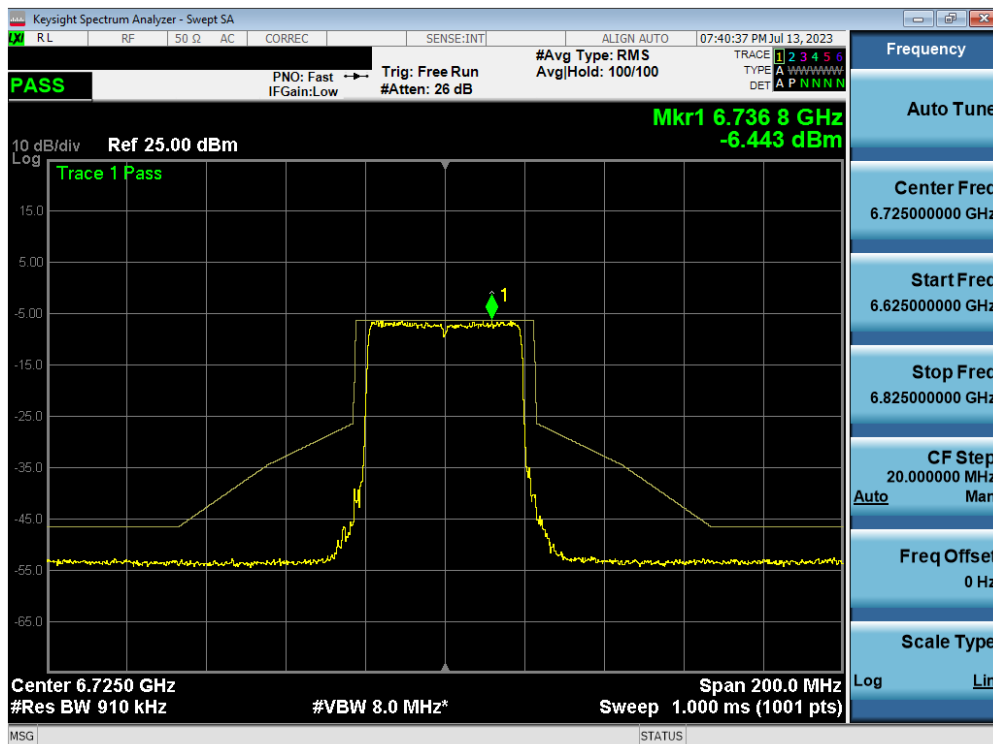


Plot 7-154. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 155)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 113 of 173

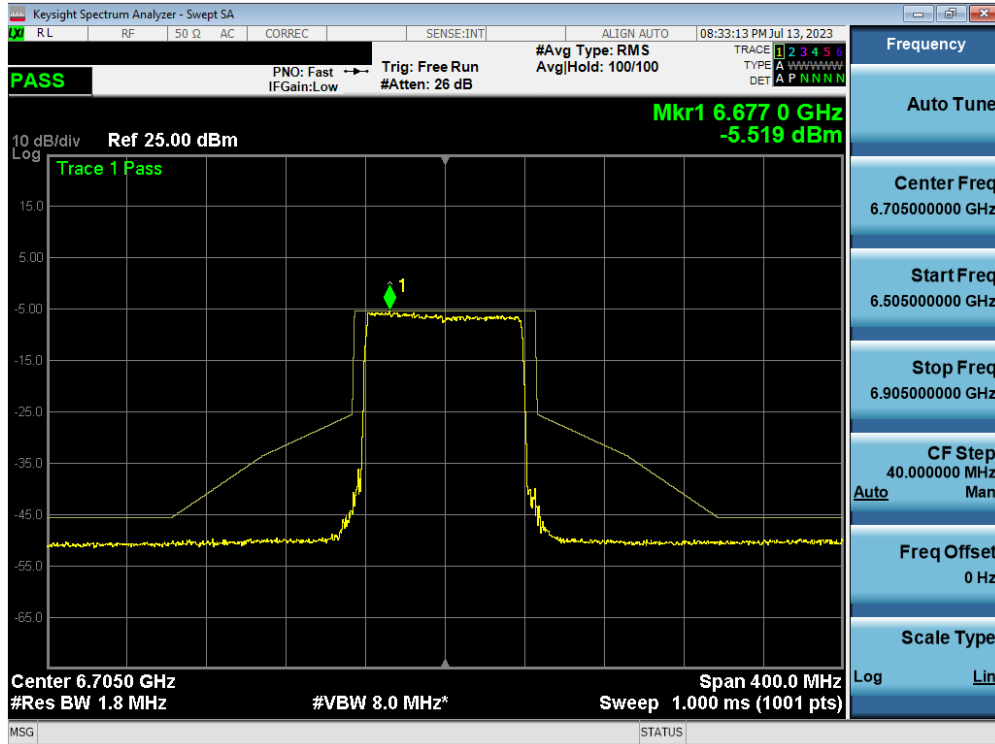


Plot 7-155. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 151)

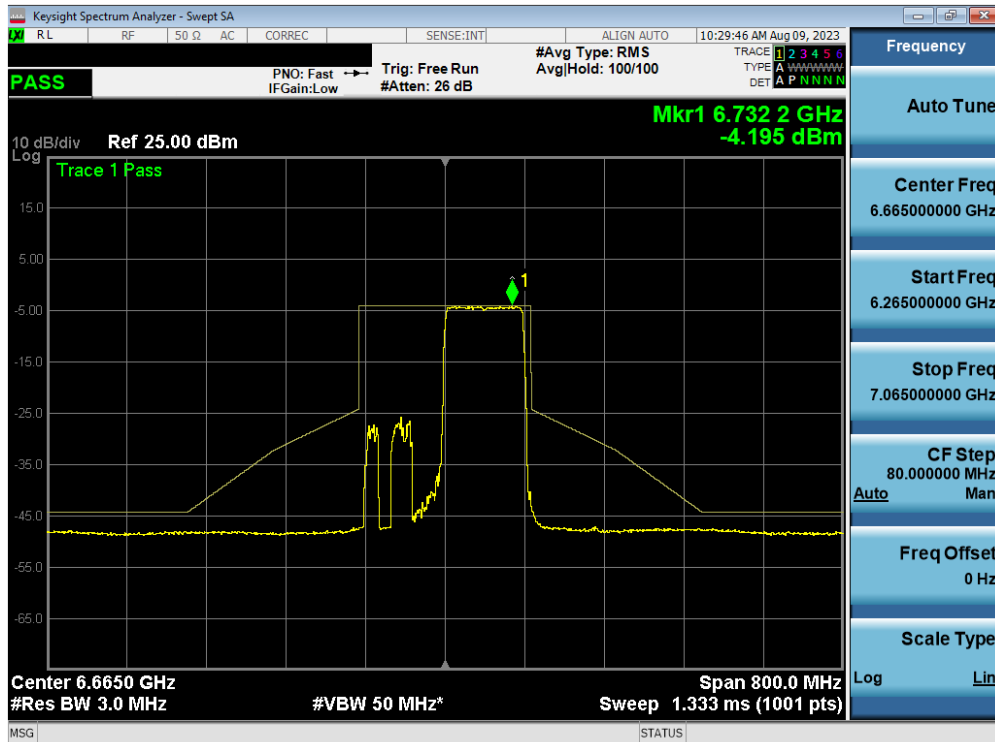


Plot 7-156. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 143)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 114 of 173

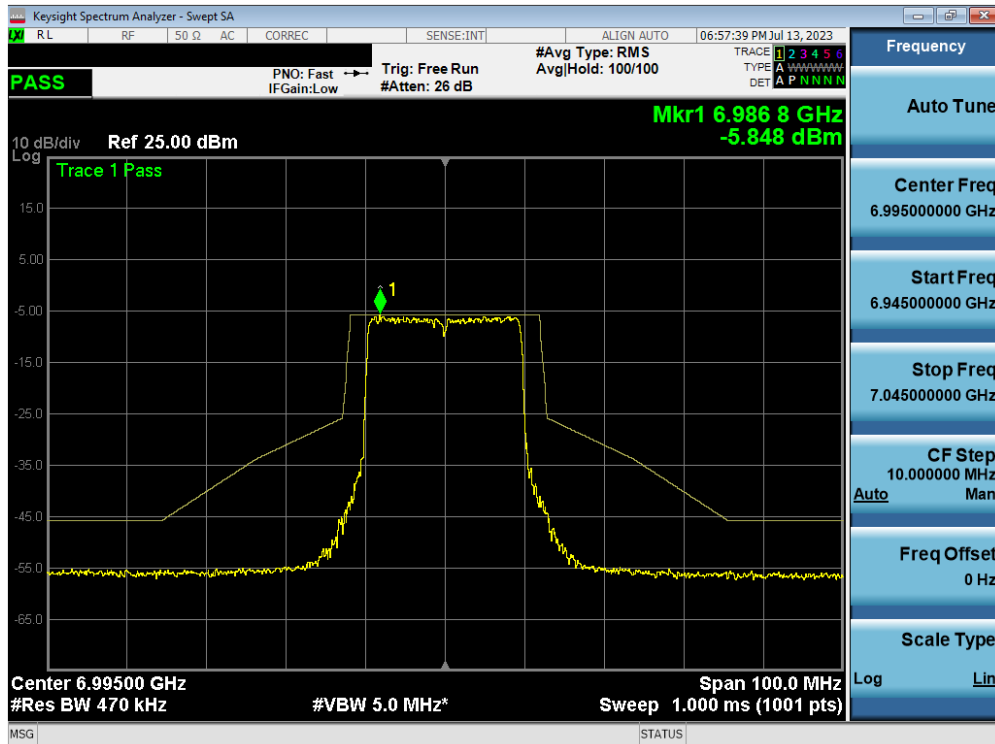


Plot 7-157. In-Band Emission Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 209)

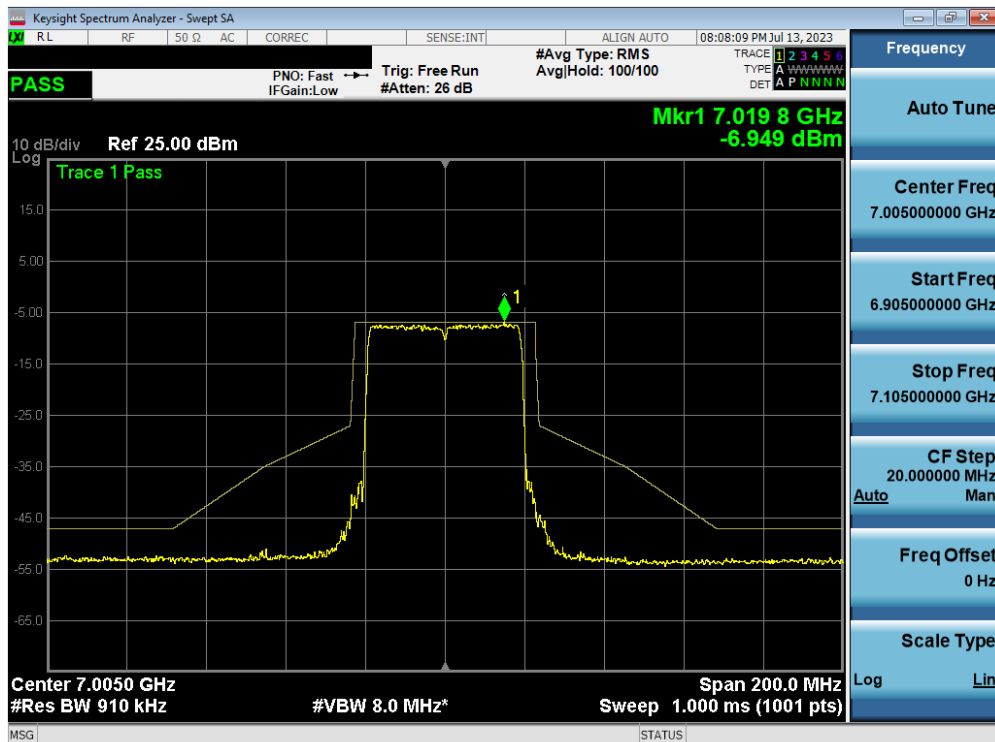


Plot 7-158. In-Band Emission Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 211)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 115 of 173

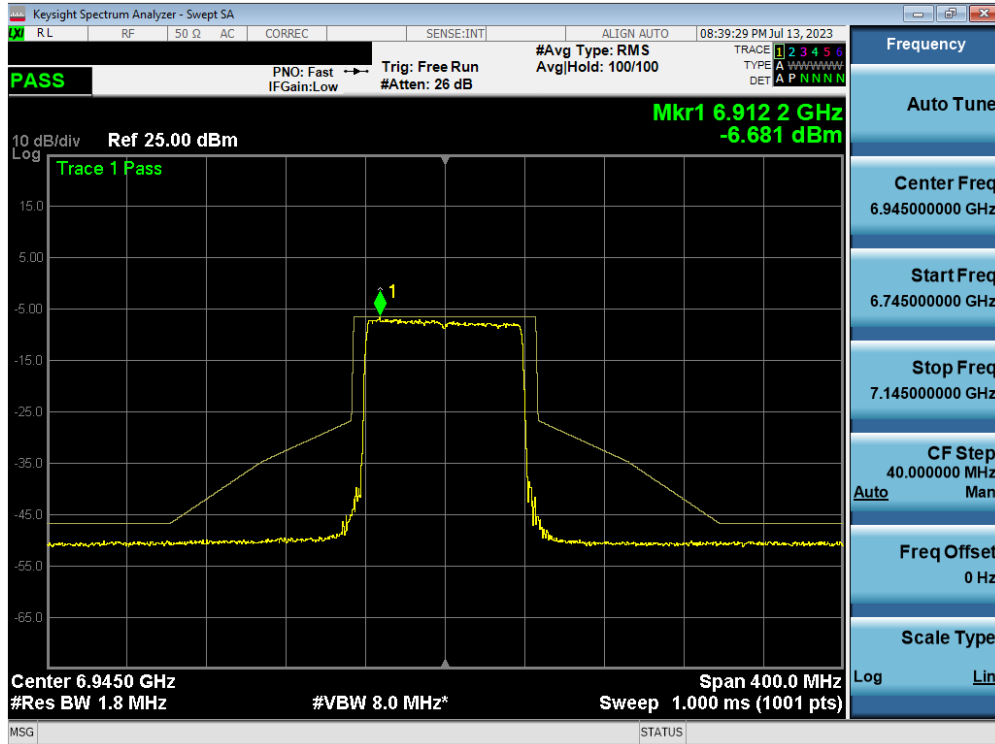


Plot 7-159. In-Band Emission Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 199)

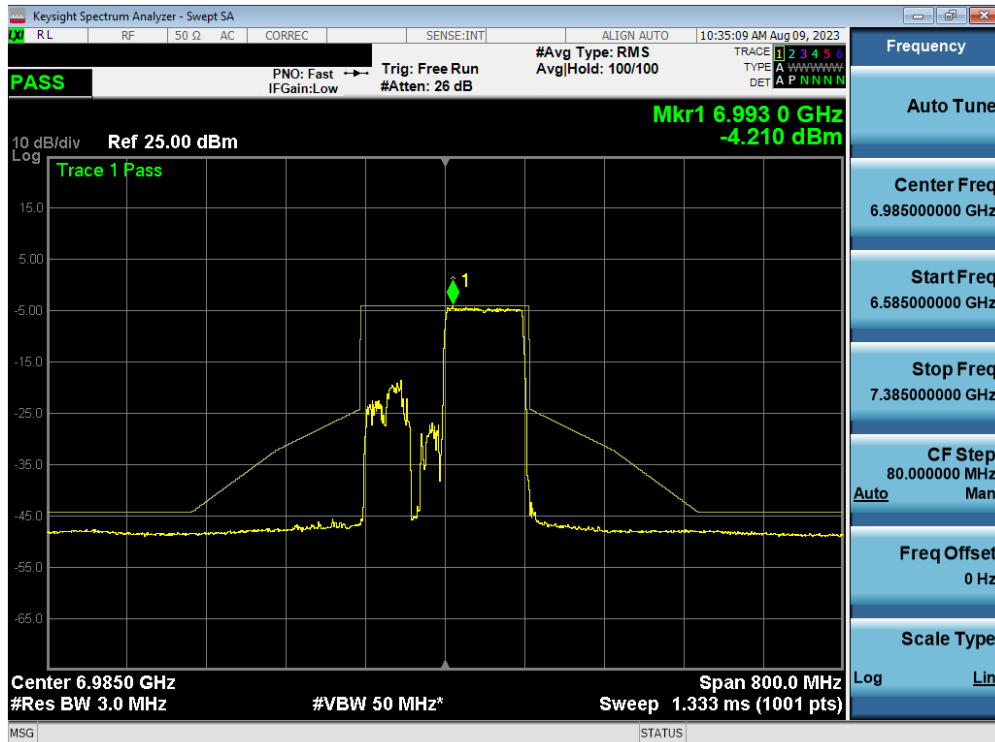


Plot 7-160. In-Band Emission Plot MIMO ANT1 (160MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 207)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 116 of 173

7.5.2 MIMO Antenna-2 In-Band Emission Measurements

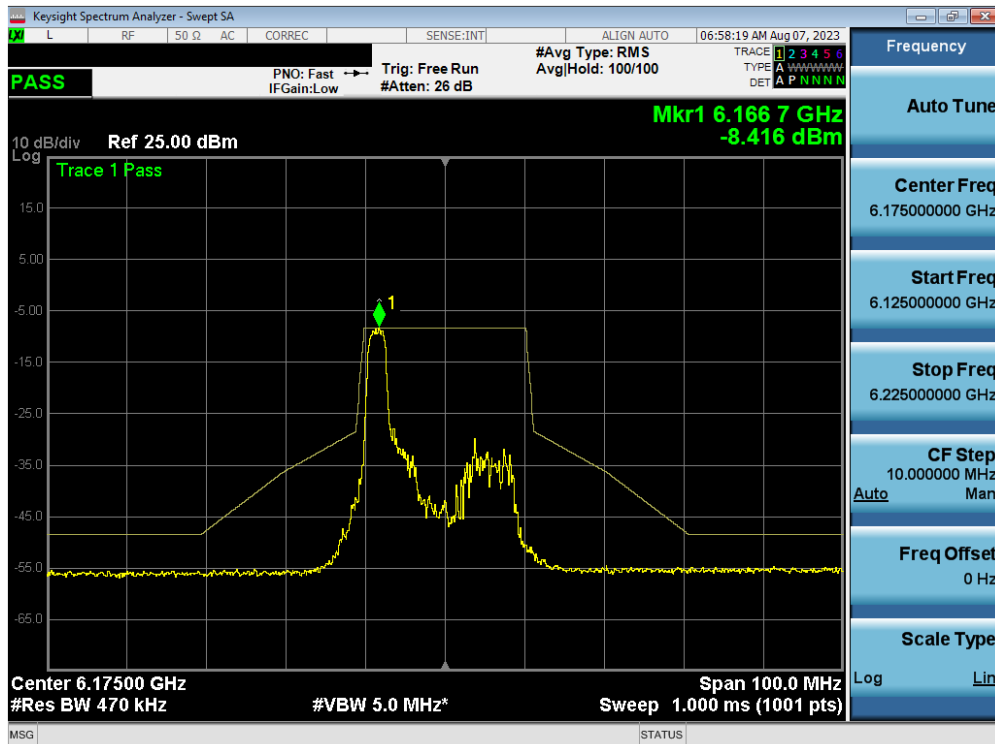


Plot 7-161. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 45)

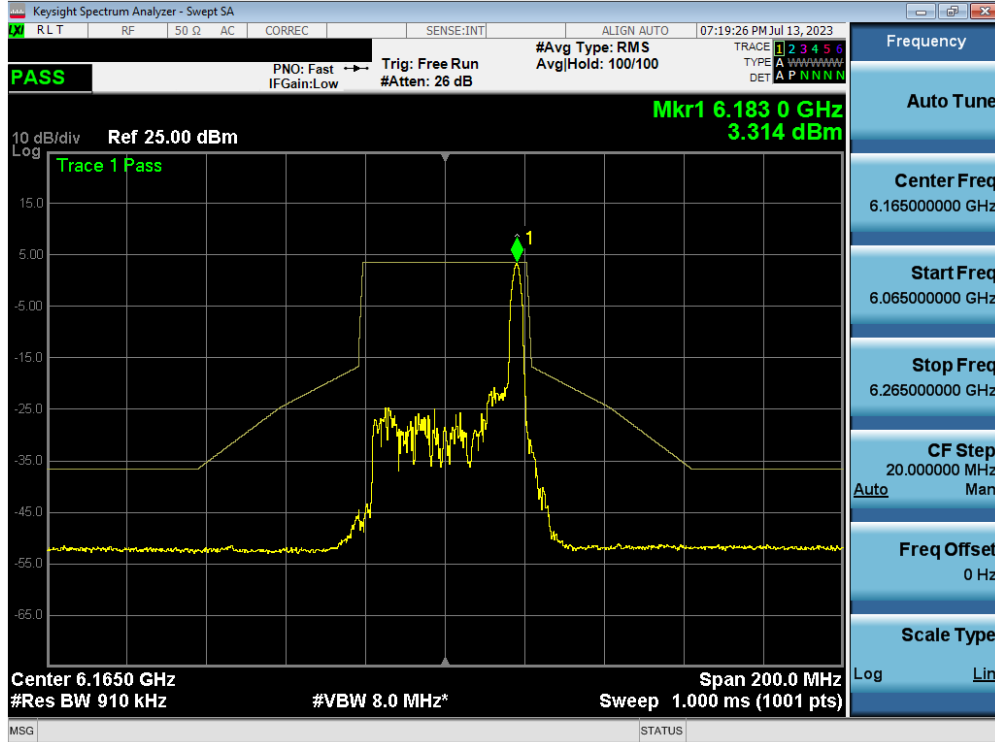


Plot 7-162. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 43)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 117 of 173

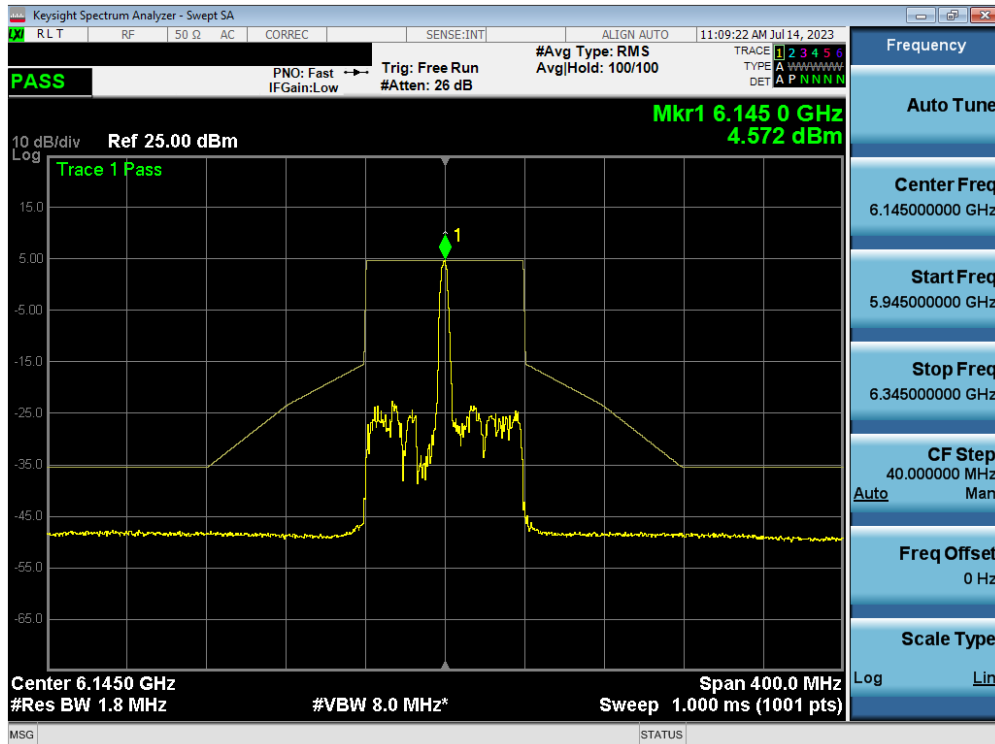


Plot 7-163. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 39)

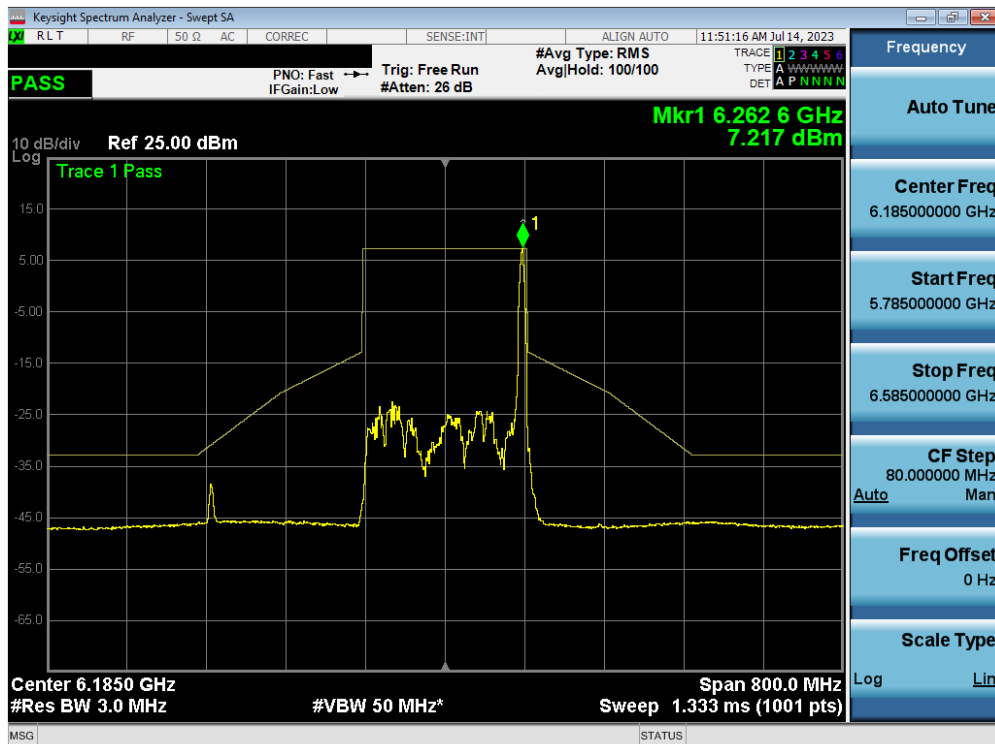


Plot 7-164. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 47)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 118 of 173

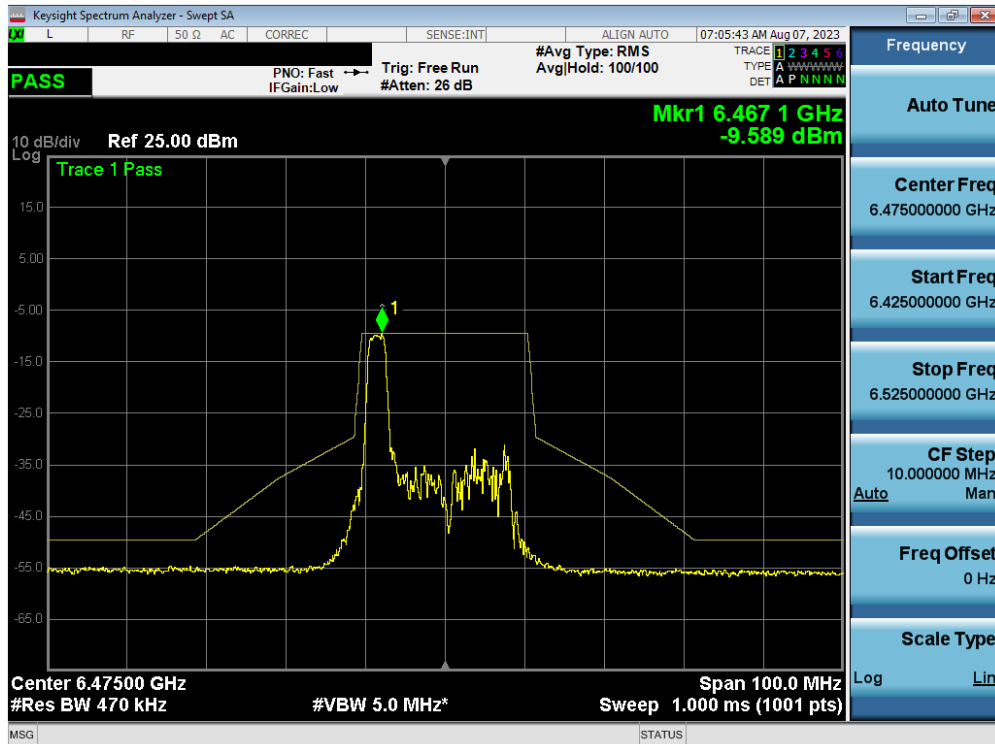


Plot 7-165. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 105)

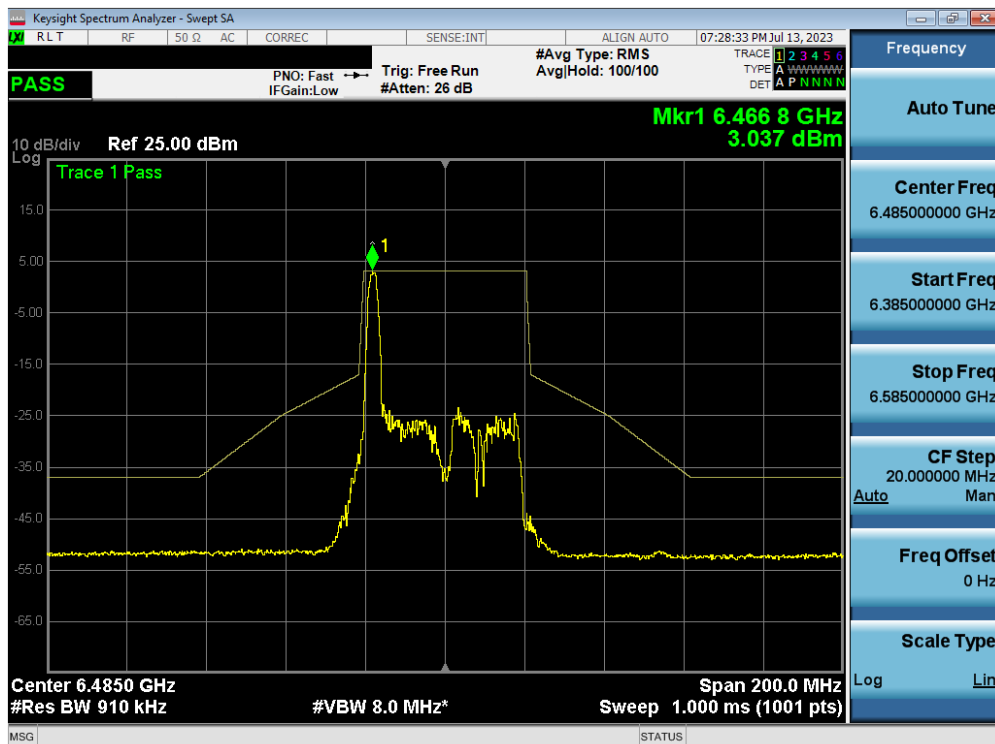


Plot 7-166. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 107)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 119 of 173

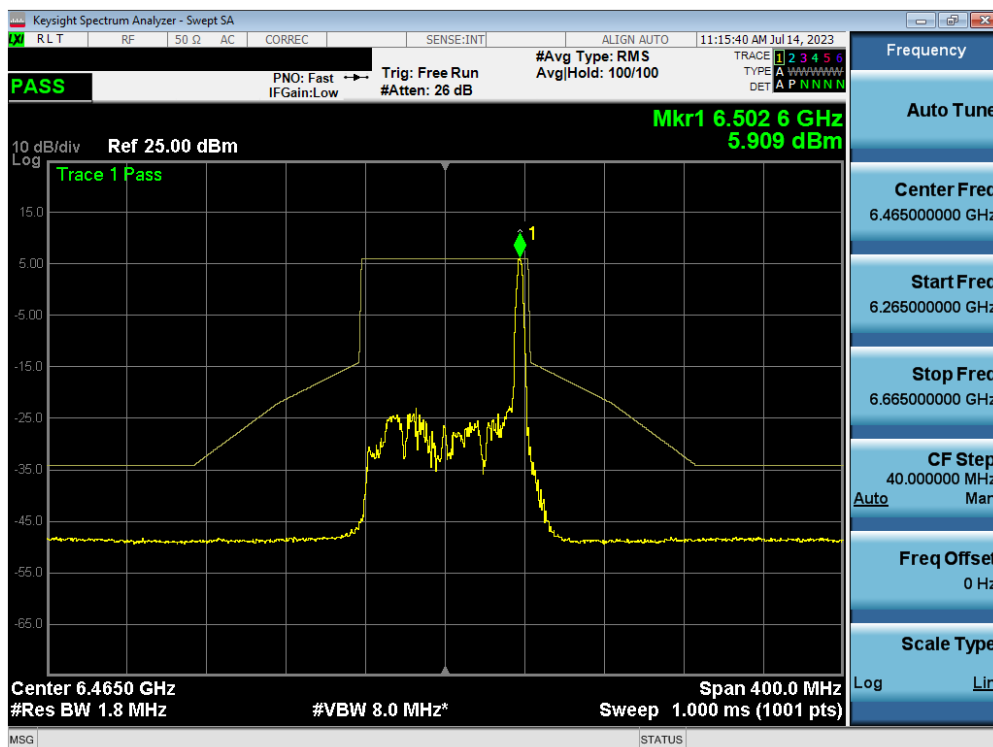


Plot 7-167. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 103)

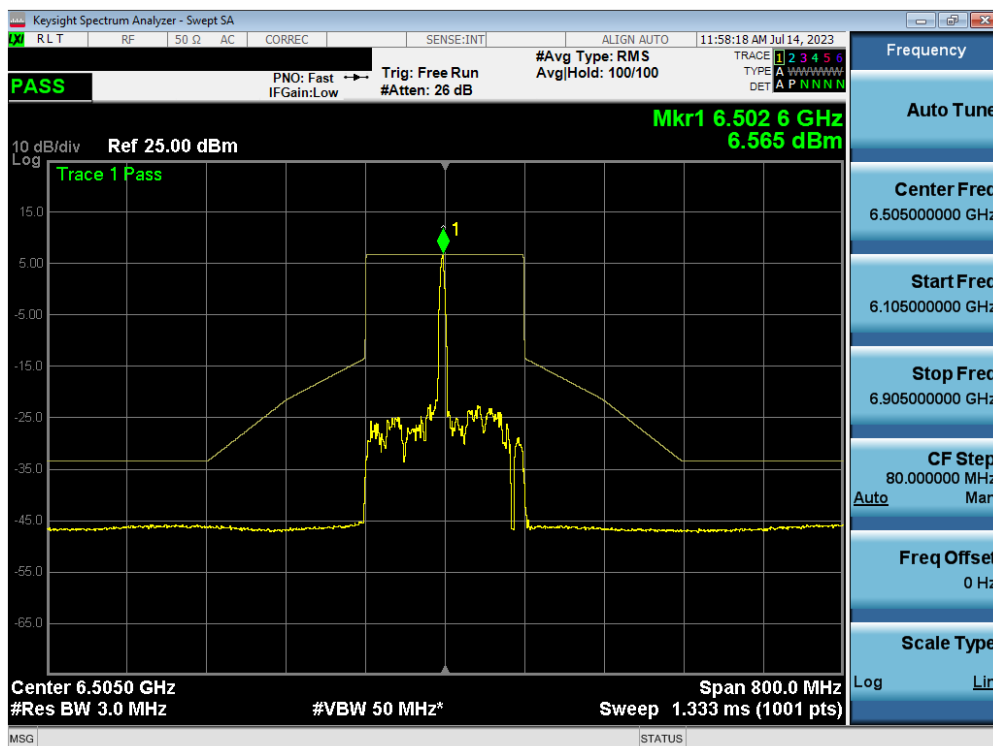

Plot 7-168. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 111)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 120 of 173

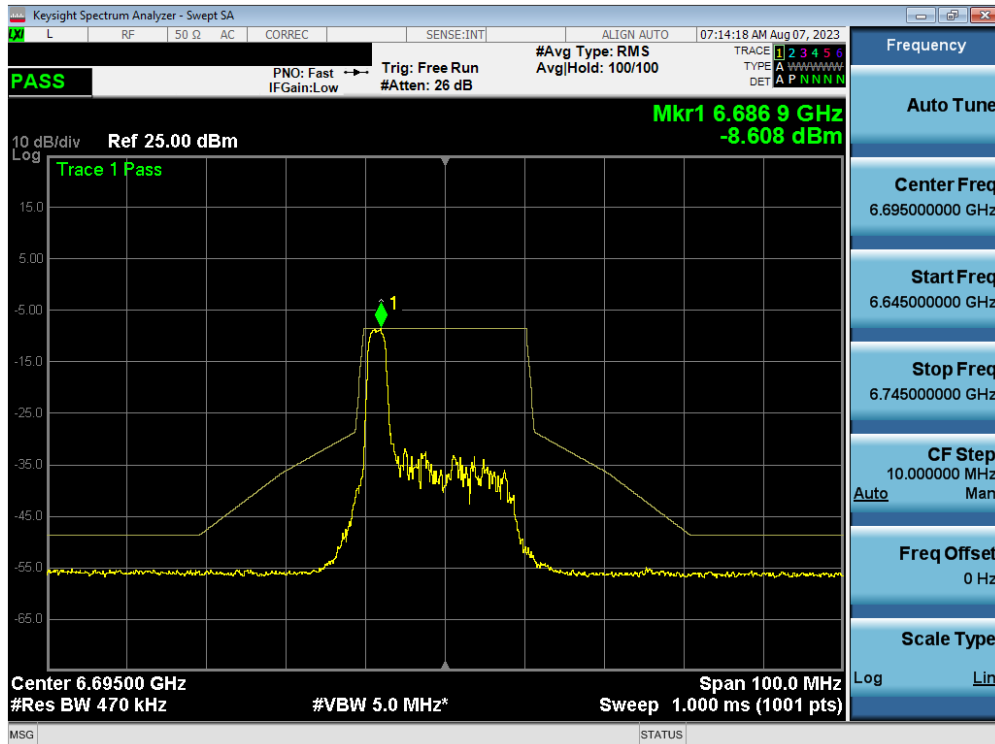


Plot 7-169. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 149)




Plot 7-170. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 155)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 121 of 173

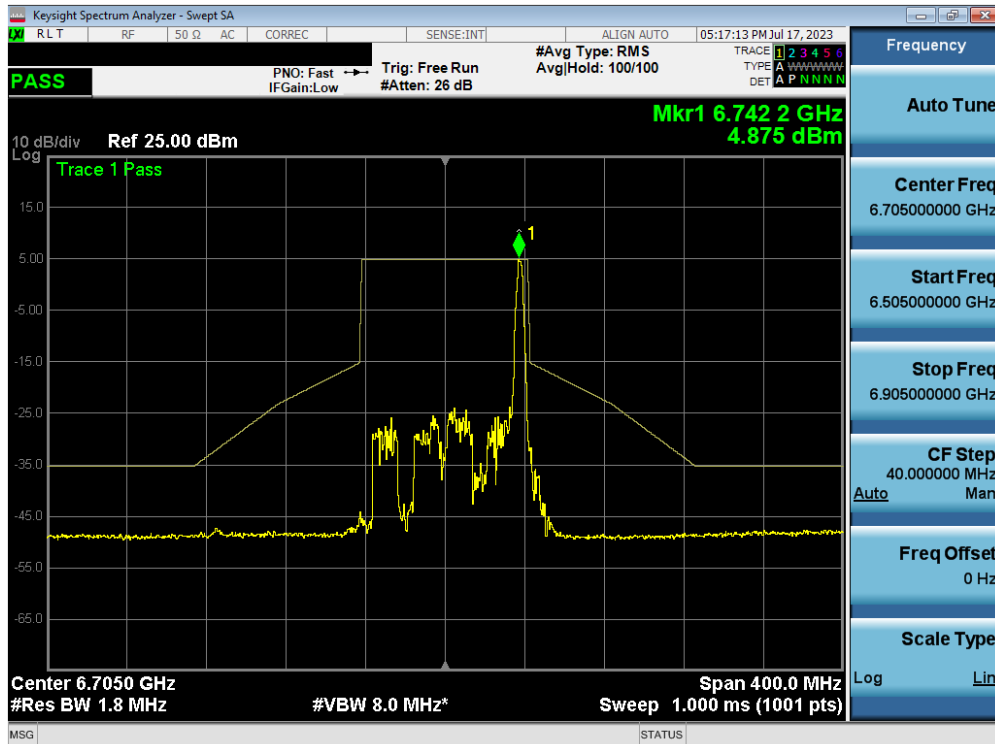


Plot 7-171. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 151)

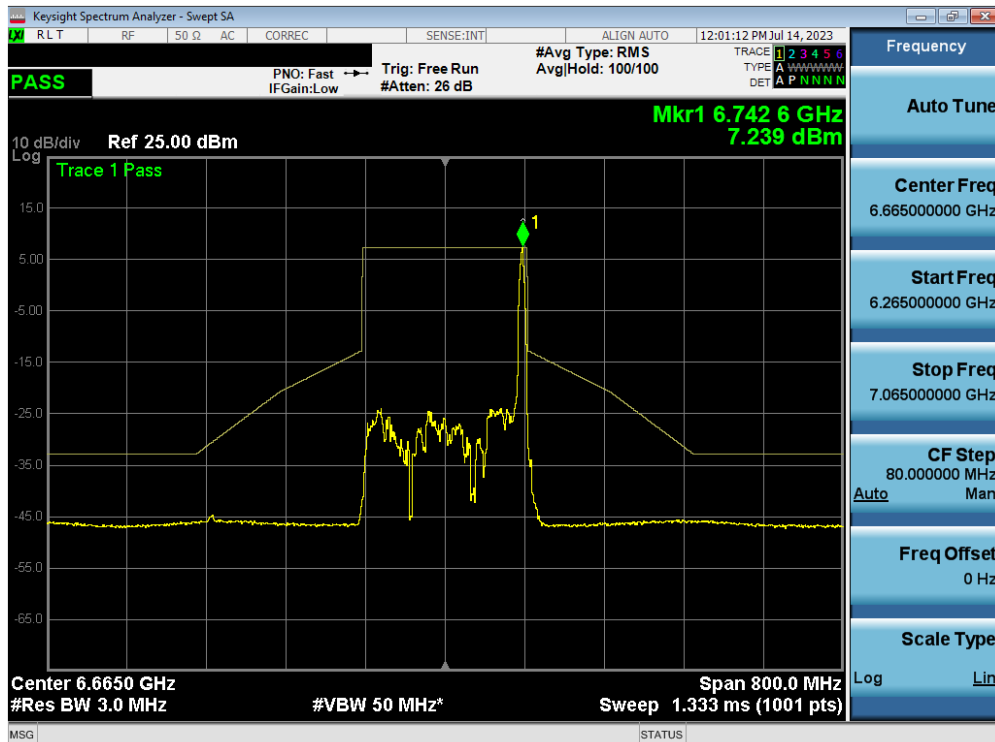


Plot 7-172. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 143)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 122 of 173

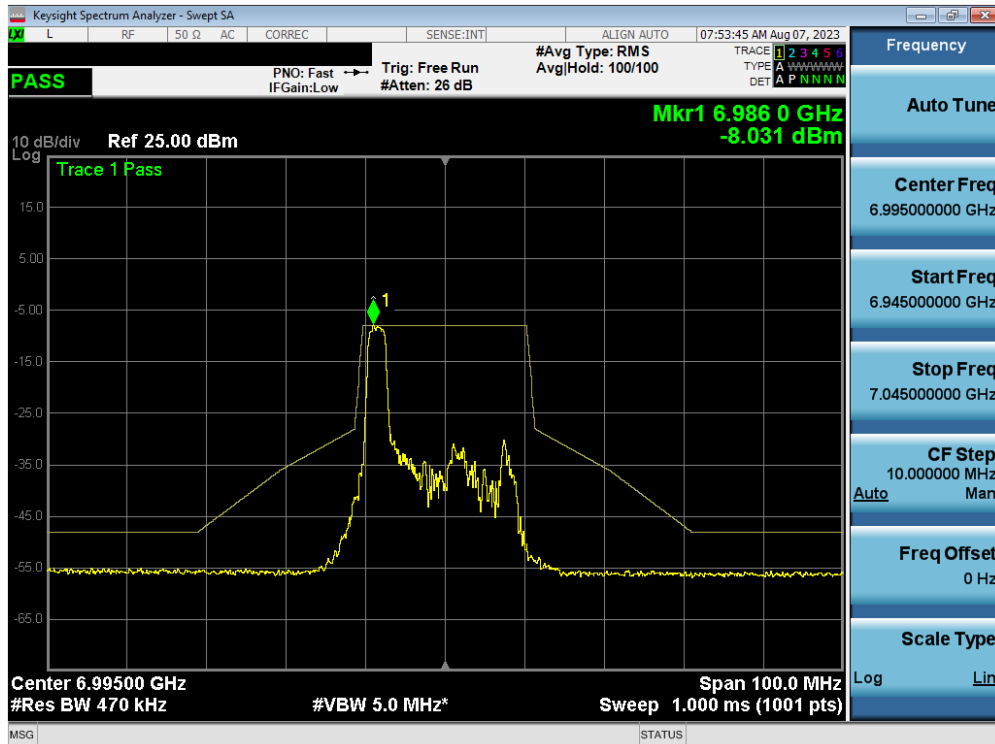


Plot 7-173. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 209)

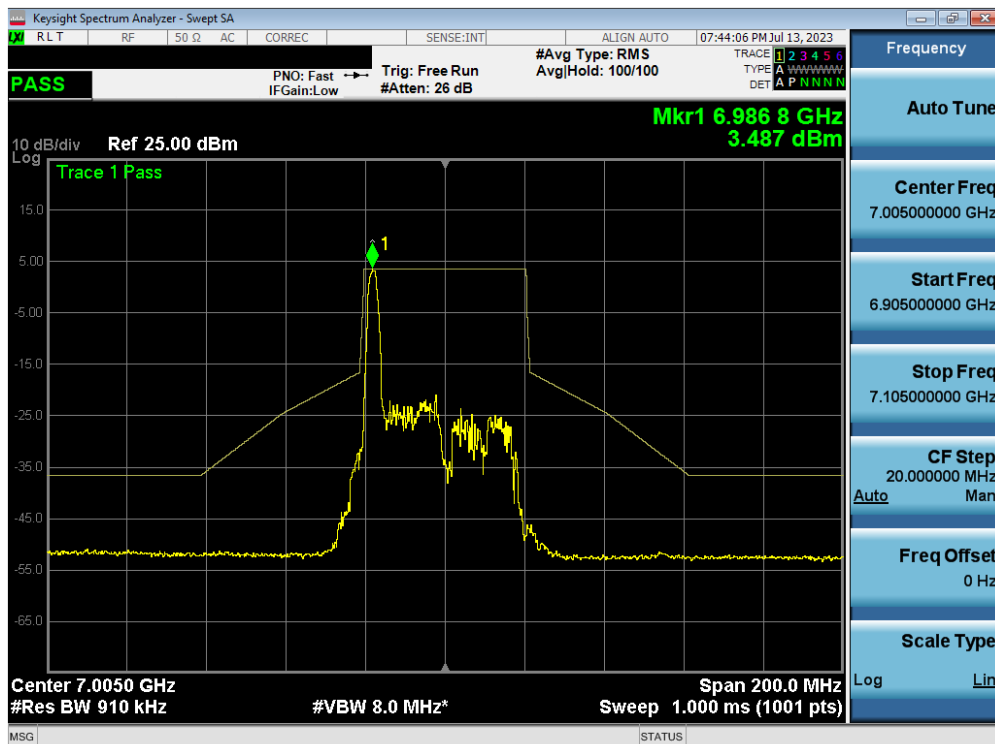


Plot 7-174. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 211)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 123 of 173

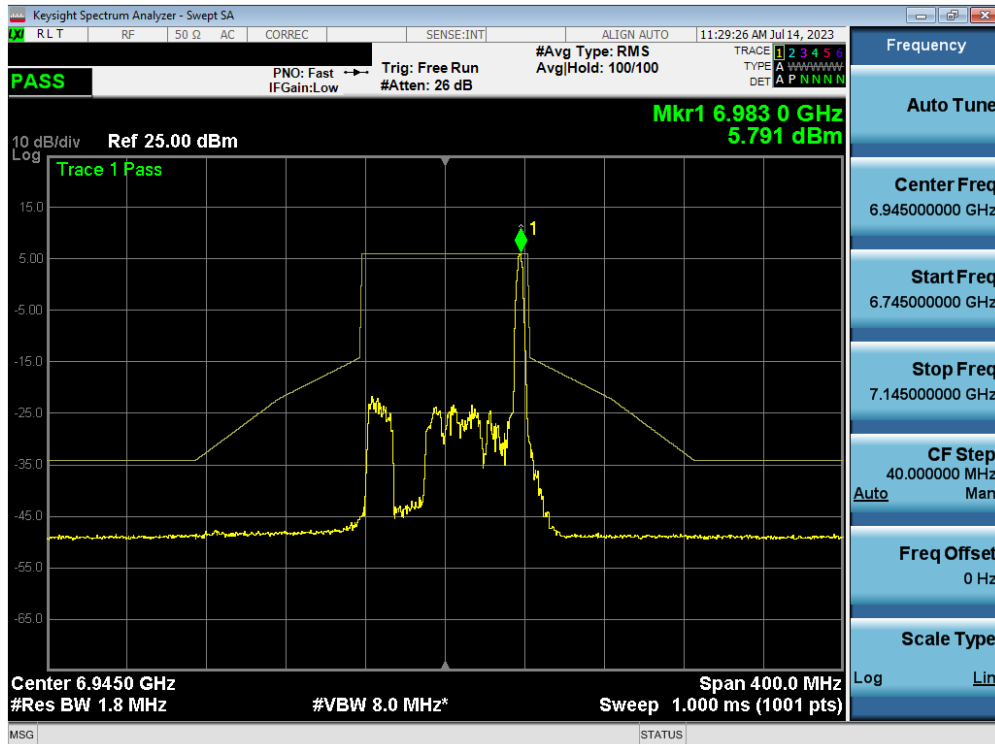


Plot 7-175. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 199)

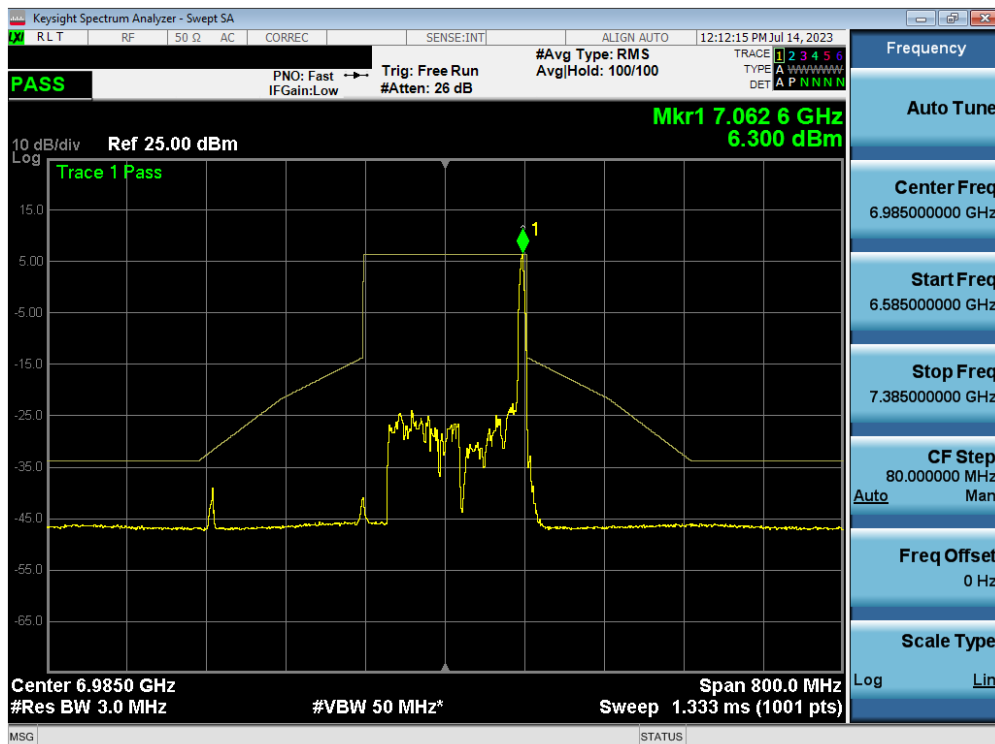


Plot 7-176. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 207)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 124 of 173

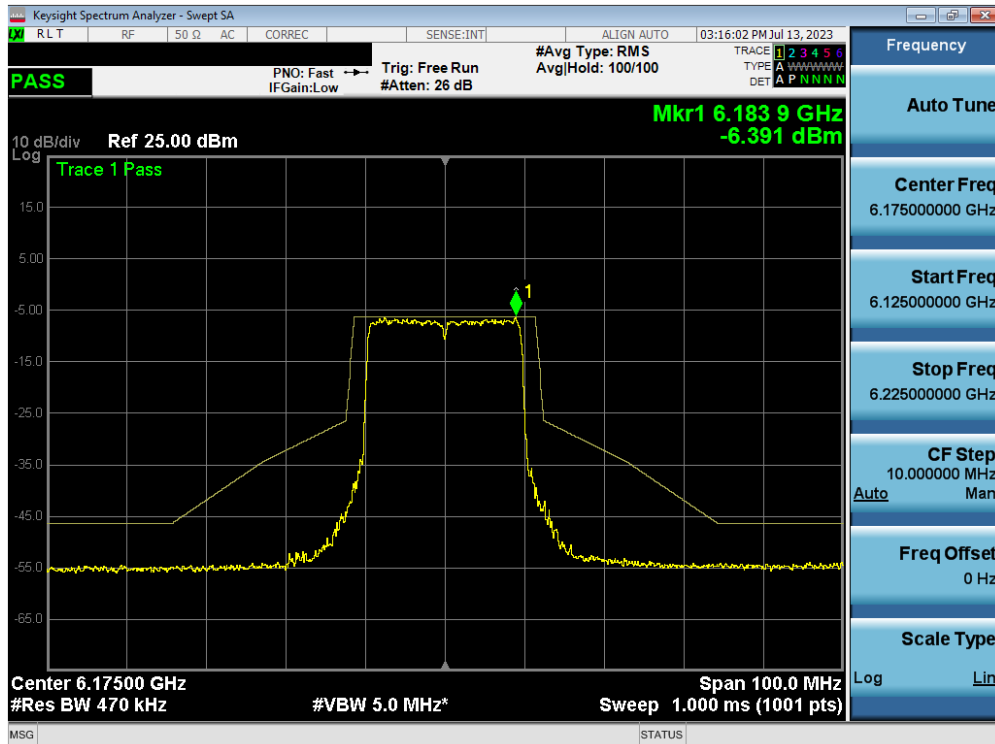


Plot 7-177. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 45)

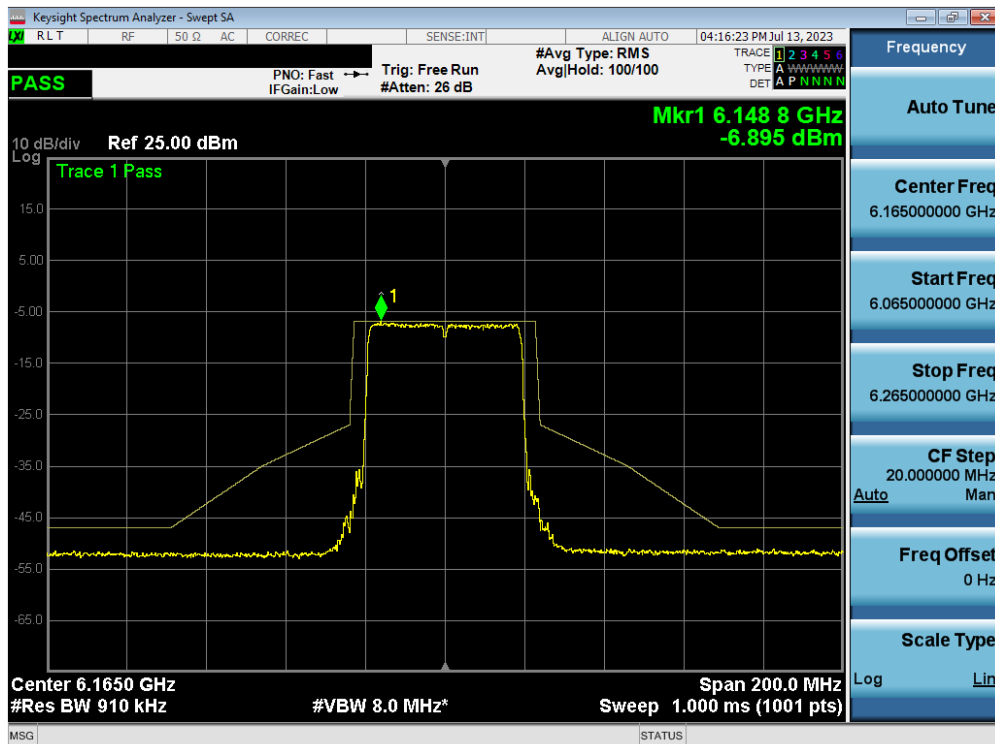


Plot 7-178. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 43)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 125 of 173

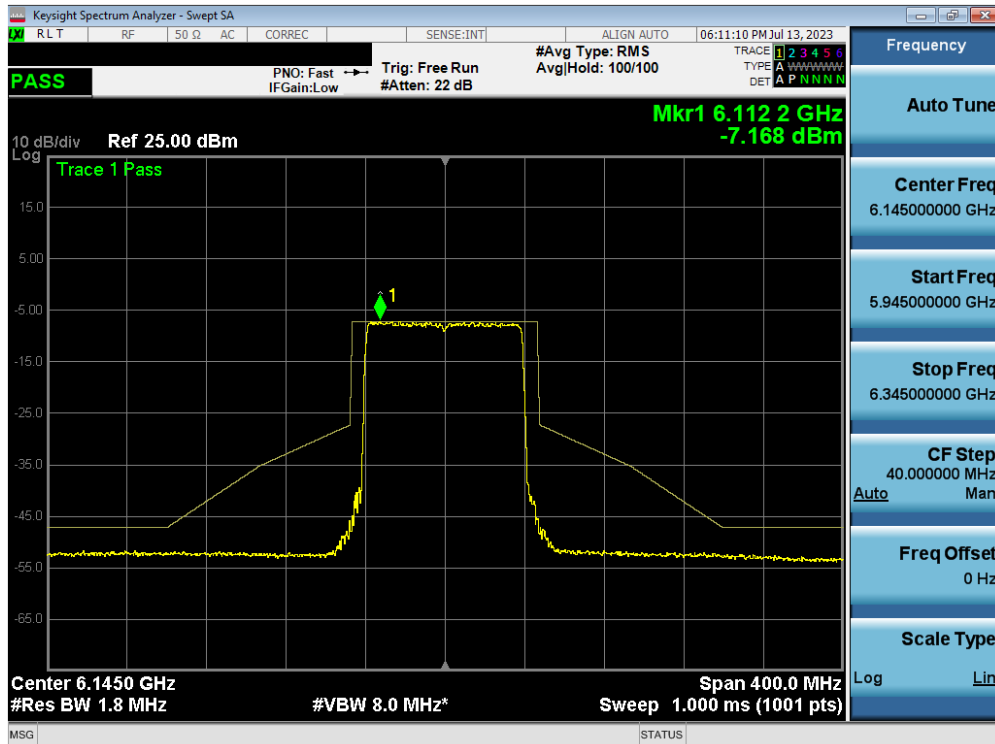


Plot 7-179. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 39)

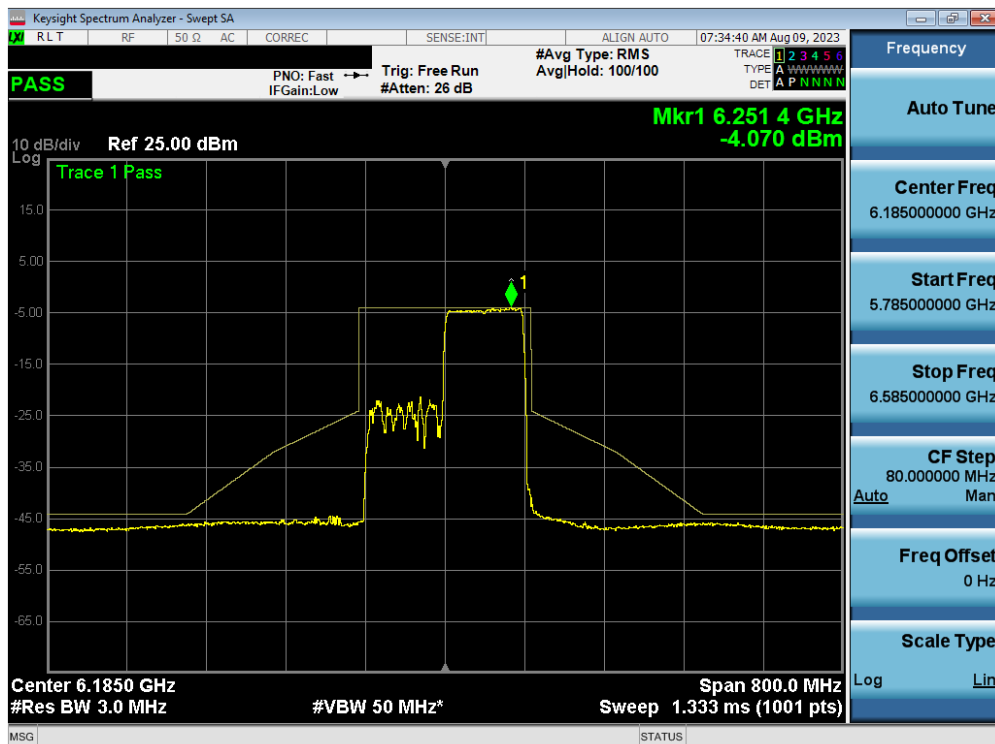


Plot 7-180. In-Band Emission Plot MIMO ANT2 160MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 47)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 126 of 173

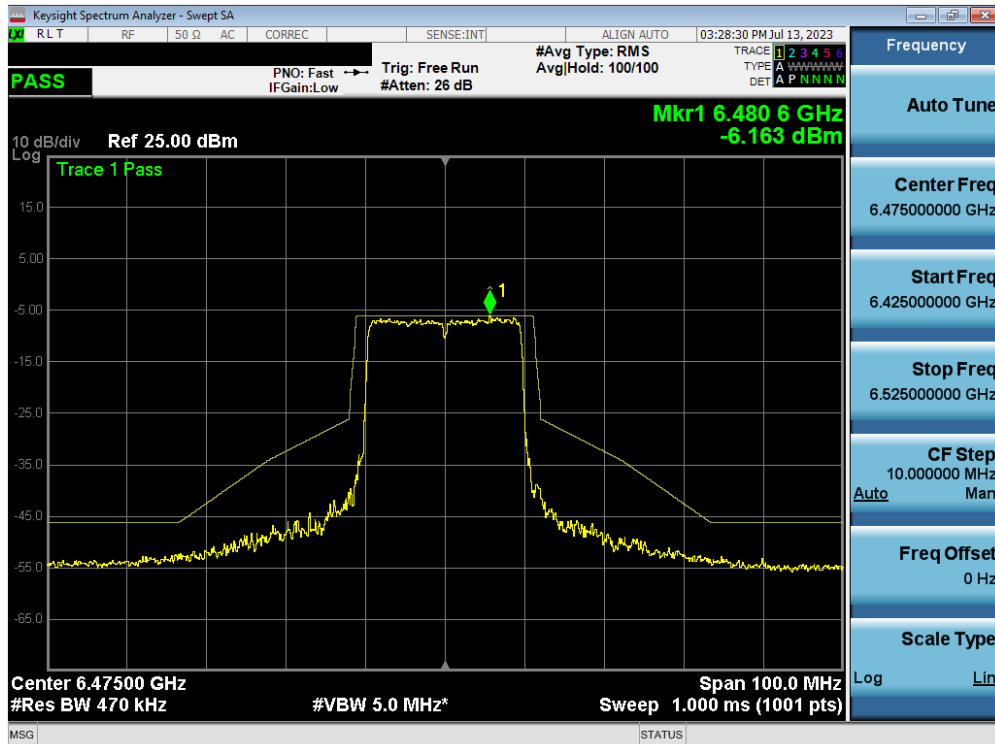


Plot 7-181. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 105)

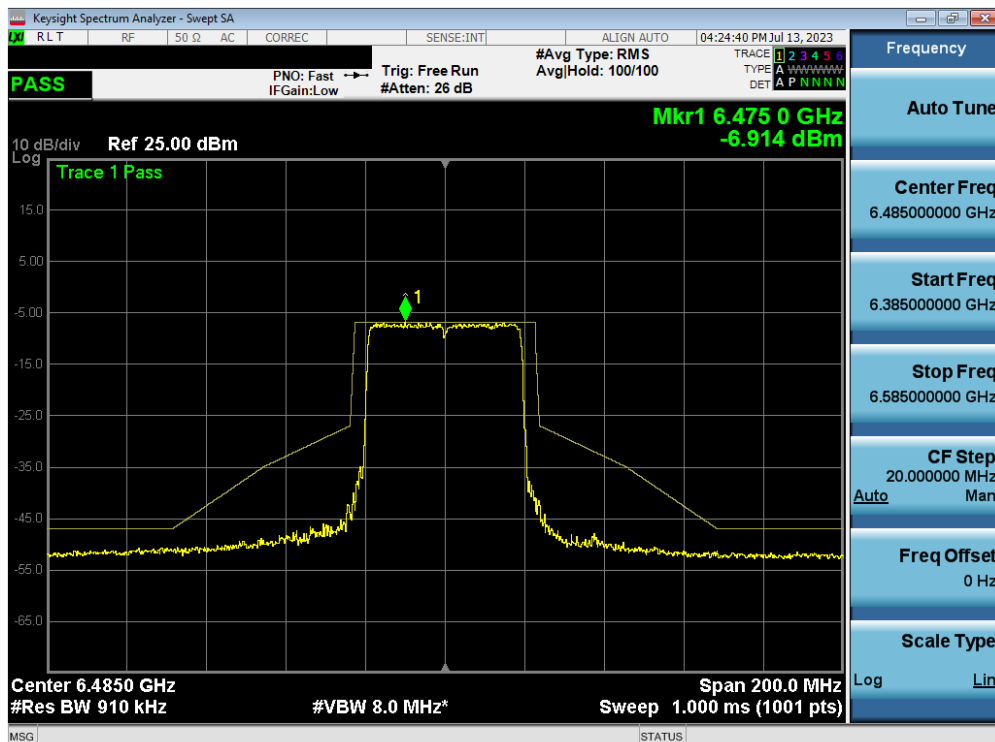


Plot 7-182. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 107)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 127 of 173

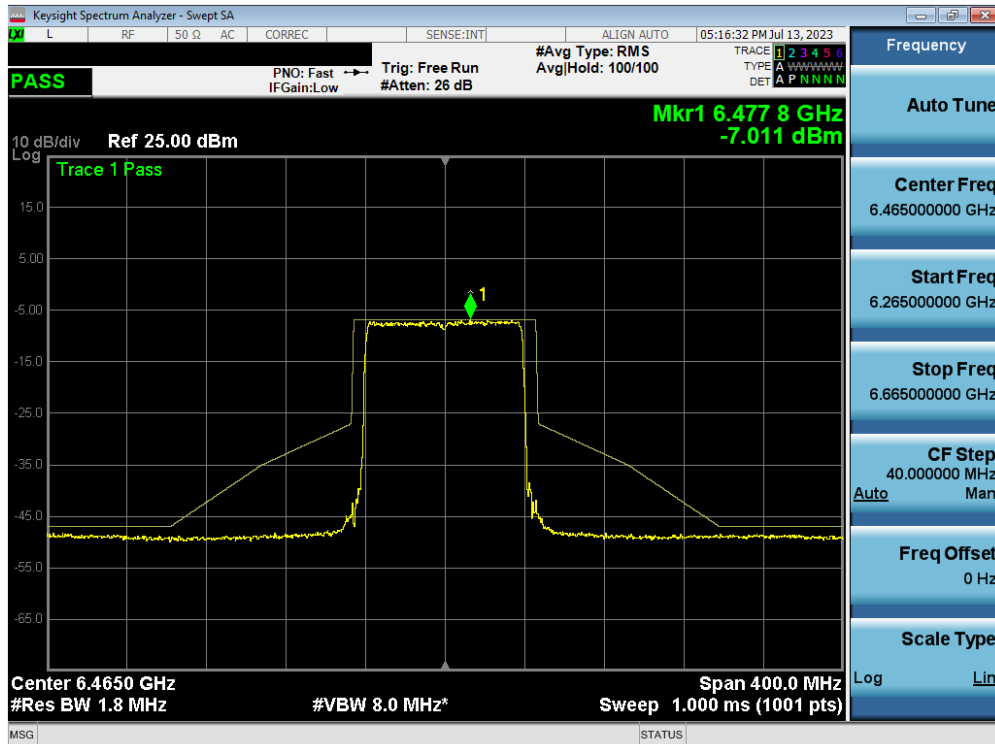


Plot 7-183. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 103)

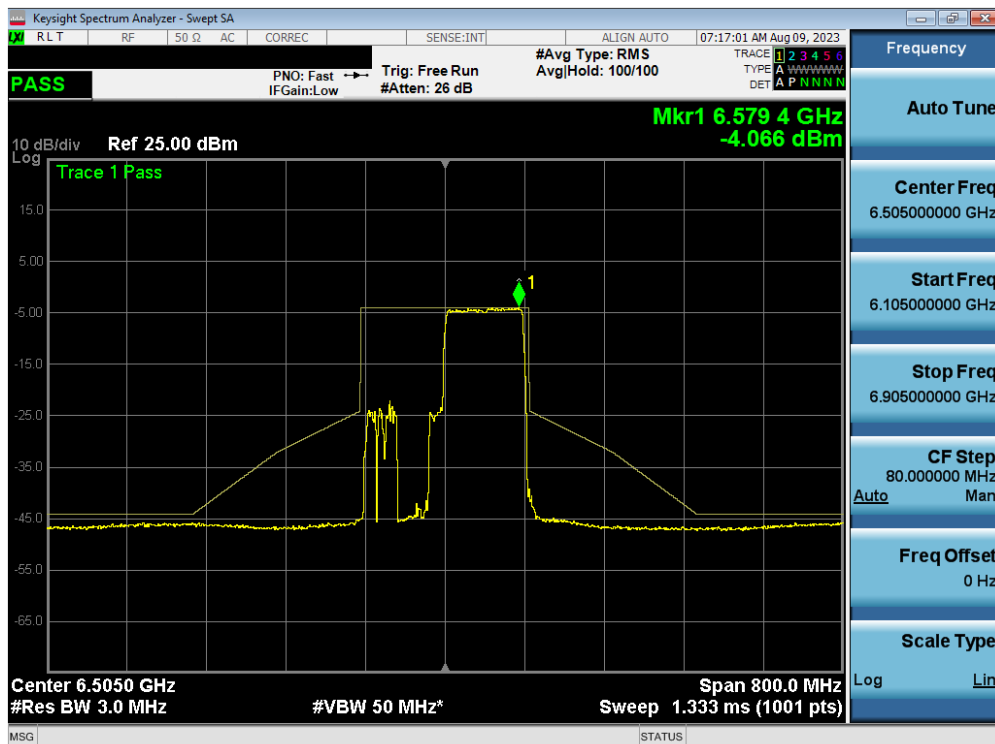


Plot 7-184. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 111)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 128 of 173

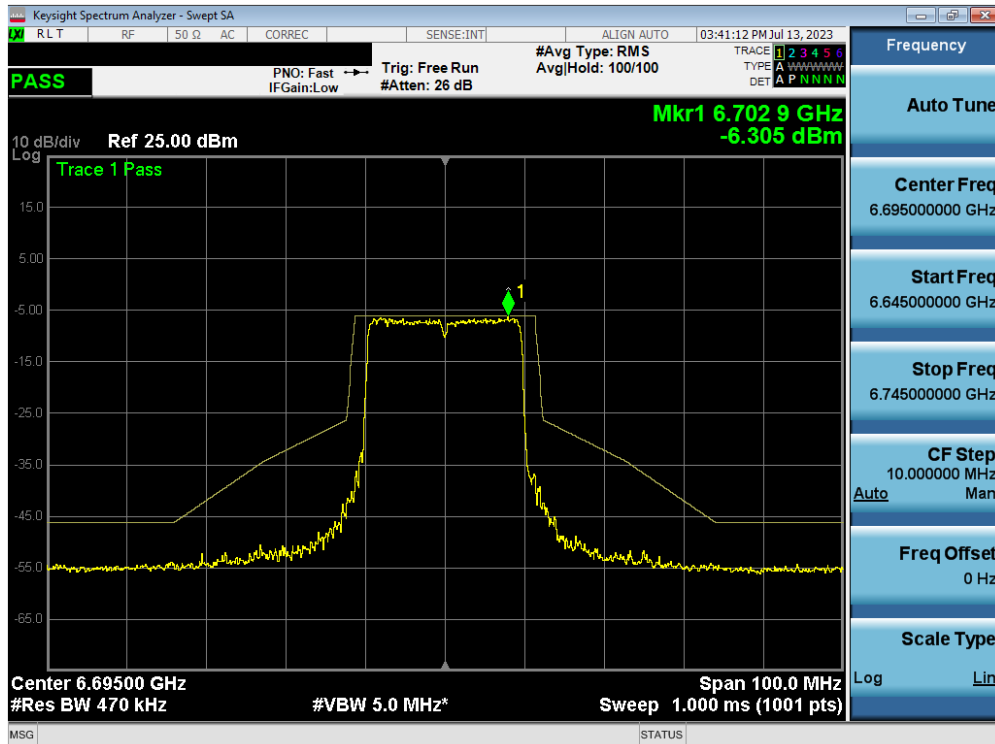


Plot 7-185. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 149)

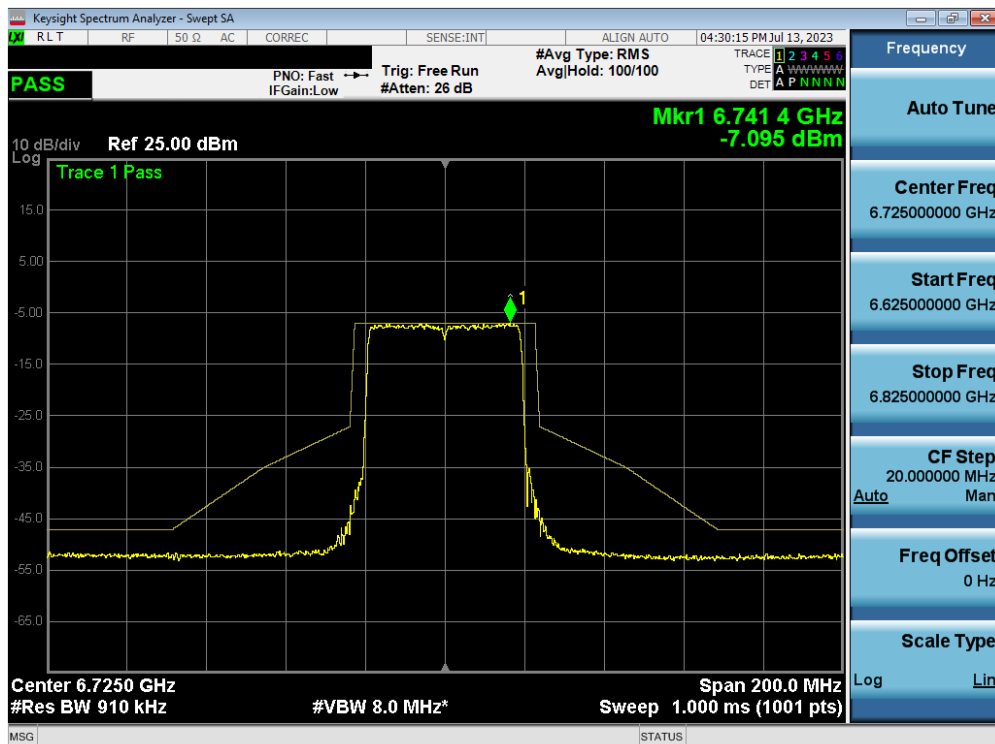


Plot 7-186. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 155)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 129 of 173

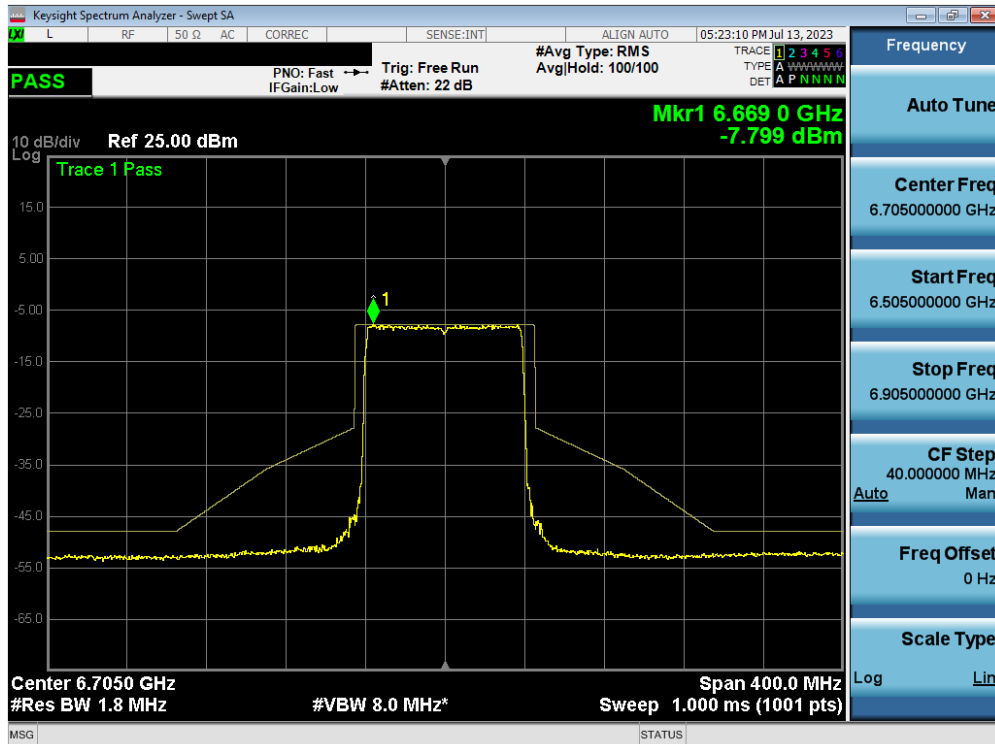


Plot 7-187. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 151)

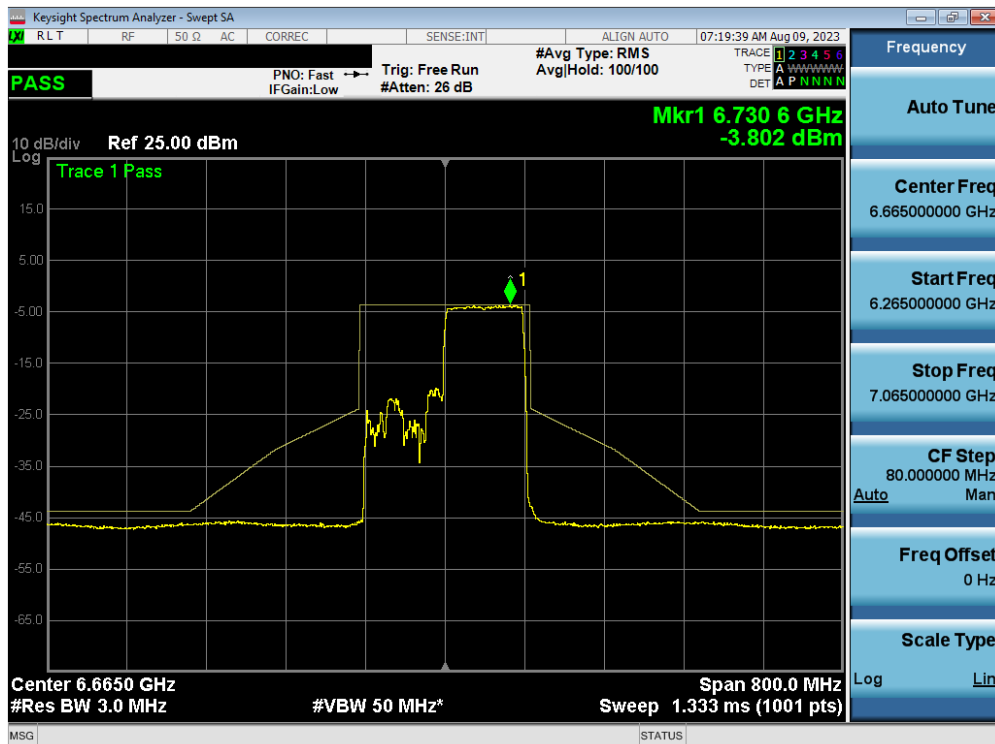


Plot 7-188. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 143)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 130 of 173

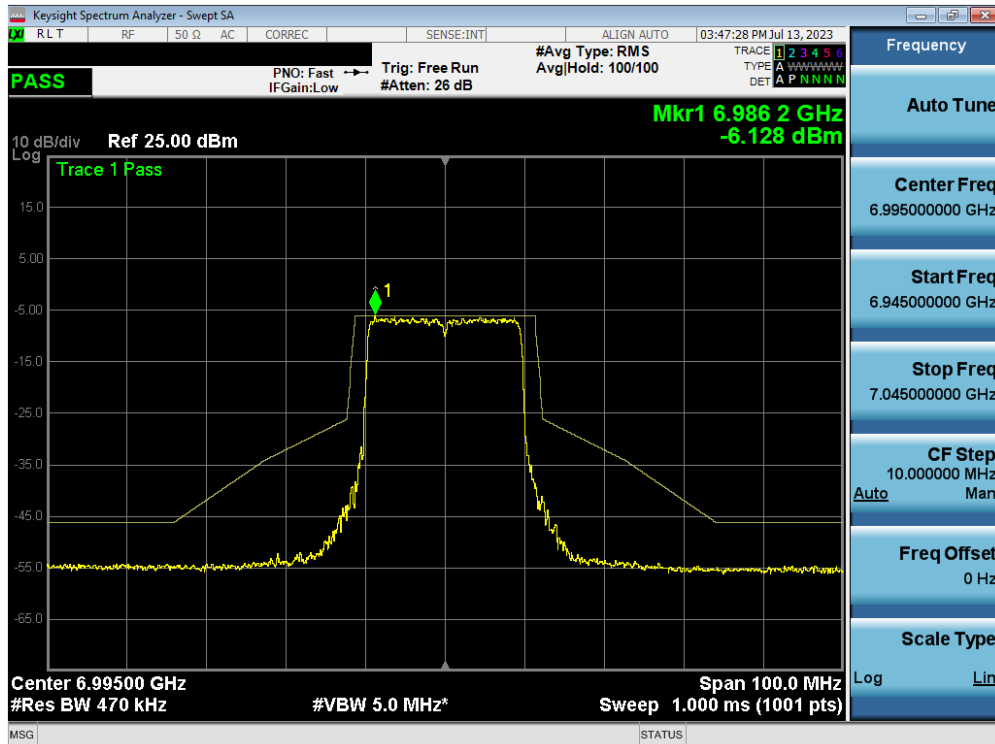


Plot 7-189. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 209)

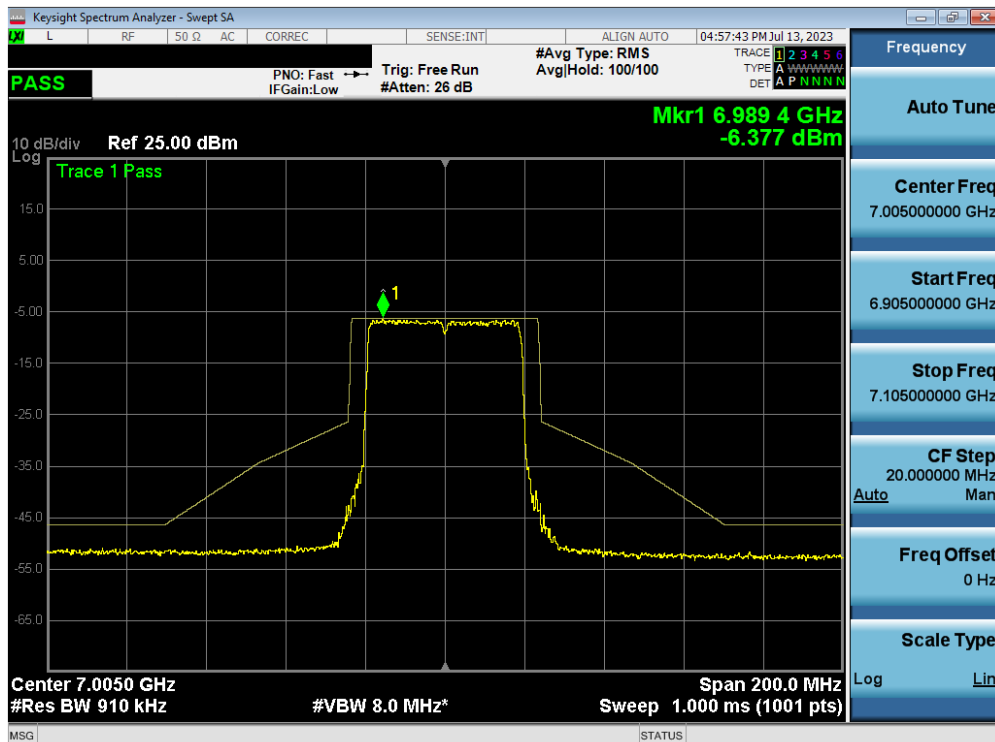


Plot 7-190. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 211)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 131 of 173

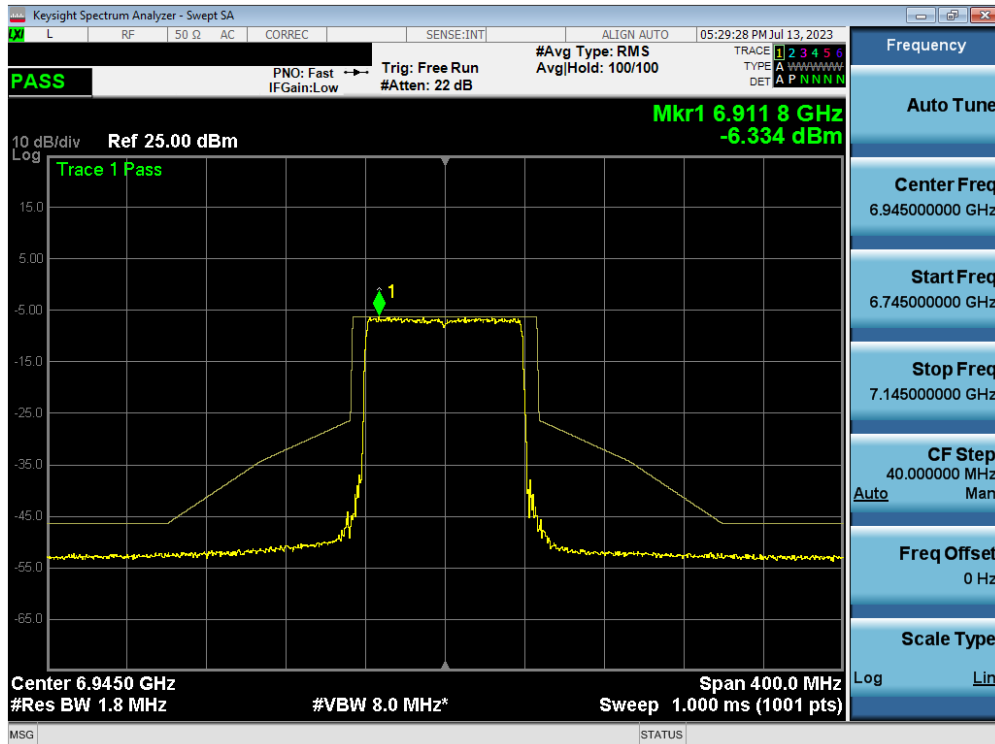

Plot 7-191. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 199)

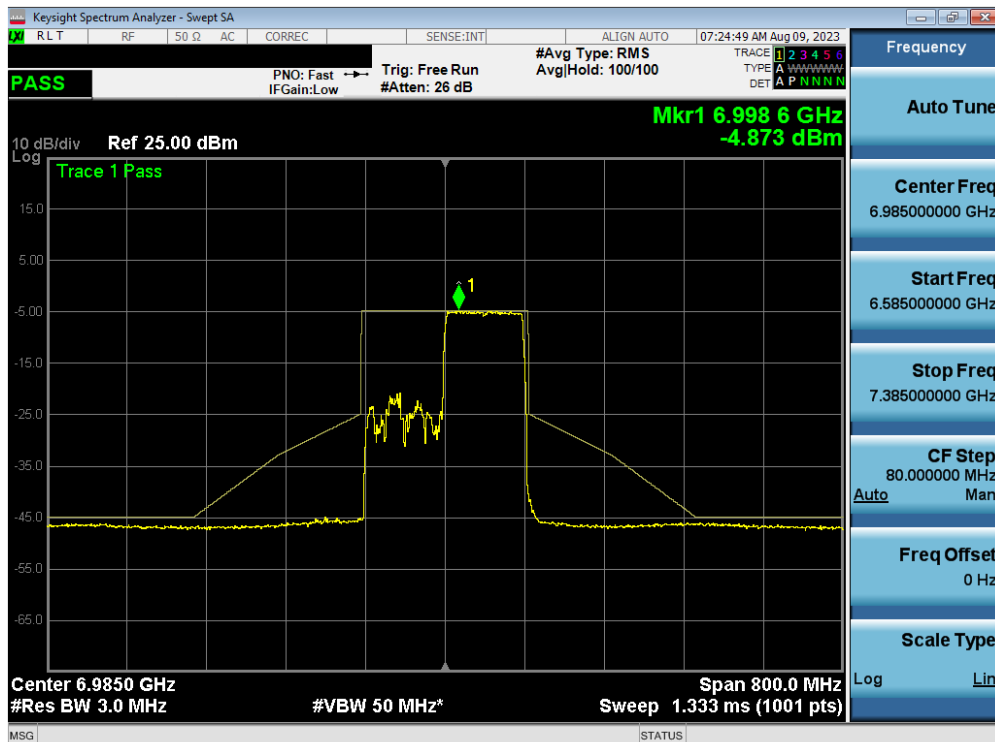

Plot 7-192. In-Band Emission Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 207)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 132 of 173

7.6 Contention Based Protocol

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel if detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02 v01r01

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation, and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 of KDB 987594 D02 v01r01 to determine the number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal, and repeat the process.

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 133 of 173

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

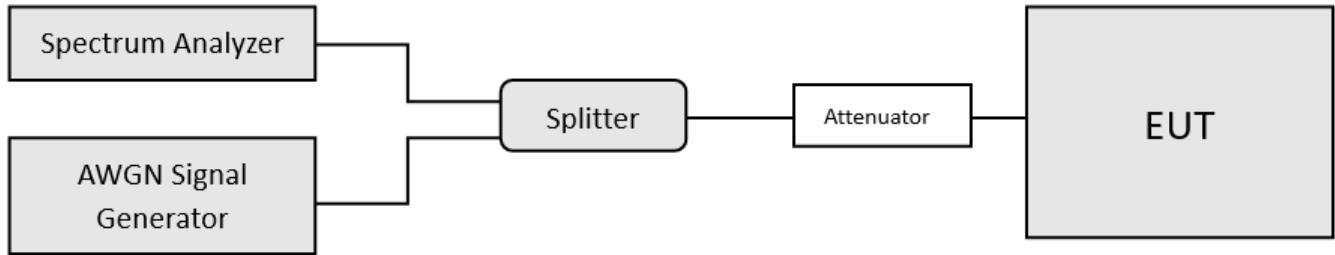


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v01r01, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-631). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-647), M1 indicates the point at which the AWGN signal is introduced. D1 indicates where the AWGN signal is terminated, at least 10 seconds following M1.
2. 15 trials were run in order to ensure certainty of 90%
3. Per Guidance from KDB 987594 D04 v01, contention based protocol was tested with receiver with the lowest antenna gain.
4. All CBP Timing Plots shown are for the ceased condition. Some spikes that may be shown are from adjacent portions of the spectrum that are still transmitting.

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Detection Level Calculation

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-80.99	-4.89	-76.10	-62.0	-14.10
				6110	-80.34	-4.89	-75.45	-62.0	-13.45
	47	6185	160	6185	-74.97	-4.89	-70.08	-62.0	-8.08
				6260	-77.61	-4.89	-72.72	-62.0	-10.72
UNII Band 6	101	6455	20	6455	-78.80	-4.89	-73.91	-62.0	-11.91
				6430	-78.40	-4.89	-73.51	-62.0	-11.51
	111	6505	160	6505	-73.17	-4.89	-68.28	-62.0	-6.28
				6580	-79.42	-4.89	-74.53	-62.0	-12.53
UNII Band 7	149	6695	20	6695	-79.25	-5.95	-73.30	-62.0	-11.30
				6750	-78.31	-5.95	-72.36	-62.0	-10.36
	175	6825	160	6825	-73.78	-5.95	-67.83	-62.0	-5.83
				6900	-78.82	-5.95	-72.87	-62.0	-10.87
UNII Band 8	197	6935	20	6935	-78.55	-5.29	-73.26	-62.0	-11.26
				6910	-78.18	-5.29	-72.89	-62.0	-10.89
	207	6985	160	6985	-73.28	-5.29	-67.99	-62.0	-5.99
				7060	-78.61	-5.29	-73.32	-62.0	-11.32

Table 7-15. Contention Based Protocol – Incumbent Detection Results

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 134 of 173

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Antenna Gain [dBi]	EUT Transmission Status			Detection Limit [dBm]	Margin [dB]
						Adjusted AWGN Power (dBm)				
						Normal	Minimal	Ceased		
UNII Band 5	53	6215	20	6215	-4.89	-78.22	-77.52	-76.10	-62.0	-14.10
	47	6185	160	6110	-4.89	-76.44	-76.66	-75.45	-62.0	-13.45
				6185	-4.89	-72.40	-71.50	-70.08	-62.0	-8.08
				6260	-4.89	-74.94	-74.00	-72.72	-62.0	-10.72
UNII Band 6	101	6455	20	6455	-4.89	-75.59	-75.33	-73.91	-62.0	-11.91
	111	6505	160	6430	-4.89	-75.34	-74.72	-73.51	-62.0	-11.51
				6505	-4.89	-70.39	-69.35	-68.28	-62.0	-6.28
				6580	-4.89	-76.51	-75.60	-74.53	-62.0	-12.53
UNII Band 7	149	6695	20	6695	-5.95	-74.89	-74.44	-73.30	-62.0	-11.30
	175	6825	160	6750	-5.95	-74.45	-73.43	-72.36	-62.0	-10.36
				6825	-5.95	-70.10	-69.11	-67.83	-62.0	-5.83
				6900	-5.95	-75.25	-74.29	-72.87	-62.0	-10.87
UNII Band 8	197	6935	20	6935	-5.29	-75.67	-74.54	-73.26	-62.0	-11.26
	207	6985	160	6910	-5.29	-75.37	-73.96	-72.89	-62.0	-10.89
				6985	-5.29	-70.20	-69.13	-67.99	-62.0	-5.99
				7060	-5.29	-76.02	-74.60	-73.32	-62.0	-11.32


Table 7-16. Contention Based Protocol – Detection Results – All Tx Cases

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate (%)
UNII Band 5	53	6215	20	6215	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
	47	6185	160	6110	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6185	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6260	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 6	101	6455	20	6455	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
	111	6505	160	6430	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6505	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6580	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 7	149	6695	20	6695	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
	175	6825	160	6750	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6825	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6900	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 8	197	6935	20	6935	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
	207	6985	160	6910	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6985	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				7060	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100

Table 7-17. Contention Based Protocol – Incumbent Detection Trial Results

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 135 of 173


7.6.1 AWGN Plots

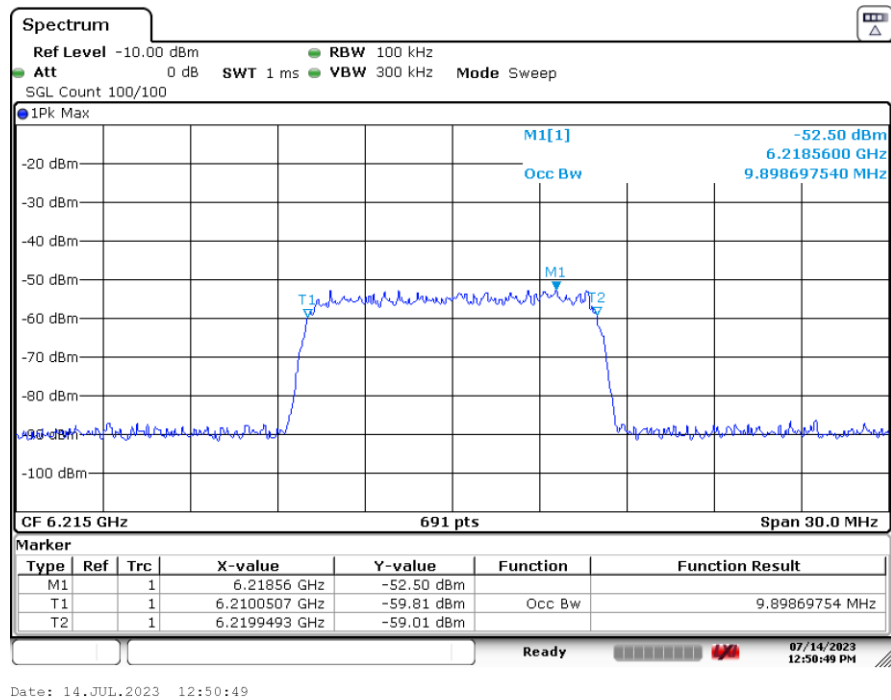


Plot 7-193. AWGN Signal (Demonstration)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 136 of 173

7.6.2 CBP Timing Plots

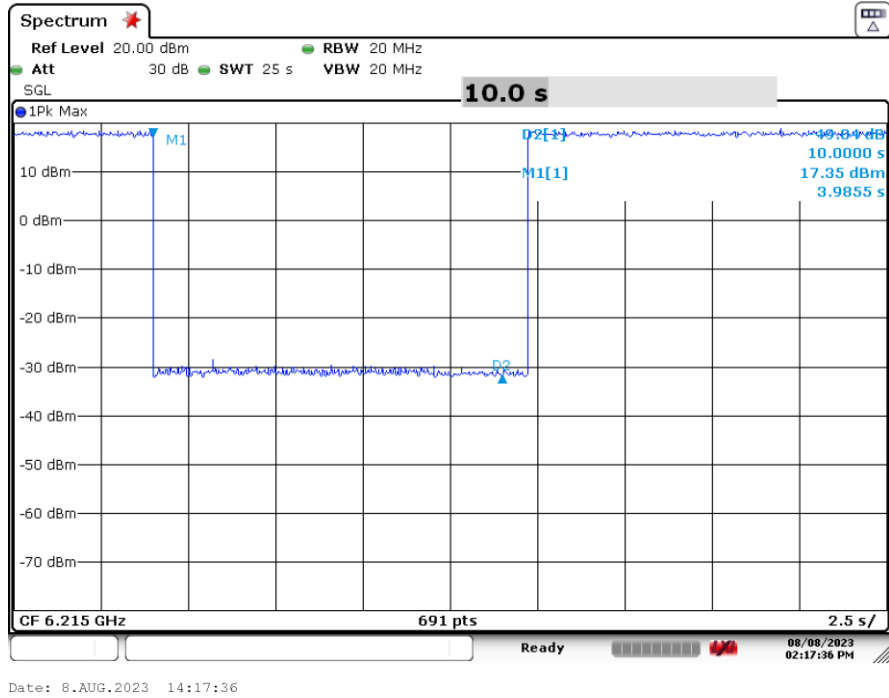


Plot 7-194. Contention Based Protocol Timing Plot (20MHz (UNII Band 5) – Ch. 53)

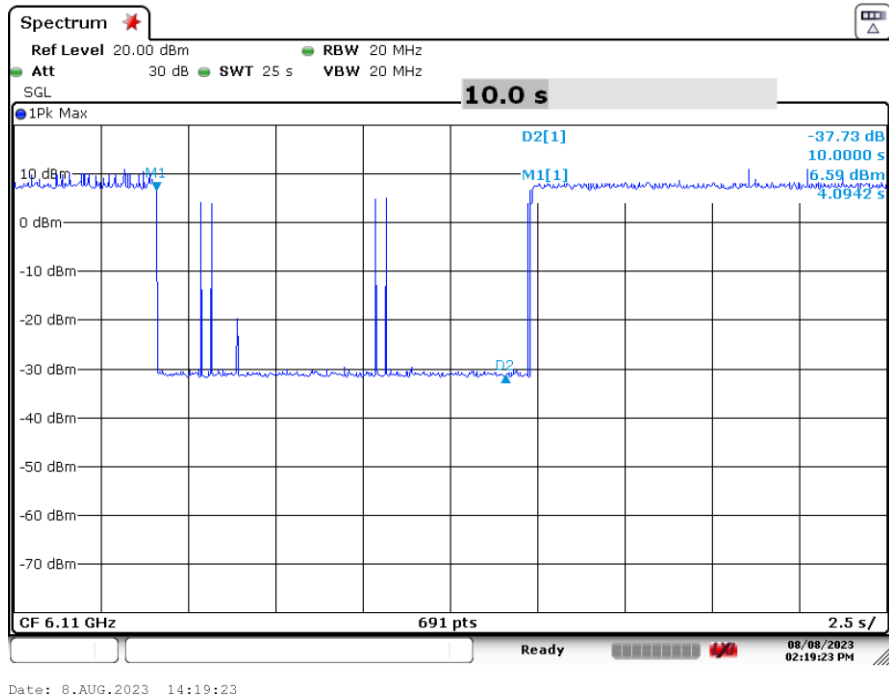


Plot 7-195. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 Low)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 137 of 173

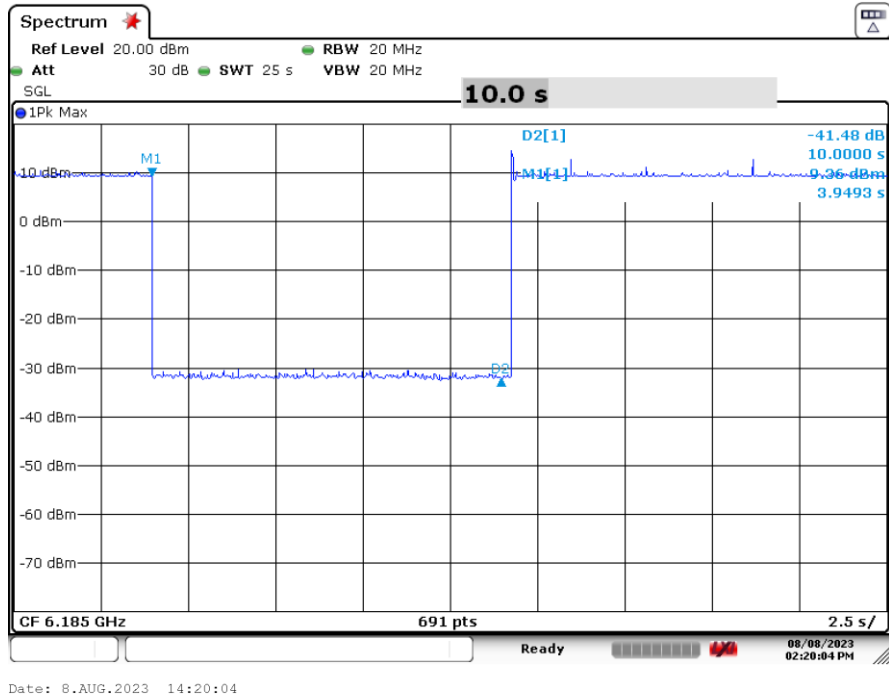


Plot 7-196. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 Mid)

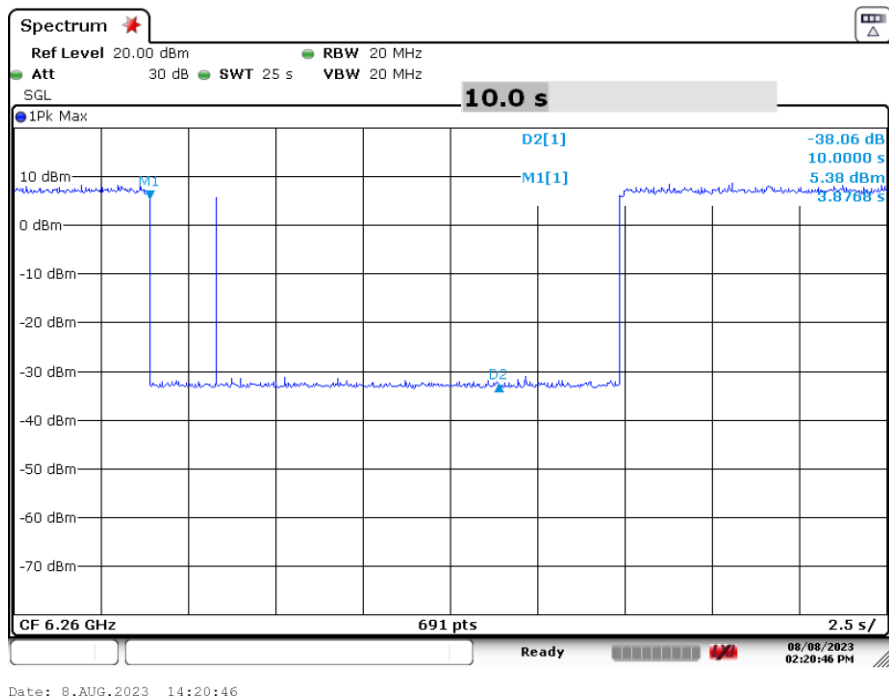


Plot 7-197. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 High)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 138 of 173

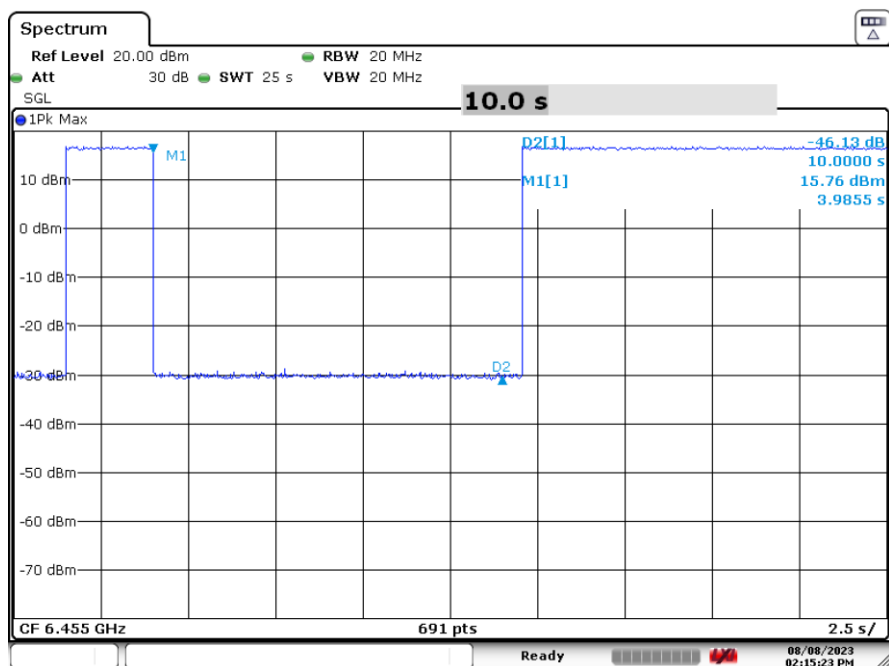

Date: 8.AUG.2023 14:15:23


Plot 7-198. Contention Based Protocol Timing Plot (20MHz (UNII Band 6) – Ch. 101)

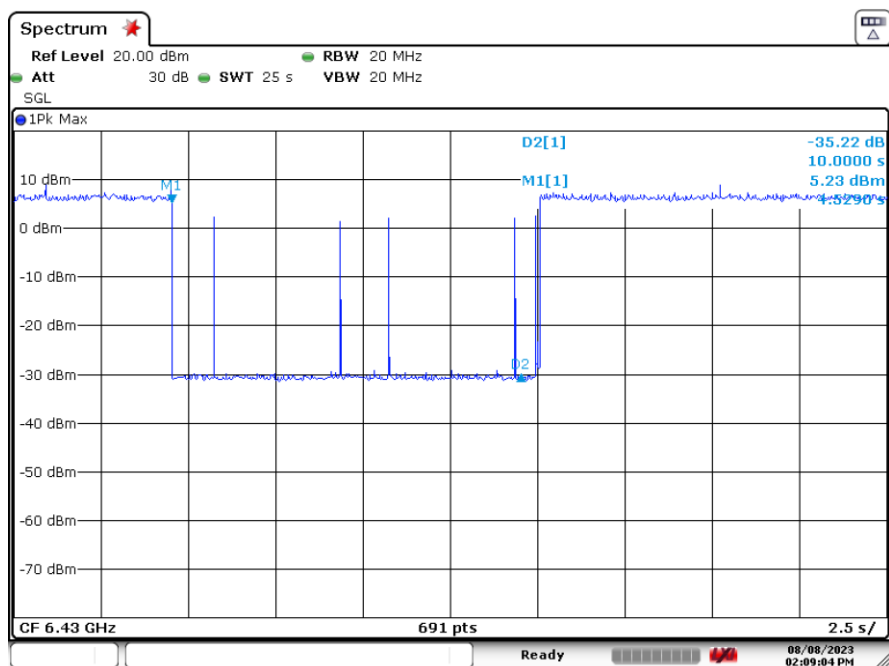

Date: 8.AUG.2023 14:09:04


Plot 7-199. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Low)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 139 of 173

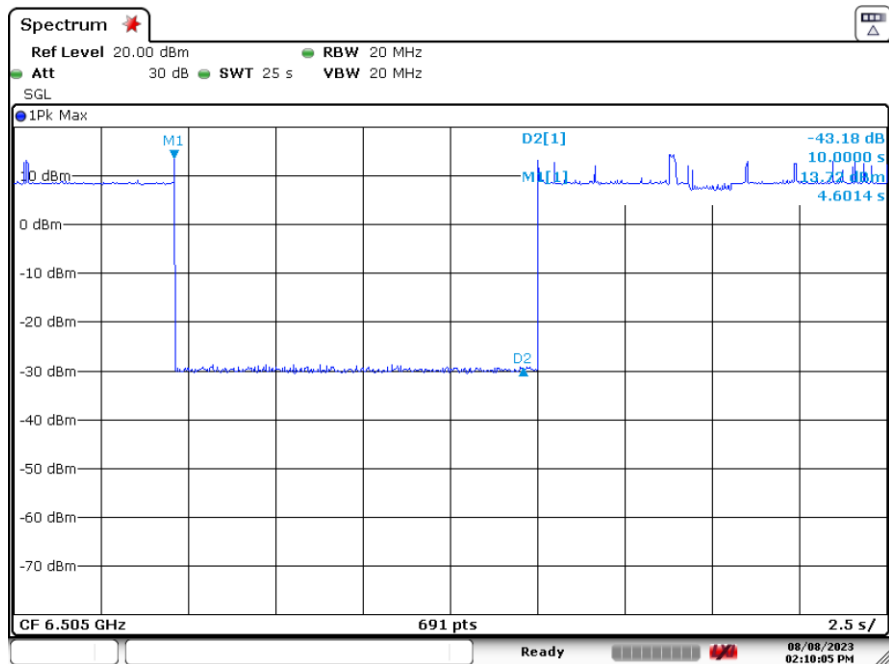

Date: 8.AUG.2023 14:10:05


Plot 7-200. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Mid)

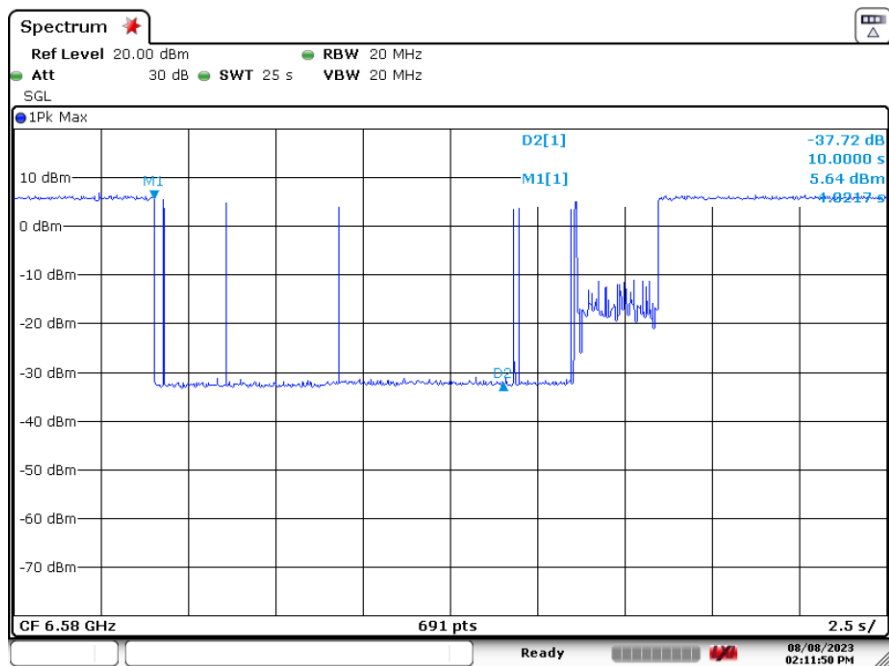

Date: 8.AUG.2023 14:11:50


Plot 7-201. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 High)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 140 of 173

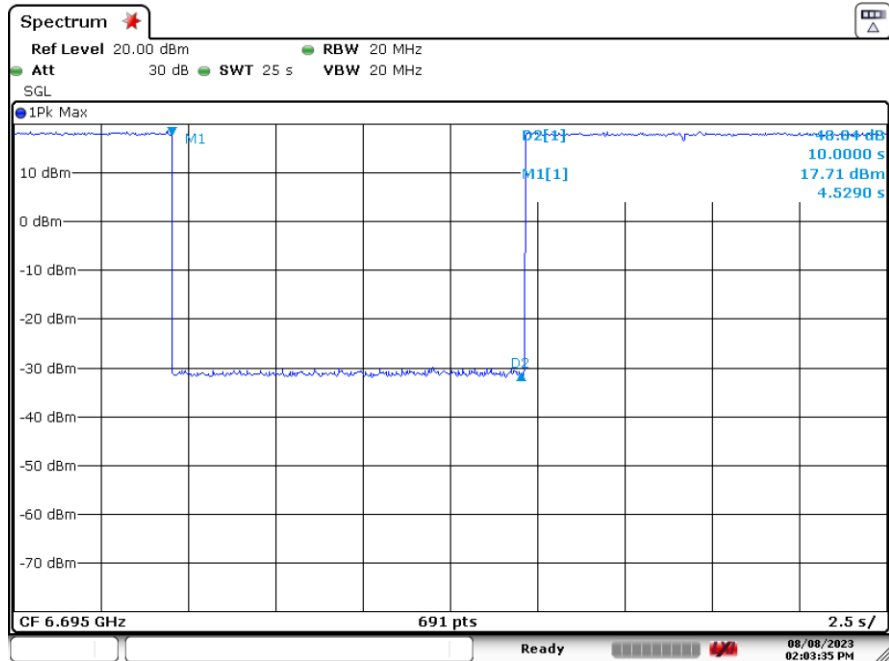

Date: 8.AUG.2023 14:03:35


Plot 7-202. Contention Based Protocol Timing Plot (20MHz (UNII Band 7) – Ch. 149)

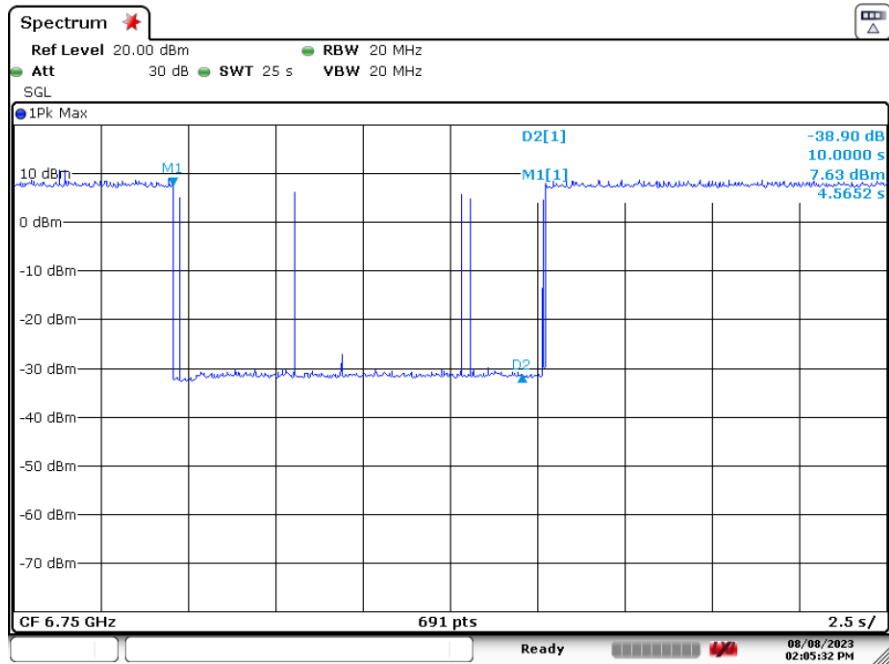

Date: 8.AUG.2023 14:05:32


Plot 7-203. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Low)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 141 of 173

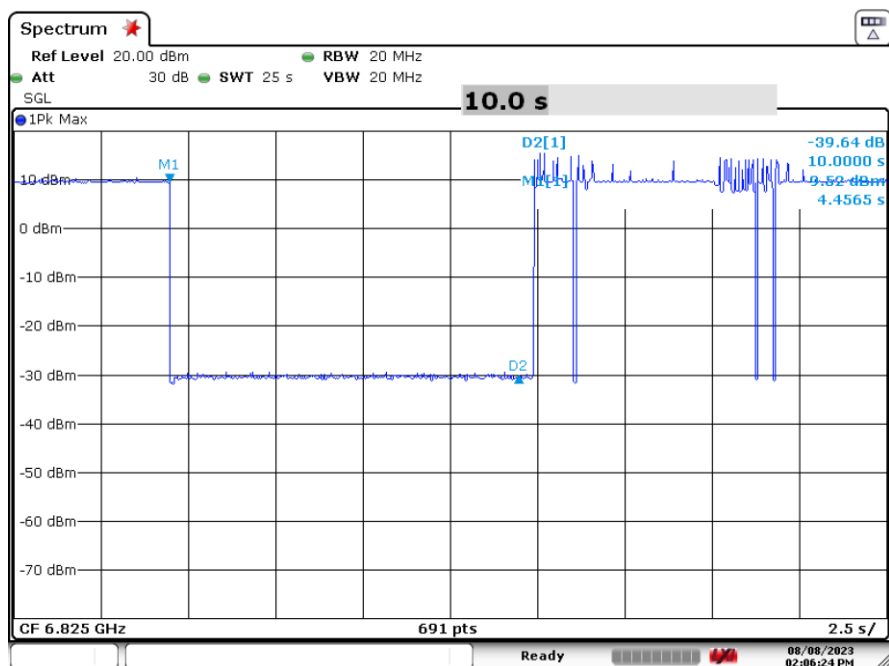

Date: 8.AUG.2023 14:06:24


Plot 7-204. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Mid)

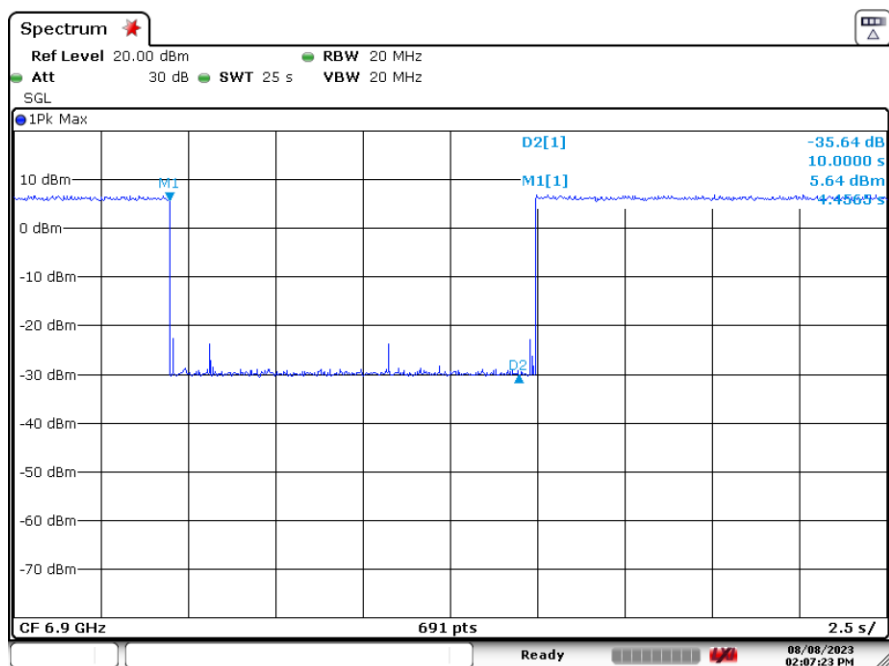

Date: 8.AUG.2023 14:07:23


Plot 7-205. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 High)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 142 of 173

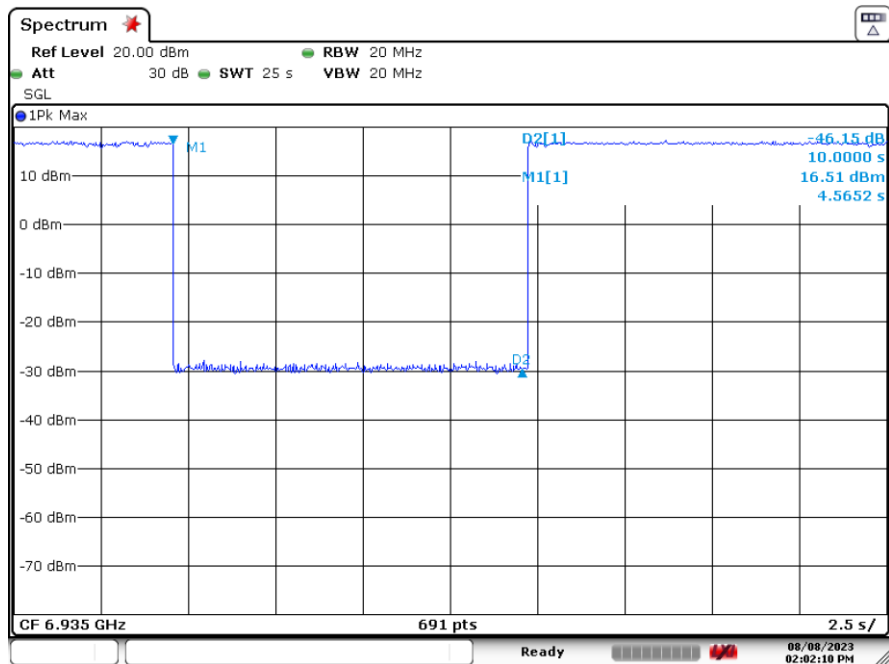

Date: 8.AUG.2023 14:02:10


Plot 7-206. Contention Based Protocol Timing Plot (20MHz (UNII Band 8) – Ch. 197)

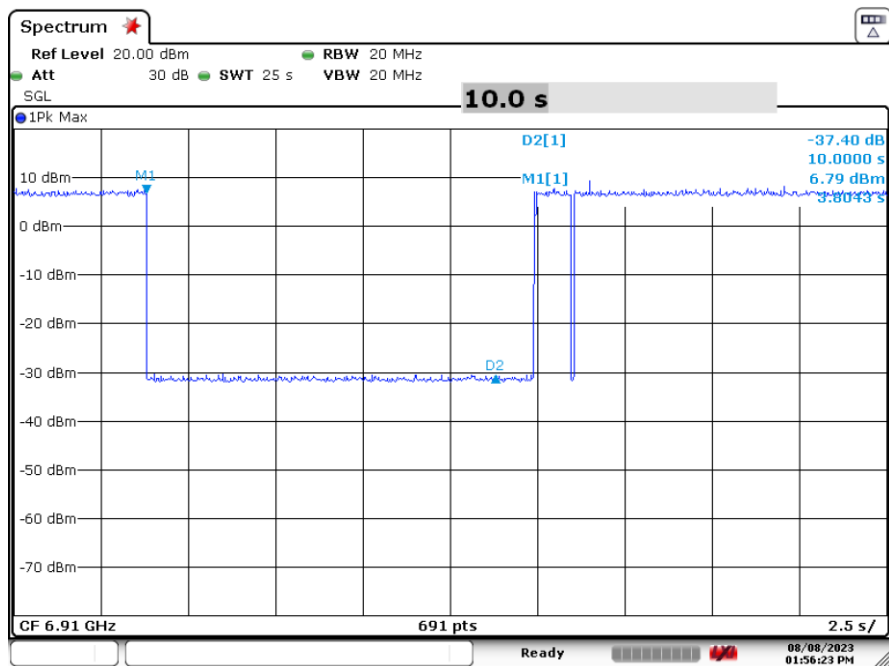

Date: 8.AUG.2023 13:56:22


Plot 7-207. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Low)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 143 of 173

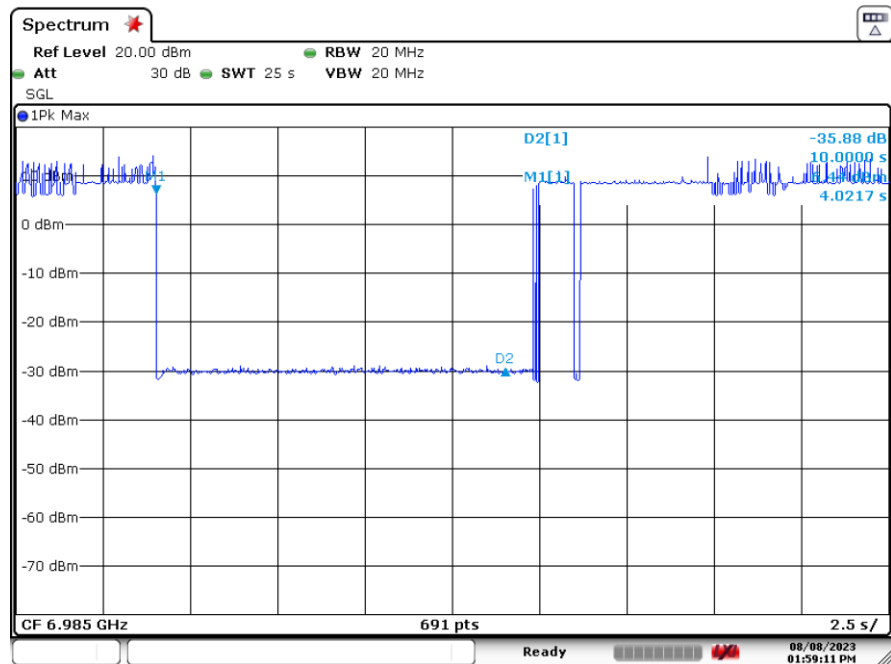

Date: 8.AUG.2023 13:59:11

Plot 7-208. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Mid)

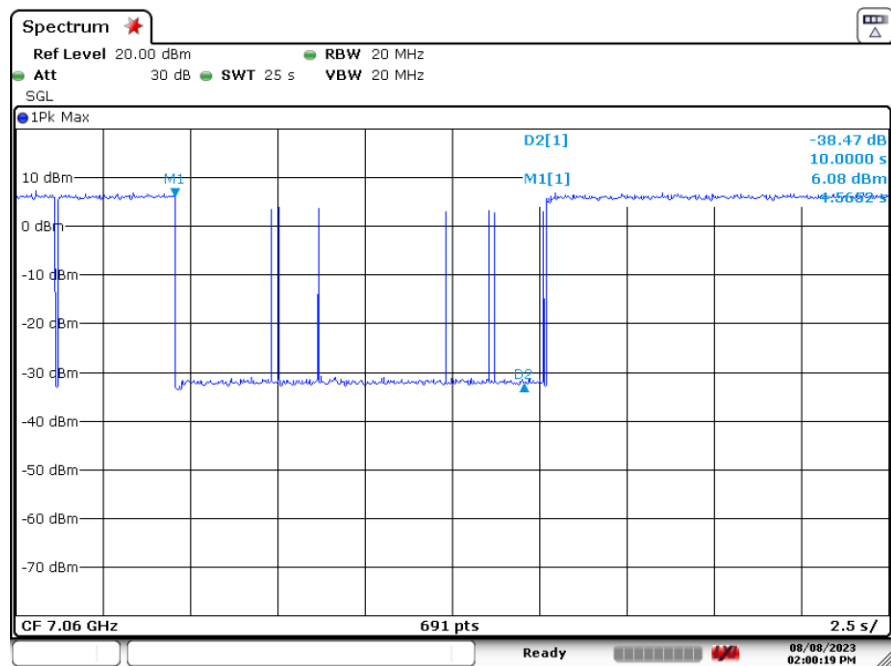

Date: 8.AUG.2023 14:00:18

Plot 7-209. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 High)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 144 of 173

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax (20/40/80/160MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-18. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 145 of 173

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

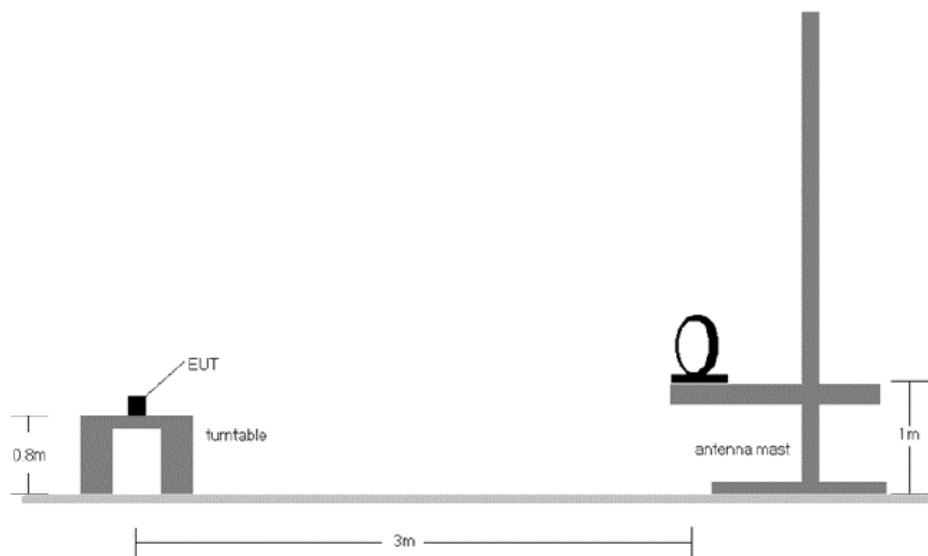


Figure 7-6. Radiated Test Setup < 30MHz

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 146 of 173

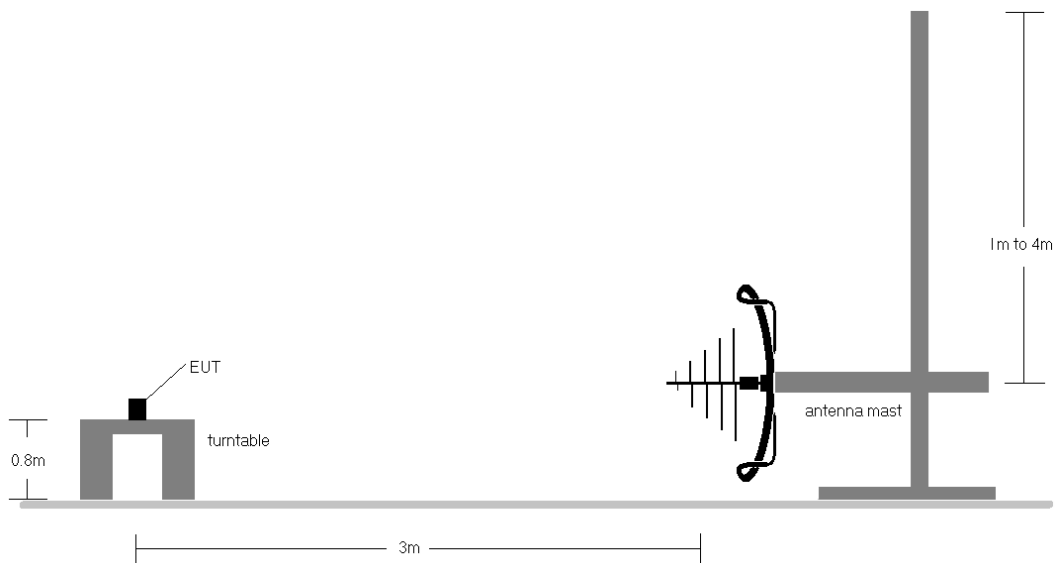


Figure 7-7. Radiated Test Setup < 1GHz

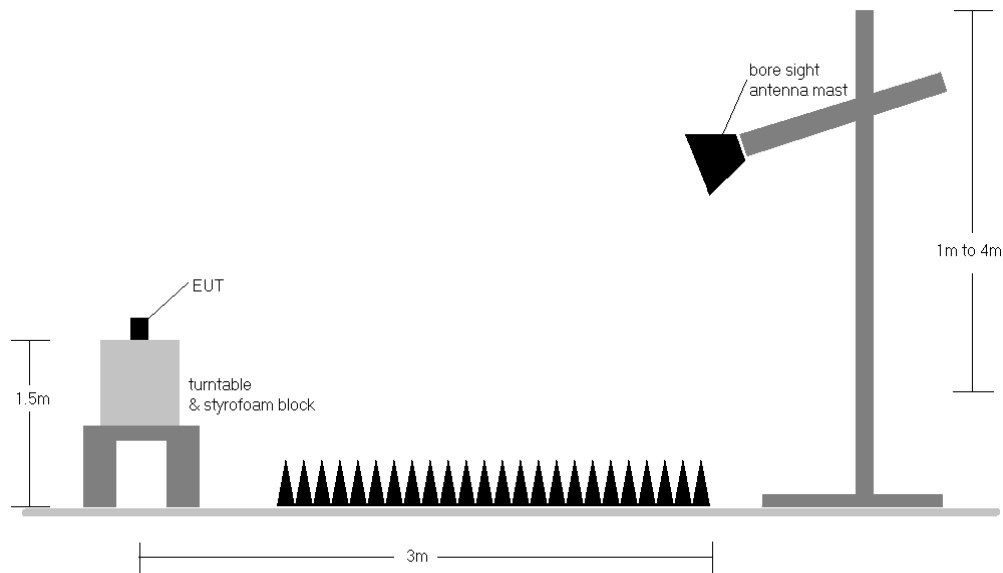


Figure 7-8. Radiated Test Setup > 1GHz

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 147 of 173

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 148 of 173


7.7.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

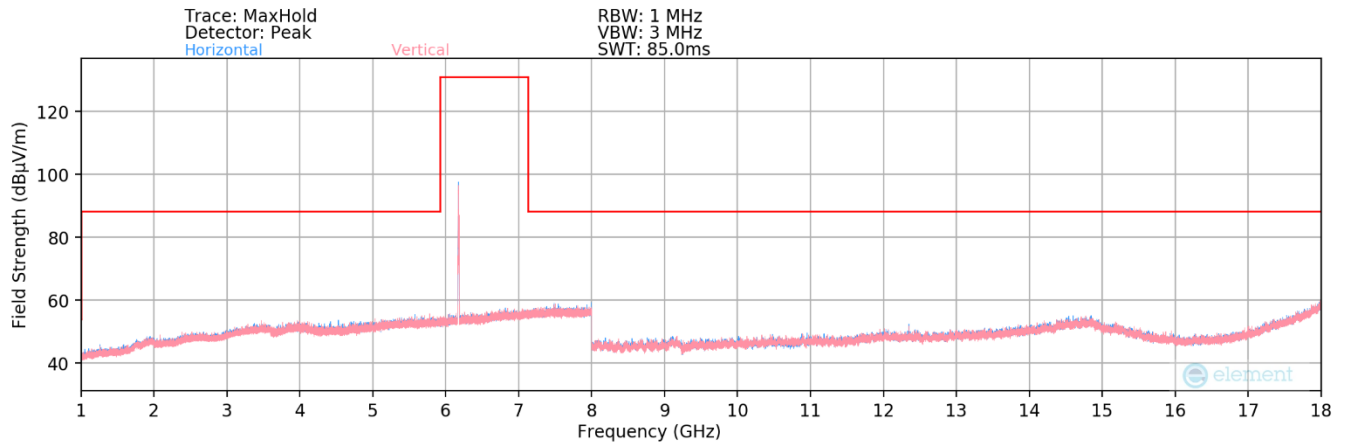

Plot 7-210. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

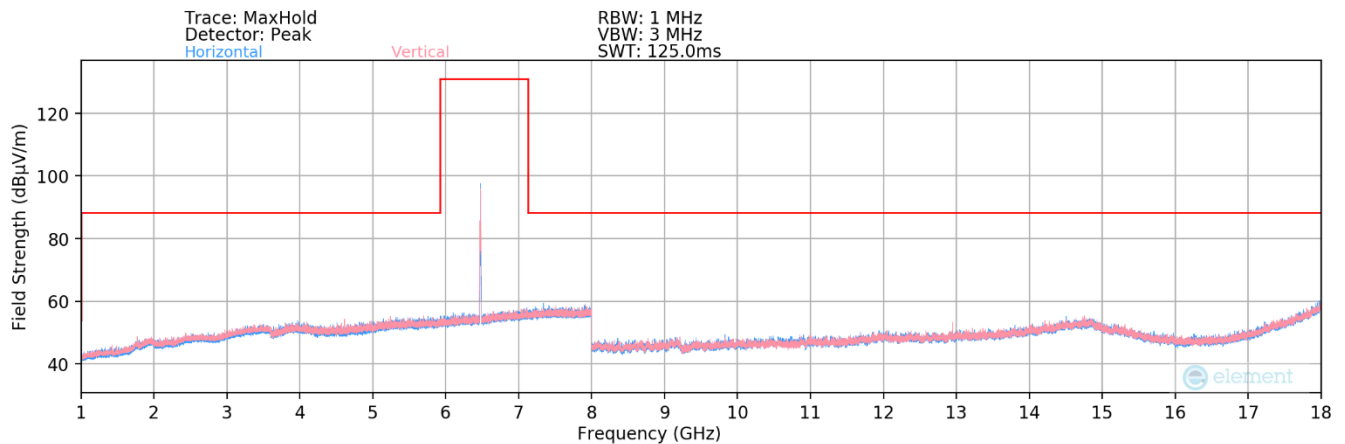


Plot 7-211. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

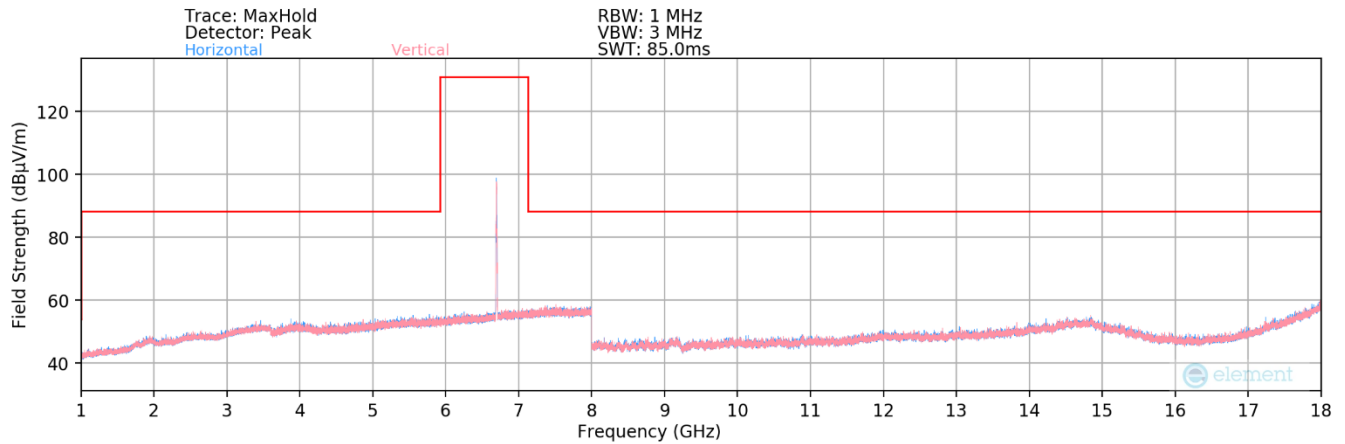


Plot 7-212. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 149 of 173

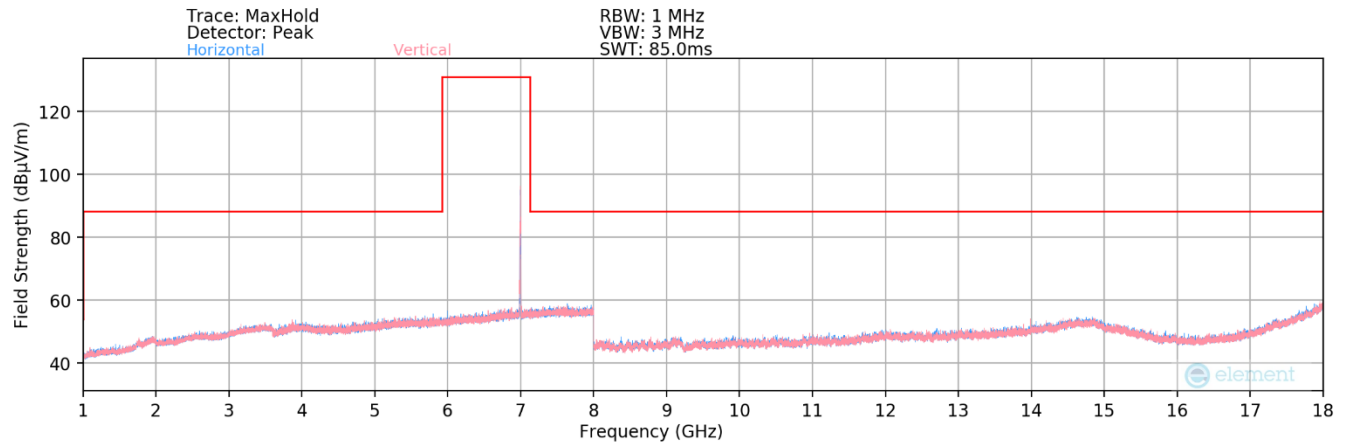

Plot 7-213. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

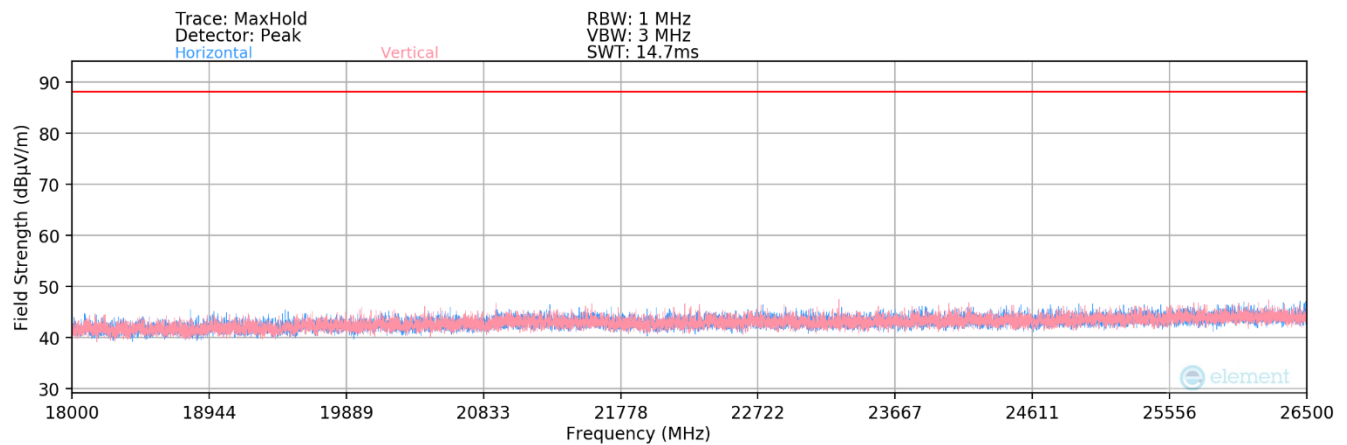

Plot 7-214. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

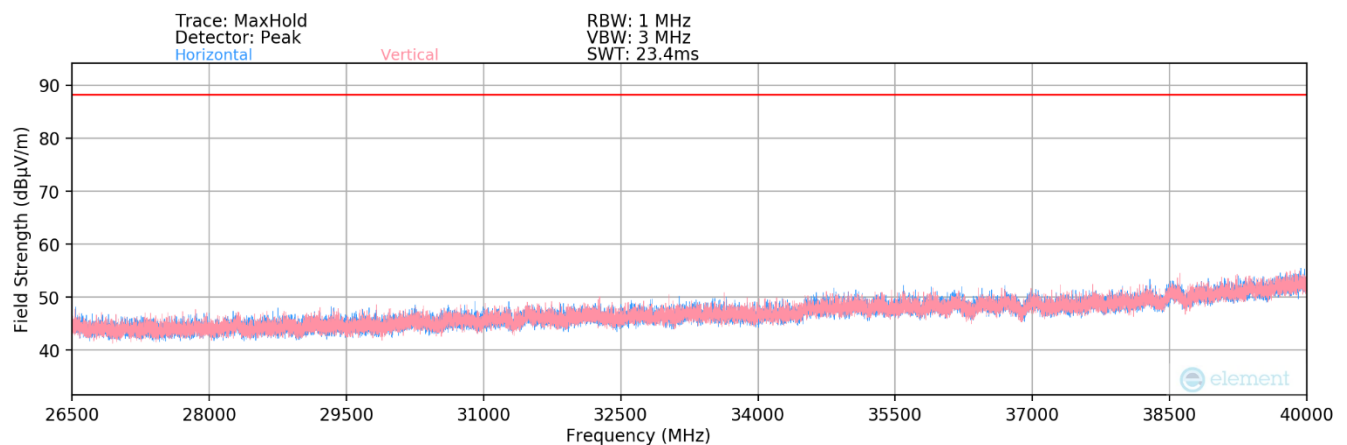

Plot 7-215. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 150 of 173

7.7.1.1 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 5

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5935MHz
Channel: 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11870.00	Average	V	106	79	-76.38	9.32	0.00	39.94	53.98	-14.04
* 11870.00	Peak	V	106	79	-63.40	9.32	0.00	52.92	73.98	-21.06
* 17805.00	Average	V	-	-	-77.04	15.72	0.00	45.68	53.98	-8.30
* 17805.00	Peak	V	-	-	-64.84	15.72	0.00	57.88	73.98	-16.10
* 23740.00	Average	V	-	-	-66.01	3.96	-9.54	35.41	53.98	-18.57
* 23740.00	Peak	V	-	-	-56.88	3.96	-9.54	44.54	73.98	-29.44
29675.00	Peak	V	-	-	-57.58	5.90	-9.54	45.79	68.20	-22.41

Table 7-19. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	100	67	-76.93	9.60	0.00	39.67	53.98	-14.31
* 12350.00	Peak	V	100	67	-63.91	9.60	0.00	52.69	73.98	-21.29
* 18525.00	Average	V	-	-	-65.19	1.55	-9.54	33.82	53.98	-20.16
* 18525.00	Peak	V	-	-	-55.74	1.55	-9.54	43.27	73.98	-30.71
24700.00	Peak	V	-	-	-57.08	4.20	-9.54	44.57	68.20	-23.63
30875.00	Peak	V	-	-	-57.02	6.77	-9.54	47.21	68.20	-20.99

Table 7-20. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 151 of 173

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	V	100	82	-65.95	9.64	0.00	50.69	68.20	-17.51
* 19245.00	Average	V	-	-	-65.15	2.35	-9.54	34.67	53.98	-19.31
* 19245.00	Peak	V	-	-	-55.55	2.35	-9.54	44.26	73.98	-29.72
25660.00	Peak	V	-	-	-56.57	4.41	-9.54	45.30	68.20	-22.90
32075.00	Peak	V	-	-	-57.09	7.43	-9.54	47.81	68.20	-20.39

Table 7-21. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 152 of 173

7.7.1.2 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 6

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Peak	V	102	73	-66.26	10.05	0.00	50.79	68.20	-17.41
* 19305.00	Average	V	-	-	-65.77	2.13	-9.54	33.82	53.98	-20.16
* 19305.00	Peak	V	-	-	-55.67	2.13	-9.54	43.92	73.98	-30.06
25740.00	Peak	V	-	-	-56.18	4.51	-9.54	45.79	68.20	-22.41
32175.00	Peak	V	-	-	-57.12	7.53	-9.54	47.87	68.20	-20.33

Table 7-22. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Peak	V	100	84	-66.12	10.12	0.00	51.00	68.20	-17.20
* 19425.00	Average	V	-	-	-65.71	2.22	-9.54	33.97	53.98	-20.01
* 19425.00	Peak	V	-	-	-55.52	2.22	-9.54	44.17	73.98	-29.81
25900.00	Peak	V	-	-	-56.21	4.57	-9.54	45.83	68.20	-22.37
32375.00	Peak	V	-	-	-57.05	7.29	-9.54	47.70	68.20	-20.50

Table 7-23. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 153 of 173

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Peak	V	101	77	-65.22	10.12	0.00	51.90	68.20	-16.30
* 19545.00	Average	V	-	-	-66.01	2.37	-9.54	33.82	53.98	-20.16
* 19545.00	Peak	V	-	-	-55.96	2.37	-9.54	43.87	73.98	-30.11
26060.00	Peak	V	-	-	-56.81	4.80	-9.54	45.45	68.20	-22.75
32575.00	Peak	V	-	-	-56.79	6.85	-9.54	47.53	68.20	-20.67

Table 7-24. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 154 of 173

7.7.1.3 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 7

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Peak	V	101	311	-64.97	10.15	0.00	52.18	68.20	-16.02
* 19605.00	Average	V	-	-	-65.11	2.64	-9.54	35.00	53.98	-18.98
* 19605.00	Peak	V	-	-	-55.50	2.64	-9.54	44.61	73.98	-29.37
26140.00	Peak	V	-	-	-56.90	4.56	-9.54	45.11	68.20	-23.09
32675.00	Peak	V	-	-	-56.89	7.03	-9.54	47.60	68.20	-20.60

Table 7-25. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	101	302	-72.49	10.35	0.00	44.86	53.98	-9.12
* 13390.00	Peak	V	101	302	-63.84	10.35	0.00	53.51	73.98	-20.47
* 20085.00	Average	V	-	-	-65.87	3.01	-9.54	34.60	53.98	-19.38
* 20085.00	Peak	V	-	-	-55.29	3.01	-9.54	45.18	73.98	-28.80
26780.00	Peak	V	-	-	-57.14	4.57	-9.54	44.89	68.20	-23.31
33475.00	Peak	V	-	-	-57.18	7.57	-9.54	47.84	68.20	-20.36

Table 7-26. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 155 of 173

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Peak	V	100	303	-64.47	11.07	0.00	53.60	68.20	-14.60
* 20625.00	Average	V	-	-	-65.37	3.42	-9.54	35.51	53.98	-18.47
* 20625.00	Peak	V	-	-	-56.17	3.42	-9.54	44.72	73.98	-29.26
27500.00	Peak	V	-	-	-56.42	4.54	-9.54	45.58	68.20	-22.62
34375.00	Peak	V	-	-	-56.90	8.08	-9.54	48.64	68.20	-19.56

Table 7-27. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 156 of 173

7.7.1.4 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 8

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Peak	V	101	301	-63.54	11.00	0.00	54.46	68.20	-13.74
* 20685.00	Average	V	-	-	-65.92	3.67	-9.54	35.21	53.98	-18.77
* 20685.00	Peak	V	-	-	-55.87	3.67	-9.54	45.26	73.98	-28.72
27580.00	Peak	V	-	-	-56.99	4.68	-9.54	45.15	68.20	-23.05
34475.00	Peak	V	-	-	-57.45	7.83	-9.54	47.84	68.20	-20.36

Table 7-28. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	V	100	298	-63.85	11.26	0.00	54.41	68.20	-13.79
* 20985.00	Average	V	-	-	-65.95	3.59	-9.54	35.10	53.98	-18.88
* 20985.00	Peak	V	-	-	-55.79	3.59	-9.54	45.26	73.98	-28.72
27980.00	Peak	V	-	-	-56.97	5.05	-9.54	45.54	68.20	-22.66
34975.00	Peak	V	-	-	-57.41	8.24	-9.54	48.29	68.20	-19.91

Table 7-29. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset		Page 157 of 173

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Peak	V	100	298	-64.98	12.13	0.00	54.15	68.20	-14.05
* 21345.00	Average	V	-	-	-65.88	4.08	-9.54	35.66	53.98	-18.32
* 21345.00	Peak	V	-	-	-56.24	4.08	-9.54	45.30	73.98	-28.68
28460.00	Peak	V	-	-	-56.84	5.14	-9.54	45.75	68.20	-22.45
35575.00	Peak	V	-	-	-56.99	8.16	-9.54	48.63	68.20	-19.57

Table 7-30. Radiated Measurements MIMO (26 Tones)

sFCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-18.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 158 of 173