


# MEASUREMENT/TECHNICAL REPORT

**APPLICANT:** A-FOUR Tech CO., Ltd.

**MODEL NO.:** RFSOP-35

FCC ID: H8GRSOP35

This report concerns ( check one ) :		<b>Original Grant</b> <input checked="" type="checkbox"/>
		<b>Class II Change</b> <input type="checkbox"/>
<b>Equipment type:</b>	RF Mouse	
Deferred grant requested per 47CFR 0.457(d)(1)(ii)? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> If yes, defer until: _____ (date)		
We, the undersigned, agree to notify the Commission by (date) _____ / _____ / _____ of the intended date of announce ment of the product so that the grant can be issued on that date.		
Transiyion Rules Request per 15.37?		Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
If no, assumed Part 15, Subpart B for unintentional radiator the new 47 CFR (10-1-90 Edition) provision.		
<b>Report Prepared</b>		
<b>by Testing House :</b>	<b>Neutron Engineering Inc.</b>	
<b>for Company :</b>		
<b>Name</b>	A-FOUR Tech CO., Ltd.	
<b>Address :</b>	6F., No. 108, Min-Chuan Rd., Hsin-Tien, Taipei, Taiwan, R.O.C.	
<b>Applicant Signature :</b>		
	_____ David King/ R&D Manager	

## CERTIFICATION

**We hereby certify that:**

The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15, Subpart C.

**Prepared by :** Carol Chen



**Reviewed by :** Vincent Su



**Approved by :** George Yao



**Issued Date :** Jan. 31, 2002

**Report No. :** NEI-FCCB-01238

**Company Stamp :**



**NEUTRON ENGINEERING INC.**

No. 132-1, Lane 329, Sec. 2, Palain Rd.,

Shijr Jen, Taipei, Taiwan

TEL : (02) 2646-5426 FAX : (02) 2646-6815

## Table of Contents

<b>1. General Information.....</b>	
1-1 Product Description.....	4
1-2 Related Submittal(s)/Grant(s).....	4
1-3 Test Methodology.....	4
1-4 Test Facility.....	4
<b>2. System Test Configuration.....</b>	
2-1 EUT Configuration.....	5
2-2 EUT Exercise.....	5
2-3 Test Procedure.....	5
2-4 Limitation.....	6
2-5 Special Accessories.....	6
2-6 Equipment Modifications.....	6
2-7 Test Set-UP.....	7
2-8 Test Equipments.....	8
<b>3. Block Diagram(s).....</b>	9
<b>4. Radiated Emission Datas .....</b>	
4-1 Reaiated Emission Data.....	10
4-2 Field Strength Calculation.....	14
<b>5. Attachment</b>	
Photos of Tested EUT.....	23
User Manual.....	24

## **1. GENERAL INFORMATION**

### **1-1. Product Description**

The A-FOUR Tech CO., Ltd. Model: RFSOP-35 (referred to as the EUT in the report) is a RF mouse transmitter that uses FSK radio frequency technology to operate a special designed receiver which associated with an IBM compatible PC. Center frequency designed for EUT operation is 27.045 or 27.145MHz (selected by switch). It is considered as a low power Communication device transmitter.

### **1-2. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: H8GRSOP35 filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules. The composite system(including receiver and transmitter) in compliance with Subpart B is authorized under a DoC procedure.

### **1-3. Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992). Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1-4. Test Facility**

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 132-1, Lane 329, Sec. 2, Palain Road, Shijr Jen, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Jun. 4, 1999 Submitted to your office, and accepted in a letter dated Sep. 02, 1999 (Reg. No. 95335).

## 2. System Test Configuration

### 2-1. EUT Configuration

The EUT was placed on a turn table which is 0.8m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

### 2-2. EUT Exercise

The EUT (Transmitter) was operated continuously in its normal operating mode for the purpose of the measurements. and used the block new battery.

### 2-3. Test Procedure

#### 2-3-1. Conducted Emissions

Conducted emissions from the EUT measured in the **frequency range between 0.45 MHz and 30MHz** were made with a **Spectrum Analyzer, HP Model 8568B**, using **CISPR Quasi-Peak detector mode** and appropriate broadband linearly polarized antenna.

#### 2-3-2. Radiated Emissions

Radiated emissions from the EUT measured in the **frequency range between 25 MHz and 1000MHz** were made with a **Spectrum Analyzer, HP Model 8568B**, using **CISPR Quasi-Peak detector mode** and appropriate broadband linearly polarized antenna.

Radiated emissions measurement for **frequency above 1000MHz** were made with a **Test Receiver, R&S model ESMI**, plus a **Pre-amplifier R&S model ESMI-Z7**, and a **Horn Antenna, EMCO model 3115** to measure its **Peak Detector Mode** level and **Average Detector Mode** level.

**2-4. Limitation****(1) Conducted Emission (Not applicable in this report)**

Frequency Range (MHz)	Quasi-Peak
0.45 - 30	48

**(2) Radiated Emission**

- a. The field strength of any emission within this band (26.96-27.28MHz) shall not exceed 10000 micro volts/meter at 3 meters. (80dBµV at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- b. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(unintentional Radiators general limit).as below.

Frequency (MHz)	Field strength mV/m	Distance(m)	Field strength at 3m dBmV/m
<b>1.705-30</b>	<b>30</b>	<b>30</b>	<b>69.54</b>
<b>30-88</b>	<b>100</b>	<b>3</b>	<b>40</b>
<b>88-216</b>	<b>150</b>	<b>3</b>	<b>43.5</b>
<b>216-960</b>	<b>200</b>	<b>3</b>	<b>46</b>

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the colsed point of EUT distance of 3. meters.
  4. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205
  5. Emission spurious frequency which appearing within the Restricted Bands specified in provision of §15.205, then the general radiated emission limits in § 15.209 apply.

**2-5. Special Accessories**


Not available for this EUT intended for grant.

**2-6. Equipment Modifications**


Not available for this EUT intended for grant.

## 2-7. Test SET-UP (Block Diagram of Configuration)

### (A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

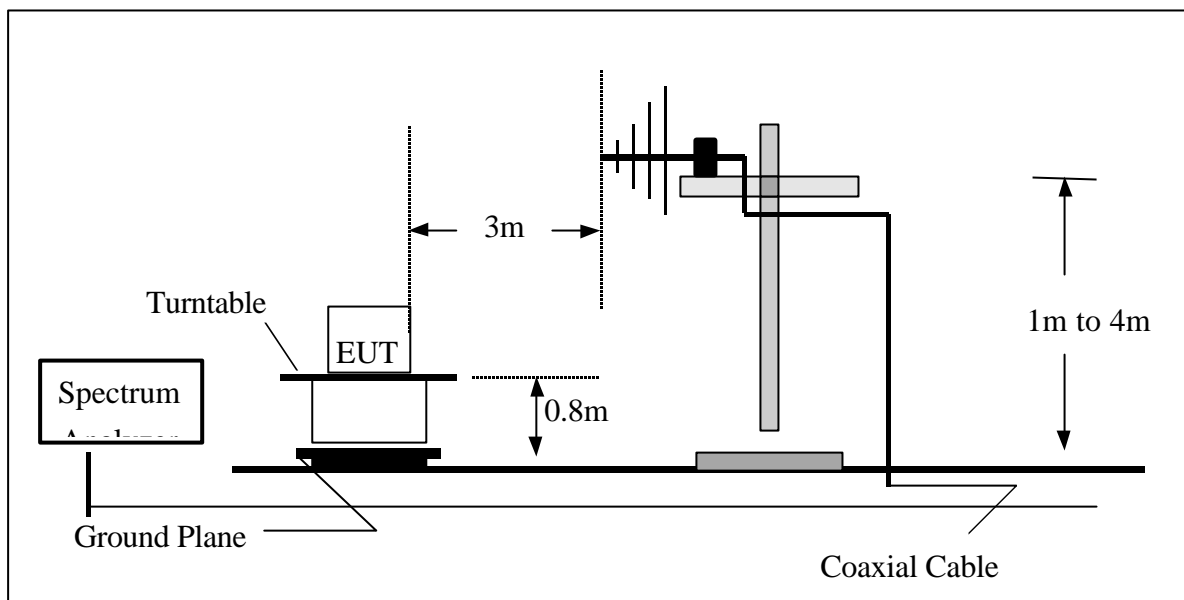

### (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

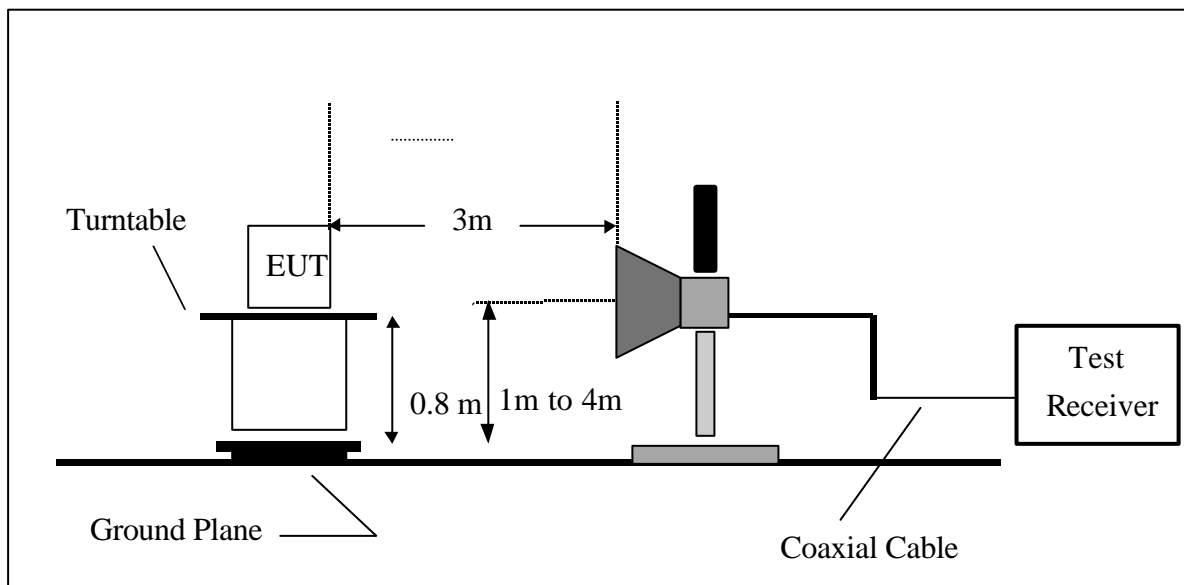

**2-8 Tested Equipments**

Item	Instruments	Mfr/Brand	Model/Type No.	Serial No.	Calibrated Date	Next Cali. Date	Note
1	LISN	EMCO	3825/2	9605-2539	2001-06-22	2002-06-21	
2	LISN	Rolf Heine	NNB-2/16Z	98083	2001-10-20	2002-10-19	✓
3	LISN	Rolf Heine	NNB-2/16Z	98053	2001-11-22	2002-11-21	✓
4	Pulse Limiter	Electro-Metrics	EM-7600	112644	2001-02-09	2002-02-08	✓
5	50 Terminator	N/A	N/A	N/A	2001-05-21	2002-05-20	✓
6	Test Cable	N/A	C01	N/A	2001-12-08	2002-12-07	✓
7	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2001-10-27	2002-10-26	
8	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3060	2001-10-20	2002-10-19	✓
9	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9161	4022	2001-07-04	2002-07-03	
10	Test Cable	N/A	10M_OS01	N/A	2001-12-08	2002-12-07	
11	Test Cable	N/A	OS01-1/-2	N/A	2001-12-08	2002-12-07	
12	Test Cable	N/A	10M_OS02	N/A	2001-12-08	2002-12-07	✓
13	Test Cable	N/A	OS02-1/-2/-3	N/A	2001-12-08	2002-12-07	✓
14	RF Switch	Anritsu	MP59B	M65982	2001-12-10	2002-12-09	✓
15	Quasi-Peak Adapter	HP	85650A	2521A00844	2001-09-24	2002-03-23	✓
16	RF Pre-Selector	HP	85685A	2648A00417	2001-09-24	2002-03-23	✓
17	Spectrum Analyzer	HP	85680B	2634A03025	2001-09-24	2002-03-23	✓
18	Spectrum Monitor	HP	85662B	2648A13616	2001-09-24	2002-03-23	✓
19	Pre-Amplifier	Anritsu	MH648A	M09961	2001-12-10	2002-12-09	✓
20	Spectrum Analyzer	ADVAN TEST	R3261C	81720298	2001-08-17	2002-08-16	
21	Test Receiver	R&S	ESH3	860156/018	2001-10-23	2002-10-22	
22	Test Receiver	R&S	ESVP	860687/009	2001-10-23	2002-10-22	
23	Test Receiver	MEB	SMV41	130	2001-12-05	2002-12-04	✓
24	Test Receiver	PMM	PMM 9000	4310J01002	2001-12-31	2002-12-30	
25	Horn Antenna	EMCO	3115	9605-4803	2001-05-09	2002-05-08	
26	Test Receiver	R&S	ESMI	843977/005	2001-11-14	2002-11-05	
27	Pre-Amplifier	R&S	ESMI-Z7	1045.5020	2001-05-21	2002-05-20	
28	Absorbing Clamp	R&S	MDS-21	841077/011	2001-08-18	2002-08-17	
29	Voltage Probe	R&S	ESH2-Z3	841.800/023	2001-08-20	2002-08-19	
30	Signal Generator	HP	8648A	3426A01034	2000-02-10	2002-02-09	
31	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
32	Turn Table	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓

**Remark :**

- (1) ✓ indicates the instrument used in this test report.
- (2) N/A denotes No Brand measurement facility.



### 3. Block Diagram(s)

Figure 3.1 Block diagram of system, Page 10.A

#### 4. Conducted Emission Datas

- 4.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-1.17 dB** in mode of **Neutral** terminal **6.52 MHz**

Test Mode : CH1, Powered by battery

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limit(dBuV) New Limit		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	QP-Mode	(dBuV)	Note
0.56	Line	42.61	*	48	*	-5.39	(QP)
0.67	Line	42.91	*	48	*	-5.09	(QP)
2.40	Line	44.01	*	48	*	-3.99	(QP)
6.52	Line	46.23	*	48	*	-1.77	(QP)
17.66	Line	48.24	41.2	48	61	-12.76	(QP)
0.56	Neutral	42.61	*	48	*	-5.39	(QP)
0.64	Neutral	42.91	*	48	*	-5.09	(QP)
2.94	Neutral	44.25	*	48	*	-3.75	(QP)
6.52	Neutral	46.83	*	48	*	-1.17	(QP)
19.12	Neutral	48.24	41.6	48	61	-12.76	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode detector.
- (2) Measuring frequency range from 450KHz to 30MHz.

Review:

*Timent*

Test Engr.:

*James*

Test Date :

Jan. 04, 2002

#### 4. Conducted Emission Datas

**4.1** The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-1.73 dB** in mode of **Neutral** terminal **13.27 MHz**

Test Mode : CH1, Powered by USB Port

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limit(dBuV) New Limit		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	QP-Mode	(dBuV)	Note
0.48	Line	43.51	*	48	*	-4.49	(QP)
0.56	Line	42.61	*	48	*	-5.39	(QP)
0.64	Line	42.91	*	48	*	-5.09	(QP)
0.65	Line	44.51	*	48	*	-3.49	(QP)
2.45	Line	44.1	*	48	*	-3.90	(QP)
0.56	Neutral	42.61	*	48	*	-5.39	(QP)
0.64	Neutral	42.91	*	48	*	-5.09	(QP)
0.65	Neutral	44.51	*	48	*	-3.49	(QP)
2.49	Neutral	43.2	*	48	*	-4.80	(QP)
6.66	Neutral	44.06	*	48	*	-3.94	(QP)
13.27	Neutral	46.27	*	48	*	-1.73	(QP)


Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode detector.
- (2) Measuring frequency range from 450KHz to 30MHz.

Review:



Test Engr.:



Test Date :

Jan. 04, 2002

#### 4. Conducted Emission Datas

**4.1** The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-1.24 dB** in mode of **Neutral** terminal **6.66 MHz**

Test Mode : CH2, Powered by battery

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limit(dBuV) New Limit		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	QP-Mode	(dBuV)	Note
0.56	Line	42.61	*	48	*	-5.39	(QP)
0.64	Line	42.91	*	48	*	-5.09	(QP)
0.65	Line	43.01	*	48	*	-4.99	(QP)
2.46	Line	43.08	*	48	*	-4.92	(QP)
6.66	Line	46.76	*	48	*	-1.24	(QP)
0.56	Neutral	42.61	*	48	*	-5.39	(QP)
0.64	Neutral	42.91	*	48	*	-5.09	(QP)
0.65	Neutral	43.31	*	48	*	-4.69	(QP)
2.55	Neutral	43.6	*	48	*	-4.40	(QP)
6.59	Neutral	46.55	*	48	*	-1.45	(QP)
13.27	Neutral	38.01	*	48	*	-9.99	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode detector.
- (2) Measuring frequency range from 450KHz to 30MHz.

Review:

*Timent*

Test Engr.:

*James*

Test Date :

Jan. 04, 2002

#### 4. Conducted Emission Datas

**4.1** The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-2.14 dB** in mode of **Neutral** terminal **6.63 MHz**

Test Mode : CH2, Powered by USB Port

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limit(dBuV) New Limit		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	QP-Mode	(dBuV)	Note
0.64	Line	42.91	*	48	*	-5.09	(QP)
0.65	Line	43.41	*	48	*	-4.59	(QP)
2.46	Line	44.4	*	48	*	-3.60	(QP)
4.14	Line	42.81	*	48	*	-5.19	(QP)
18.82	Line	48.32	38.5	48	61	-12.68	(QP)
0.56	Neutral	42.61	*	48	*	-5.39	(QP)
0.64	Neutral	42.91	*	48	*	-5.09	(QP)
0.65	Neutral	43.31	*	48	*	-4.69	(QP)
2.55	Neutral	43.7	*	48	*	-4.30	(QP)
6.63	Neutral	45.86	*	48	*	-2.14	(QP)
17.66	Neutral	44.44	*	48	*	-3.56	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode detector.
- (2) Measuring frequency range from 450KHz to 30MHz.

Review:

*Timent*

Test Engr.:

*James*

Test Date :

Jan. 04, 2002

**4. Radiated Emission Data**

**4-2.** The following data lists the significant emission frequencies, measured emission levels, correction factor (including cable loss antenna factor, and if any needed, the duty cycle correction factor), the corrected field strength, as well as the limitation.

Judgement : Passed by -4.22 dB at 40.558 MHz Ant.Pol.: Vertical  
 Operation frequency 27.04MHz Model No. : CH1, Powered by battery

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
27.045	V	Peak	59.00	-15.78	43.22	80.00	-36.78	F
26.961	V	Peak	51.52	-15.80	35.72	69.50	-33.78	E
27.279	V	Peak	36.10	-15.72	20.38	69.50	-49.12	E
40.558	V	Peak	47.80	-12.02	35.78	40.00	-4.22	H
54.089	V	Peak	*			40.00		H
81.680	V	Peak	*			40.00		H
135.370	V	Peak	42.70	-10.89	31.81	43.50	-11.69	H
189.294	V	Peak	33.10	-12.84	20.26	43.50	-23.24	H
27.045	H	Peak	80.36	-16.36	64.00	80.00	-16.00	F
26.961	H	Peak	75.15	-16.36	58.79	69.50	-10.71	E
27.279	H	Peak	54.98	-16.35	38.63	69.50	-30.87	E
40.800	H	Peak	45.40	-12.02	33.38	40.00	-6.62	H
54.400	H	Peak	*			40.00		H
81.118	H	Peak	*			40.00		H
135.200	H	Peak	36.60	-10.91	25.69	43.50	-17.81	H
194.200	H	Peak	36.00	-13.11	22.89	43.50	-20.61	H

Remark :

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 25MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- (4) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (5) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.109 apply.
- (6) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.
- (7) The IF bandwidth of SPA between 25MHz to 30MHz was 10KHz; 30MHz to 1GHz was 100KHz.

Review:

Timent

Test Engr.:

Jame

Test Date : Jan. 05, 2002

#### 4. Radiated Emission Data

4-2. The following data lists the significant emission frequencies, measured emission levels, correction factor (including cable loss antenna factor, and if any needed, the duty cycle correction factor), the corrected field strength, as well as the limitation.

Judgement : Passed by -3.52 dB at 40.565 MHz Ant.Pol.: Vertical  
 Operation frequency 27.04MHz Model No. : CH1, Powered by USB Port

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
27.045	V	Peak	69.96	-15.78	54.18	80.00	-25.82	F
26.961	V	Peak	66.75	-15.80	50.95	69.50	-18.55	E
27.279	V	Peak	40.98	-15.72	25.26	69.50	-44.24	E
40.565	V	Peak	48.50	-12.02	36.48	40.00	-3.52	H
54.092	V	Peak	*			40.00		H
81.122	V	Peak	*			40.00		H
108.167	V	Peak	44.80	-13.11	31.69	43.50	-11.81	H
135.212	V	Peak	35.30	-10.91	24.39	43.50	-19.11	H
27.045	H	Peak	77.36	-16.36	61.00	80.00	-19.00	F
26.961	H	Peak	71.05	-16.36	54.69	69.50	-14.81	E
27.279	H	Peak	48.98	-16.35	32.63	69.50	-36.87	E
40.534	H	Peak	46.80	-12.02	34.78	40.00	-5.22	H
54.088	H	Peak	*			40.00		H
81.128	H	Peak	*			40.00		H
108.173	H	Peak	44.80	-13.11	31.69	43.50	-11.81	H
135.218	H	Peak	34.50	-10.91	23.59	43.50	-19.91	H

Remark :

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 25MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- (4) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (5) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.109 apply.
- (6) Datas of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.
- (7) The IF bandwidth of SPA between 25MHz to 30MHz was 10KHz; 30MHz to 1GHz was 100KHz.

Review:

Timent

Test Engr.:

Jame

Test Date : Jan. 05, 2002

#### 4. Radiated Emission Data

**4.2** The following data lists the significant emission frequencies, measured emission levels, correction factor (including cable loss antenna factor, and if any needed, the duty cycle correction factor), the corrected field strength, as well as the limitation.

Judgement : Passed by -17.29 dB at 27.145 MHz Ant.Pol.: Vertical  
 Operation frequency 27.14 MHz Mode : CH2, Powered by battery

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
27.140	V	Peak	77.47	-16.36	61.11	80.00	-18.89	F
26.961	V	Peak	56.95	-16.36	40.59	69.50	-28.91	E
27.279	V	Peak	63.48	-16.35	47.13	69.50	-22.37	E
54.281	V	Peak	*			40.00		H
81.416	V	Peak	*			40.00		H
162.850	V	Peak	32.80	-10.45	22.35	43.50	-21.15	H
167.570	V	Peak	34.00	-10.68	23.32	43.50	-20.18	H
193.980	V	Peak	37.50	-13.10	24.40	43.50	-19.10	H
27.145	H	Peak	79.07	-16.36	62.71	80.00	-17.29	F
26.961	H	Peak	56.85	-16.36	40.49	69.50	-29.01	E
27.279	H	Peak	61.58	-16.35	45.23	69.50	-24.27	E
54.270	H	Peak	*			40.00		H
81.418	H	Peak	*			40.00		H
108.964	H	Peak	37.50	-13.02	24.48	43.50	-19.02	H
193.974	H	Peak	33.10	-13.10	20.00	43.50	-23.50	H
216.818	H	Peak	32.20	-13.30	18.90	46.00	-27.10	H

Remark :

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 25MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- (4) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (5) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.109 apply.
- (6) Datas of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.
- (7) The IF bandwidth of SPA between 25MHz to 30MHz was 10KHz; 30MHz to 1GHz was 100KHz.

Review:

Timent

Test Engr.:

James

Test Date : Jan. 03, 2002



#### 4. Radiated Emission Data

**4.2** The following data lists the significant emission frequencies, measured emission levels, correction factor (including cable loss antenna factor, and if any needed, the duty cycle correction factor), the corrected field strength, as well as the limitation.

Judgement : Passed by -2.62 dB at 40.704 MHz Ant.Pol.: Vertical  
 Operation frequency 27.14 MHz Mode : CH2, Powered by USB Port

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
27.145	V	Peak	74.97	-16.36	58.61	80.00	-21.39	F
26.961	V	Peak	55.45	-16.36	39.09	69.50	-30.41	E
27.279	V	Peak	61.58	-16.35	45.23	69.50	-24.27	E
40.704	V	Peak	49.40	-12.02	37.38	40.00	-2.62	H
54.268	V	Peak	*			40.00		H
81.428	V	Peak	*			40.00		H
108.560	V	Peak	44.30	-13.08	31.22	43.50	-12.28	H
190.025	V	Peak	49.80	-12.90	36.90	43.50	-6.60	H
27.145	H	Peak	80.17	-16.36	63.81	80.00	-16.19	F
26.961	H	Peak	56.65	-16.36	40.29	69.50	-29.21	E
27.279	H	Peak	62.88	-16.35	46.53	69.50	-22.97	E
40.714	H	Peak	46.00	-12.02	33.98	40.00	-6.02	H
54.262	H	Peak	*			40.00		H
81.422	H	Peak	*			40.00		H
108.560	H	Peak	44.30	-13.08	31.22	43.50	-12.28	H
135.726	H	Peak	33.70	-10.87	22.83	43.50	-20.67	H

Remark :

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 25MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- (4) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (5) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.109 apply.
- (6) Datas of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20Db below the permissible limits or the field strength is too small to be measured.
- (7) The IF bandwidth of SPA between 25MHz to 30MHz was 10KHz; 30MHz to 1GHz was 100KHz.

Review:

James

Test Engr.:

James

Test Date : Jan. 05, 2002

### 4.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} + \text{CL} - \text{AG}$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

**Remark :**

(1) The Correction Factor = AF + CF - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

**Example of Calculation:**

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dB and a Cable Factor of 1.1 dBuV. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = \text{AF} + \text{CF} - \text{AG} = 7.2 + 1.1 - 0 = 8.3 \text{ (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$\text{FS} = \text{RA} + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV/m)}.$$



FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted



to its corresponding level in uV/m as:

$$\text{Log}^{-1}\{(32.0\text{dBuV/m})/20\} = 39.8 \text{ (uV/m)}$$

## 4.4 Bandwidth requirement Mode : CH1, Powered by battery

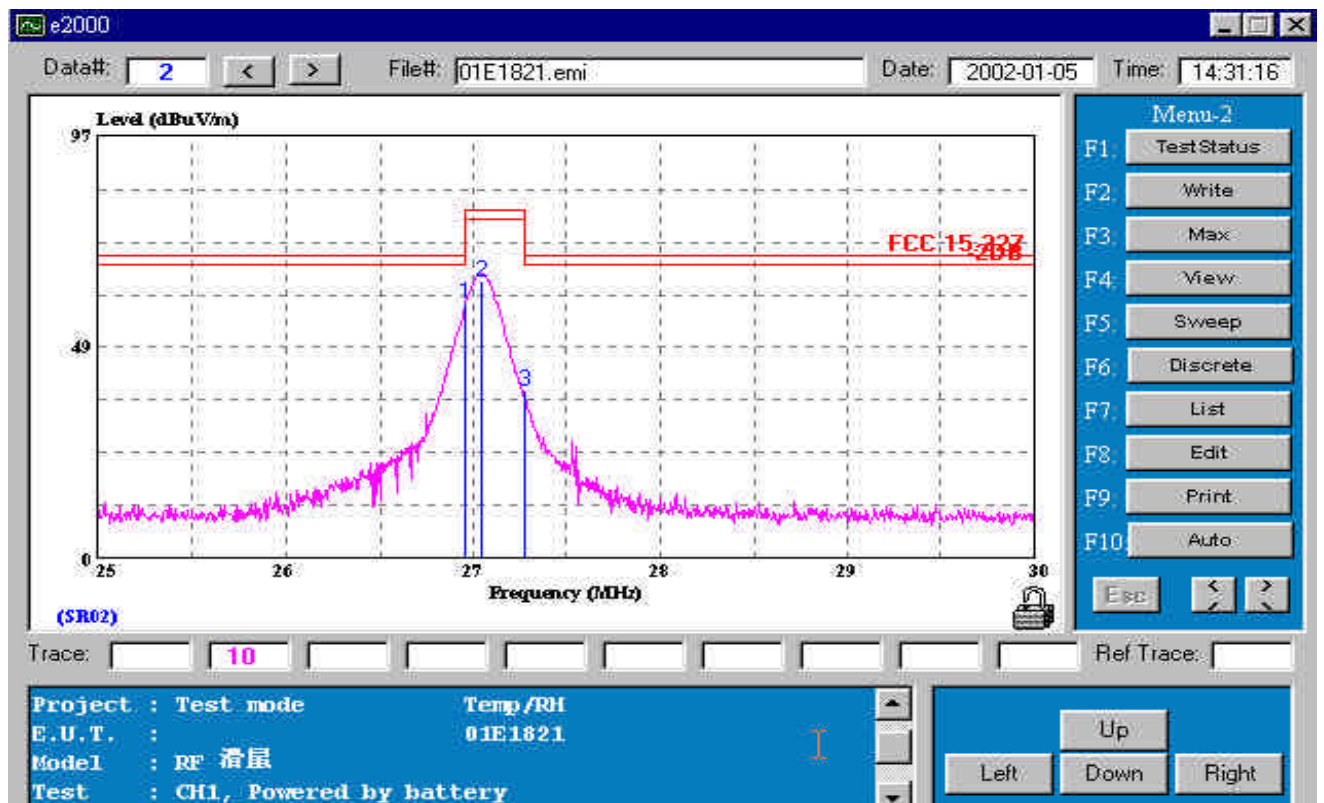
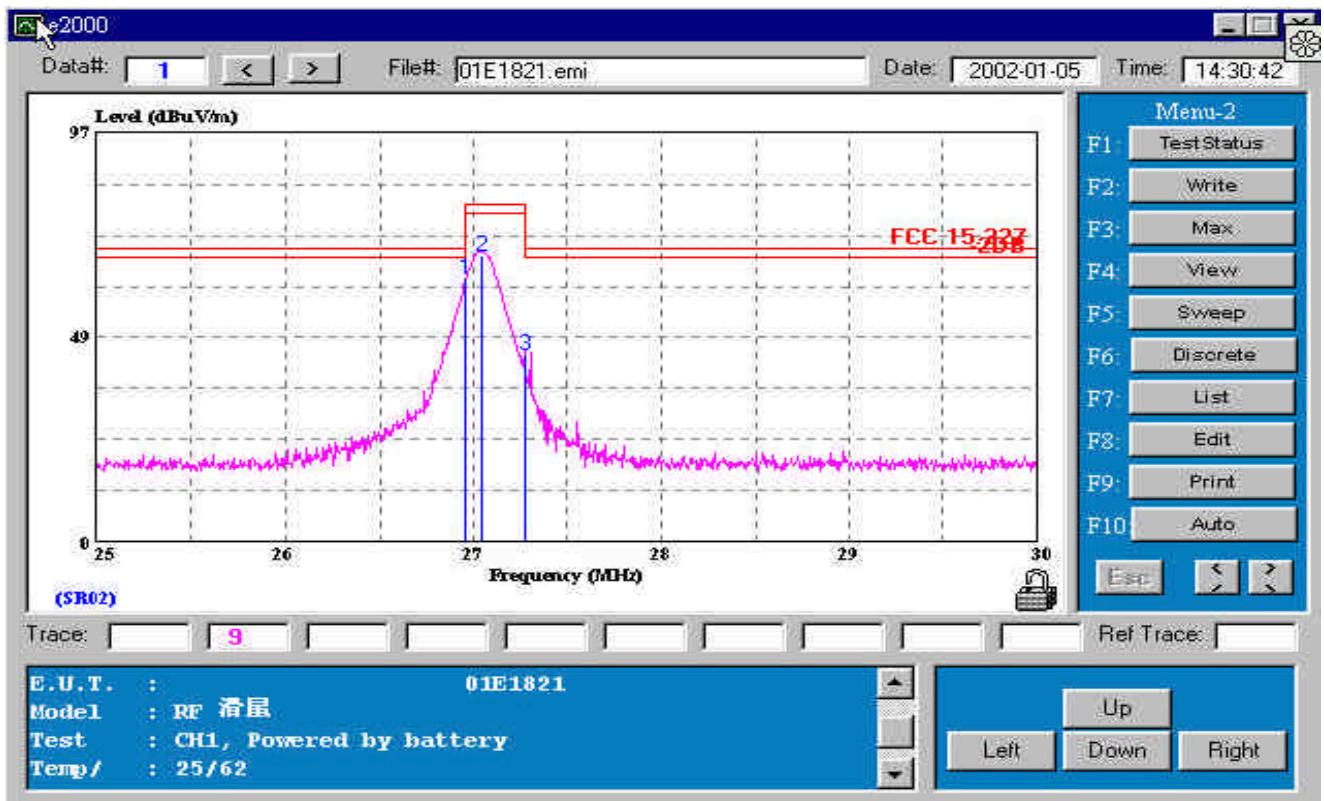


## 4.4 Bandwidth requirement Mode : CH1, Powered by USB Port

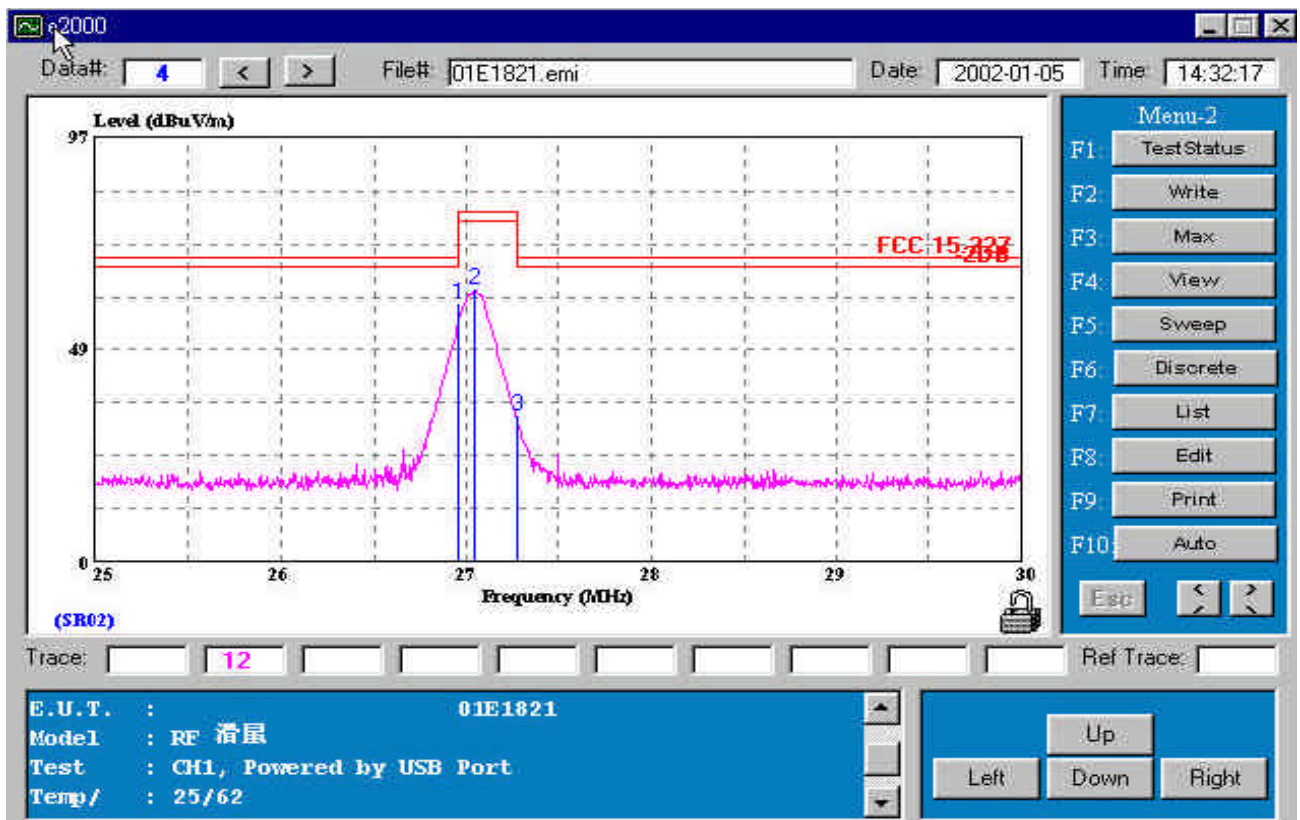
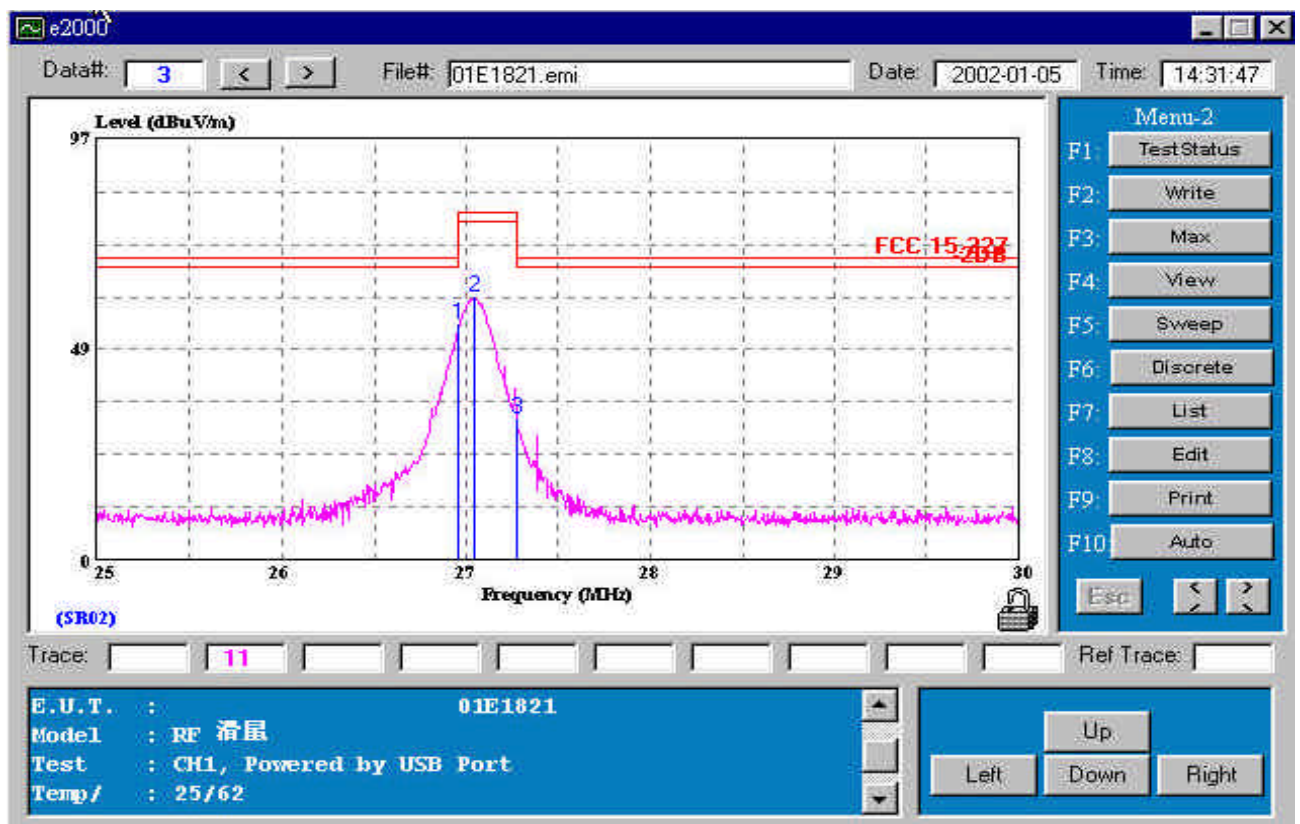




## 4.4 Bandwidth requirement Mode : CH2, Powered by battery

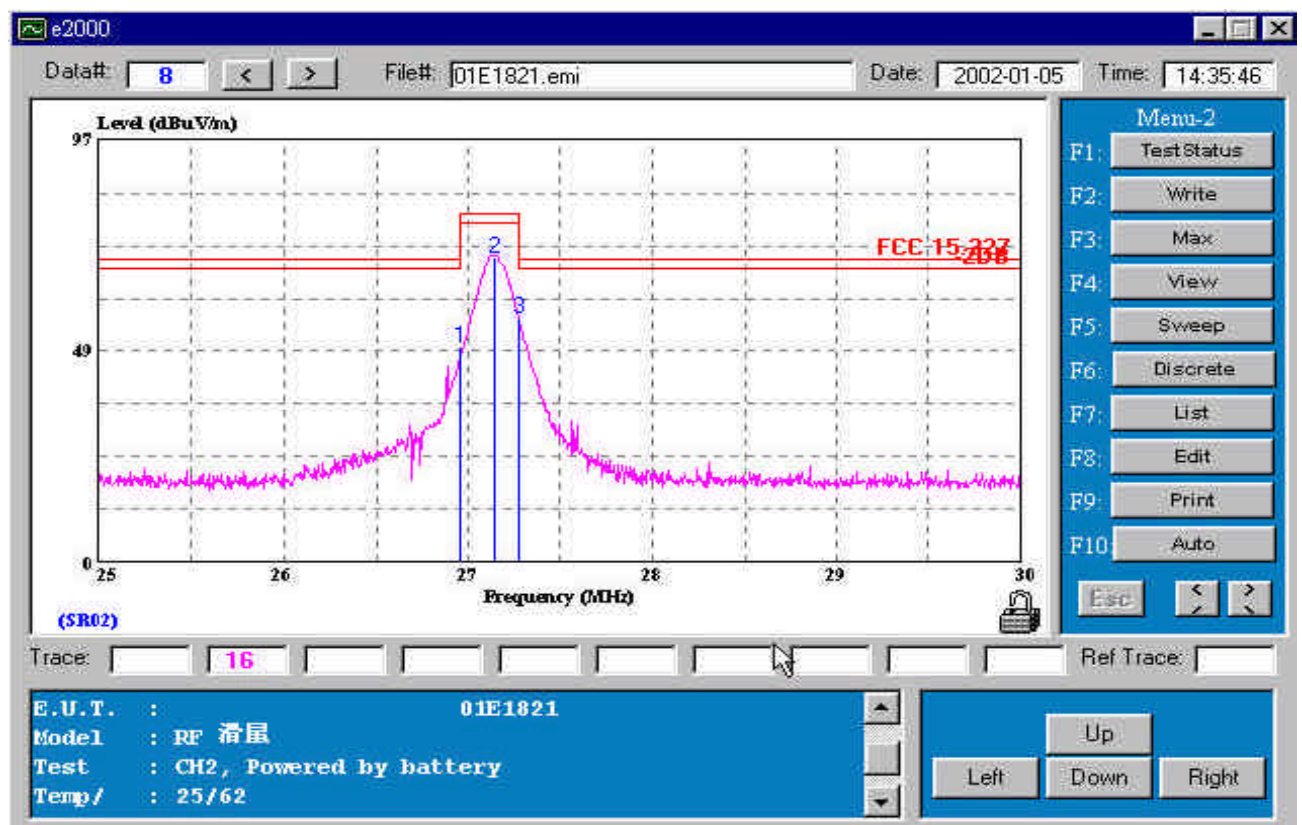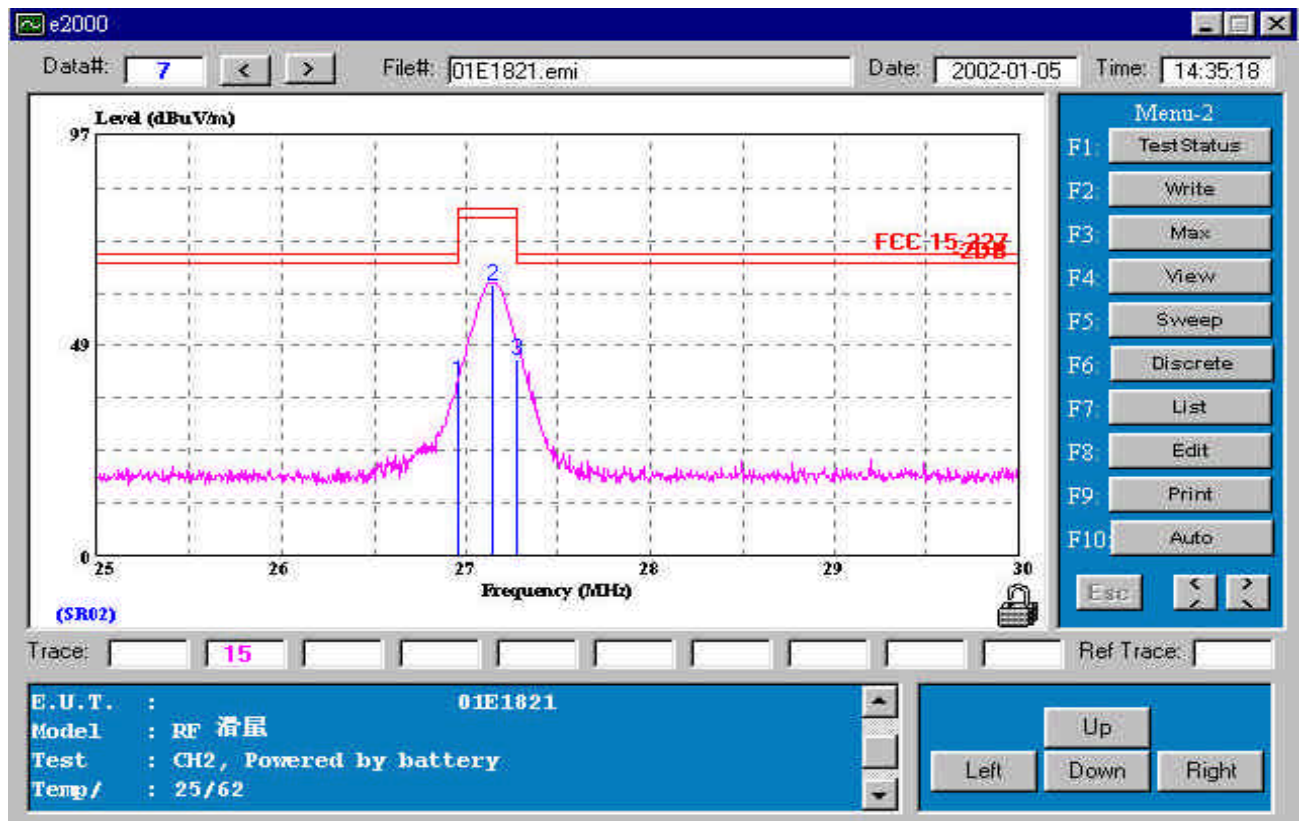

## 4.4 Bandwidth requirement Mode : CH2, Powered by USB Port

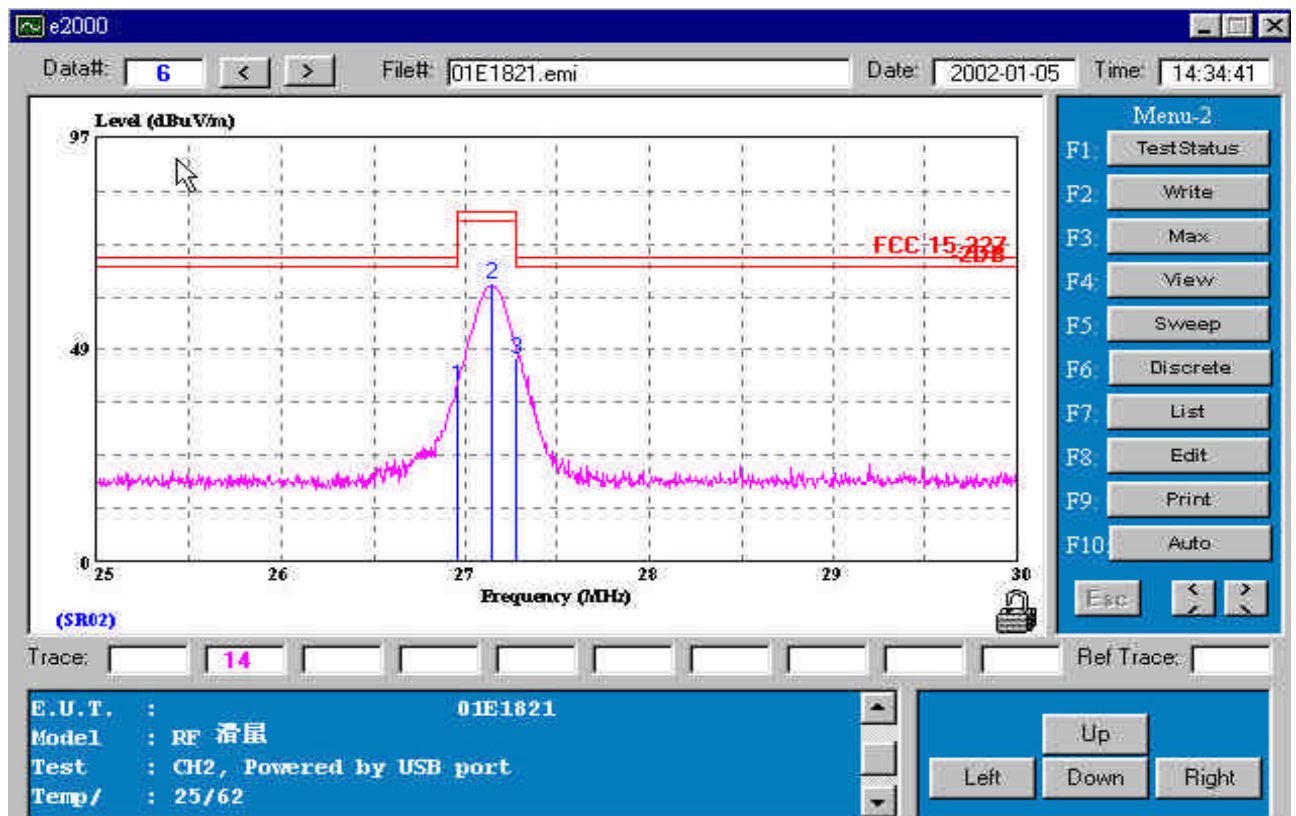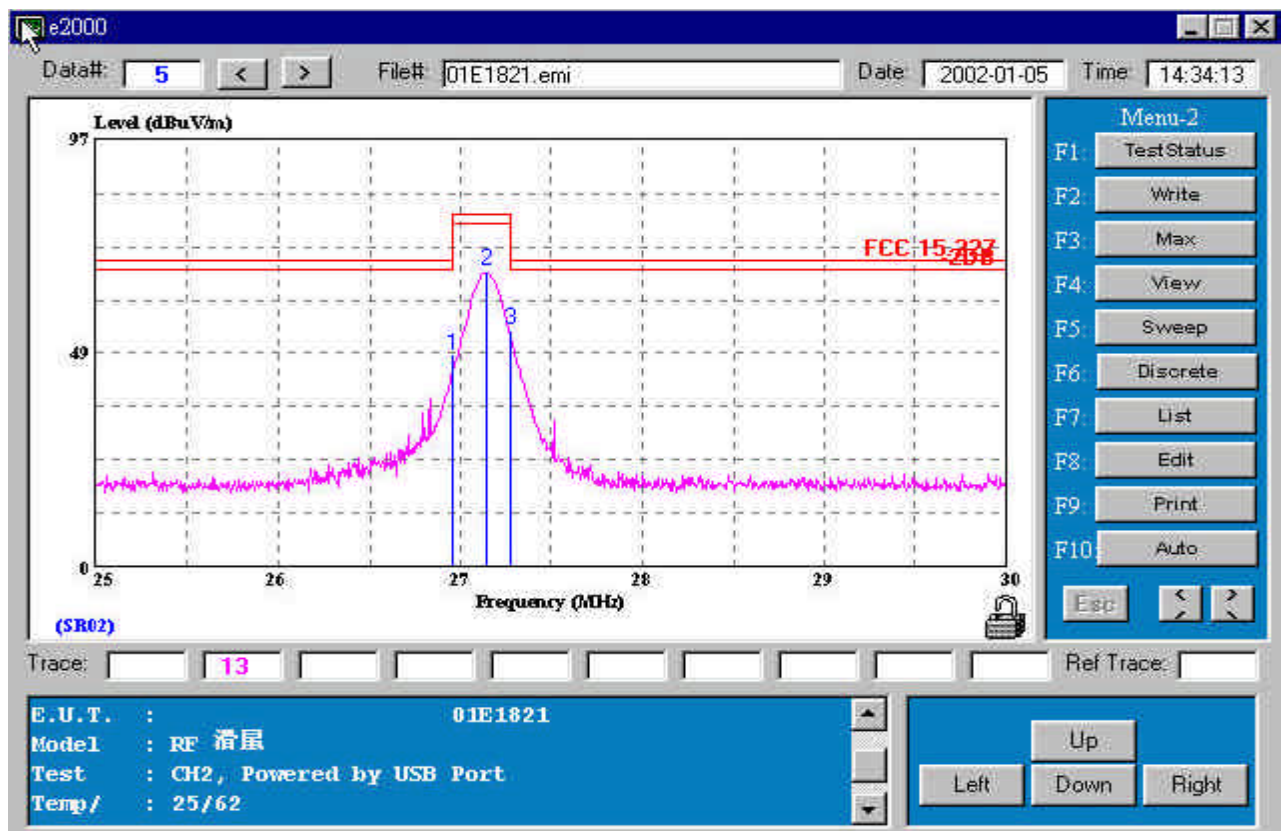

## **Attachment**

### **Photos of Tested EUT**

- |                      |                                    |
|----------------------|------------------------------------|
| <b>1. Photo # 1.</b> | <b>Front View / Rear View</b>      |
| <b>2. Photo # 2.</b> | <b>Unit partially Disassembled</b> |
| <b>3. Photo # 3</b>  | <b>Unit partially Disassembled</b> |
| <b>4. Photo # 4</b>  | <b>Unit partially Disassembled</b> |
| <b>5. Photo # 5</b>  | <b>Unit partially Disassembled</b> |

# **Attachment**

## **User's Manual**



**Photo # 1. Front View Rear View**

**Mode : Powered by battery**




**Mode : Powered by USB Port**



**Photo # 2. Unit partially Disassembled**





**Photo # 3. Unit partially Disassembled**

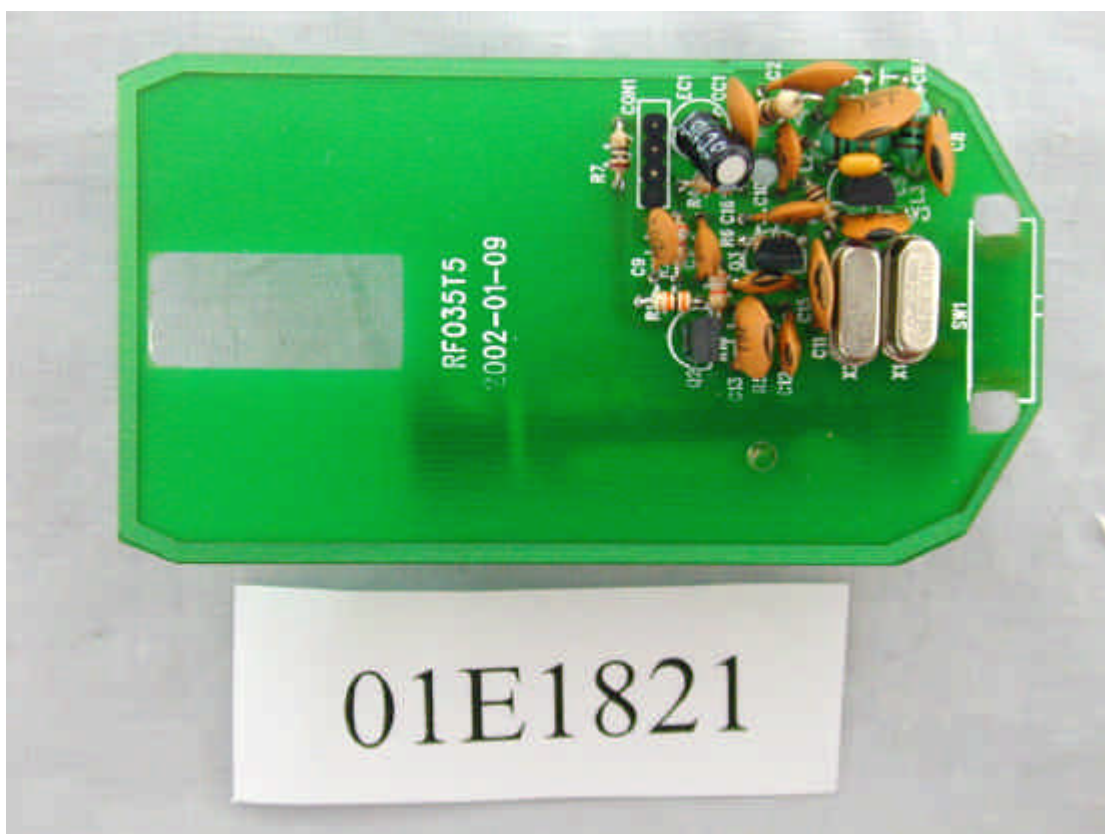



**Photo # 4.**      **Unit partially Disassembled**

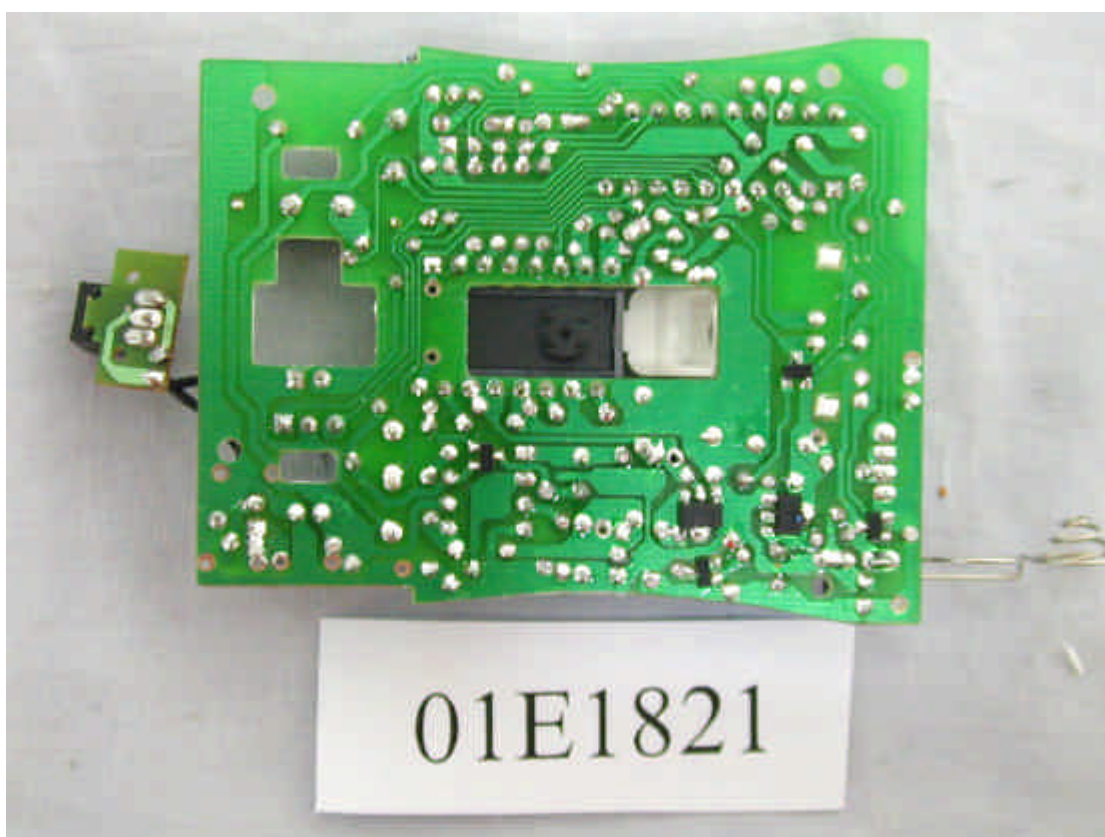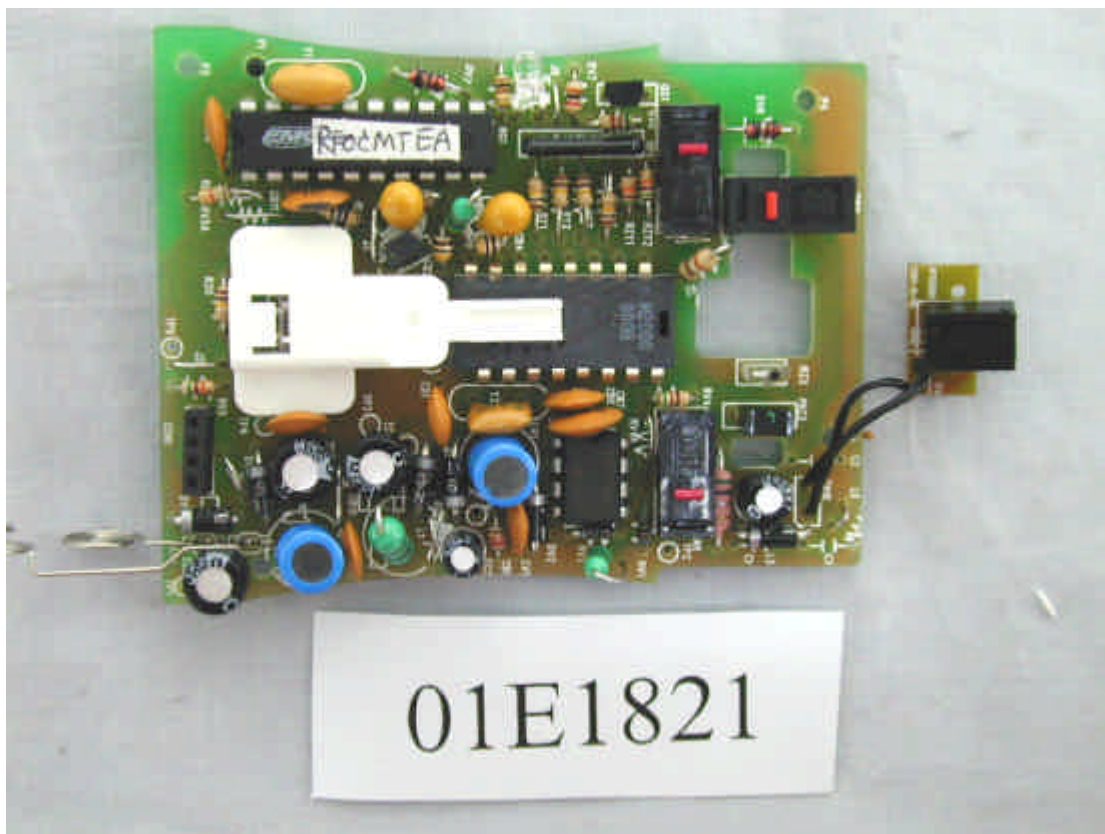

**Photo # 5. Unit partially Disassembled**

