

System Check_H5250


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.748 \text{ S/m}$; $\epsilon_r = 36.88$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2022/4/18;
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=10.00 \text{ mm}$, $dy=10.00 \text{ mm}$
Maximum value of SAR (interpolated) = 22.2 W/kg

Pin=100mW/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 57.229 V/m ; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 37.6 W/kg
SAR(1 g) = 7.60 W/kg ; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 23.4 W/kg

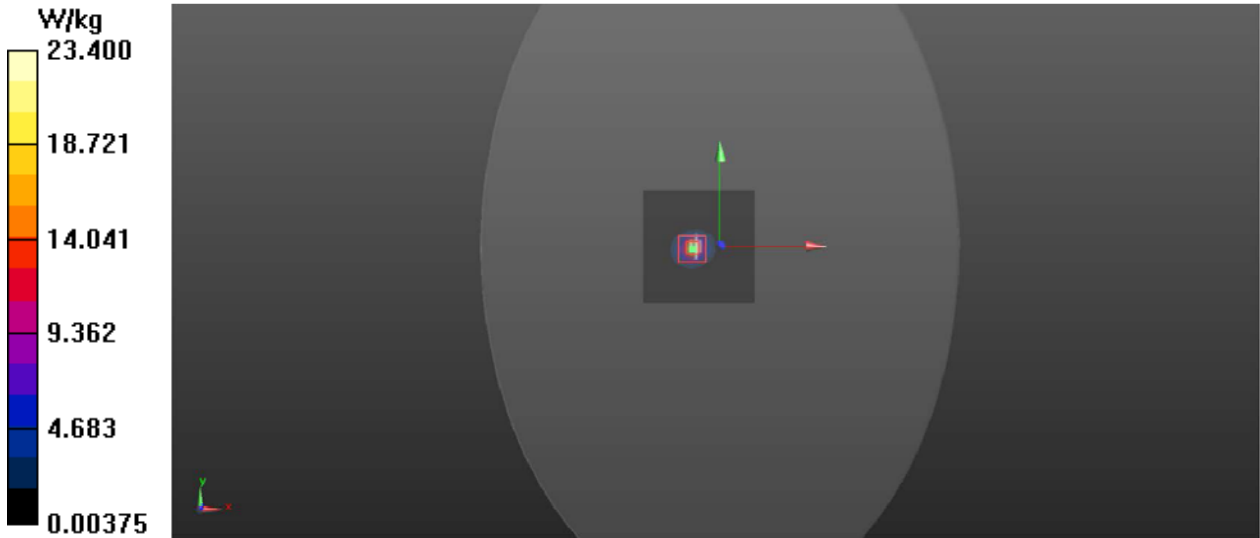

System Check_H5750

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5750 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5750\text{ MHz}$; $\sigma = 5.415\text{ S/m}$; $\epsilon_r = 35.658$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $21.0\text{ }^\circ\text{C}$; Liquid Temperature : $20.8\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2022/4/18;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=10.00\text{ mm}$, $dy=10.00\text{ mm}$

Maximum value of SAR (interpolated) = 20.6 W/kg

Pin=100mW/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$

Reference Value = 50.784 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.50 W/kg ; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

