



TEST REPORT nr. R15131301

Federal Communication Commission (FCC)

Test item

Description.....: WITTY SEM
Trademark.....: MICROGATE
Model/Type: WIT005
FCC ID.....: 2ADEOWIT005

Test Specification

Standard: FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 231

Client's name: MICROGATE S.r.l.

Address: Via Stradivari, 4 – 39100 Bolzano (BZ) – ITALY

Manufacturer's name : Same as client

Address: --

Report

Tested by: A. Bertezolo – Technician

Approved by: R. Beghetto – Laboratory Manager

Date of issue: 16.02.16

Contents.....: 44 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	4
5. PHOTOGRAPH(S) OF EUT	5
5.1 PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST	6
7. MEASUREMENT UNCERTAINTY	7
8. REFERENCE DOCUMENTS	8
9. DEVIATION FROM TEST SPECIFICATION	9
10. TEST CASE VERDICTS	9
11. RESULTS	10
11.1 ANTENNA REQUIREMENTS	11
11.2 RADIATED EMISSIONS	12
11.3 FUNDAMENTAL AND SPURIOUS EMISSION (≤ 1 GHz)	29
11.4 SPURIOUS EMISSION (> 1 GHz)	33
11.5 OCCUPIED CHANNEL BANDWIDTH	37
11.6 PERIODIC OPERATION CHARACTERISTICS	41



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 231

Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.203	Antenna requirements	1	Complies
Part 15.207	Conducted emissions	--	N.A. (+)
Part 15.209	Radiated emissions	2	Complies
Part 15.209 and 15.231(a)	Fundamental and spurious emissions (≤ 1 GHz)	3	Complies
Part 15.209 and 15.231	Spurious emissions (> 1 GHz)	4	Complies
Part 15.231(c)	Occupied channel bandwidth	5	Complies
Part 15.231(a)	Periodic operation characteristics	6	Complies

(+) Devices which only employ battery power. See FCC Part 15.207 (c)

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification

2. Description of Equipment under test (EUT)

Power supply : 3,7 Vdc from battery

Serial Number.....: --

Type of equipment : ☒ Transmitter Unit

☒ Receiver Unit

Type of station : ☐ Fixed station

☒ Portable station

- Mobile station

Nominal frequency.....: 434,01 MHz

2.1 Test Site

Company.....: CMC Centro Misure Compatibilità S.r.l.

Address.....: Via dell'Elettronica, 12/C

36016 Thiene (VI) – ITALY

Test site facility's FCC registration number: 271947

3. Testing and sampling

Date of receipt of test item : 12.05.15

Testing start date : 30.07.15

Testing end date: 22.10.15

Samples tested nr.....: 1

Sampling procedure. : Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion

Internal identification : adhesive label with the product number
P150534

4. Operative conditions

EUT exercising : EUT in continuous transmission at maximum power



5. Photograph(s) of EUT

5.1 Photograph(s) of EUT





6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '15	January '16
CMC S108	EMCO	3115	Horn Antenna	9811-5622	May '13	May '16
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	January '13	January '16
CMC S129	Rohde & Schwarz	ESPI7	Receiver	836.914/004	January '15	January '16
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '13	May '16
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '15	January '16
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '15	January '16
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '15	January '16



7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.6 dB	1
(50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±2.8 dB	1
(50Ω/5μH AMN) - (150 kHz – 108 MHz)	±2.6 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
Disturbance Power (30 MHz – 300 MHz)		
	±3.7 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	±4.0 dB	1
(30 MHz – 1000 MHz)	±4.3 dB	1
(1 GHz – 6 GHz)	±4.5 dB	1
Electromagnetic field EMF		
	±10.5 %	1
Harmonic current emissions test		
	±1.8 %	1
Voltage fluctuation and flicker test		
	±2.6 %	1
Insertion loss test		
	±2.0 dB	1
Radiated electromagnetic disturbance test (loop antenna)		
	±2.1 dB	1
Radiated electromagnetic field immunity test		
	0.81 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test		
	0.81 V/m at 3V/m	1
Injected currents immunity test		
	0.45 V at 3V	1
Bulk current		
	3.7 mA at 60 mA	1
Power frequency magnetic field immunity test		
	0.1 A/m at 10 A/m	1
Effective radiated power (F < 1GHz)		
	±4.3 dB	1
Effective radiated power (F > 1GHz)		
	±3.7 dB	1
Frequency error		
	< 1x10 ⁻⁷	1
Modulation bandwidth		
	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission		
	±0.7 dB	1
Adjacent channel power		
	±1.2 dB	1
Blocking		
	±1.2 dB	1
Electrostatic discharge immunity test		
		2
Electrical fast transients / burst immunity test		
		2
Surge immunity test		
		2
Pulse magnetic field immunity test		
		2
Damped oscillatory magnetic field immunity test		
		2
Short interruption immunity test		
		2
Voltage transient emission test		
	±2.2 %	1
Transient immunity test		
		2

Notes

Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2014	--
ANSI C63.4:2009	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 8.2 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object..... : N.A.

Test item does meet the requirement..... : Complies

Test item does not meet the requirement..... : Does not comply

Test not performed : N.E.






11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 8.2.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirement.	The sample complies with the requirement.	The sample does not comply with the requirement.	The sample does not comply with the requirement.
The measurement results is within the specification limit when the measurement uncertainty is taken into account.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	101	45

Result

Antenna Type	External R.F. power amplifier	Remarks	Results
Integral antenna	Not Present	--	Complies

Result: The requirements are met



11.2 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 1000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45

Acceptance limits

Frequency range (MHz)	Limits [dB(μV/m)]
0,009 to 0,490	128,51 to 93,80
0,490 to 1,705	73,80 to 62,97
1,705 to 30	69,54
30 to 88	40
88 to 216	43,52
216 to 960	46,02
Above 960	53,98

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Setup

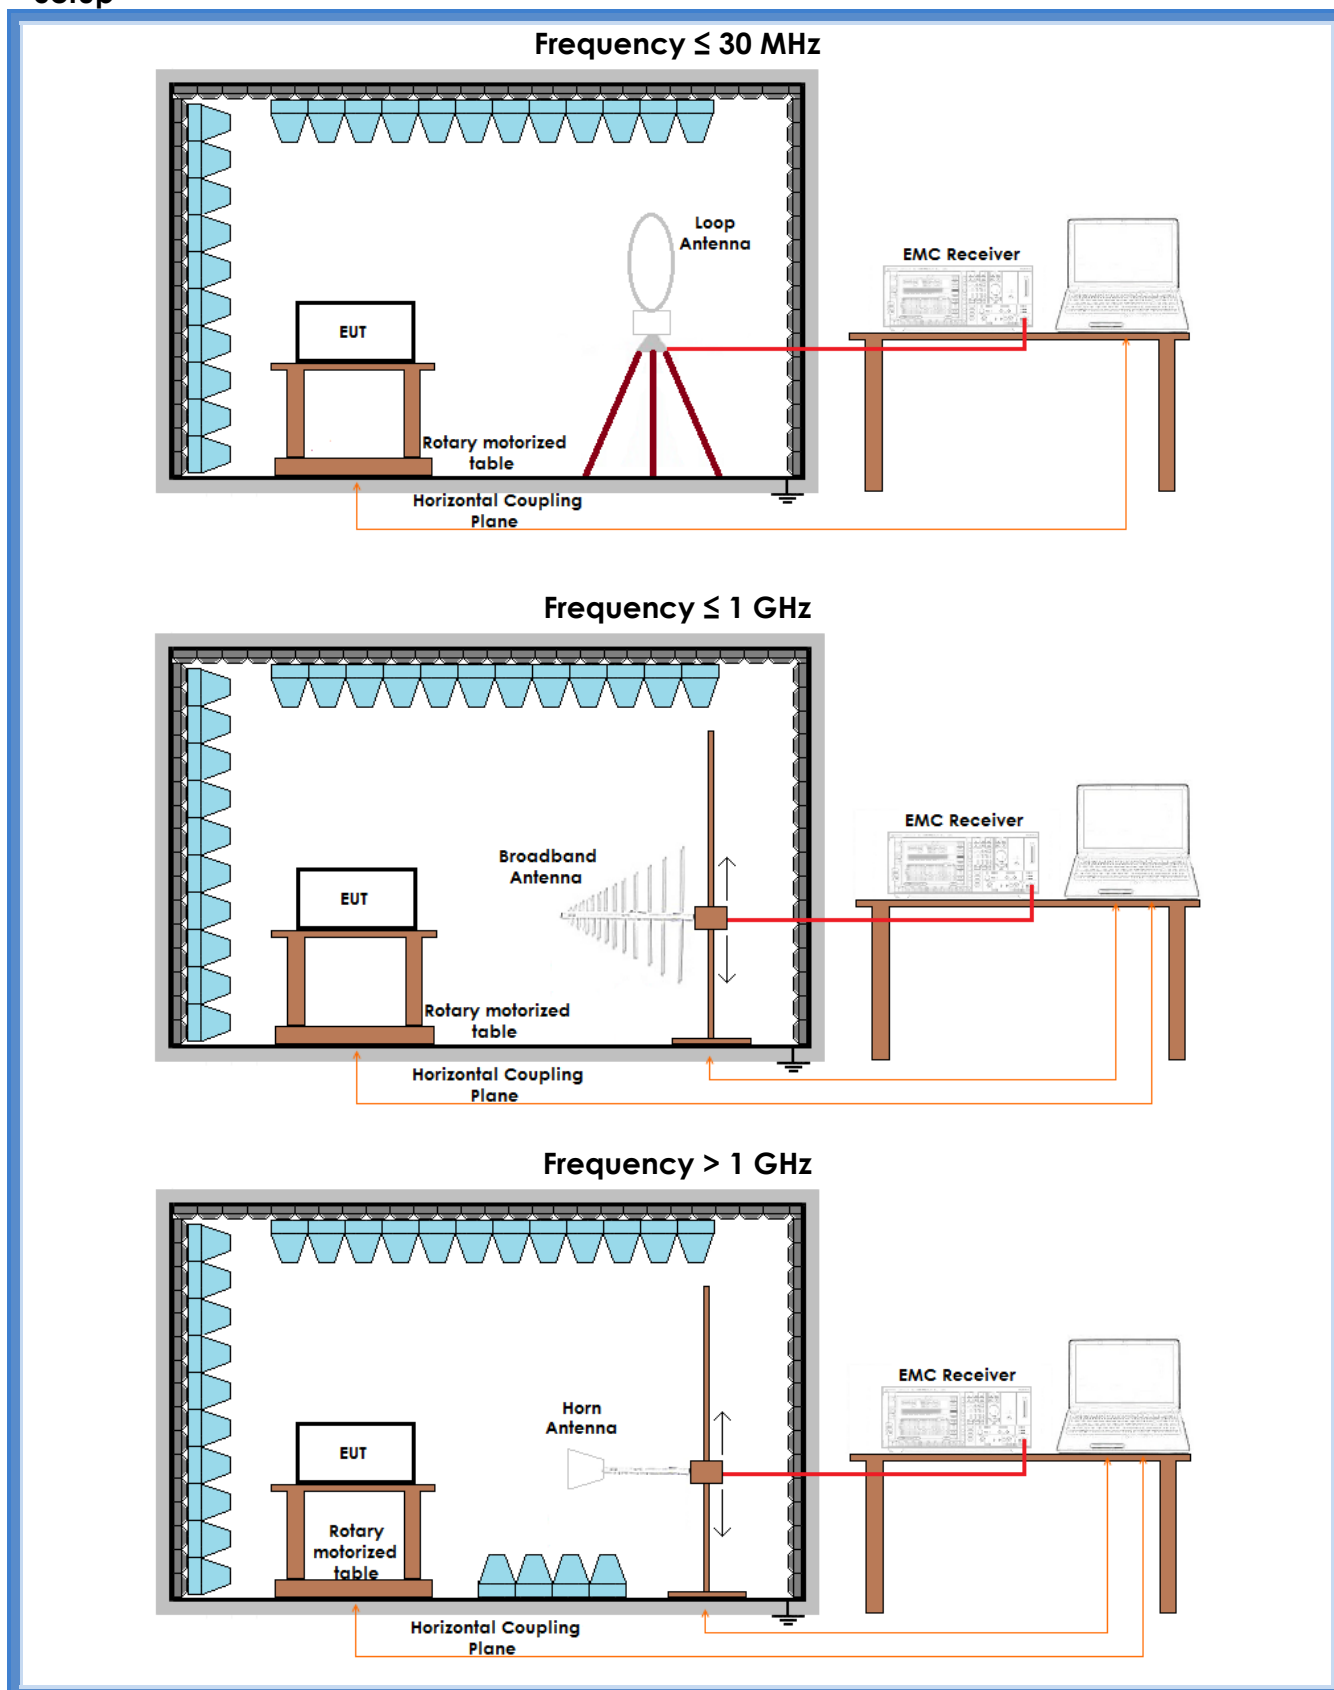



Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
Loop	0,009 – 30	G15131313	CH 1 (lowest channel)	Complies
H	30 – 1000	G15131312	CH 1 (lowest channel)	Complies
V	30 – 1000	G15131311	CH 1 (lowest channel)	Complies
H	1000 – 6000	G15131317	CH 1 (lowest channel)	Complies
V	1000 – 6000	G15131318	CH 1 (lowest channel)	Complies
Loop	0,009 – 30	G15131314	CH 8 (highest channel)	Complies
H	30 – 1000	G15131306	CH 8 (highest channel)	Complies
V	30 – 1000	G15131305	CH 8 (highest channel)	Complies
H	1000 – 6000	G15131315	CH 8 (highest channel)	Complies
V	1000 – 6000	G15131316	CH 8 (highest channel)	Complies
Remarks: Peak above the limit on graph G15131317 is inside a restricted band, on these restricted bands the limits is 20 dB lower than the limit provided for the fundamental				

Graphs Legend


PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

G15131305

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15131305
Test Spec

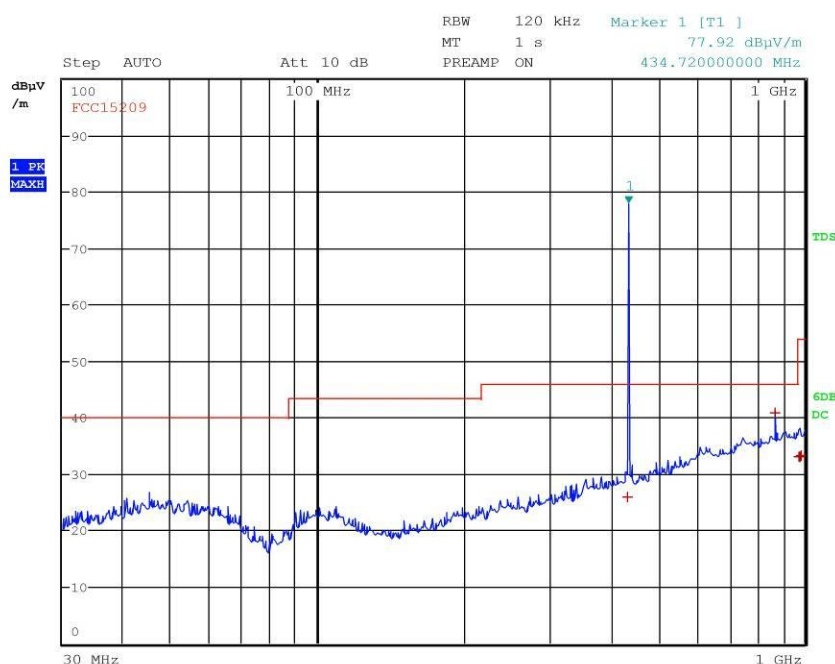

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Peaks: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	433.20000000 MHz	25.95	Quasi Peak	-20.07
1	869.44000000 MHz	40.96	Quasi Peak	-5.06
1	970.44000000 MHz	33.07	Quasi Peak	-20.91
1	975.84000000 MHz	33.15	Quasi Peak	-20.83
1	976.80000000 MHz	33.18	Quasi Peak	-20.80
1	981.72000000 MHz	33.23	Quasi Peak	-20.75



G15131306

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131306
Test Spec

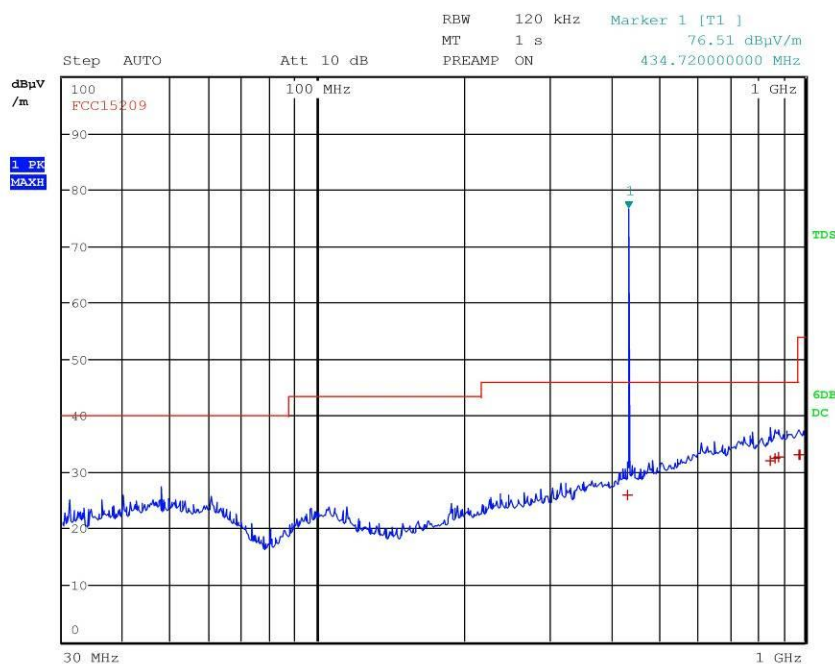

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Peaks: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	433.20000000 MHz	25.85	Quasi Peak	-20.17
1	850.20000000 MHz	32.09	Quasi Peak	-13.93
1	869.84000000 MHz	32.43	Quasi Peak	-13.59
1	884.40000000 MHz	32.68	Quasi Peak	-13.34
1	970.88000000 MHz	33.06	Quasi Peak	-20.92
1	979.00000000 MHz	33.16	Quasi Peak	-20.82



G15131311

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131311
Test Spec

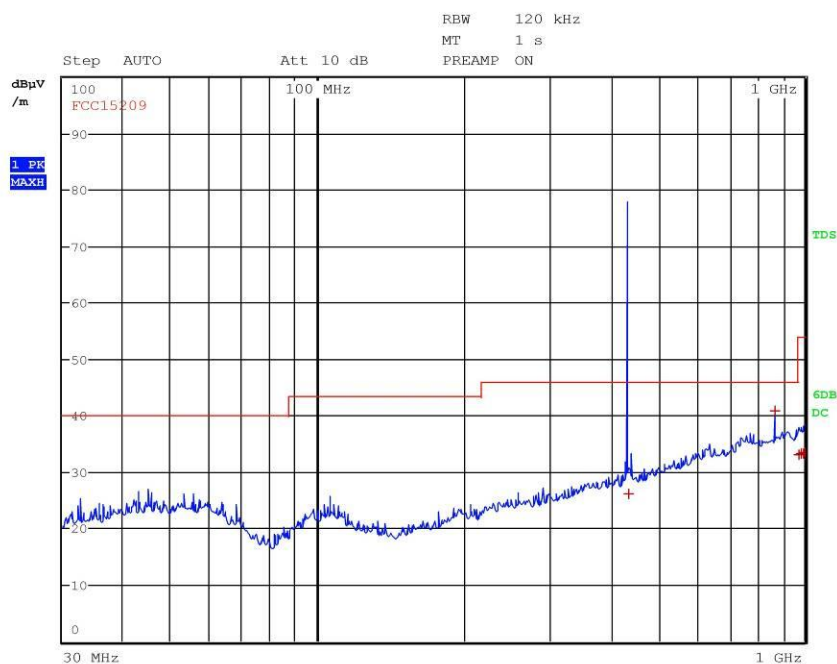

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Peaks: 6

Trace	Frequency	Level (dB μ V/m)	Detector	Delta Limit/dB
1	434.50000000 MHz	26.23	Quasi Peak	-19.79
1	866.64000000 MHz	40.95	Quasi Peak	-5.07
1	973.56000000 MHz	33.14	Quasi Peak	-20.84
1	985.60000000 MHz	33.29	Quasi Peak	-20.69
1	993.36000000 MHz	33.36	Quasi Peak	-20.62
1	999.88000000 MHz	33.47	Quasi Peak	-20.51



G15131312

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131312
Test Spec

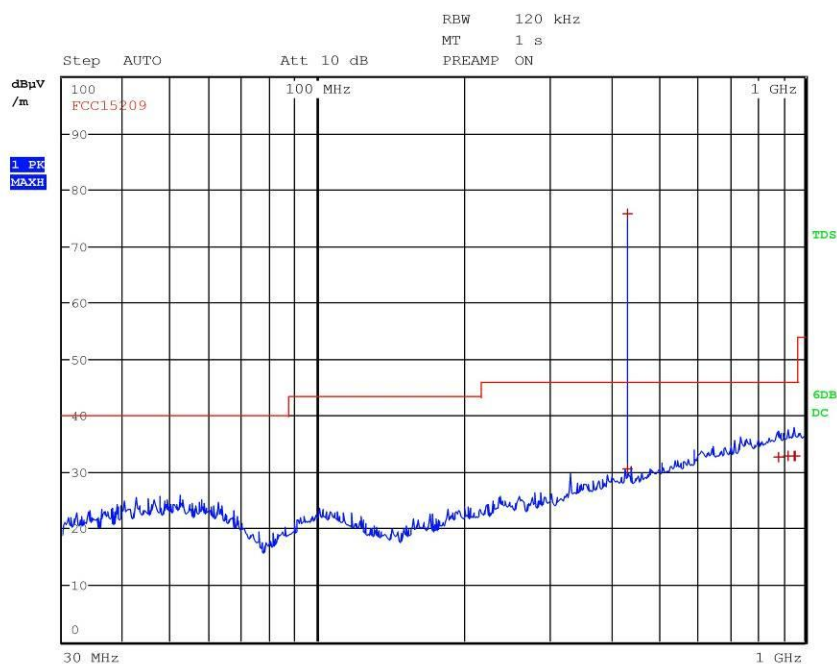

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Peaks: 6

Trace	Frequency	Level (dB μ V/m)	Detector	Delta Limit/dB
1	433.320000000 MHz	75.80	Quasi Peak	29.78
1	434.500000000 MHz	30.64	Quasi Peak	-15.38
1	882.320000000 MHz	32.64	Quasi Peak	-13.38
1	922.080000000 MHz	32.78	Quasi Peak	-13.24
1	948.480000000 MHz	32.83	Quasi Peak	-13.19
1	952.800000000 MHz	32.86	Quasi Peak	-13.16



G15131313


Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131313
Test Spec

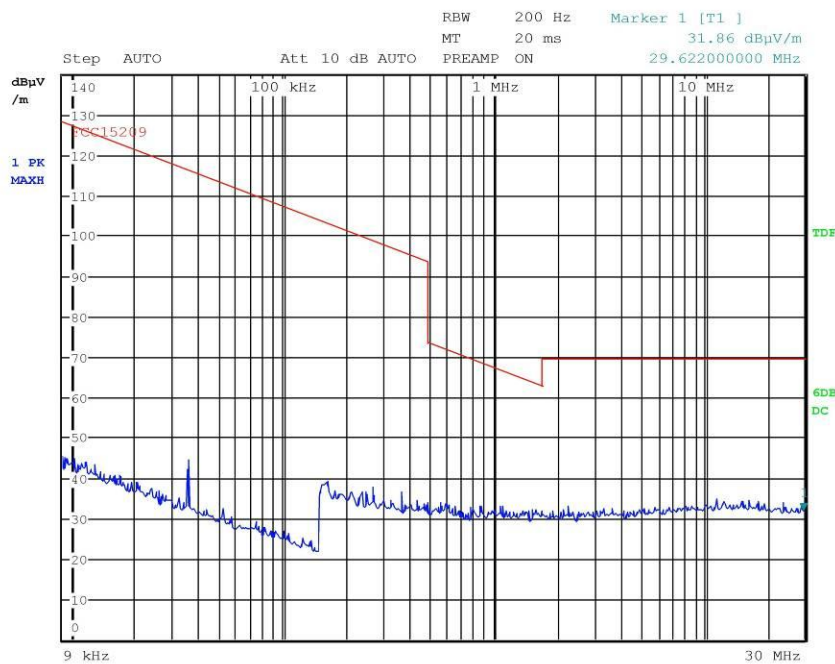



G15131314

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131314
Test Spec

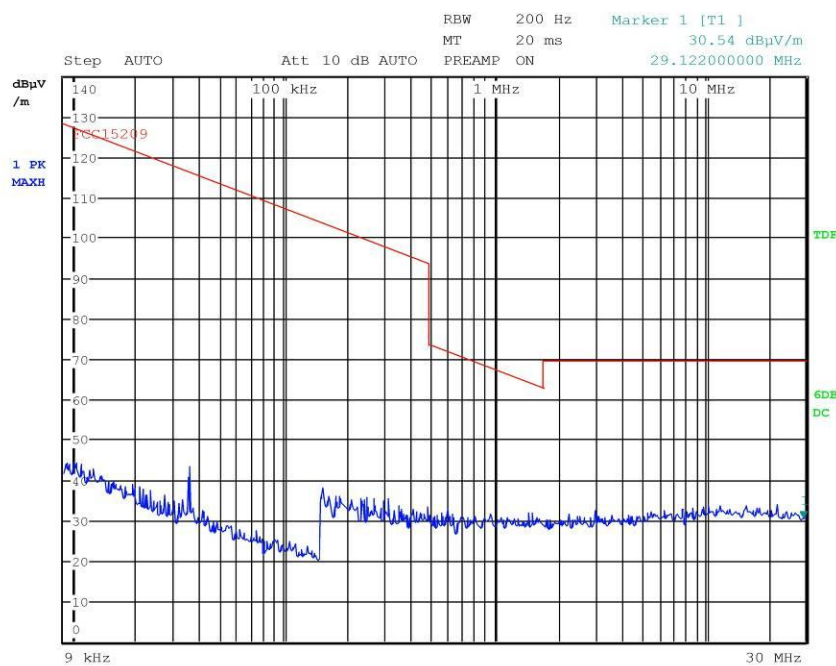


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G15131315

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131315
Test Spec

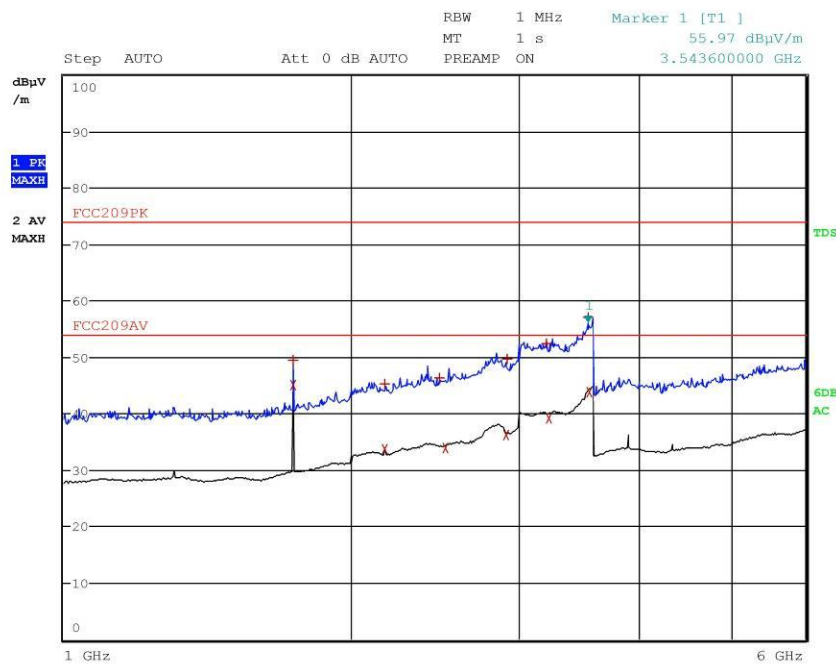



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131315
Test Spec

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Peaks: 12

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	1.738800000 GHz	49.46	Max Peak	-24.54
2	1.738800000 GHz	45.10	Average	-8.90
1	2.173200000 GHz	45.21	Max Peak	-28.79
2	2.173600000 GHz	33.64	Average	-20.36
1	2.478400000 GHz	46.43	Max Peak	-27.57
2	2.515200000 GHz	33.85	Average	-20.15
2	2.907600000 GHz	36.25	Average	-17.75
1	2.920000000 GHz	49.58	Max Peak	-24.42
1	3.204400000 GHz	52.32	Max Peak	-21.68
2	3.222400000 GHz	39.13	Average	-14.87
1	3.543600000 GHz	57.00	Max Peak	-17.00
2	3.560800000 GHz	43.76	Average	-10.24



G15131316

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131316
Test Spec

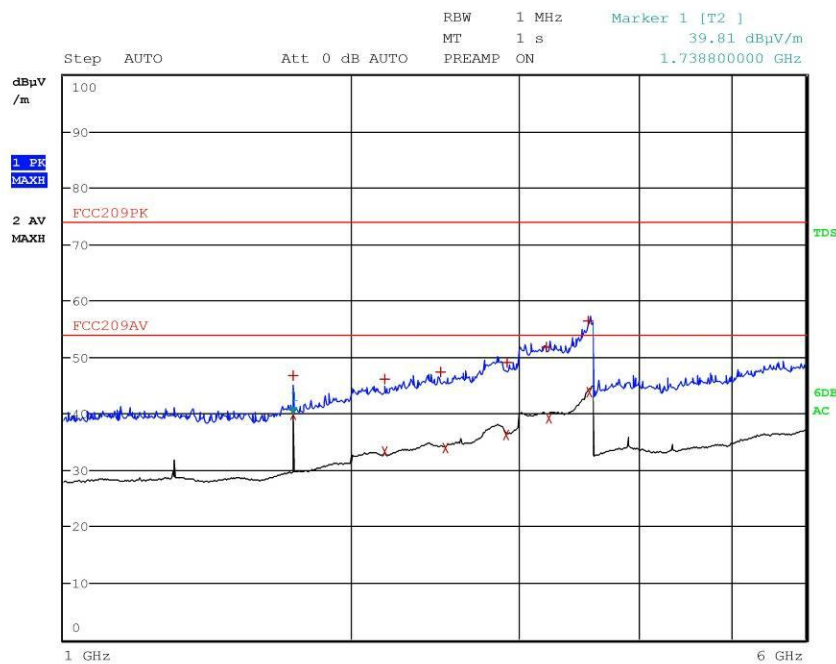



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131316
Test Spec

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Peaks: 12

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	1.738800000 GHz	46.72	Max Peak	-27.28
2	1.738800000 GHz	39.71	Average	-14.29
1	2.173200000 GHz	46.15	Max Peak	-27.85
2	2.173600000 GHz	33.24	Average	-20.76
1	2.478400000 GHz	47.41	Max Peak	-26.59
2	2.515200000 GHz	33.86	Average	-20.14
2	2.907600000 GHz	36.24	Average	-17.76
1	2.920000000 GHz	49.06	Max Peak	-24.94
1	3.204400000 GHz	51.77	Max Peak	-22.23
2	3.222400000 GHz	39.13	Average	-14.87
1	3.543600000 GHz	56.39	Max Peak	-17.61
2	3.560800000 GHz	43.77	Average	-10.23



G15131317

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131317
Test Spec

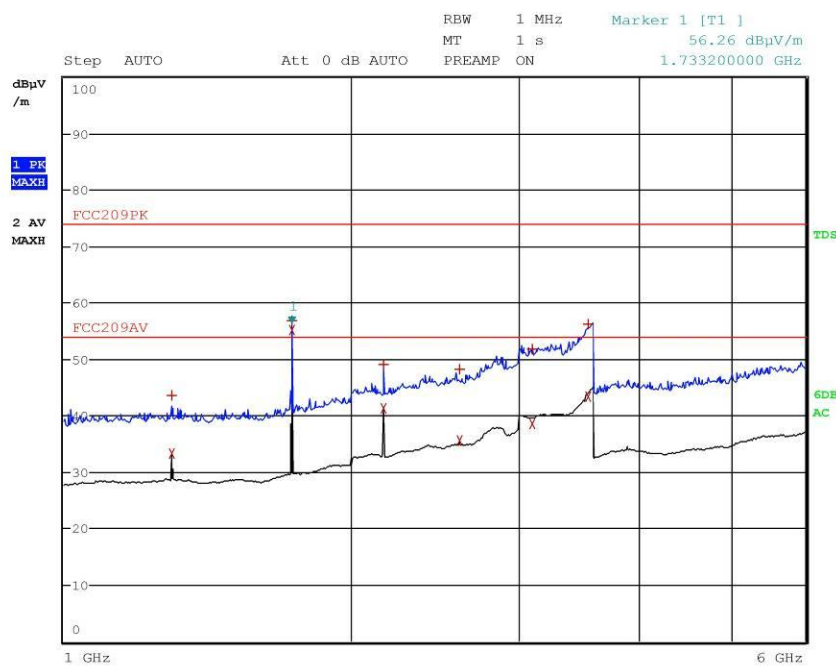



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131317
Test Spec

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Peaks: 12

Trace	Frequency	Level (dB μ V/m)	Detector	Delta Limit/dB
1	1.300000000 GHz	43.66	Max Peak	-30.34
2	1.300000000 GHz	33.25	Average	-20.75
1	1.733200000 GHz	56.74	Max Peak	-17.26
2	1.733200000 GHz	55.06	Average	1.06
1	2.166400000 GHz	48.97	Max Peak	-25.03
2	2.166400000 GHz	41.33	Average	-12.67
1	2.599600000 GHz	48.17	Max Peak	-25.83
2	2.600000000 GHz	35.58	Average	-18.42
1	3.099600000 GHz	51.79	Max Peak	-22.21
2	3.105200000 GHz	38.53	Average	-15.47
1	3.549200000 GHz	56.18	Max Peak	-17.82
2	3.550000000 GHz	43.45	Average	-10.55



G15131318

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131318
Test Spec

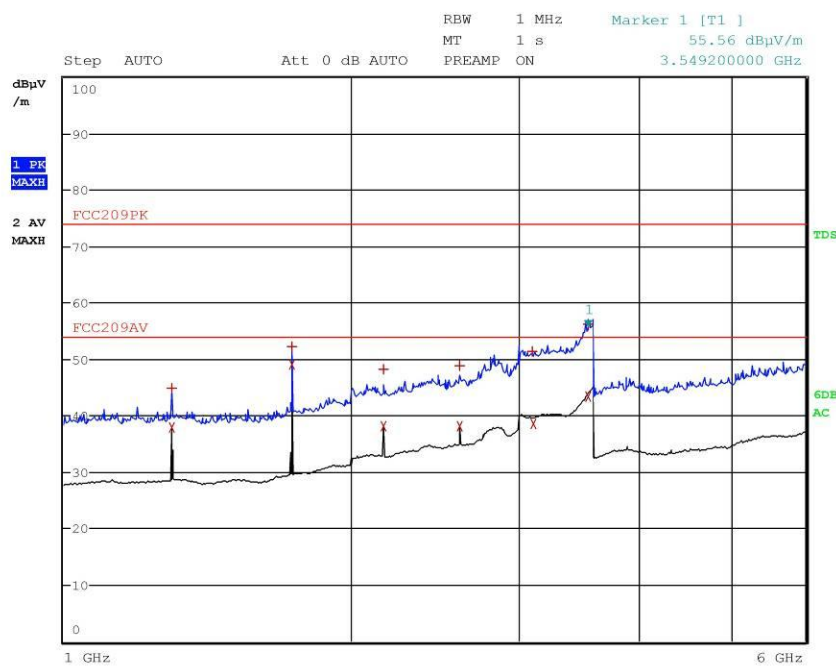



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131318
Test Spec

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Peaks: 12

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	1.300000000 GHz	44.88	Max Peak	-29.12
2	1.300000000 GHz	37.87	Average	-16.13
1	1.733200000 GHz	52.10	Max Peak	-21.90
2	1.733200000 GHz	48.96	Average	-5.04
1	2.166400000 GHz	48.19	Max Peak	-25.81
2	2.166400000 GHz	38.12	Average	-15.88
1	2.599600000 GHz	48.75	Max Peak	-25.25
2	2.600000000 GHz	38.16	Average	-15.84
1	3.099600000 GHz	51.33	Max Peak	-22.67
2	3.105200000 GHz	38.53	Average	-15.47
1	3.549200000 GHz	56.19	Max Peak	-17.81
2	3.550000000 GHz	43.45	Average	-10.55

Result: The requirements are met



11.3 Fundamental and Spurious Emission (≤ 1 GHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231 (a)
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m
Detector CISPR quasi-peak

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
20	100	45


Acceptance limits

FCC Part 15.231 (b)		
Fundamental frequency (MHz)	Field strength of fundamental [dB(μ V/m)]	Field strength of spurious emissions [dB(μ V/m)]
40,66 to 40,70	67,04	47,04
70 to 130	61,94	41,94
130 to 174	61,94 to 71,48	41,94 to 51,48
174 to 260	71,48	51,48
260 to 470	71,48 to 81,94	51,48 to 61,94
Above 470	81,94	61,94

FCC Part 15.231 (e)

Fundamental frequency (MHz)	Field strength of fundamental [dB(μV/m)]	Field strength of spurious emissions [dB(μV/m)]
40,66 to 40,70	60	40
70 to 130	53,98	33,98
130 to 174	53,98 to 63,52	33,98 to 43,52
174 to 260	63,52	43,52
260 to 470	63,52 to 73,98	43,52 to 53,98
Above 470	73,98	53,98

Setup

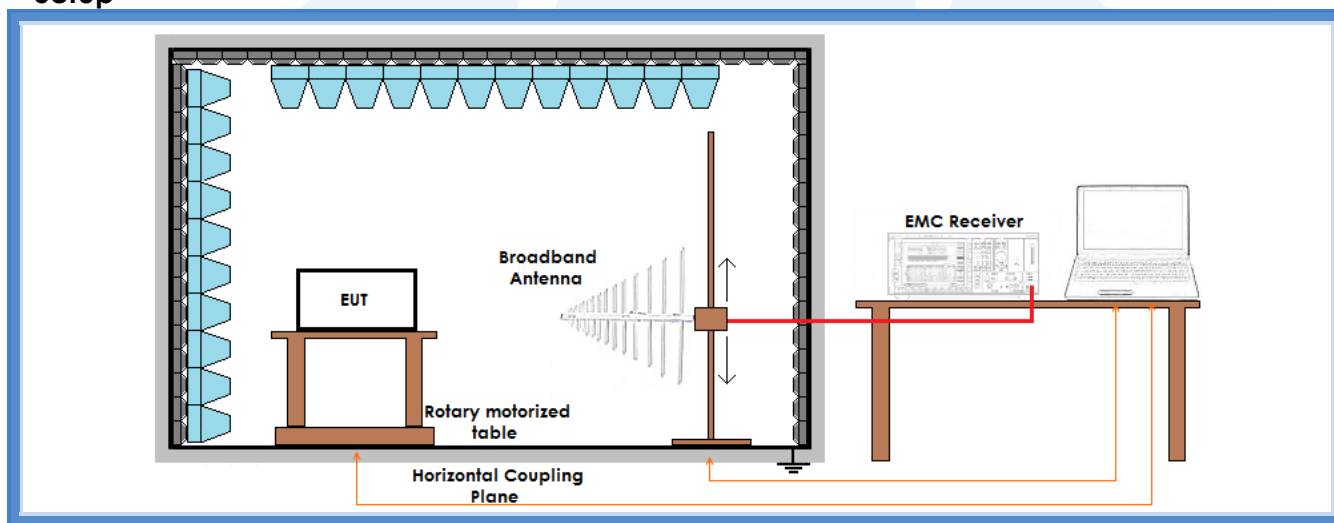

Graphs:

G15131303 and G15131308

Result – Field strength of fundamental

Channel	f (MHz)	Limits (dBμV/m)	Level (dBμV/m)	Results
CH 1	433,31	80,79	77,94	Complies
CH 8	434,71	80,84	78,13	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest value.

Result – Field strength of spurious emissions

Channel	f (MHz)	Limits (dBμV/m)	Level (dBμV/m)	Results
CH 1	866,62	60,79	46,03	Complies
CH 8	869,42	60,84	43,40	Complies


Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest value.



Graphs

G15131303


Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15131303
Test Spec

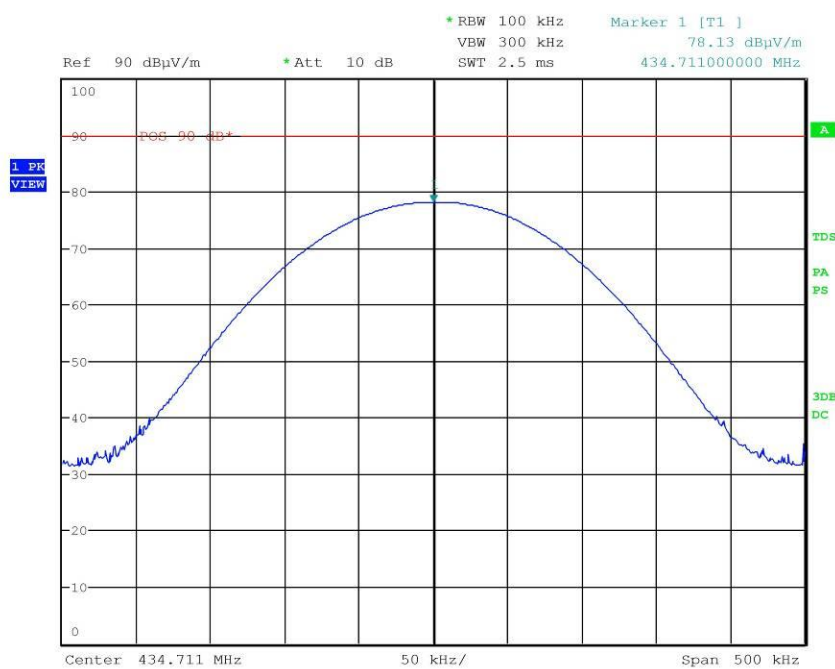



G15131308

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15131308
Test Spec

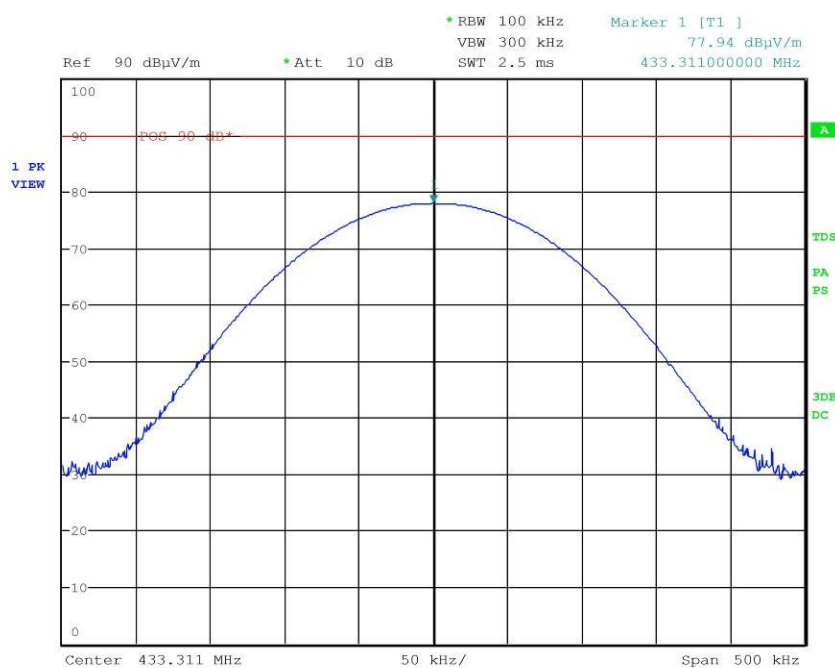

Result: The requirements are met



11.4 Spurious Emission (> 1 GHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m
Detector AV + Peak


Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	101	45

Acceptance limits

Frequency (MHz)	AV limits [dB(μV/m)]	Peak limits [dB(μV/m)]
> 1000	54	74

Setup

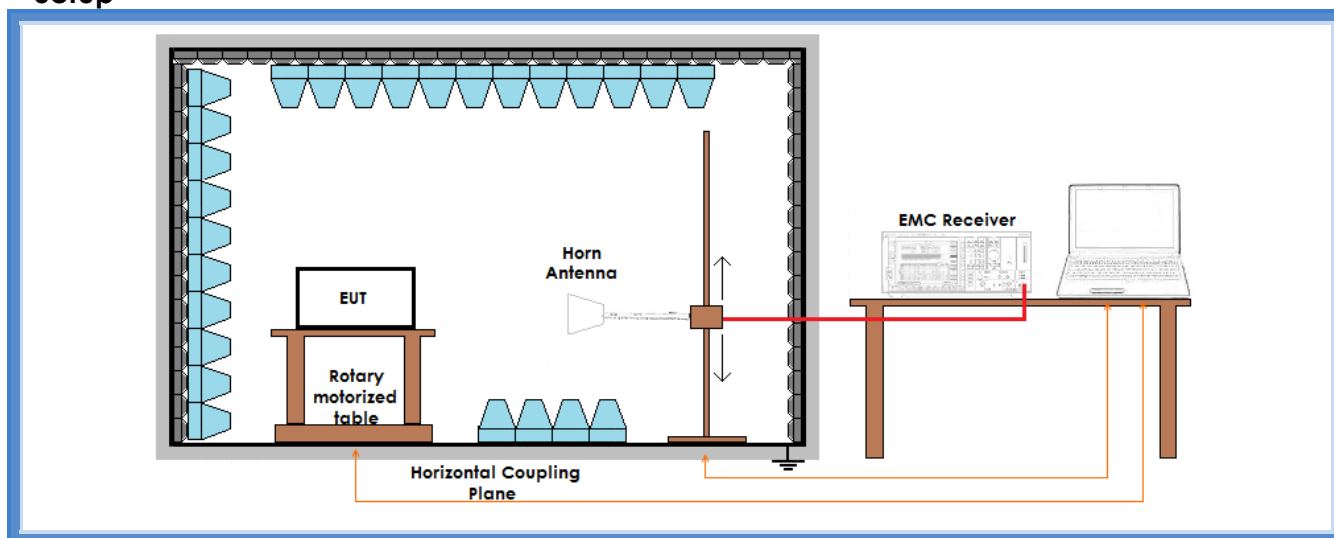

Result – AV detector

Channel CH 1 (lowest channel)			
Harmonic	Limits (dB μ V/m)	Level (dB μ V/m)	Results
III	54	More than 20 dB below limit	Complies
IV	60,79*	55,2*	Complies
V	54	More than 20 dB below limit	Complies
VI	54	More than 20 dB below limit	Complies
VII	54	More than 20 dB below limit	Complies
VIII	54	More than 20 dB below limit	Complies
IX	54	More than 20 dB below limit	Complies
X	54	More than 20 dB below limit	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values

*: measurements inside a restricted band, on these restricted bands the limits is 20 dB lower than the limit provided for the fundamental



Channel CH 8 (highest channel)			
Harmonic	Limits (dB μ V/m)	Level (dB μ V/m)	Results
III	54	More than 20 dB below limit	Complies
IV	54	45,1	Complies
V	54	More than 20 dB below limit	Complies
VI	54	More than 20 dB below limit	Complies
VII	54	More than 20 dB below limit	Complies
VIII	54	More than 20 dB below limit	Complies
IX	54	More than 20 dB below limit	Complies
X	54	More than 20 dB below limit	Complies
Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values			

Result – Peak detector

Channel CH 1 (lowest channel)			
Harmonic	Limits (dB μ V/m)	Level (dB μ V/m)	Results
III	74	More than 20 dB below limit	Complies
IV	74	56,9	Complies
V	74	More than 20 dB below limit	Complies
VI	74	More than 20 dB below limit	Complies
VII	74	More than 20 dB below limit	Complies
VIII	74	More than 20 dB below limit	Complies
IX	74	More than 20 dB below limit	Complies
X	74	More than 20 dB below limit	Complies
Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values			



Channel CH 8 (highest channel)			
Harmonic	Limits (dB μ V/m)	Level (dB μ V/m)	Results
III	74	More than 20 dB below limit	Complies
IV	74	49,5	Complies
V	74	More than 20 dB below limit	Complies
VI	74	More than 20 dB below limit	Complies
VII	74	More than 20 dB below limit	Complies
VIII	74	More than 20 dB below limit	Complies
IX	74	More than 20 dB below limit	Complies
X	74	More than 20 dB below limit	Complies
Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values			

Result: The requirements are met



11.5 Occupied channel bandwidth

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (c)
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

The bandwidth of the emission shall be no wider than 0,25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0,5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
23	101	55

Acceptance limits

Limits	
Devices operating above 70 MHz and below 900 MHz	Devices operating above 900 MHz
0,25% of the center frequency	0,5% of the center frequency



Setup

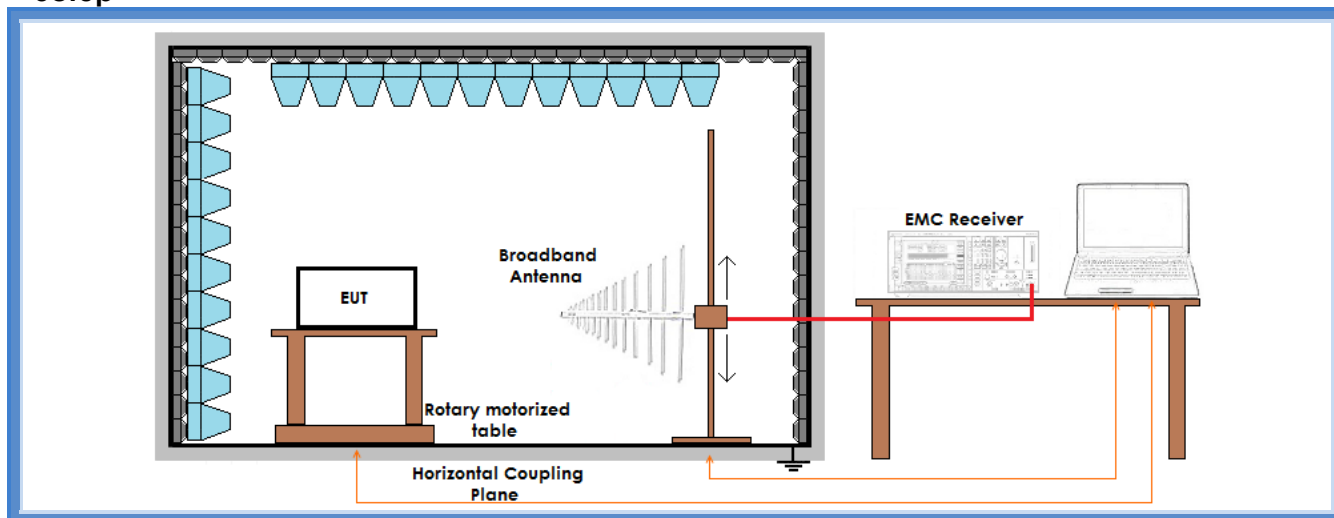

Result


Channel	f (MHz)	Limit (kHz)	20 dB bandwidth (kHz)	Graphs	Results
CH 1	433,31	1083,275	9,086	G15131310	Complies
CH 8	434,71	1086,775	9,374	G15131307	Complies




Graphs

G15131307


Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzolo 15131307
Test Spec

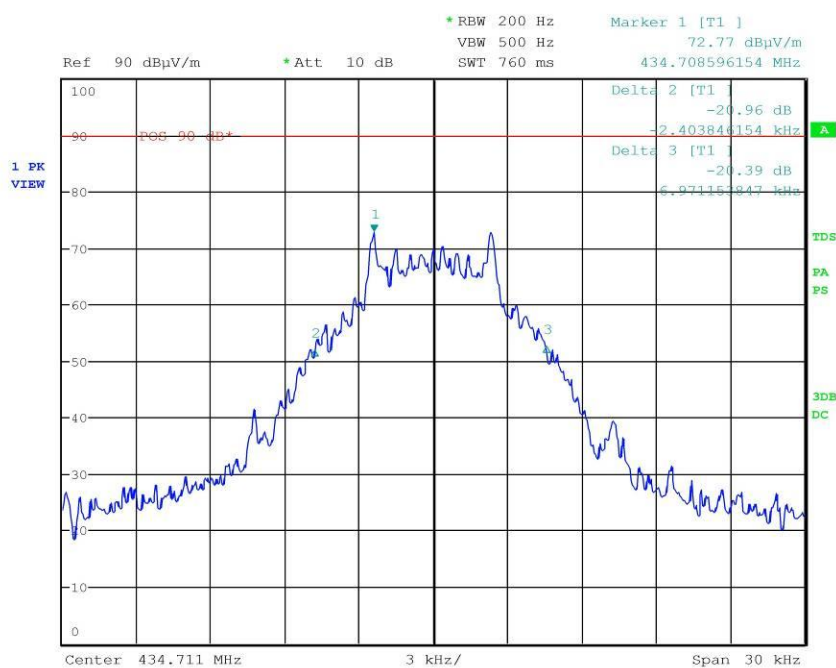



LAB N° 0168

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzo 15131310
Test Spec	

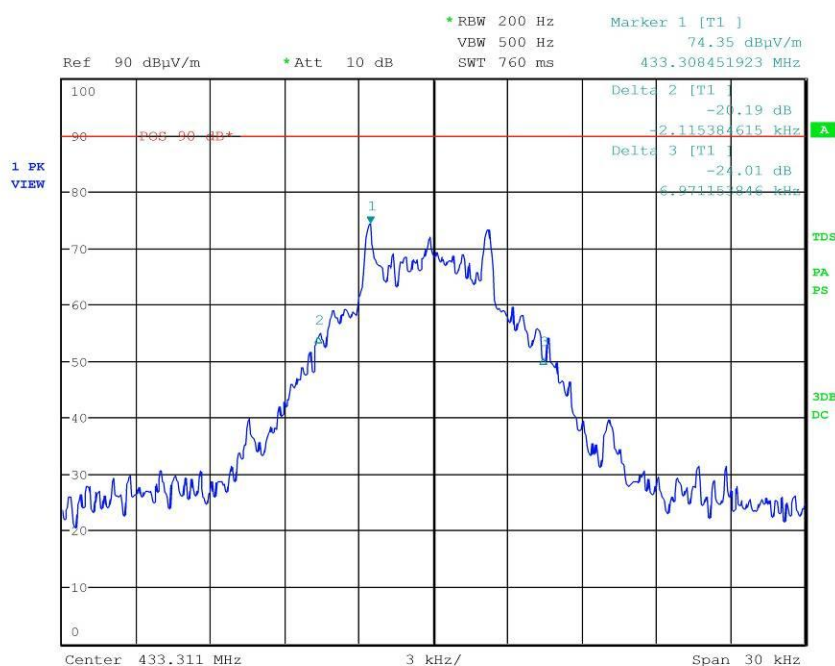

Result: The requirements are met



11.6 Periodic Operation Characteristics

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (a)
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S227
Measurement uncertainty: See clause 7 of this test report

Test specification

- ☒ Manually operated transmitter
- ☐ Transmitter activated automatically

The provisions of this section are restricted to periodic operation within the band 40,66–40,70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
23	100	45



Result

15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

Channel	Frequency (MHz)	Transmitter deactivation time	Graphs
CH 1	433,31	0,325 s	G15131320
CH 8	434,71	0,324 s	G15131321

15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation

Result: N.A.

15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour

Result: The EUT does not employ periodic transmission.

15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result: N.A.


15.231 (a5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

Result: N.A.



Graphs


G15131320

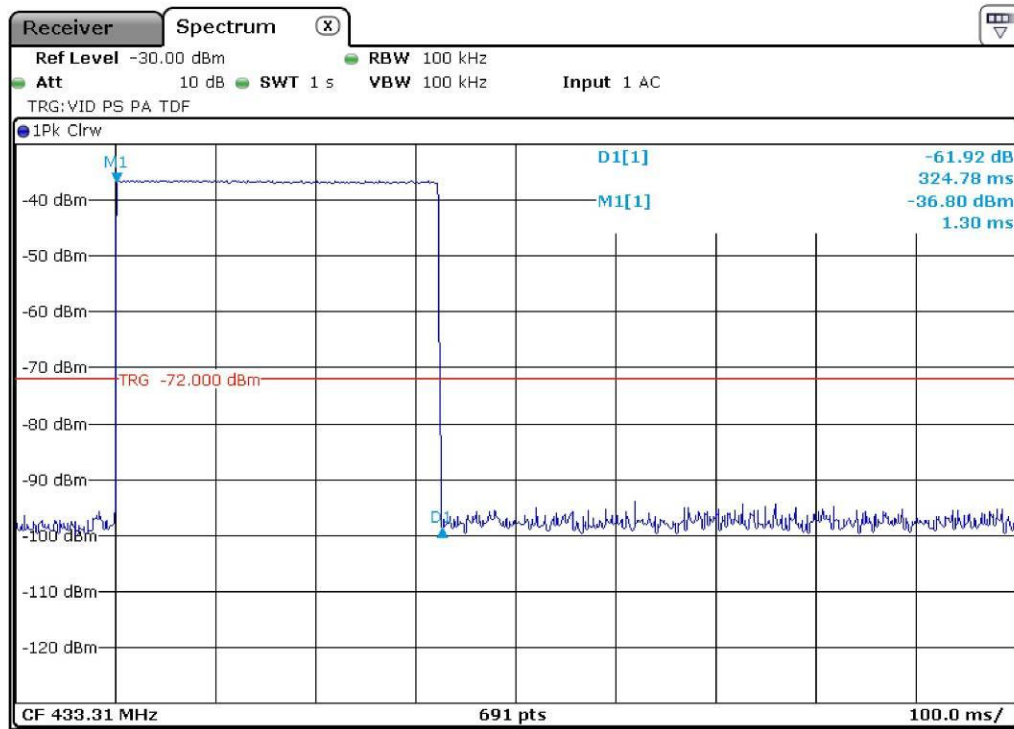

Bertezzo 15131320



G15131321

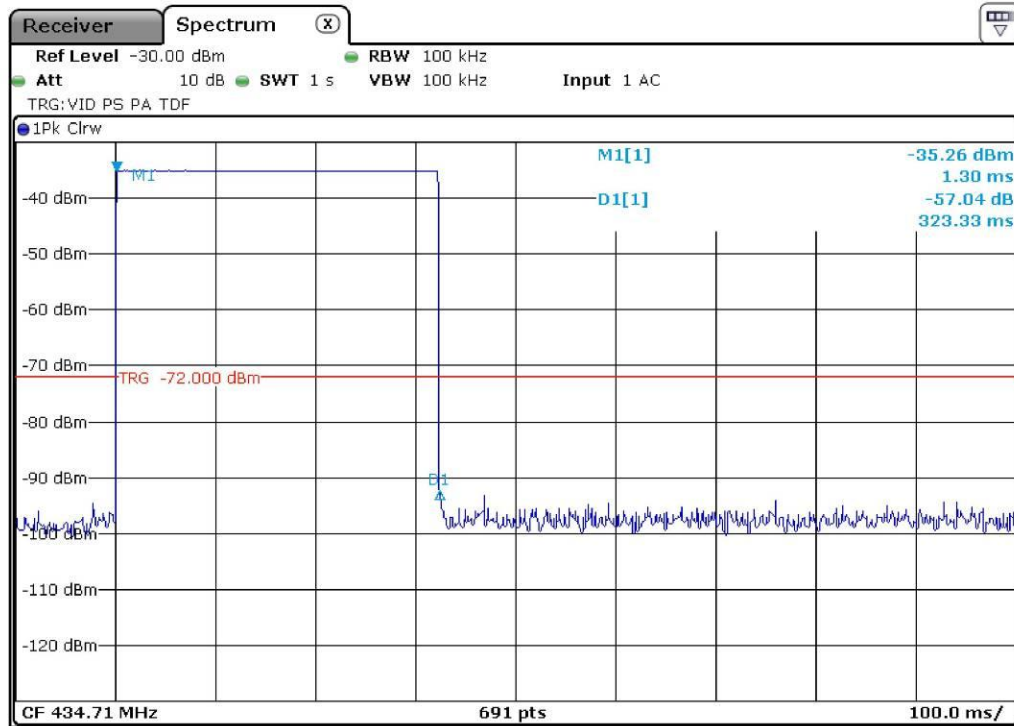

Bertezzo 15131321

Result: The requirements are met