



Sverige



Report On

FCC and ISED Testing of the Ericsson Radio 4415 B66A, NB-IoT IB, KRC 161 644/1 (2100 MHz) Base Station in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, ISED RSS-GEN and Industry Canada RSS-139

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRC161644-3

IC: 287AB-AS1616443

PREPARED BY

Maggie Whiting
Key Account Manager

APPROVED BY

Steve Scarfe
Authorised Signatory

DATED

9 September 2021

Document 75952701 Report 05 Issue 1

September 2021



CONTENTS

| Section | Page No |
|----------------|---|
| 1 | REPORT INFORMATION 2 |
| 1.1 | Report Details 3 |
| 1.2 | Brief Summary of Results 4 |
| 1.3 | Test Rationale..... 5 |
| 1.4 | Configuration Description 6 |
| 1.5 | Declaration of Build Status 7 |
| 1.6 | Product Information 8 |
| 1.7 | Test Setup 9 |
| 1.8 | Test Conditions..... 10 |
| 1.9 | Deviation From The Standard 10 |
| 1.10 | Modification Record 10 |
| 1.11 | Additional Information 10 |
| 2 | TEST DETAILS 11 |
| 2.1 | Maximum Peak Output Power and Peak to Average Ratio - Conducted..... 12 |
| 2.2 | Occupied Bandwidth..... 19 |
| 2.3 | Band Edge 25 |
| 2.4 | Transmitter Spurious Emissions..... 29 |
| 3 | TEST EQUIPMENT USED 53 |
| 3.1 | Test Equipment Used 54 |
| 3.2 | Measurement Uncertainty..... 56 |
| 4 | ACCREDITATION, DISCLAIMERS AND COPYRIGHT 57 |
| 4.1 | Accreditation, Disclaimers and Copyright..... 58 |
| ANNEX A | Module Lists.....A.2 |



SECTION 1

REPORT INFORMATION



1.1 REPORT DETAILS

| | |
|-------------------------------|--|
| Manufacturer | Ericsson |
| Address | Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden |
| Product Name & Product Number | Radio 4415 B66A - KRC 161 644/1 |
| Serial Number(s) | D16X595592 |
| Software Version | CXP9013268/12 Revision R82CM |
| Hardware Version | R1B/A |
| Test Specification/Issue/Date | FCC CFR 47 Part 2: 2020 FCC CFR 47 Part 27: 2020 ISED RSS-GEN: Issue 5: March 2019 Amendment 1, 2021 Amendment 2 Industry Canada RSS-139: Issue 3: 2015 |
| Test Plan | Q1 FCC_IC test plan for MR7602-1 NR-IoT V 0.9 Reduced Scope |
| Start of Test | 07 July 2021 |
| Finish of Test | 07 July 2021 |
| Name of Engineer(s) | Hector Moreno & Ashok Kumar |
| Related Document(s) | KDB 971168 D01 v02r02 KDB 662911 D01 v02r01 KDB 716230 ICES-003:Issue 7 (2020-10) ANSI C63.26-2015 |

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with and FCC CFR 47 Part 2: 2020, FCC CFR 47 Part 27: 2020, ISED RSS-GEN: Issue 5: March 2019 Amendment 1, 2021 Amendment 2, Industry Canada RSS-139: Issue 3: 2015 The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

Hector Moreno & Ashok Kumar



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 27, ISSED RSS-GEN and Industry Canada RSS-139 is shown below.

| Section | Specification Clause | | | | Test Description | Result |
|---------|----------------------|--------------------|---------|---------|---|--------|
| | FCC CFR 47 Part 2 | FCC CFR 47 Part 27 | RSS-GEN | RSS-139 | | |
| 2.1 | 2.1046 | 27.50 | - | 6.5 | Maximum Peak Output Power and Peak to Average Ratio - Conducted | Pass |
| 2.2 | 2.1049 | 27.53 | 6.6 | - | Occupied Bandwidth | Pass |
| 2.3 | 2.1051 | 27.53 | - | 6.5 | Band Edge | Pass |
| 2.4 | 2.1051 | 27.53 | - | 6.6 | Transmitter Spurious Emissions | Pass |

Testing for Radiated Spurious Emissions are recording in the following report:
2104108STO-104 Radio 4415 B66A G2 FCC27 NRIoT



1.3 TEST RATIONALE

The tests that have been selected are detailed in the customer Test Plan as defined in section 1.1 of this report. The Test Plan is based on the TÜV SÜD FCC Test Plan Rationale, available on request.



1.4 CONFIGURATION DESCRIPTION

| Configuration | RAT | No. Of carriers | Pout (W) | Carrier Bandwidth | Carrier Frequency Configuration (MHz) | | |
|---------------|-----------------------------|-----------------|----------|-------------------|---------------------------------------|--------|--------|
| | | | | | Bottom | Middle | Top |
| 1 | NR in NR/ESS Setup (NB-IoT) | 1 | 40 | 10 MHz- SCS 15kHz | 2115.0 | 2145.0 | 2175.0 |
| | | | | 15 MHz- SCS 15kHz | 2117.5 | 2145.0 | 2172.5 |
| | | | | 20 MHz- SCS 15kHz | 2120.0 | 2145.0 | 2170.0 |



1.5 DECLARATION OF BUILD STATUS

| Equipment Description | | | | | | |
|---|------|---|-----------|------------------------------------|--|-----|
| Technical Description: (Please provide a brief description of the intended use of the equipment including the technologies the product supports) | | Multi-standard remote radio unit | | | | |
| Manufacturer: | | Ericsson AB | | | | |
| Model: | | Radio 4415 B86A | | | | |
| Part Number: | | KRC 161 644/1 | | | | |
| Hardware Version: | | R1B/A | | | | |
| Software Version: | | CXP 901 3268/12 R82CM | | | | |
| FCC ID of the product under test | | TA8AKRC161644-3 | | | | |
| IC ID of the product under test | | 287AB-AS1616443 | | | | |
| Intentional Radiators | | | | | | |
| FDD, TDD | | FDD | | | | |
| Frequency Range (MHz to MHz) | | 2110MHz - 2180MHz DL 17100MHz - 1780MHz UL | | | | |
| FDD / TDD | | FDD | | | | |
| Conducted Declared Output Power (dBm) | | 40W per antenna connector (NB IoT SA carrier max 20W) | | | | |
| RAT | | WCDMA | NB IoT SA | LTE (incl. NB IoT IB, GB) | NR (incl. NB IoT IB) | MRO |
| Supported Bandwidth(s) (MHz) | 5MHz | | | 5, 10, 15, 20MHz | 5, 10, 15, 20MHz | |
| Modulation Scheme(s) DL | | QPSK, 16QAM, 64QAM | QPSK | QPSK, 16QAM, 64QAM, 256QAM | QPSK, 16QAM, 64QAM, 256QAM | |
| ITU Emission Designator | | 5M00F9W | 230KW7D | 5M00W7D, 9M40W7D, 14M0W7D, 18M5W7D | 4M47W7D, 9M30W7D, 14M1W7D, 18M8W7D, 37M8W7D, 9M44W7D, 14M4W7D, 19M2W7D | |
| IBW | | 70MHz | 20MHz | 70MHz | 70MHz | |
| Maximum number of carriers | | 6 | | 6 | 6 | 6 |
| Unintentional Radiators | | | | | | |
| Highest frequency generated or used in the device or on which the device operates or tunes | | 10.1 Gbit/s | | | | |
| Lowest frequency generated or used in the device or on which the device operates or tunes if <30MHz | | - | | | | |
| Class A Digital Device (Use in commercial, industrial or business environment) or Class B Digital Device (Use in residential environment) | | Class B | | | | |
| DC Power Supply (Delete if Not Applicable) | | | | | | |
| Nominal voltage: | | -48V | | | | |
| Extreme upper voltage: | | -36V | | | | |
| Extreme lower voltage: | | -58.5V | | | | |
| Max current: | | 20A | | | | |
| Temperature | | | | | | |
| Minimum temperature: | | -40°C | | | | |
| Maximum temperature: | | 55°C | | | | |
| I hereby declare that I am entitled to sign on behalf of the manufacturer and that the information supplied is correct and complete. | | | | | | |
| | | <i>Faysal Pirmohamed</i> | | | | |
| Name: | | Faysal Pirmohamed | | | | |
| Position held: | | Regulatory Engineer | | | | |
| Date: | | 2021-09-06 | | | | |


No responsibility will be accepted by TÜV SÜD as to the accuracy of the information declared in this document by the manufacturer.

1.6 PRODUCT INFORMATION

1.6.1 Technical Description

The Equipment Under Test (EUT) Radio 4415 B66A - KRC 161 644/1 is an Ericsson AB Radio Unit working in the public mobile service 2110-2180 MHz band which provides communication connections to 2110-2180 MHz network. The EUT operates from a -48V DC supply.


The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

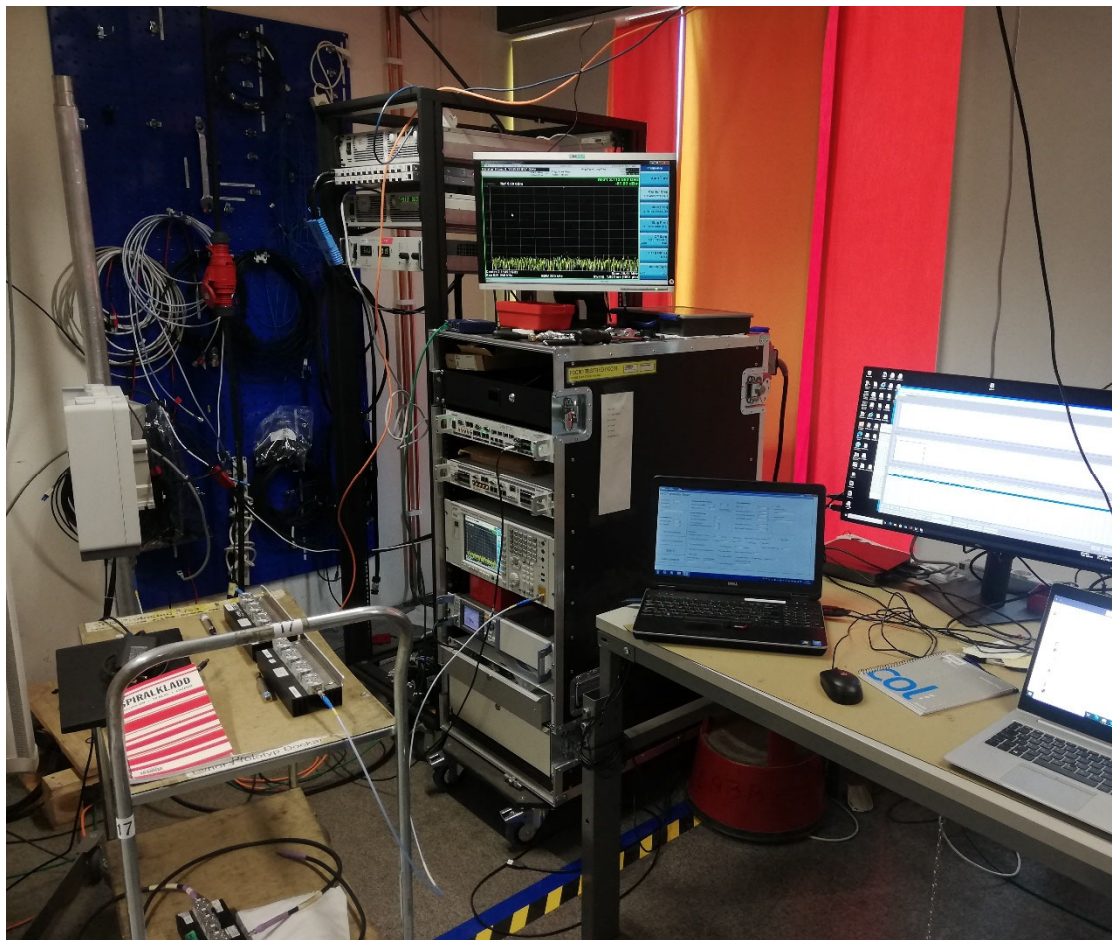

Equipment Under Test

1.7 TEST SETUP

Conducted Test Set Up

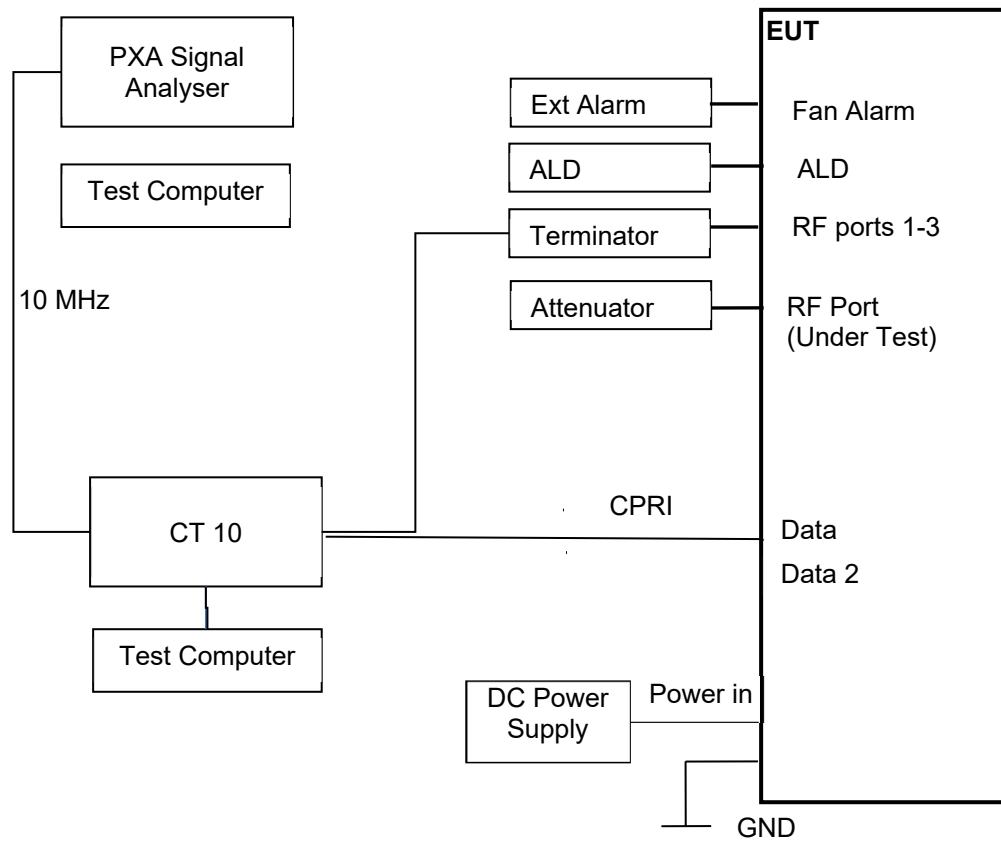



1.8 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated as described in the Test Method for each Test.

The EUT was powered from a -48V DC supply.

FCC Measurement Facility Registration Number
563983 Ericsson Test Laboratory, Kista
Postal Address: Ericsson AB, Isafjordsgatan 10, Stockholm, SE-16 440, Sweden

ISED Accreditation
IC#26170 Ericsson Test Laboratory, Kista
Postal Address: Ericsson AB, Isafjordsgatan 10, Stockholm, SE-164 40, Sweden

| Test Name | Name of Engineer(s) |
|---|--|
| Maximum Peak Output Power and Peak to Average Ratio - Conducted | Ashok Kumar, Hector Eric Moreno Trujillo |
| Occupied Bandwidth | Ashok Kumar, Hector Eric Moreno Trujillo |
| Band Edge | Ashok Kumar, Hector Eric Moreno Trujillo |
| Transmitter Spurious Emissions | Ashok Kumar, Hector Eric Moreno Trujillo |

1.9 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.10 MODIFICATION RECORD

No modifications were made to the EUT during testing.

1.11 ADDITIONAL INFORMATION

Ericsson will limit this product through the software from operating across the whole of Band 66A, it will be limited to 2110-2180 MHz.

This filing is for a Class 2 Permissive change to add NR in NR/ESS (NB-IoT) to a previously certified Radio for use in the USA and Canada under the following ID's:

FCC ID: TA8FKRC161644-3
IC: 287AB-AS1616443

This device is electrically identical as originally certified as no hardware changes have been made
Frequency Stability has been verified at time of original certification.

The Test Plan is based on the TUV SUD Document FCC and ISED Test Plan Rationale for Base Station Equipment.

This TX and RX share the same port and therefore Rx Spurious Emissions have not been performed.



SECTION 2

TEST DETAILS



2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.50
FCC CFR 47 Part 2, Clause 2.1046
Industry Canada RSS-139, Clause 6.5

2.1.2 Date of Test and Modification State

07 July 2021 - Modification State 0

2.1.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.4 Environmental Conditions

Ambient Temperature 22.4°C
Relative Humidity 44.5%

2.1.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, clause 5.2.1 and summed in accordance with FCC KDB 662911 D01.

Calculations

Total Power = Measured PSD (Total Power Port A) + $10\log(N_{ANT})$, where $N_{ANT} = 4$

Maximum Total Power (EIRP) = Total Power (as above) + Declared Antenna Gain


2.1.6 Test Results

Configuration 1


Maximum Output Power 46.00 dBm

| Antenna | NR in NR/ESS Setup (NB-IoT) Modulation | NR in NR/ESS Setup (NB-IoT) Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power / PSD | | | | |
|---------|---|---|--|-------------------|---------|-----------------------------------|---------|
| | | | Channel Position B | | | | |
| | | | PAR (dB) | Average Power/PSD | | Total Power Port A + B + C + D | |
| | | | | dBm | dBm/MHz | dBm | dBm/MHz |
| A | QPSK | 10.0 MHz | 7.38 | 46.18 | 37.48 | 52.20 | 43.50 |
| A | QPSK | 15.0 MHz | 7.47 | 46.04 | 36.64 | 52.06 | 42.66 |
| A | QPSK | 20.0 MHz | 7.48 | 46.03 | 37.51 | 52.05 | 43.53 |

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position B

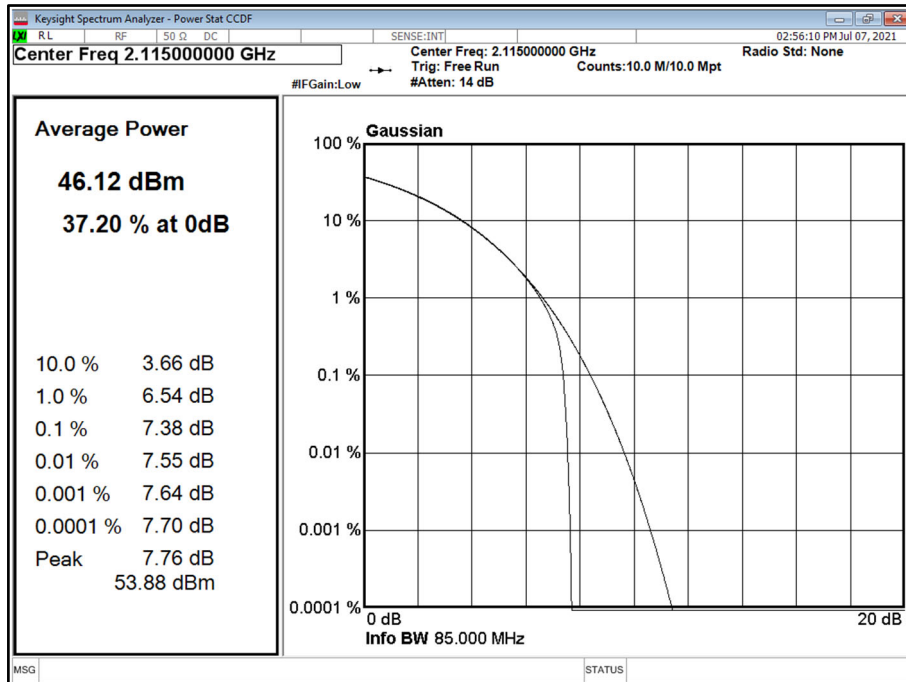


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position B

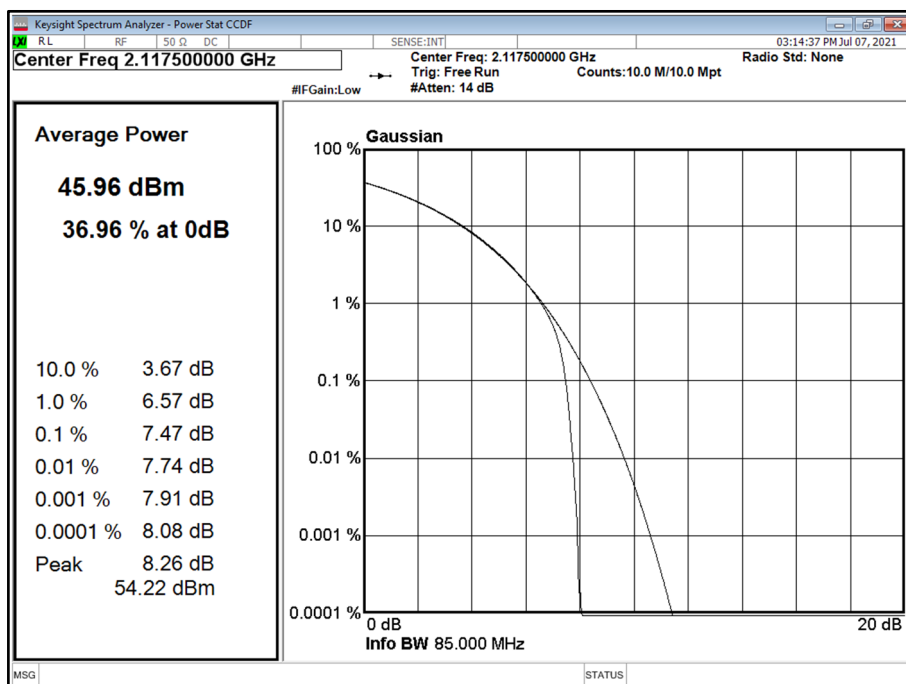



Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position B

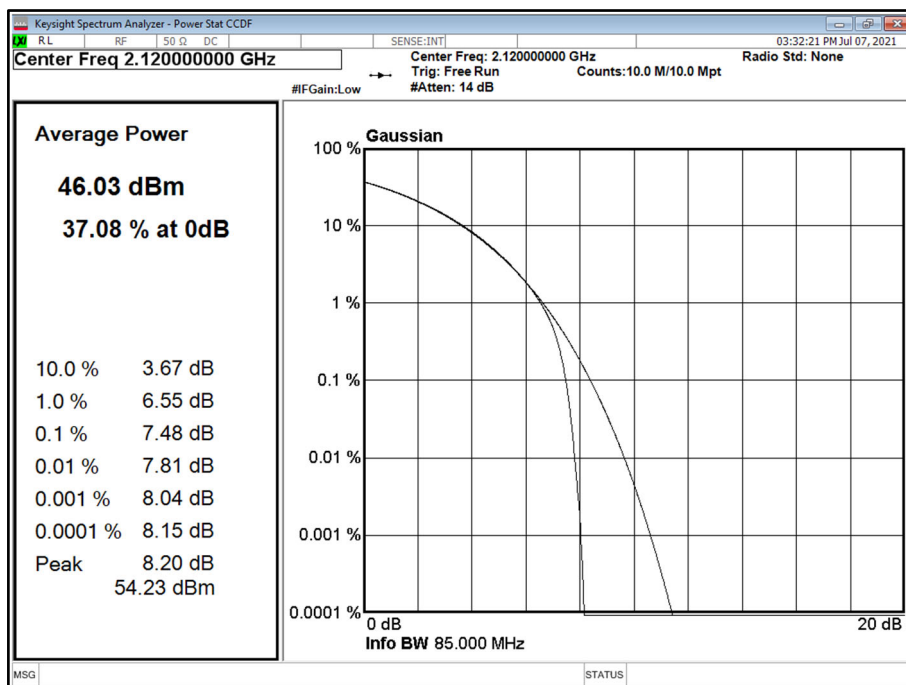


Configuration 1


Maximum Output Power 46.00 dBm

| Antenna | NR in NR/ESS Setup (NB-IoT) Modulation | NR in NR/ESS Setup (NB-IoT) Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power / PSD | | | | |
|---------|--|---|--|-------------------|---------|--------------------------------|---------|
| | | | Channel Position M | | | | |
| | | | PAR (dB) | Average Power/PSD | | Total Power Port A + B + C + D | |
| | | | | dBm | dBm/MHz | dBm | dBm/MHz |
| A | QPSK | 10.0 MHz | 7.35 | 46.10 | 37.30 | 52.12 | 43.32 |
| A | QPSK | 15.0 MHz | 7.42 | 46.11 | 36.71 | 52.13 | 42.73 |
| A | QPSK | 20.0 MHz | 7.38 | 46.10 | 36.93 | 52.12 | 42.95 |

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position M

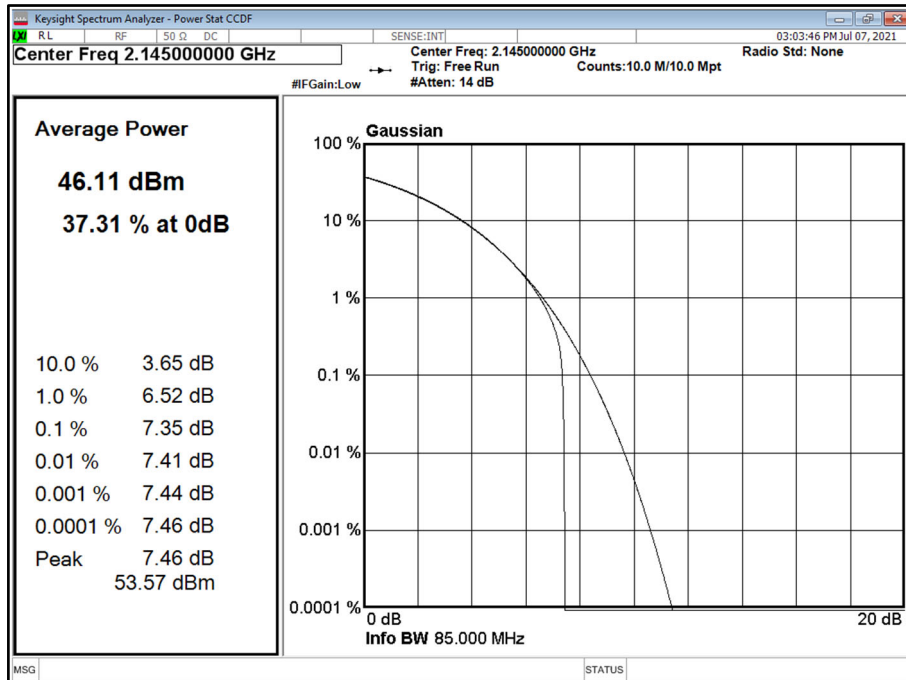


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position M

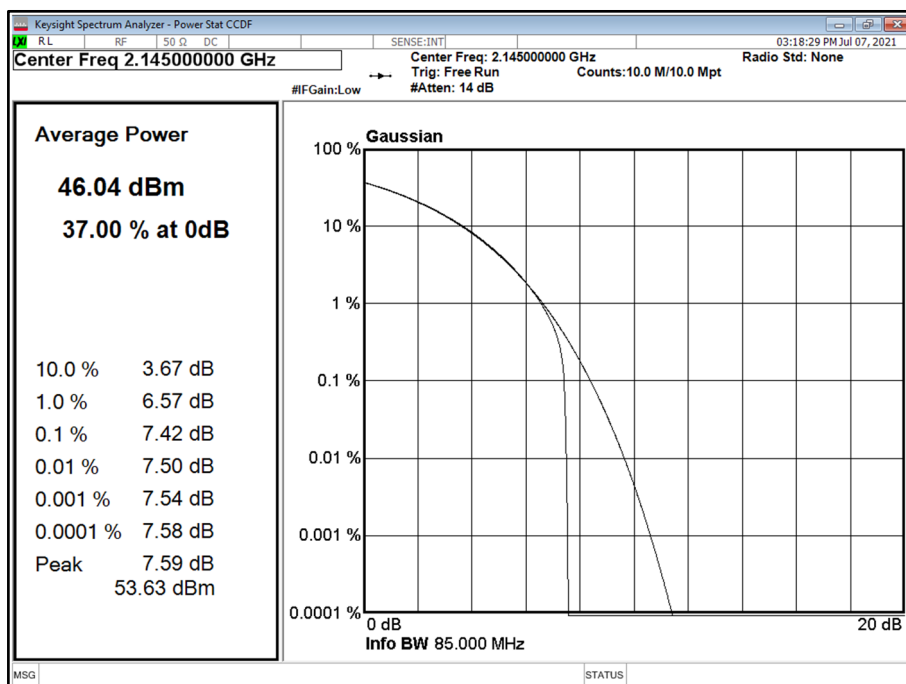



Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position M

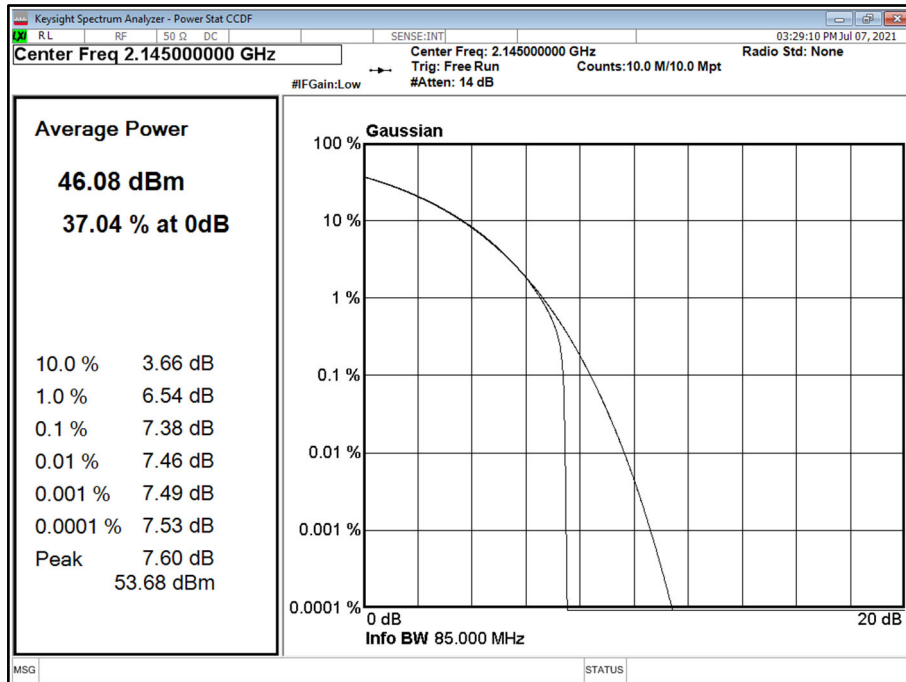


Configuration 1


Maximum Output Power 46.00 dBm

| Antenna | NR in NR/ESS Setup (NB-IoT) Modulation | NR in NR/ESS Setup (NB-IoT) Carrier Bandwidth | Peak to Average Ratio (PAR) / Output Power / PSD | | | | |
|---------|---|---|--|-------------------|---------|-----------------------------------|---------|
| | | | Channel Position T | | | | |
| | | | PAR (dB) | Average Power/PSD | | Total Power Port A + B + C + D | |
| | | | | dBm | dBm/MHz | dBm | dBm/MHz |
| A | QPSK | 10.0 MHz | 7.38 | 45.98 | 37.21 | 52.00 | 43.23 |
| A | QPSK | 15.0 MHz | 7.46 | 46.00 | 37.13 | 52.02 | 43.15 |
| A | QPSK | 20.0 MHz | 7.46 | 45.97 | 36.61 | 51.99 | 42.63 |


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position T

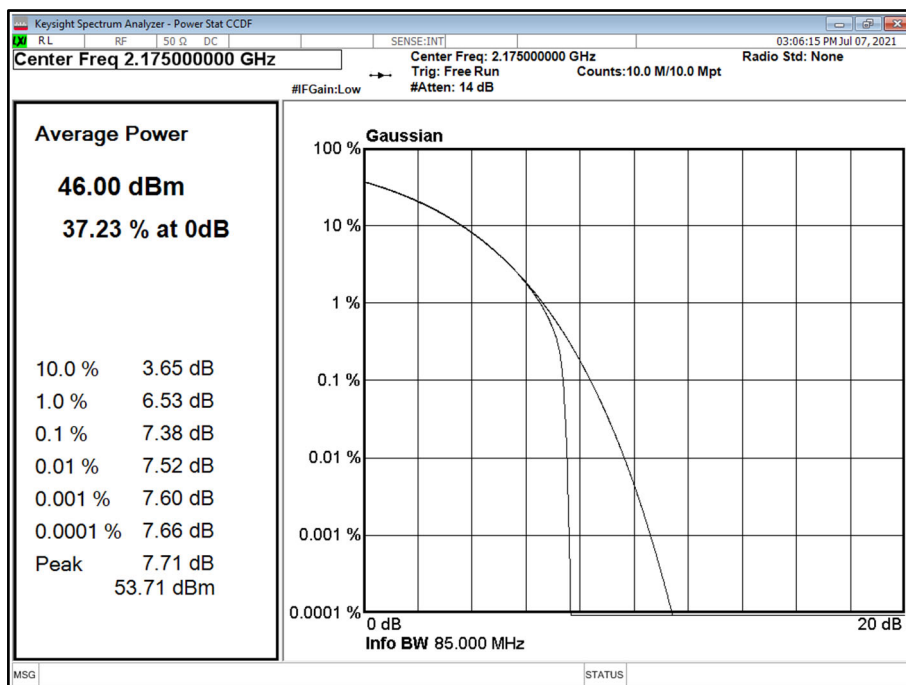

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position T

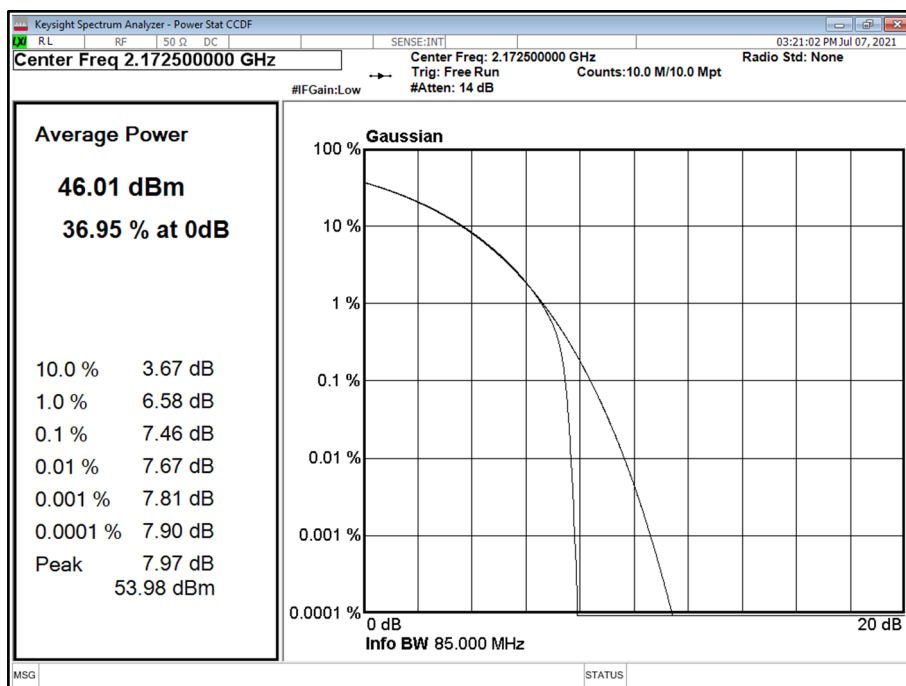

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position T

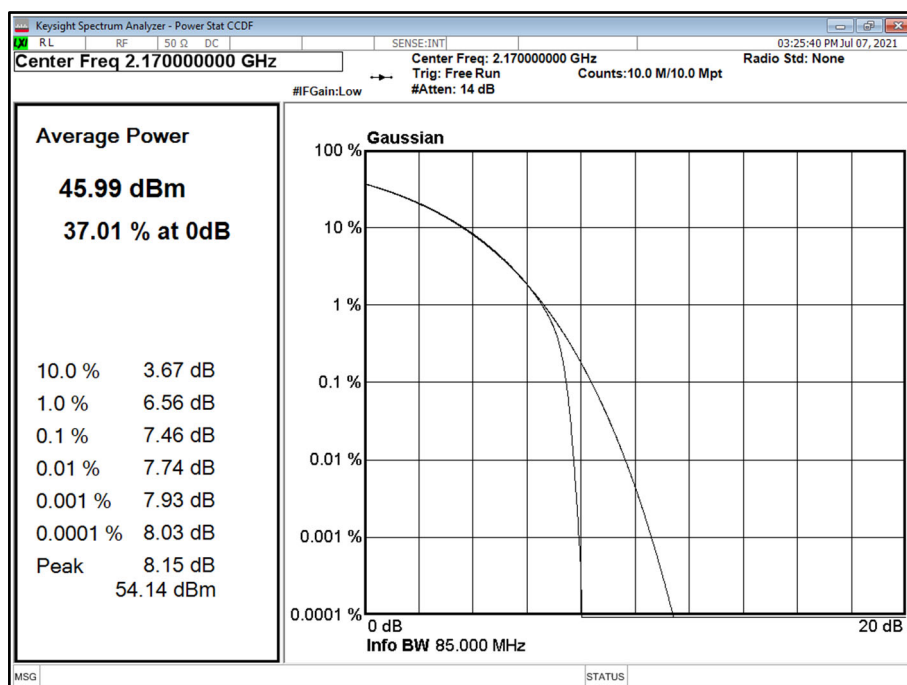

| Limit | |
|--|---------------------------------|
| Maximum rated output power (Non-Rural) | ≤ 1640 W/MHz or ≤+62.15 dBm/MHz |
| Maximum rated output power (Rural) | ≤ 3280 W/MHz or ≤+65.15 dBm/MHz |
| Peak to Average Ratio | 13 dB |

The radio unit was tested with maximum output power and without an antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/ISED Bureau(s). Licensees are required to take into account maximum allowed antenna gain used in combination with the applicable power settings to prevent the radiated output power exceeding the limits.



2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.53
ISED RSS-GEN, Clause 6.6
FCC CFR 47 Part 2, Clause 2.1049

2.2.2 Date of Test and Modification State

07 July 2021 - Modification State 0

2.2.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.4 Environmental Conditions

Ambient Temperature 22.4°C
Relative Humidity 44.5%

2.2.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 4.3.
The Spectrum Analyser RBW was configured to be at least 1% of the channel bandwidth of the carrier to be measured.

For 26 dB Bandwidth, in accordance with KDB 971168 D01, a peak detector and a trace setting of Max Hold were used. The trace was allowed to stabilise. Using the Spectrum Analyser function, the 26dB measurement result was obtained.

4.3 Occupied bandwidth – power bandwidth (99 %) measurement procedure
Subclause 5.4.4 of ANSI C63.26-2015 is applicable (wherein the recommendation is to use the 99 % power bandwidth function of a spectrum analyser).

2.2.6 Test Results


Configuration 1

Maximum Output Power 46.00 dBm


| Antenna | NR in NR/ESS Setup (NB-IoT) Modulation | NR in NR/ESS Setup (NB-IoT) Carrier Bandwidth | Result (kHz) | | | | | |
|---------|--|---|--------------------|------------------|--------------------|------------------|--------------------|------------------|
| | | | Channel Position B | | Channel Position M | | Channel Position T | |
| | | | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth | Occupied Bandwidth | -26 dB Bandwidth |
| A | QPSK | 10.0 MHz | 9436.68 | 9797.94 | 9430.92 | 9786.21 | 9432.13 | 9784.38 |
| A | QPSK | 15.0 MHz | 14361.70 | 14775.51 | 14371.44 | 14763.96 | 14359.80 | 14788.56 |
| A | QPSK | 20.0 MHz | 19216.08 | 19769.69 | 19192.24 | 19743.12 | 19179.79 | 19720.47 |



Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position B

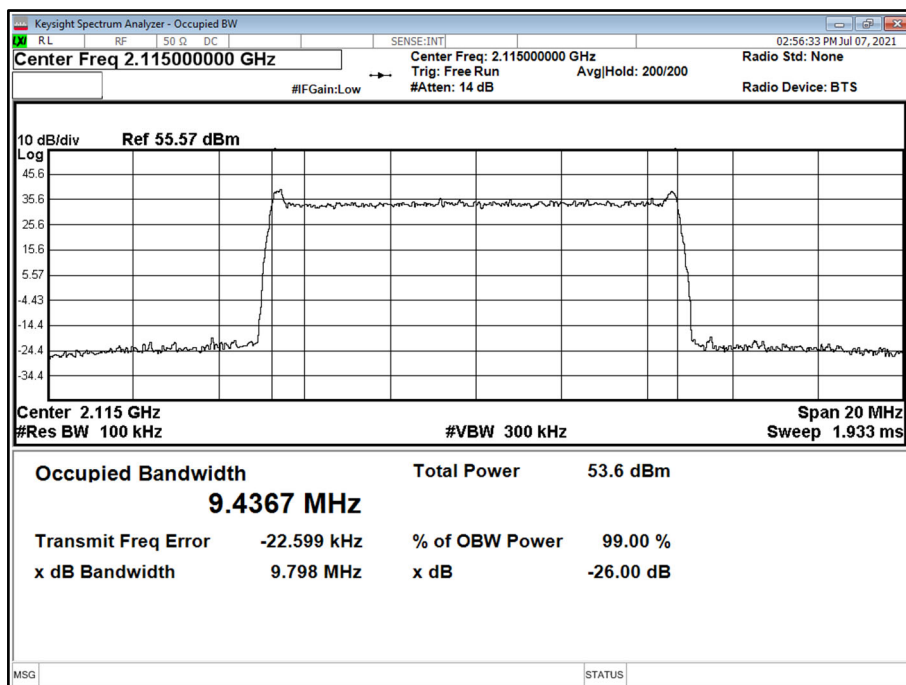


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position M

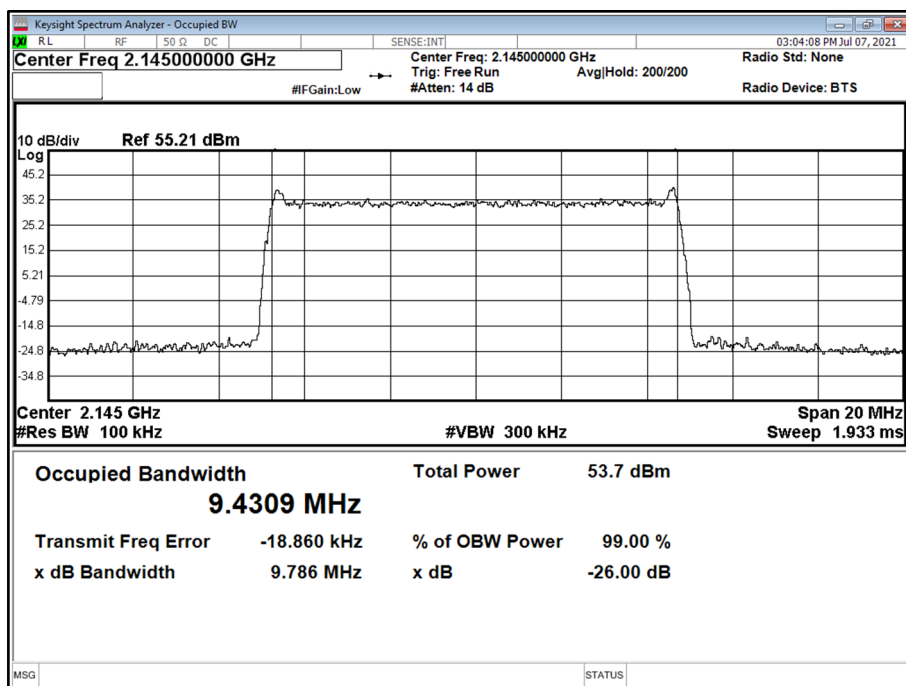




Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position T

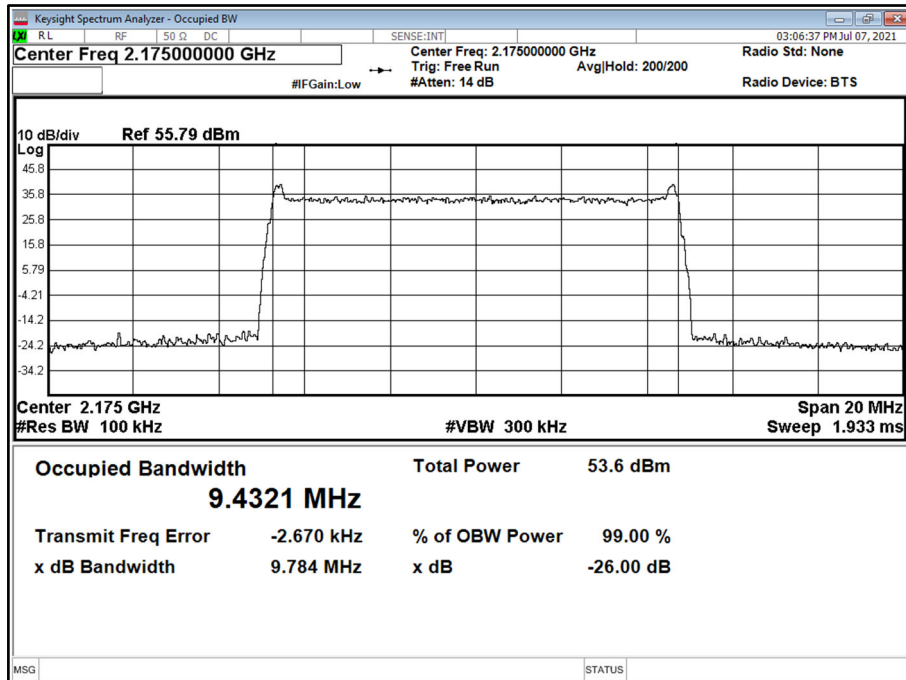


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position B

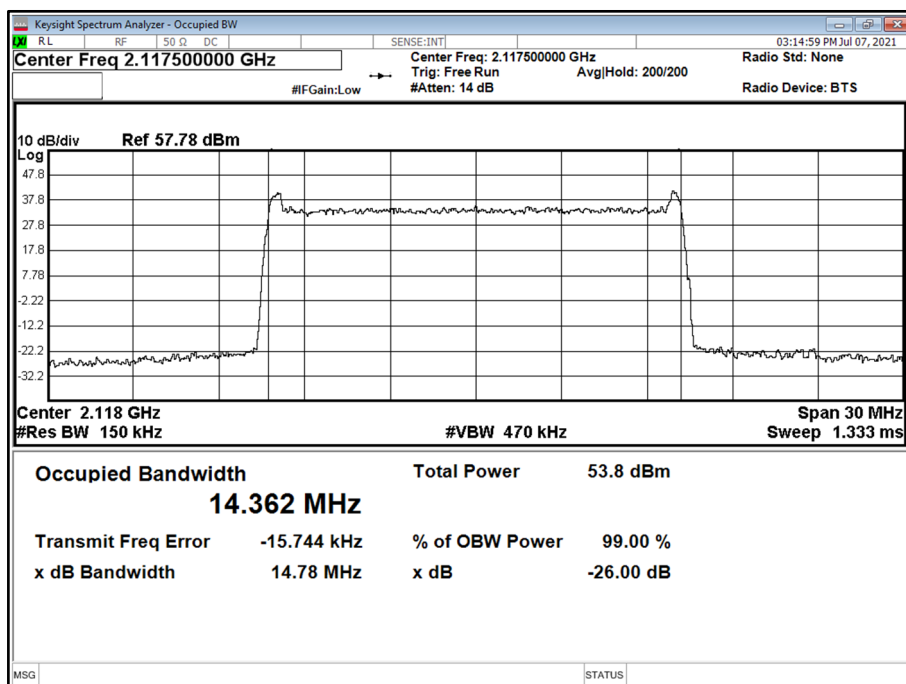




Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position M

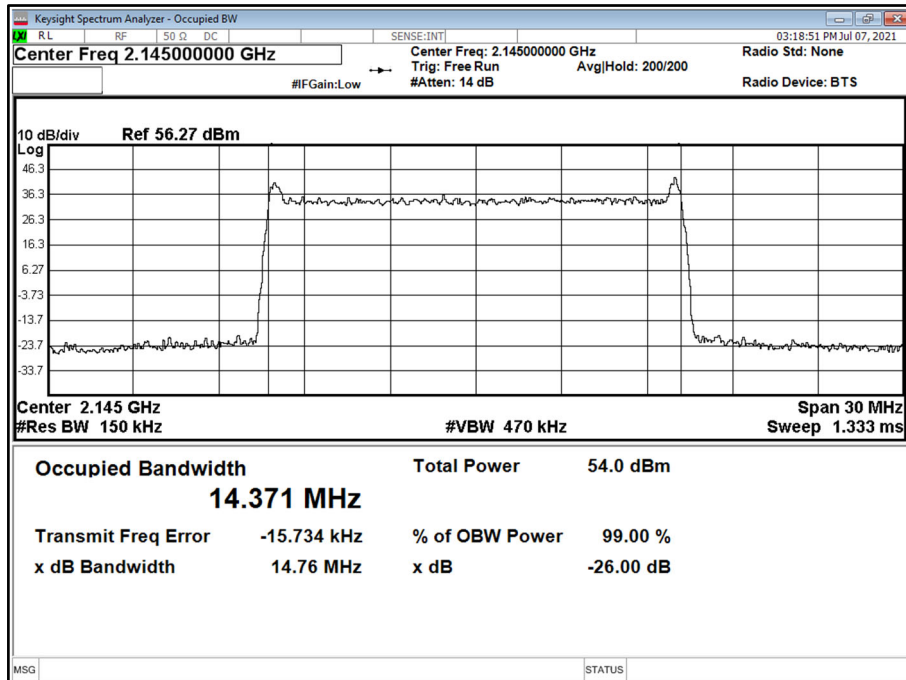


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position T

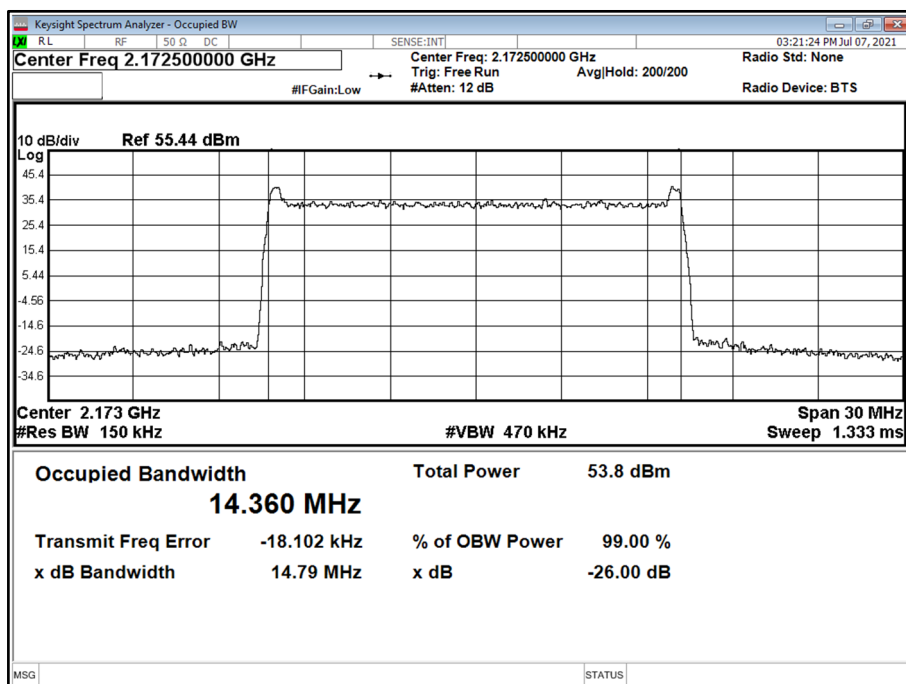




Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position B

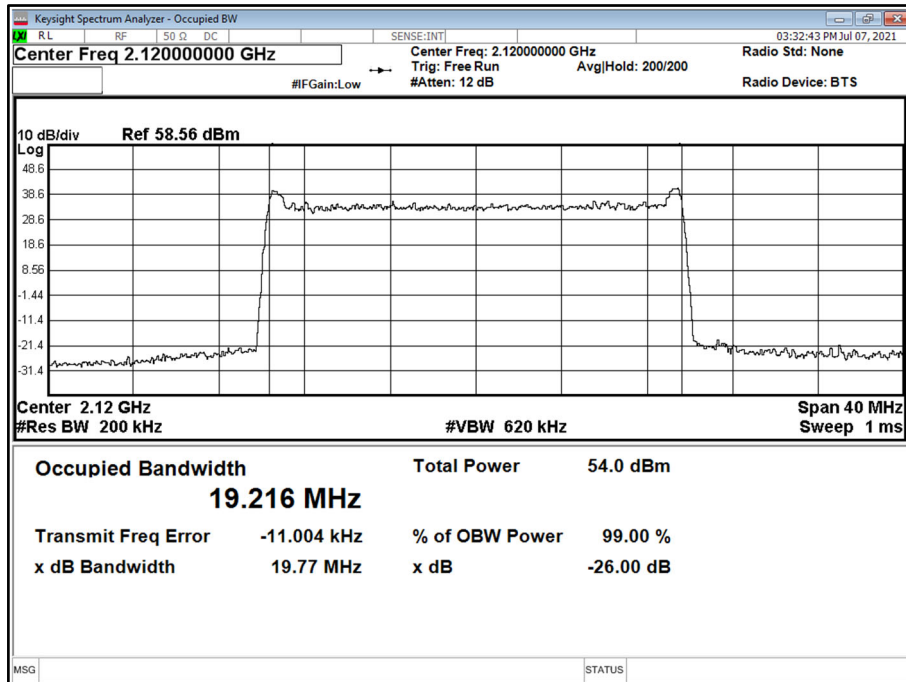


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position M

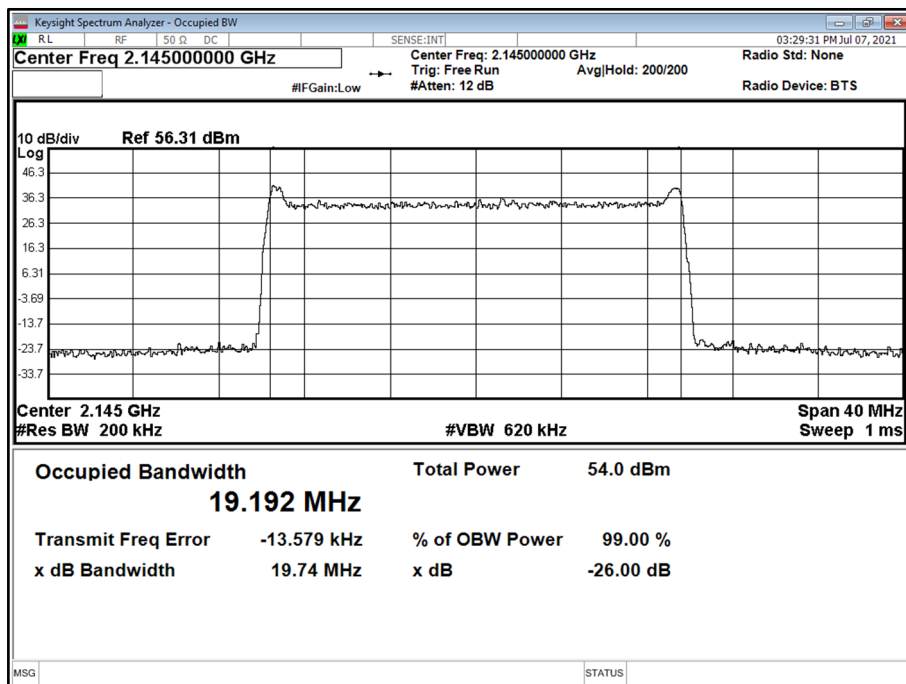



Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 20.0 MHz - Channel Position T

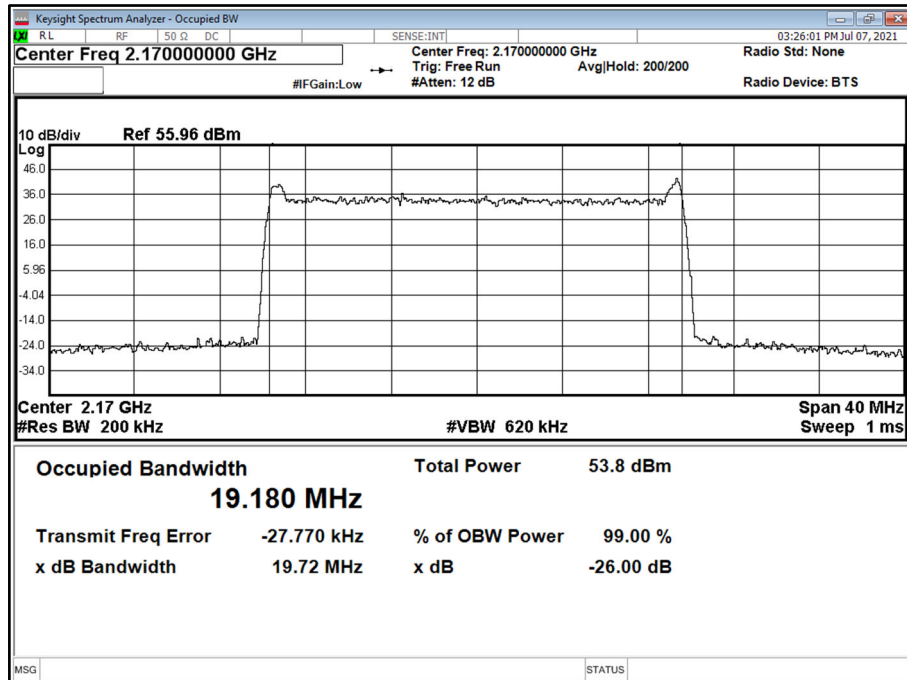



2.3 BAND EDGE

2.3.1 Specification Reference

FCC CFR 47 Part 27, Clause 27.53
Industry Canada RSS-139, Clause 6.5
FCC CFR 47 Part 2, Clause 2.1051

2.3.2 Date of Test and Modification State

07 July 2021 - Modification State 0

2.3.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.4 Environmental Conditions

Ambient Temperature 22.4°C
Relative Humidity 44.5%

2.3.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.0.

Band Edge measurements were used an Integration Bandwidth of at least 1% of the measured 26dB Bandwidth.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \log(N)$, where N is equal to the number of MIMO antenna ports.

For 4 ports, the limit was calculated as being $-13 \text{ dBm} - 10 * \log(4) = -19 \text{ dBm}$.


2.3.6 Test Results

Configuration 1


Maximum Output Power 46.00 dBm

| Antenna | NR in NR/ESS Setup (NB-IoT) Modulation | NR in NR/ESS Setup (NB-IoT) Carrier Bandwidth | Band Edge (MHz) | |
|---------|---|---|--------------------|--------------------|
| | | | Channel Position B | Channel Position T |
| A | QPSK | 10.0 MHz | 2,115.0 | 2,175.0 |
| A | QPSK | 15.0 MHz | 2,117.5 | 2,172.5 |
| A | QPSK | 20.0 MHz | 2,120.0 | 2,170.0 |


Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position B

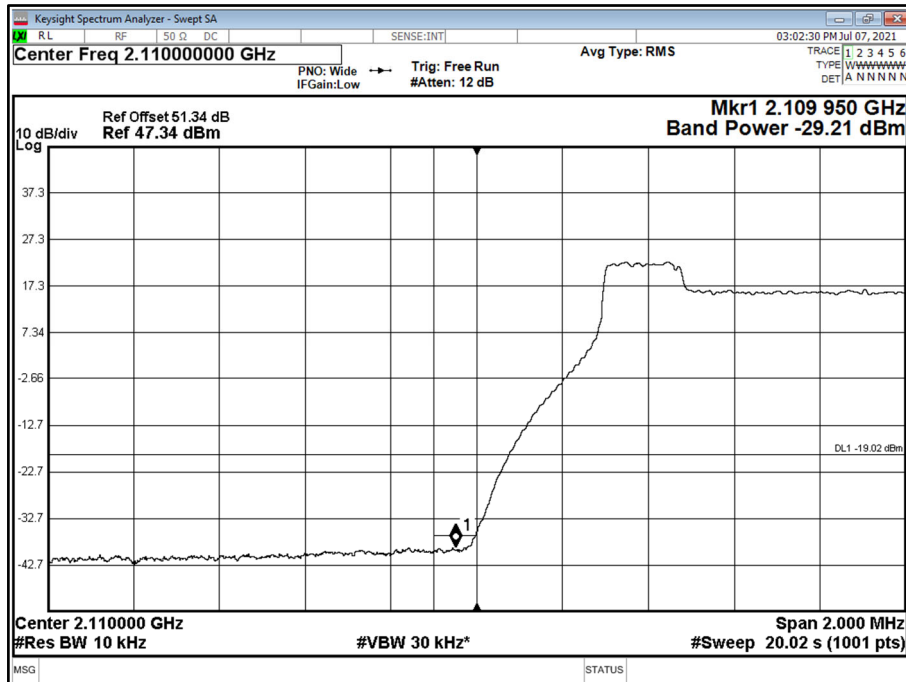

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 10.0 MHz - Channel Position T

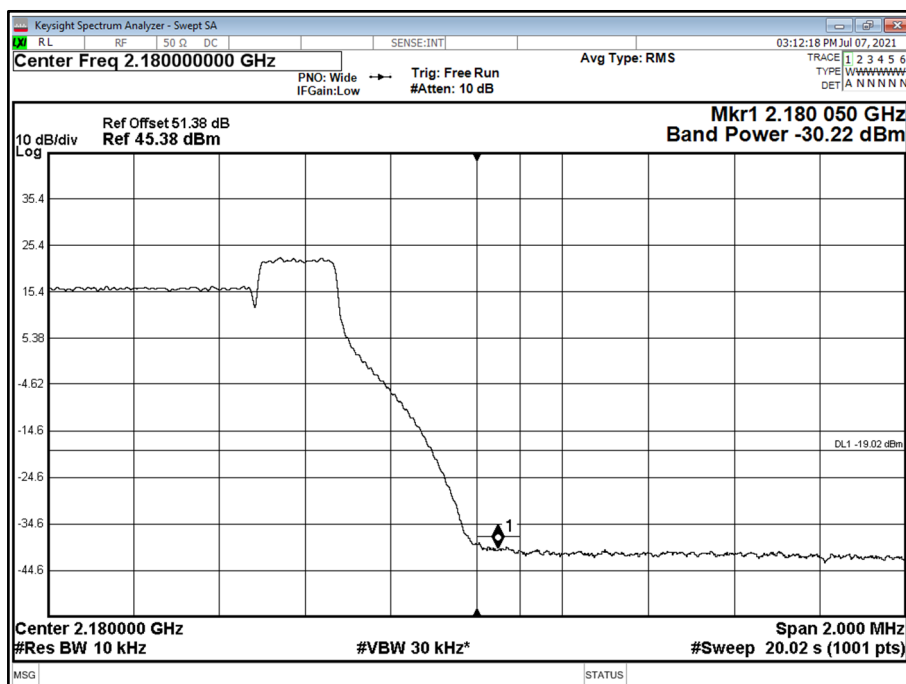

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position B

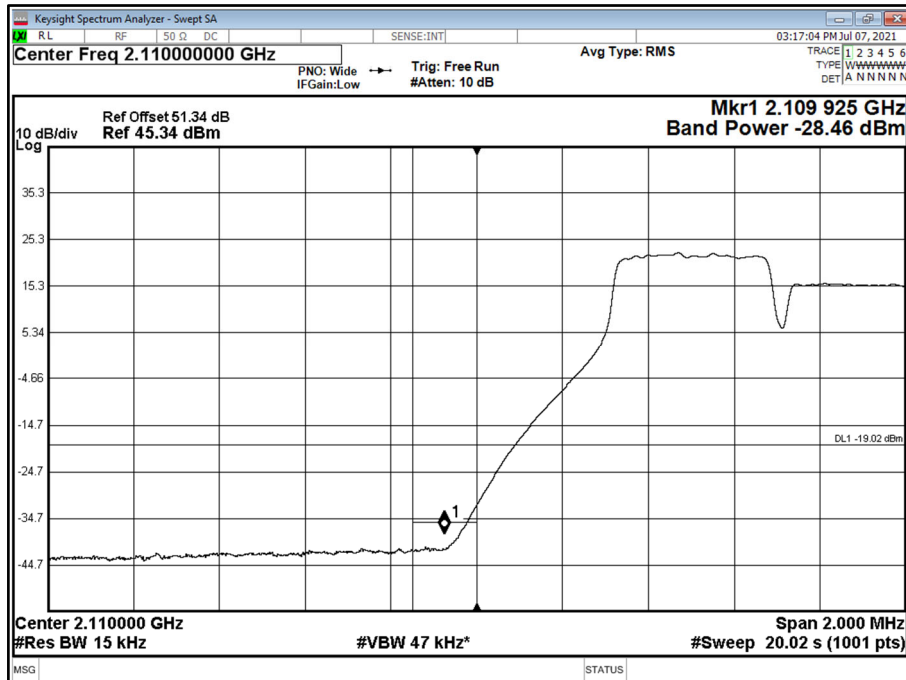

Antenna A - NR in NR/ESS Setup (NB-IoT) Modulation QPSK - NR in NR/ESS Setup (NB-IoT)
Carrier Bandwidth 15.0 MHz - Channel Position T

