


# TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China  
Report Number: 2401T34440E-RFA  
FCC ID: T2C-UVC85  
IC: 10741A-UVC85

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;  
RSS-247 ISSUE 3, AUGUST 2023

## Sample Description

Product Type: Video Conferencing Camera  
Model No.: UVC85  
Multiple Model(s) No.: N/A  
Trade Mark:   
Date Received: 2024/06/04  
Issue Date: 2024/09/27

Test Result:

Pass<sup>▲</sup>

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Gala Liu

Gala Liu  
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao  
EMC Manager

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

**Bay Area Compliance Laboratories Corp. (Shenzhen)**

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>3</b>
<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE .....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>12</b>
<b>FCC §15.247 (I) &amp; §1.1307 (B) (3) &amp; §2.1091 - RF EXPOSURE EVALUATION .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
RESULT .....	14
<b>RSS-102 § 4 - EXPOSURE LIMITS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
RESULT .....	15
<b>FCC §15.203 &amp; RSS-GEN §6.8 - ANTENNA REQUIREMENT .....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
ANTENNA CONNECTOR CONSTRUCTION .....	17
<b>FCC §15.207 (A) &amp; RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP .....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE .....	18
FACTOR & OVER LIMIT CALCULATION.....	19
TEST DATA .....	19
<b>FCC §15.209, §15.205 &amp; §15.247(D) &amp; RSS-247§ 5.5 - SPURIOUS EMISSIONS .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24
EUT SETUP .....	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	25
TEST PROCEDURE .....	26
FACTOR & OVER LIMIT/MARGIN CALCULATION .....	26
TEST DATA .....	26
<b>EUT PHOTOGRAPHS.....</b>	<b>41</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>42</b>

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401T34440E-RFA	Original Report	2024/09/27

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

HVIN	UVC85
FVIN	UVC85
Product	Video Conferencing Camera
Tested Model	UVC85
Multiple Model(s)	N/A
Frequency Range	Bluetooth: 2402-2480MHz
Transmit Power	7.90dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification <sup>#</sup>	3.51dBi (provided by the applicant)
Voltage Range	DC 48V from Adapter or DC 54V from POE
Sample serial number	2MDE-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note 1: The device install two certified WLAN module: YL43752(FCC ID: T2C-YL43752, IC: 10741A-YL43752) and YL43456(FCC ID: T2C-YL43456, IC: 10741A-YL43456), for module YL43752, support Bluetooth(include BLE), 2.4GHz Wi-Fi and 5GHz Wi-Fi, for module YL43456, support 2.4GHz Wi-Fi and 5GHz Wi-Fi. Note 2: The device support adapter power mode and POE power mode, the adapter power mode was select to full test, for POE power mode was checked test item AC line conducted emission on Bluetooth mode for module YL43752 and on 2.4GHz Wi-Fi mode for module YL43456, and test item radiated emission of below 1GHz on 2.4GHz Wi-Fi mode for both two module, test result show the POE mode can compliance with the limit.	

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...	...	...	...
...	...	...	...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

“AuthenticationTool.exe v2.0.2.0”<sup>#</sup> software was used and the power level is Default<sup>#</sup>. The power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude E5430	JG3NLV1
Unknown	Earphone	Unknown	Unknown
Redmi	Monitor	24B1	QVGP3HA038953
Kingston	Flash drive	Unknown	Unknown
Shenzhen JingQuanHua&Evemse Intel ligent Electric Co.,Ltd	Adapter	YLPS482000C	Unknown
Unknown	Adapter	CD265	Unknown
HIKVISION	Router	DS-3WR03	10021642429
TP-LINK	POE	TL-POE2412G	T240050-2-PoE
Unknown	Receptacle	Unknown	Unknown


**External I/O Cable**

Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	1.0	EUT	Adapter
Un-shielding Un-Detachable AC Cable	1.0	POE	EUT
Un-shielding Un-Detachable HDMI Cable	1.5	EUT	Monitor
Un-shielded Detachable AC Cable	1.5	Adapter	LISN/AC Mains
Un-shielding Un-Detachable AC Cable	1.5	Receptacle	LISN/AC Mains
Un-shielding Detachable AC Cable	0.5	Receptacle	POE
Unshielded detachable USB cable	1.0	EUT	PC
Unshielded un-detachable RJ45 cable	2.5	EUT	PC
Unshielded un-detachable RJ45 cable	8	EUT	Router


## Block Diagram of Test Setup

Power by Adapter

For Conducted Emissions:

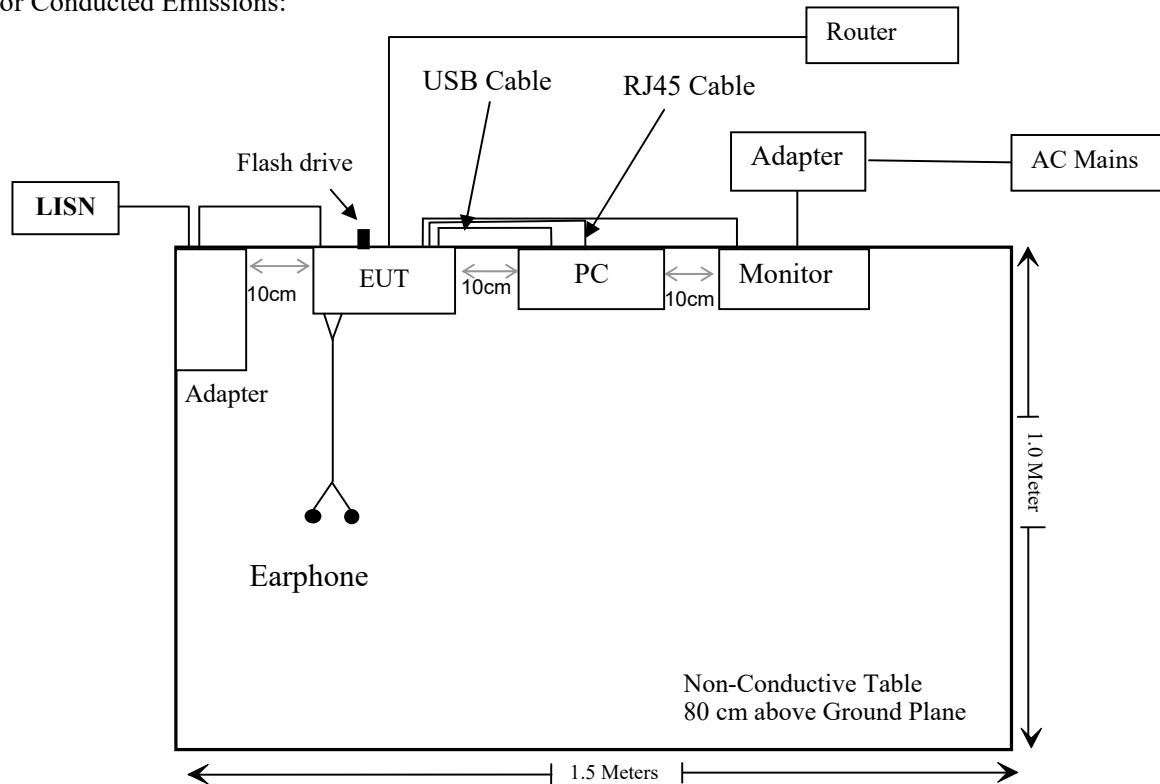


For Radiated Emissions below 1GHz:

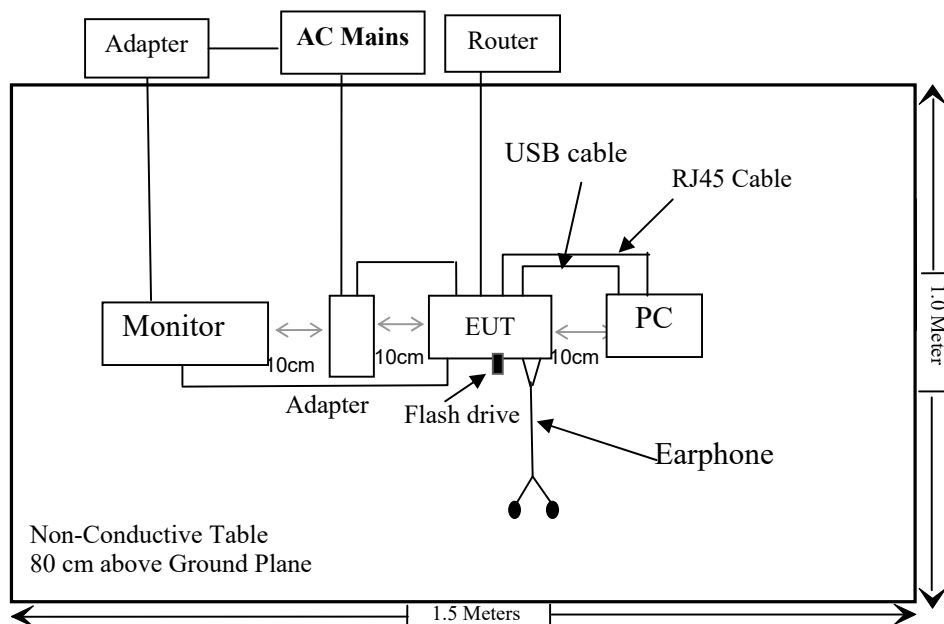




For Radiated Emissions above 1GHz:

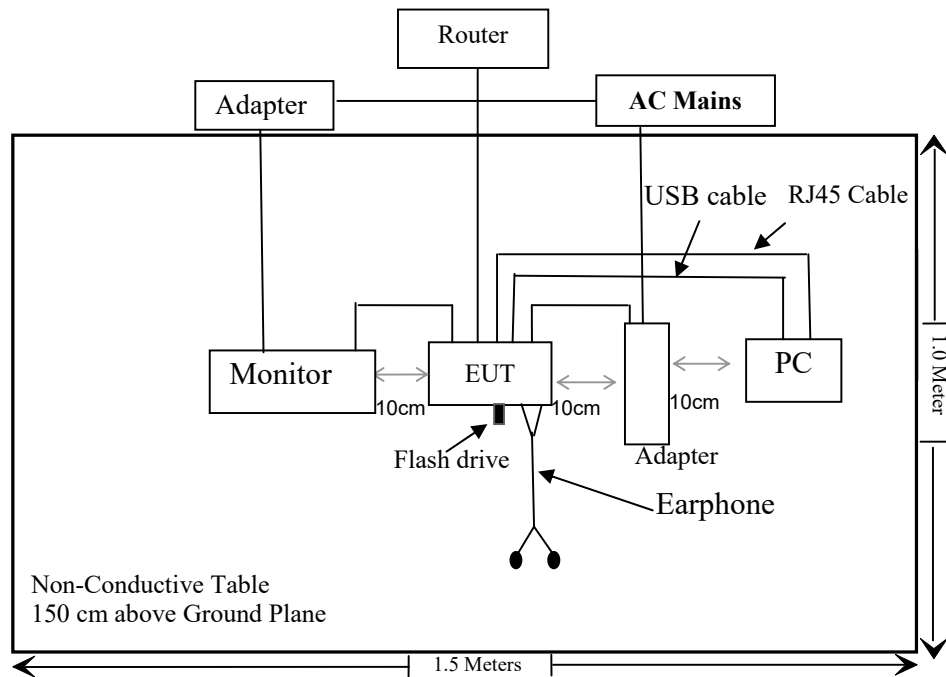


Power by POE

For Conducted Emissions:

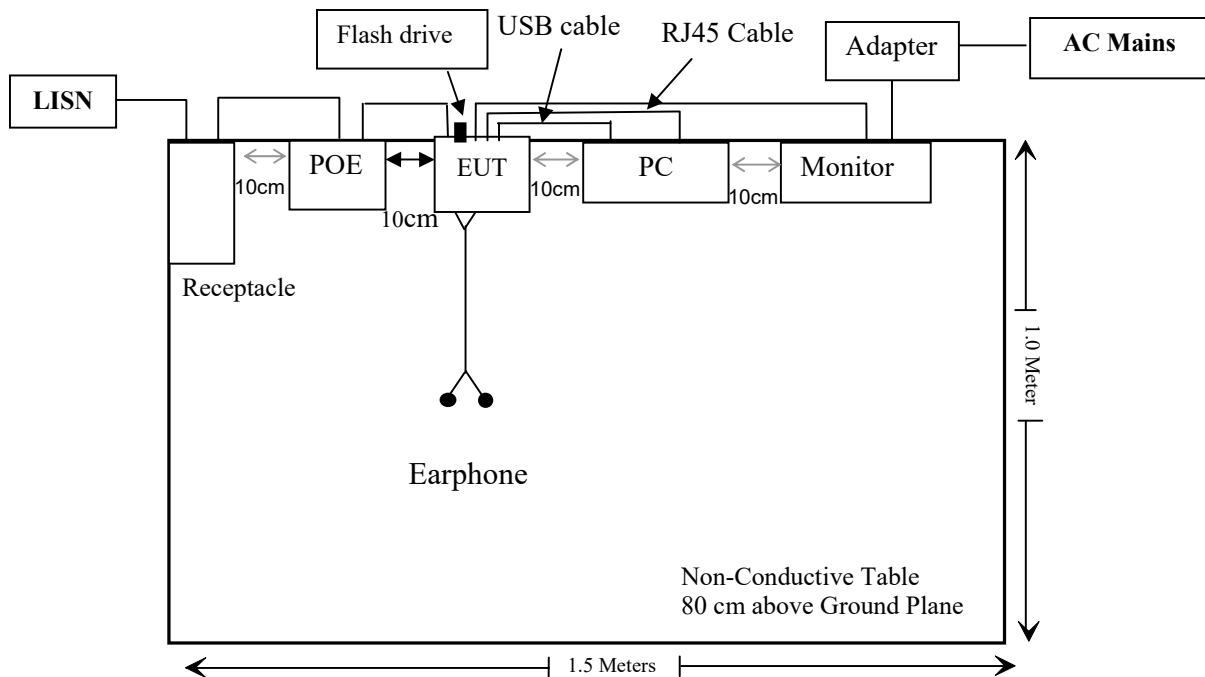

For Radiated Emissions

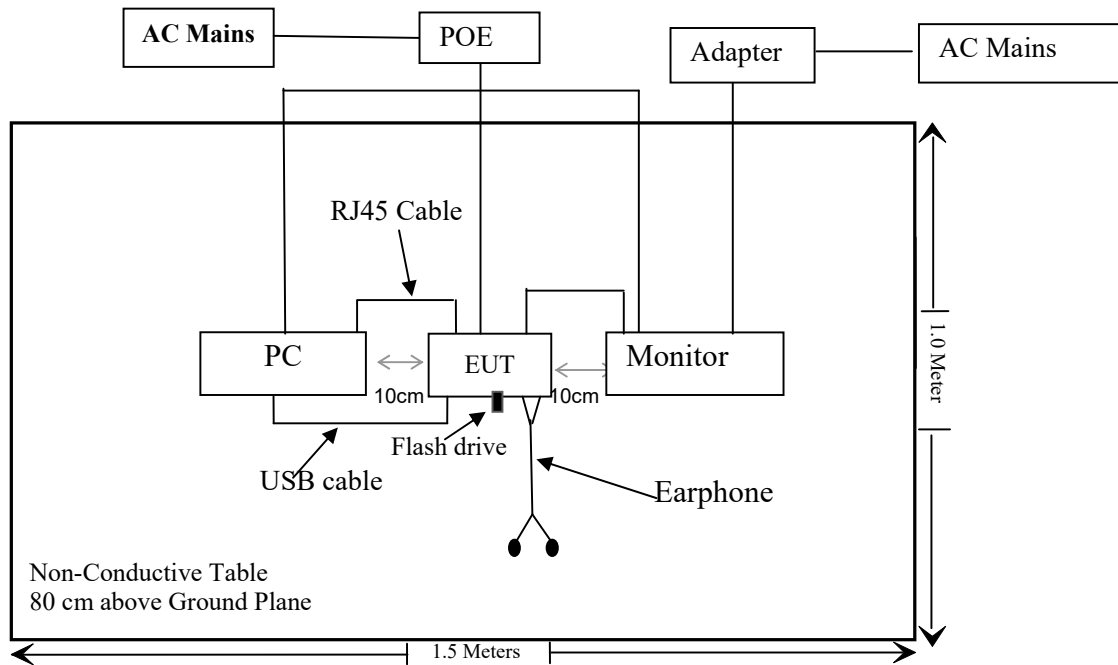

## SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result	Remark
§15.247 (i), §1.1307 (b) (3) & §2.1091	RSS-102 §4	RF Exposure Evaluation & Exposure Limits	Compliant	-
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant	-
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant	-
FCC §15.205, §15.209, §15.247(d)	RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant	-
FCC §15.247(a)(1)	RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	-	See Note
FCC §15.247(a)(1)	RSS-247 § 5.1 (b)	Channel Separation Test	-	See Note
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	-	See Note
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Quantity of hopping channel Test	-	See Note
FCC §15.247(b)(1)	RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	-	See Note
FCC §15.247(d)	RSS-247 § 5.5	Band edges	-	See Note

### Note:

1: The manufacturer declared certified WLAN module installed in EUT, model YL43752 (FCC ID: T2C-YL43752, IC: 10741A-YL43752).

2: The test data are referred to the module report SZNS220511-19727E-RFA, the reference of each test item and the data of reference module report as below:

Test item	Reference data of module report SZNS220511-19727E-RFA
20 dB Emission Bandwidth & 99% Occupied Bandwidth	Page 45~52
Channel Separation Test	Page 57~58
Time of Occupancy (Dwell Time)	Page 59~65
Quantity of hopping channel Test	Page 66~67
Peak Output Power Measurement	Page 53~56 Maximum EIRP=7.90dBm+3.51dBi=11.41dBm<36dBm
Band edges	Page 68~71

3: The BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
The Electro-Mechanics Co.	Horn Antenna	3115	9107-3694	2024/06/06	2027/06/05
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091 - RF EXPOSURE EVALUATION

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2 R^2$ .

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

**Result****For worst case:**

For Module YL43752:

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	8.5	3.51	1.36	9.86	9.68	0.2	768
BLE	2402-2480	8.0	3.51	1.36	9.36	8.63	0.2	768
2.4G Wi-Fi	2412-2462	18.5	3.51	1.36	19.86	96.83	0.2	768
5G Wi-Fi	5180-5240	12.0	3.39	1.24	13.24	21.09	0.2	768
	5260-5280	13.0	3.39	1.24	14.24	26.55	0.2	768
	5500-5700	12.0	3.39	1.24	13.24	21.09	0.2	768
	5745-5825	14.5	3.39	1.24	15.74	37.50	0.2	768

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: according to module report, the BT can transmit at the same time with the Wi-Fi, the 2.4G Wi-Fi and 5G Wi-Fi cannot Simultaneous transmitting

Simultaneous transmitting consideration:

The ratio= $ERP_{BT}/limit + ERP_{Wi-Fi}/limit = 9.68/768 + 96.83/768 = 0.139 < 1.0$ , so simultaneous exposure is compliant.

For Module YL43456:

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	8.0	4.42	2.27	10.27	10.64	0.2	768
BLE	2402-2480	4.0	4.42	2.27	6.27	4.24	0.2	768
2.4G Wi-Fi	2412-2462	21.0	4.42	2.27	23.27	212.32	0.2	768
5G Wi-Fi	5180-5825	16.5	3.39	1.24	17.74	59.43	0.2	768

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: according to module report, the BT cannot transmit at the same time with the Wi-Fi

The two WLAN module cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant**

## RSS-102 § 4 - EXPOSURE LIMITS

### Applicable Standard

According to RSS-102 § 4:

**Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)**

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)
0.003-10 <sup>21</sup>	83	90	-	Instantaneous <sup>*</sup>
0.1-10	-	0.73/ <i>f</i>	-	6 <sup>**</sup>
1.1-10	87/ <i>f</i> <sup>0.5</sup>	-	-	6 <sup>**</sup>
10-20	27.46	0.0728	-2	6
20-48	58.07/ <i>f</i> <sup>0.25</sup>	0.1540/ <i>f</i> <sup>0.25</sup>	8.944/ <i>f</i> <sup>0.5</sup>	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 <i>f</i> <sup>0.3417</sup>	0.008335 <i>f</i> <sup>0.3417</sup>	0.02619 <i>f</i> <sup>0.6834</sup>	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> <sup>1.2</sup>
150000-300000	0.158 <i>f</i> <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 x 10 <sup>-5</sup> <i>f</i>	616000/ <i>f</i>

**Note:** *f* is frequency in MHz.

<sup>\*</sup> Based on nerve stimulation (NS).

<sup>\*\*</sup> Based on specific absorption rate (SAR).

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. W/m<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., W).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For worst case:

For Module YL43752:

Mode	Frequency (MHz)	Antenna Gain <sup>#</sup>		Max Tune-up Power <sup>#</sup>		Evaluation Distance (m)	Power Density (W/m <sup>2</sup> )	MPE Limit (W/m <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(W)			
BT	2402-2480	3.51	2.24	8.5	0.007	0.2	0.031	5.35
BLE	2402-2480	3.51	2.24	8.0	0.006	0.2	0.027	5.35
2.4G Wi-Fi	2412-2462	3.51	2.24	18.5	0.071	0.2	0.317	5.37
5G Wi-Fi	5180-5240	3.39	2.18	12.0	0.016	0.2	0.069	9.02
	5260-5280	3.39	2.18	13.0	0.020	0.2	0.087	9.13
	5500-5700	3.39	2.18	12.0	0.016	0.2	0.069	9.39
	5745-5825	3.39	2.18	14.5	0.028	0.2	0.121	9.69

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: according to module report, the BT can transmit at the same time with the Wi-Fi, the 2.4G Wi-Fi and 5G Wi-Fi cannot Simultaneous transmitting

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.031/5.35 + 0.317/5.37 = 0.065 < 1.0$$

For Module YL43456:

Mode	Frequency (MHz)	Antenna Gain <sup>#</sup>		Max Tune-up Power <sup>#</sup>		Evaluation Distance (m)	Power Density (W/m <sup>2</sup> )	MPE Limit (W/m <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(W)			
BT	2402-2480	4.42	2.77	8.0	0.006	0.2	0.033	5.35
BLE	2402-2480	4.42	2.77	4.0	0.003	0.2	0.017	5.35
2.4G Wi-Fi	2412-2462	4.42	2.77	21.0	0.126	0.2	0.695	5.37
5G Wi-Fi	5180-5825	3.39	2.18	16.5	0.045	0.2	0.195	9.02

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: according to module report, the BT cannot transmit at the same time with the Wi-Fi

The two WLAN module cannot transmit at same time.

### Result: Compliant

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 0.2 m from nearby persons.



## FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached for Bluetooth and the maximum antenna gain<sup>#</sup> is 3.51dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain <sup>#</sup>	Impedance	Frequency Range
FPC	3.51dBi	50Ω	2.4~2.5GHz


**Result: Compliant**

## FCC §15.207 (a) & RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

### EUT Setup

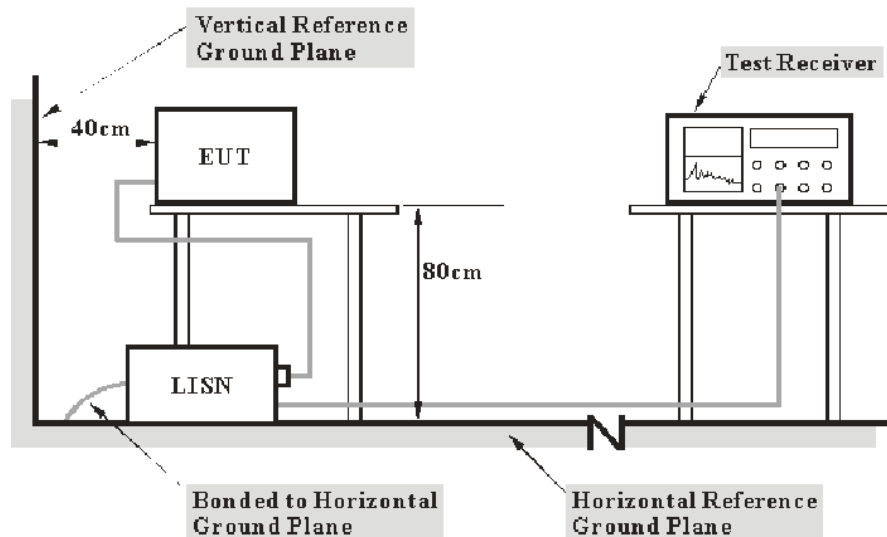

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


## Test Data

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	69 %
ATM Pressure:	101 kPa

*The testing was performed by Macy Shi from 2024-07-13 to 2024-09-04.*

*EUT operation mode: Transmitting (Maximum output power mode GFSK Low channel)*

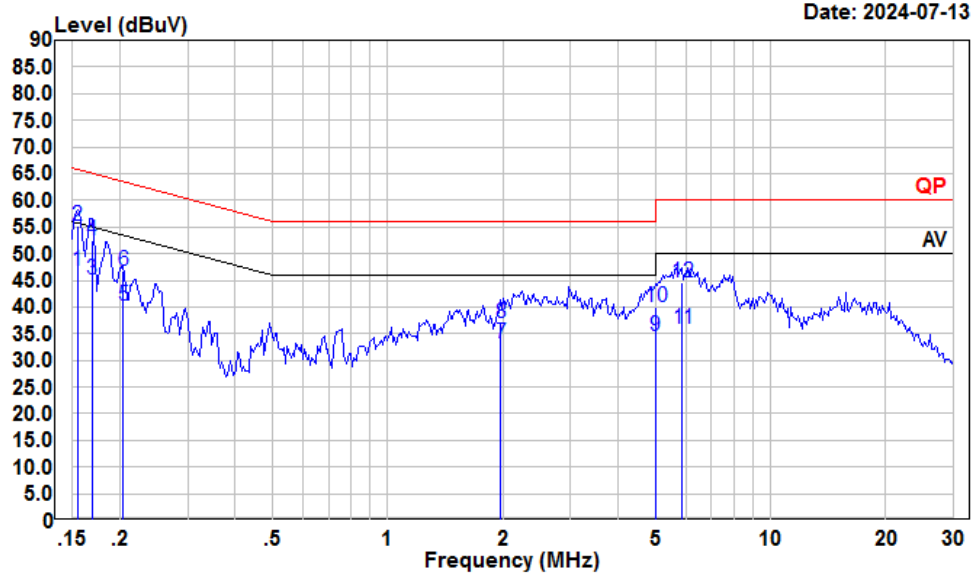**Power by Adapter  
AC 120V/60 Hz, Line**

Condition: Line


Project : 2401T34440E-RF

tester : Macy.shi

Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	25.80	46.81	10.89	10.12	55.74	-8.93	Average
2	0.15	34.28	55.29	10.89	10.12	65.74	-10.45	QP
3	0.17	24.30	45.26	10.86	10.10	55.03	-9.77	Average
4	0.17	31.60	52.56	10.86	10.10	65.03	-12.47	QP
5	0.20	19.40	40.28	10.79	10.09	53.45	-13.17	Average
6	0.20	25.99	46.87	10.79	10.09	63.45	-16.58	QP
7	1.97	12.32	33.11	10.60	10.19	46.00	-12.89	Average
8	1.97	16.30	37.09	10.60	10.19	56.00	-18.91	QP
9	5.00	13.94	34.50	10.38	10.18	50.00	-15.50	Average
10	5.00	19.45	40.01	10.38	10.18	60.00	-19.99	QP
11	5.87	15.39	36.01	10.44	10.18	50.00	-13.99	Average
12	5.87	23.87	44.49	10.44	10.18	60.00	-15.51	QP

## AC 120V/60 Hz, Neutral

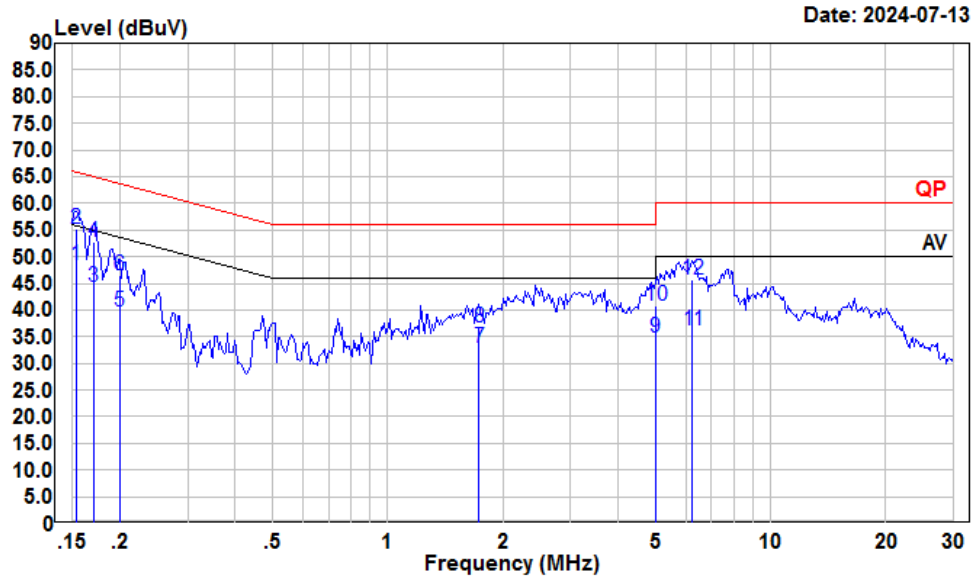


Condition: Neutral

Project : 2401T34440E-RF

tester : Macy.shi

Note : BT


	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	27.81	48.53	10.59	10.13	55.82	-7.29	Average
2	0.15	34.48	55.20	10.59	10.13	65.82	-10.62	QP
3	0.17	23.70	44.31	10.51	10.10	54.94	-10.63	Average
4	0.17	32.10	52.71	10.51	10.10	64.94	-12.23	QP
5	0.20	19.17	39.66	10.40	10.09	53.62	-13.96	Average
6	0.20	26.06	46.55	10.40	10.09	63.62	-17.07	QP
7	1.73	12.38	33.05	10.50	10.17	46.00	-12.95	Average
8	1.73	16.07	36.74	10.50	10.17	56.00	-19.26	QP
9	5.00	14.18	34.88	10.52	10.18	50.00	-15.12	Average
10	5.00	20.20	40.90	10.52	10.18	60.00	-19.10	QP
11	6.25	15.27	36.10	10.64	10.19	50.00	-13.90	Average
12	6.25	24.98	45.81	10.64	10.19	60.00	-14.19	QP

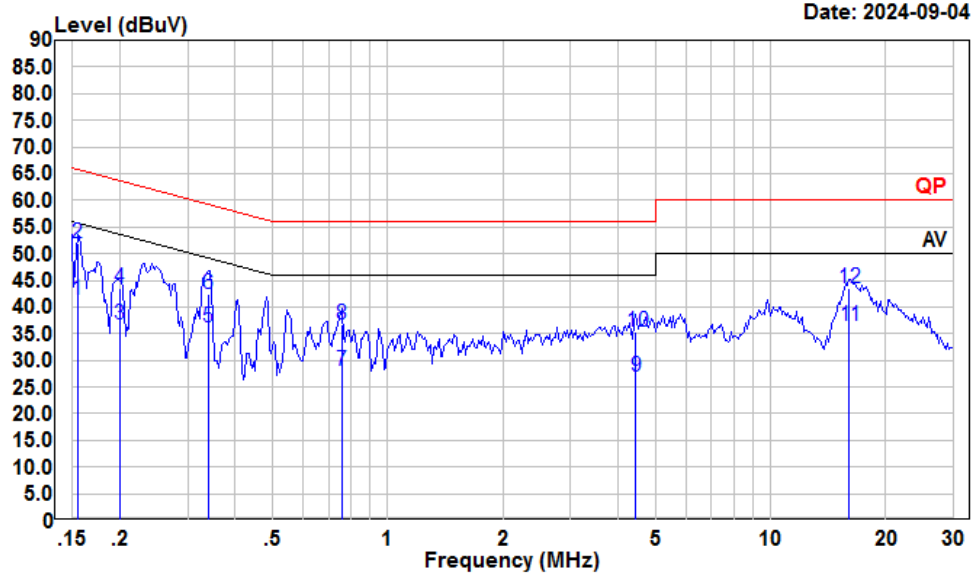**Power by POE**  
**AC 120V/60 Hz, Line**

Condition: Line  
Project : 2401T34440E-RF  
tester : Macy.shi  
Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.155	20.25	41.26	10.89	10.12	55.74	-14.48	Average
2	0.155	30.91	51.92	10.89	10.12	65.74	-13.82	QP
3	0.200	15.78	36.67	10.80	10.09	53.62	-16.95	Average
4	0.200	22.61	43.50	10.80	10.09	63.62	-20.12	QP
5	0.339	15.55	36.30	10.63	10.12	49.22	-12.92	Average
6	0.339	21.74	42.49	10.63	10.12	59.22	-16.73	QP
7	0.759	7.45	28.06	10.48	10.13	46.00	-17.94	Average
8	0.759	16.16	36.77	10.48	10.13	56.00	-19.23	QP
9	4.454	6.52	27.06	10.34	10.20	46.00	-18.94	Average
10	4.454	14.75	35.29	10.34	10.20	56.00	-20.71	QP
11	16.055	15.62	36.50	10.67	10.21	50.00	-13.50	Average
12	16.055	22.51	43.39	10.67	10.21	60.00	-16.61	QP

## AC 120V/60 Hz, Neutral

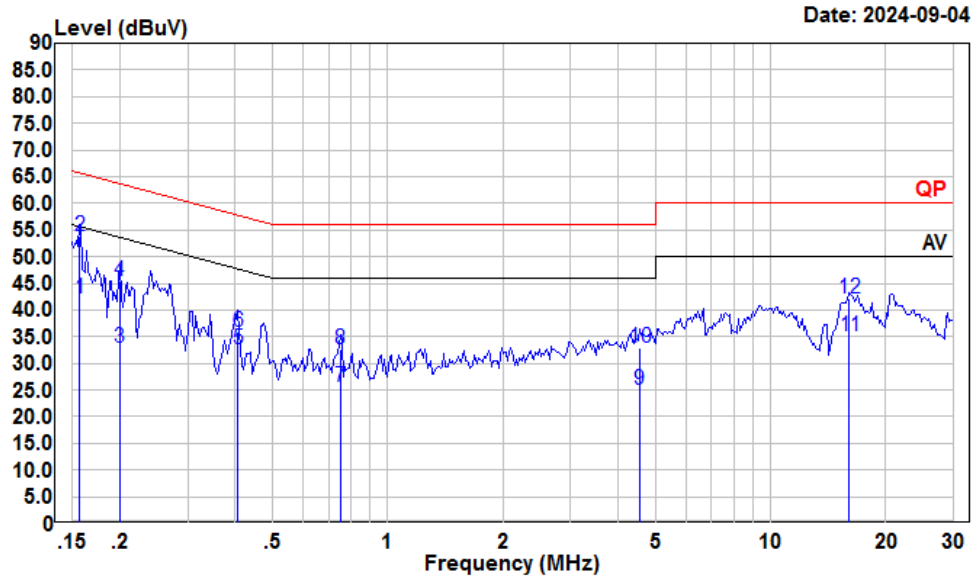

Condition: Neutral

Project : 2401T34440E-RF

tester : Macy.shi

Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	21.56	42.25	10.57	10.12	55.65	-13.40	Average
2	0.156	33.23	53.92	10.57	10.12	65.65	-11.73	QP
3	0.200	12.32	32.81	10.40	10.09	53.62	-20.81	Average
4	0.200	24.96	45.45	10.40	10.09	63.62	-18.17	QP
5	0.406	12.02	32.75	10.63	10.10	47.73	-14.98	Average
6	0.406	15.07	35.80	10.63	10.10	57.73	-21.93	QP
7	0.751	4.64	25.51	10.74	10.13	46.00	-20.49	Average
8	0.751	11.70	32.57	10.74	10.13	56.00	-23.43	QP
9	4.549	4.36	25.02	10.47	10.19	46.00	-20.98	Average
10	4.549	12.33	32.99	10.47	10.19	56.00	-23.01	QP
11	16.055	14.05	35.04	10.78	10.21	50.00	-14.96	Average
12	16.055	21.05	42.04	10.78	10.21	60.00	-17.96	QP


## FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10

### EUT Setup


9 kHz-30MHz:

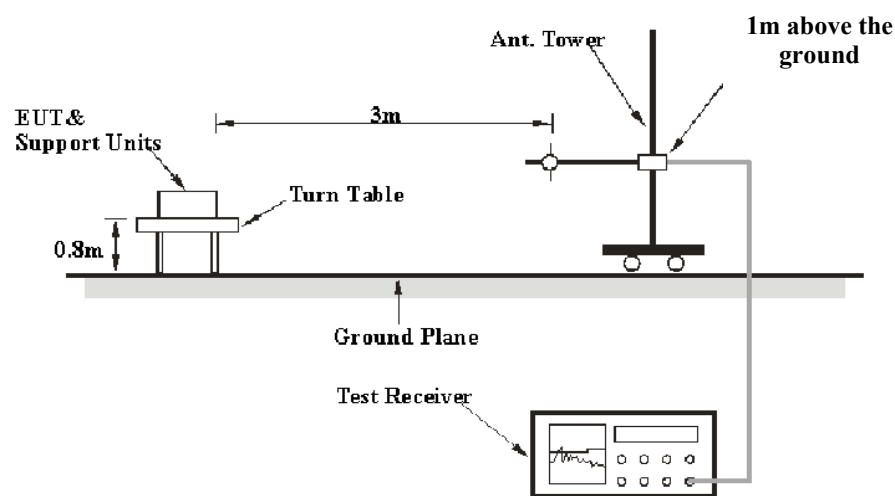

30MHz-1GHz:

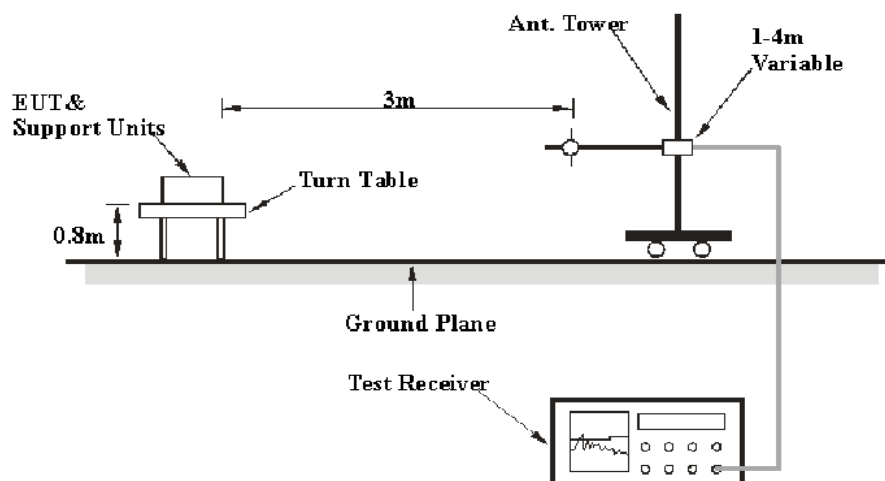

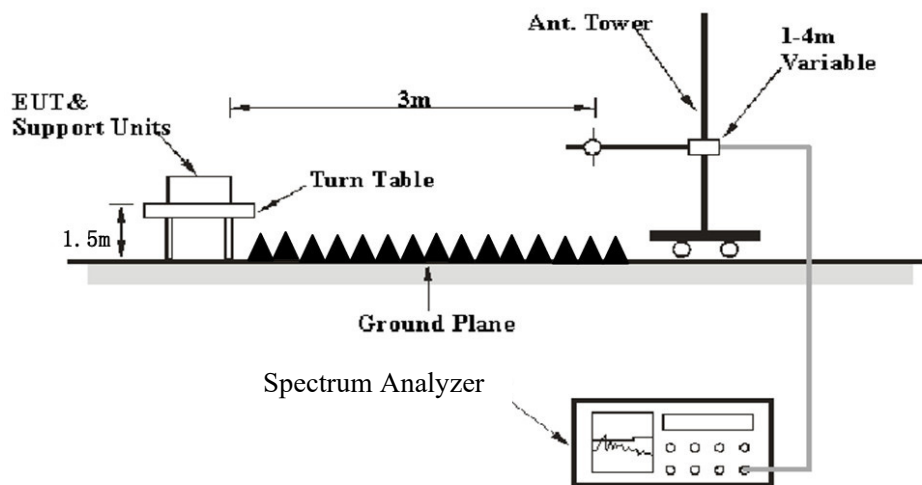

**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics & Band Edge			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ ,

Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulse, etc.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	22~25.5 °C
Relative Humidity:	50~54 %
ATM Pressure:	101 kPa

*The testing was performed by Anson Su on 2024-07-12 for below 1GHz and Zenos Qiao on 2024-07-18 for above 1GHz.*

*EUT operation mode: Transmitting*


*Note: After pre-scan in the X, Y and Z axes of orientation, the worst case as below:*

**9 kHz-30MHz:**

*The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.*

30MHz-1GHz: (Maximum output power mode GFSK Low channel)  
Power by Adapter


Horizontal

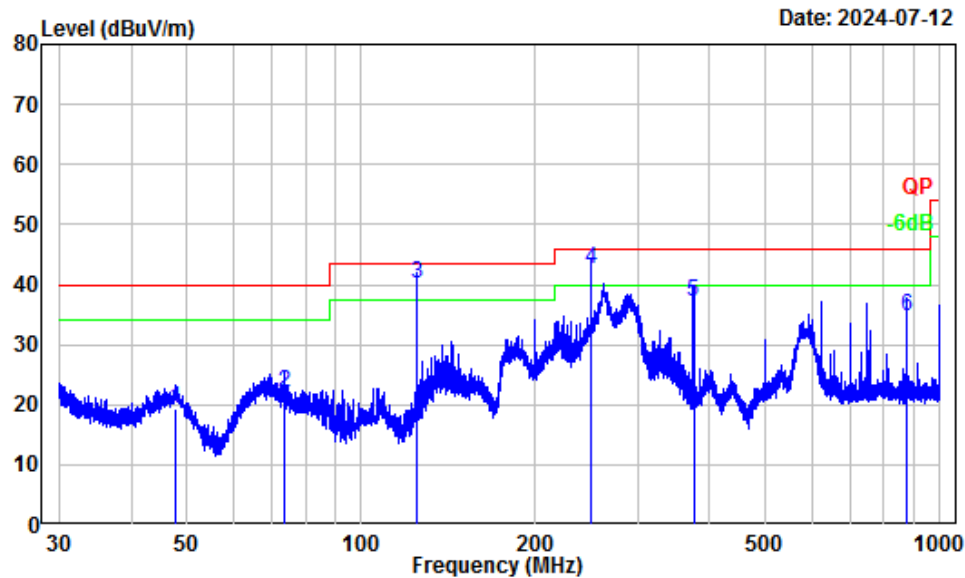

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401T34440E-RF  
Test Mode : BT  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.66	-16.35	35.54	19.19	40.00	-20.81	QP
2	73.68	-17.80	39.86	22.06	40.00	-17.94	QP
3	125.01	-12.21	52.50	40.29	43.50	-3.21	QP
4	249.97	-14.53	57.00	42.47	46.00	-3.53	QP
5	375.12	-11.29	48.50	37.21	46.00	-8.79	QP
6	875.25	-4.63	39.39	34.76	46.00	-11.24	QP

Vertical

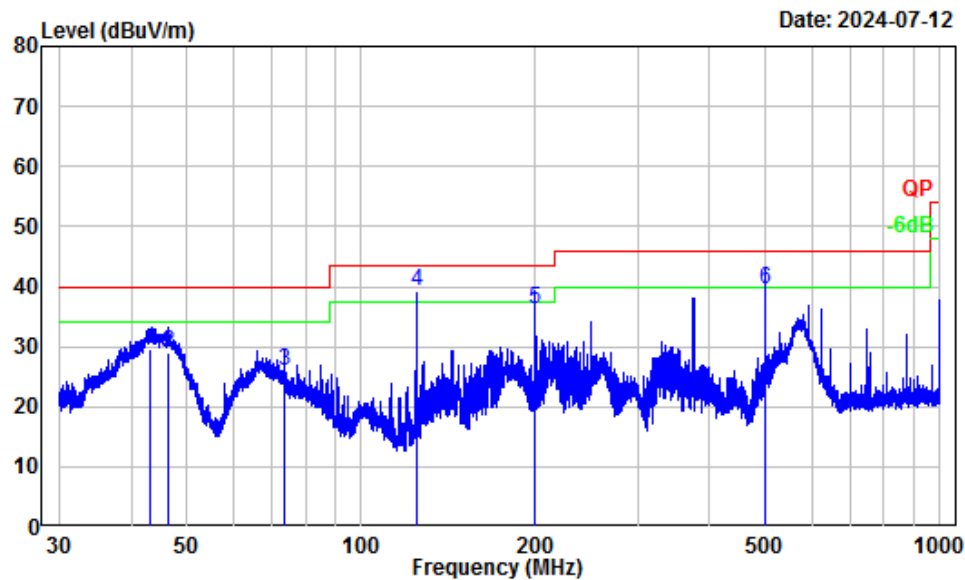

Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401T34440E-RF  
Test Mode : BT  
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.16	-14.81	44.30	29.49	40.00	-10.51	QP
2	46.22	-16.52	45.59	29.07	40.00	-10.93	QP
3	73.58	-18.68	44.63	25.95	40.00	-14.05	QP
4	125.01	-12.66	52.00	39.34	43.50	-4.16	QP
5	199.99	-14.69	51.00	36.31	43.50	-7.19	QP
6	500.08	-8.47	48.00	39.53	46.00	-6.47	QP

**Above 1GHz:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
GFSK(worst case)							
Low Channel 2402MHz							
2376.05	55.88	PK	H	-2.93	52.95	74	-21.05
2375.70	55.63	PK	V	-2.93	52.70	74	-21.30
4804.00	60.21	PK	H	2.42	62.63	74	-11.37
4804.00	58.95	PK	V	2.42	61.37	74	-12.63
Middle Channel 2441MHz							
4882.00	57.48	PK	H	2.58	60.06	74	-13.94
4882.00	56.27	PK	V	2.58	58.85	74	-15.15
High Channel 2480MHz							
2483.56	61.26	PK	H	-3.17	58.09	74	-15.91
2483.80	59.80	PK	V	-3.17	56.63	74	-17.37
4960.00	52.76	PK	H	2.77	55.53	74	-18.47
4960.00	48.05	PK	V	2.77	50.82	74	-23.18

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Corrected Factor (dB)	Average Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel 2402MHz							
2376.05	52.95	H	-24.73	28.22	54	-25.78	Bandedge
2375.70	52.70	V	-24.73	27.97	54	-26.03	Bandedge
4804.00	62.63	H	-24.73	37.90	54	-16.10	Harmonic
4804.00	61.37	V	-24.73	36.64	54	-17.36	Harmonic
Middle Channel 2441MHz							
4882.00	60.06	H	-24.73	35.33	54	-18.67	Harmonic
4882.00	58.85	V	-24.73	34.12	54	-19.88	Harmonic
High Channel 2480MHz							
2483.56	58.09	H	-24.73	33.36	54	-20.64	Bandedge
2483.80	56.63	V	-24.73	31.90	54	-22.10	Bandedge
4960.00	59.73	H	-24.73	35.00	54	-19.00	Harmonic
4960.00	58.52	V	-24.73	33.79	54	-20.21	Harmonic

Note: Average level= Peak level+ Duty Cycle Corrected Factor

Worst case duty cycle:


Duty Cycle =  $T_{on}/100ms = 2.899*2/100=0.05798$


Duty Cycle Corrected Factor =  $20\lg(\text{Duty Cycle}) = 20\lg 0.05798 = -24.73$

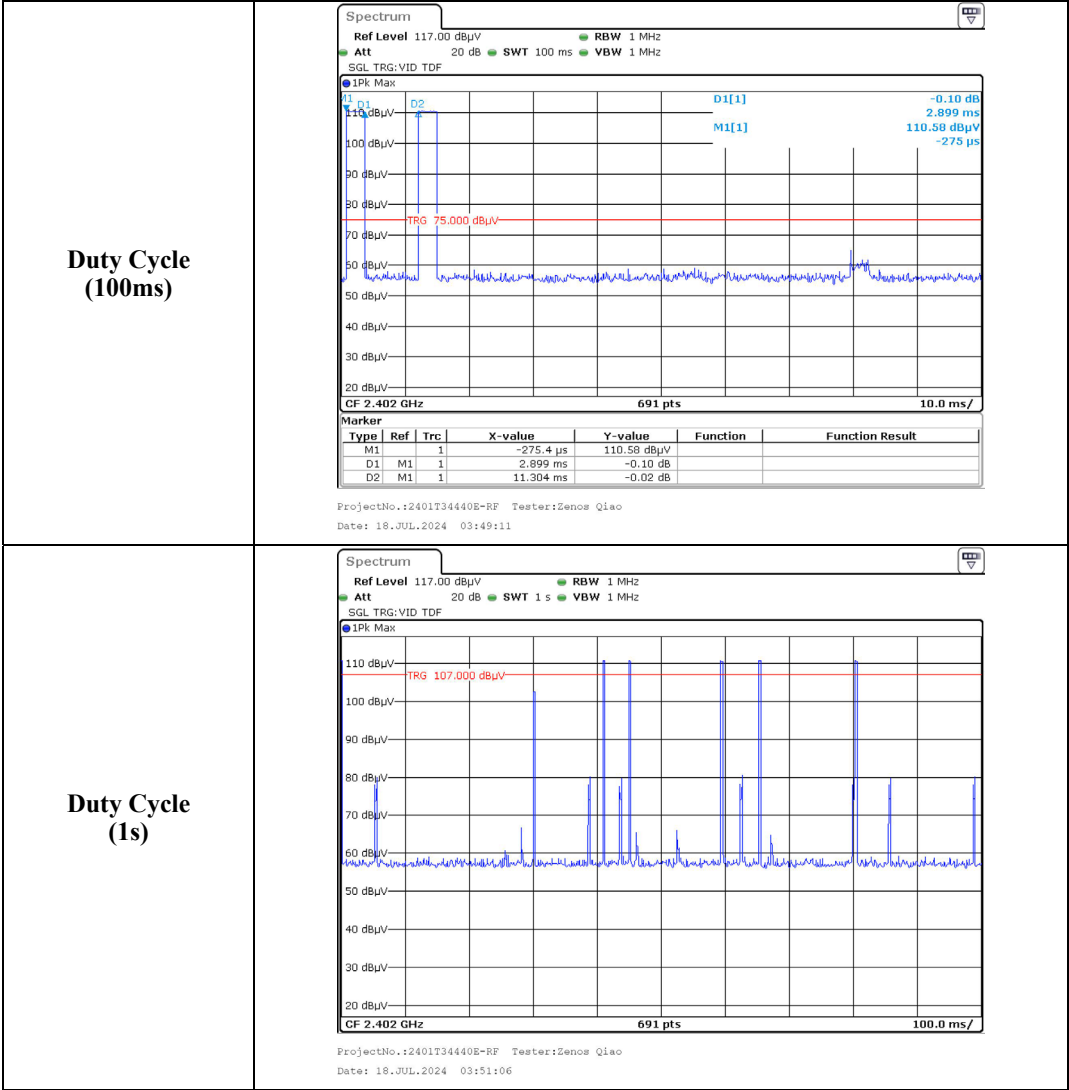





Test plots for Band Edge Measurements (Radiated):

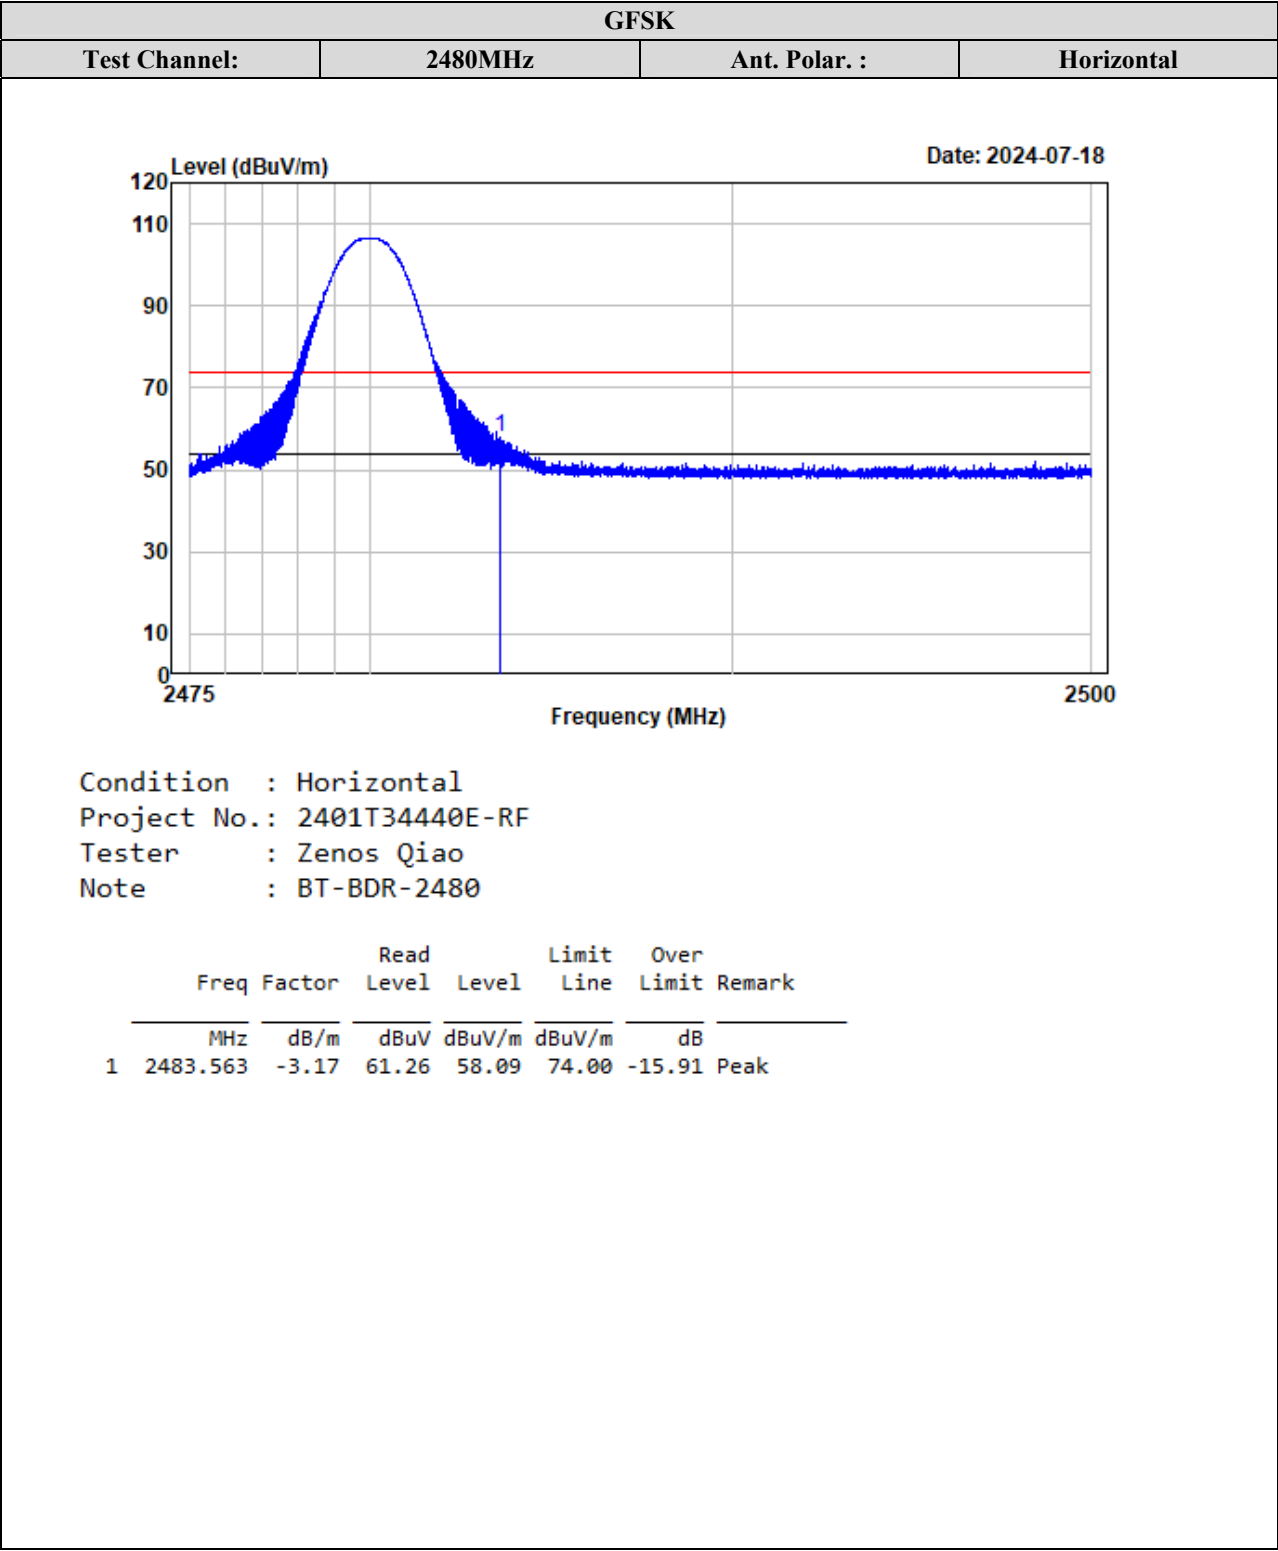


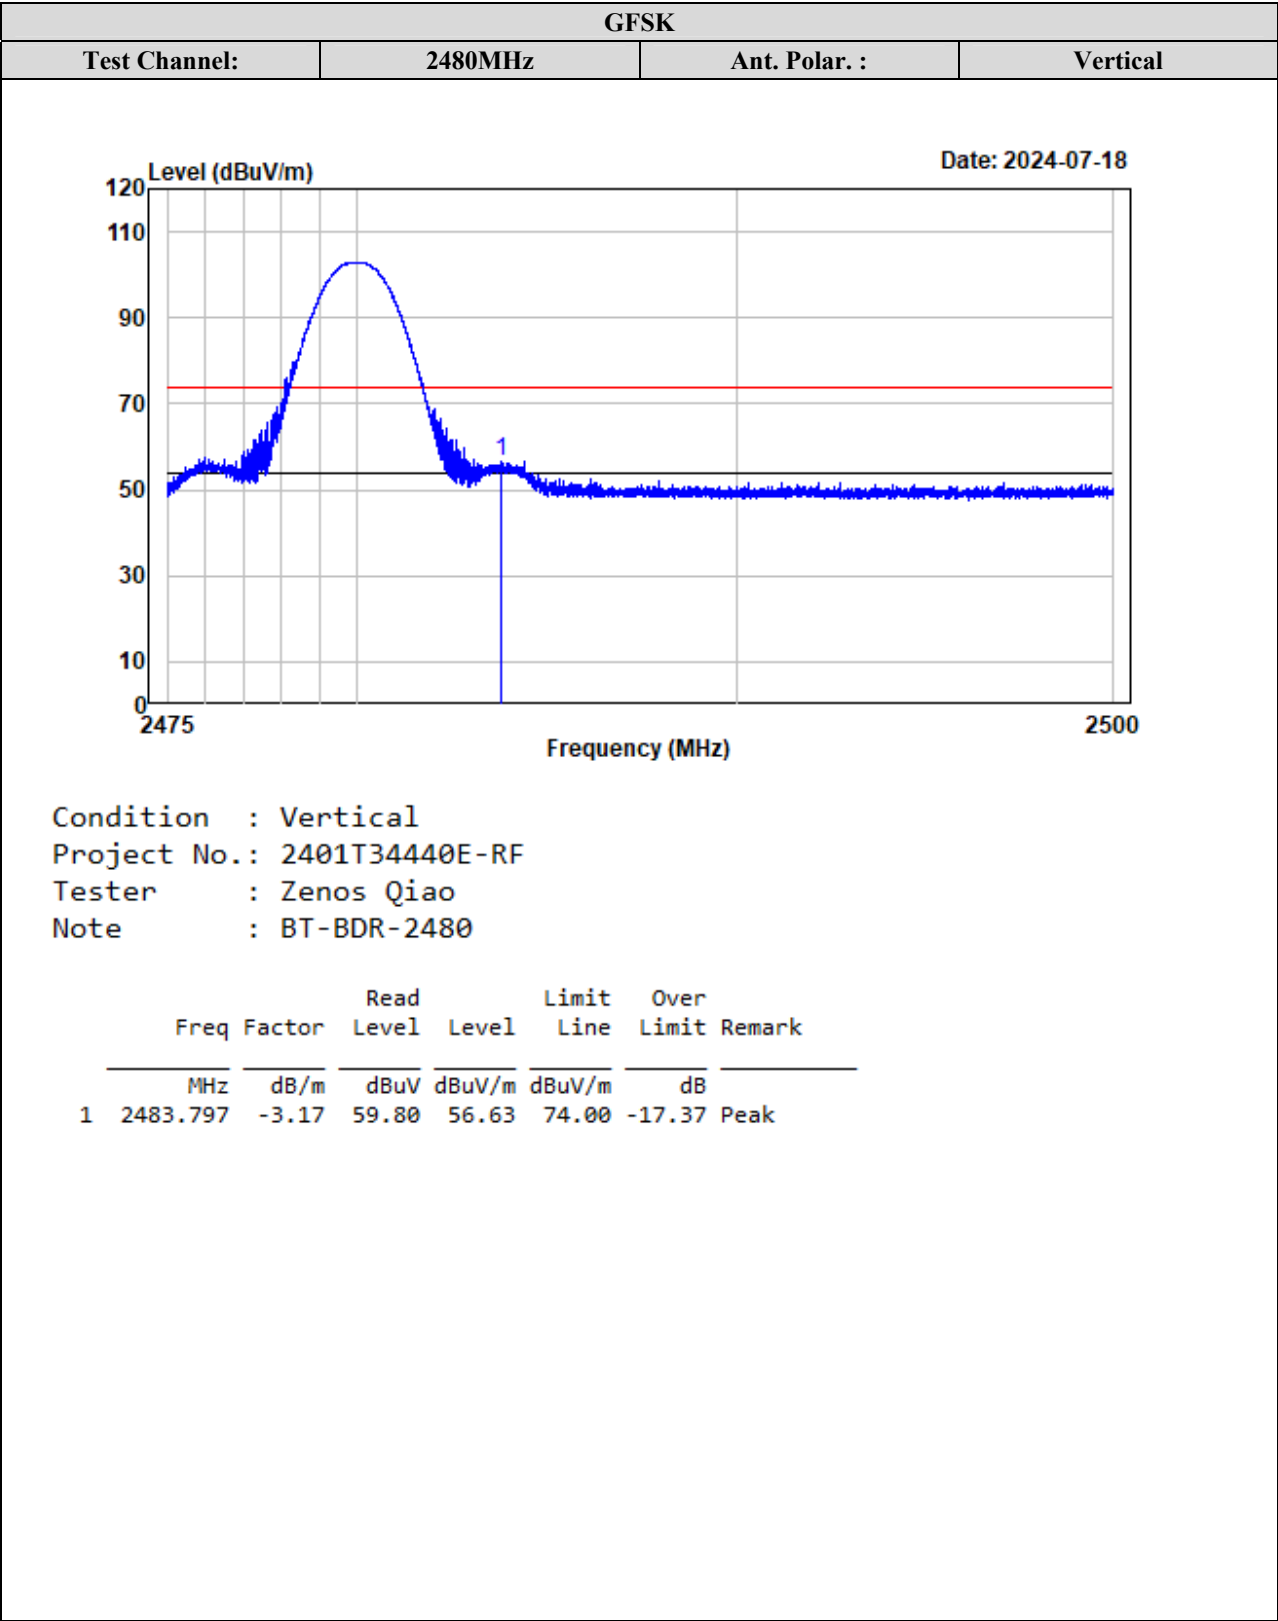



Test plots for Harmonic and Emissions Measurements:

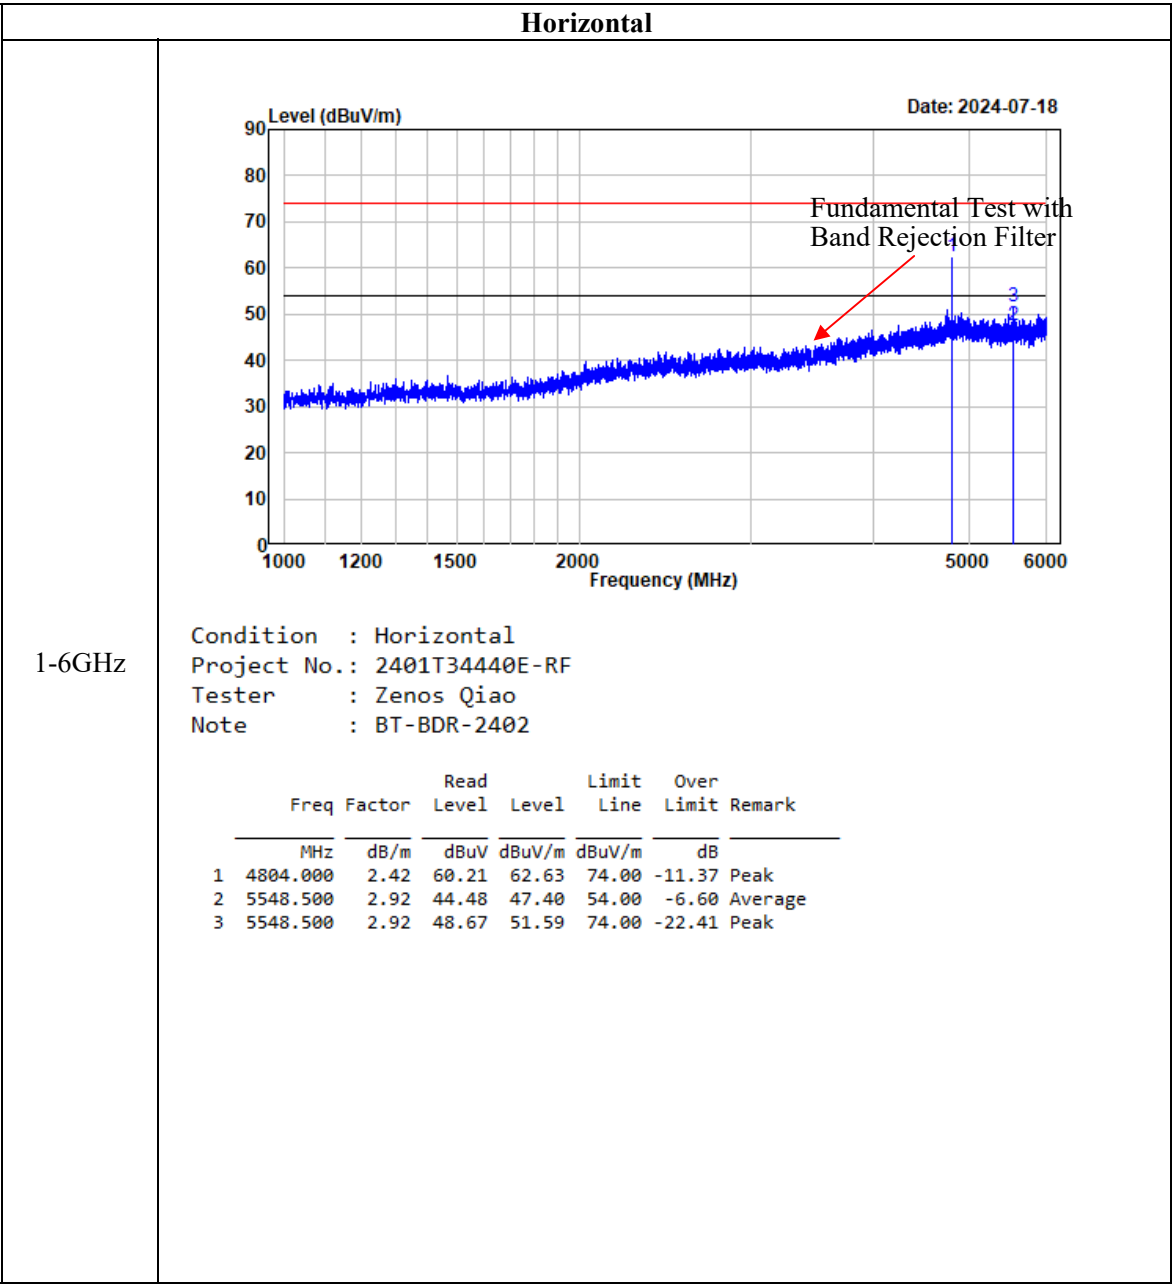


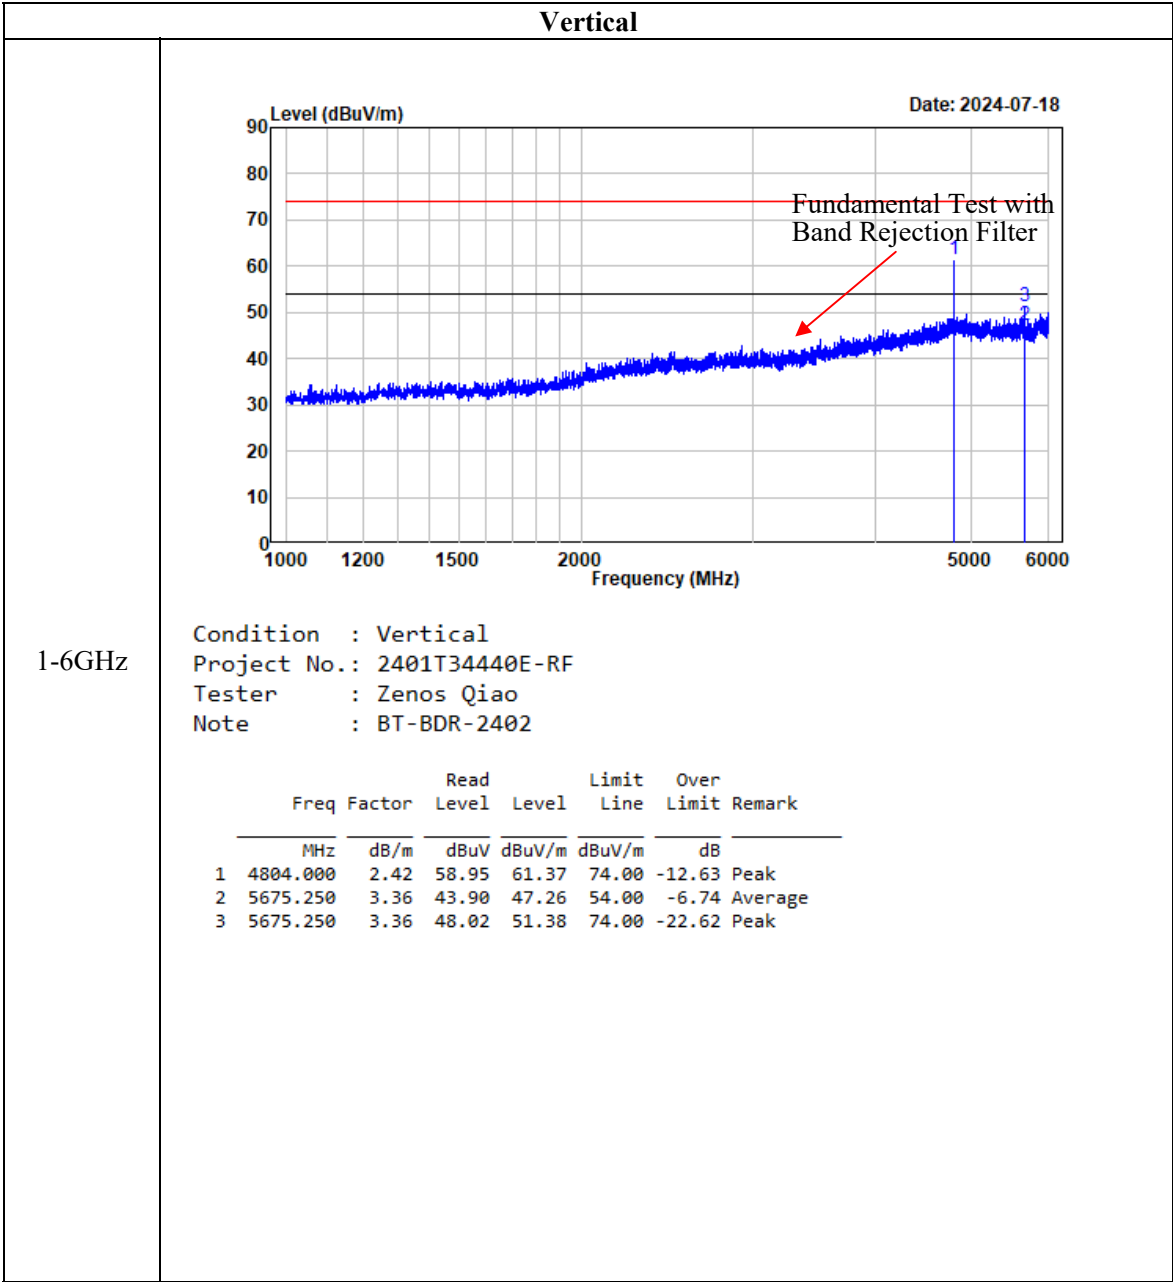

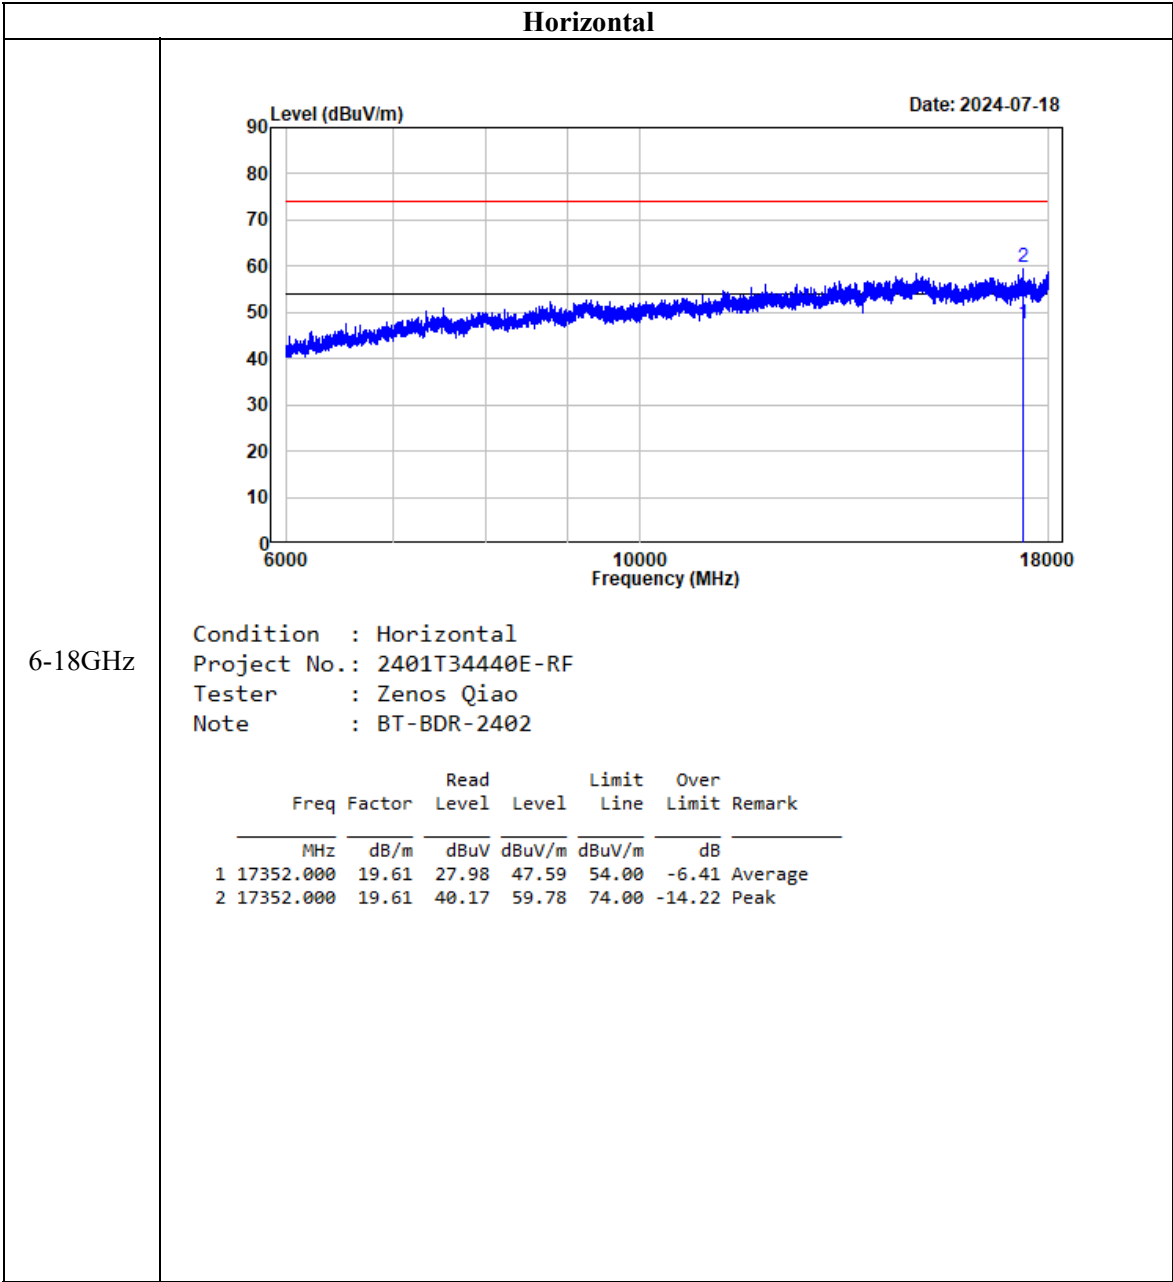

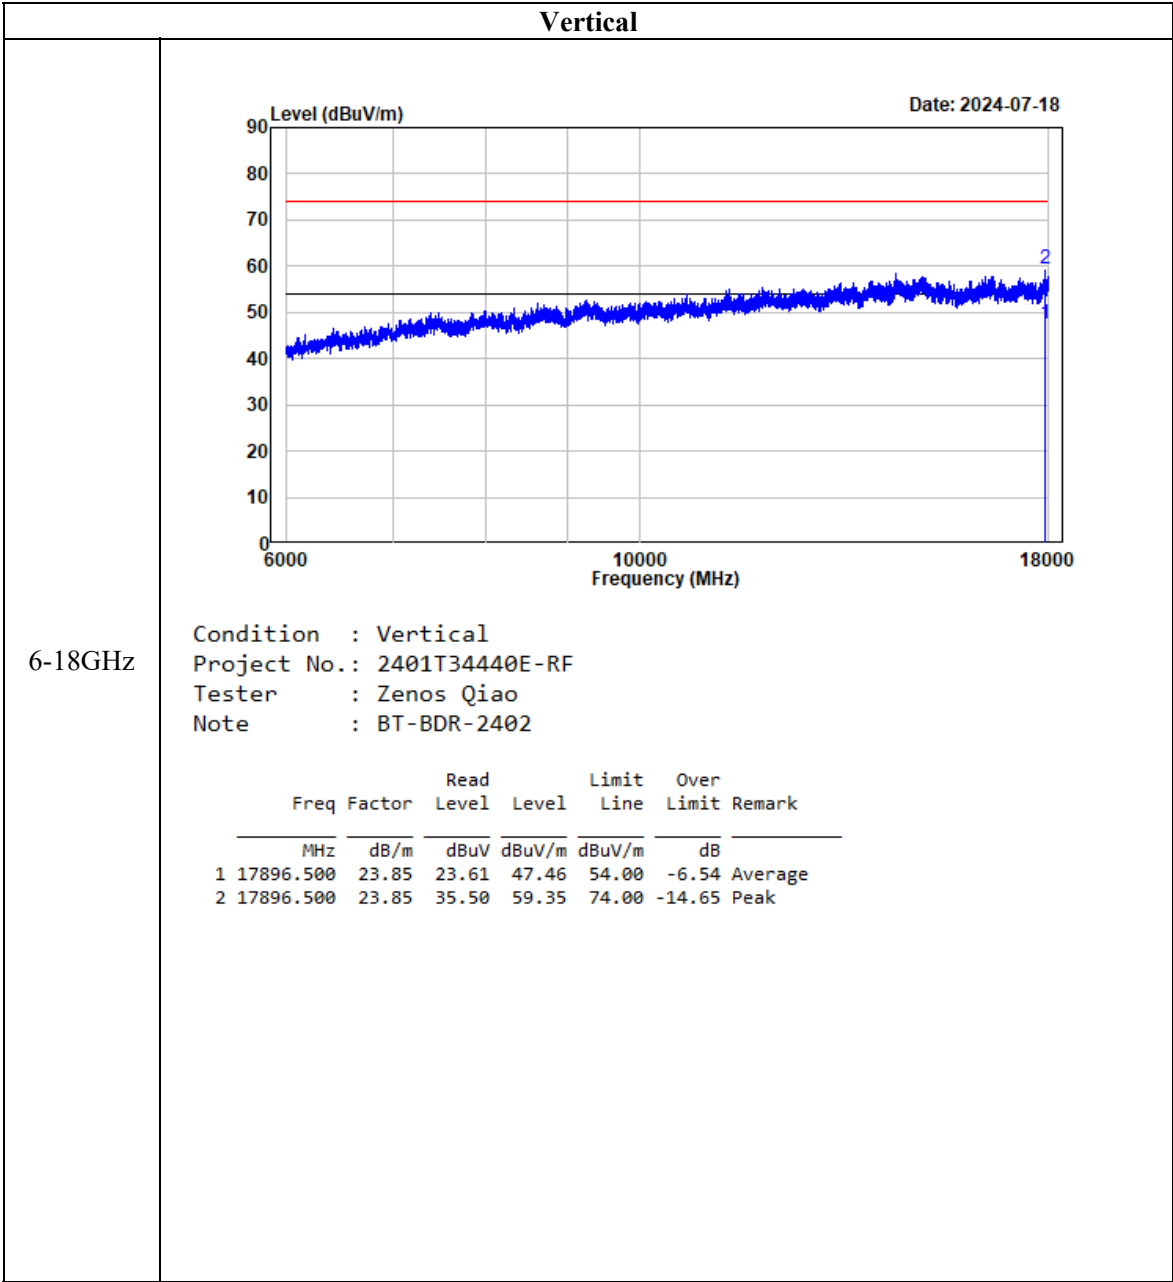

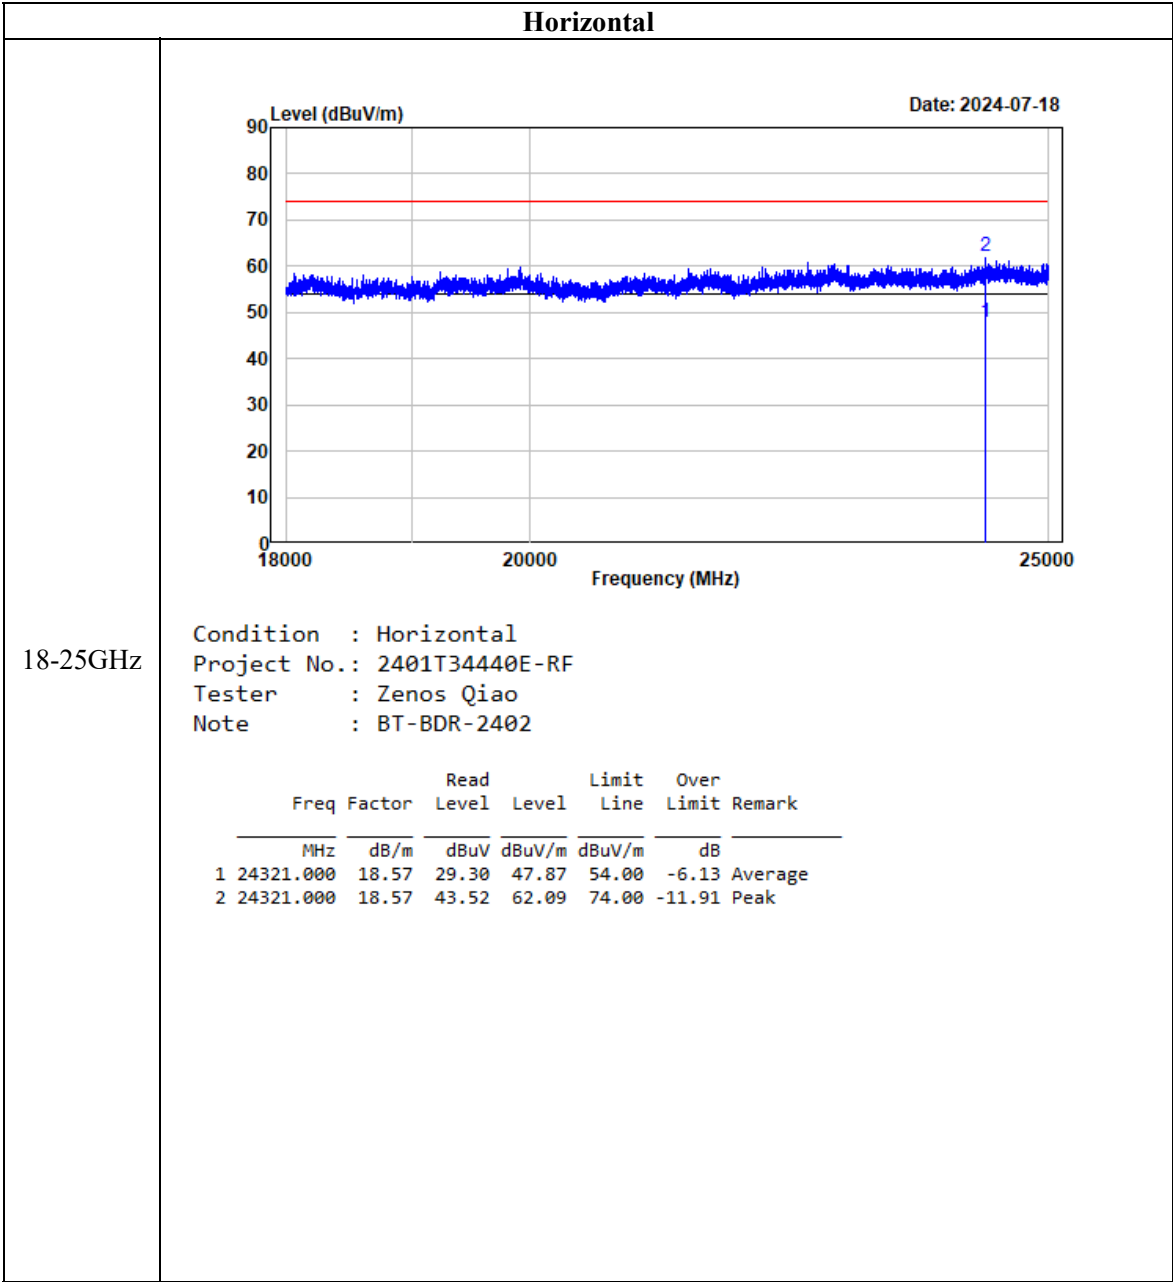

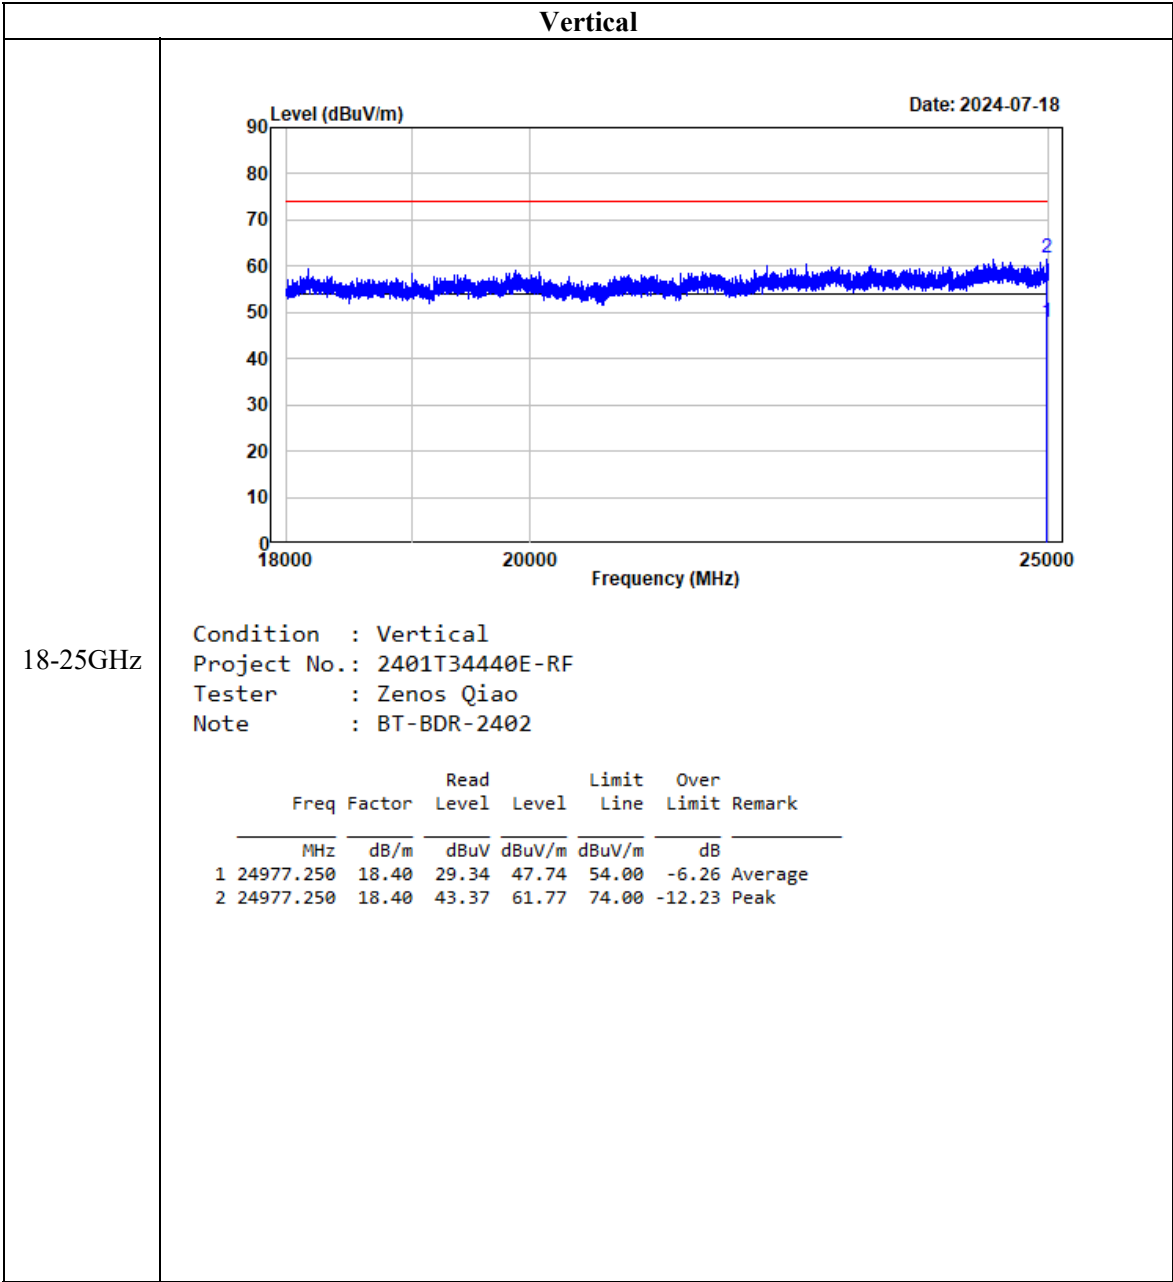



## **EUT PHOTOGRAPHS**

Please refer to the attachment 2401T34440E-RF External photo and 2401T34440E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2401T34440E-RFA Test Setup photo.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***