




Secure the bracket to the outlet box with the screws.

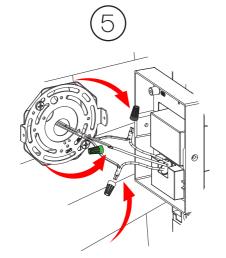


Push the bare metal ends of the wires together and slide a wire nut over them. Twist the wire nut clockwise until tight. Give it a gentle pull to ensure none of the wires come apart.

Note: Ensure that the wires are connected according to the table below (Ground, Hot, and Neutral).					
G Ground	Ζ	Hot		W	Neutral
Warning: If you doing it yours					

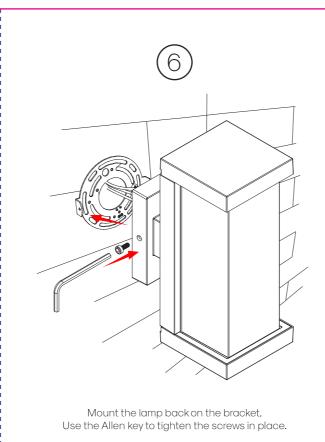


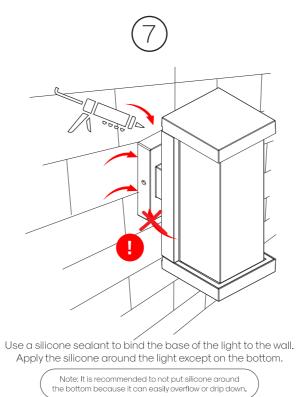



8

Turn on the switch that controls the power to the wall light.

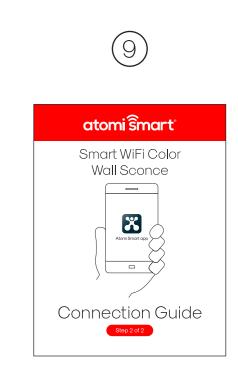

Please, check the Connection User Guide to get instructions for connecting to the app. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

The distance between user and products should be no less than 20cm