

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

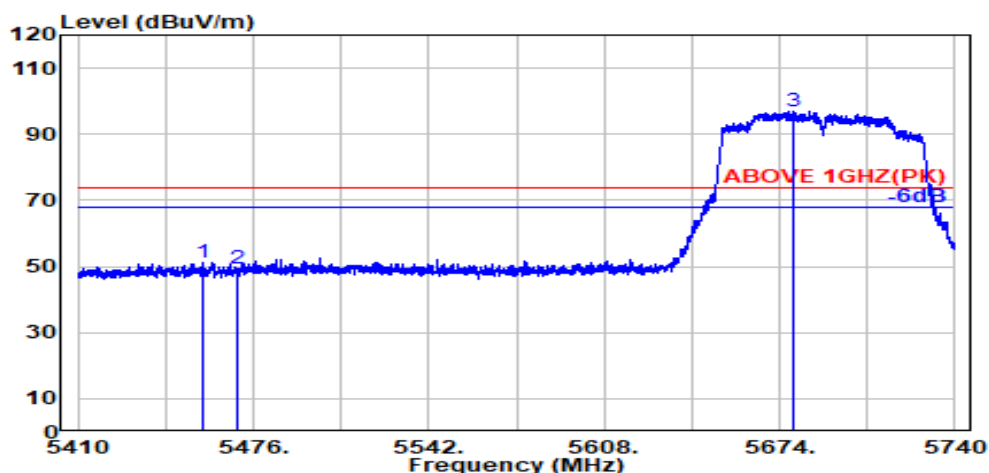

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.800	34.01	8.68	39.15	47.81	51.35	74.00	22.65	Peak
5470.000	34.04	8.69	39.15	45.93	49.51	74.00	24.49	Peak
@ 5679.400	33.68	8.88	39.19	93.53	96.91	---	---	Peak

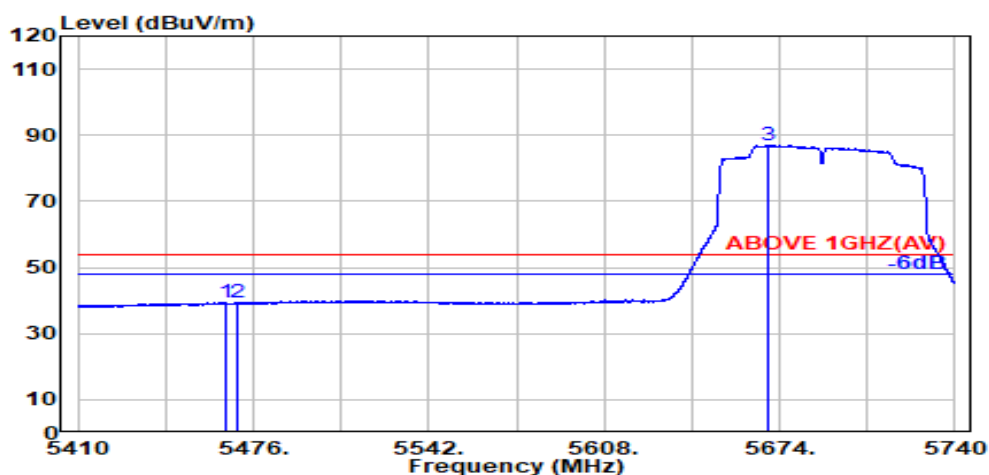

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.03	8.68	39.15	35.81	39.37	54.00	14.63	Average
5470.000	34.04	8.69	39.15	35.68	39.26	54.00	14.74	Average
@ 5669.700	33.72	8.87	39.18	83.47	86.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

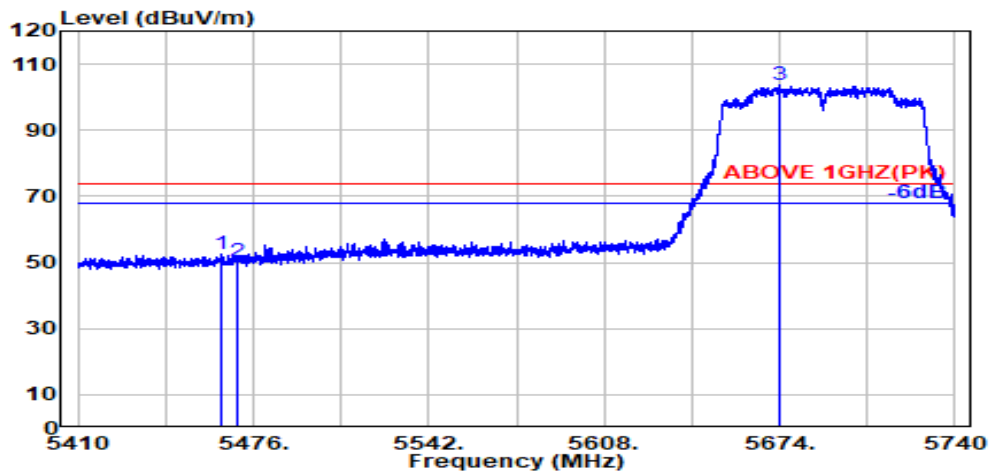

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.03	8.68	39.15	48.96	52.52	74.00	21.48	Peak
5470.000	34.04	8.69	39.15	46.75	50.32	74.00	23.68	Peak
@ 5673.800	33.70	8.88	39.19	100.14	103.54	---	---	Peak

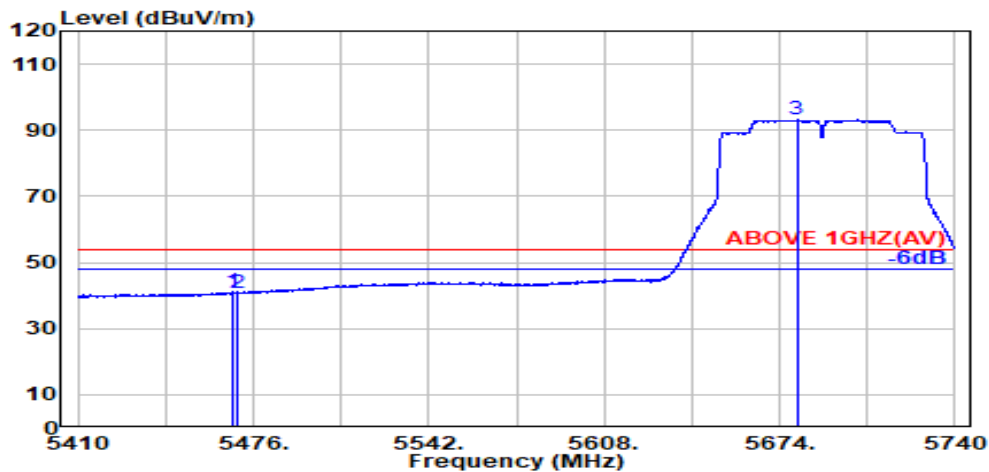

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	37.42	40.99	54.00	13.01	Average
5470.000	34.04	8.69	39.15	37.40	40.98	54.00	13.02	Average
@ 5680.500	33.68	8.88	39.19	89.75	93.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

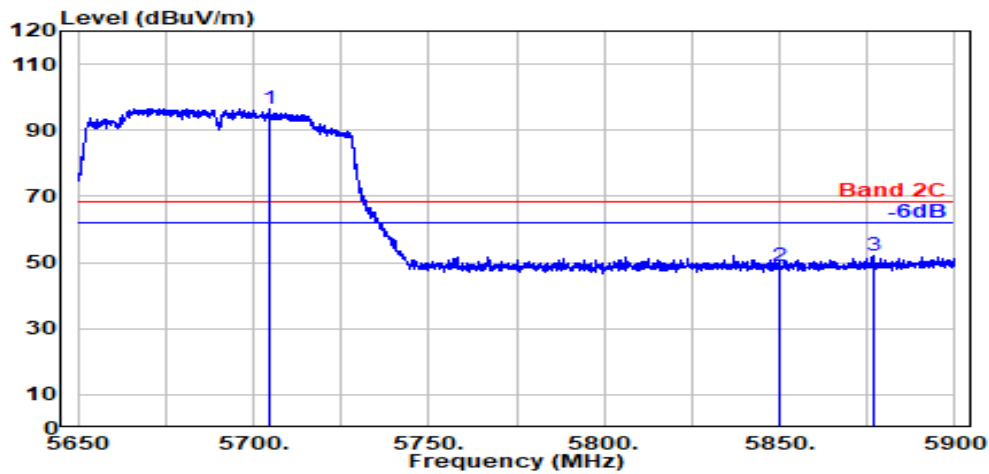

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.300	33.60	8.91	39.19	92.93	96.24	---	---	Peak
5850.000	33.90	9.04	39.22	44.98	48.70	68.20	19.50	Peak
5876.600	34.01	9.06	39.23	48.26	52.10	68.20	16.10	Peak

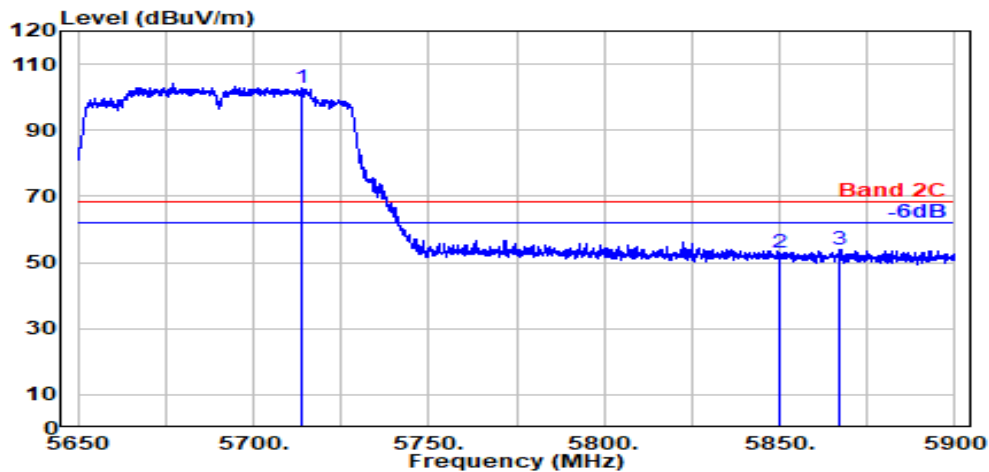

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.500	33.60	8.92	39.19	99.51	102.84	---	---	Peak
5850.000	33.90	9.04	39.22	49.47	53.19	68.20	15.01	Peak
5867.000	33.97	9.05	39.22	50.24	54.04	68.20	14.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

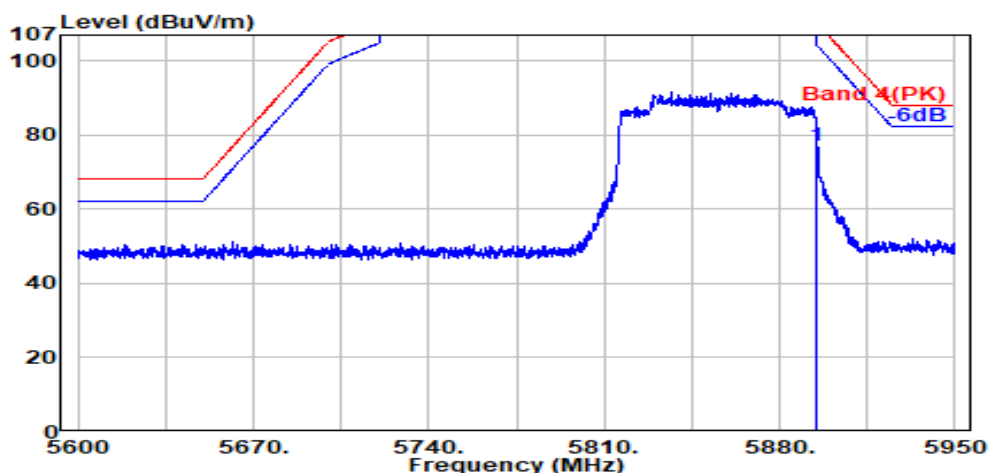

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	68.59	77.31	110.16	32.85	Peak

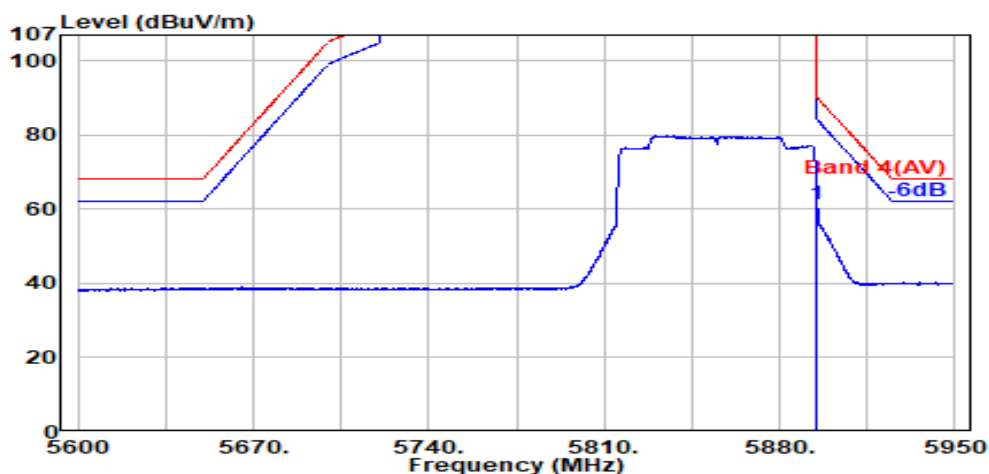

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	52.57	61.29	90.16	28.87	Average

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

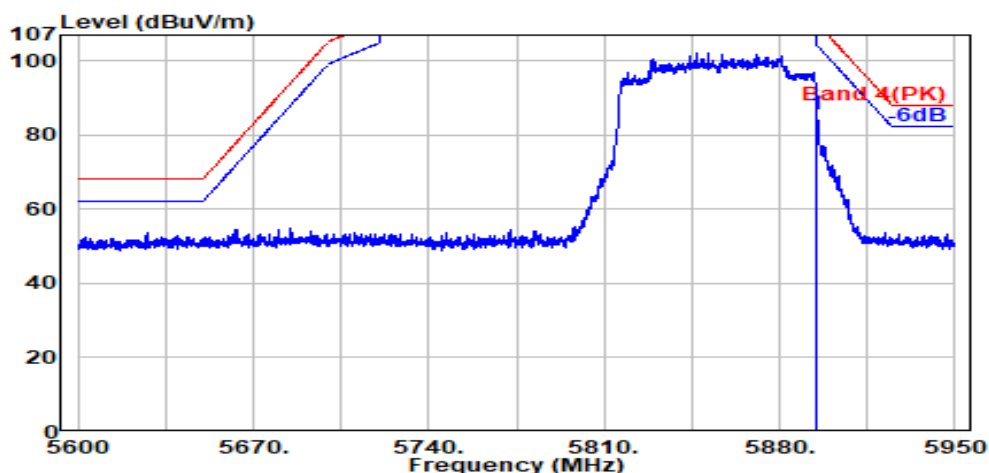

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	77.07	85.79	110.16	24.37	Peak

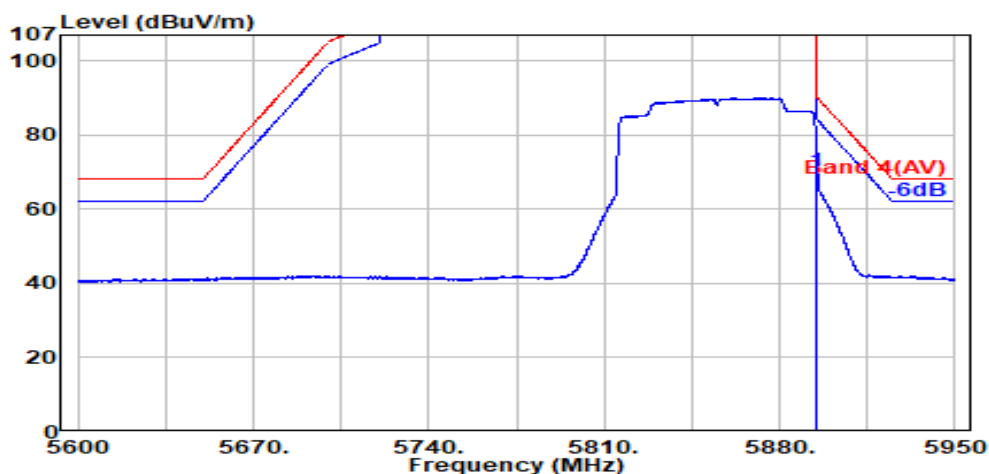


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	61.65	70.37	90.16	19.80	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

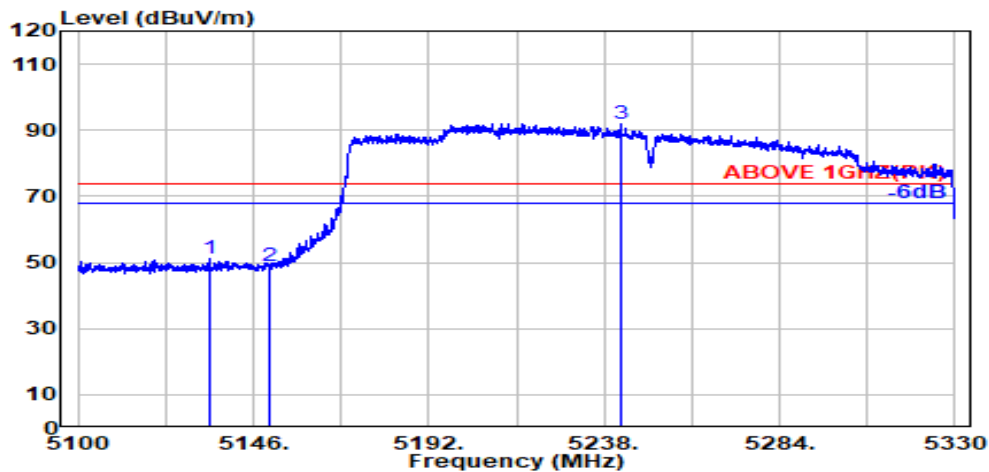

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.400	33.47	8.36	39.19	48.42	51.06	74.00	22.94	Peak
5150.000	33.50	8.37	39.19	46.26	48.94	74.00	25.06	Peak
@ 5242.600	33.71	8.47	39.18	88.94	91.94	---	---	Peak

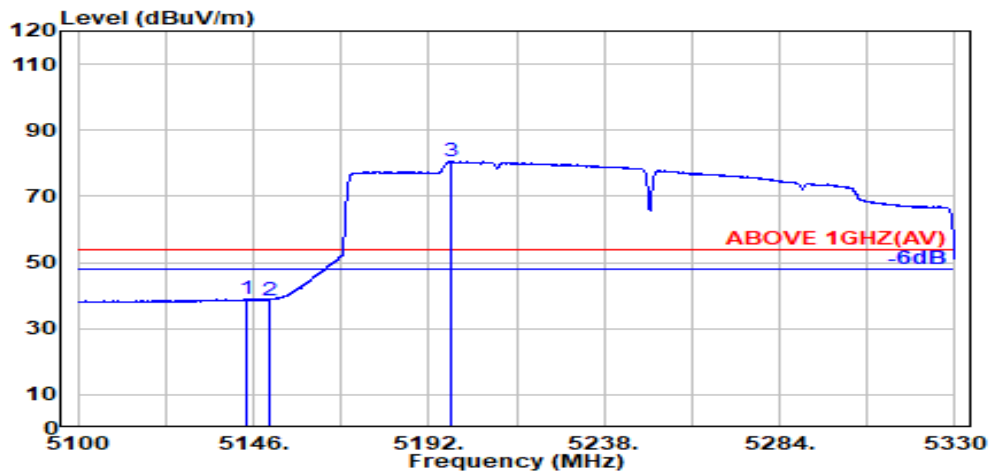

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.300	33.49	8.37	39.19	36.17	38.83	54.00	15.17	Average
5150.000	33.50	8.37	39.19	36.00	38.69	54.00	15.31	Average
@ 5197.700	33.79	8.42	39.19	77.57	80.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

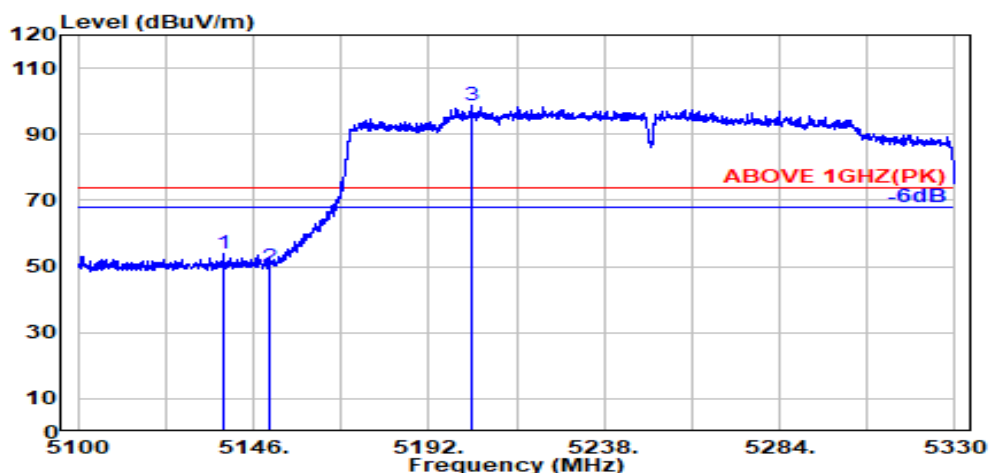

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.000	33.48	8.36	39.19	51.03	53.68	74.00	20.32	Peak
5150.000	33.50	8.37	39.19	47.26	49.94	74.00	24.06	Peak
@ 5203.100	33.79	8.43	39.18	95.74	98.78	---	---	Peak

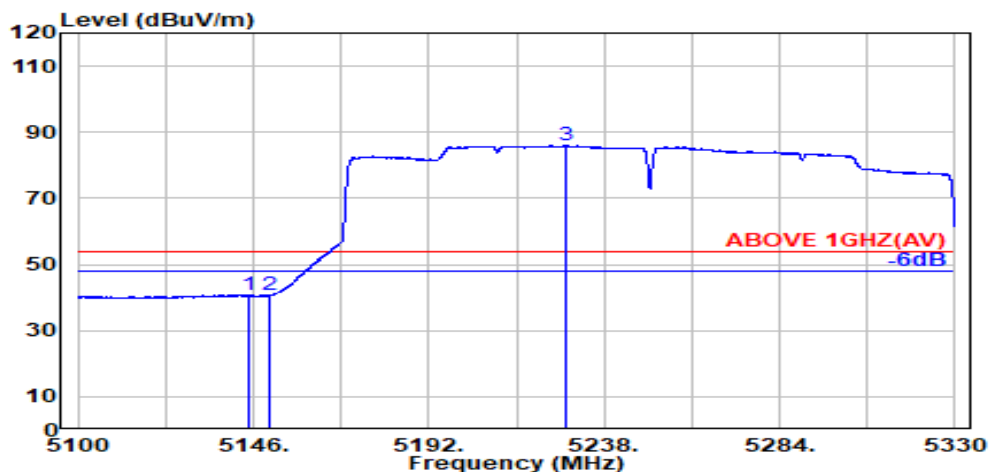

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	33.49	8.37	39.19	38.07	40.74	54.00	13.26	Average
5150.000	33.50	8.37	39.19	37.87	40.55	54.00	13.45	Average
@ 5227.700	33.74	8.45	39.18	82.88	85.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

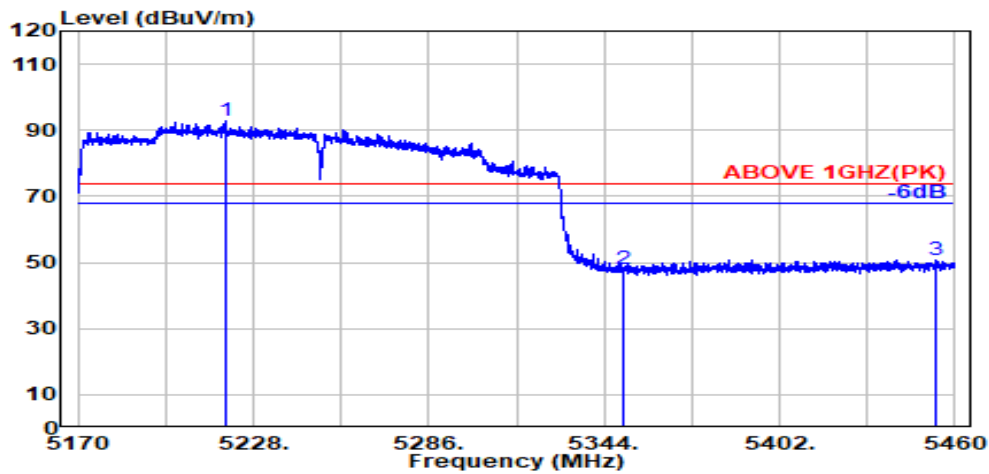

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5218.700	33.76	8.44	39.18	89.67	92.69	---	---	Peak
5350.000	33.70	8.57	39.17	44.88	47.99	74.00	26.01	Peak
5454.000	34.01	8.67	39.16	47.42	50.94	74.00	23.06	Peak

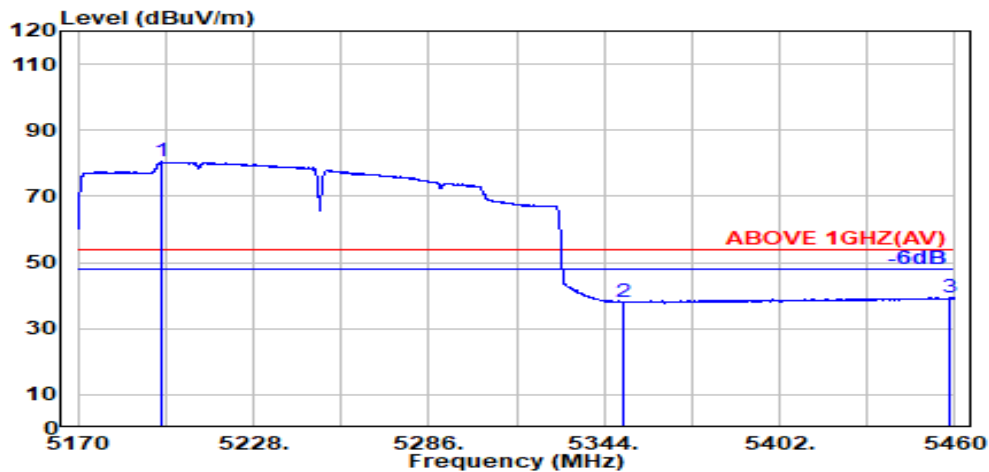

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.500	33.79	8.42	39.19	77.42	80.44	---	---	Average
5350.000	33.70	8.57	39.17	35.04	38.15	54.00	15.85	Average
5458.300	34.02	8.68	39.15	35.92	39.46	54.00	14.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

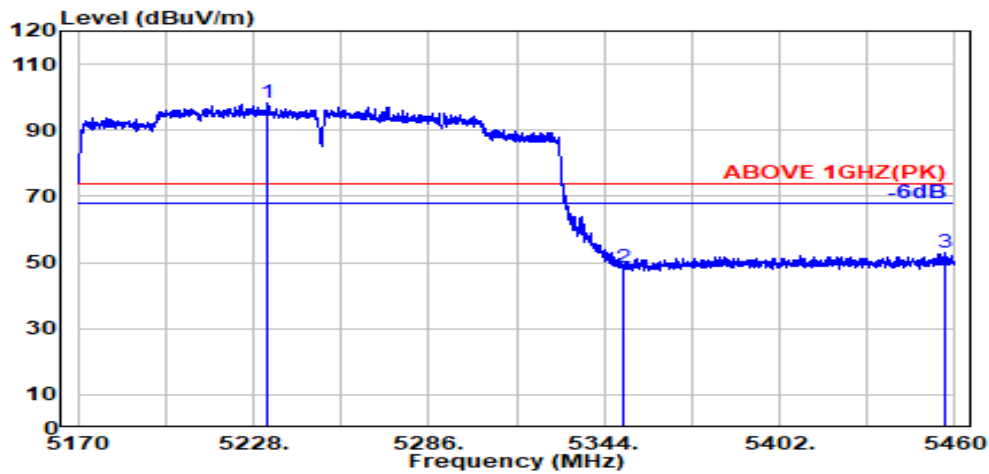

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5232.800	33.73	8.46	39.18	95.10	98.11	---	---	Peak
5350.000	33.70	8.57	39.17	45.51	48.61	74.00	25.39	Peak
5457.000	34.01	8.68	39.15	49.29	52.83	74.00	21.17	Peak

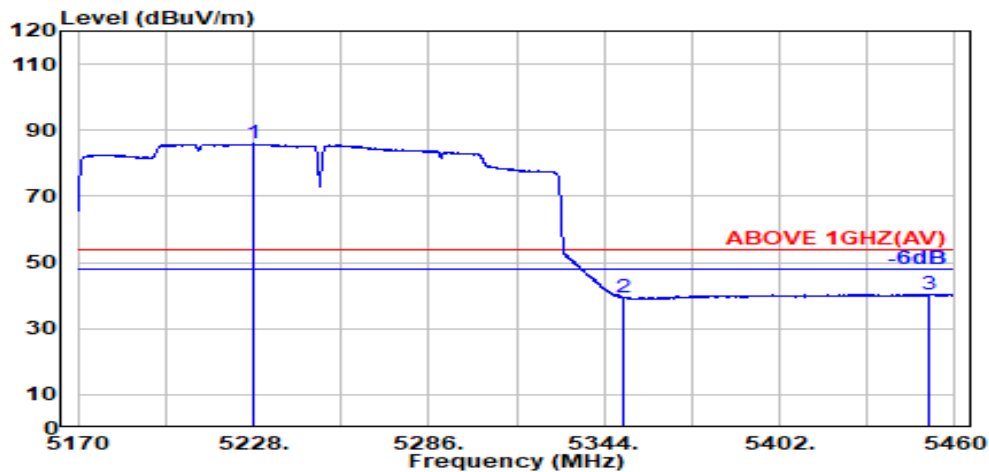

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5228.000	33.74	8.45	39.18	82.83	85.85	---	---	Average
5350.000	33.70	8.57	39.17	36.39	39.49	54.00	14.51	Average
5451.300	34.00	8.67	39.16	36.90	40.41	54.00	13.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

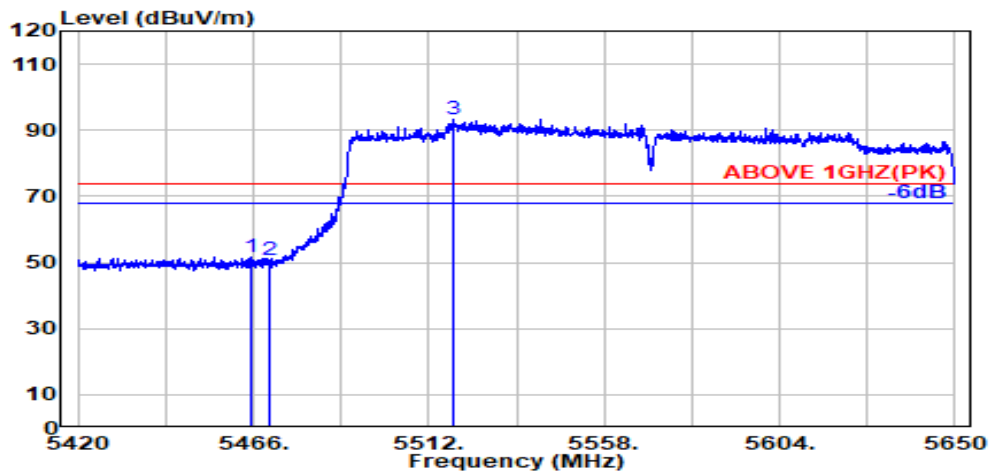

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.15	47.96	51.52	74.00	22.48	Peak
5470.000	34.04	8.69	39.15	47.22	50.79	74.00	23.21	Peak
@ 5518.300	34.06	8.73	39.15	89.55	93.20	---	---	Peak

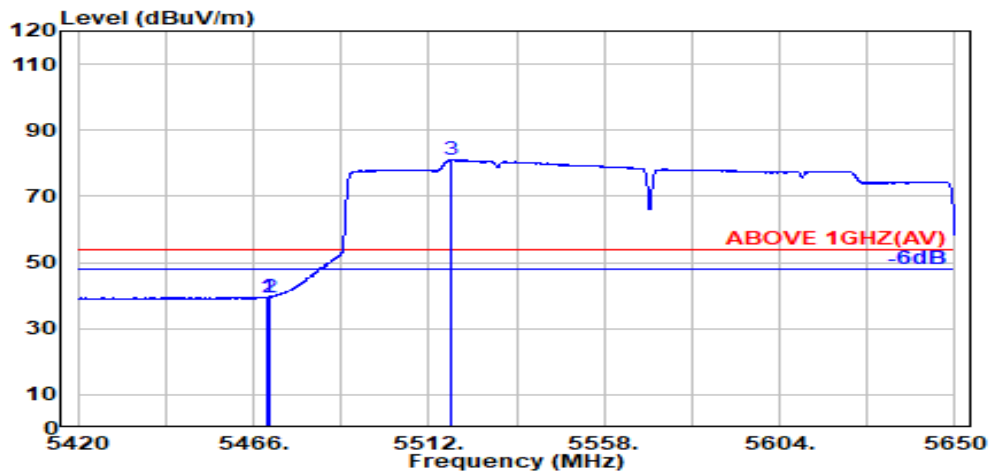


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.04	8.69	39.15	35.98	39.55	54.00	14.45	Average
5470.000	34.04	8.69	39.15	35.81	39.39	54.00	14.61	Average
@ 5517.700	34.06	8.73	39.15	77.45	81.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

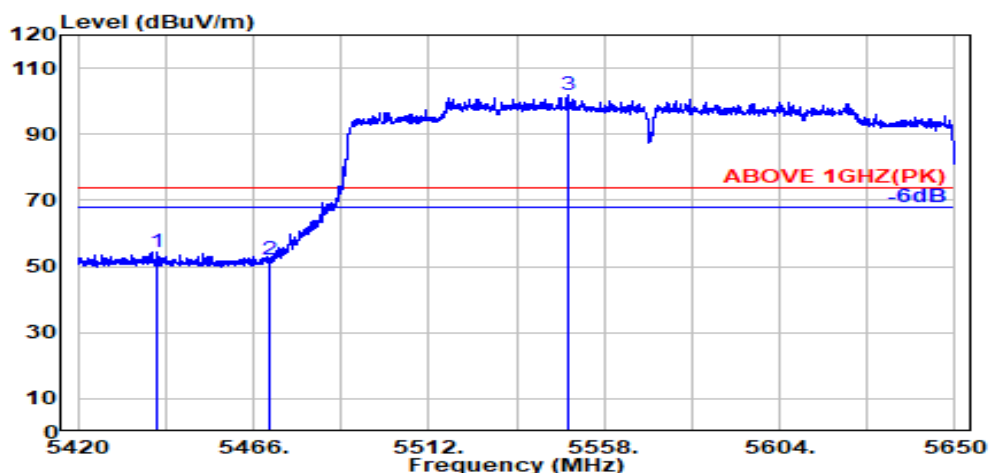

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.000	33.98	8.66	39.16	50.98	54.47	74.00	19.53	Peak
5470.000	34.04	8.69	39.15	48.63	52.21	74.00	21.79	Peak
@ 5548.300	34.00	8.76	39.16	98.20	101.81	---	---	Peak

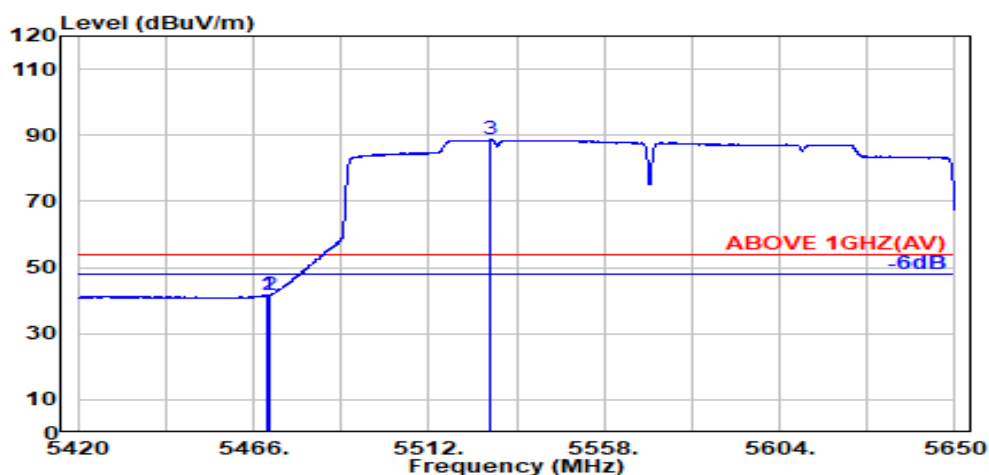


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.15	38.19	41.77	54.00	12.23	Average
5470.000	34.04	8.69	39.15	38.18	41.75	54.00	12.25	Average
@ 5528.000	34.04	8.74	39.16	84.95	88.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

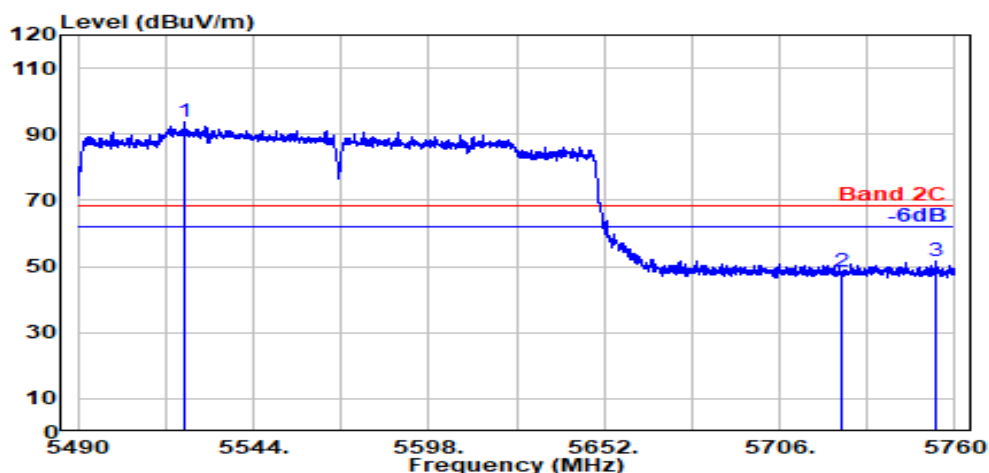

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5523.000	34.05	8.74	39.15	90.22	93.86	---	---	Peak
5725.000	33.60	8.93	39.20	45.27	48.60	68.20	19.60	Peak
5754.000	33.62	8.95	39.20	48.08	51.45	68.20	16.75	Peak

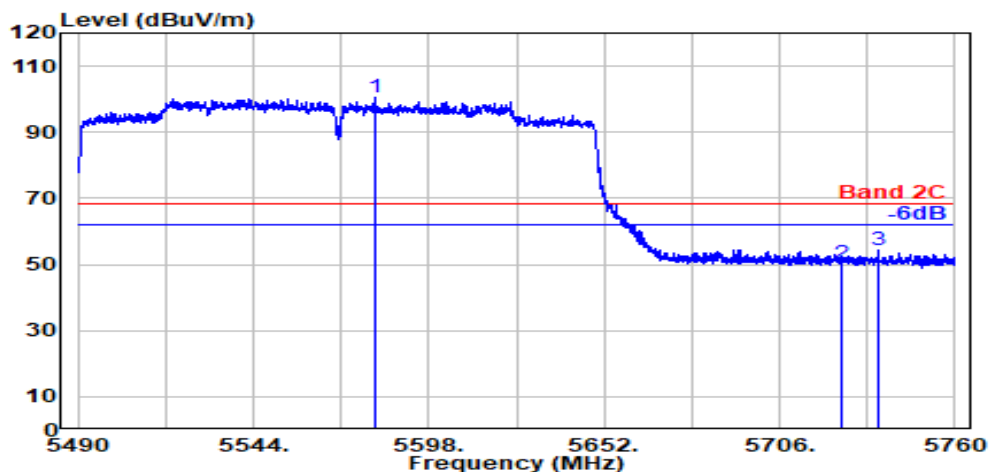


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5581.200	33.87	8.79	39.17	96.91	100.41	---	---	Peak
5725.000	33.60	8.93	39.20	47.11	50.43	68.20	17.77	Peak
5736.600	33.60	8.94	39.20	50.84	54.17	68.20	14.03	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

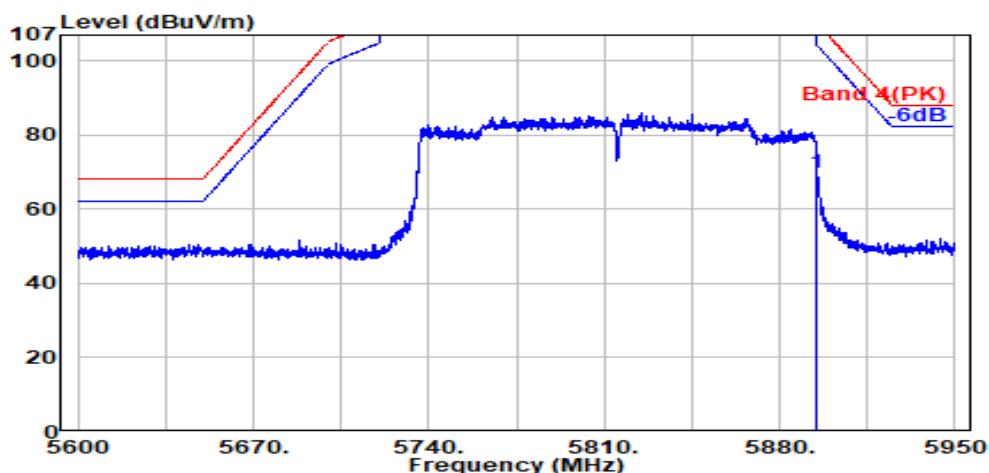

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	61.31	70.03	110.16	40.14	Peak

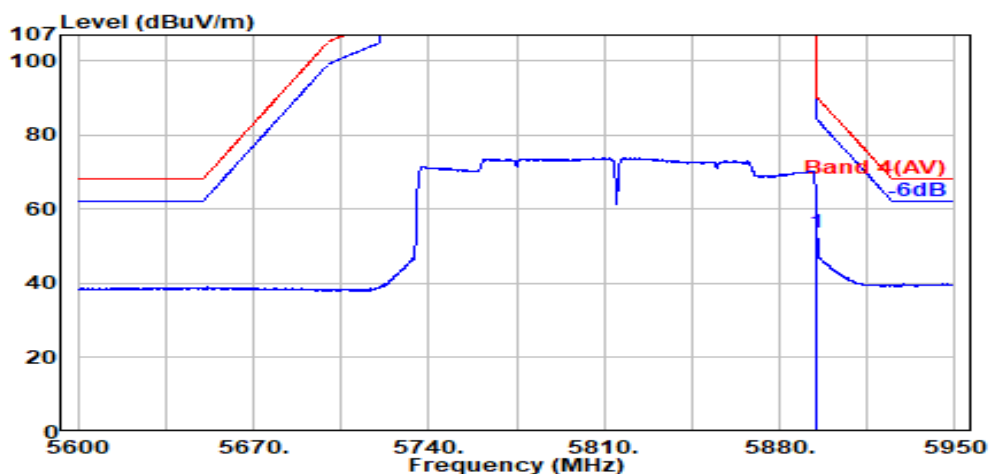


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	44.85	53.57	90.16	36.60	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

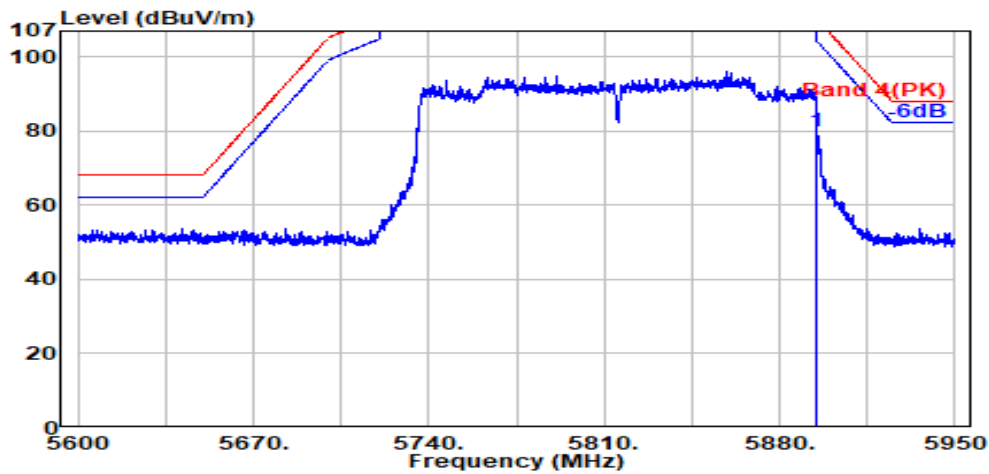

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	71.06	79.78	110.16	30.38	Peak

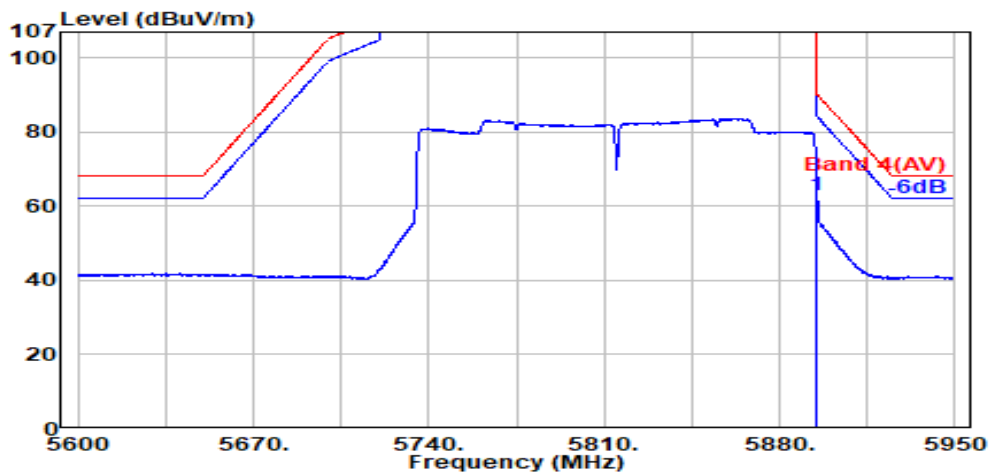


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	54.07	62.79	90.16	27.37	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

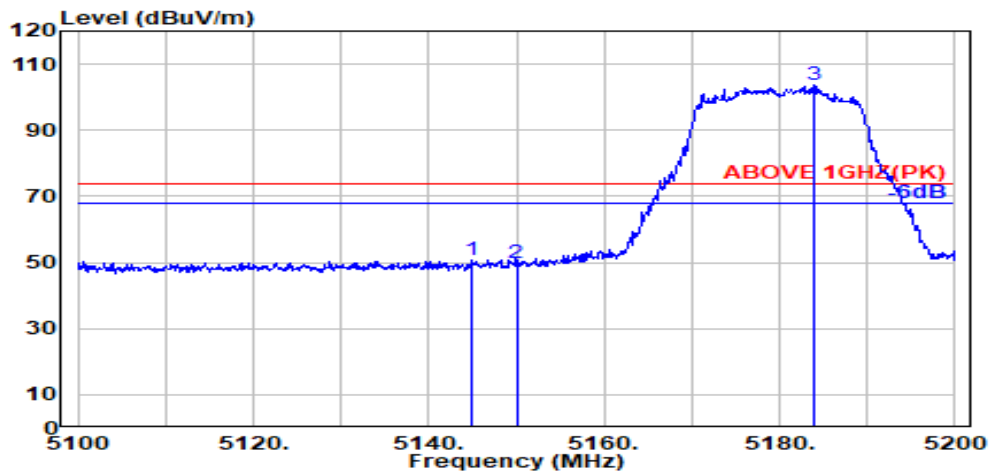

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.49	8.37	39.19	48.11	50.78	74.00	23.22	Peak
5150.000	33.50	8.37	39.19	47.03	49.71	74.00	24.29	Peak
@ 5184.000	33.70	8.41	39.19	100.60	103.52	---	---	Peak

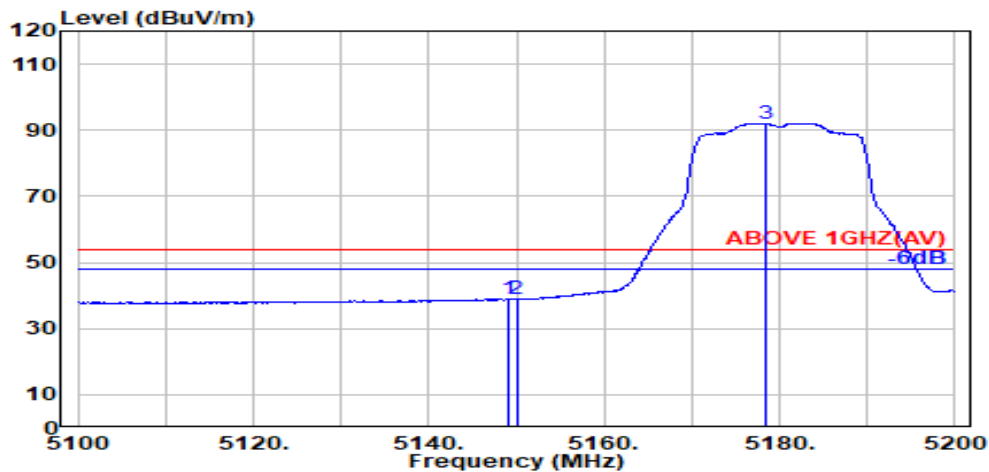

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	36.34	39.02	54.00	14.98	Average
5150.000	33.50	8.37	39.19	36.12	38.80	54.00	15.20	Average
@ 5178.400	33.67	8.40	39.19	89.22	92.11	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

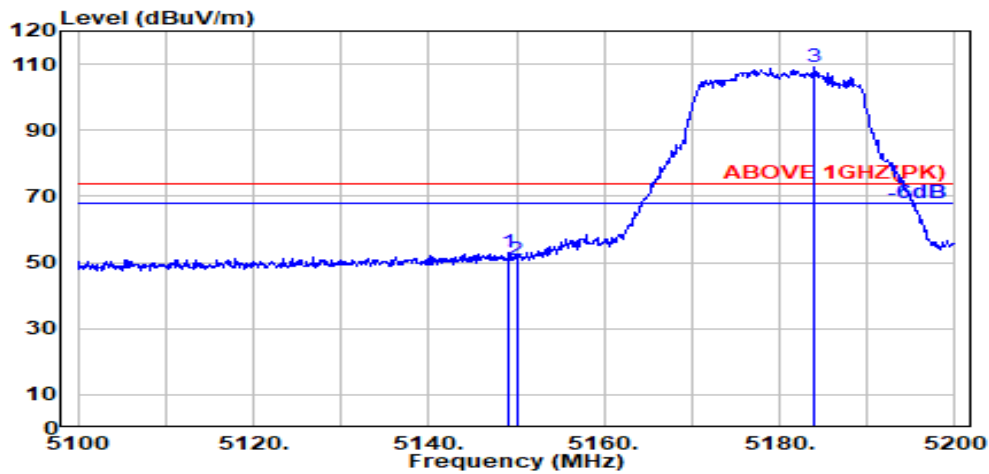

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	50.51	53.19	74.00	20.81	Peak
5150.000	33.50	8.37	39.19	48.06	50.74	74.00	23.26	Peak
@ 5184.000	33.70	8.41	39.19	106.30	109.22	---	---	Peak

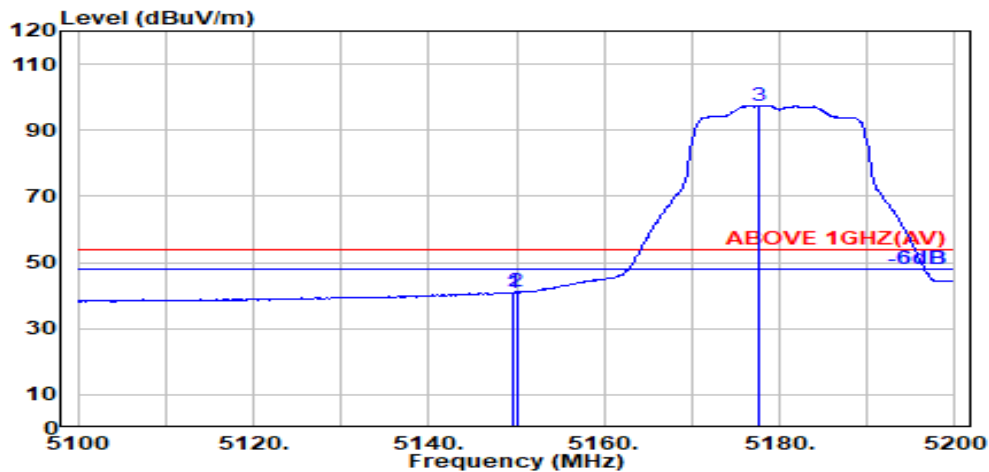

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	38.28	40.97	54.00	13.03	Average
5150.000	33.50	8.37	39.19	38.34	41.02	54.00	12.98	Average
@ 5177.700	33.67	8.40	39.19	94.48	97.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

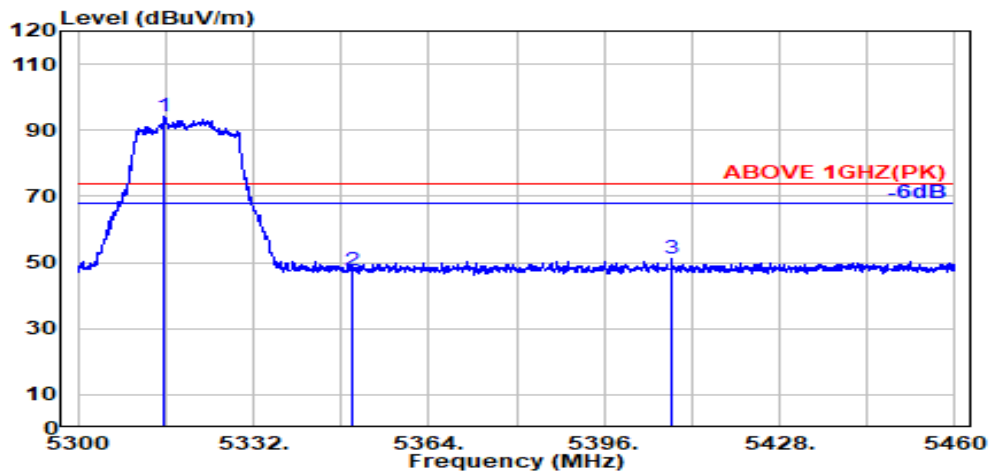

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.800	33.77	8.54	39.17	90.94	94.08	---	---	Peak
5350.000	33.70	8.57	39.17	44.31	47.42	74.00	26.58	Peak
5408.400	33.92	8.63	39.16	47.77	51.16	74.00	22.84	Peak

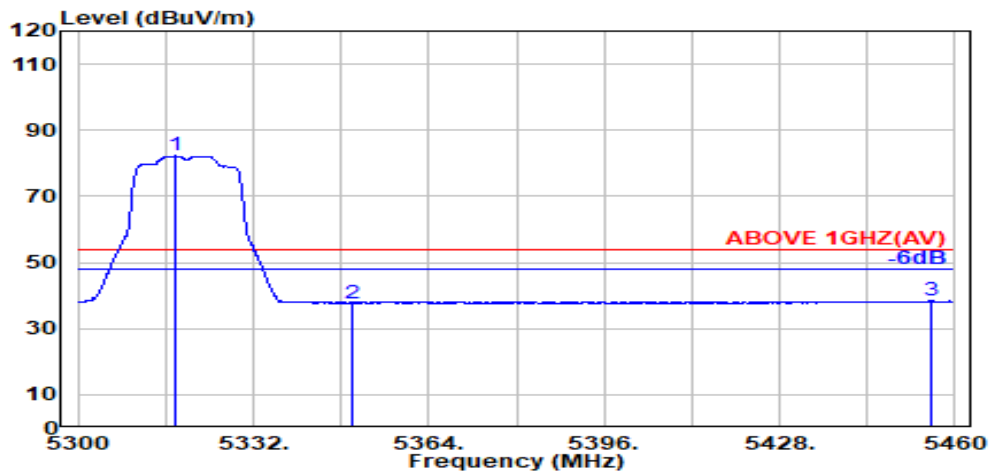

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	33.76	8.54	39.17	79.07	82.20	---	---	Average
5350.000	33.70	8.57	39.17	34.70	37.80	54.00	16.20	Average
5455.700	34.01	8.67	39.16	34.80	38.33	54.00	15.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

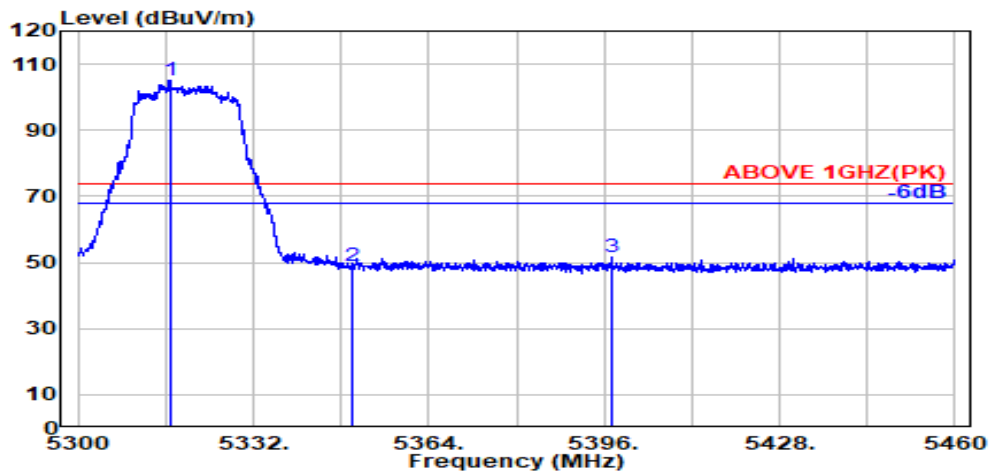

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	33.77	8.54	39.17	101.98	105.12	---	---	Peak
5350.000	33.70	8.57	39.17	45.93	49.04	74.00	24.96	Peak
5397.300	33.89	8.62	39.16	48.40	51.75	74.00	22.25	Peak

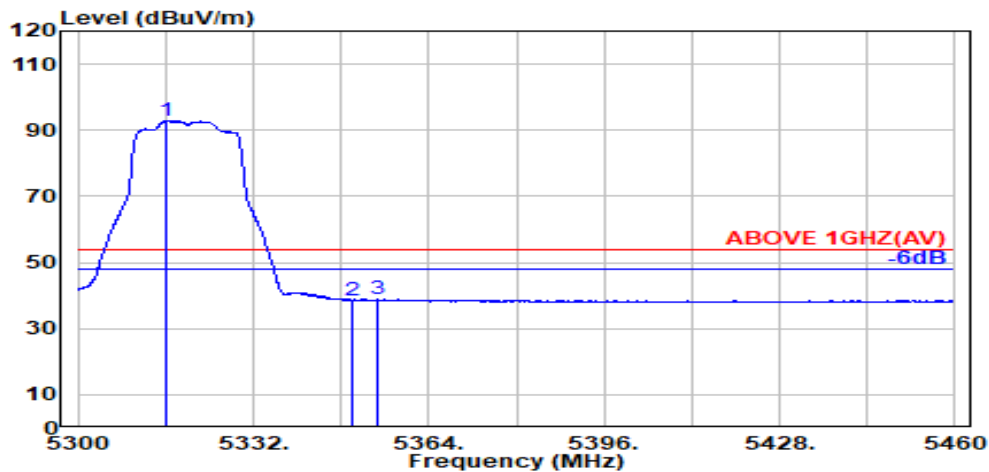


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.17	89.68	92.82	---	---	Average
5350.000	33.70	8.57	39.17	35.50	38.61	54.00	15.39	Average
5354.600	33.72	8.58	39.17	35.77	38.90	54.00	15.10	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

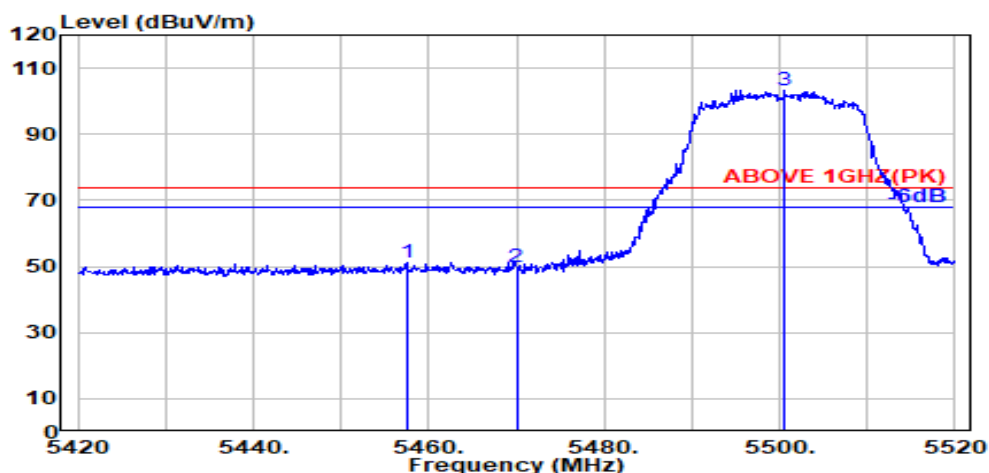

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.02	8.68	39.15	47.48	51.01	74.00	22.99	Peak
5470.000	34.04	8.69	39.15	46.06	49.64	74.00	24.36	Peak
@ 5500.600	34.10	8.72	39.15	99.66	103.32	---	---	Peak

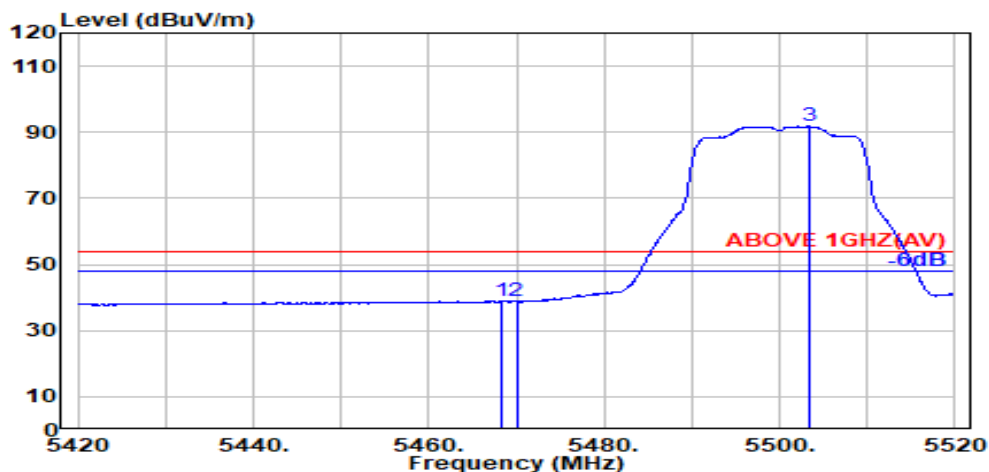

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.15	35.35	38.92	54.00	15.08	Average
5470.000	34.04	8.69	39.15	35.25	38.82	54.00	15.18	Average
@ 5503.500	34.09	8.72	39.15	88.05	91.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

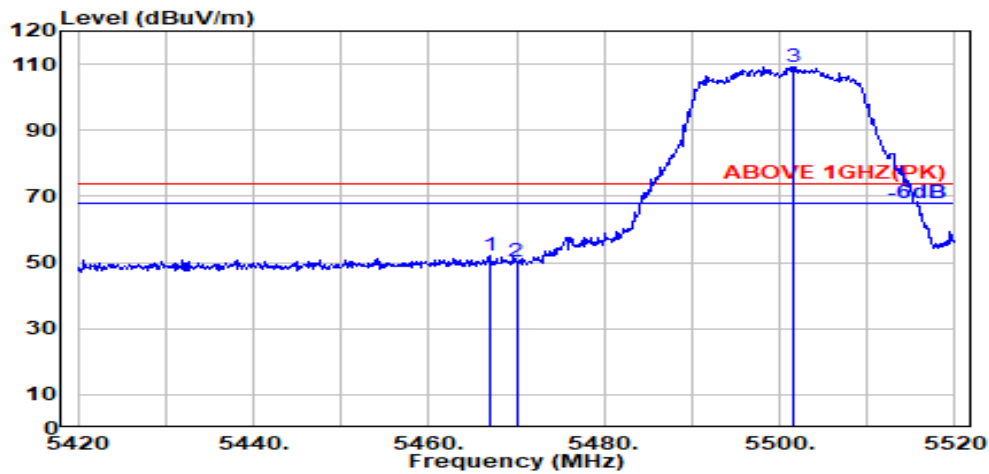

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.03	8.69	39.15	48.39	51.96	74.00	22.04	Peak
5470.000	34.04	8.69	39.15	46.52	50.10	74.00	23.90	Peak
@ 5501.600	34.10	8.72	39.15	105.43	109.09	---	---	Peak

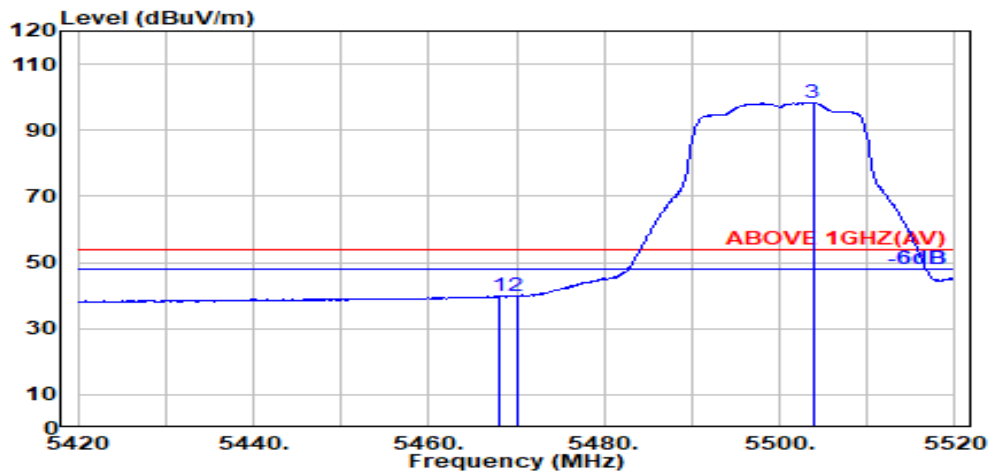

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	36.22	39.79	54.00	14.21	Average
5470.000	34.04	8.69	39.15	36.10	39.67	54.00	14.33	Average
@ 5503.800	34.09	8.72	39.15	94.65	98.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

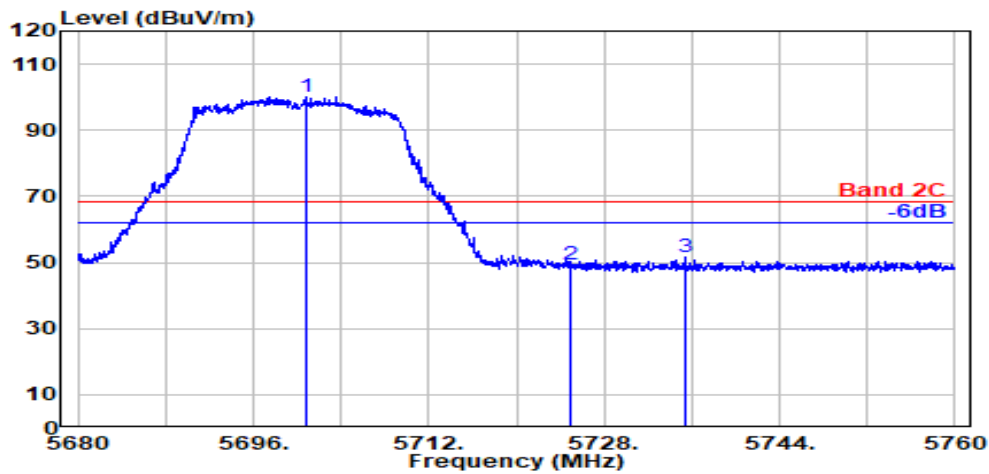

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.850	33.60	8.90	39.19	96.80	100.11	---	---	Peak
5725.000	33.60	8.93	39.20	46.23	49.55	68.20	18.65	Peak
5735.400	33.60	8.93	39.20	48.32	51.65	68.20	16.55	Peak

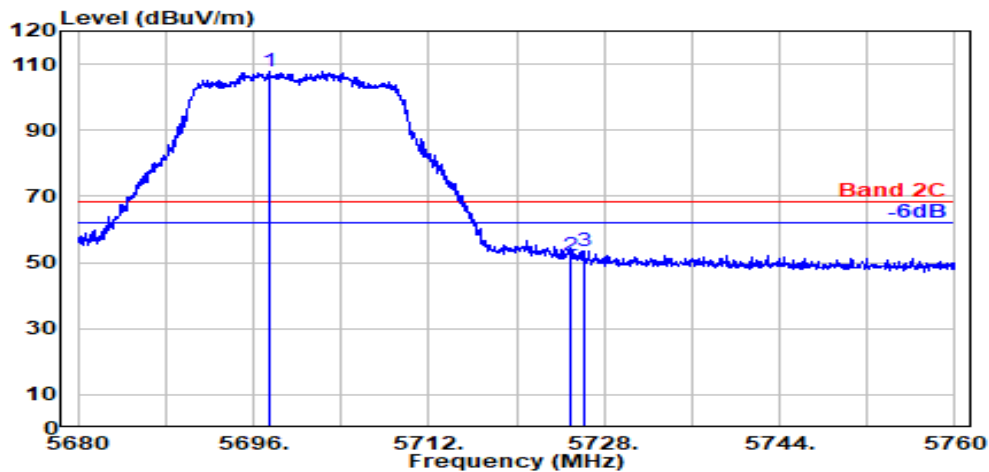

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.450	33.61	8.90	39.19	104.47	107.79	---	---	Peak
5725.000	33.60	8.93	39.20	48.56	51.89	68.20	16.31	Peak
5726.100	33.60	8.93	39.20	50.22	53.55	68.20	14.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

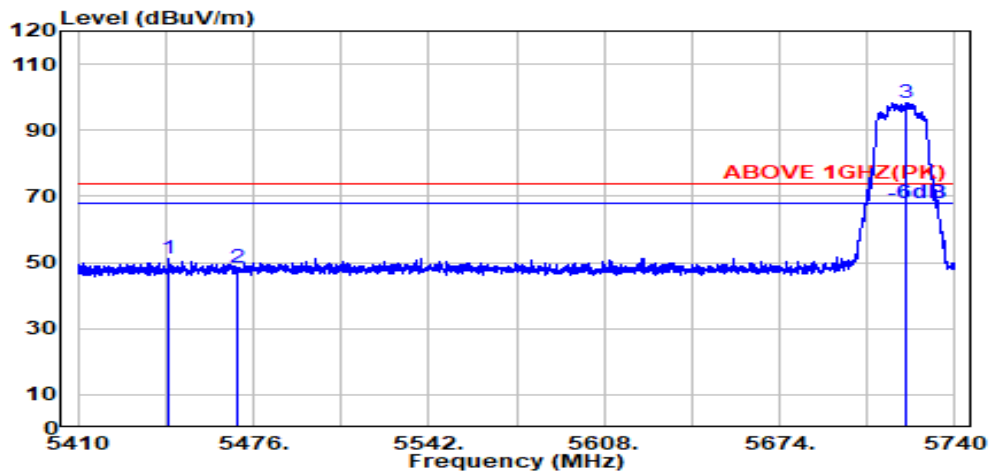

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.300	33.99	8.66	39.16	47.71	51.21	74.00	22.79	Peak
5470.000	34.04	8.69	39.15	44.69	48.27	74.00	25.73	Peak
@ 5721.800	33.60	8.92	39.20	95.08	98.41	---	---	Peak

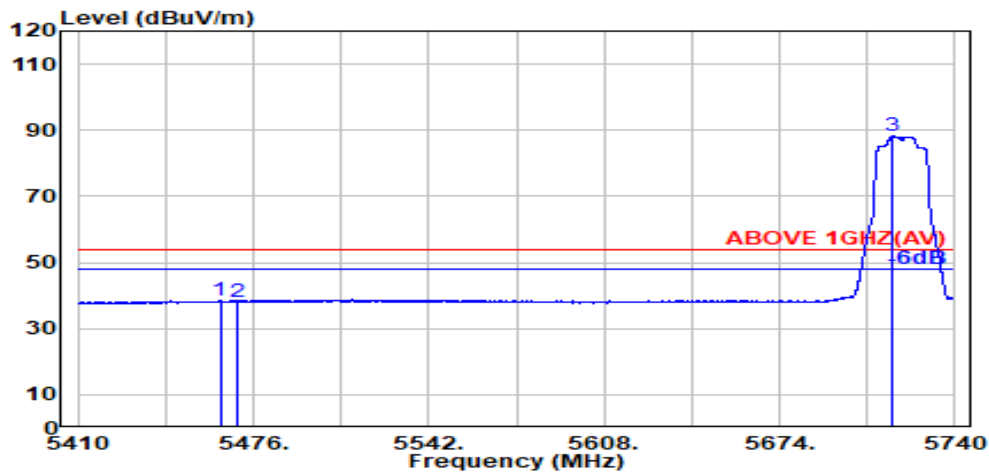

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.15	34.88	38.44	54.00	15.56	Average
5470.000	34.04	8.69	39.15	34.37	37.94	54.00	16.06	Average
@ 5716.300	33.60	8.92	39.19	84.82	88.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

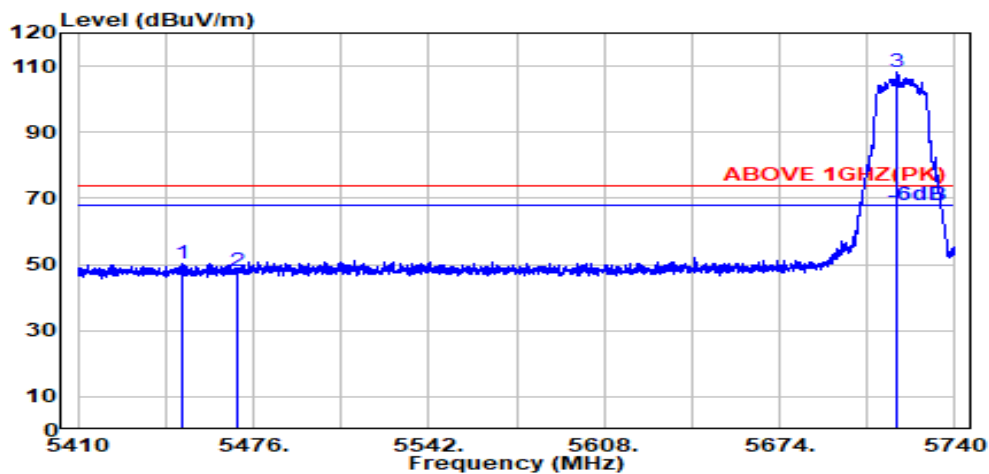

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.900	34.00	8.67	39.16	46.68	50.19	74.00	23.81	Peak
5470.000	34.04	8.69	39.15	44.39	47.97	74.00	26.03	Peak
@ 5718.300	33.60	8.92	39.19	104.79	108.12	---	---	Peak

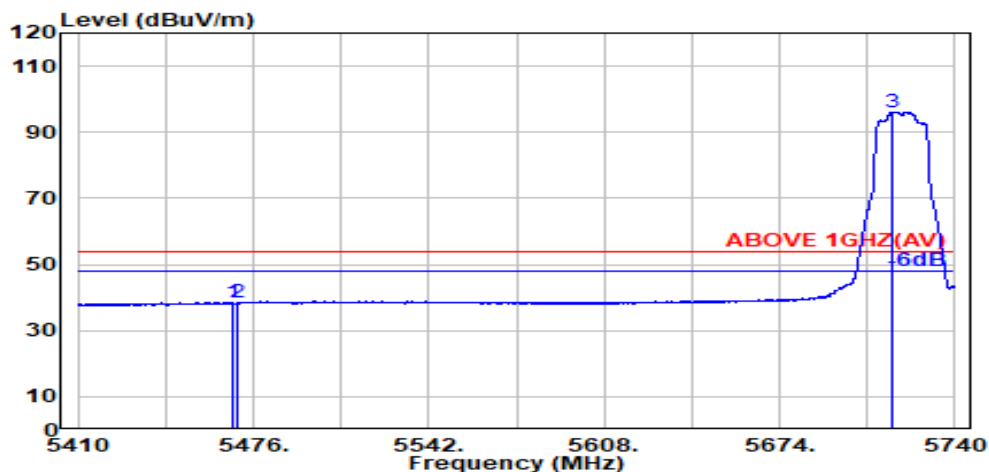

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	35.04	38.61	54.00	15.39	Average
5470.000	34.04	8.69	39.15	34.75	38.32	54.00	15.68	Average
@ 5716.500	33.60	8.92	39.19	92.87	96.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

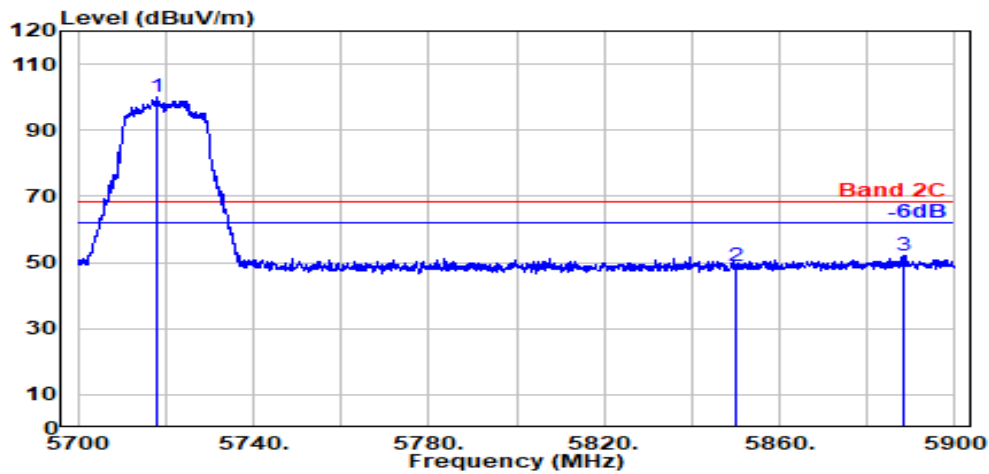

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.800	33.60	8.92	39.19	96.54	99.86	---	---	Peak
5850.000	33.90	9.04	39.22	45.02	48.73	68.20	19.47	Peak
5888.500	34.05	9.07	39.23	48.09	51.99	68.20	16.21	Peak

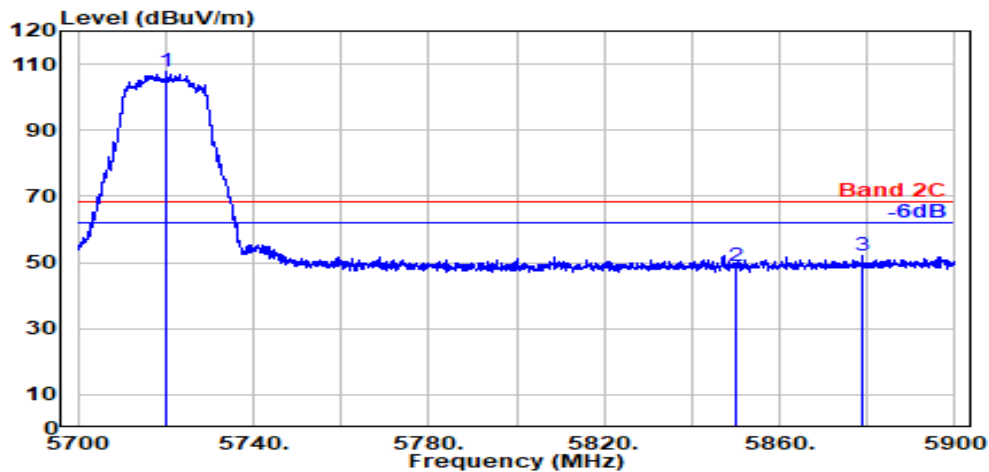

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.200	33.60	8.92	39.20	104.37	107.70	---	---	Peak
5850.000	33.90	9.04	39.22	45.08	48.79	68.20	19.41	Peak
5878.700	34.02	9.06	39.23	48.06	51.92	68.20	16.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

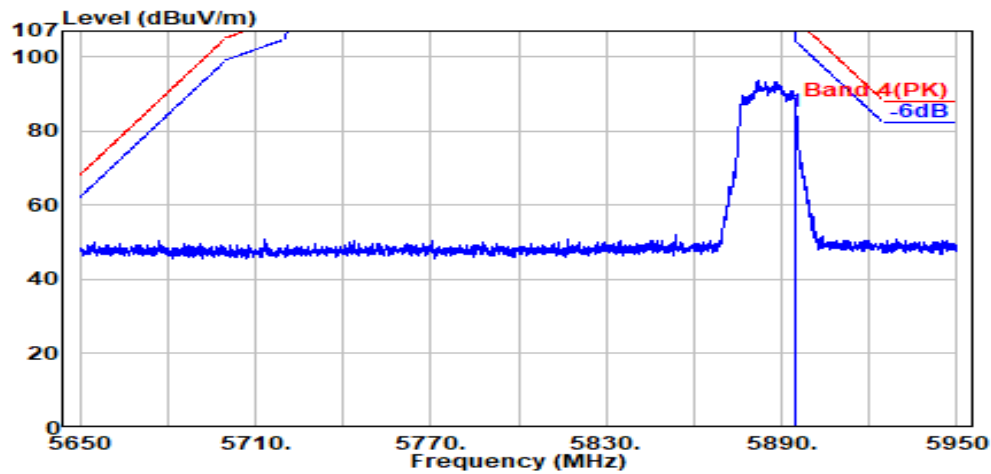

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	76.39	85.11	110.20	25.09	Peak

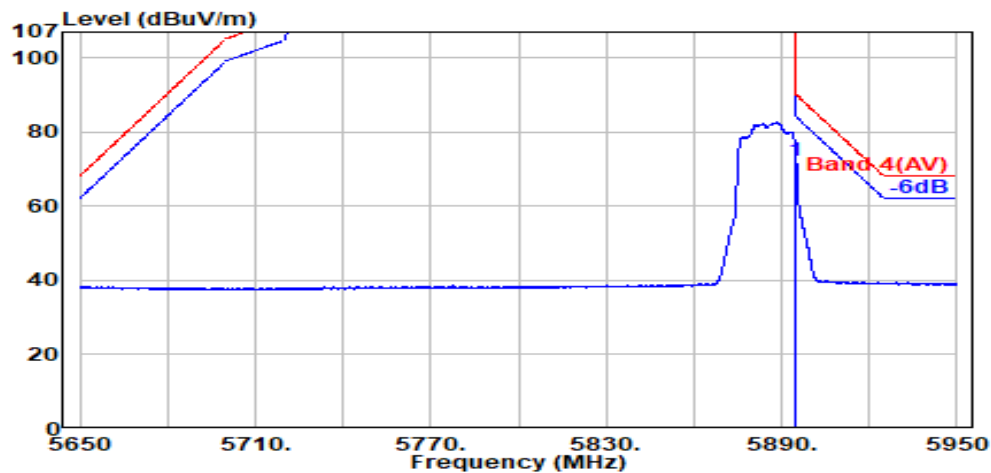

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	63.65	72.37	90.20	17.83	Average

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

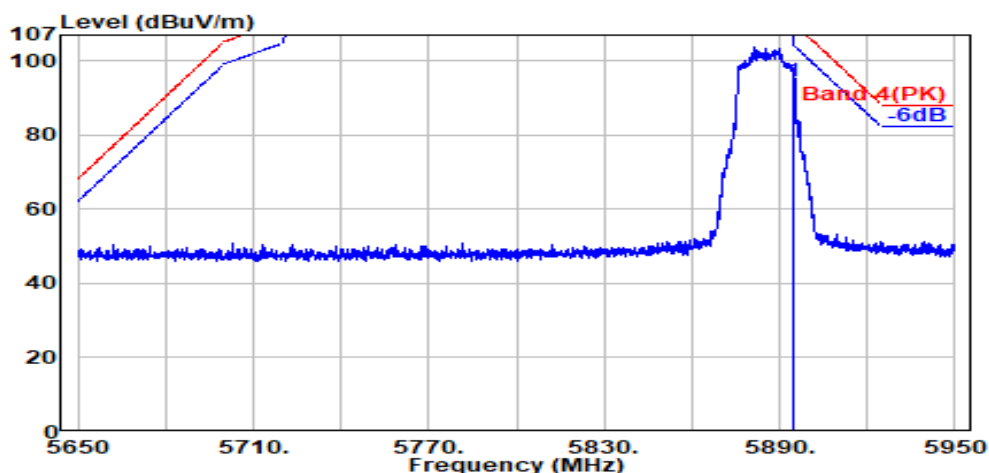

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	85.94	94.66	110.20	15.54	Peak

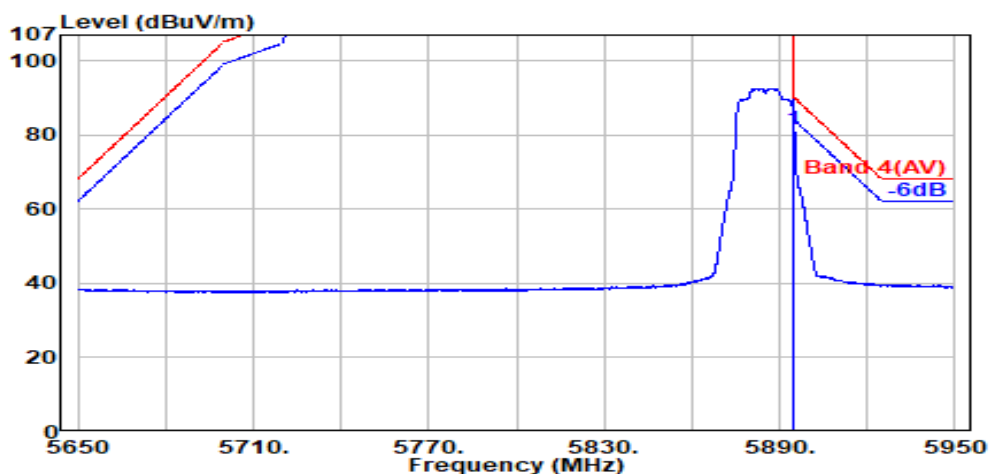

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	73.01	81.73	90.20	8.47	Average

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

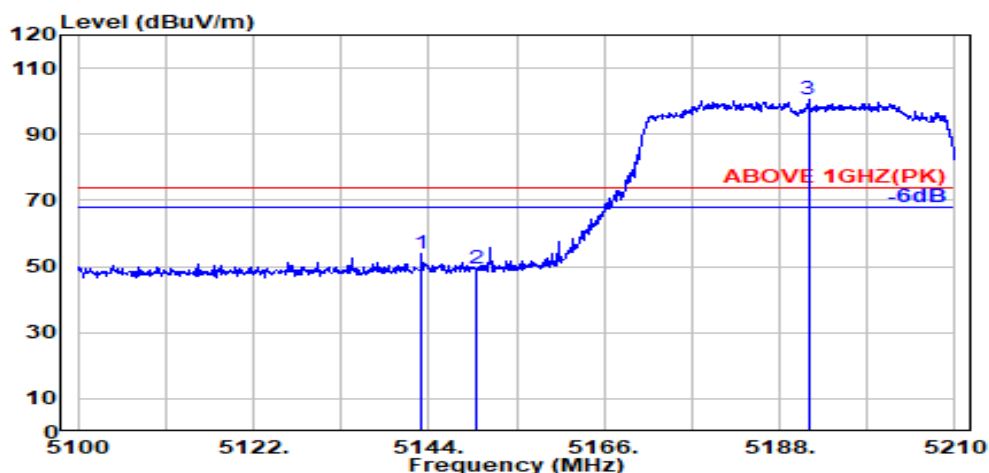

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.100	33.49	8.37	39.19	51.34	54.00	74.00	20.00	Peak
5150.000	33.50	8.37	39.19	46.51	49.19	74.00	24.81	Peak
@ 5191.600	33.75	8.42	39.19	97.60	100.58	---	---	Peak

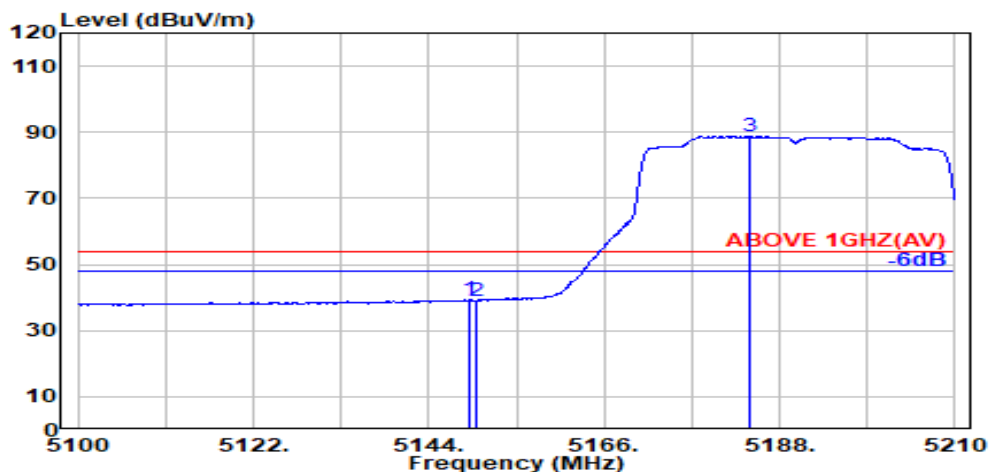

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	36.71	39.39	54.00	14.61	Average
5150.000	33.50	8.37	39.19	36.39	39.07	54.00	14.93	Average
@ 5184.300	33.71	8.41	39.19	85.79	88.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

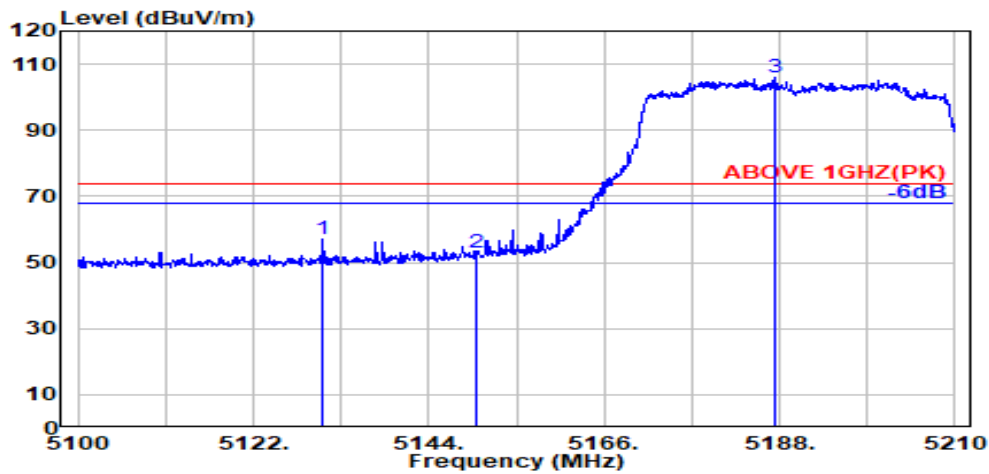

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5130.700	33.46	8.35	39.19	54.23	56.85	74.00	17.15	Peak
5150.000	33.50	8.37	39.19	50.17	52.86	74.00	21.14	Peak
@ 5187.400	33.72	8.41	39.19	102.93	105.88	---	---	Peak

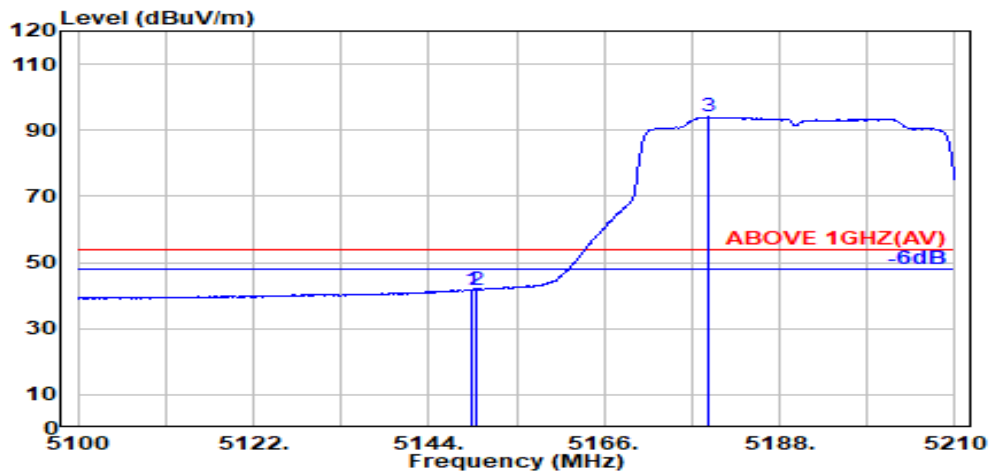

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	39.12	41.80	54.00	12.20	Average
5150.000	33.50	8.37	39.19	39.05	41.74	54.00	12.26	Average
@ 5179.000	33.67	8.40	39.19	91.09	93.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

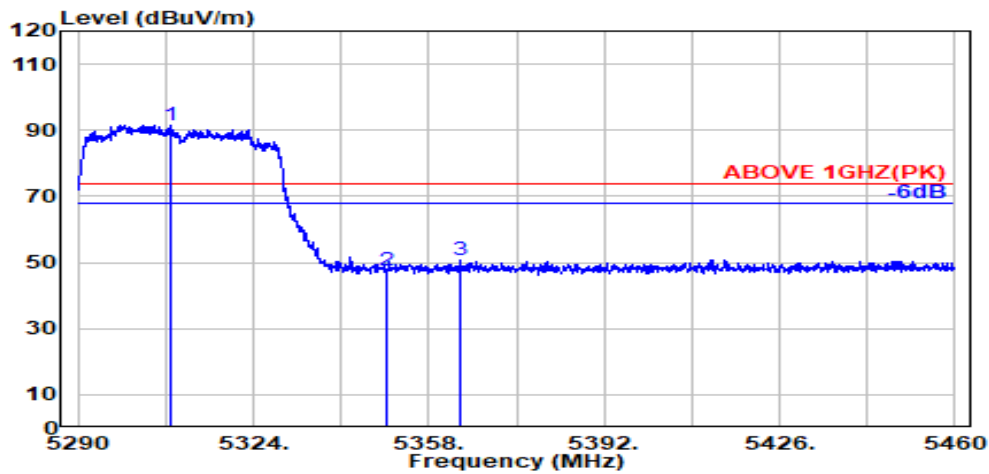

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.900	33.78	8.53	39.17	88.40	91.54	---	---	Peak
5350.000	33.70	8.57	39.17	44.59	47.69	74.00	26.31	Peak
5364.300	33.76	8.59	39.17	47.76	50.94	74.00	23.06	Peak

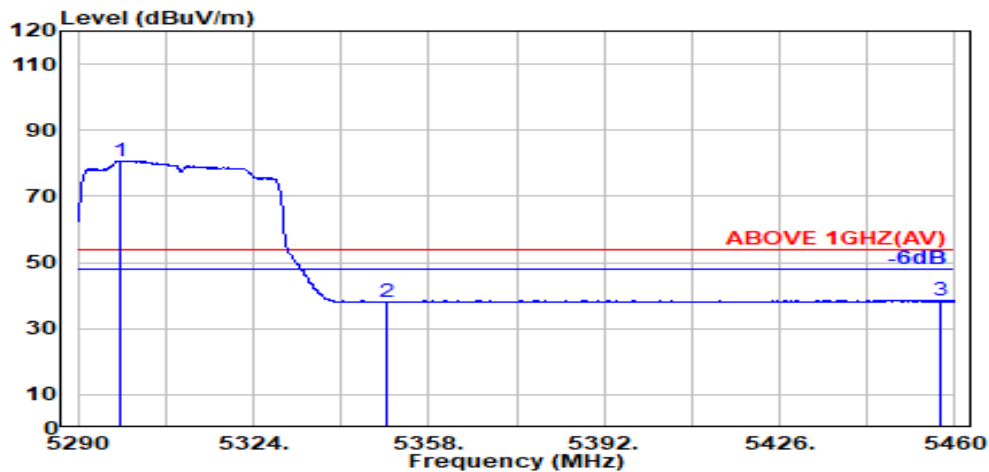

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.100	33.80	8.52	39.17	77.67	80.82	---	---	Average
5350.000	33.70	8.57	39.17	35.04	38.15	54.00	15.85	Average
5457.300	34.01	8.68	39.15	35.06	38.60	54.00	15.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

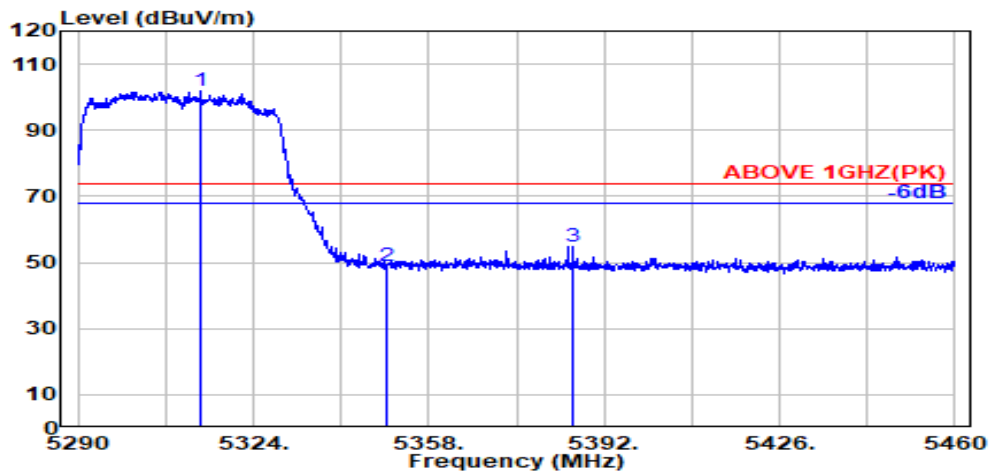

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.800	33.77	8.54	39.17	98.67	101.81	---	---	Peak
5350.000	33.70	8.57	39.17	45.85	48.95	74.00	25.05	Peak
5385.800	33.84	8.61	39.16	51.63	54.91	74.00	19.09	Peak

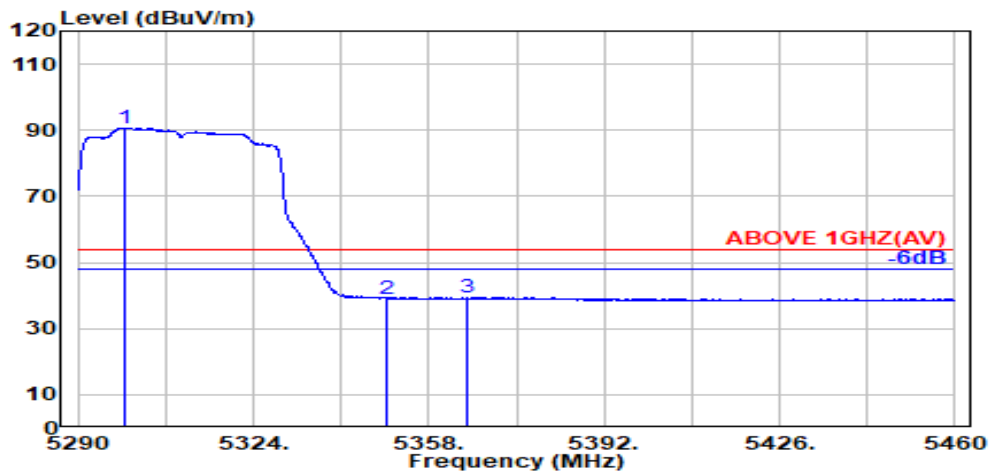

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.900	33.80	8.52	39.17	87.47	90.62	---	---	Average
5350.000	33.70	8.57	39.17	36.03	39.13	54.00	14.87	Average
5365.600	33.76	8.59	39.17	36.16	39.35	54.00	14.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

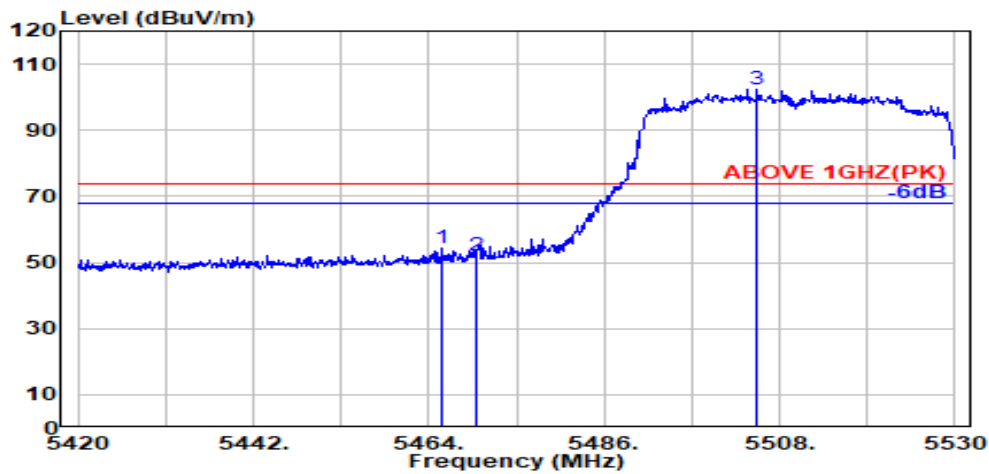

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.700	34.03	8.68	39.15	50.96	54.52	74.00	19.48	Peak
5470.000	34.04	8.69	39.15	48.35	51.92	74.00	22.08	Peak
@ 5505.100	34.09	8.72	39.15	98.78	102.44	---	---	Peak

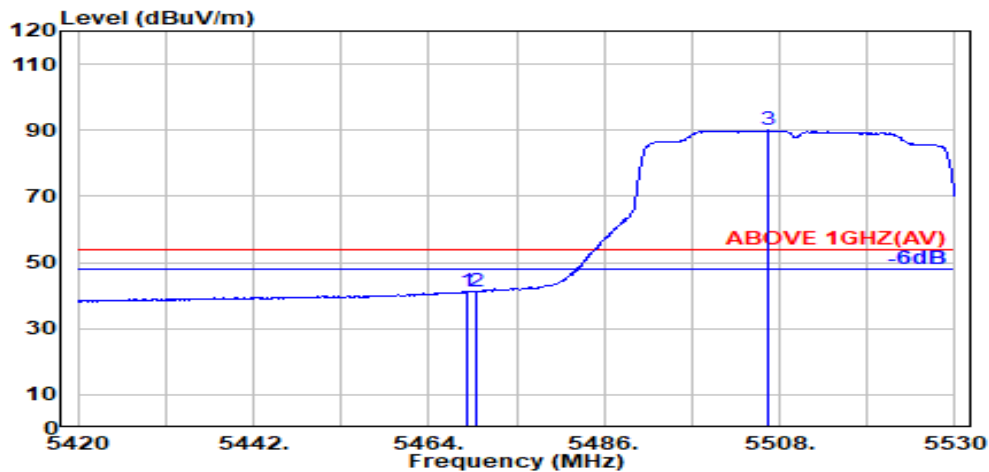


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	37.75	41.32	54.00	12.68	Average
5470.000	34.04	8.69	39.15	37.80	41.37	54.00	12.63	Average
@ 5506.500	34.09	8.72	39.15	86.27	89.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

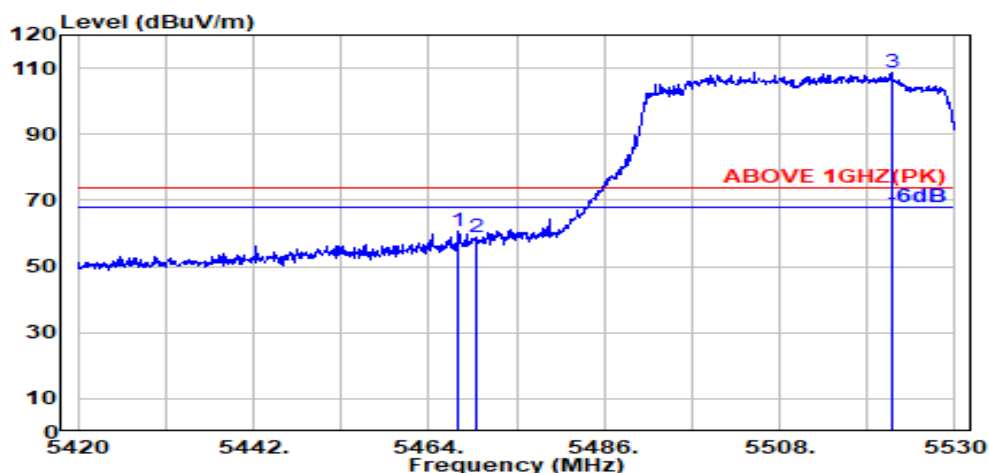

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.04	8.69	39.15	57.29	60.86	74.00	13.14	Peak
5470.000	34.04	8.69	39.15	55.44	59.02	74.00	14.98	Peak
@ 5522.000	34.06	8.74	39.15	104.84	108.48	---	---	Peak

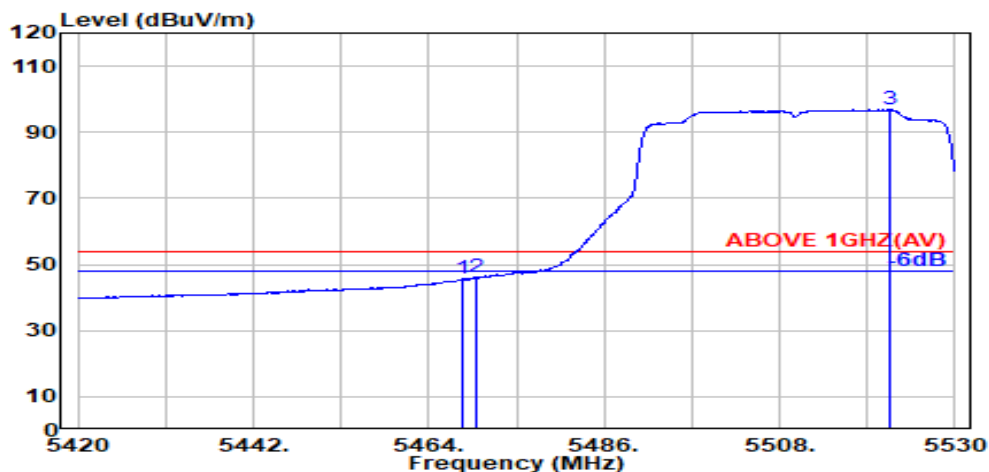

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.15	42.09	45.66	54.00	8.34	Average
5470.000	34.04	8.69	39.15	42.58	46.15	54.00	7.85	Average
@ 5521.800	34.06	8.74	39.15	93.16	96.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

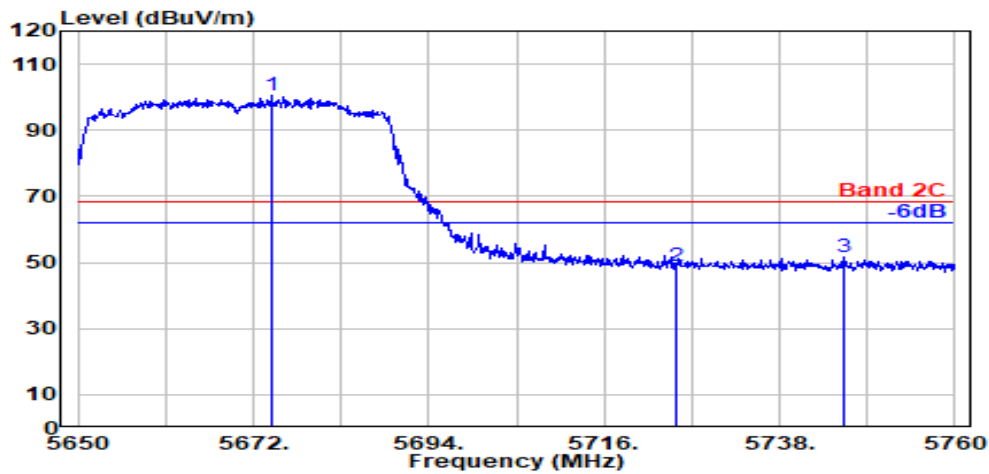

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.300	33.70	8.88	39.19	97.10	100.50	---	---	Peak
5725.000	33.60	8.93	39.20	45.46	48.79	68.20	19.41	Peak
5746.100	33.60	8.94	39.20	48.15	51.50	68.20	16.70	Peak

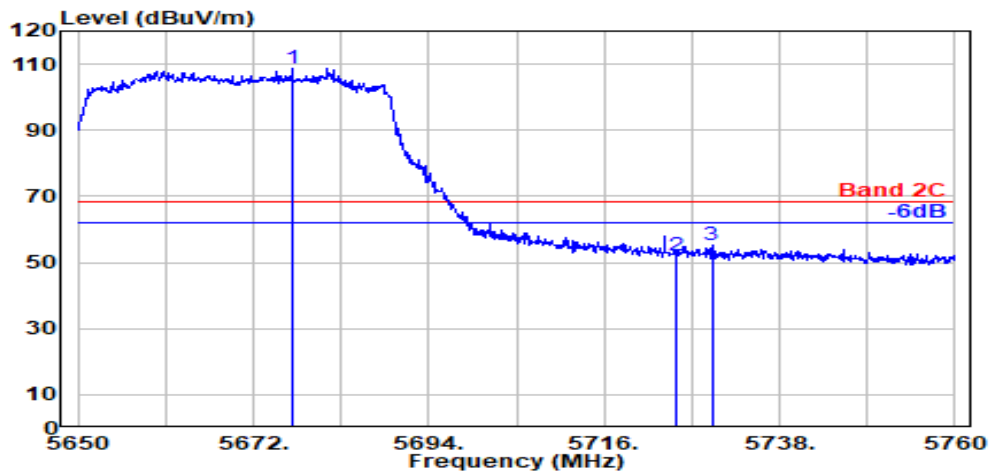


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.900	33.69	8.88	39.19	105.38	108.77	---	---	Peak
5725.000	33.60	8.93	39.20	48.61	51.94	68.20	16.26	Peak
5729.500	33.60	8.93	39.20	52.11	55.44	68.20	12.76	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

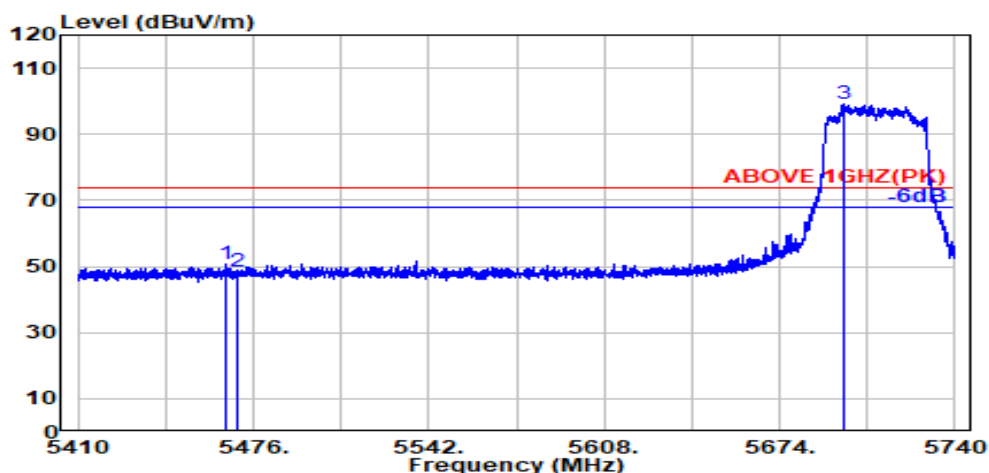

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.15	47.06	50.62	74.00	23.38	Peak
5470.000	34.04	8.69	39.15	44.82	48.40	74.00	25.60	Peak
@ 5697.800	33.61	8.90	39.19	95.89	99.21	---	---	Peak

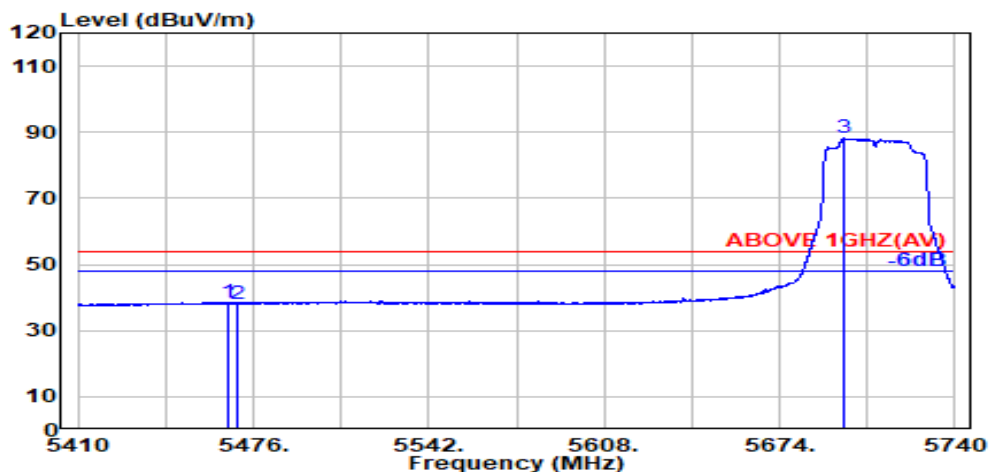

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.15	35.06	38.63	54.00	15.37	Average
5470.000	34.04	8.69	39.15	34.68	38.25	54.00	15.75	Average
@ 5698.600	33.61	8.90	39.19	84.77	88.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

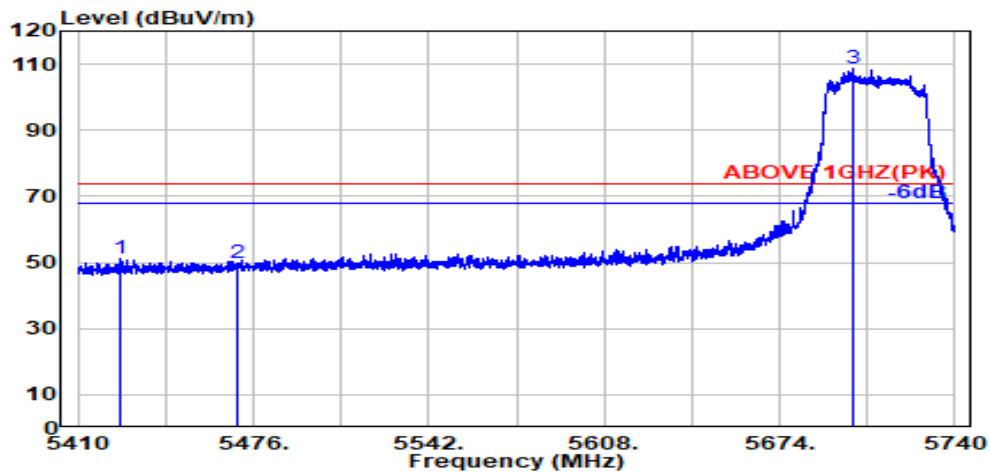

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.600	33.95	8.65	39.16	47.56	51.00	74.00	23.00	Peak
5470.000	34.04	8.69	39.15	46.10	49.68	74.00	24.32	Peak
@ 5701.600	33.60	8.90	39.19	105.52	108.84	---	---	Peak

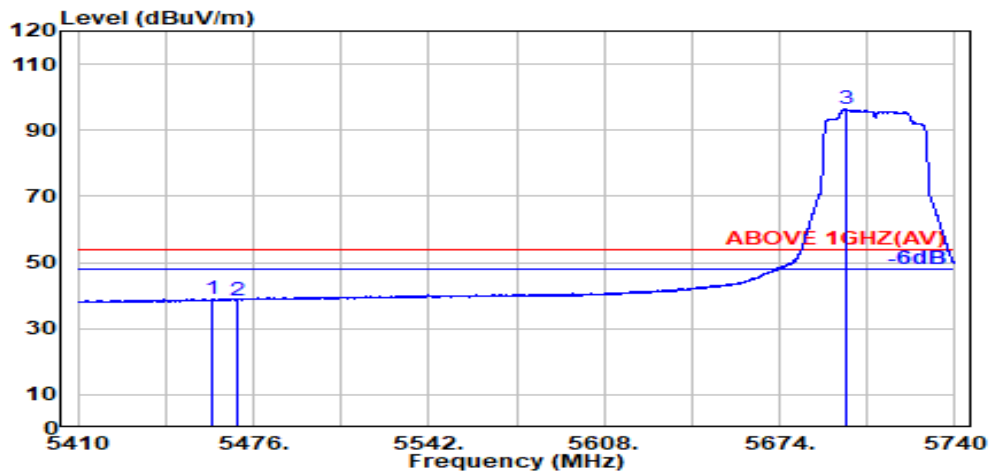

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.02	8.68	39.15	35.40	38.94	54.00	15.06	Average
5470.000	34.04	8.69	39.15	35.13	38.70	54.00	15.30	Average
@ 5698.700	33.61	8.90	39.19	93.07	96.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

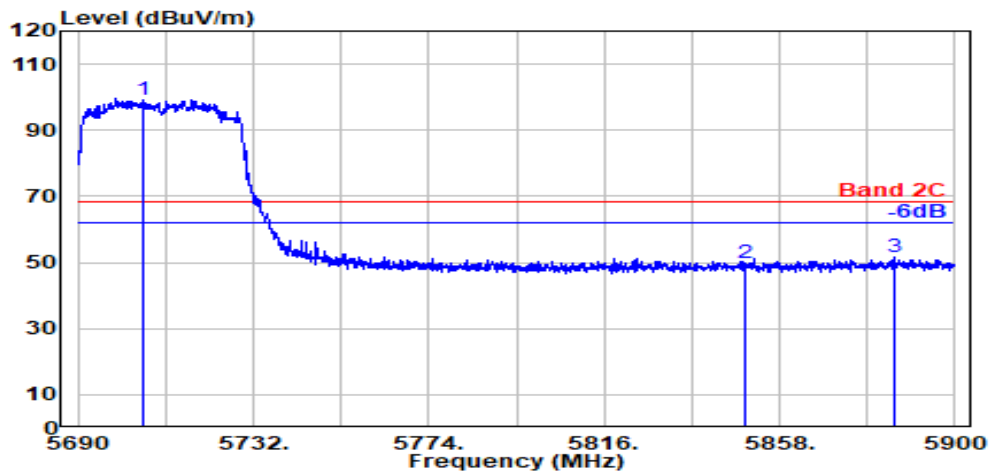

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.400	33.60	8.91	39.19	95.71	99.02	---	---	Peak
5850.000	33.90	9.04	39.22	45.97	49.69	68.20	18.51	Peak
5885.400	34.04	9.07	39.23	47.70	51.58	68.20	16.62	Peak

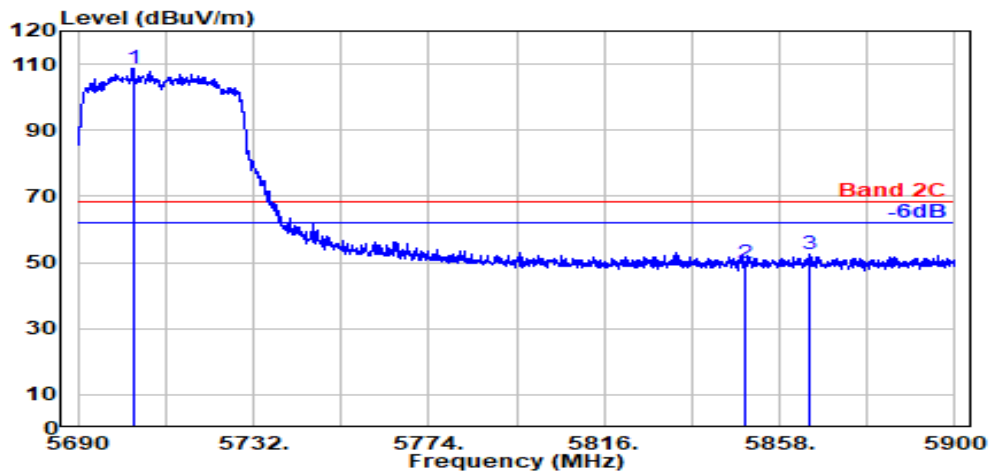

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.200	33.60	8.91	39.19	105.39	108.70	---	---	Peak
5850.000	33.90	9.04	39.22	46.03	49.75	68.20	18.45	Peak
5864.900	33.96	9.05	39.22	48.56	52.35	68.20	15.85	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

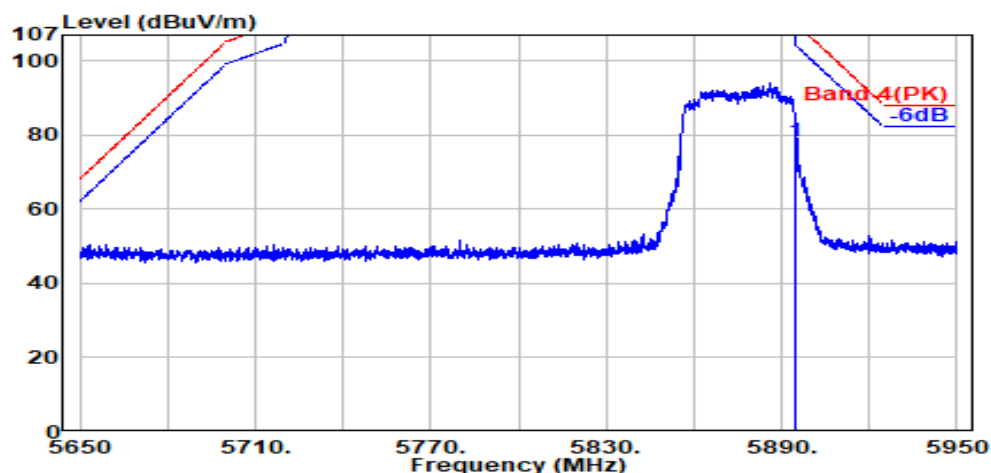

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	69.74	78.46	110.20	31.74	Peak

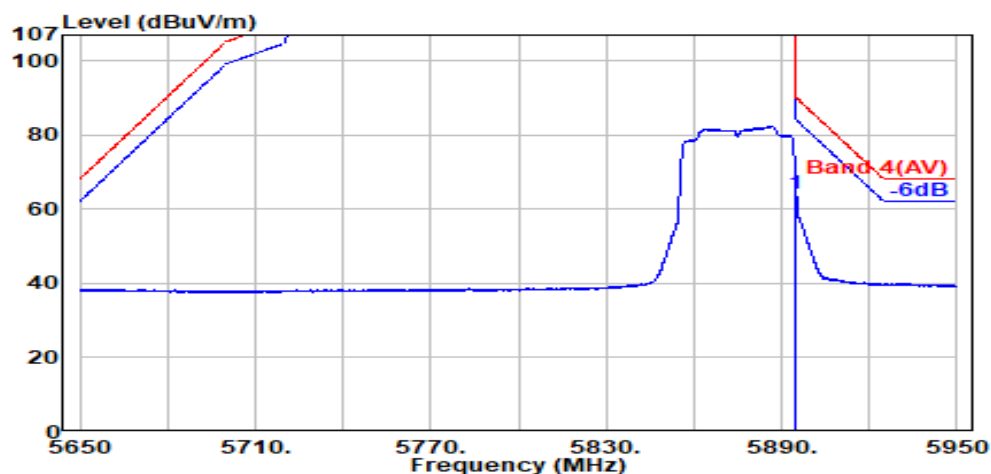

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	55.64	64.36	90.20	25.84	Average

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

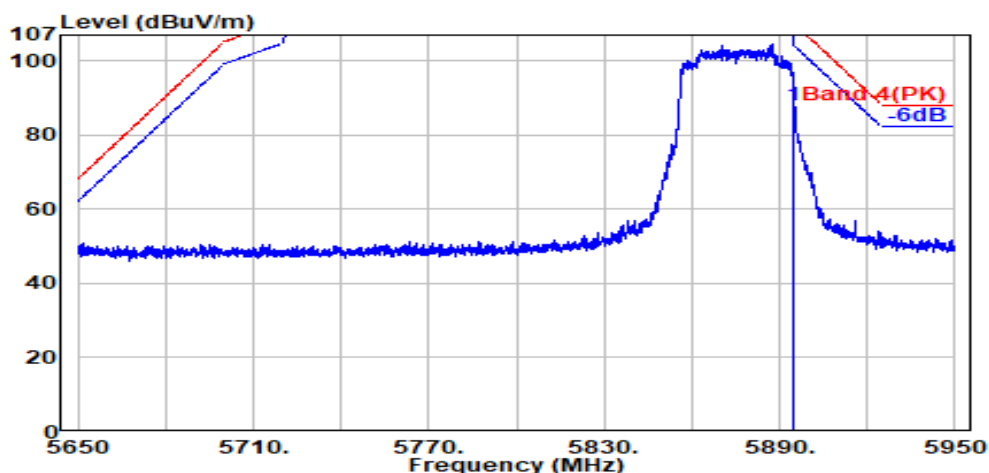

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	79.38	88.10	110.20	22.10	Peak

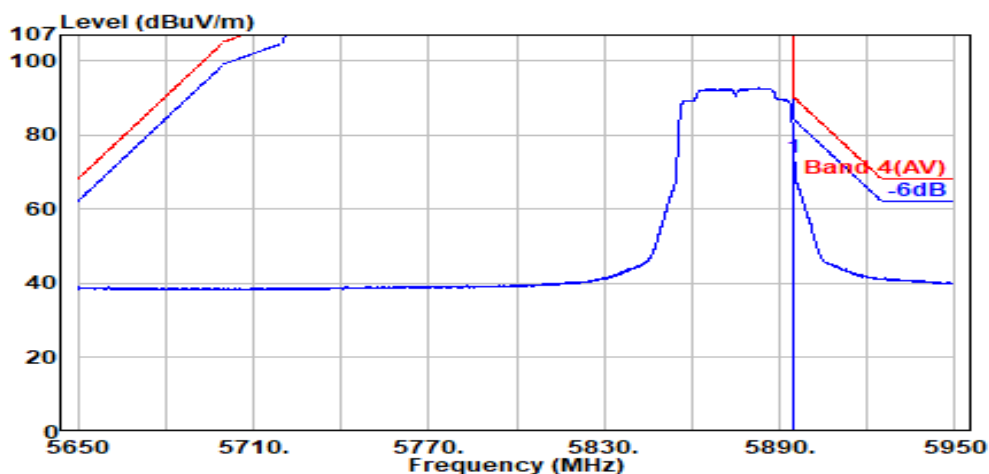


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	65.02	73.74	90.20	16.46	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

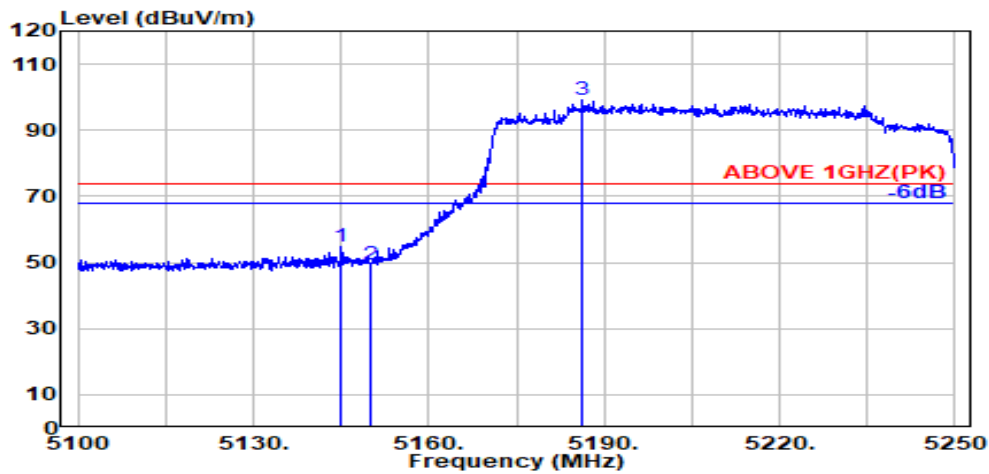

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.49	8.37	39.19	52.10	54.77	74.00	19.23	Peak
5150.000	33.50	8.37	39.19	46.79	49.47	74.00	24.53	Peak
@ 5186.300	33.72	8.41	39.19	96.06	99.00	---	---	Peak

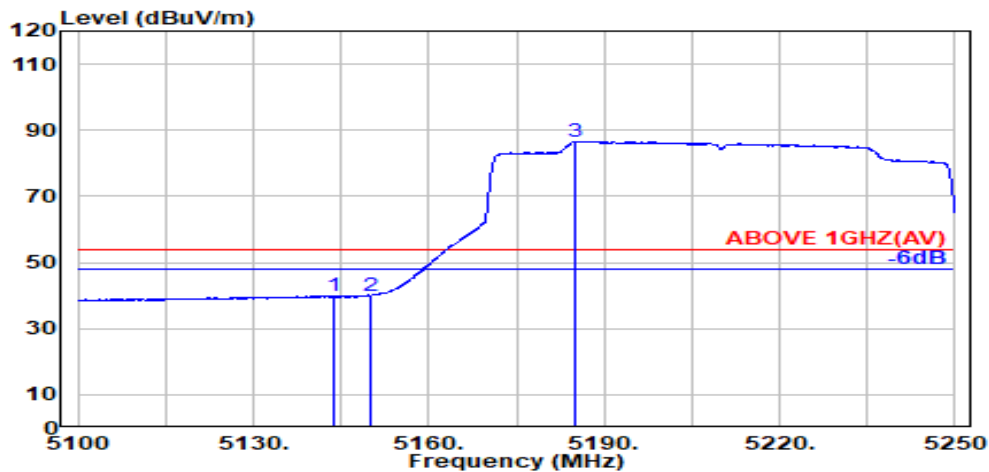


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	33.49	8.37	39.19	37.32	39.98	54.00	14.02	Average
5150.000	33.50	8.37	39.19	37.29	39.97	54.00	14.03	Average
@ 5185.200	33.71	8.41	39.19	83.69	86.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

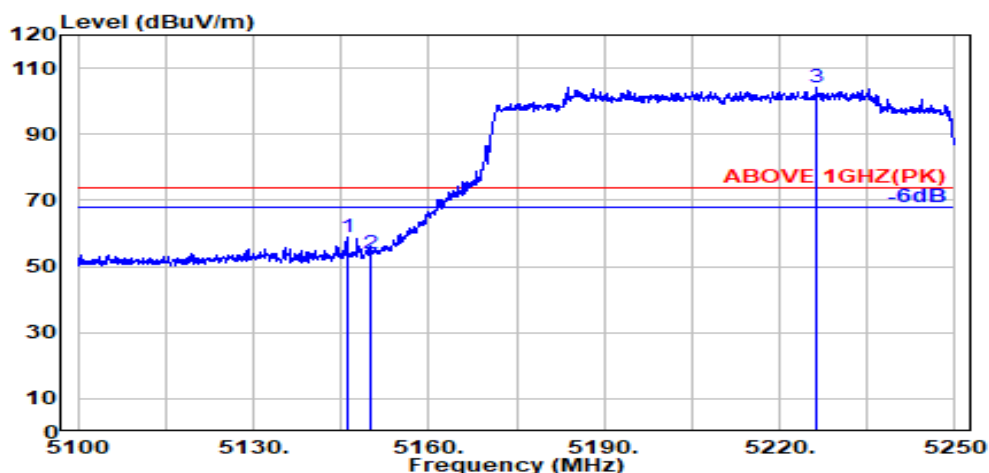

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.49	8.37	39.19	56.35	59.02	74.00	14.98	Peak
5150.000	33.50	8.37	39.19	51.43	54.11	74.00	19.89	Peak
@ 5226.400	33.75	8.45	39.18	101.08	104.09	---	---	Peak

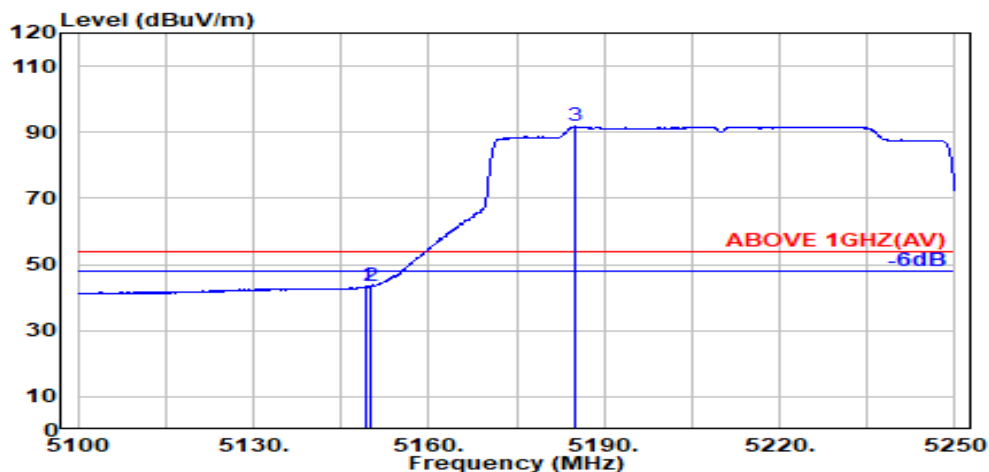

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	40.79	43.47	54.00	10.53	Average
5150.000	33.50	8.37	39.19	40.70	43.38	54.00	10.62	Average
@ 5185.100	33.71	8.41	39.19	88.80	91.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

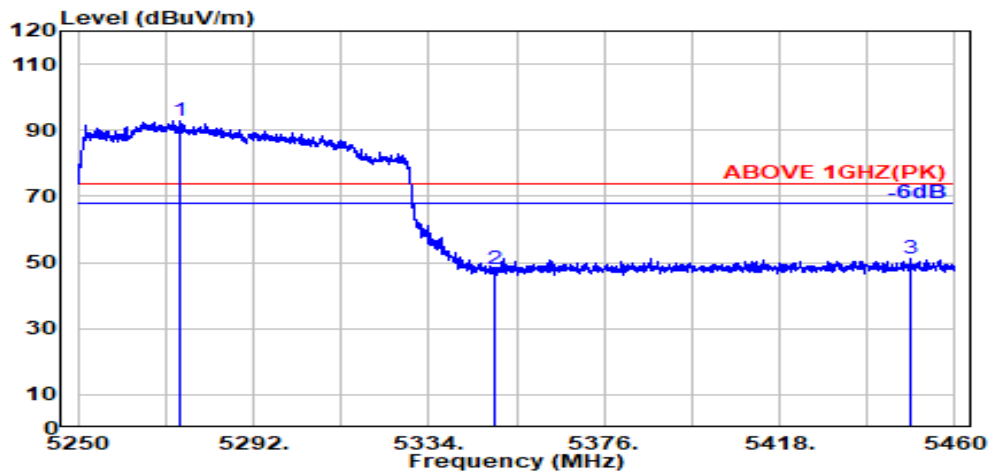

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.300	33.75	8.50	39.18	89.79	92.86	---	---	Peak
5350.000	33.70	8.57	39.17	45.07	48.18	74.00	25.82	Peak
5449.100	34.00	8.67	39.16	47.61	51.12	74.00	22.88	Peak

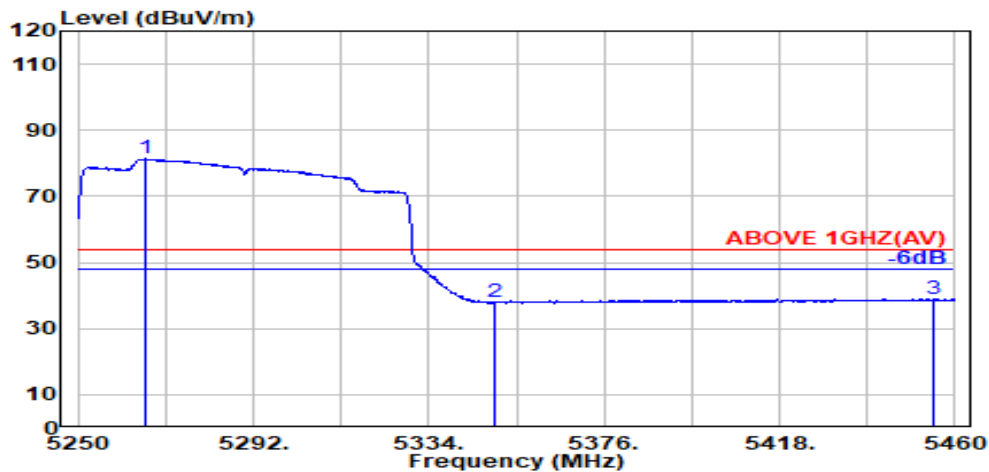

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.200	33.73	8.49	39.18	78.25	81.30	---	---	Average
5350.000	33.70	8.57	39.17	34.94	38.04	54.00	15.96	Average
5455.000	34.01	8.67	39.16	35.40	38.92	54.00	15.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

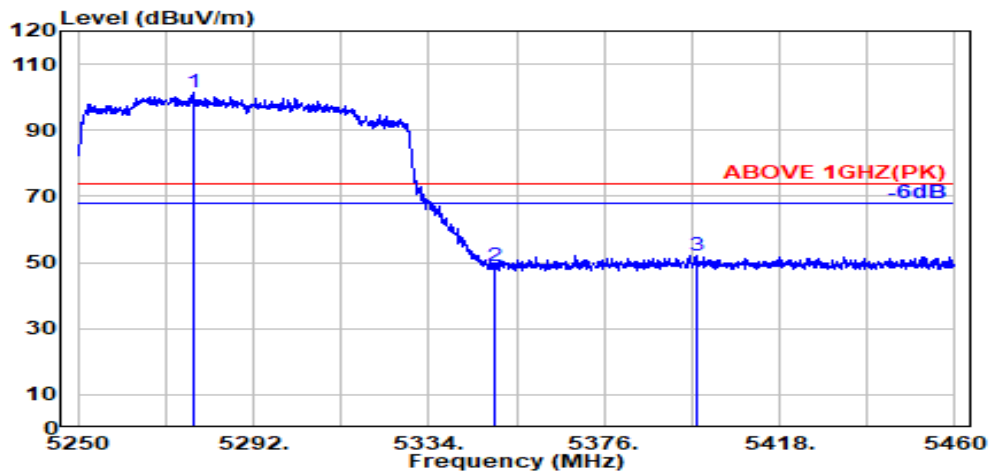

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.500	33.76	8.50	39.18	98.17	101.25	---	---	Peak
5350.000	33.70	8.57	39.17	45.65	48.75	74.00	25.25	Peak
5398.100	33.89	8.62	39.16	48.83	52.18	74.00	21.82	Peak

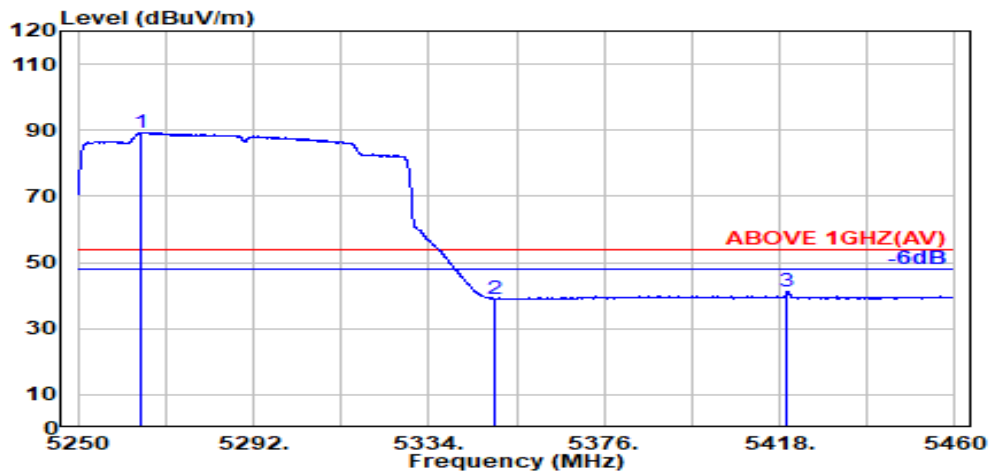

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.300	33.73	8.49	39.18	86.35	89.39	---	---	Average
5350.000	33.70	8.57	39.17	35.89	38.99	54.00	15.01	Average
5419.900	33.94	8.64	39.16	37.60	41.02	54.00	12.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

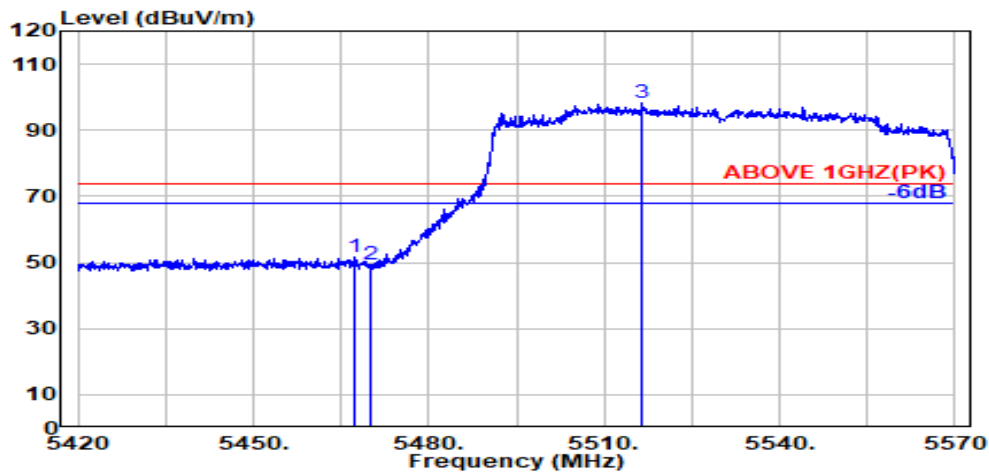

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	48.07	51.64	74.00	22.36	Peak
5470.000	34.04	8.69	39.15	45.99	49.57	74.00	24.43	Peak
@ 5516.400	34.07	8.73	39.15	94.48	98.12	---	---	Peak

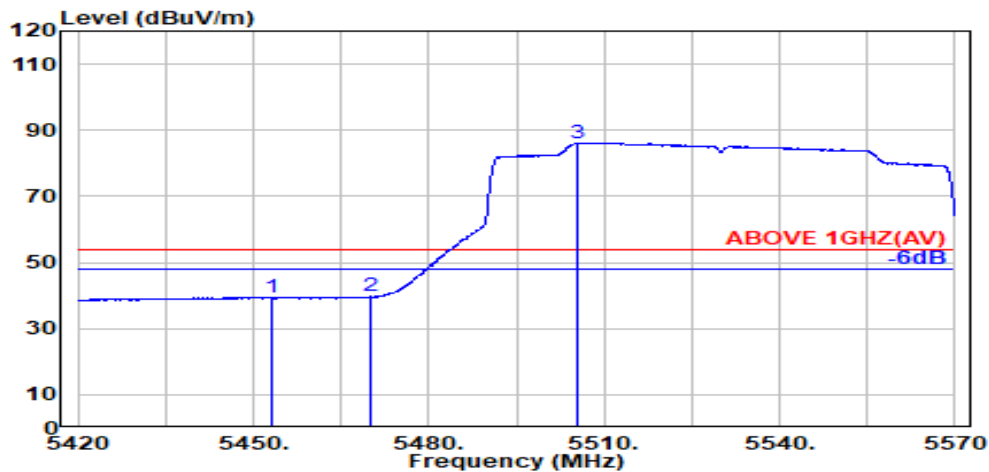


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.100	34.01	8.67	39.16	36.02	39.54	54.00	14.46	Average
5470.000	34.04	8.69	39.15	36.10	39.68	54.00	14.32	Average
@ 5505.300	34.09	8.72	39.15	82.54	86.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

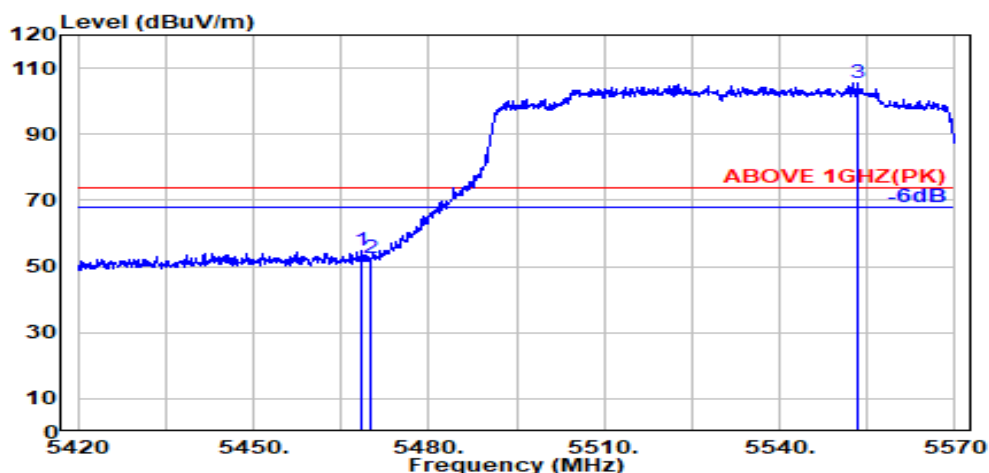

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	51.31	54.88	74.00	19.12	Peak
5470.000	34.04	8.69	39.15	48.77	52.34	74.00	21.66	Peak
@ 5553.200	33.99	8.77	39.16	102.00	105.60	---	---	Peak

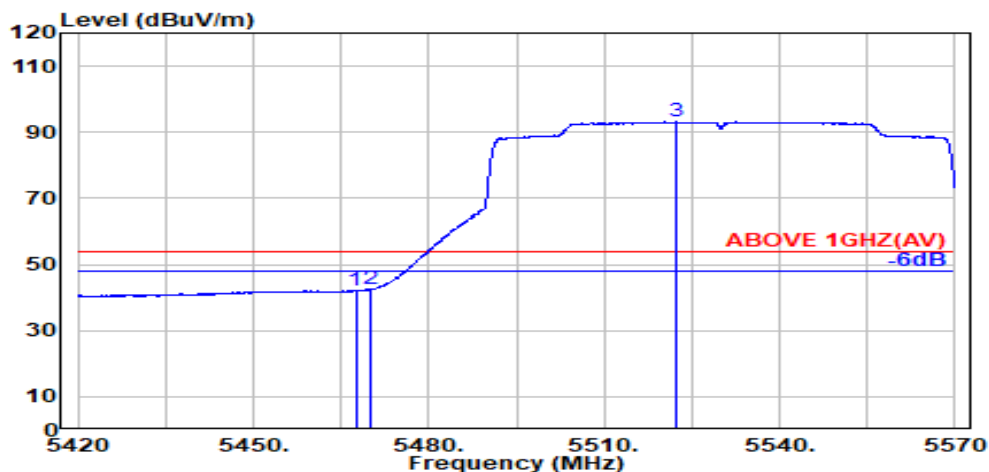

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	38.71	42.27	54.00	11.73	Average
5470.000	34.04	8.69	39.15	38.83	42.40	54.00	11.60	Average
@ 5522.200	34.06	8.74	39.15	89.48	93.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

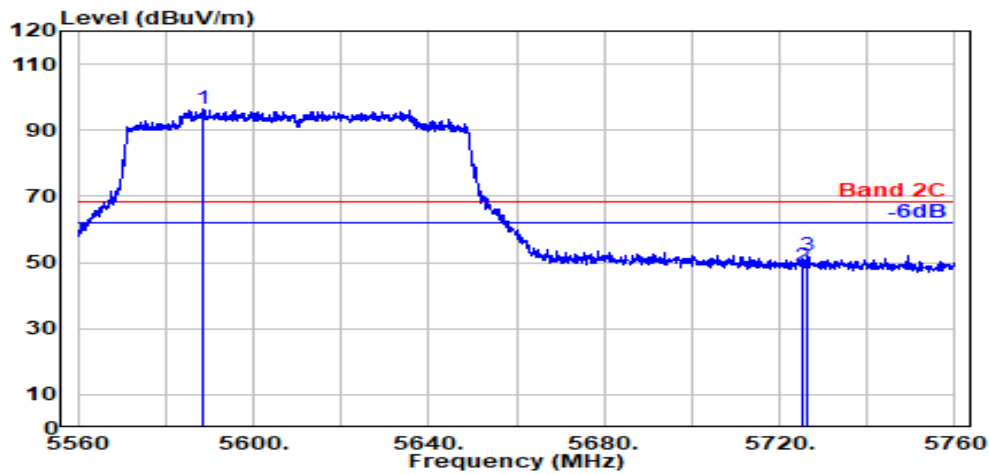

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.700	33.85	8.80	39.17	93.13	96.61	---	---	Peak
5725.000	33.60	8.93	39.20	45.44	48.77	68.20	19.43	Peak
5726.500	33.60	8.93	39.20	48.57	51.90	68.20	16.30	Peak

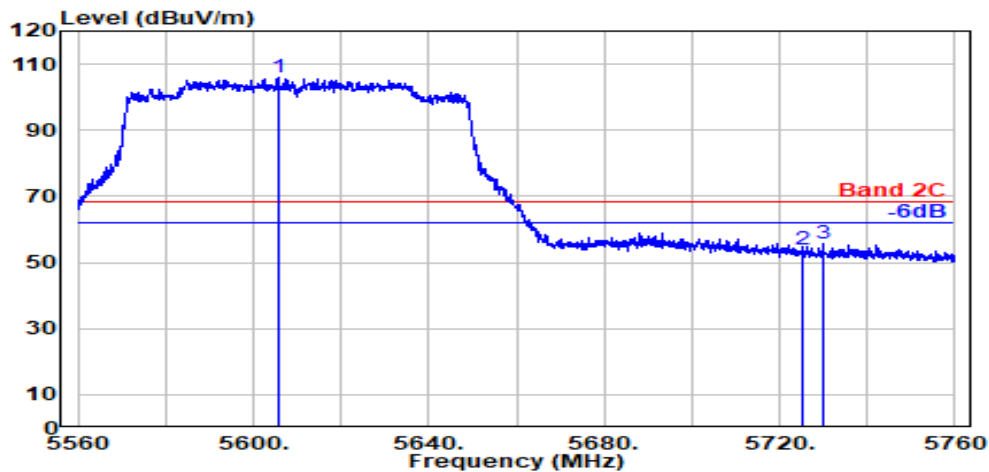

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.600	33.80	8.82	39.17	102.69	106.13	---	---	Peak
5725.000	33.60	8.93	39.20	50.55	53.88	68.20	14.32	Peak
5729.900	33.60	8.93	39.20	52.35	55.69	68.20	12.51	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

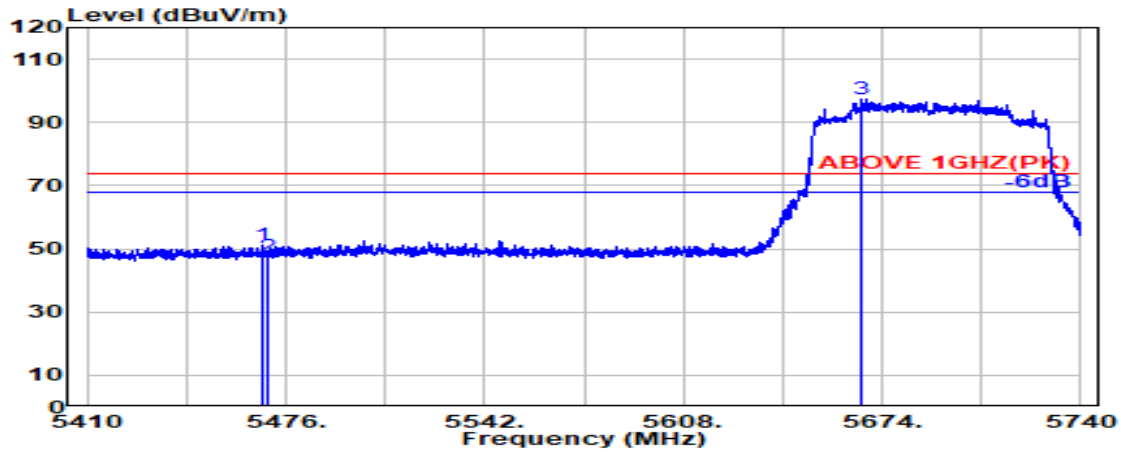

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	47.64	51.21	74.00	22.79	Peak
5470.000	34.04	8.69	39.15	44.08	47.66	74.00	26.34	Peak
@ 5667.100	33.73	8.87	39.18	94.14	97.56	---	---	Peak

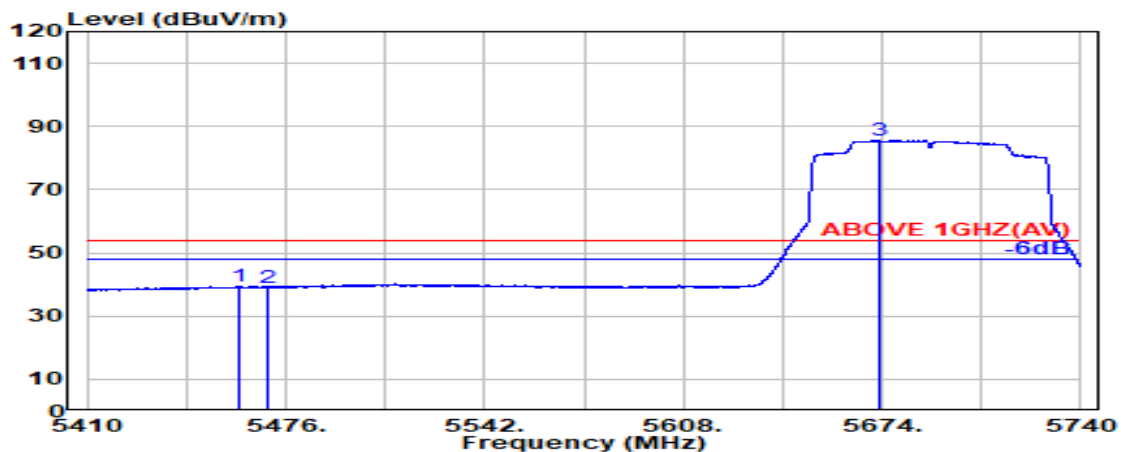

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.600	34.02	8.68	39.15	35.84	39.38	54.00	14.62	Average
5470.000	34.04	8.69	39.15	35.50	39.08	54.00	14.92	Average
@ 5673.000	33.71	8.88	39.19	82.21	85.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

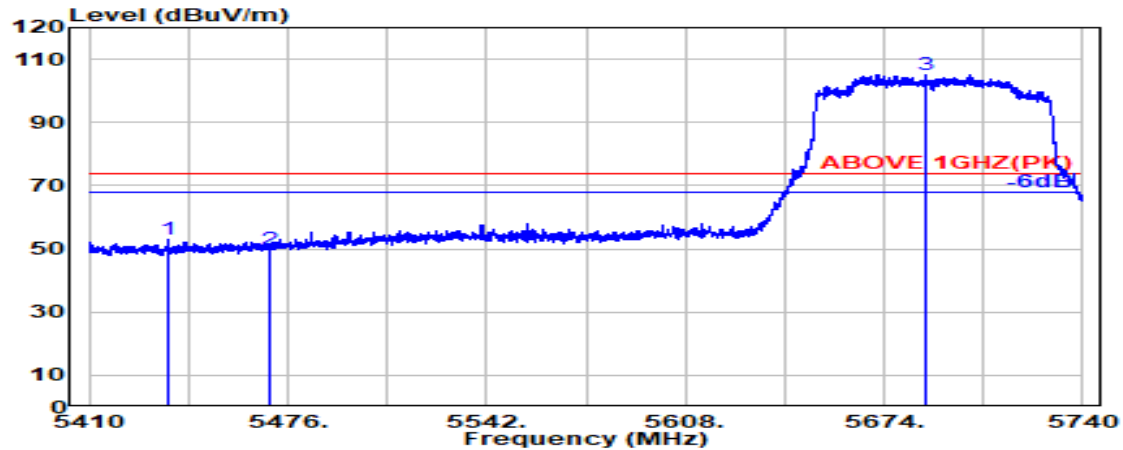

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.400	33.97	8.66	39.16	49.30	52.77	74.00	21.23	Peak
5470.000	34.04	8.69	39.15	46.36	49.94	74.00	24.06	Peak
@ 5687.700	33.65	8.89	39.19	101.89	105.24	---	---	Peak

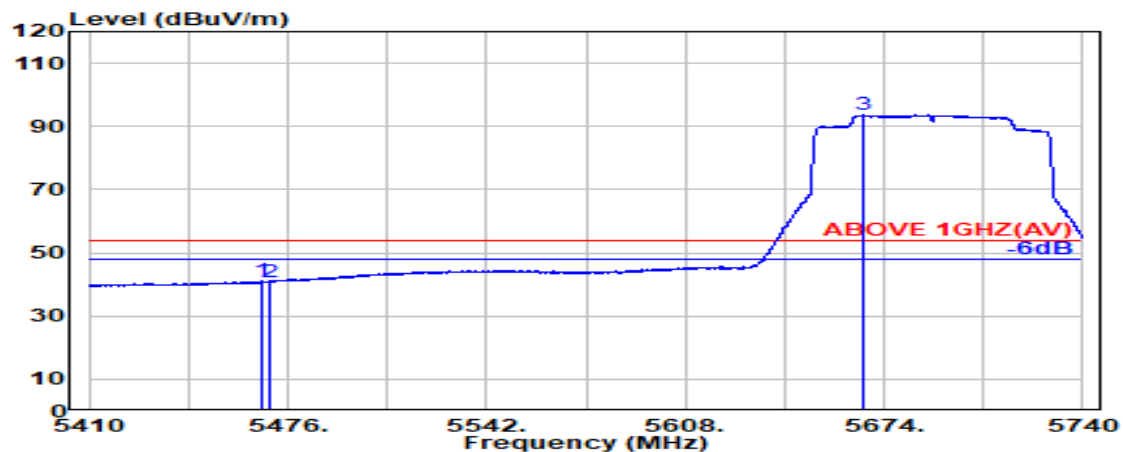

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	37.46	41.03	54.00	12.97	Average
5470.000	34.04	8.69	39.15	37.23	40.81	54.00	13.19	Average
@ 5667.400	33.73	8.87	39.18	90.15	93.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

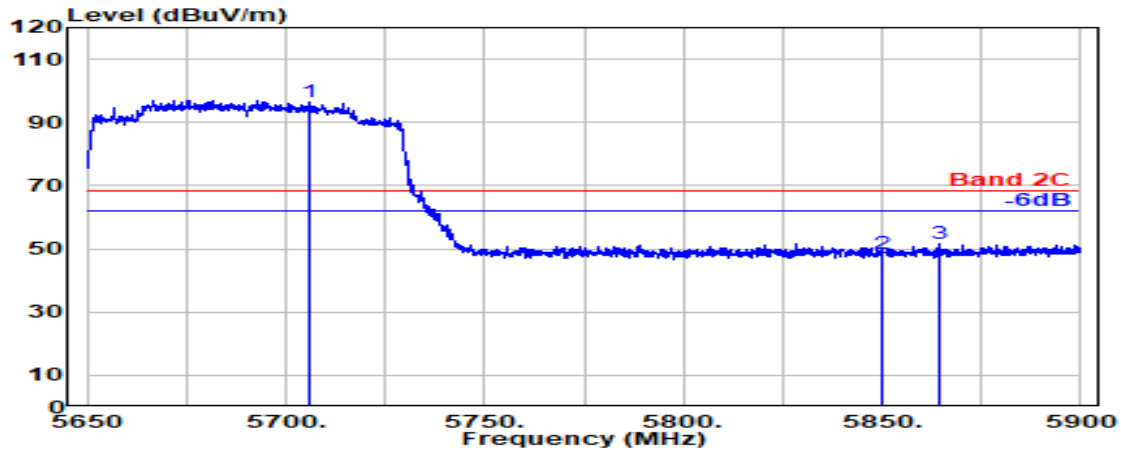

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.800	33.60	8.91	39.19	93.12	96.44	---	---	Peak
5850.000	33.90	9.04	39.22	44.81	48.53	68.20	19.67	Peak
5864.200	33.96	9.05	39.22	47.92	51.70	68.20	16.50	Peak

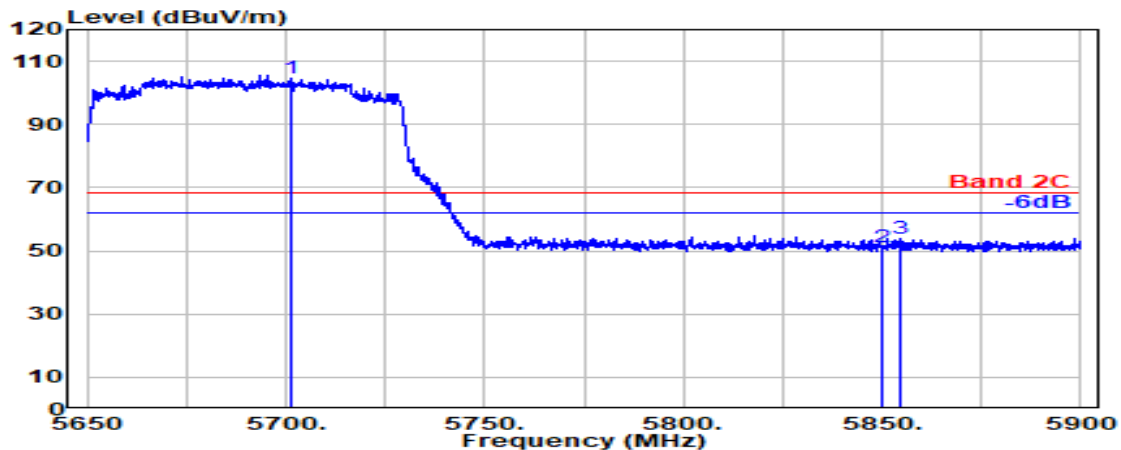

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.200	33.60	8.90	39.19	101.32	104.63	---	---	Peak
5850.000	33.90	9.04	39.22	47.28	51.00	68.20	17.20	Peak
5854.400	33.92	9.04	39.22	50.06	53.80	68.20	14.40	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

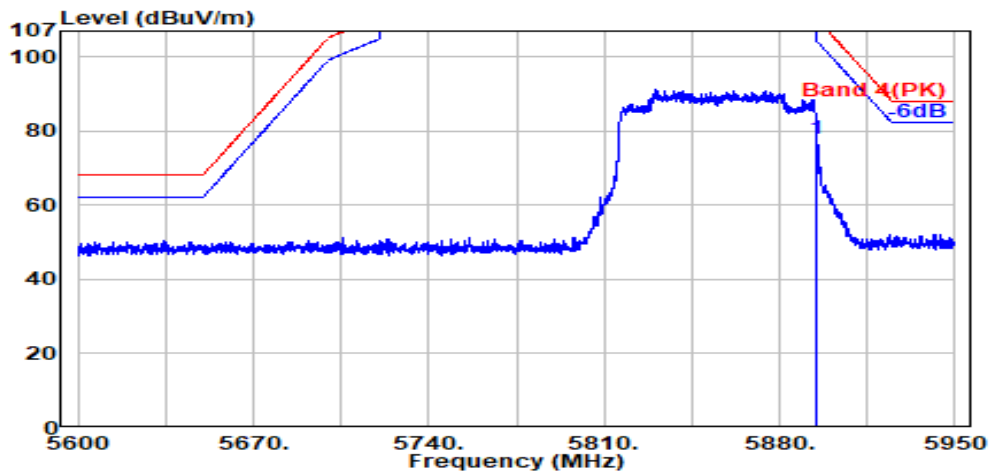

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	69.19	77.91	110.16	32.25	Peak

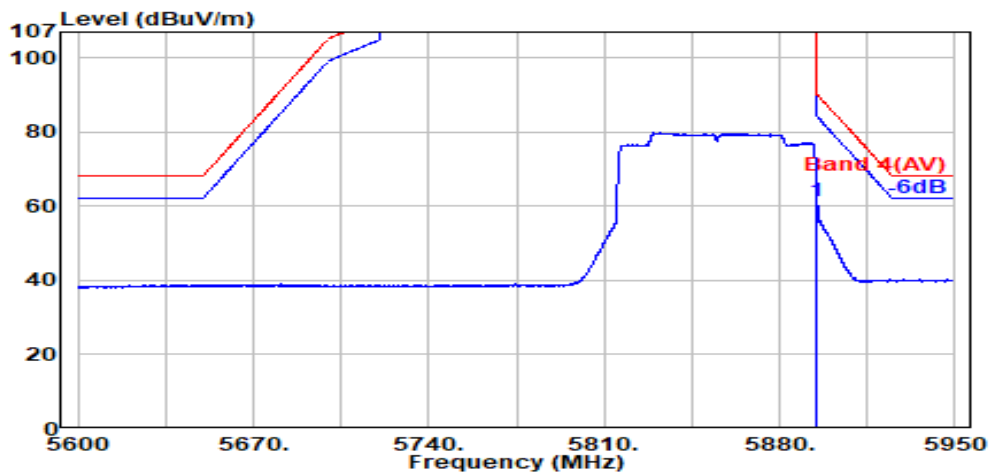


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	52.81	61.53	90.16	28.63	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

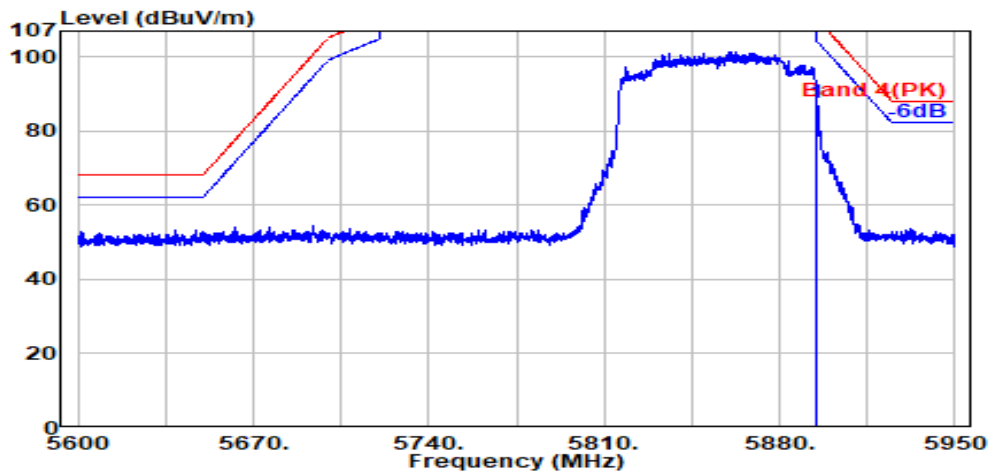

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	78.96	87.68	110.16	22.49	Peak

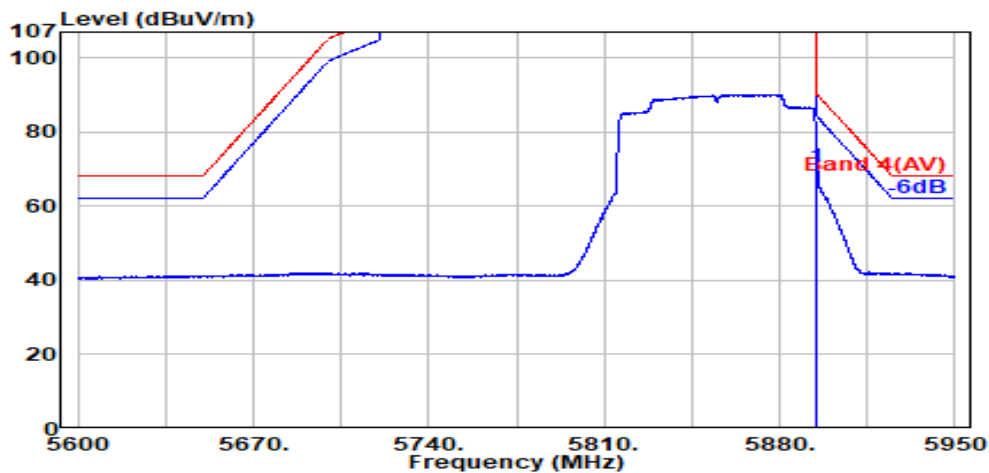


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	61.87	70.59	90.16	19.57	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

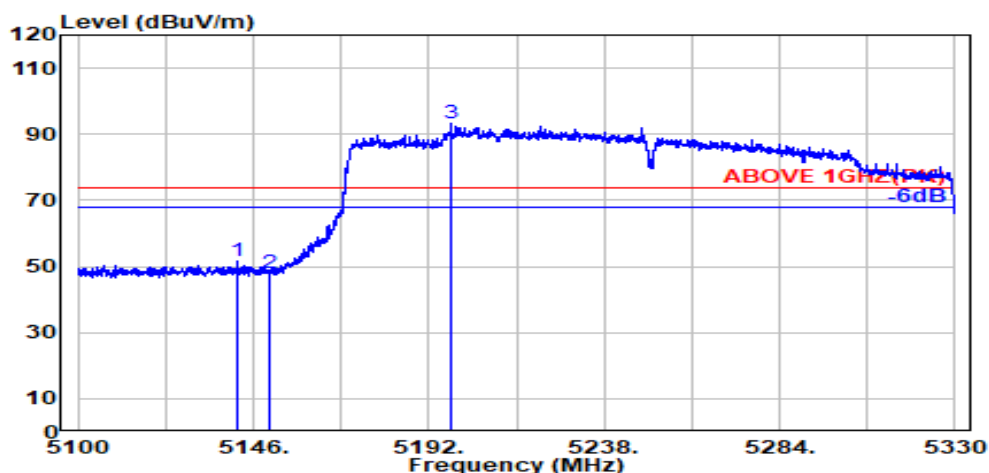

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.800	33.48	8.37	39.19	49.10	51.75	74.00	22.25	Peak
5150.000	33.50	8.37	39.19	45.50	48.18	74.00	25.82	Peak
@ 5197.900	33.79	8.42	39.19	90.14	93.17	---	---	Peak

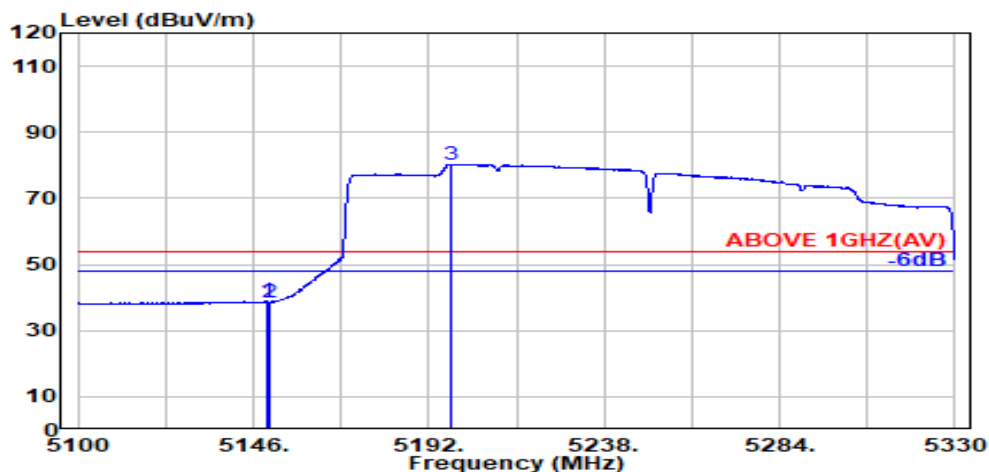

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	36.07	38.75	54.00	15.25	Average
5150.000	33.50	8.37	39.19	35.75	38.43	54.00	15.57	Average
@ 5197.700	33.79	8.42	39.19	77.32	80.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

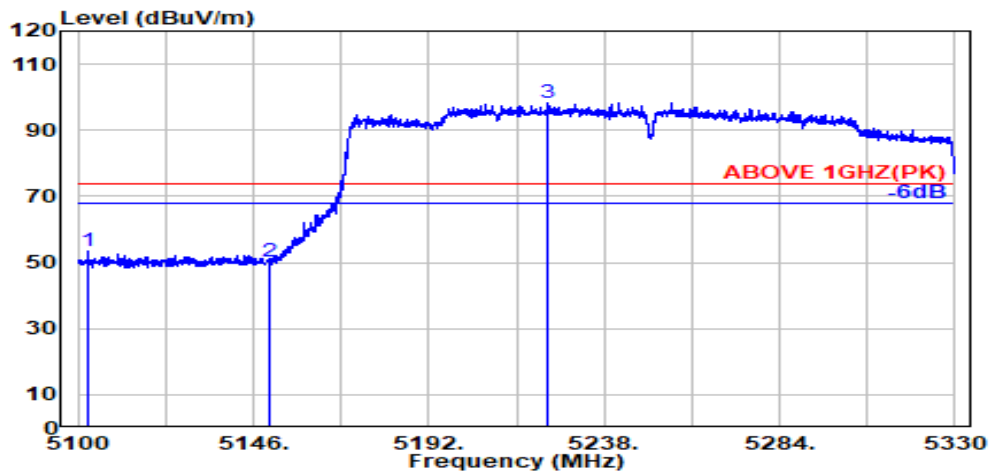

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.700	33.41	8.33	39.20	50.84	53.37	74.00	20.63	Peak
5150.000	33.50	8.37	39.19	47.61	50.30	74.00	23.70	Peak
@ 5223.000	33.75	8.45	39.18	95.14	98.15	---	---	Peak

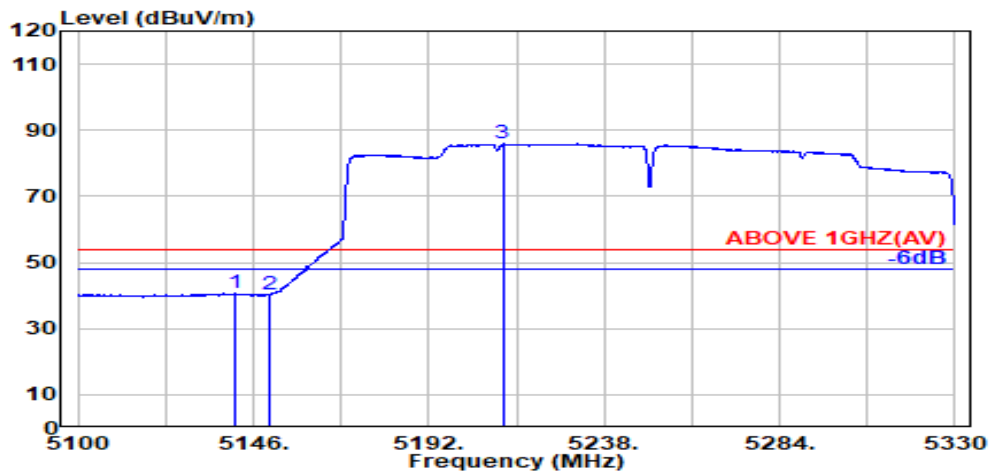

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.200	33.48	8.37	39.19	37.94	40.60	54.00	13.40	Average
5150.000	33.50	8.37	39.19	37.50	40.18	54.00	13.82	Average
@ 5211.400	33.78	8.44	39.18	82.81	85.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

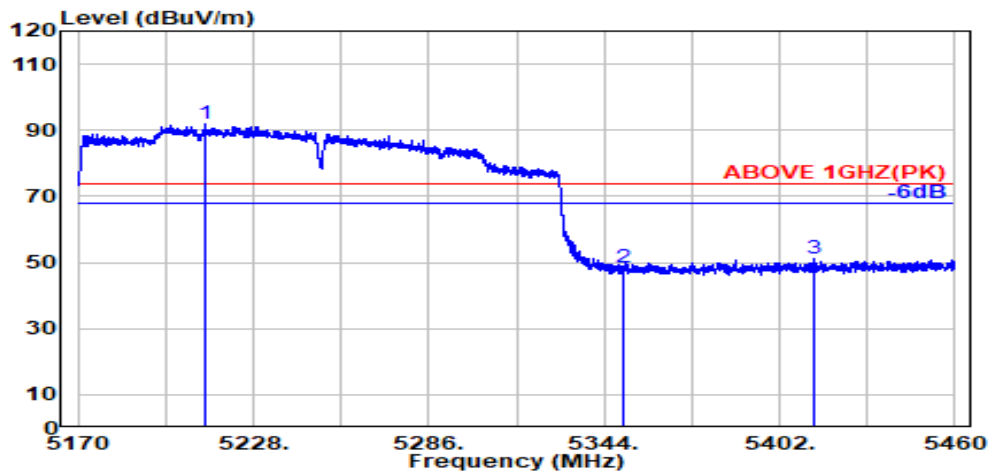

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5212.000	33.78	8.44	39.18	88.97	92.00	---	---	Peak
5350.000	33.70	8.57	39.17	45.14	48.24	74.00	25.76	Peak
5413.600	33.93	8.63	39.16	47.55	50.95	74.00	23.05	Peak

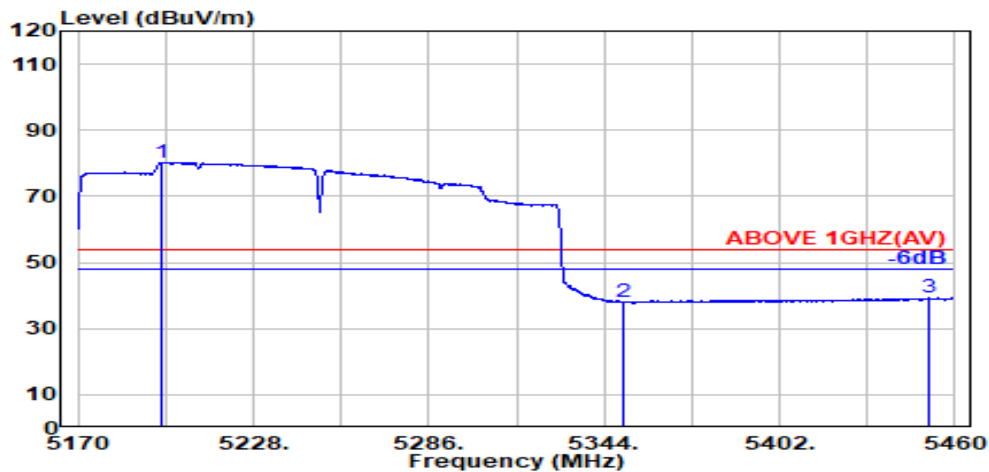


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5198.000	33.79	8.42	39.19	77.29	80.32	---	---	Average
5350.000	33.70	8.57	39.17	34.89	38.00	54.00	16.00	Average
5451.300	34.00	8.67	39.16	35.72	39.24	54.00	14.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

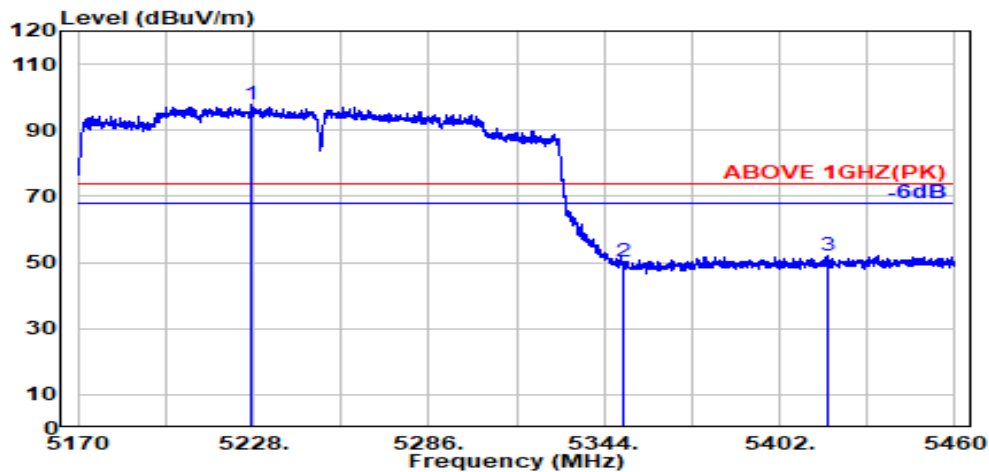

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5227.400	33.75	8.45	39.18	94.62	97.63	---	---	Peak
5350.000	33.70	8.57	39.17	46.99	50.10	74.00	23.90	Peak
5417.600	33.94	8.64	39.16	48.52	51.94	74.00	22.06	Peak

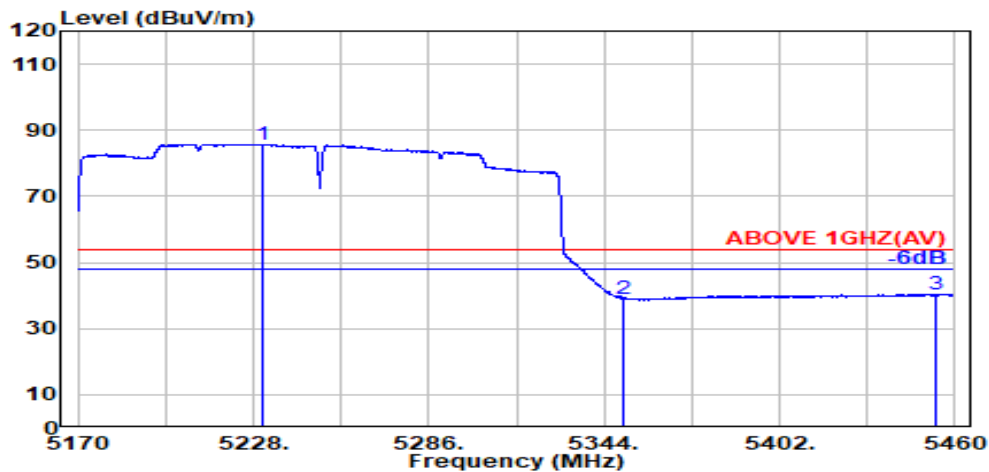

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.400	33.74	8.46	39.18	82.72	85.74	---	---	Average
5350.000	33.70	8.57	39.17	35.99	39.09	54.00	14.91	Average
5453.600	34.01	8.67	39.16	37.00	40.52	54.00	13.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

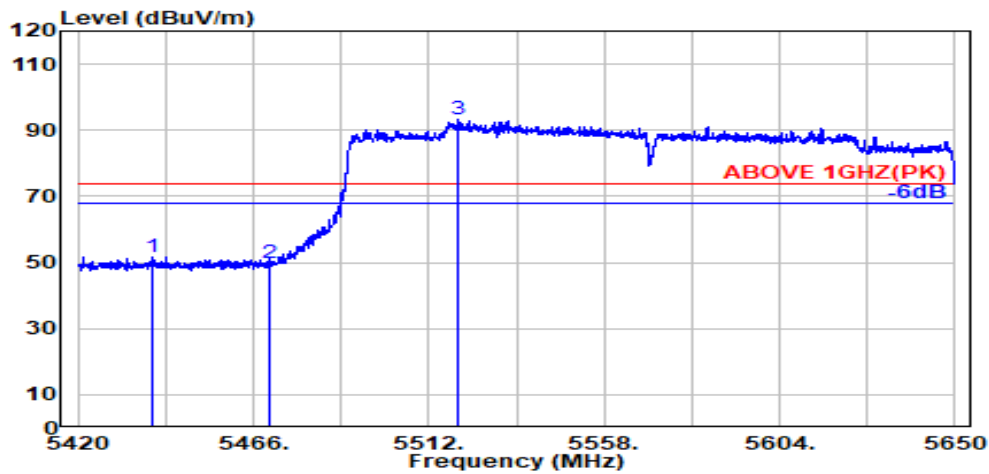

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.800	33.98	8.66	39.16	48.28	51.76	74.00	22.24	Peak
5470.000	34.04	8.69	39.15	46.02	49.59	74.00	24.41	Peak
@ 5519.900	34.06	8.74	39.15	89.53	93.17	---	---	Peak

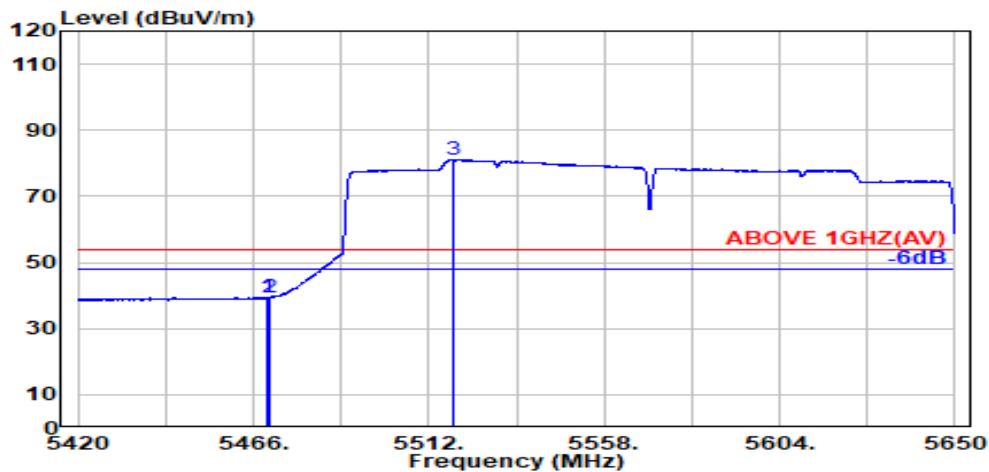


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.04	8.69	39.15	35.81	39.38	54.00	14.62	Average
5470.000	34.04	8.69	39.15	35.76	39.33	54.00	14.67	Average
@ 5518.200	34.06	8.73	39.15	77.45	81.09	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

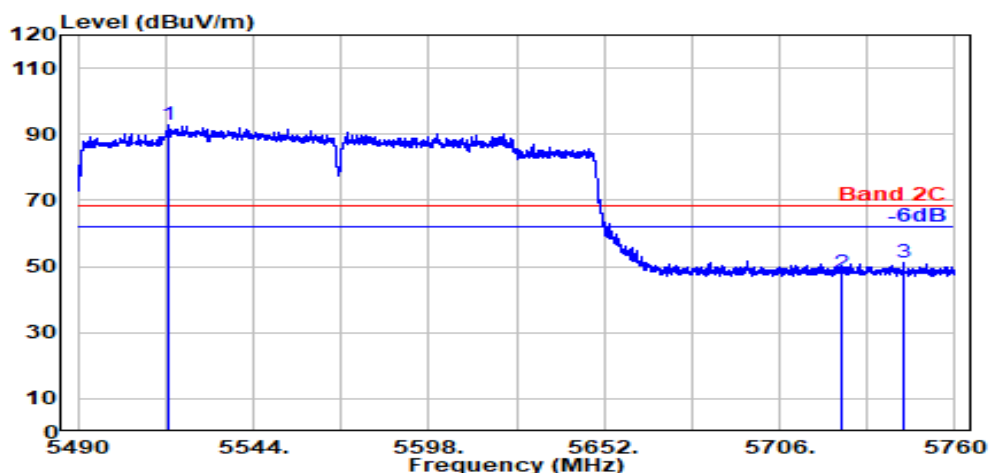

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5517.800	34.06	8.73	39.15	89.09	92.74	---	---	Peak
5725.000	33.60	8.93	39.20	44.69	48.02	68.20	20.18	Peak
5744.300	33.60	8.94	39.20	47.72	51.06	68.20	17.14	Peak

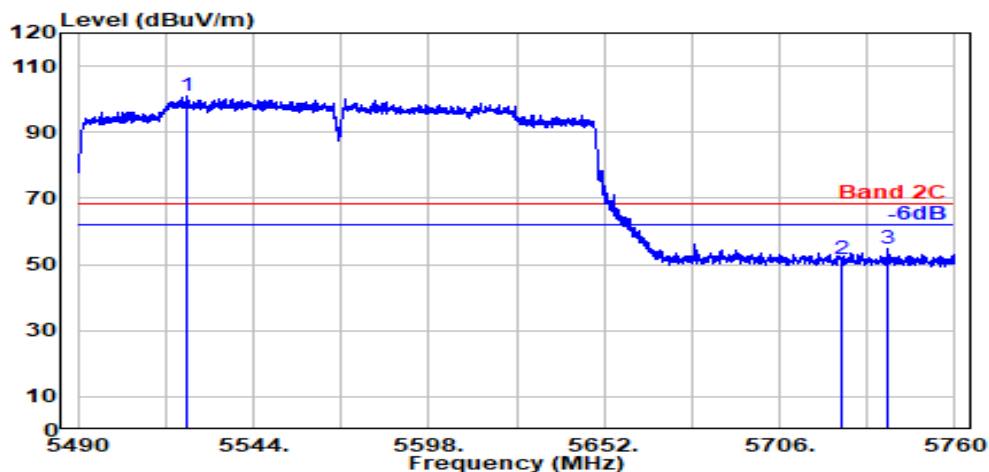


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5523.800	34.05	8.74	39.15	97.30	100.93	---	---	Peak
5725.000	33.60	8.93	39.20	48.18	51.50	68.20	16.70	Peak
5739.200	33.60	8.94	39.20	51.52	54.86	68.20	13.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

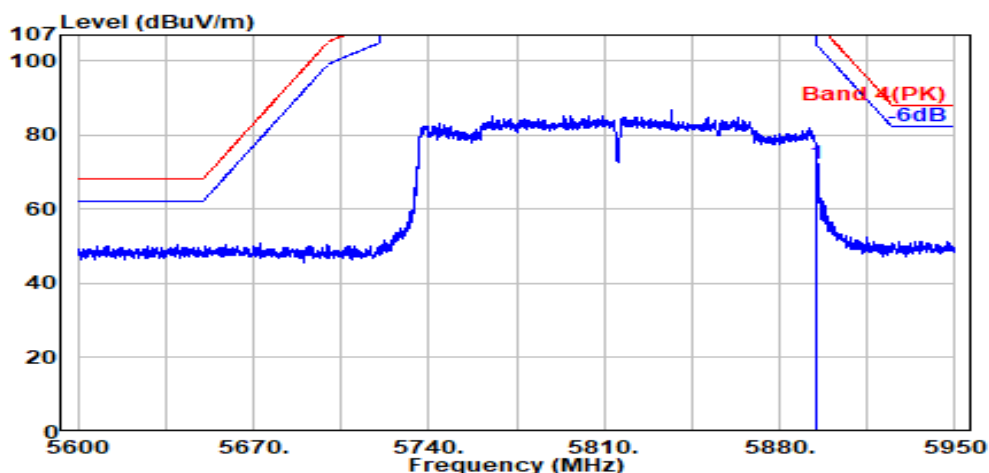

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	63.36	72.08	110.16	38.08	Peak

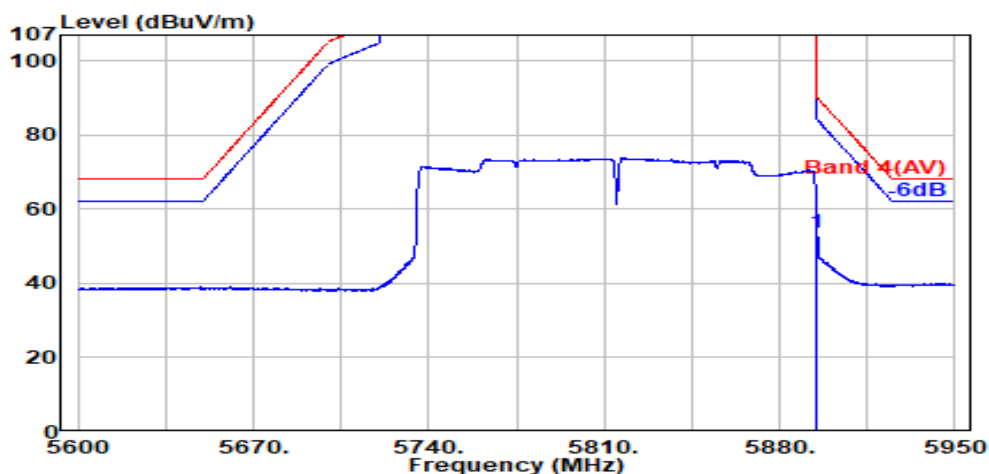

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	45.16	53.88	90.16	36.29	Average

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

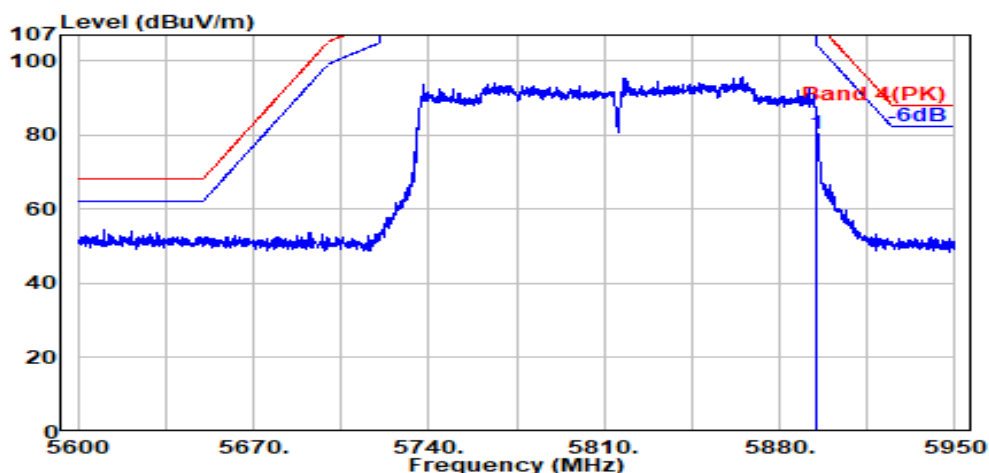

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	71.62	80.34	110.16	29.82	Peak

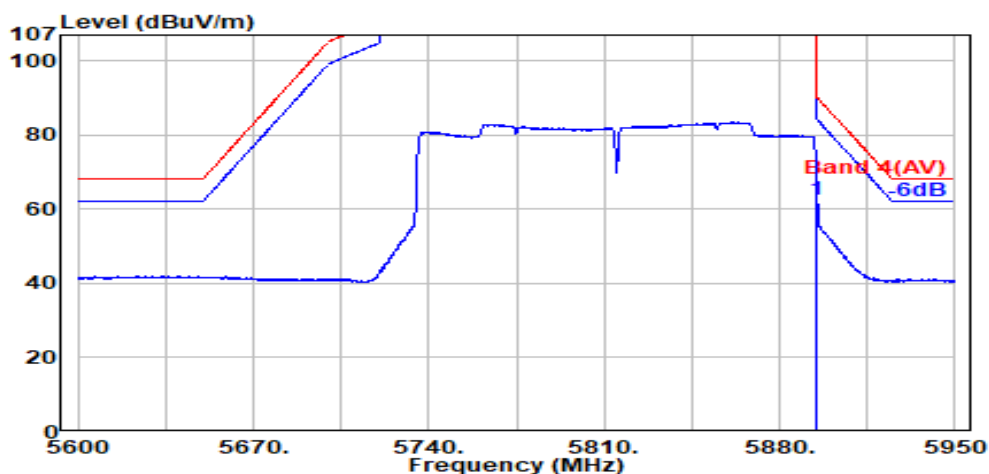

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	53.94	62.66	90.16	27.50	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

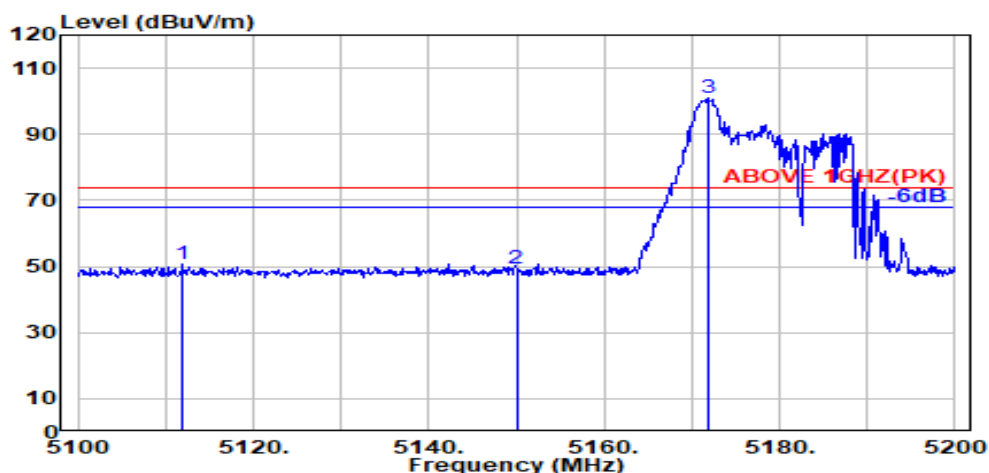

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.900	33.42	8.34	39.20	48.37	50.94	74.00	23.06	Peak
5150.000	33.50	8.37	39.19	46.85	49.53	74.00	24.47	Peak
@ 5171.800	33.63	8.40	39.19	98.01	100.85	---	---	Peak

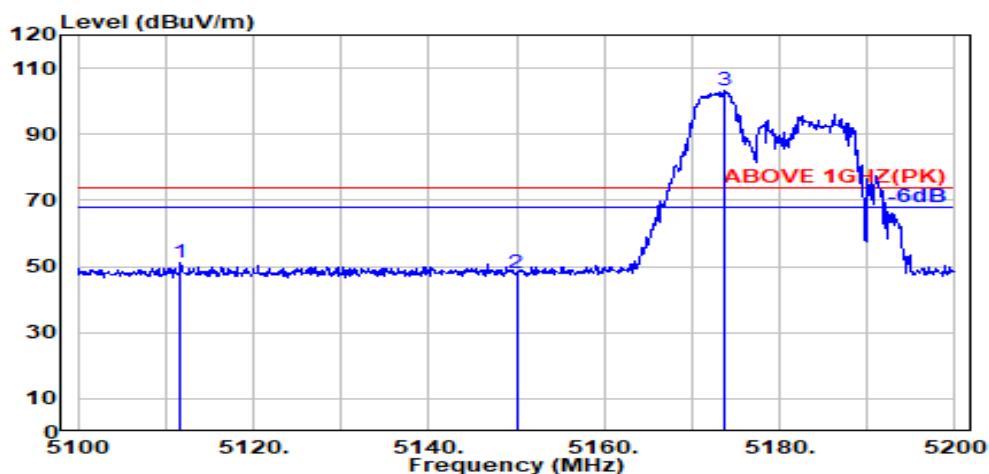

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.700	33.42	8.34	39.20	48.49	51.05	74.00	22.95	Peak
5150.000	33.50	8.37	39.19	45.18	47.86	74.00	26.14	Peak
@ 5173.600	33.64	8.40	39.19	100.20	103.05	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

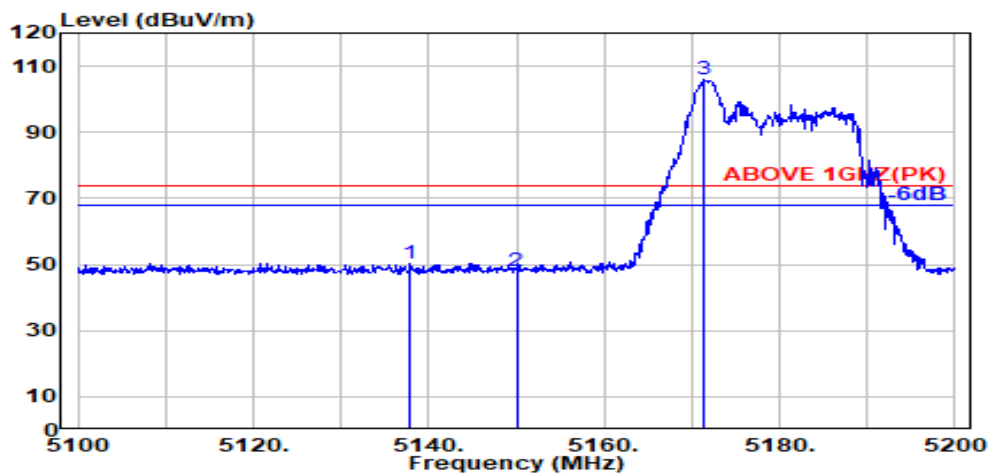

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.48	8.36	39.19	47.69	50.34	74.00	23.66	Peak
5150.000	33.50	8.37	39.19	45.44	48.12	74.00	25.88	Peak
@ 5171.400	33.63	8.40	39.19	102.92	105.75	---	---	Peak

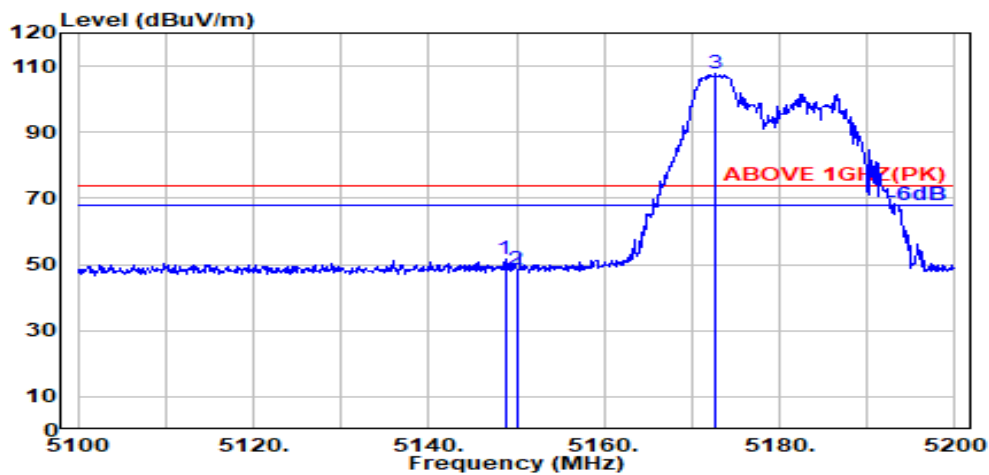

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.19	48.94	51.62	74.00	22.38	Peak
5150.000	33.50	8.37	39.19	45.91	48.60	74.00	25.40	Peak
@ 5172.700	33.64	8.40	39.19	104.84	107.68	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

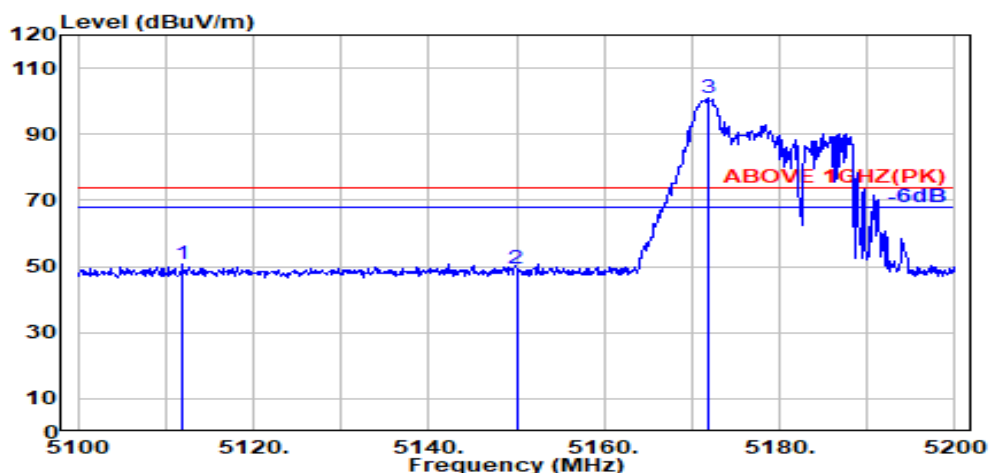

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.900	33.42	8.34	39.20	48.37	50.94	74.00	23.06	Peak
5150.000	33.50	8.37	39.19	46.85	49.53	74.00	24.47	Peak
@ 5171.800	33.63	8.40	39.19	98.01	100.85	---	---	Peak

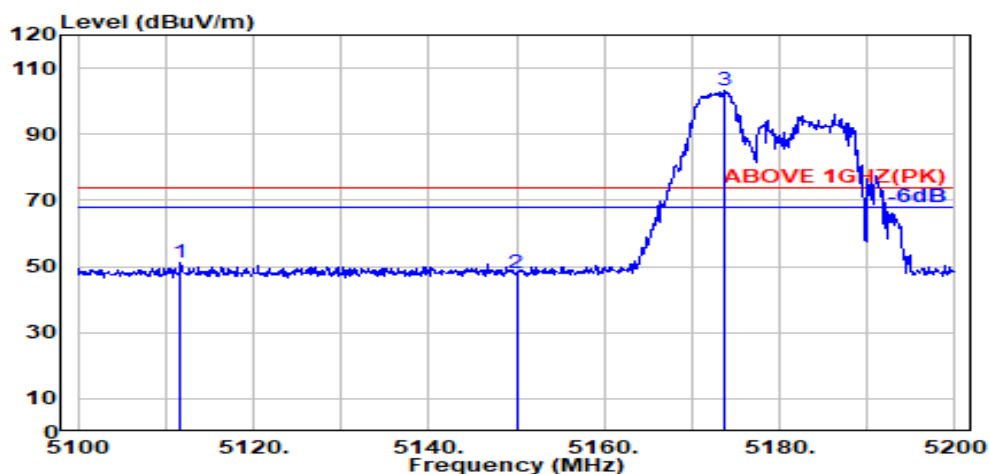

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.700	33.42	8.34	39.20	48.49	51.05	74.00	22.95	Peak
5150.000	33.50	8.37	39.19	45.18	47.86	74.00	26.14	Peak
@ 5173.600	33.64	8.40	39.19	100.20	103.05	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

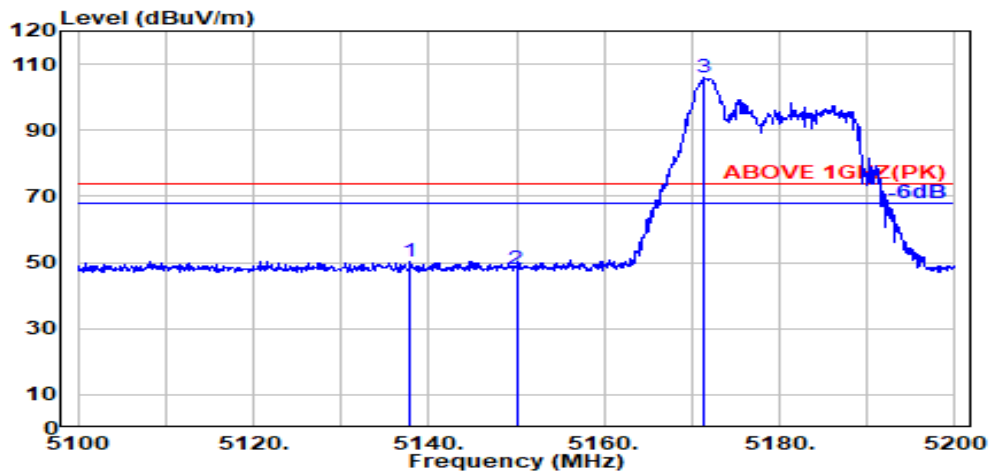

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.48	8.36	39.19	47.69	50.34	74.00	23.66	Peak
5150.000	33.50	8.37	39.19	45.44	48.12	74.00	25.88	Peak
@ 5171.400	33.63	8.40	39.19	102.92	105.75	---	---	Peak

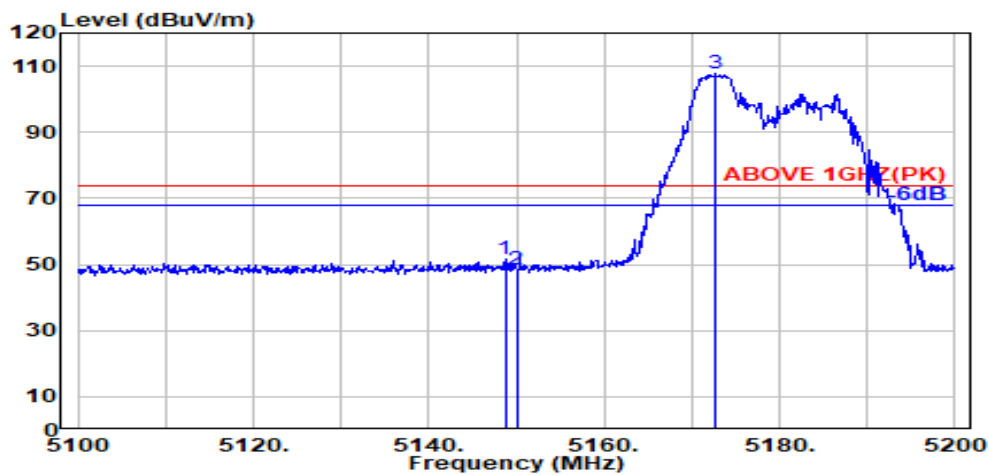

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.19	48.94	51.62	74.00	22.38	Peak
5150.000	33.50	8.37	39.19	45.91	48.60	74.00	25.40	Peak
@ 5172.700	33.64	8.40	39.19	104.84	107.68	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

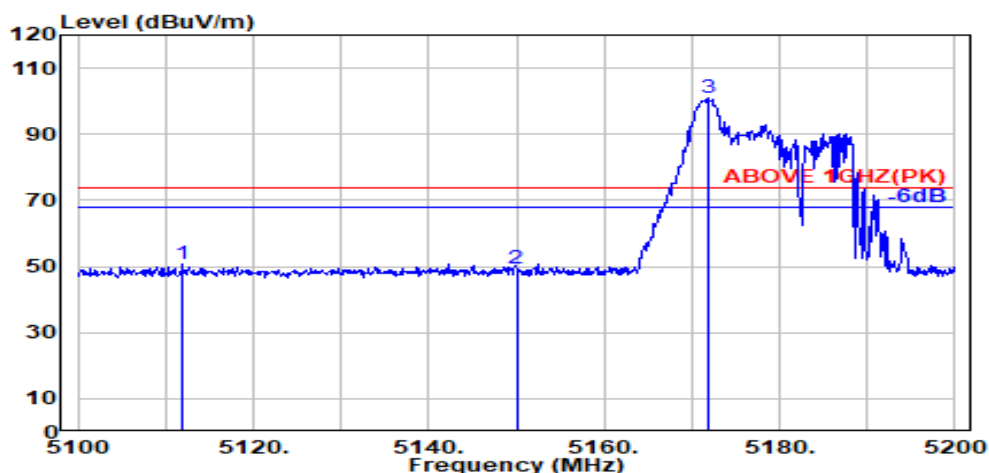

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.900	33.42	8.34	39.20	48.37	50.94	74.00	23.06	Peak
5150.000	33.50	8.37	39.19	46.85	49.53	74.00	24.47	Peak
@ 5171.800	33.63	8.40	39.19	98.01	100.85	---	---	Peak

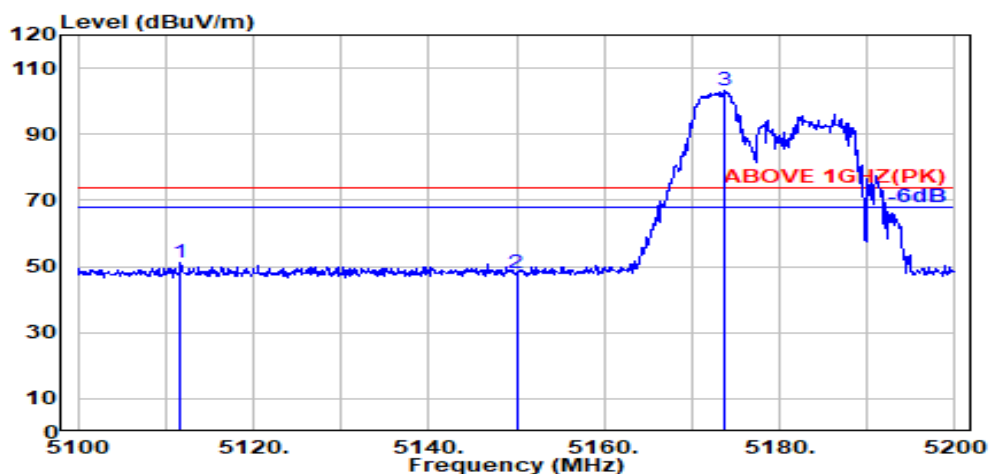

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.700	33.42	8.34	39.20	48.49	51.05	74.00	22.95	Peak
5150.000	33.50	8.37	39.19	45.18	47.86	74.00	26.14	Peak
@ 5173.600	33.64	8.40	39.19	100.20	103.05	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

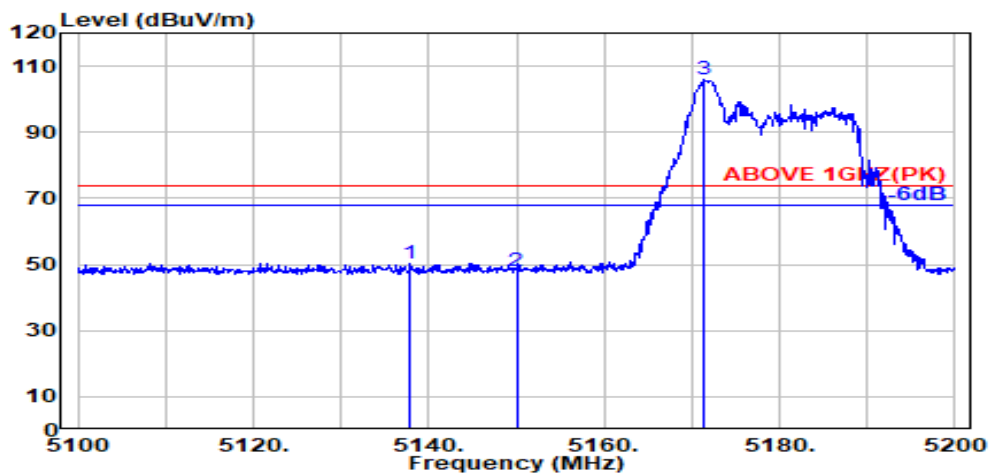

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.48	8.36	39.19	47.69	50.34	74.00	23.66	Peak
5150.000	33.50	8.37	39.19	45.44	48.12	74.00	25.88	Peak
@ 5171.400	33.63	8.40	39.19	102.92	105.75	---	---	Peak

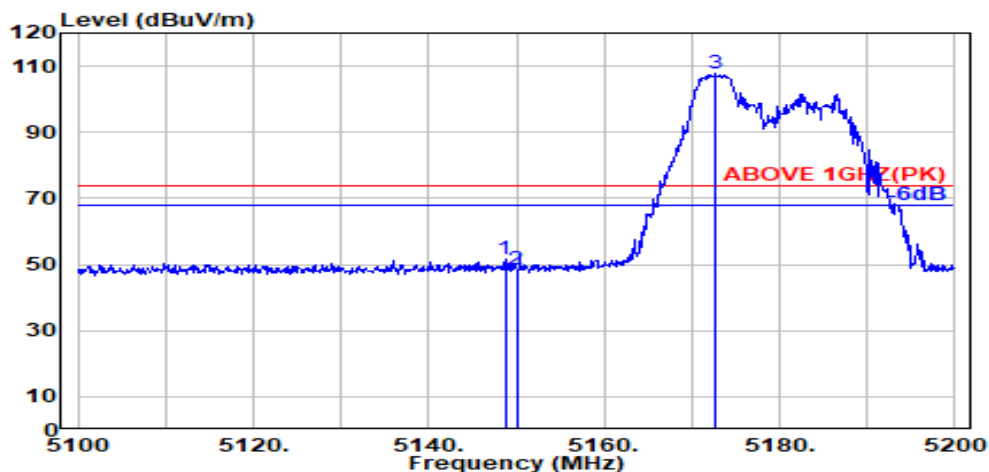


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.50	8.37	39.19	48.94	51.62	74.00	22.38	Peak
5150.000	33.50	8.37	39.19	45.91	48.60	74.00	25.40	Peak
@ 5172.700	33.64	8.40	39.19	104.84	107.68	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

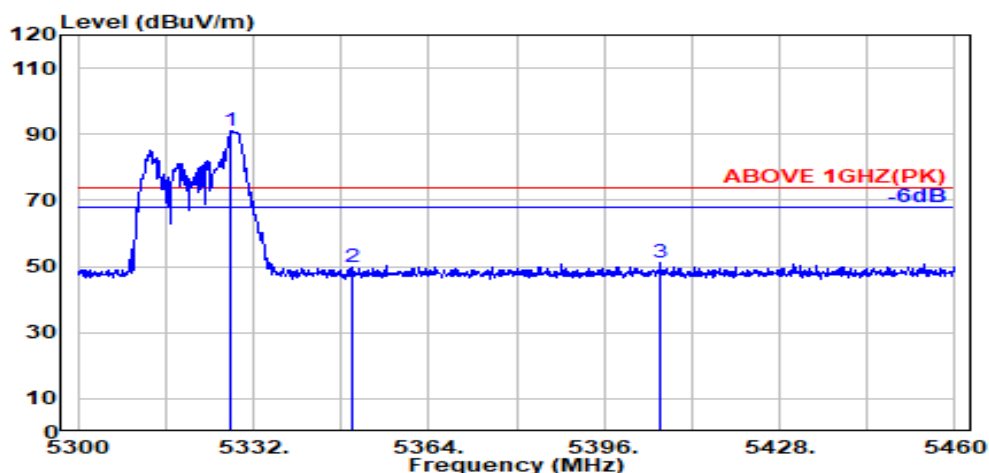

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	87.88	91.00	---	---	Peak
5350.000	33.70	8.57	39.17	46.84	49.95	74.00	24.05	Peak
5406.300	33.91	8.63	39.16	47.93	51.31	74.00	22.69	Peak

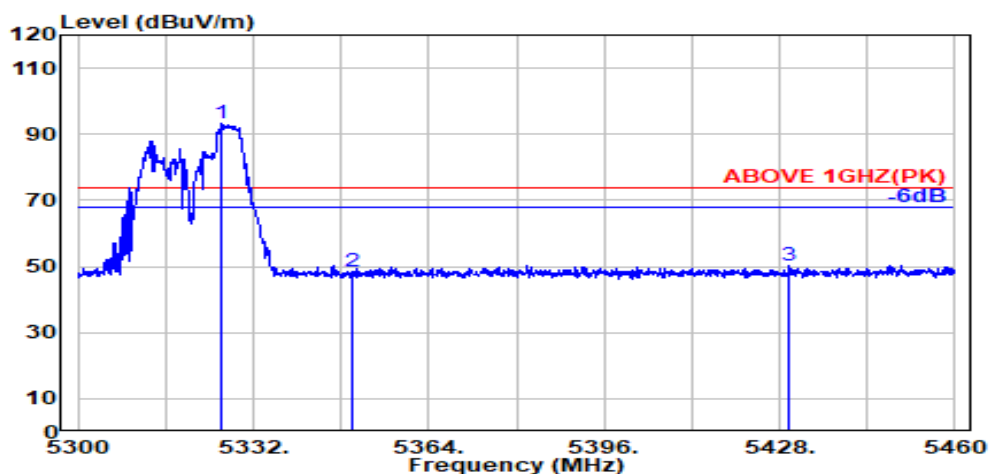


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.75	8.55	39.17	90.13	93.26	---	---	Peak
5350.000	33.70	8.57	39.17	45.30	48.40	74.00	25.60	Peak
5429.700	33.96	8.65	39.16	46.92	50.37	74.00	23.63	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

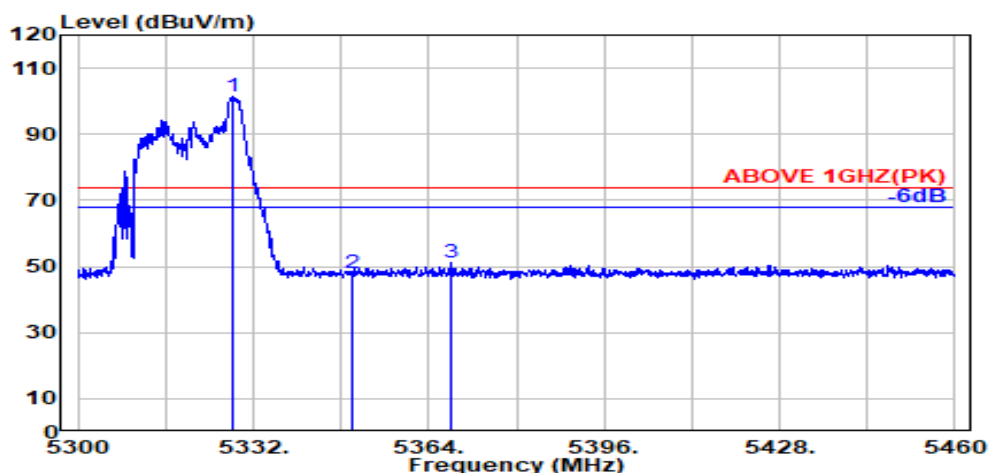

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.100	33.74	8.55	39.17	98.19	101.31	---	---	Peak
	5350.000	33.70	8.57	39.17	45.06	48.16	74.00	25.84	Peak
	5368.000	33.77	8.59	39.17	47.80	51.00	74.00	23.00	Peak

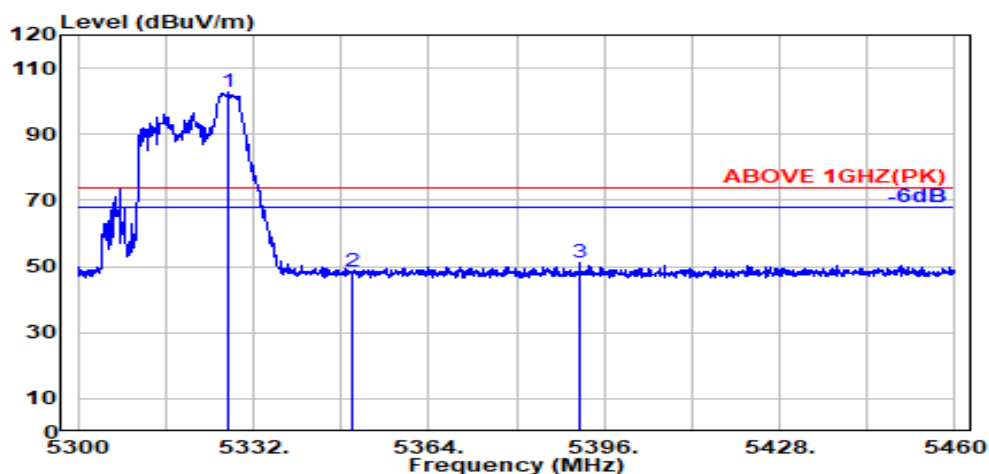


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.300	33.75	8.55	39.17	99.45	102.57	---	---	Peak
	5350.000	33.70	8.57	39.17	45.52	48.62	74.00	25.38	Peak
	5391.600	33.87	8.61	39.16	47.84	51.16	74.00	22.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

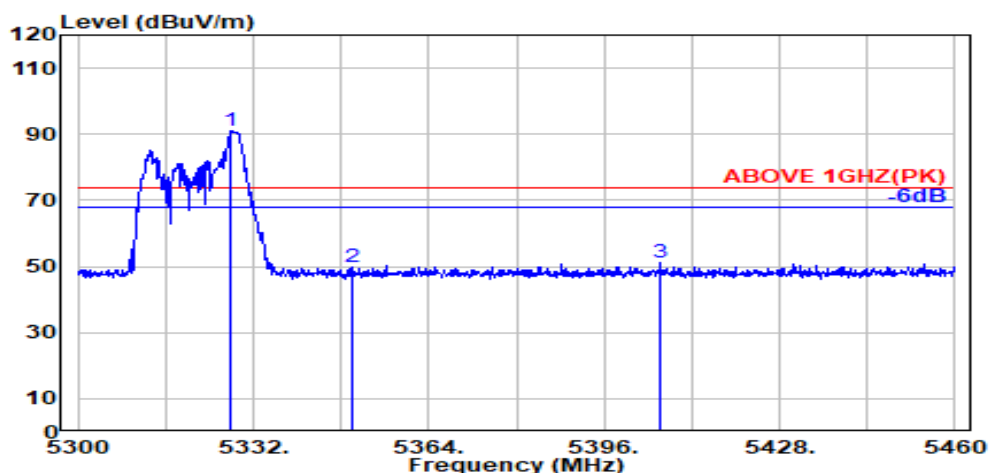

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	87.88	91.00	---	---	Peak
5350.000	33.70	8.57	39.17	46.84	49.95	74.00	24.05	Peak
5406.300	33.91	8.63	39.16	47.93	51.31	74.00	22.69	Peak

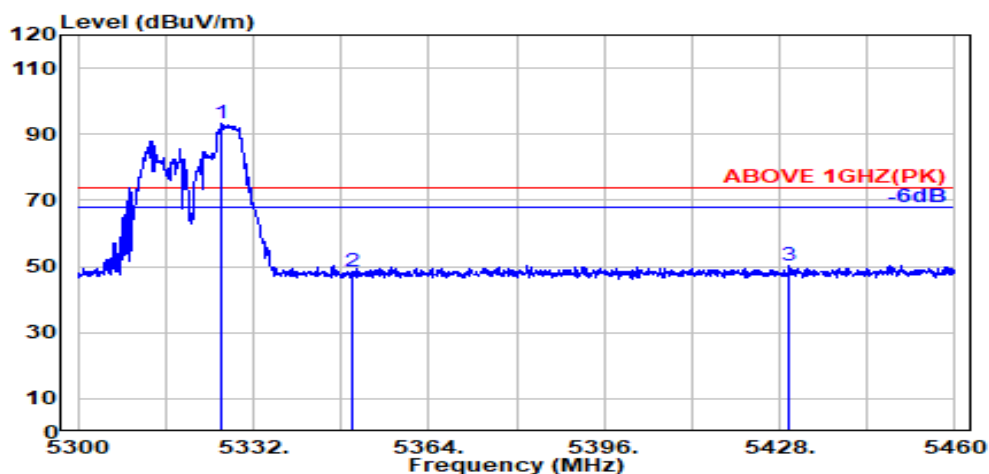

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.75	8.55	39.17	90.13	93.26	---	---	Peak
5350.000	33.70	8.57	39.17	45.30	48.40	74.00	25.60	Peak
5429.700	33.96	8.65	39.16	46.92	50.37	74.00	23.63	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

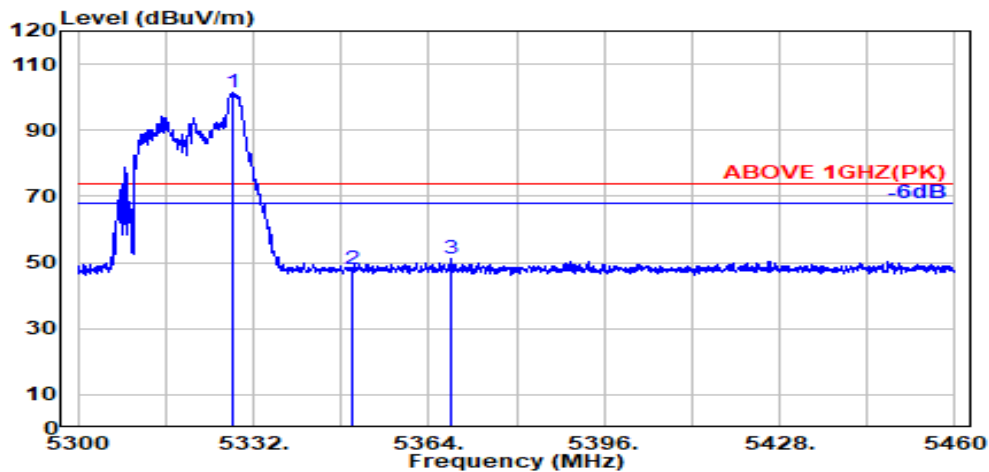

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.74	8.55	39.17	98.19	101.31	---	---	Peak
5350.000	33.70	8.57	39.17	45.06	48.16	74.00	25.84	Peak
5368.000	33.77	8.59	39.17	47.80	51.00	74.00	23.00	Peak

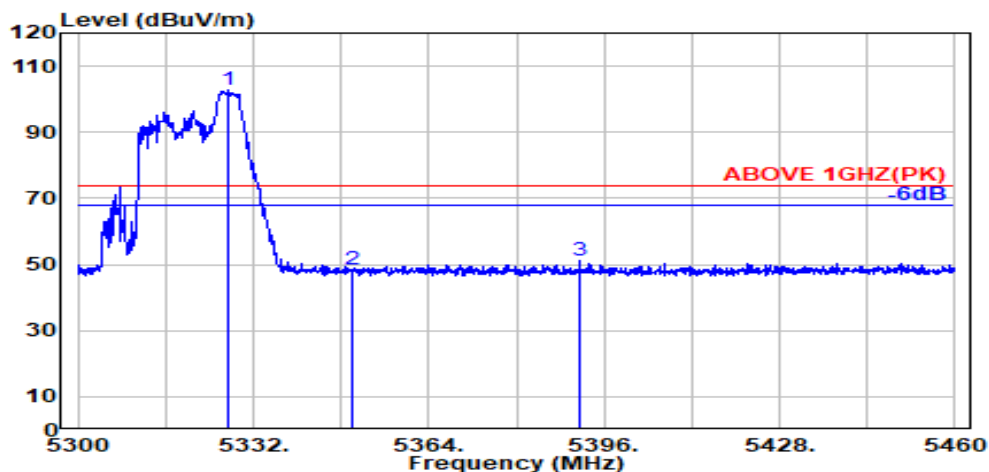


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.75	8.55	39.17	99.45	102.57	---	---	Peak
5350.000	33.70	8.57	39.17	45.52	48.62	74.00	25.38	Peak
5391.600	33.87	8.61	39.16	47.84	51.16	74.00	22.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

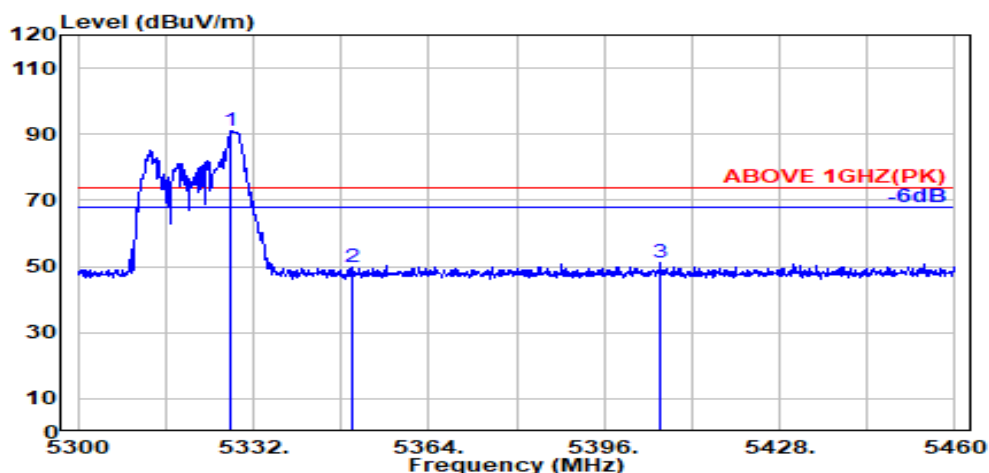

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	87.88	91.00	---	---	Peak
5350.000	33.70	8.57	39.17	46.84	49.95	74.00	24.05	Peak
5406.300	33.91	8.63	39.16	47.93	51.31	74.00	22.69	Peak

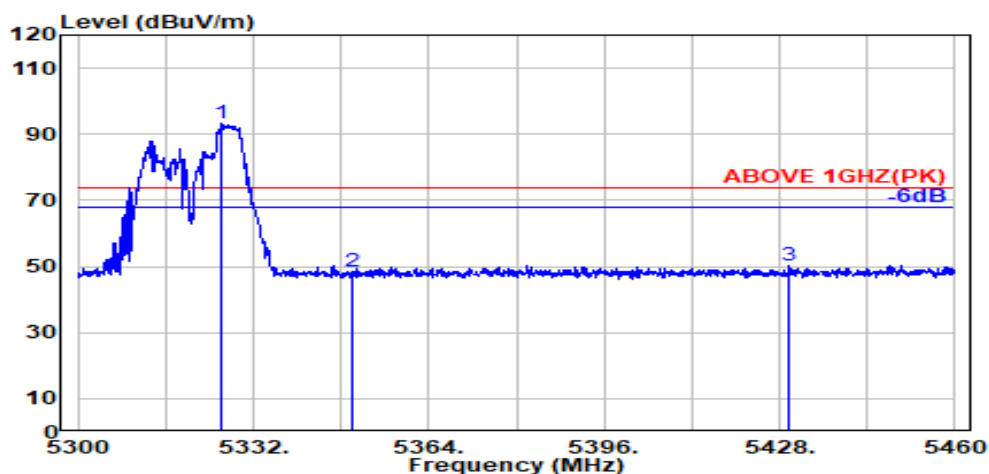

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.75	8.55	39.17	90.13	93.26	---	---	Peak
5350.000	33.70	8.57	39.17	45.30	48.40	74.00	25.60	Peak
5429.700	33.96	8.65	39.16	46.92	50.37	74.00	23.63	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

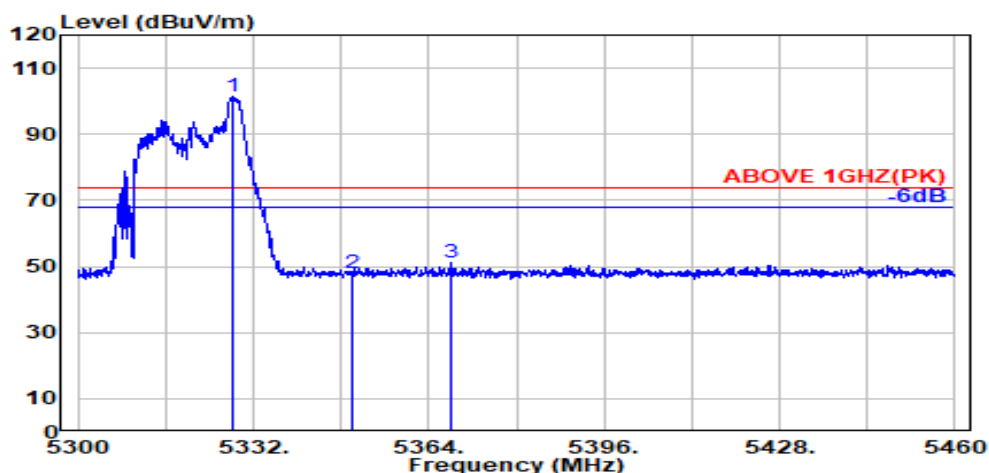

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.100	33.74	8.55	39.17	98.19	101.31	---	---	Peak
5350.000	33.70	8.57	39.17	45.06	48.16	74.00	25.84	Peak
5368.000	33.77	8.59	39.17	47.80	51.00	74.00	23.00	Peak

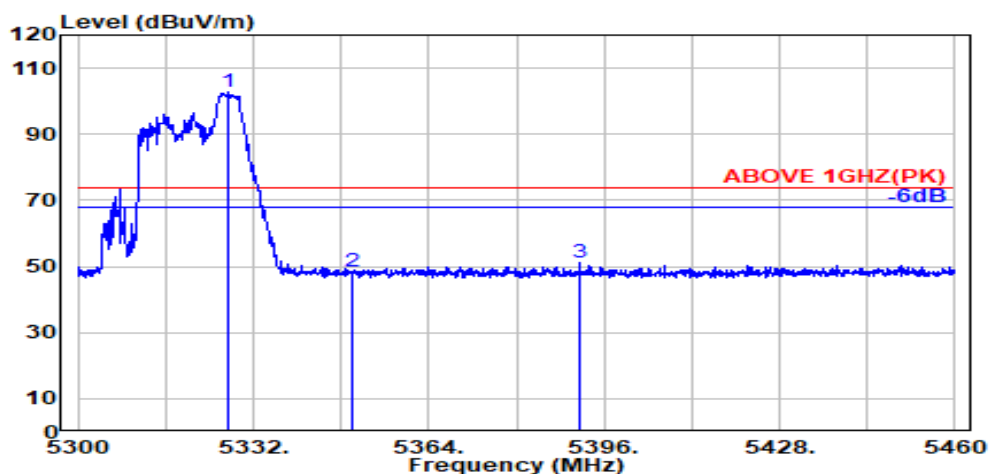

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.300	33.75	8.55	39.17	99.45	102.57	---	---	Peak
5350.000	33.70	8.57	39.17	45.52	48.62	74.00	25.38	Peak
5391.600	33.87	8.61	39.16	47.84	51.16	74.00	22.85	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

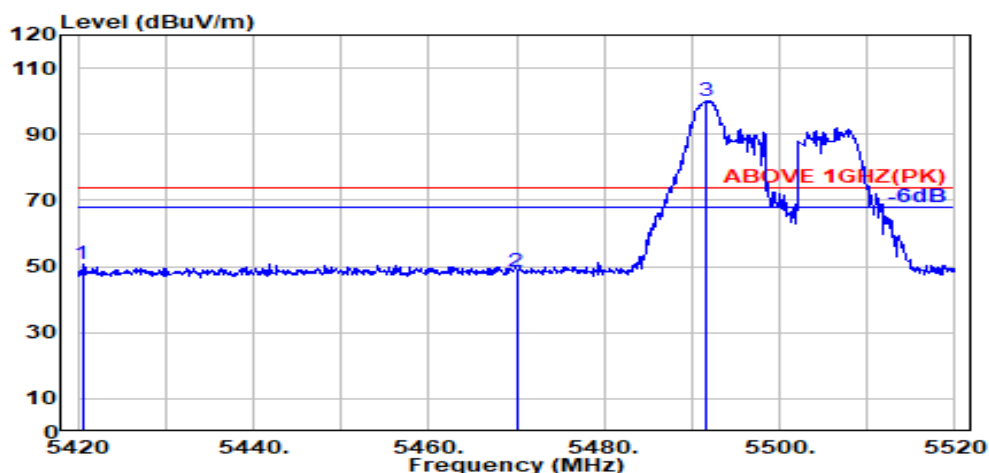

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.500	33.94	8.64	39.16	47.29	50.71	74.00	23.29	Peak
5470.000	34.04	8.69	39.15	44.87	48.45	74.00	25.55	Peak
@ 5491.700	34.08	8.71	39.15	96.47	100.11	---	---	Peak

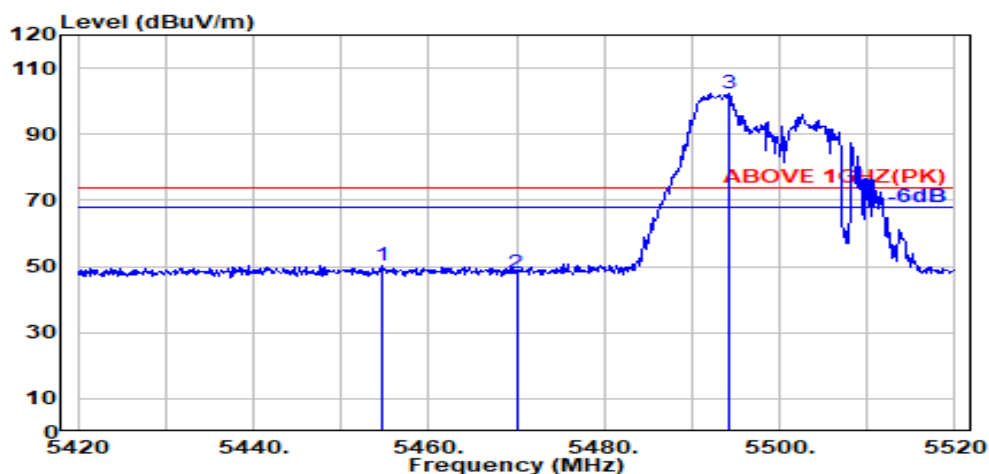

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.600	34.01	8.67	39.16	46.72	50.25	74.00	23.75	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5494.300	34.09	8.71	39.15	98.66	102.31	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

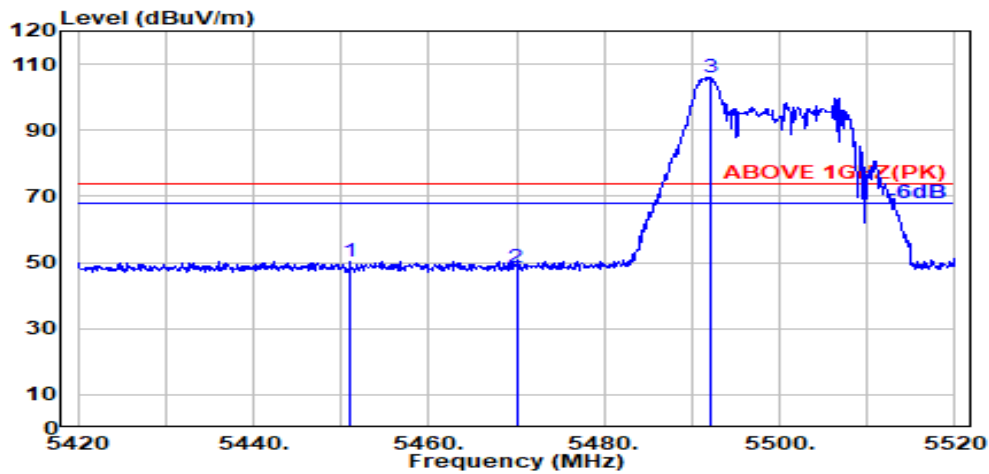

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.00	8.67	39.16	46.95	50.47	74.00	23.53	Peak
5470.000	34.04	8.69	39.15	45.03	48.61	74.00	25.39	Peak
@ 5492.100	34.08	8.71	39.15	102.39	106.03	---	---	Peak

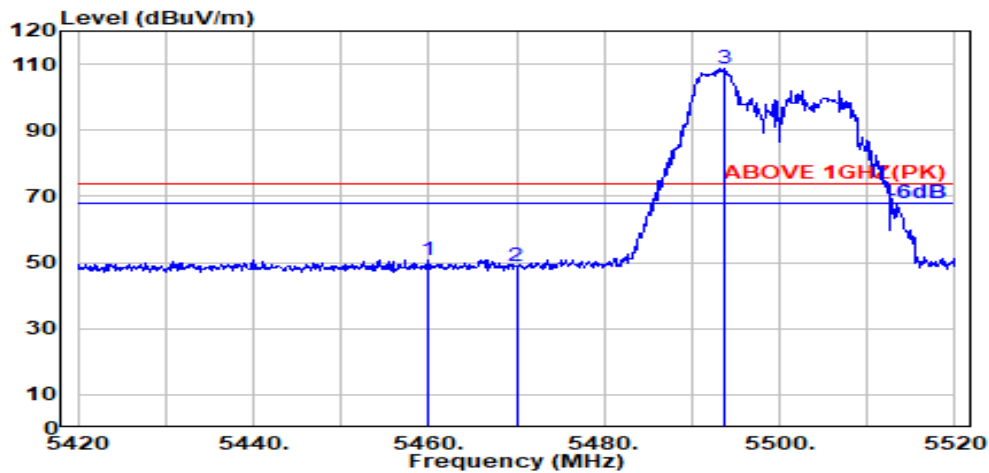

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.02	8.68	39.15	47.27	50.81	74.00	23.19	Peak
5470.000	34.04	8.69	39.15	45.28	48.86	74.00	25.14	Peak
@ 5493.700	34.09	8.71	39.15	105.11	108.76	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

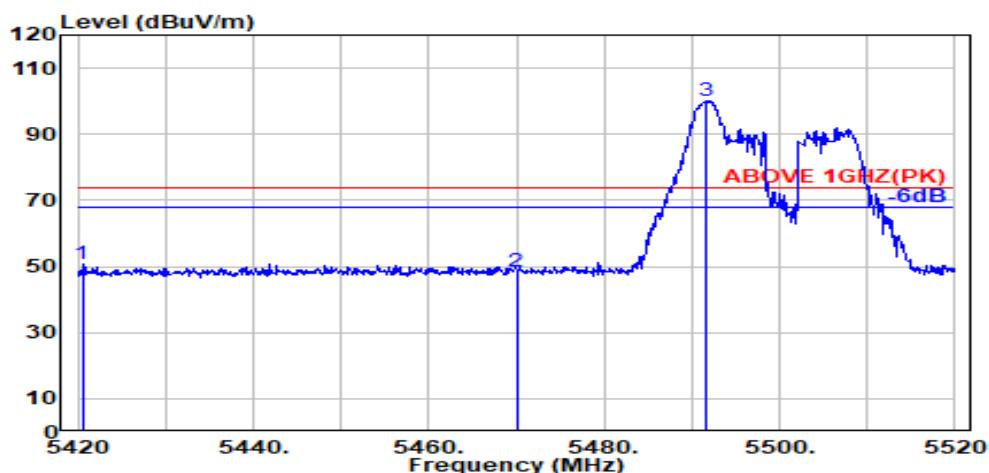

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.500	33.94	8.64	39.16	47.29	50.71	74.00	23.29	Peak
5470.000	34.04	8.69	39.15	44.87	48.45	74.00	25.55	Peak
@ 5491.700	34.08	8.71	39.15	96.47	100.11	---	---	Peak

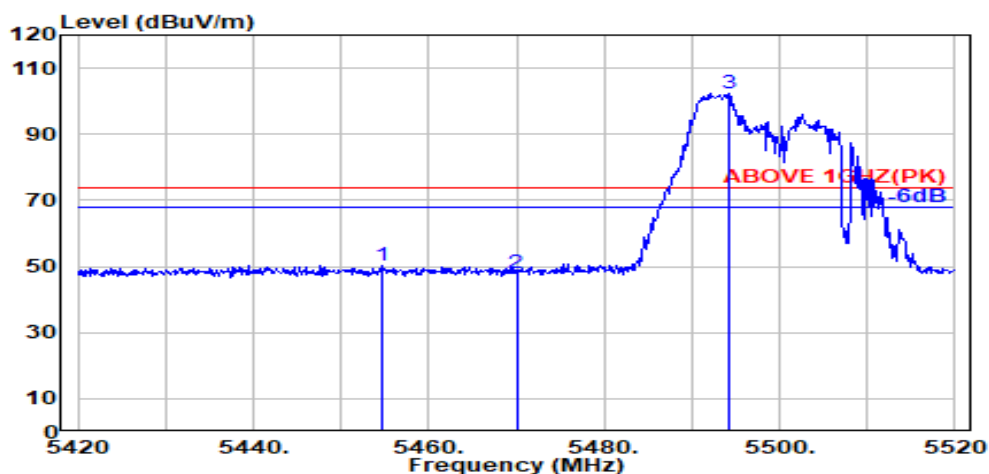

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.600	34.01	8.67	39.16	46.72	50.25	74.00	23.75	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5494.300	34.09	8.71	39.15	98.66	102.31	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

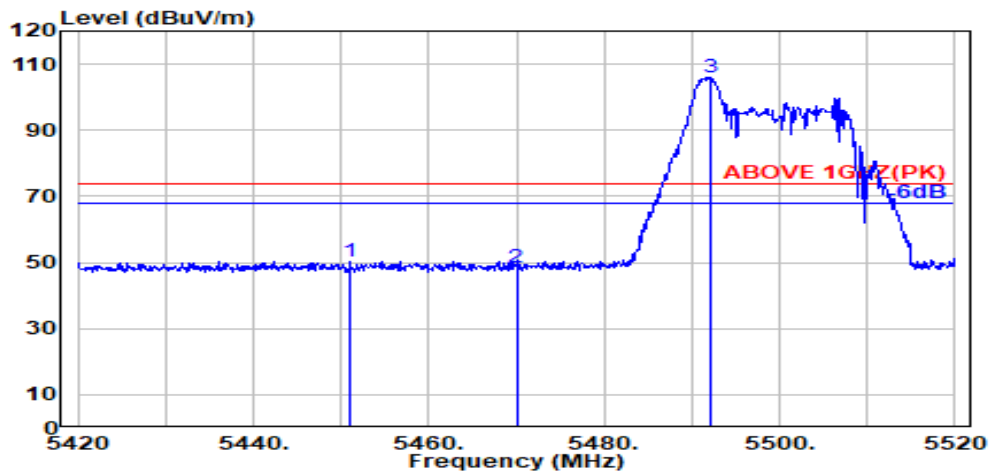

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.00	8.67	39.16	46.95	50.47	74.00	23.53	Peak
5470.000	34.04	8.69	39.15	45.03	48.61	74.00	25.39	Peak
@ 5492.100	34.08	8.71	39.15	102.39	106.03	---	---	Peak

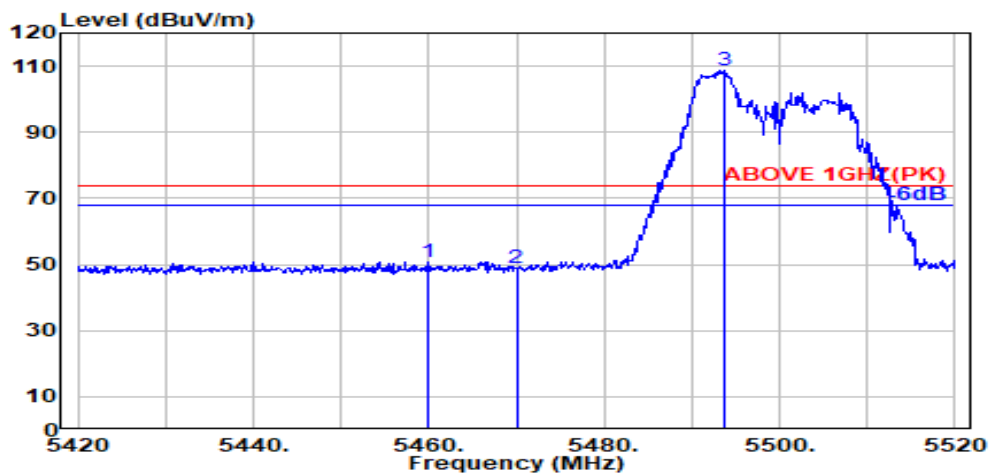

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.02	8.68	39.15	47.27	50.81	74.00	23.19	Peak
5470.000	34.04	8.69	39.15	45.28	48.86	74.00	25.14	Peak
@ 5493.700	34.09	8.71	39.15	105.11	108.76	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

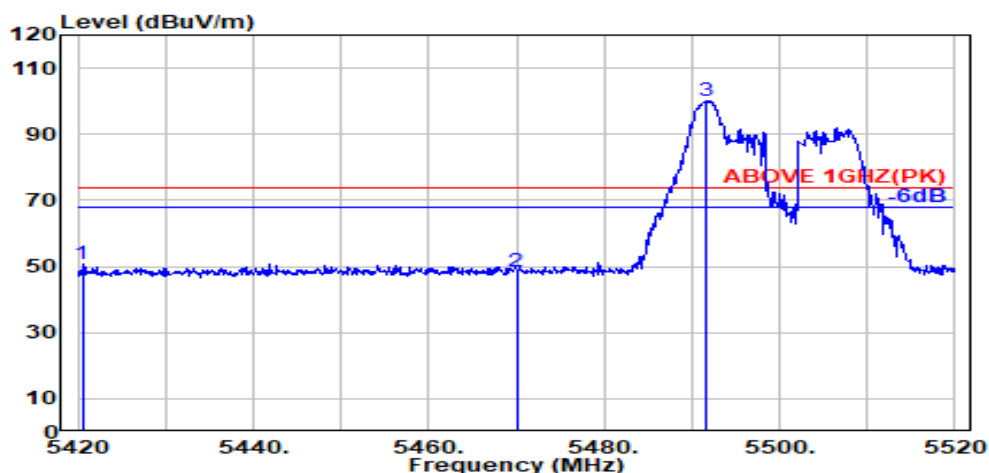

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.500	33.94	8.64	39.16	47.29	50.71	74.00	23.29	Peak
5470.000	34.04	8.69	39.15	44.87	48.45	74.00	25.55	Peak
@ 5491.700	34.08	8.71	39.15	96.47	100.11	---	---	Peak

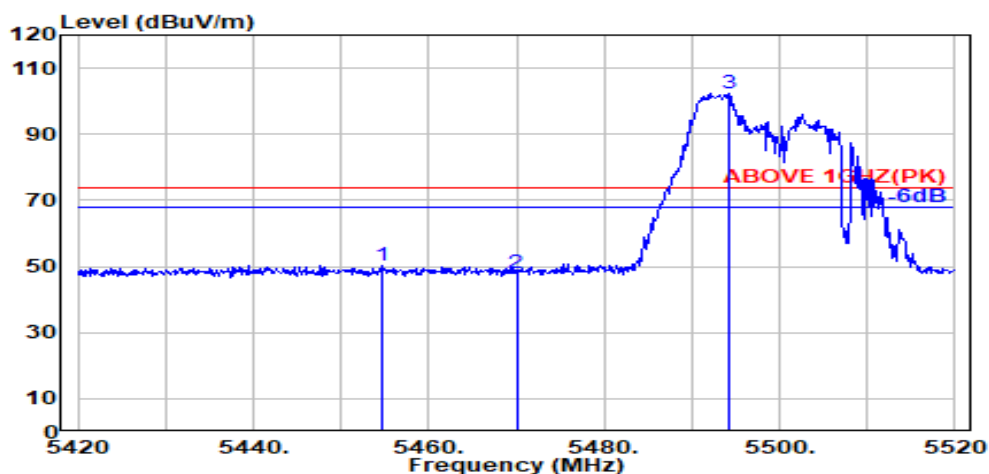

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.600	34.01	8.67	39.16	46.72	50.25	74.00	23.75	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5494.300	34.09	8.71	39.15	98.66	102.31	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

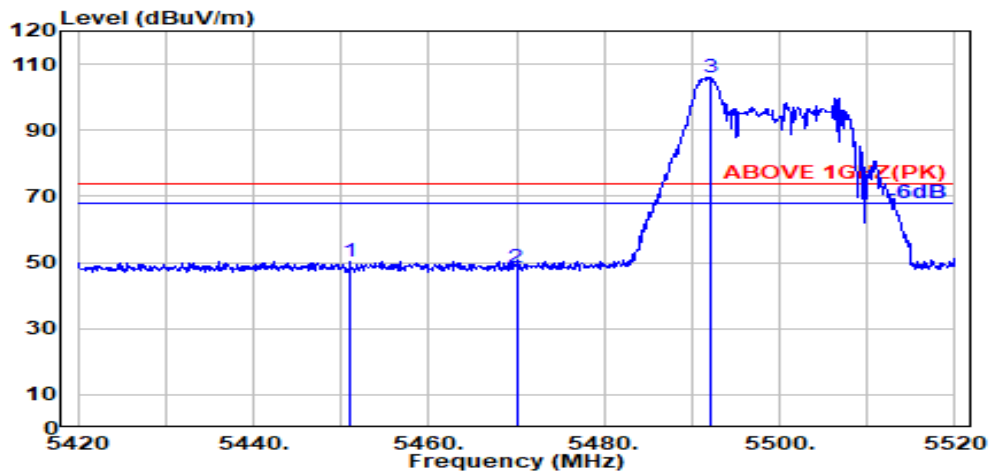

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.000	34.00	8.67	39.16	46.95	50.47	74.00	23.53	Peak
5470.000	34.04	8.69	39.15	45.03	48.61	74.00	25.39	Peak
@ 5492.100	34.08	8.71	39.15	102.39	106.03	---	---	Peak

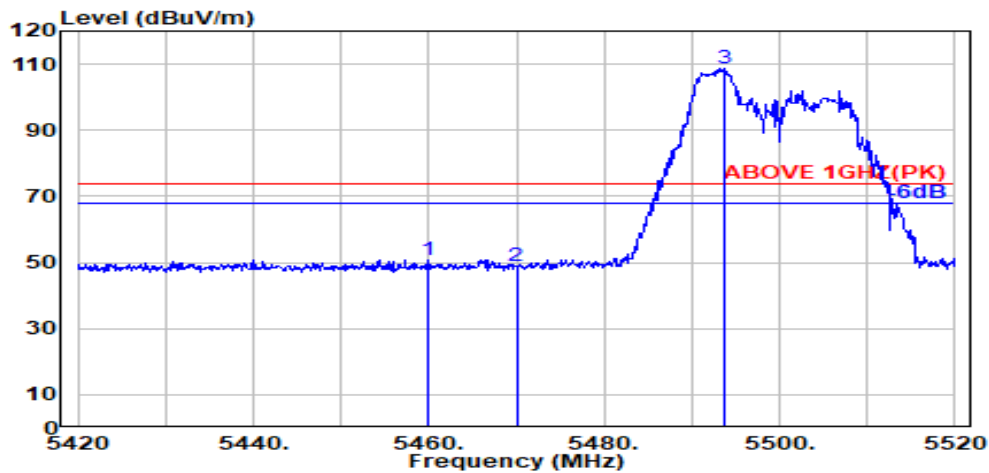


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.02	8.68	39.15	47.27	50.81	74.00	23.19	Peak
5470.000	34.04	8.69	39.15	45.28	48.86	74.00	25.14	Peak
@ 5493.700	34.09	8.71	39.15	105.11	108.76	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

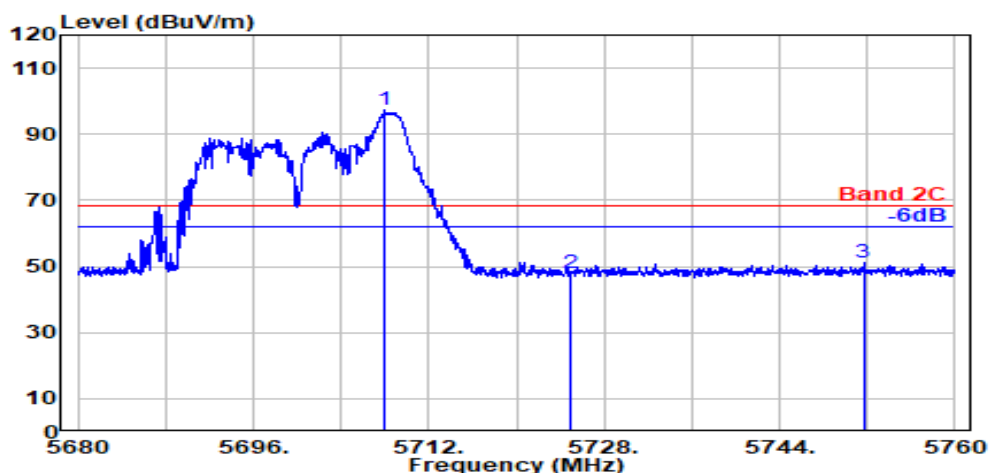

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.60	8.91	39.19	93.89	97.21	---	---	Peak
5725.000	33.60	8.93	39.20	44.73	48.06	68.20	20.14	Peak
5751.650	33.61	8.95	39.20	47.70	51.05	68.20	17.15	Peak

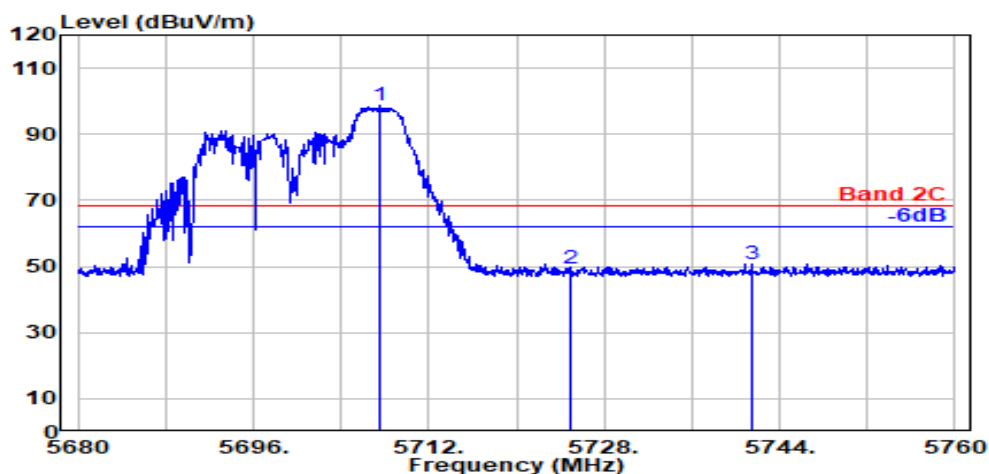

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.500	33.60	8.91	39.19	95.36	98.67	---	---	Peak
5725.000	33.60	8.93	39.20	45.98	49.31	68.20	18.89	Peak
5741.500	33.60	8.94	39.20	47.30	50.64	68.20	17.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

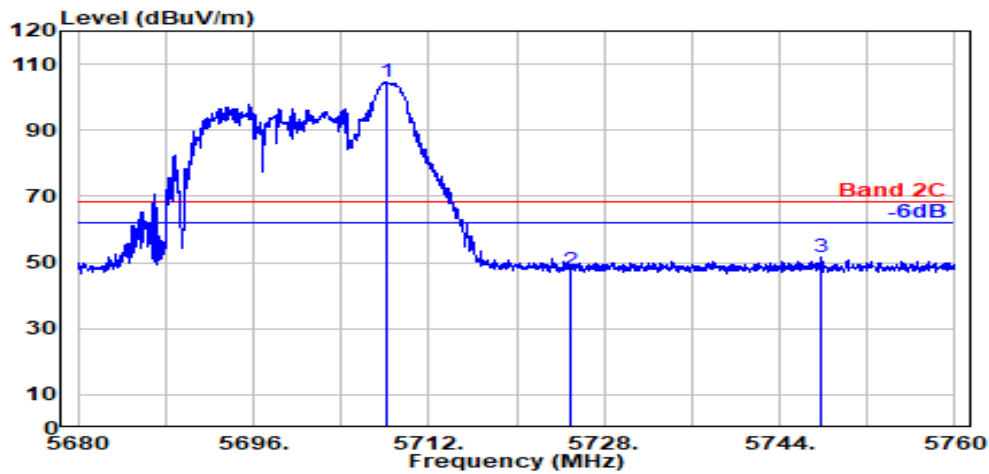

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.250	33.60	8.91	39.19	101.27	104.59	---	---	Peak
5725.000	33.60	8.93	39.20	44.32	47.64	68.20	20.56	Peak
5747.800	33.60	8.95	39.20	48.20	51.55	68.20	16.65	Peak

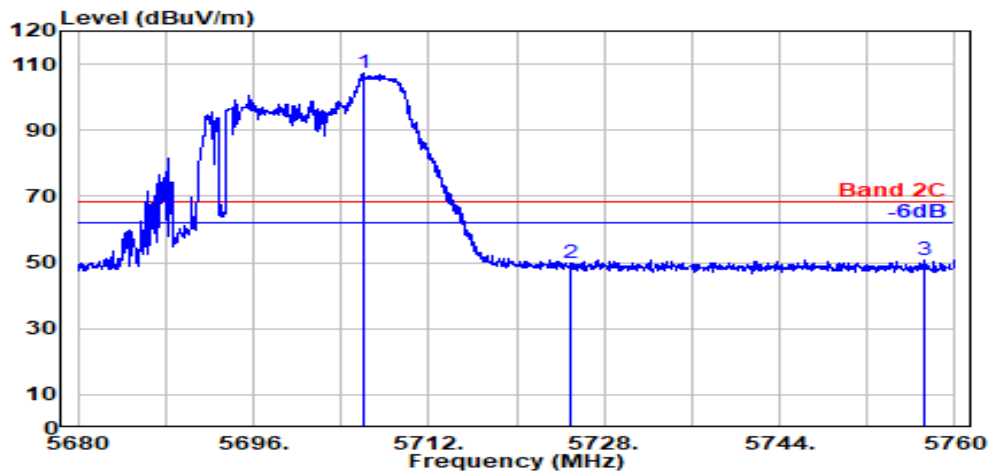

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	33.60	8.91	39.19	104.06	107.37	---	---	Peak
5725.000	33.60	8.93	39.20	46.31	49.63	68.20	18.57	Peak
5757.300	33.63	8.95	39.20	47.39	50.77	68.20	17.43	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5700MHz

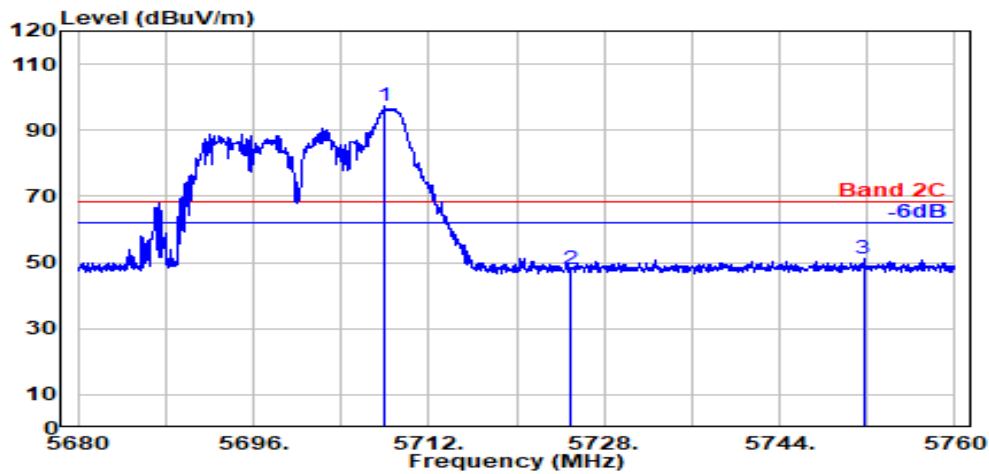

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.60	8.91	39.19	93.89	97.21	---	---	Peak
5725.000	33.60	8.93	39.20	44.73	48.06	68.20	20.14	Peak
5751.650	33.61	8.95	39.20	47.70	51.05	68.20	17.15	Peak

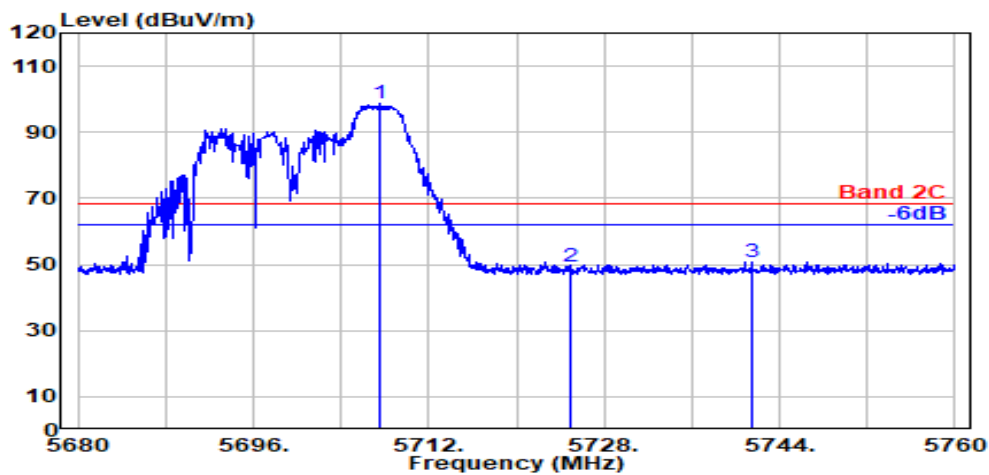

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.500	33.60	8.91	39.19	95.36	98.67	---	---	Peak
5725.000	33.60	8.93	39.20	45.98	49.31	68.20	18.89	Peak
5741.500	33.60	8.94	39.20	47.30	50.64	68.20	17.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5700MHz

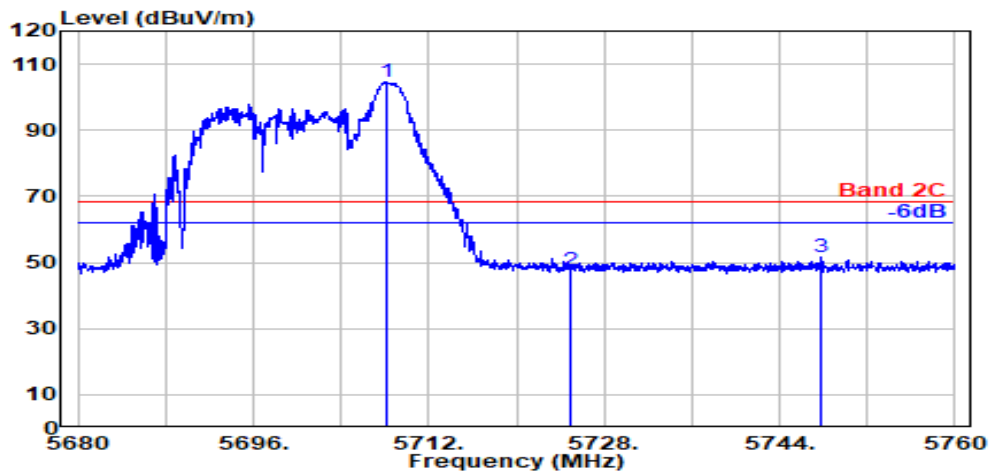

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.250	33.60	8.91	39.19	101.27	104.59	---	---	Peak
5725.000	33.60	8.93	39.20	44.32	47.64	68.20	20.56	Peak
5747.800	33.60	8.95	39.20	48.20	51.55	68.20	16.65	Peak

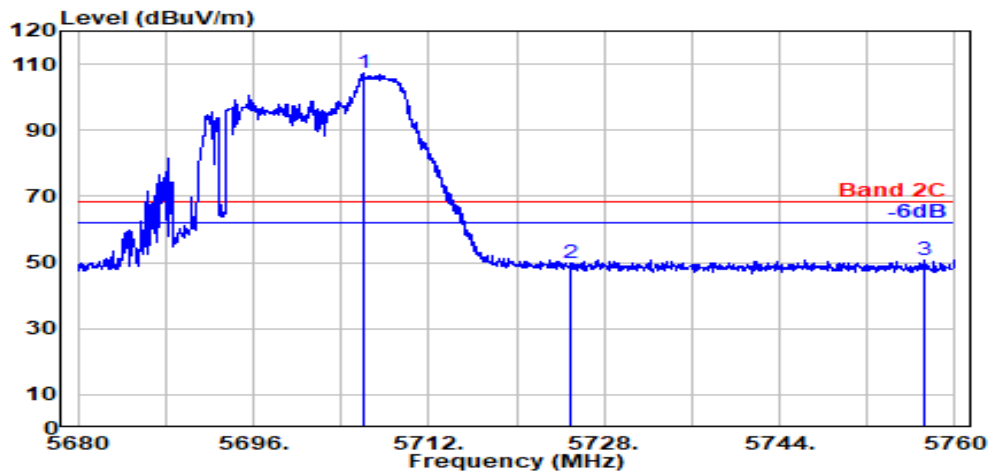


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	33.60	8.91	39.19	104.06	107.37	---	---	Peak
5725.000	33.60	8.93	39.20	46.31	49.63	68.20	18.57	Peak
5757.300	33.63	8.95	39.20	47.39	50.77	68.20	17.43	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

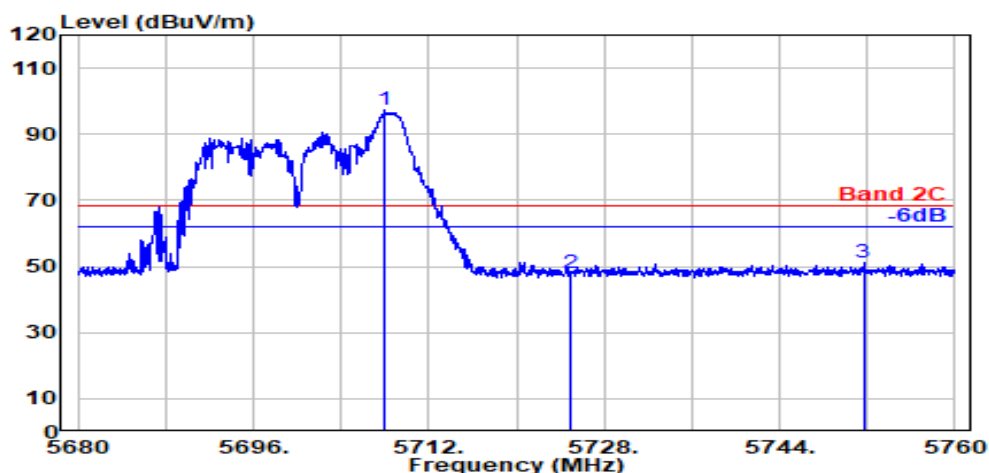

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.000	33.60	8.91	39.19	93.89	97.21	---	---	Peak
5725.000	33.60	8.93	39.20	44.73	48.06	68.20	20.14	Peak
5751.650	33.61	8.95	39.20	47.70	51.05	68.20	17.15	Peak

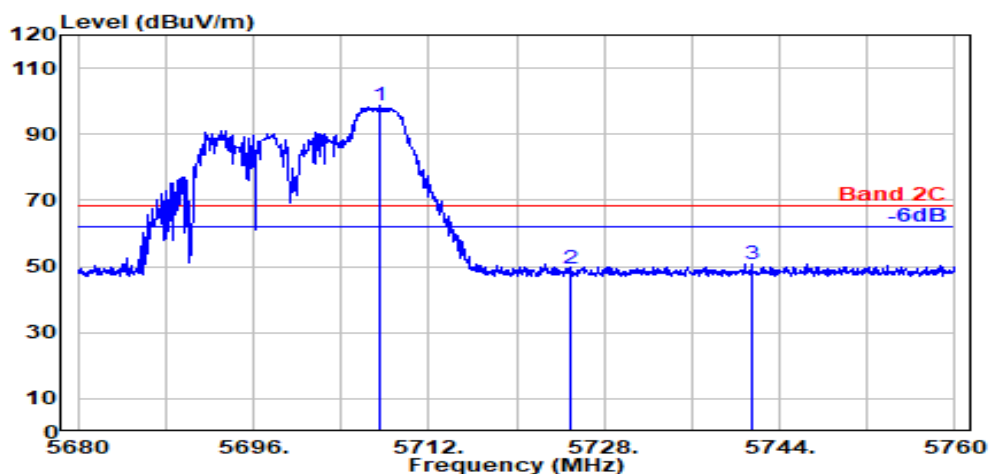

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.500	33.60	8.91	39.19	95.36	98.67	---	---	Peak
5725.000	33.60	8.93	39.20	45.98	49.31	68.20	18.89	Peak
5741.500	33.60	8.94	39.20	47.30	50.64	68.20	17.56	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

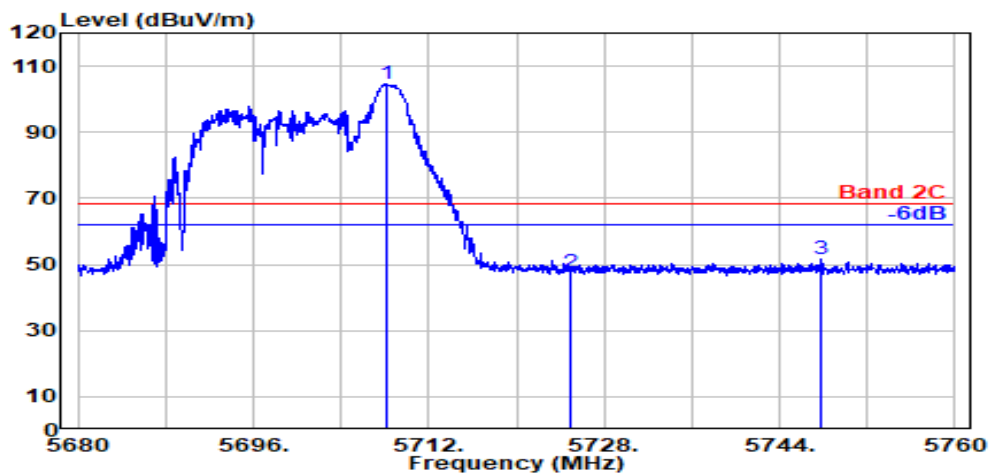

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.250	33.60	8.91	39.19	101.27	104.59	---	---	Peak
5725.000	33.60	8.93	39.20	44.32	47.64	68.20	20.56	Peak
5747.800	33.60	8.95	39.20	48.20	51.55	68.20	16.65	Peak

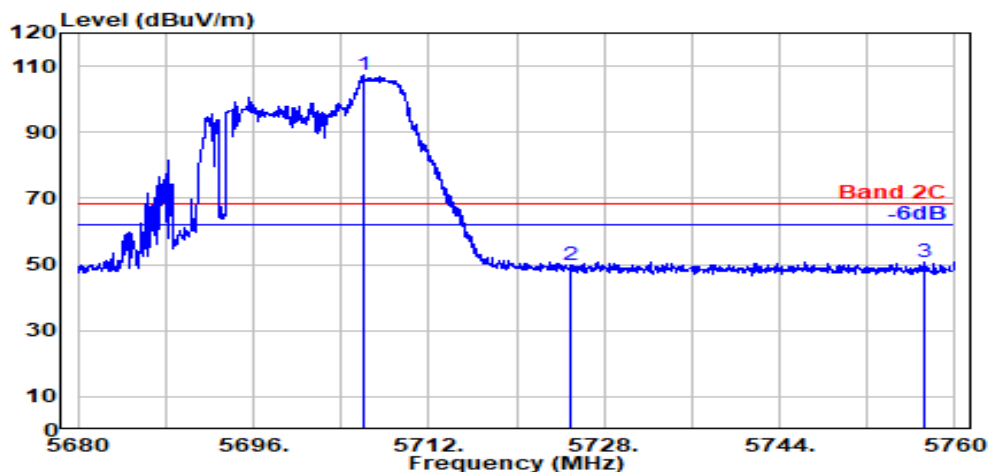

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	33.60	8.91	39.19	104.06	107.37	---	---	Peak
5725.000	33.60	8.93	39.20	46.31	49.63	68.20	18.57	Peak
5757.300	33.63	8.95	39.20	47.39	50.77	68.20	17.43	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

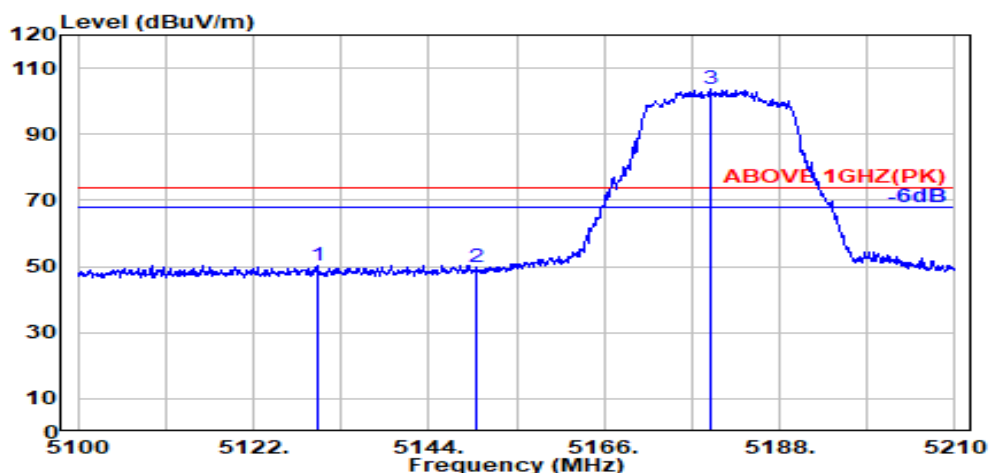

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5130.000	33.46	8.35	39.19	47.76	50.38	74.00	23.62	Peak
5150.000	33.50	8.37	39.19	47.09	49.78	74.00	24.22	Peak
@ 5179.300	33.68	8.40	39.19	100.76	103.66	---	---	Peak

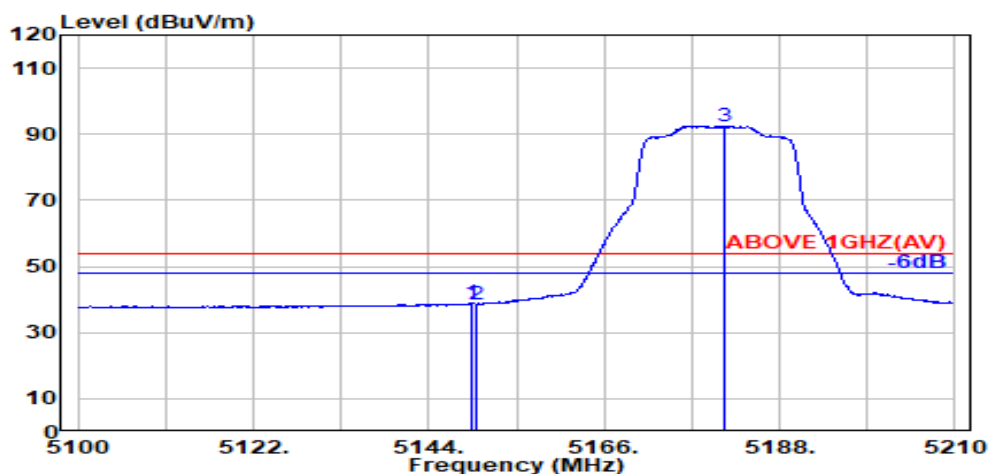


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	36.12	38.80	54.00	15.20	Average
5150.000	33.50	8.37	39.19	35.89	38.57	54.00	15.43	Average
@ 5181.000	33.69	8.41	39.19	89.48	92.39	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

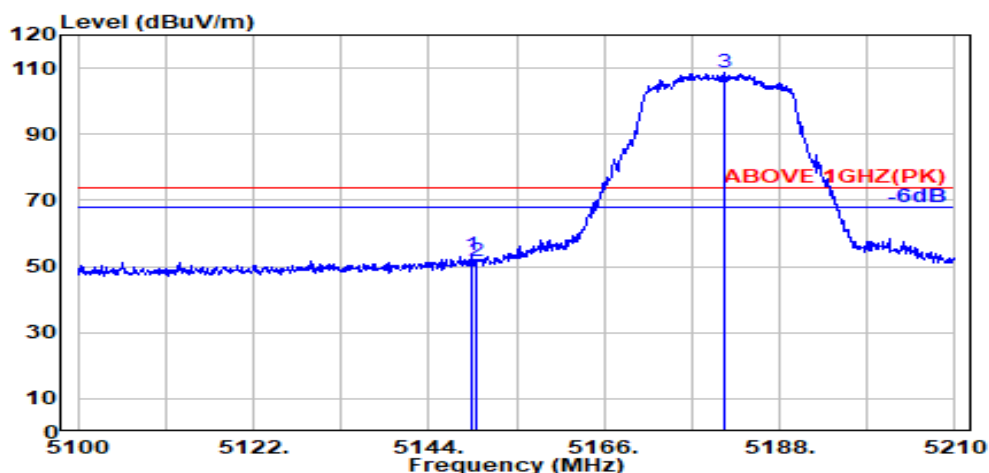

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	50.65	53.33	74.00	20.67	Peak
5150.000	33.50	8.37	39.19	48.92	51.60	74.00	22.40	Peak
@ 5181.000	33.69	8.41	39.19	105.78	108.68	---	---	Peak

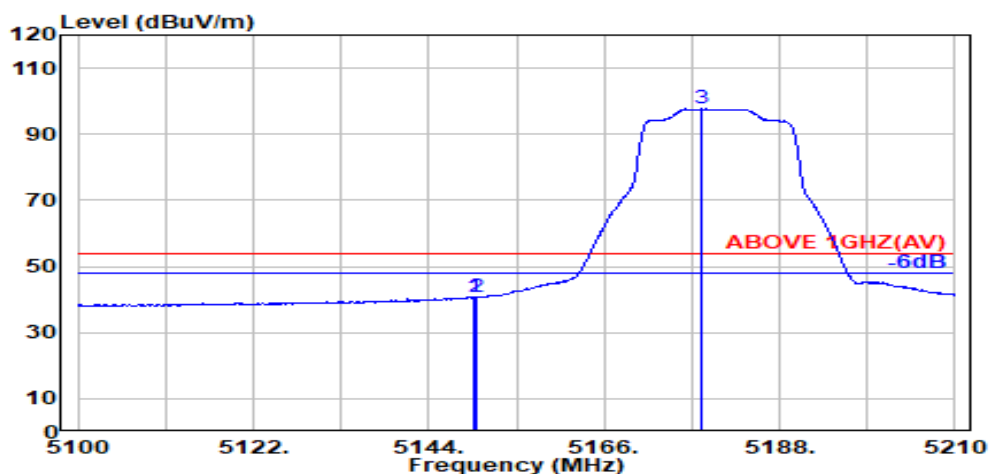


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	37.93	40.61	54.00	13.39	Average
5150.000	33.50	8.37	39.19	37.91	40.59	54.00	13.41	Average
@ 5178.300	33.67	8.40	39.19	94.72	97.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

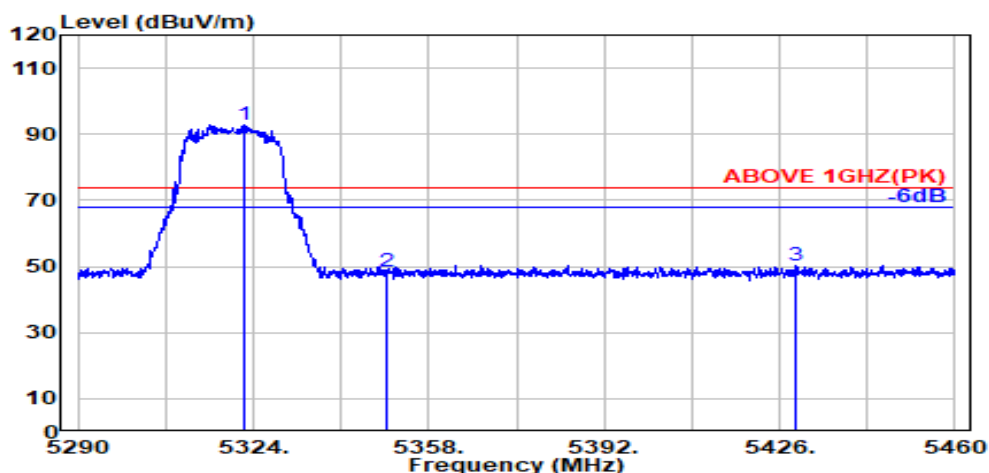

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.100	33.76	8.55	39.17	89.92	93.05	---	---	Peak
5350.000	33.70	8.57	39.17	45.30	48.40	74.00	25.60	Peak
5429.100	33.96	8.65	39.16	46.85	50.30	74.00	23.70	Peak

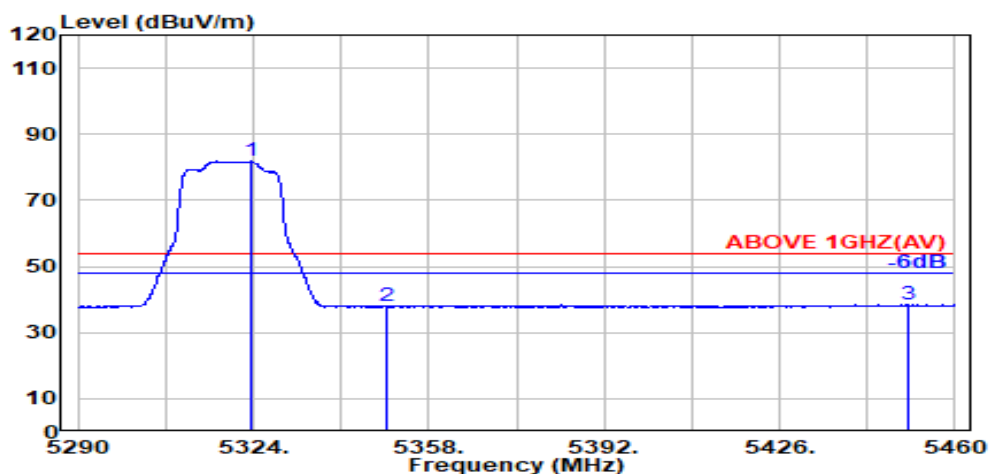


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	33.75	8.55	39.17	78.74	81.87	---	---	Average
5350.000	33.70	8.57	39.17	35.00	38.10	54.00	15.90	Average
5450.900	34.00	8.67	39.16	34.91	38.43	54.00	15.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

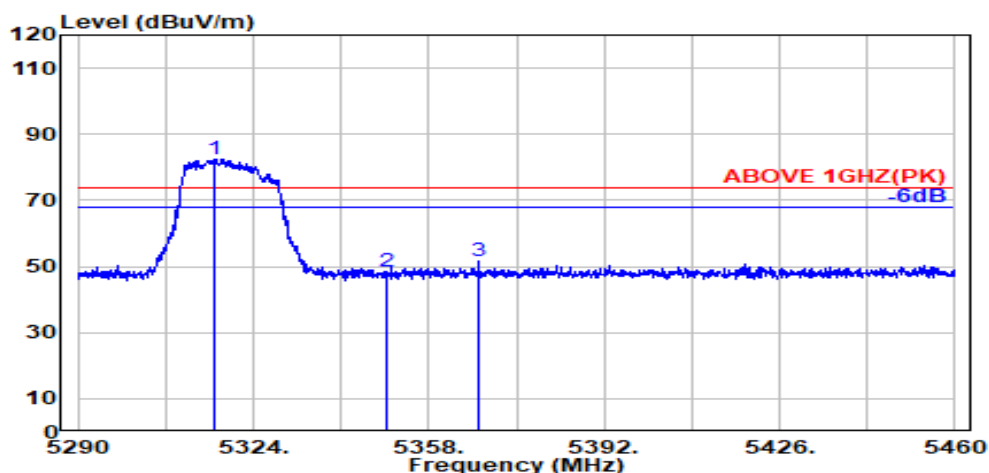

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.500	33.77	8.54	39.17	79.47	82.61	---	---	Peak
5350.000	33.70	8.57	39.17	45.24	48.35	74.00	25.65	Peak
5367.700	33.77	8.59	39.17	48.43	51.63	74.00	22.37	Peak

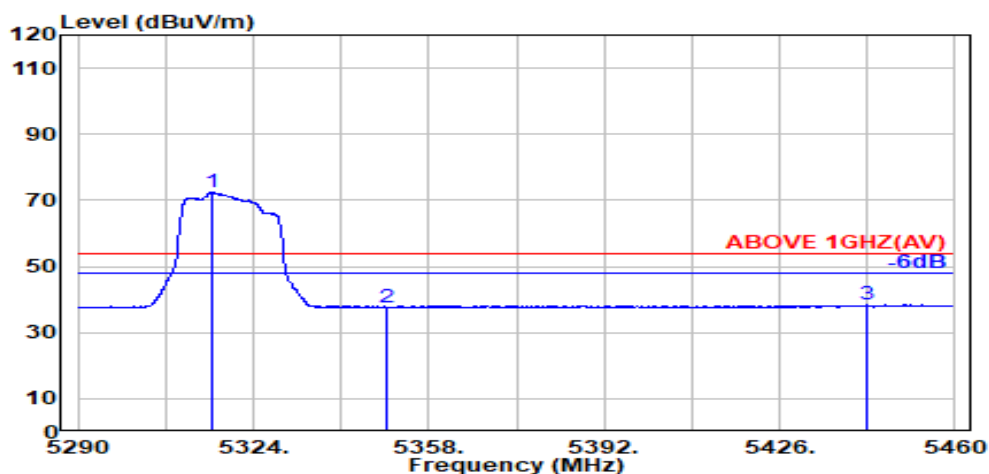

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.17	69.50	72.63	---	---	Average
5350.000	33.70	8.57	39.17	34.53	37.63	54.00	16.37	Average
5442.800	33.99	8.66	39.16	34.92	38.42	54.00	15.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

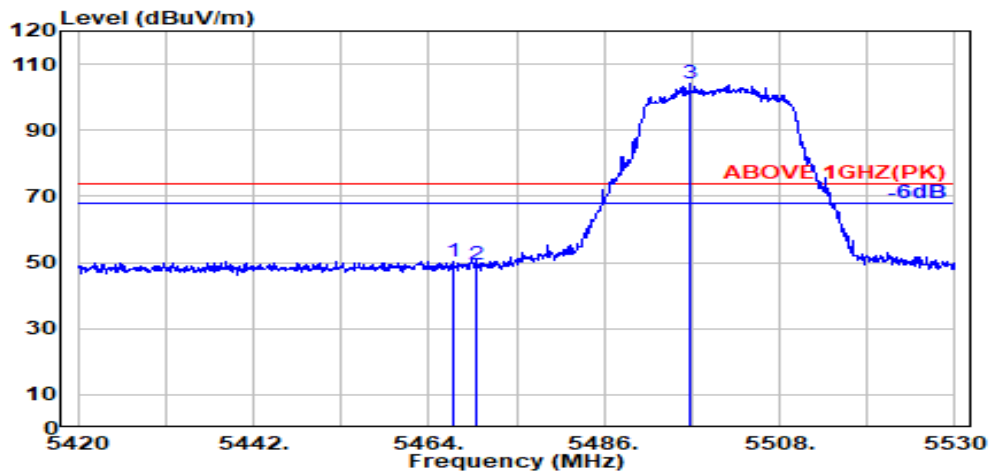

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.03	8.69	39.15	46.85	50.42	74.00	23.58	Peak
5470.000	34.04	8.69	39.15	45.89	49.47	74.00	24.53	Peak
@ 5496.800	34.09	8.71	39.15	100.53	104.19	---	---	Peak

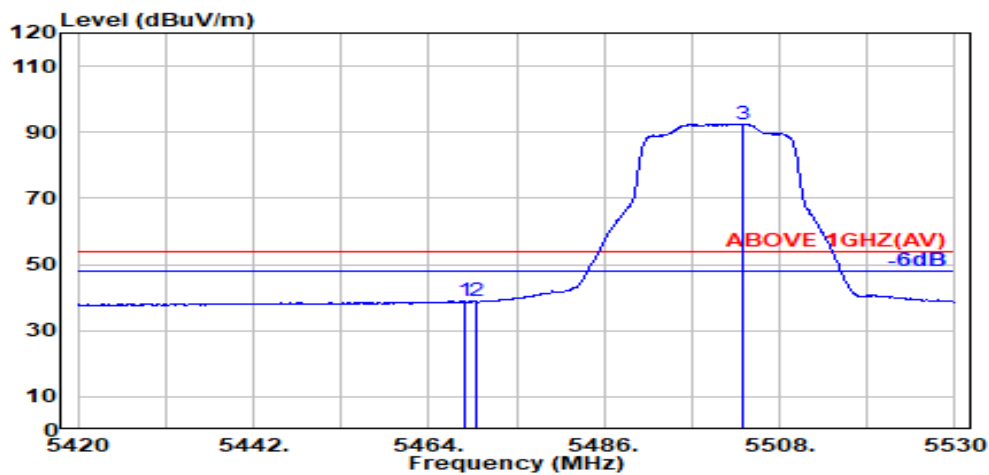

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	35.32	38.89	54.00	15.11	Average
5470.000	34.04	8.69	39.15	35.29	38.86	54.00	15.14	Average
@ 5503.300	34.09	8.72	39.15	88.86	92.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

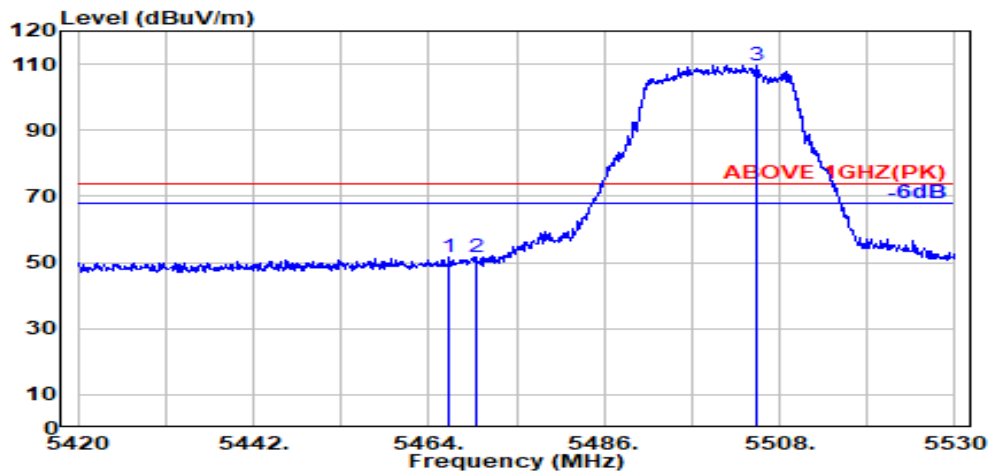

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.03	8.68	39.15	48.03	51.59	74.00	22.41	Peak
5470.000	34.04	8.69	39.15	48.27	51.84	74.00	22.16	Peak
@ 5505.100	34.09	8.72	39.15	106.05	109.71	---	---	Peak

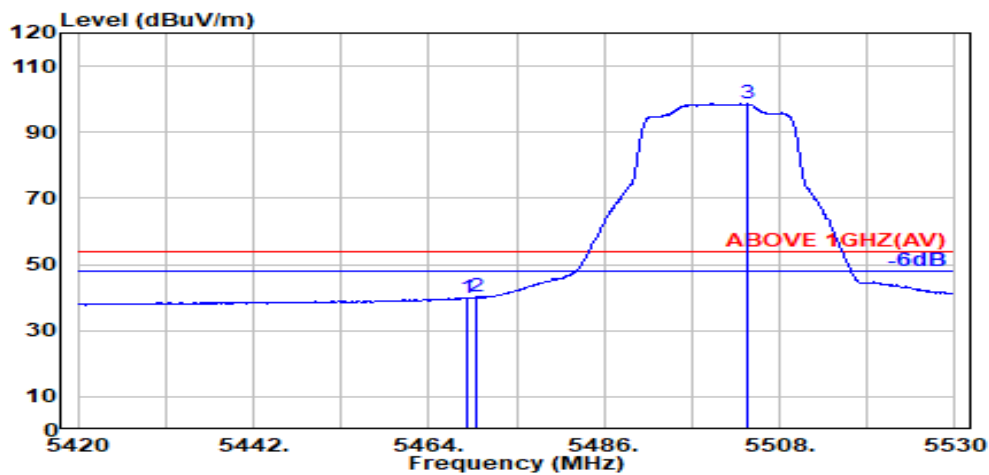

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	36.42	39.99	54.00	14.01	Average
5470.000	34.04	8.69	39.15	36.55	40.12	54.00	13.88	Average
@ 5504.100	34.09	8.72	39.15	94.94	98.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

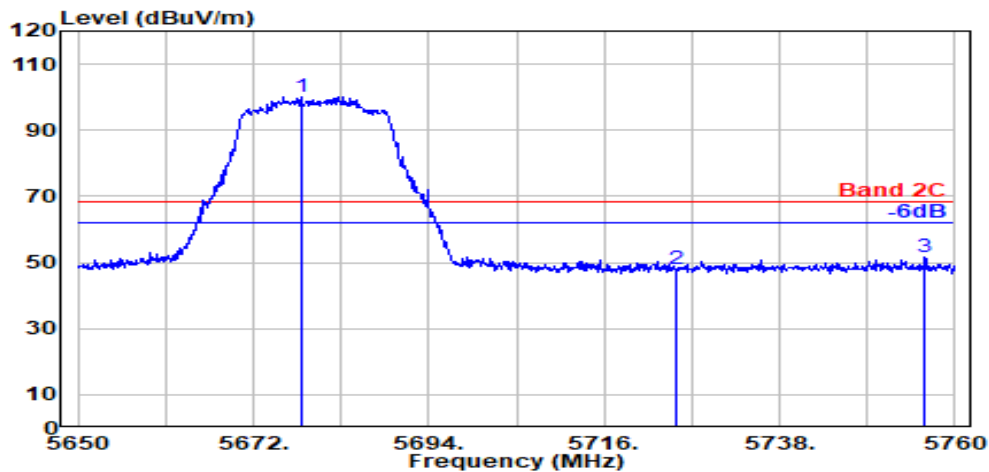

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.100	33.69	8.88	39.19	96.84	100.23	---	---	Peak
5725.000	33.60	8.93	39.20	44.70	48.03	68.20	20.17	Peak
5756.200	33.62	8.95	39.20	48.24	51.62	68.20	16.58	Peak

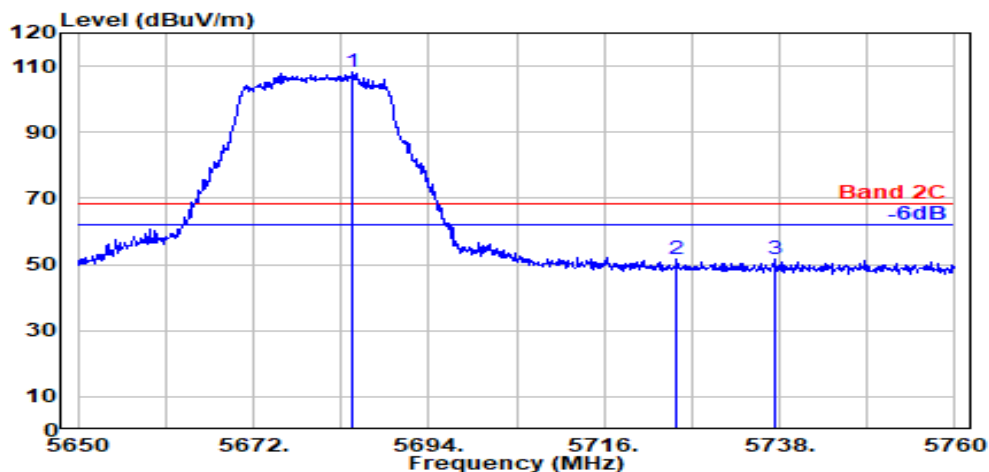

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5684.400	33.66	8.89	39.19	104.94	108.31	---	---	Peak
5725.000	33.60	8.93	39.20	48.07	51.40	68.20	16.80	Peak
5737.500	33.60	8.94	39.20	48.24	51.58	68.20	16.62	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

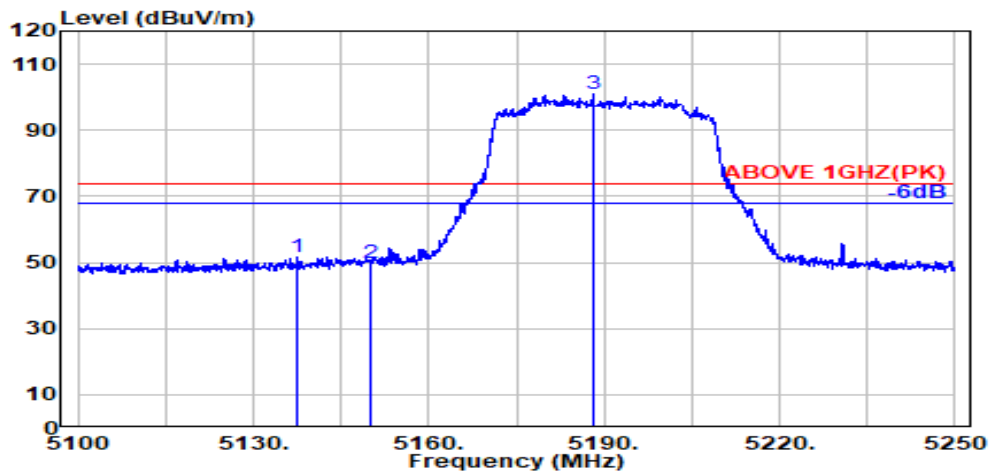

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.600	33.48	8.36	39.19	49.04	51.68	74.00	22.32	Peak
5150.000	33.50	8.37	39.19	47.20	49.88	74.00	24.12	Peak
@ 5188.100	33.73	8.41	39.19	97.87	100.82	---	---	Peak

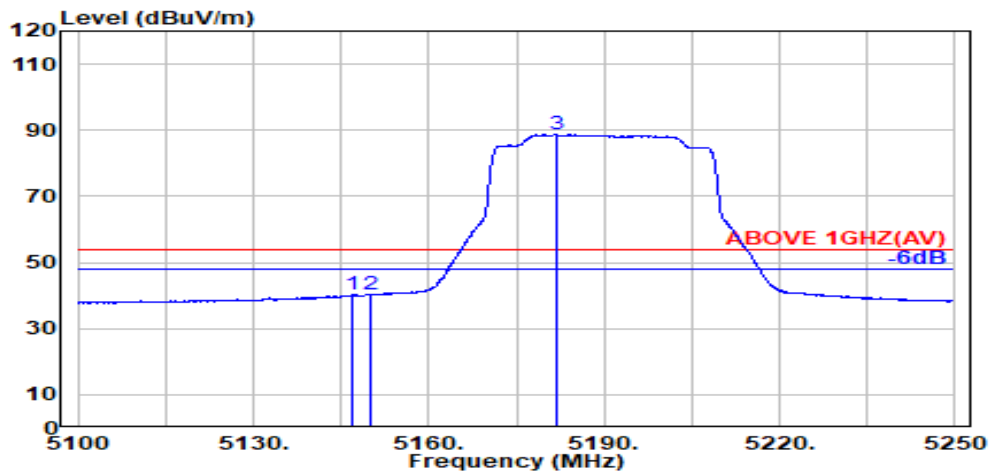


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.49	8.37	39.19	37.60	40.27	54.00	13.73	Average
5150.000	33.50	8.37	39.19	37.66	40.34	54.00	13.66	Average
@ 5181.700	33.69	8.41	39.19	85.81	88.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

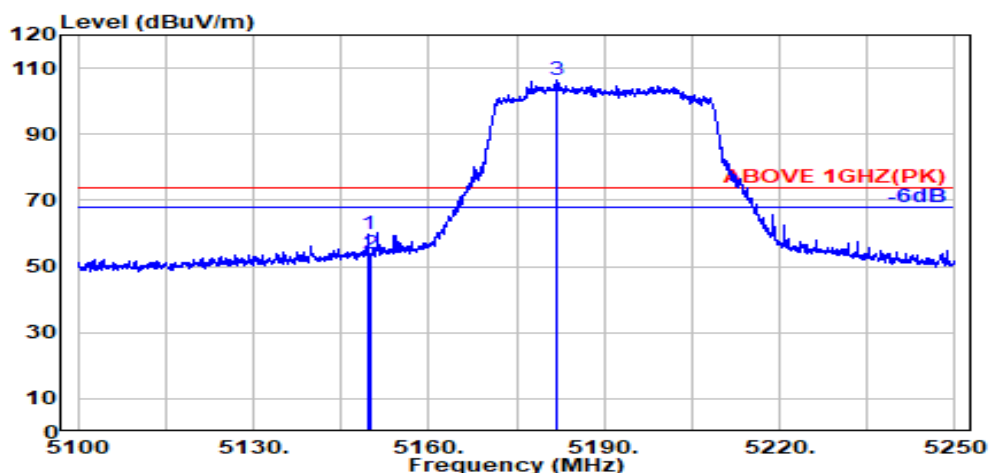

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	57.14	59.82	74.00	14.18	Peak
5150.000	33.50	8.37	39.19	51.32	54.00	74.00	20.00	Peak
@ 5181.700	33.69	8.41	39.19	103.44	106.35	---	---	Peak

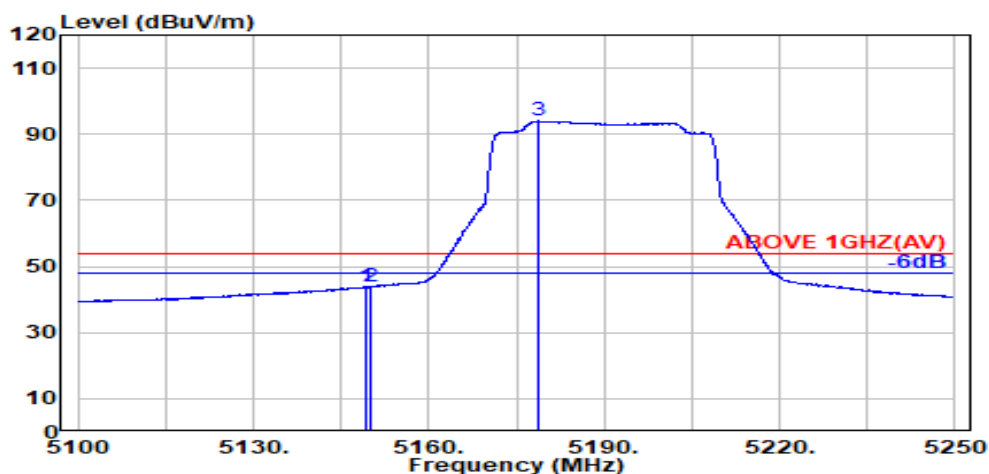

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	41.24	43.92	54.00	10.08	Average
5150.000	33.50	8.37	39.19	41.17	43.85	54.00	10.15	Average
@ 5178.900	33.67	8.40	39.19	91.13	94.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

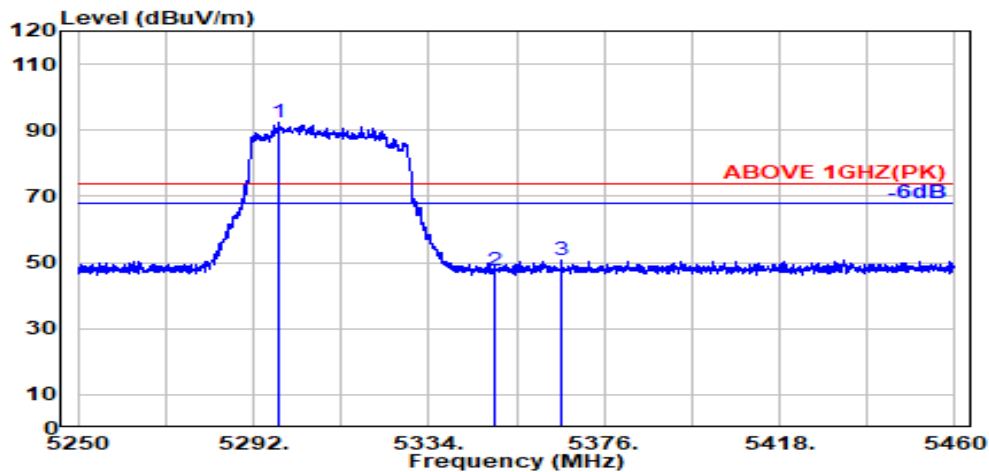

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.000	33.80	8.52	39.17	89.04	92.18	---	---	Peak
5350.000	33.70	8.57	39.17	44.62	47.73	74.00	26.27	Peak
5365.900	33.76	8.59	39.17	47.65	50.84	74.00	23.16	Peak

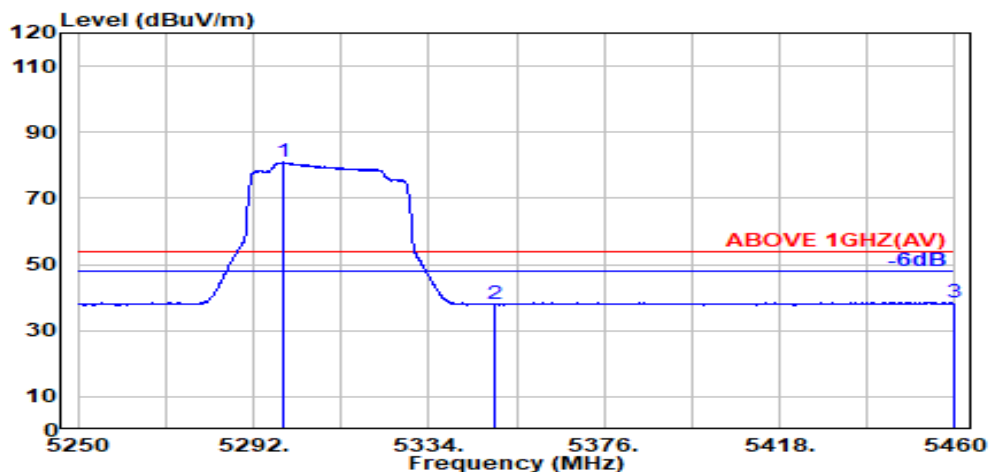


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.400	33.80	8.52	39.17	77.69	80.84	---	---	Average
5350.000	33.70	8.57	39.17	34.95	38.06	54.00	15.94	Average
5460.000	34.02	8.68	39.15	35.08	38.62	54.00	15.38	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

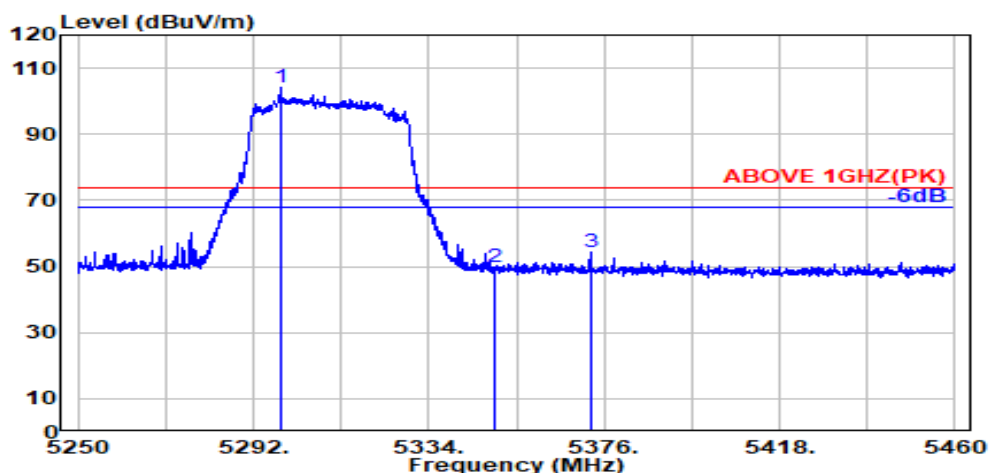

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.500	33.80	8.52	39.17	100.86	104.01	---	---	Peak
5350.000	33.70	8.57	39.17	46.89	49.99	74.00	24.01	Peak
5373.000	33.79	8.59	39.16	51.23	54.45	74.00	19.55	Peak

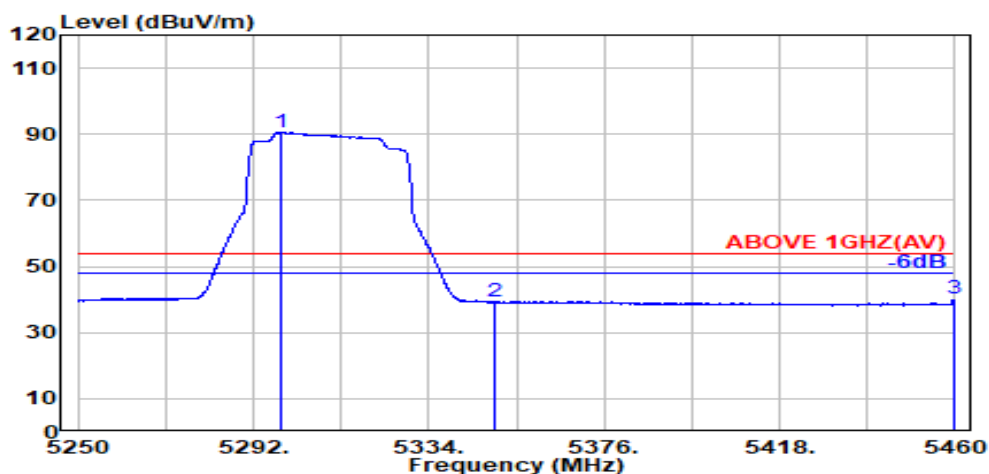


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.600	33.80	8.52	39.17	87.40	90.55	---	---	Average
5350.000	33.70	8.57	39.17	36.24	39.35	54.00	14.65	Average
5460.000	34.02	8.68	39.15	36.76	40.30	54.00	13.70	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

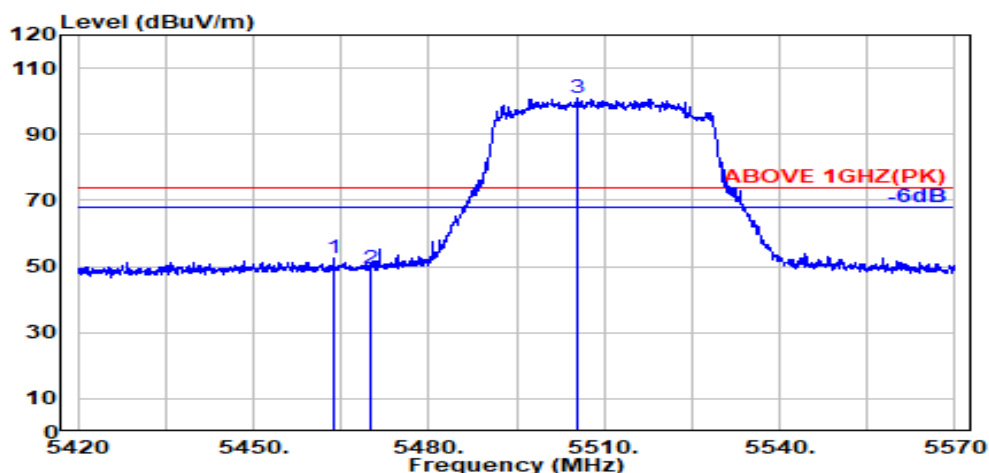

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.700	34.03	8.68	39.15	49.13	52.68	74.00	21.32	Peak
5470.000	34.04	8.69	39.15	45.58	49.16	74.00	24.84	Peak
@ 5505.500	34.09	8.72	39.15	97.23	100.89	---	---	Peak

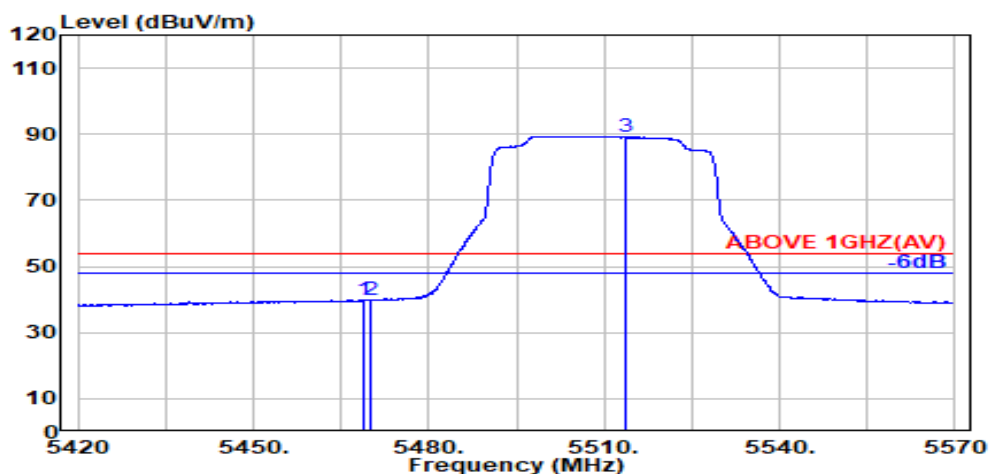

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	36.37	39.94	54.00	14.06	Average
5470.000	34.04	8.69	39.15	36.12	39.70	54.00	14.30	Average
@ 5513.500	34.07	8.73	39.15	85.69	89.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

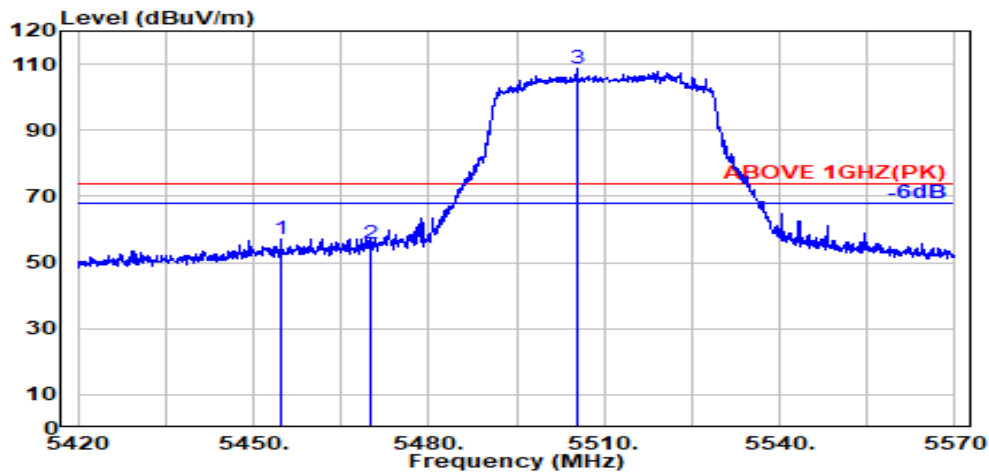

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.800	34.01	8.67	39.16	53.68	57.20	74.00	16.80	Peak
5470.000	34.04	8.69	39.15	51.94	55.51	74.00	18.49	Peak
@ 5505.400	34.09	8.72	39.15	104.82	108.48	---	---	Peak

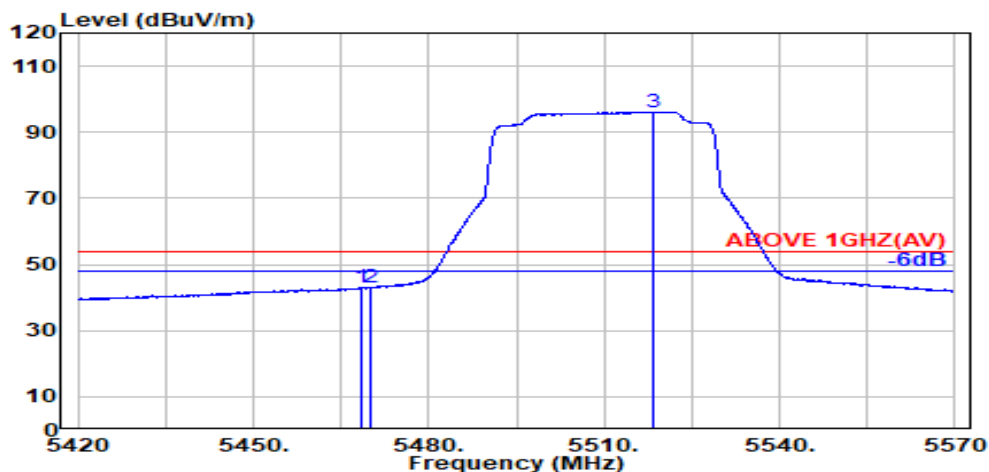


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	39.35	42.92	54.00	11.08	Average
5470.000	34.04	8.69	39.15	39.42	42.99	54.00	11.01	Average
@ 5518.500	34.06	8.73	39.15	92.53	96.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

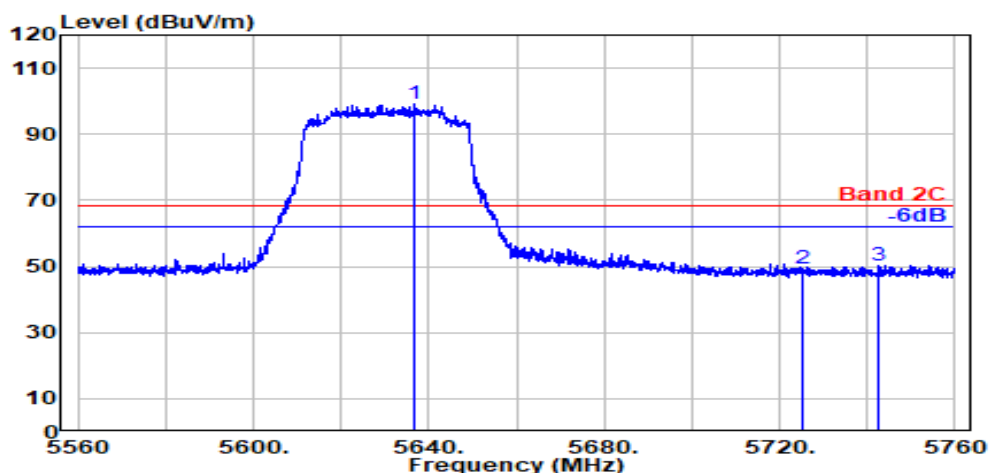

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5636.600	33.80	8.84	39.18	95.61	99.08	---	---	Peak
5725.000	33.60	8.93	39.20	46.19	49.52	68.20	18.68	Peak
5742.500	33.60	8.94	39.20	47.03	50.37	68.20	17.83	Peak

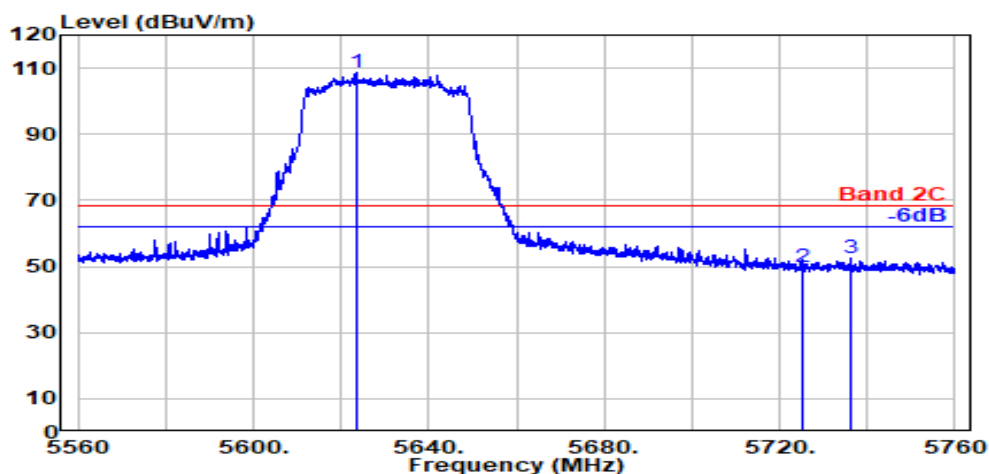


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5623.400	33.80	8.83	39.18	105.42	108.87	---	---	Peak
5725.000	33.60	8.93	39.20	46.45	49.78	68.20	18.42	Peak
5736.300	33.60	8.94	39.20	49.08	52.42	68.20	15.78	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

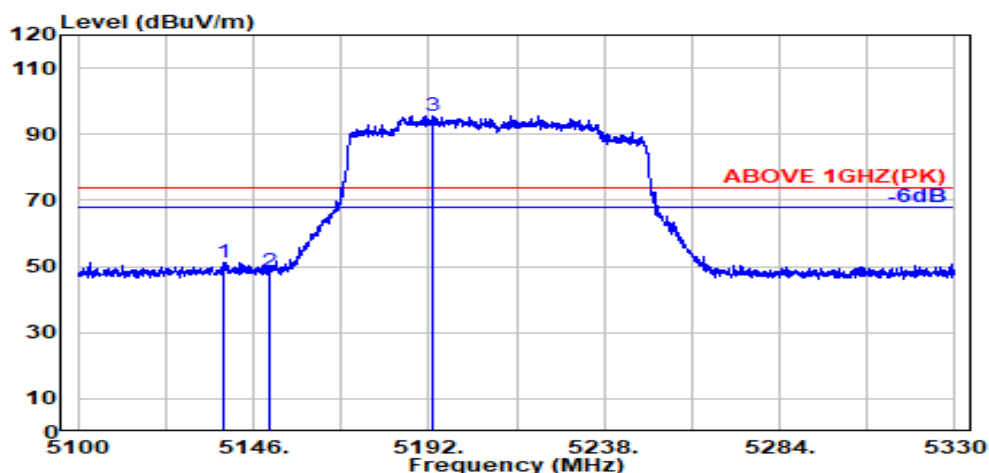

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.300	33.48	8.36	39.19	48.50	51.15	74.00	22.85	Peak
5150.000	33.50	8.37	39.19	45.64	48.32	74.00	25.68	Peak
@ 5193.100	33.76	8.42	39.19	92.58	95.57	---	---	Peak

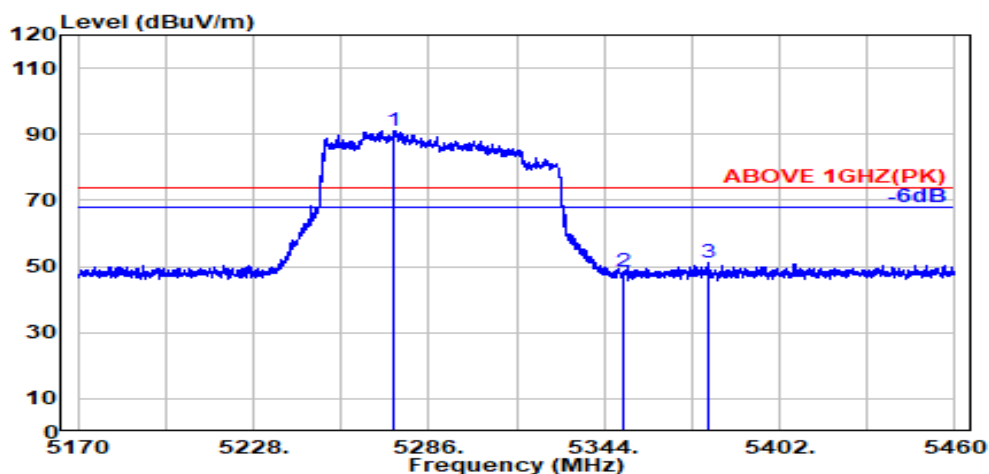

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.700	33.75	8.50	39.18	88.06	91.14	---	---	Peak
5350.000	33.70	8.57	39.17	45.56	48.67	74.00	25.34	Peak
5378.100	33.81	8.60	39.16	48.03	51.28	74.00	22.72	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

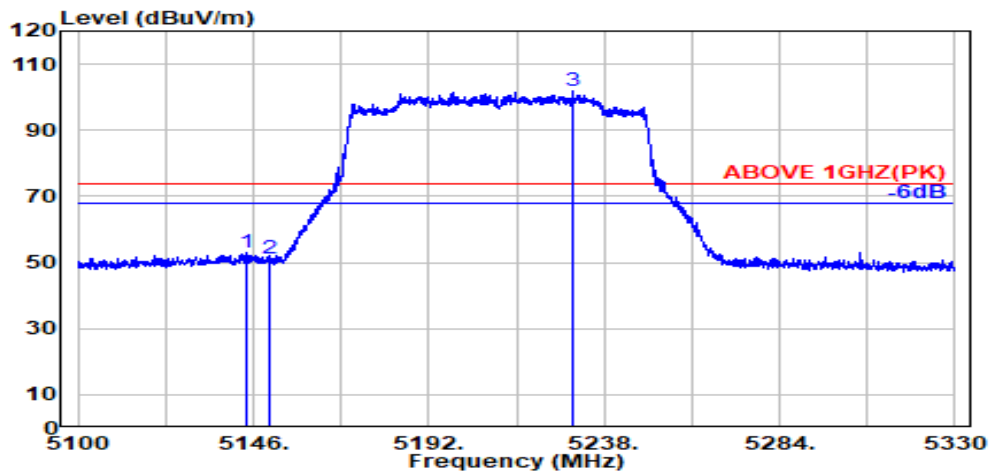

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.300	33.49	8.37	39.19	50.25	52.92	74.00	21.08	Peak
5150.000	33.50	8.37	39.19	48.36	51.04	74.00	22.96	Peak
@ 5229.900	33.74	8.45	39.18	99.01	102.02	---	---	Peak

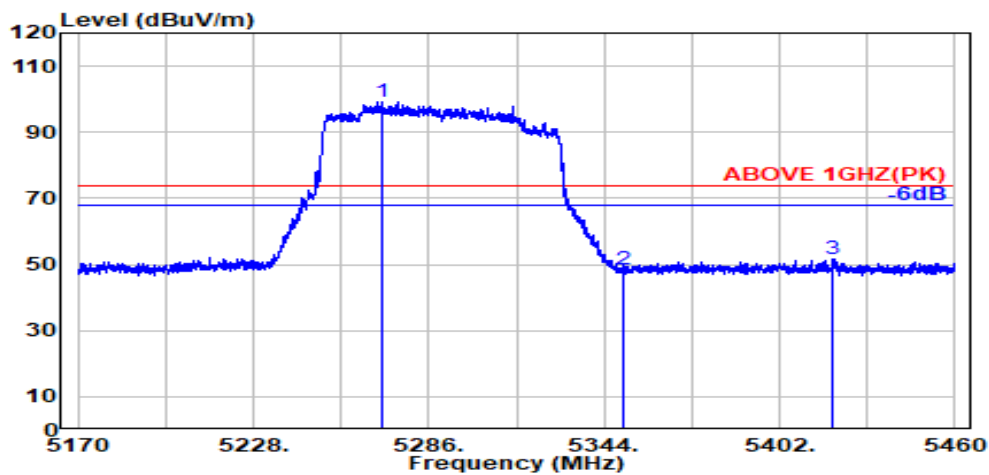

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.400	33.74	8.49	39.18	96.24	99.30	---	---	Peak
5350.000	33.70	8.57	39.17	45.16	48.27	74.00	25.73	Peak
5419.500	33.94	8.64	39.16	48.28	51.70	74.00	22.30	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

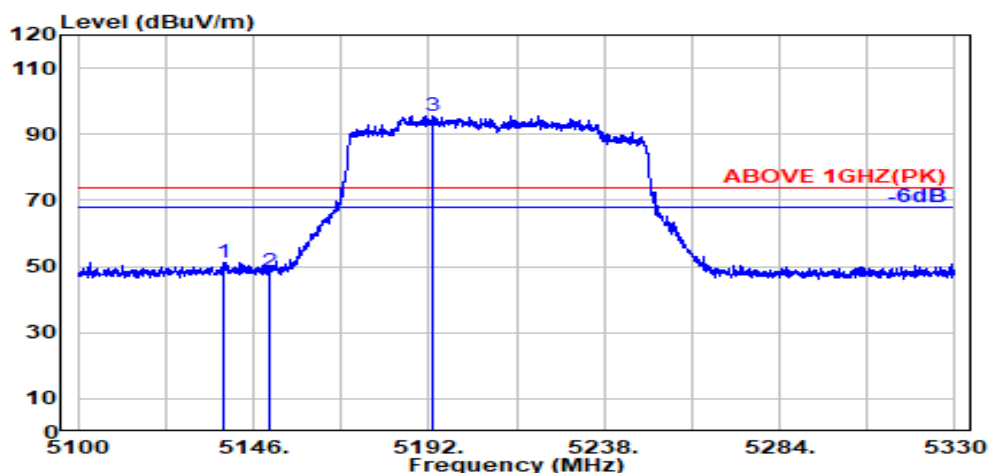

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.300	33.48	8.36	39.19	48.50	51.15	74.00	22.85	Peak
5150.000	33.50	8.37	39.19	45.64	48.32	74.00	25.68	Peak
@ 5193.100	33.76	8.42	39.19	92.58	95.57	---	---	Peak

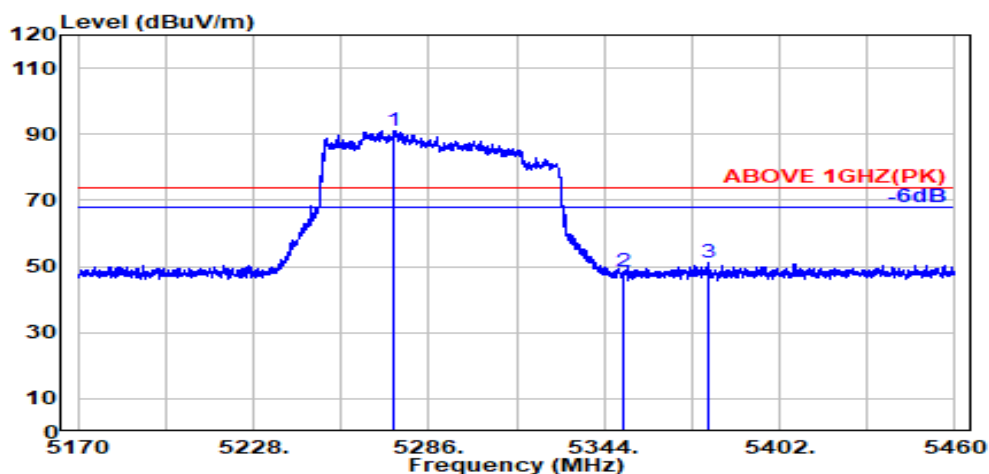

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5274.700	33.75	8.50	39.18	88.06	91.14	---	---	Peak
5350.000	33.70	8.57	39.17	45.56	48.67	74.00	25.34	Peak
5378.100	33.81	8.60	39.16	48.03	51.28	74.00	22.72	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

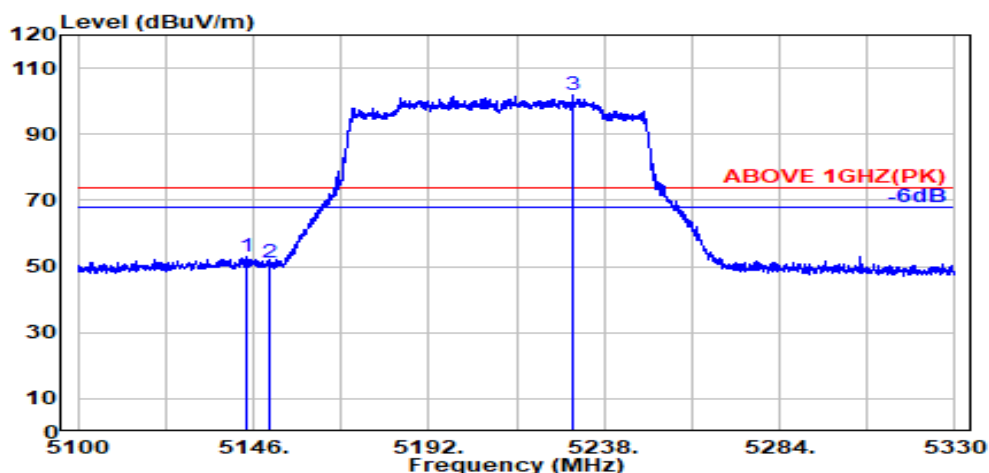

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.300	33.49	8.37	39.19	50.25	52.92	74.00	21.08	Peak
5150.000	33.50	8.37	39.19	48.36	51.04	74.00	22.96	Peak
@ 5229.900	33.74	8.45	39.18	99.01	102.02	---	---	Peak

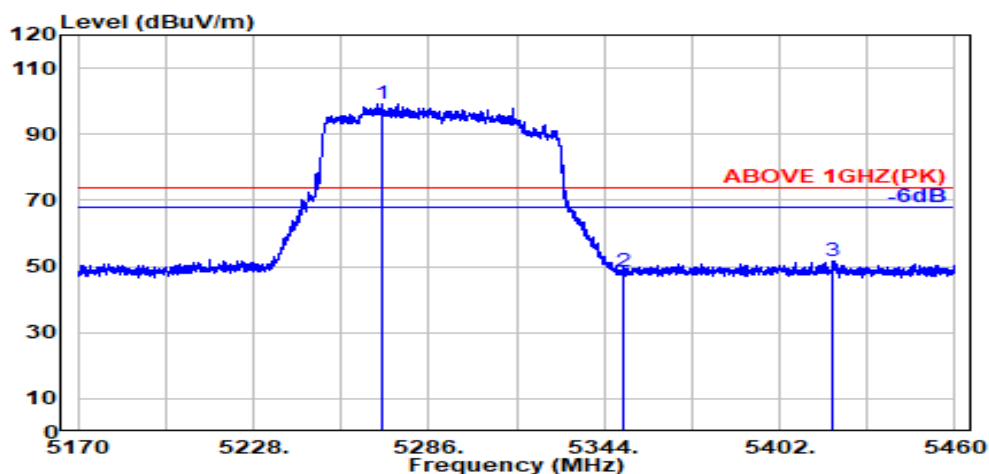

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.400	33.74	8.49	39.18	96.24	99.30	---	---	Peak
5350.000	33.70	8.57	39.17	45.16	48.27	74.00	25.73	Peak
5419.500	33.94	8.64	39.16	48.28	51.70	74.00	22.30	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

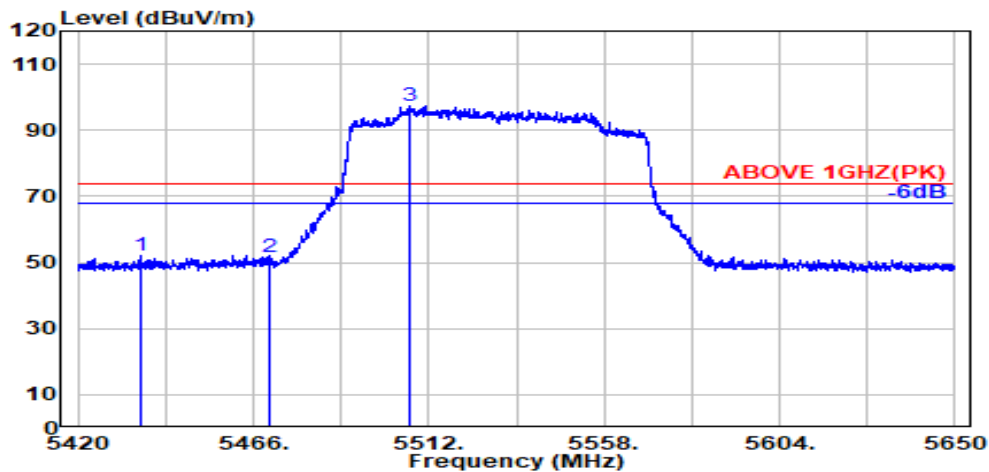

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.600	33.97	8.66	39.16	48.53	52.00	74.00	22.00	Peak
5470.000	34.04	8.69	39.15	47.95	51.53	74.00	22.47	Peak
@ 5506.800	34.09	8.72	39.15	93.82	97.48	---	---	Peak

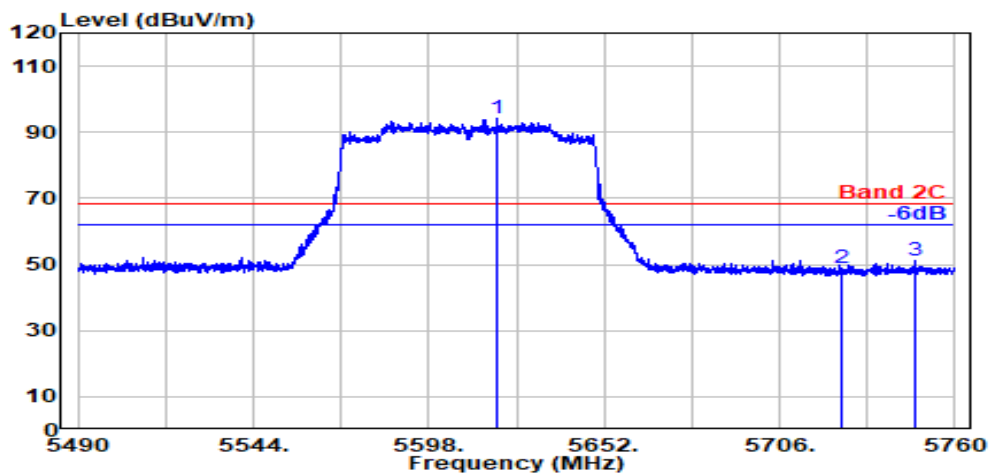

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.800	33.80	8.83	39.17	90.72	94.17	---	---	Peak
5725.000	33.60	8.93	39.20	45.57	48.90	68.20	19.30	Peak
5747.800	33.60	8.95	39.20	47.77	51.11	68.20	17.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

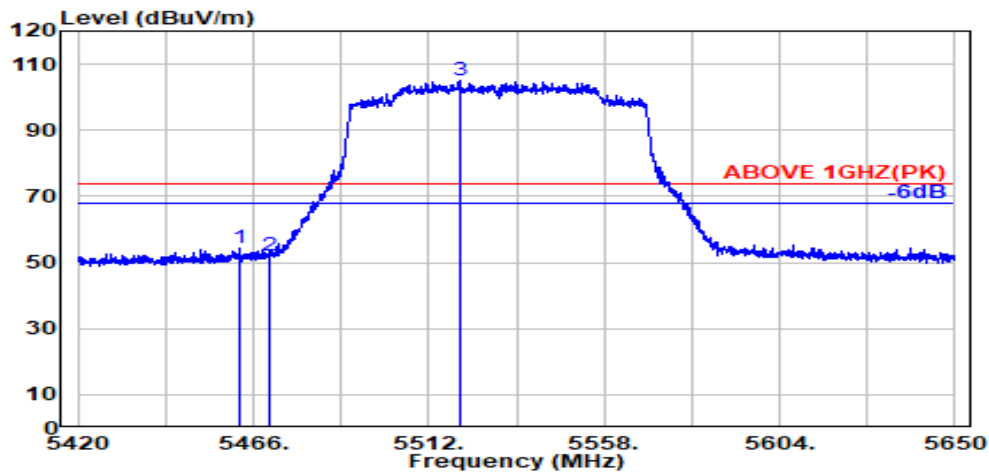

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.02	8.68	39.15	50.64	54.19	74.00	19.81	Peak
5470.000	34.04	8.69	39.15	48.66	52.24	74.00	21.76	Peak
@ 5520.000	34.06	8.74	39.15	101.22	104.86	---	---	Peak

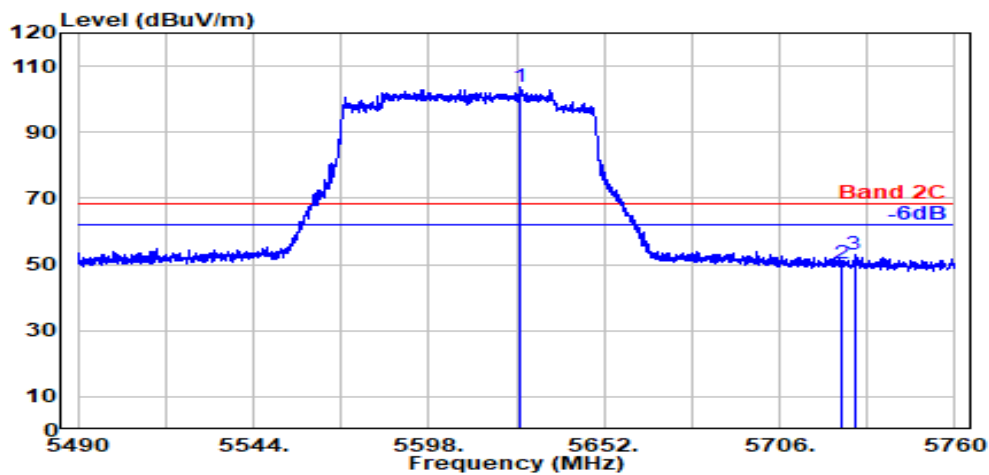

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.100	33.80	8.83	39.18	100.36	103.82	---	---	Peak
5725.000	33.60	8.93	39.20	46.74	50.07	68.20	18.13	Peak
5729.000	33.60	8.93	39.20	49.59	52.93	68.20	15.27	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

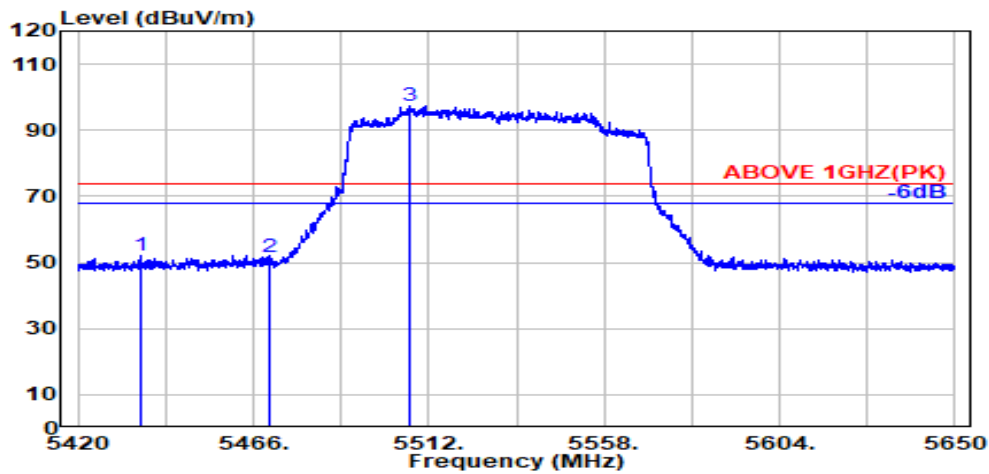

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.600	33.97	8.66	39.16	48.53	52.00	74.00	22.00	Peak
5470.000	34.04	8.69	39.15	47.95	51.53	74.00	22.47	Peak
@ 5506.800	34.09	8.72	39.15	93.82	97.48	---	---	Peak

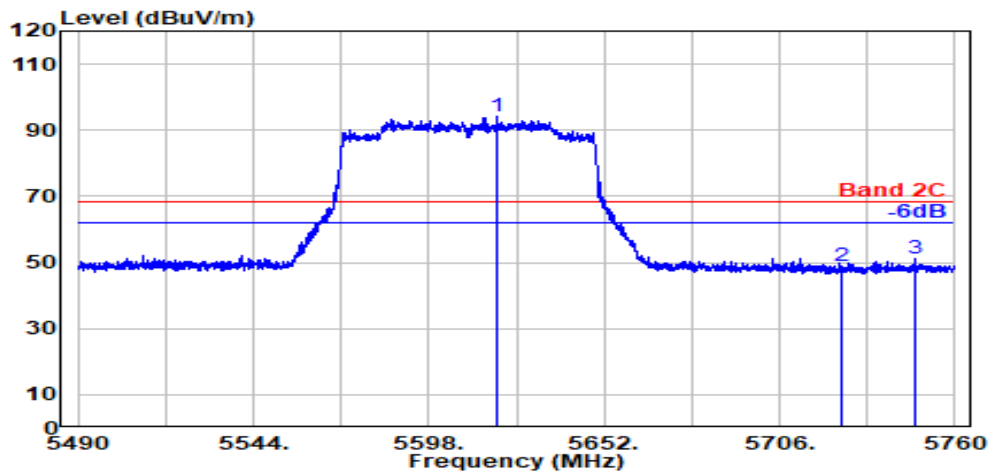


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5618.800	33.80	8.83	39.17	90.72	94.17	---	---	Peak
5725.000	33.60	8.93	39.20	45.57	48.90	68.20	19.30	Peak
5747.800	33.60	8.95	39.20	47.77	51.11	68.20	17.09	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

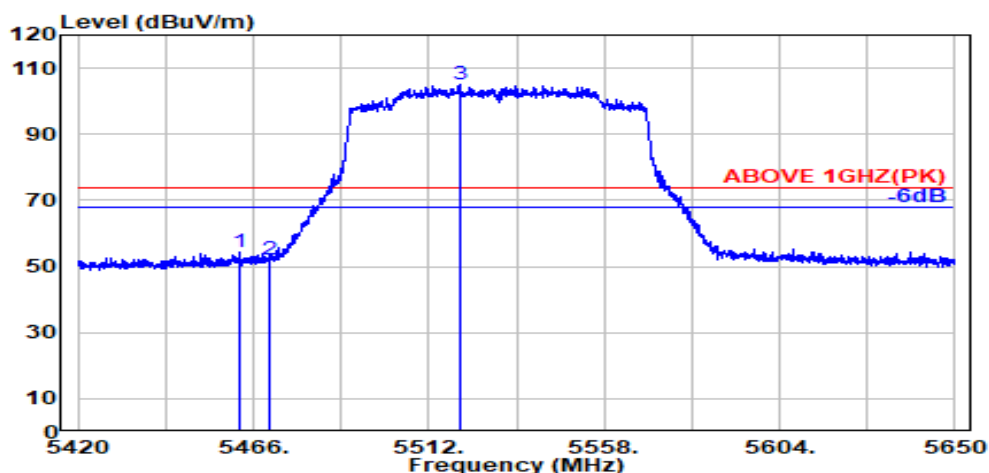

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.02	8.68	39.15	50.64	54.19	74.00	19.81	Peak
5470.000	34.04	8.69	39.15	48.66	52.24	74.00	21.76	Peak
@ 5520.000	34.06	8.74	39.15	101.22	104.86	---	---	Peak

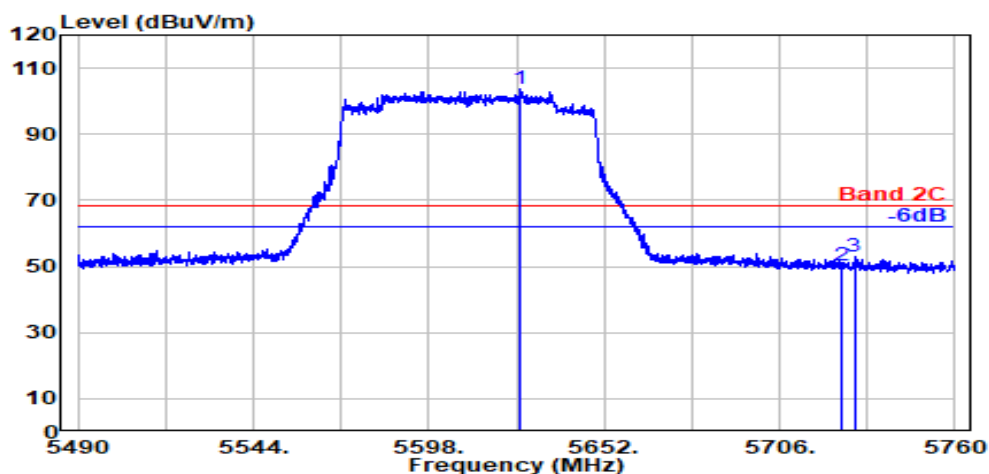

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5626.100	33.80	8.83	39.18	100.36	103.82	---	---	Peak
5725.000	33.60	8.93	39.20	46.74	50.07	68.20	18.13	Peak
5729.000	33.60	8.93	39.20	49.59	52.93	68.20	15.27	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

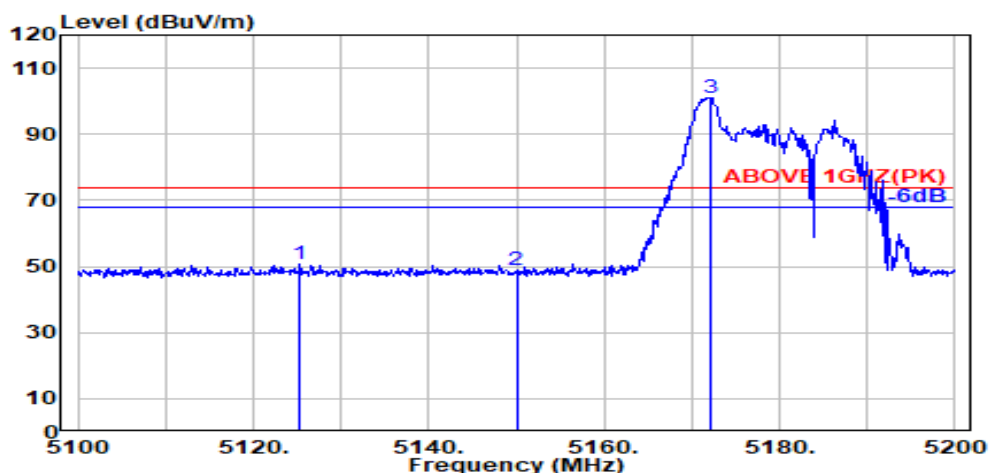

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.300	33.45	8.35	39.19	47.98	50.59	74.00	23.41	Peak
5150.000	33.50	8.37	39.19	46.23	48.92	74.00	25.08	Peak
@ 5172.100	33.63	8.40	39.19	98.11	100.95	---	---	Peak

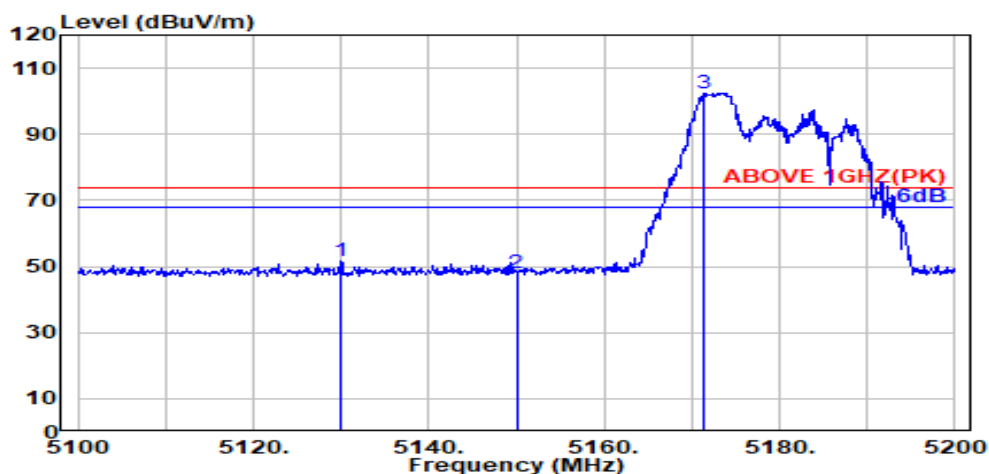

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.000	33.46	8.35	39.19	48.91	51.53	74.00	22.47	Peak
5150.000	33.50	8.37	39.19	45.35	48.04	74.00	25.96	Peak
@ 5171.400	33.63	8.40	39.19	99.70	102.54	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

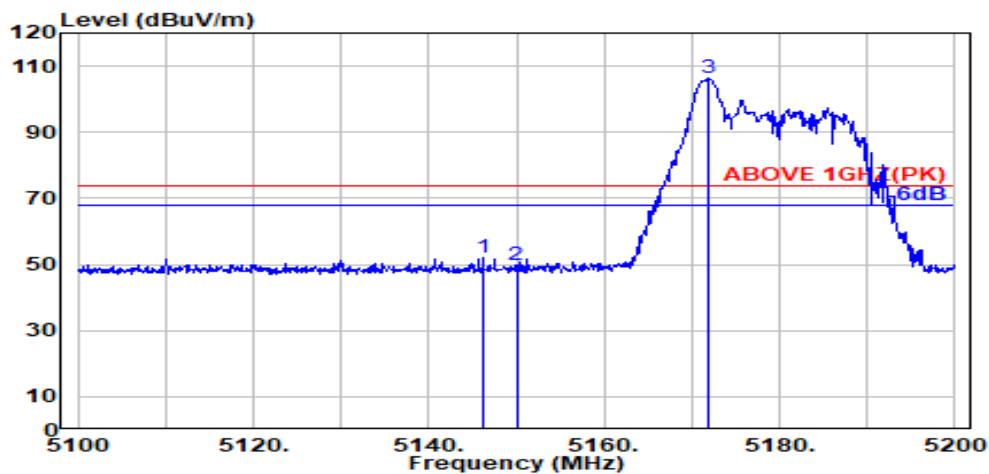

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.49	8.37	39.19	49.38	52.06	74.00	21.94	Peak
5150.000	33.50	8.37	39.19	47.19	49.87	74.00	24.13	Peak
@ 5172.000	33.63	8.40	39.19	103.39	106.23	---	---	Peak

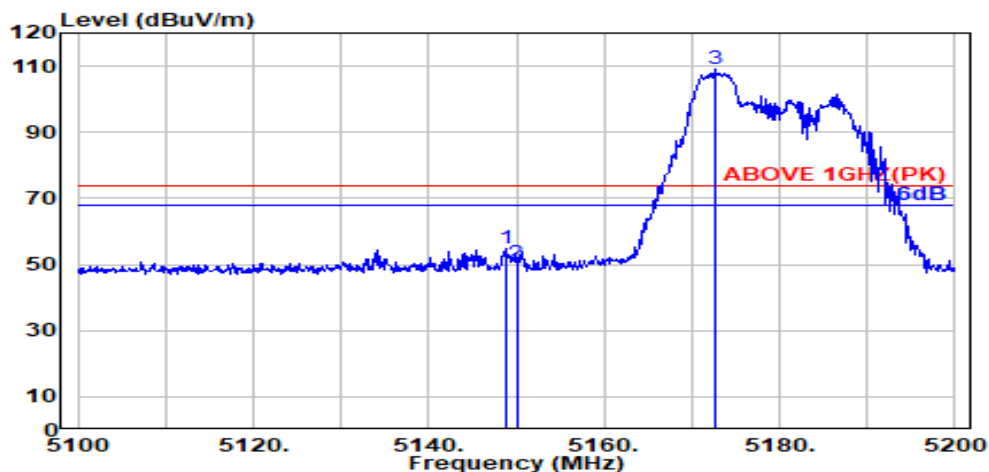

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.19	52.08	54.76	74.00	19.24	Peak
5150.000	33.50	8.37	39.19	47.56	50.25	74.00	23.75	Peak
@ 5172.600	33.64	8.40	39.19	106.49	109.33	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

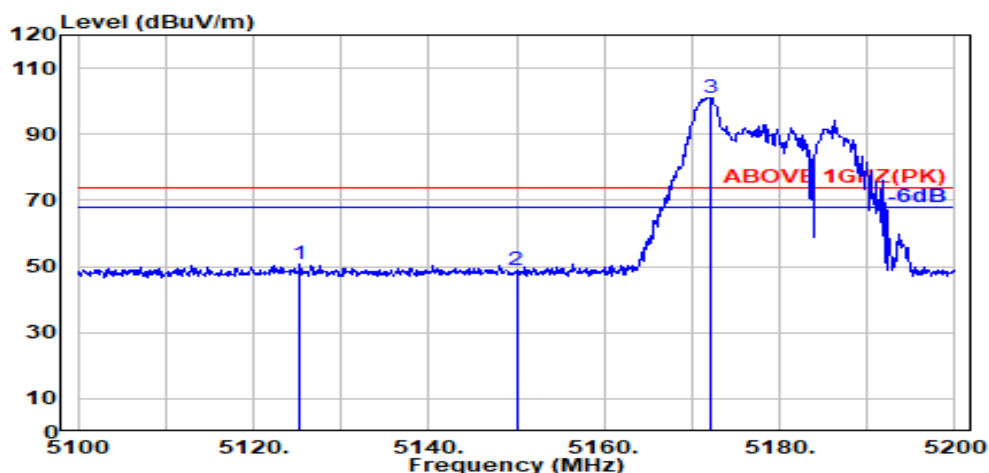

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.300	33.45	8.35	39.19	47.98	50.59	74.00	23.41	Peak
5150.000	33.50	8.37	39.19	46.23	48.92	74.00	25.08	Peak
@ 5172.100	33.63	8.40	39.19	98.11	100.95	---	---	Peak

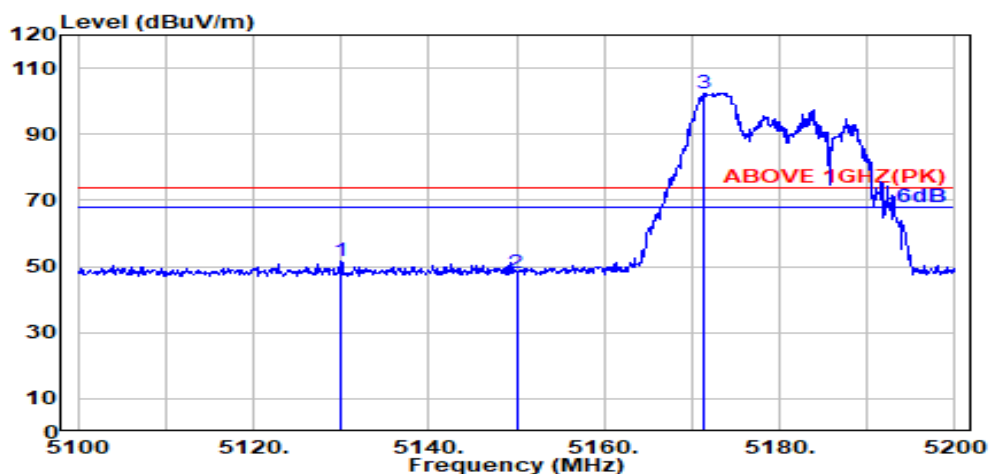

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.000	33.46	8.35	39.19	48.91	51.53	74.00	22.47	Peak
5150.000	33.50	8.37	39.19	45.35	48.04	74.00	25.96	Peak
@ 5171.400	33.63	8.40	39.19	99.70	102.54	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

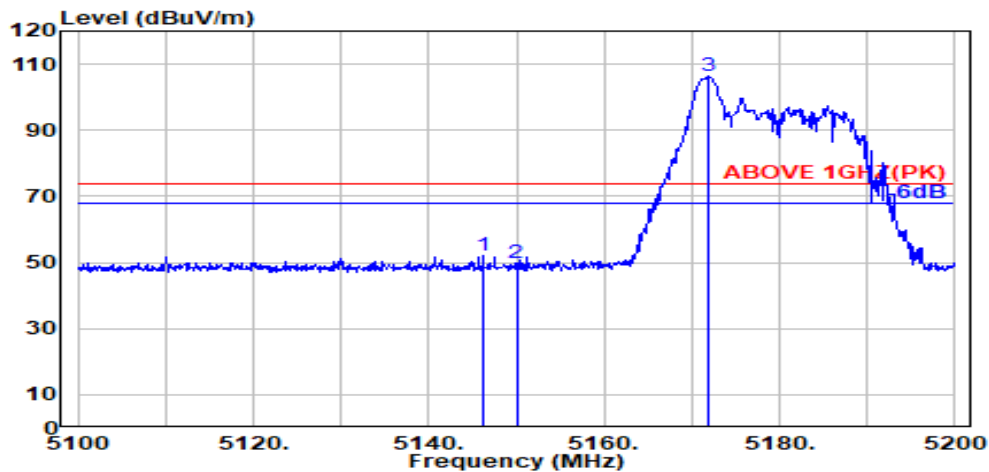

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.49	8.37	39.19	49.38	52.06	74.00	21.94	Peak
5150.000	33.50	8.37	39.19	47.19	49.87	74.00	24.13	Peak
@ 5172.000	33.63	8.40	39.19	103.39	106.23	---	---	Peak

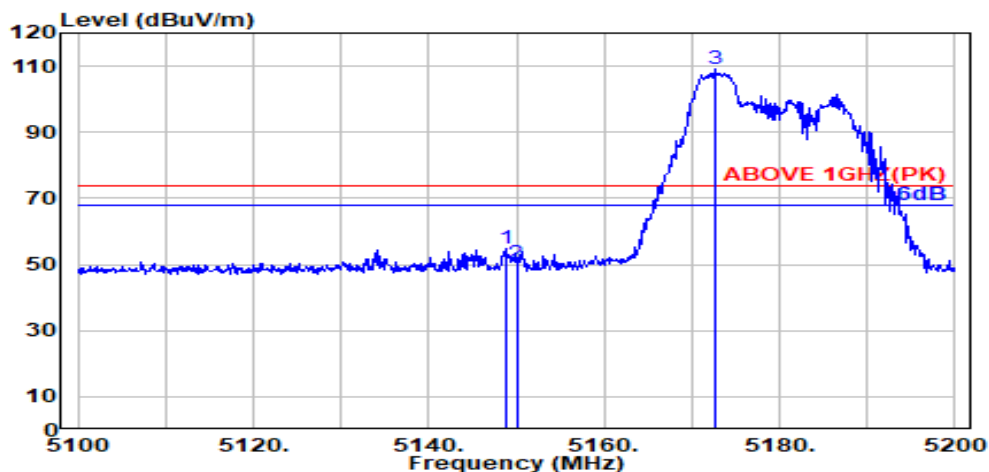

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.19	52.08	54.76	74.00	19.24	Peak
5150.000	33.50	8.37	39.19	47.56	50.25	74.00	23.75	Peak
@ 5172.600	33.64	8.40	39.19	106.49	109.33	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

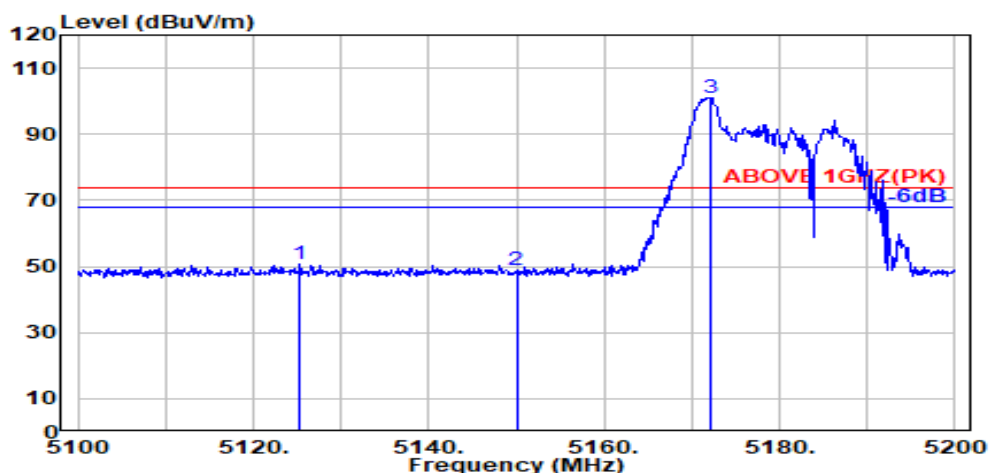

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5125.300	33.45	8.35	39.19	47.98	50.59	74.00	23.41	Peak
5150.000	33.50	8.37	39.19	46.23	48.92	74.00	25.08	Peak
@ 5172.100	33.63	8.40	39.19	98.11	100.95	---	---	Peak

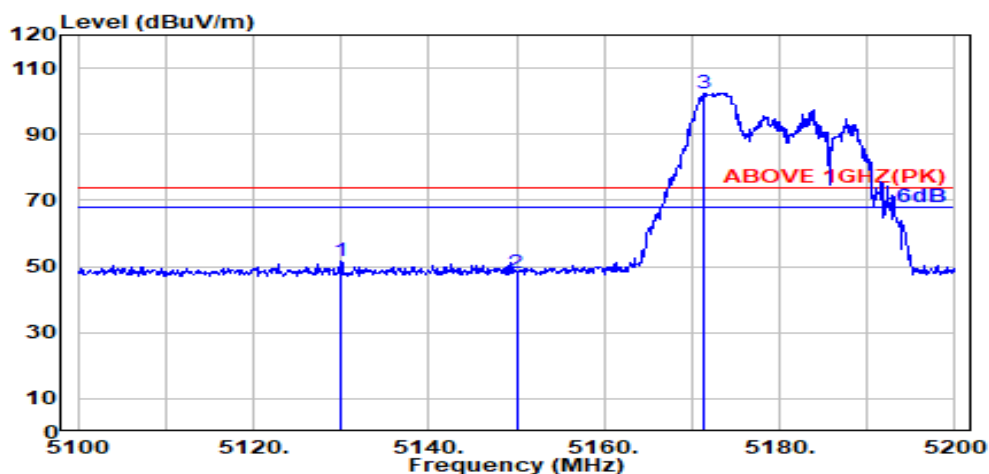

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.000	33.46	8.35	39.19	48.91	51.53	74.00	22.47	Peak
5150.000	33.50	8.37	39.19	45.35	48.04	74.00	25.96	Peak
@ 5171.400	33.63	8.40	39.19	99.70	102.54	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

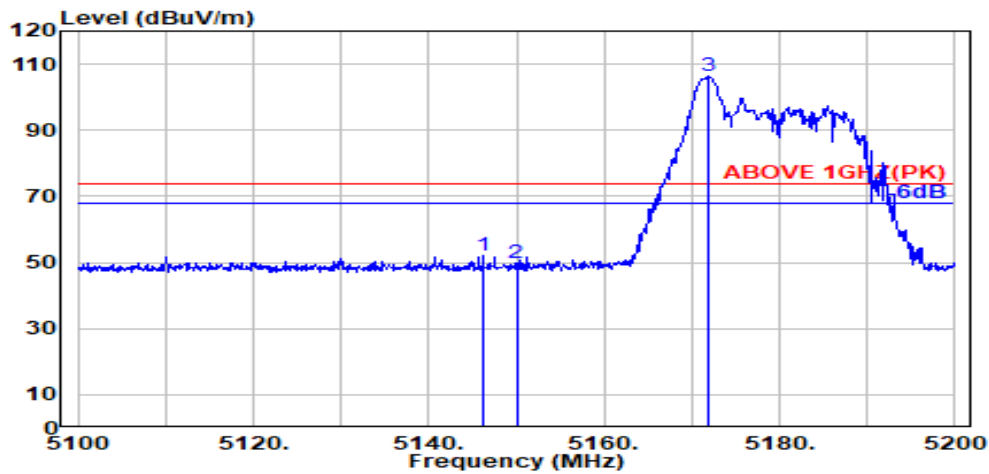

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.200	33.49	8.37	39.19	49.38	52.06	74.00	21.94	Peak
5150.000	33.50	8.37	39.19	47.19	49.87	74.00	24.13	Peak
@ 5172.000	33.63	8.40	39.19	103.39	106.23	---	---	Peak

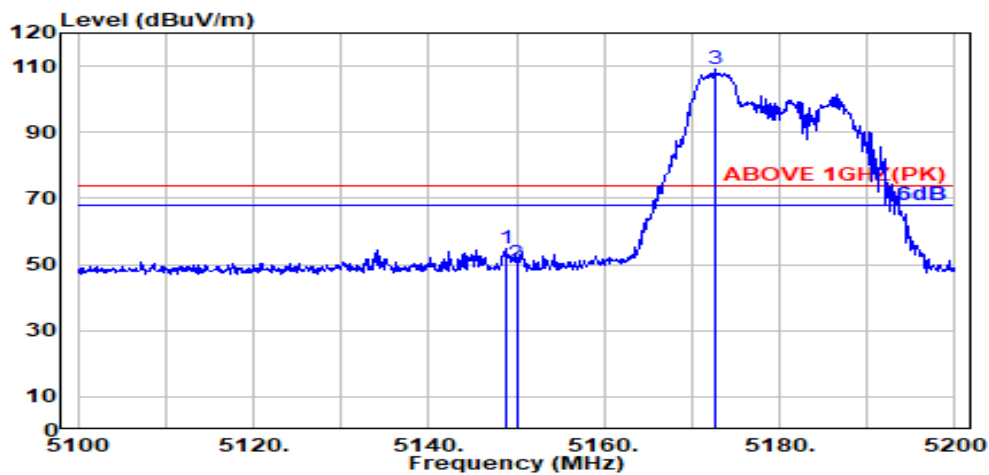

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.19	52.08	54.76	74.00	19.24	Peak
5150.000	33.50	8.37	39.19	47.56	50.25	74.00	23.75	Peak
@ 5172.600	33.64	8.40	39.19	106.49	109.33	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

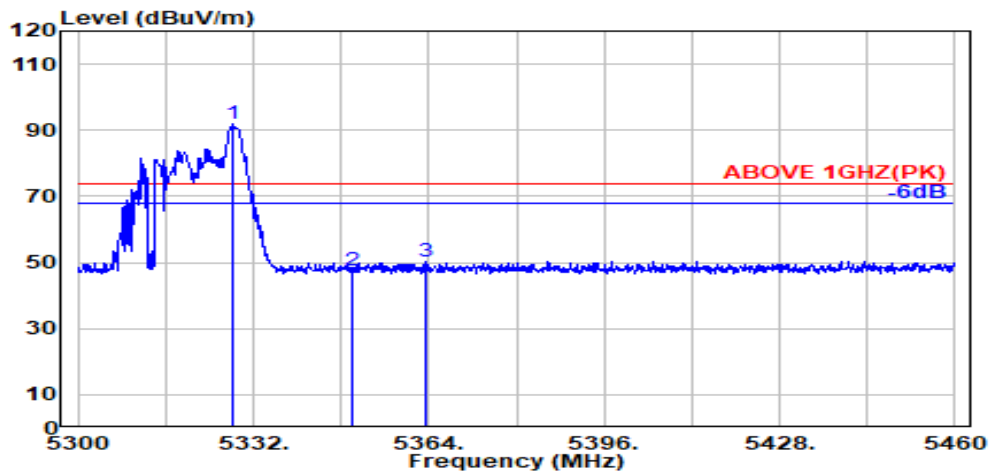

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	88.70	91.83	---	---	Peak
5350.000	33.70	8.57	39.17	44.33	47.43	74.00	26.57	Peak
5363.300	33.75	8.59	39.17	47.16	50.33	74.00	23.67	Peak

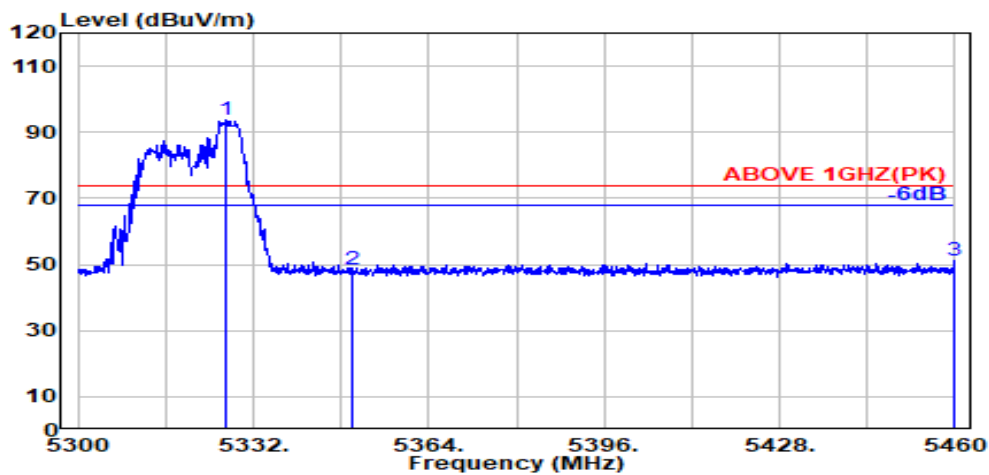

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.17	90.56	93.68	---	---	Peak
5350.000	33.70	8.57	39.17	45.37	48.48	74.00	25.52	Peak
5459.900	34.02	8.68	39.15	47.47	51.02	74.00	22.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

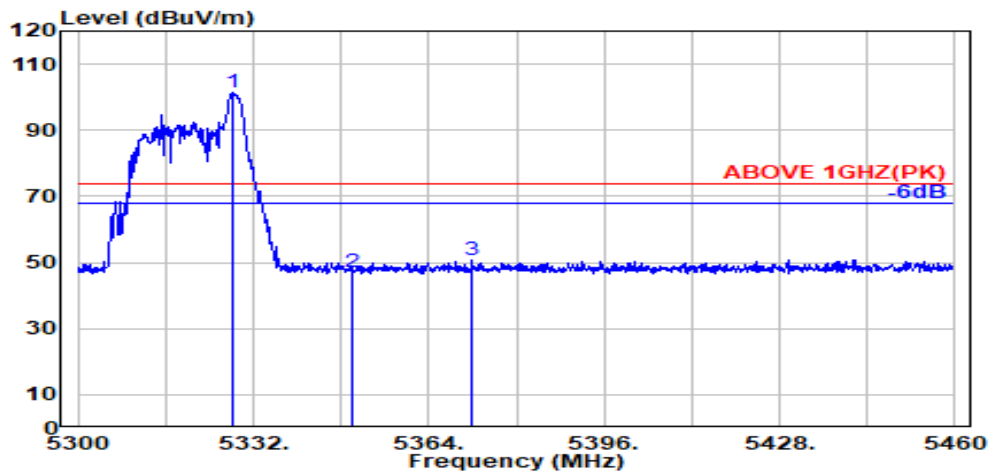

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	98.49	101.61	---	---	Peak
5350.000	33.70	8.57	39.17	44.21	47.31	74.00	26.69	Peak
5372.000	33.79	8.59	39.16	47.57	50.78	74.00	23.22	Peak

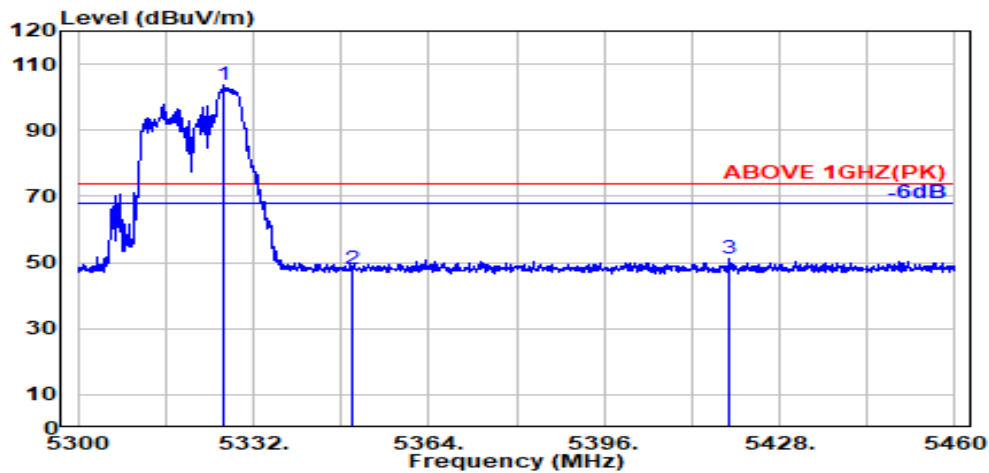

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.75	8.55	39.17	100.46	103.58	---	---	Peak
5350.000	33.70	8.57	39.17	44.76	47.86	74.00	26.14	Peak
5418.900	33.94	8.64	39.16	47.93	51.35	74.00	22.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

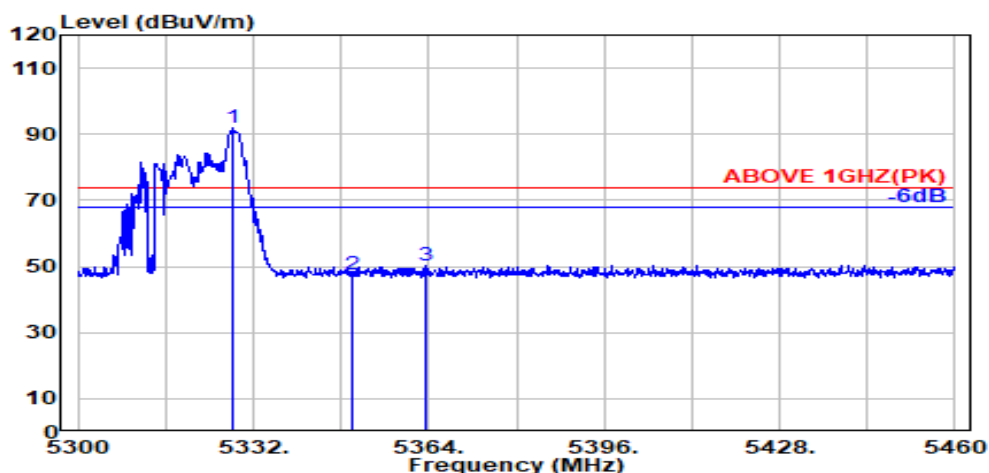

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	88.70	91.83	---	---	Peak
5350.000	33.70	8.57	39.17	44.33	47.43	74.00	26.57	Peak
5363.300	33.75	8.59	39.17	47.16	50.33	74.00	23.67	Peak

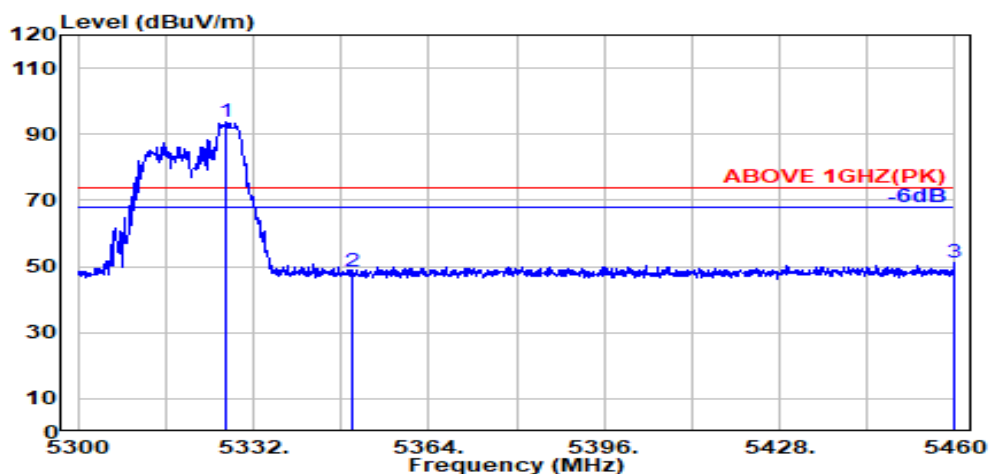

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.17	90.56	93.68	---	---	Peak
5350.000	33.70	8.57	39.17	45.37	48.48	74.00	25.52	Peak
5459.900	34.02	8.68	39.15	47.47	51.02	74.00	22.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

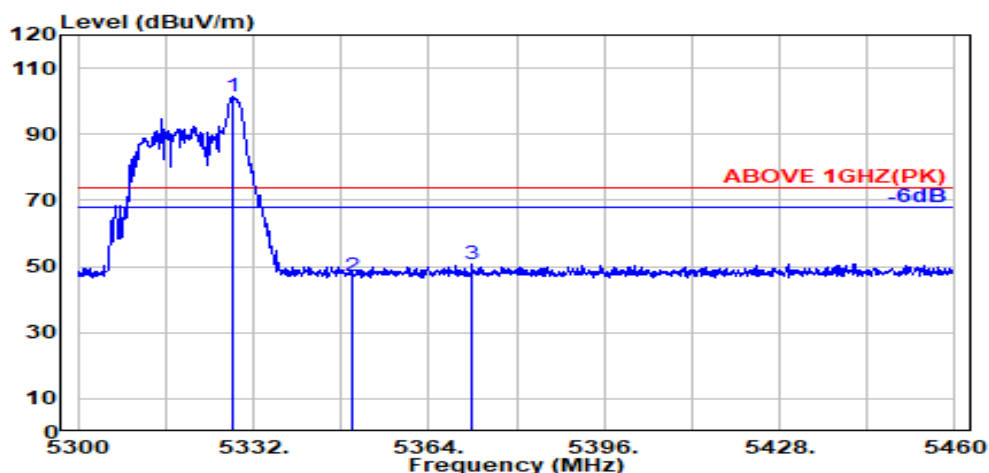

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	98.49	101.61	---	---	Peak
5350.000	33.70	8.57	39.17	44.21	47.31	74.00	26.69	Peak
5372.000	33.79	8.59	39.16	47.57	50.78	74.00	23.22	Peak

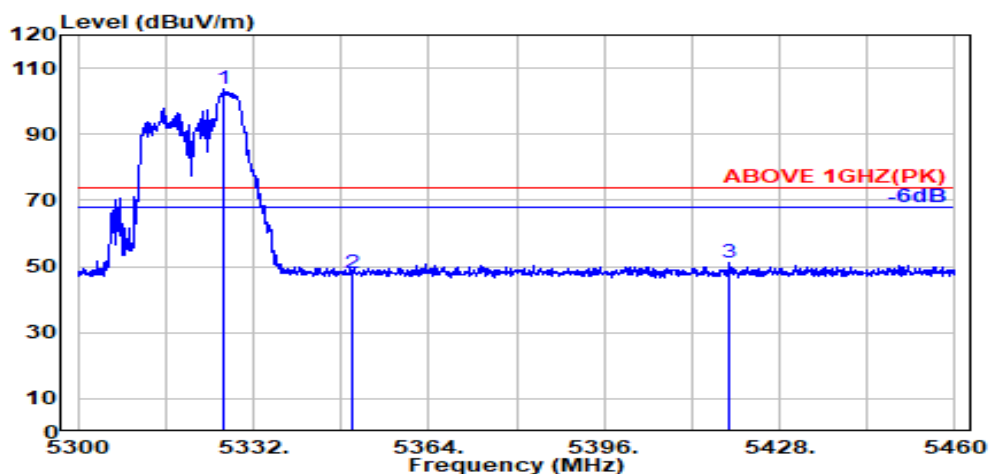

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.75	8.55	39.17	100.46	103.58	---	---	Peak
5350.000	33.70	8.57	39.17	44.76	47.86	74.00	26.14	Peak
5418.900	33.94	8.64	39.16	47.93	51.35	74.00	22.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

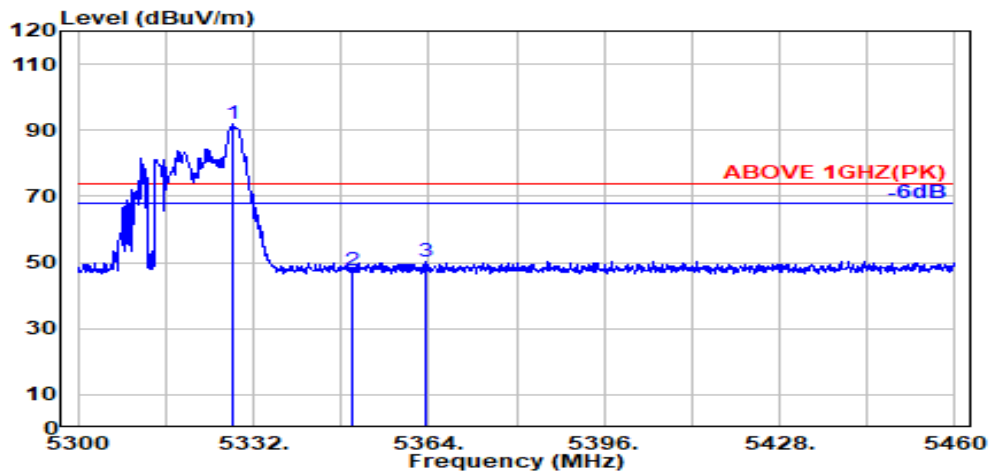

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	88.70	91.83	---	---	Peak
5350.000	33.70	8.57	39.17	44.33	47.43	74.00	26.57	Peak
5363.300	33.75	8.59	39.17	47.16	50.33	74.00	23.67	Peak

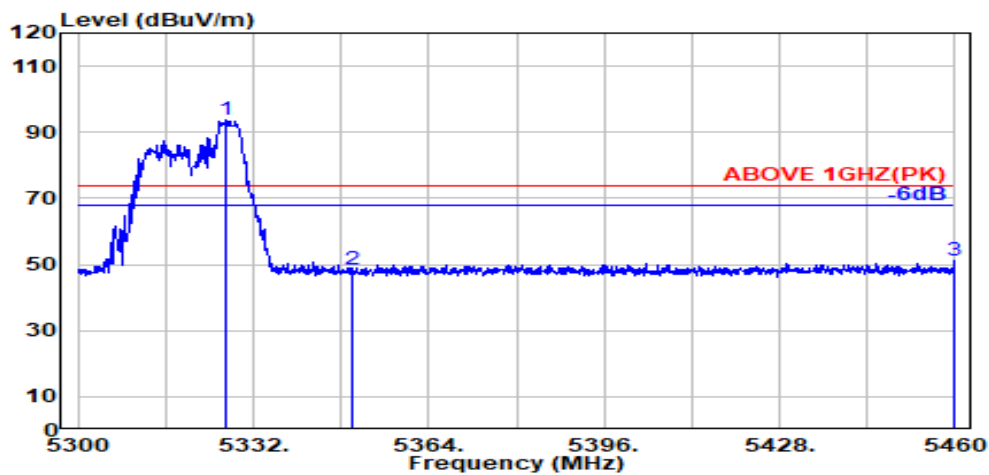

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.75	8.55	39.17	90.56	93.68	---	---	Peak
5350.000	33.70	8.57	39.17	45.37	48.48	74.00	25.52	Peak
5459.900	34.02	8.68	39.15	47.47	51.02	74.00	22.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

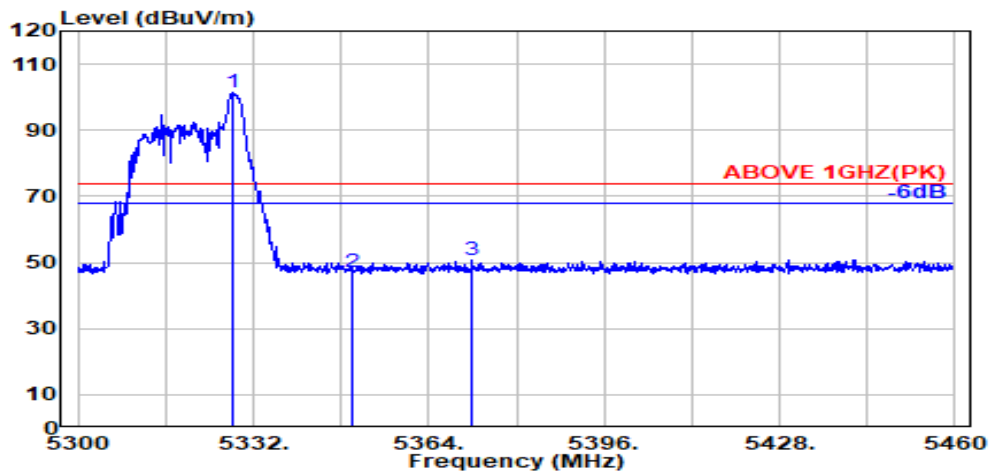

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	98.49	101.61	---	---	Peak
5350.000	33.70	8.57	39.17	44.21	47.31	74.00	26.69	Peak
5372.000	33.79	8.59	39.16	47.57	50.78	74.00	23.22	Peak

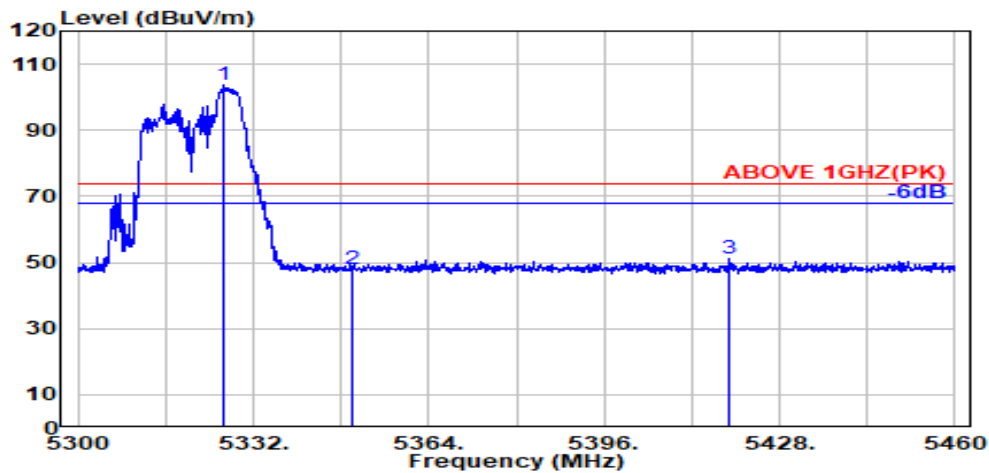

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.600	33.75	8.55	39.17	100.46	103.58	---	---	Peak
5350.000	33.70	8.57	39.17	44.76	47.86	74.00	26.14	Peak
5418.900	33.94	8.64	39.16	47.93	51.35	74.00	22.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

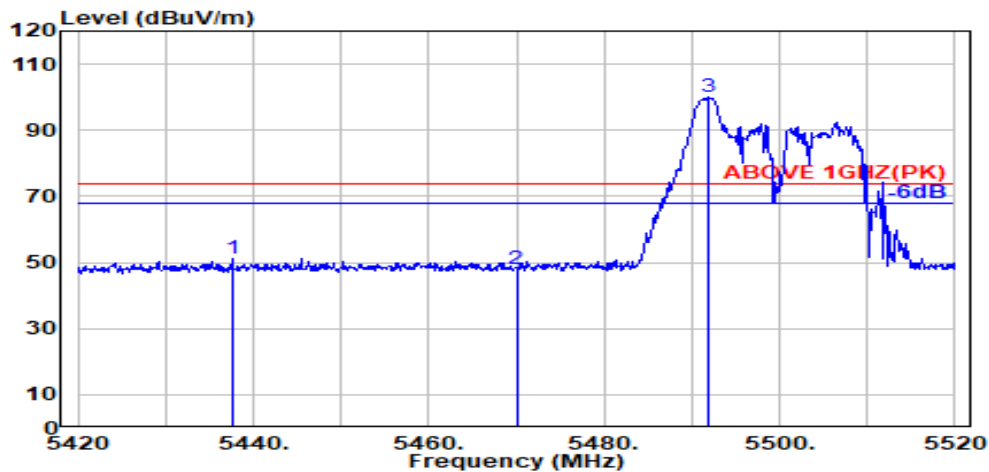

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.600	33.98	8.66	39.16	47.60	51.08	74.00	22.92	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5492.000	34.08	8.71	39.15	96.23	99.87	---	---	Peak

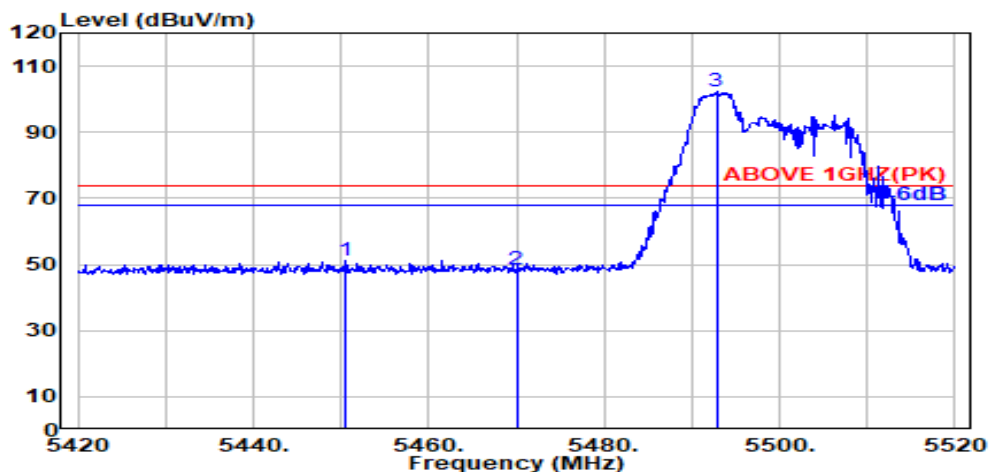

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.500	34.00	8.67	39.16	47.54	51.06	74.00	22.94	Peak
5470.000	34.04	8.69	39.15	45.02	48.60	74.00	25.40	Peak
@ 5492.800	34.09	8.71	39.15	98.53	102.18	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

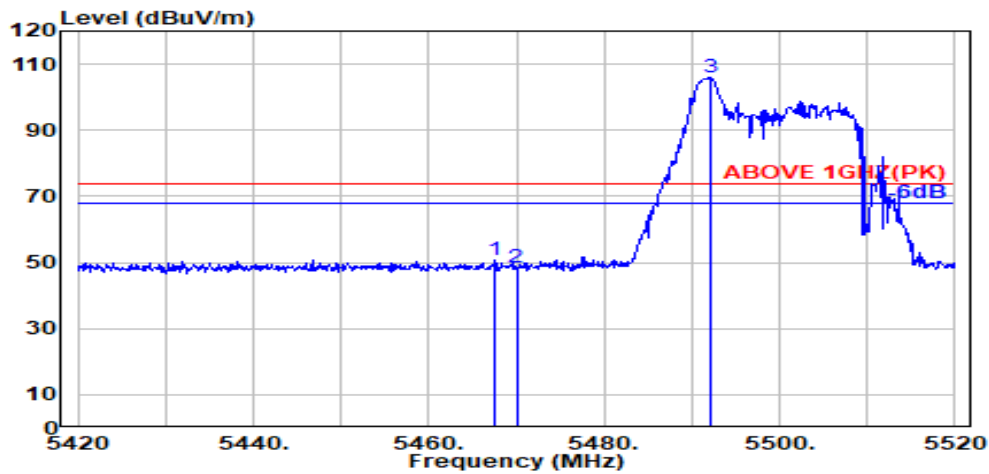

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	47.30	50.86	74.00	23.14	Peak
5470.000	34.04	8.69	39.15	44.90	48.48	74.00	25.52	Peak
@ 5492.100	34.08	8.71	39.15	102.43	106.07	---	---	Peak

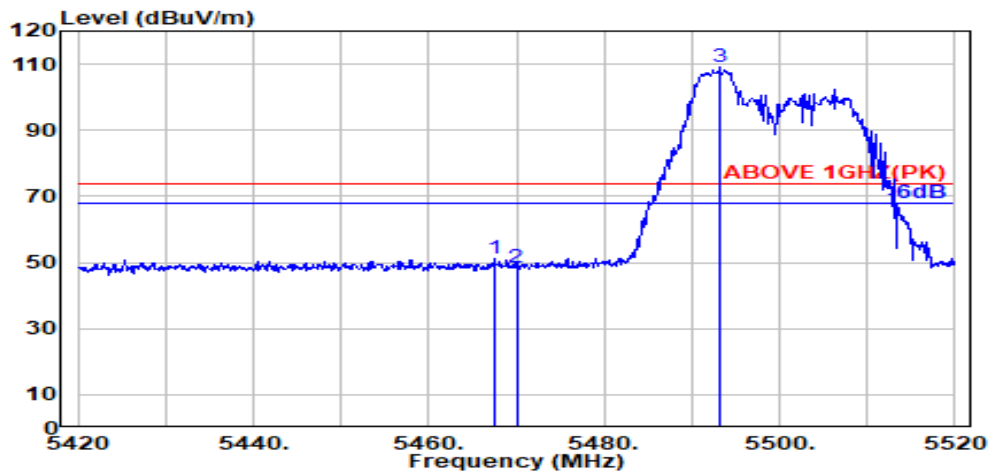

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	47.43	51.00	74.00	23.00	Peak
5470.000	34.04	8.69	39.15	44.66	48.23	74.00	25.77	Peak
@ 5493.200	34.09	8.71	39.15	105.36	109.01	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

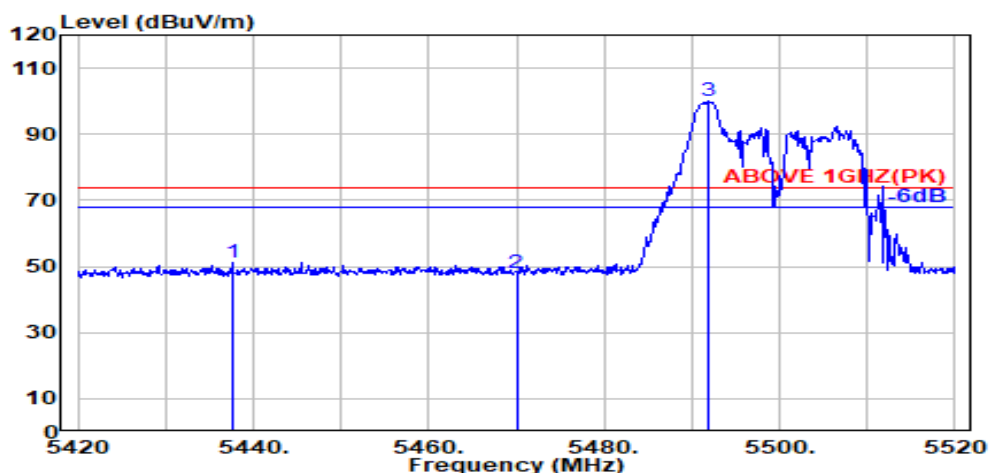

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.600	33.98	8.66	39.16	47.60	51.08	74.00	22.92	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5492.000	34.08	8.71	39.15	96.23	99.87	---	---	Peak

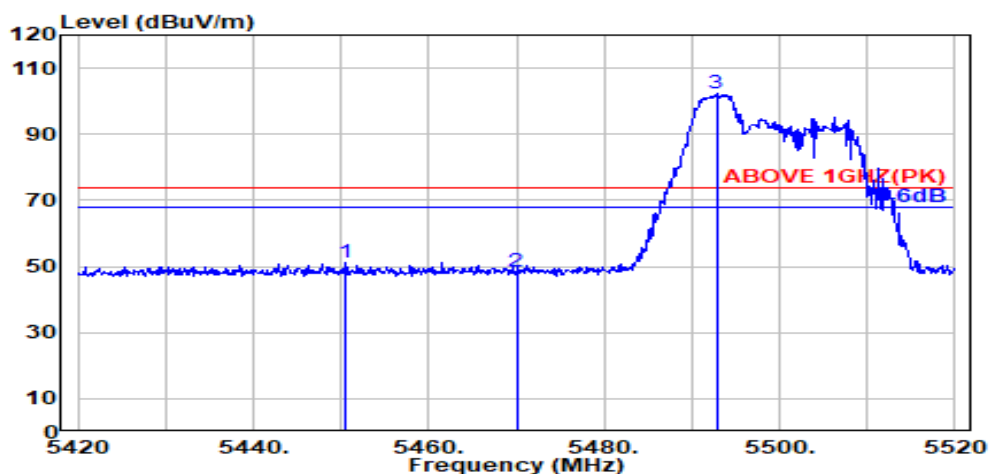

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.500	34.00	8.67	39.16	47.54	51.06	74.00	22.94	Peak
5470.000	34.04	8.69	39.15	45.02	48.60	74.00	25.40	Peak
@ 5492.800	34.09	8.71	39.15	98.53	102.18	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

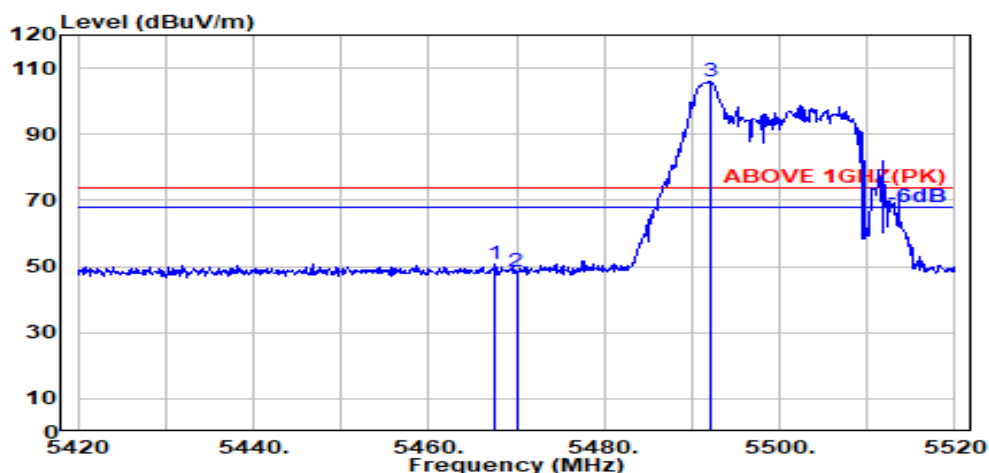

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	47.30	50.86	74.00	23.14	Peak
5470.000	34.04	8.69	39.15	44.90	48.48	74.00	25.52	Peak
@ 5492.100	34.08	8.71	39.15	102.43	106.07	---	---	Peak

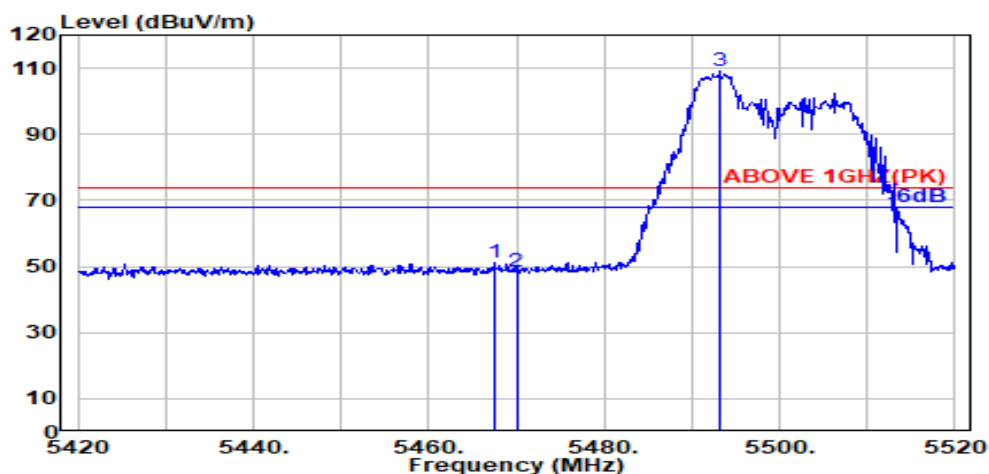

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	47.43	51.00	74.00	23.00	Peak
5470.000	34.04	8.69	39.15	44.66	48.23	74.00	25.77	Peak
@ 5493.200	34.09	8.71	39.15	105.36	109.01	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

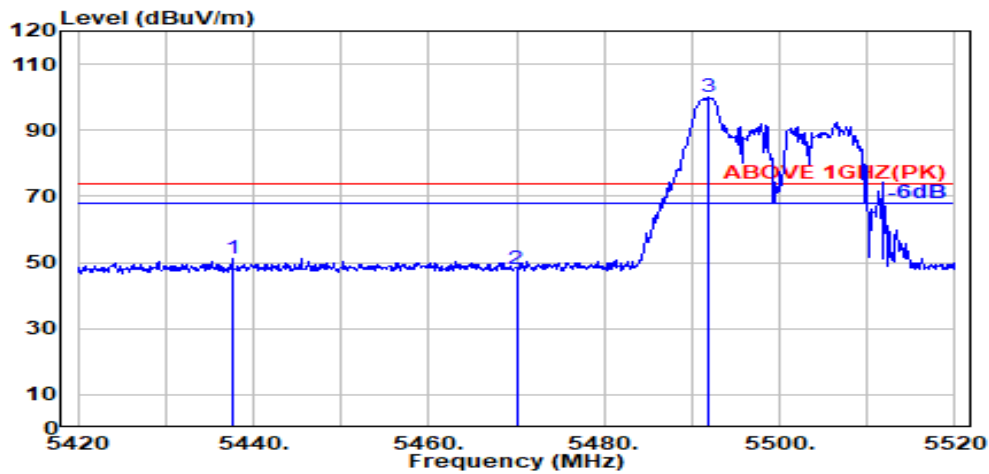

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.600	33.98	8.66	39.16	47.60	51.08	74.00	22.92	Peak
5470.000	34.04	8.69	39.15	44.38	47.95	74.00	26.05	Peak
@ 5492.000	34.08	8.71	39.15	96.23	99.87	---	---	Peak

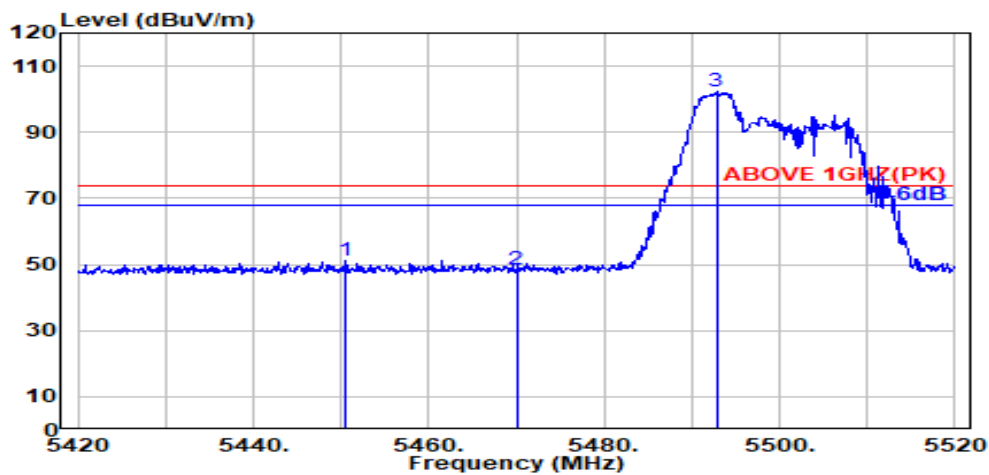

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.500	34.00	8.67	39.16	47.54	51.06	74.00	22.94	Peak
5470.000	34.04	8.69	39.15	45.02	48.60	74.00	25.40	Peak
@ 5492.800	34.09	8.71	39.15	98.53	102.18	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

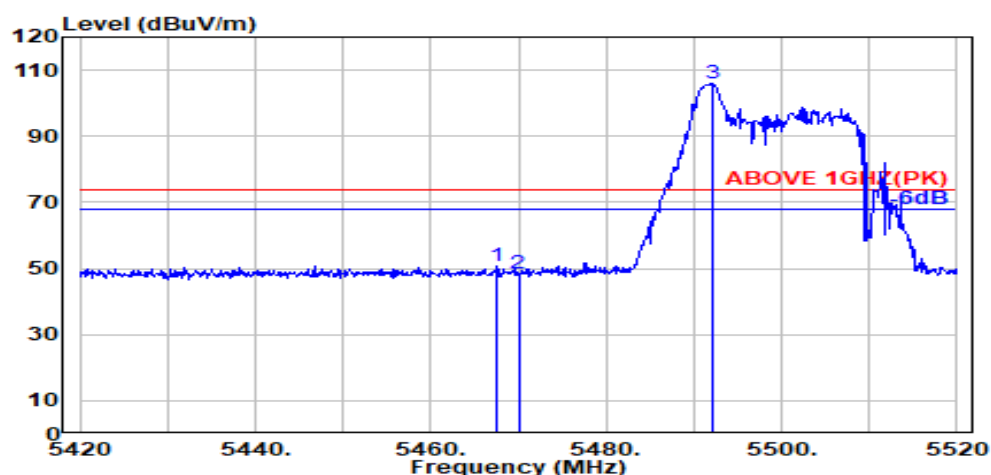

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	47.30	50.86	74.00	23.14	Peak
5470.000	34.04	8.69	39.15	44.90	48.48	74.00	25.52	Peak
@ 5492.100	34.08	8.71	39.15	102.43	106.07	---	---	Peak

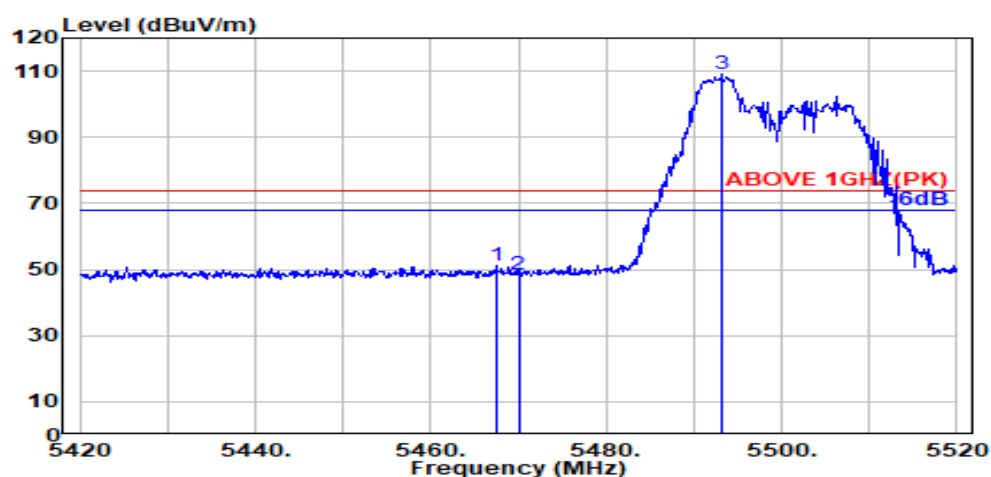

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	47.43	51.00	74.00	23.00	Peak
5470.000	34.04	8.69	39.15	44.66	48.23	74.00	25.77	Peak
@ 5493.200	34.09	8.71	39.15	105.36	109.01	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

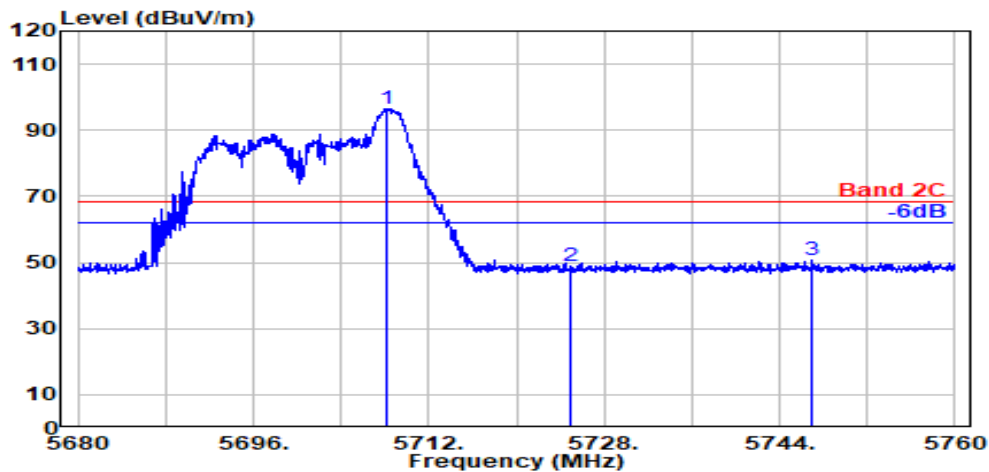

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.19	93.12	96.44	---	---	Peak
5725.000	33.60	8.93	39.20	45.70	49.03	68.20	19.17	Peak
5746.900	33.60	8.95	39.20	47.23	50.57	68.20	17.63	Peak

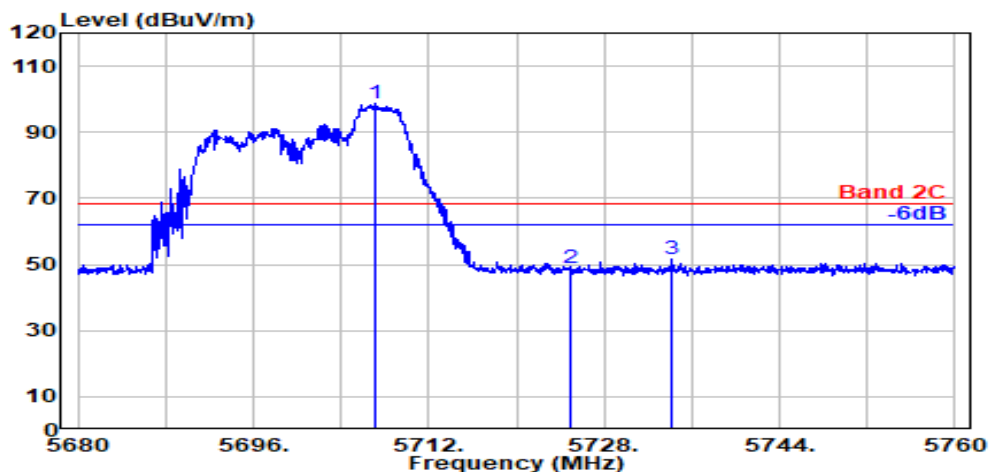

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.150	33.60	8.91	39.19	95.19	98.50	---	---	Peak
5725.000	33.60	8.93	39.20	45.69	49.02	68.20	19.18	Peak
5734.250	33.60	8.93	39.20	48.33	51.67	68.20	16.53	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

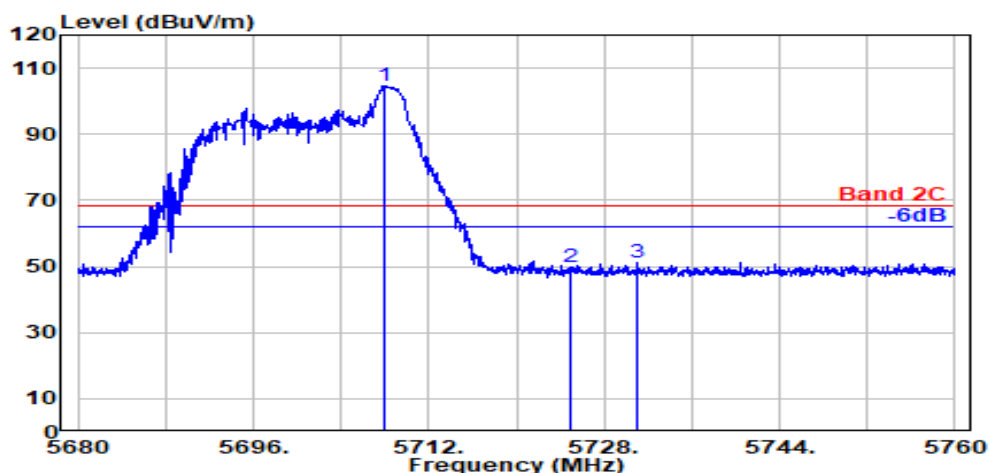

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.050	33.60	8.91	39.19	101.38	104.70	---	---	Peak
5725.000	33.60	8.93	39.20	46.43	49.76	68.20	18.44	Peak
5731.050	33.60	8.93	39.20	47.66	50.99	68.20	17.21	Peak

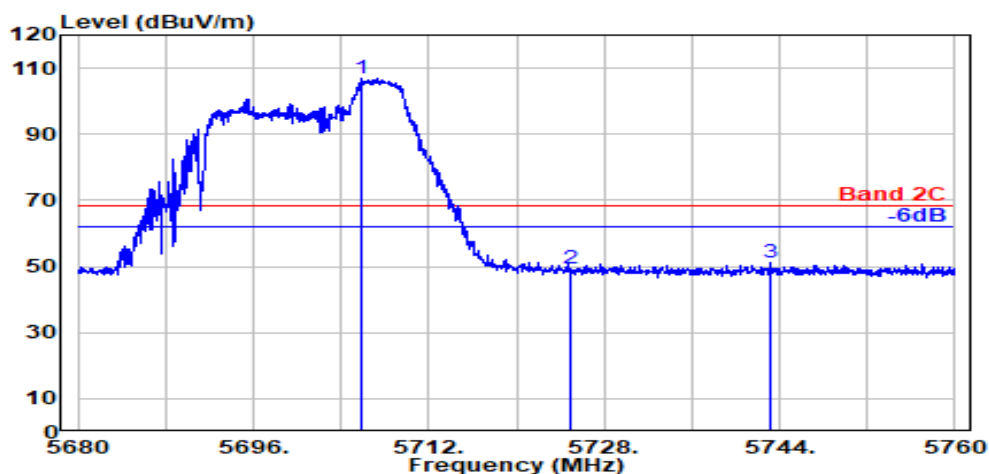


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.950	33.60	8.91	39.19	103.40	106.71	---	---	Peak
5725.000	33.60	8.93	39.20	46.10	49.43	68.20	18.77	Peak
5743.150	33.60	8.94	39.20	47.90	51.25	68.20	16.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

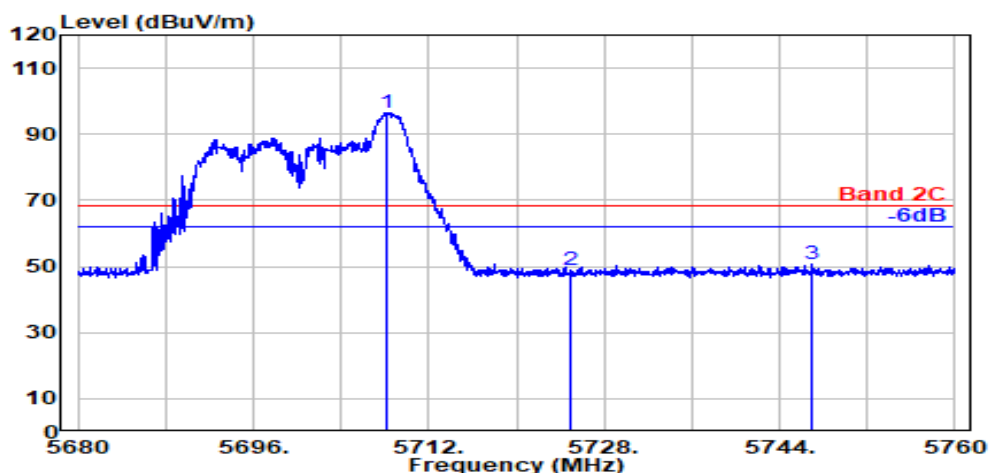

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.19	93.12	96.44	---	---	Peak
5725.000	33.60	8.93	39.20	45.70	49.03	68.20	19.17	Peak
5746.900	33.60	8.95	39.20	47.23	50.57	68.20	17.63	Peak

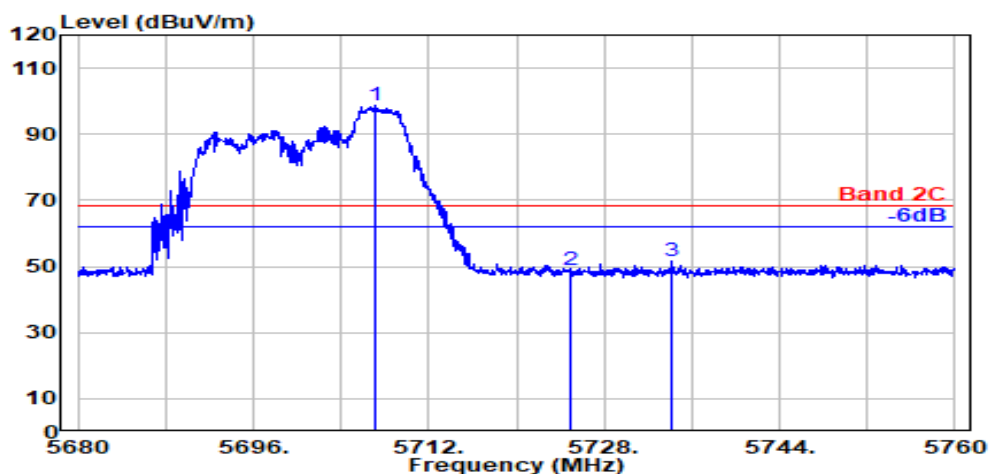


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.150	33.60	8.91	39.19	95.19	98.50	---	---	Peak
5725.000	33.60	8.93	39.20	45.69	49.02	68.20	19.18	Peak
5734.250	33.60	8.93	39.20	48.33	51.67	68.20	16.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

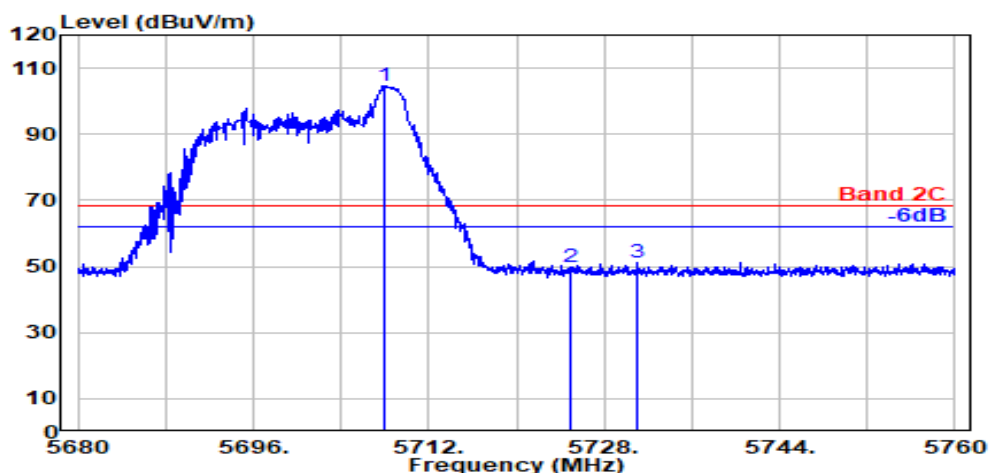

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.050	33.60	8.91	39.19	101.38	104.70	---	---	Peak
5725.000	33.60	8.93	39.20	46.43	49.76	68.20	18.44	Peak
5731.050	33.60	8.93	39.20	47.66	50.99	68.20	17.21	Peak

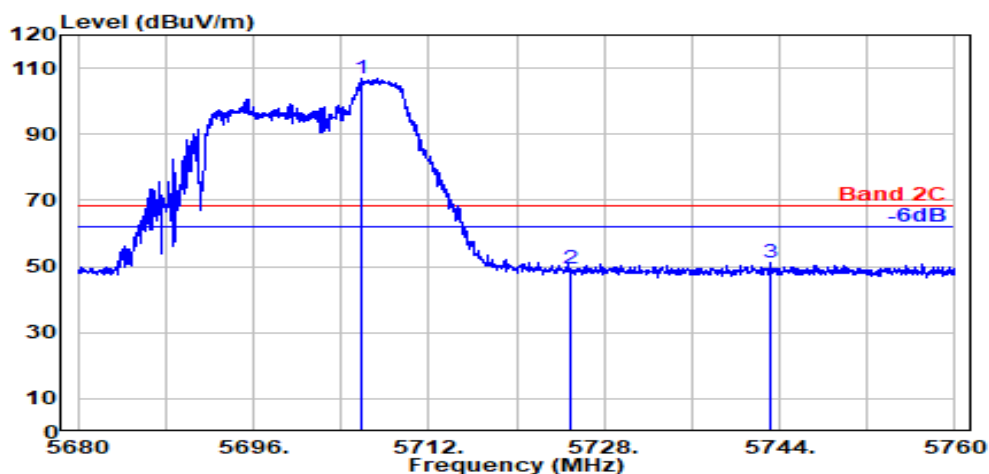


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.950	33.60	8.91	39.19	103.40	106.71	---	---	Peak
5725.000	33.60	8.93	39.20	46.10	49.43	68.20	18.77	Peak
5743.150	33.60	8.94	39.20	47.90	51.25	68.20	16.95	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

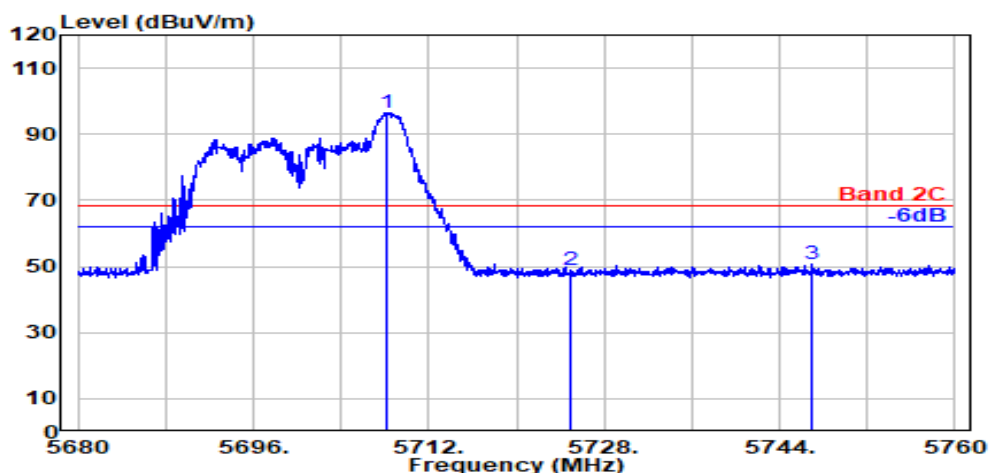

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.60	8.91	39.19	93.12	96.44	---	---	Peak
5725.000	33.60	8.93	39.20	45.70	49.03	68.20	19.17	Peak
5746.900	33.60	8.95	39.20	47.23	50.57	68.20	17.63	Peak

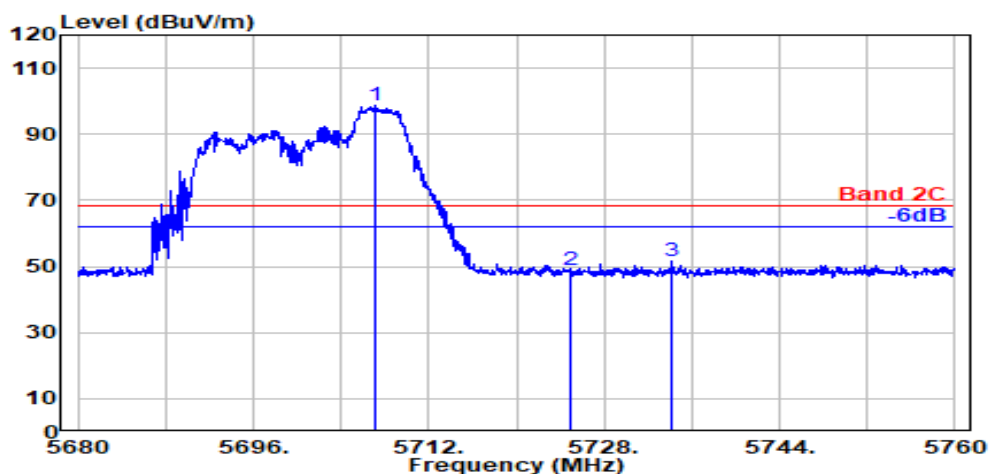


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.150	33.60	8.91	39.19	95.19	98.50	---	---	Peak
5725.000	33.60	8.93	39.20	45.69	49.02	68.20	19.18	Peak
5734.250	33.60	8.93	39.20	48.33	51.67	68.20	16.53	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

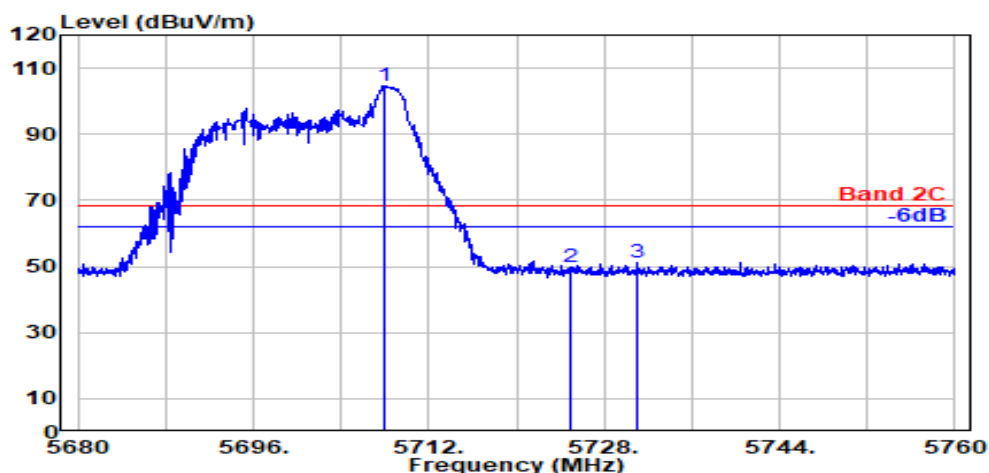

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.050	33.60	8.91	39.19	101.38	104.70	---	---	Peak
5725.000	33.60	8.93	39.20	46.43	49.76	68.20	18.44	Peak
5731.050	33.60	8.93	39.20	47.66	50.99	68.20	17.21	Peak

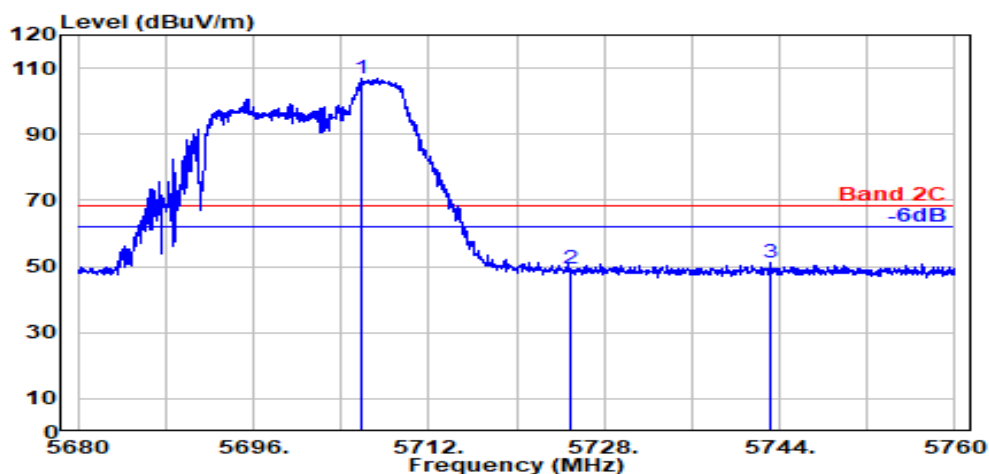

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.950	33.60	8.91	39.19	103.40	106.71	---	---	Peak
5725.000	33.60	8.93	39.20	46.10	49.43	68.20	18.77	Peak
5743.150	33.60	8.94	39.20	47.90	51.25	68.20	16.95	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

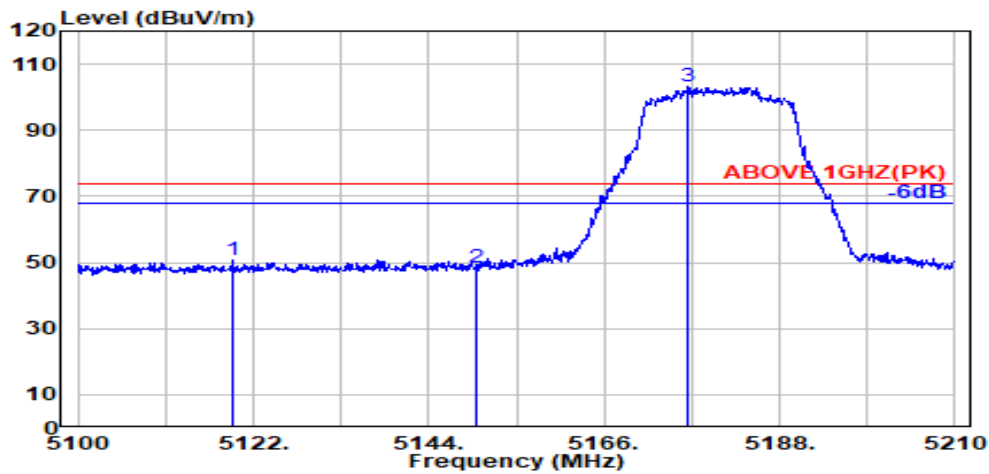

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.400	33.44	8.34	39.20	48.34	50.93	74.00	23.07	Peak
5150.000	33.50	8.37	39.19	45.81	48.49	74.00	25.51	Peak
@ 5176.500	33.66	8.40	39.19	100.15	103.02	---	---	Peak

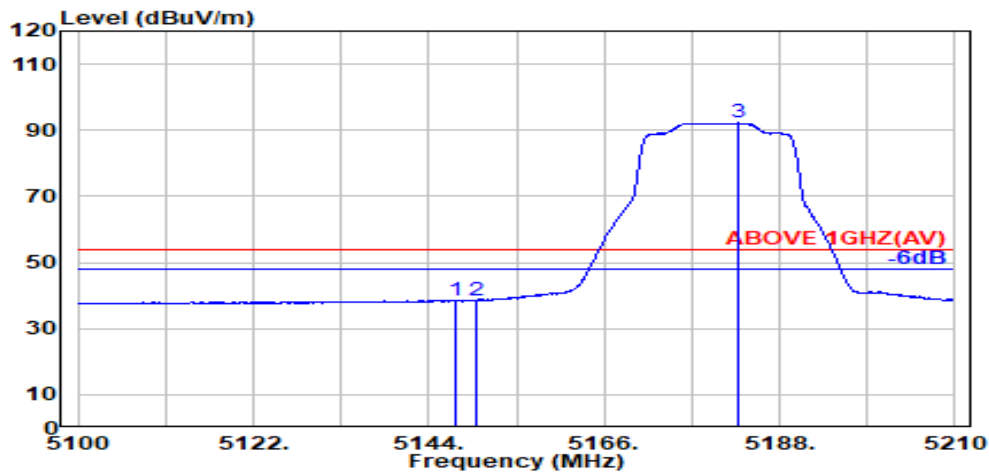

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.19	35.98	38.65	54.00	15.35	Average
5150.000	33.50	8.37	39.19	36.02	38.70	54.00	15.30	Average
@ 5182.700	33.70	8.41	39.19	89.24	92.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

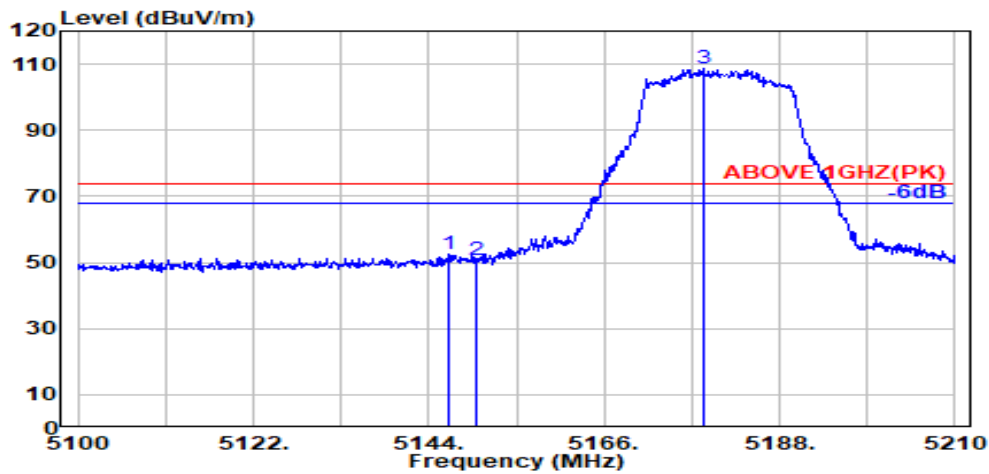

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.19	49.64	52.31	74.00	21.69	Peak
5150.000	33.50	8.37	39.19	48.13	50.82	74.00	23.18	Peak
@ 5178.500	33.67	8.40	39.19	105.63	108.52	---	---	Peak

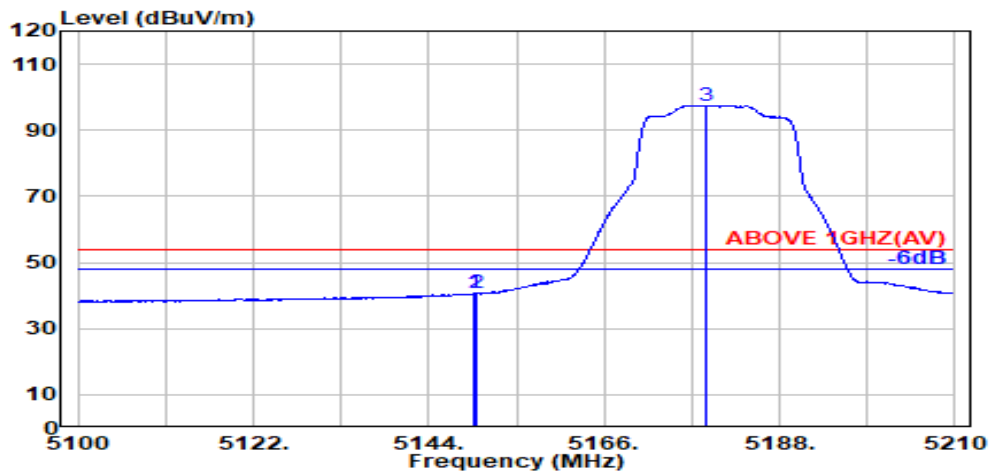

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	37.87	40.56	54.00	13.44	Average
5150.000	33.50	8.37	39.19	37.95	40.64	54.00	13.36	Average
@ 5178.900	33.67	8.40	39.19	94.66	97.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

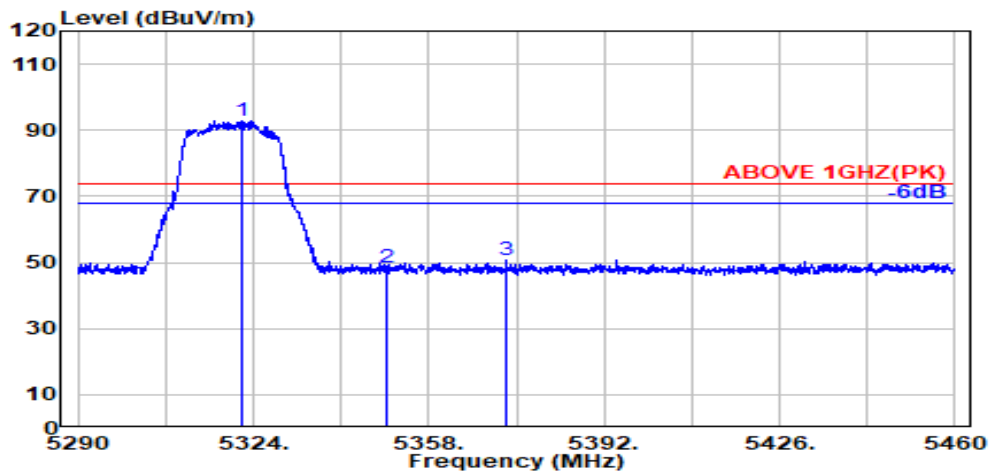

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.000	33.76	8.55	39.17	89.77	92.90	---	---	Peak
5350.000	33.70	8.57	39.17	45.40	48.51	74.00	25.49	Peak
5373.000	33.79	8.59	39.16	47.42	50.64	74.00	23.36	Peak

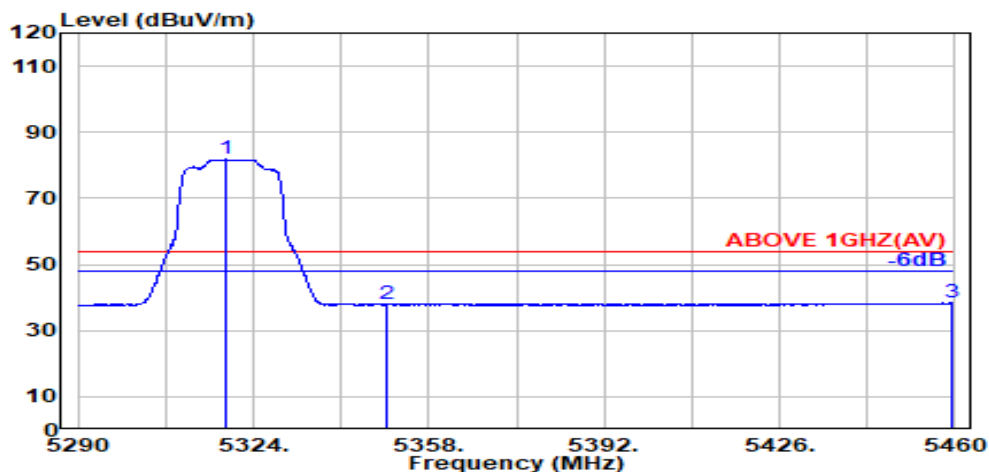


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	33.76	8.54	39.17	78.77	81.90	---	---	Average
5350.000	33.70	8.57	39.17	34.81	37.92	54.00	16.08	Average
5459.200	34.02	8.68	39.15	34.77	38.31	54.00	15.69	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

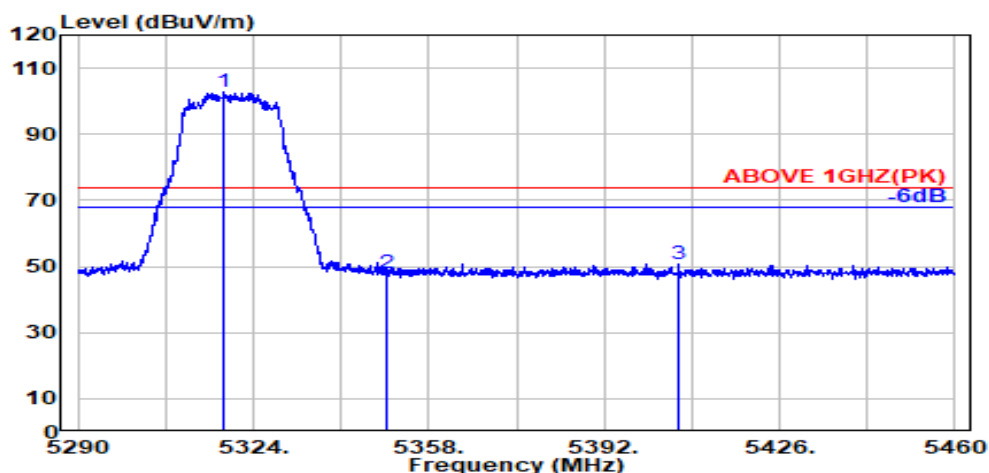

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.300	33.76	8.54	39.17	99.62	102.75	---	---	Peak
5350.000	33.70	8.57	39.17	44.96	48.07	74.00	25.93	Peak
5406.600	33.91	8.63	39.16	47.38	50.76	74.00	23.24	Peak

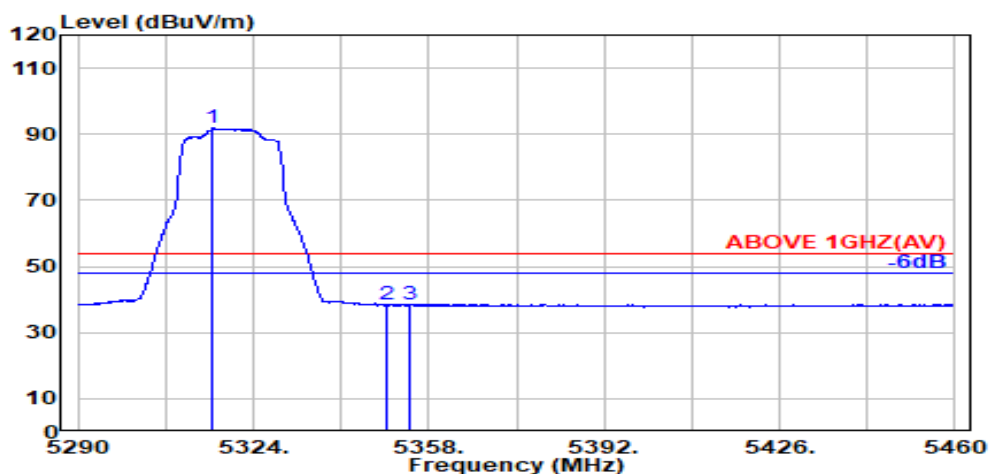

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.200	33.77	8.54	39.17	88.63	91.76	---	---	Average
5350.000	33.70	8.57	39.17	35.16	38.27	54.00	15.73	Average
5354.200	33.72	8.58	39.17	35.56	38.69	54.00	15.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

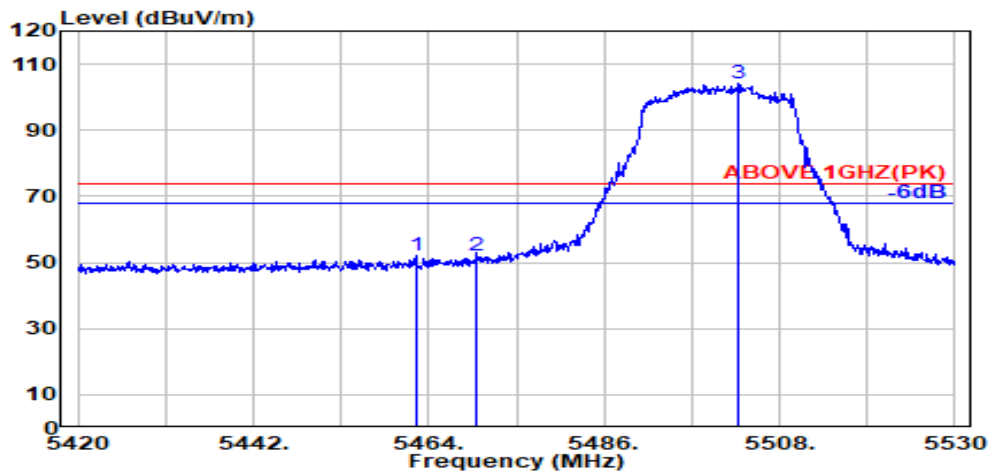

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.400	34.02	8.68	39.15	48.51	52.06	74.00	21.94	Peak
5470.000	34.04	8.69	39.15	48.44	52.01	74.00	21.99	Peak
@ 5502.900	34.09	8.72	39.15	100.66	104.32	---	---	Peak

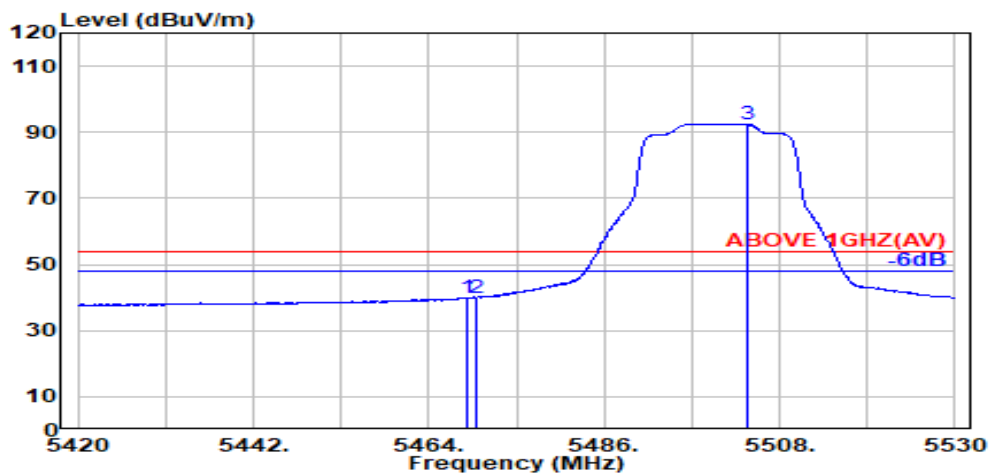


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	36.42	39.99	54.00	14.01	Average
5470.000	34.04	8.69	39.15	36.46	40.04	54.00	13.96	Average
@ 5503.900	34.09	8.72	39.15	88.92	92.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

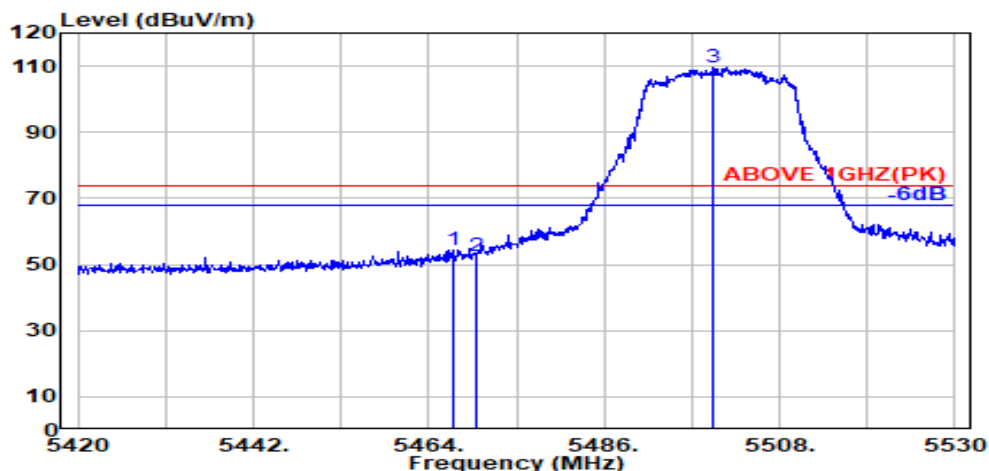

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.200	34.03	8.69	39.15	50.92	54.48	74.00	19.52	Peak
5470.000	34.04	8.69	39.15	48.83	52.41	74.00	21.59	Peak
@ 5499.700	34.10	8.72	39.15	106.02	109.68	---	---	Peak

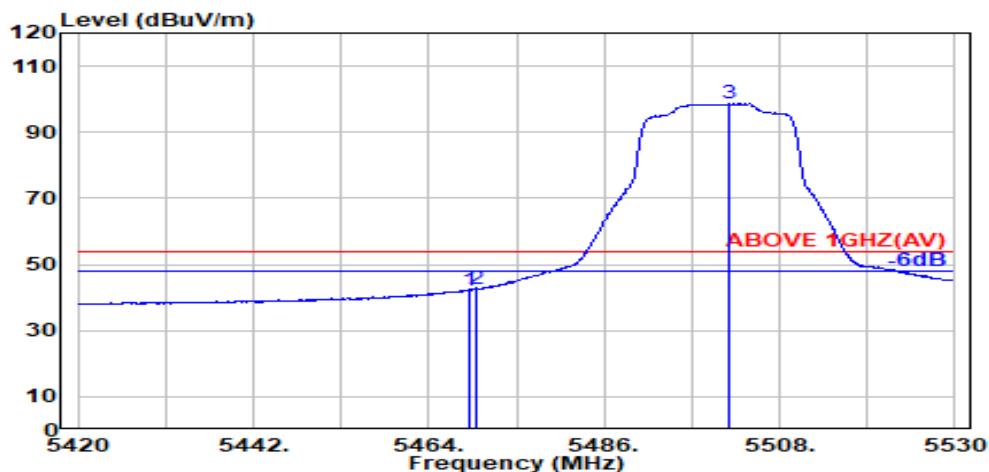

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	38.66	42.24	54.00	11.76	Average
5470.000	34.04	8.69	39.15	38.86	42.43	54.00	11.57	Average
@ 5501.600	34.10	8.72	39.15	94.92	98.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

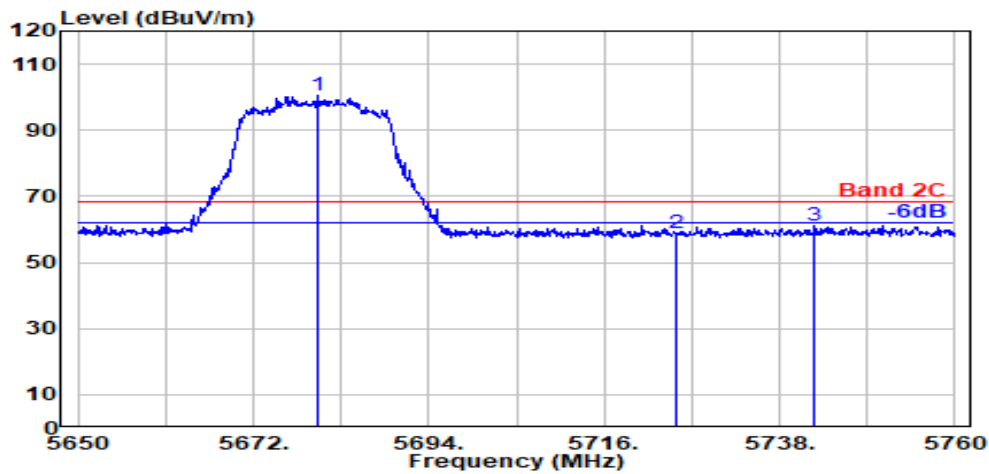

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.100	33.68	8.88	39.19	97.30	100.68	---	---	Peak
5725.000	33.60	8.93	39.20	55.39	58.72	68.20	9.48	Peak
5742.400	33.60	8.94	39.20	57.68	61.02	68.20	7.18	Peak

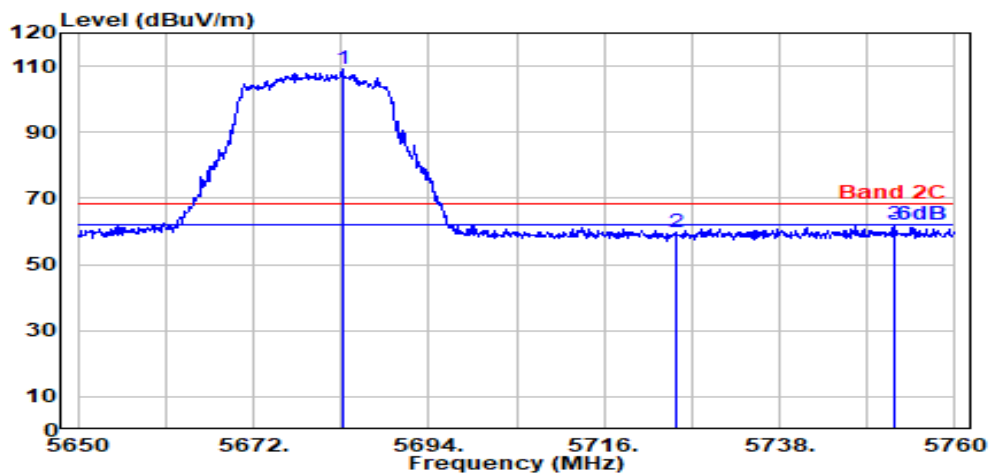

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.200	33.67	8.89	39.19	105.71	109.08	---	---	Peak
5725.000	33.60	8.93	39.20	56.25	59.58	68.20	8.62	Peak
5752.500	33.61	8.95	39.20	58.75	62.11	68.20	6.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

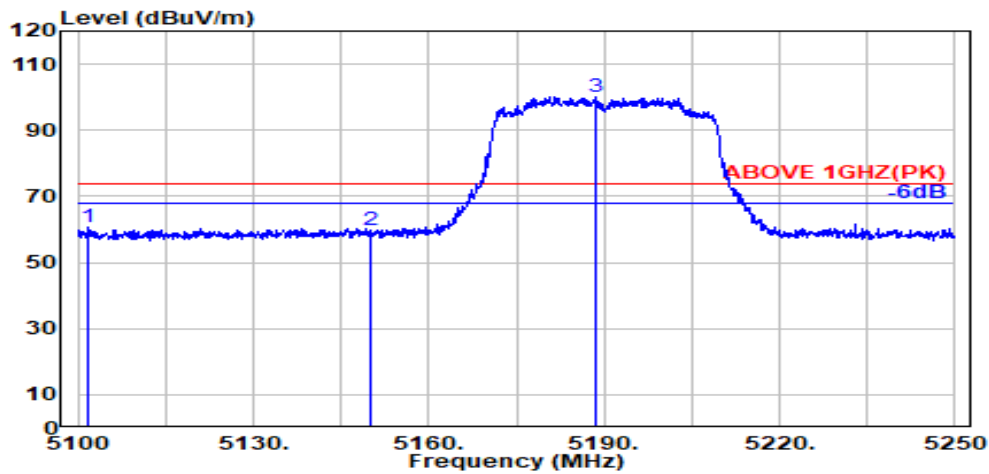

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.800	33.40	8.33	39.20	58.03	60.57	74.00	13.44	Peak
5150.000	33.50	8.37	39.19	57.13	59.81	74.00	14.19	Peak
@ 5188.700	33.73	8.41	39.19	97.12	100.07	---	---	Peak

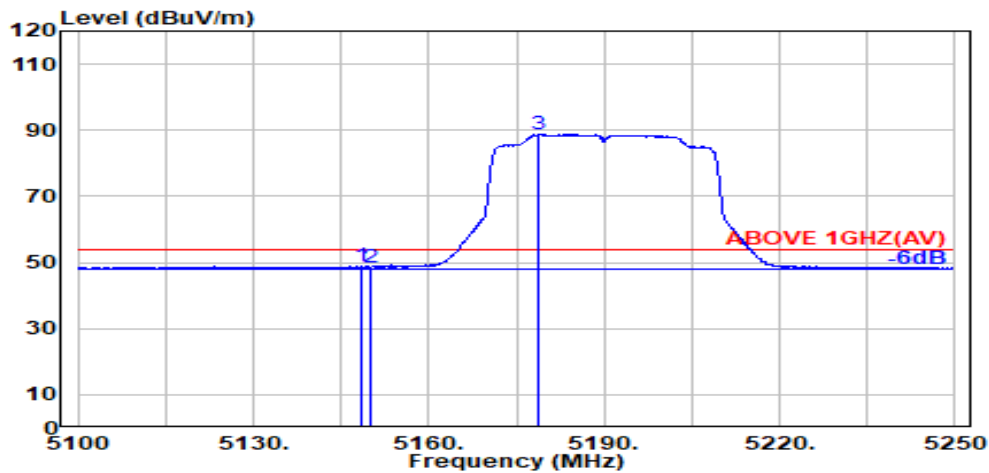


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.50	8.37	39.19	46.13	48.81	54.00	5.19	Average
5150.000	33.50	8.37	39.19	45.89	48.58	54.00	5.42	Average
@ 5178.900	33.67	8.40	39.19	85.88	88.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

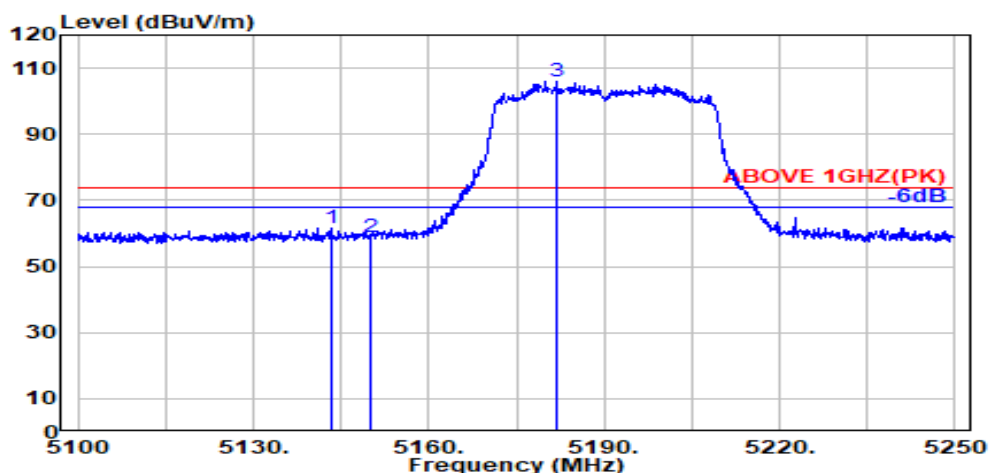

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.200	33.49	8.37	39.19	59.12	61.78	74.00	12.22	Peak
5150.000	33.50	8.37	39.19	56.28	58.96	74.00	15.04	Peak
@ 5181.900	33.69	8.41	39.19	103.05	105.96	---	---	Peak

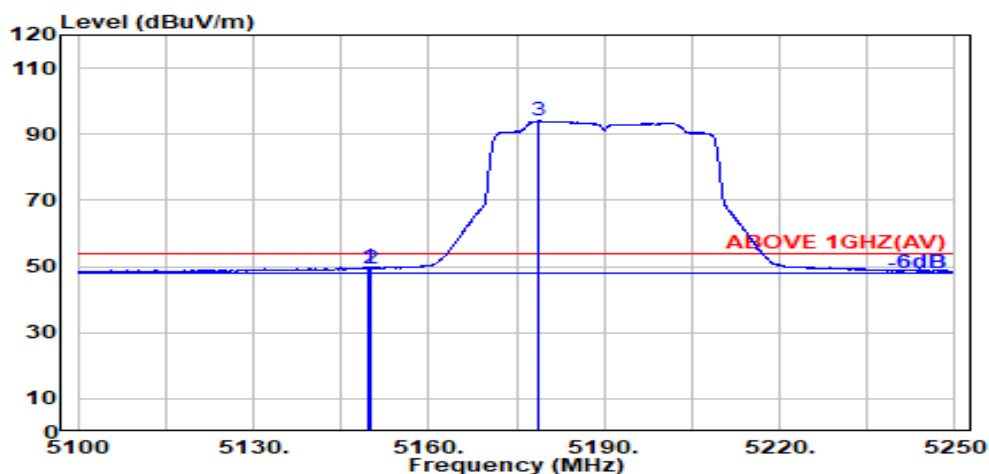

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	46.97	49.66	54.00	4.34	Average
5150.000	33.50	8.37	39.19	46.88	49.56	54.00	4.44	Average
@ 5178.900	33.67	8.40	39.19	91.16	94.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

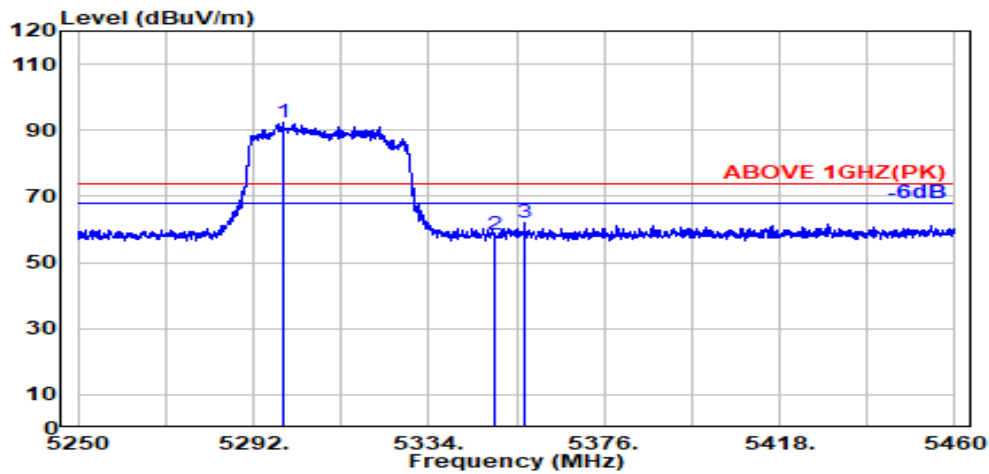

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.300	33.80	8.52	39.17	89.30	92.44	---	---	Peak
5350.000	33.70	8.57	39.17	55.13	58.23	74.00	15.77	Peak
5356.900	33.73	8.58	39.17	58.75	61.89	74.00	12.11	Peak

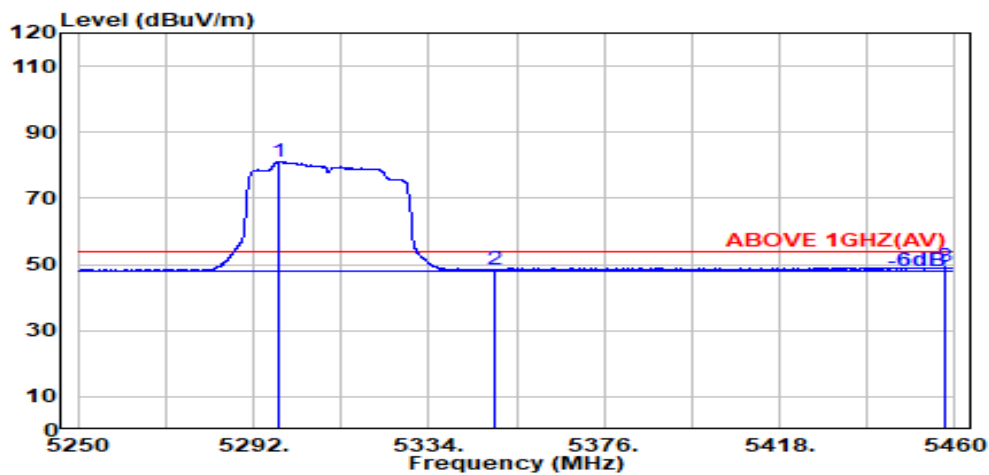

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.200	33.80	8.52	39.17	77.91	81.05	---	---	Average
5350.000	33.70	8.57	39.17	45.35	48.45	54.00	5.55	Average
5457.600	34.02	8.68	39.15	45.63	49.16	54.00	4.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

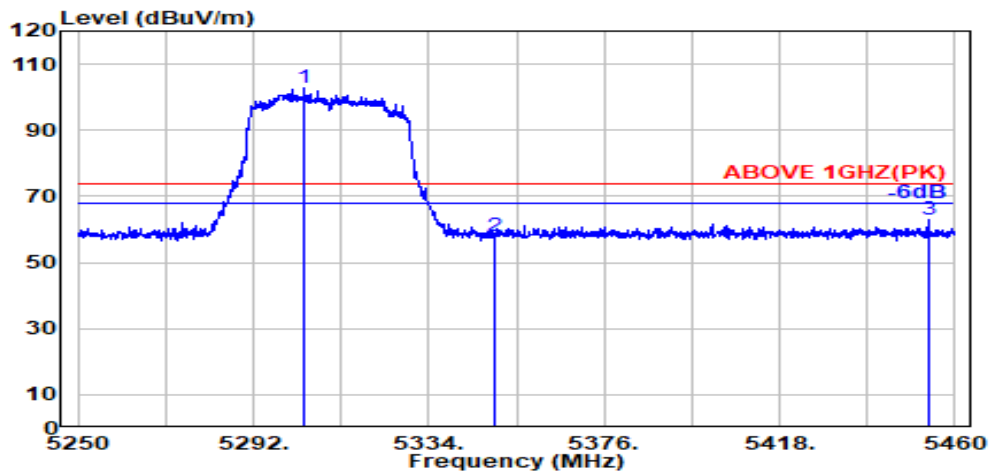

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.000	33.79	8.53	39.17	99.86	103.01	---	---	Peak
5350.000	33.70	8.57	39.17	54.93	58.03	74.00	15.97	Peak
5453.500	34.01	8.67	39.16	59.22	62.74	74.00	11.26	Peak

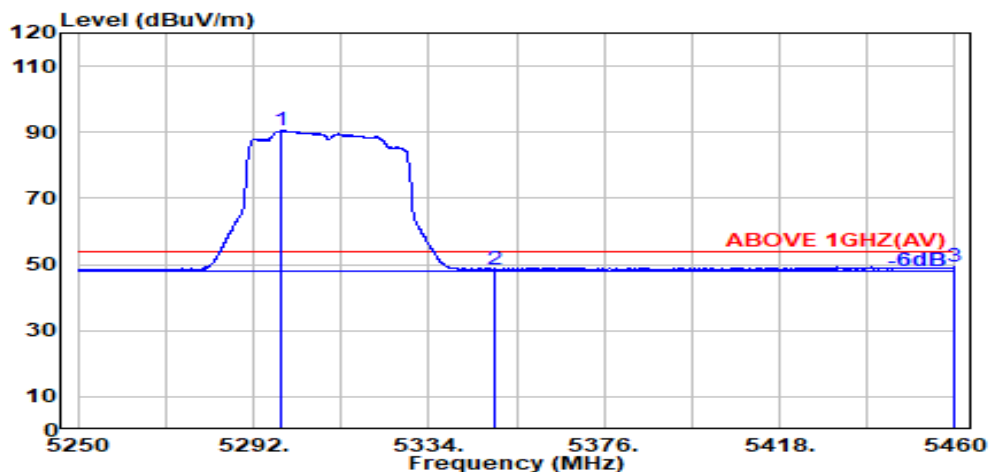

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.700	33.80	8.52	39.17	87.37	90.52	---	---	Average
5350.000	33.70	8.57	39.17	45.40	48.51	54.00	5.49	Average
5459.700	34.02	8.68	39.15	45.68	49.22	54.00	4.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

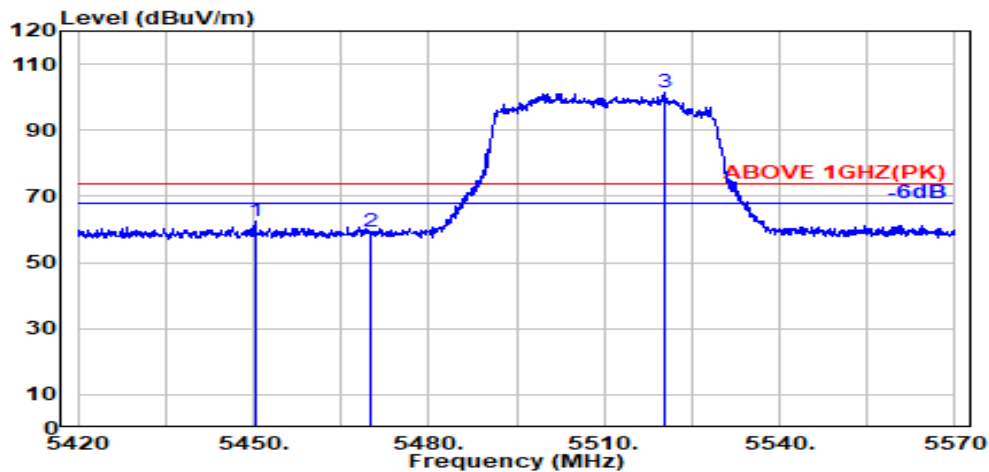

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.300	34.00	8.67	39.16	58.88	62.39	74.00	11.61	Peak
5470.000	34.04	8.69	39.15	55.82	59.40	74.00	14.60	Peak
@ 5520.200	34.06	8.74	39.15	97.71	101.35	---	---	Peak

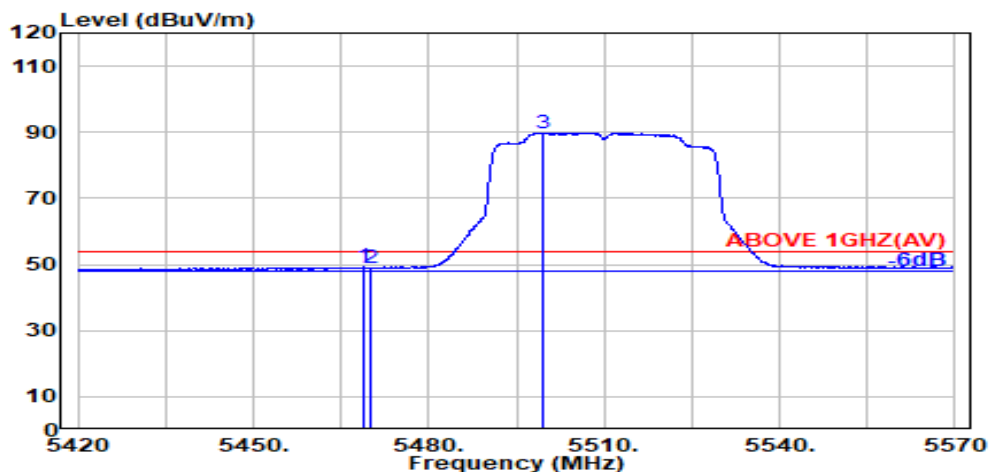

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	45.61	49.18	54.00	4.82	Average
5470.000	34.04	8.69	39.15	45.26	48.84	54.00	5.16	Average
@ 5499.600	34.10	8.72	39.15	86.03	89.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

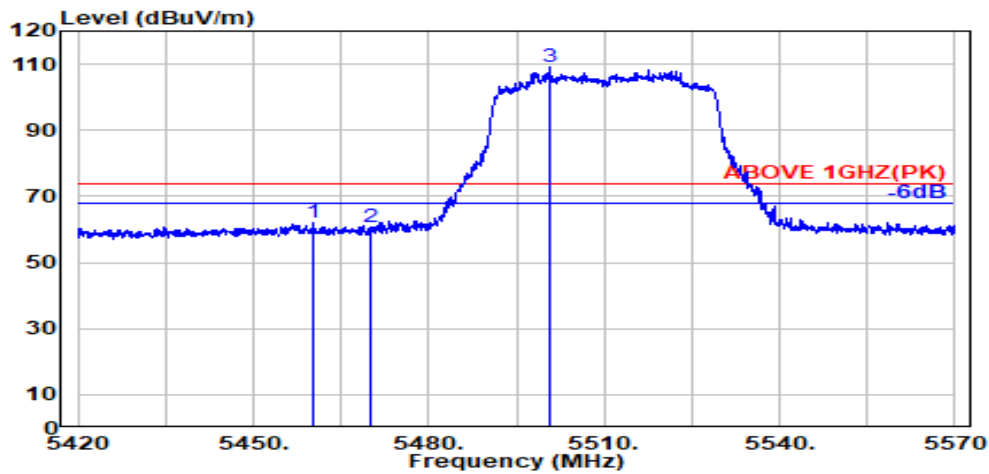

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.02	8.68	39.15	58.27	61.82	74.00	12.18	Peak
5470.000	34.04	8.69	39.15	57.15	60.72	74.00	13.28	Peak
@ 5500.600	34.10	8.72	39.15	105.55	109.22	---	---	Peak

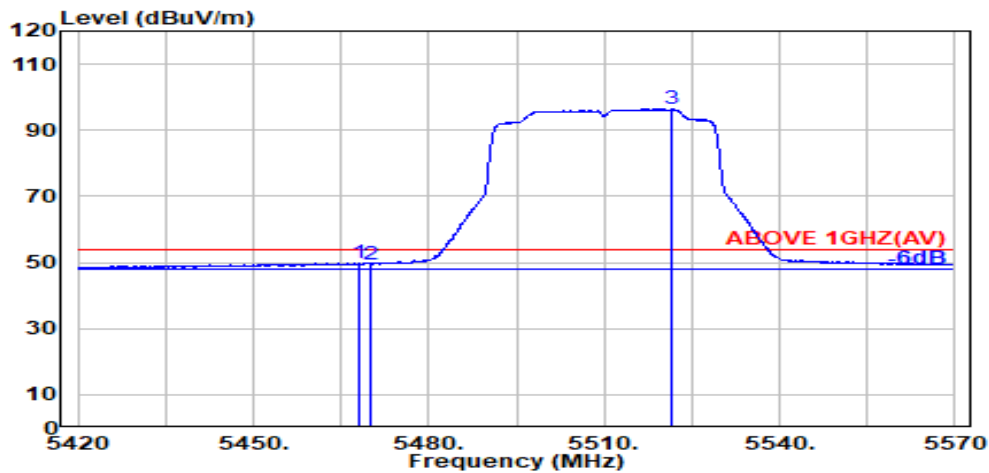

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	46.09	49.66	54.00	4.34	Average
5470.000	34.04	8.69	39.15	46.00	49.58	54.00	4.42	Average
@ 5521.500	34.06	8.74	39.15	92.80	96.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

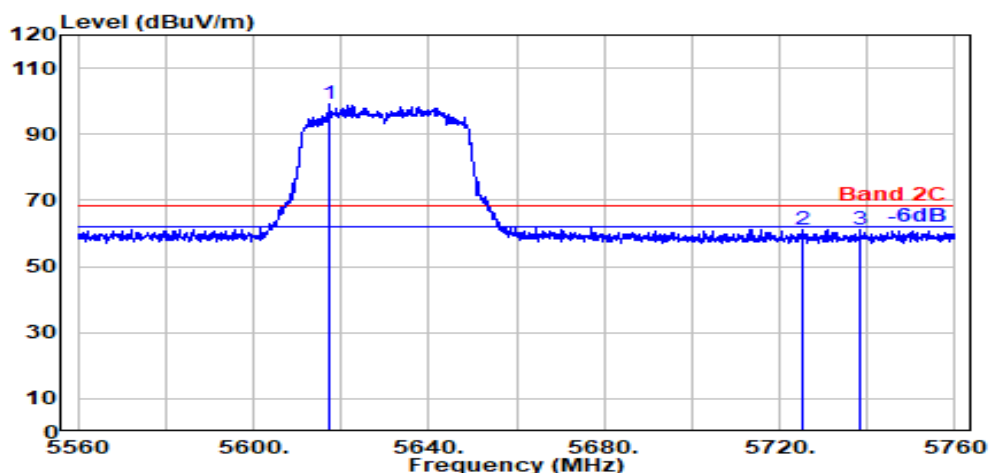

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.400	33.80	8.83	39.17	95.69	99.15	---	---	Peak
5725.000	33.60	8.93	39.20	57.60	60.93	68.20	7.27	Peak
5738.500	33.60	8.94	39.20	57.76	61.10	68.20	7.10	Peak

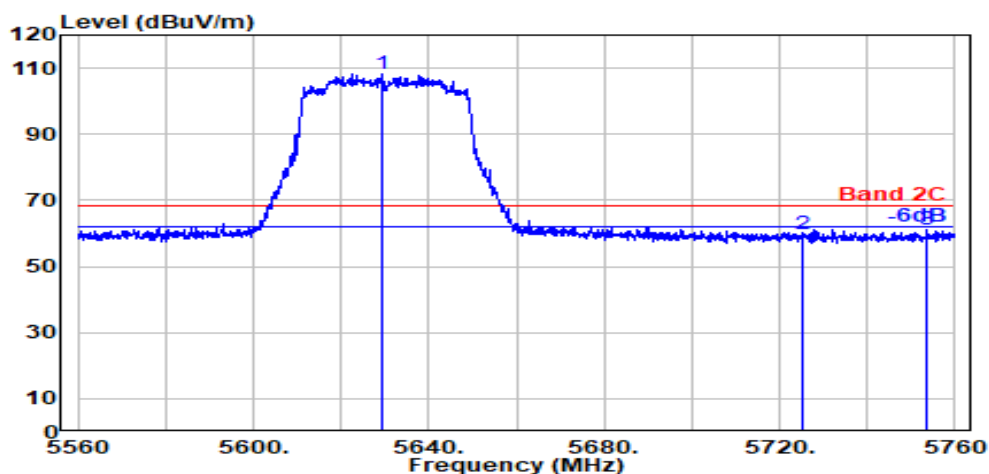


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5629.600	33.80	8.84	39.18	104.76	108.22	---	---	Peak
5725.000	33.60	8.93	39.20	56.38	59.71	68.20	8.49	Peak
5753.400	33.61	8.95	39.20	57.96	61.33	68.20	6.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

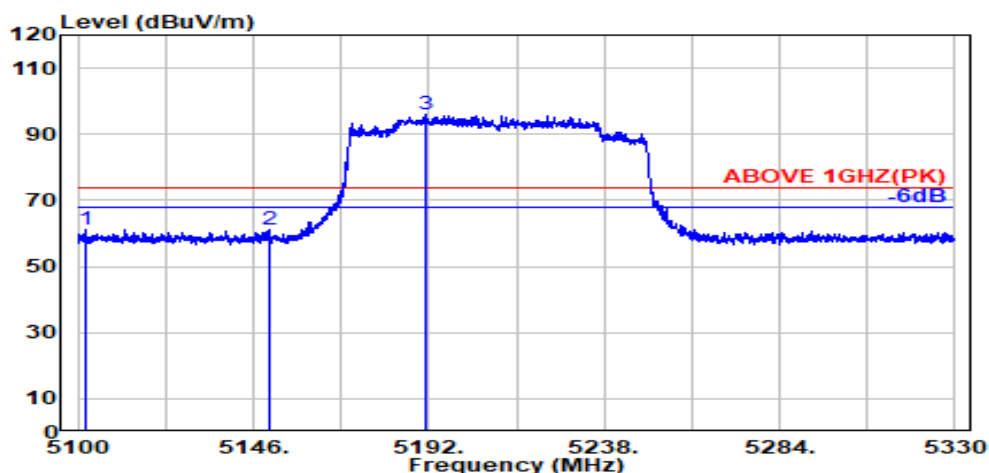

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.900	33.40	8.33	39.20	58.53	61.07	74.00	12.93	Peak
5150.000	33.50	8.37	39.19	58.62	61.30	74.00	12.70	Peak
@ 5191.200	33.75	8.42	39.19	93.23	96.20	---	---	Peak

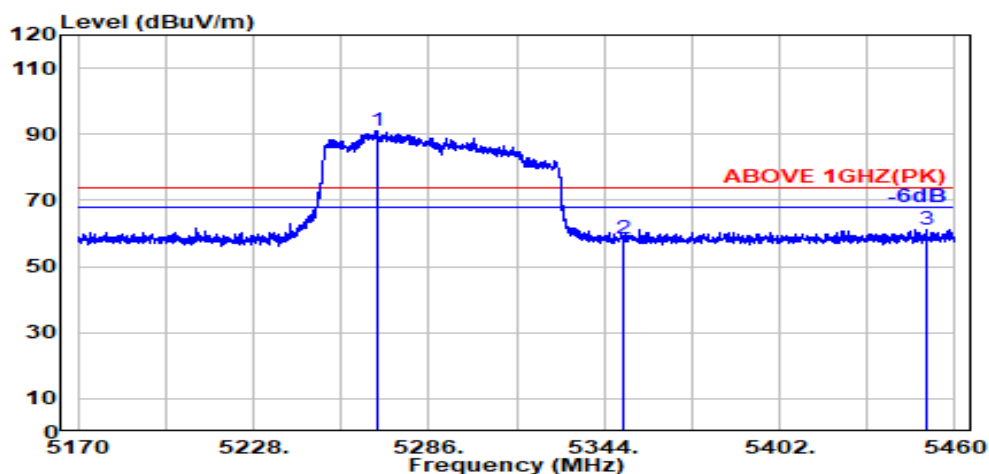


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.900	33.74	8.49	39.18	88.19	91.24	---	---	Peak
5350.000	33.70	8.57	39.17	55.35	58.46	74.00	15.54	Peak
5450.800	34.00	8.67	39.16	57.78	61.30	74.00	12.70	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

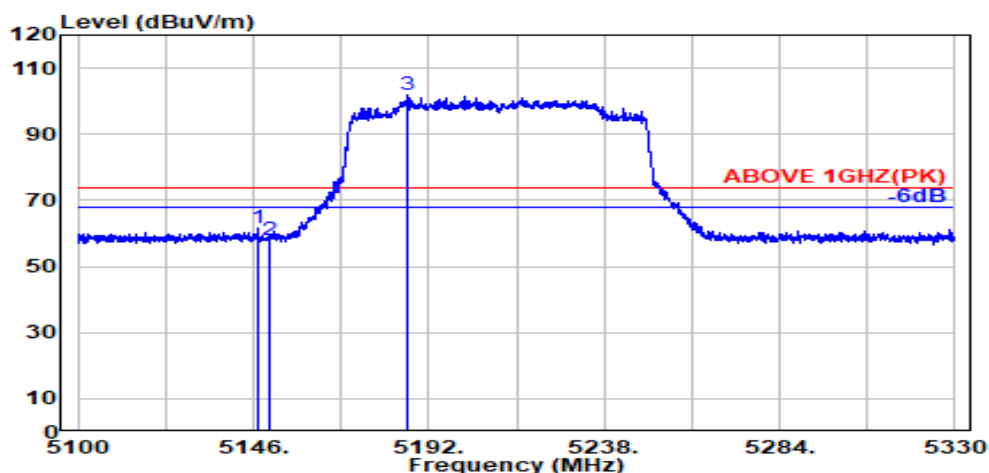

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.49	8.37	39.19	59.14	61.81	74.00	12.19	Peak
5150.000	33.50	8.37	39.19	55.40	58.08	74.00	15.92	Peak
@ 5186.600	33.72	8.41	39.19	99.05	101.99	---	---	Peak

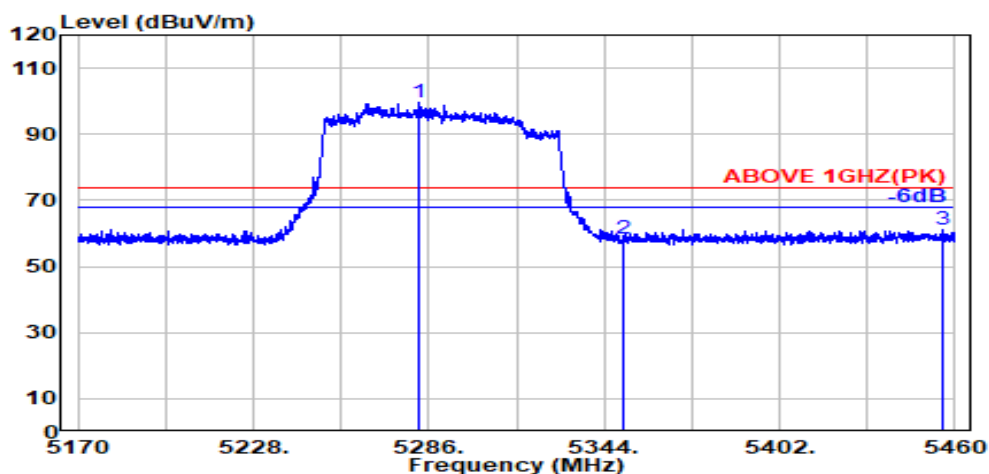

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.500	33.77	8.51	39.18	96.54	99.64	---	---	Peak
5350.000	33.70	8.57	39.17	55.45	58.56	74.00	15.44	Peak
5455.700	34.01	8.67	39.16	57.67	61.20	74.00	12.80	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

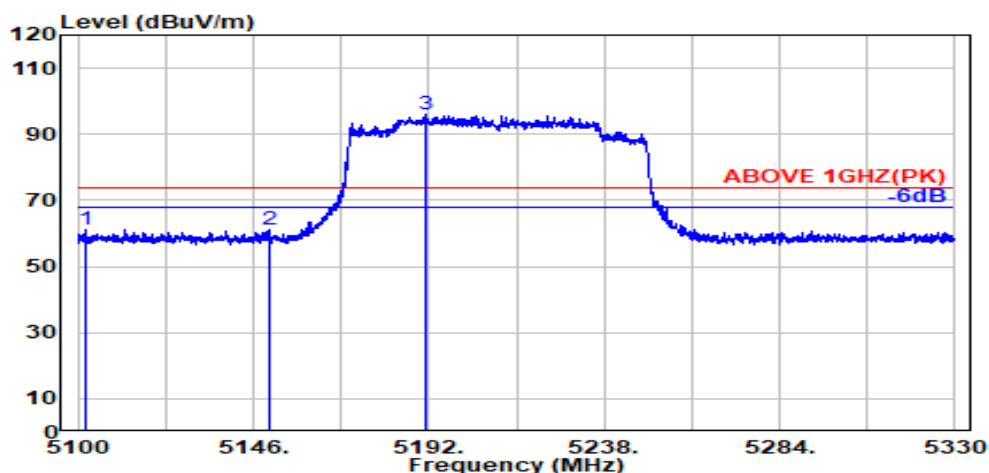

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.900	33.40	8.33	39.20	58.53	61.07	74.00	12.93	Peak
5150.000	33.50	8.37	39.19	58.62	61.30	74.00	12.70	Peak
@ 5191.200	33.75	8.42	39.19	93.23	96.20	---	---	Peak

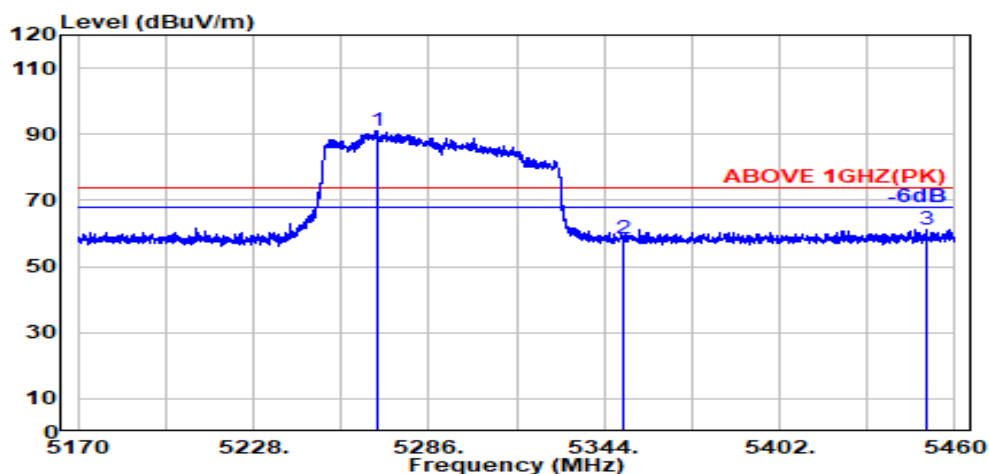

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.900	33.74	8.49	39.18	88.19	91.24	---	---	Peak
5350.000	33.70	8.57	39.17	55.35	58.46	74.00	15.54	Peak
5450.800	34.00	8.67	39.16	57.78	61.30	74.00	12.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

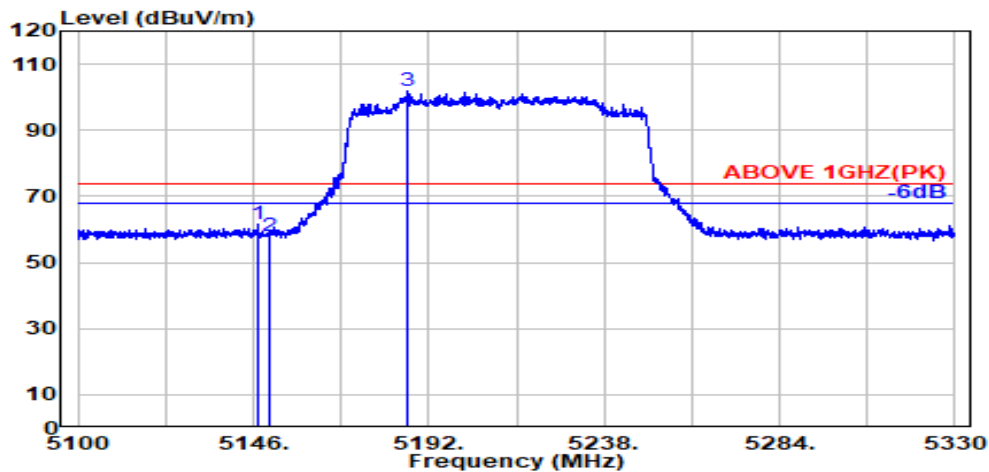

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.49	8.37	39.19	59.14	61.81	74.00	12.19	Peak
5150.000	33.50	8.37	39.19	55.40	58.08	74.00	15.92	Peak
@ 5186.600	33.72	8.41	39.19	99.05	101.99	---	---	Peak

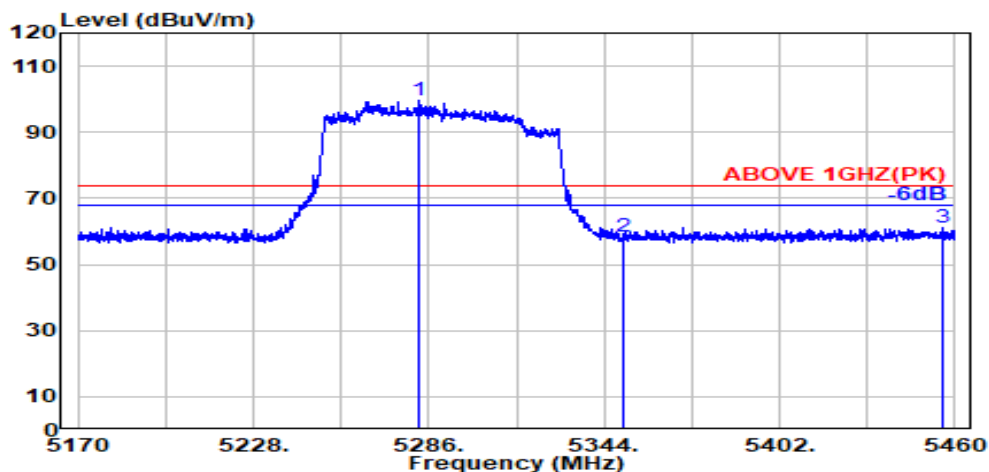


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5282.500	33.77	8.51	39.18	96.54	99.64	---	---	Peak
5350.000	33.70	8.57	39.17	55.45	58.56	74.00	15.44	Peak
5455.700	34.01	8.67	39.16	57.67	61.20	74.00	12.80	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

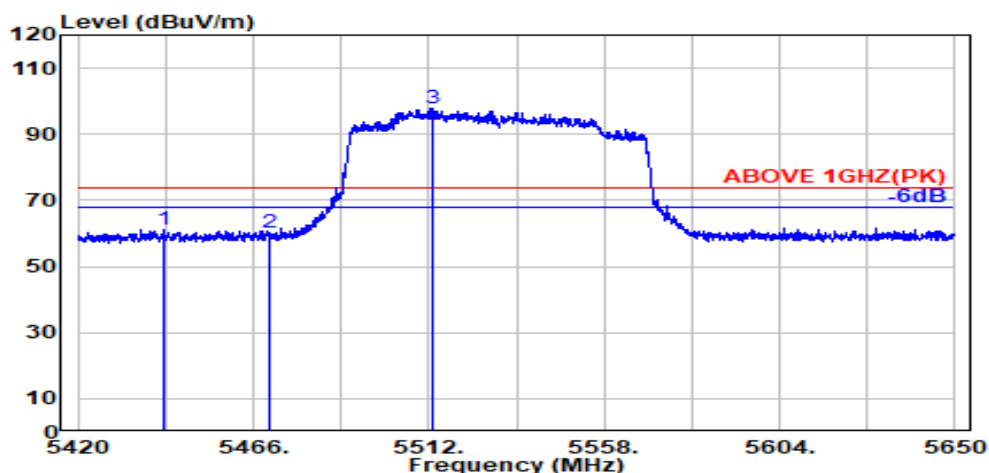

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.700	33.99	8.66	39.16	57.80	61.29	74.00	12.71	Peak
5470.000	34.04	8.69	39.15	56.53	60.11	74.00	13.89	Peak
@ 5513.200	34.07	8.73	39.15	94.22	97.87	---	---	Peak

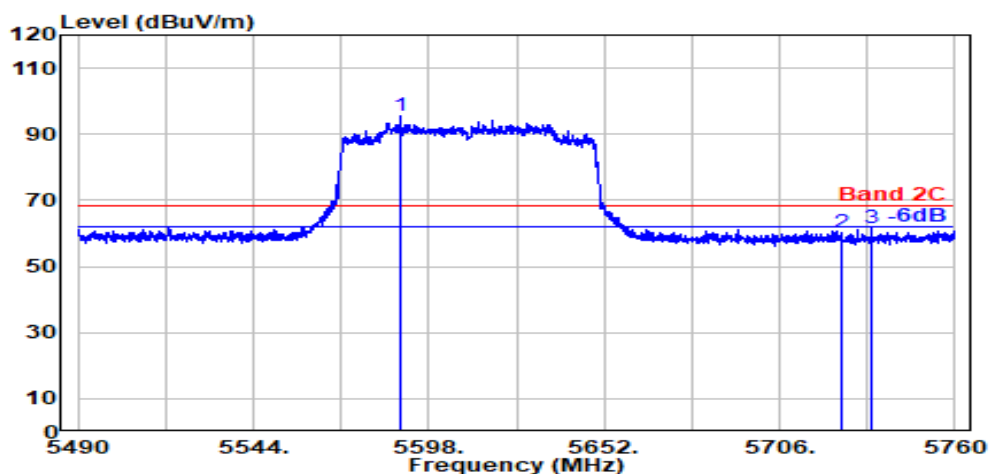


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.100	33.84	8.80	39.17	92.29	95.76	---	---	Peak
5725.000	33.60	8.93	39.20	56.90	60.23	68.20	7.97	Peak
5734.500	33.60	8.93	39.20	58.25	61.58	68.20	6.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

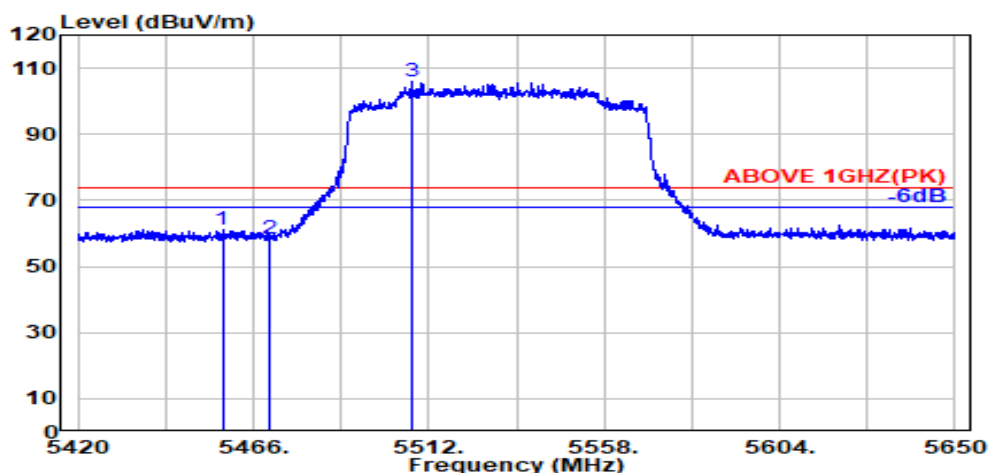

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.02	8.68	39.15	57.58	61.12	74.00	12.88	Peak
5470.000	34.04	8.69	39.15	55.00	58.57	74.00	15.43	Peak
@ 5507.700	34.08	8.72	39.15	102.22	105.88	---	---	Peak

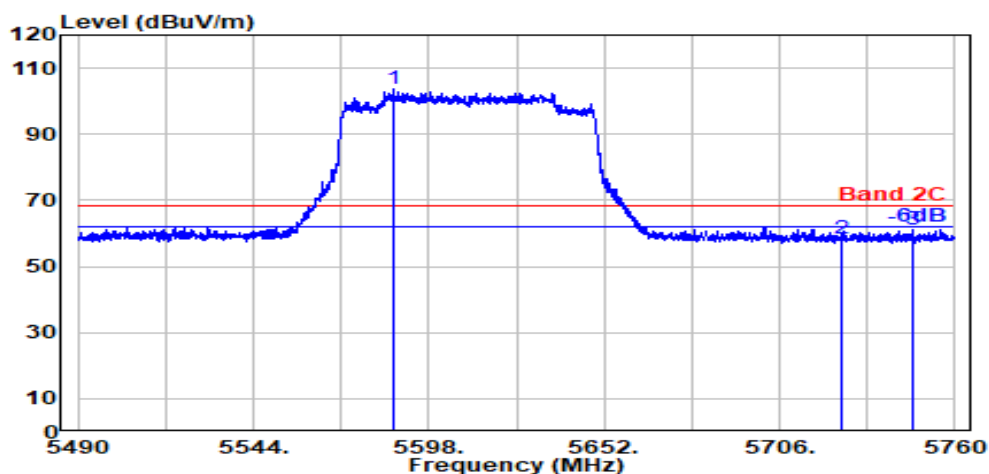


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.200	33.85	8.80	39.17	100.32	103.81	---	---	Peak
5725.000	33.60	8.93	39.20	55.17	58.50	68.20	9.70	Peak
5746.700	33.60	8.95	39.20	57.92	61.27	68.20	6.93	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

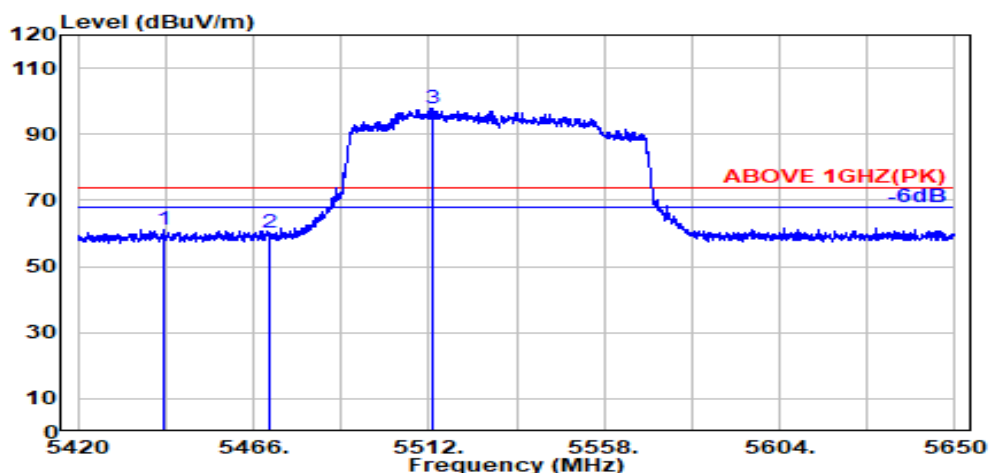

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.700	33.99	8.66	39.16	57.80	61.29	74.00	12.71	Peak
5470.000	34.04	8.69	39.15	56.53	60.11	74.00	13.89	Peak
@ 5513.200	34.07	8.73	39.15	94.22	97.87	---	---	Peak

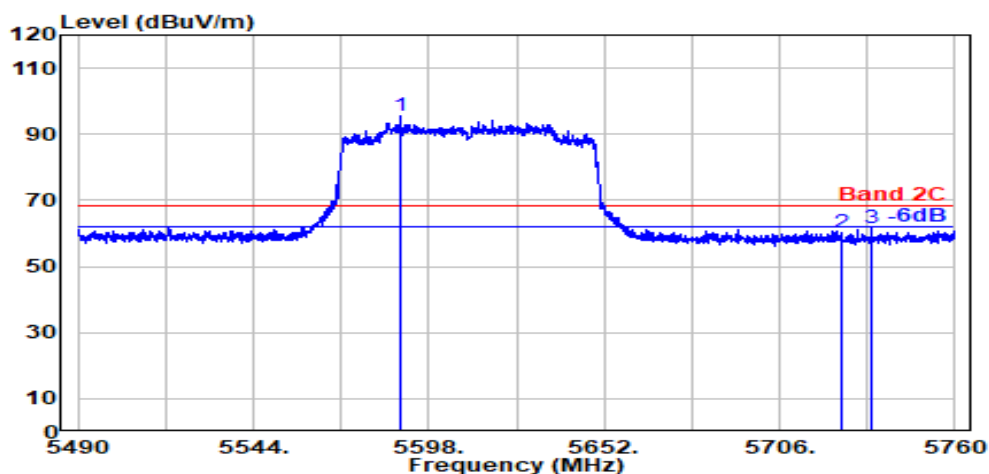


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5589.100	33.84	8.80	39.17	92.29	95.76	---	---	Peak
5725.000	33.60	8.93	39.20	56.90	60.23	68.20	7.97	Peak
5734.500	33.60	8.93	39.20	58.25	61.58	68.20	6.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

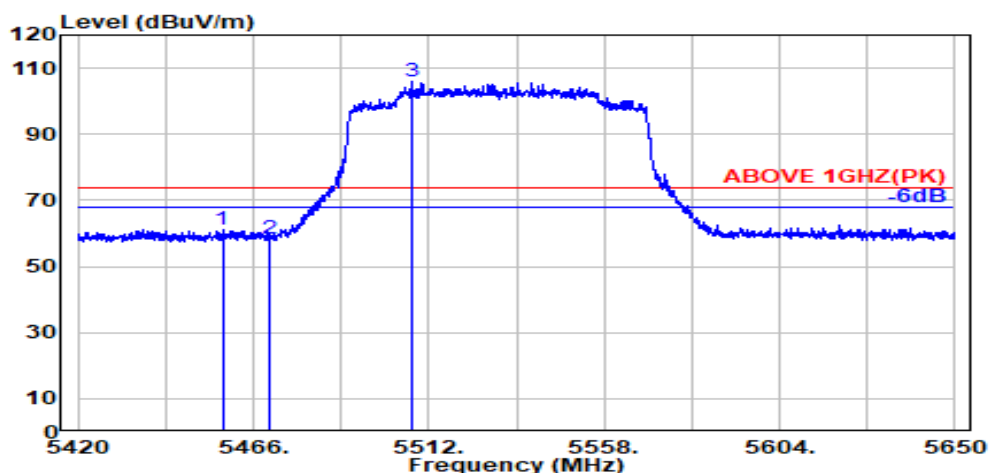

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.900	34.02	8.68	39.15	57.58	61.12	74.00	12.88	Peak
5470.000	34.04	8.69	39.15	55.00	58.57	74.00	15.43	Peak
@ 5507.700	34.08	8.72	39.15	102.22	105.88	---	---	Peak

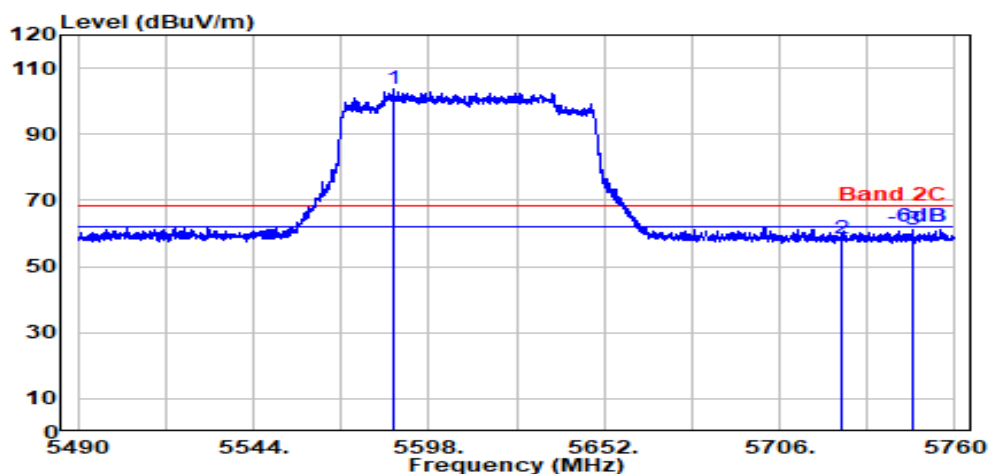

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5587.200	33.85	8.80	39.17	100.32	103.81	---	---	Peak
5725.000	33.60	8.93	39.20	55.17	58.50	68.20	9.70	Peak
5746.700	33.60	8.95	39.20	57.92	61.27	68.20	6.93	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Antenna: LUXSHARE-ICT

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

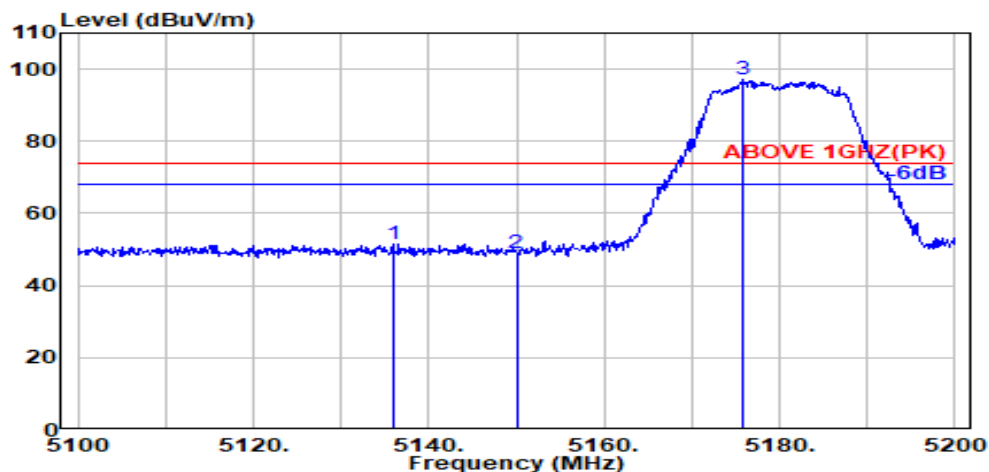

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.900	33.70	8.54	34.28	43.51	51.46	74.00	22.54	Peak
5150.000	33.70	8.54	34.28	40.95	48.91	74.00	25.09	Peak
@ 5175.900	33.70	8.56	34.27	89.33	97.31	---	---	Peak

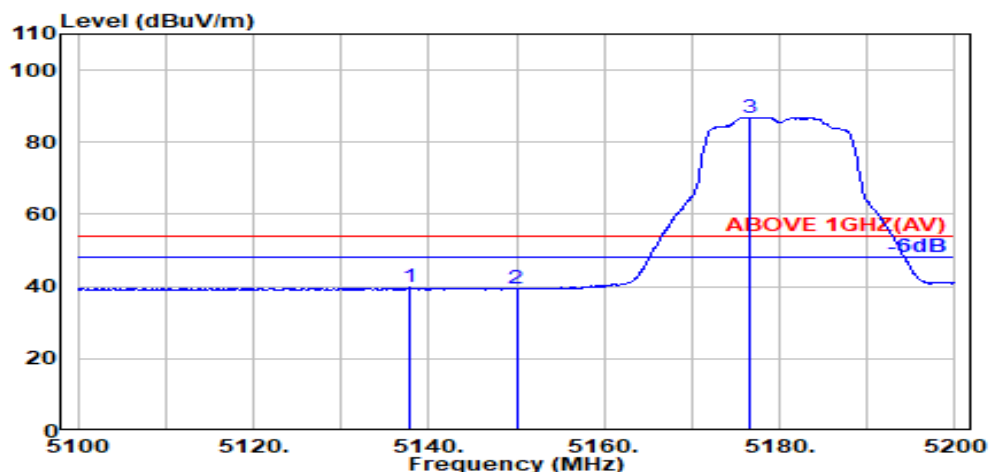

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.70	8.54	34.28	31.74	39.69	54.00	14.31	Average
5150.000	33.70	8.54	34.28	31.45	39.41	54.00	14.59	Average
@ 5176.500	33.70	8.56	34.27	78.97	86.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

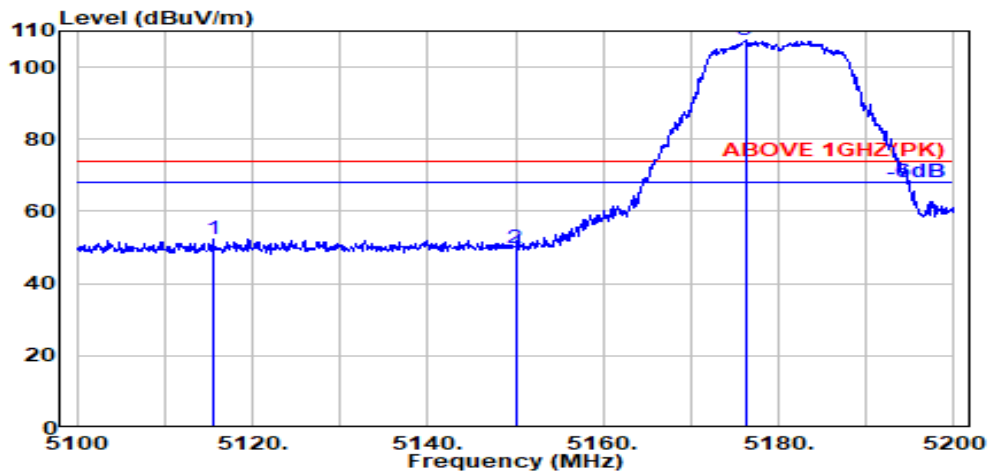

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.500	33.70	8.52	34.29	44.49	52.42	74.00	21.58	Peak
5150.000	33.70	8.54	34.28	42.00	49.96	74.00	24.04	Peak
@ 5176.200	33.70	8.56	34.27	99.32	107.31	---	---	Peak

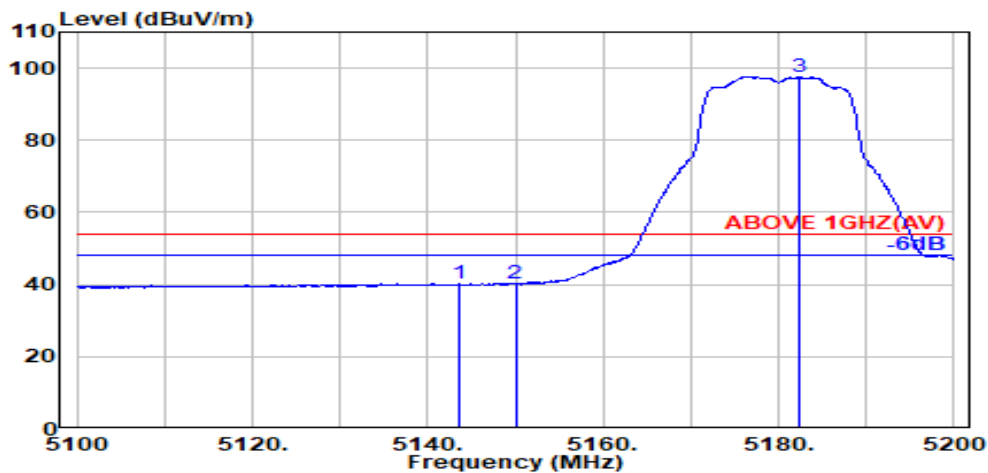

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.500	33.70	8.54	34.28	32.29	40.24	54.00	13.76	Average
5150.000	33.70	8.54	34.28	32.19	40.15	54.00	13.85	Average
@ 5182.400	33.70	8.56	34.27	89.53	97.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

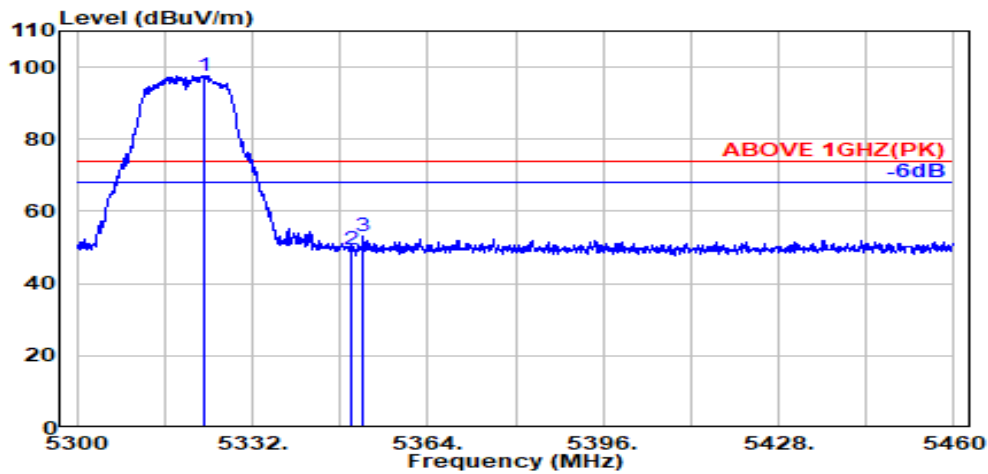

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	34.01	8.65	34.22	89.23	97.66	---	---	Peak
5350.000	33.90	8.67	34.22	41.16	49.51	74.00	24.49	Peak
5352.300	33.91	8.67	34.22	44.82	53.18	74.00	20.82	Peak

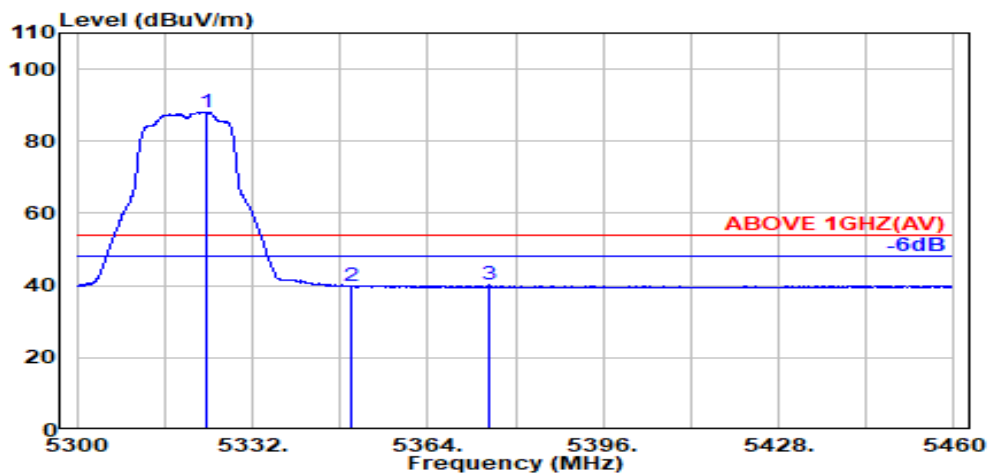

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	79.64	88.07	---	---	Average
5350.000	33.90	8.67	34.22	31.48	39.83	54.00	14.17	Average
5375.300	34.00	8.68	34.21	31.61	40.08	54.00	13.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

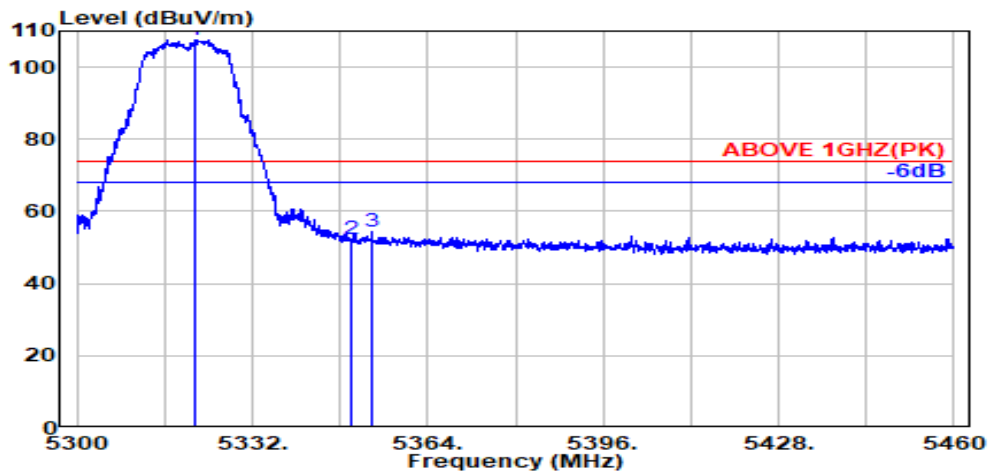

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.700	34.01	8.65	34.23	99.26	107.70	---	---	Peak
5350.000	33.90	8.67	34.22	43.77	52.11	74.00	21.89	Peak
5353.700	33.91	8.67	34.22	46.04	54.41	74.00	19.59	Peak

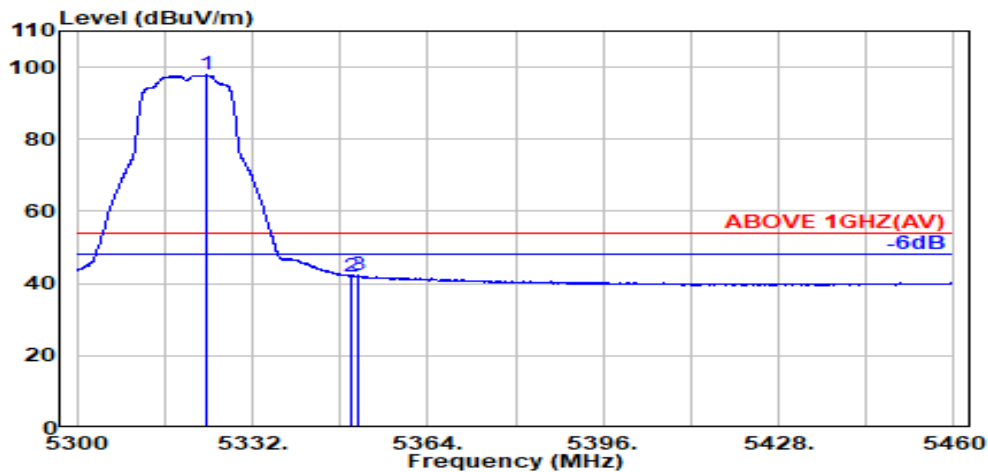

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.700	34.00	8.65	34.22	89.41	97.84	---	---	Average
5350.000	33.90	8.67	34.22	33.77	42.12	54.00	11.88	Average
5351.200	33.90	8.67	34.22	33.82	42.18	54.00	11.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

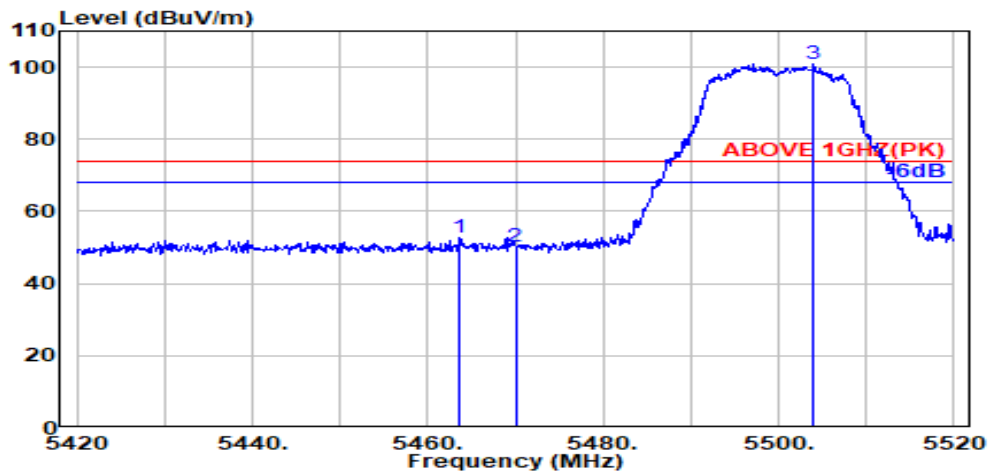

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.17	8.73	34.18	44.16	52.88	74.00	21.12	Peak
5470.000	34.16	8.74	34.18	41.41	50.13	74.00	23.87	Peak
@ 5504.000	34.10	8.76	34.17	92.05	100.73	---	---	Peak

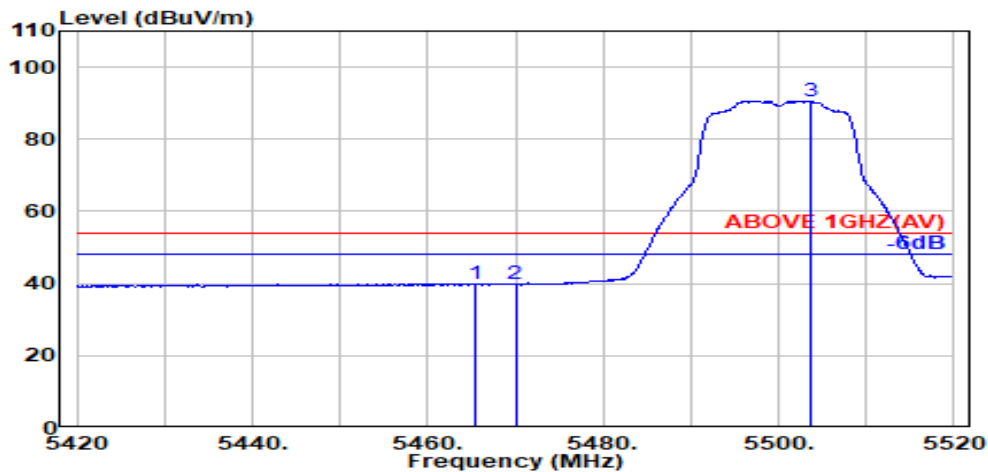

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.17	8.73	34.18	31.28	40.00	54.00	14.00	Average
5470.000	34.16	8.74	34.18	30.94	39.66	54.00	14.34	Average
@ 5503.700	34.10	8.76	34.17	82.01	90.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

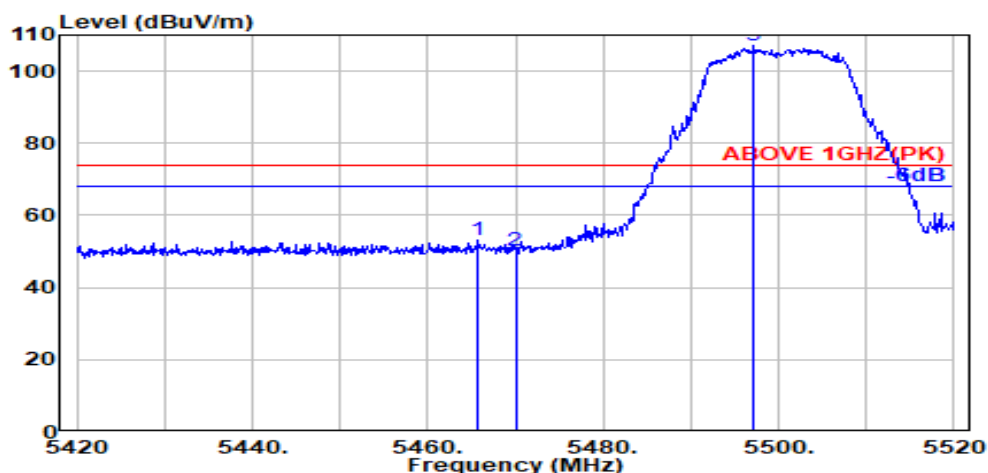

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.800	34.17	8.73	34.18	44.27	53.00	74.00	21.00	Peak
5470.000	34.16	8.74	34.18	41.54	50.26	74.00	23.74	Peak
@ 5497.100	34.11	8.75	34.17	98.22	106.91	---	---	Peak

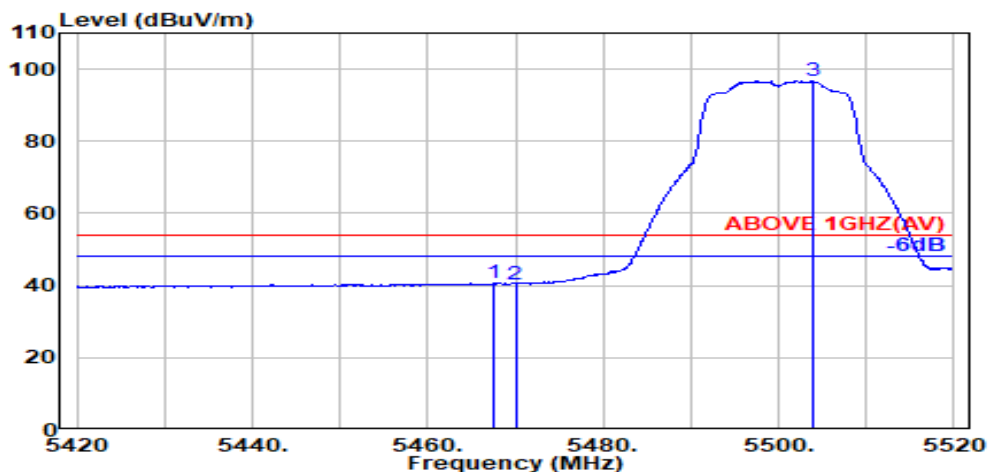

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.16	8.73	34.18	31.94	40.66	54.00	13.34	Average
5470.000	34.16	8.74	34.18	31.71	40.43	54.00	13.57	Average
@ 5503.900	34.10	8.76	34.17	88.08	96.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

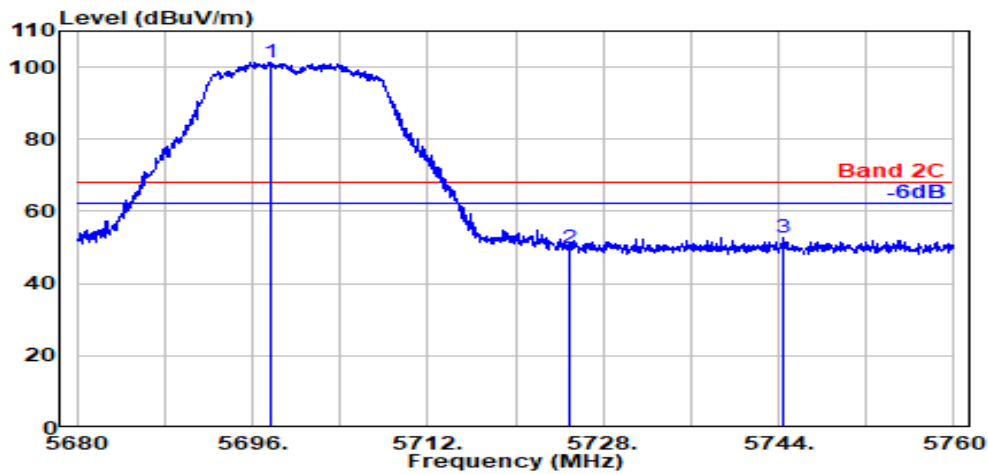

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.600	33.81	8.87	34.26	92.98	101.39	---	---	Peak
5725.000	33.80	8.88	34.28	41.20	49.61	68.20	18.59	Peak
5744.500	33.80	8.89	34.28	44.47	52.88	68.20	15.32	Peak

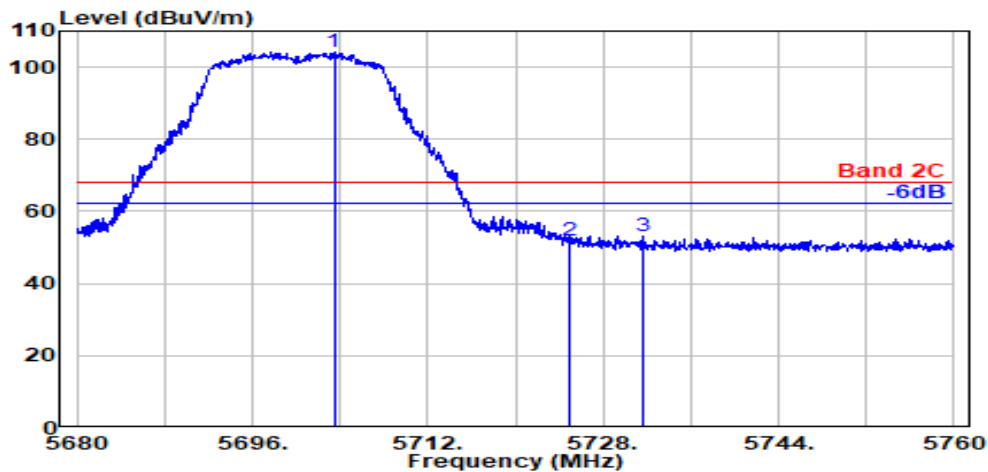

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.450	33.80	8.87	34.27	95.89	104.30	---	---	Peak
5725.000	33.80	8.88	34.28	43.69	52.09	68.20	16.11	Peak
5731.600	33.80	8.88	34.28	44.69	53.10	68.20	15.10	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

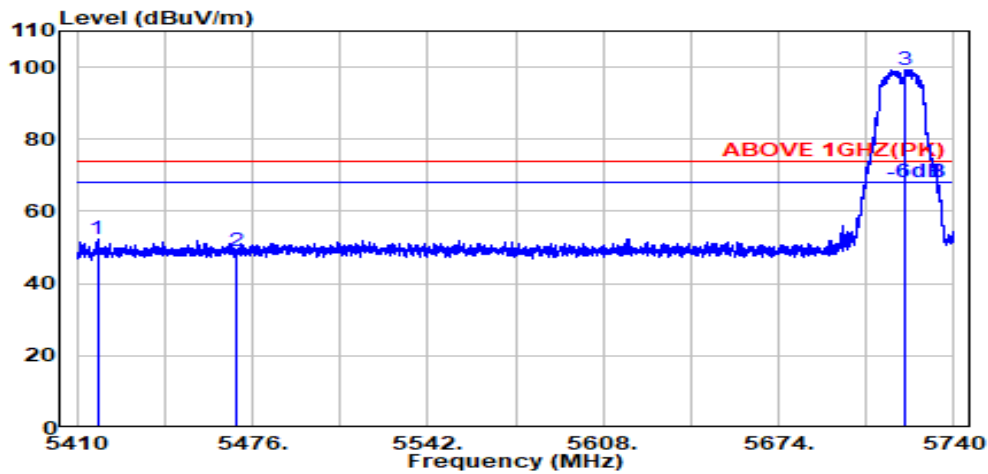

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.700	34.14	8.71	34.20	43.49	52.14	74.00	21.86	Peak
5470.000	34.16	8.74	34.18	40.16	48.88	74.00	25.12	Peak
@ 5721.400	33.80	8.88	34.27	90.91	99.32	---	---	Peak

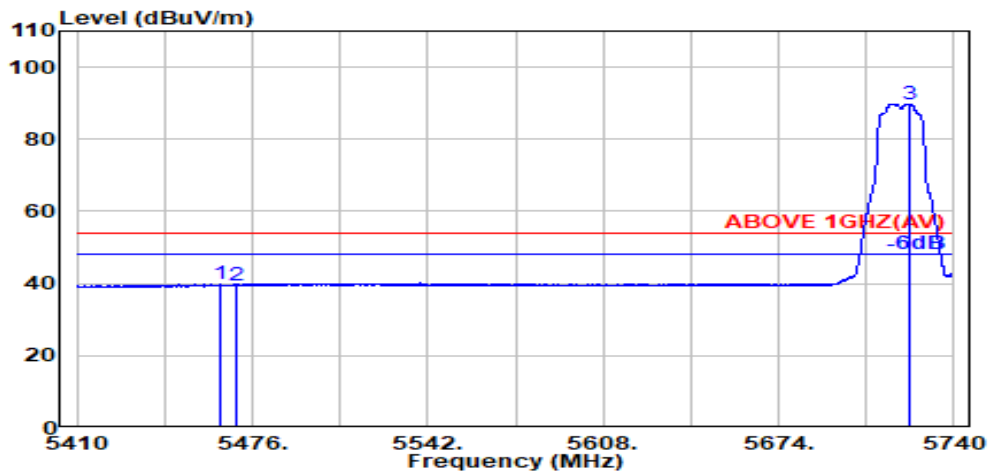

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.17	8.73	34.18	31.07	39.80	54.00	14.20	Average
5470.000	34.16	8.74	34.18	30.79	39.50	54.00	14.50	Average
@ 5723.600	33.80	8.88	34.28	81.32	89.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

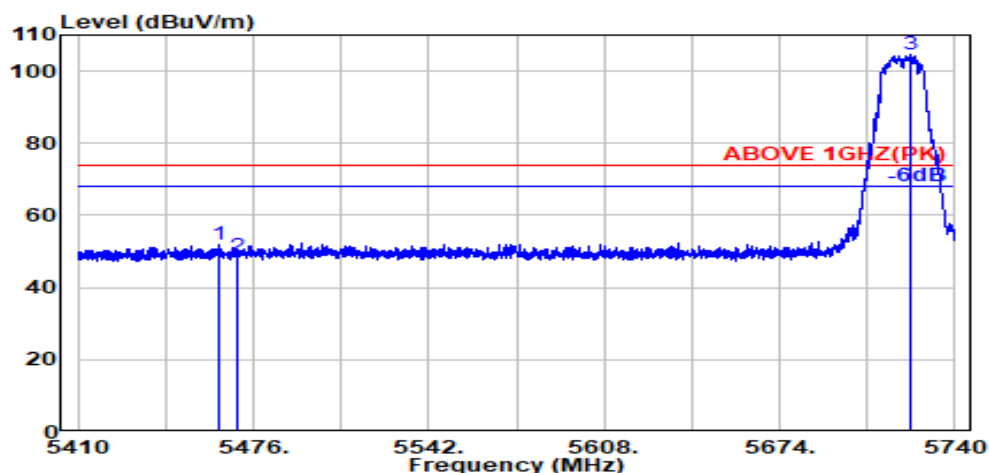

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.17	8.73	34.18	43.01	51.73	74.00	22.27	Peak
5470.000	34.16	8.74	34.18	39.96	48.68	74.00	25.32	Peak
@ 5723.400	33.80	8.88	34.28	96.15	104.56	---	---	Peak

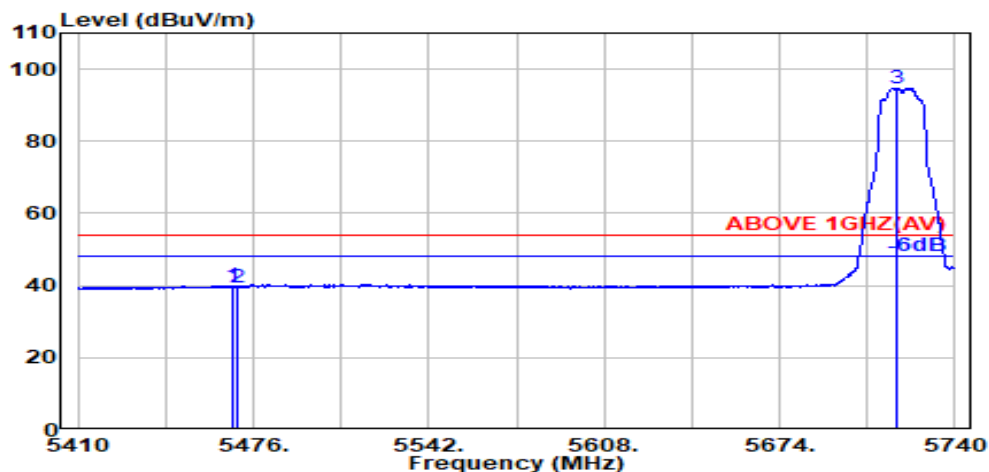

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.16	8.73	34.18	31.16	39.88	54.00	14.12	Average
5470.000	34.16	8.74	34.18	30.85	39.56	54.00	14.44	Average
@ 5718.100	33.80	8.88	34.27	86.43	94.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

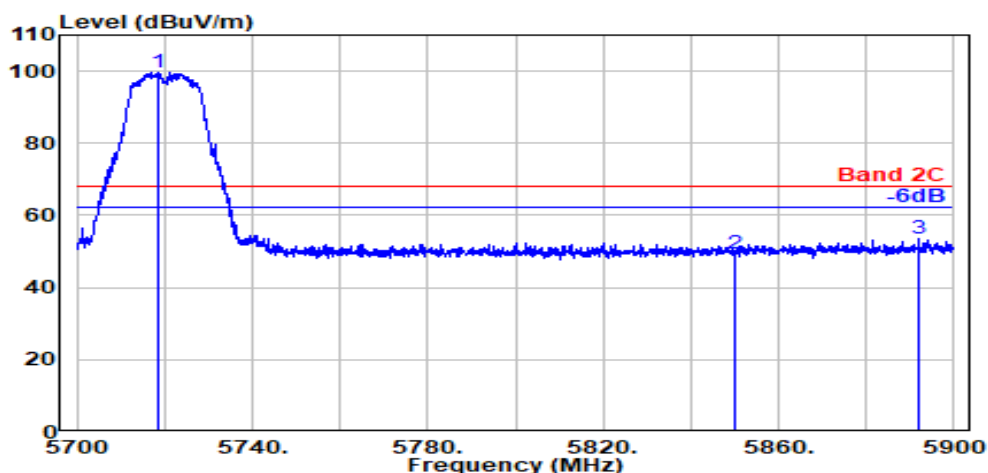

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.400	33.80	8.88	34.27	91.12	99.53	---	---	Peak
5850.000	34.10	8.95	34.33	40.76	49.48	68.20	18.72	Peak
5892.000	34.10	8.97	34.35	44.66	53.38	68.20	14.82	Peak

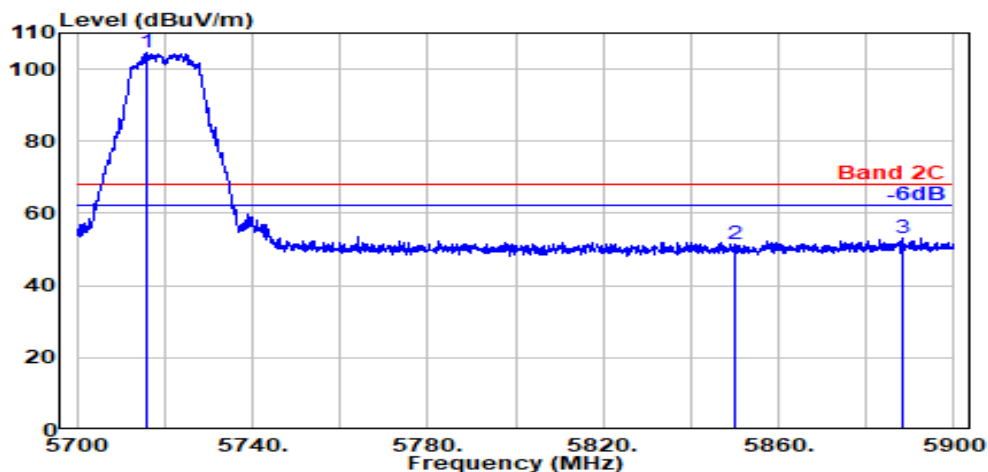


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.000	33.80	8.88	34.27	96.07	104.47	---	---	Peak
5850.000	34.10	8.95	34.33	42.82	51.54	68.20	16.66	Peak
5888.200	34.10	8.97	34.35	44.28	53.00	68.20	15.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

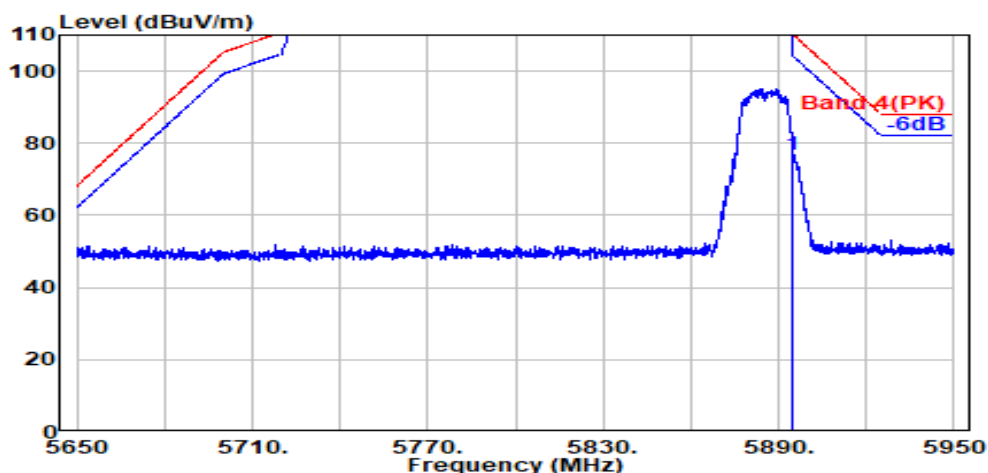

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	67.99	76.71	110.20	33.49	Peak

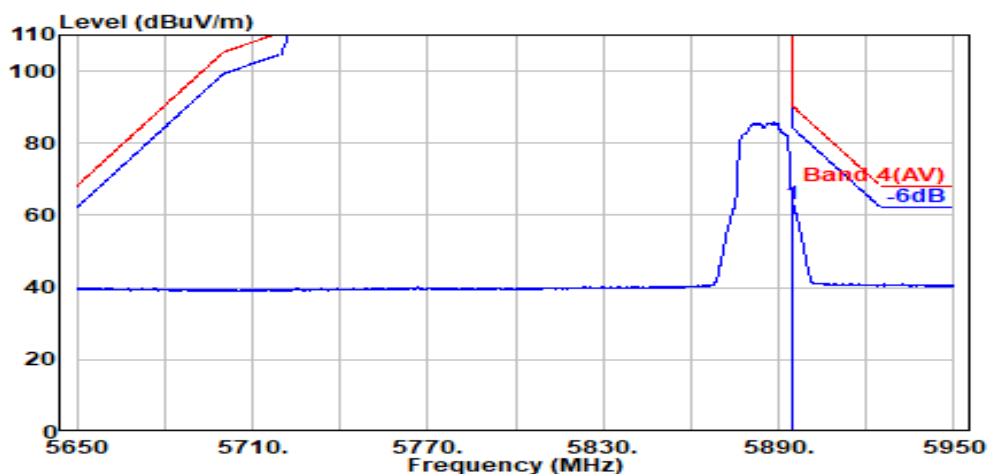


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	54.20	62.92	90.20	27.28	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

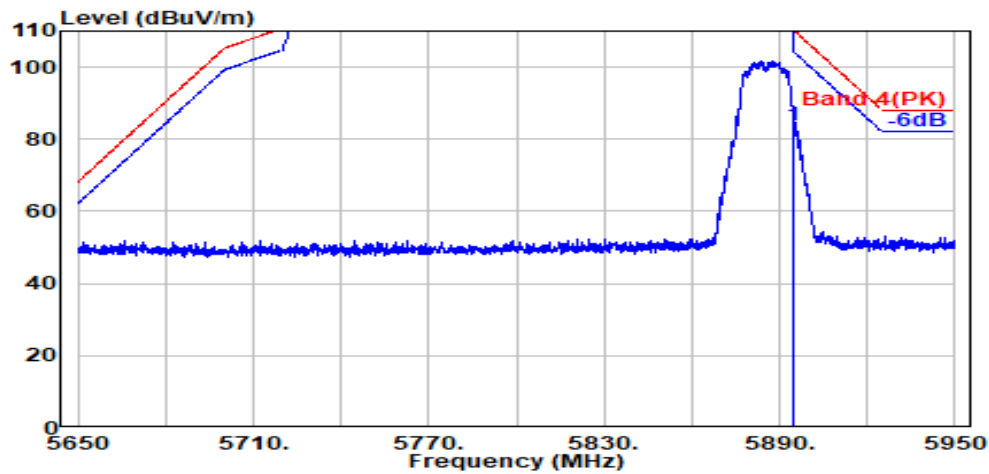

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	75.02	83.74	110.20	26.46	Peak

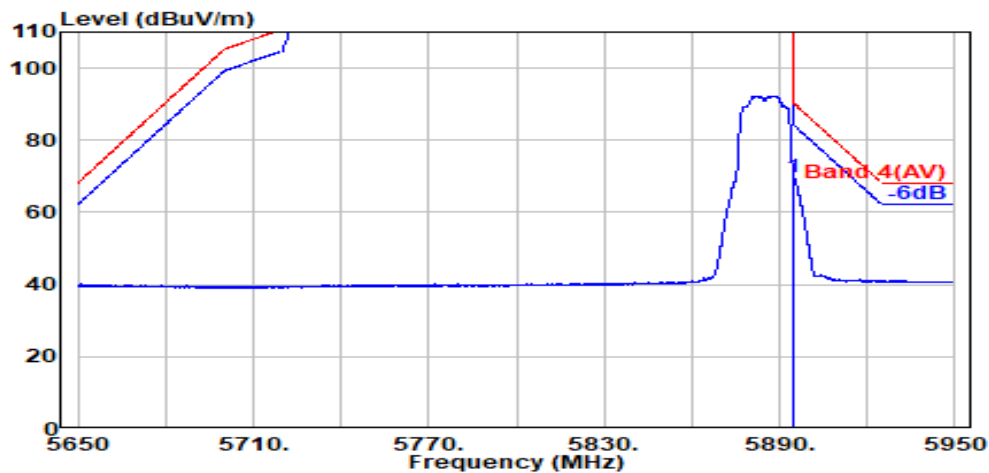


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	61.10	69.82	90.20	20.38	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

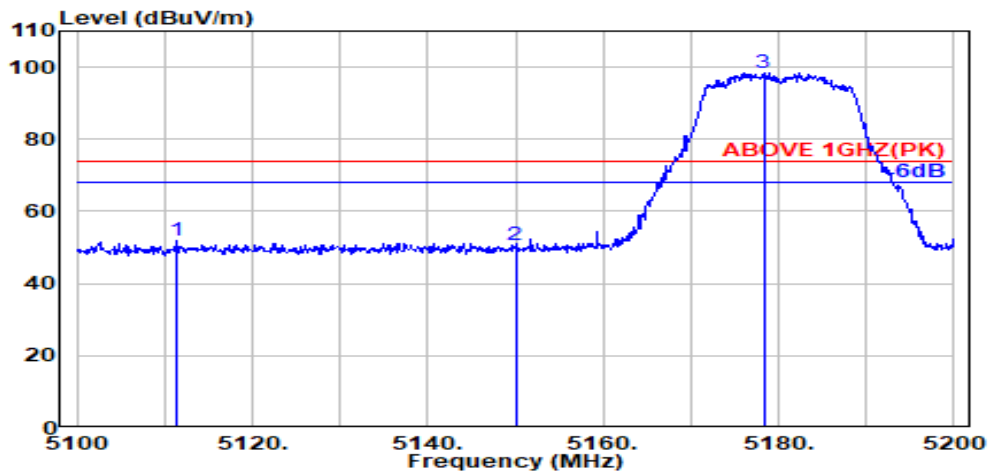

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5111.400	33.70	8.52	34.29	43.86	51.78	74.00	22.22	Peak
5150.000	33.70	8.54	34.28	42.81	50.77	74.00	23.23	Peak
@ 5178.300	33.70	8.56	34.27	90.36	98.35	---	---	Peak

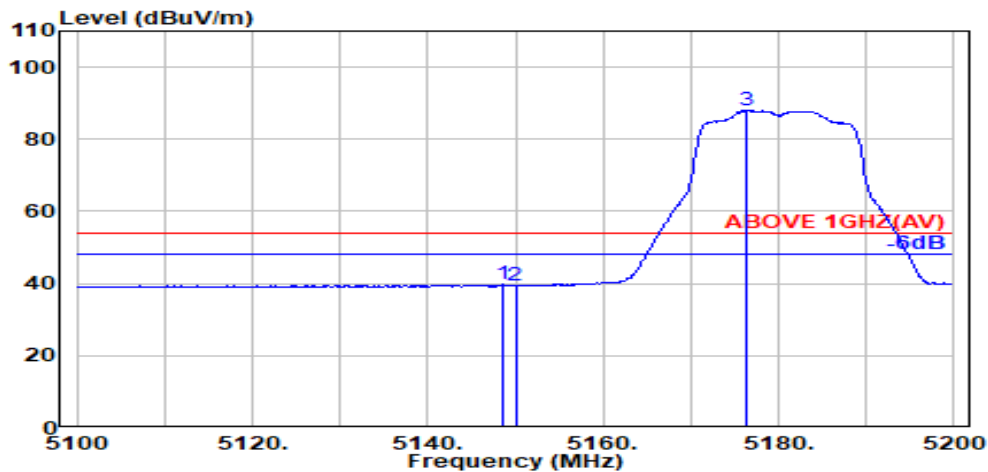

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.500	33.70	8.54	34.28	31.72	39.68	54.00	14.32	Average
5150.000	33.70	8.54	34.28	31.56	39.53	54.00	14.47	Average
@ 5176.400	33.70	8.56	34.27	79.95	87.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

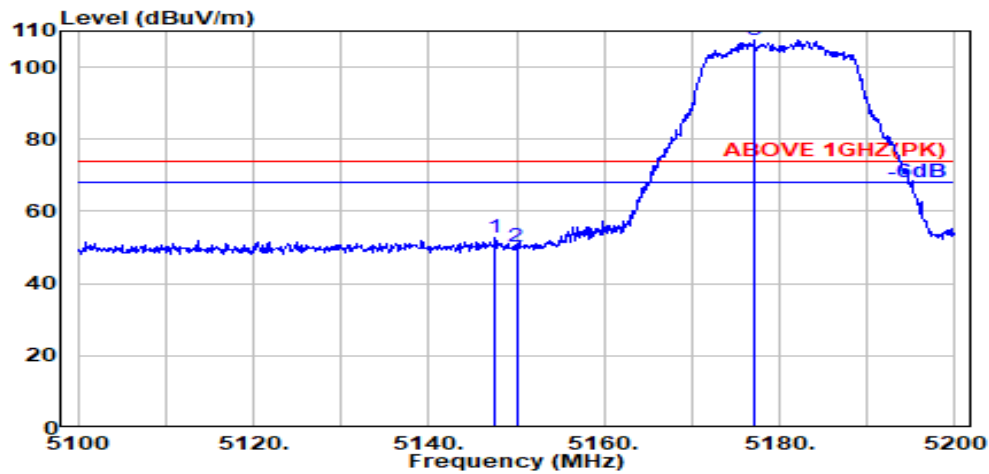

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	33.70	8.54	34.28	44.68	52.64	74.00	21.36	Peak
5150.000	33.70	8.54	34.28	42.21	50.17	74.00	23.83	Peak
@ 5177.100	33.70	8.56	34.27	99.49	107.48	---	---	Peak

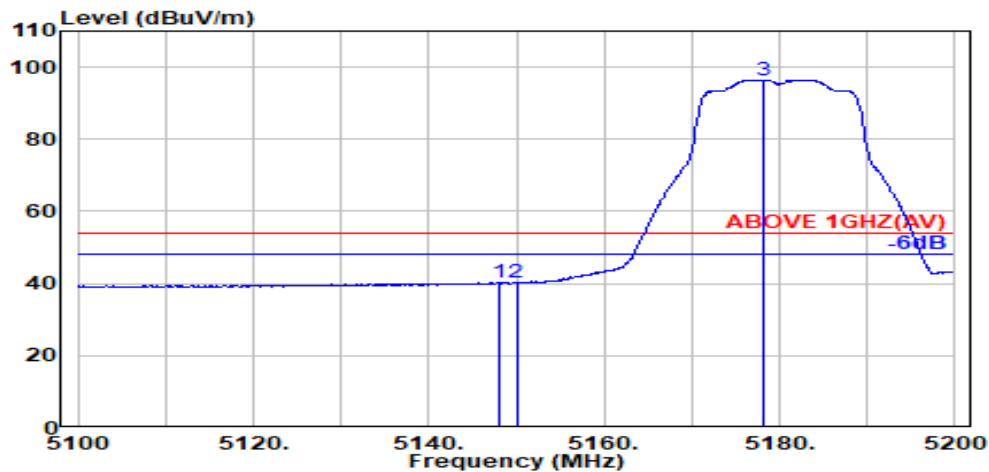

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	33.70	8.54	34.28	32.40	40.36	54.00	13.64	Average
5150.000	33.70	8.54	34.28	32.10	40.07	54.00	13.93	Average
@ 5178.200	33.70	8.56	34.27	88.50	96.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

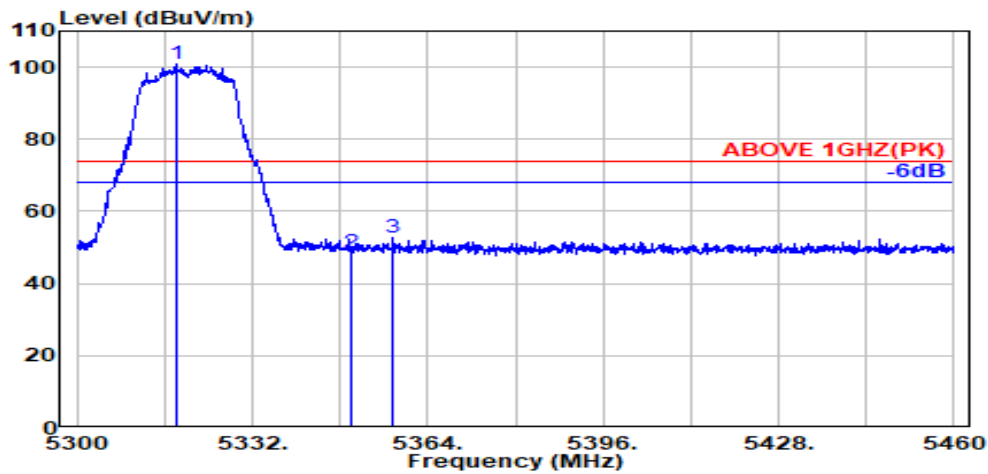

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	34.03	8.65	34.23	92.26	100.70	---	---	Peak
5350.000	33.90	8.67	34.22	40.27	48.62	74.00	25.38	Peak
5357.700	33.93	8.67	34.21	44.19	52.58	74.00	21.42	Peak

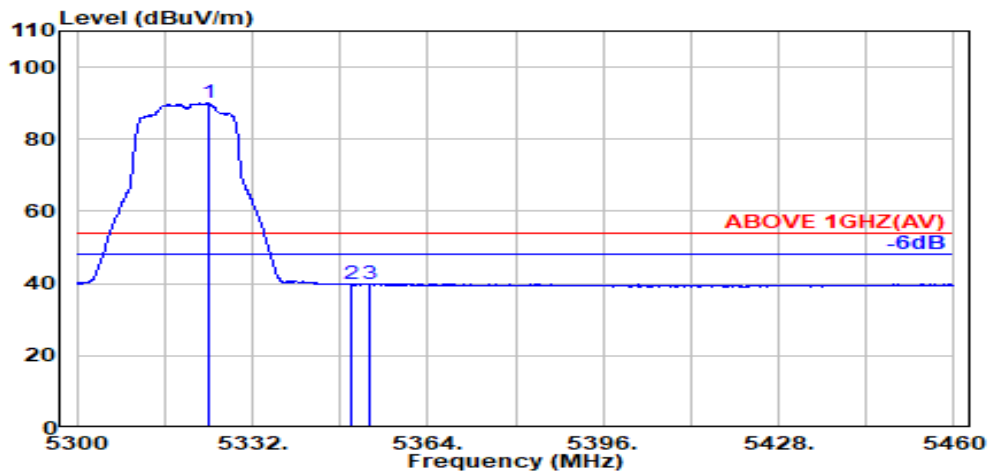

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	34.00	8.65	34.22	81.59	90.02	---	---	Average
5350.000	33.90	8.67	34.22	31.37	39.72	54.00	14.28	Average
5353.200	33.91	8.67	34.22	31.63	39.99	54.00	14.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

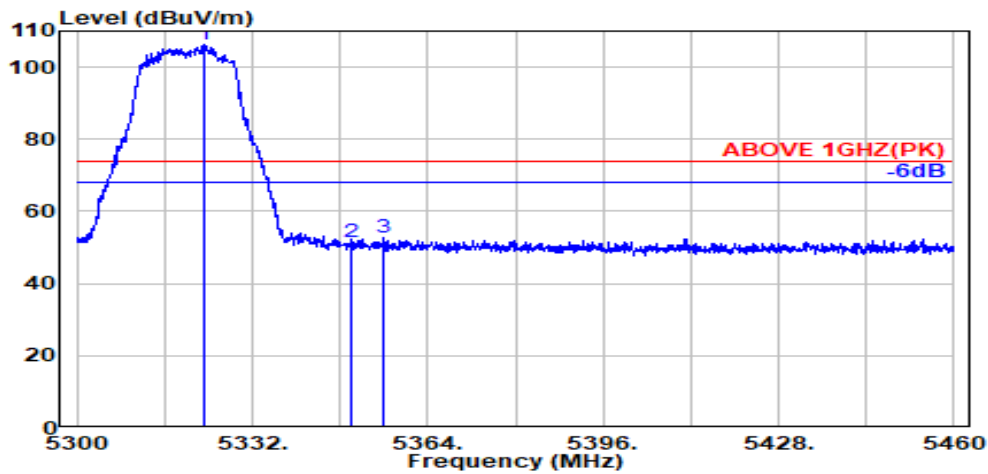

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	34.01	8.65	34.22	97.78	106.21	---	---	Peak
5350.000	33.90	8.67	34.22	43.12	51.47	74.00	22.53	Peak
5356.000	33.92	8.67	34.21	44.24	52.62	74.00	21.38	Peak

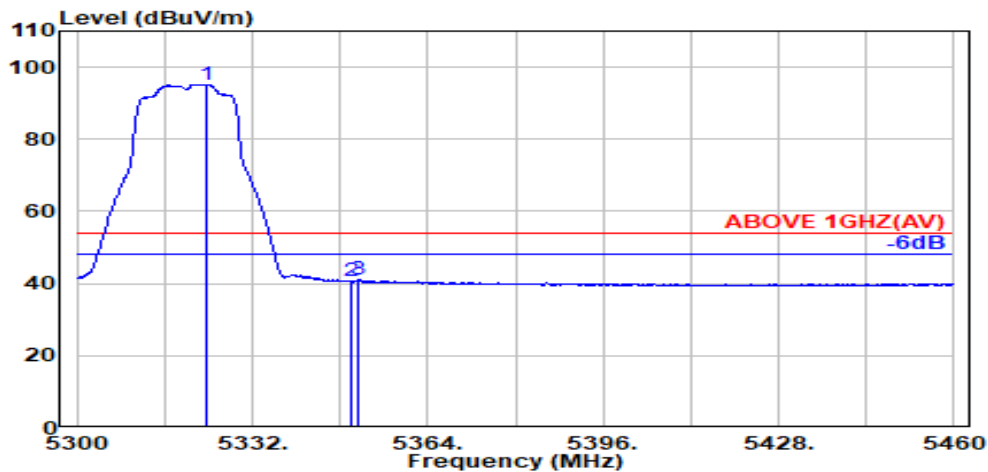

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	34.00	8.65	34.22	86.81	95.24	---	---	Average
5350.000	33.90	8.67	34.22	32.21	40.56	54.00	13.44	Average
5351.300	33.91	8.67	34.22	32.64	40.99	54.00	13.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

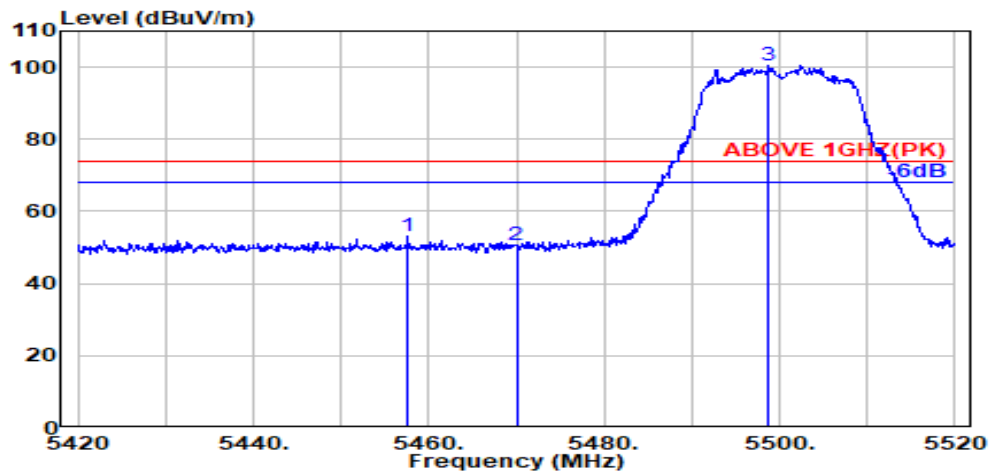

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.600	34.18	8.73	34.18	44.23	52.96	74.00	21.04	Peak
5470.000	34.16	8.74	34.18	41.84	50.56	74.00	23.44	Peak
@ 5498.700	34.10	8.75	34.17	91.70	100.39	---	---	Peak

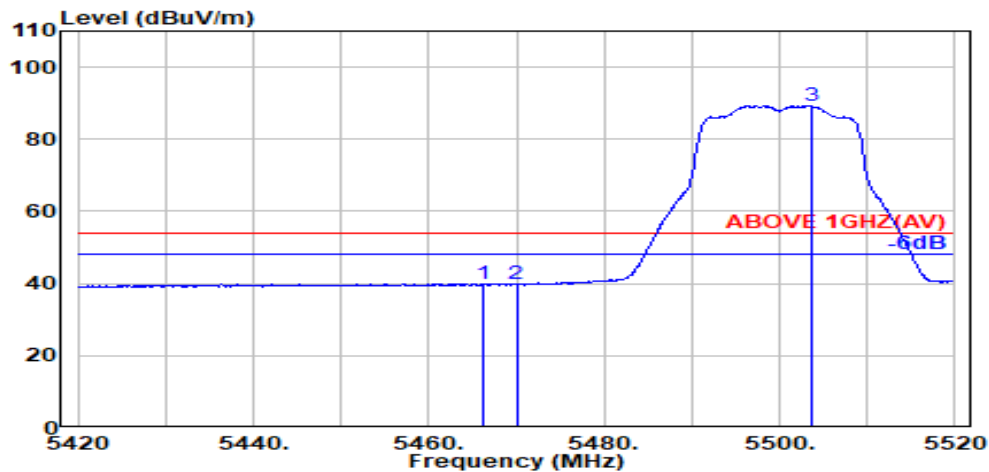

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	31.17	39.89	54.00	14.11	Average
5470.000	34.16	8.74	34.18	30.98	39.70	54.00	14.30	Average
@ 5503.600	34.10	8.76	34.17	80.62	89.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

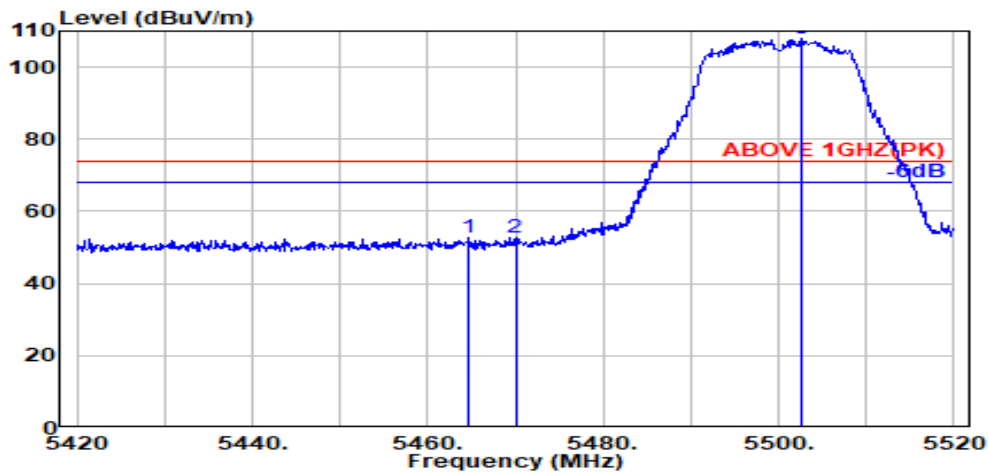

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.17	8.73	34.18	43.88	52.60	74.00	21.40	Peak
5470.000	34.16	8.74	34.18	44.13	52.85	74.00	21.15	Peak
@ 5502.500	34.10	8.75	34.17	99.23	107.92	---	---	Peak

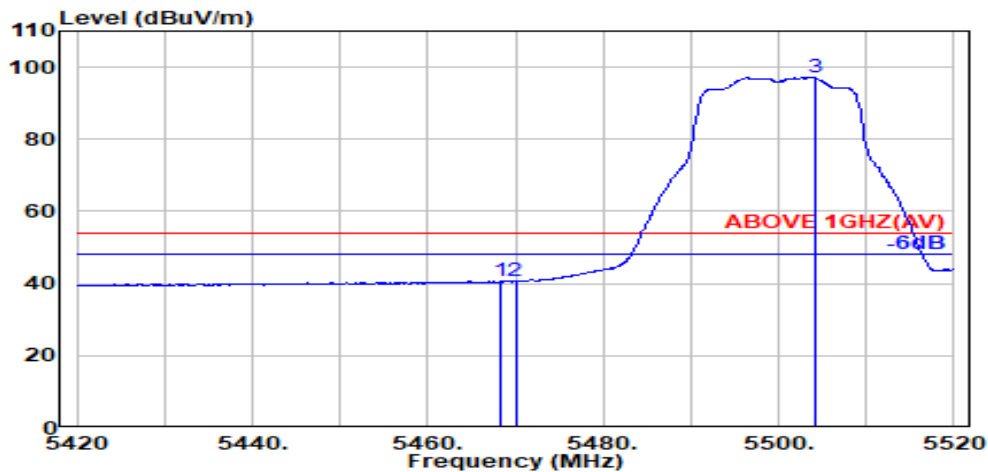

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	31.96	40.68	54.00	13.32	Average
5470.000	34.16	8.74	34.18	31.84	40.56	54.00	13.44	Average
@ 5504.100	34.10	8.76	34.17	88.46	97.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

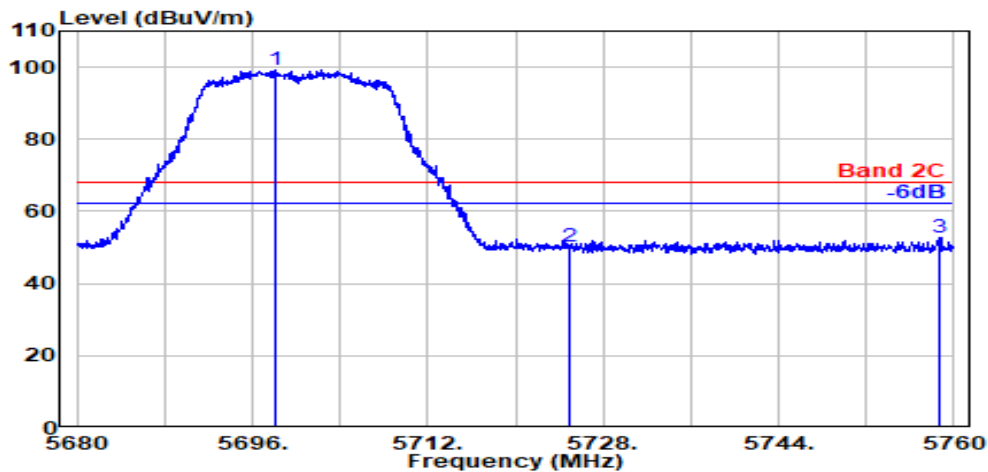

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.100	33.81	8.87	34.26	90.68	99.09	---	---	Peak
5725.000	33.80	8.88	34.28	41.85	50.26	68.20	17.94	Peak
5758.750	33.84	8.90	34.29	44.28	52.72	68.20	15.48	Peak

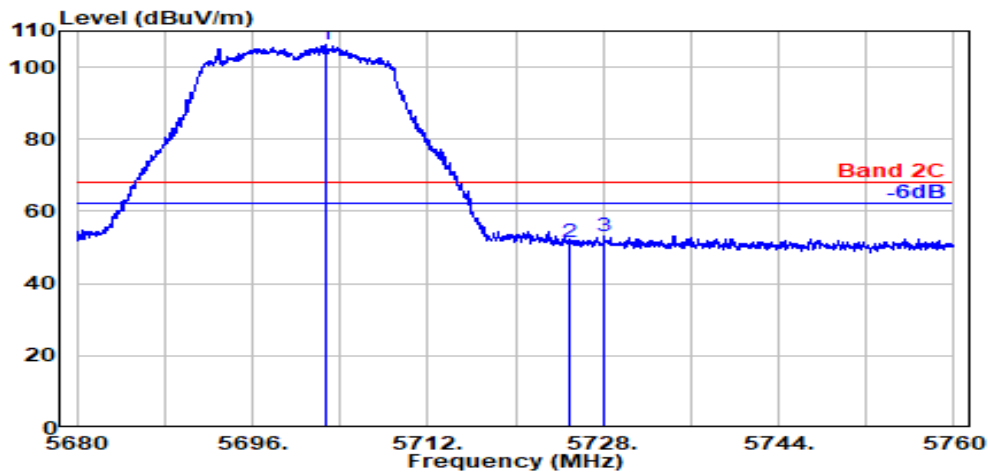


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.650	33.80	8.87	34.27	97.68	106.08	---	---	Peak
5725.000	33.80	8.88	34.28	42.97	51.38	68.20	16.82	Peak
5728.050	33.80	8.88	34.28	44.86	53.26	68.20	14.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

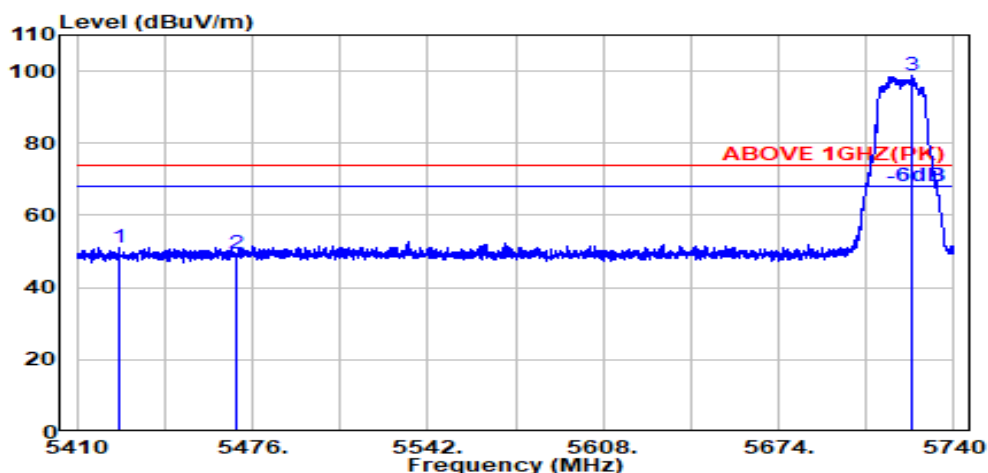

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.100	34.15	8.71	34.19	42.48	51.15	74.00	22.85	Peak
5470.000	34.16	8.74	34.18	40.67	49.39	74.00	24.61	Peak
@ 5723.900	33.80	8.88	34.28	90.57	98.98	---	---	Peak

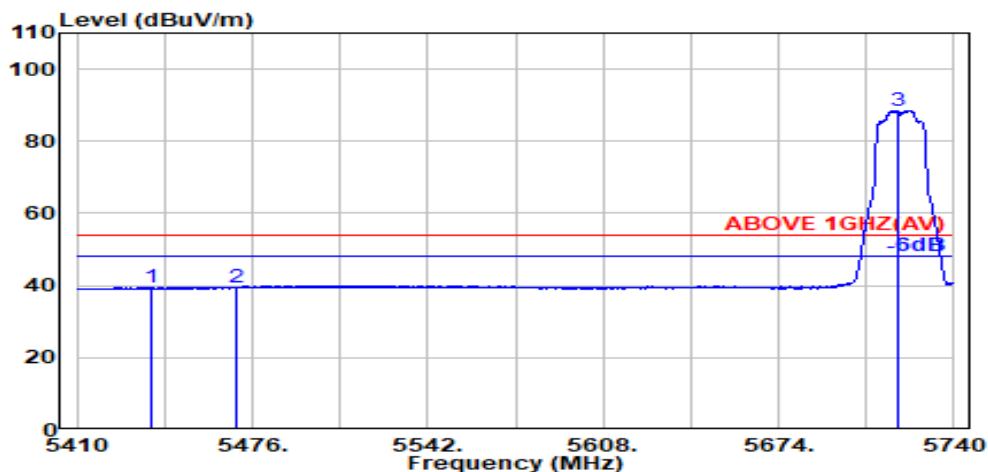

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.000	34.18	8.72	34.19	30.92	39.62	54.00	14.38	Average
5470.000	34.16	8.74	34.18	30.59	39.31	54.00	14.69	Average
@ 5719.100	33.80	8.88	34.27	80.09	88.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

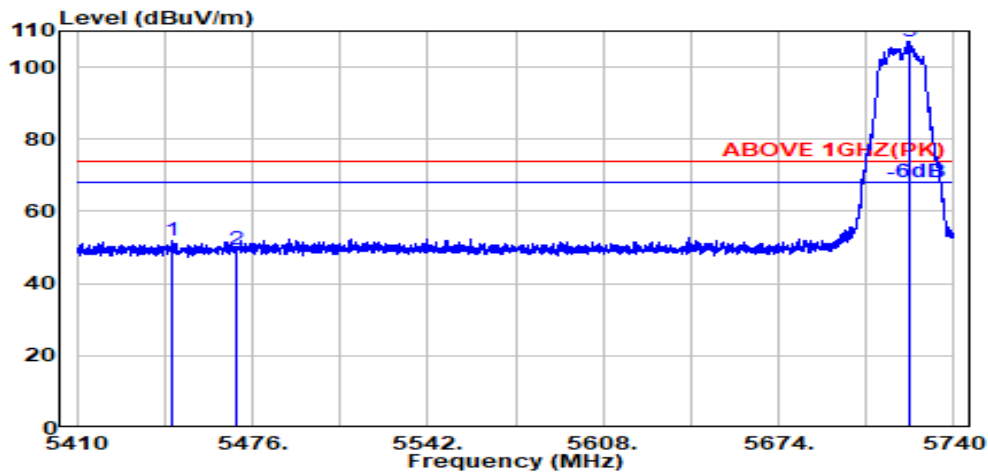

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.000	34.19	8.72	34.19	43.01	51.74	74.00	22.26	Peak
5470.000	34.16	8.74	34.18	40.58	49.29	74.00	24.71	Peak
@ 5722.900	33.80	8.88	34.28	98.66	107.06	---	---	Peak

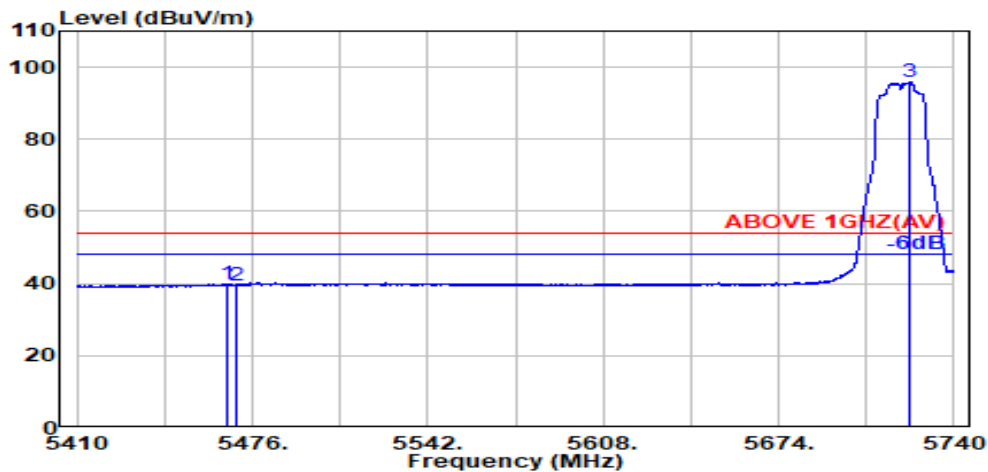

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.17	8.73	34.18	31.05	39.77	54.00	14.23	Average
5470.000	34.16	8.74	34.18	30.75	39.47	54.00	14.53	Average
@ 5723.500	33.80	8.88	34.28	87.41	95.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

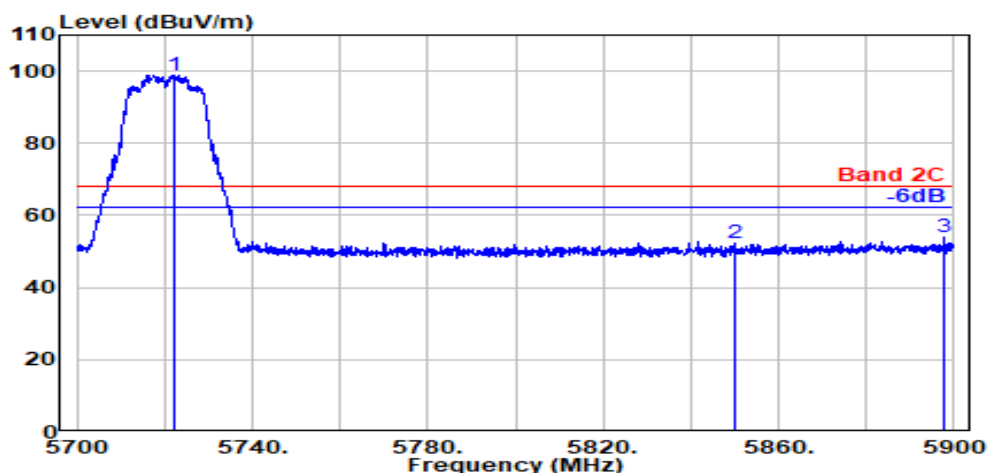

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.300	33.80	8.88	34.27	90.59	99.00	---	---	Peak
5850.000	34.10	8.95	34.33	43.69	52.40	68.20	15.80	Peak
5897.800	34.10	8.98	34.35	45.11	53.83	68.20	14.37	Peak

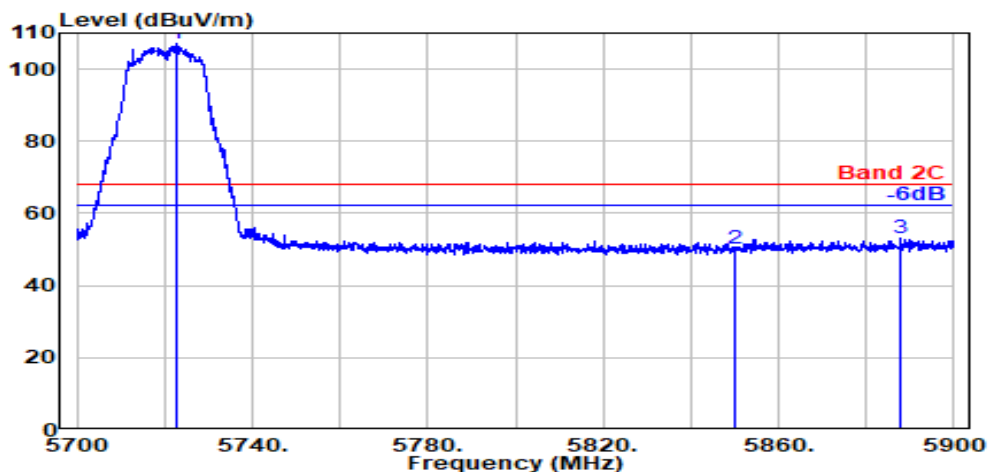


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.500	33.80	8.88	34.27	98.87	107.27	---	---	Peak
5850.000	34.10	8.95	34.33	41.65	50.37	68.20	17.83	Peak
5887.900	34.10	8.97	34.35	44.61	53.33	68.20	14.87	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

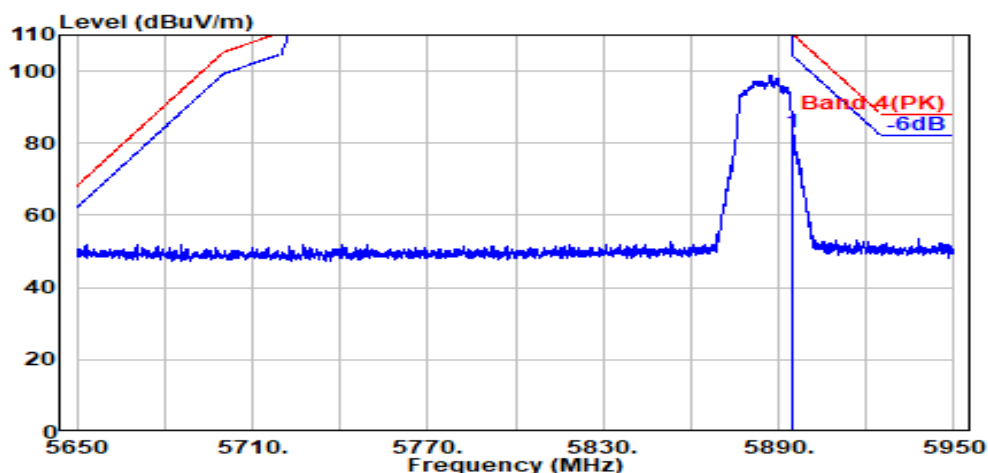

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	74.47	83.19	110.20	27.01	Peak

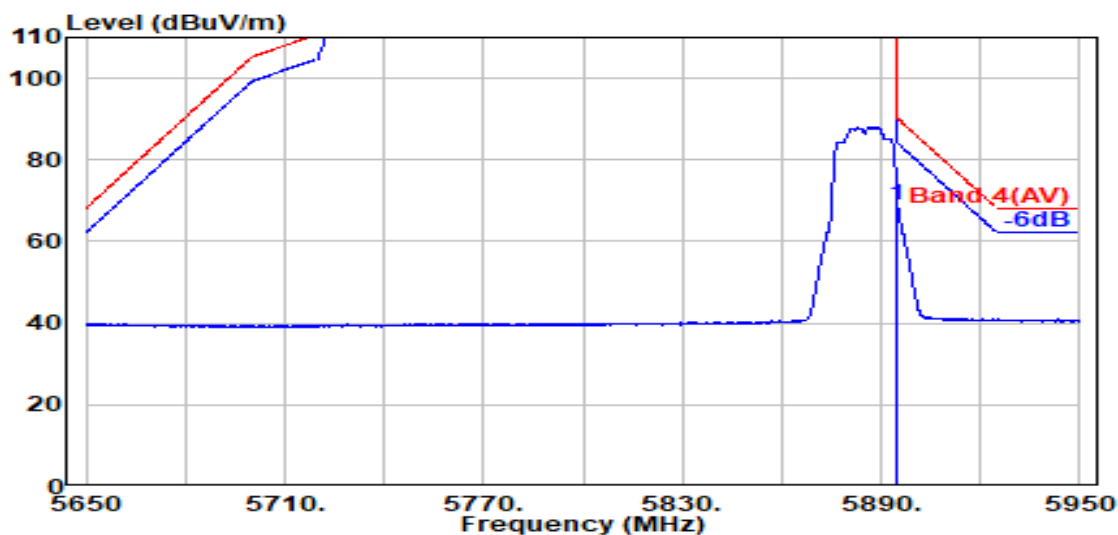

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	60.15	68.87	90.20	21.33	Average

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

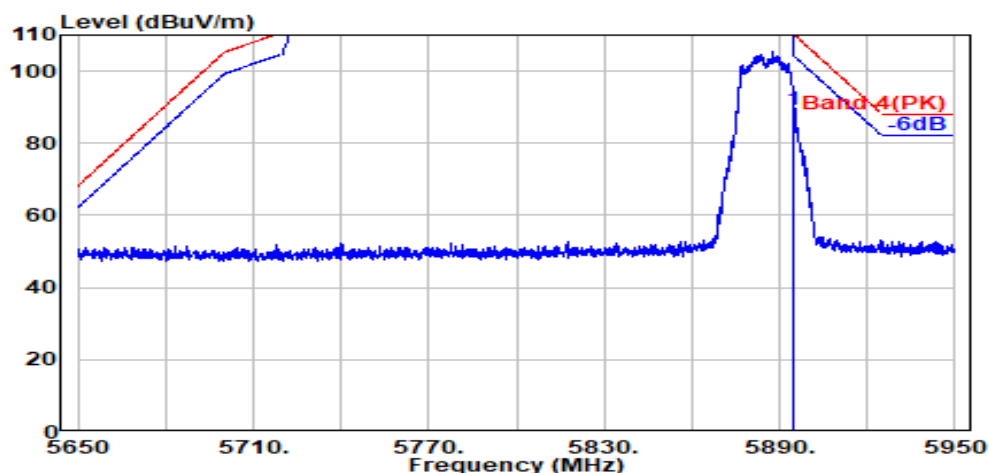

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	80.42	89.14	110.20	21.06	Peak

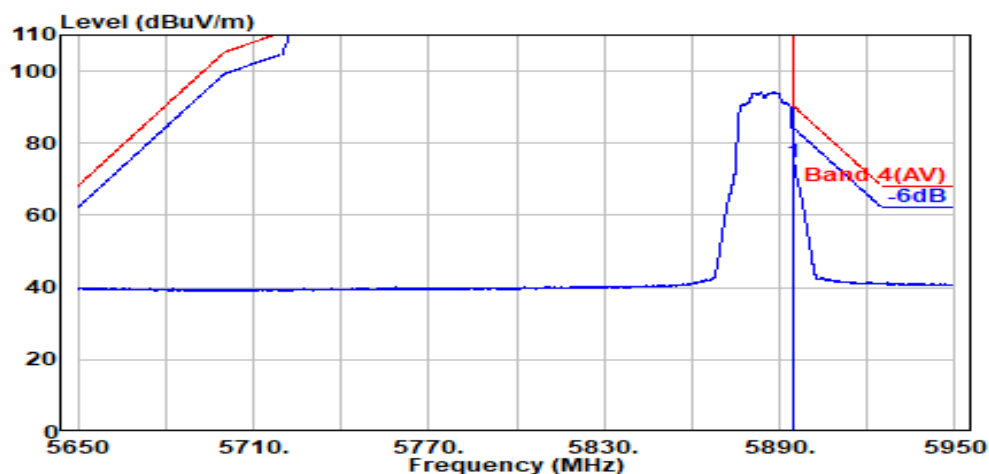


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	65.83	74.55	90.20	15.65	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

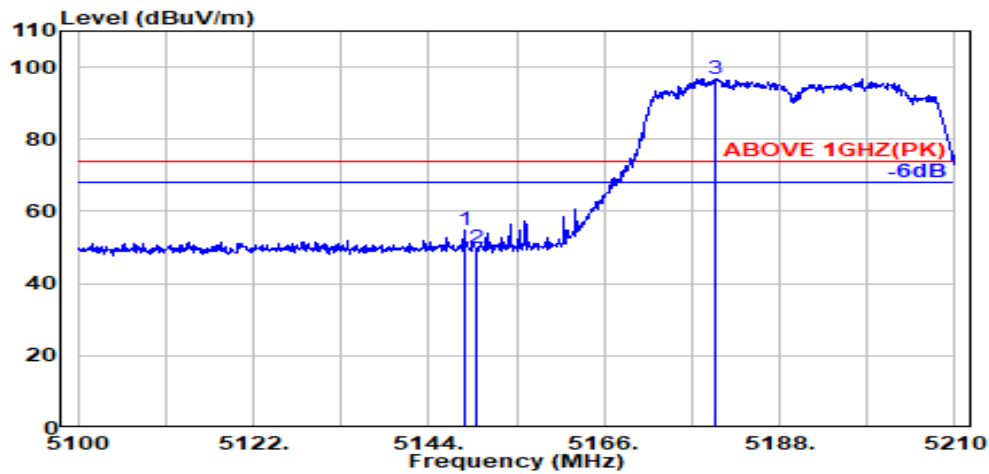

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.70	8.54	34.28	46.91	54.87	74.00	19.13	Peak
5150.000	33.70	8.54	34.28	41.98	49.94	74.00	24.06	Peak
@ 5179.800	33.70	8.56	34.27	88.85	96.84	---	---	Peak

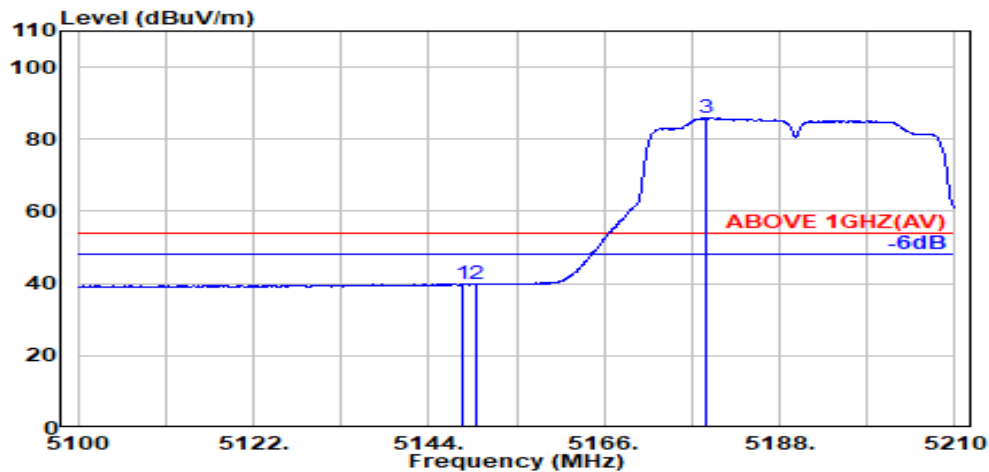

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.70	8.54	34.28	31.97	39.94	54.00	14.06	Average
5150.000	33.70	8.54	34.28	31.81	39.77	54.00	14.23	Average
@ 5178.800	33.70	8.56	34.27	77.91	85.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

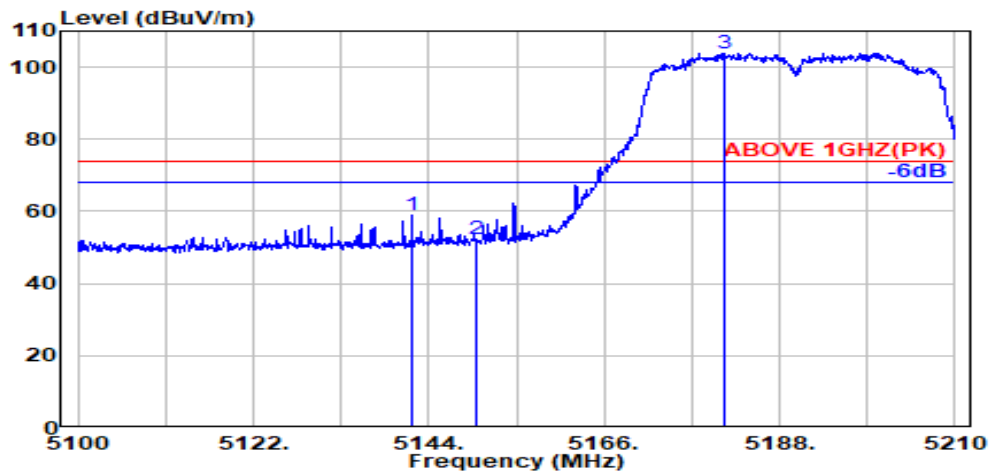

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.900	33.70	8.54	34.28	50.88	58.84	74.00	15.16	Peak
5150.000	33.70	8.54	34.28	44.46	52.42	74.00	21.58	Peak
@ 5181.200	33.70	8.56	34.27	95.87	103.86	---	---	Peak

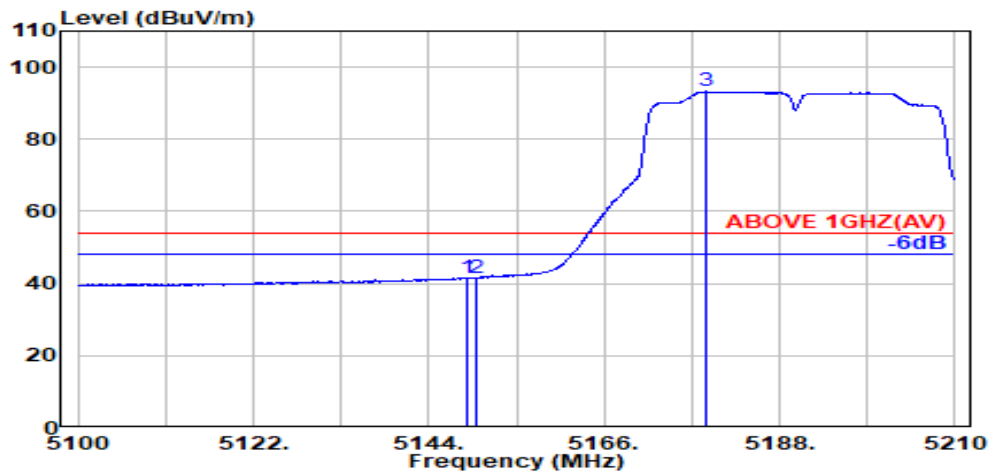

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.70	8.54	34.28	33.72	41.68	54.00	12.32	Average
5150.000	33.70	8.54	34.28	33.52	41.49	54.00	12.51	Average
@ 5178.900	33.70	8.56	34.27	85.21	93.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

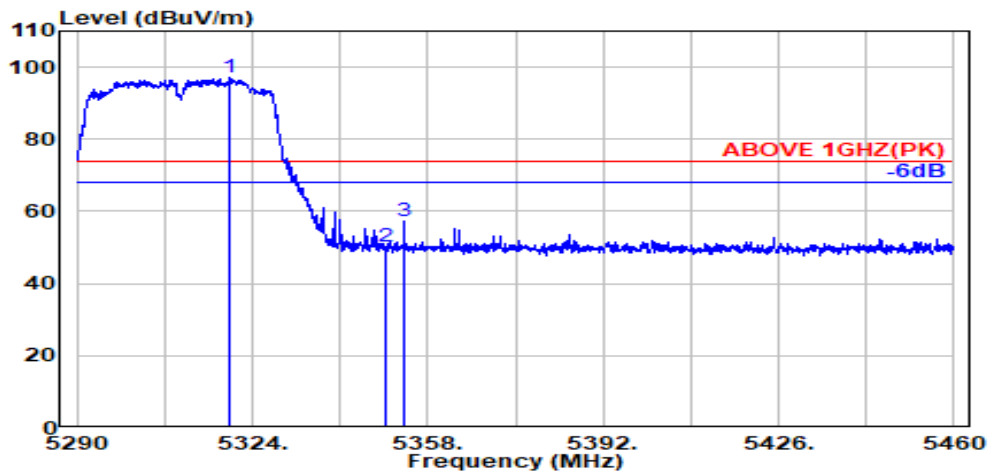

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.600	34.02	8.65	34.23	88.58	97.02	---	---	Peak
5350.000	33.90	8.67	34.22	41.75	50.09	74.00	23.91	Peak
5353.500	33.91	8.67	34.22	48.86	57.23	74.00	16.77	Peak

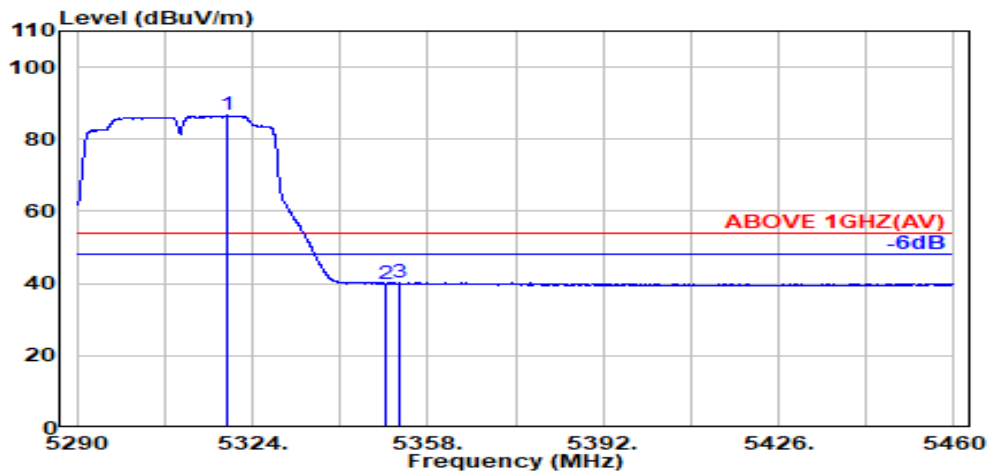

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.300	34.02	8.65	34.23	78.13	86.58	---	---	Average
5350.000	33.90	8.67	34.22	31.63	39.98	54.00	14.02	Average
5352.600	33.91	8.67	34.22	31.88	40.24	54.00	13.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

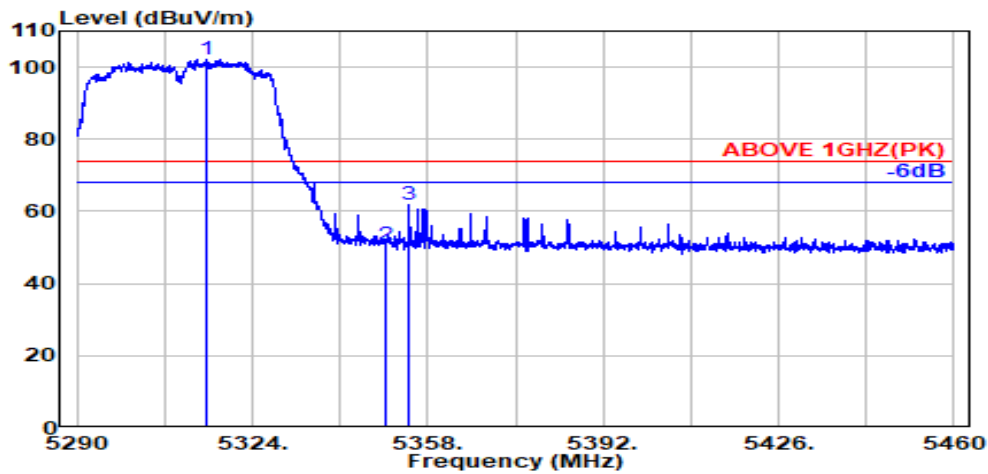

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.200	34.04	8.64	34.23	93.82	102.28	---	---	Peak
5350.000	33.90	8.67	34.22	42.27	50.62	74.00	23.38	Peak
5354.400	33.92	8.67	34.22	53.42	61.79	74.00	12.21	Peak

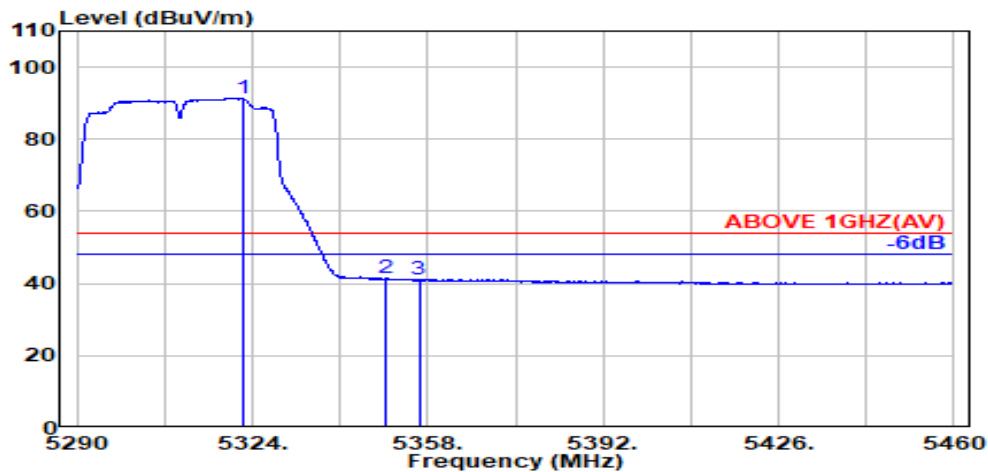

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.100	34.01	8.65	34.23	83.02	91.45	---	---	Average
5350.000	33.90	8.67	34.22	33.01	41.36	54.00	12.64	Average
5356.300	33.93	8.67	34.21	32.85	41.23	54.00	12.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

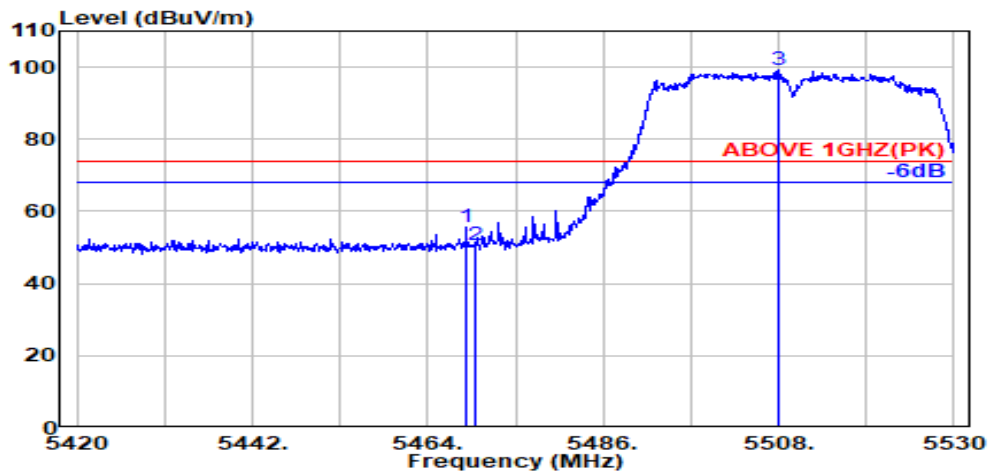

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.16	8.74	34.18	46.88	55.60	74.00	18.40	Peak
5470.000	34.16	8.74	34.18	41.89	50.61	74.00	23.39	Peak
@ 5507.900	34.10	8.76	34.17	90.37	99.06	---	---	Peak

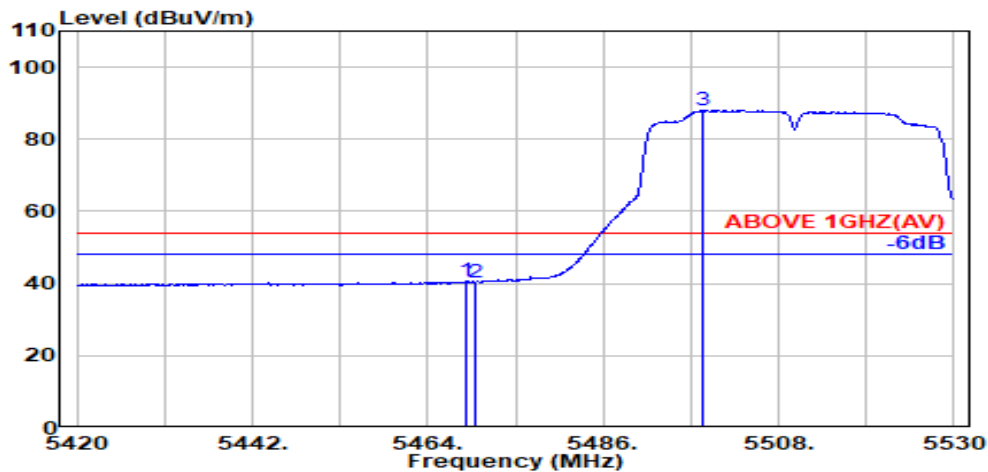

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.76	40.48	54.00	13.52	Average
5470.000	34.16	8.74	34.18	31.62	40.33	54.00	13.67	Average
@ 5498.500	34.10	8.75	34.17	79.28	87.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

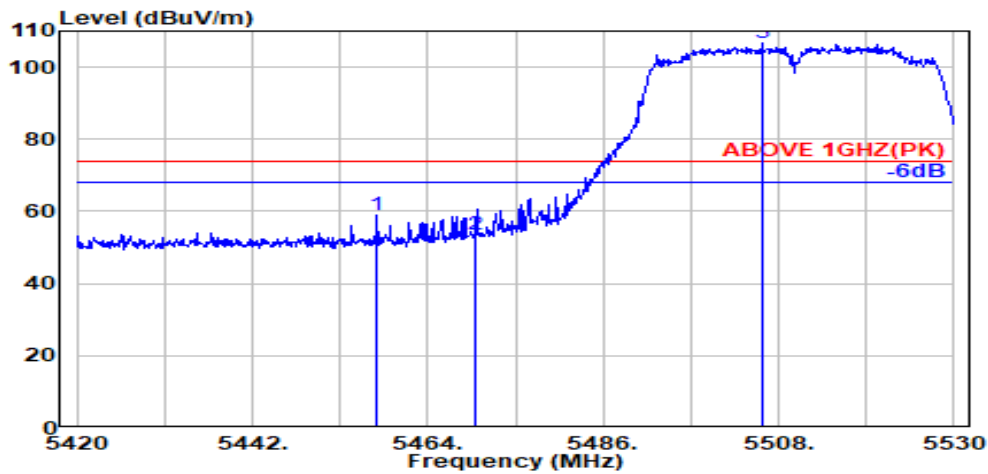

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.700	34.18	8.73	34.18	50.23	58.96	74.00	15.04	Peak
5470.000	34.16	8.74	34.18	44.74	53.45	74.00	20.55	Peak
@ 5505.900	34.10	8.76	34.17	97.94	106.62	---	---	Peak

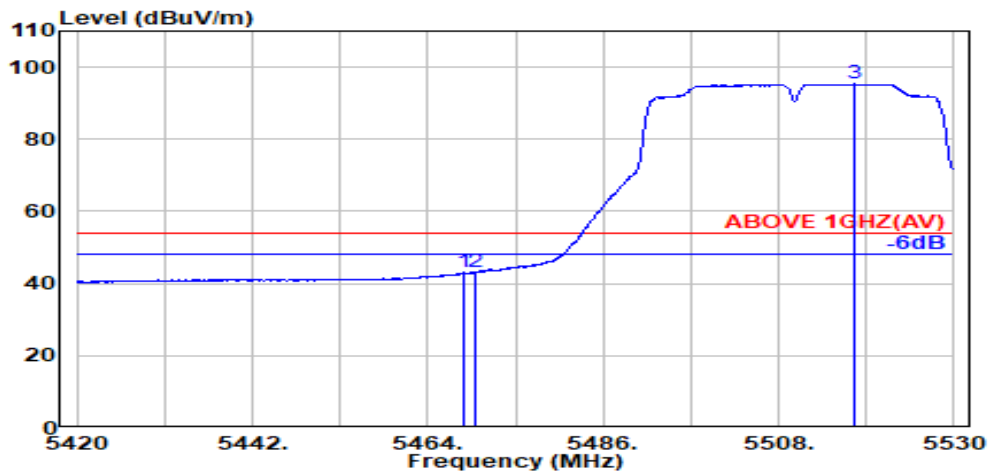

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.600	34.16	8.73	34.18	34.26	42.98	54.00	11.02	Average
5470.000	34.16	8.74	34.18	34.38	43.10	54.00	10.90	Average
@ 5517.400	34.10	8.76	34.18	86.63	95.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

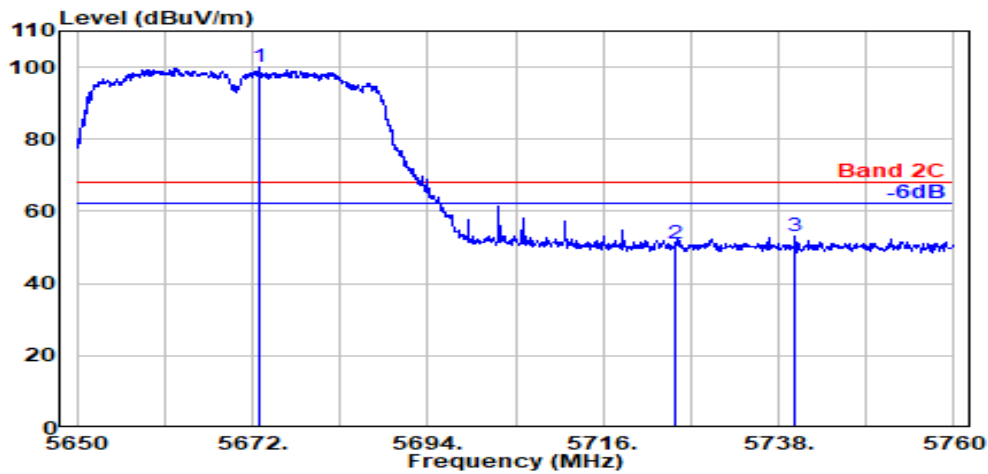

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.800	33.91	8.85	34.25	91.51	100.02	---	---	Peak
5725.000	33.80	8.88	34.28	42.60	51.00	68.20	17.20	Peak
5740.100	33.80	8.89	34.28	44.65	53.06	68.20	15.14	Peak

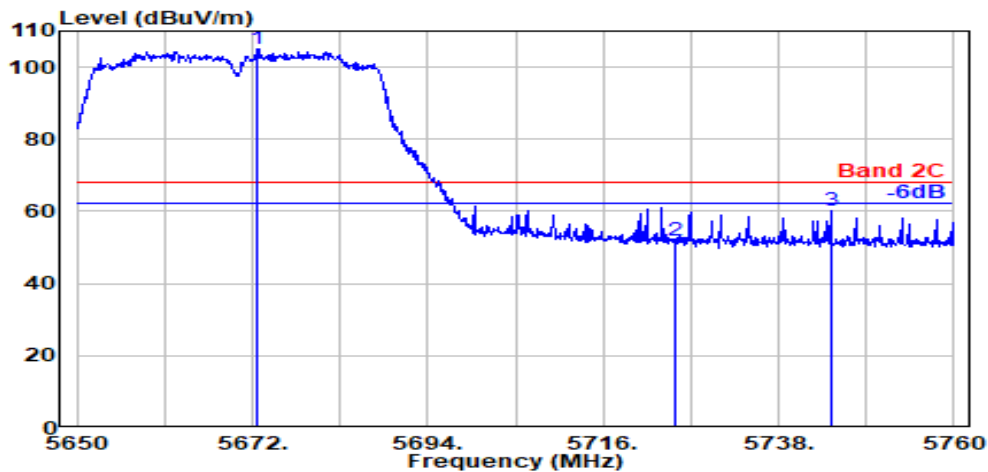

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.600	33.91	8.85	34.25	96.56	105.07	---	---	Peak
5725.000	33.80	8.88	34.28	43.33	51.73	68.20	16.47	Peak
5744.500	33.80	8.89	34.28	51.85	60.26	68.20	7.94	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

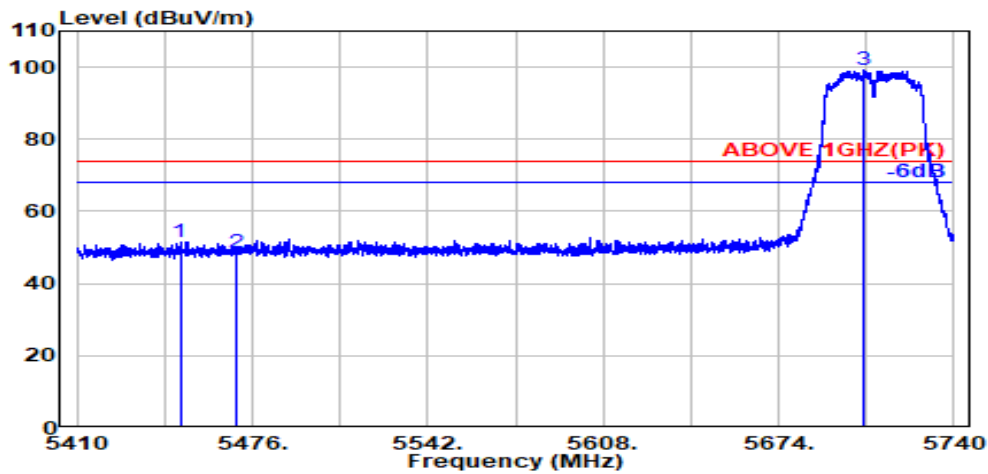

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.800	34.20	8.72	34.19	42.93	51.66	74.00	22.34	Peak
5470.000	34.16	8.74	34.18	39.75	48.47	74.00	25.53	Peak
@ 5705.700	33.80	8.87	34.27	90.82	99.22	---	---	Peak

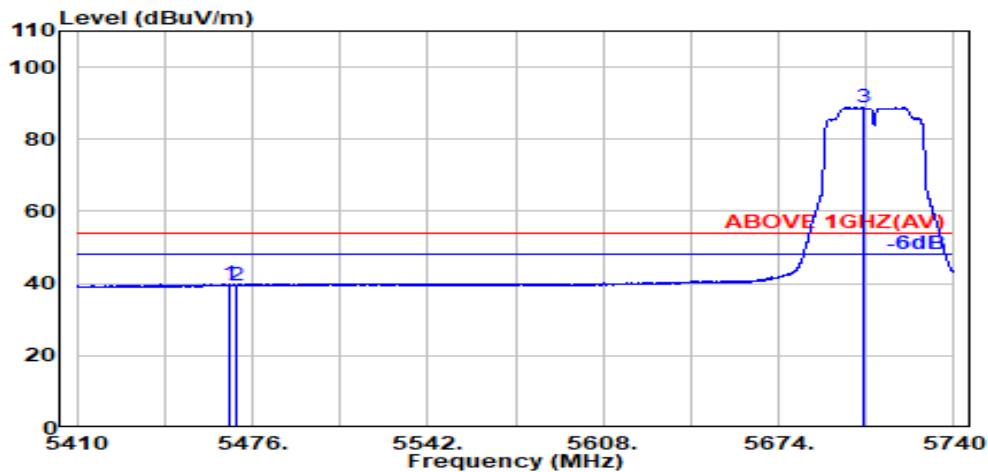

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.17	8.73	34.18	31.06	39.78	54.00	14.22	Average
5470.000	34.16	8.74	34.18	30.62	39.34	54.00	14.66	Average
@ 5705.900	33.80	8.87	34.27	80.43	88.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

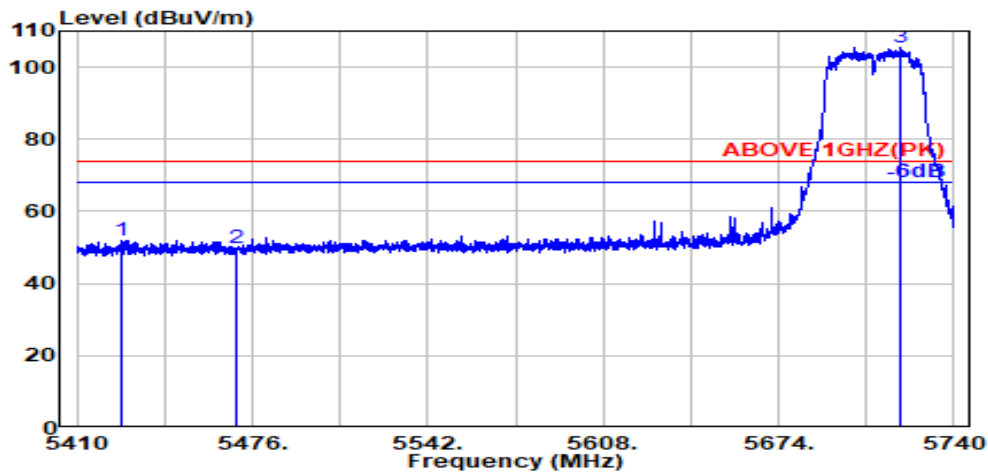

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.100	34.15	8.71	34.19	43.25	51.92	74.00	22.08	Peak
5470.000	34.16	8.74	34.18	40.99	49.71	74.00	24.29	Peak
@ 5719.700	33.80	8.88	34.27	96.88	105.29	---	---	Peak

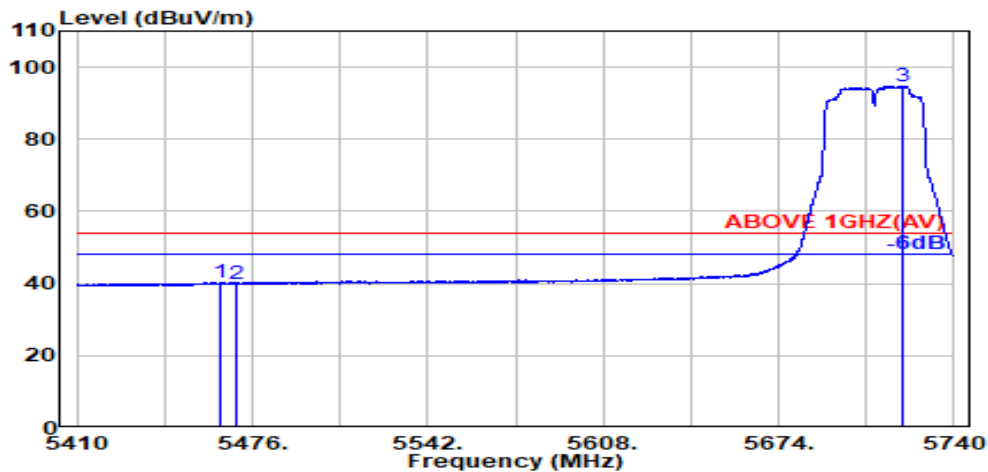


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.17	8.73	34.18	31.50	40.23	54.00	13.77	Average
5470.000	34.16	8.74	34.18	31.22	39.94	54.00	14.06	Average
@ 5720.500	33.80	8.88	34.27	86.36	94.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

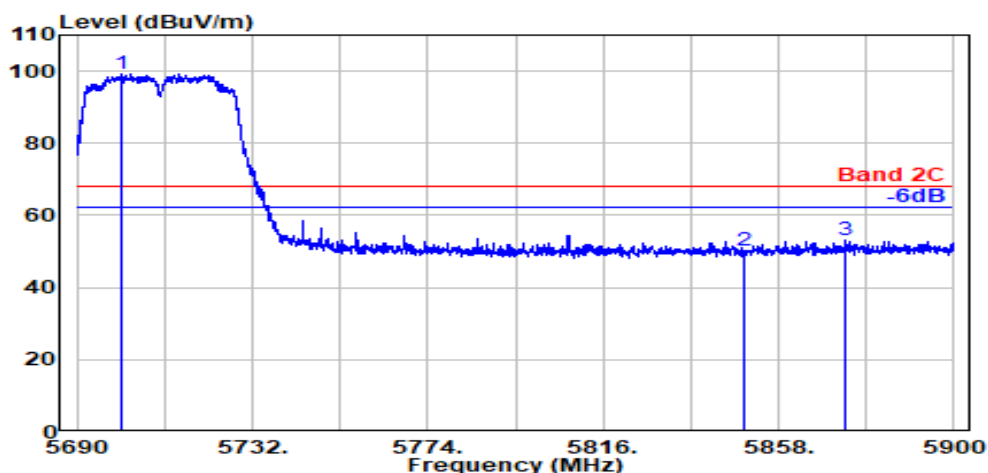

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.800	33.80	8.87	34.26	90.94	99.35	---	---	Peak
5850.000	34.10	8.95	34.33	41.36	50.08	68.20	18.12	Peak
5874.100	34.10	8.96	34.34	44.29	53.00	68.20	15.20	Peak

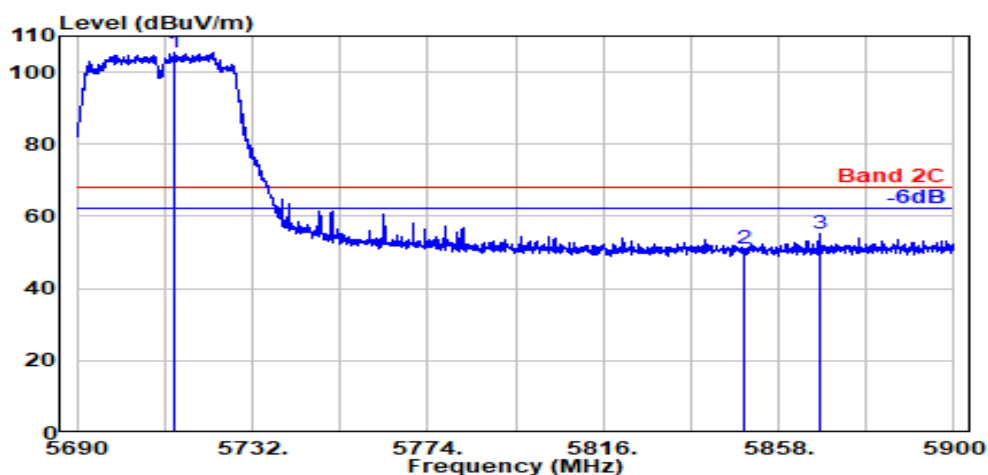

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.200	33.80	8.87	34.27	97.17	105.57	---	---	Peak
5850.000	34.10	8.95	34.33	42.42	51.14	68.20	17.06	Peak
5867.700	34.10	8.96	34.34	46.48	55.19	68.20	13.01	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

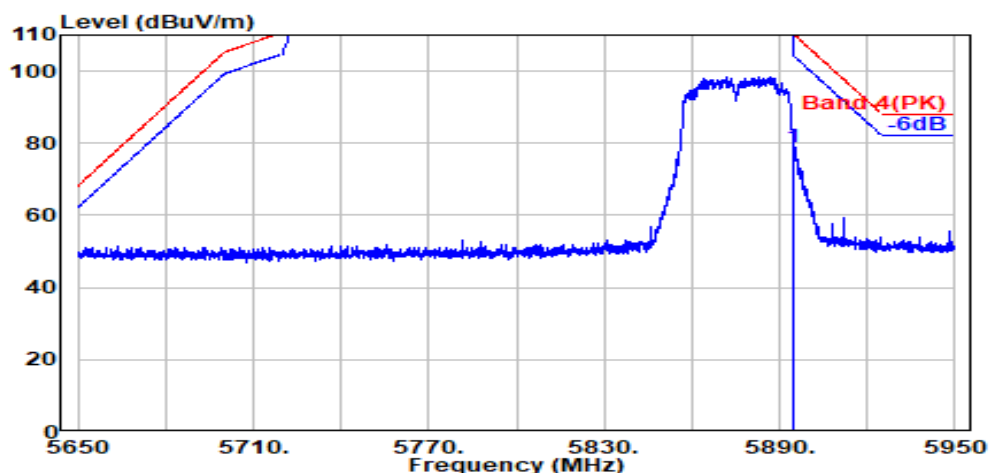

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	70.28	79.00	110.20	31.20	Peak

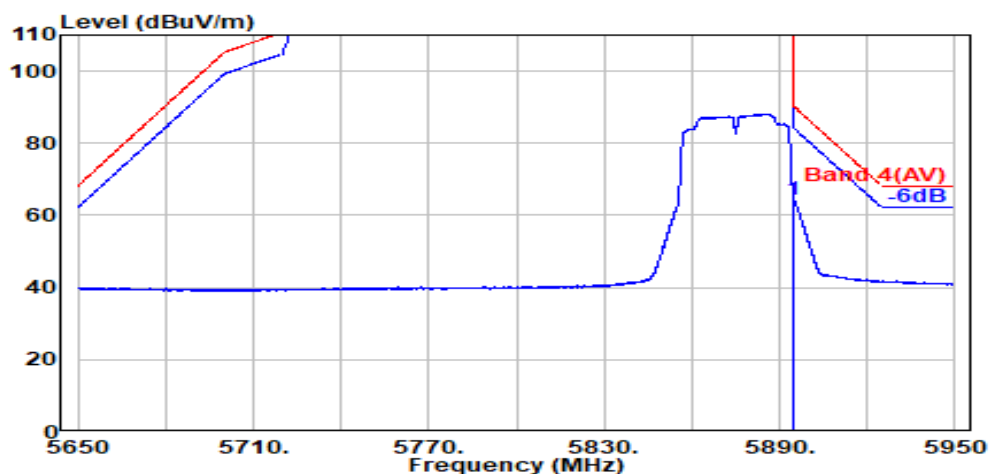


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	55.76	64.48	90.20	25.72	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

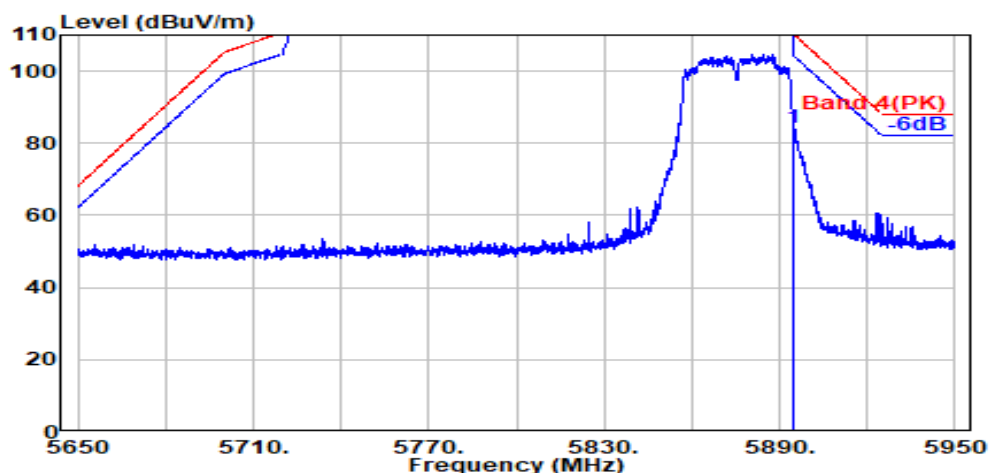

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	75.67	84.39	110.20	25.81	Peak

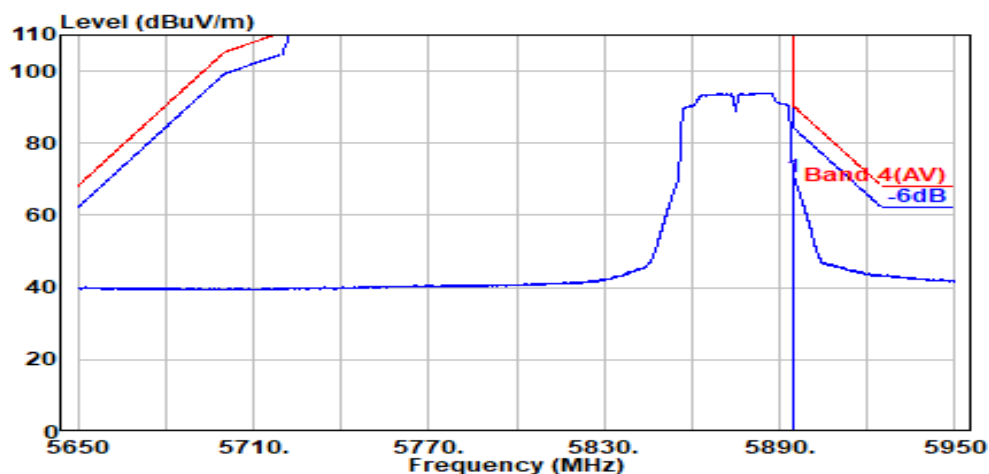

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	61.64	70.36	90.20	19.84	Average

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

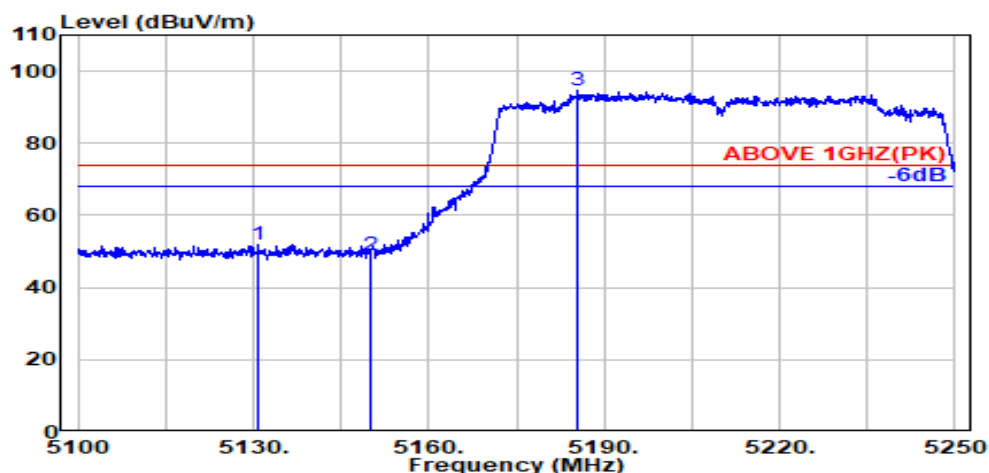

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.900	33.70	8.53	34.29	44.08	52.02	74.00	21.98	Peak
5150.000	33.70	8.54	34.28	41.19	49.15	74.00	24.85	Peak
@ 5185.500	33.70	8.57	34.27	86.55	94.55	---	---	Peak

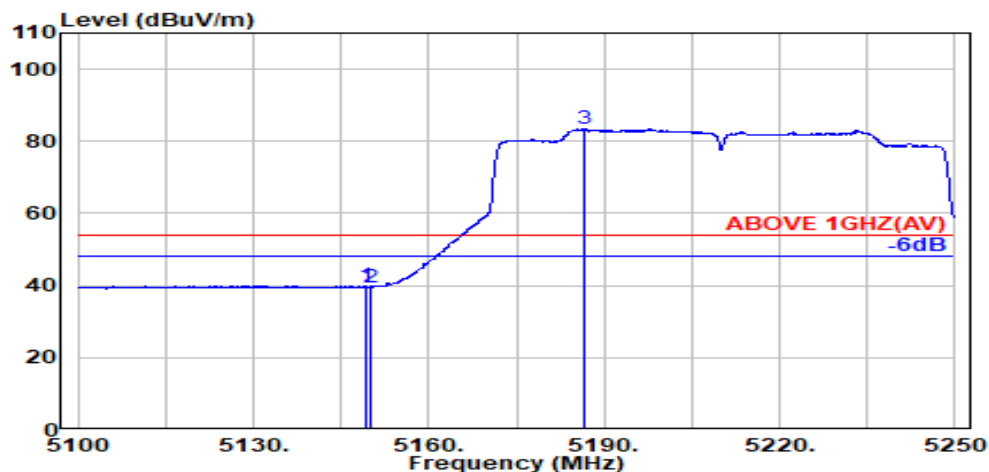

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.54	34.28	31.90	39.86	54.00	14.14	Average
5150.000	33.70	8.54	34.28	31.64	39.61	54.00	14.39	Average
@ 5186.500	33.70	8.57	34.27	75.46	83.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

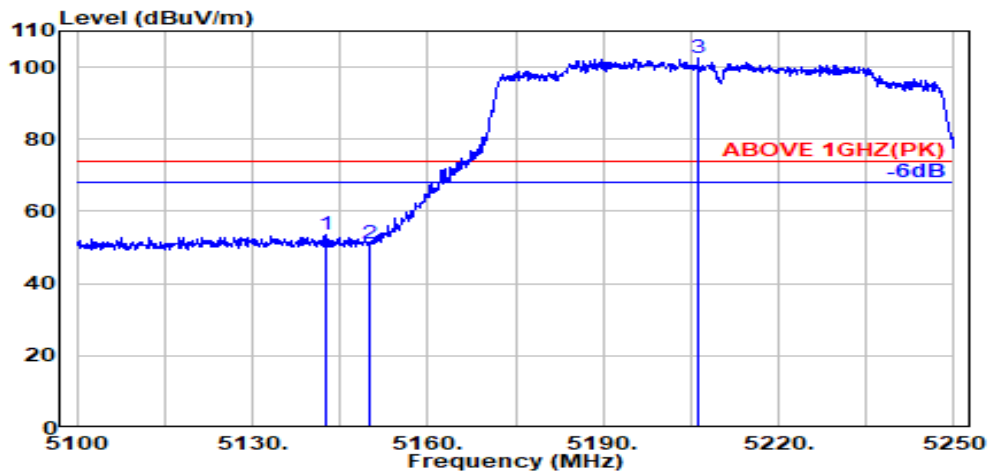

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.700	33.70	8.54	34.28	45.41	53.37	74.00	20.63	Peak
5150.000	33.70	8.54	34.28	43.27	51.23	74.00	22.77	Peak
@ 5206.200	33.71	8.58	34.26	94.37	102.39	---	---	Peak

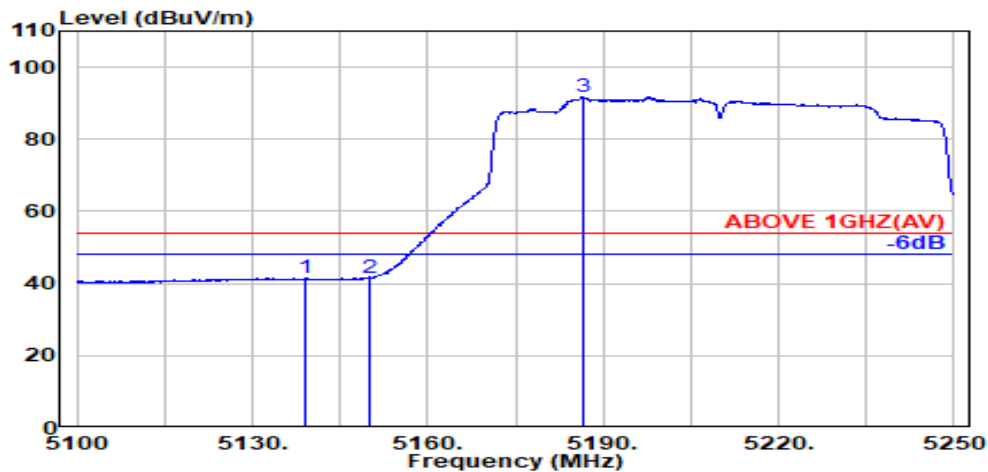

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.200	33.70	8.54	34.28	33.65	41.61	54.00	12.39	Average
5150.000	33.70	8.54	34.28	33.75	41.71	54.00	12.29	Average
@ 5186.500	33.70	8.57	34.27	83.87	91.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

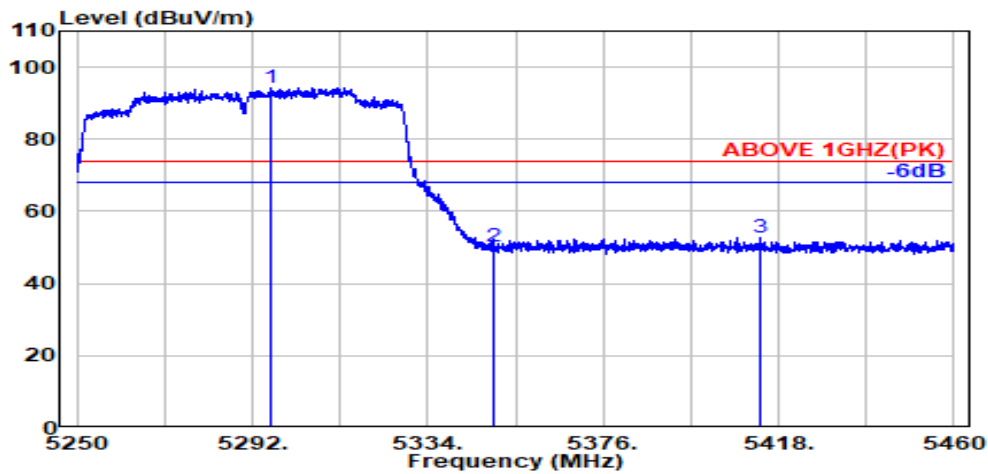

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5296.500	34.08	8.63	34.23	85.88	94.36	---	---	Peak
5350.000	33.90	8.67	34.22	41.79	50.14	74.00	23.86	Peak
5413.700	34.13	8.70	34.20	44.09	52.73	74.00	21.27	Peak

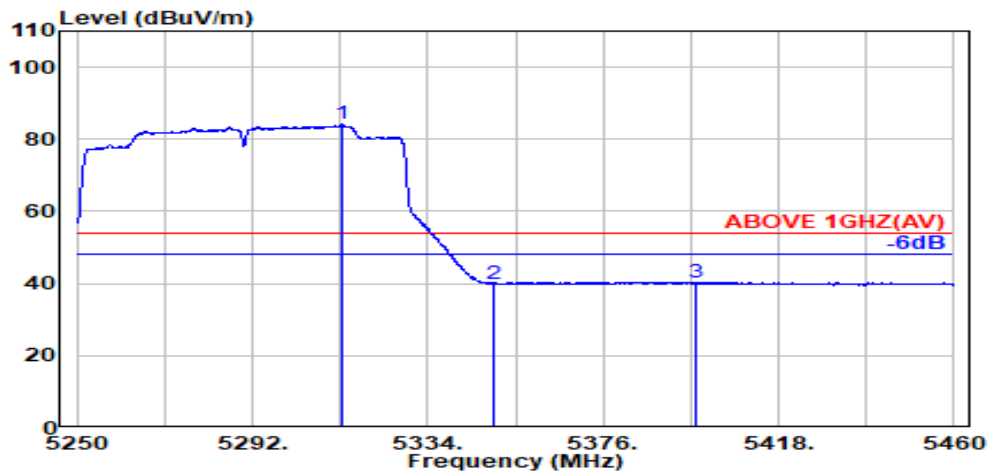

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.500	34.05	8.64	34.23	75.70	84.16	---	---	Average
5350.000	33.90	8.67	34.22	31.69	40.04	54.00	13.96	Average
5398.200	34.09	8.69	34.20	31.88	40.47	54.00	13.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

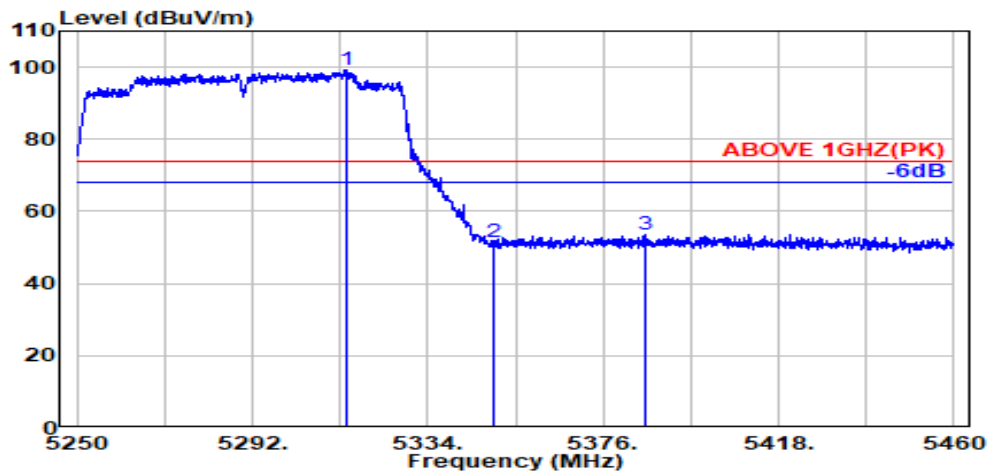

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.500	34.04	8.64	34.23	90.93	99.39	---	---	Peak
5350.000	33.90	8.67	34.22	43.03	51.38	74.00	22.62	Peak
5385.900	34.04	8.69	34.21	45.07	53.60	74.00	20.40	Peak

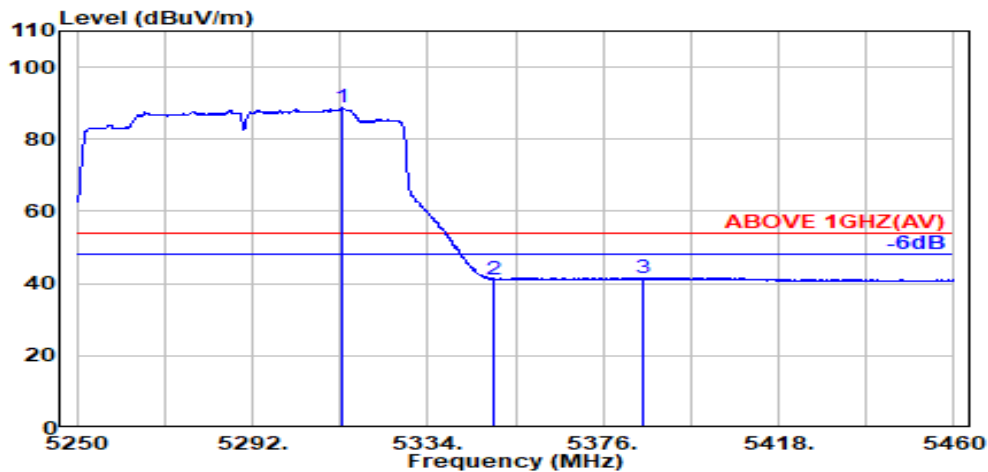


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.400	34.05	8.64	34.23	80.39	88.86	---	---	Average
5350.000	33.90	8.67	34.22	32.93	41.28	54.00	12.72	Average
5385.300	34.04	8.69	34.21	33.09	41.61	54.00	12.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

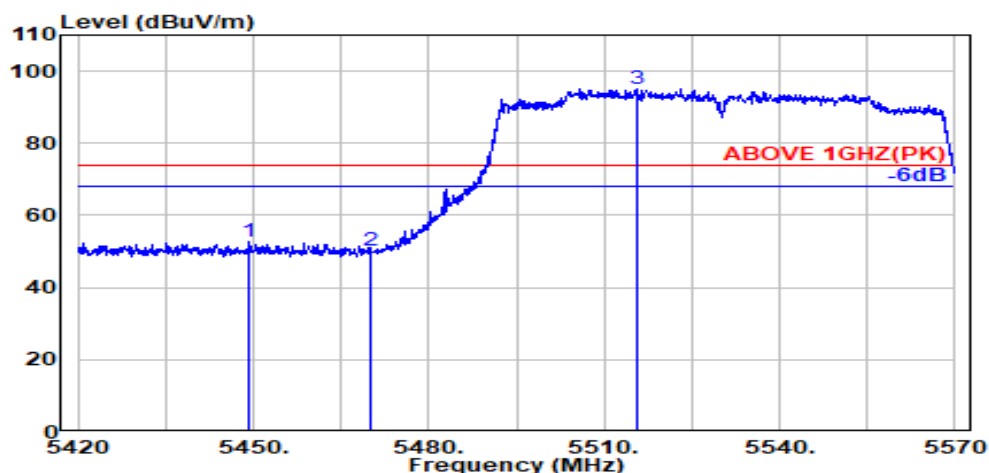

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.200	34.20	8.72	34.19	43.94	52.68	74.00	21.32	Peak
5470.000	34.16	8.74	34.18	41.54	50.26	74.00	23.74	Peak
@ 5515.500	34.10	8.76	34.18	86.54	95.22	---	---	Peak

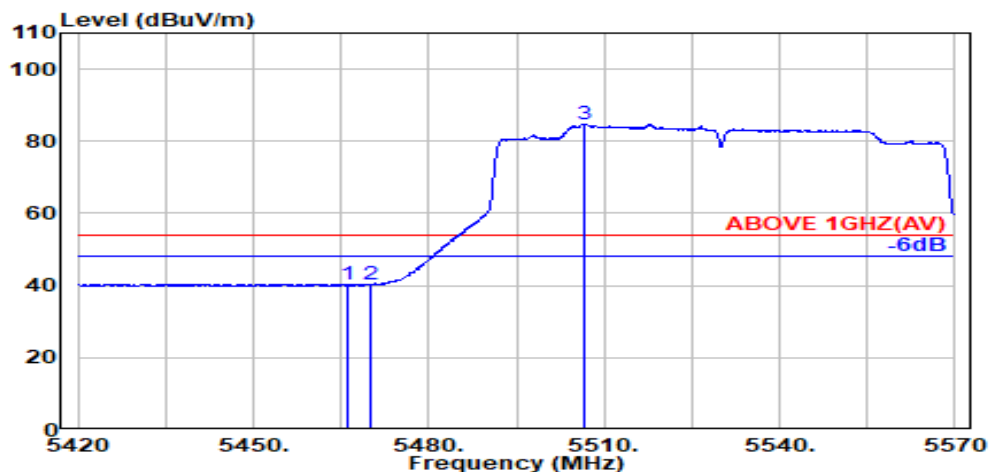

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.17	8.73	34.18	31.72	40.44	54.00	13.56	Average
5470.000	34.16	8.74	34.18	31.46	40.17	54.00	13.83	Average
@ 5506.500	34.10	8.76	34.17	76.20	84.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

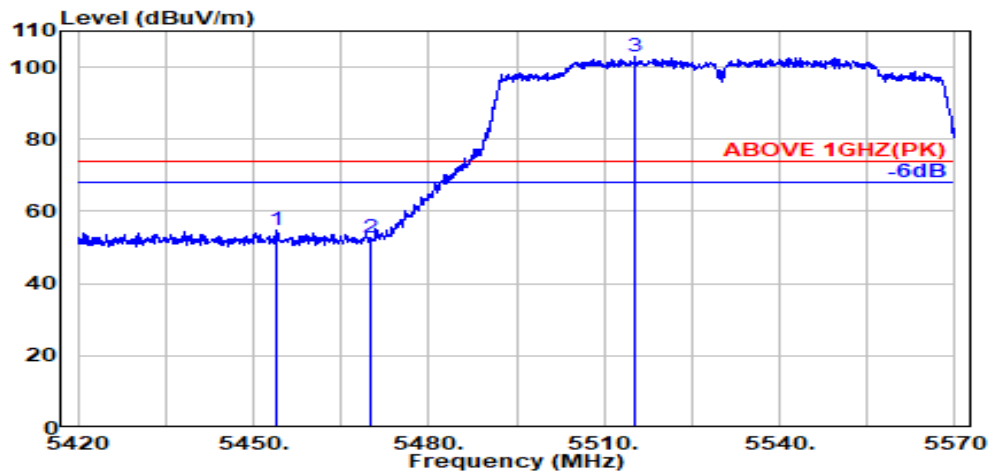

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.100	34.19	8.73	34.18	45.95	54.69	74.00	19.31	Peak
5470.000	34.16	8.74	34.18	44.07	52.79	74.00	21.21	Peak
@ 5515.300	34.10	8.76	34.18	94.31	102.99	---	---	Peak

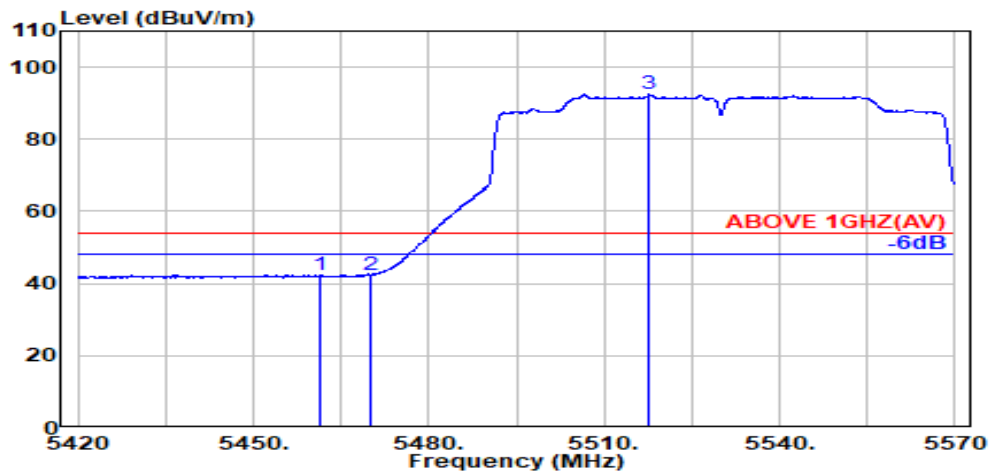

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.500	34.18	8.73	34.18	33.59	42.32	54.00	11.68	Average
5470.000	34.16	8.74	34.18	33.62	42.33	54.00	11.67	Average
@ 5517.700	34.10	8.76	34.18	83.72	92.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

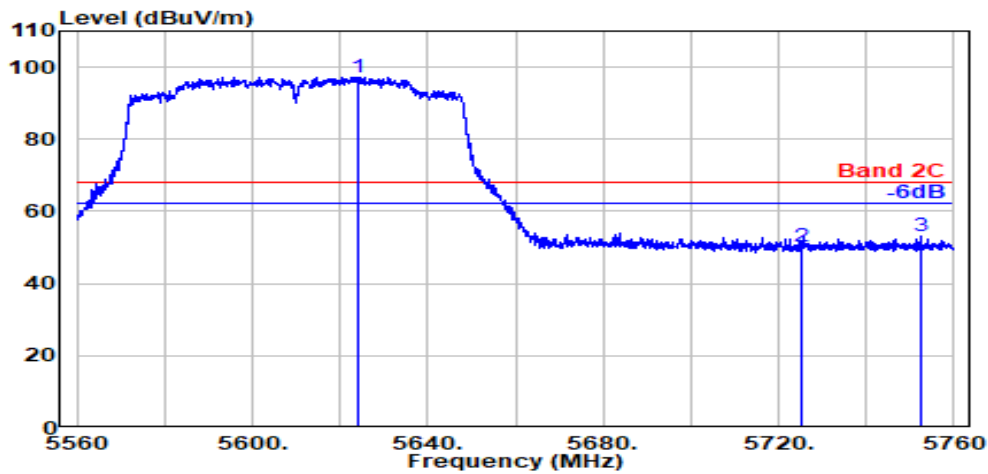

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5624.200	34.00	8.82	34.23	88.70	97.30	---	---	Peak
5725.000	33.80	8.88	34.28	41.72	50.12	68.20	18.08	Peak
5752.400	33.81	8.90	34.29	44.65	53.07	68.20	15.13	Peak

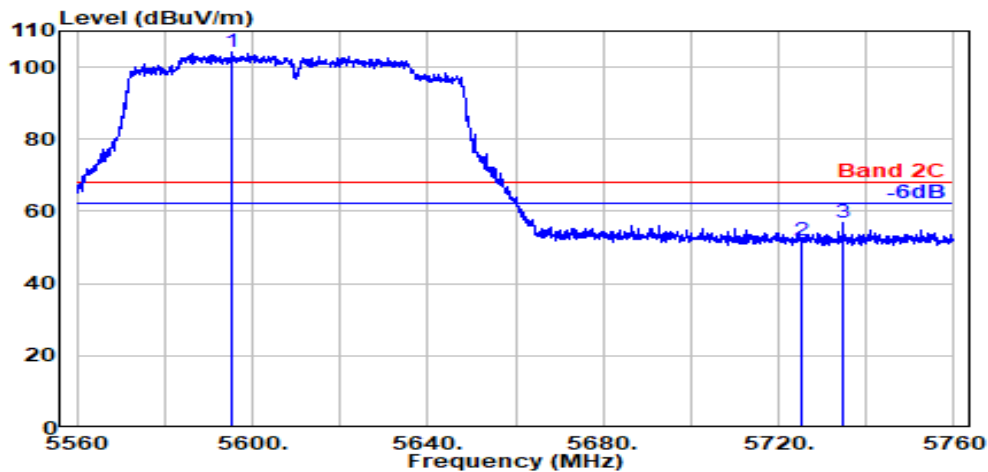

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.400	34.01	8.81	34.22	95.51	104.11	---	---	Peak
5725.000	33.80	8.88	34.28	43.54	51.94	68.20	16.26	Peak
5734.700	33.80	8.89	34.28	48.27	56.67	68.20	11.53	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

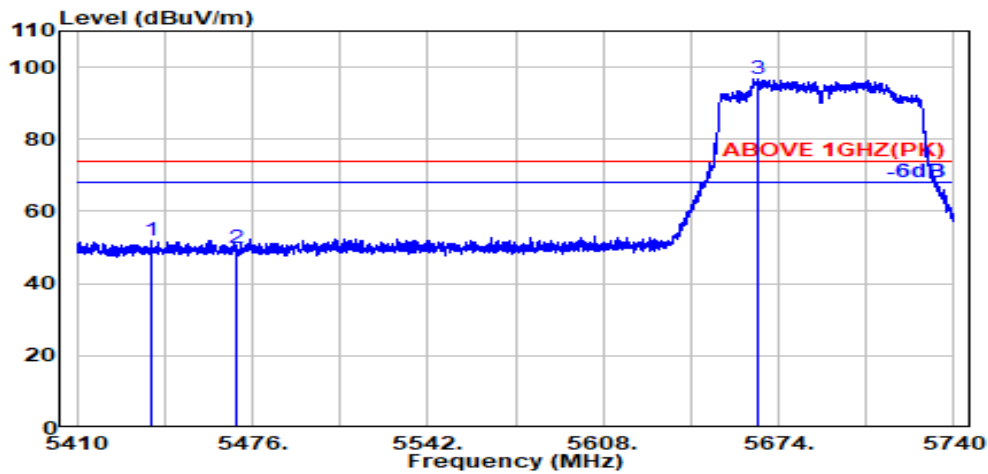

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.700	34.18	8.72	34.19	43.35	52.05	74.00	21.95	Peak
5470.000	34.16	8.74	34.18	40.98	49.70	74.00	24.30	Peak
@ 5666.300	33.93	8.85	34.25	88.02	96.55	---	---	Peak

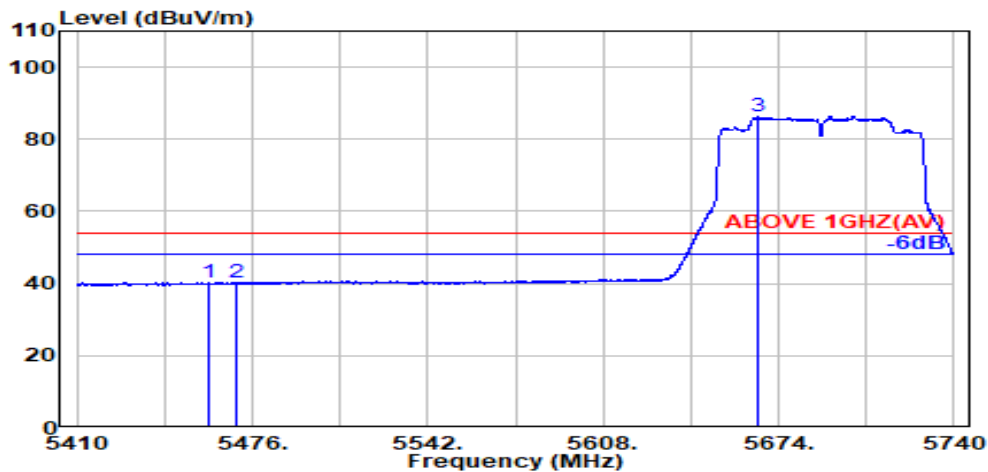

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.18	8.73	34.18	31.63	40.36	54.00	13.64	Average
5470.000	34.16	8.74	34.18	31.40	40.12	54.00	13.88	Average
@ 5666.500	33.93	8.85	34.25	77.86	86.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

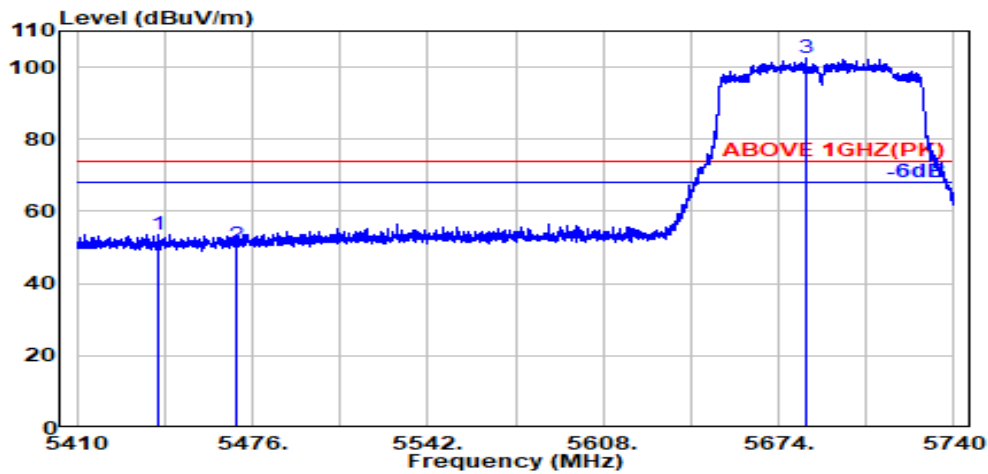

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.500	34.18	8.72	34.19	44.97	53.68	74.00	20.32	Peak
5470.000	34.16	8.74	34.18	41.81	50.52	74.00	23.48	Peak
@ 5684.500	33.86	8.86	34.26	93.91	102.37	---	---	Peak

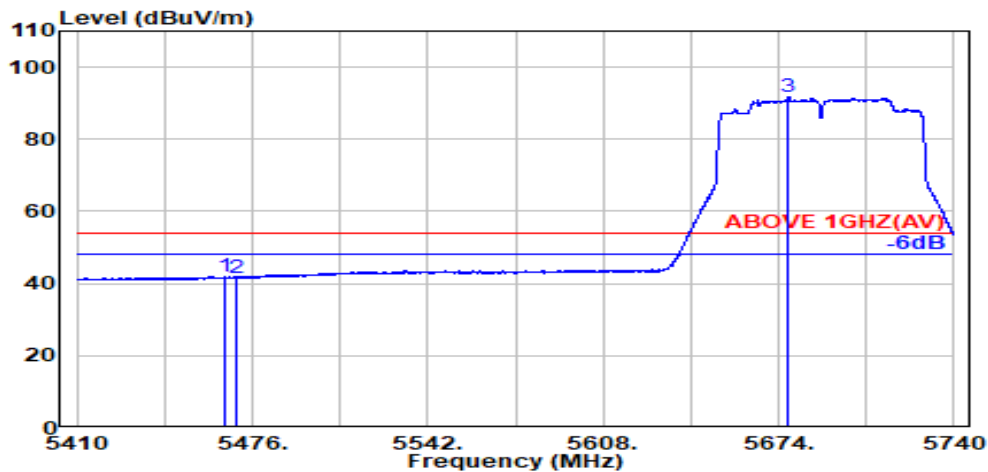

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.17	8.73	34.18	33.26	41.98	54.00	12.02	Average
5470.000	34.16	8.74	34.18	32.94	41.66	54.00	12.34	Average
@ 5677.700	33.89	8.85	34.25	83.10	91.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

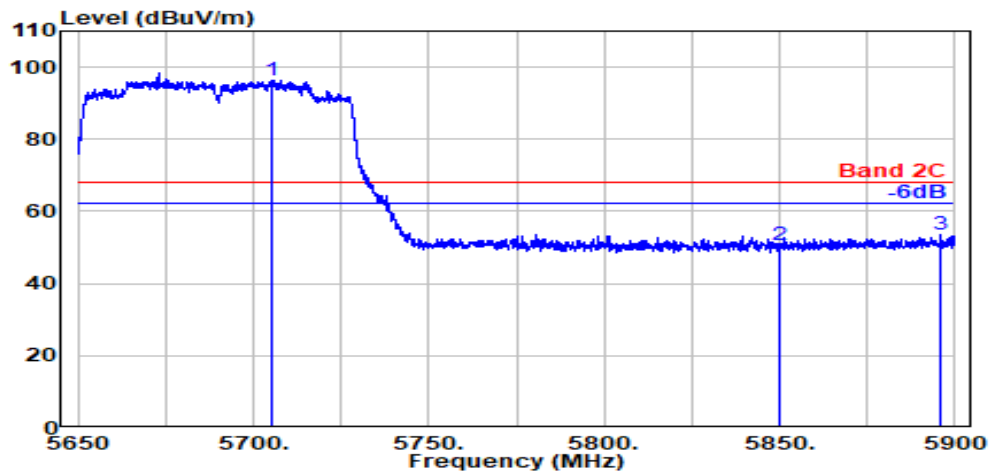

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.500	33.80	8.87	34.27	88.03	96.43	---	---	Peak
5850.000	34.10	8.95	34.33	41.79	50.50	68.20	17.70	Peak
5896.100	34.10	8.97	34.35	44.93	53.65	68.20	14.55	Peak

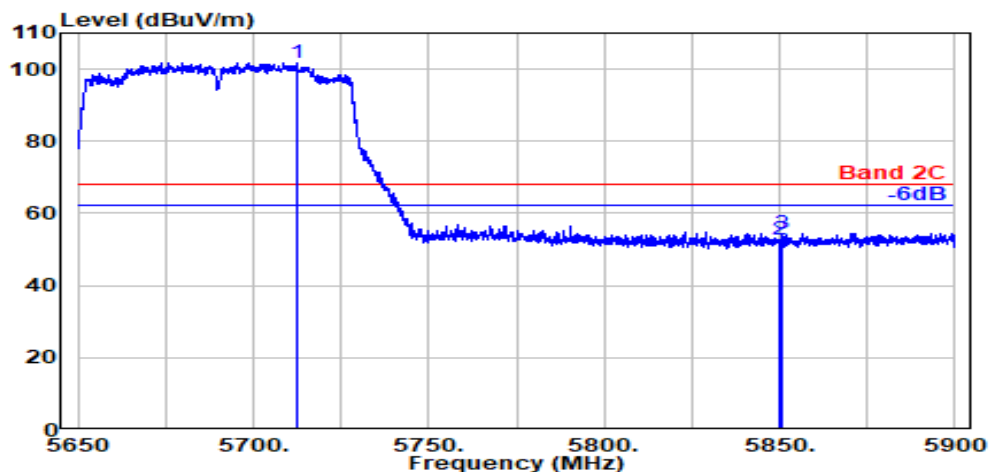


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.300	33.80	8.87	34.27	93.49	101.89	---	---	Peak
5850.000	34.10	8.95	34.33	43.95	52.67	68.20	15.53	Peak
5850.700	34.10	8.95	34.33	45.87	54.58	68.20	13.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

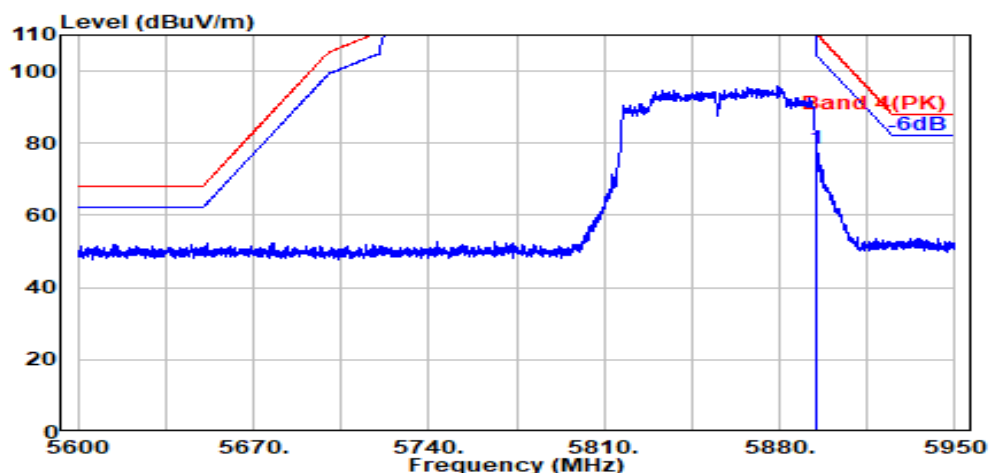

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	69.67	78.40	110.16	31.77	Peak

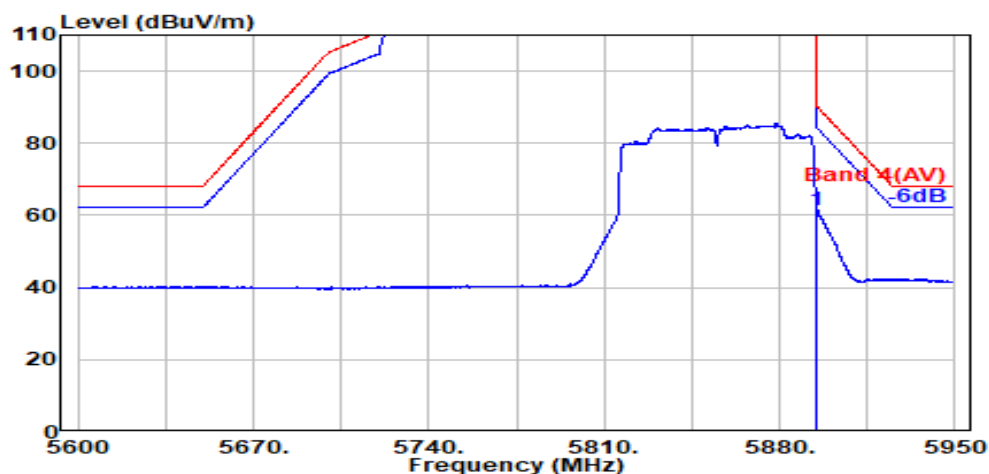

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	52.67	61.39	90.16	28.78	Average

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

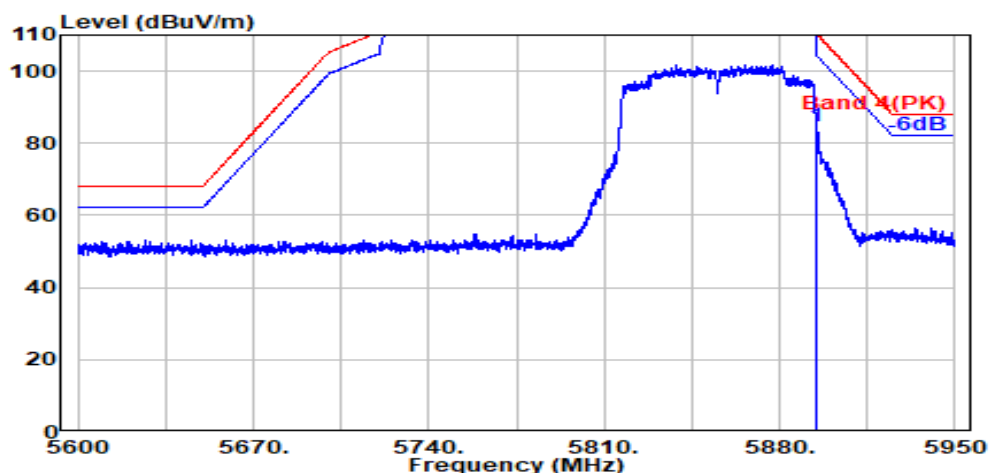

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	75.81	84.53	110.16	25.64	Peak

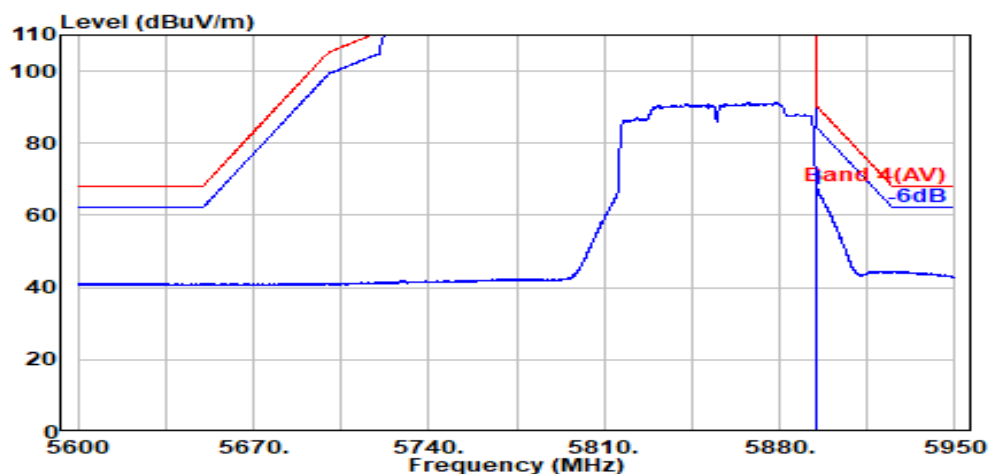


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	58.47	67.19	90.16	22.98	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

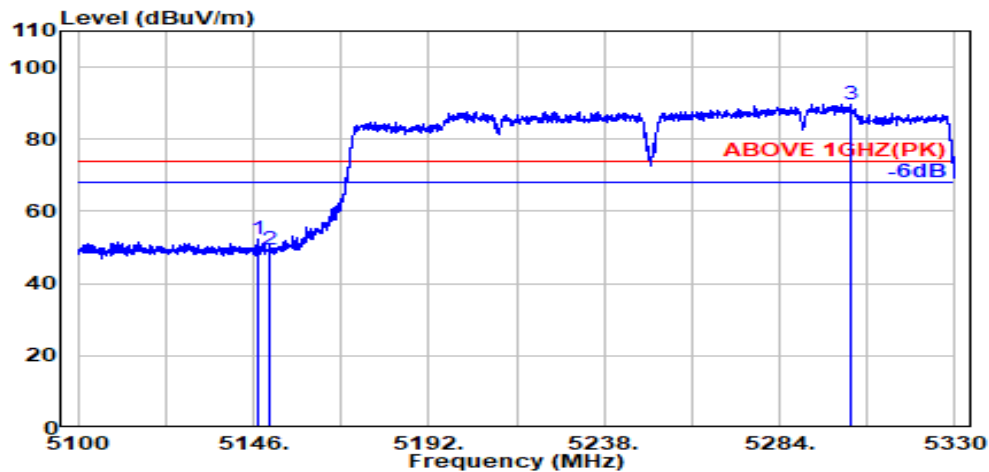

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.70	8.54	34.28	44.50	52.46	74.00	21.54	Peak
5150.000	33.70	8.54	34.28	41.27	49.23	74.00	24.77	Peak
@ 5302.800	34.09	8.64	34.23	81.23	89.72	---	---	Peak

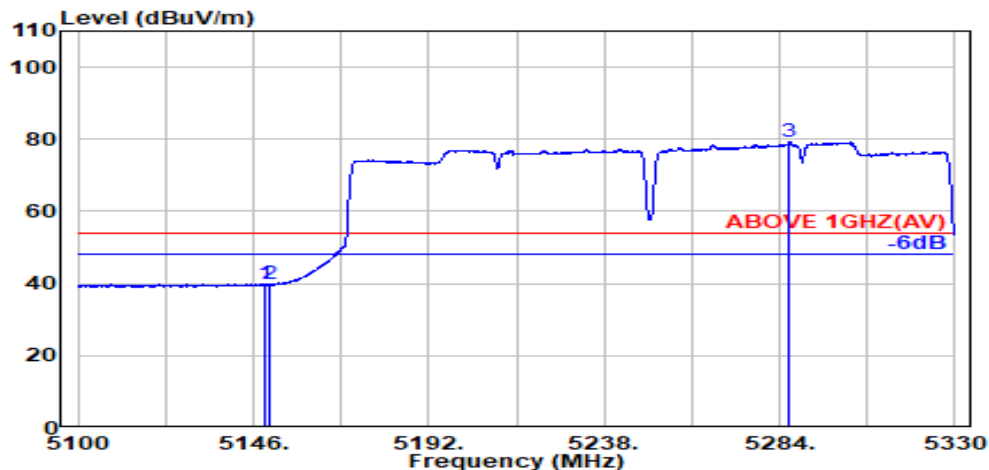

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.70	8.54	34.28	31.91	39.88	54.00	14.12	Average
5150.000	33.70	8.54	34.28	31.74	39.71	54.00	14.29	Average
@ 5286.500	34.02	8.63	34.24	71.01	79.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

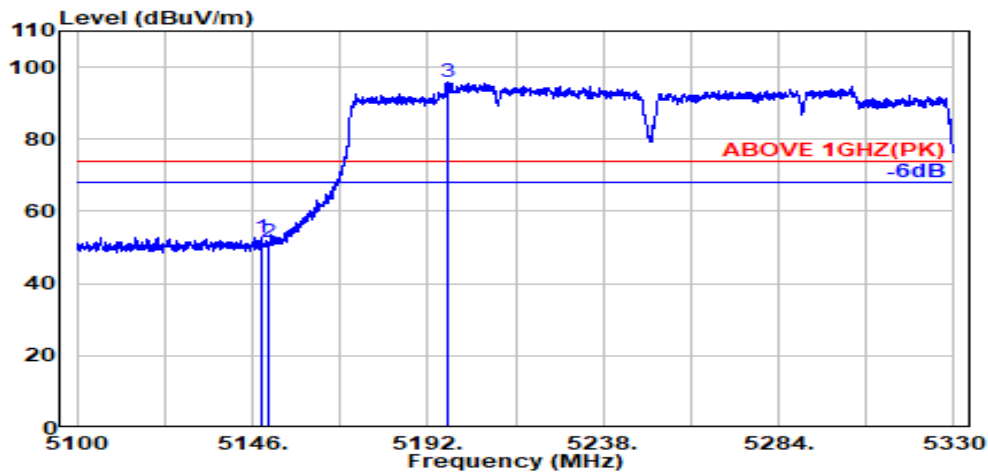

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.70	8.54	34.28	44.92	52.89	74.00	21.11	Peak
5150.000	33.70	8.54	34.28	43.51	51.47	74.00	22.53	Peak
@ 5197.500	33.70	8.57	34.26	87.68	95.69	---	---	Peak

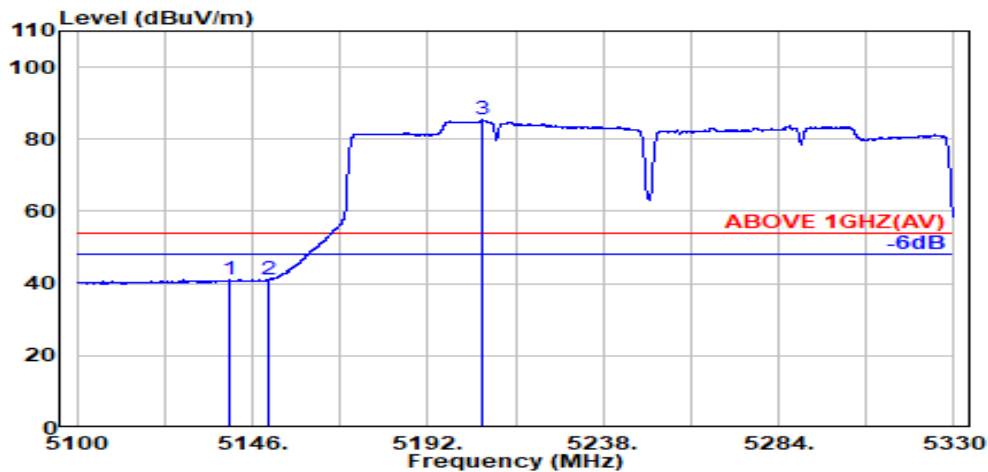

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.000	33.70	8.54	34.28	33.06	41.02	54.00	12.98	Average
5150.000	33.70	8.54	34.28	33.04	41.00	54.00	13.00	Average
@ 5206.500	33.71	8.58	34.26	77.34	85.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

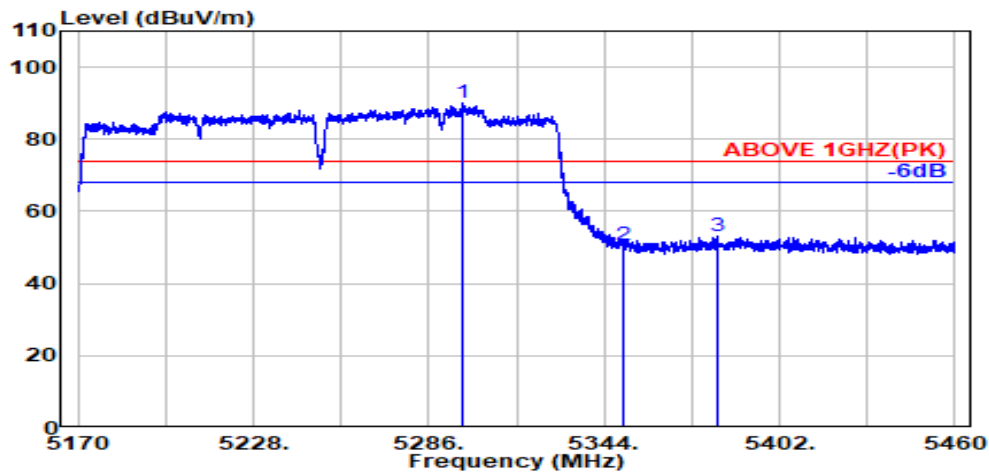

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5297.500	34.09	8.63	34.23	81.52	90.01	---	---	Peak
5350.000	33.90	8.67	34.22	42.19	50.54	74.00	23.46	Peak
5381.500	34.03	8.68	34.21	44.76	53.26	74.00	20.74	Peak

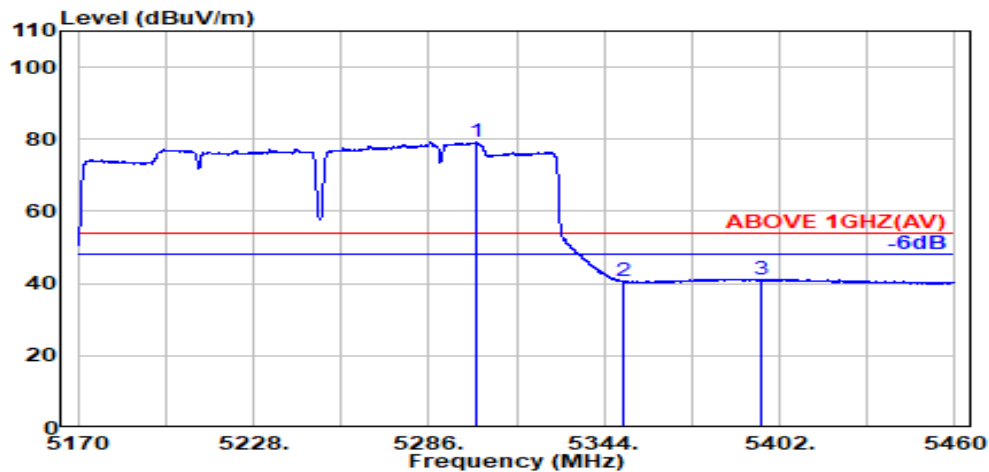

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.900	34.09	8.64	34.23	70.66	79.16	---	---	Average
5350.000	33.90	8.67	34.22	32.16	40.51	54.00	13.49	Average
5396.100	34.08	8.69	34.20	32.69	41.27	54.00	12.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

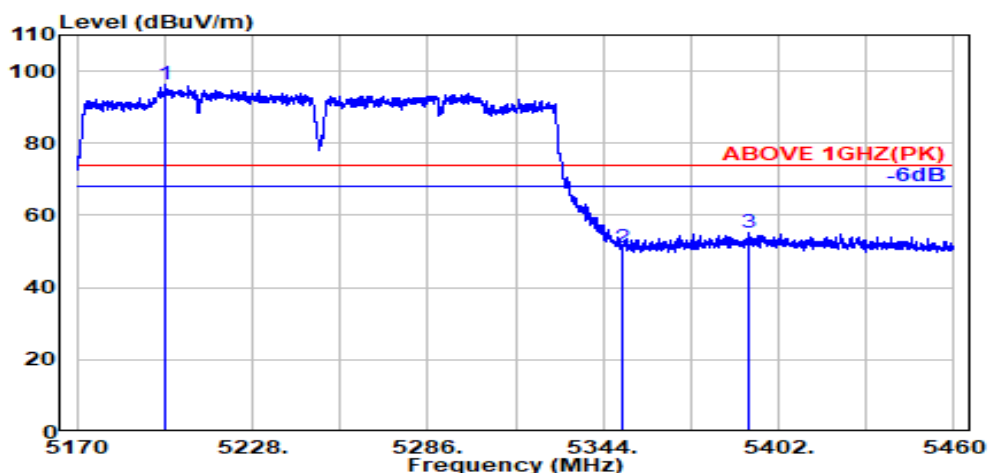

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5199.300	33.70	8.57	34.26	88.13	96.14	---	---	Peak
5350.000	33.90	8.67	34.22	42.89	51.24	74.00	22.76	Peak
5392.400	34.07	8.69	34.20	46.55	55.11	74.00	18.89	Peak

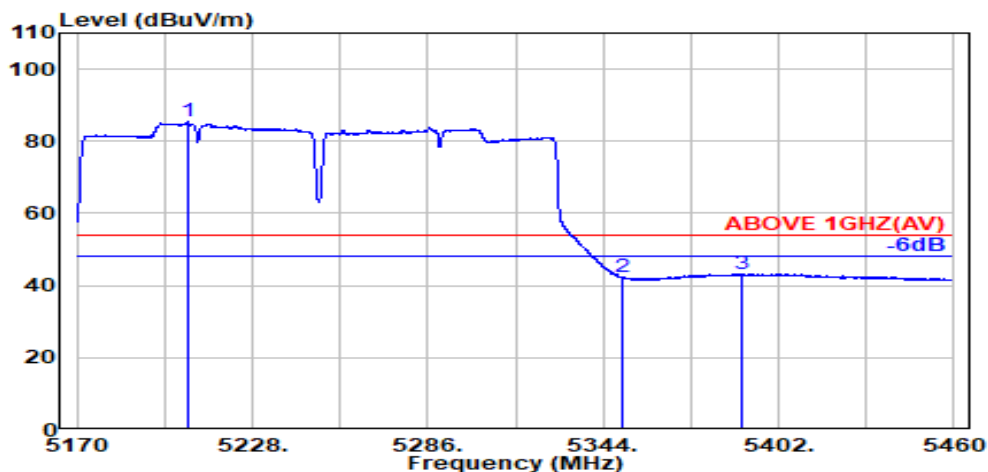


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.700	33.71	8.58	34.26	77.36	85.39	---	---	Average
5350.000	33.90	8.67	34.22	33.86	42.21	54.00	11.79	Average
5389.900	34.06	8.69	34.20	34.64	43.19	54.00	10.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

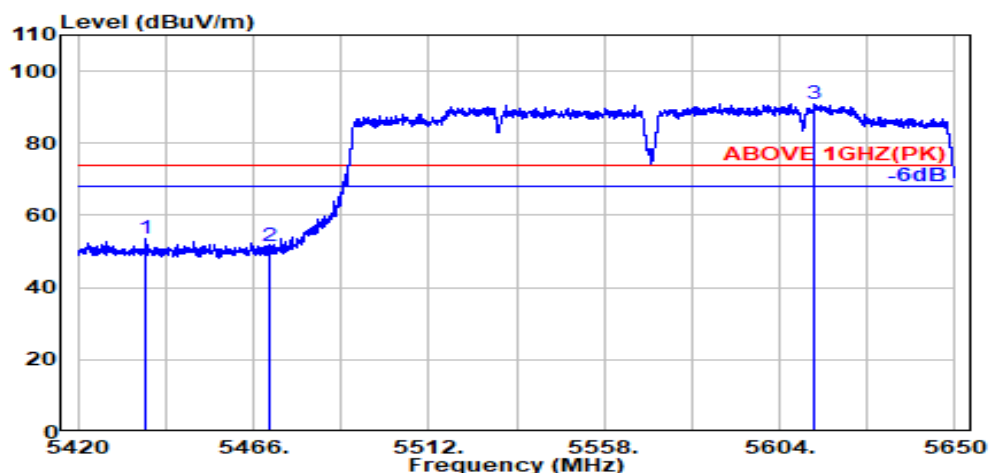

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.800	34.18	8.72	34.19	44.70	53.41	74.00	20.59	Peak
5470.000	34.16	8.74	34.18	42.78	51.49	74.00	22.51	Peak
@ 5613.000	34.00	8.82	34.22	82.40	90.99	---	---	Peak

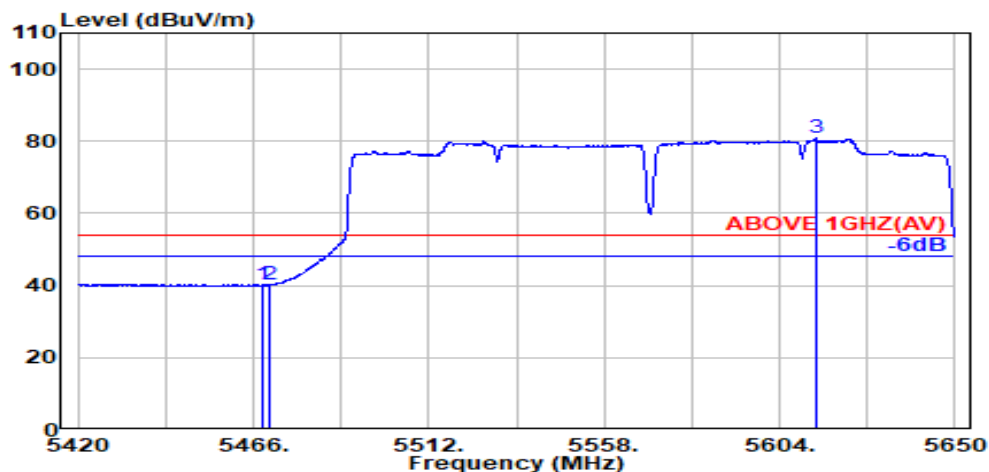


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.66	40.38	54.00	13.62	Average
5470.000	34.16	8.74	34.18	31.36	40.07	54.00	13.93	Average
@ 5613.500	34.00	8.82	34.22	72.26	80.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

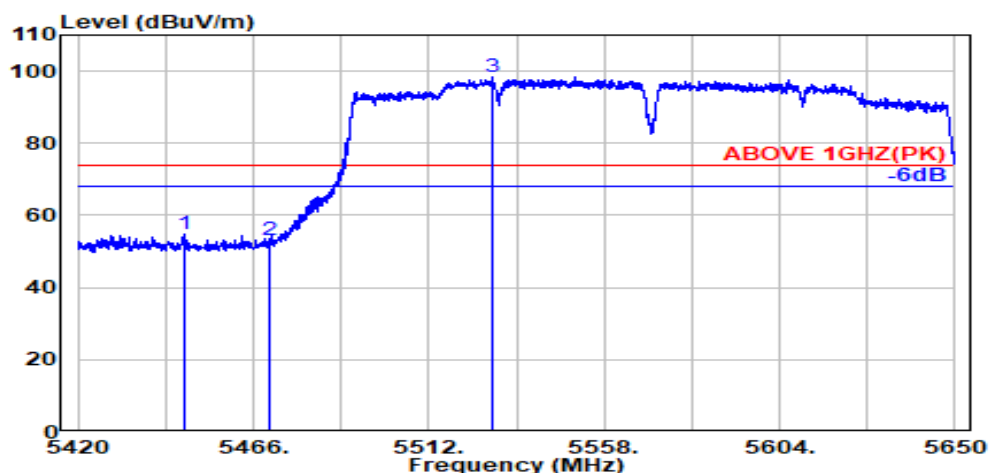

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.800	34.20	8.72	34.19	46.10	54.83	74.00	19.17	Peak
5470.000	34.16	8.74	34.18	44.57	53.28	74.00	20.72	Peak
@ 5528.400	34.10	8.77	34.18	89.71	98.40	---	---	Peak

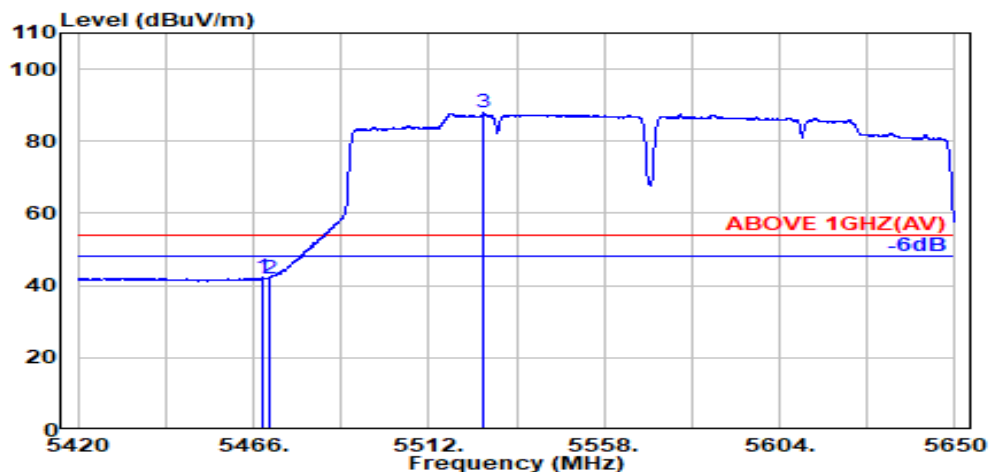

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	33.66	42.38	54.00	11.62	Average
5470.000	34.16	8.74	34.18	33.42	42.13	54.00	11.87	Average
@ 5526.500	34.10	8.77	34.18	79.20	87.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

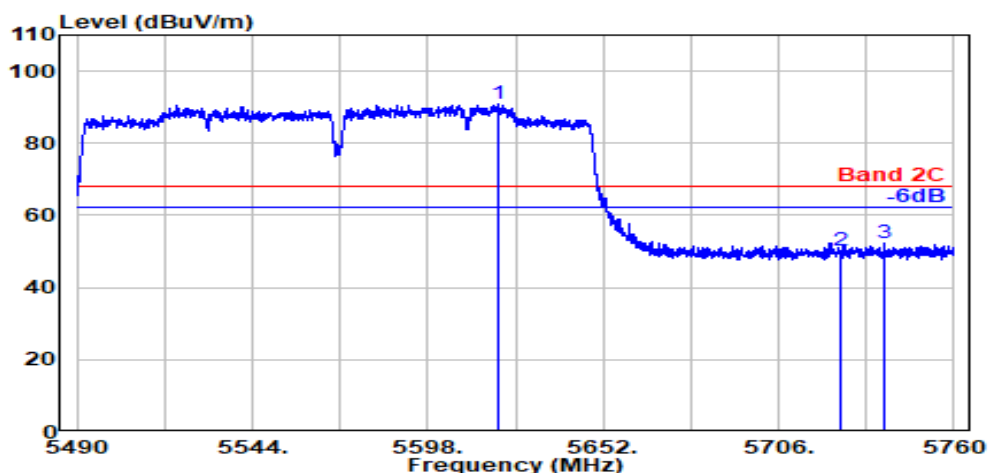

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.700	34.00	8.82	34.23	82.21	90.81	---	---	Peak
5725.000	33.80	8.88	34.28	41.73	50.14	68.20	18.06	Peak
5738.500	33.80	8.89	34.28	43.87	52.28	68.20	15.92	Peak

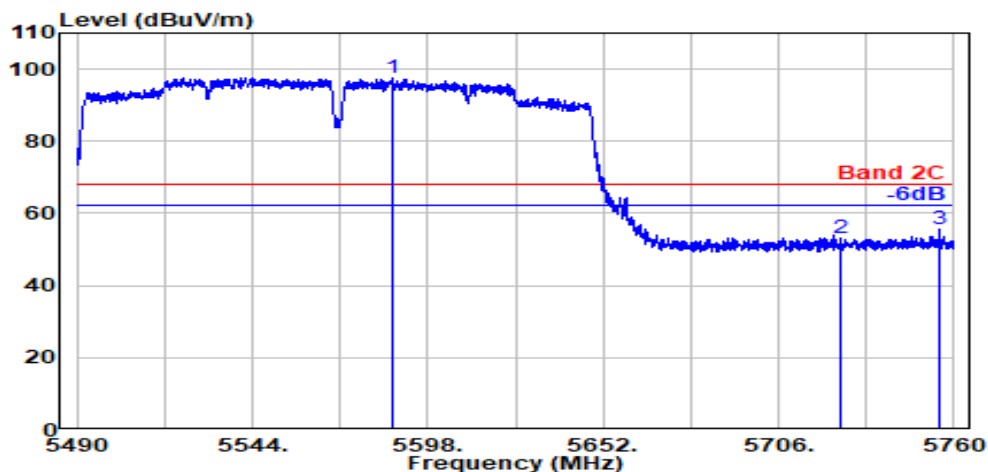


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5586.900	34.03	8.80	34.21	89.11	97.73	---	---	Peak
5725.000	33.80	8.88	34.28	44.82	53.22	68.20	14.98	Peak
5755.600	33.82	8.90	34.29	47.03	55.46	68.20	12.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

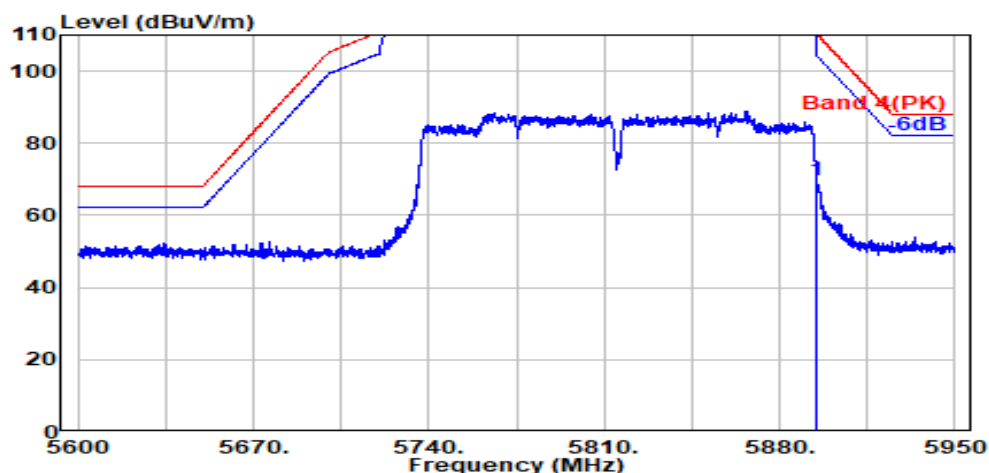

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	60.84	69.56	110.16	40.60	Peak

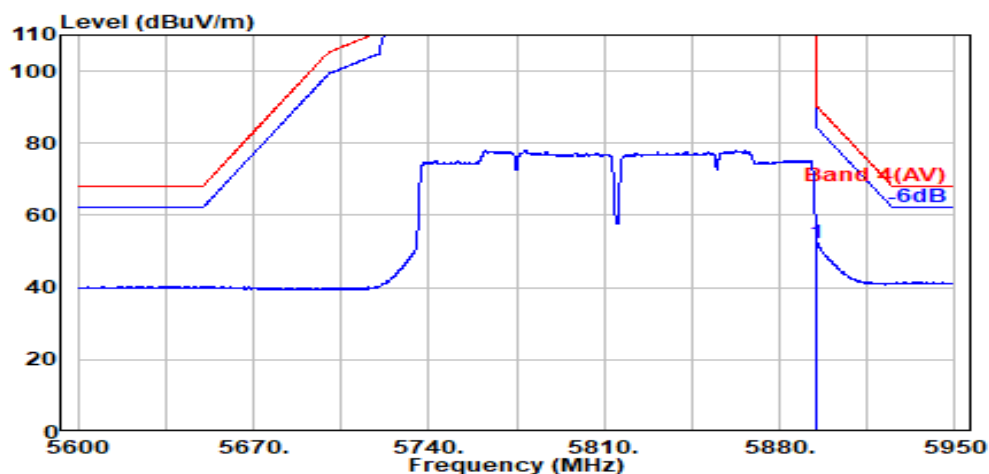

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	43.46	52.18	90.16	37.98	Average

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

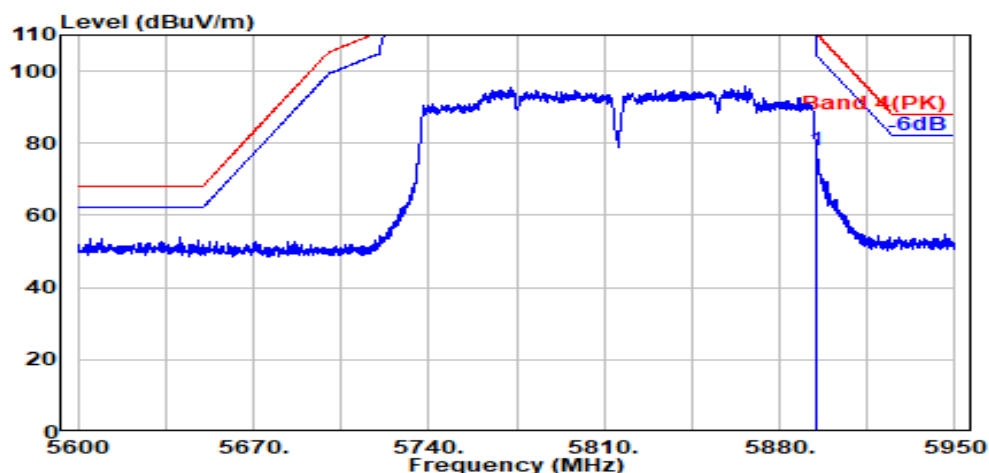

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	69.40	78.12	110.16	32.04	Peak

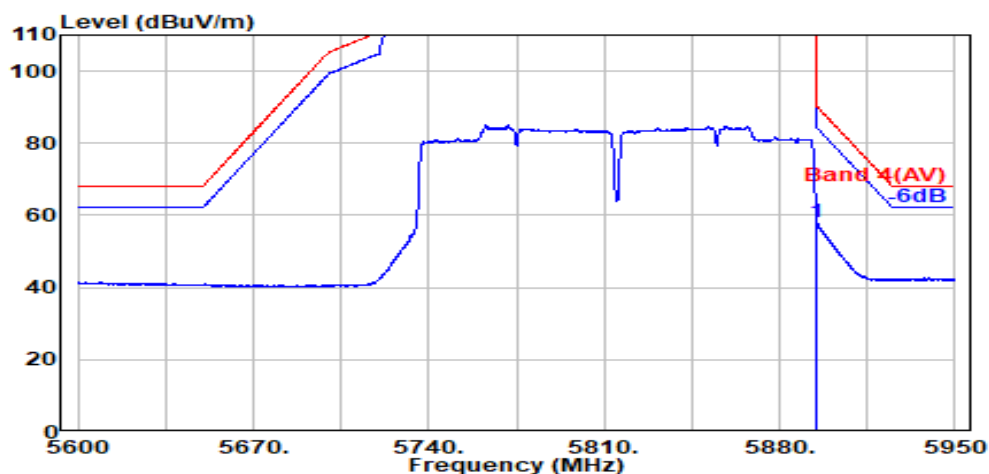


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	49.22	57.94	90.16	32.23	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

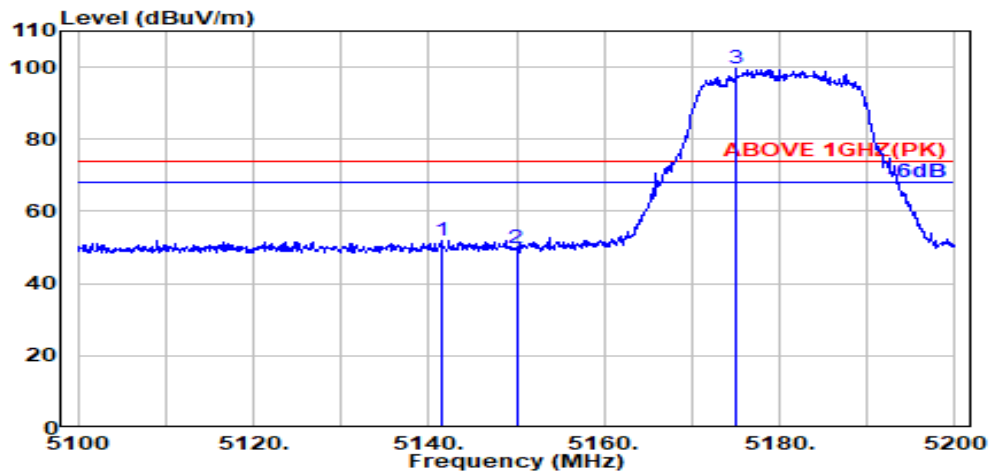

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.500	33.70	8.54	34.28	44.04	51.99	74.00	22.01	Peak
5150.000	33.70	8.54	34.28	41.74	49.70	74.00	24.30	Peak
@ 5175.000	33.70	8.56	34.27	91.56	99.55	---	---	Peak

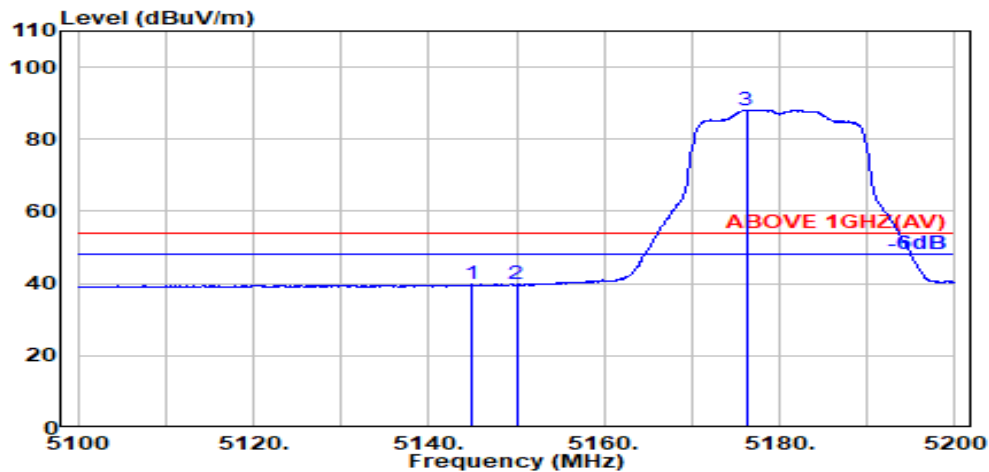

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.70	8.54	34.28	31.74	39.70	54.00	14.30	Average
5150.000	33.70	8.54	34.28	31.69	39.66	54.00	14.34	Average
@ 5176.200	33.70	8.56	34.27	80.18	88.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

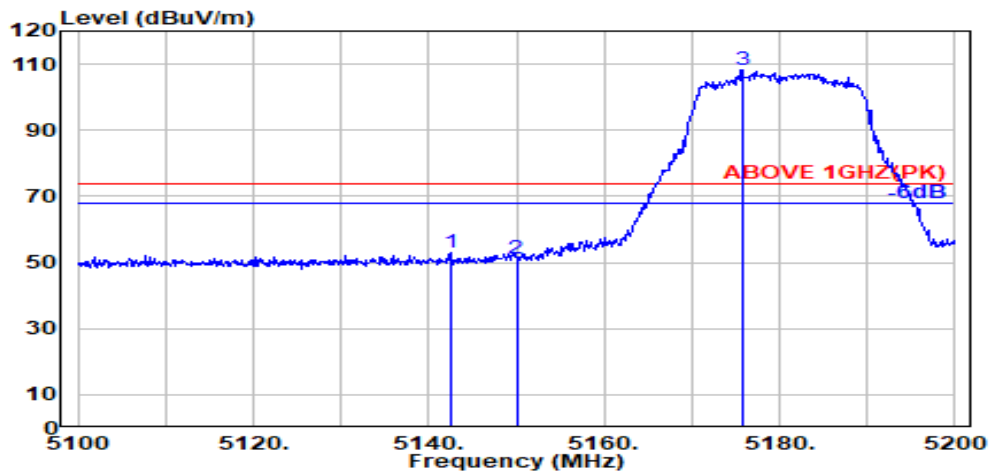

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.70	8.54	34.28	44.94	52.90	74.00	21.10	Peak
5150.000	33.70	8.54	34.28	43.34	51.31	74.00	22.69	Peak
@ 5175.700	33.70	8.56	34.27	100.24	108.23	---	---	Peak

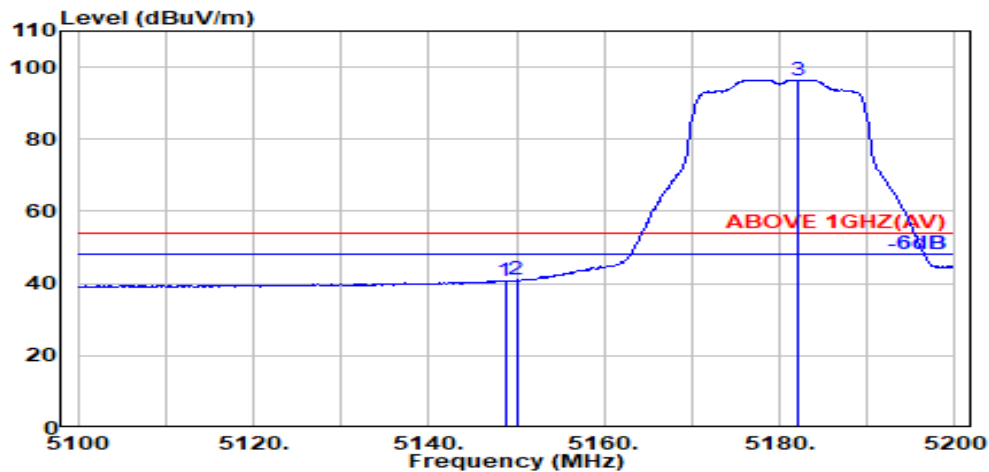

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.70	8.54	34.28	32.88	40.84	54.00	13.16	Average
5150.000	33.70	8.54	34.28	32.95	40.91	54.00	13.09	Average
@ 5182.000	33.70	8.56	34.27	88.51	96.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

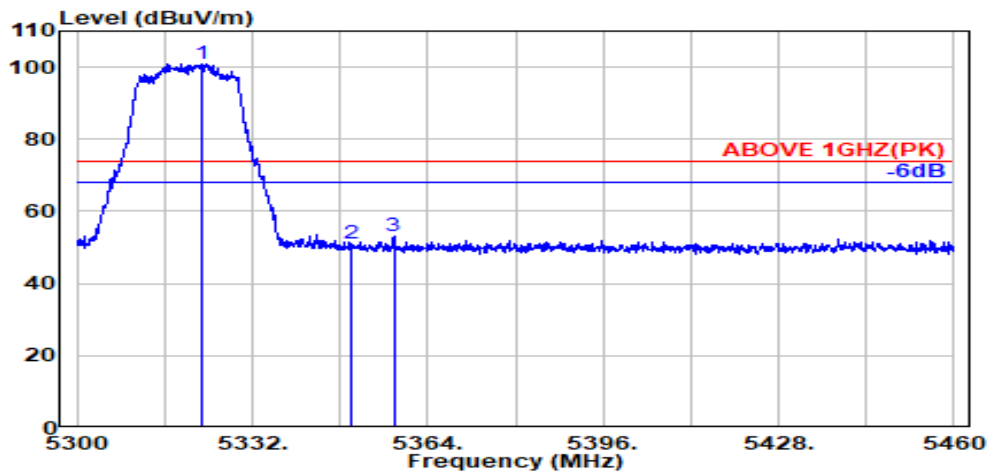

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	34.01	8.65	34.23	92.46	100.90	---	---	Peak
5350.000	33.90	8.67	34.22	42.60	50.95	74.00	23.05	Peak
5357.800	33.93	8.67	34.21	44.67	53.06	74.00	20.94	Peak

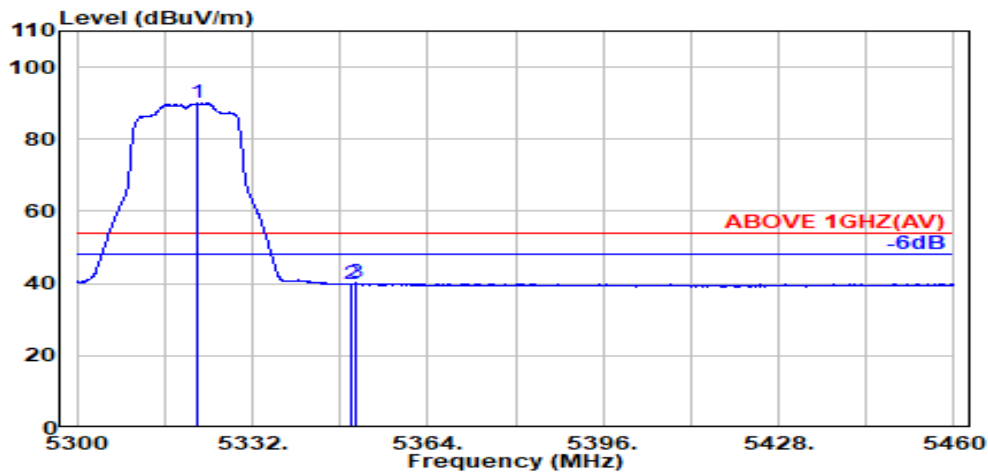

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.100	34.01	8.65	34.23	81.60	90.03	---	---	Average
5350.000	33.90	8.67	34.22	31.50	39.85	54.00	14.15	Average
5350.800	33.90	8.67	34.22	31.84	40.19	54.00	13.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

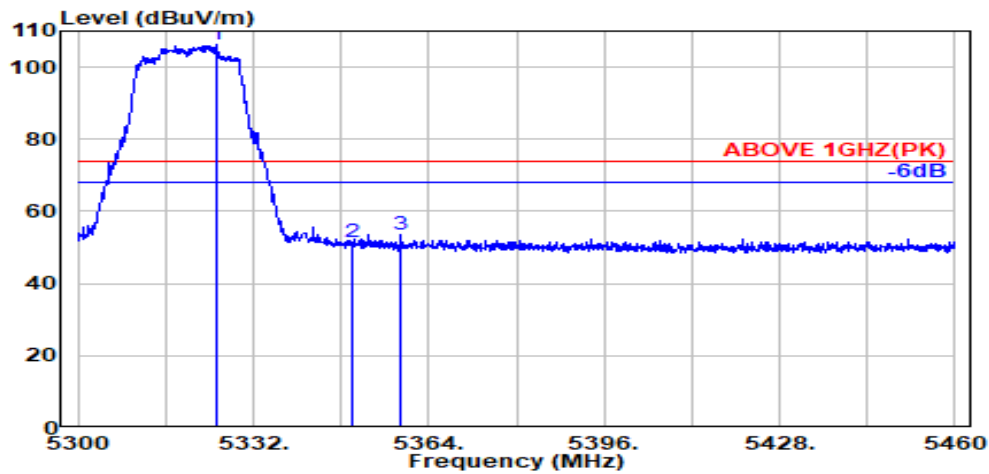

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.500	34.00	8.65	34.22	97.92	106.34	---	---	Peak
5350.000	33.90	8.67	34.22	43.15	51.50	74.00	22.50	Peak
5358.900	33.94	8.67	34.21	45.05	53.44	74.00	20.56	Peak

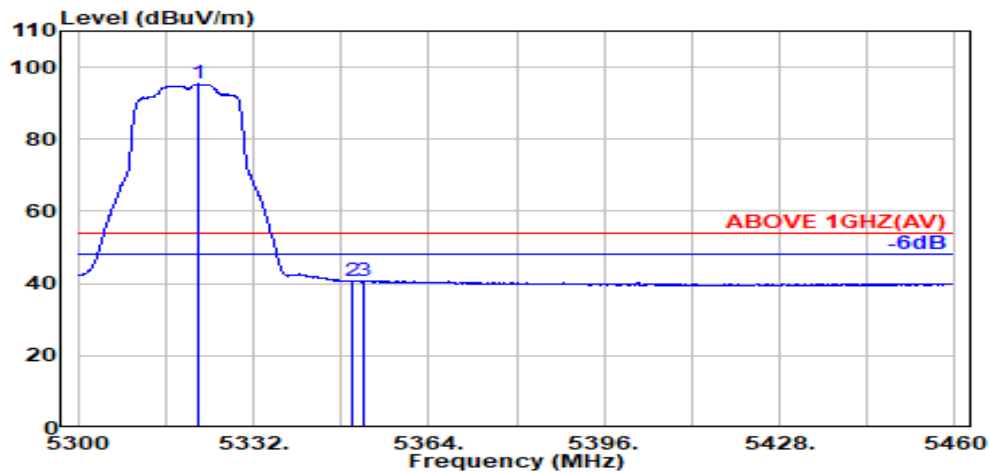

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	34.01	8.65	34.23	86.86	95.30	---	---	Average
5350.000	33.90	8.67	34.22	32.23	40.58	54.00	13.42	Average
5352.100	33.91	8.67	34.22	32.50	40.86	54.00	13.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

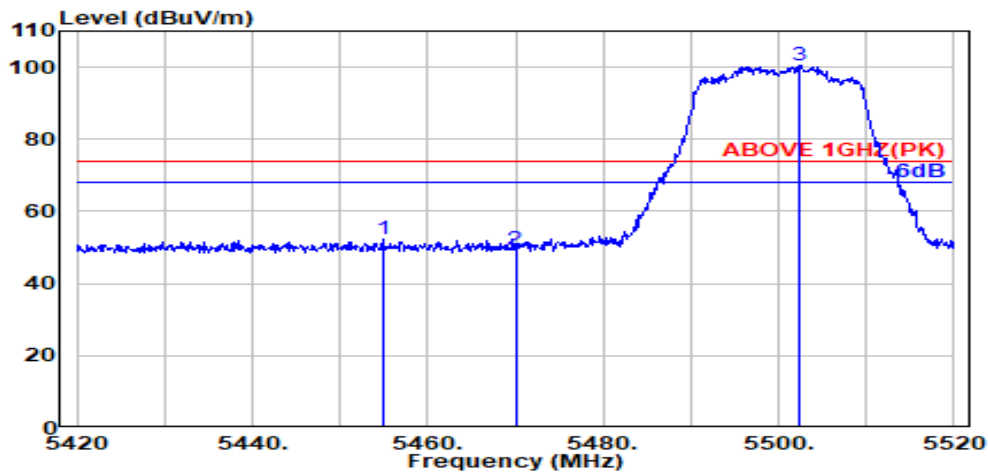

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.900	34.19	8.73	34.18	43.38	52.11	74.00	21.89	Peak
5470.000	34.16	8.74	34.18	40.74	49.45	74.00	24.55	Peak
@ 5502.400	34.10	8.75	34.17	91.91	100.59	---	---	Peak

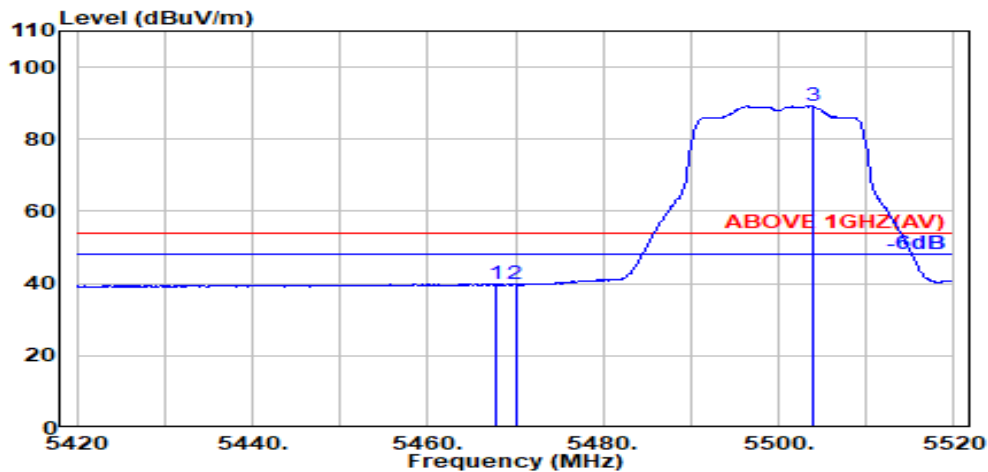

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.16	8.73	34.18	31.18	39.90	54.00	14.10	Average
5470.000	34.16	8.74	34.18	30.98	39.69	54.00	14.31	Average
@ 5504.000	34.10	8.76	34.17	80.55	89.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

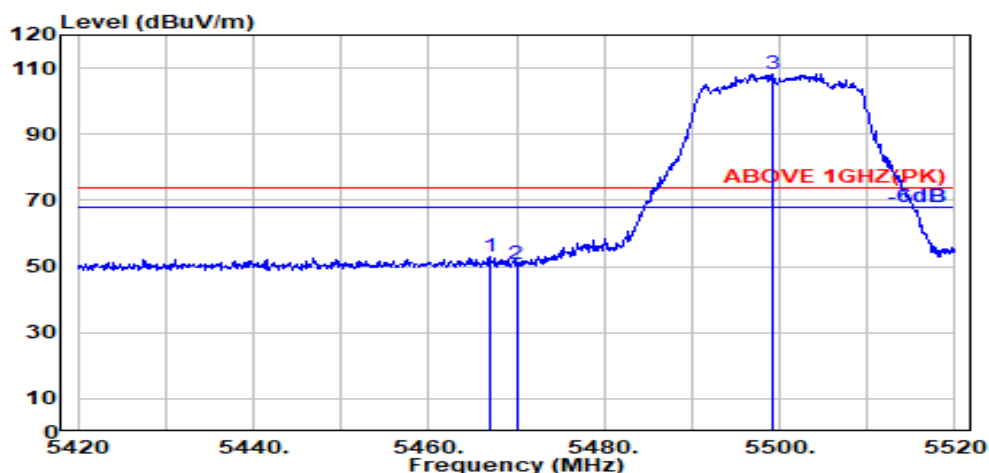

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.17	8.73	34.18	44.06	52.78	74.00	21.22	Peak
5470.000	34.16	8.74	34.18	42.01	50.72	74.00	23.28	Peak
@ 5499.300	34.10	8.75	34.17	99.44	108.12	---	---	Peak

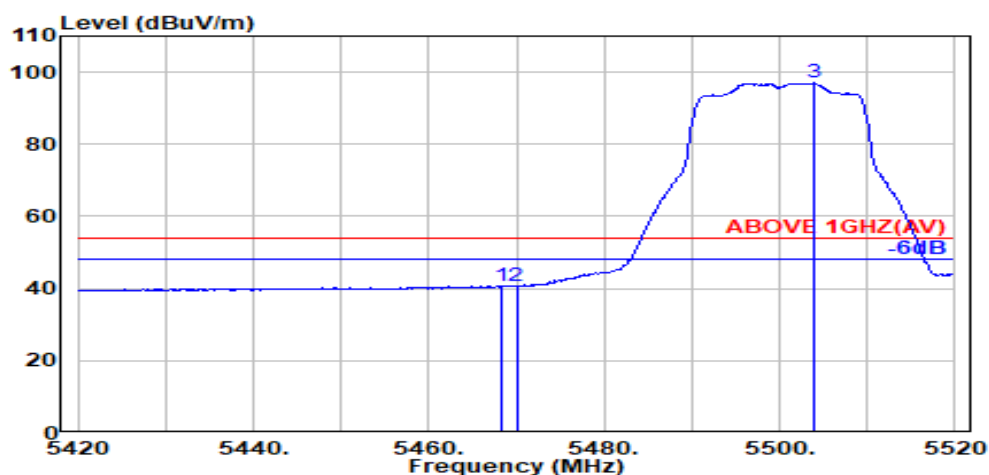

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.16	8.73	34.18	32.03	40.75	54.00	13.25	Average
5470.000	34.16	8.74	34.18	31.84	40.56	54.00	13.44	Average
@ 5503.900	34.10	8.76	34.17	88.25	96.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

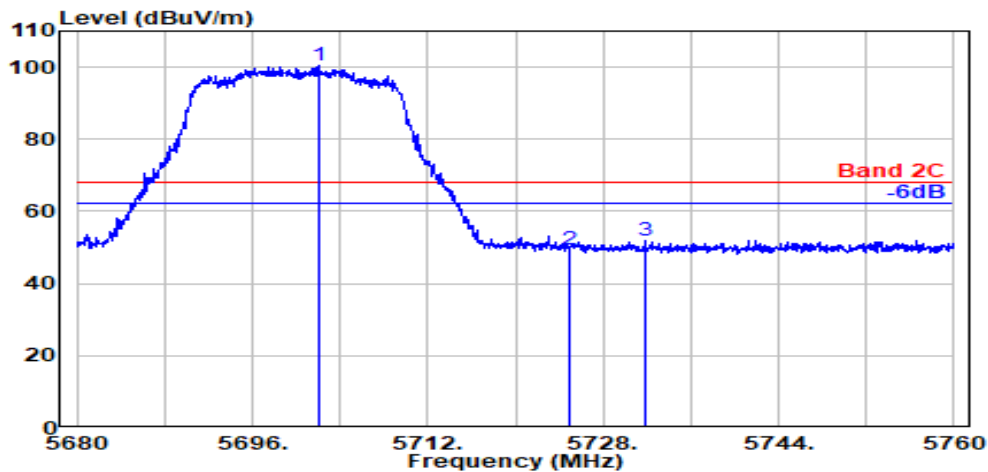

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.000	33.80	8.87	34.27	92.02	100.42	---	---	Peak
5725.000	33.80	8.88	34.28	40.97	49.38	68.20	18.82	Peak
5731.850	33.80	8.88	34.28	43.50	51.90	68.20	16.30	Peak

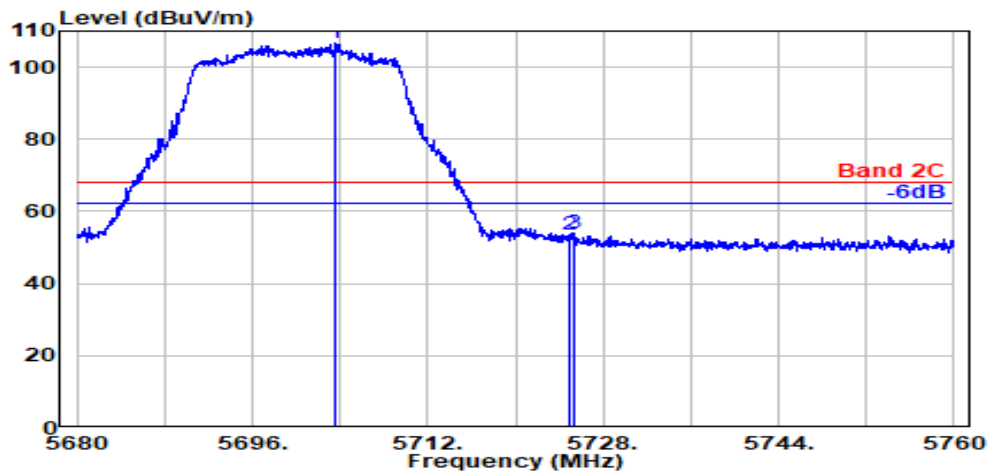

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.550	33.80	8.87	34.27	98.15	106.55	---	---	Peak
5725.000	33.80	8.88	34.28	45.08	53.48	68.20	14.72	Peak
5725.300	33.80	8.88	34.28	45.57	53.97	68.20	14.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

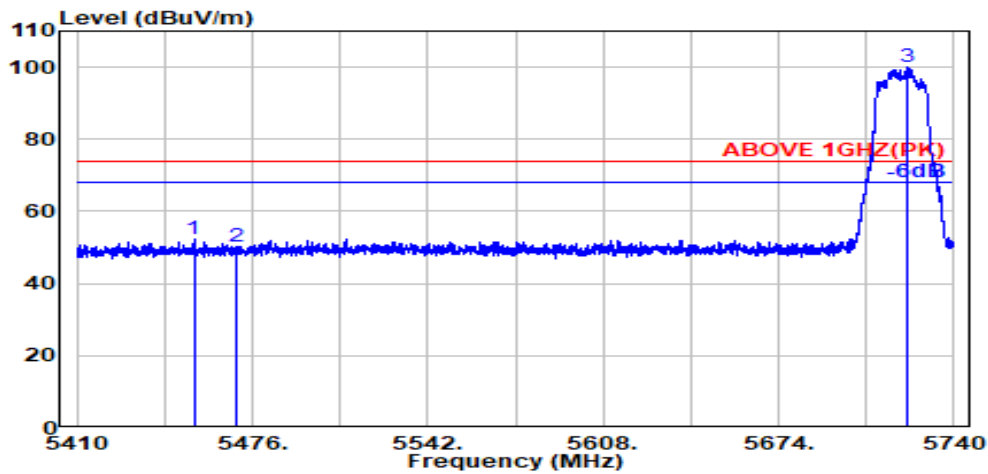

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.000	34.19	8.73	34.18	43.48	52.21	74.00	21.79	Peak
5470.000	34.16	8.74	34.18	41.49	50.21	74.00	23.79	Peak
@ 5722.800	33.80	8.88	34.27	91.61	100.01	---	---	Peak

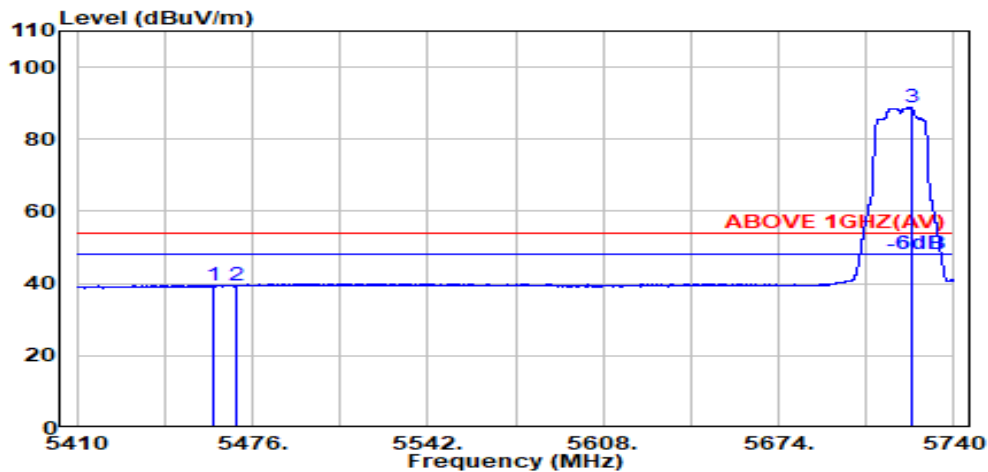

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.18	8.73	34.18	30.91	39.64	54.00	14.36	Average
5470.000	34.16	8.74	34.18	30.58	39.30	54.00	14.70	Average
@ 5723.900	33.80	8.88	34.28	80.34	88.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

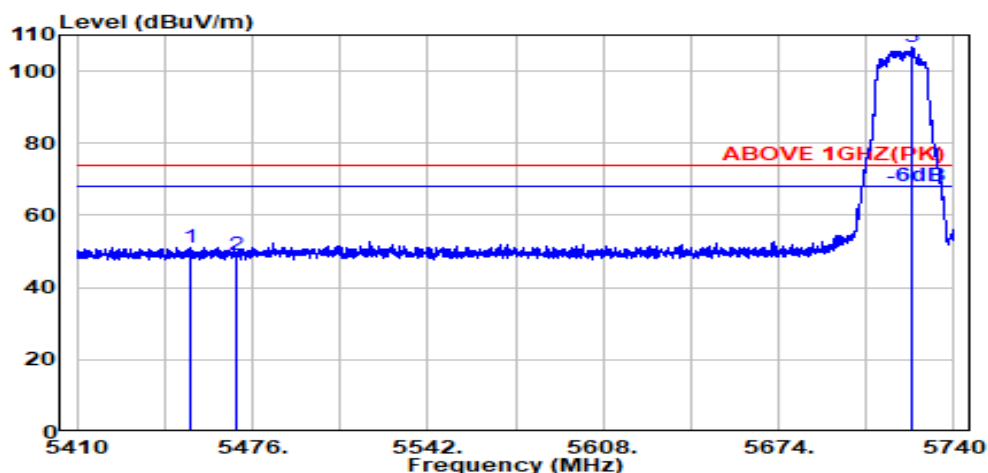

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.300	34.20	8.73	34.18	42.47	51.20	74.00	22.80	Peak
5470.000	34.16	8.74	34.18	40.12	48.84	74.00	25.16	Peak
@ 5724.500	33.80	8.88	34.28	98.19	106.59	---	---	Peak

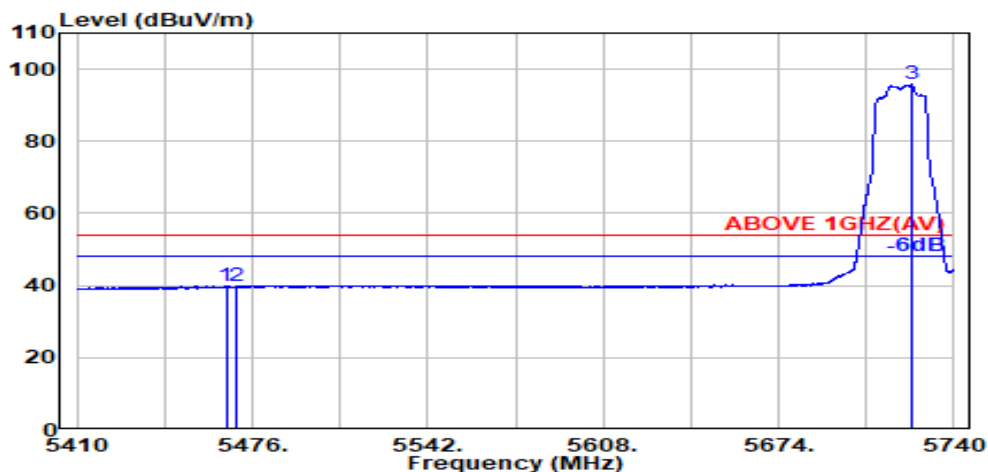

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.100	34.17	8.73	34.18	31.04	39.76	54.00	14.24	Average
5470.000	34.16	8.74	34.18	31.00	39.71	54.00	14.29	Average
@ 5724.000	33.80	8.88	34.28	87.37	95.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

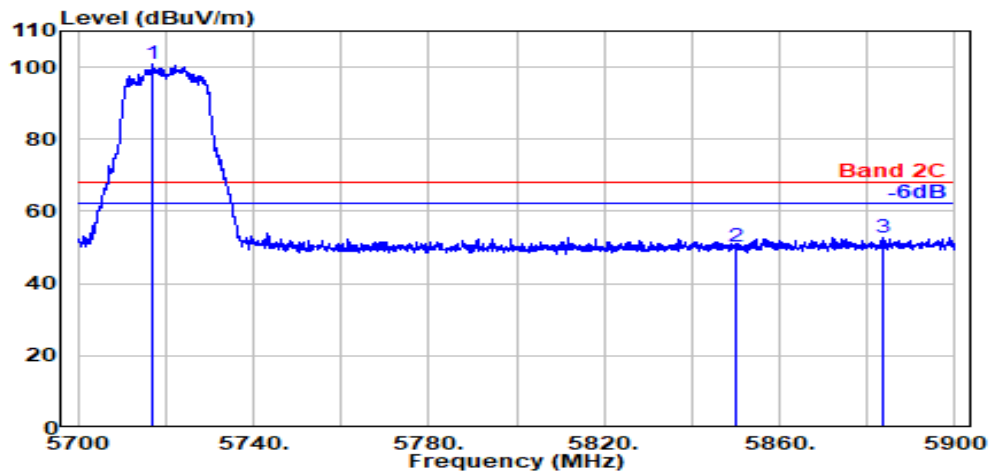

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.100	33.80	8.88	34.27	92.37	100.78	---	---	Peak
5850.000	34.10	8.95	34.33	41.49	50.21	68.20	17.99	Peak
5883.800	34.10	8.97	34.35	43.89	52.61	68.20	15.59	Peak

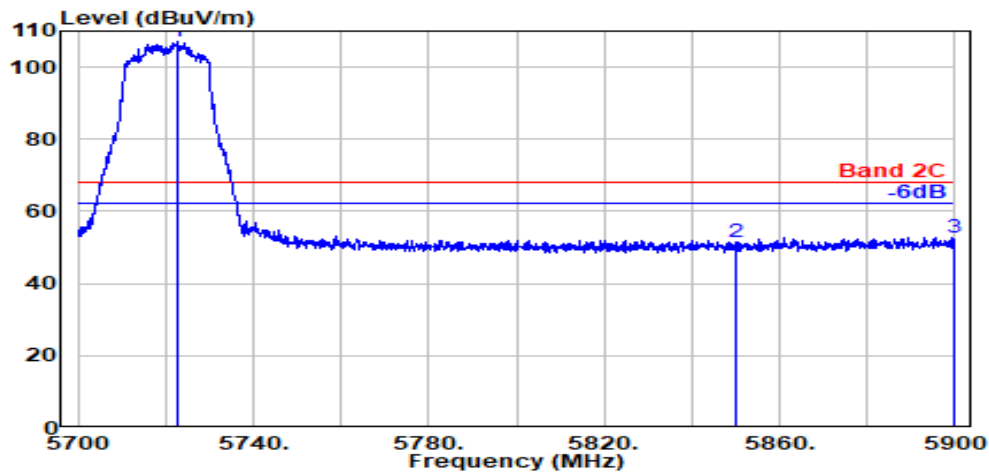

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.700	33.80	8.88	34.27	98.58	106.98	---	---	Peak
5850.000	34.10	8.95	34.33	42.87	51.59	68.20	16.61	Peak
5900.000	34.10	8.98	34.36	43.99	52.71	68.20	15.49	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

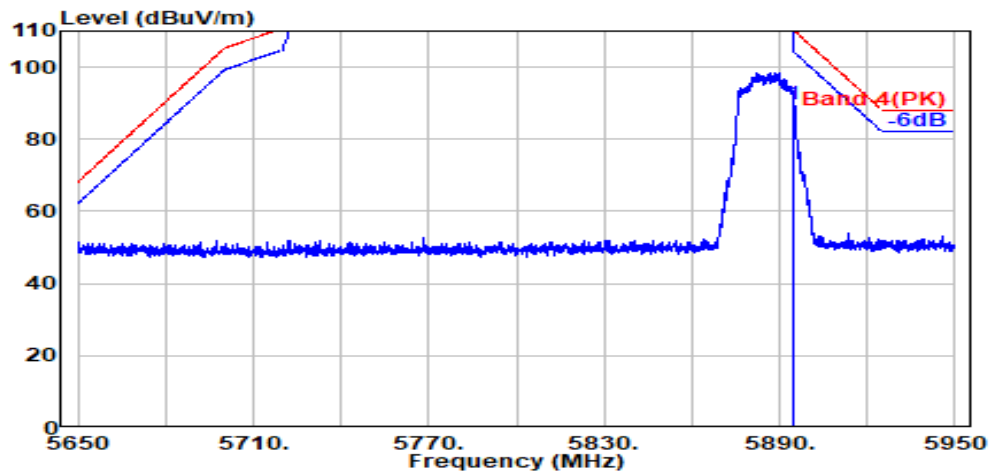

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	80.85	89.57	110.20	20.63	Peak

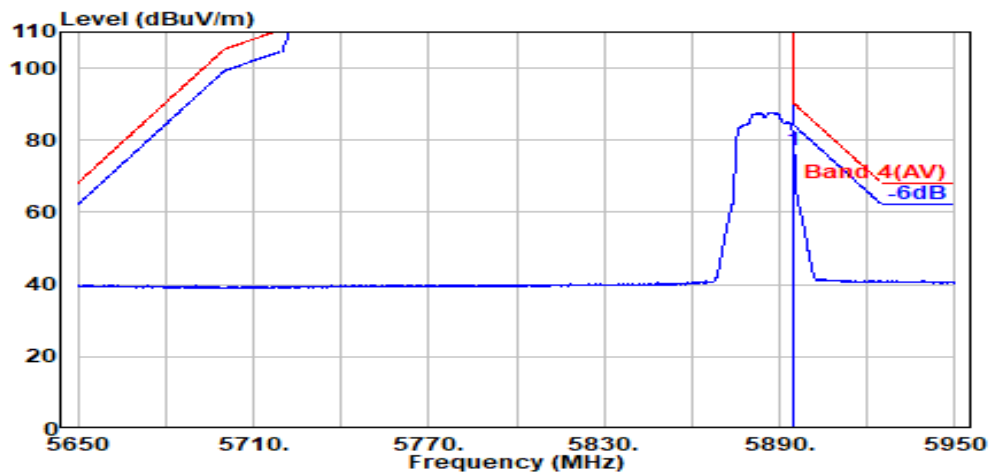

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	68.54	77.26	90.20	12.94	Average

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

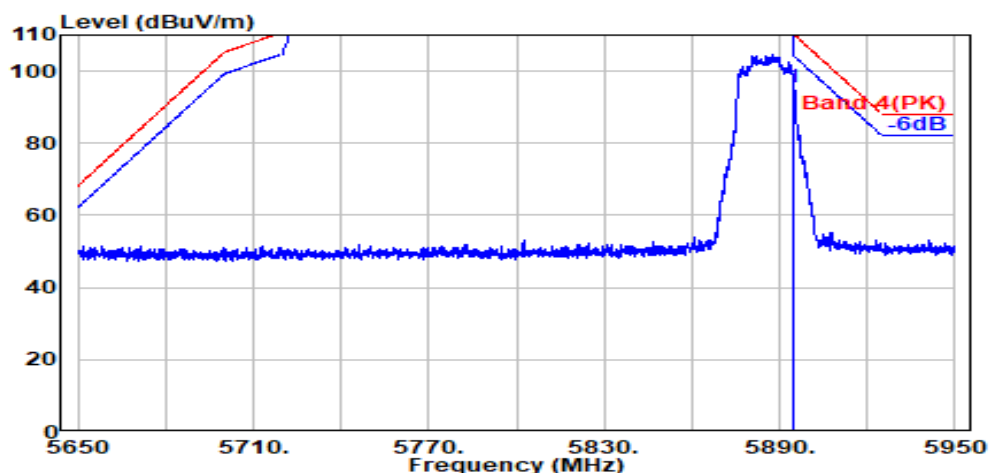

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	86.85	95.57	110.20	14.63	Peak

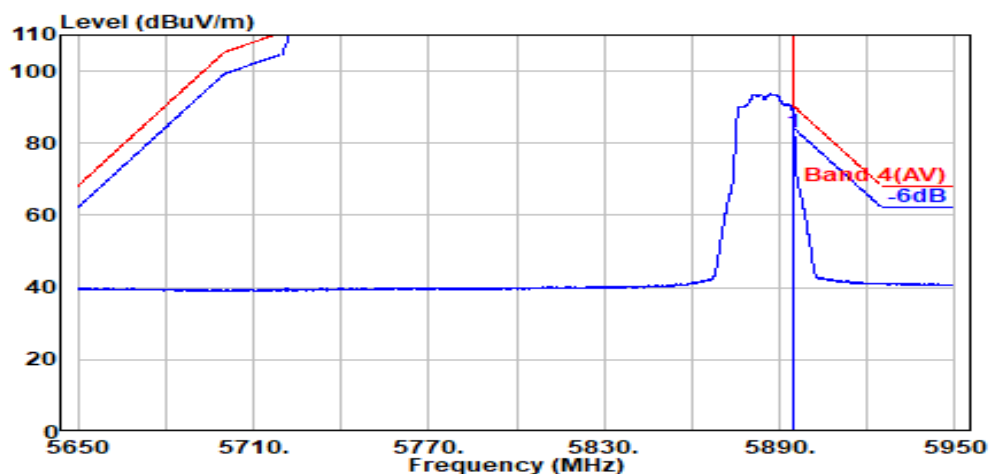


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	74.49	83.21	90.20	6.99	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

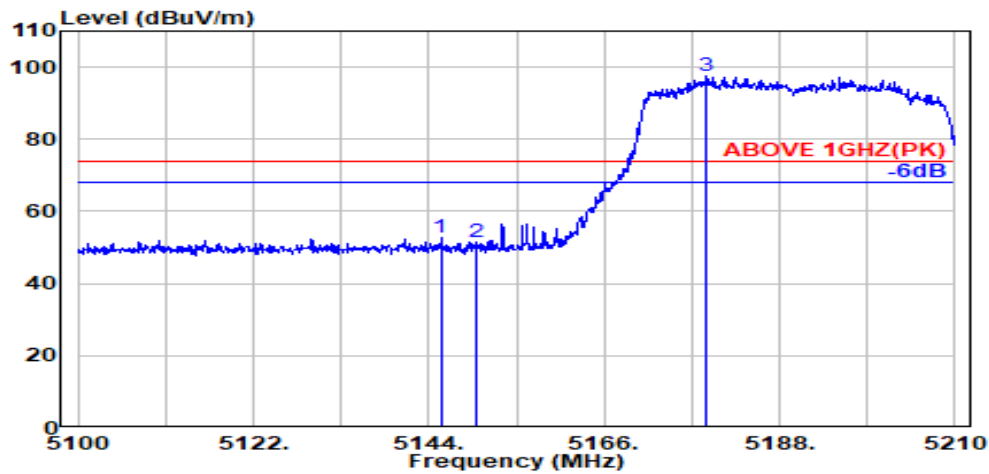

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.500	33.70	8.54	34.28	44.57	52.53	74.00	21.47	Peak
5150.000	33.70	8.54	34.28	43.36	51.32	74.00	22.68	Peak
@ 5178.900	33.70	8.56	34.27	89.38	97.37	---	---	Peak

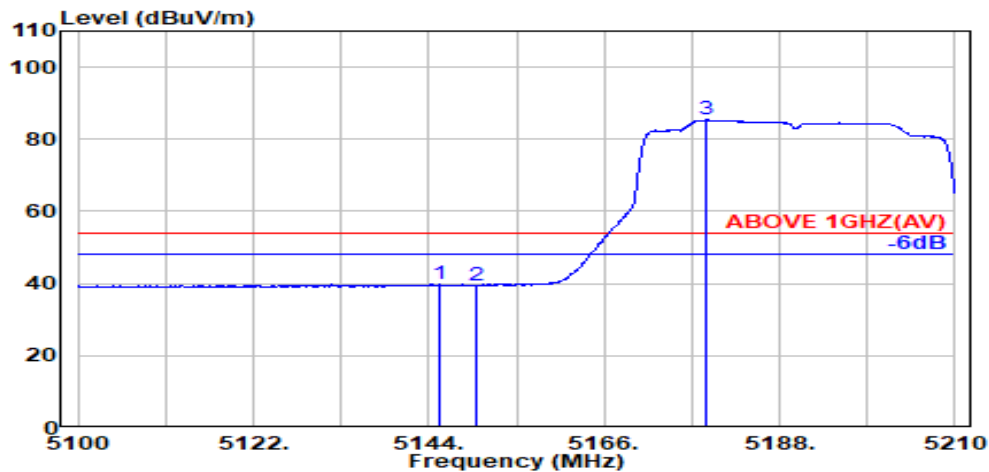

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.400	33.70	8.54	34.28	31.78	39.74	54.00	14.26	Average
5150.000	33.70	8.54	34.28	31.62	39.59	54.00	14.41	Average
@ 5178.700	33.70	8.56	34.27	77.37	85.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

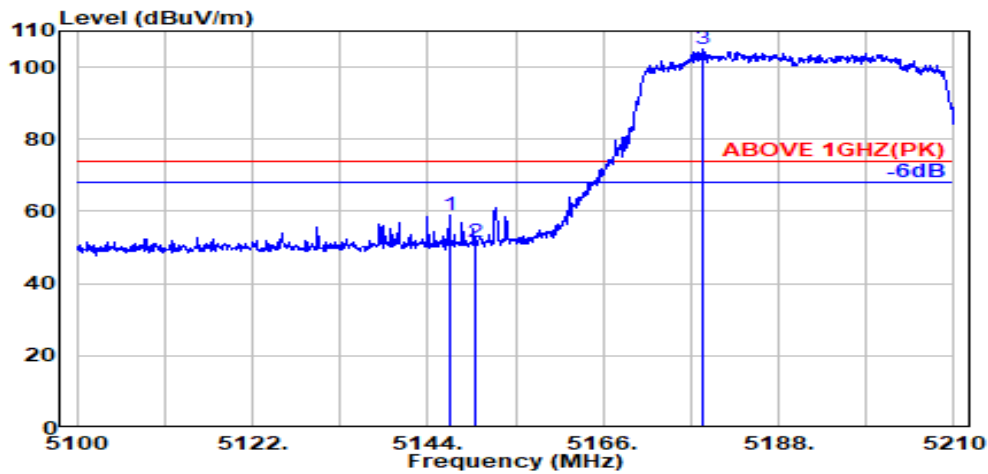

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.70	8.54	34.28	51.09	59.05	74.00	14.95	Peak
5150.000	33.70	8.54	34.28	43.55	51.51	74.00	22.49	Peak
@ 5178.400	33.70	8.56	34.27	96.91	104.90	---	---	Peak

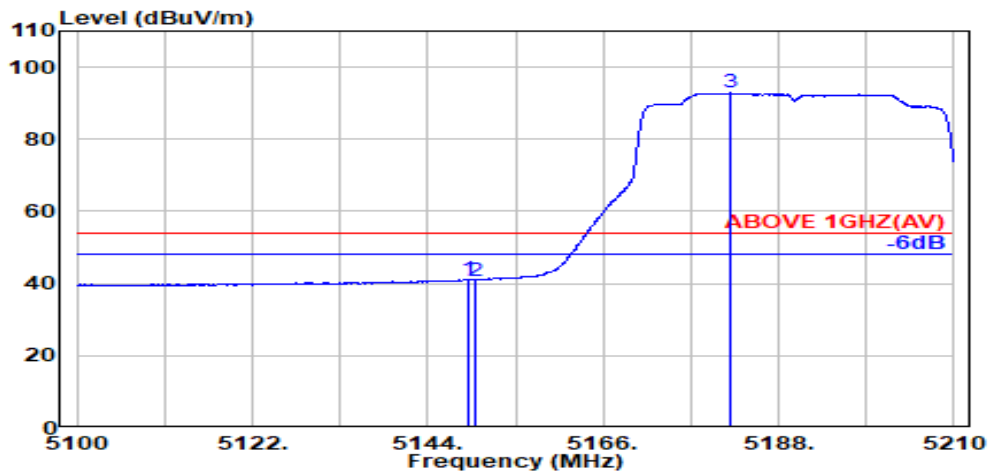

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.70	8.54	34.28	33.08	41.04	54.00	12.96	Average
5150.000	33.70	8.54	34.28	32.92	40.88	54.00	13.12	Average
@ 5182.000	33.70	8.56	34.27	84.80	92.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

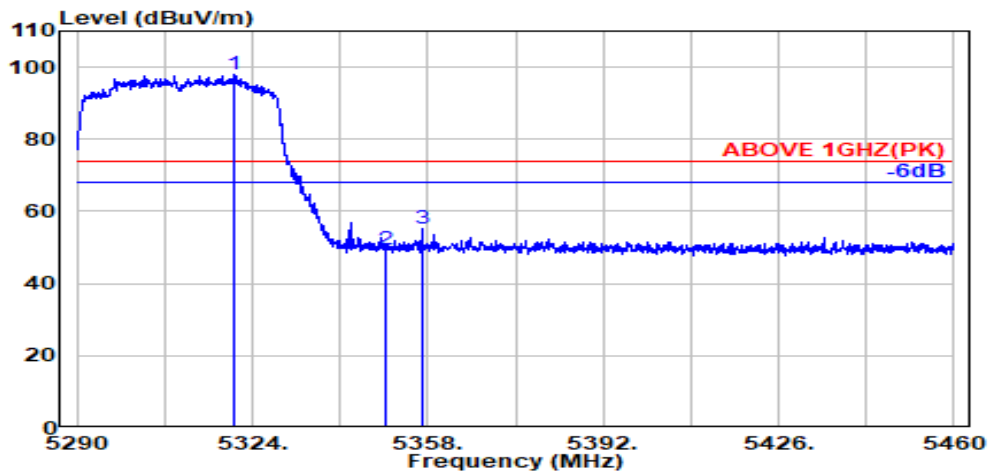

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.600	34.02	8.65	34.23	89.33	97.77	---	---	Peak
5350.000	33.90	8.67	34.22	41.23	49.58	74.00	24.42	Peak
5356.900	33.93	8.67	34.21	46.72	55.11	74.00	18.89	Peak

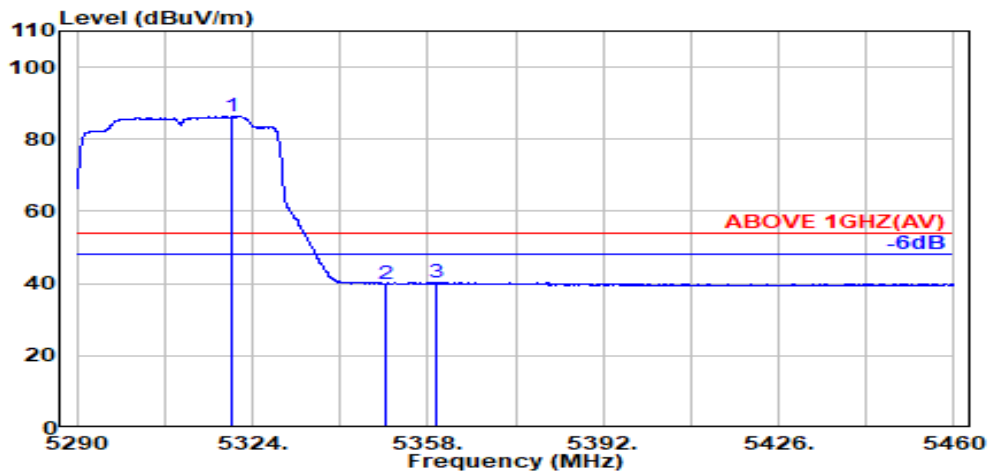

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.200	34.02	8.65	34.23	77.83	86.27	---	---	Average
5350.000	33.90	8.67	34.22	31.63	39.98	54.00	14.02	Average
5359.500	33.94	8.67	34.21	31.88	40.27	54.00	13.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

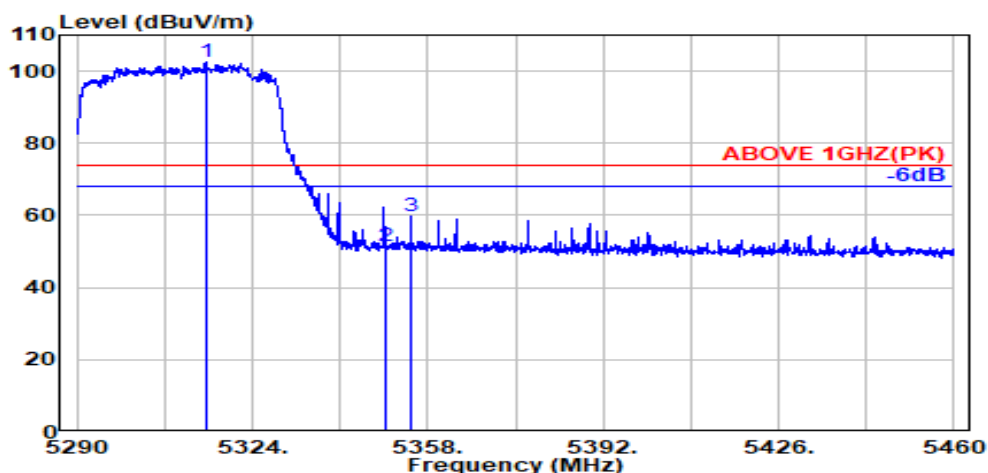

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.900	34.04	8.64	34.23	94.09	102.55	---	---	Peak
5350.000	33.90	8.67	34.22	42.95	51.30	74.00	22.70	Peak
5354.800	33.92	8.67	34.21	51.41	59.78	74.00	14.22	Peak

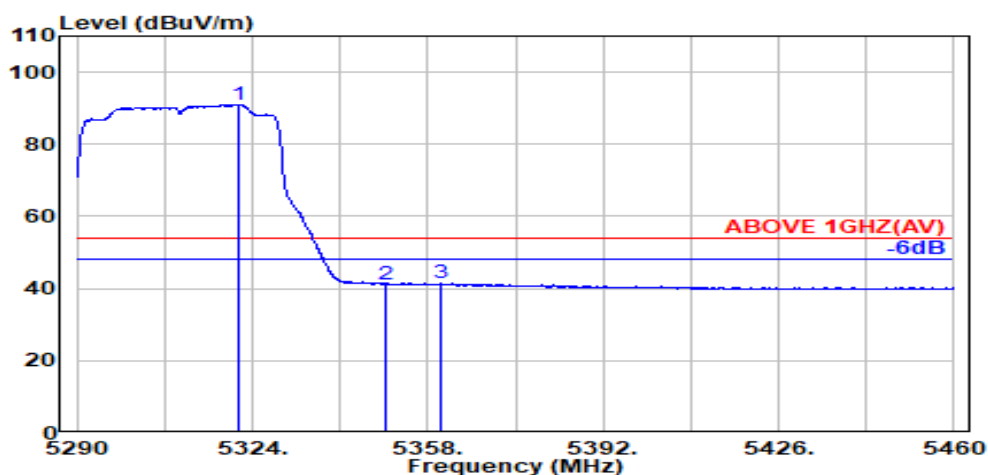

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.01	8.65	34.23	82.53	90.97	---	---	Average
5350.000	33.90	8.67	34.22	32.95	41.30	54.00	12.70	Average
5360.400	33.94	8.67	34.21	33.03	41.43	54.00	12.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

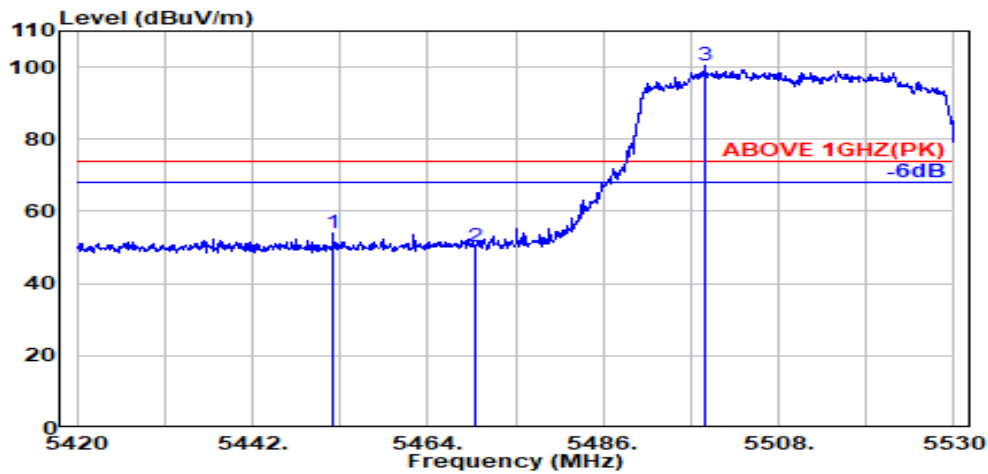

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.100	34.20	8.73	34.18	45.13	53.87	74.00	20.13	Peak
5470.000	34.16	8.74	34.18	41.57	50.29	74.00	23.71	Peak
@ 5498.800	34.10	8.75	34.17	91.62	100.31	---	---	Peak

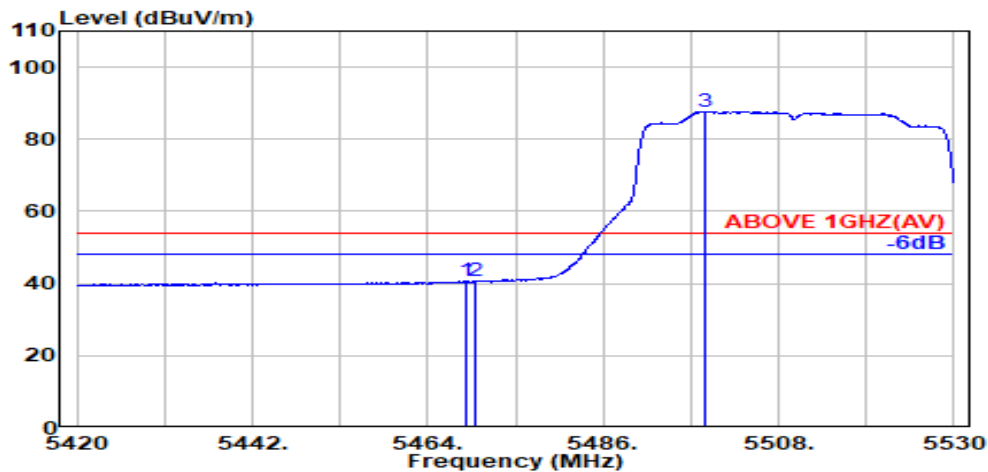

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.16	8.74	34.18	31.89	40.60	54.00	13.40	Average
5470.000	34.16	8.74	34.18	31.79	40.50	54.00	13.50	Average
@ 5498.800	34.10	8.75	34.17	79.05	87.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

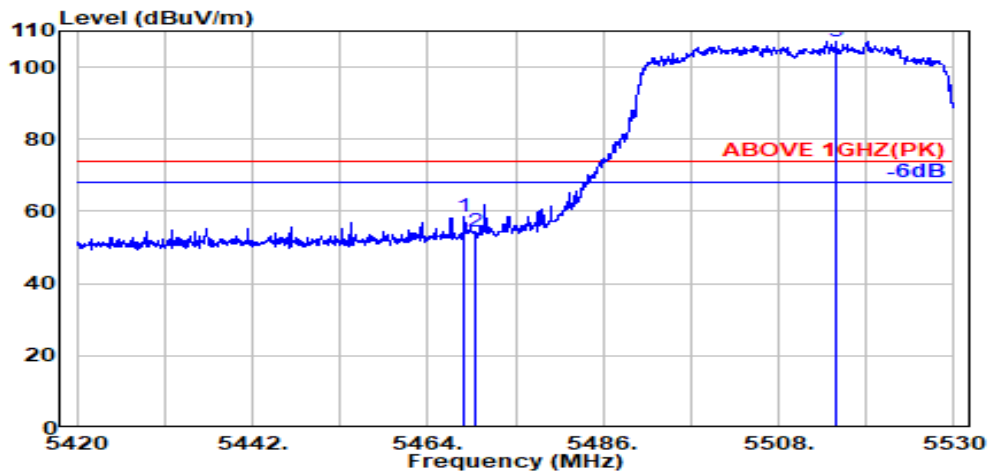

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	49.71	58.43	74.00	15.57	Peak
5470.000	34.16	8.74	34.18	45.52	54.24	74.00	19.76	Peak
@ 5515.200	34.10	8.76	34.18	98.50	107.18	---	---	Peak

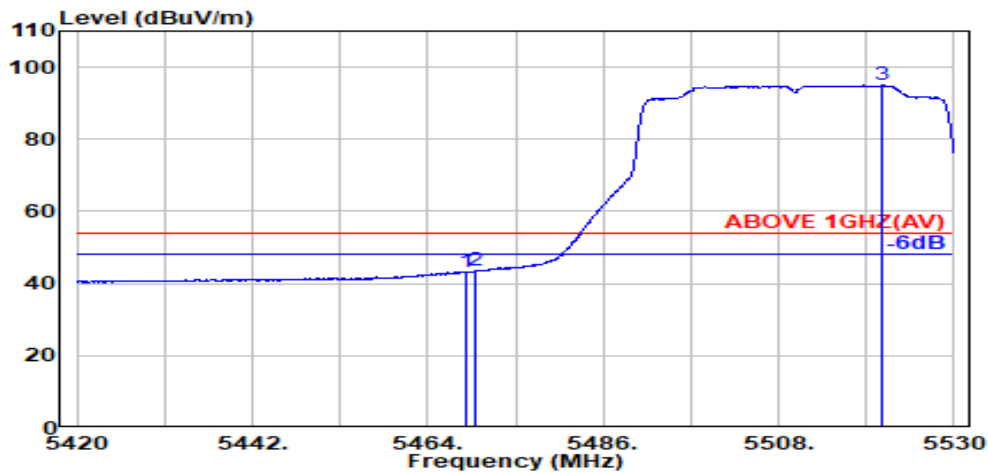

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.16	8.74	34.18	34.55	43.27	54.00	10.73	Average
5470.000	34.16	8.74	34.18	34.68	43.40	54.00	10.60	Average
@ 5521.000	34.10	8.77	34.18	86.23	94.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

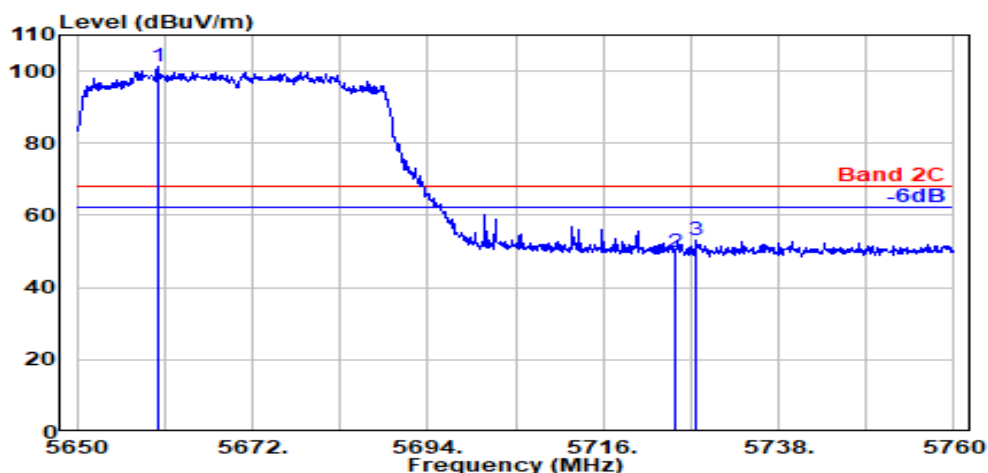

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.200	33.96	8.84	34.25	92.84	101.39	---	---	Peak
5725.000	33.80	8.88	34.28	41.25	49.65	68.20	18.55	Peak
5727.600	33.80	8.88	34.28	44.82	53.23	68.20	14.97	Peak

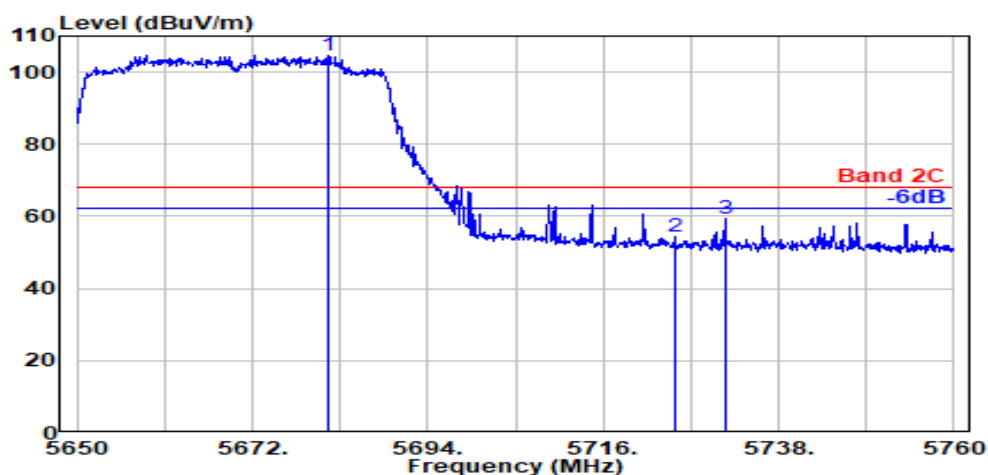

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.600	33.87	8.86	34.26	96.18	104.65	---	---	Peak
5725.000	33.80	8.88	34.28	45.94	54.34	68.20	13.86	Peak
5731.300	33.80	8.88	34.28	50.95	59.36	68.20	8.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

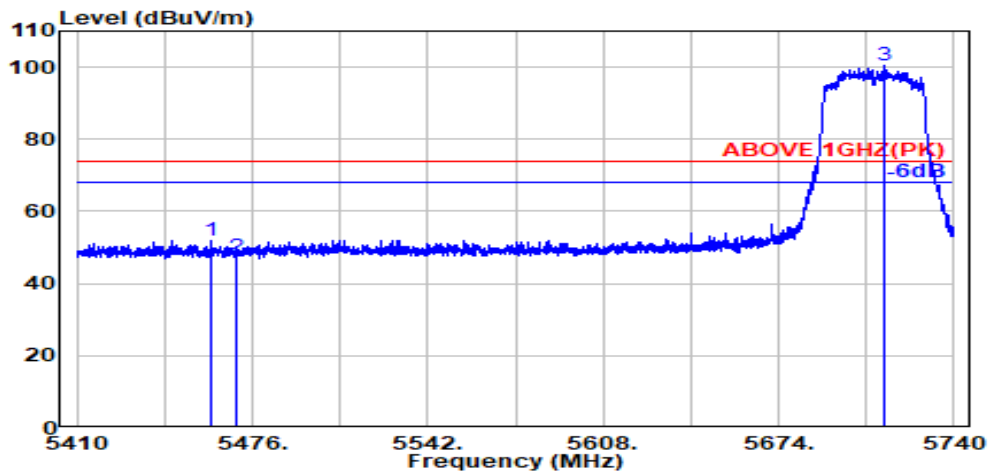

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.18	8.73	34.18	43.23	51.95	74.00	22.05	Peak
5470.000	34.16	8.74	34.18	38.66	47.38	74.00	26.62	Peak
@ 5713.500	33.80	8.87	34.27	92.20	100.60	---	---	Peak

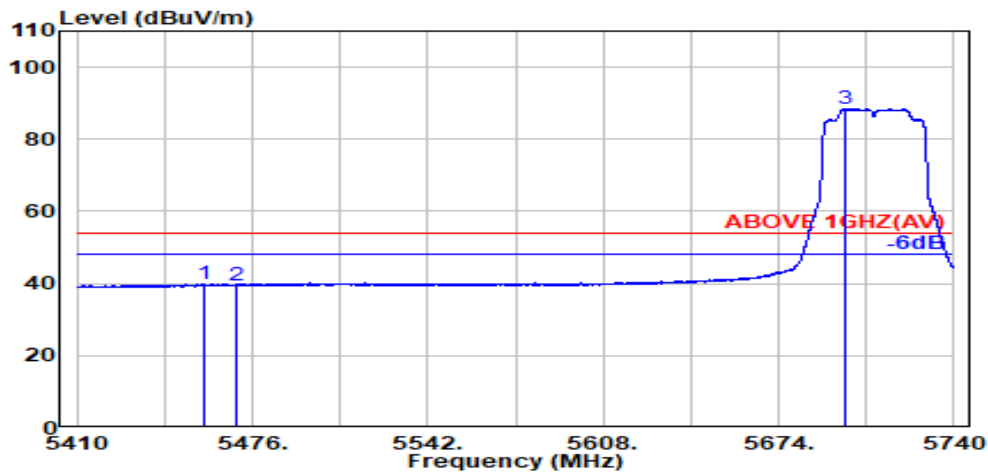


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.700	34.18	8.73	34.18	31.17	39.90	54.00	14.10	Average
5470.000	34.16	8.74	34.18	30.72	39.43	54.00	14.57	Average
@ 5698.800	33.80	8.87	34.26	80.09	88.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

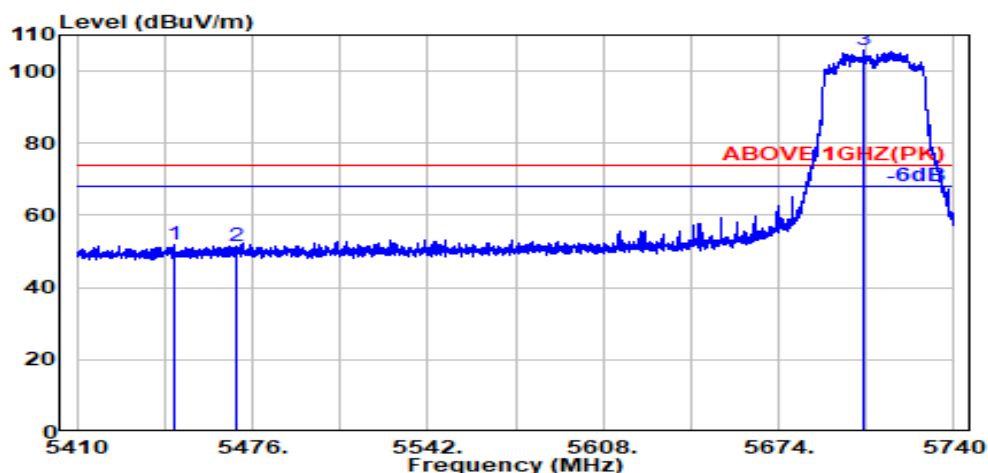

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.700	34.19	8.72	34.19	43.03	51.76	74.00	22.24	Peak
5470.000	34.16	8.74	34.18	42.74	51.46	74.00	22.54	Peak
@ 5706.300	33.80	8.87	34.27	97.37	105.78	---	---	Peak

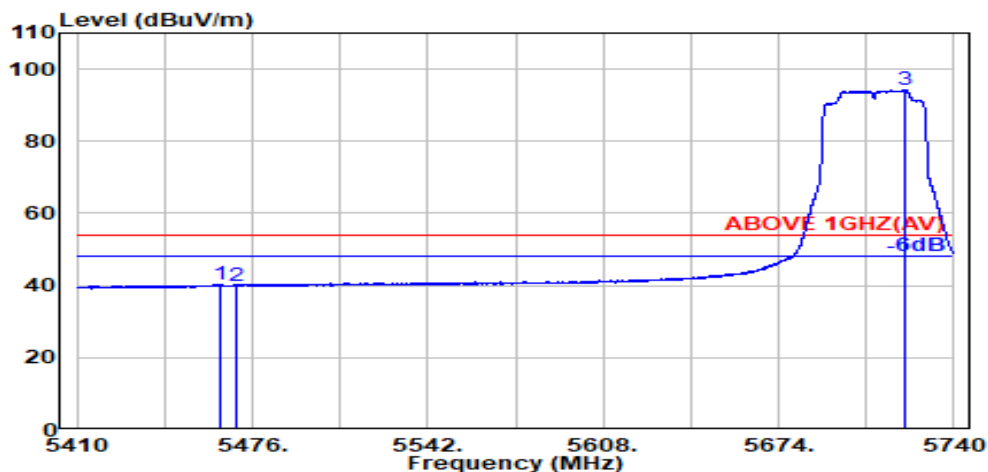


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.17	8.73	34.18	31.46	40.18	54.00	13.82	Average
5470.000	34.16	8.74	34.18	31.26	39.98	54.00	14.02	Average
@ 5721.200	33.80	8.88	34.27	85.95	94.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

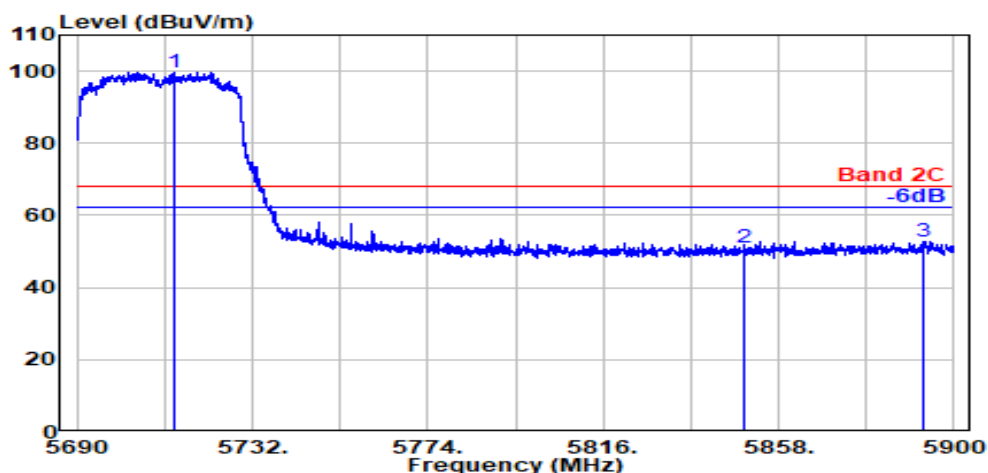

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.500	33.80	8.87	34.27	91.34	99.74	---	---	Peak
5850.000	34.10	8.95	34.33	42.53	51.25	68.20	16.95	Peak
5892.500	34.10	8.97	34.35	44.09	52.81	68.20	15.39	Peak

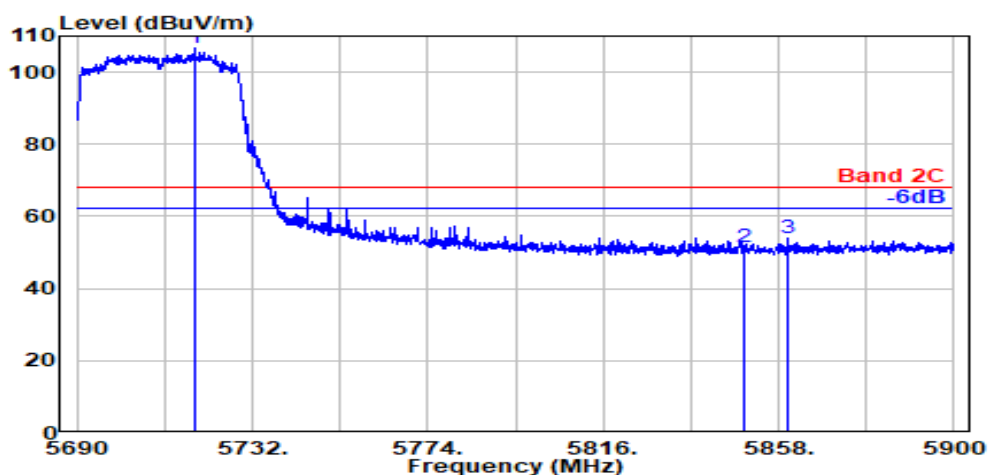


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.300	33.80	8.88	34.27	98.22	106.63	---	---	Peak
5850.000	34.10	8.95	34.33	42.57	51.28	68.20	16.92	Peak
5860.300	34.10	8.96	34.34	45.28	54.00	68.20	14.20	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

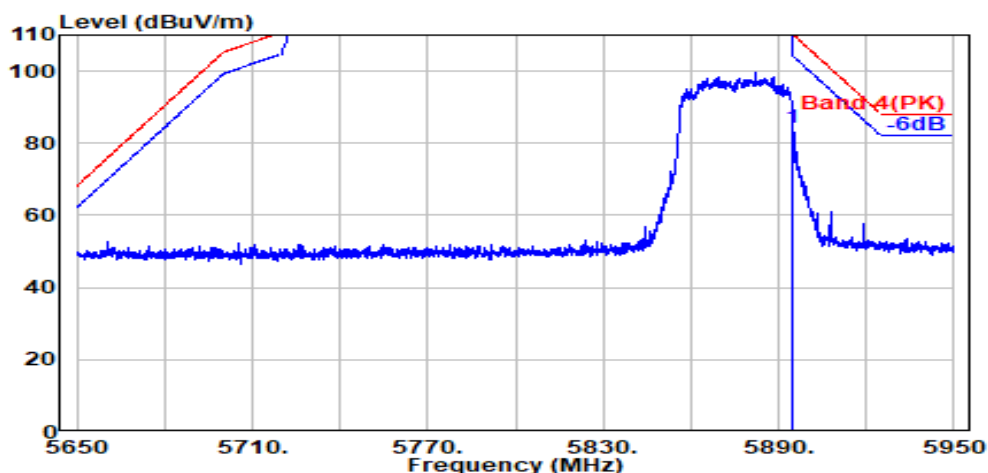

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	75.68	84.40	110.20	25.80	Peak

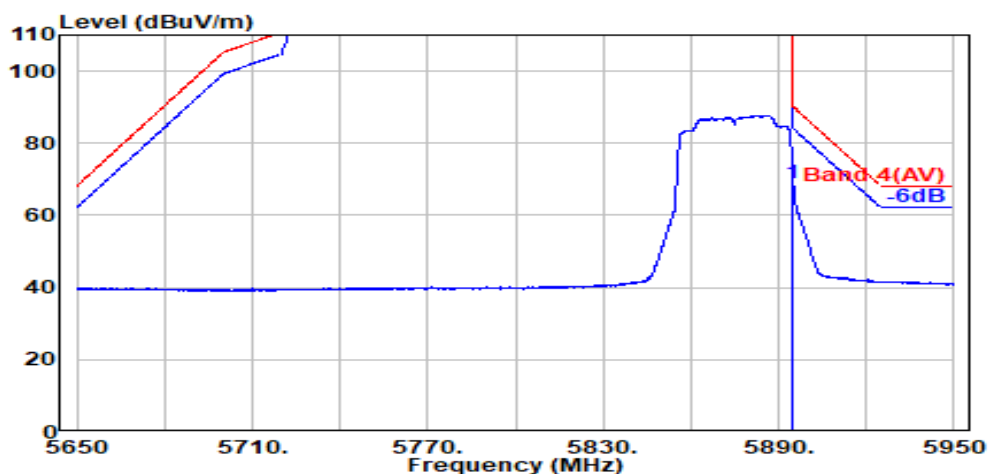

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	60.33	69.05	90.20	21.15	Average

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

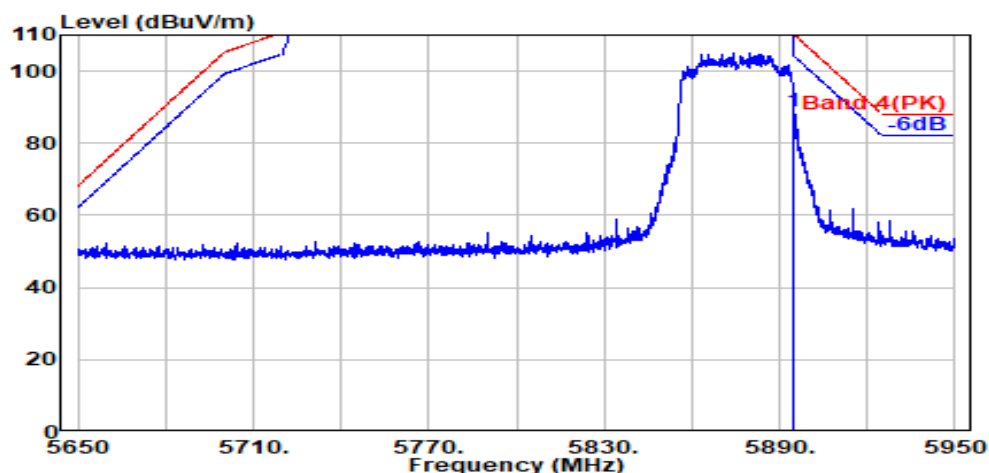

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	80.21	88.93	110.20	21.27	Peak

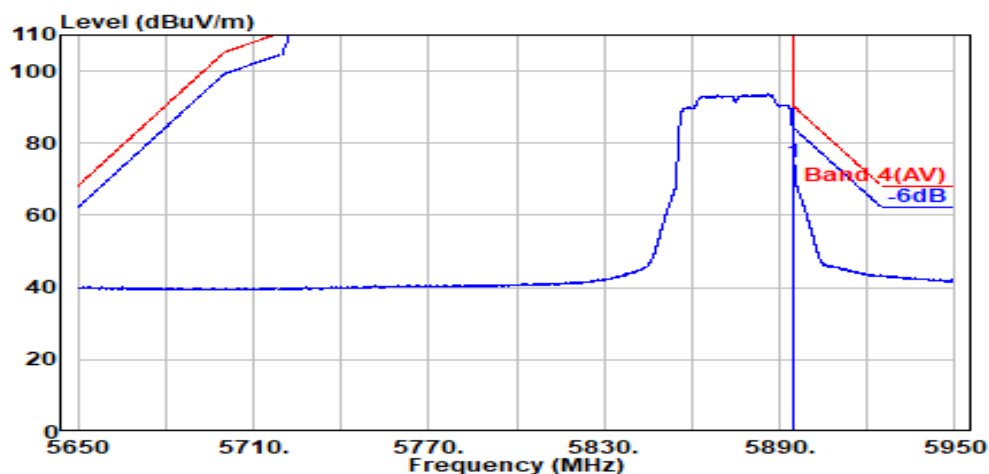


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.10	8.97	34.35	66.12	74.84	90.20	15.36	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

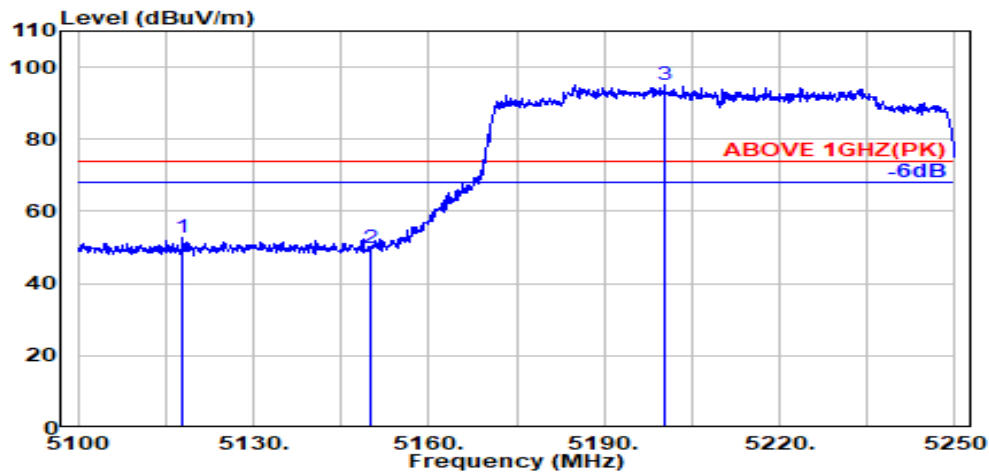

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.900	33.70	8.52	34.29	44.85	52.79	74.00	21.21	Peak
5150.000	33.70	8.54	34.28	41.66	49.62	74.00	24.38	Peak
@ 5200.300	33.70	8.57	34.26	87.13	95.14	---	---	Peak

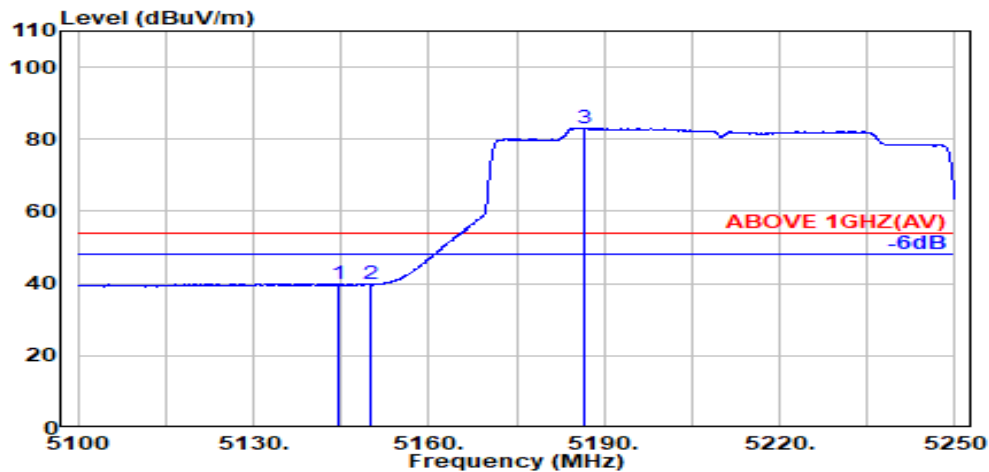

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.600	33.70	8.54	34.28	31.99	39.95	54.00	14.05	Average
5150.000	33.70	8.54	34.28	31.80	39.77	54.00	14.23	Average
@ 5186.500	33.70	8.57	34.27	75.07	83.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

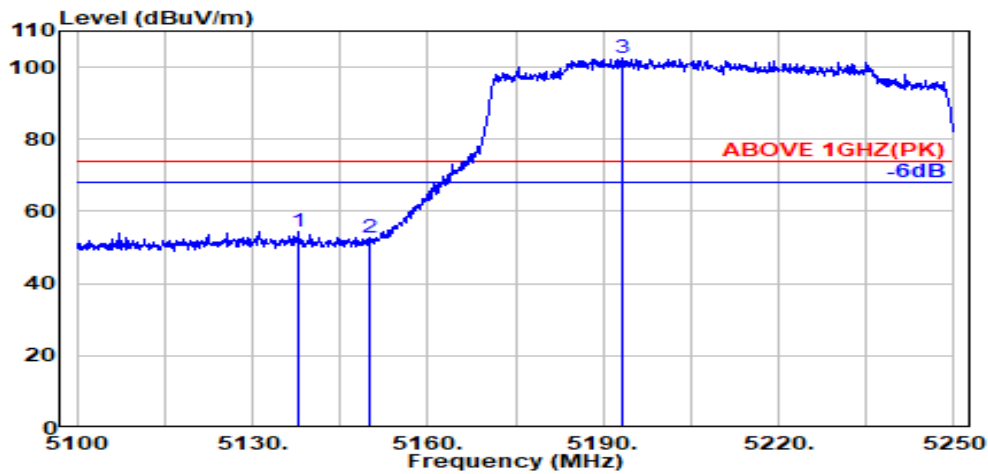

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.800	33.70	8.54	34.28	46.46	54.41	74.00	19.59	Peak
5150.000	33.70	8.54	34.28	44.77	52.73	74.00	21.27	Peak
@ 5193.200	33.70	8.57	34.27	94.32	102.32	---	---	Peak

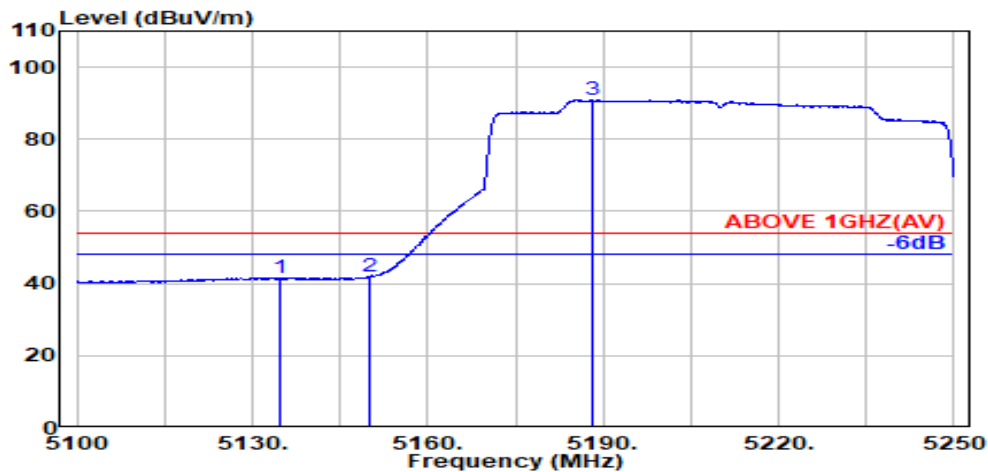

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.900	33.70	8.53	34.29	33.71	41.66	54.00	12.34	Average
5150.000	33.70	8.54	34.28	33.89	41.85	54.00	12.15	Average
@ 5188.100	33.70	8.57	34.27	82.83	90.83	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

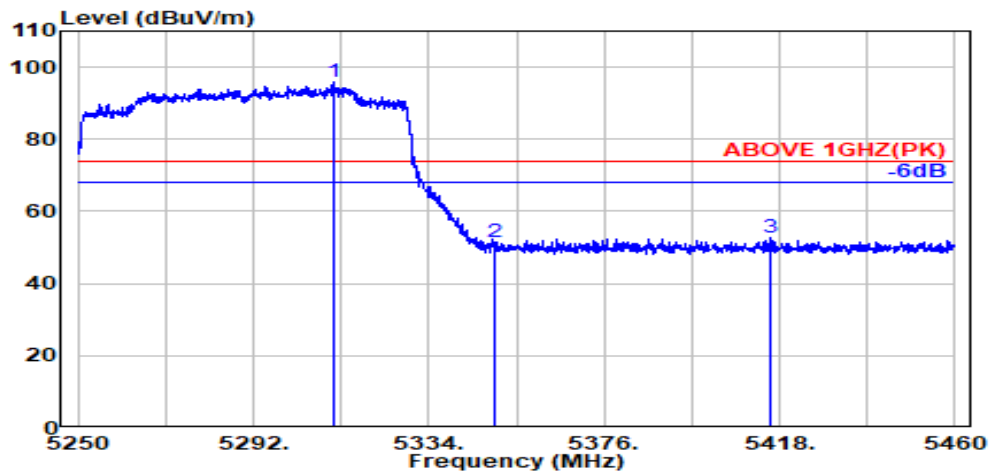

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.500	34.05	8.64	34.23	87.35	95.82	---	---	Peak
5350.000	33.90	8.67	34.22	43.14	51.49	74.00	22.51	Peak
5416.000	34.13	8.70	34.20	43.96	52.60	74.00	21.40	Peak

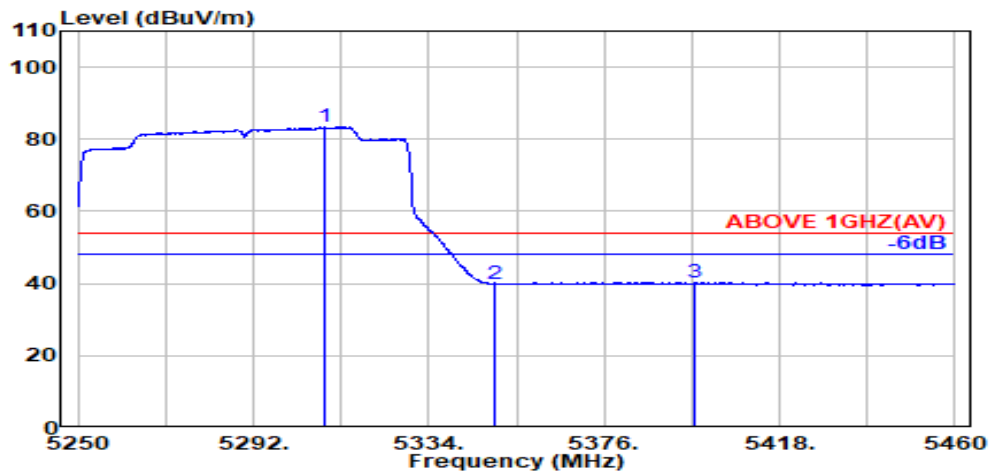

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.300	34.06	8.64	34.23	74.90	83.37	---	---	Average
5350.000	33.90	8.67	34.22	31.59	39.94	54.00	14.06	Average
5397.500	34.09	8.69	34.20	31.69	40.27	54.00	13.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

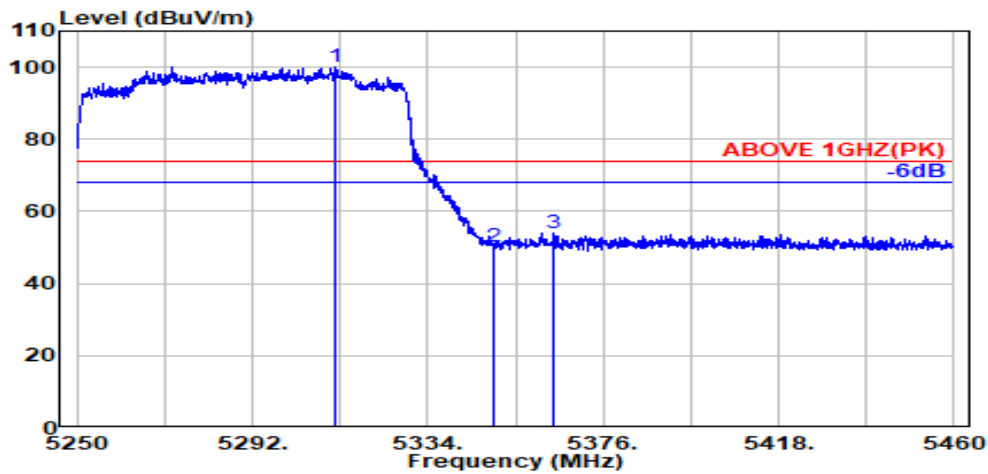

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.800	34.05	8.64	34.23	91.57	100.04	---	---	Peak
5350.000	33.90	8.67	34.22	41.90	50.25	74.00	23.75	Peak
5364.000	33.96	8.67	34.21	45.65	54.07	74.00	19.93	Peak

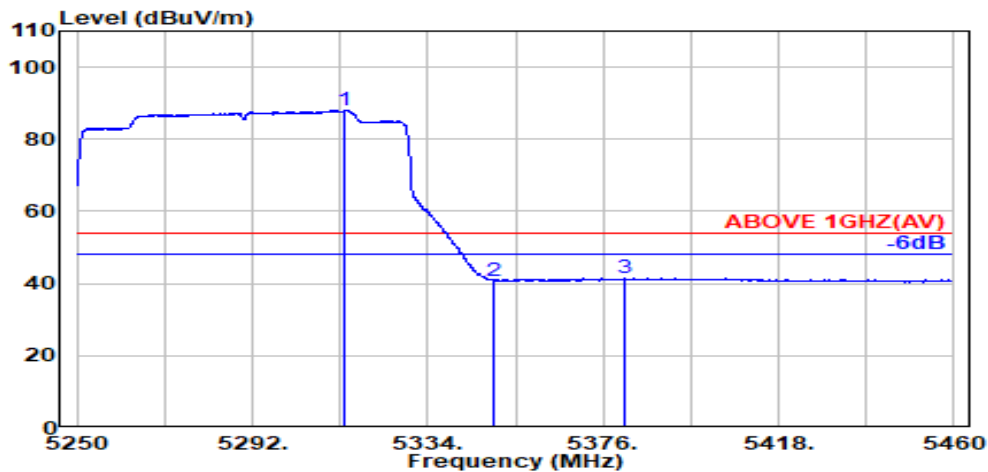


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.200	34.04	8.64	34.23	79.54	88.00	---	---	Average
5350.000	33.90	8.67	34.22	32.51	40.85	54.00	13.15	Average
5381.000	34.02	8.68	34.21	32.93	41.43	54.00	12.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

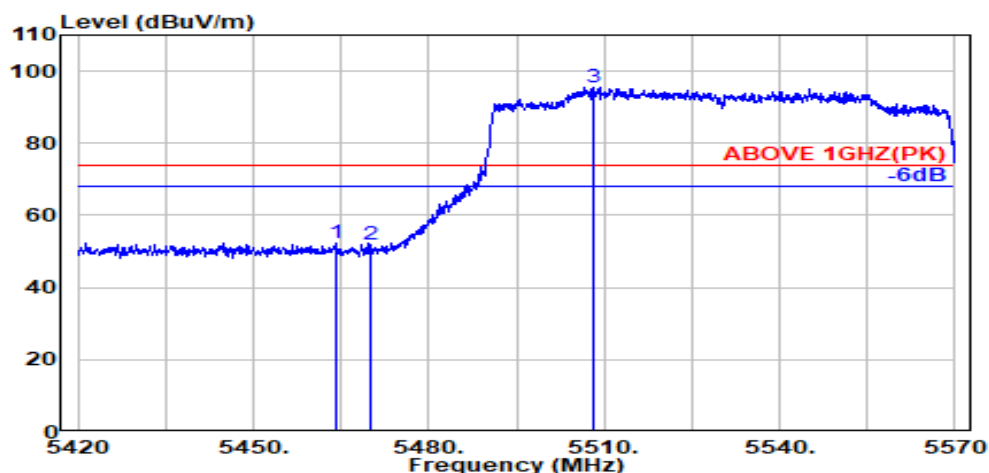

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.17	8.73	34.18	43.78	52.50	74.00	21.50	Peak
5470.000	34.16	8.74	34.18	42.97	51.68	74.00	22.32	Peak
@ 5508.000	34.10	8.76	34.17	86.91	95.60	---	---	Peak

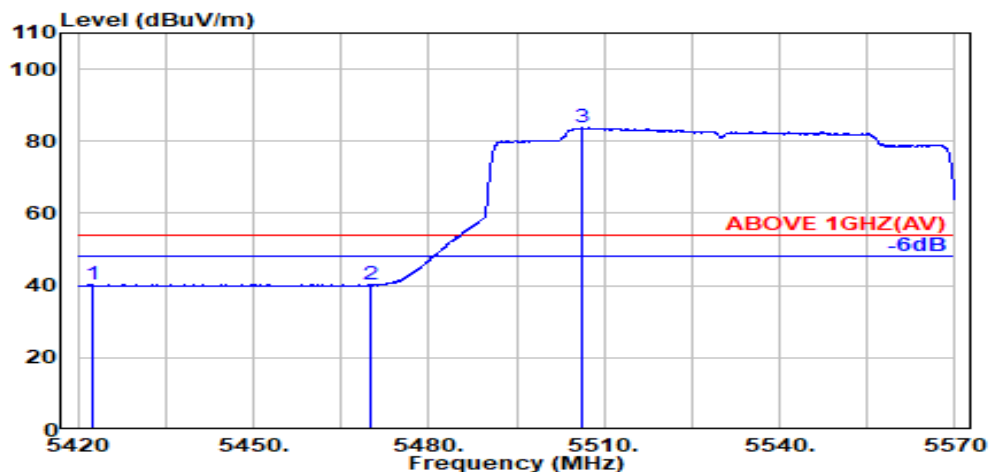

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.500	34.15	8.71	34.19	31.61	40.27	54.00	13.73	Average
5470.000	34.16	8.74	34.18	31.34	40.06	54.00	13.94	Average
@ 5506.300	34.10	8.76	34.17	75.04	83.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

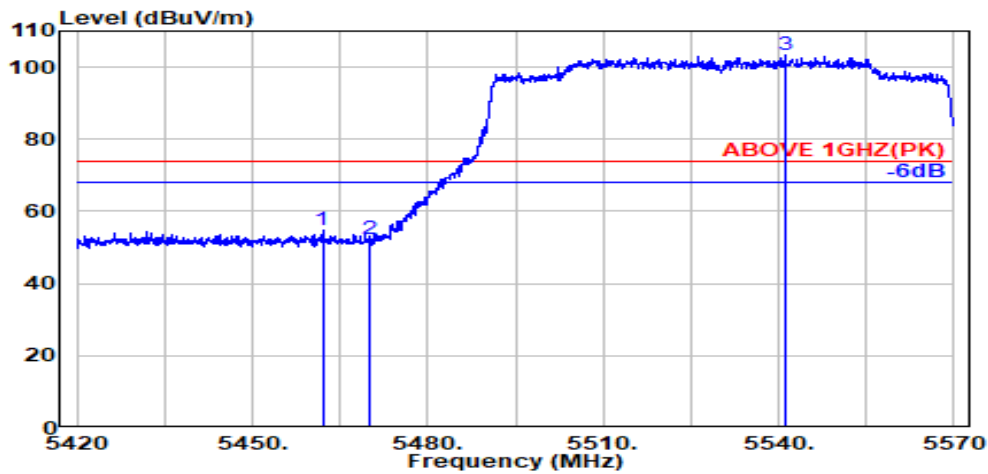

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.18	8.73	34.18	46.00	54.72	74.00	19.28	Peak
5470.000	34.16	8.74	34.18	43.45	52.16	74.00	21.84	Peak
@ 5541.000	34.10	8.78	34.19	94.76	103.45	---	---	Peak

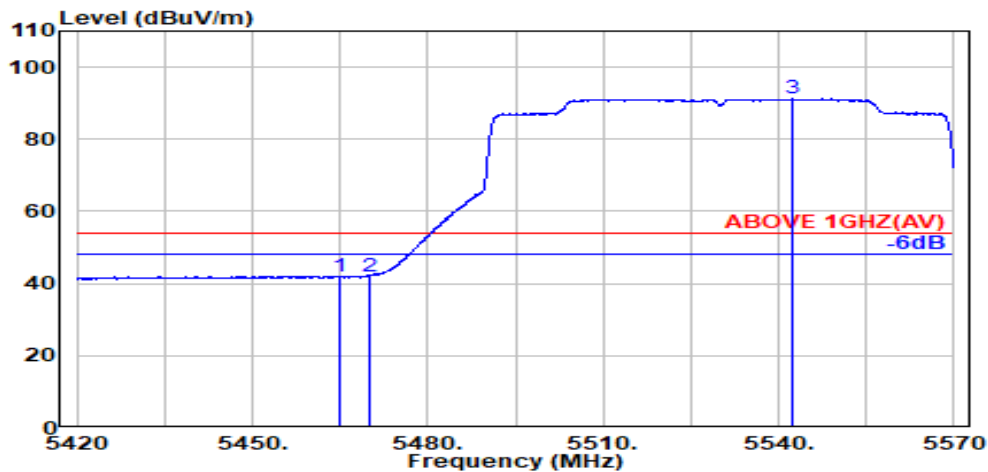

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.17	8.73	34.18	33.38	42.10	54.00	11.90	Average
5470.000	34.16	8.74	34.18	33.38	42.10	54.00	11.90	Average
@ 5542.300	34.10	8.78	34.19	82.51	91.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

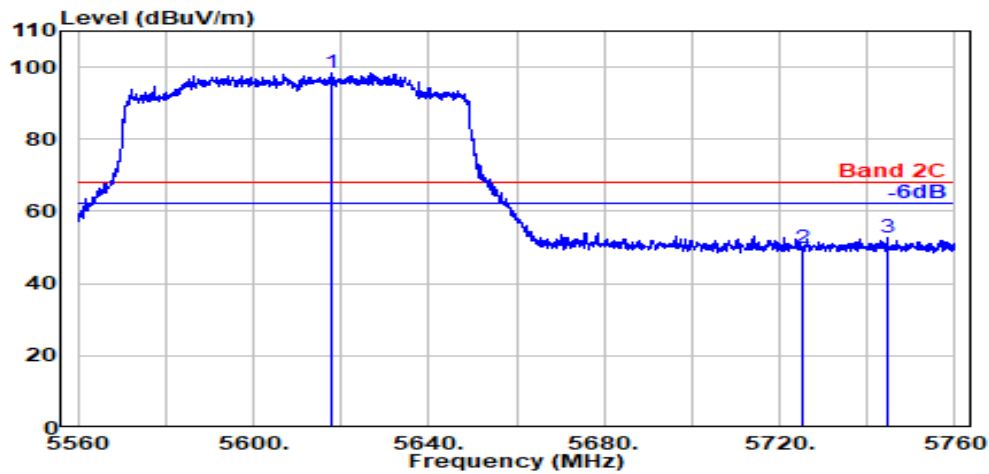

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5617.600	34.00	8.82	34.23	89.79	98.38	---	---	Peak
5725.000	33.80	8.88	34.28	41.52	49.93	68.20	18.27	Peak
5744.500	33.80	8.89	34.28	44.51	52.92	68.20	15.28	Peak

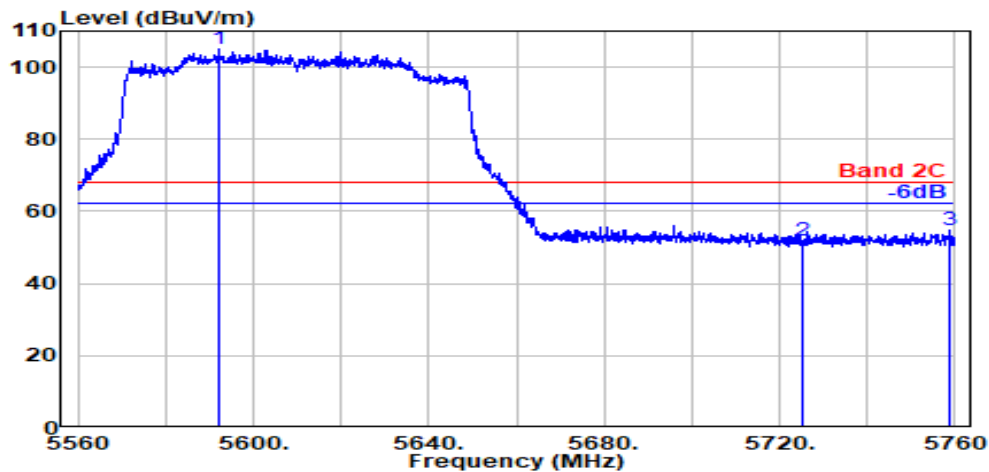

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5592.300	34.02	8.81	34.21	96.35	104.96	---	---	Peak
5725.000	33.80	8.88	34.28	43.33	51.73	68.20	16.47	Peak
5758.600	33.83	8.90	34.29	46.50	54.94	68.20	13.26	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

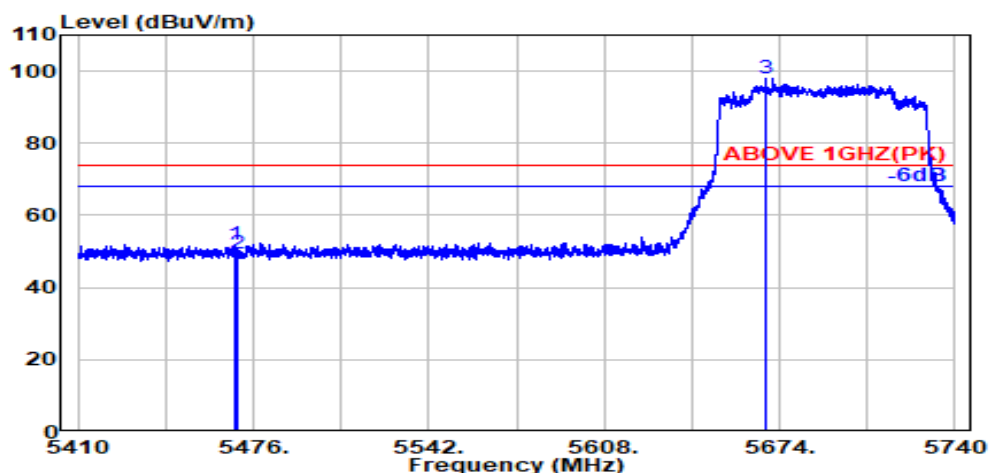

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.16	8.74	34.18	43.13	51.85	74.00	22.15	Peak
5470.000	34.16	8.74	34.18	40.77	49.48	74.00	24.52	Peak
@ 5668.600	33.93	8.85	34.25	89.31	97.84	---	---	Peak

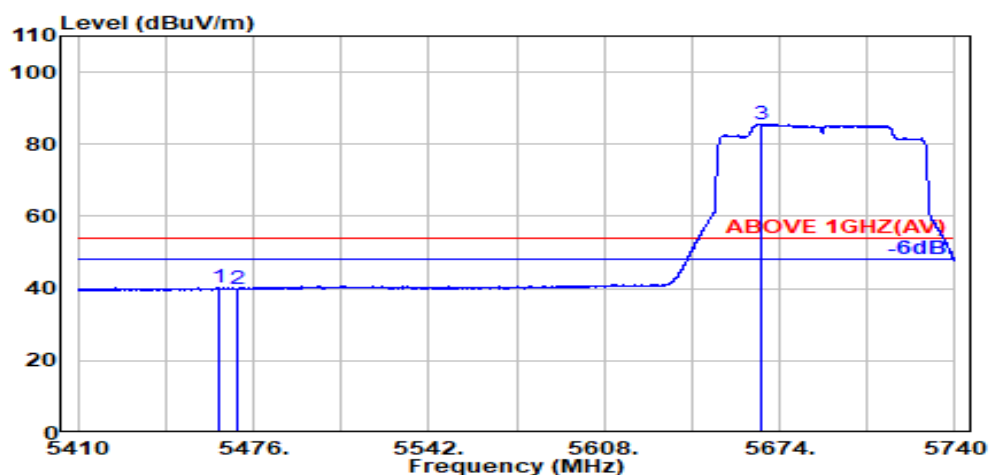

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.17	8.73	34.18	31.48	40.21	54.00	13.79	Average
5470.000	34.16	8.74	34.18	31.04	39.75	54.00	14.25	Average
@ 5667.400	33.93	8.85	34.25	77.10	85.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

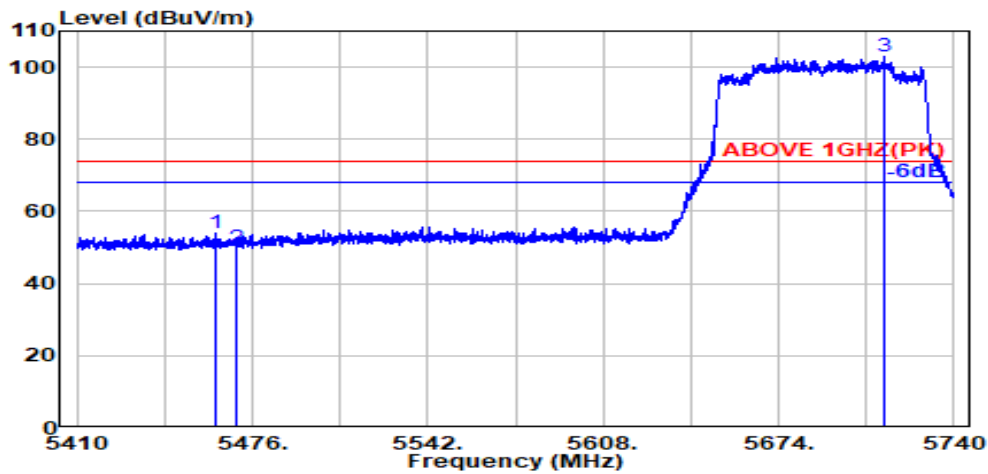

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.18	8.73	34.18	45.36	54.08	74.00	19.92	Peak
5470.000	34.16	8.74	34.18	41.23	49.95	74.00	24.05	Peak
@ 5713.900	33.80	8.87	34.27	94.51	102.92	---	---	Peak

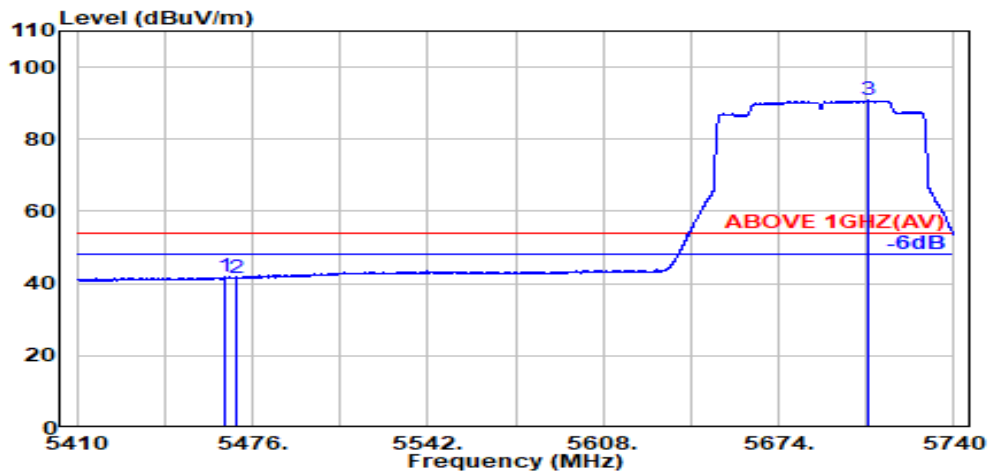

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.17	8.73	34.18	33.10	41.82	54.00	12.18	Average
5470.000	34.16	8.74	34.18	32.68	41.40	54.00	12.60	Average
@ 5707.500	33.80	8.87	34.27	82.33	90.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

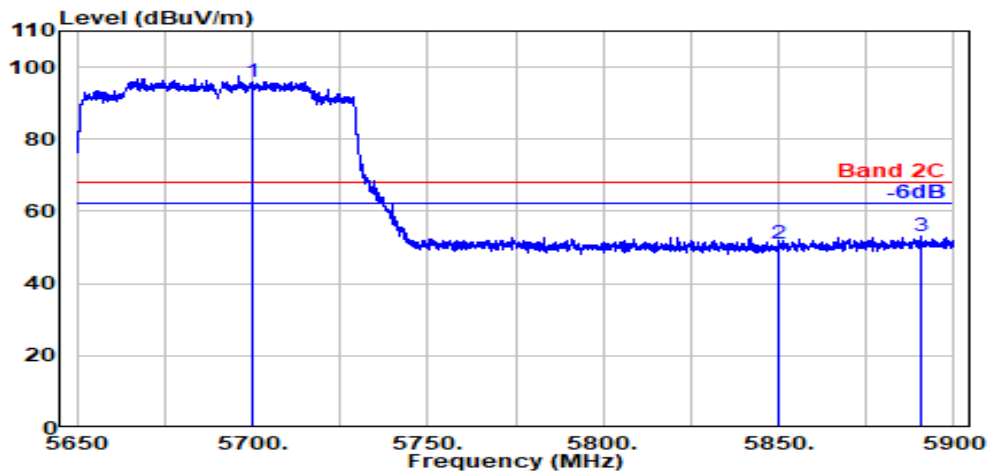

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.100	33.80	8.87	34.26	87.63	96.03	---	---	Peak
5850.000	34.10	8.95	34.33	42.20	50.92	68.20	17.28	Peak
5890.300	34.10	8.97	34.35	44.34	53.06	68.20	15.14	Peak

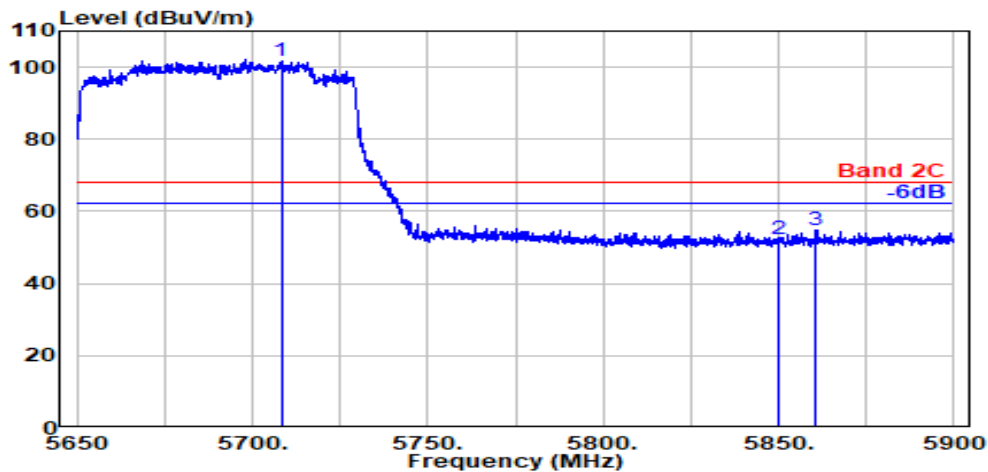


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.200	33.80	8.87	34.27	93.32	101.72	---	---	Peak
5850.000	34.10	8.95	34.33	43.77	52.49	68.20	15.71	Peak
5860.700	34.10	8.96	34.34	46.24	54.95	68.20	13.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

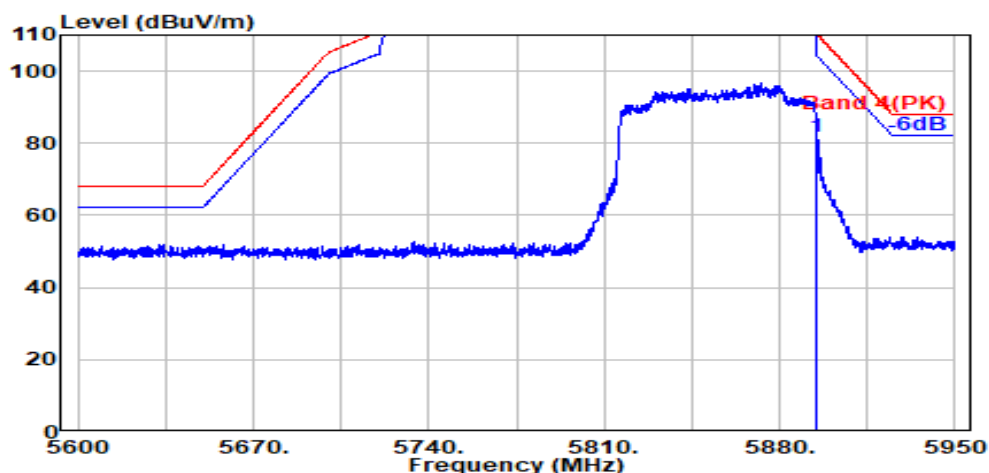

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	73.05	81.77	110.16	28.39	Peak

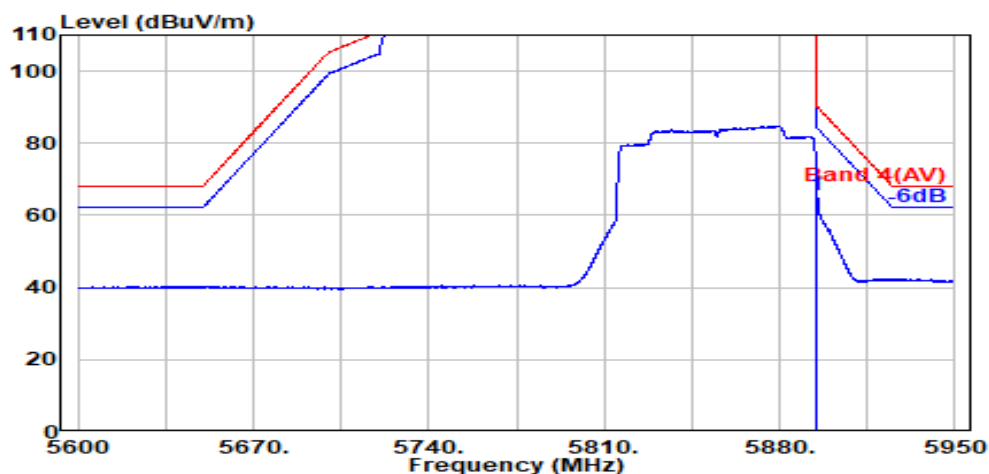


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	56.83	65.55	90.16	24.61	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

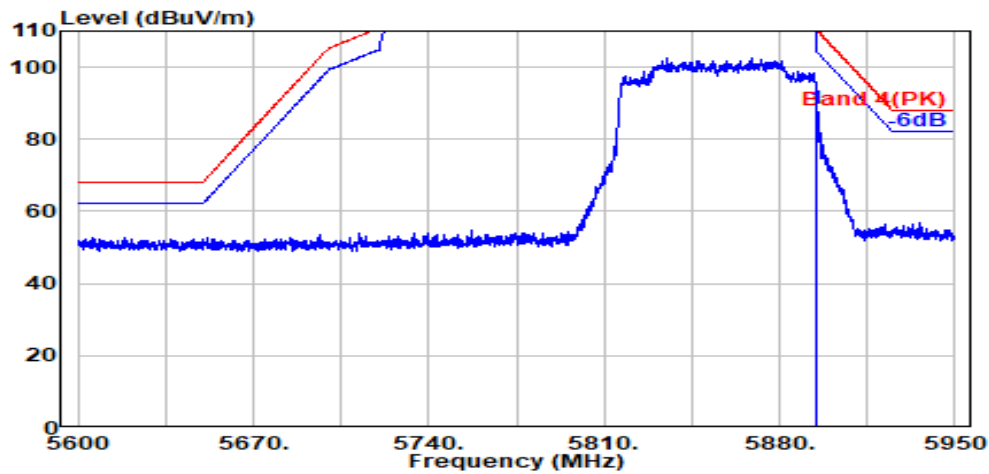

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	79.68	88.40	110.16	21.77	Peak

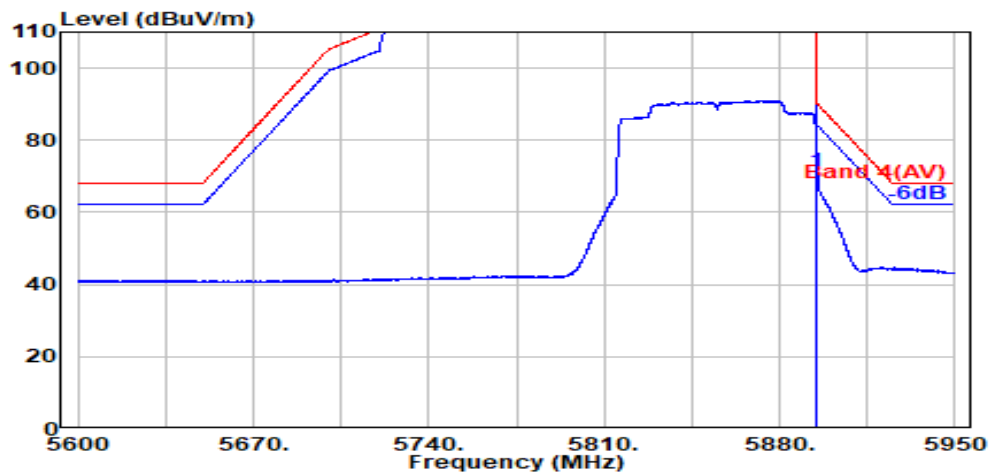

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	62.80	71.52	90.16	18.64	Average

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

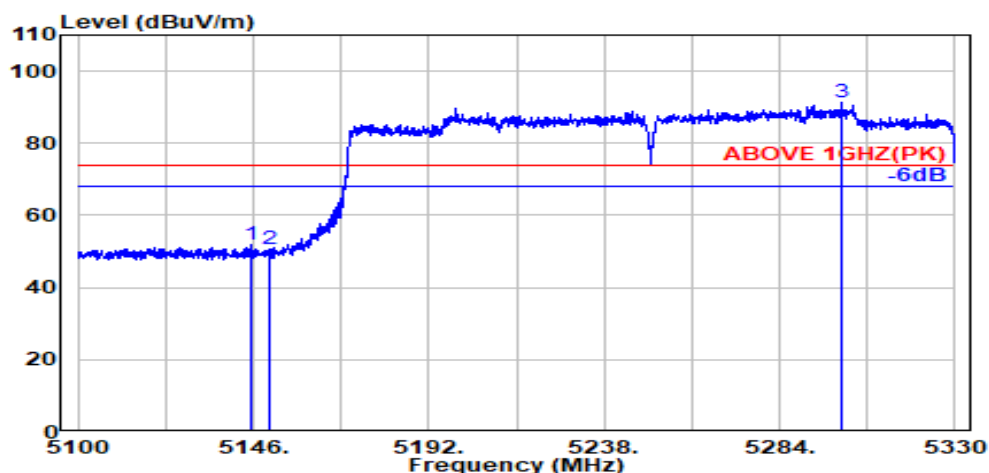

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.70	8.54	34.28	43.82	51.78	74.00	22.22	Peak
5150.000	33.70	8.54	34.28	42.88	50.84	74.00	23.16	Peak
@ 5300.300	34.10	8.64	34.23	82.80	91.30	---	---	Peak

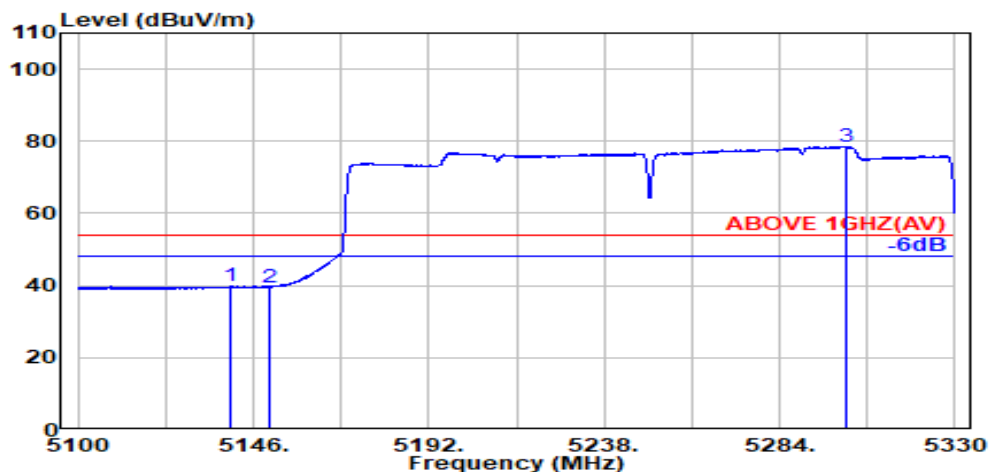


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.200	33.70	8.54	34.28	31.81	39.77	54.00	14.23	Average
5150.000	33.70	8.54	34.28	31.54	39.50	54.00	14.50	Average
@ 5301.300	34.09	8.64	34.23	70.02	78.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

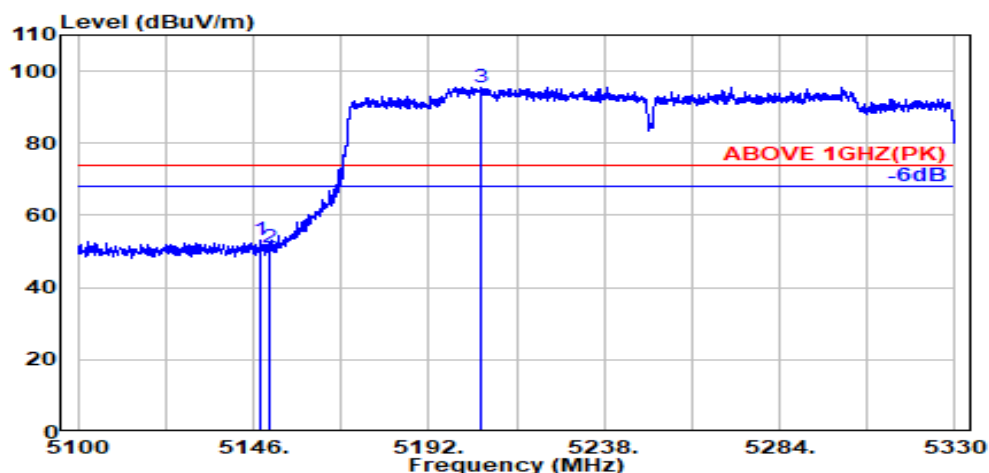

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.70	8.54	34.28	45.03	52.99	74.00	21.01	Peak
5150.000	33.70	8.54	34.28	43.18	51.14	74.00	22.86	Peak
@ 5205.800	33.71	8.58	34.26	87.60	95.63	---	---	Peak

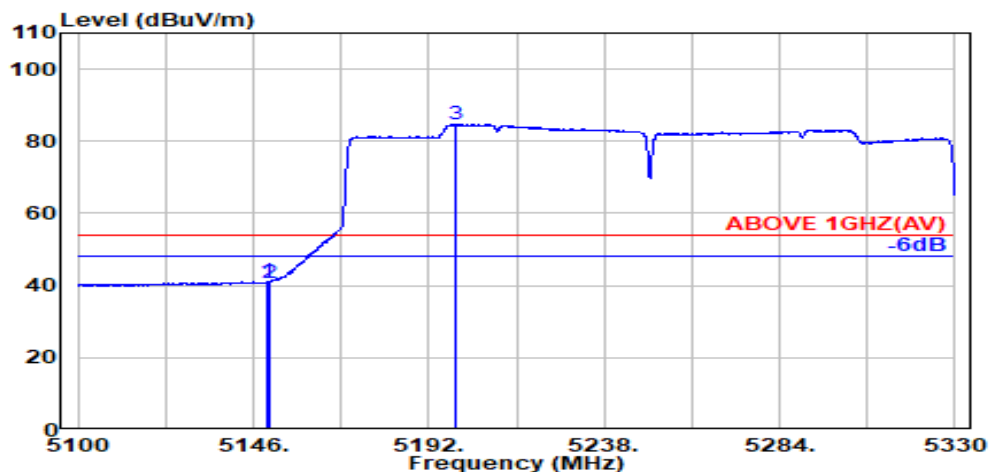

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.70	8.54	34.28	33.15	41.11	54.00	12.89	Average
5150.000	33.70	8.54	34.28	32.90	40.86	54.00	13.14	Average
@ 5199.300	33.70	8.57	34.26	76.63	84.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

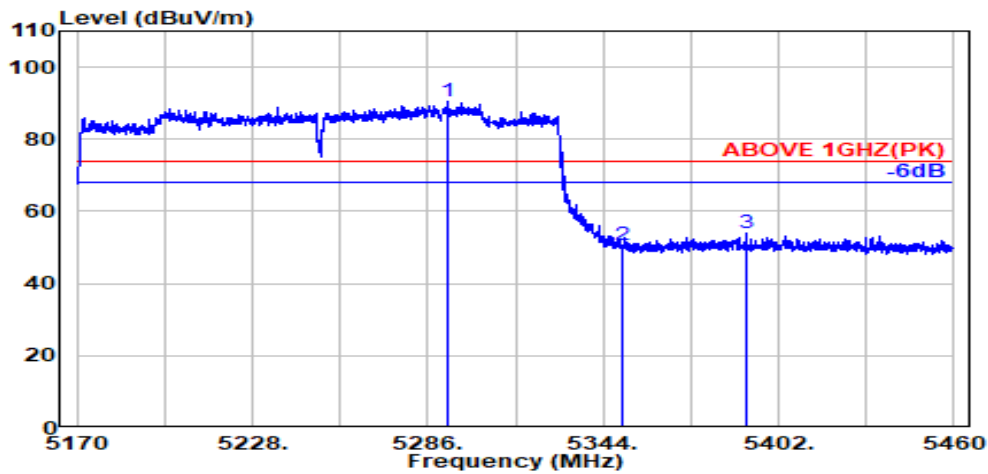

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.800	34.06	8.63	34.23	82.14	90.59	---	---	Peak
5350.000	33.90	8.67	34.22	42.46	50.81	74.00	23.19	Peak
5391.200	34.06	8.69	34.20	45.53	54.08	74.00	19.92	Peak

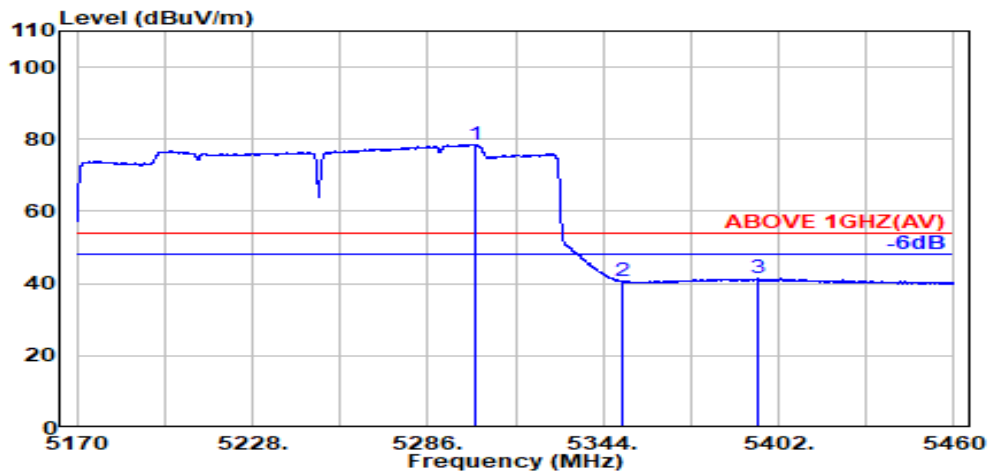

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.800	34.09	8.64	34.23	70.00	78.50	---	---	Average
5350.000	33.90	8.67	34.22	32.36	40.71	54.00	13.29	Average
5395.400	34.08	8.69	34.20	32.98	41.55	54.00	12.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

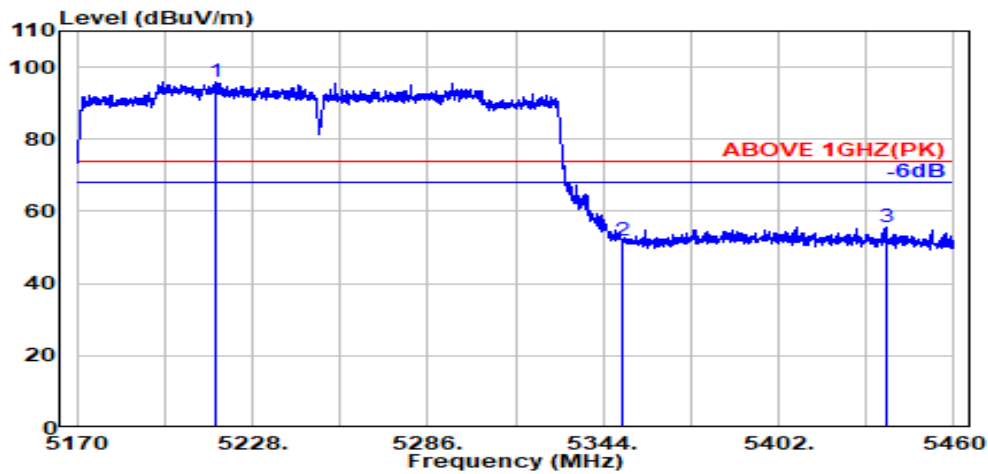

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5215.900	33.73	8.58	34.26	87.82	95.88	---	---	Peak
5350.000	33.90	8.67	34.22	43.48	51.83	74.00	22.17	Peak
5437.400	34.17	8.72	34.19	47.10	55.81	74.00	18.19	Peak

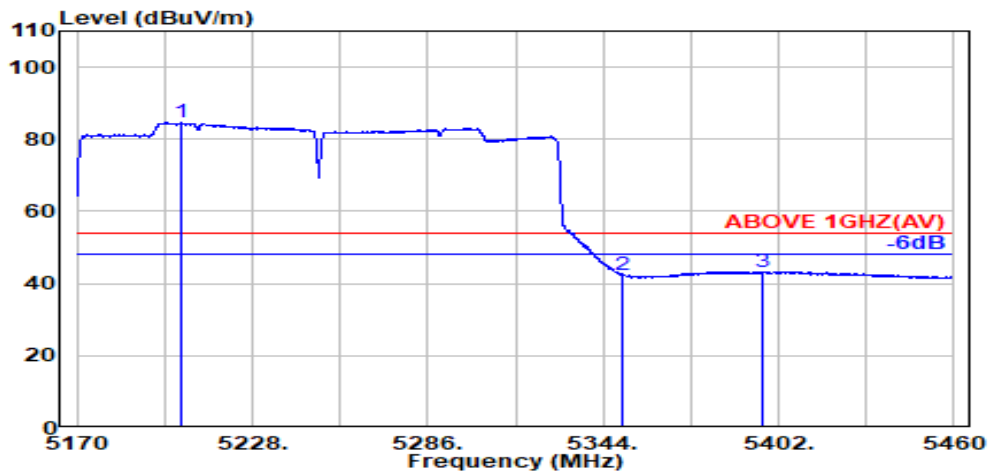


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5204.300	33.71	8.58	34.26	76.51	84.54	---	---	Average
5350.000	33.90	8.67	34.22	34.11	42.46	54.00	11.54	Average
5396.500	34.09	8.69	34.20	34.76	43.34	54.00	10.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

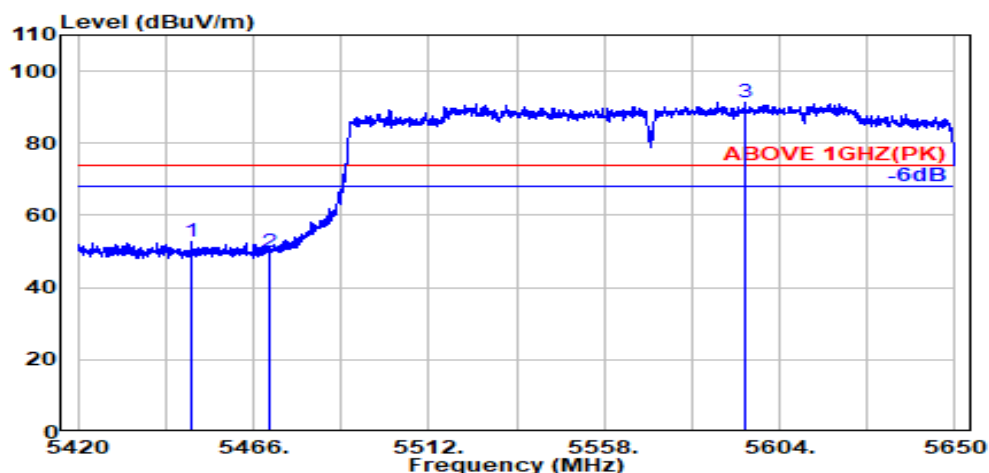

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.700	34.20	8.72	34.19	43.98	52.72	74.00	21.28	Peak
5470.000	34.16	8.74	34.18	41.16	49.87	74.00	24.13	Peak
@ 5595.000	34.01	8.81	34.22	82.92	91.52	---	---	Peak

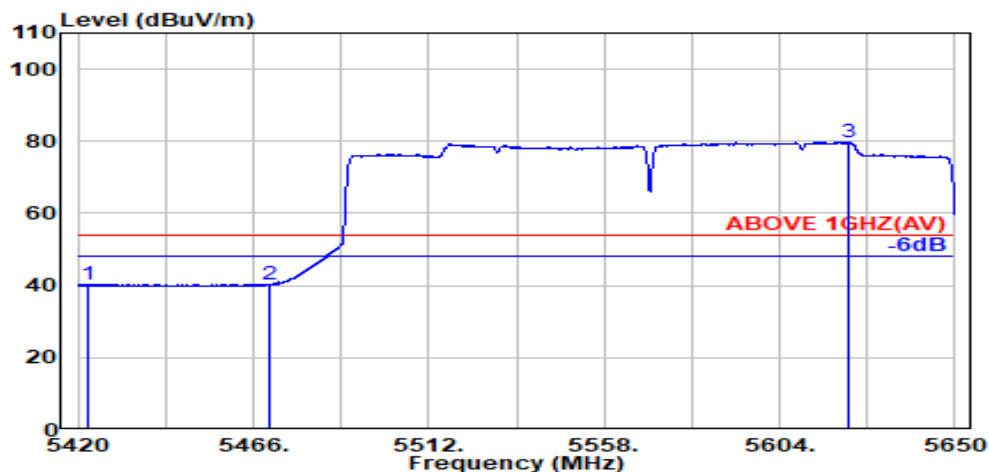

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.900	34.15	8.71	34.19	31.73	40.39	54.00	13.61	Average
5470.000	34.16	8.74	34.18	31.39	40.11	54.00	13.89	Average
@ 5621.900	34.00	8.82	34.23	71.16	79.76	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

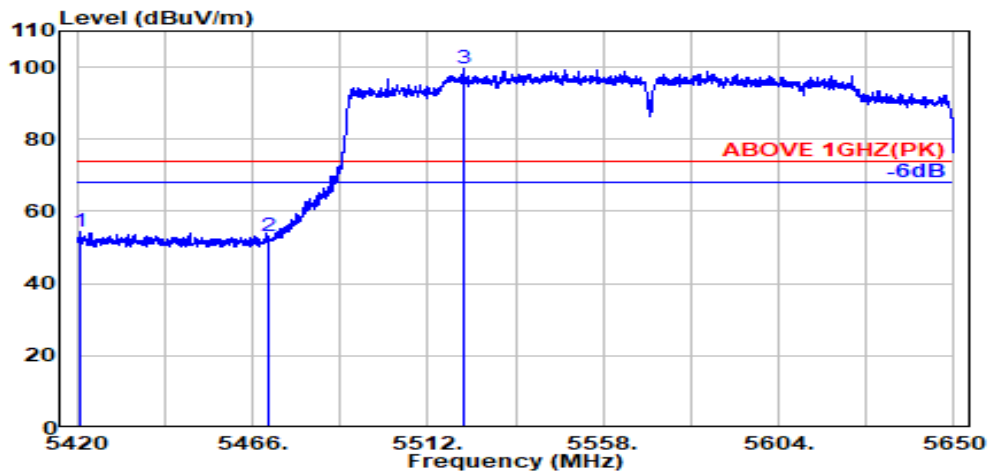

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.600	34.14	8.71	34.19	45.59	54.24	74.00	19.76	Peak
5470.000	34.16	8.74	34.18	44.24	52.95	74.00	21.05	Peak
@ 5521.500	34.10	8.77	34.18	91.09	99.77	---	---	Peak

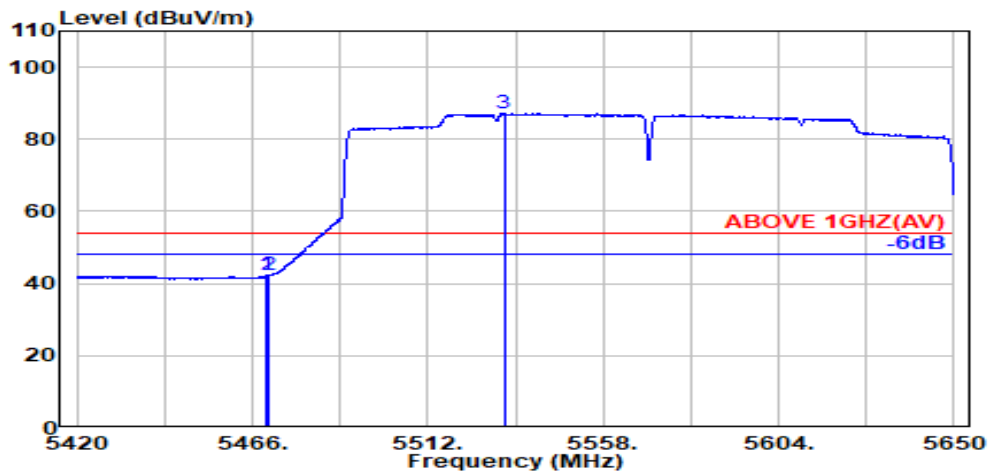

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.16	8.74	34.18	33.46	42.18	54.00	11.82	Average
5470.000	34.16	8.74	34.18	33.58	42.30	54.00	11.70	Average
@ 5532.000	34.10	8.77	34.19	78.52	87.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

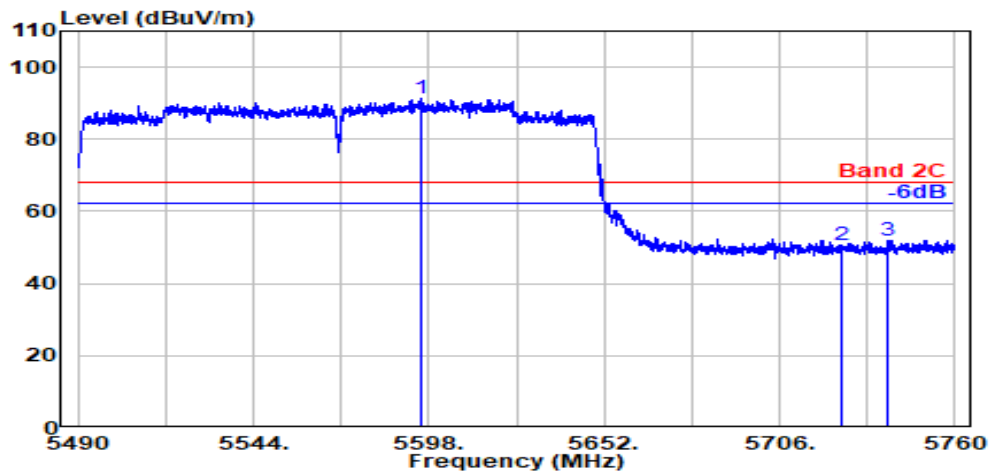

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.400	34.01	8.81	34.22	82.75	91.35	---	---	Peak
5725.000	33.80	8.88	34.28	42.18	50.58	68.20	17.62	Peak
5739.300	33.80	8.89	34.28	43.66	52.07	68.20	16.13	Peak

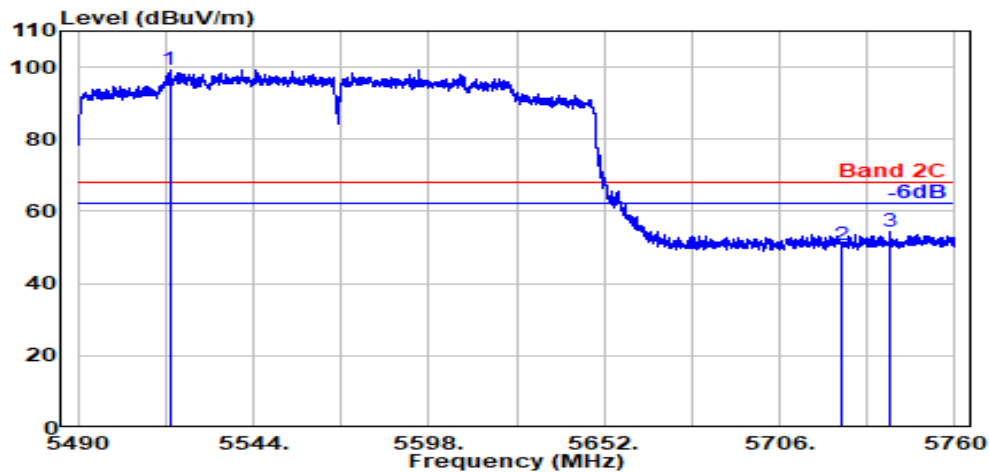


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5518.200	34.10	8.76	34.18	90.73	99.41	---	---	Peak
5725.000	33.80	8.88	34.28	42.39	50.80	68.20	17.40	Peak
5739.800	33.80	8.89	34.28	45.86	54.26	68.20	13.94	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

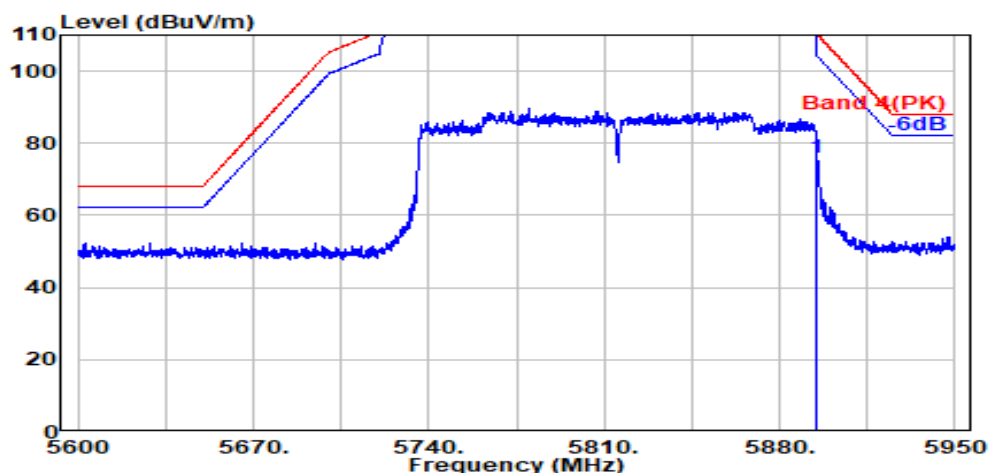

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	67.08	75.80	110.16	34.37	Peak

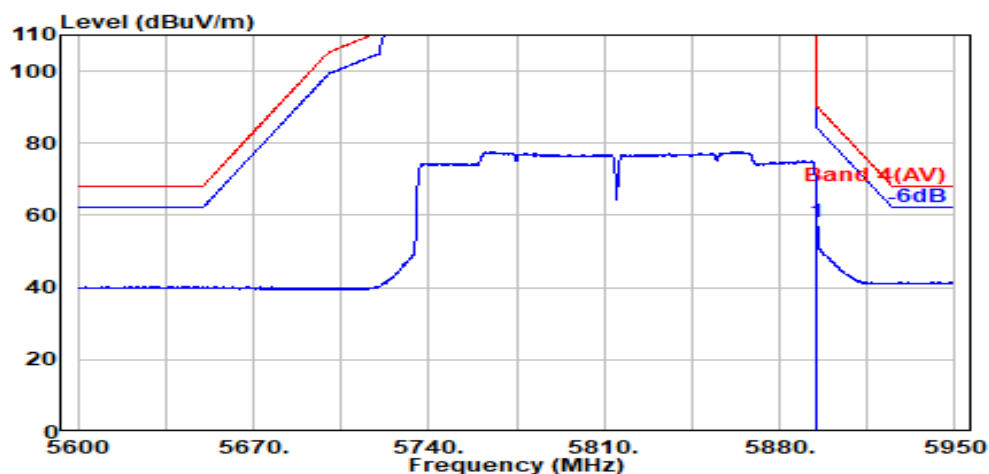

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	49.38	58.10	90.16	32.07	Average

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

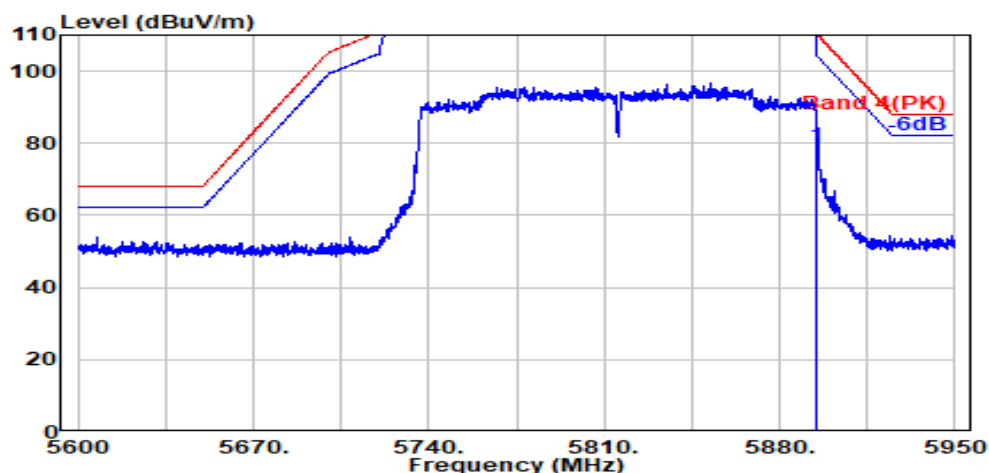

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	70.73	79.45	110.16	30.71	Peak

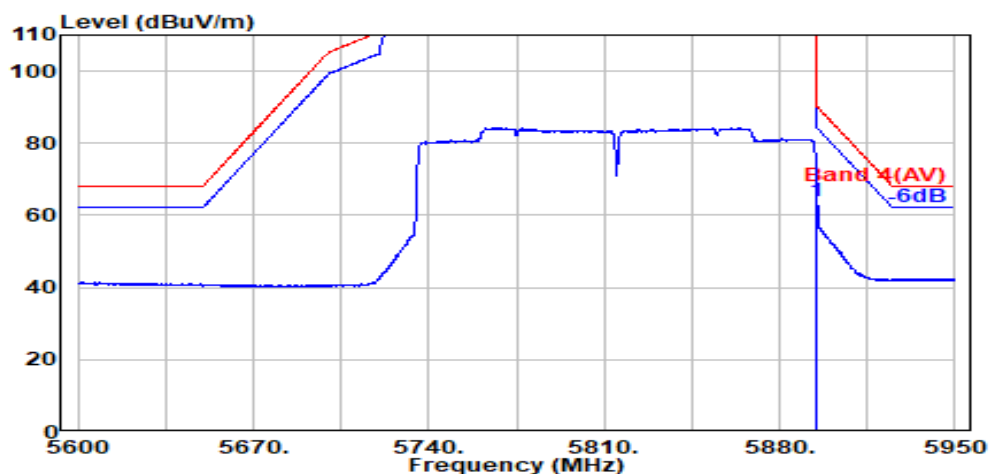


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.10	8.97	34.35	55.33	64.05	90.16	26.11	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

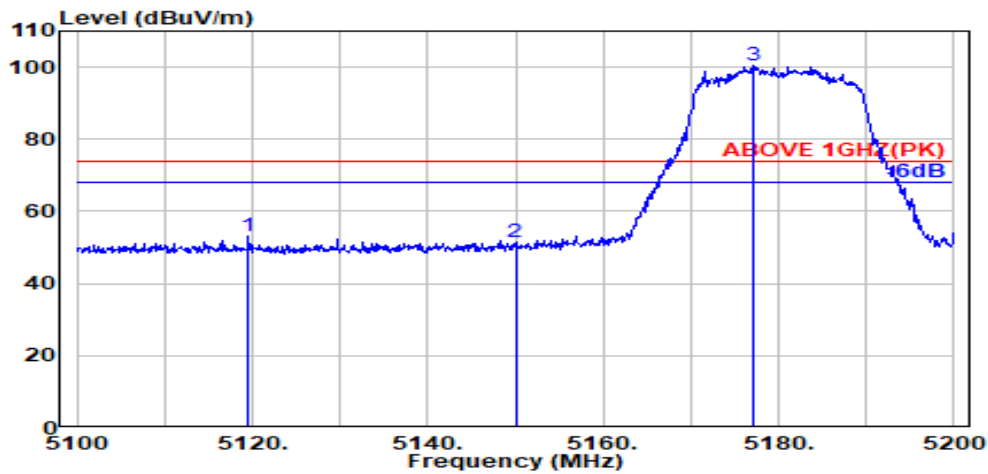

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.600	33.70	8.53	34.29	45.02	52.95	74.00	21.05	Peak
5150.000	33.70	8.54	34.28	43.67	51.63	74.00	22.37	Peak
@ 5177.000	33.70	8.56	34.27	92.28	100.27	---	---	Peak

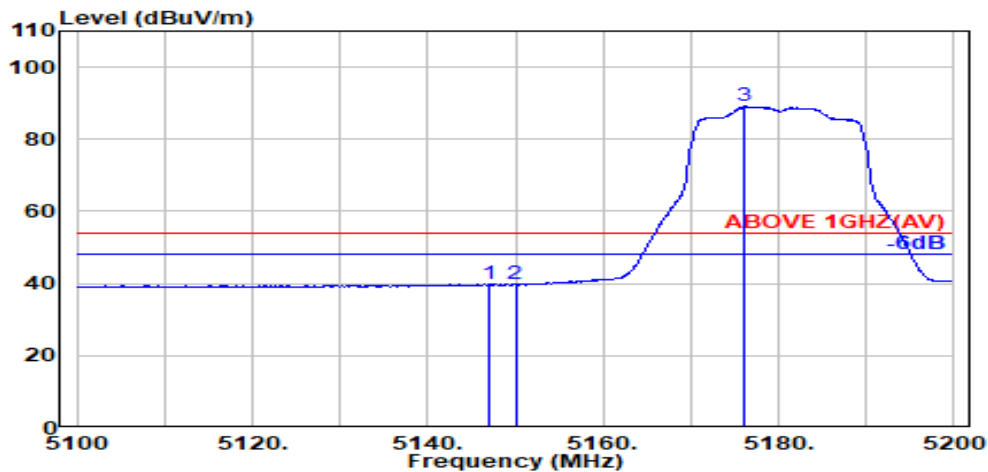

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.70	8.54	34.28	31.89	39.85	54.00	14.15	Average
5150.000	33.70	8.54	34.28	31.79	39.75	54.00	14.25	Average
@ 5176.100	33.70	8.56	34.27	81.09	89.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

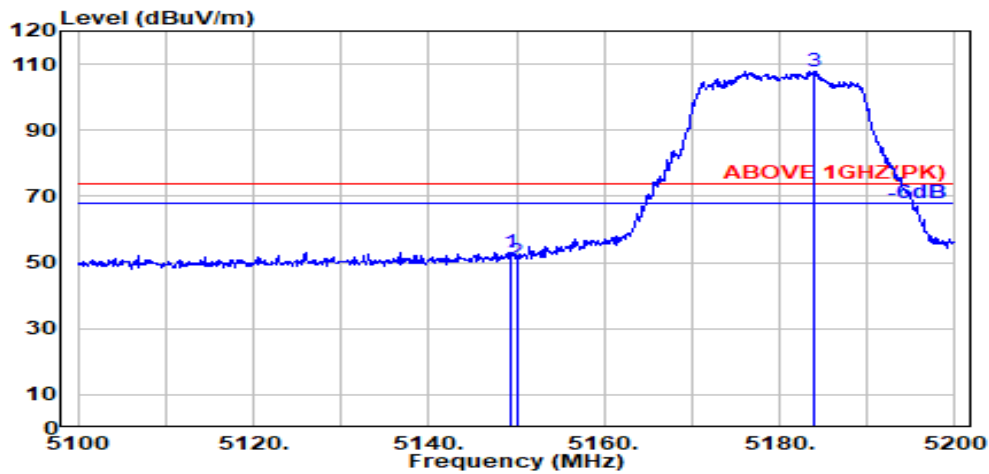

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.70	8.54	34.28	45.19	53.15	74.00	20.85	Peak
5150.000	33.70	8.54	34.28	42.10	50.07	74.00	23.93	Peak
@ 5184.000	33.70	8.56	34.27	99.88	107.88	---	---	Peak

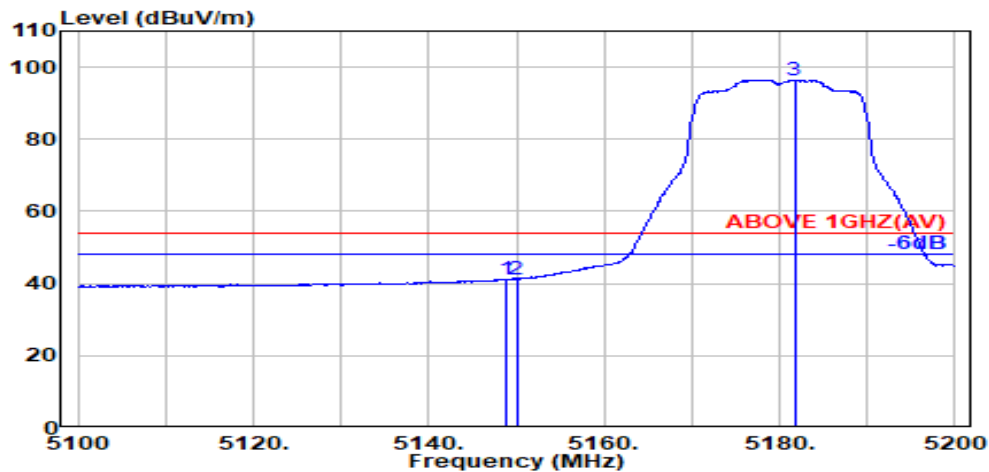

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.70	8.54	34.28	33.23	41.19	54.00	12.81	Average
5150.000	33.70	8.54	34.28	33.26	41.22	54.00	12.78	Average
@ 5181.700	33.70	8.56	34.27	88.44	96.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

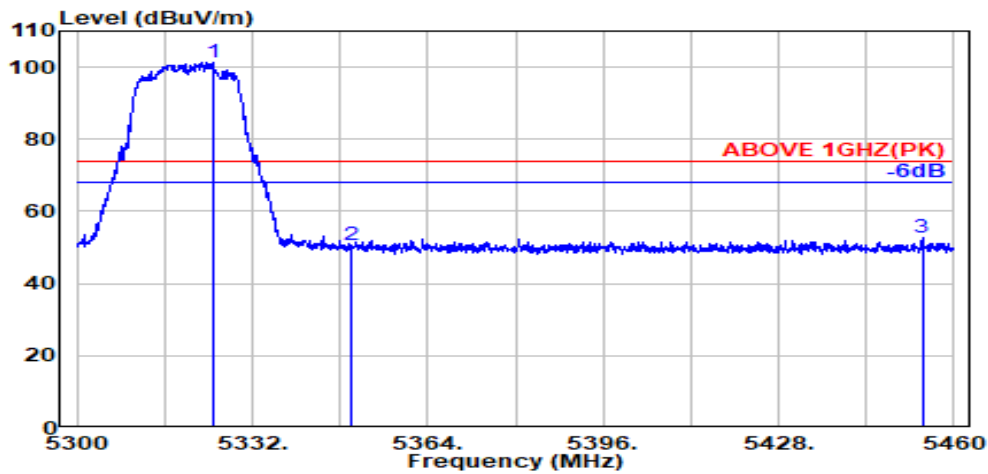

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.700	34.00	8.65	34.22	92.93	101.36	---	---	Peak
5350.000	33.90	8.67	34.22	42.34	50.69	74.00	23.31	Peak
5454.200	34.19	8.73	34.18	43.94	52.68	74.00	21.32	Peak

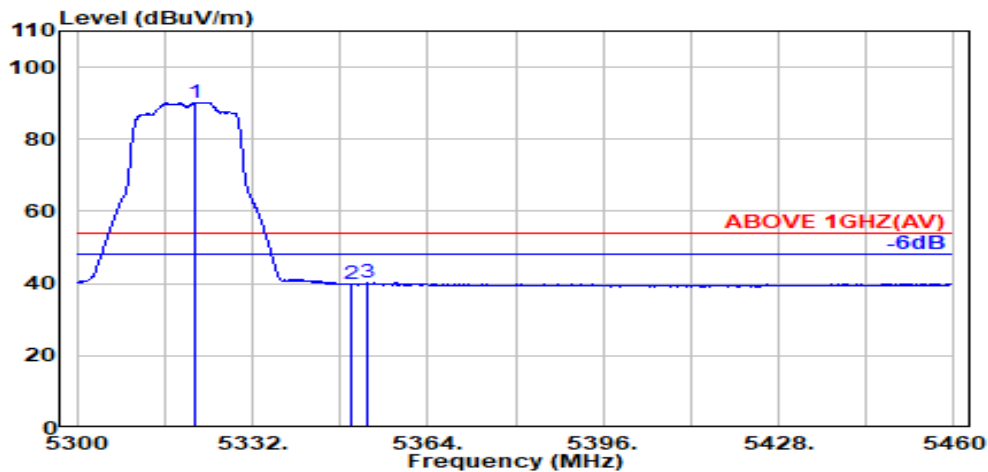


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.400	34.01	8.65	34.23	81.83	90.27	---	---	Average
5350.000	33.90	8.67	34.22	31.62	39.97	54.00	14.03	Average
5352.800	33.91	8.67	34.22	31.80	40.16	54.00	13.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

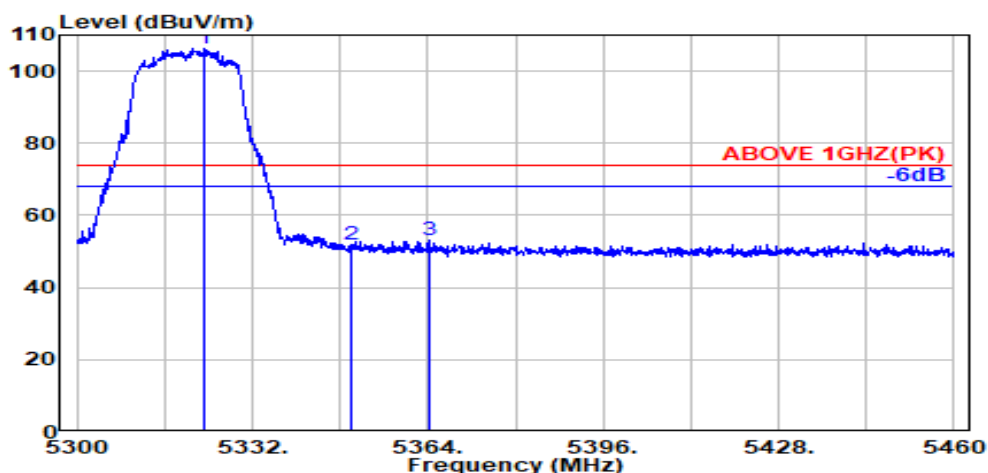

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	34.01	8.65	34.22	97.74	106.17	---	---	Peak
5350.000	33.90	8.67	34.22	43.41	51.76	74.00	22.24	Peak
5364.100	33.96	8.67	34.21	44.67	53.09	74.00	20.91	Peak

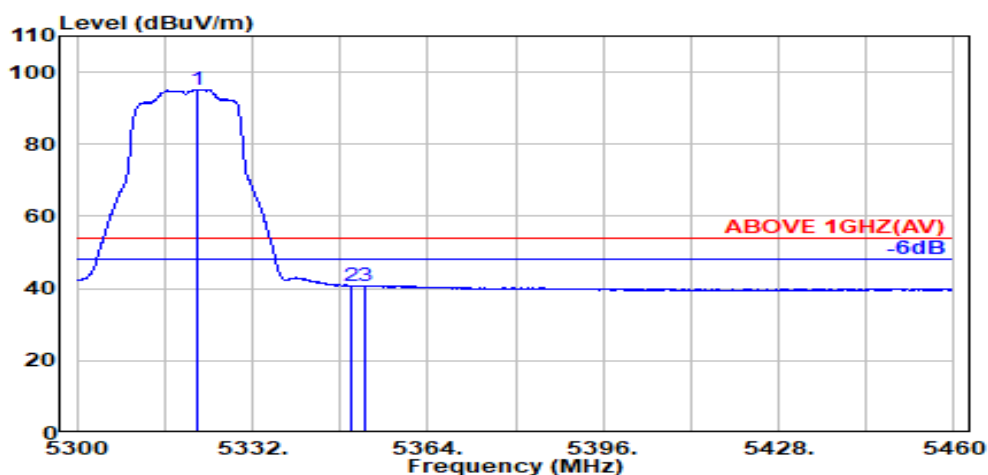

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	34.01	8.65	34.23	86.70	95.14	---	---	Average
5350.000	33.90	8.67	34.22	32.37	40.72	54.00	13.28	Average
5352.400	33.91	8.67	34.22	32.53	40.89	54.00	13.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

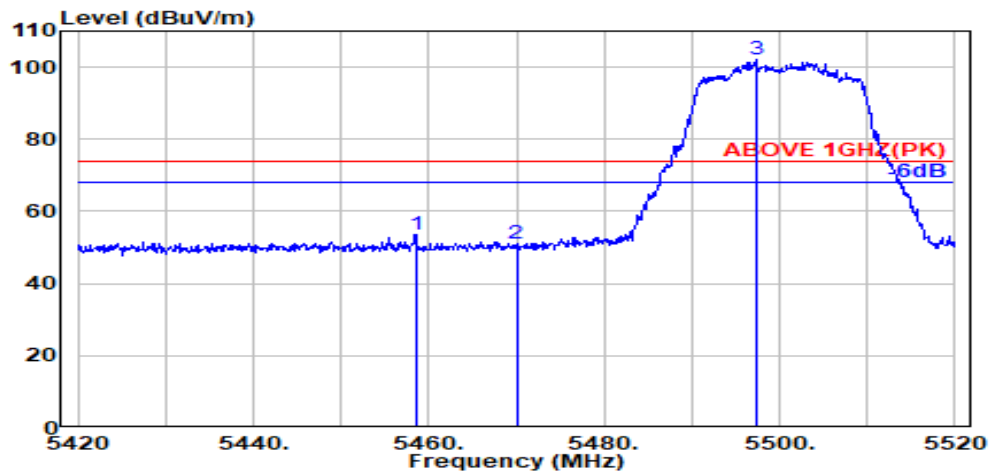

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.500	34.18	8.73	34.18	44.89	53.62	74.00	20.38	Peak
5470.000	34.16	8.74	34.18	42.20	50.92	74.00	23.08	Peak
@ 5497.300	34.11	8.75	34.17	93.54	102.23	---	---	Peak

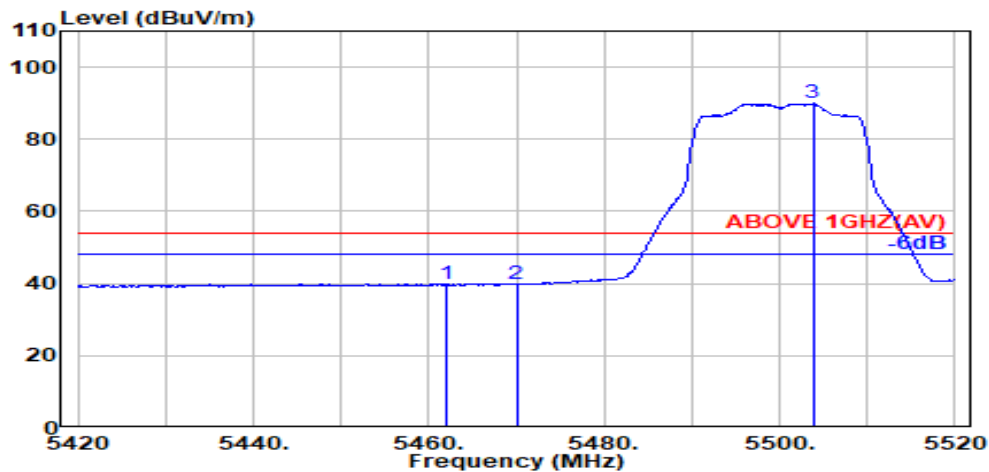

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.900	34.18	8.73	34.18	31.26	39.99	54.00	14.01	Average
5470.000	34.16	8.74	34.18	31.18	39.89	54.00	14.11	Average
@ 5503.800	34.10	8.76	34.17	81.23	89.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

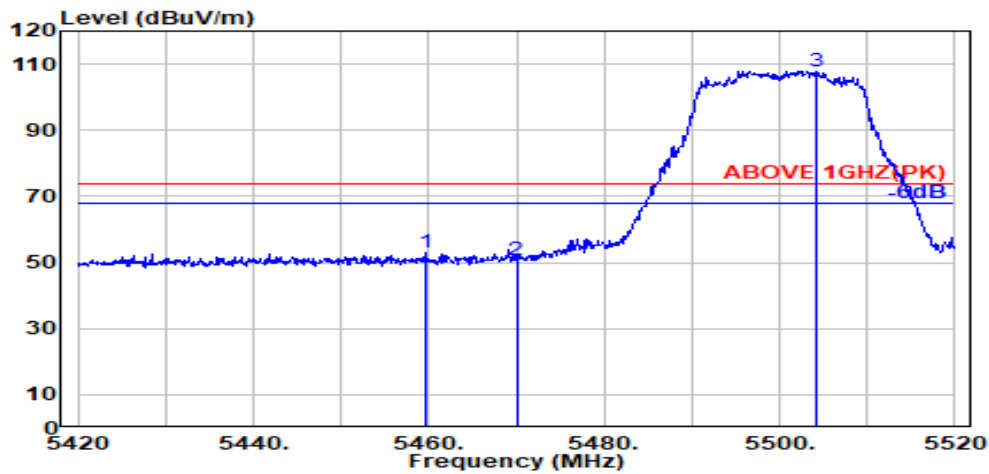

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.18	8.73	34.18	44.37	53.10	74.00	20.90	Peak
5470.000	34.16	8.74	34.18	42.15	50.87	74.00	23.13	Peak
@ 5504.200	34.10	8.76	34.17	99.24	107.93	---	---	Peak

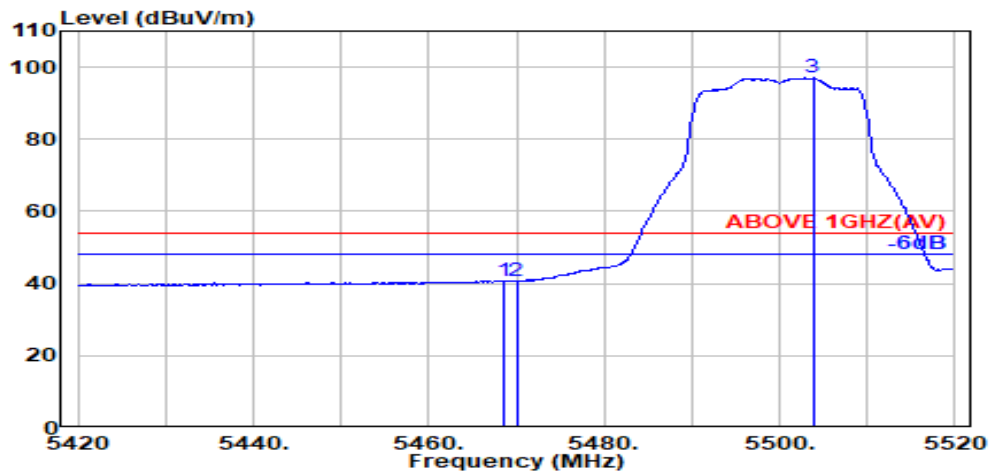

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.16	8.73	34.18	32.07	40.79	54.00	13.21	Average
5470.000	34.16	8.74	34.18	32.06	40.78	54.00	13.22	Average
@ 5503.800	34.10	8.76	34.17	88.29	96.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

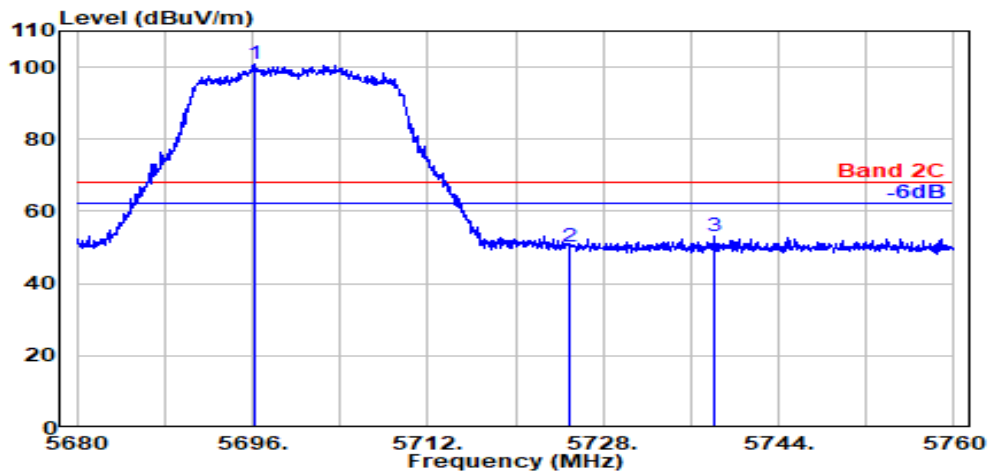

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.150	33.82	8.86	34.26	92.41	100.83	---	---	Peak
5725.000	33.80	8.88	34.28	41.82	50.23	68.20	17.97	Peak
5738.150	33.80	8.89	34.28	44.69	53.09	68.20	15.11	Peak

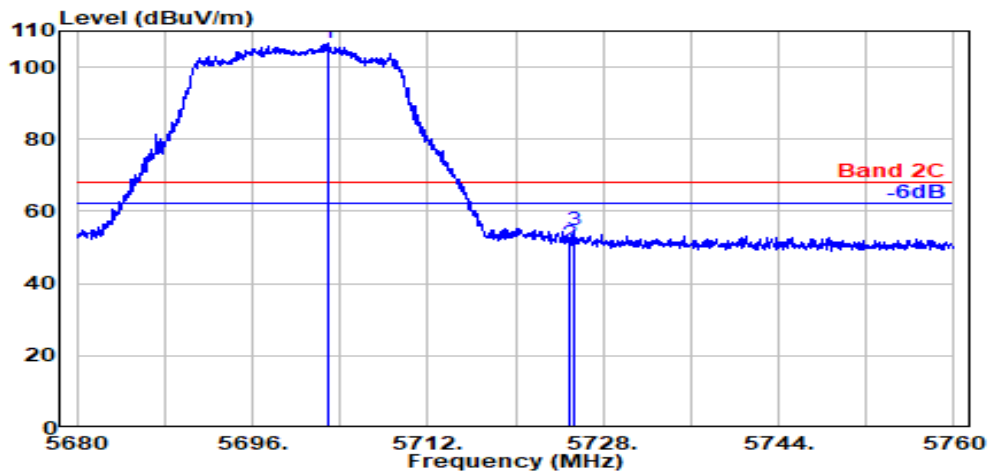

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.000	33.80	8.87	34.27	98.07	106.48	---	---	Peak
5725.000	33.80	8.88	34.28	42.72	51.12	68.20	17.08	Peak
5725.400	33.80	8.88	34.28	46.20	54.60	68.20	13.60	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.