




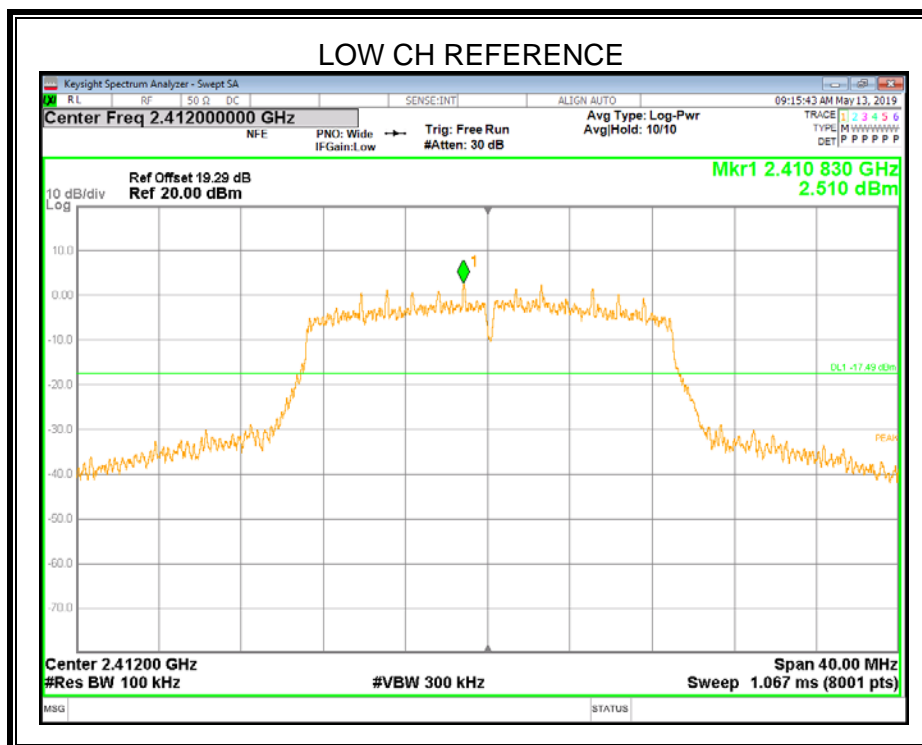




8.5.3. 802.11n HT20 MIMO MODE


MIMO MODE-2TX



ANTENNA 0


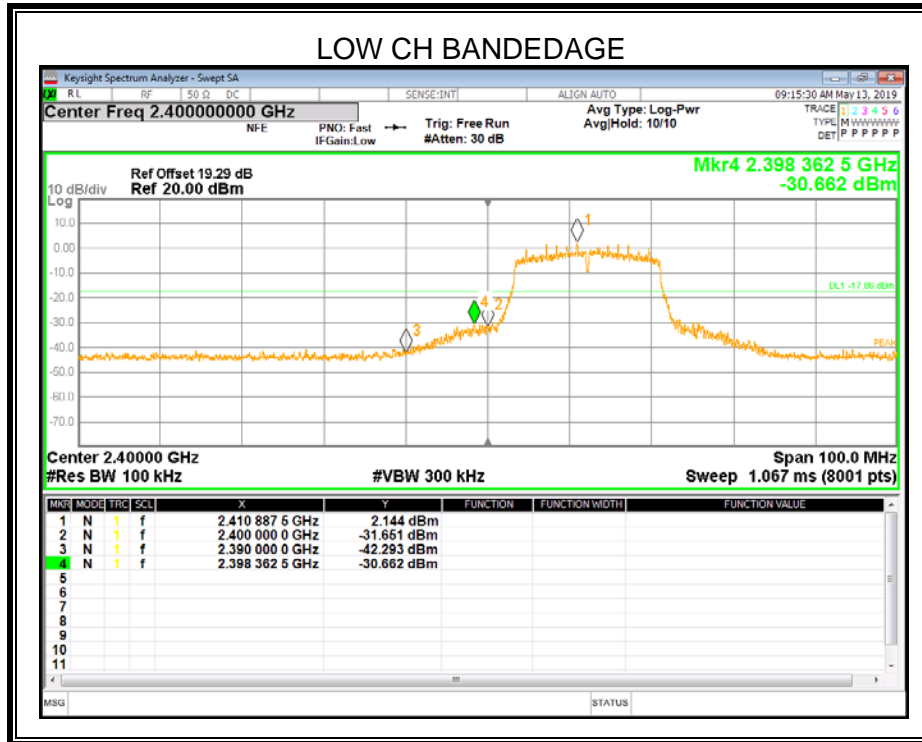


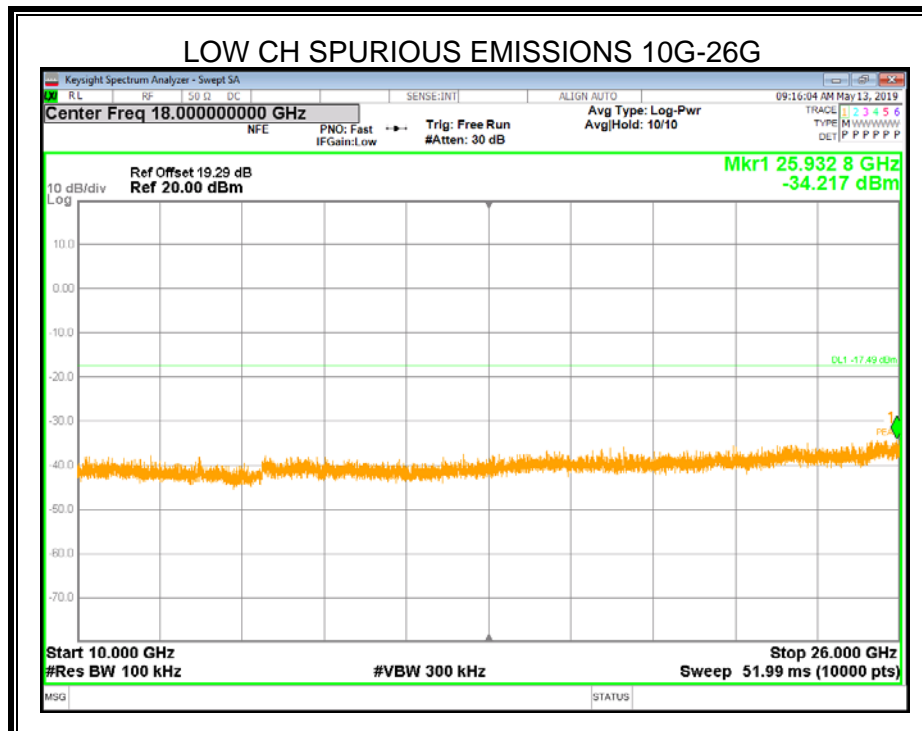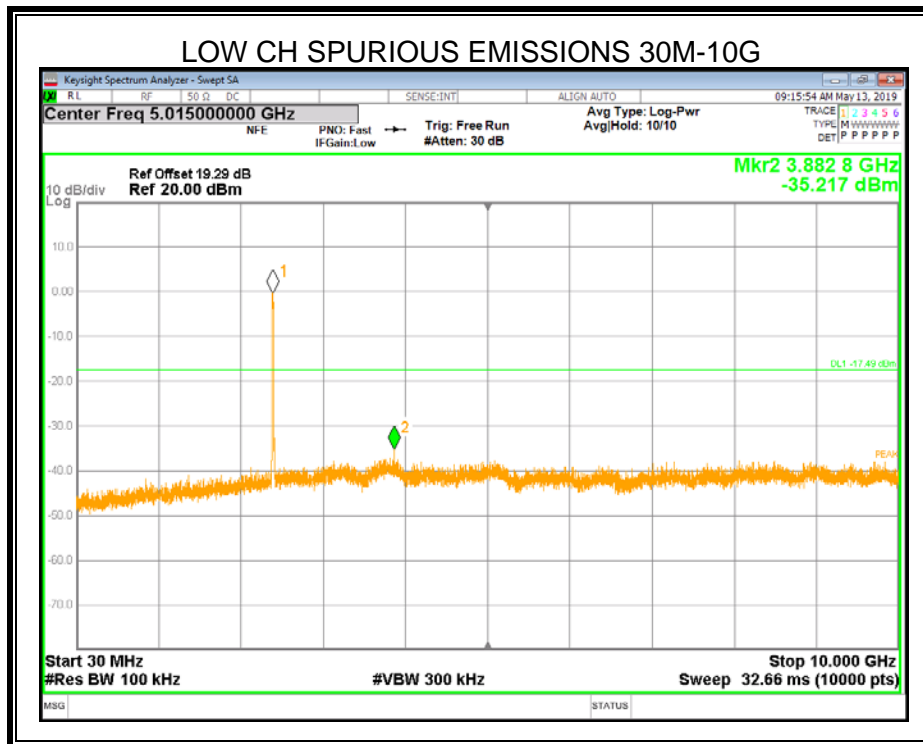

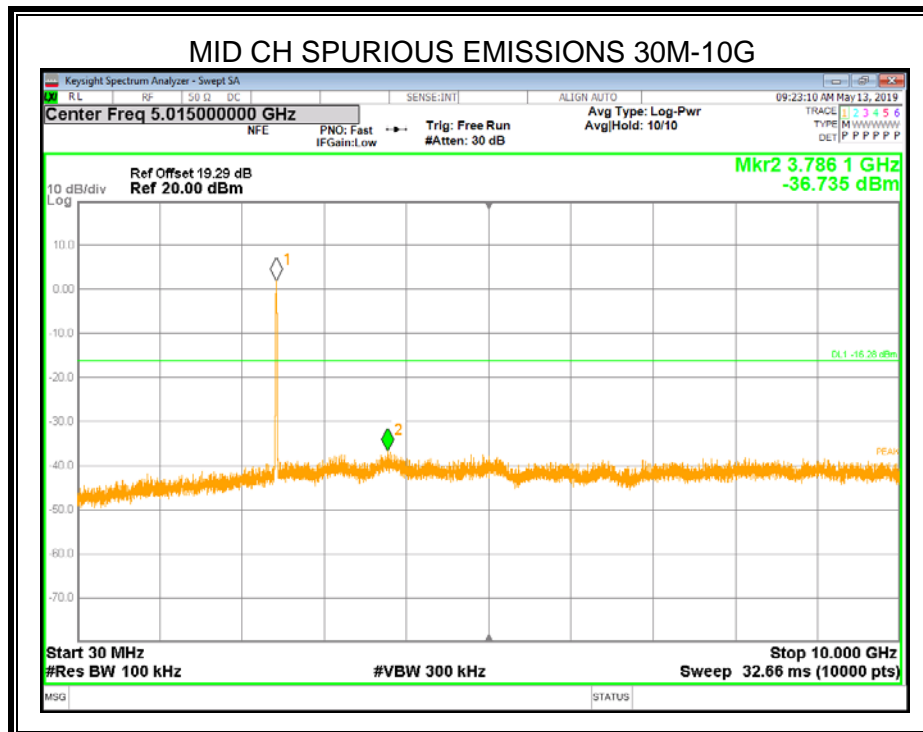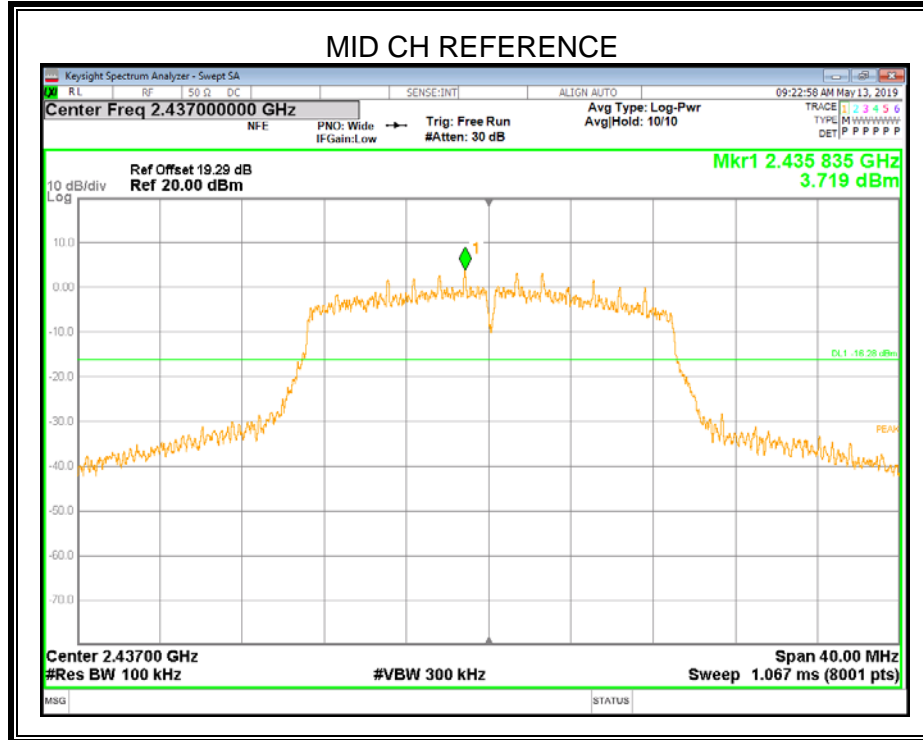


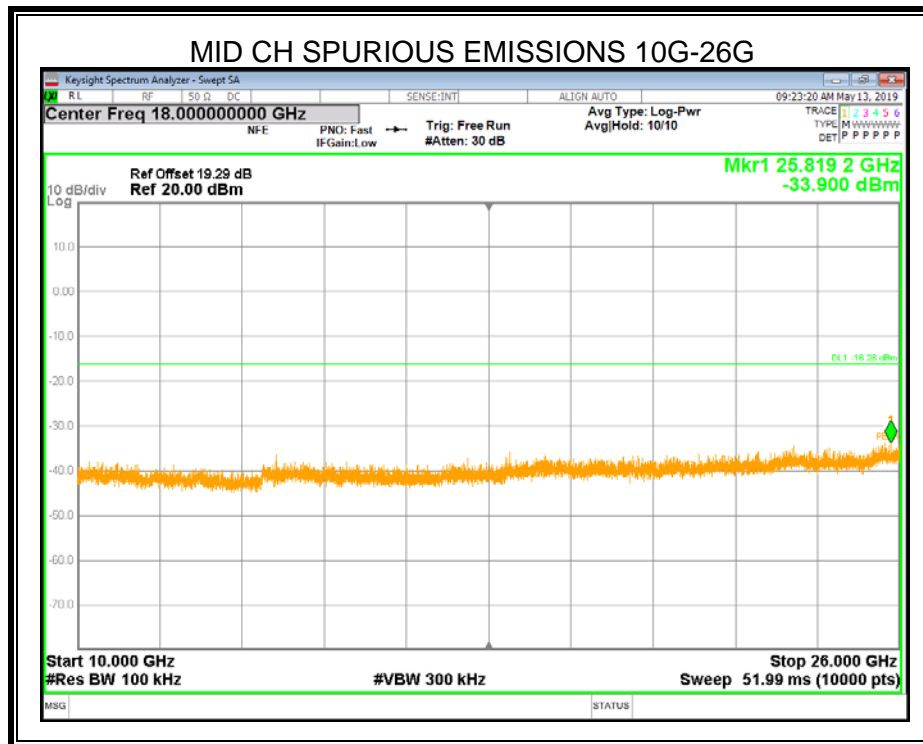


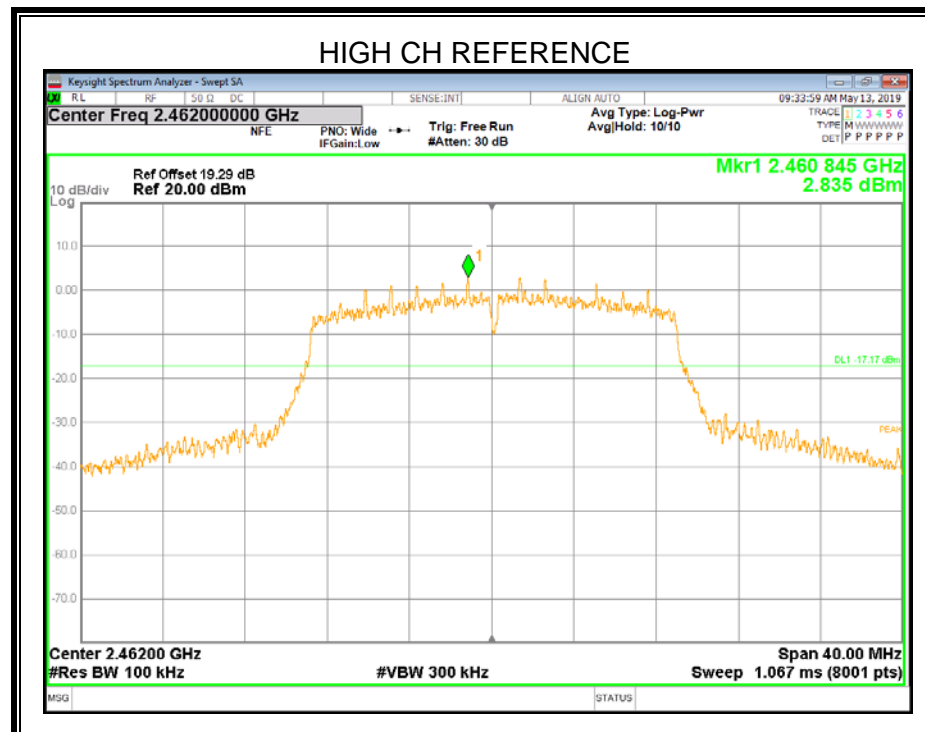
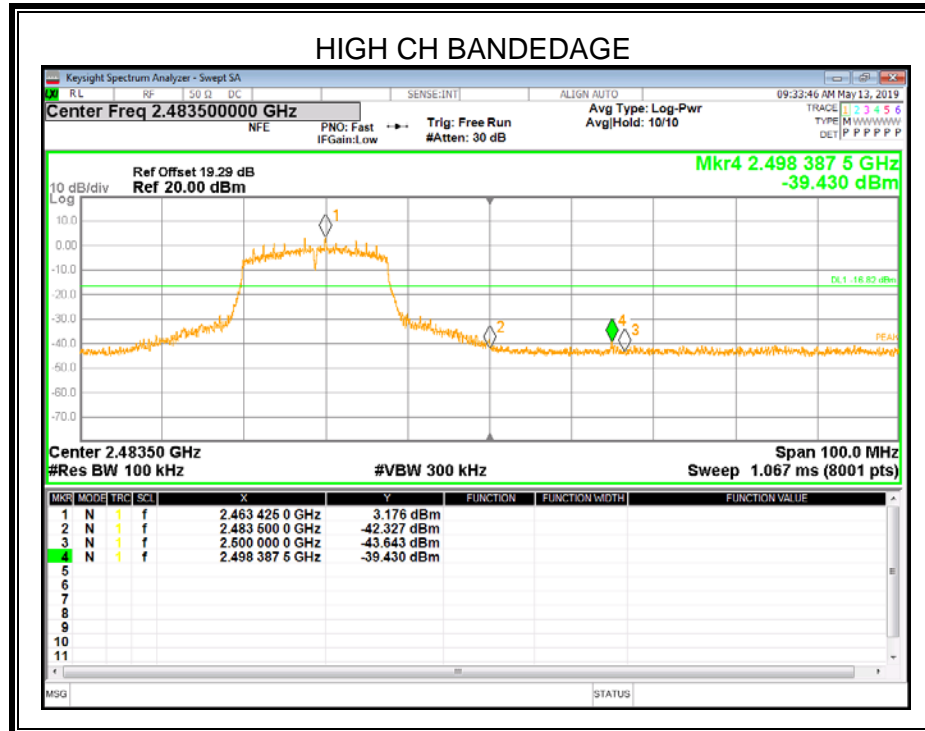


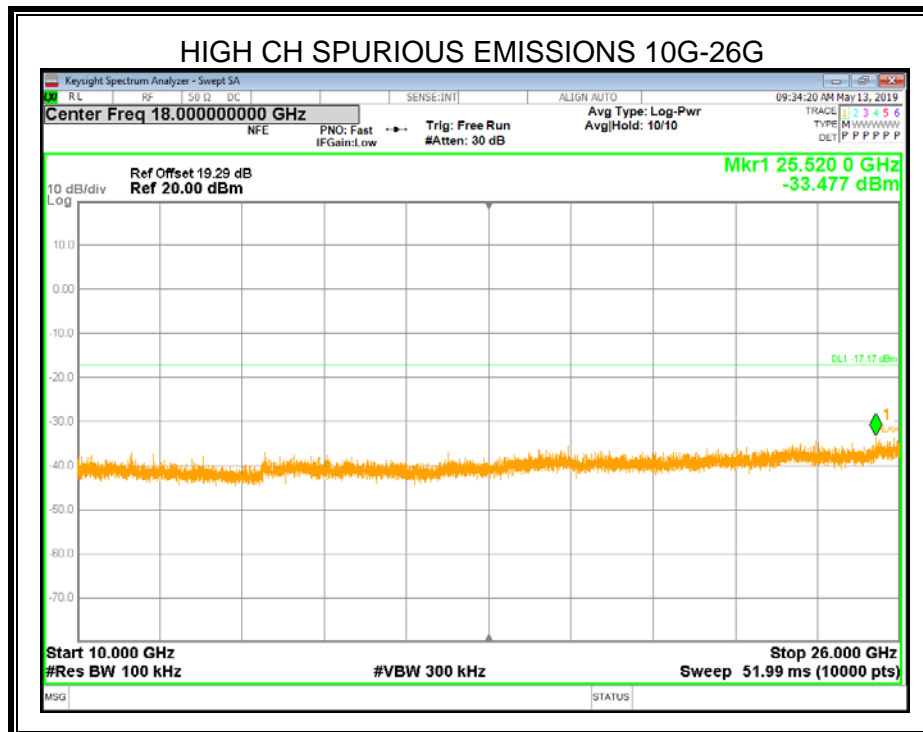
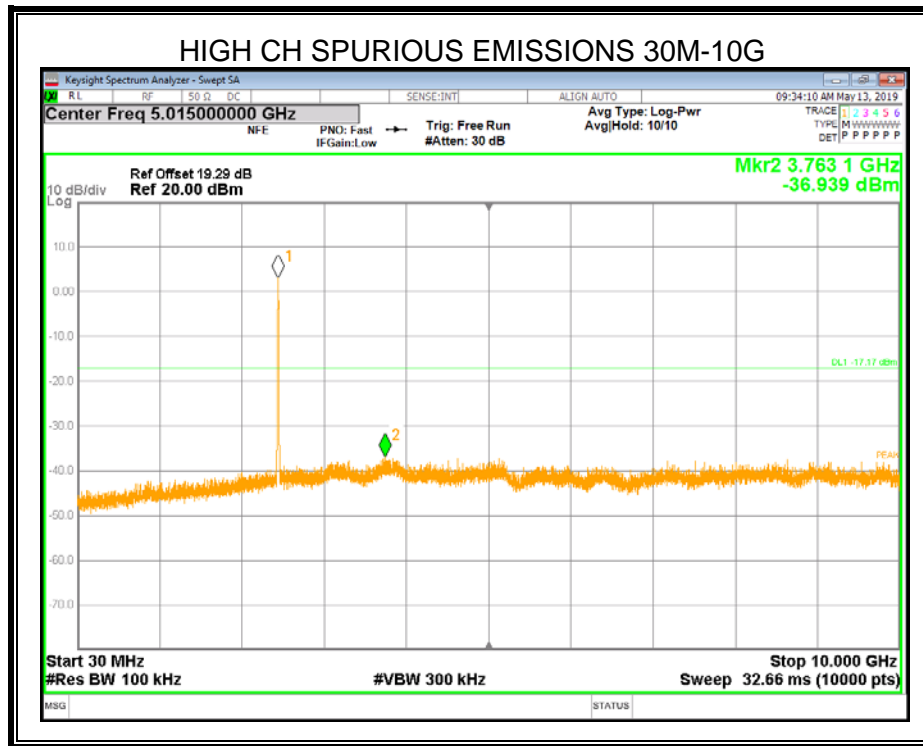








ANTENNA 1

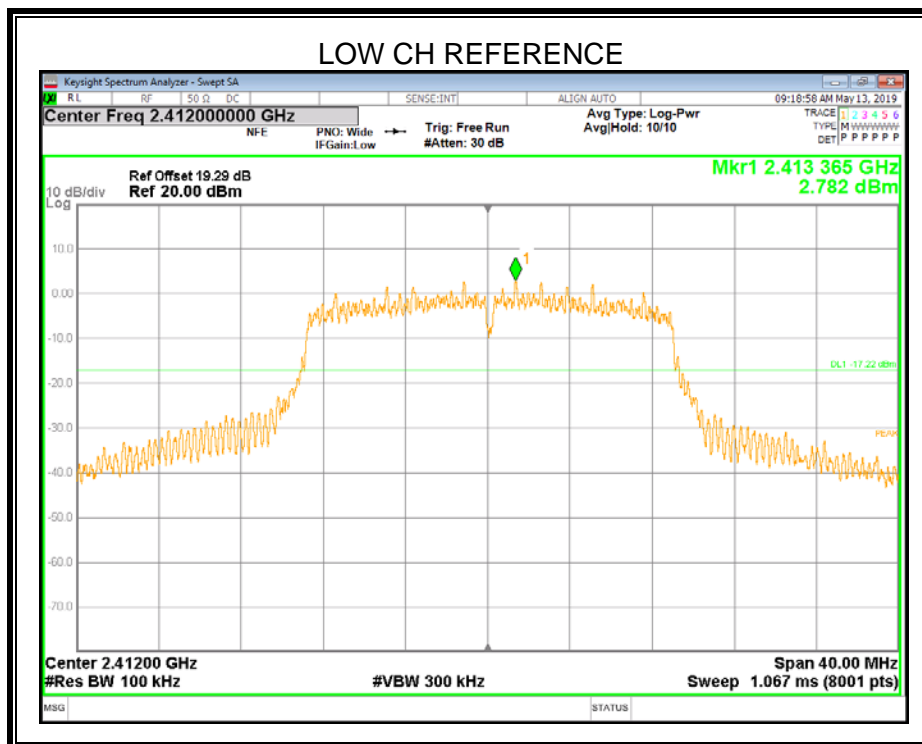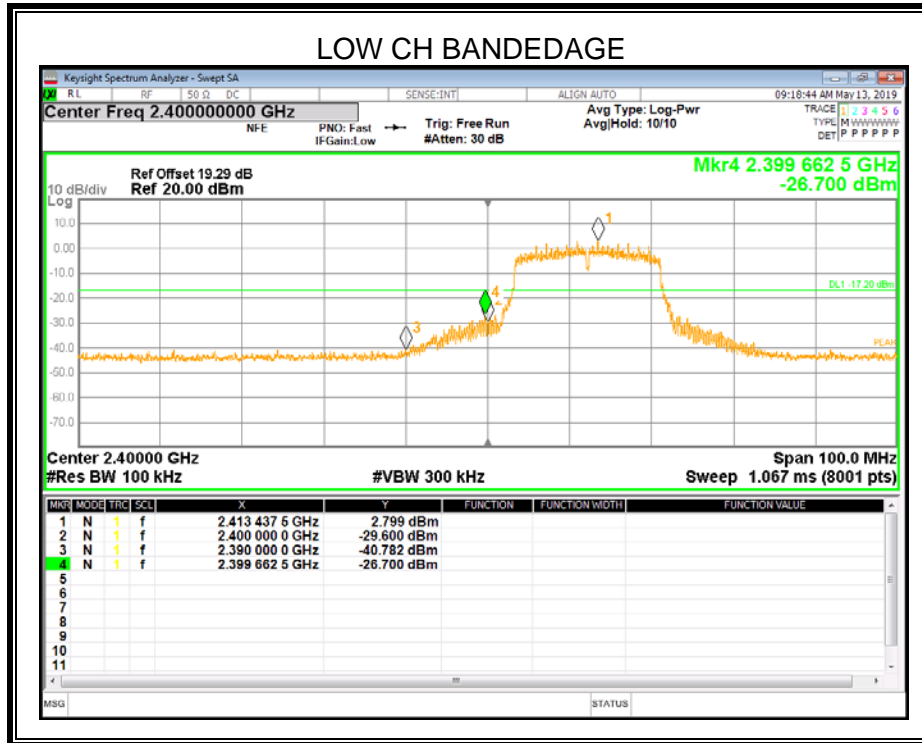


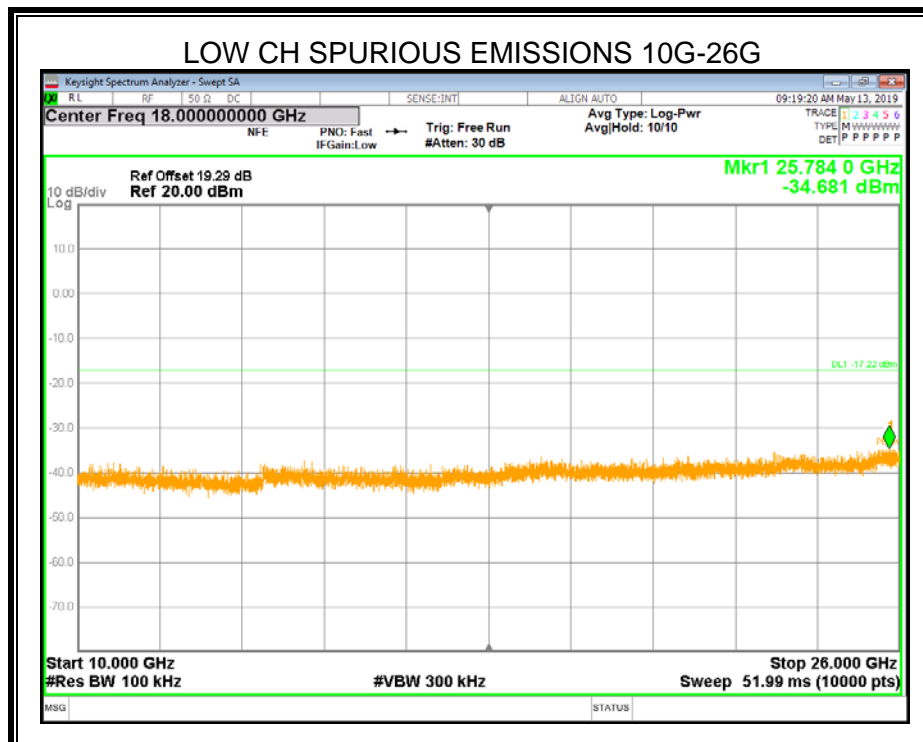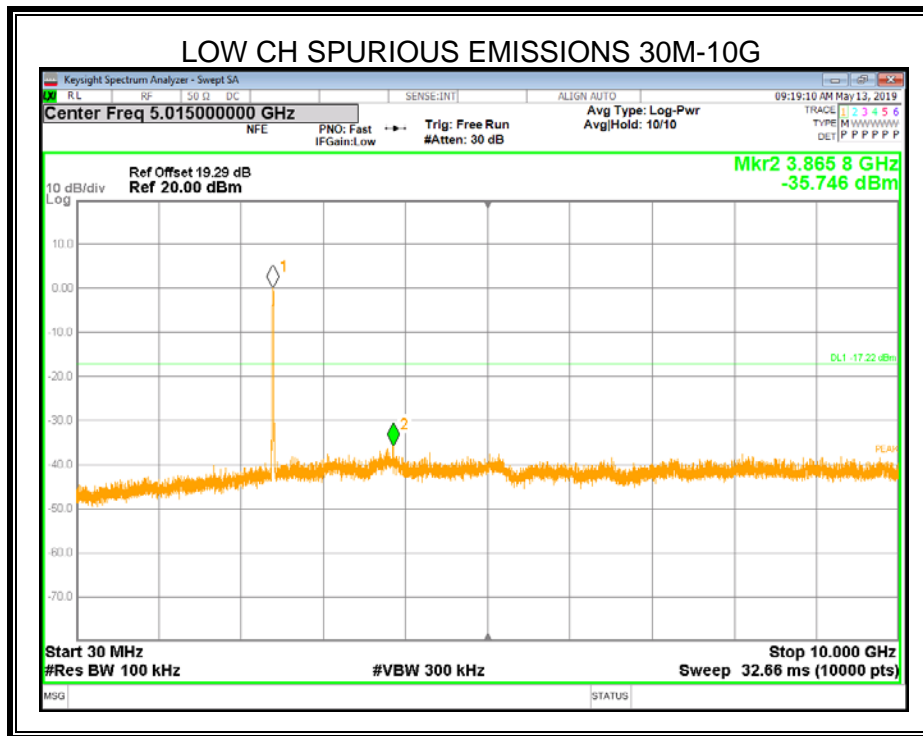

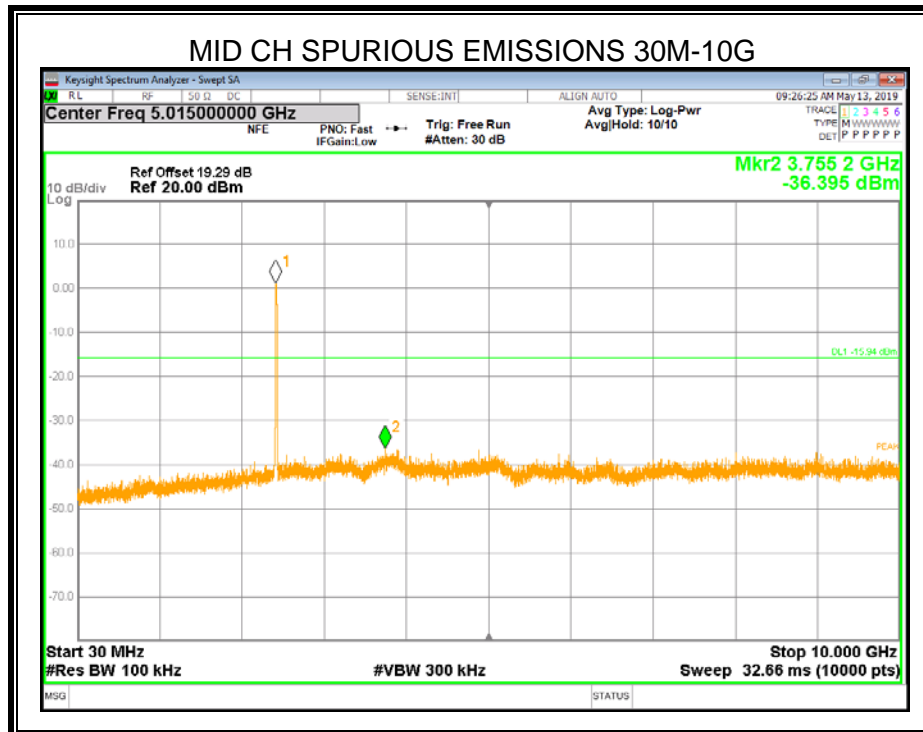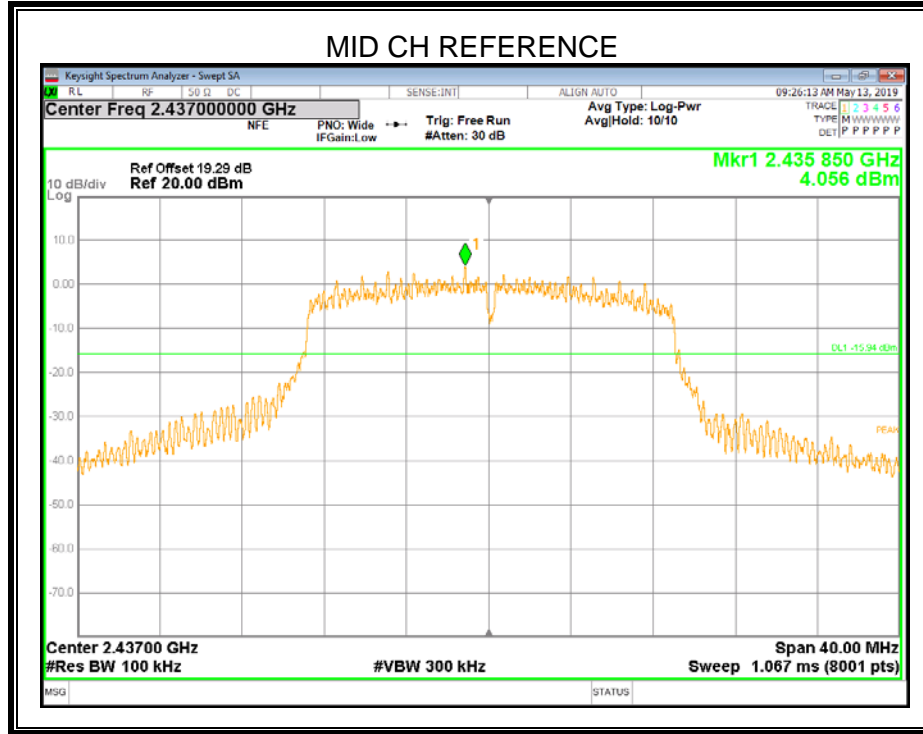

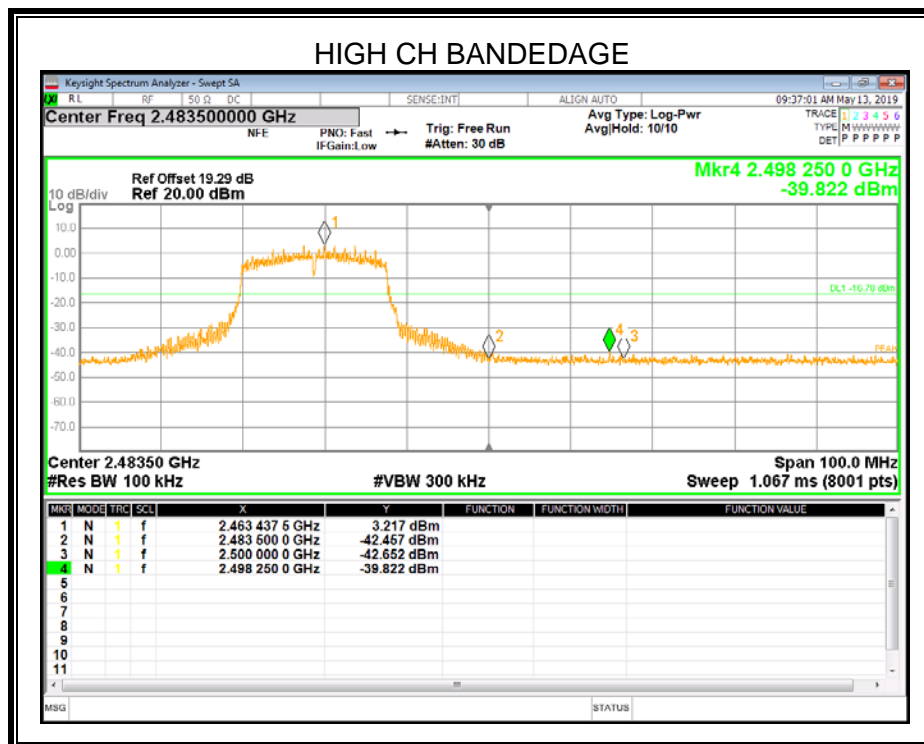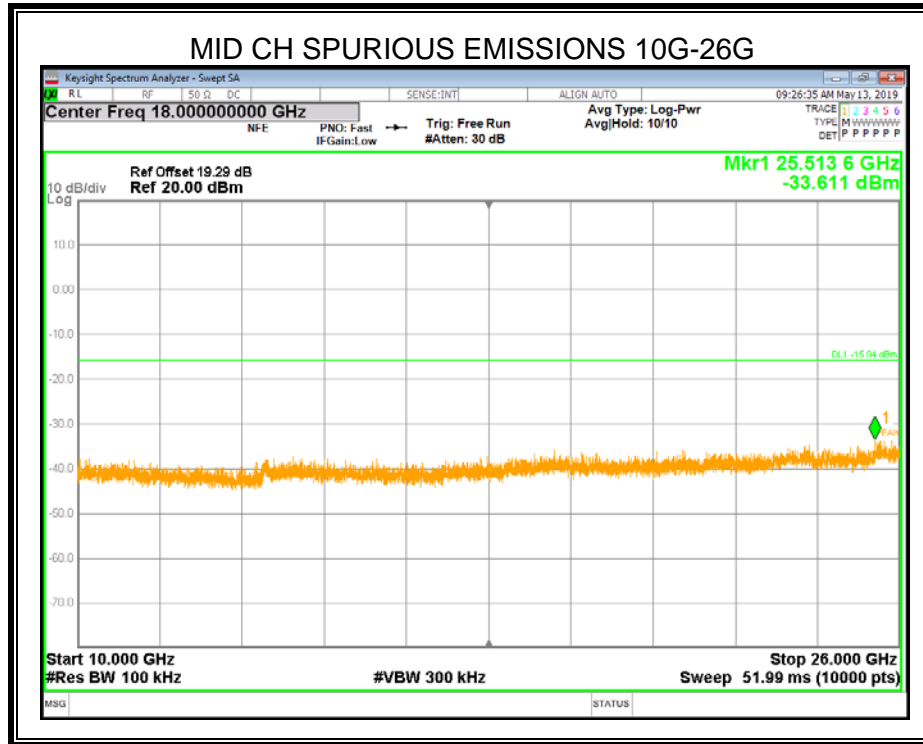

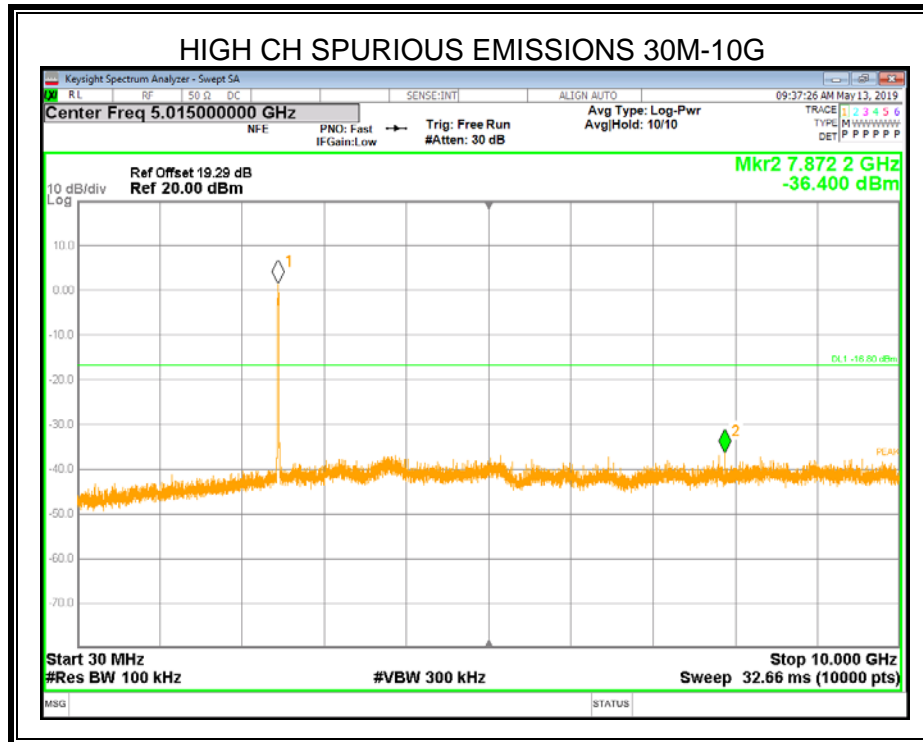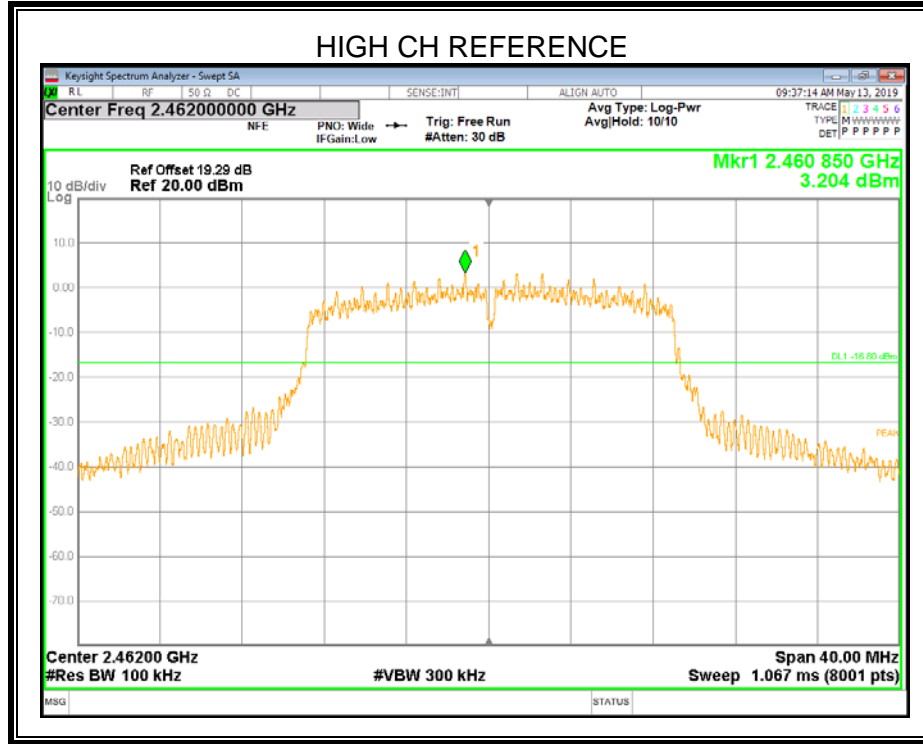


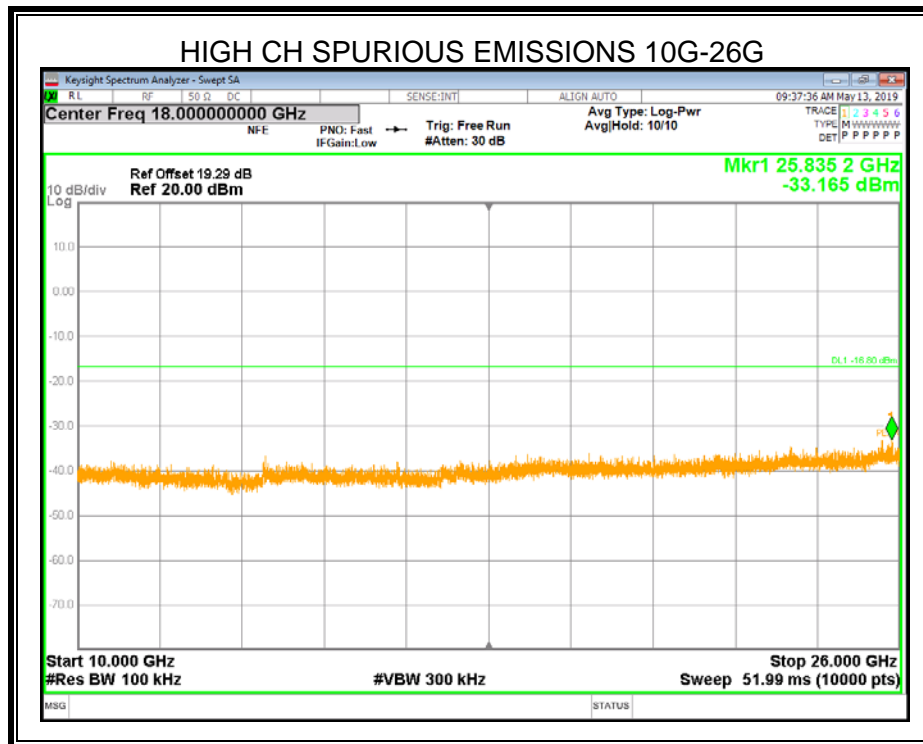








8.5.4. 802.11n HT40 MIMO MODE



MIMO MODE-2TX



ANTENNA 0

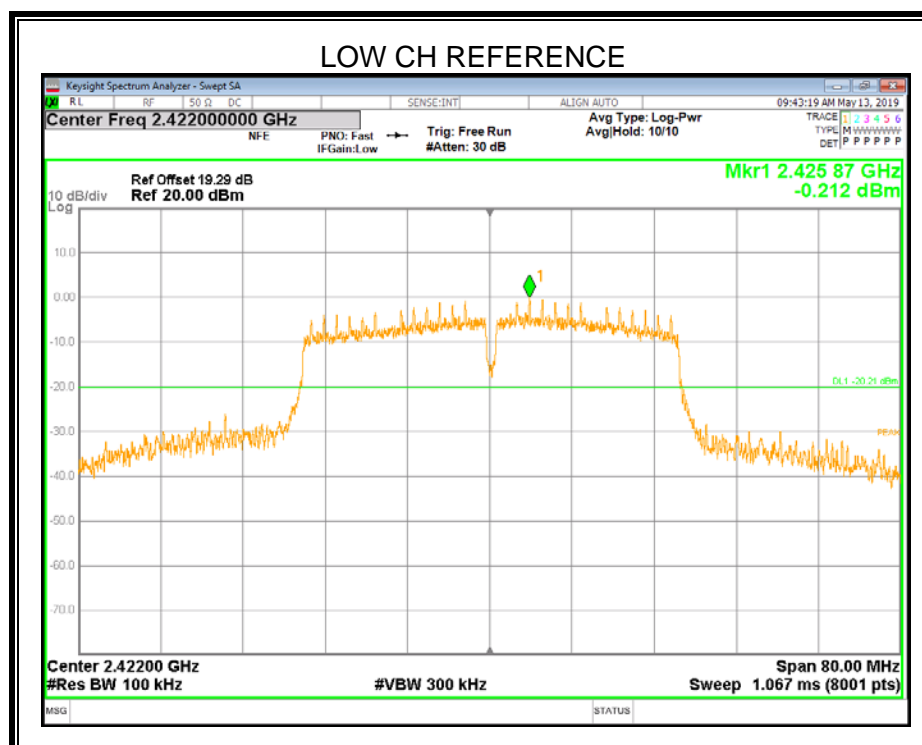
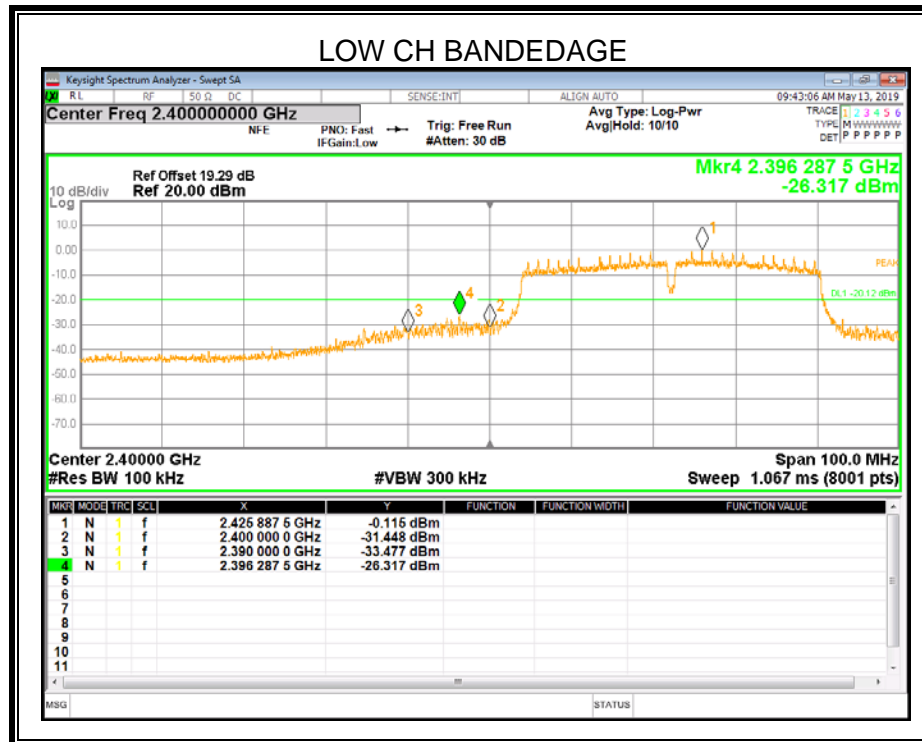


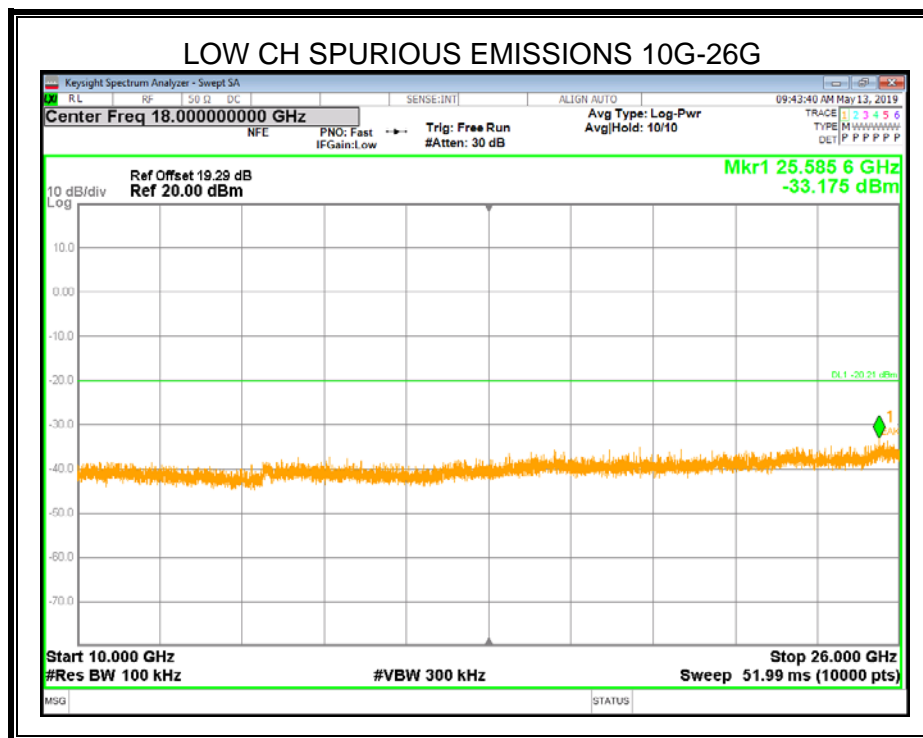
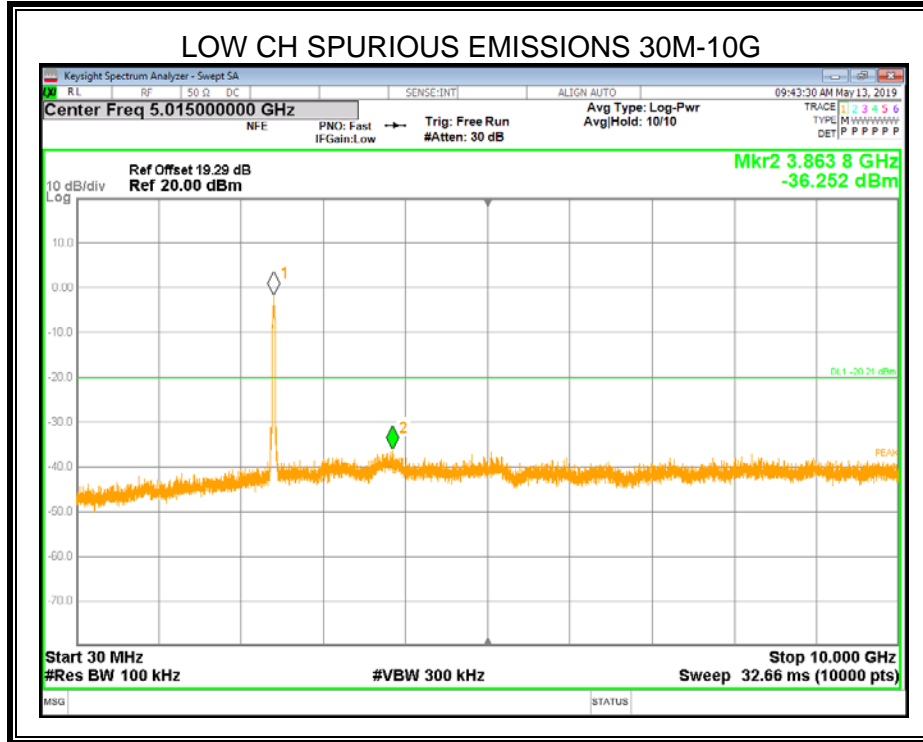


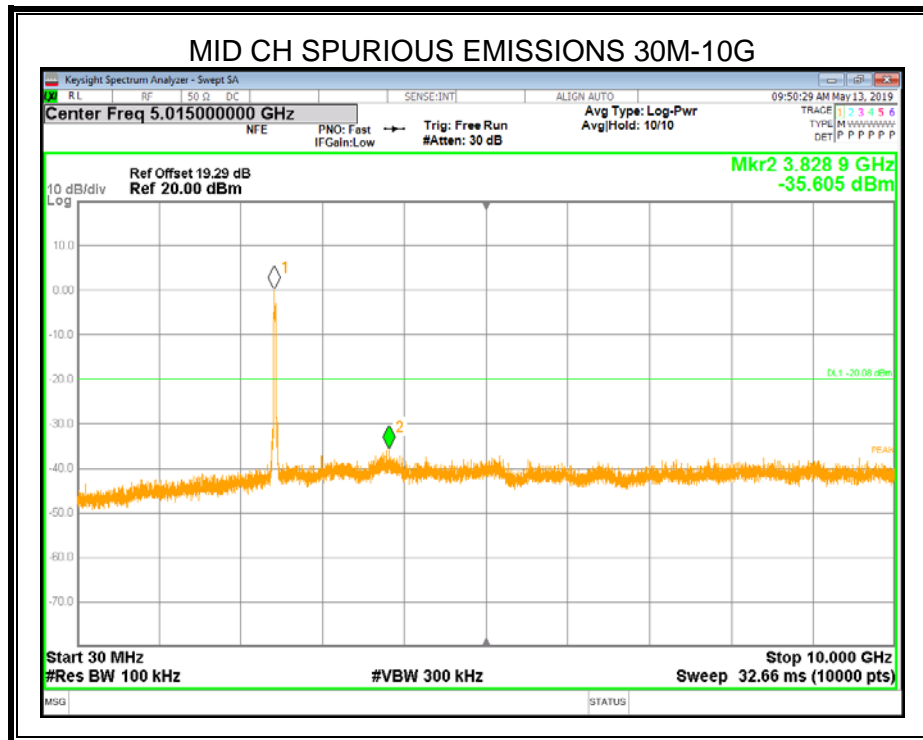
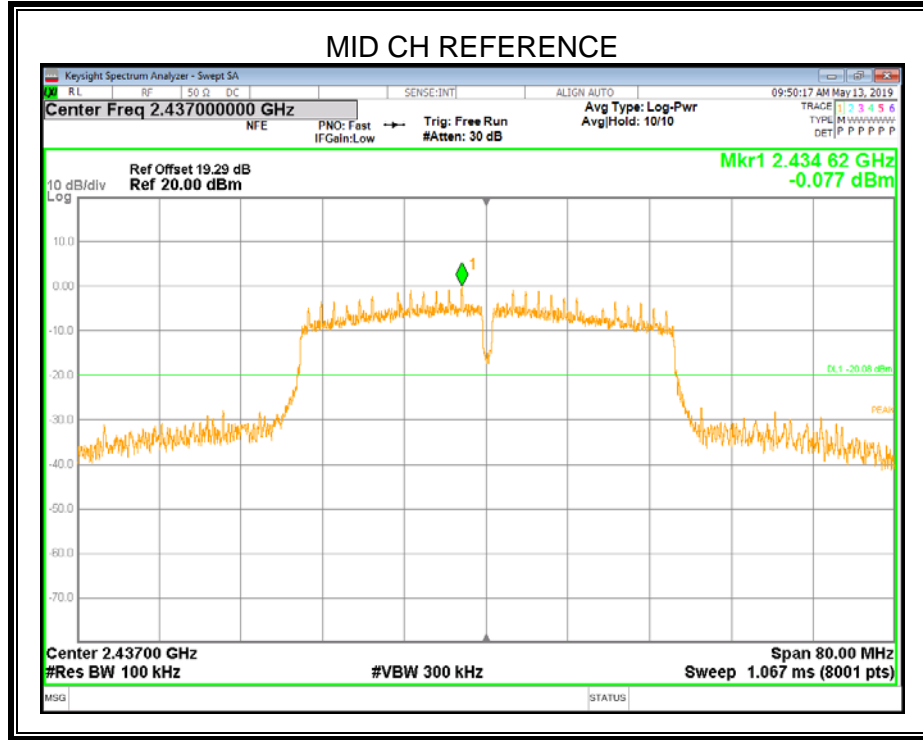


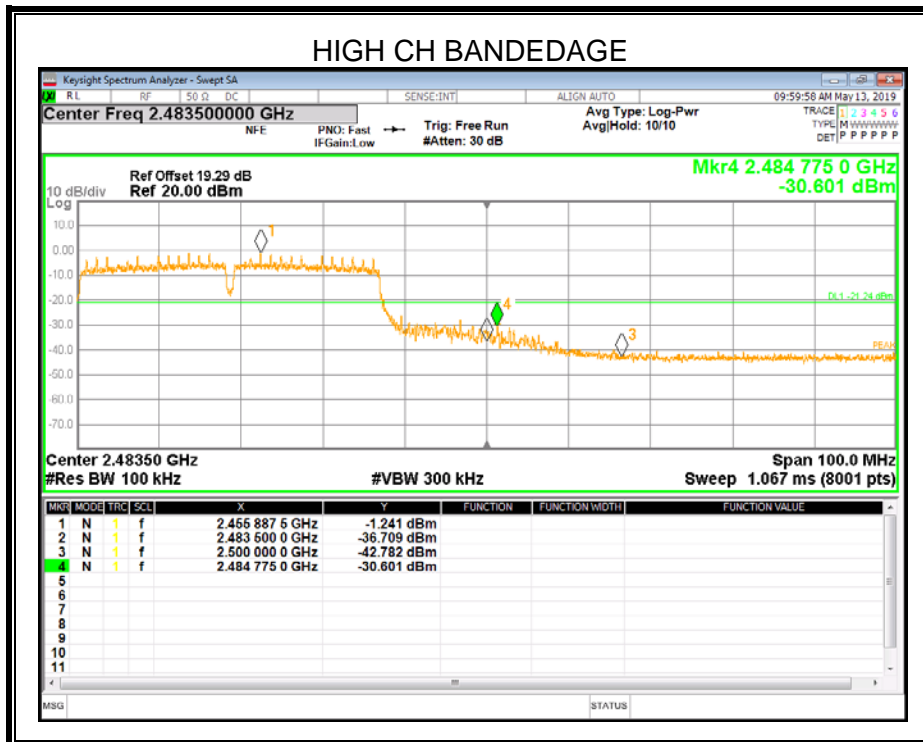
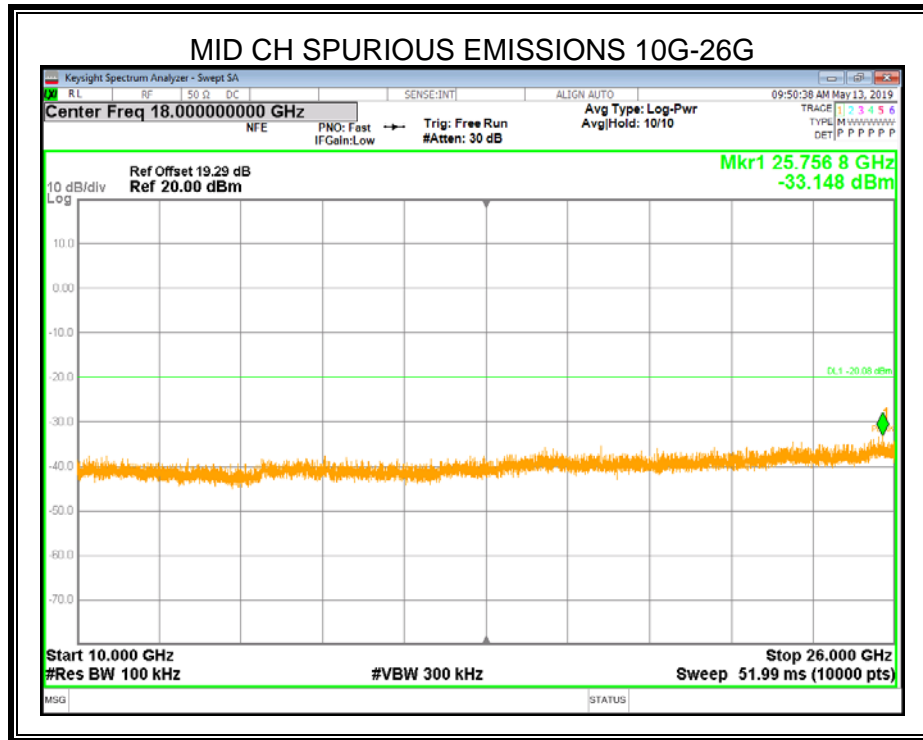


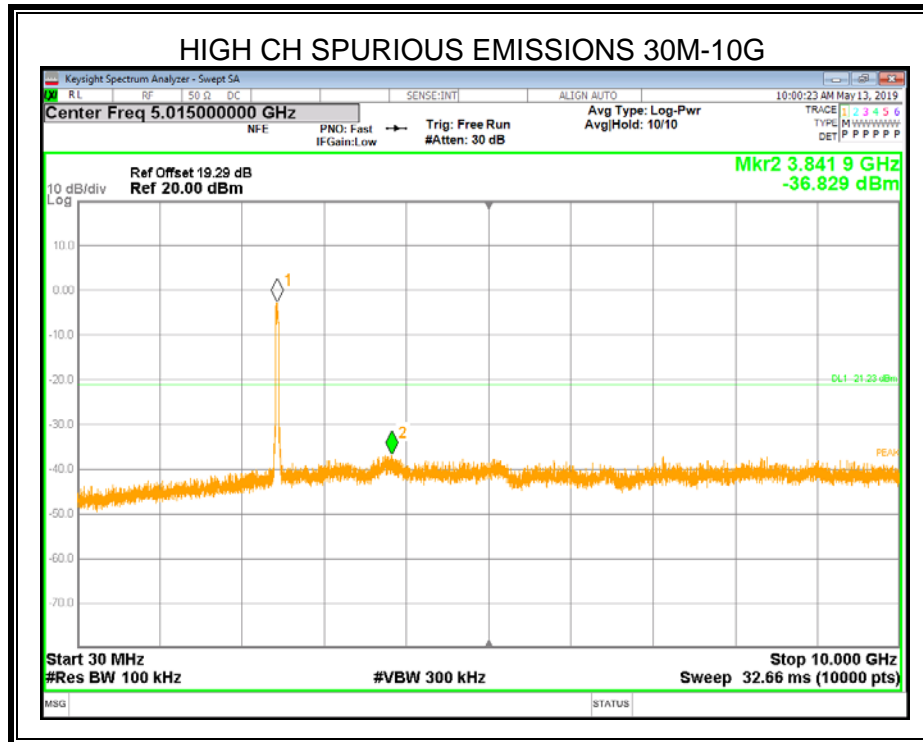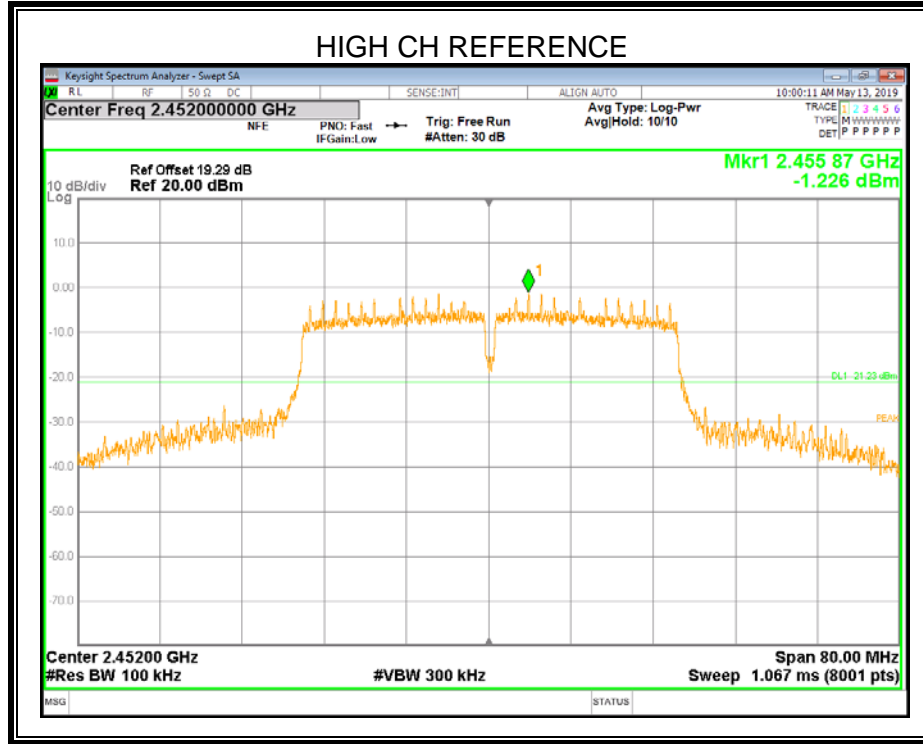

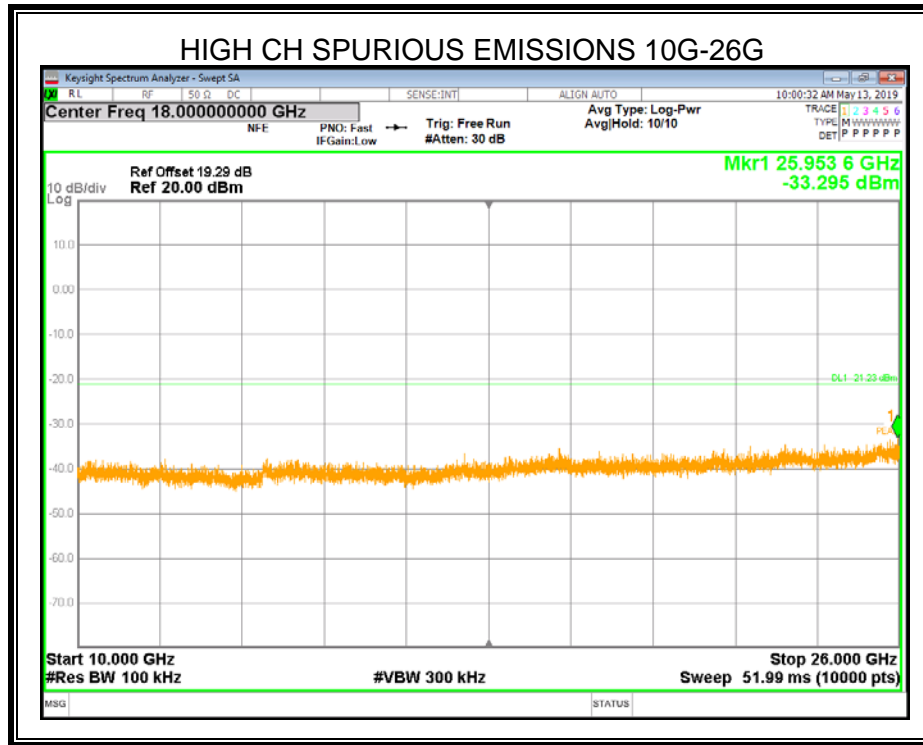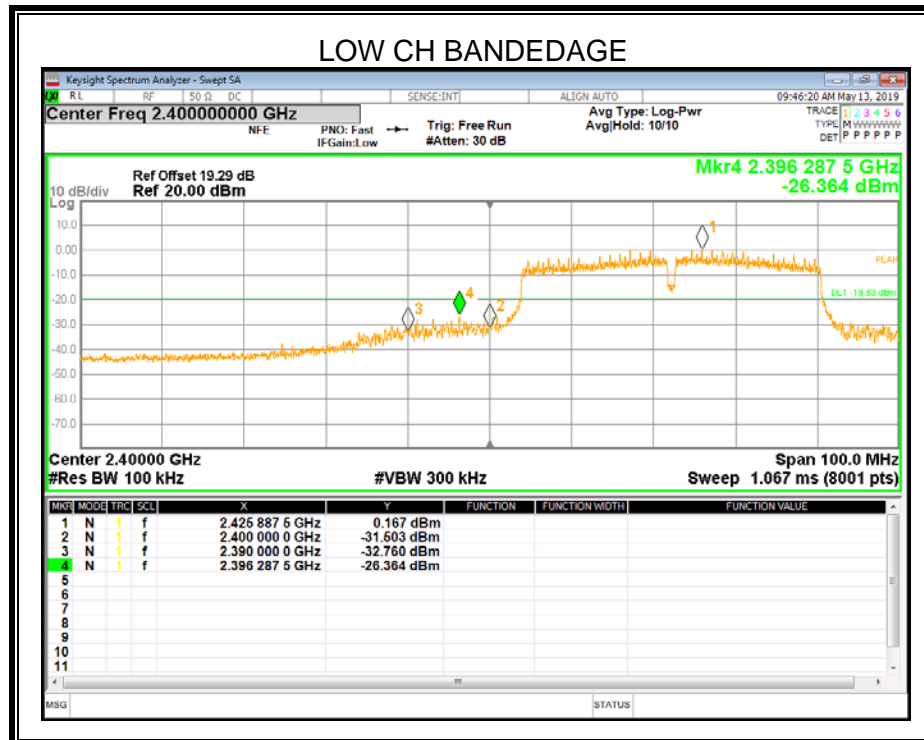**ANTENNA 1**

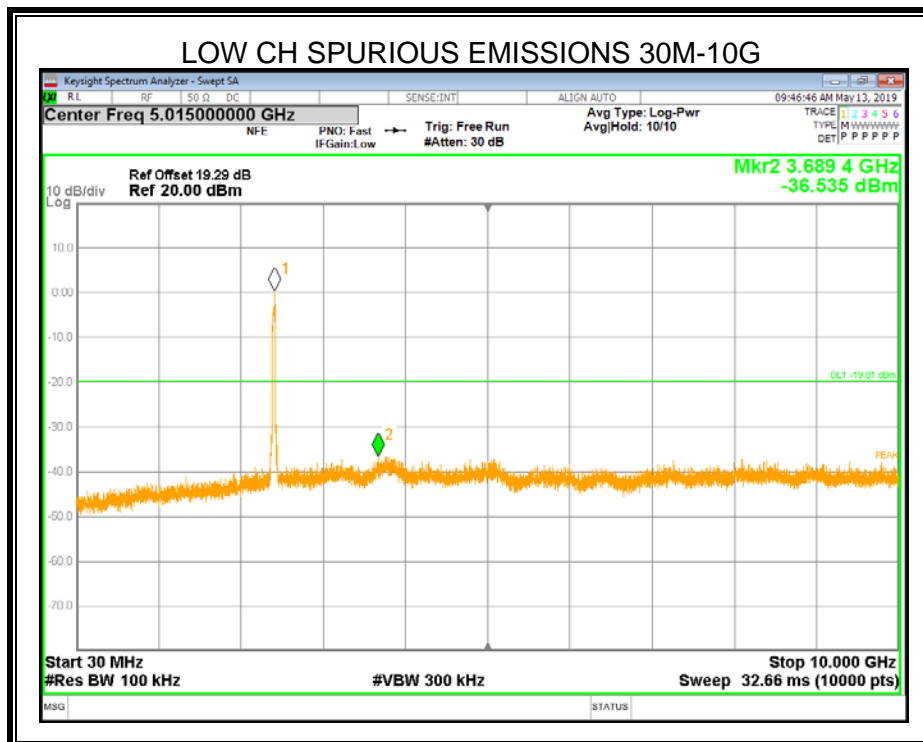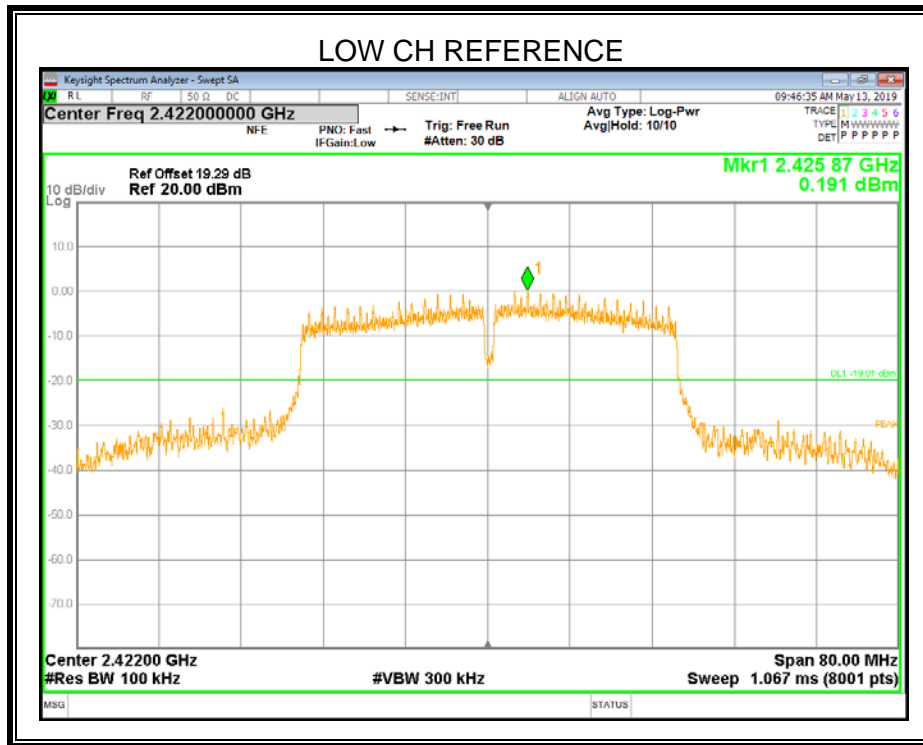


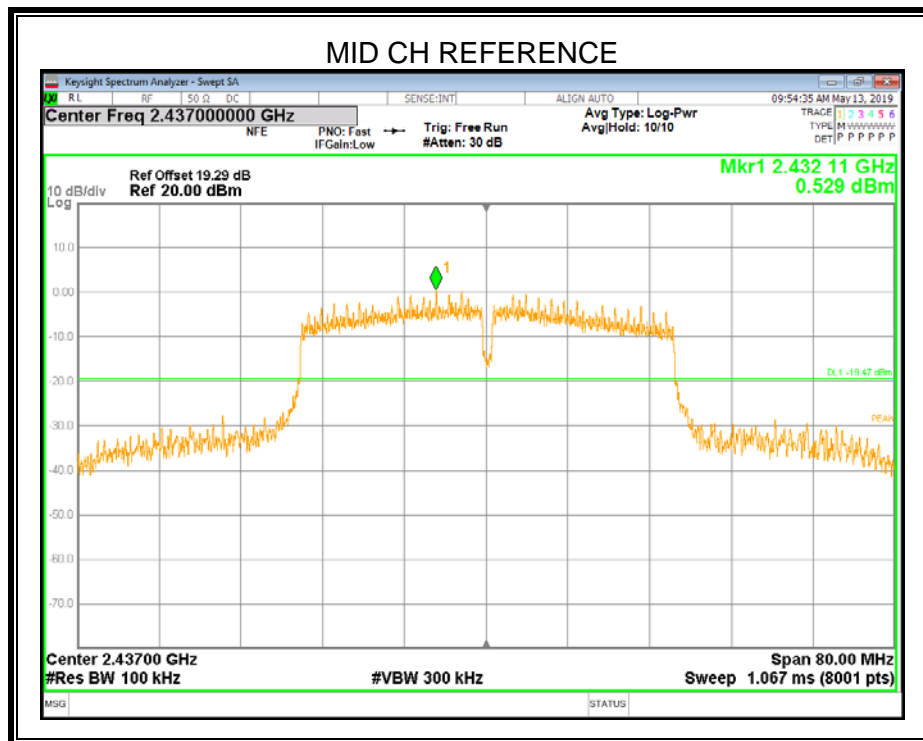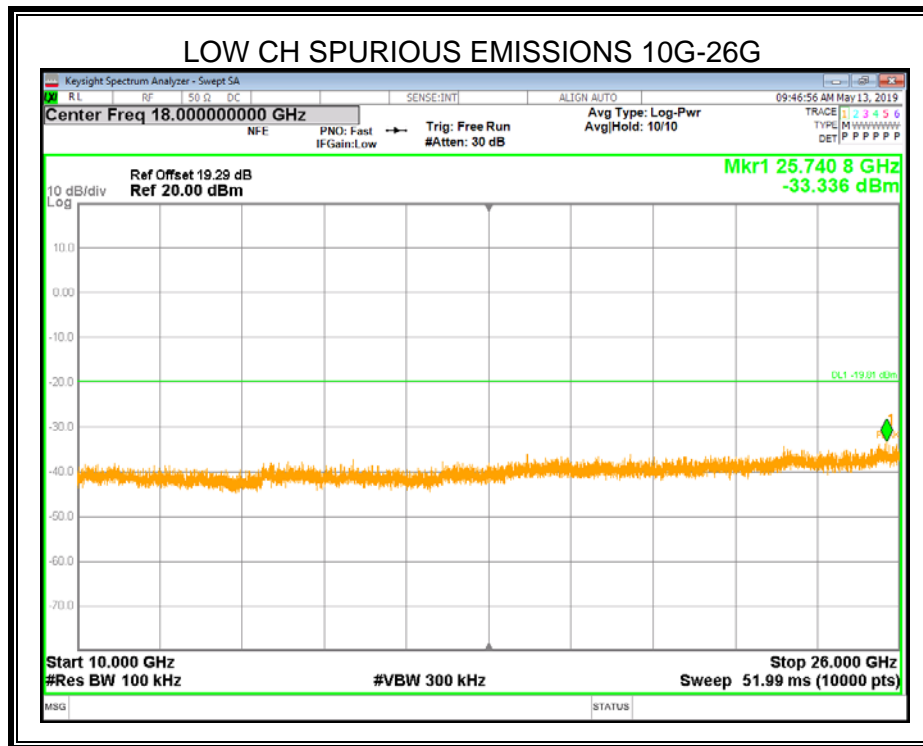

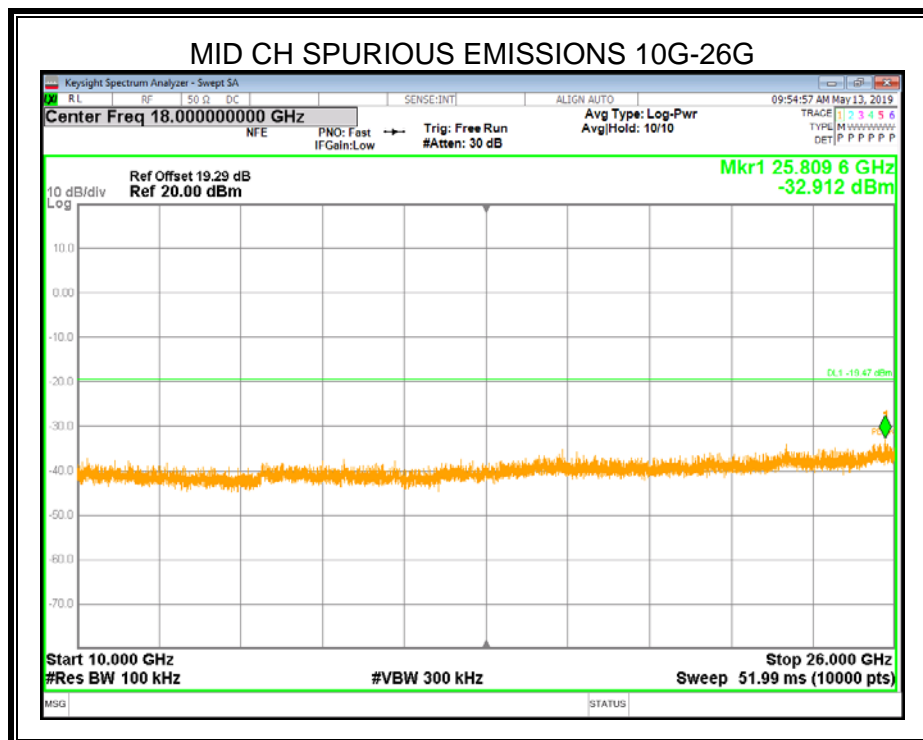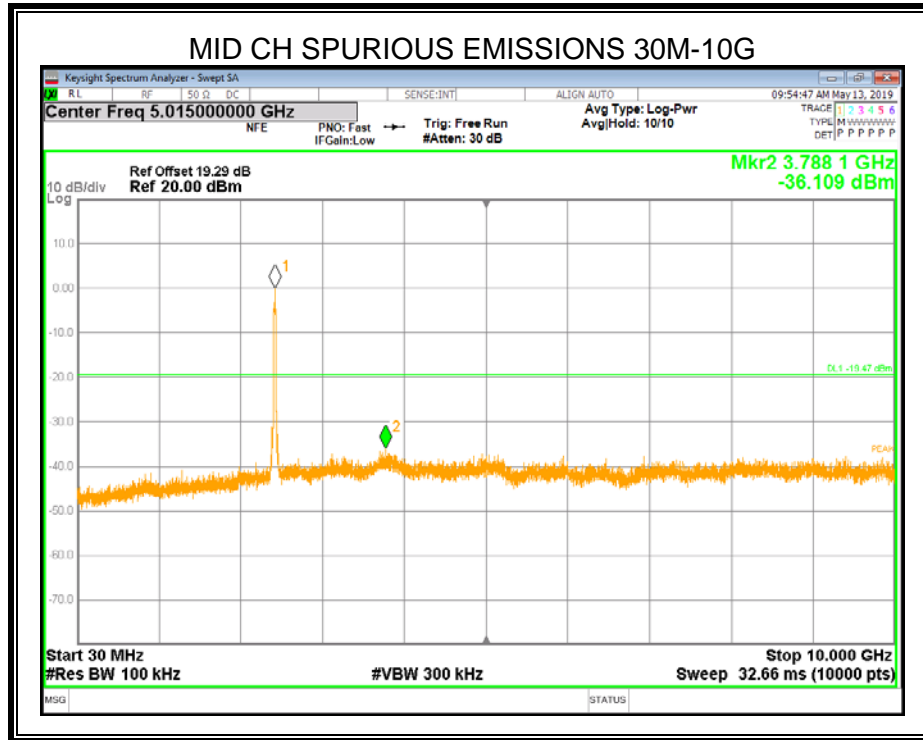






HIGH CH BANDEDGE

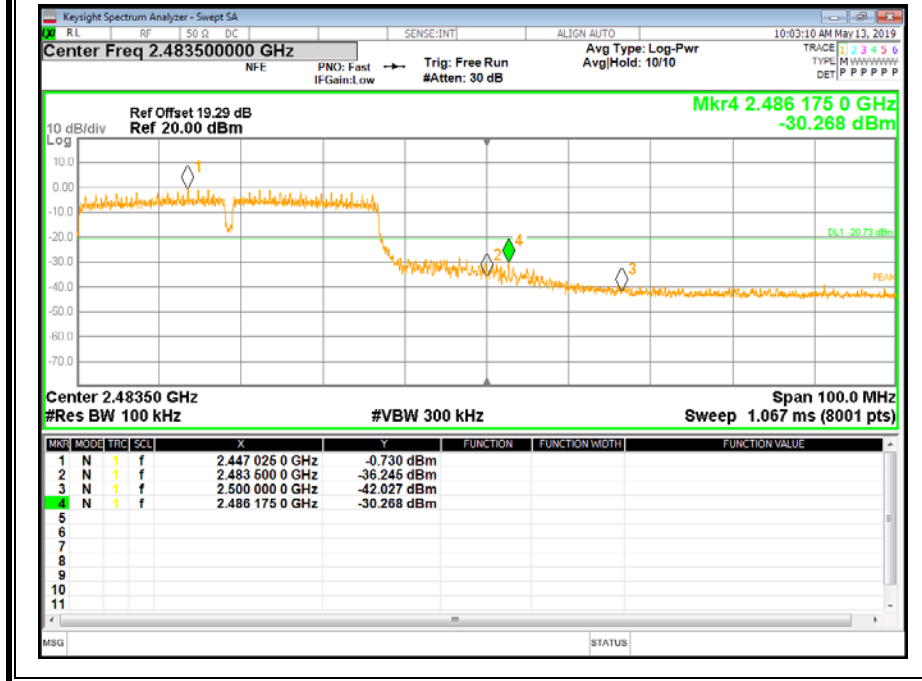

HIGH CH REFERENCE

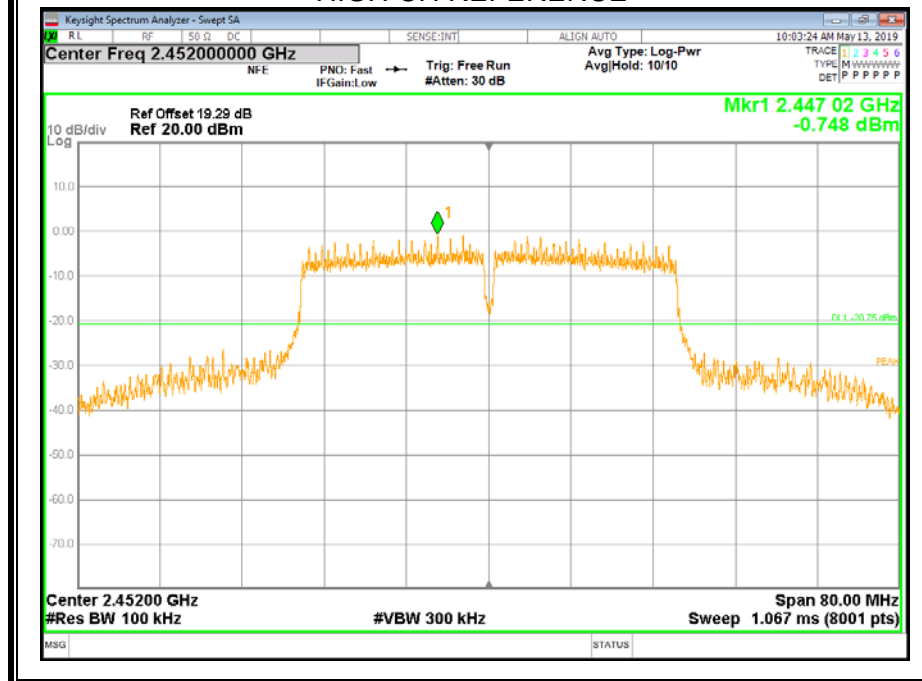

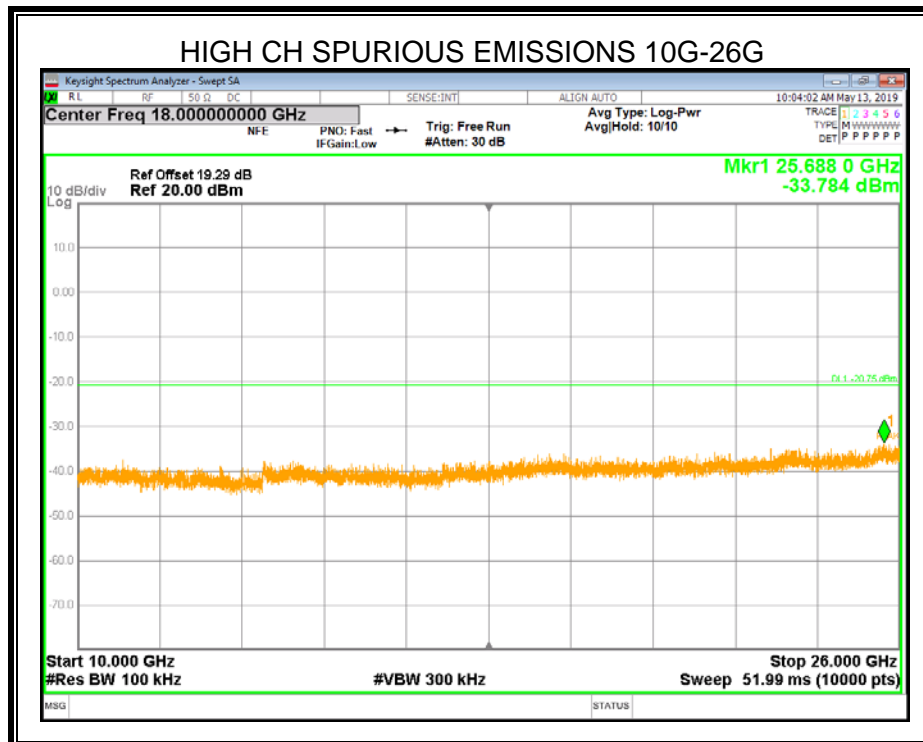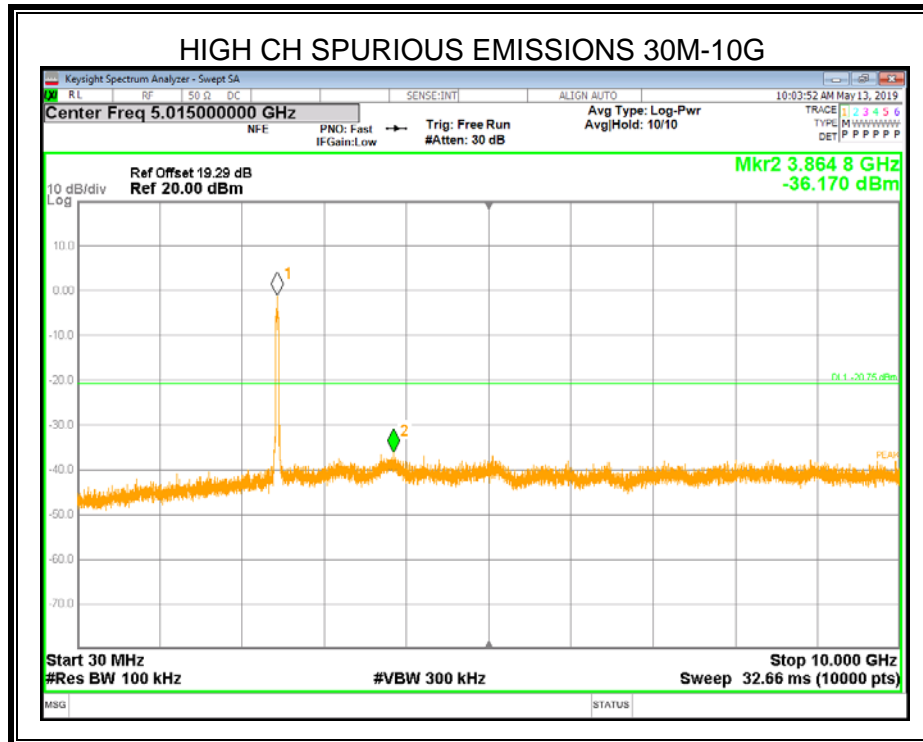



9. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Please refer to ISSED RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

| Frequency (MHz) | dB(uV/m) (at 3 meters) | |
|-----------------|------------------------|---------|
| | Peak | Average |
| Above 1000 | 74 | 54 |

IC Restricted bands please refer to ISSED RSS-GEN Clause 8.10

FCC Restricted bands of operation:


| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

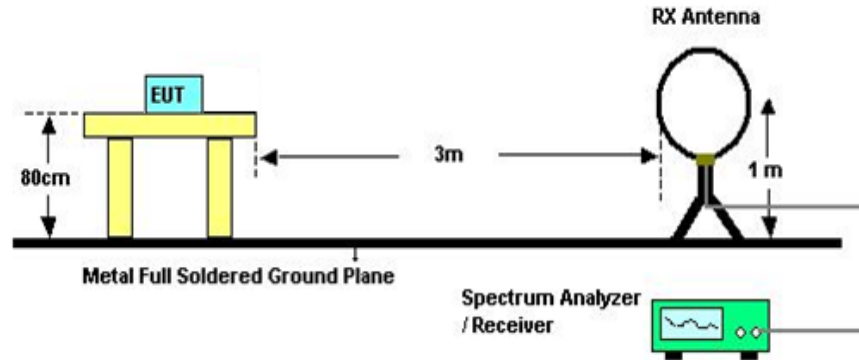


The setting of the spectrum analyser

| | |
|----------|--|
| RBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| VBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| Sweep | Auto |
| Detector | Peak/QP/ Average |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G

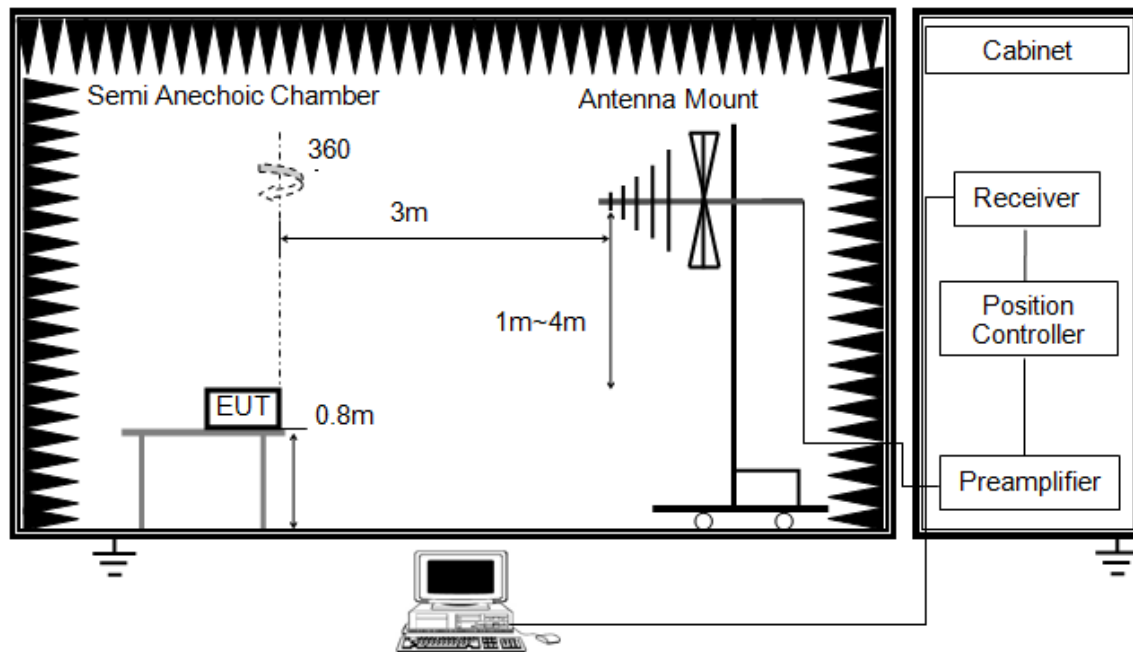


The setting of the spectrum analyser

| | |
|----------|----------|
| RBW | 120K |
| VBW | 300K |
| Sweep | Auto |
| Detector | Peak/QP |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

ABOVE 1G

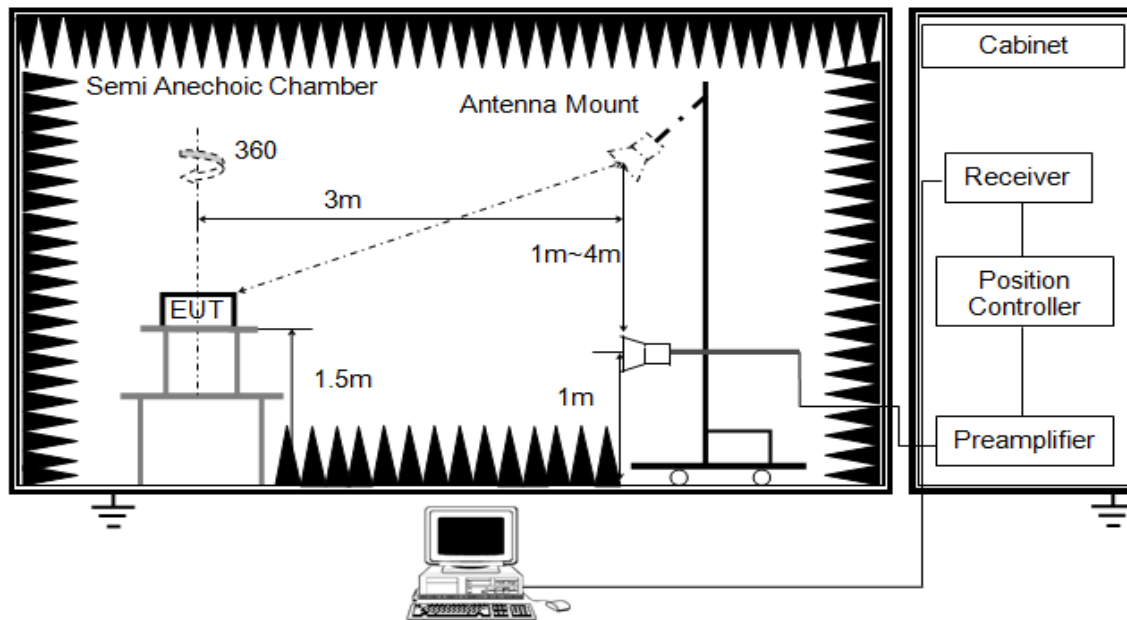


The setting of the spectrum analyser

| | |
|----------|-----------------------------|
| RBW | 1M |
| VBW | PEAK: 3M AVG: see note 6 |
| Sweep | Auto |
| Detector | Peak |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

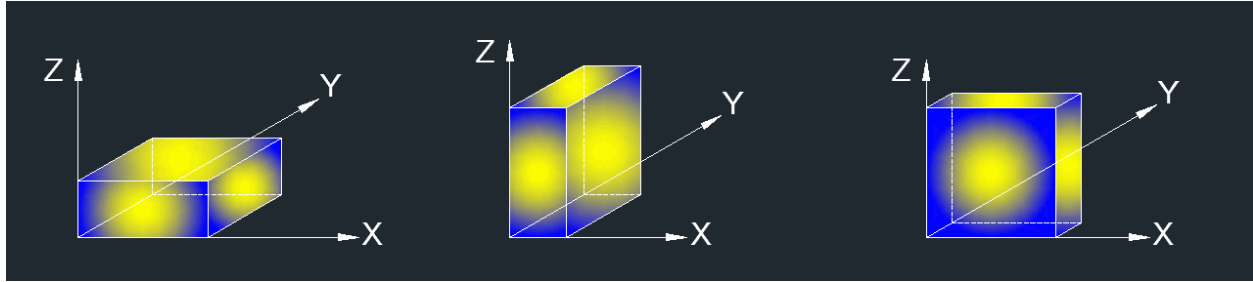

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Y axis) data recorded in the report.

Note 2: All the EUT's emissions had been evaluated for simultaneous transmission with the other WIFI 2.4GHz, WIFI 5GHz and BT transmitter and there were no any additional or worse emissions found.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 24.6°C | Relative Humidity | 59% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.3V |




9.1. RESTRICTED BANDEDGE

9.1.1. 802.11b SISO MODE


1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

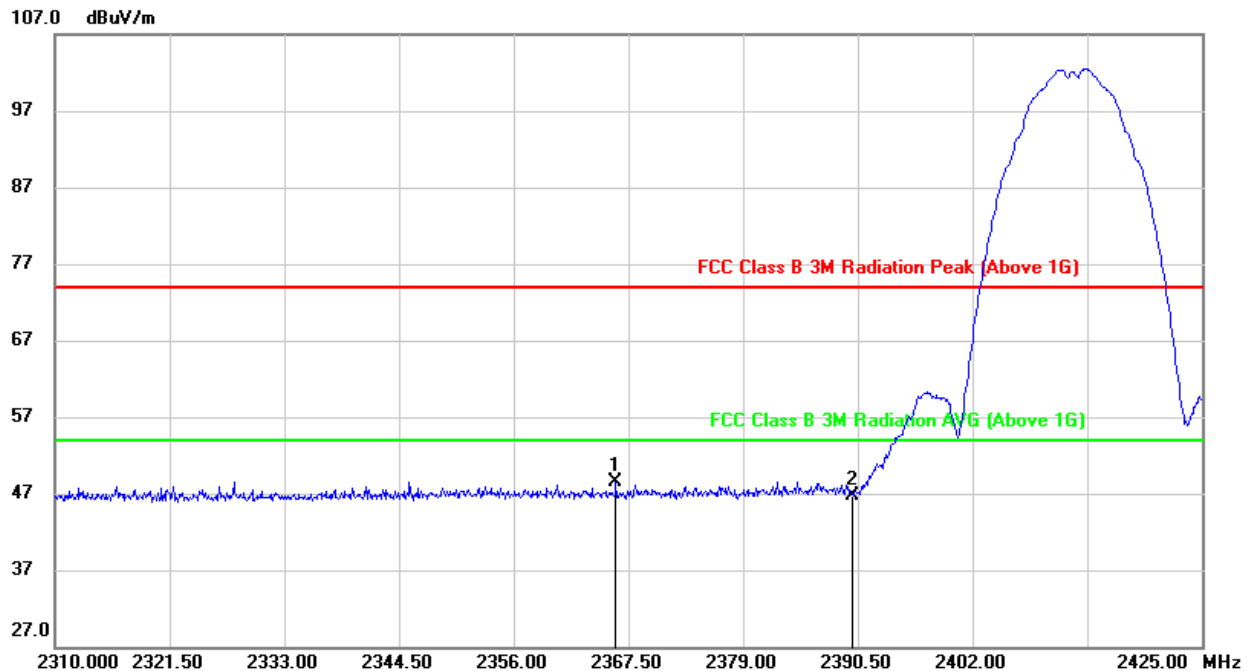


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2366.235 | 15.69 | 32.87 | 48.56 | 74.00 | -25.44 | peak |
| 2 | 2390.000 | 13.78 | 32.94 | 46.72 | 74.00 | -27.28 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

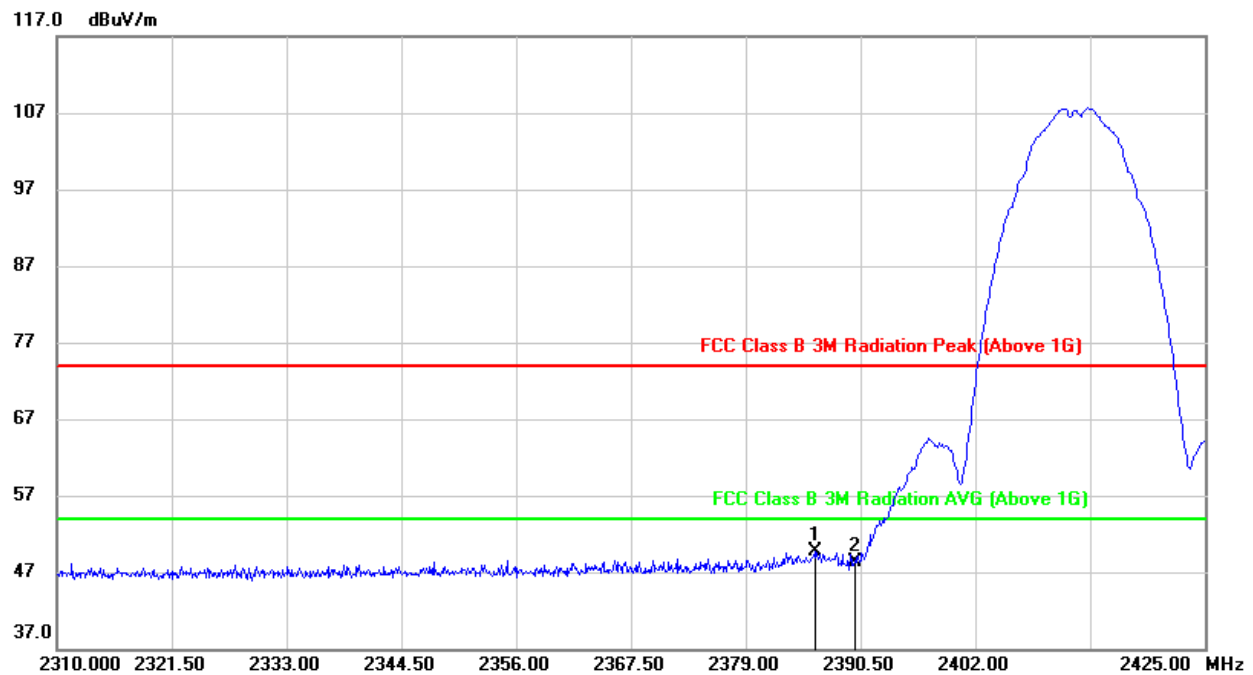**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2385.900 | 16.67 | 32.93 | 49.60 | 74.00 | -24.40 | peak |
| 2 | 2390.000 | 15.44 | 32.94 | 48.38 | 74.00 | -25.62 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

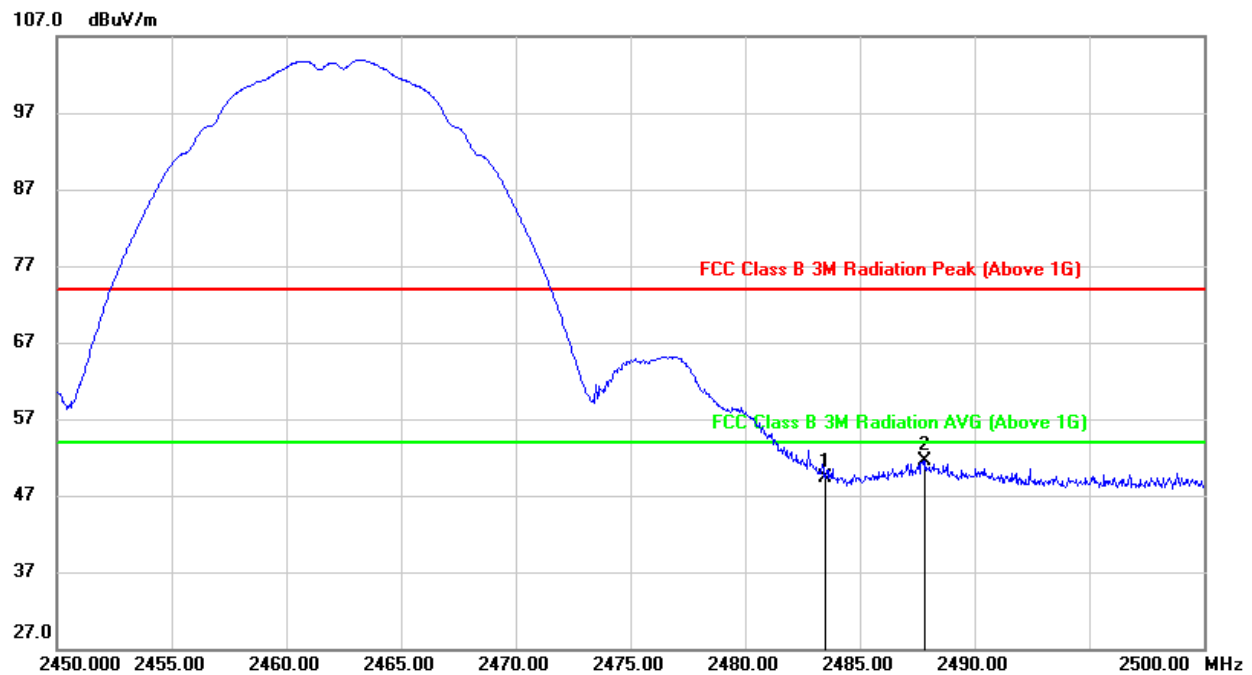**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 15.80 | 33.58 | 49.38 | 74.00 | -24.62 | peak |
| 2 | 2487.850 | 17.91 | 33.61 | 51.52 | 74.00 | -22.48 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

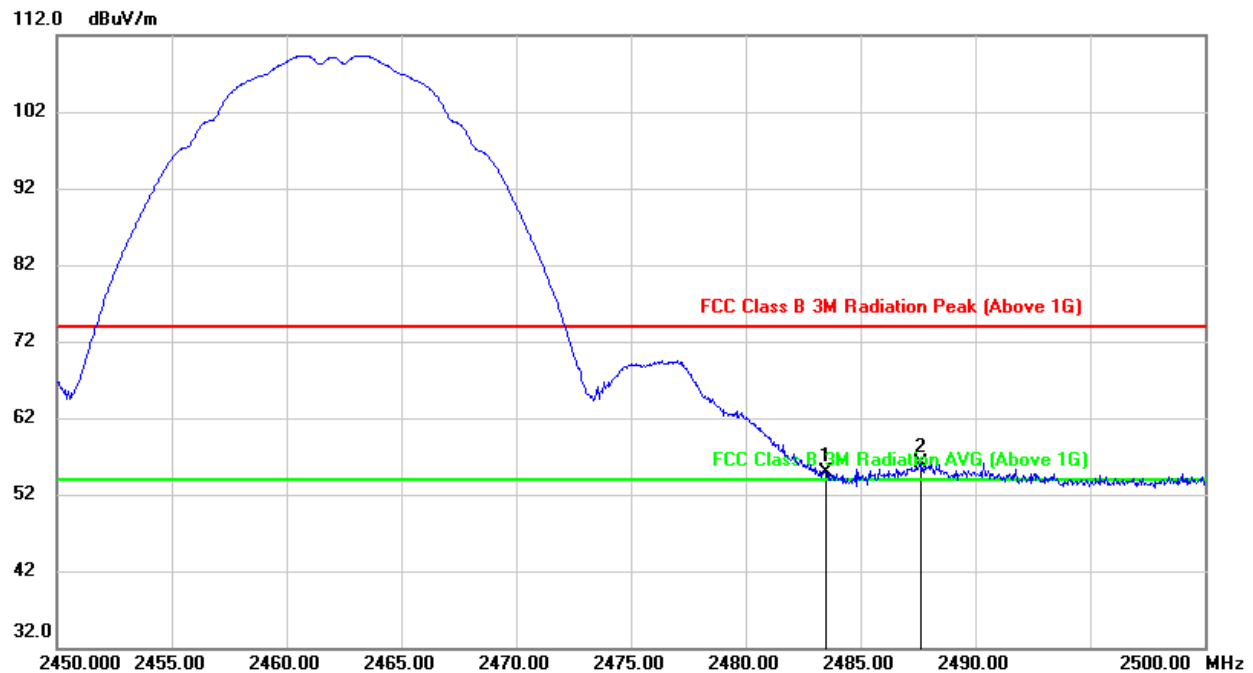**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|--------|
| 1 | 2483.500 | 21.41 | 33.58 | 54.99 | 74.00 | -19.01 | peak |
| 2 | 2487.650 | 22.41 | 33.61 | 56.02 | 74.00 | -17.98 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

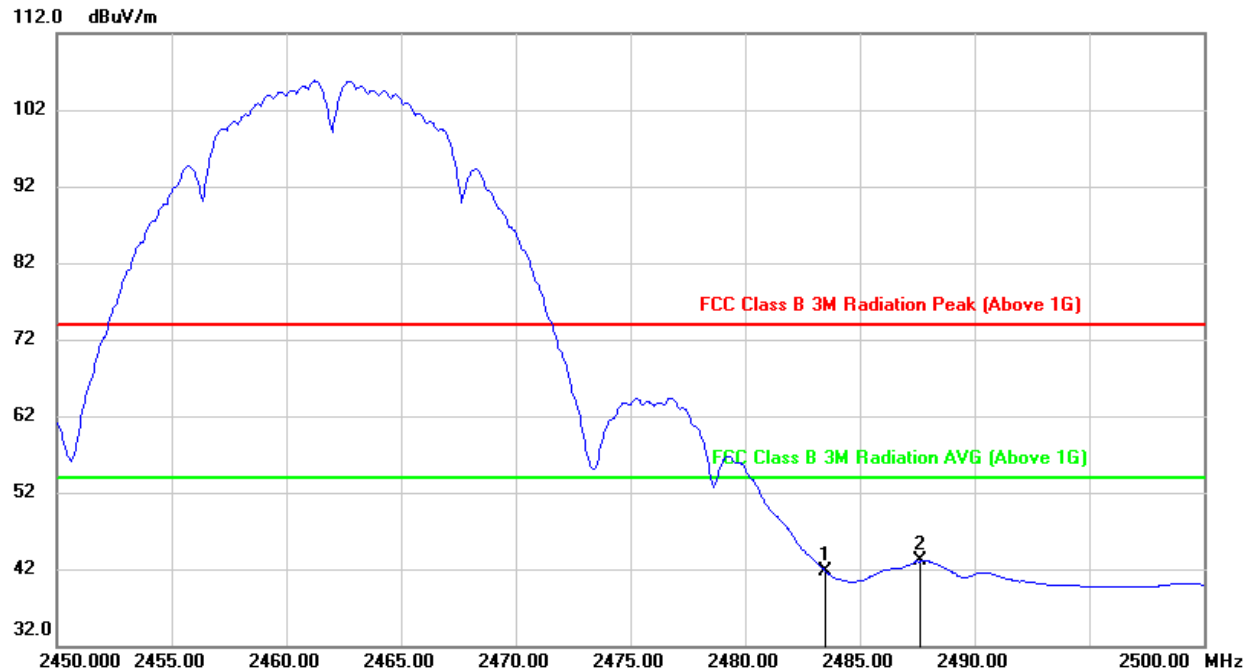**AVG**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 8.19 | 33.58 | 41.77 | 54.00 | -12.23 | AVG |
| 2 | 2487.650 | 9.41 | 33.61 | 43.02 | 54.00 | -10.98 | AVG |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/T_{on}$ where: t_{on} is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



9.1.2. 802.11g SISO MODE


1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

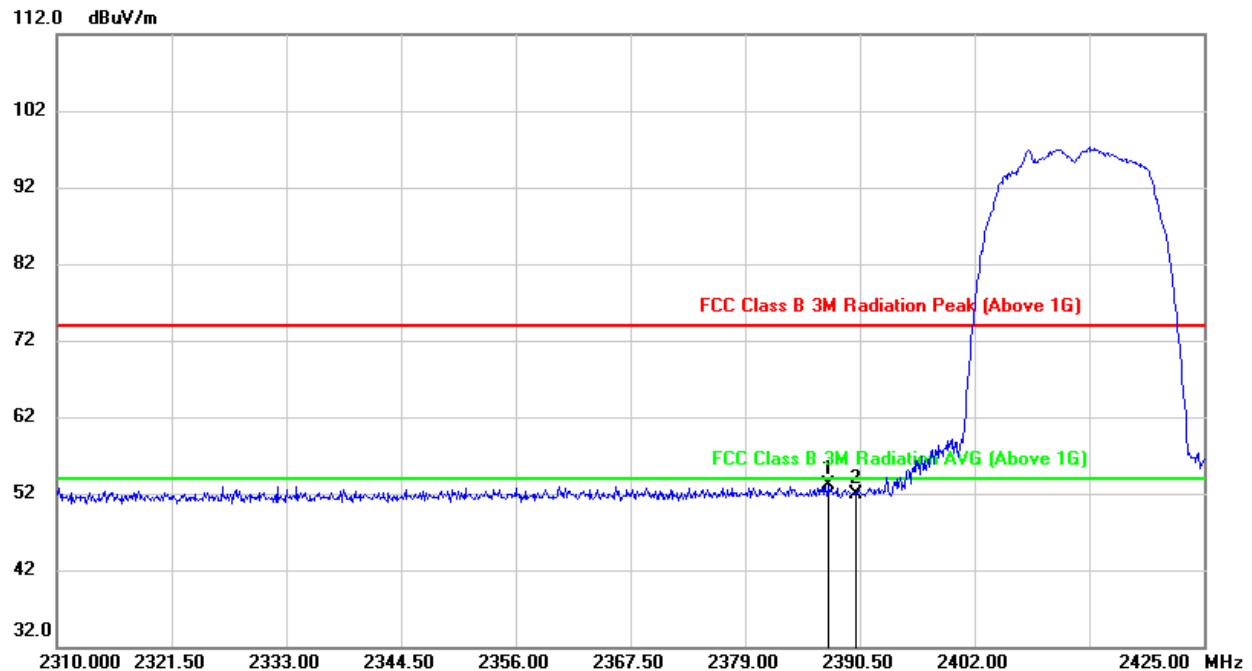

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2387.280 | 20.14 | 32.94 | 53.08 | 74.00 | -20.92 | peak |
| 2 | 2390.000 | 18.97 | 32.94 | 51.91 | 74.00 | -22.09 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

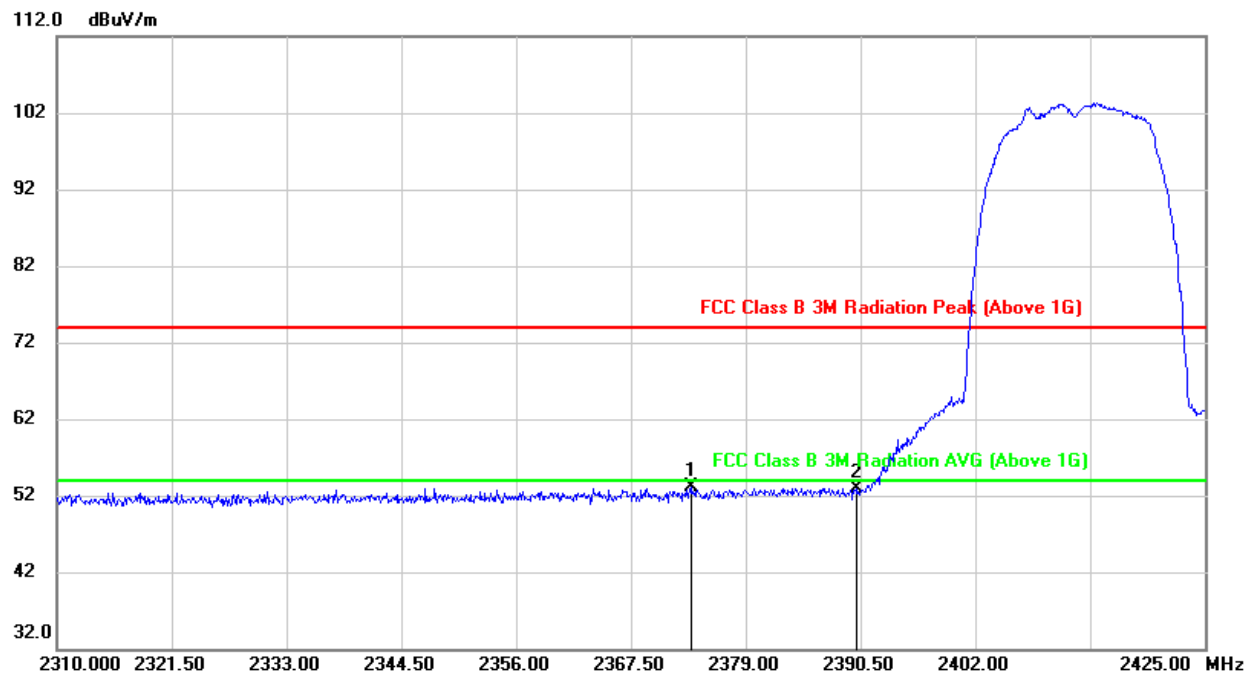**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2373.595 | 20.29 | 32.89 | 53.18 | 74.00 | -20.82 | peak |
| 2 | 2390.000 | 19.93 | 32.94 | 52.87 | 74.00 | -21.13 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

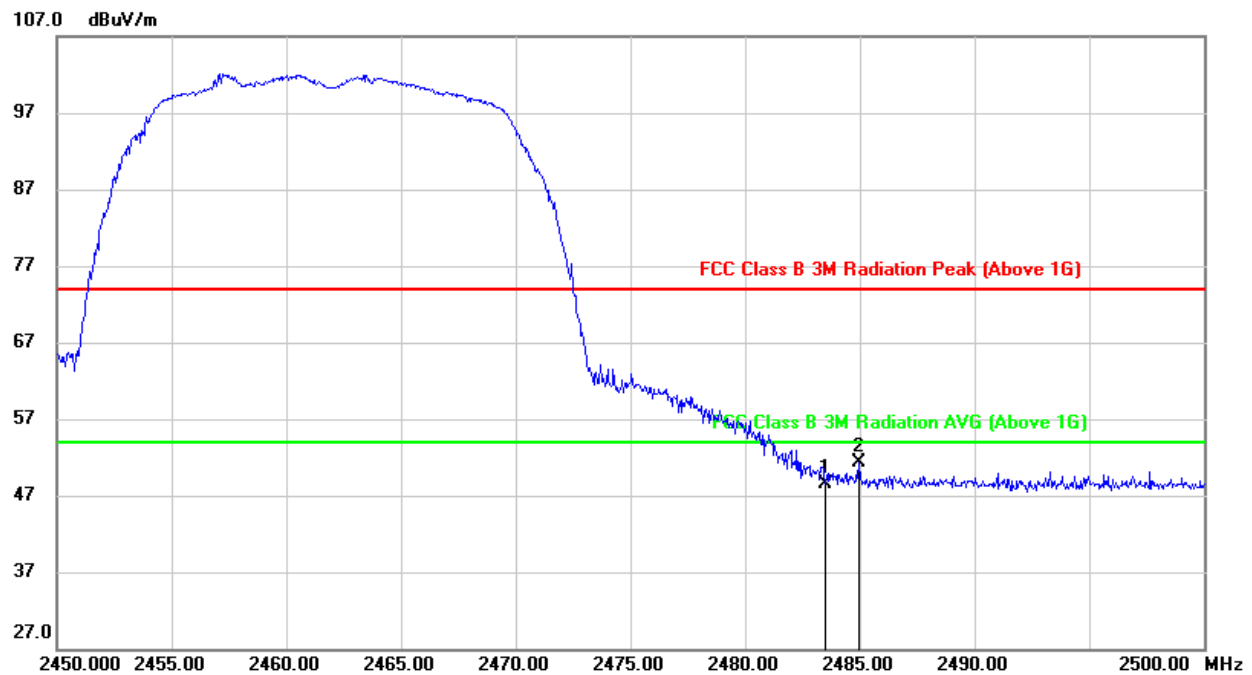**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 14.83 | 33.58 | 48.41 | 74.00 | -25.59 | peak |
| 2 | 2484.950 | 17.73 | 33.59 | 51.32 | 74.00 | -22.68 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

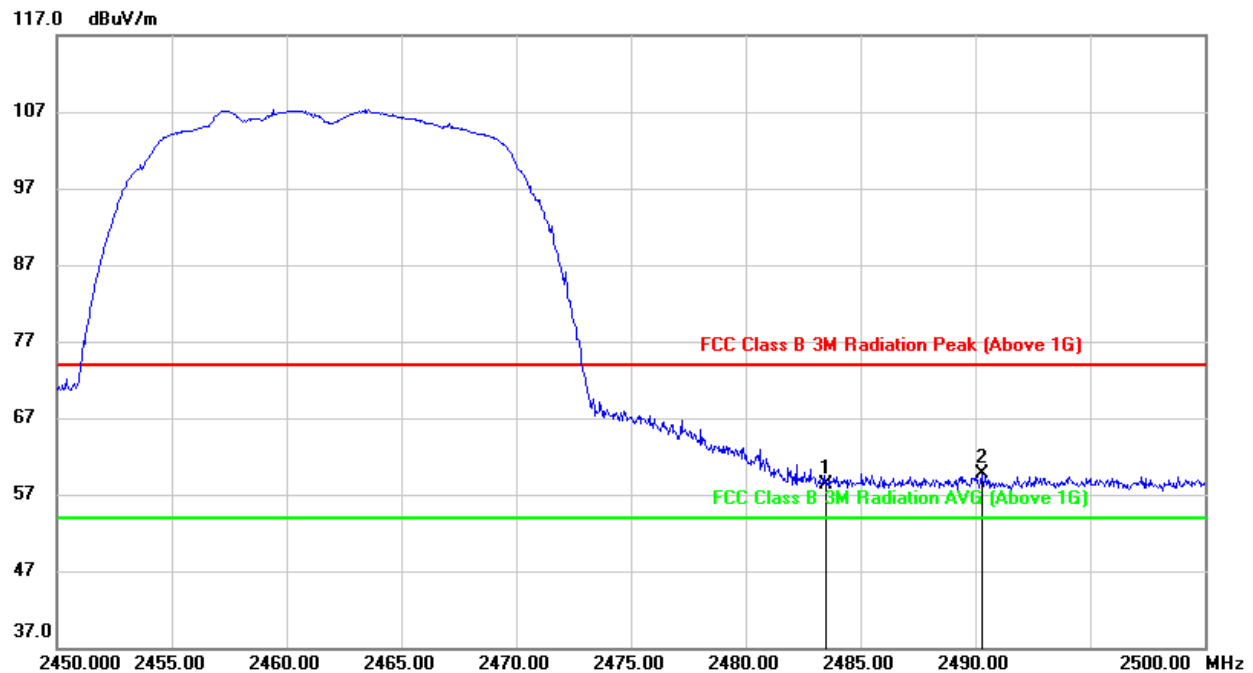**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|--------|
| 1 | 2483.500 | 24.79 | 33.58 | 58.37 | 74.00 | -15.63 | peak |
| 2 | 2490.300 | 26.13 | 33.63 | 59.76 | 74.00 | -14.24 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

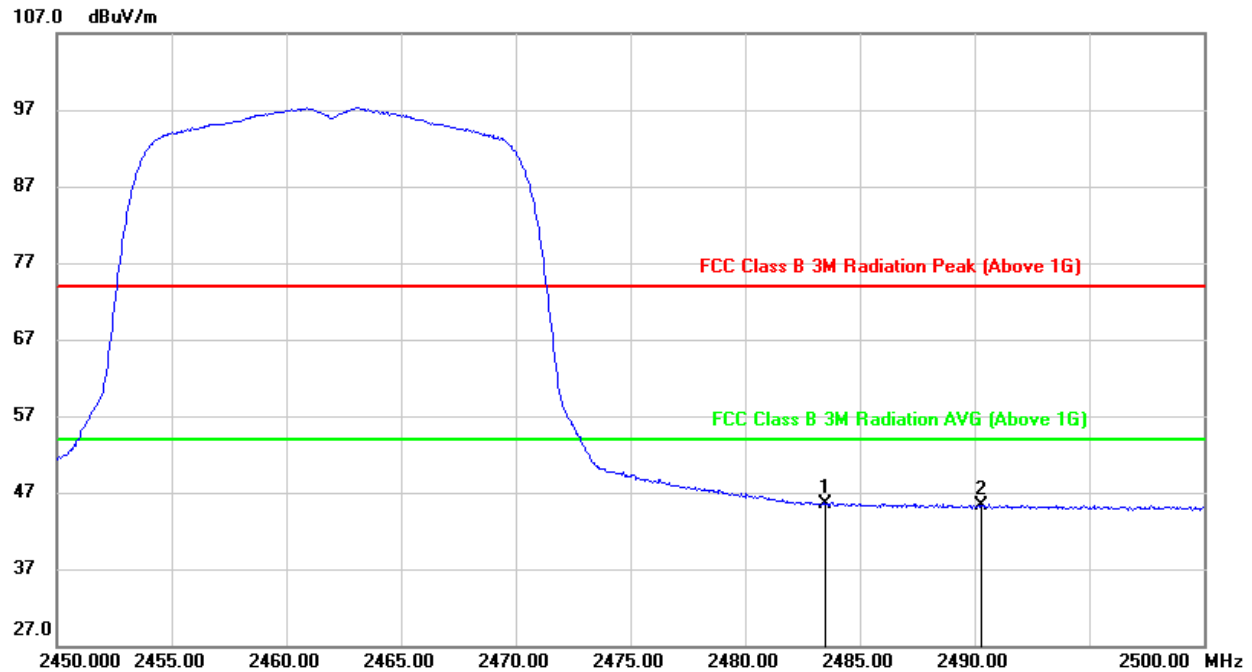**AVG**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|--------|
| 1 | 2483.500 | 11.94 | 33.58 | 45.52 | 54.00 | -8.48 | AVG |
| 2 | 2490.300 | 11.62 | 33.63 | 45.25 | 54.00 | -8.75 | AVG |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



9.1.3. 802.11n HT20 MIMO MODE

2TX MODE (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

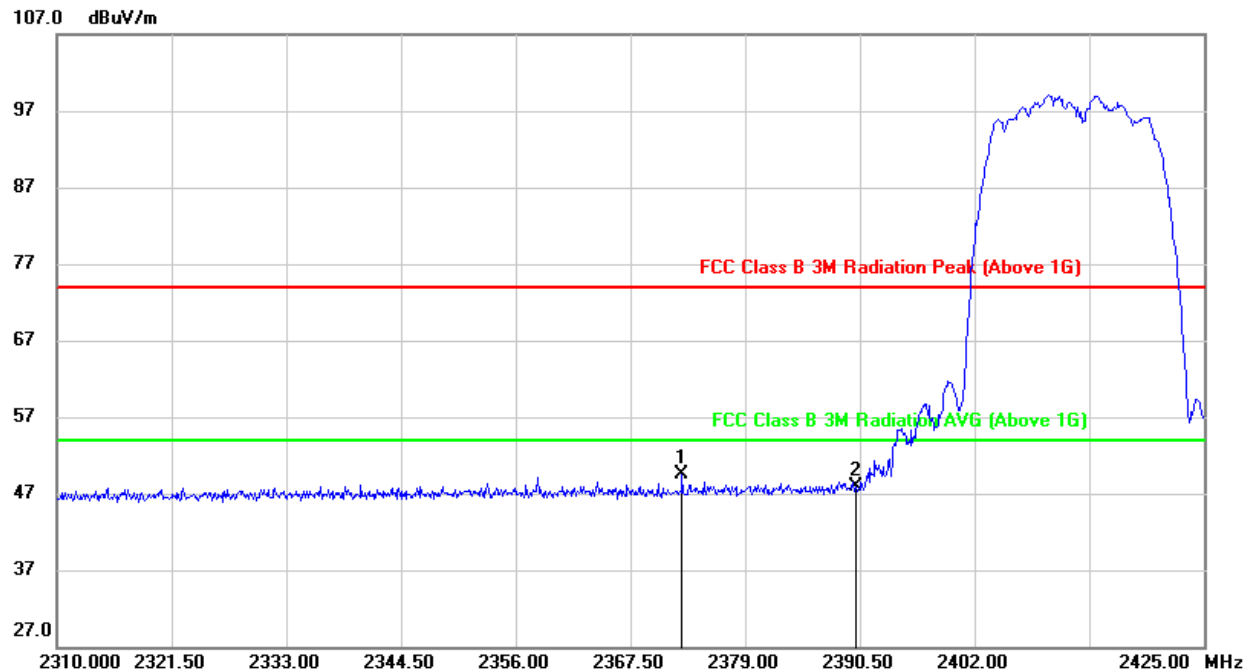


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2372.675 | 16.53 | 32.89 | 49.42 | 74.00 | -24.58 | peak |
| 2 | 2390.000 | 14.89 | 32.94 | 47.83 | 74.00 | -26.17 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

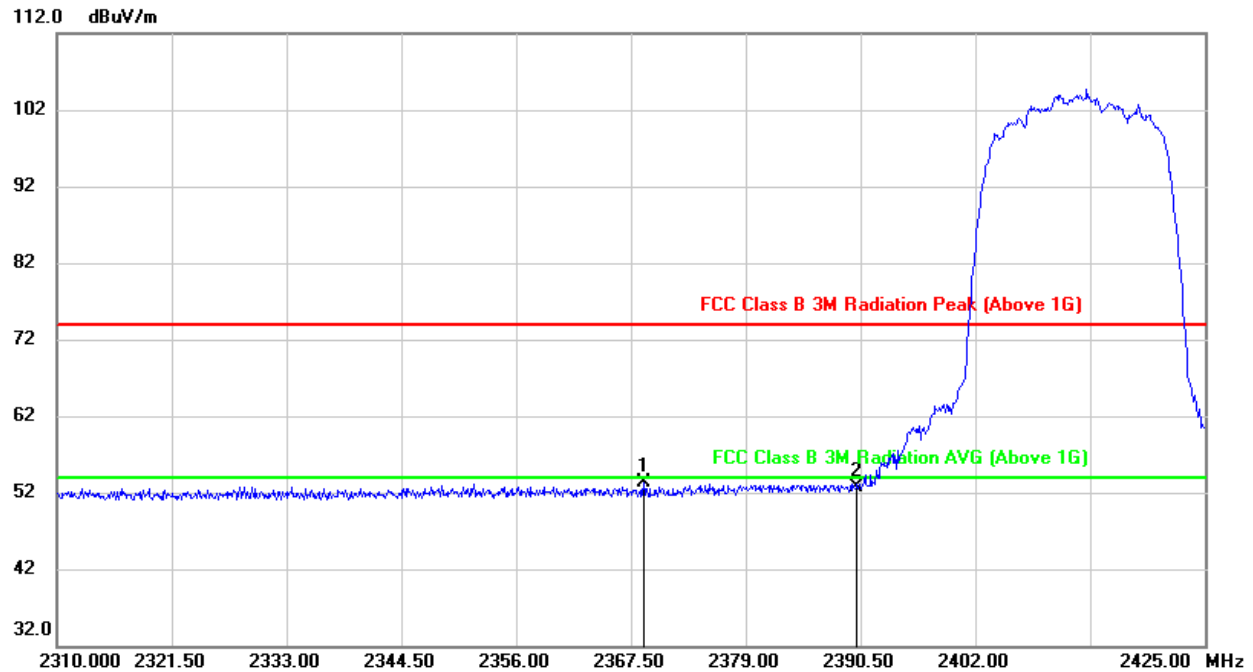

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2368.765 | 20.45 | 32.87 | 53.32 | 74.00 | -20.68 | peak |
| 2 | 2390.000 | 19.72 | 32.94 | 52.66 | 74.00 | -21.34 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

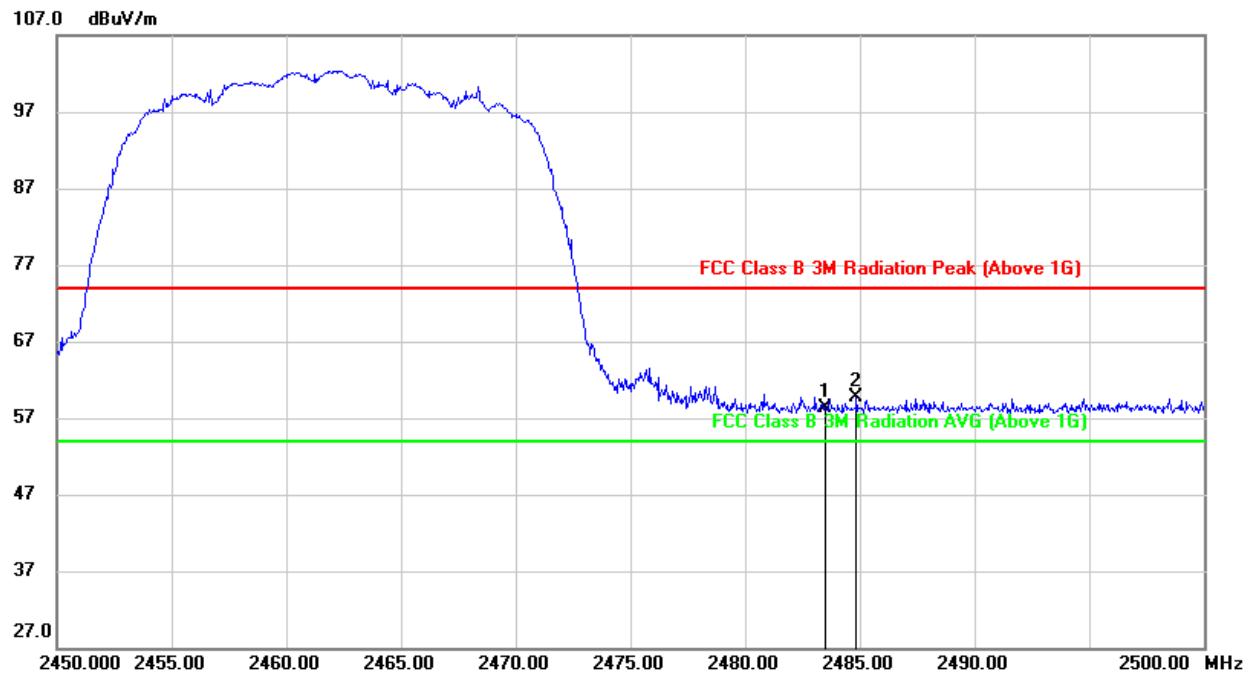
**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 24.75 | 33.58 | 58.33 | 74.00 | -15.67 | peak |
| 2 | 2484.850 | 26.06 | 33.59 | 59.65 | 74.00 | -14.35 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

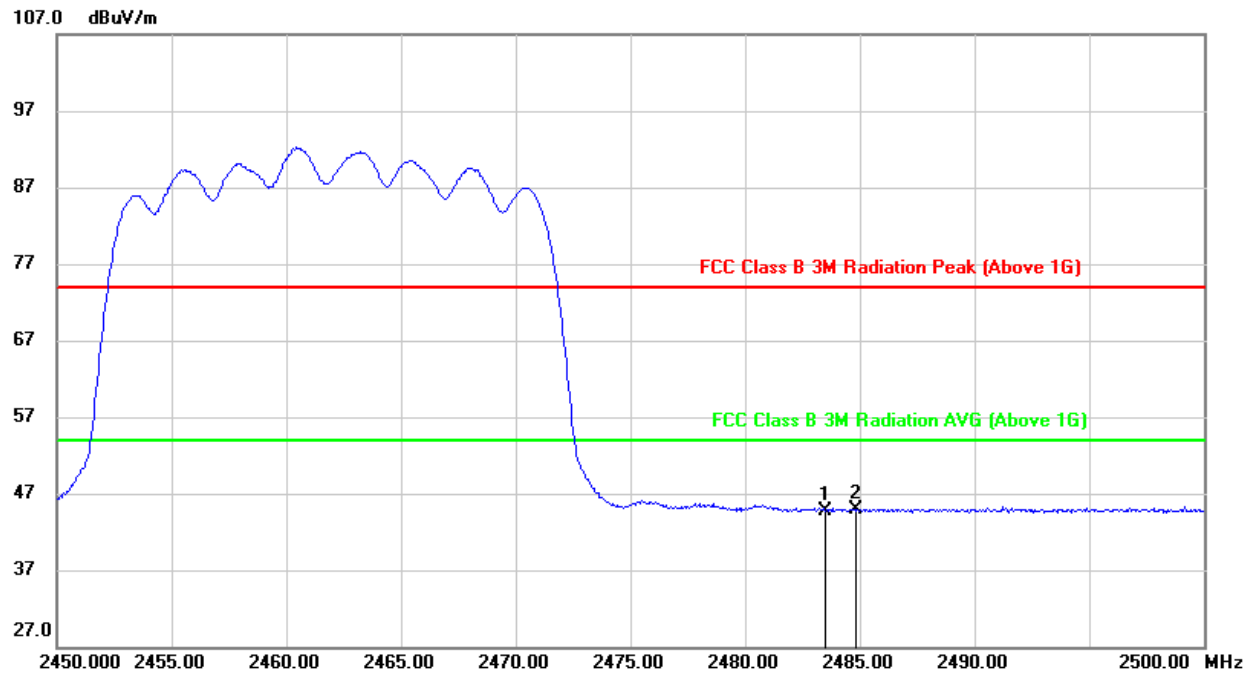


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 11.16 | 33.58 | 44.74 | 54.00 | -9.26 | AVG |
| 2 | 2484.850 | 11.39 | 33.59 | 44.98 | 54.00 | -9.02 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

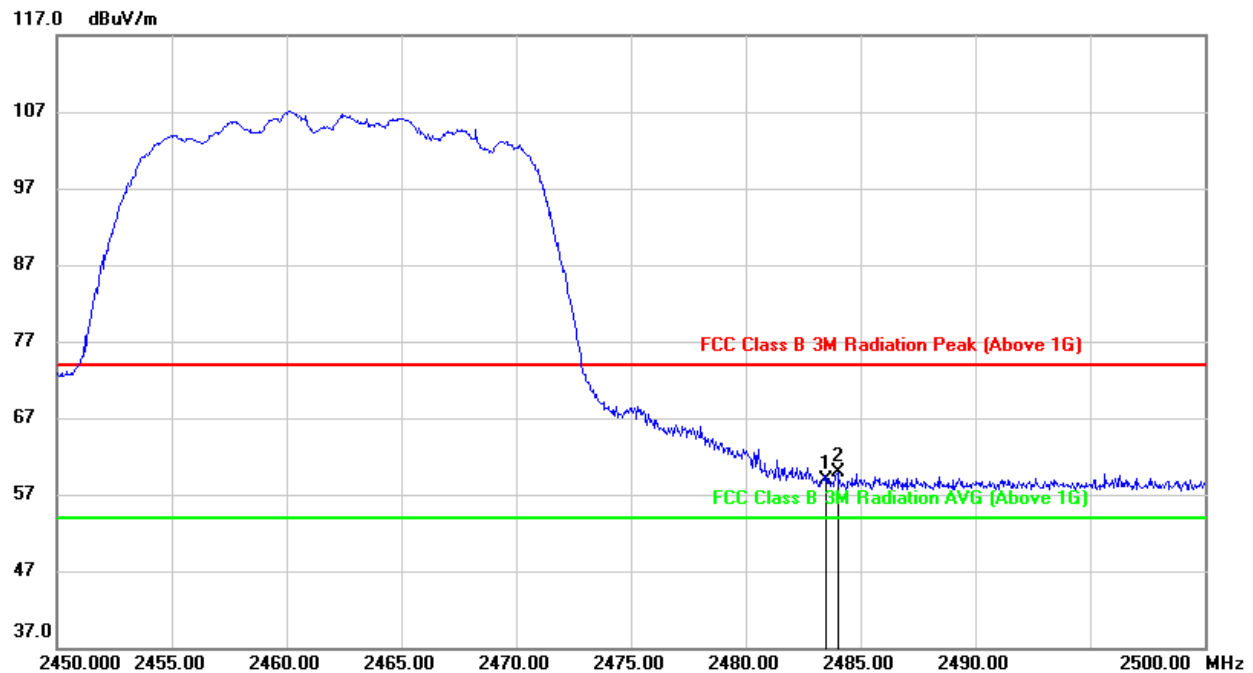

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|--------|
| 1 | 2483.500 | 25.24 | 33.58 | 58.82 | 74.00 | -15.18 | peak |
| 2 | 2484.000 | 26.39 | 33.58 | 59.97 | 74.00 | -14.03 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

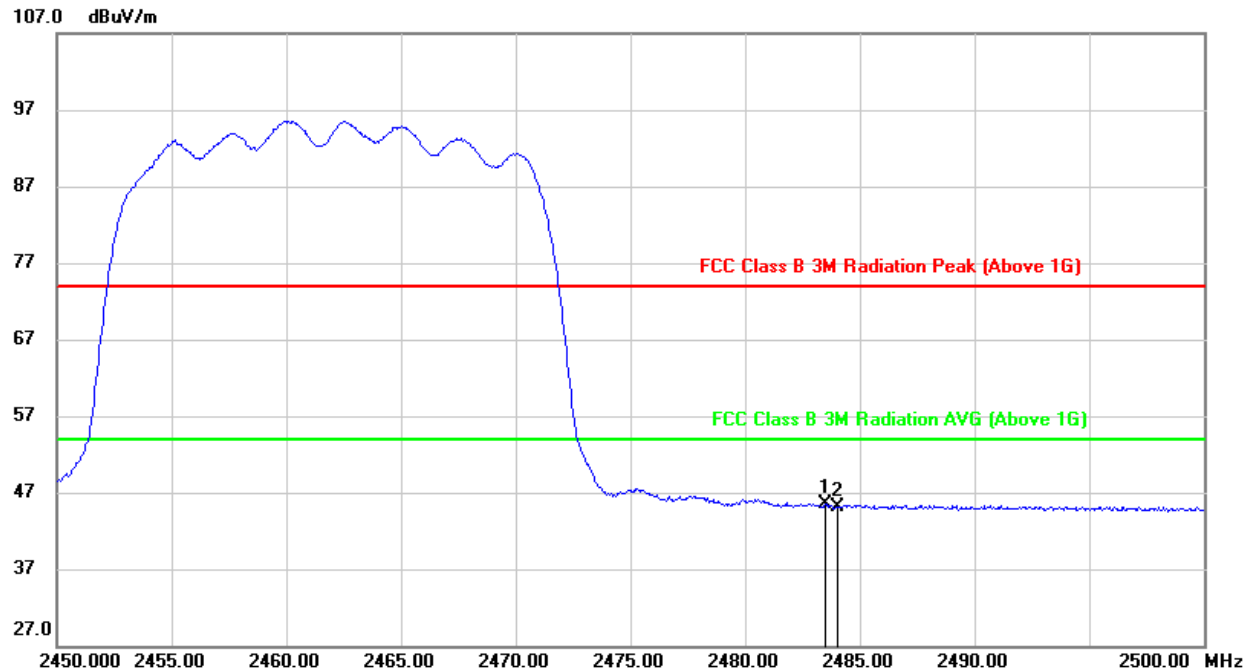**AVG**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 11.87 | 33.58 | 45.45 | 54.00 | -8.55 | AVG |
| 2 | 2484.000 | 11.55 | 33.58 | 45.13 | 54.00 | -8.87 | AVG |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




9.1.4. 802.11n HT40 MIMO MODE

2TX MODE (WORST-CASE CONFIGURATION)


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

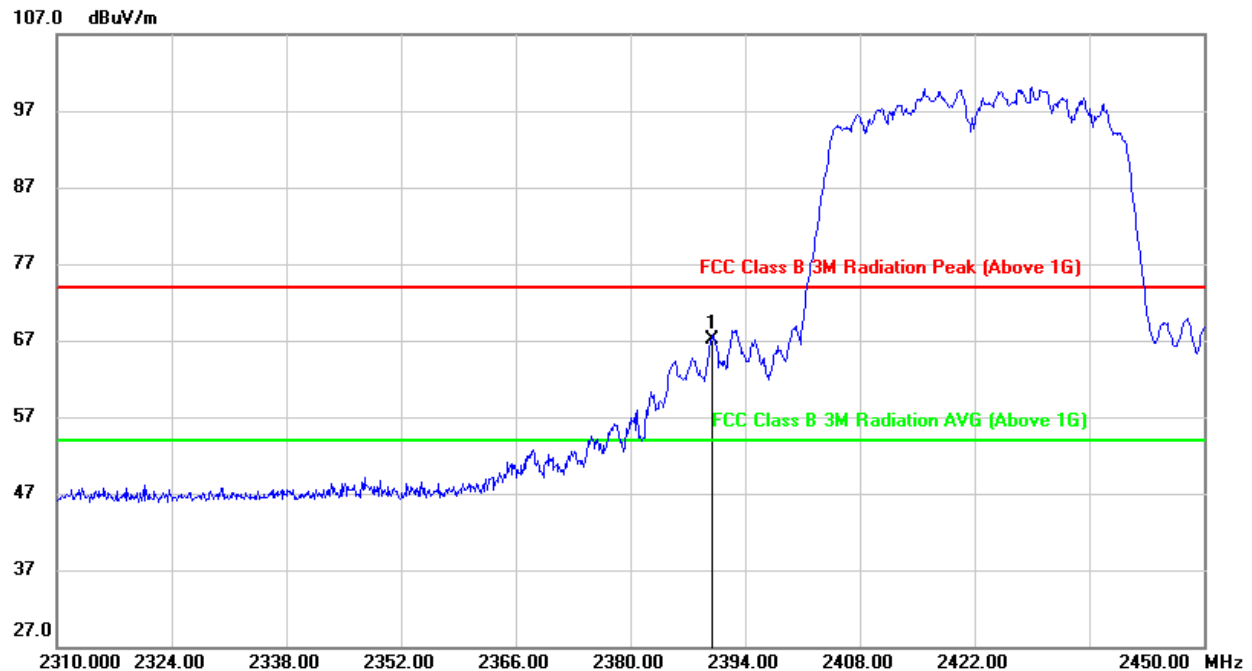

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 34.09 | 32.94 | 67.03 | 74.00 | -6.97 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

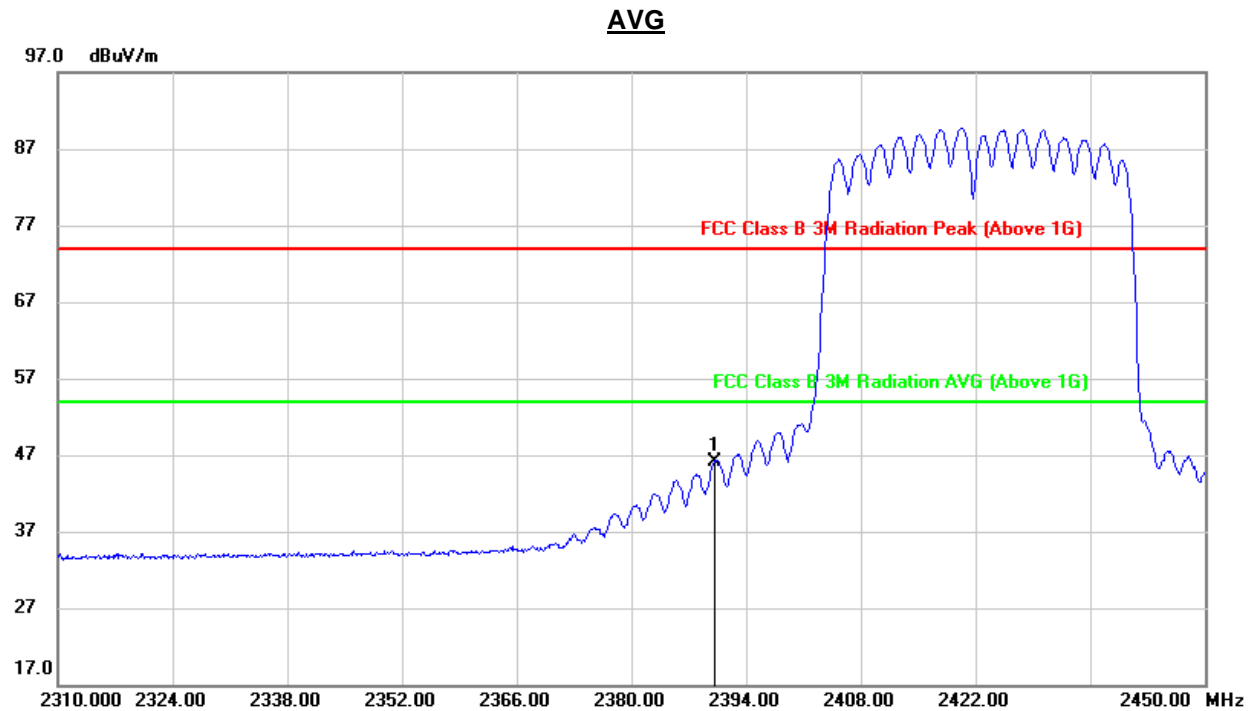


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 13.26 | 32.94 | 46.20 | 54.00 | -7.80 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

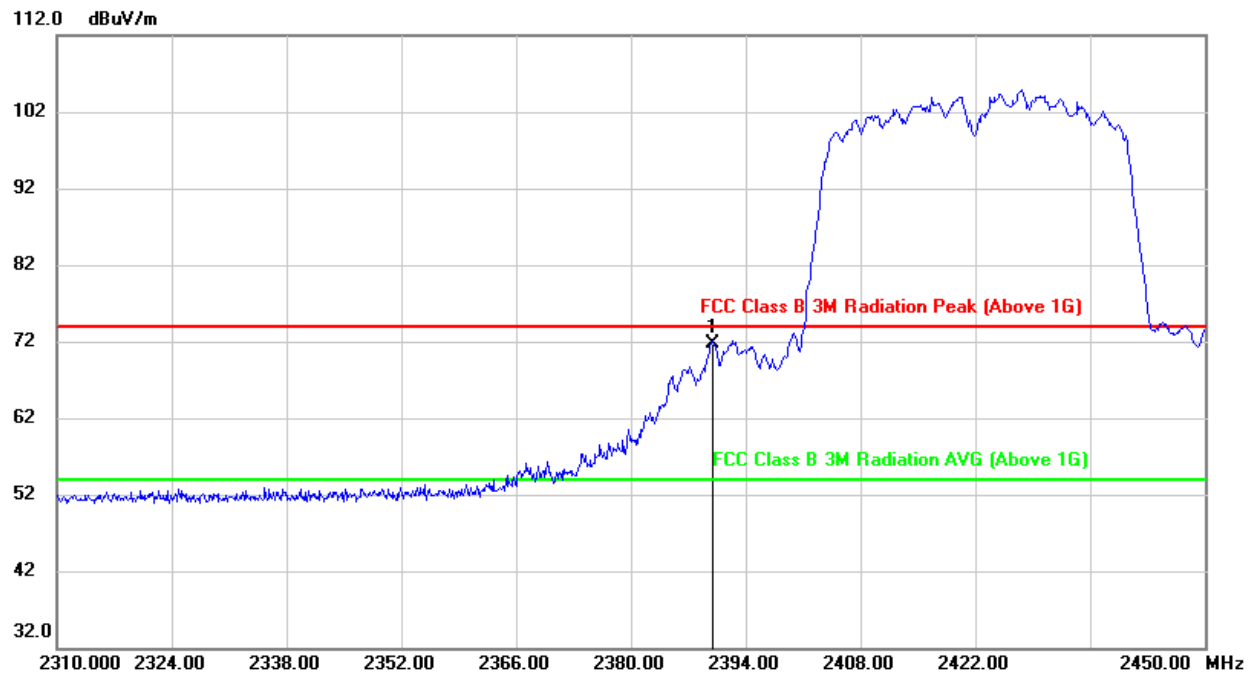


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 38.79 | 32.94 | 71.73 | 74.00 | -2.27 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

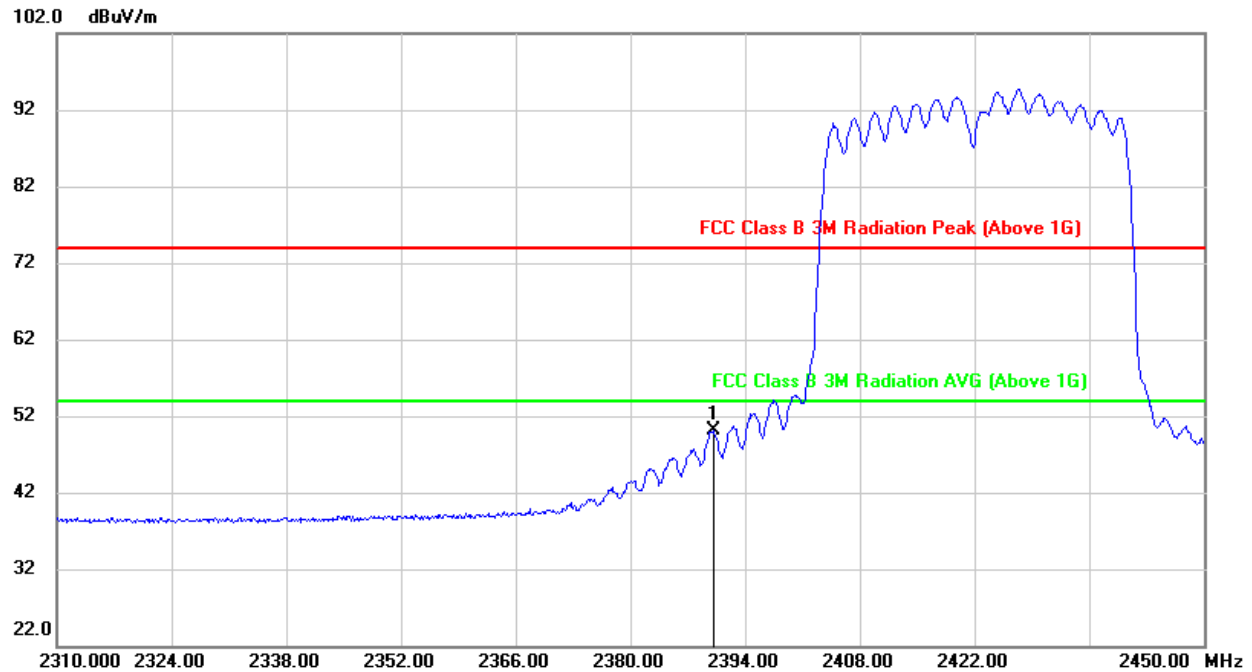**AVG**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 17.13 | 32.94 | 50.07 | 54.00 | -3.93 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/T_{on}$ where: t_{on} is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

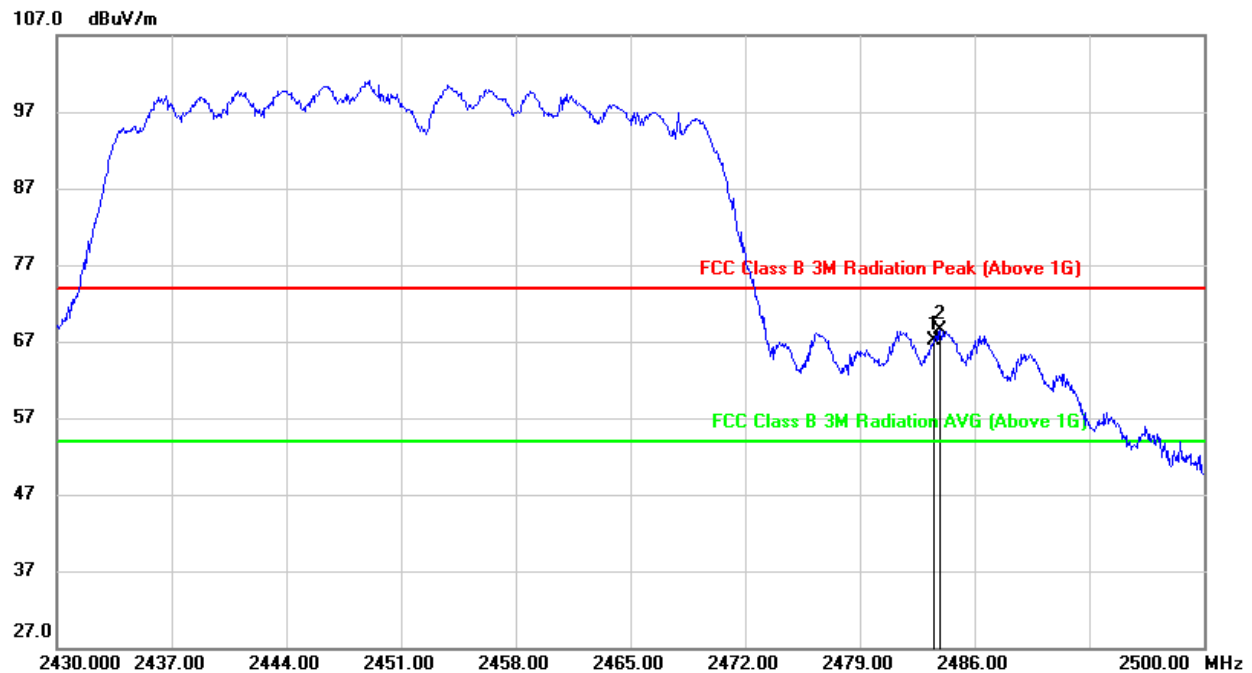**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 33.55 | 33.58 | 67.13 | 74.00 | -6.87 | peak |
| 2 | 2483.900 | 34.94 | 33.58 | 68.52 | 74.00 | -5.48 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

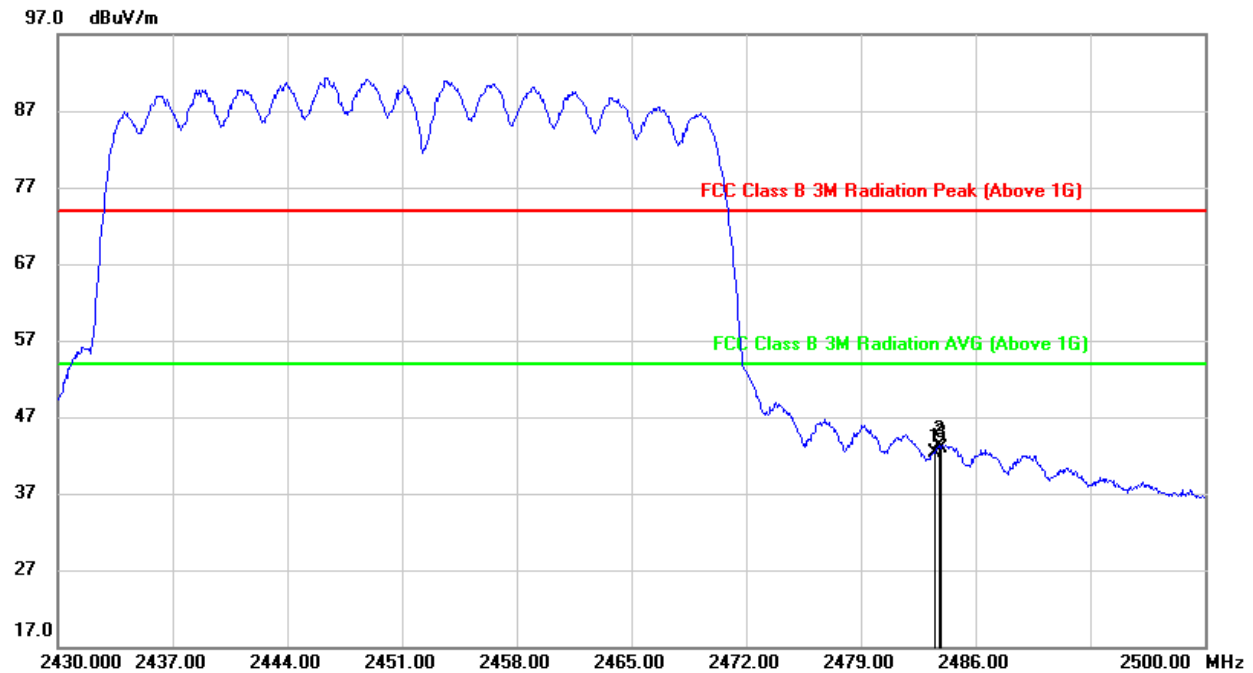


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 8.80 | 33.58 | 42.38 | 54.00 | -11.62 | AVG |
| 2 | 2483.900 | 9.35 | 33.58 | 42.93 | 54.00 | -11.07 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/T_{on}$ where: t_{on} is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

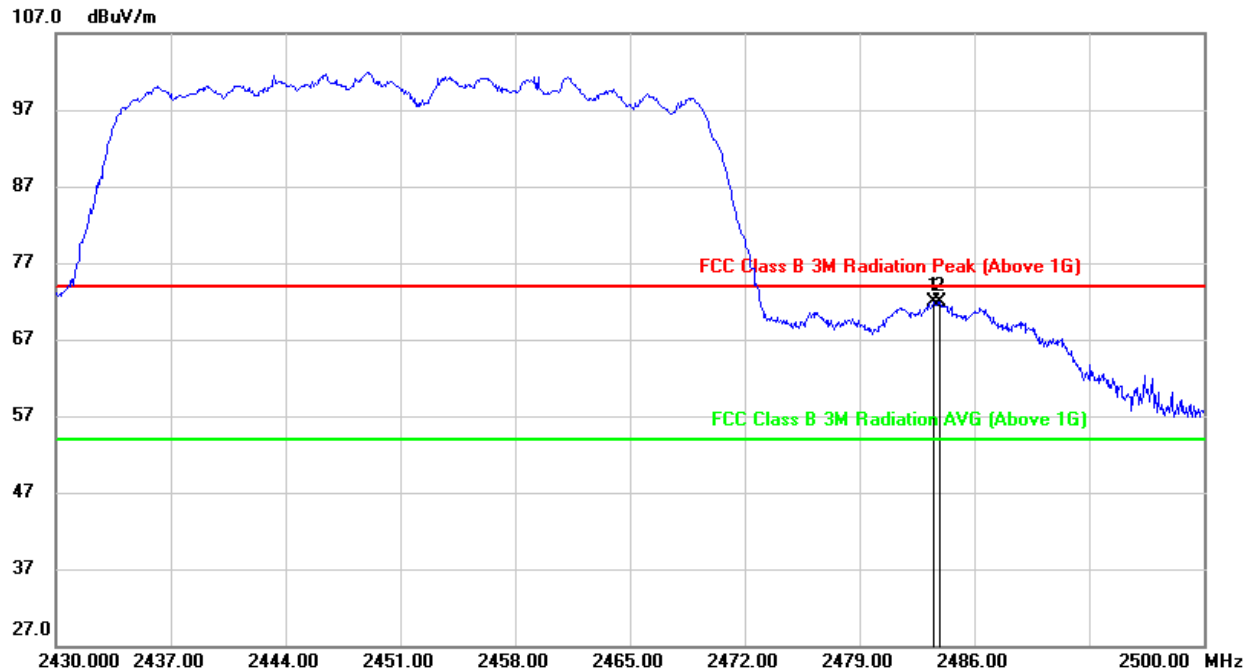

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 38.37 | 33.58 | 71.95 | 74.00 | -2.05 | peak |
| 2 | 2483.900 | 38.36 | 33.58 | 71.94 | 74.00 | -2.06 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

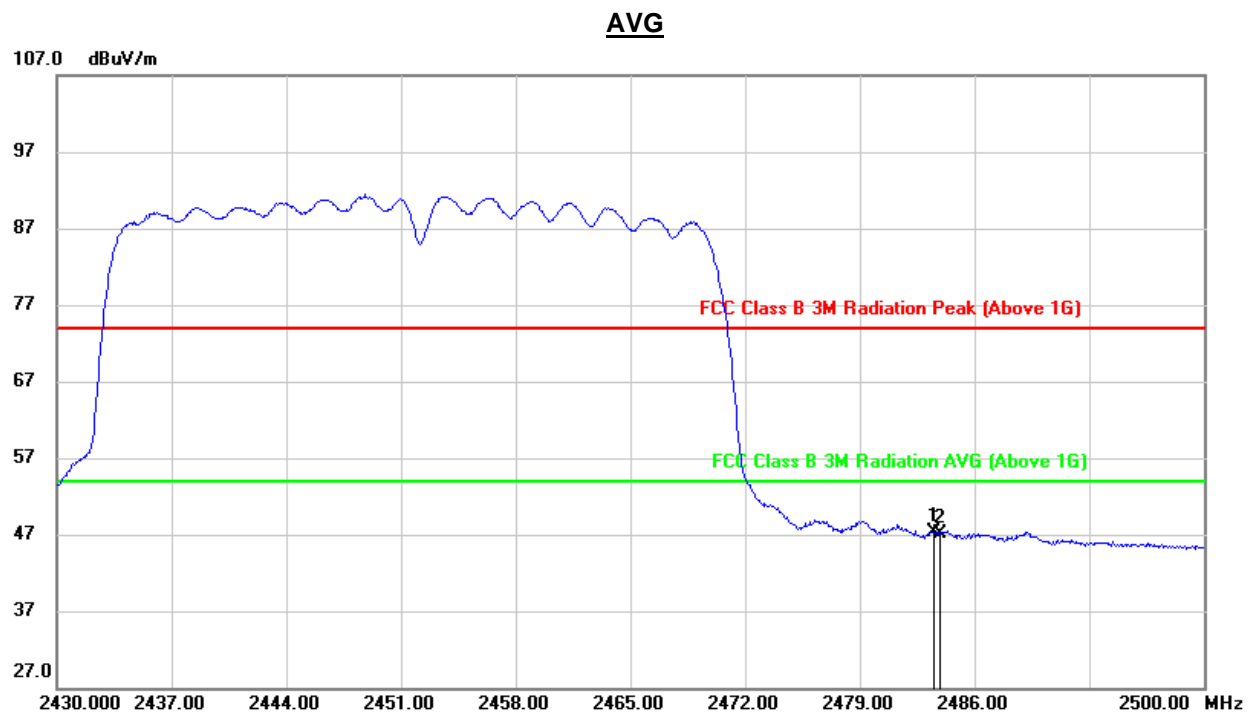

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2483.500 | 13.74 | 33.58 | 47.32 | 54.00 | -6.68 | AVG |
| 2 | 2483.900 | 13.54 | 33.58 | 47.12 | 54.00 | -6.88 | AVG |


- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

9.2. SPURIOUS EMISSIONS (3~18GHz)

9.2.1. 802.11b SISO MODE

1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

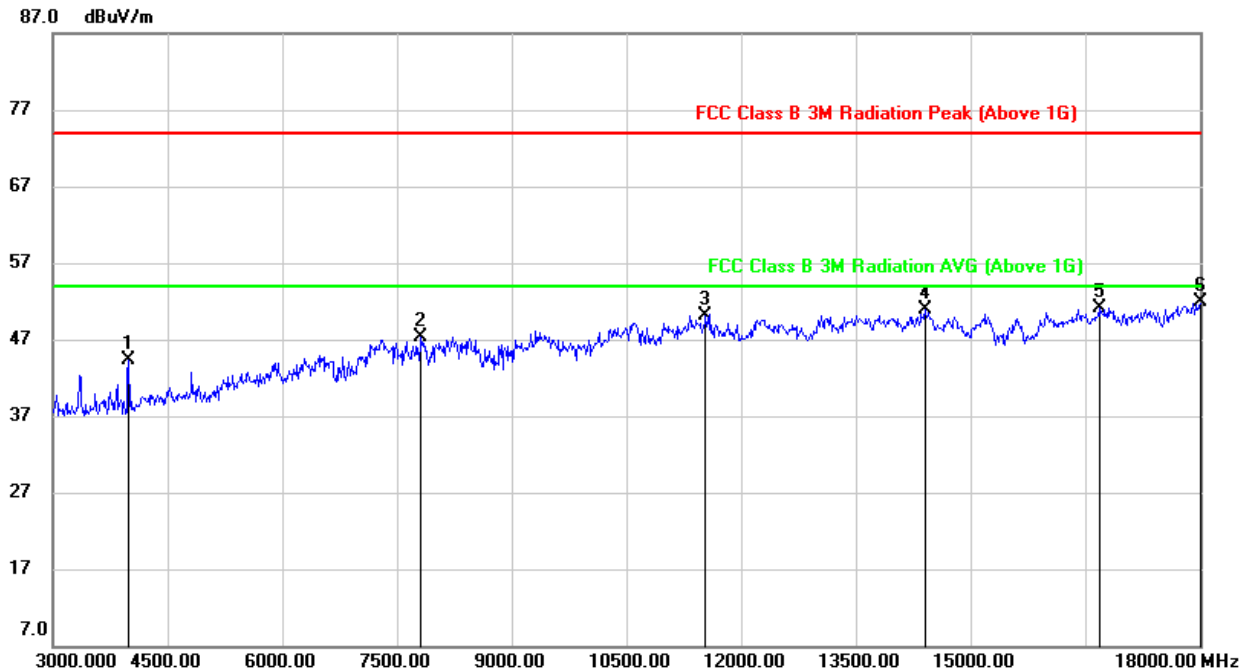


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 3990.000 | 47.23 | -2.95 | 44.28 | 74.00 | -29.72 | peak |
| 2 | 7815.000 | 38.52 | 8.81 | 47.33 | 74.00 | -26.67 | peak |
| 3 | 11535.000 | 35.94 | 14.10 | 50.04 | 74.00 | -23.96 | peak |
| 4 | 14400.000 | 34.38 | 16.43 | 50.81 | 74.00 | -23.19 | peak |
| 5 | 16680.000 | 31.45 | 19.74 | 51.19 | 74.00 | -22.81 | peak |
| 6 | 18000.000 | 28.71 | 23.27 | 51.98 | 74.00 | -22.02 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

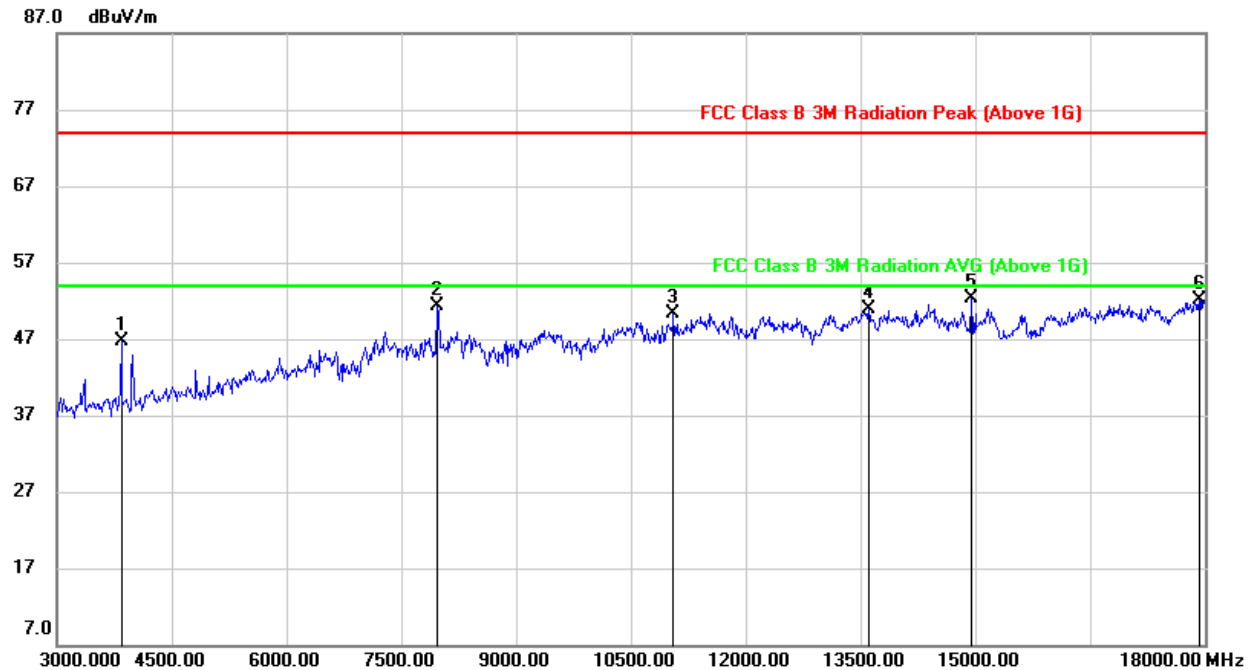


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3840.000 | 49.82 | -3.07 | 46.75 | 74.00 | -27.25 | peak |
| 2 | 7965.000 | 43.04 | 8.26 | 51.30 | 74.00 | -22.70 | peak |
| 3 | 11055.000 | 37.04 | 13.26 | 50.30 | 74.00 | -23.70 | peak |
| 4 | 13605.000 | 34.81 | 16.07 | 50.88 | 74.00 | -23.12 | peak |
| 5 | 14955.000 | 36.82 | 15.49 | 52.31 | 74.00 | -21.69 | peak |
| 6 | 17925.000 | 29.01 | 23.18 | 52.19 | 74.00 | -21.81 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

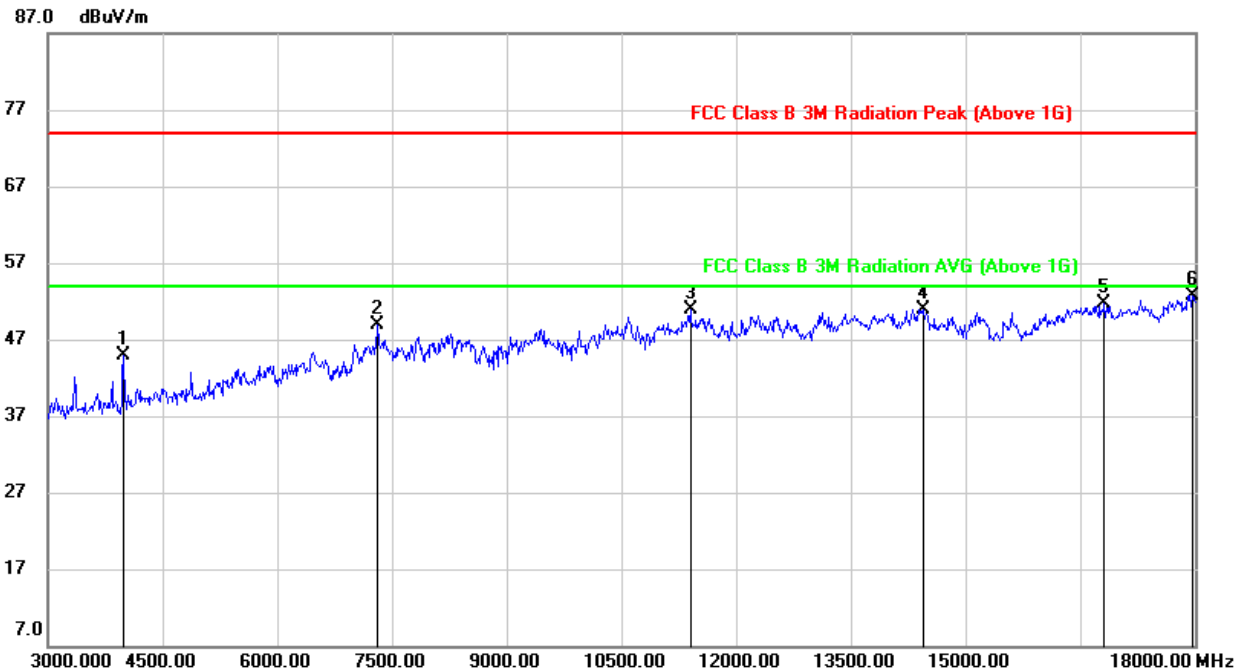**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 47.83 | -2.95 | 44.88 | 74.00 | -29.12 | peak |
| 2 | 7305.000 | 41.74 | 7.15 | 48.89 | 74.00 | -25.11 | peak |
| 3 | 11400.000 | 37.58 | 13.36 | 50.94 | 74.00 | -23.06 | peak |
| 4 | 14445.000 | 34.54 | 16.37 | 50.91 | 74.00 | -23.09 | peak |
| 5 | 16815.000 | 31.73 | 19.92 | 51.65 | 74.00 | -22.35 | peak |
| 6 | 17970.000 | 29.49 | 23.24 | 52.73 | 74.00 | -21.27 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

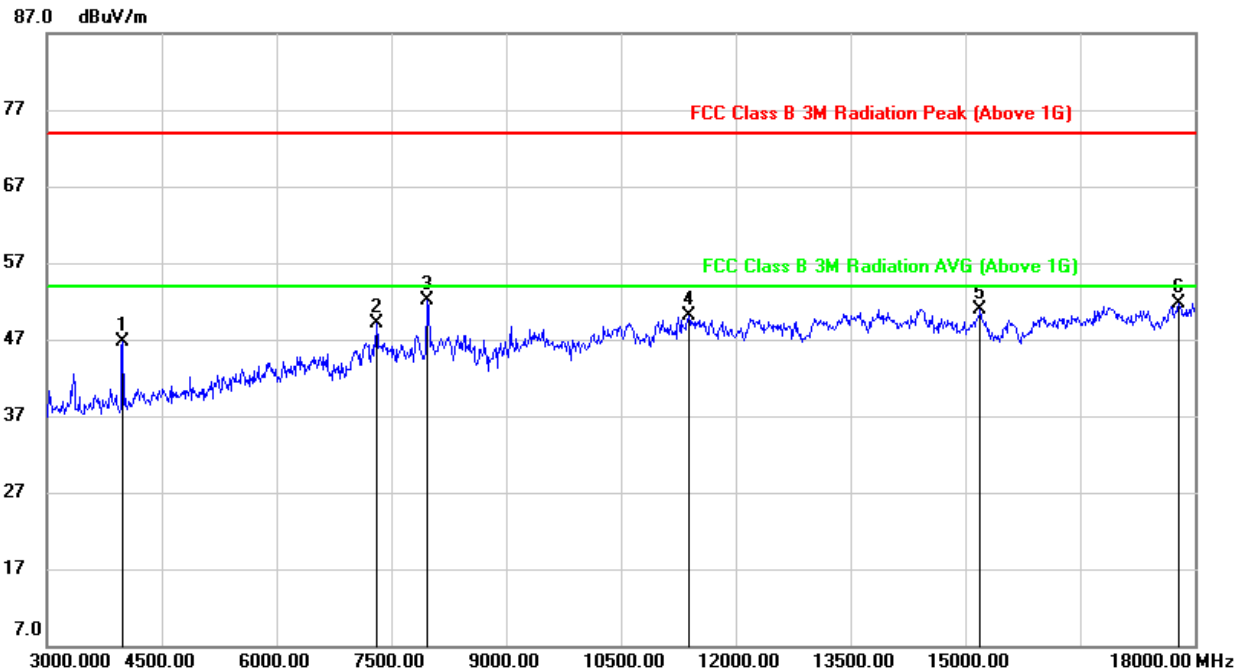
**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 49.67 | -2.95 | 46.72 | 74.00 | -27.28 | peak |
| 2 | 7305.000 | 42.04 | 7.15 | 49.19 | 74.00 | -24.81 | peak |
| 3 | 7965.000 | 43.92 | 8.26 | 52.18 | 74.00 | -21.82 | peak |
| 4 | 11385.000 | 36.83 | 13.29 | 50.12 | 74.00 | -23.88 | peak |
| 5 | 15195.000 | 35.44 | 15.56 | 51.00 | 74.00 | -23.00 | peak |
| 6 | 17790.000 | 28.59 | 23.12 | 51.71 | 74.00 | -22.29 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

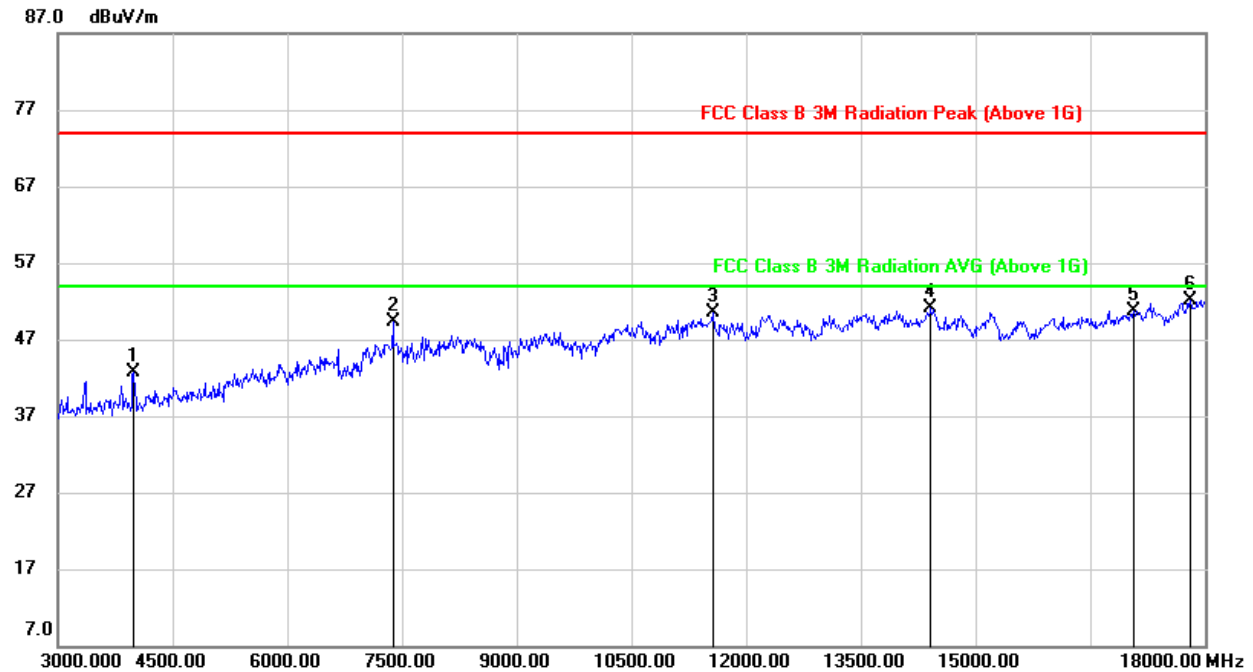

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 45.61 | -2.95 | 42.66 | 74.00 | -31.34 | peak |
| 2 | 7380.000 | 41.80 | 7.42 | 49.22 | 74.00 | -24.78 | peak |
| 3 | 11565.000 | 36.32 | 14.14 | 50.46 | 74.00 | -23.54 | peak |
| 4 | 14415.000 | 34.69 | 16.41 | 51.10 | 74.00 | -22.90 | peak |
| 5 | 17070.000 | 30.13 | 20.65 | 50.78 | 74.00 | -23.22 | peak |
| 6 | 17805.000 | 28.89 | 23.22 | 52.11 | 74.00 | -21.89 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

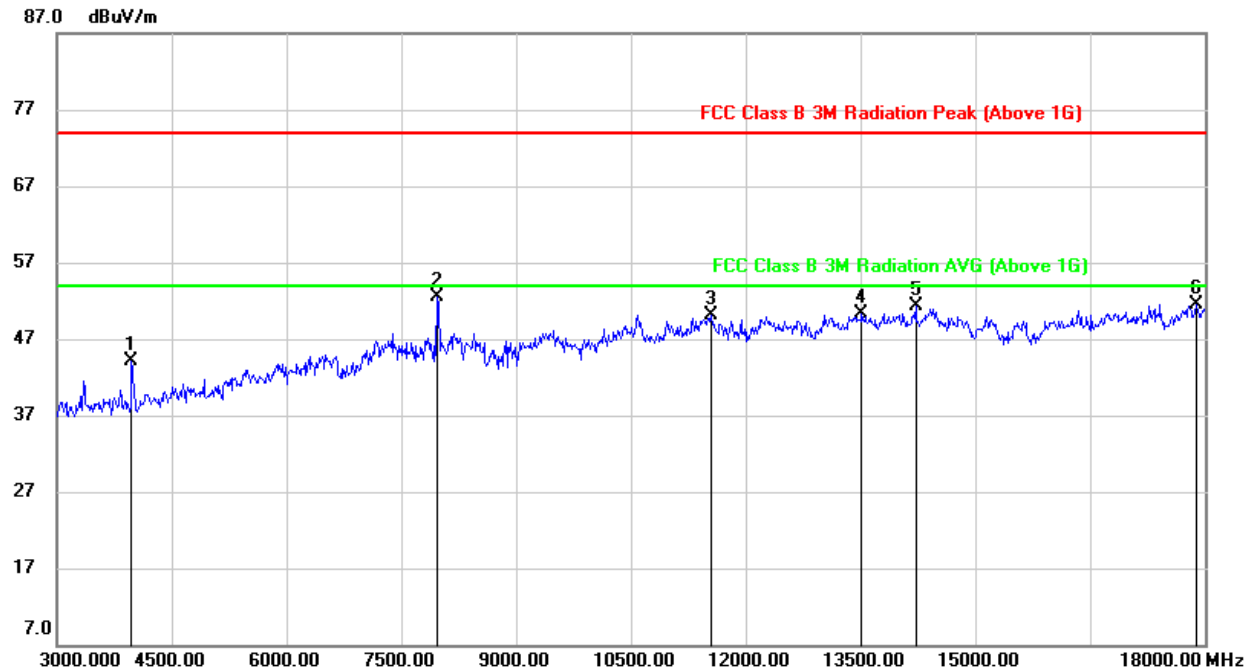**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.17 | -2.98 | 44.19 | 74.00 | -29.81 | peak |
| 2 | 7965.000 | 44.25 | 8.26 | 52.51 | 74.00 | -21.49 | peak |
| 3 | 11550.000 | 35.97 | 14.13 | 50.10 | 74.00 | -23.90 | peak |
| 4 | 13515.000 | 34.56 | 15.72 | 50.28 | 74.00 | -23.72 | peak |
| 5 | 14220.000 | 34.89 | 16.45 | 51.34 | 74.00 | -22.66 | peak |
| 6 | 17880.000 | 28.40 | 23.18 | 51.58 | 74.00 | -22.42 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The High Pass filter loss factor already add into the correct factor.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.2.2. 802.11g SISO MODE


1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

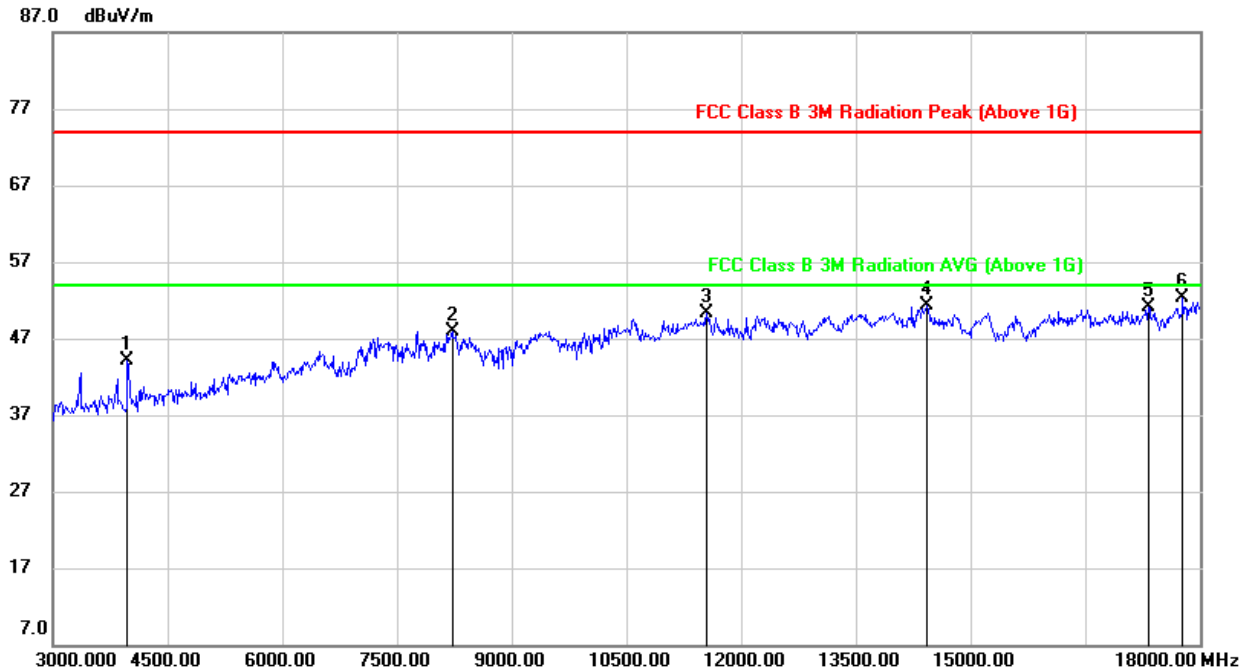

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.09 | -2.98 | 44.11 | 74.00 | -29.89 | peak |
| 2 | 8220.000 | 38.54 | 9.40 | 47.94 | 74.00 | -26.06 | peak |
| 3 | 11550.000 | 36.11 | 14.13 | 50.24 | 74.00 | -23.76 | peak |
| 4 | 14430.000 | 34.85 | 16.39 | 51.24 | 74.00 | -22.76 | peak |
| 5 | 17325.000 | 29.39 | 21.80 | 51.19 | 74.00 | -22.81 | peak |
| 6 | 17775.000 | 29.33 | 22.97 | 52.30 | 74.00 | -21.70 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

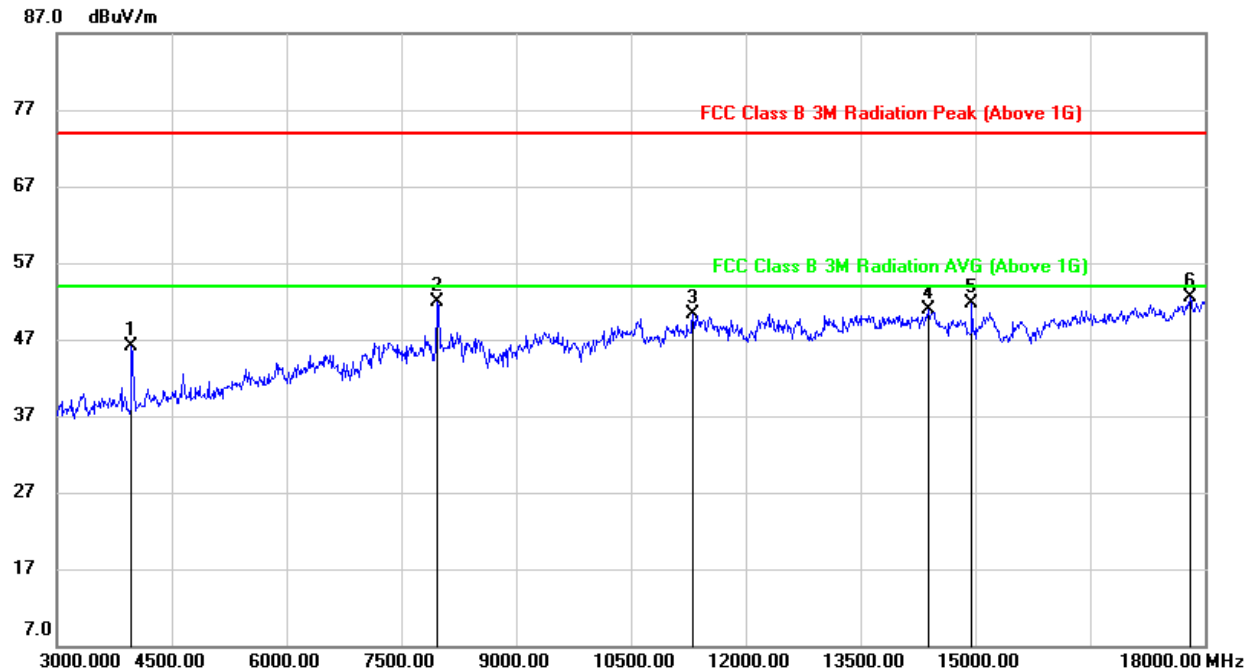**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 49.11 | -2.98 | 46.13 | 74.00 | -27.87 | peak |
| 2 | 7965.000 | 43.69 | 8.26 | 51.95 | 74.00 | -22.05 | peak |
| 3 | 11310.000 | 37.36 | 12.94 | 50.30 | 74.00 | -23.70 | peak |
| 4 | 14385.000 | 34.49 | 16.41 | 50.90 | 74.00 | -23.10 | peak |
| 5 | 14955.000 | 36.12 | 15.49 | 51.61 | 74.00 | -22.39 | peak |
| 6 | 17805.000 | 29.25 | 23.22 | 52.47 | 74.00 | -21.53 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The High Pass filter loss factor already add into the correct factor.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

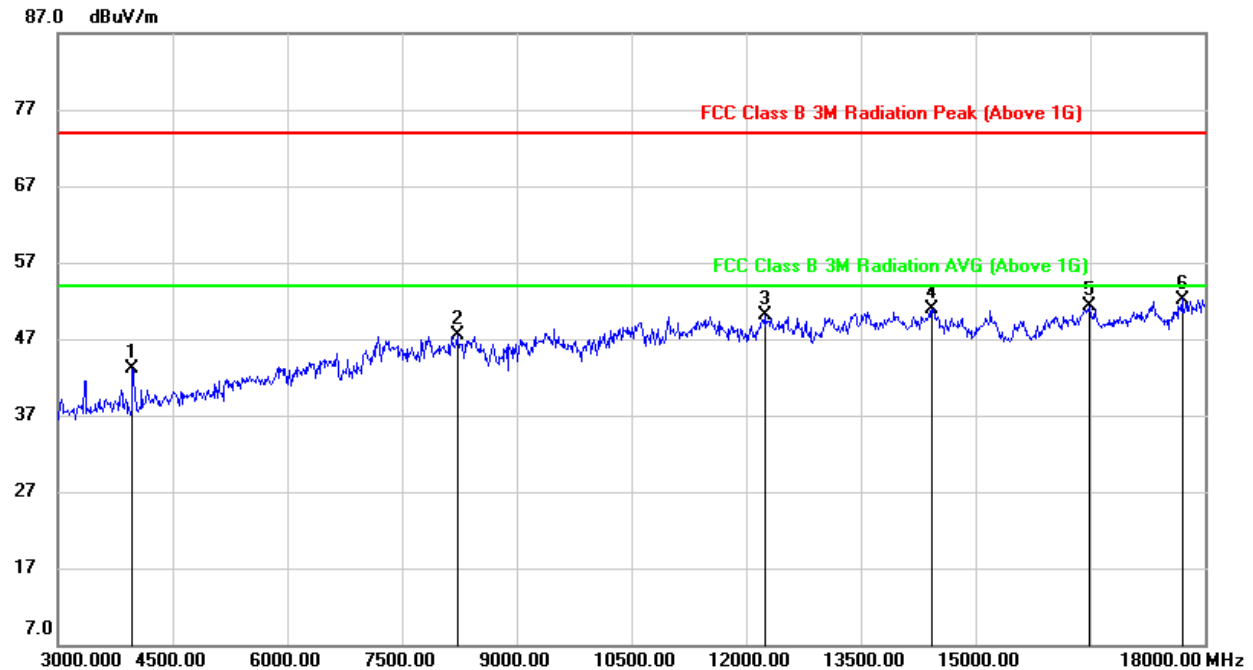**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 46.16 | -2.98 | 43.18 | 74.00 | -30.82 | peak |
| 2 | 8220.000 | 38.16 | 9.40 | 47.56 | 74.00 | -26.44 | peak |
| 3 | 12240.000 | 35.77 | 14.31 | 50.08 | 74.00 | -23.92 | peak |
| 4 | 14430.000 | 34.48 | 16.39 | 50.87 | 74.00 | -23.13 | peak |
| 5 | 16485.000 | 32.41 | 18.84 | 51.25 | 74.00 | -22.75 | peak |
| 6 | 17700.000 | 29.96 | 22.24 | 52.20 | 74.00 | -21.80 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The High Pass filter loss factor already add into the correct factor.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

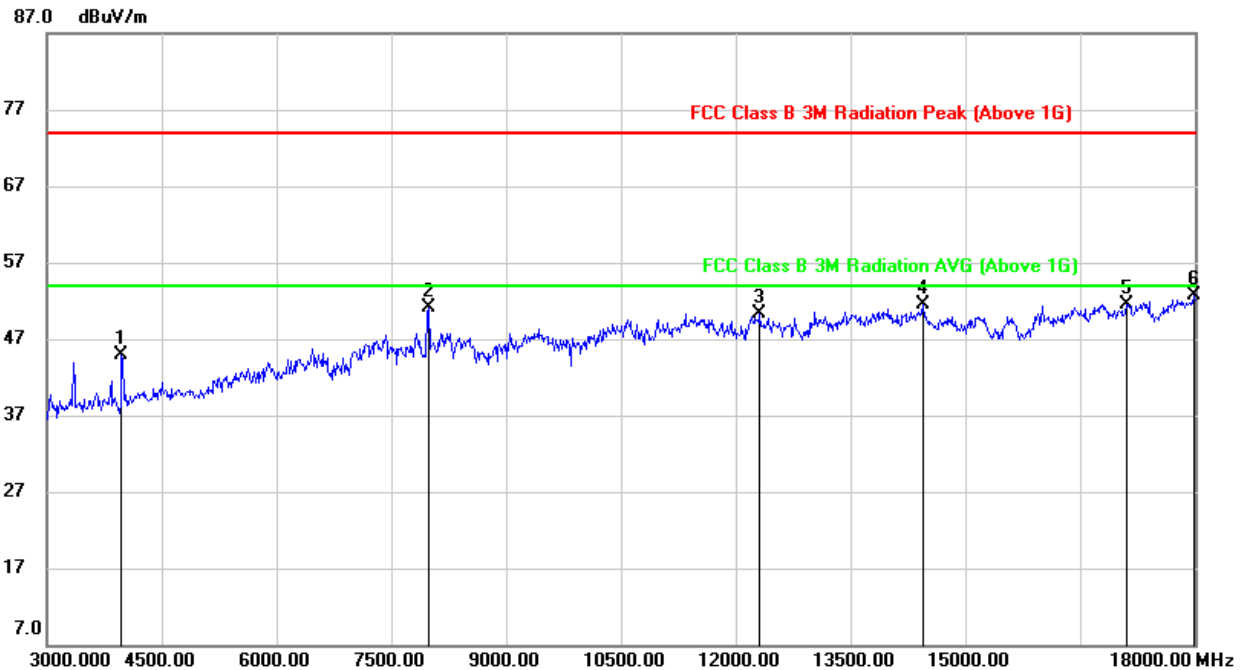**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.88 | -2.98 | 44.90 | 74.00 | -29.10 | peak |
| 2 | 7995.000 | 42.92 | 8.16 | 51.08 | 74.00 | -22.92 | peak |
| 3 | 12315.000 | 35.98 | 14.37 | 50.35 | 74.00 | -23.65 | peak |
| 4 | 14445.000 | 35.18 | 16.37 | 51.55 | 74.00 | -22.45 | peak |
| 5 | 17100.000 | 30.68 | 20.78 | 51.46 | 74.00 | -22.54 | peak |
| 6 | 17985.000 | 29.49 | 23.25 | 52.74 | 74.00 | -21.26 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

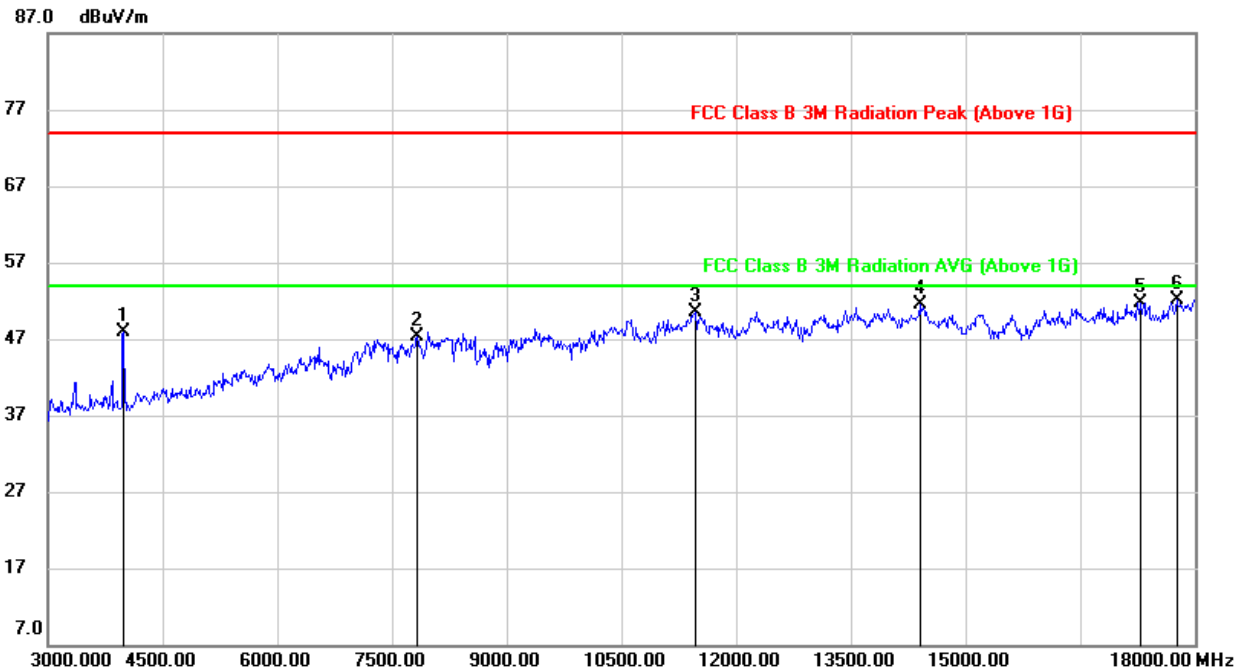**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 3990.000 | 50.78 | -2.95 | 47.83 | 74.00 | -26.17 | peak |
| 2 | 7830.000 | 38.47 | 8.75 | 47.22 | 74.00 | -26.78 | peak |
| 3 | 11475.000 | 36.57 | 13.90 | 50.47 | 74.00 | -23.53 | peak |
| 4 | 14400.000 | 34.98 | 16.43 | 51.41 | 74.00 | -22.59 | peak |
| 5 | 17295.000 | 29.82 | 21.86 | 51.68 | 74.00 | -22.32 | peak |
| 6 | 17760.000 | 29.19 | 22.83 | 52.02 | 74.00 | -21.98 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

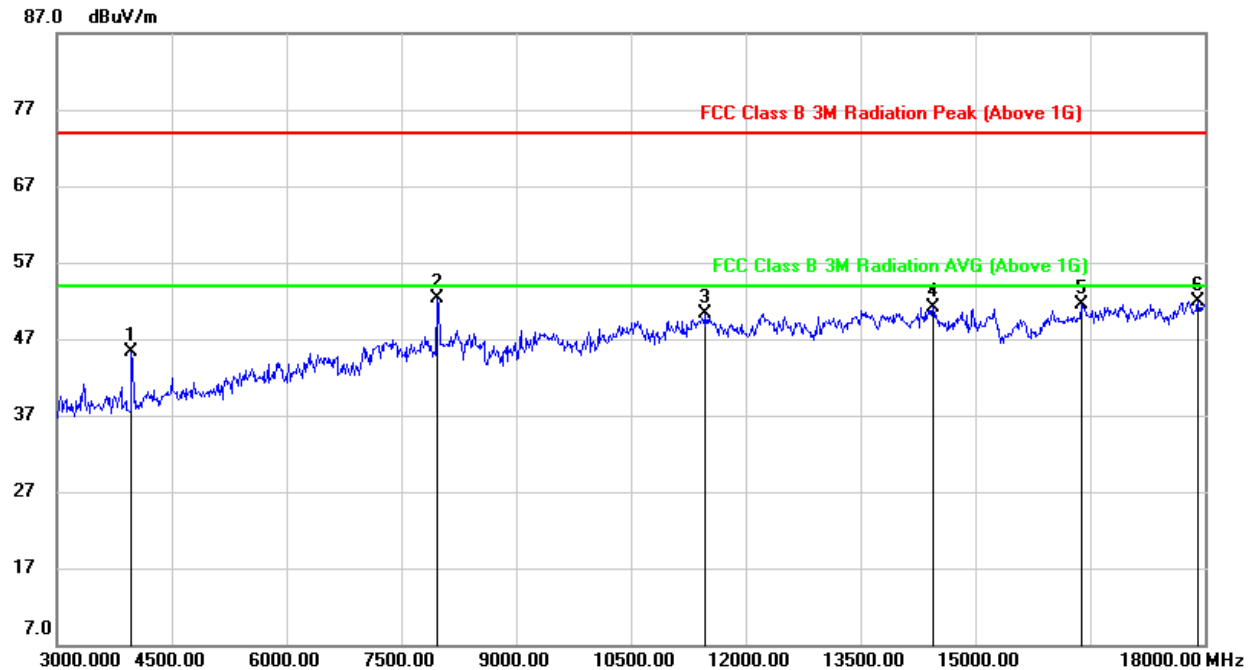**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 48.31 | -2.98 | 45.33 | 74.00 | -28.67 | peak |
| 2 | 7965.000 | 44.06 | 8.26 | 52.32 | 74.00 | -21.68 | peak |
| 3 | 11475.000 | 36.31 | 13.90 | 50.21 | 74.00 | -23.79 | peak |
| 4 | 14445.000 | 34.83 | 16.37 | 51.20 | 74.00 | -22.80 | peak |
| 5 | 16380.000 | 33.01 | 18.47 | 51.48 | 74.00 | -22.52 | peak |
| 6 | 17910.000 | 28.75 | 23.17 | 51.92 | 74.00 | -22.08 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The High Pass filter loss factor already add into the correct factor.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.2.3. 802.11n HT20 MIMO MODE


2TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

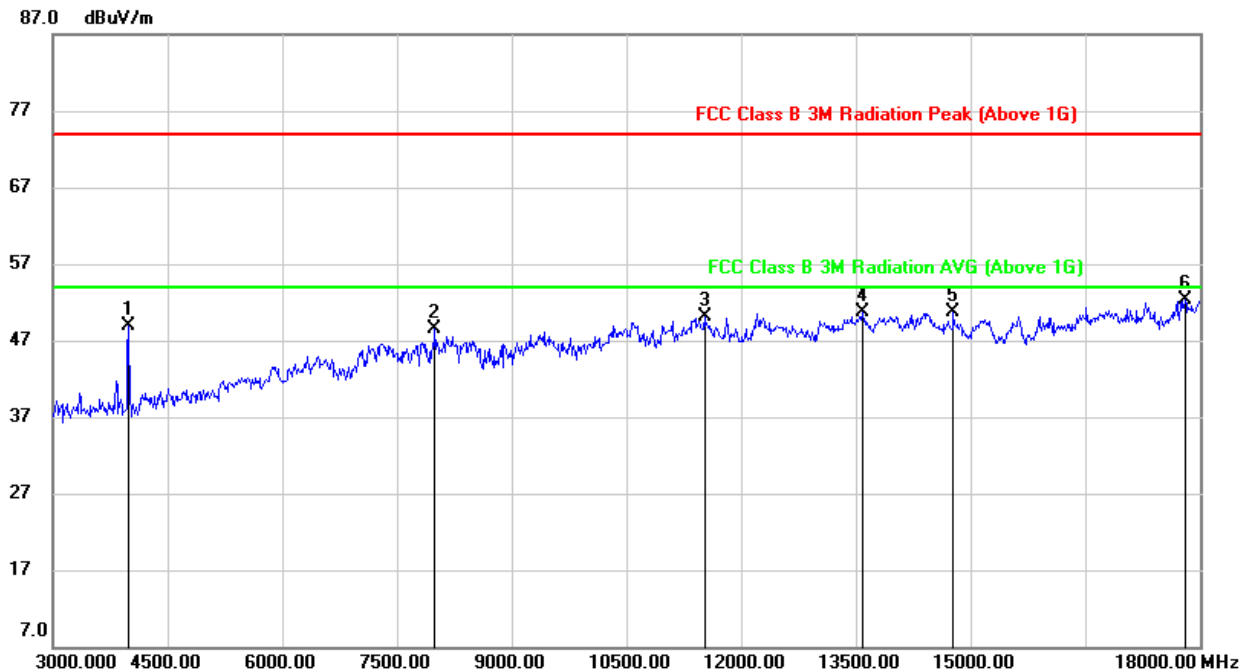

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 51.76 | -2.95 | 48.81 | 74.00 | -25.19 | peak |
| 2 | 7995.000 | 40.35 | 8.16 | 48.51 | 74.00 | -25.49 | peak |
| 3 | 11520.000 | 35.95 | 14.10 | 50.05 | 74.00 | -23.95 | peak |
| 4 | 13590.000 | 34.60 | 16.04 | 50.64 | 74.00 | -23.36 | peak |
| 5 | 14775.000 | 35.07 | 15.71 | 50.78 | 74.00 | -23.22 | peak |
| 6 | 17805.000 | 28.99 | 23.22 | 52.21 | 74.00 | -21.79 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

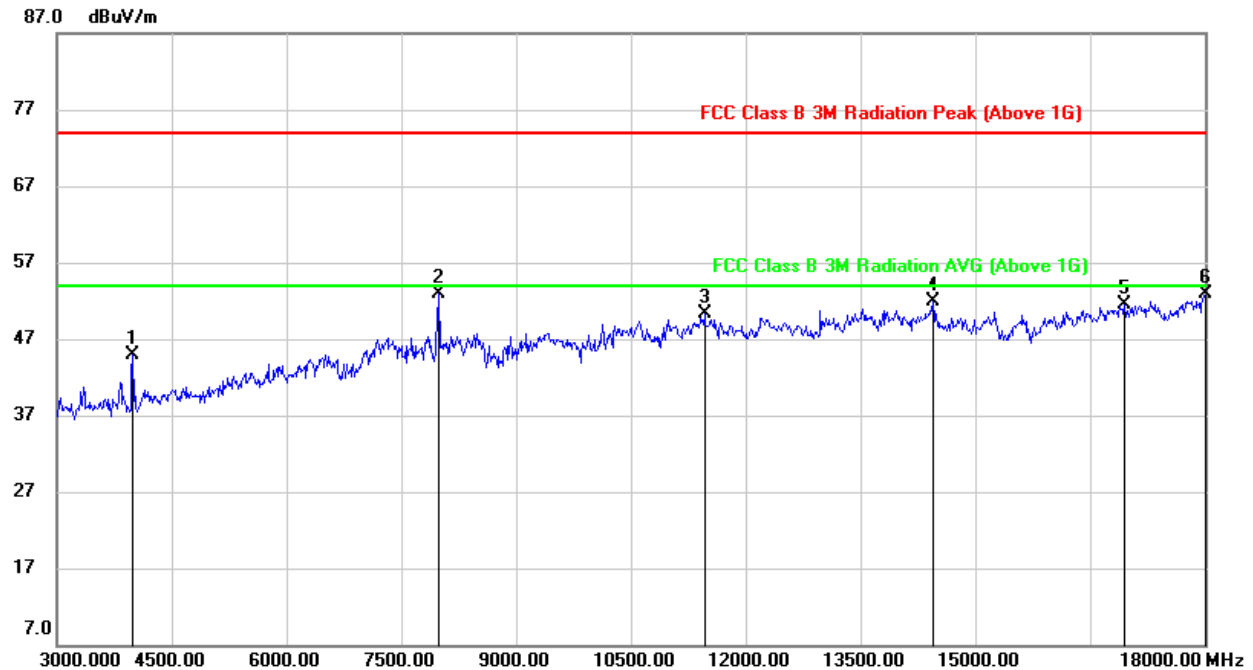**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 47.79 | -2.95 | 44.84 | 74.00 | -29.16 | peak |
| 2 | 7995.000 | 44.69 | 8.16 | 52.85 | 74.00 | -21.15 | peak |
| 3 | 11460.000 | 36.59 | 13.79 | 50.38 | 74.00 | -23.62 | peak |
| 4 | 14445.000 | 35.54 | 16.37 | 51.91 | 74.00 | -22.09 | peak |
| 5 | 16950.000 | 31.40 | 20.13 | 51.53 | 74.00 | -22.47 | peak |
| 6 | 18000.000 | 29.56 | 23.27 | 52.83 | 74.00 | -21.17 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The High Pass filter loss factor already add into the correct factor.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

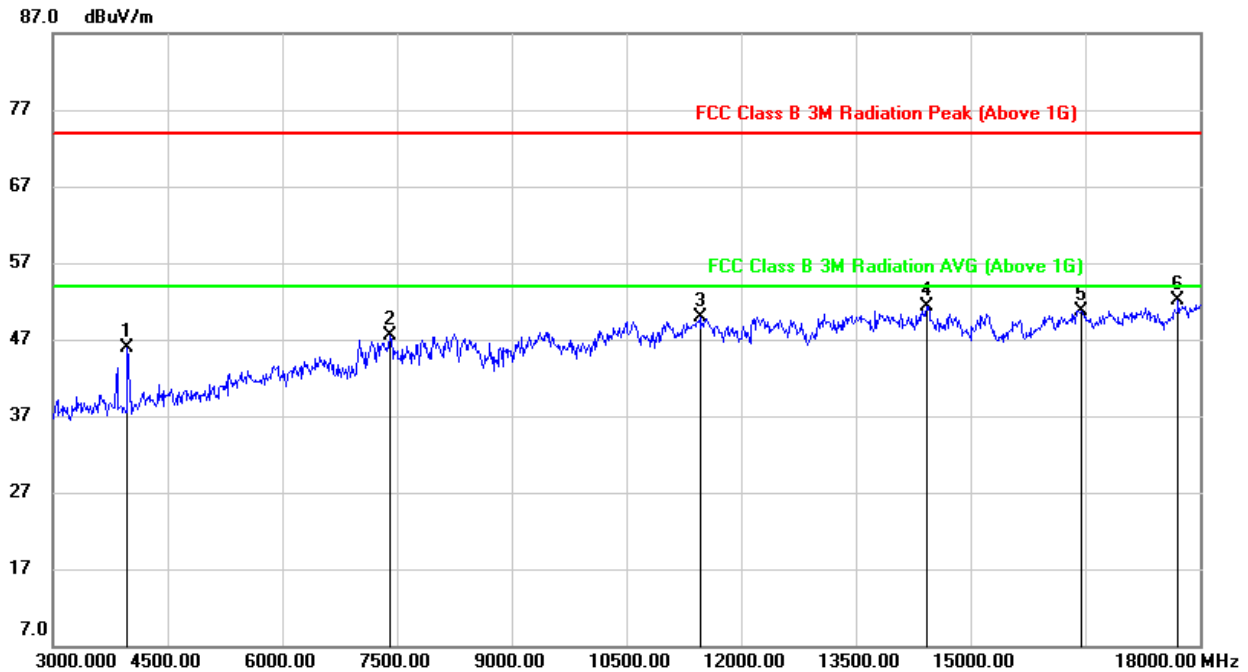**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 48.79 | -2.98 | 45.81 | 74.00 | -28.19 | peak |
| 2 | 7410.000 | 40.00 | 7.47 | 47.47 | 74.00 | -26.53 | peak |
| 3 | 11460.000 | 36.10 | 13.79 | 49.89 | 74.00 | -24.11 | peak |
| 4 | 14430.000 | 34.99 | 16.39 | 51.38 | 74.00 | -22.62 | peak |
| 5 | 16440.000 | 32.06 | 18.69 | 50.75 | 74.00 | -23.25 | peak |
| 6 | 17715.000 | 29.62 | 22.39 | 52.01 | 74.00 | -21.99 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

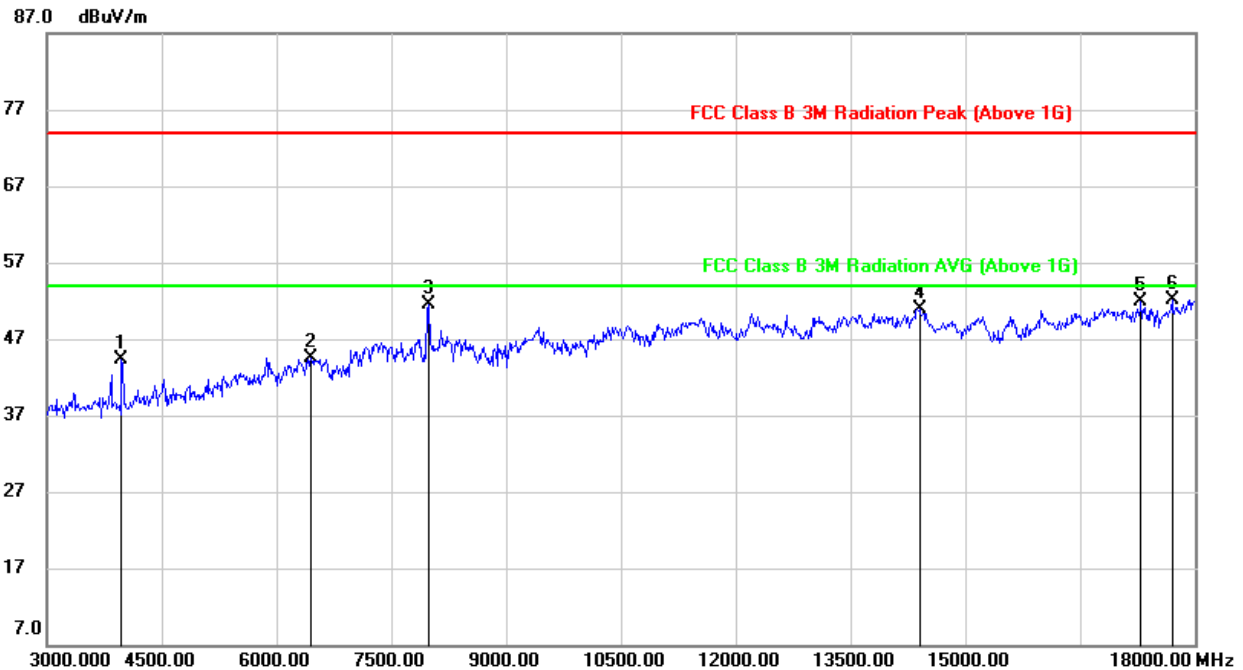**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.34 | -2.98 | 44.36 | 74.00 | -29.64 | peak |
| 2 | 6450.000 | 38.85 | 5.67 | 44.52 | 74.00 | -29.48 | peak |
| 3 | 7995.000 | 43.35 | 8.16 | 51.51 | 74.00 | -22.49 | peak |
| 4 | 14400.000 | 34.53 | 16.43 | 50.96 | 74.00 | -23.04 | peak |
| 5 | 17295.000 | 30.07 | 21.86 | 51.93 | 74.00 | -22.07 | peak |
| 6 | 17700.000 | 29.92 | 22.24 | 52.16 | 74.00 | -21.84 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

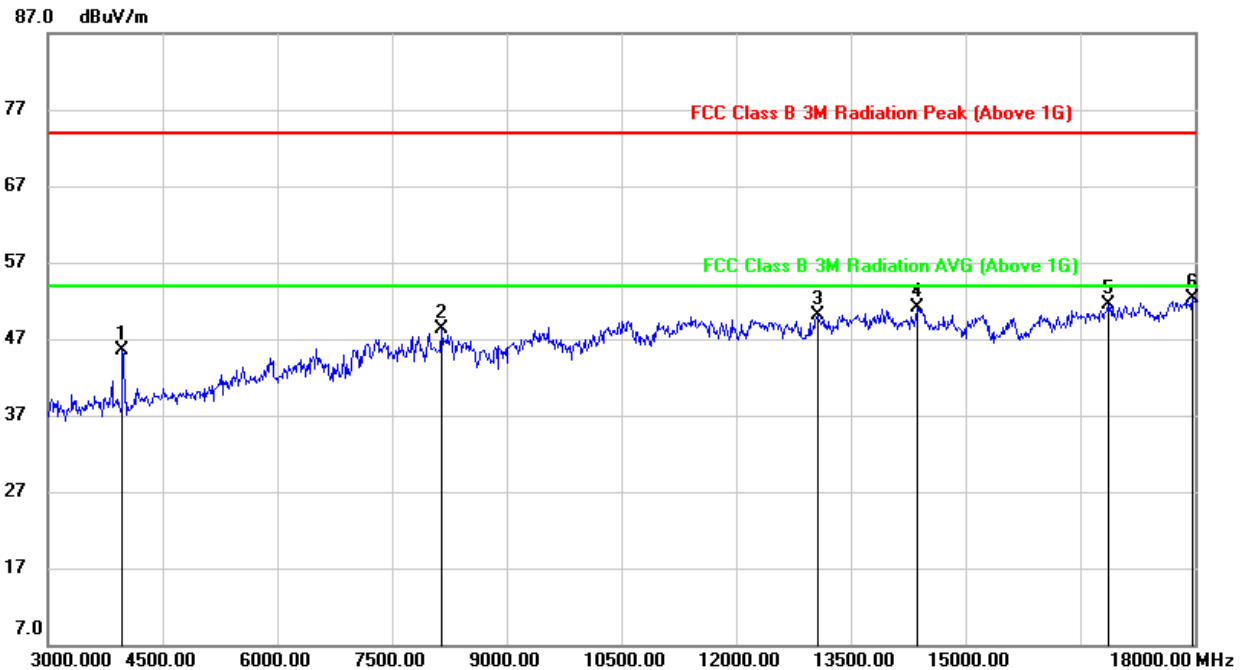**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 48.50 | -2.98 | 45.52 | 74.00 | -28.48 | peak |
| 2 | 8145.000 | 38.96 | 9.30 | 48.26 | 74.00 | -25.74 | peak |
| 3 | 13065.000 | 35.30 | 14.89 | 50.19 | 74.00 | -23.81 | peak |
| 4 | 14370.000 | 34.63 | 16.39 | 51.02 | 74.00 | -22.98 | peak |
| 5 | 16860.000 | 31.54 | 19.92 | 51.46 | 74.00 | -22.54 | peak |
| 6 | 17970.000 | 28.99 | 23.24 | 52.23 | 74.00 | -21.77 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

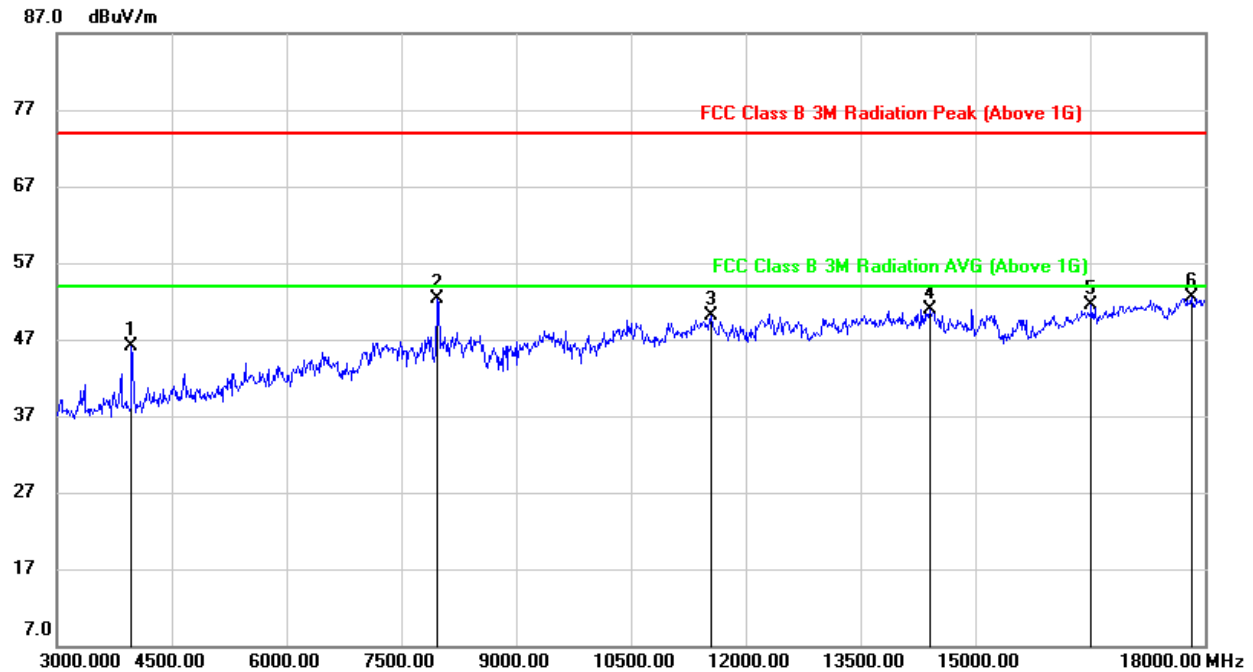**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 49.07 | -2.98 | 46.09 | 74.00 | -27.91 | peak |
| 2 | 7965.000 | 43.96 | 8.26 | 52.22 | 74.00 | -21.78 | peak |
| 3 | 11550.000 | 35.92 | 14.13 | 50.05 | 74.00 | -23.95 | peak |
| 4 | 14415.000 | 34.53 | 16.41 | 50.94 | 74.00 | -23.06 | peak |
| 5 | 16515.000 | 32.48 | 18.97 | 51.45 | 74.00 | -22.55 | peak |
| 6 | 17820.000 | 29.29 | 23.21 | 52.50 | 74.00 | -21.50 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The High Pass filter loss factor already add into the correct factor.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.2.4. 802.11n HT40 MIMO MODE


2TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

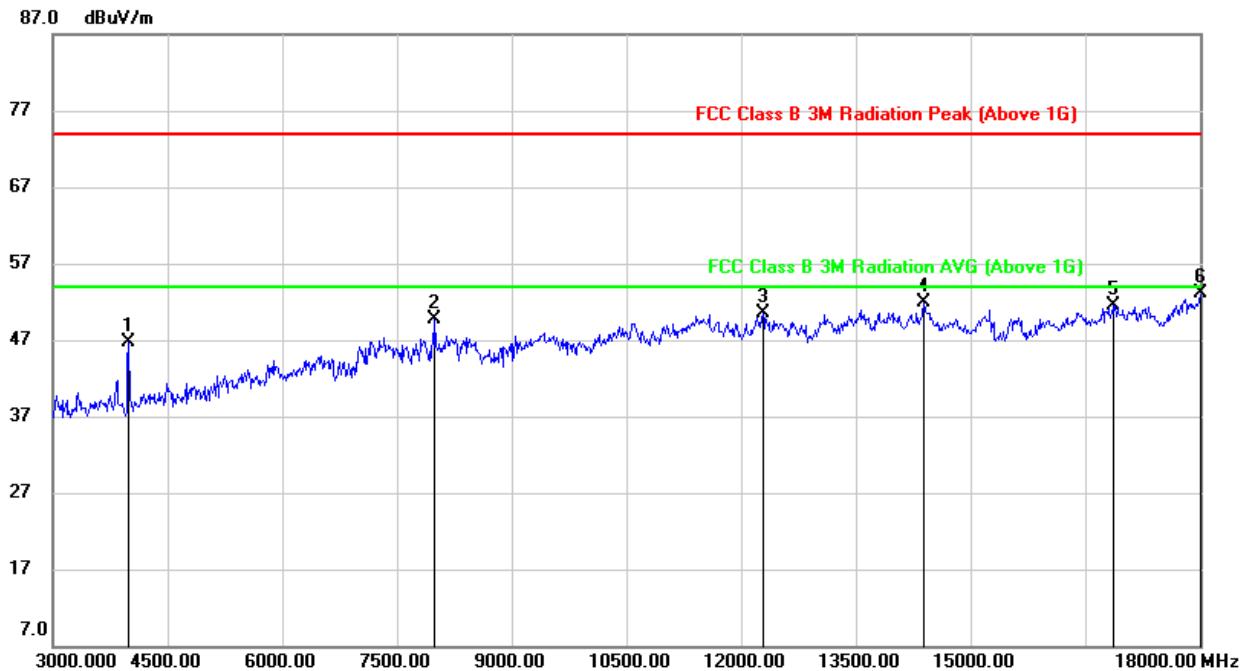


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 49.59 | -2.95 | 46.64 | 74.00 | -27.36 | peak |
| 2 | 7995.000 | 41.60 | 8.16 | 49.76 | 74.00 | -24.24 | peak |
| 3 | 12285.000 | 36.08 | 14.37 | 50.45 | 74.00 | -23.55 | peak |
| 4 | 14385.000 | 35.52 | 16.41 | 51.93 | 74.00 | -22.07 | peak |
| 5 | 16875.000 | 31.64 | 19.93 | 51.57 | 74.00 | -22.43 | peak |
| 6 | 18000.000 | 29.90 | 23.27 | 53.17 | 74.00 | -20.83 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

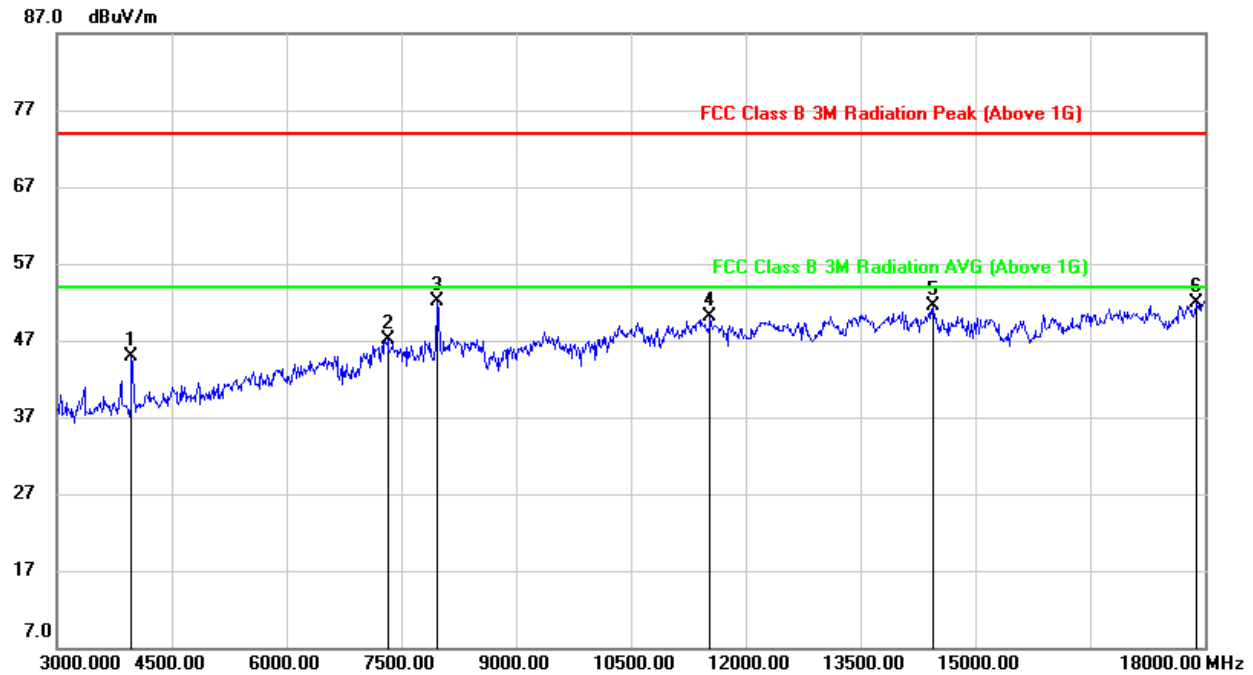**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.94 | -2.98 | 44.96 | 74.00 | -29.04 | peak |
| 2 | 7320.000 | 39.87 | 7.20 | 47.07 | 74.00 | -26.93 | peak |
| 3 | 7965.000 | 43.88 | 8.26 | 52.14 | 74.00 | -21.86 | peak |
| 4 | 11535.000 | 36.05 | 14.10 | 50.15 | 74.00 | -23.85 | peak |
| 5 | 14445.000 | 35.09 | 16.37 | 51.46 | 74.00 | -22.54 | peak |
| 6 | 17895.000 | 28.80 | 23.16 | 51.96 | 74.00 | -22.04 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

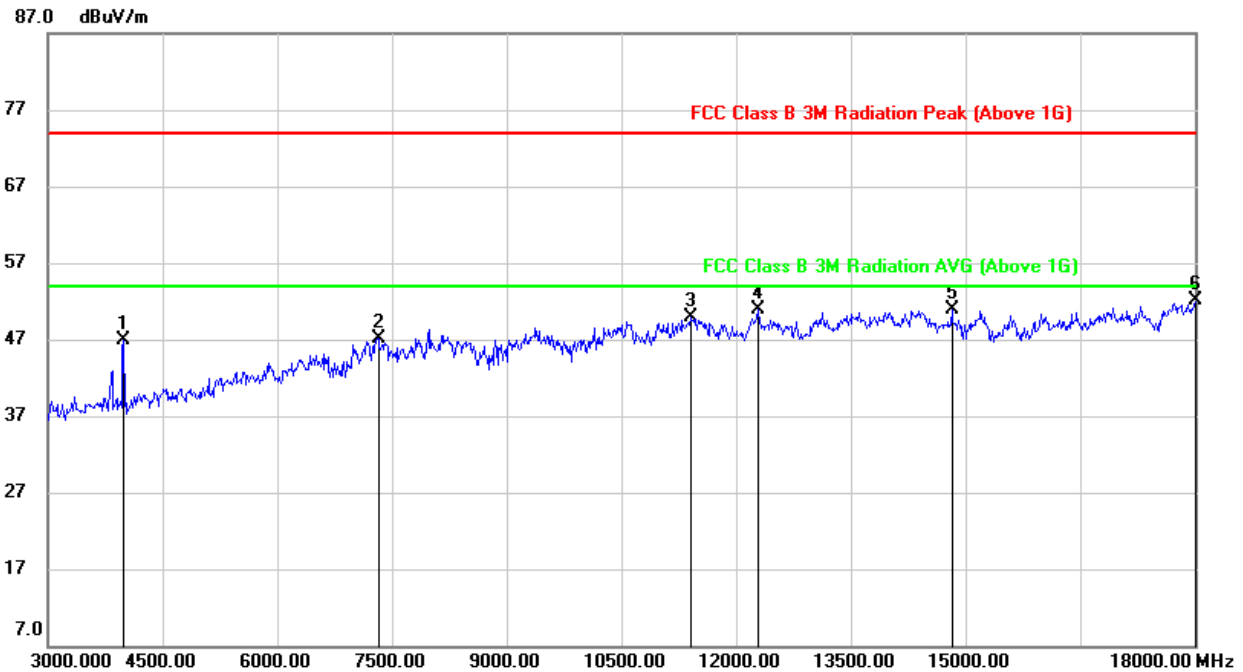**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3990.000 | 49.90 | -2.95 | 46.95 | 74.00 | -27.05 | peak |
| 2 | 7320.000 | 39.85 | 7.20 | 47.05 | 74.00 | -26.95 | peak |
| 3 | 11400.000 | 36.49 | 13.36 | 49.85 | 74.00 | -24.15 | peak |
| 4 | 12285.000 | 36.44 | 14.37 | 50.81 | 74.00 | -23.19 | peak |
| 5 | 14820.000 | 35.31 | 15.63 | 50.94 | 74.00 | -23.06 | peak |
| 6 | 18000.000 | 28.77 | 23.27 | 52.04 | 74.00 | -21.96 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

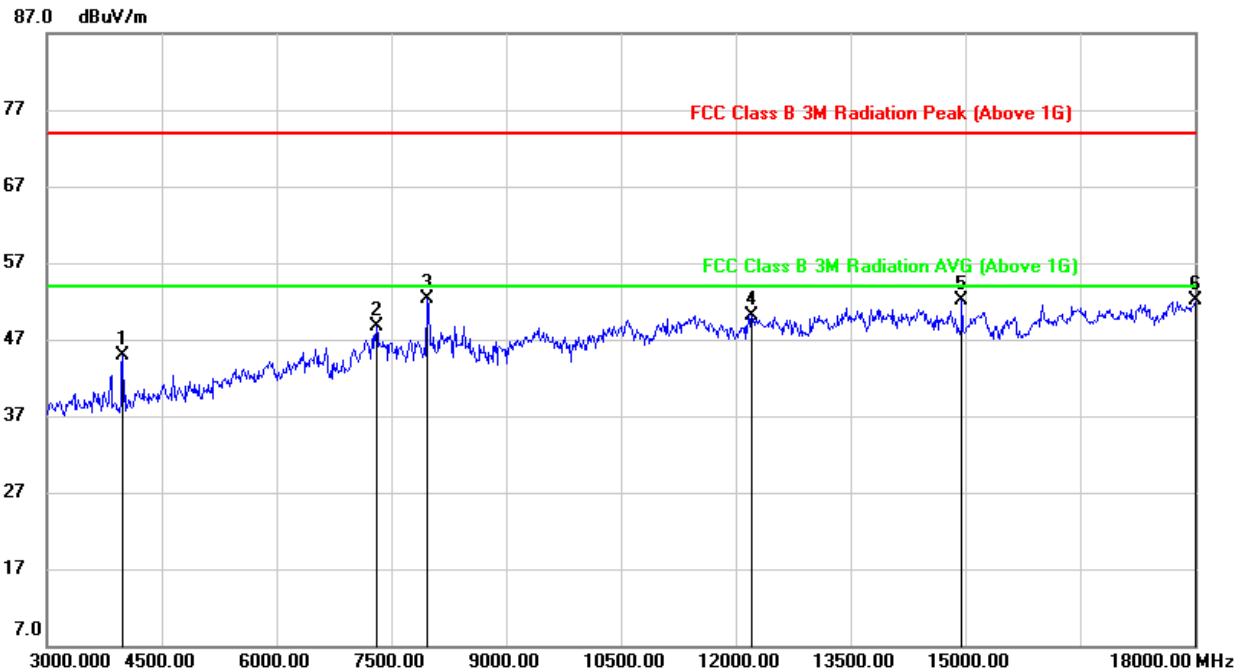**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 3990.000 | 47.81 | -2.95 | 44.86 | 74.00 | -29.14 | peak |
| 2 | 7305.000 | 41.55 | 7.15 | 48.70 | 74.00 | -25.30 | peak |
| 3 | 7965.000 | 44.11 | 8.26 | 52.37 | 74.00 | -21.63 | peak |
| 4 | 12210.000 | 35.90 | 14.25 | 50.15 | 74.00 | -23.85 | peak |
| 5 | 14955.000 | 36.60 | 15.49 | 52.09 | 74.00 | -21.91 | peak |
| 6 | 18000.000 | 28.86 | 23.27 | 52.13 | 74.00 | -21.87 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The High Pass filter loss factor already add into the correct factor.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

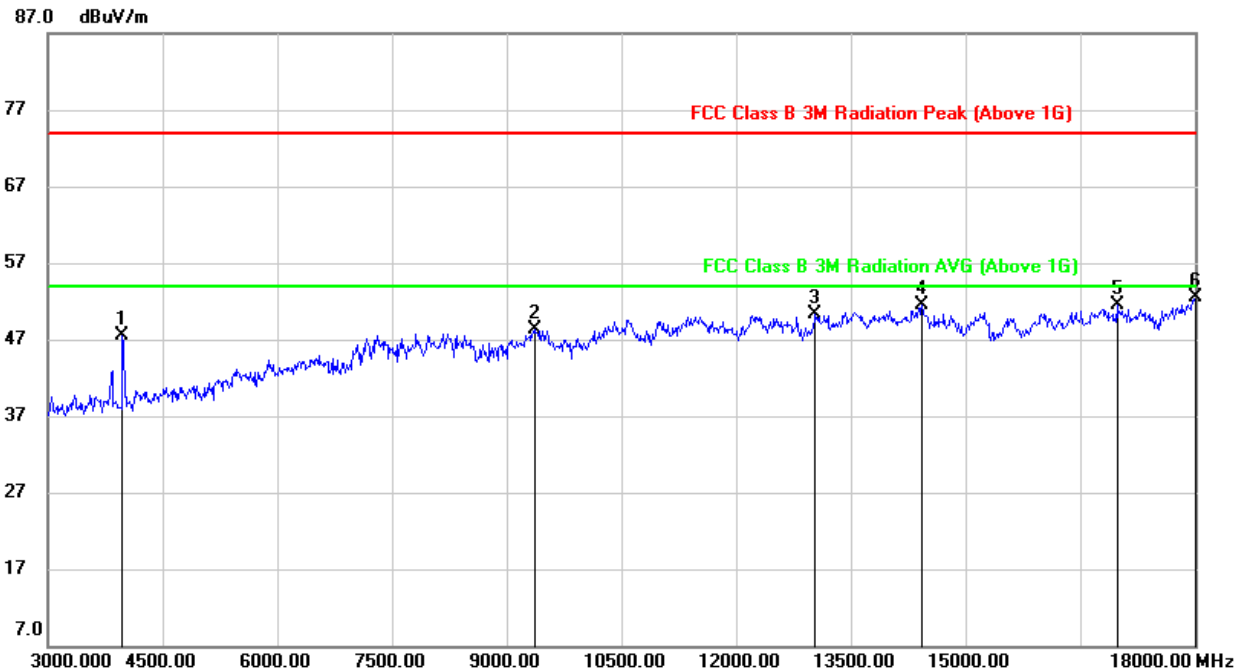**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 50.57 | -2.98 | 47.59 | 74.00 | -26.41 | peak |
| 2 | 9360.000 | 38.24 | 10.05 | 48.29 | 74.00 | -25.71 | peak |
| 3 | 13035.000 | 35.47 | 14.81 | 50.28 | 74.00 | -23.72 | peak |
| 4 | 14430.000 | 35.05 | 16.39 | 51.44 | 74.00 | -22.56 | peak |
| 5 | 16980.000 | 31.18 | 20.25 | 51.43 | 74.00 | -22.57 | peak |
| 6 | 18000.000 | 29.17 | 23.27 | 52.44 | 74.00 | -21.56 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

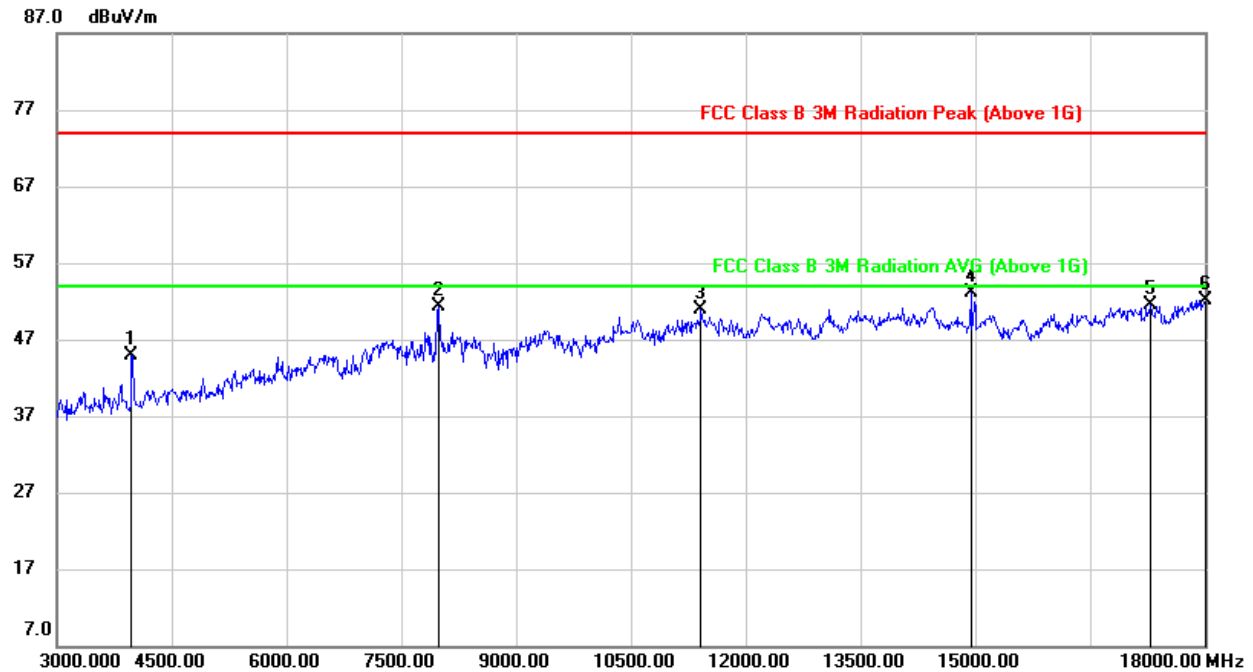**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3975.000 | 47.81 | -2.98 | 44.83 | 74.00 | -29.17 | peak |
| 2 | 7995.000 | 43.09 | 8.16 | 51.25 | 74.00 | -22.75 | peak |
| 3 | 11415.000 | 37.38 | 13.46 | 50.84 | 74.00 | -23.16 | peak |
| 4 | 14940.000 | 37.57 | 15.50 | 53.07 | 74.00 | -20.93 | peak |
| 5 | 17295.000 | 29.62 | 21.86 | 51.48 | 74.00 | -22.52 | peak |
| 6 | 18000.000 | 28.86 | 23.27 | 52.13 | 74.00 | -21.87 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The High Pass filter loss factor already add into the correct factor.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

9.3. SPURIOUS EMISSIONS (1~3GHz)

9.3.1. 802.11b SISO MODE

1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

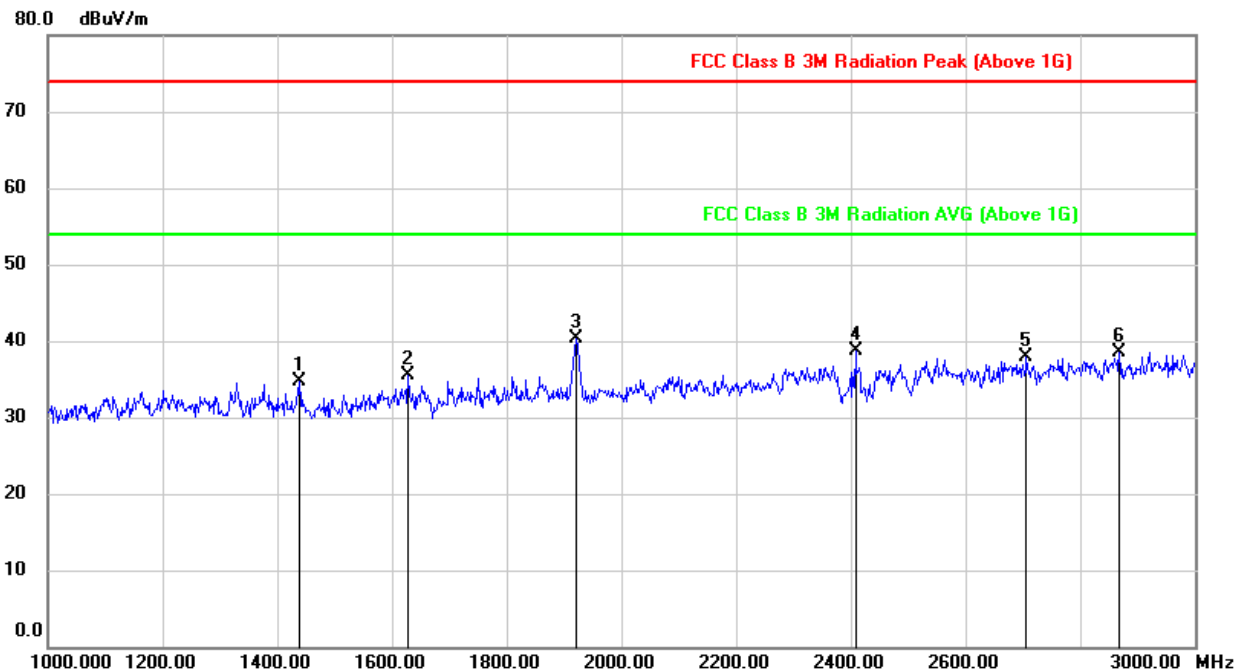

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1438.000 | 46.54 | -11.85 | 34.69 | 74.00 | -39.31 | peak |
| 2 | 1628.000 | 46.25 | -10.76 | 35.49 | 74.00 | -38.51 | peak |
| 3 | 1922.000 | 49.65 | -9.37 | 40.28 | 74.00 | -33.72 | peak |
| 4 | 2408.000 | 45.66 | -6.94 | 38.72 | 74.00 | -35.28 | peak |
| 5 | 2706.000 | 43.81 | -5.93 | 37.88 | 74.00 | -36.12 | peak |
| 6 | 2868.000 | 43.36 | -4.93 | 38.43 | 74.00 | -35.57 | peak |


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The Band Reject filter loss factor already add into the correct factor.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

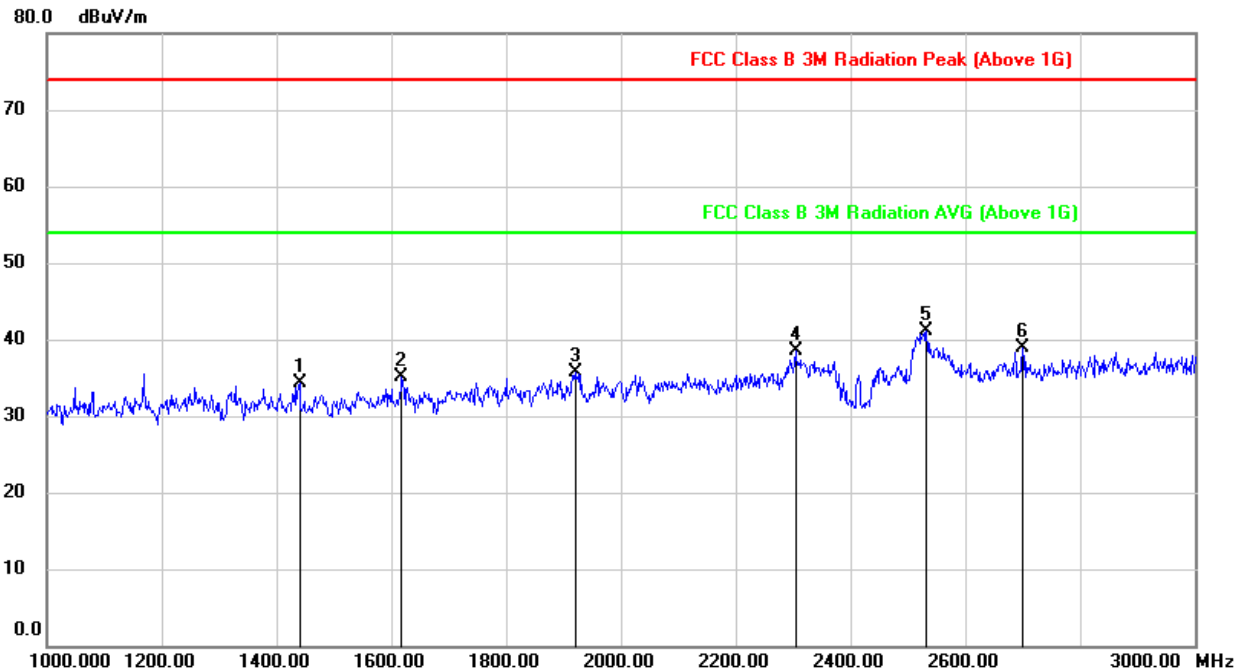**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1440.000 | 46.09 | -11.85 | 34.24 | 74.00 | -39.76 | peak |
| 2 | 1618.000 | 45.90 | -10.79 | 35.11 | 74.00 | -38.89 | peak |
| 3 | 1920.000 | 45.11 | -9.36 | 35.75 | 74.00 | -38.25 | peak |
| 4 | 2304.000 | 45.93 | -7.45 | 38.48 | 74.00 | -35.52 | peak |
| 5 | 2532.000 | 47.41 | -6.29 | 41.12 | 74.00 | -32.88 | peak |
| 6 | 2700.000 | 44.95 | -5.98 | 38.97 | 74.00 | -35.03 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

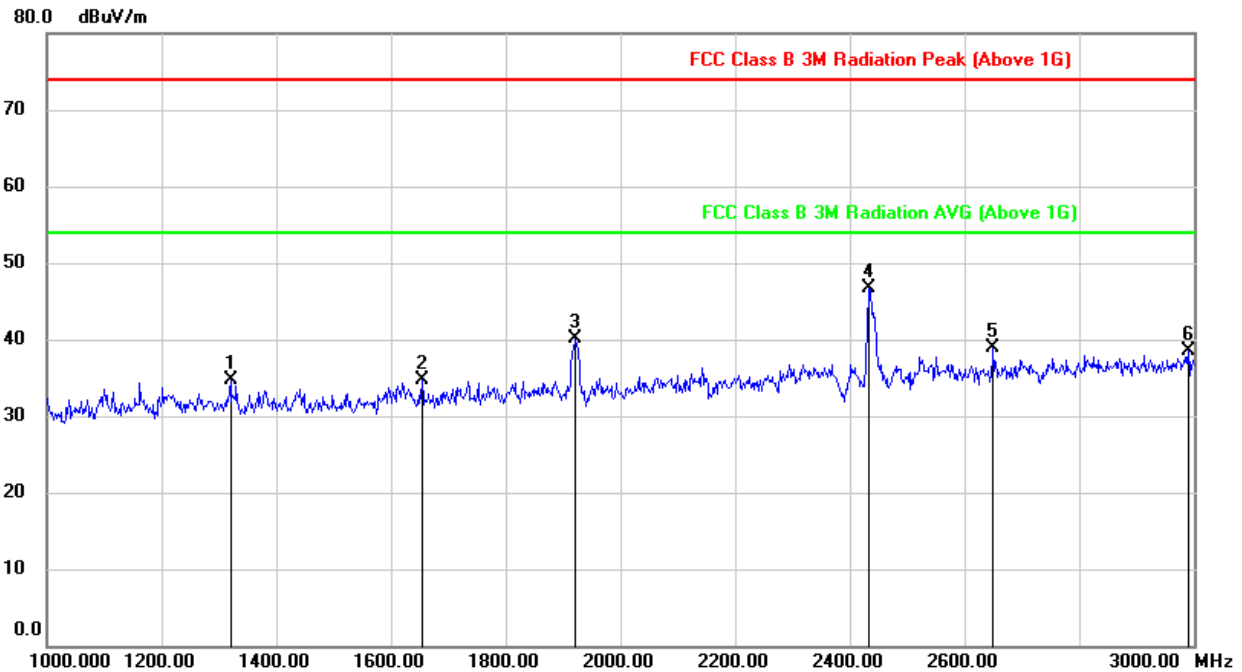
**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1320.000 | 46.62 | -11.86 | 34.76 | 74.00 | -39.24 | peak |
| 2 | 1654.000 | 45.43 | -10.71 | 34.72 | 74.00 | -39.28 | peak |
| 3 | 1922.000 | 49.53 | -9.37 | 40.16 | 74.00 | -33.84 | peak |
| 4 | 2434.000 | 53.41 | -6.72 | 46.69 | 74.00 | -27.31 | peak |
| 5 | 2650.000 | 45.26 | -6.29 | 38.97 | 74.00 | -35.03 | peak |
| 6 | 2990.000 | 42.87 | -4.37 | 38.50 | 74.00 | -35.50 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

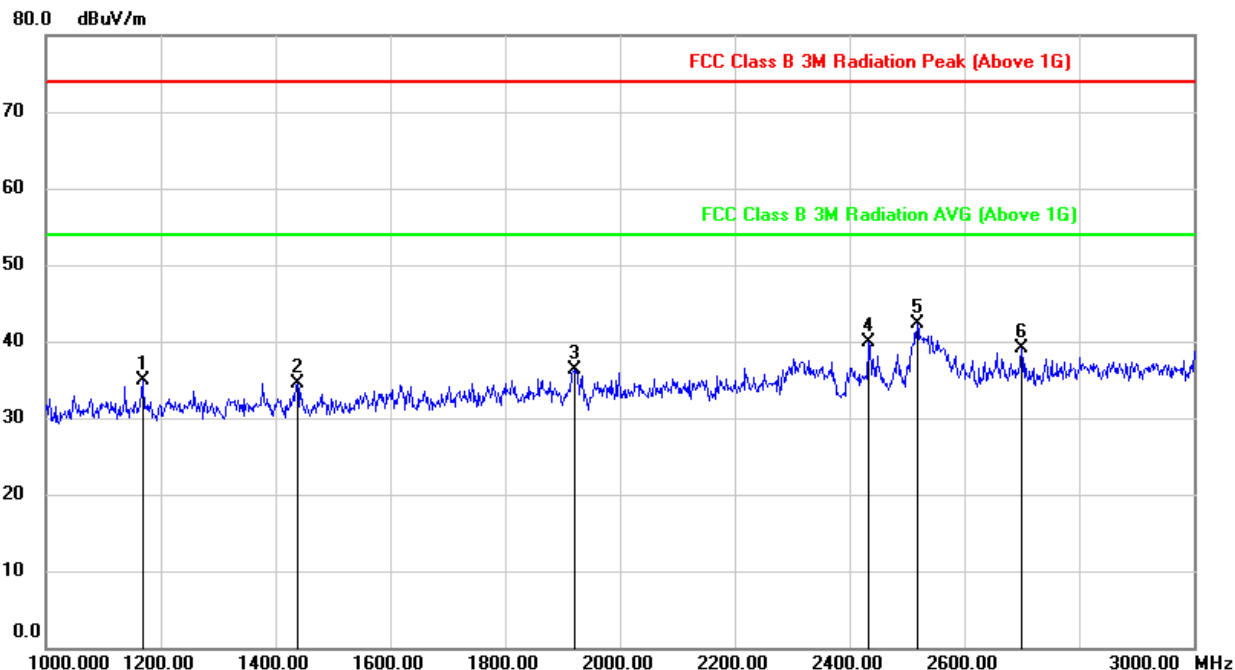


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1168.000 | 47.38 | -12.51 | 34.87 | 74.00 | -39.13 | peak |
| 2 | 1438.000 | 46.38 | -11.85 | 34.53 | 74.00 | -39.47 | peak |
| 3 | 1922.000 | 45.69 | -9.37 | 36.32 | 74.00 | -37.68 | peak |
| 4 | 2434.000 | 46.62 | -6.72 | 39.90 | 74.00 | -34.10 | peak |
| 5 | 2518.000 | 48.55 | -6.24 | 42.31 | 74.00 | -31.69 | peak |
| 6 | 2700.000 | 45.14 | -5.98 | 39.16 | 74.00 | -34.84 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

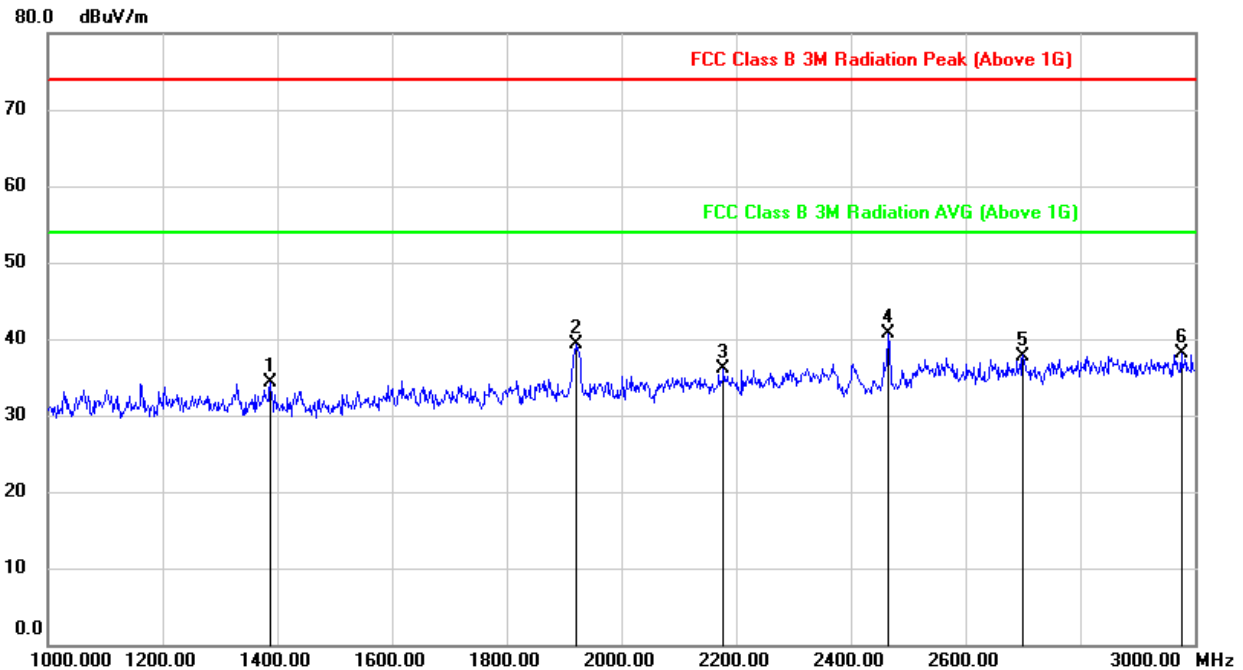**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1388.000 | 46.17 | -11.90 | 34.27 | 74.00 | -39.73 | peak |
| 2 | 1920.000 | 48.68 | -9.36 | 39.32 | 74.00 | -34.68 | peak |
| 3 | 2178.000 | 44.23 | -8.20 | 36.03 | 74.00 | -37.97 | peak |
| 4 | 2464.000 | 47.26 | -6.46 | 40.80 | 74.00 | -33.20 | peak |
| 5 | 2700.000 | 43.78 | -5.98 | 37.80 | 74.00 | -36.20 | peak |
| 6 | 2976.000 | 42.45 | -4.43 | 38.02 | 74.00 | -35.98 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

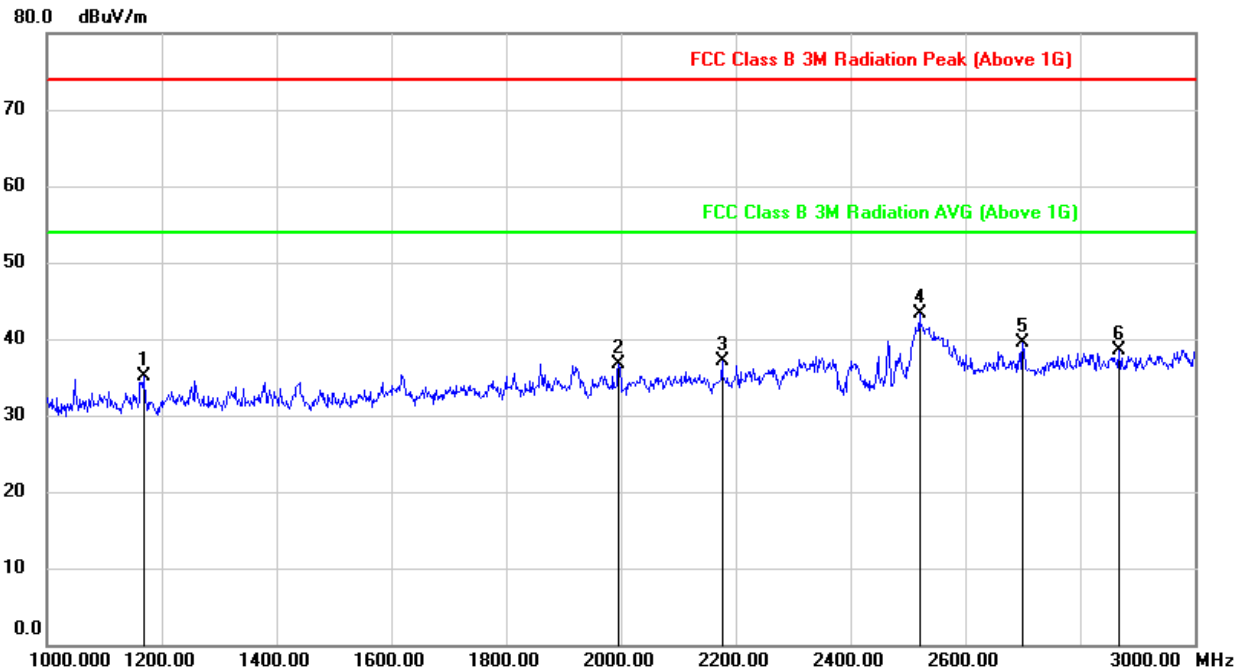**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1168.000 | 47.58 | -12.51 | 35.07 | 74.00 | -38.93 | peak |
| 2 | 1996.000 | 46.23 | -9.43 | 36.80 | 74.00 | -37.20 | peak |
| 3 | 2176.000 | 45.33 | -8.21 | 37.12 | 74.00 | -36.88 | peak |
| 4 | 2520.000 | 49.50 | -6.25 | 43.25 | 74.00 | -30.75 | peak |
| 5 | 2700.000 | 45.53 | -5.98 | 39.55 | 74.00 | -34.45 | peak |
| 6 | 2868.000 | 43.49 | -4.93 | 38.56 | 74.00 | -35.44 | peak |


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.3.2. 802.11g SISO MODE


1TX MODE FOR ANT1 (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

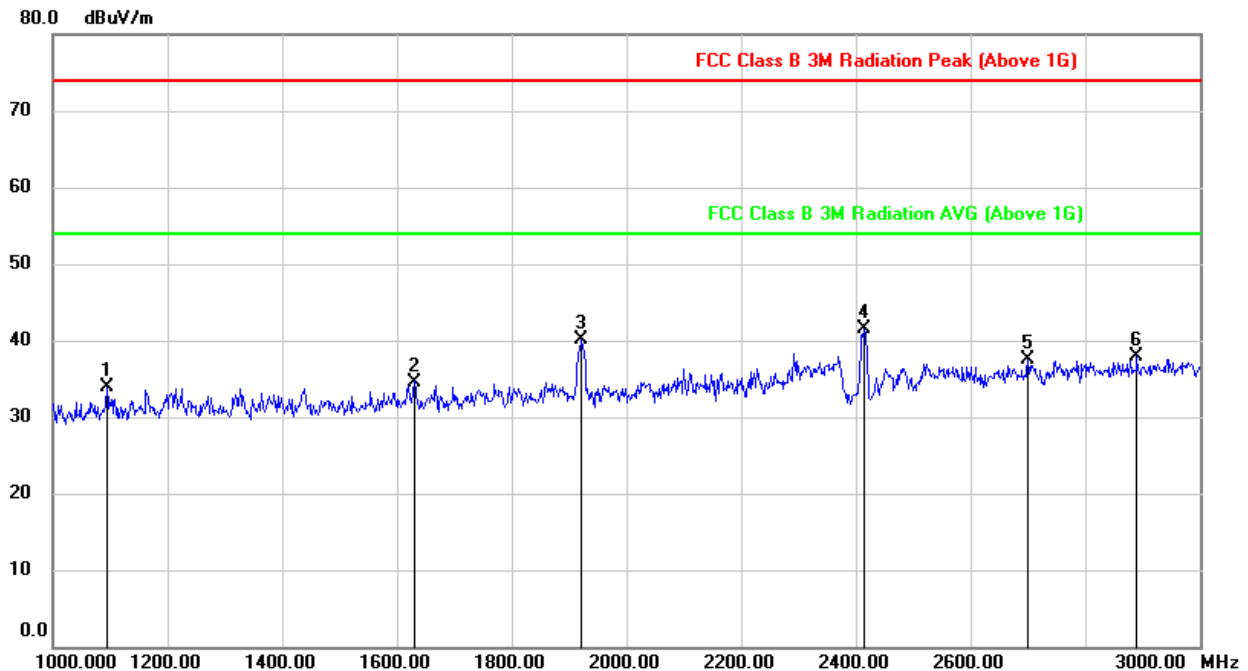


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1094.000 | 47.08 | -13.15 | 33.93 | 74.00 | -40.07 | peak |
| 2 | 1630.000 | 45.36 | -10.76 | 34.60 | 74.00 | -39.40 | peak |
| 3 | 1920.000 | 49.44 | -9.36 | 40.08 | 74.00 | -33.92 | peak |
| 4 | 2414.000 | 48.31 | -6.89 | 41.42 | 74.00 | -32.58 | peak |
| 5 | 2700.000 | 43.52 | -5.98 | 37.54 | 74.00 | -36.46 | peak |
| 6 | 2890.000 | 42.65 | -4.80 | 37.85 | 74.00 | -36.15 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

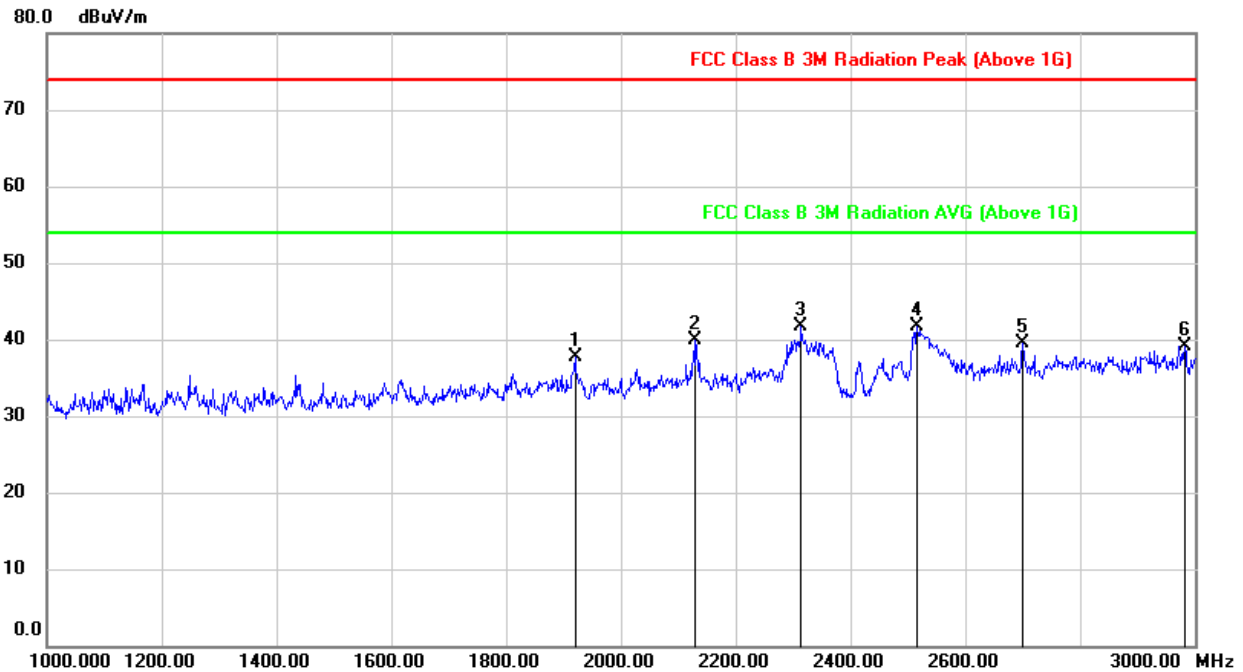**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1920.000 | 47.12 | -9.36 | 37.76 | 74.00 | -36.24 | peak |
| 2 | 2130.000 | 48.35 | -8.45 | 39.90 | 74.00 | -34.10 | peak |
| 3 | 2314.000 | 49.07 | -7.40 | 41.67 | 74.00 | -32.33 | peak |
| 4 | 2516.000 | 47.84 | -6.23 | 41.61 | 74.00 | -32.39 | peak |
| 5 | 2700.000 | 45.56 | -5.98 | 39.58 | 74.00 | -34.42 | peak |
| 6 | 2982.000 | 43.52 | -4.40 | 39.12 | 74.00 | -34.88 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

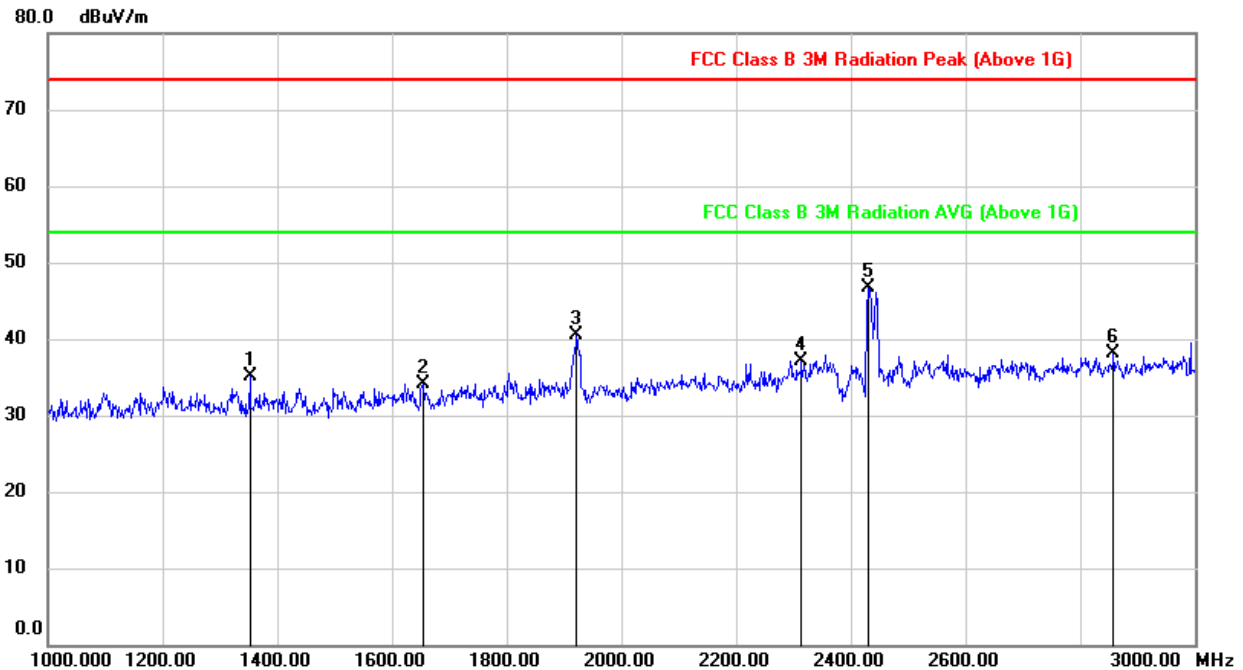**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1352.000 | 46.94 | -11.89 | 35.05 | 74.00 | -38.95 | peak |
| 2 | 1654.000 | 44.77 | -10.71 | 34.06 | 74.00 | -39.94 | peak |
| 3 | 1922.000 | 49.87 | -9.37 | 40.50 | 74.00 | -33.50 | peak |
| 4 | 2314.000 | 44.48 | -7.40 | 37.08 | 74.00 | -36.92 | peak |
| 5 | 2430.000 | 53.48 | -6.76 | 46.72 | 74.00 | -27.28 | peak |
| 6 | 2858.000 | 43.08 | -4.97 | 38.11 | 74.00 | -35.89 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

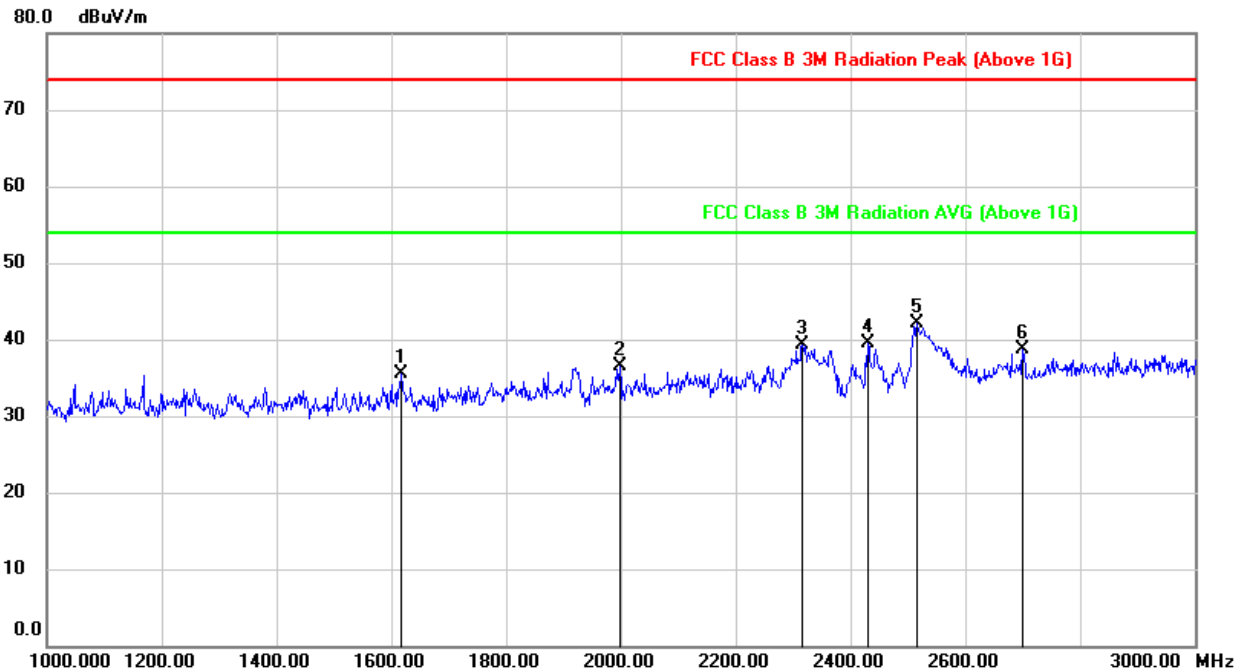**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1618.000 | 46.27 | -10.79 | 35.48 | 74.00 | -38.52 | peak |
| 2 | 1998.000 | 46.00 | -9.43 | 36.57 | 74.00 | -37.43 | peak |
| 3 | 2316.000 | 46.62 | -7.40 | 39.22 | 74.00 | -34.78 | peak |
| 4 | 2430.000 | 46.33 | -6.76 | 39.57 | 74.00 | -34.43 | peak |
| 5 | 2516.000 | 48.39 | -6.23 | 42.16 | 74.00 | -31.84 | peak |
| 6 | 2700.000 | 44.72 | -5.98 | 38.74 | 74.00 | -35.26 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

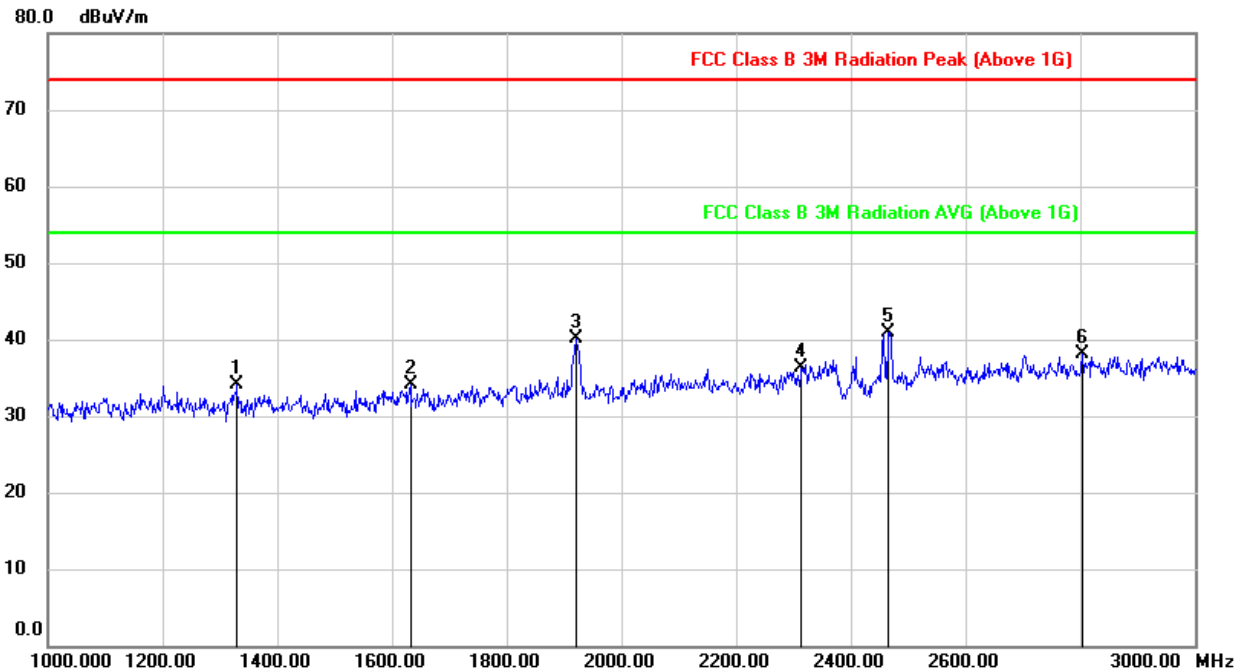**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1330.000 | 45.93 | -11.87 | 34.06 | 74.00 | -39.94 | peak |
| 2 | 1632.000 | 44.79 | -10.75 | 34.04 | 74.00 | -39.96 | peak |
| 3 | 1920.000 | 49.48 | -9.36 | 40.12 | 74.00 | -33.88 | peak |
| 4 | 2314.000 | 43.68 | -7.40 | 36.28 | 74.00 | -37.72 | peak |
| 5 | 2466.000 | 47.28 | -6.45 | 40.83 | 74.00 | -33.17 | peak |
| 6 | 2804.000 | 43.35 | -5.27 | 38.08 | 74.00 | -35.92 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

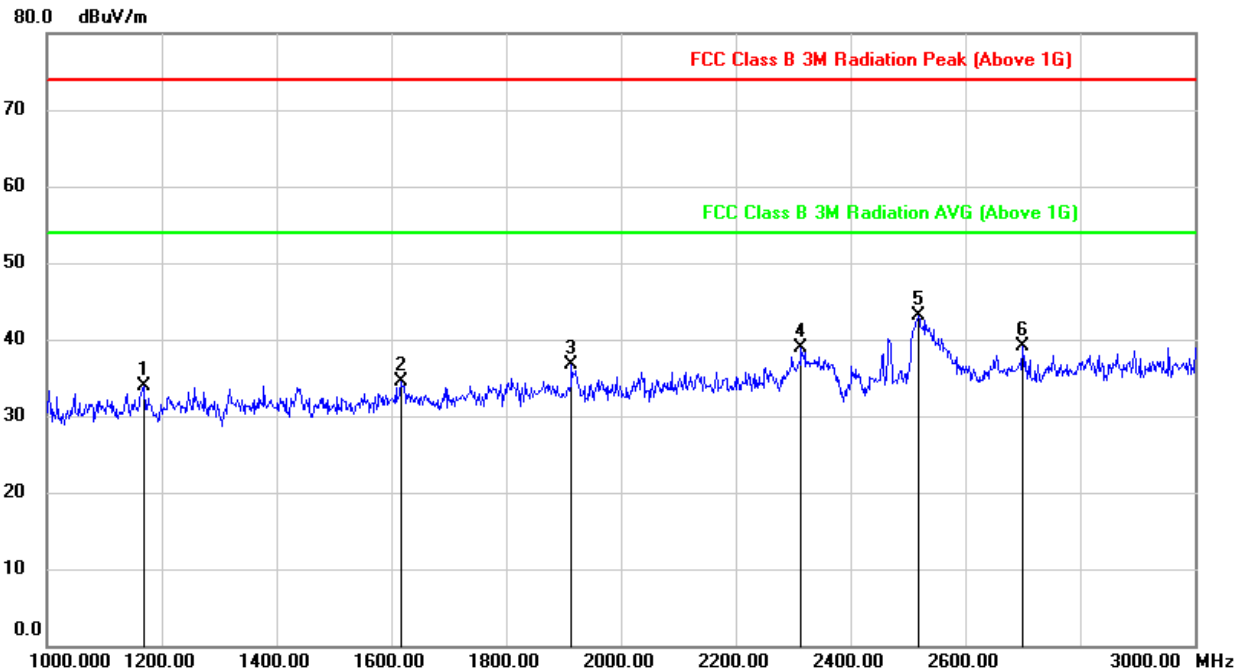**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1168.000 | 46.40 | -12.51 | 33.89 | 74.00 | -40.11 | peak |
| 2 | 1616.000 | 45.39 | -10.79 | 34.60 | 74.00 | -39.40 | peak |
| 3 | 1914.000 | 46.09 | -9.36 | 36.73 | 74.00 | -37.27 | peak |
| 4 | 2314.000 | 46.29 | -7.40 | 38.89 | 74.00 | -35.11 | peak |
| 5 | 2518.000 | 49.33 | -6.24 | 43.09 | 74.00 | -30.91 | peak |
| 6 | 2700.000 | 45.00 | -5.98 | 39.02 | 74.00 | -34.98 | peak |


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.3.3. 802.11n HT20 MIMO MODE


2TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

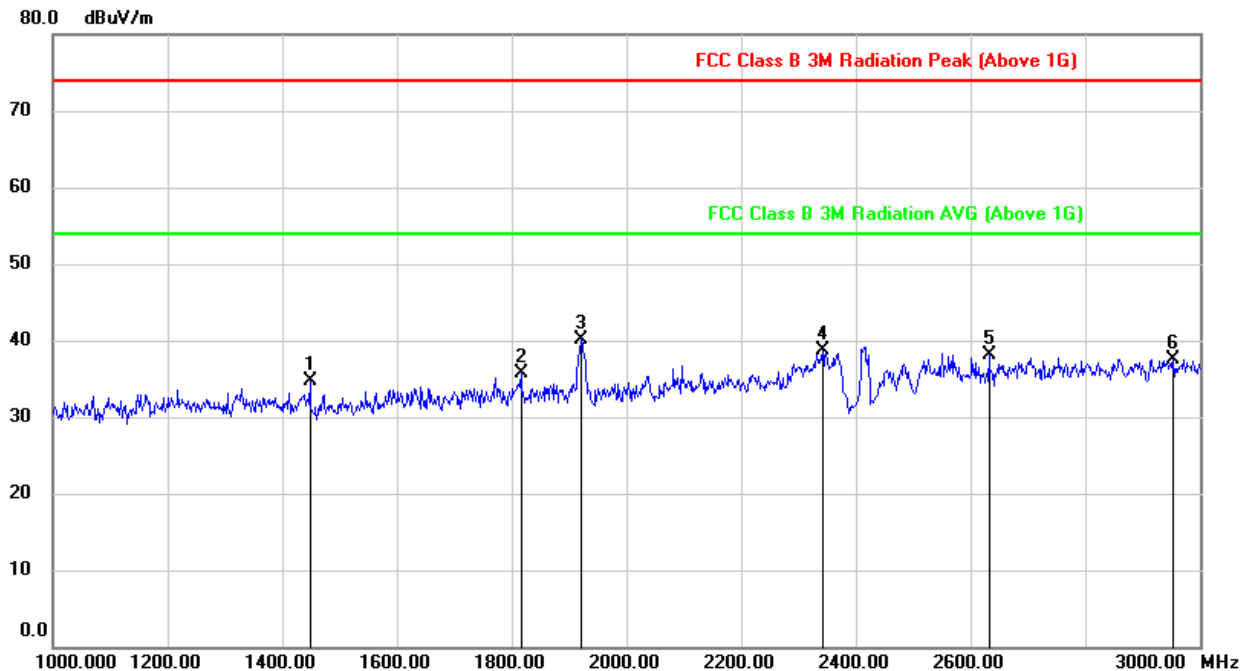


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1448.000 | 46.53 | -11.83 | 34.70 | 74.00 | -39.30 | peak |
| 2 | 1816.000 | 45.38 | -9.58 | 35.80 | 74.00 | -38.20 | peak |
| 3 | 1922.000 | 49.57 | -9.37 | 40.20 | 74.00 | -33.80 | peak |
| 4 | 2342.000 | 46.01 | -7.27 | 38.74 | 74.00 | -35.26 | peak |
| 5 | 2632.000 | 44.42 | -6.39 | 38.03 | 74.00 | -35.97 | peak |
| 6 | 2954.000 | 42.06 | -4.52 | 37.54 | 74.00 | -36.46 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

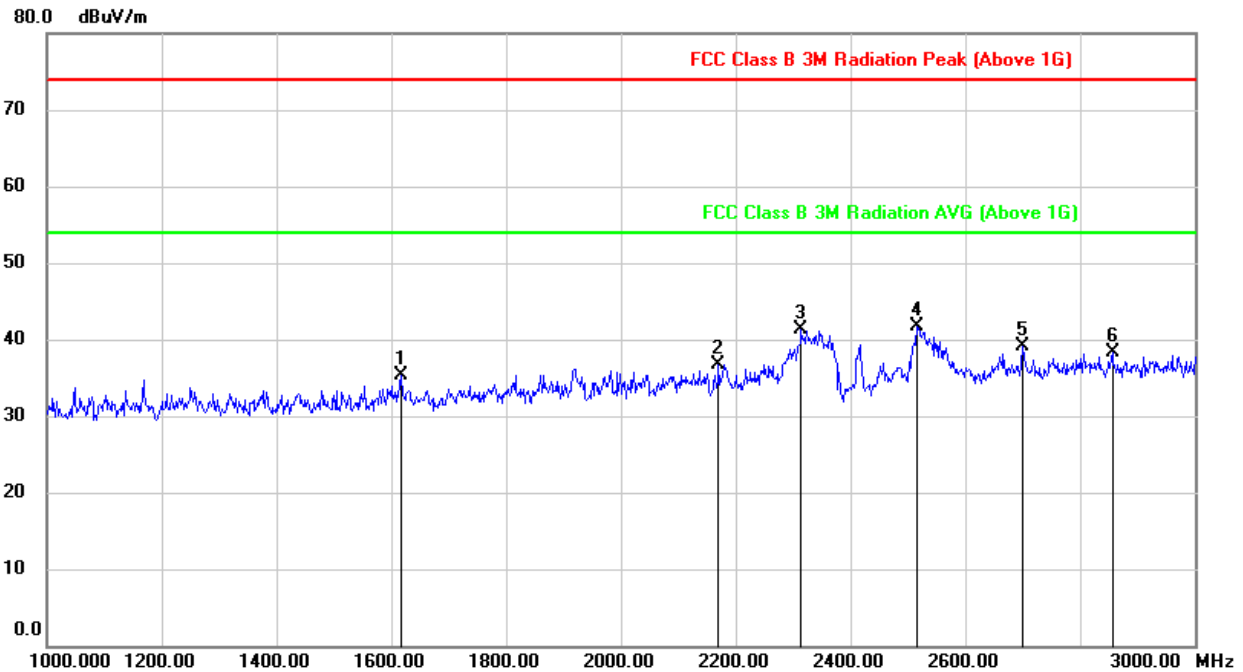**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1616.000 | 46.10 | -10.79 | 35.31 | 74.00 | -38.69 | peak |
| 2 | 2170.000 | 45.00 | -8.24 | 36.76 | 74.00 | -37.24 | peak |
| 3 | 2314.000 | 48.69 | -7.40 | 41.29 | 74.00 | -32.71 | peak |
| 4 | 2516.000 | 47.85 | -6.23 | 41.62 | 74.00 | -32.38 | peak |
| 5 | 2700.000 | 45.11 | -5.98 | 39.13 | 74.00 | -34.87 | peak |
| 6 | 2856.000 | 43.31 | -4.99 | 38.32 | 74.00 | -35.68 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

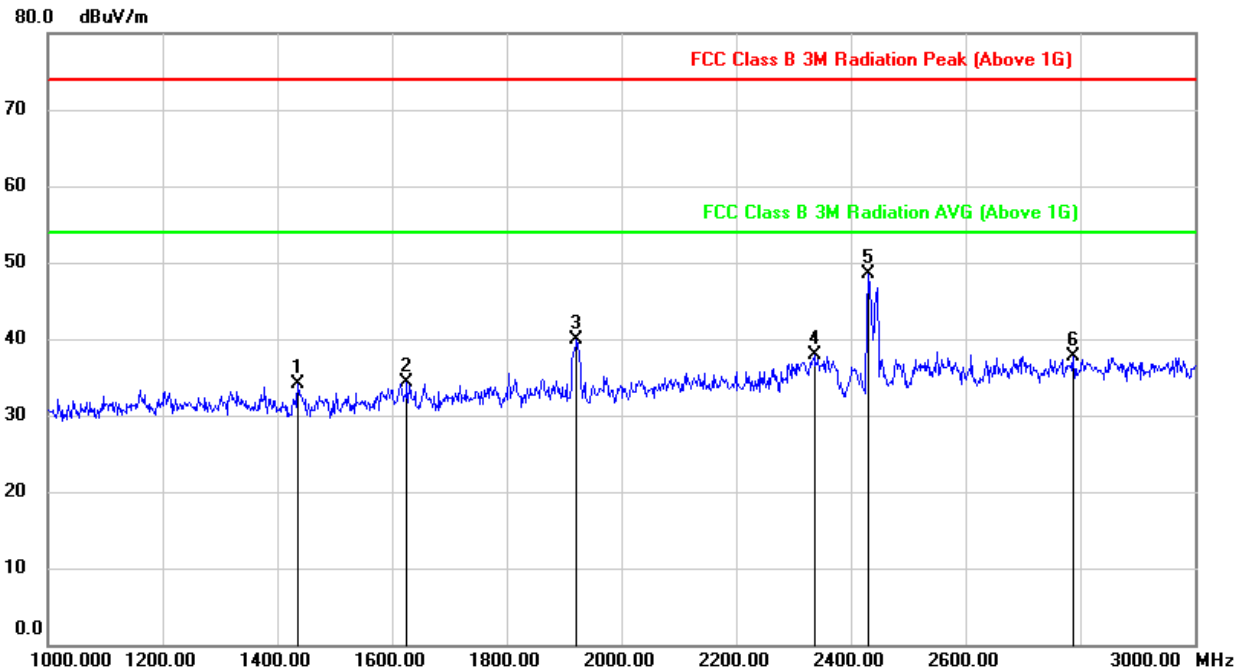**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1436.000 | 46.05 | -11.86 | 34.19 | 74.00 | -39.81 | peak |
| 2 | 1626.000 | 45.00 | -10.77 | 34.23 | 74.00 | -39.77 | peak |
| 3 | 1922.000 | 49.24 | -9.37 | 39.87 | 74.00 | -34.13 | peak |
| 4 | 2336.000 | 45.27 | -7.30 | 37.97 | 74.00 | -36.03 | peak |
| 5 | 2430.000 | 55.33 | -6.76 | 48.57 | 74.00 | -25.43 | peak |
| 6 | 2788.000 | 43.09 | -5.36 | 37.73 | 74.00 | -36.27 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

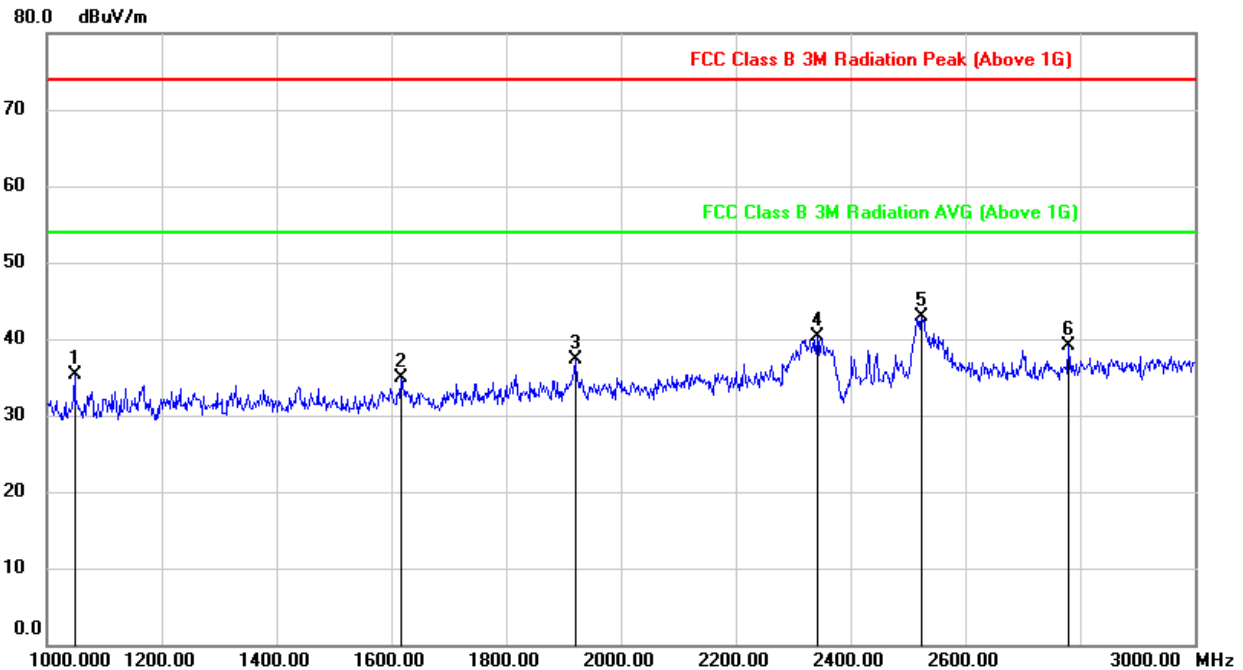**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1048.000 | 48.47 | -13.24 | 35.23 | 74.00 | -38.77 | peak |
| 2 | 1616.000 | 45.72 | -10.79 | 34.93 | 74.00 | -39.07 | peak |
| 3 | 1920.000 | 46.72 | -9.36 | 37.36 | 74.00 | -36.64 | peak |
| 4 | 2342.000 | 47.51 | -7.27 | 40.24 | 74.00 | -33.76 | peak |
| 5 | 2524.000 | 49.18 | -6.26 | 42.92 | 74.00 | -31.08 | peak |
| 6 | 2780.000 | 44.61 | -5.42 | 39.19 | 74.00 | -34.81 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

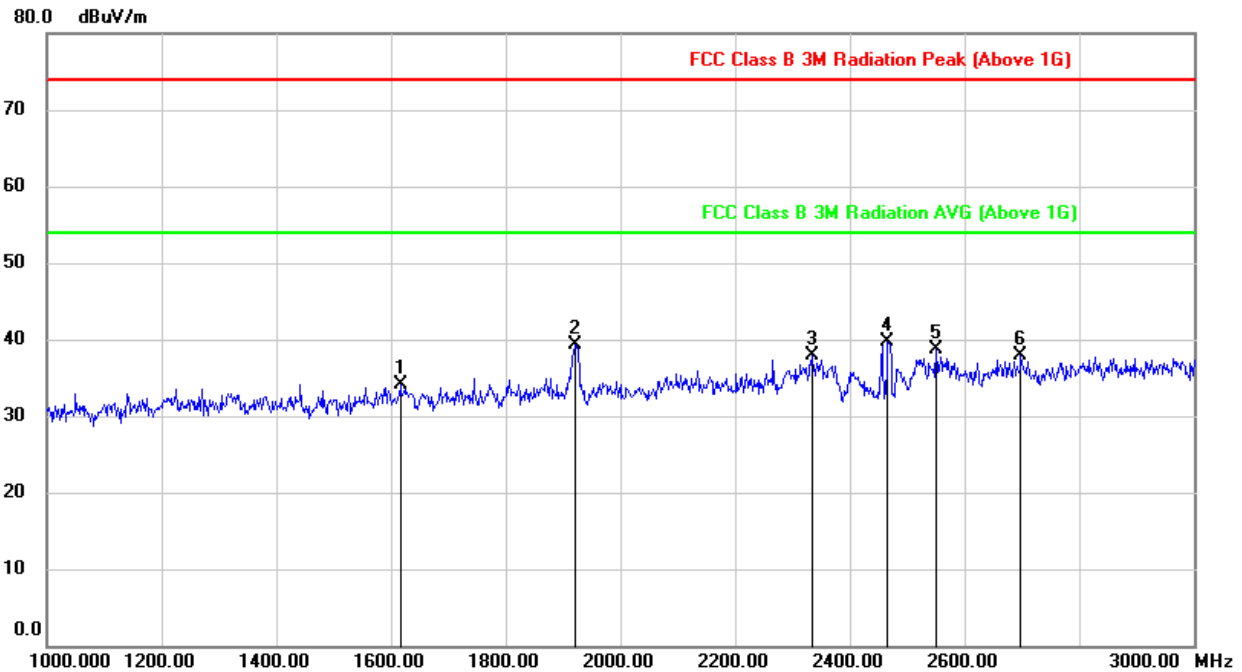**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1616.000 | 44.83 | -10.79 | 34.04 | 74.00 | -39.96 | peak |
| 2 | 1920.000 | 48.65 | -9.36 | 39.29 | 74.00 | -34.71 | peak |
| 3 | 2334.000 | 45.21 | -7.32 | 37.89 | 74.00 | -36.11 | peak |
| 4 | 2466.000 | 46.22 | -6.45 | 39.77 | 74.00 | -34.23 | peak |
| 5 | 2550.000 | 45.01 | -6.38 | 38.63 | 74.00 | -35.37 | peak |
| 6 | 2698.000 | 43.81 | -5.99 | 37.82 | 74.00 | -36.18 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

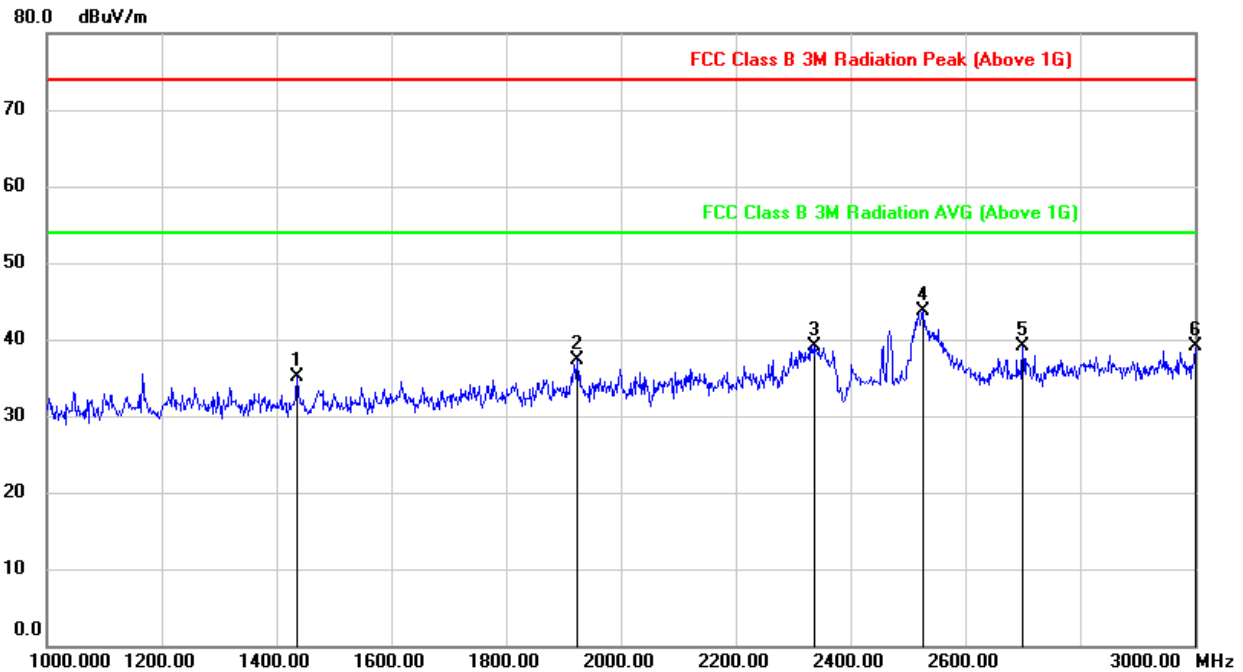**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1436.000 | 46.91 | -11.86 | 35.05 | 74.00 | -38.95 | peak |
| 2 | 1924.000 | 46.63 | -9.37 | 37.26 | 74.00 | -36.74 | peak |
| 3 | 2338.000 | 46.40 | -7.29 | 39.11 | 74.00 | -34.89 | peak |
| 4 | 2526.000 | 49.99 | -6.28 | 43.71 | 74.00 | -30.29 | peak |
| 5 | 2700.000 | 45.02 | -5.98 | 39.04 | 74.00 | -34.96 | peak |
| 6 | 3000.000 | 43.33 | -4.32 | 39.01 | 74.00 | -34.99 | peak |


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.3.4. 802.11n HT40 MIMO MODE


2TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

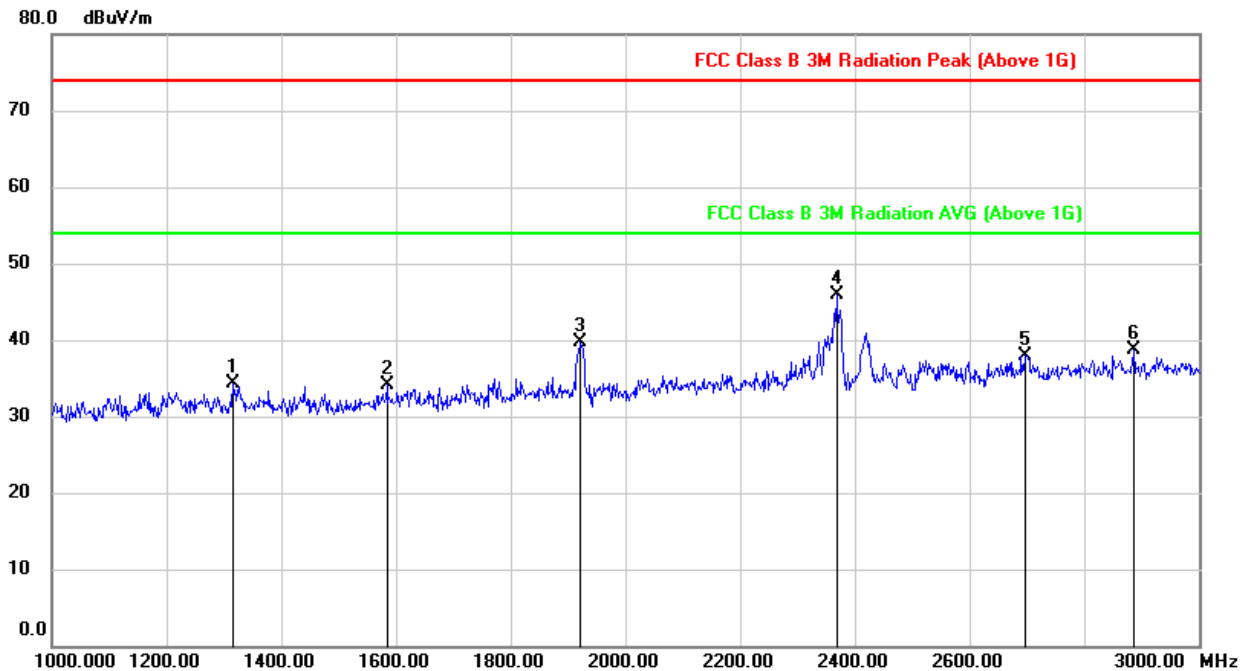


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1316.000 | 46.09 | -11.86 | 34.23 | 74.00 | -39.77 | peak |
| 2 | 1584.000 | 45.18 | -10.98 | 34.20 | 74.00 | -39.80 | peak |
| 3 | 1922.000 | 49.17 | -9.37 | 39.80 | 74.00 | -34.20 | peak |
| 4 | 2368.000 | 53.14 | -7.16 | 45.98 | 74.00 | -28.02 | peak |
| 5 | 2698.000 | 43.89 | -5.99 | 37.90 | 74.00 | -36.10 | peak |
| 6 | 2886.000 | 43.52 | -4.82 | 38.70 | 74.00 | -35.30 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

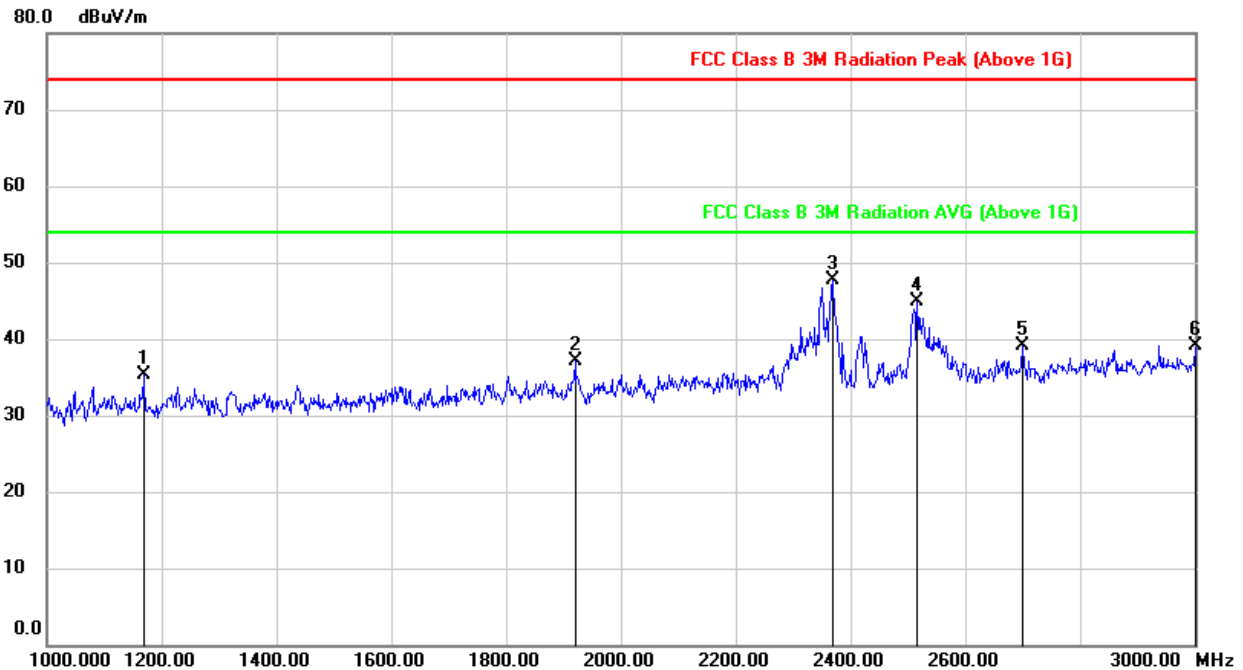**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1168.000 | 47.87 | -12.51 | 35.36 | 74.00 | -38.64 | peak |
| 2 | 1920.000 | 46.46 | -9.36 | 37.10 | 74.00 | -36.90 | peak |
| 3 | 2368.000 | 54.84 | -7.16 | 47.68 | 74.00 | -26.32 | peak |
| 4 | 2516.000 | 51.07 | -6.23 | 44.84 | 74.00 | -29.16 | peak |
| 5 | 2700.000 | 45.12 | -5.98 | 39.14 | 74.00 | -34.86 | peak |
| 6 | 3000.000 | 43.49 | -4.32 | 39.17 | 74.00 | -34.83 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

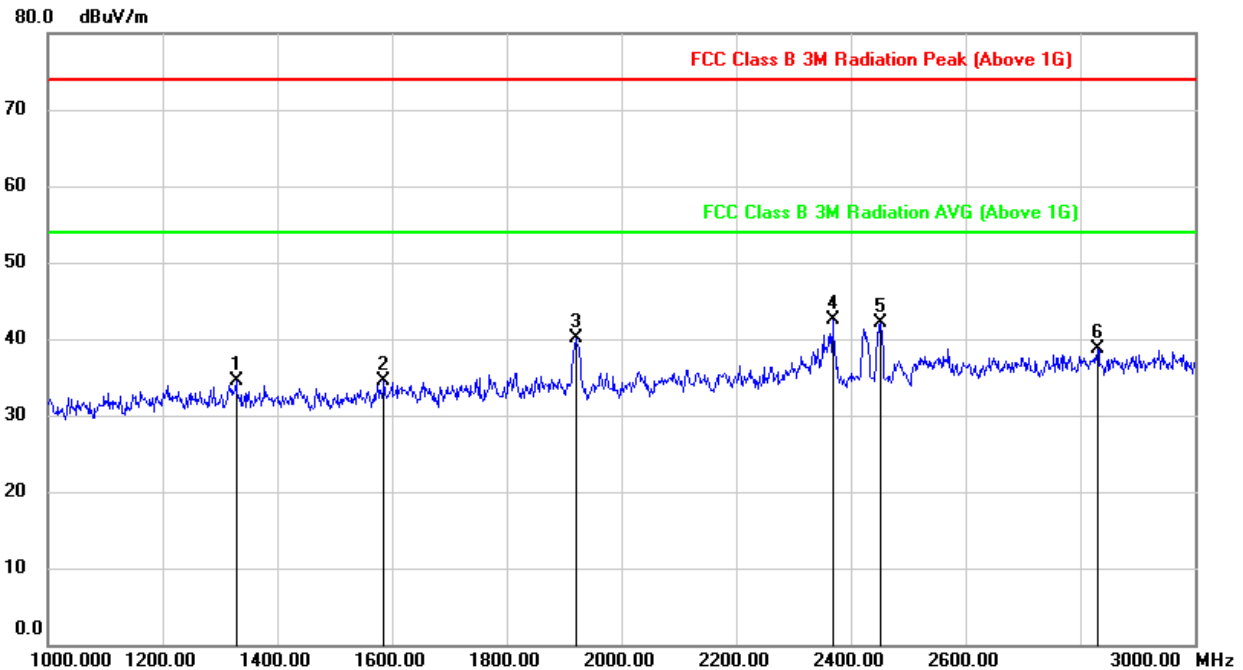**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1328.000 | 46.29 | -11.86 | 34.43 | 74.00 | -39.57 | peak |
| 2 | 1586.000 | 45.40 | -10.96 | 34.44 | 74.00 | -39.56 | peak |
| 3 | 1920.000 | 49.40 | -9.36 | 40.04 | 74.00 | -33.96 | peak |
| 4 | 2368.000 | 49.74 | -7.16 | 42.58 | 74.00 | -31.42 | peak |
| 5 | 2452.000 | 48.60 | -6.57 | 42.03 | 74.00 | -31.97 | peak |
| 6 | 2830.000 | 43.77 | -5.12 | 38.65 | 74.00 | -35.35 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

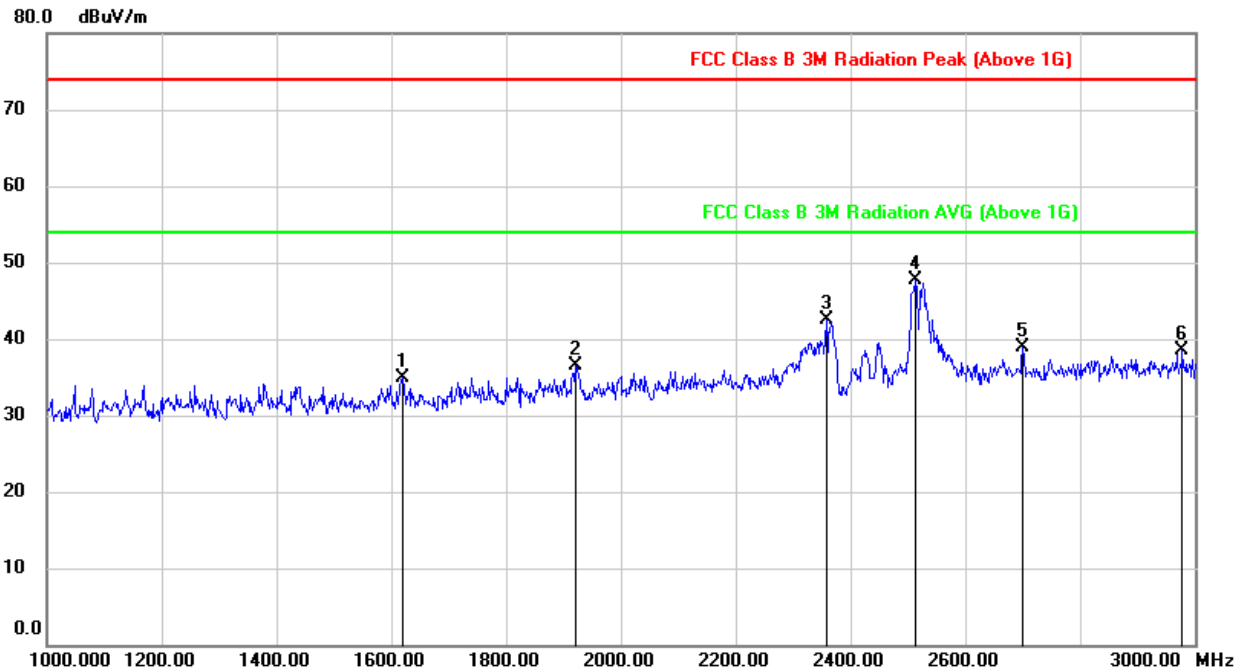**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 1620.000 | 45.62 | -10.78 | 34.84 | 74.00 | -39.16 | peak |
| 2 | 1920.000 | 45.89 | -9.36 | 36.53 | 74.00 | -37.47 | peak |
| 3 | 2358.000 | 49.71 | -7.21 | 42.50 | 74.00 | -31.50 | peak |
| 4 | 2512.000 | 53.96 | -6.22 | 47.74 | 74.00 | -26.26 | peak |
| 5 | 2700.000 | 44.82 | -5.98 | 38.84 | 74.00 | -35.16 | peak |
| 6 | 2978.000 | 42.96 | -4.42 | 38.54 | 74.00 | -35.46 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

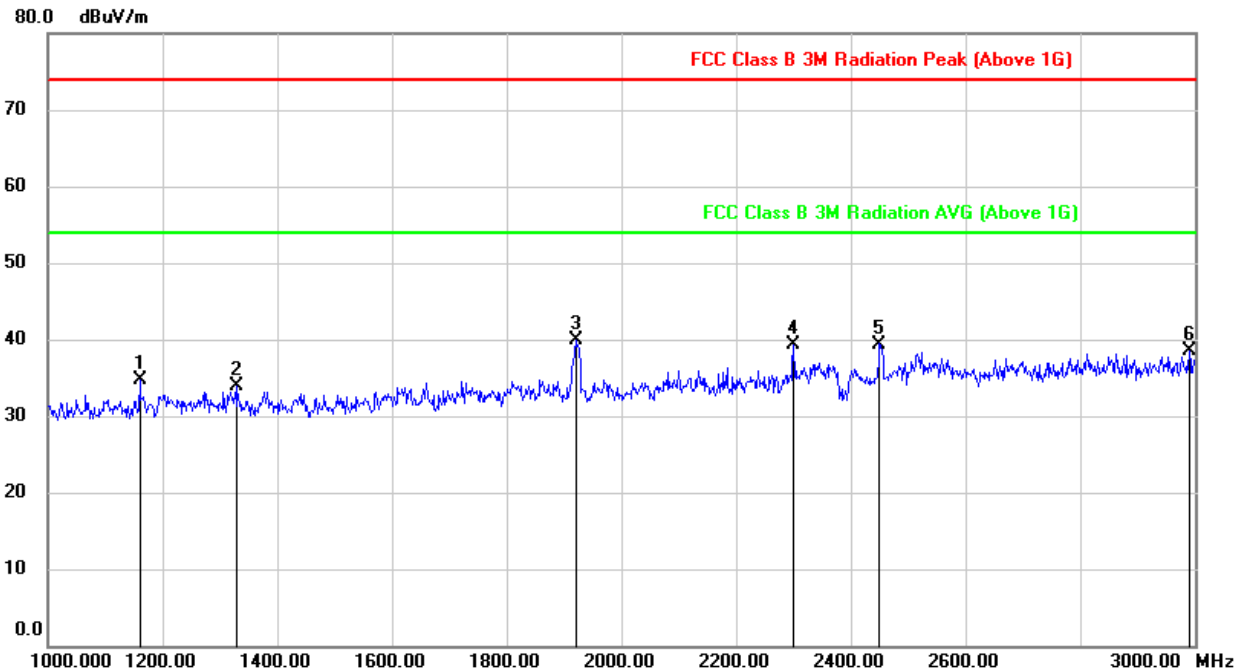**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1160.000 | 47.24 | -12.58 | 34.66 | 74.00 | -39.34 | peak |
| 2 | 1330.000 | 45.79 | -11.87 | 33.92 | 74.00 | -40.08 | peak |
| 3 | 1920.000 | 49.34 | -9.36 | 39.98 | 74.00 | -34.02 | peak |
| 4 | 2300.000 | 46.69 | -7.47 | 39.22 | 74.00 | -34.78 | peak |
| 5 | 2450.000 | 45.98 | -6.58 | 39.40 | 74.00 | -34.60 | peak |
| 6 | 2990.000 | 42.94 | -4.37 | 38.57 | 74.00 | -35.43 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

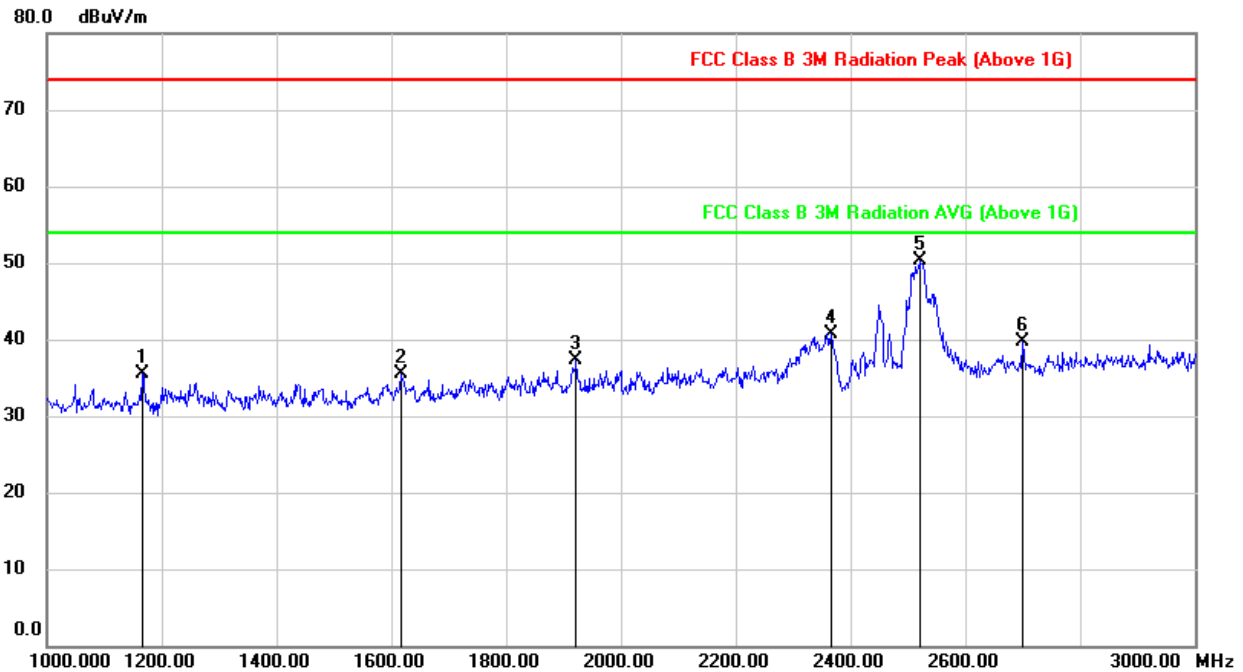**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 1166.000 | 48.03 | -12.52 | 35.51 | 74.00 | -38.49 | peak |
| 2 | 1618.000 | 46.22 | -10.79 | 35.43 | 74.00 | -38.57 | peak |
| 3 | 1922.000 | 46.59 | -9.37 | 37.22 | 74.00 | -36.78 | peak |
| 4 | 2366.000 | 47.89 | -7.16 | 40.73 | 74.00 | -33.27 | peak |
| 5 | 2522.000 | 56.56 | -6.26 | 50.30 | 74.00 | -23.70 | peak |
| 6 | 2700.000 | 45.72 | -5.98 | 39.74 | 74.00 | -34.26 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




9.4. WORST-CASE CO-LOCATION

9.4.1. BT GFSK AND 802.11n HT20 MIMO MODE


SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

1-3GHz

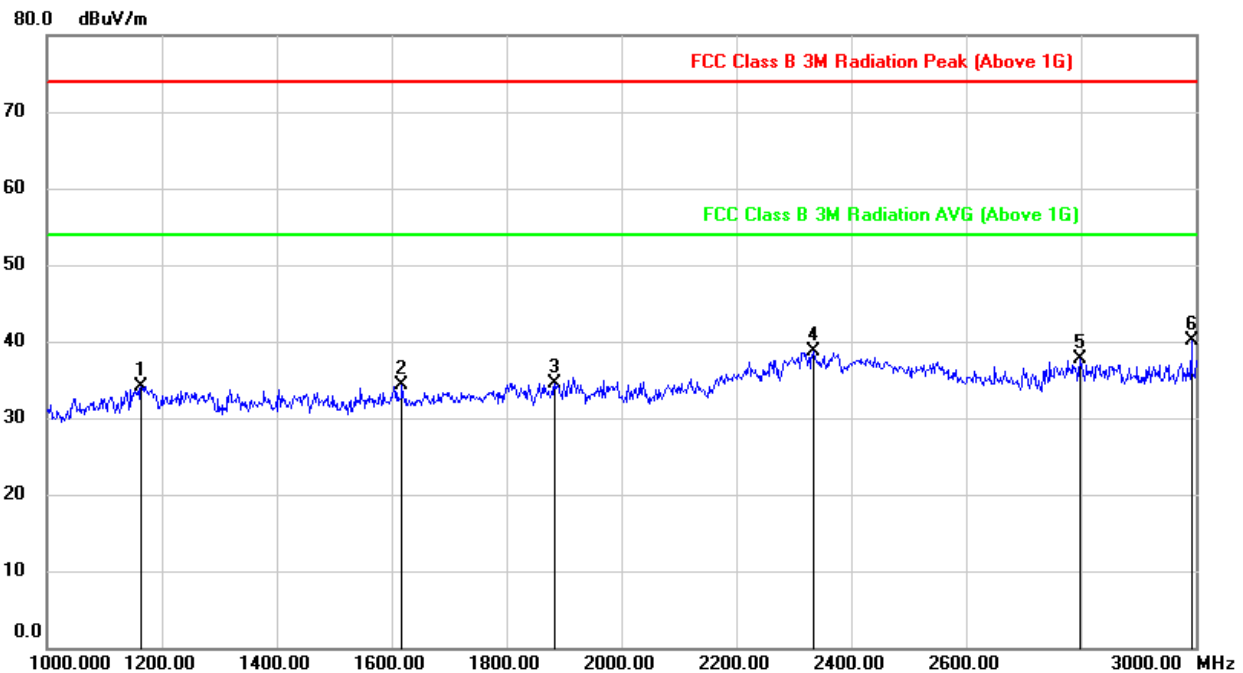


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 1164.000 | 46.57 | -12.55 | 34.02 | 74.00 | -39.98 | peak |
| 2 | 1618.000 | 45.08 | -10.79 | 34.29 | 74.00 | -39.71 | peak |
| 3 | 1884.000 | 43.93 | -9.39 | 34.54 | 74.00 | -39.46 | peak |
| 4 | 2334.000 | 45.93 | -7.32 | 38.61 | 74.00 | -35.39 | peak |
| 5 | 2798.000 | 43.05 | -5.31 | 37.74 | 74.00 | -36.26 | peak |
| 6 | 2992.000 | 44.52 | -4.36 | 40.16 | 74.00 | -33.84 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

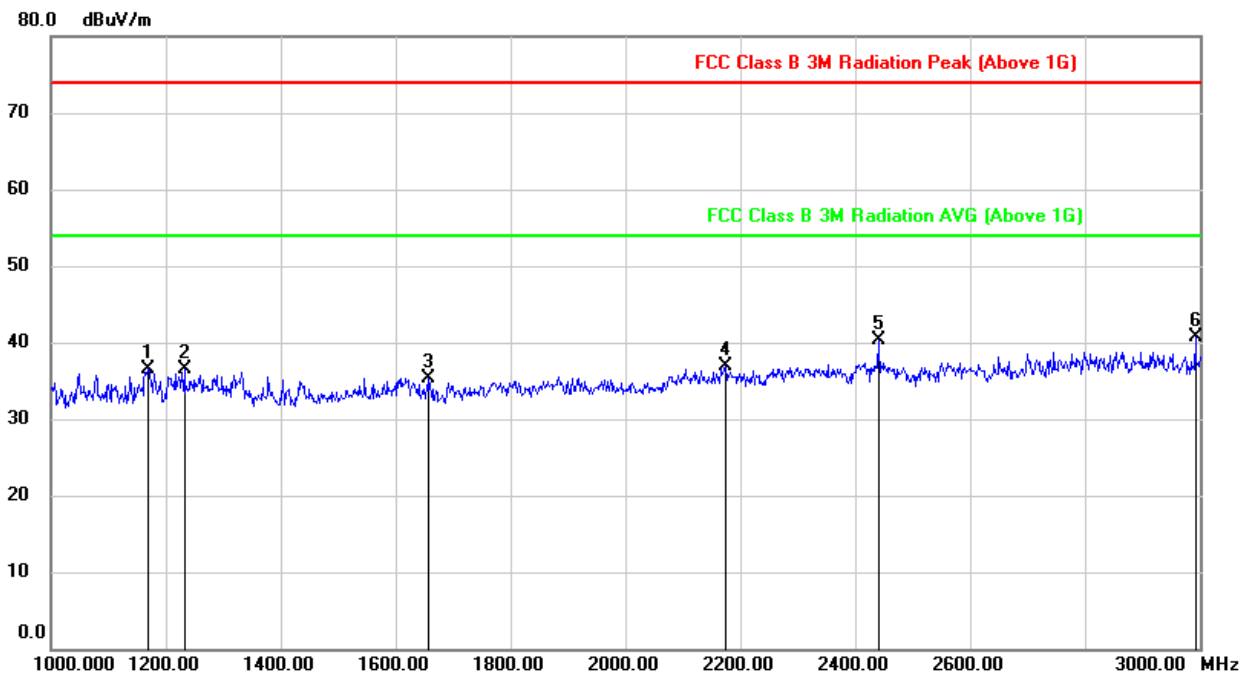**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)****1-3GHz**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 1170.000 | 49.08 | -12.48 | 36.60 | 74.00 | -37.40 | peak |
| 2 | 1232.000 | 48.57 | -12.08 | 36.49 | 74.00 | -37.51 | peak |
| 3 | 1658.000 | 46.04 | -10.70 | 35.34 | 74.00 | -38.66 | peak |
| 4 | 2174.000 | 45.15 | -8.22 | 36.93 | 74.00 | -37.07 | peak |
| 5 | 2440.000 | 47.00 | -6.67 | 40.33 | 74.00 | -33.67 | peak |
| 6 | 2992.000 | 45.02 | -4.36 | 40.66 | 74.00 | -33.34 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The Band Reject filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

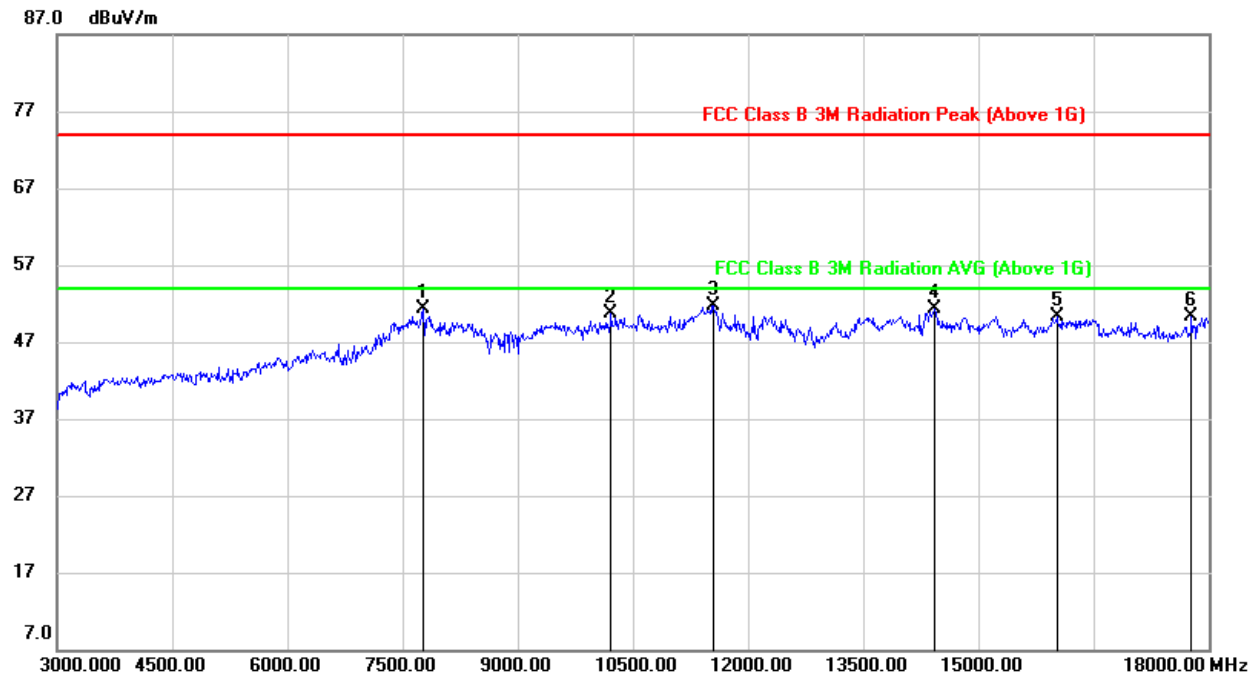**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)****3-18GHz**


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 7770.000 | 42.85 | 8.49 | 51.34 | 74.00 | -22.66 | peak |
| 2 | 10215.000 | 39.89 | 10.88 | 50.77 | 74.00 | -23.23 | peak |
| 3 | 11550.000 | 37.61 | 14.13 | 51.74 | 74.00 | -22.26 | peak |
| 4 | 14430.000 | 34.85 | 16.39 | 51.24 | 74.00 | -22.76 | peak |
| 5 | 16020.000 | 33.08 | 17.28 | 50.36 | 74.00 | -23.64 | peak |
| 6 | 17775.000 | 27.33 | 22.97 | 50.30 | 74.00 | -23.70 | peak |

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

3-18GHz

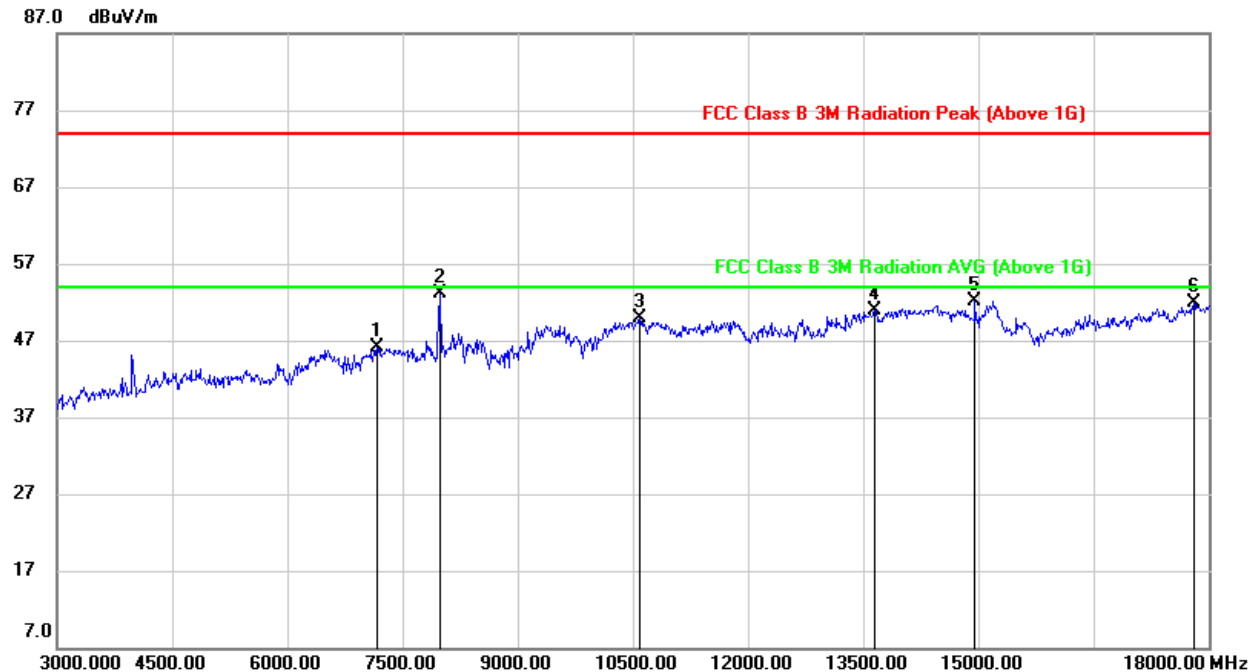

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|--------|
| 1 | 7170.000 | 39.15 | 6.87 | 46.02 | 74.00 | -27.98 | peak |
| 2 | 7995.000 | 44.92 | 8.16 | 53.08 | 74.00 | -20.92 | peak |
| 3 | 10590.000 | 37.14 | 12.68 | 49.82 | 74.00 | -24.18 | peak |
| 4 | 13650.000 | 34.91 | 15.98 | 50.89 | 74.00 | -23.11 | peak |
| 5 | 14955.000 | 36.62 | 15.49 | 52.11 | 74.00 | -21.89 | peak |
| 6 | 17805.000 | 28.75 | 23.22 | 51.97 | 74.00 | -22.03 | peak |


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.4.2. BT GFSK AND 802.11n HT40 MIMO MODE


RESTRICTED BANDEDGE (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

PEAK

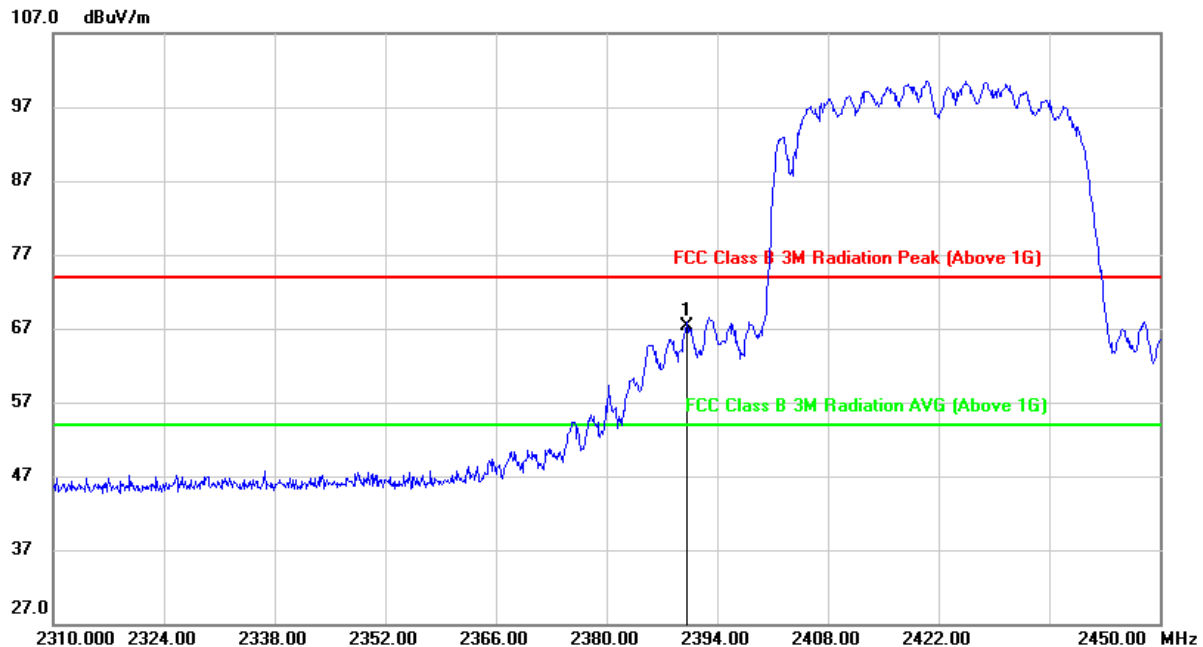

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 34.31 | 32.94 | 67.25 | 74.00 | -6.75 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

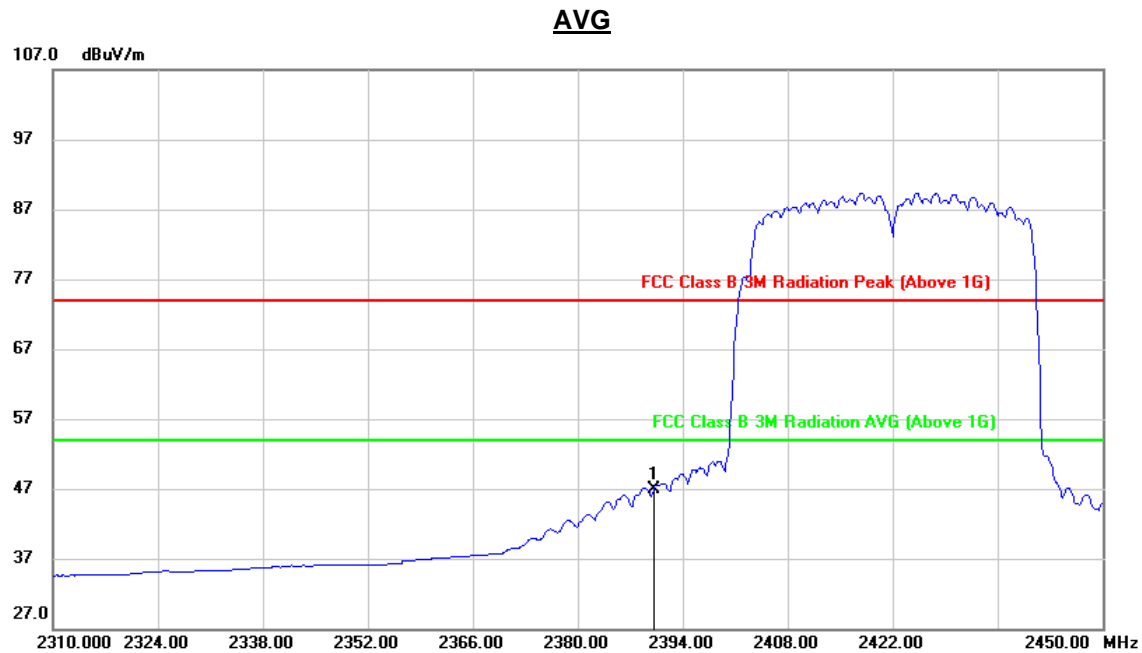


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 13.95 | 32.94 | 46.89 | 54.00 | -7.11 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

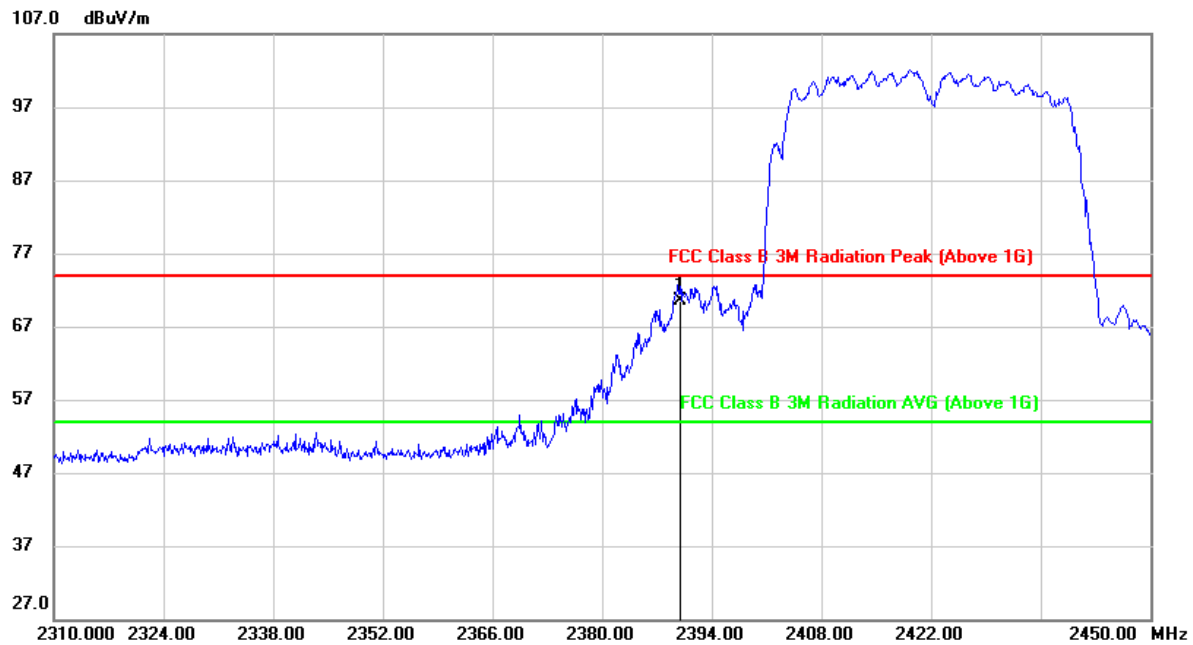

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 37.60 | 32.94 | 70.54 | 74.00 | -3.46 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

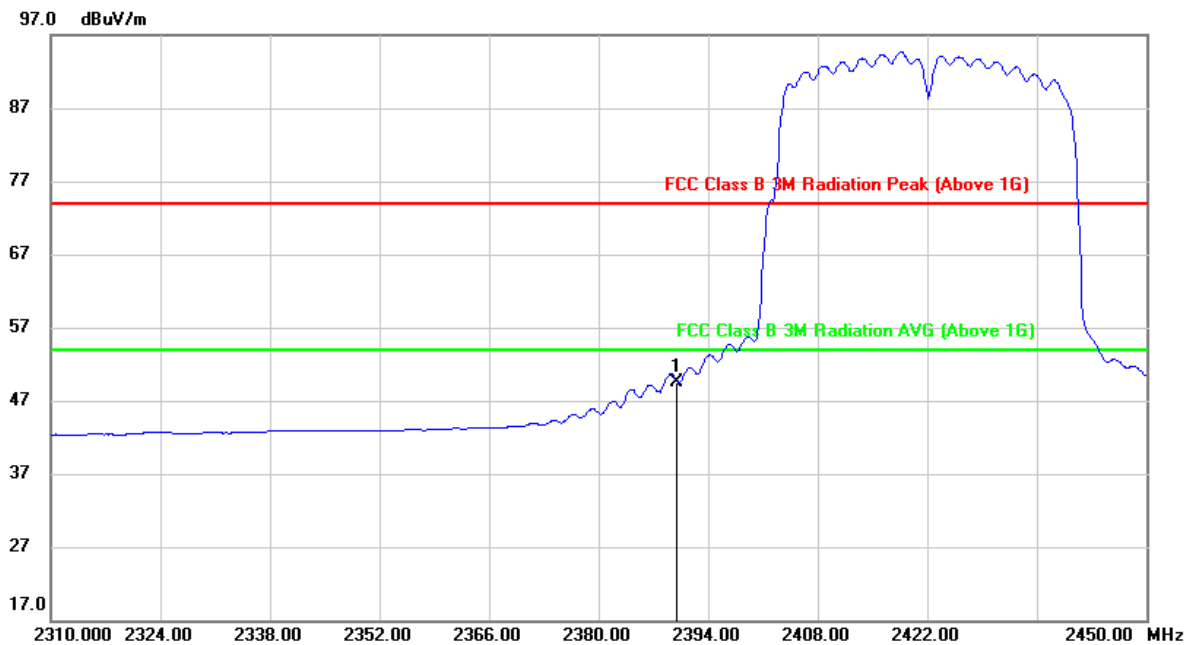**AVG**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|--------|
| 1 | 2390.000 | 16.53 | 32.94 | 49.47 | 74.00 | -4.53 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




9.5. SPURIOUS EMISSIONS (18~25GHz)

9.5.1. 802.11n HT20 MIMO MODE

2TX MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

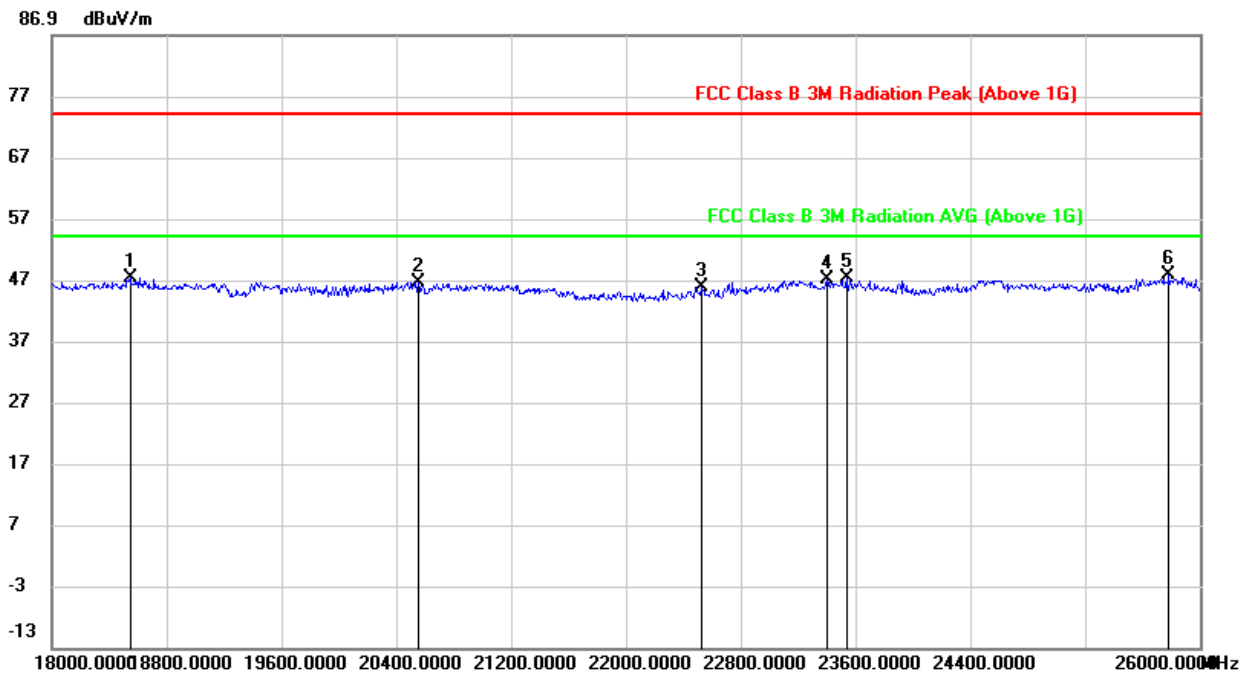


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 18544.000 | 51.76 | -4.46 | 47.30 | 74.00 | -26.70 | peak |
| 2 | 20552.000 | 51.55 | -5.00 | 46.55 | 74.00 | -27.45 | peak |
| 3 | 22528.000 | 51.66 | -5.79 | 45.87 | 74.00 | -28.13 | peak |
| 4 | 23400.000 | 51.92 | -4.96 | 46.96 | 74.00 | -27.04 | peak |
| 5 | 23536.000 | 51.96 | -4.74 | 47.22 | 74.00 | -26.78 | peak |
| 6 | 25784.000 | 49.23 | -1.49 | 47.74 | 74.00 | -26.26 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

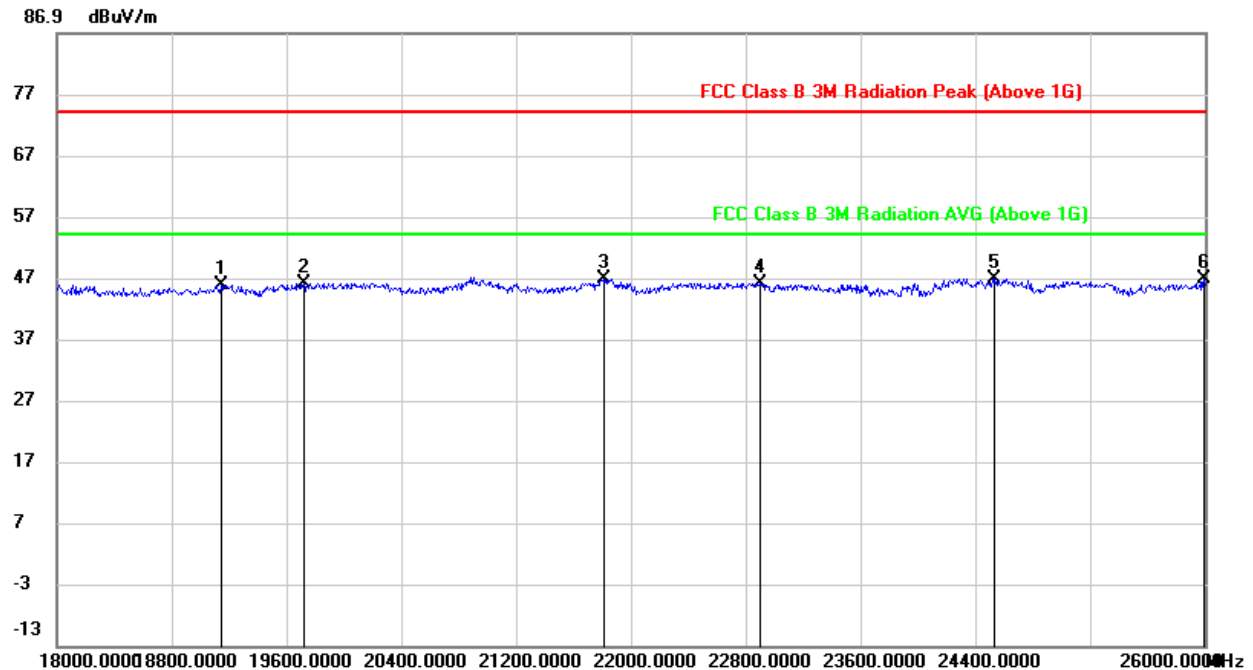

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 19144.000 | 50.77 | -4.98 | 45.79 | 74.00 | -28.21 | peak |
| 2 | 19720.000 | 50.50 | -4.39 | 46.11 | 74.00 | -27.89 | peak |
| 3 | 21808.000 | 52.68 | -5.86 | 46.82 | 74.00 | -27.18 | peak |
| 4 | 22896.000 | 51.80 | -5.66 | 46.14 | 74.00 | -27.86 | peak |
| 5 | 24528.000 | 49.36 | -2.51 | 46.85 | 74.00 | -27.15 | peak |
| 6 | 25992.000 | 49.17 | -2.43 | 46.74 | 74.00 | -27.26 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

Note: All test mode has been tested, only the worst data record in the report




9.6. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)

9.6.1. 802.11n HT20 MIMO MODE


2TX MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

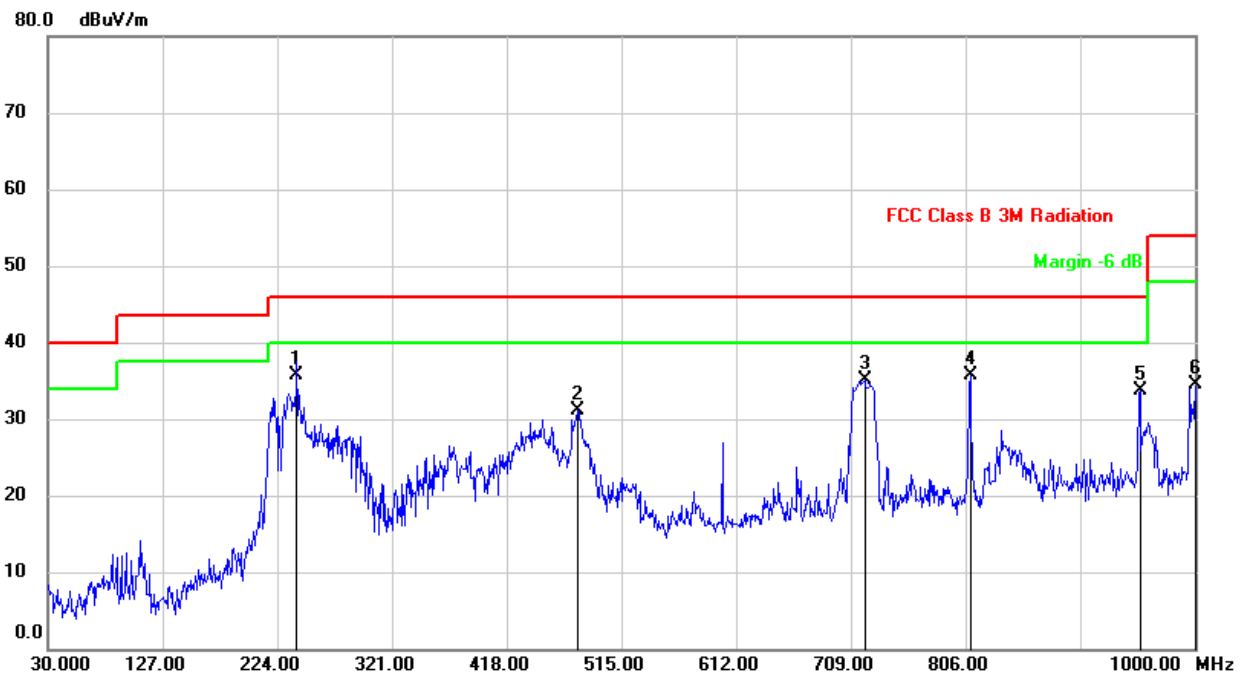

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 240.4900 | 52.62 | -16.97 | 35.65 | 46.00 | -10.35 | QP |
| 2 | 478.1400 | 42.06 | -10.87 | 31.19 | 46.00 | -14.81 | QP |
| 3 | 720.6400 | 41.19 | -6.10 | 35.09 | 46.00 | -10.91 | QP |
| 4 | 809.8800 | 41.00 | -5.27 | 35.73 | 46.00 | -10.27 | QP |
| 5 | 953.4400 | 37.08 | -3.37 | 33.71 | 46.00 | -12.29 | QP |
| 6 | 1000.0000 | 37.38 | -2.84 | 34.54 | 54.00 | -19.46 | QP |

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

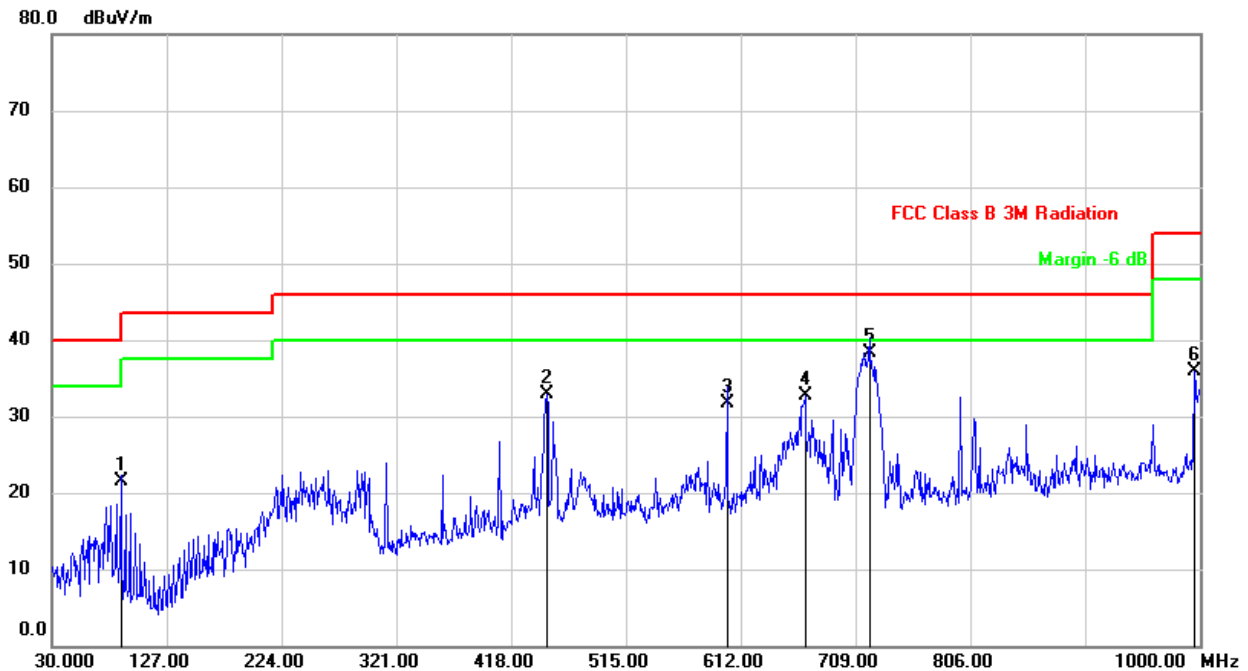**SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 88.2000 | 42.59 | -21.03 | 21.56 | 43.50 | -21.94 | QP |
| 2 | 448.0700 | 44.31 | -11.45 | 32.86 | 46.00 | -13.14 | QP |
| 3 | 600.3600 | 40.05 | -8.42 | 31.63 | 46.00 | -14.37 | QP |
| 4 | 666.3200 | 39.93 | -7.23 | 32.70 | 46.00 | -13.30 | QP |
| 5 | 720.6400 | 44.33 | -6.10 | 38.23 | 46.00 | -7.77 | QP |
| 6 | 995.1500 | 38.76 | -2.95 | 35.81 | 54.00 | -18.19 | QP |

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All test mode has been tested, only the worst data record in the report.


9.7. SPURIOUS EMISSIONS BELOW 30M

9.7.1. 802.11n HT20 MIMO MODE

2TX MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

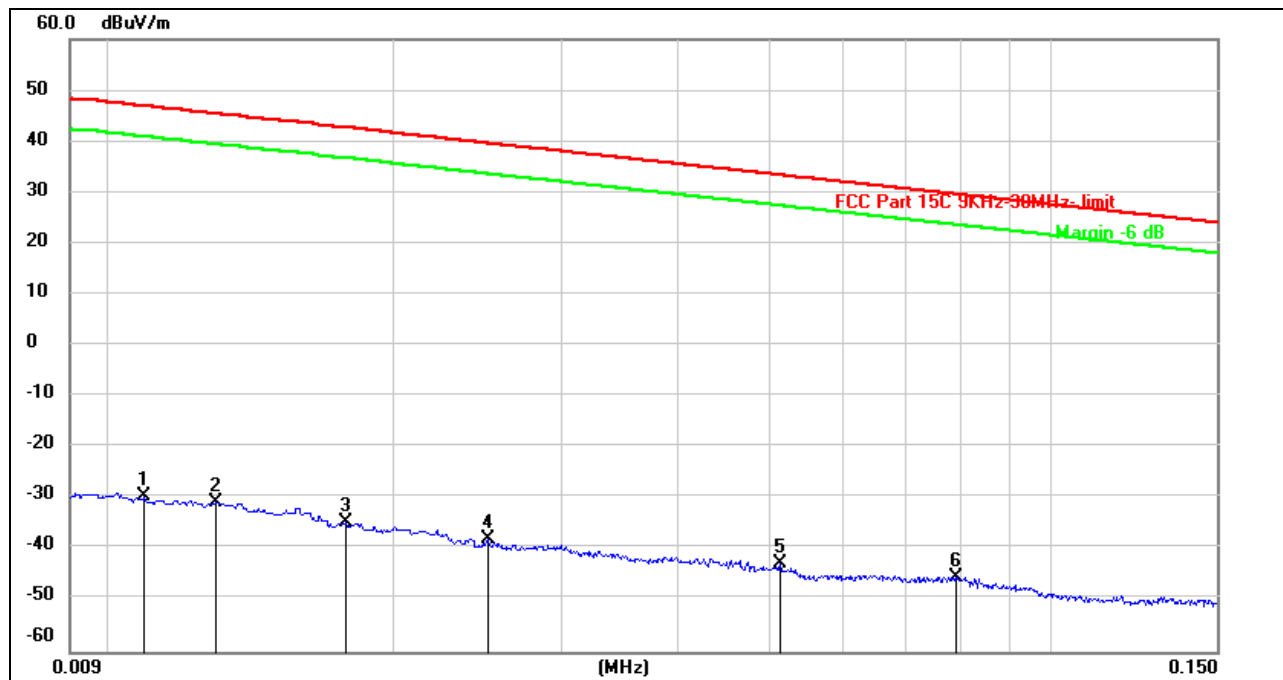

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 0.0108 | 71.78 | -101.39 | -29.61 | 46.93 | -76.54 | peak |
| 2 | 0.0129 | 70.68 | -101.38 | -30.70 | 45.39 | -76.09 | peak |
| 3 | 0.0177 | 66.57 | -101.35 | -34.78 | 42.64 | -77.42 | peak |
| 4 | 0.0251 | 63.29 | -101.37 | -38.08 | 39.61 | -77.69 | peak |
| 5 | 0.0514 | 58.68 | -101.48 | -42.80 | 33.38 | -76.18 | peak |
| 6 | 0.0791 | 56.21 | -101.63 | -45.42 | 29.64 | -75.06 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



150kHz ~ 0.49MHz

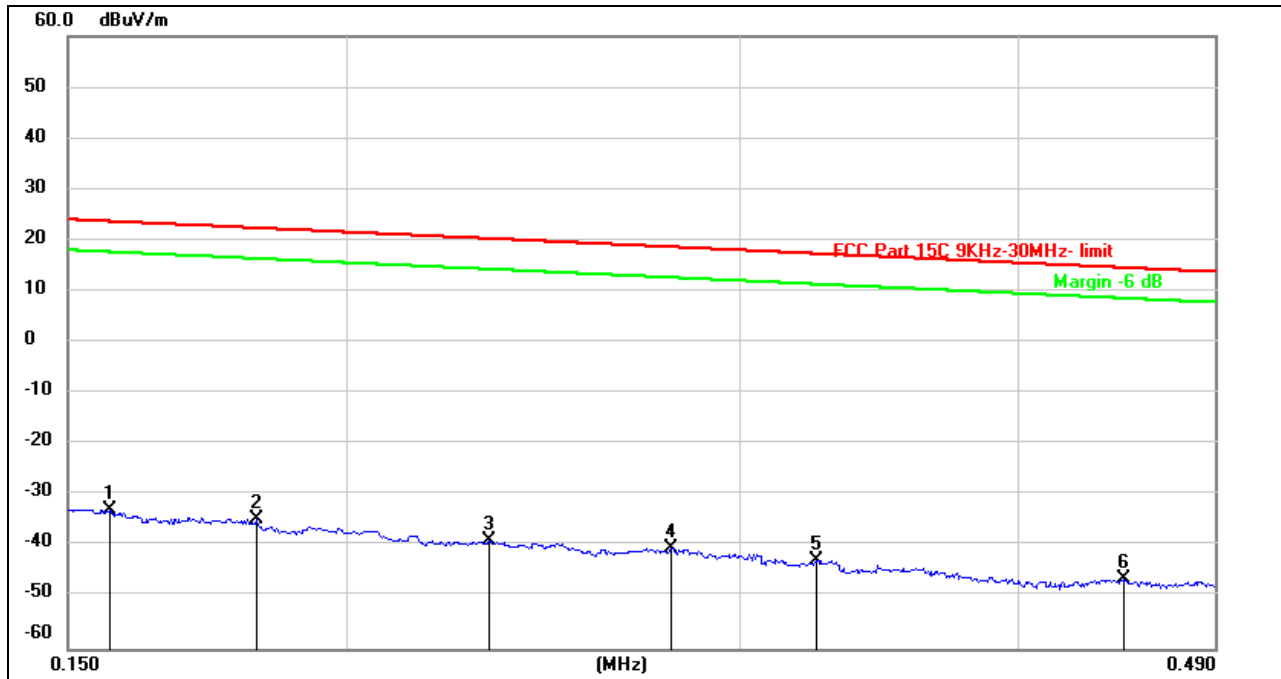


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.1567 | 68.95 | -101.65 | -32.70 | 23.70 | -56.40 | peak |
| 2 | 0.1822 | 66.89 | -101.68 | -34.79 | 22.39 | -57.18 | peak |
| 3 | 0.2316 | 63.02 | -101.77 | -38.75 | 20.31 | -59.06 | peak |
| 4 | 0.2796 | 61.41 | -101.83 | -40.42 | 18.67 | -59.09 | peak |
| 5 | 0.3251 | 59.21 | -101.88 | -42.67 | 17.36 | -60.03 | peak |
| 6 | 0.4460 | 55.58 | -102.01 | -46.43 | 14.62 | -61.05 | peak |

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



0.49MHz ~ 30MHz

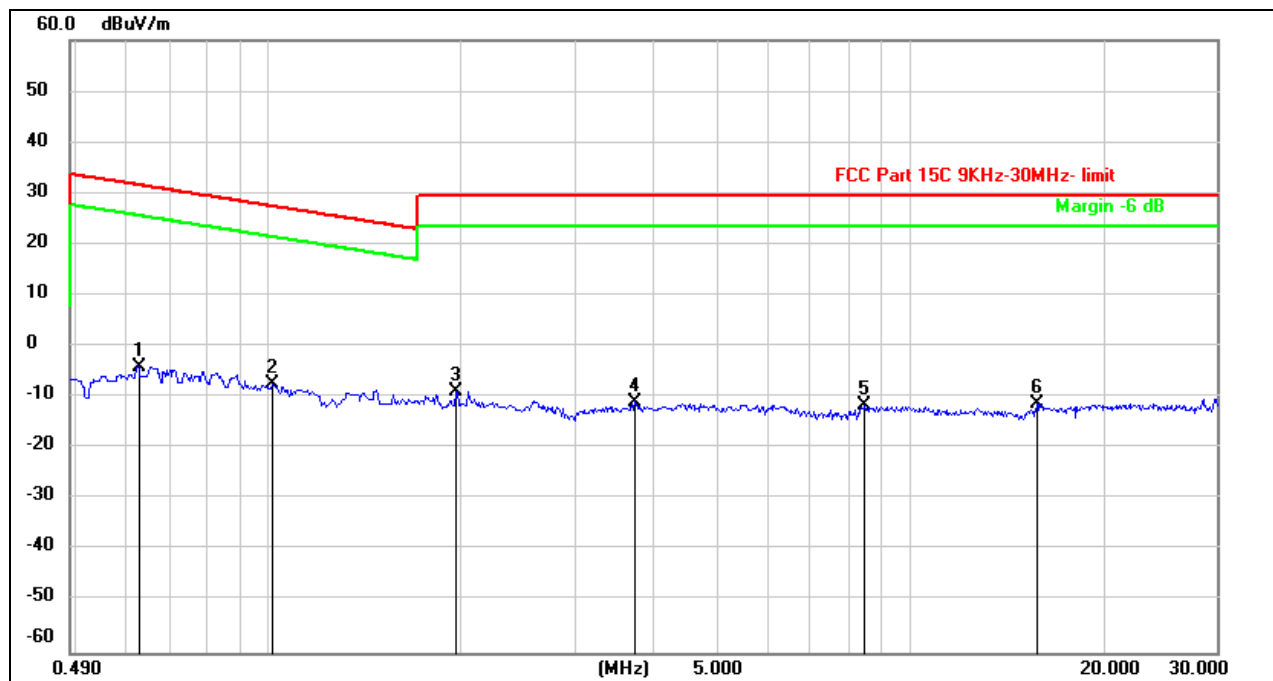

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.6270 | 58.15 | -62.09 | -3.94 | 31.66 | -35.60 | peak |
| 2 | 1.0104 | 54.79 | -62.27 | -7.48 | 27.51 | -34.99 | peak |
| 3 | 1.9521 | 53.11 | -61.84 | -8.73 | 29.54 | -38.27 | peak |
| 4 | 3.7360 | 50.33 | -61.40 | -11.07 | 29.54 | -40.61 | peak |
| 5 | 8.4870 | 49.60 | -61.01 | -11.41 | 29.54 | -40.95 | peak |
| 6 | 15.7759 | 49.75 | -60.99 | -11.24 | 29.54 | -40.78 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All test mode has been tested, only the worst data record in the report.


10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Quasi-peak | Average |
|-----------------|------------|-----------|
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

TEST SETUP AND PROCEDURE

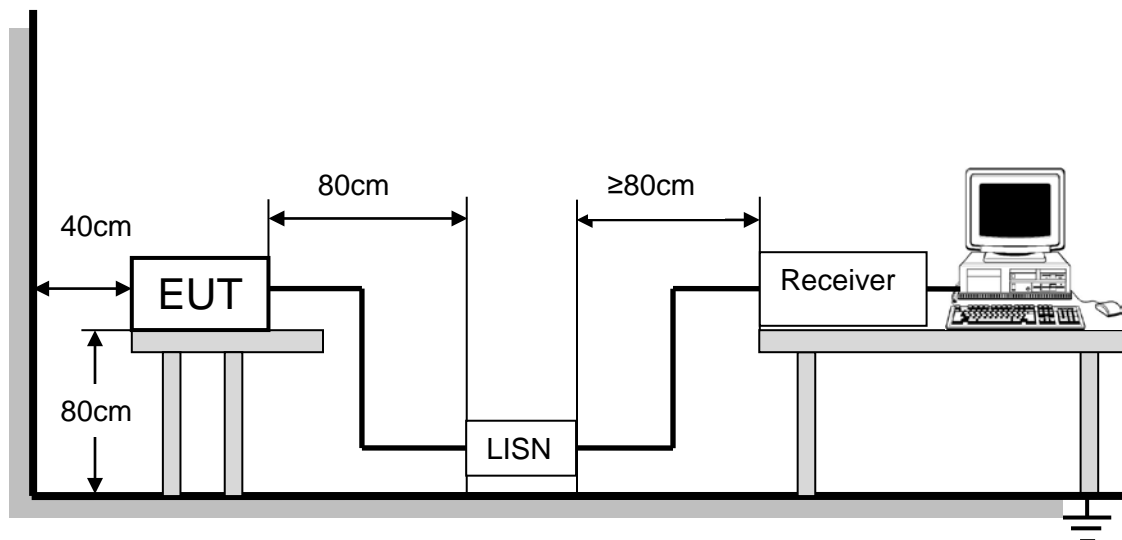

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 24.1°C | Relative Humidity | 63% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.3V |




TEST RESULTS

10.1. 802.11n HT20 MIMO MODE

2TX MODE (WORST-CASE CONFIGURATION)

LINE N RESULTS (MID CHANNEL)

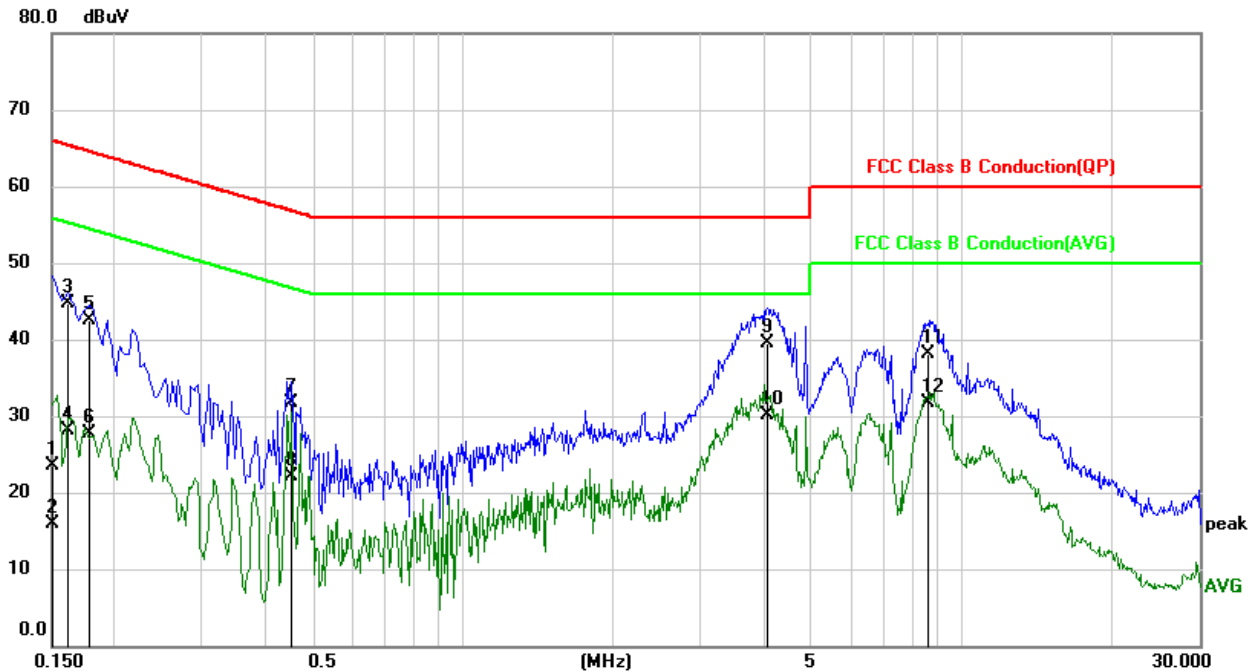

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1 | 0.1500 | 13.81 | 9.60 | 23.41 | 66.00 | -42.59 | QP |
| 2 | 0.1500 | 6.30 | 9.60 | 15.90 | 56.00 | -40.10 | AVG |
| 3 | 0.1617 | 35.17 | 9.60 | 44.77 | 65.38 | -20.61 | QP |
| 4 | 0.1617 | 18.43 | 9.60 | 28.03 | 55.38 | -27.35 | AVG |
| 5 | 0.1774 | 32.94 | 9.60 | 42.54 | 64.61 | -22.07 | QP |
| 6 | 0.1774 | 18.03 | 9.60 | 27.63 | 54.61 | -26.98 | AVG |
| 7 | 0.4573 | 22.17 | 9.60 | 31.77 | 56.74 | -24.97 | QP |
| 8 | 0.4573 | 12.48 | 9.60 | 22.08 | 46.74 | -24.66 | AVG |
| 9 | 4.0590 | 29.81 | 9.66 | 39.47 | 56.00 | -16.53 | QP |
| 10 | 4.0590 | 20.48 | 9.66 | 30.14 | 46.00 | -15.86 | AVG |
| 11 | 8.5599 | 28.37 | 9.74 | 38.11 | 60.00 | -21.89 | QP |
| 12 | 8.5599 | 21.95 | 9.74 | 31.69 | 50.00 | -18.31 | AVG |

Note: 1. Result = Reading +Correct Factor.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS (MID CHANNEL)

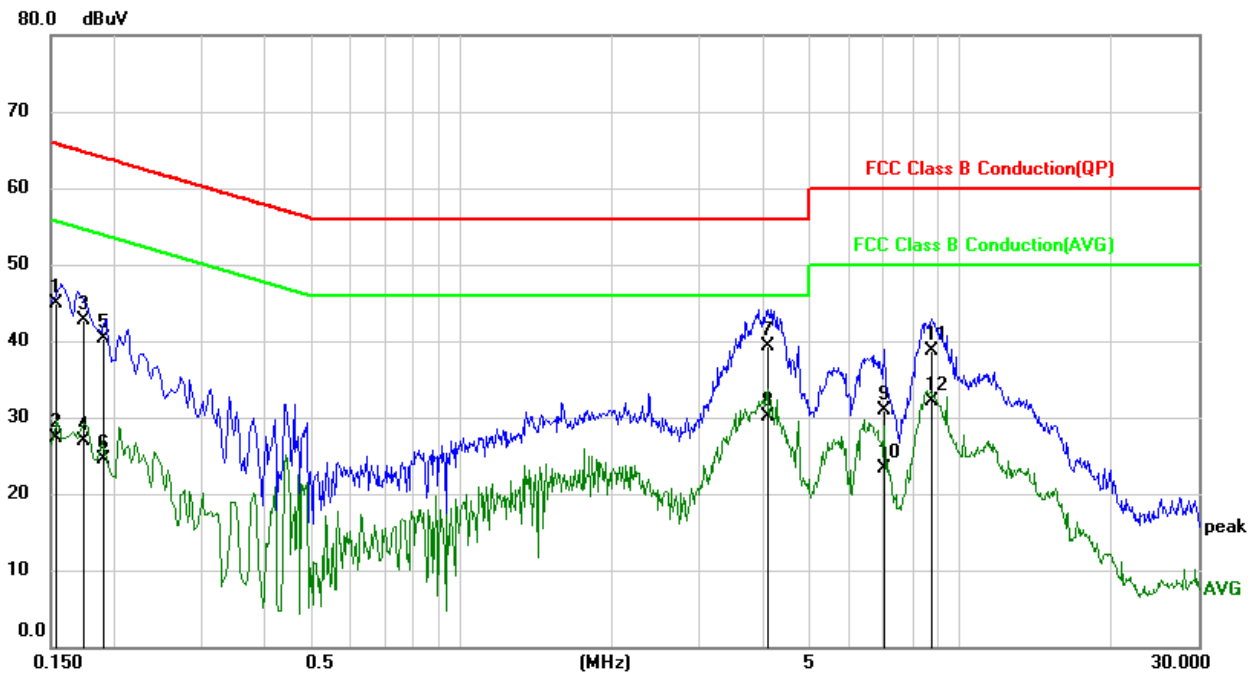

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1 | 0.1538 | 35.39 | 9.61 | 45.00 | 65.79 | -20.79 | QP |
| 2 | 0.1538 | 17.61 | 9.61 | 27.22 | 55.79 | -28.57 | AVG |
| 3 | 0.1749 | 33.05 | 9.61 | 42.66 | 64.72 | -22.06 | QP |
| 4 | 0.1749 | 17.21 | 9.61 | 26.82 | 54.72 | -27.90 | AVG |
| 5 | 0.1912 | 30.65 | 9.60 | 40.25 | 63.98 | -23.73 | QP |
| 6 | 0.1912 | 14.91 | 9.60 | 24.51 | 53.98 | -29.47 | AVG |
| 7 | 4.1088 | 29.74 | 9.66 | 39.40 | 56.00 | -16.60 | QP |
| 8 | 4.1088 | 20.40 | 9.66 | 30.06 | 46.00 | -15.94 | AVG |
| 9 | 7.0567 | 21.28 | 9.71 | 30.99 | 60.00 | -29.01 | QP |
| 10 | 7.0567 | 13.57 | 9.71 | 23.28 | 50.00 | -26.72 | AVG |
| 11 | 8.7136 | 29.05 | 9.73 | 38.78 | 60.00 | -21.22 | QP |
| 12 | 8.7136 | 22.31 | 9.73 | 32.04 | 50.00 | -17.96 | AVG |

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test mode has been tested, only the worst data record in the report



11. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT