



### 9.4.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.



#### RESULTS



Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
CH1	2412	17.89	17.82
CH2	2417	17.77	17.74
CH6	2437	17.74	17.77
CH11	2462	16.41	17.77
CH12	2467	16.48	17.80
CH13	2472	16.49	17.72

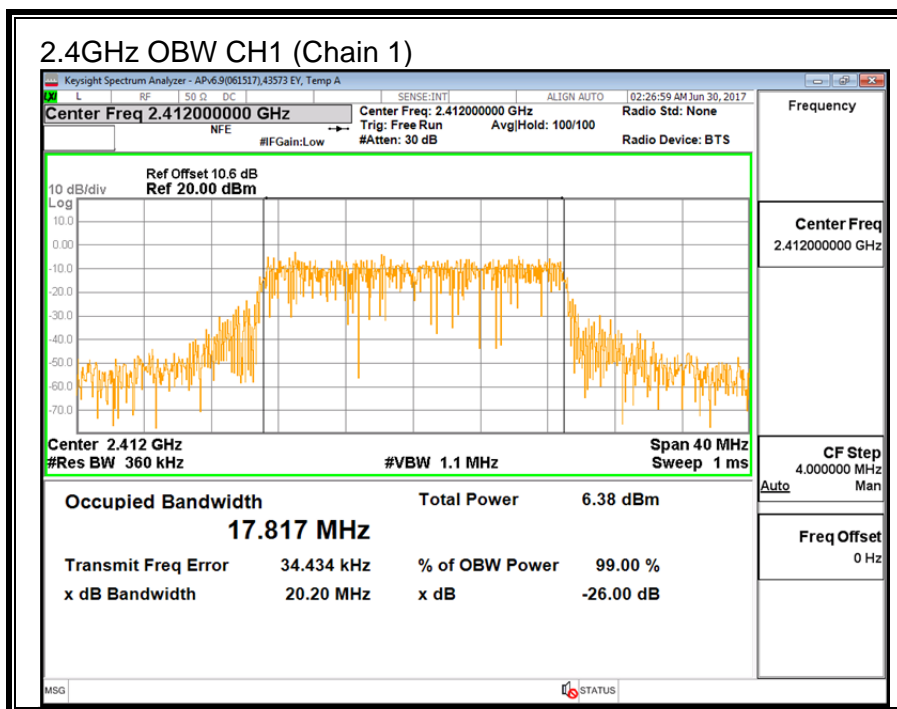
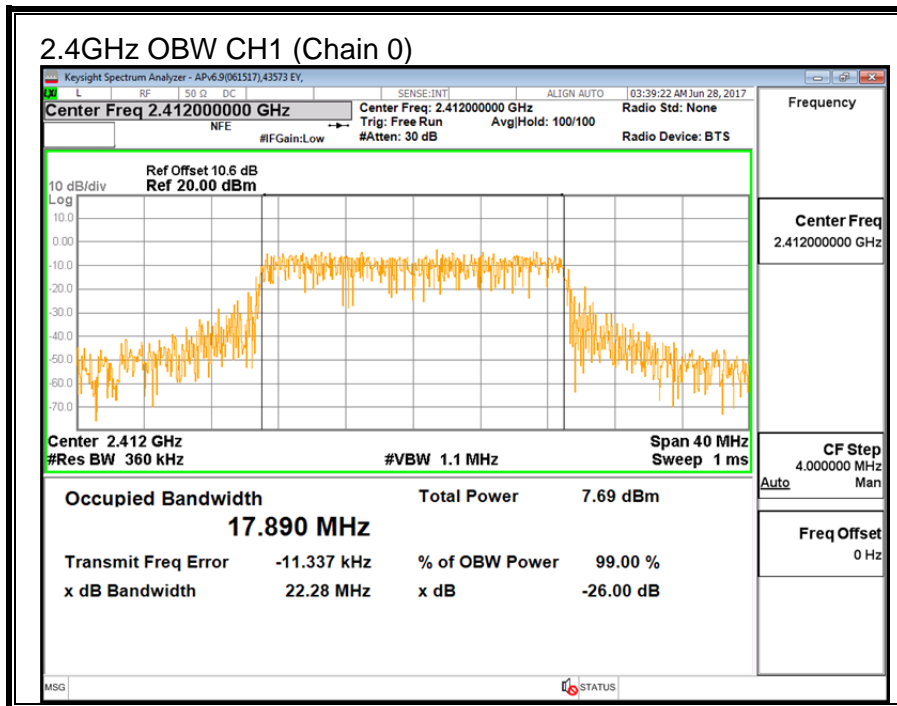


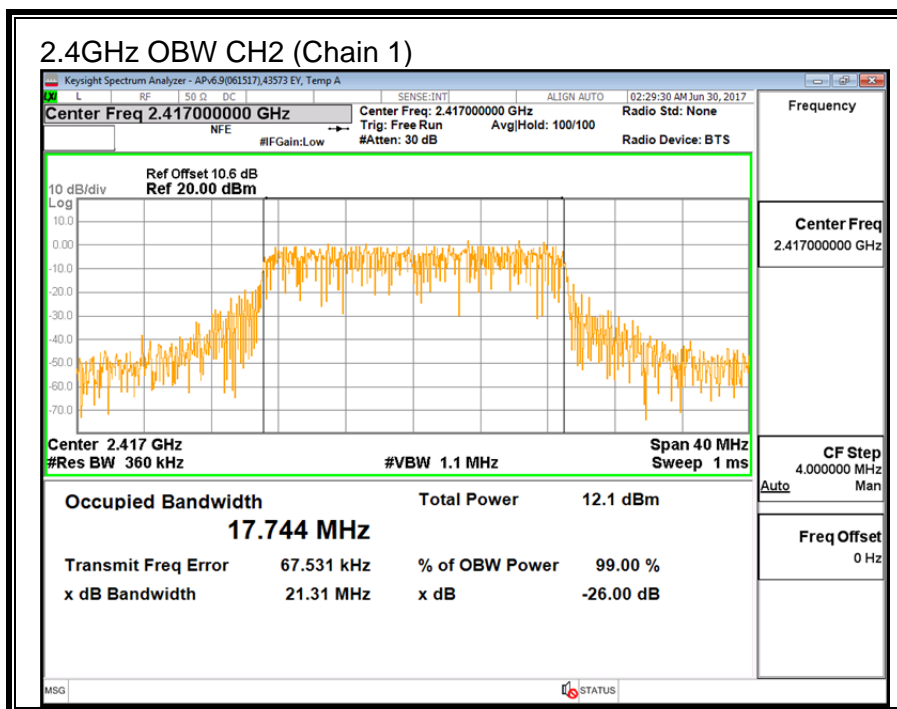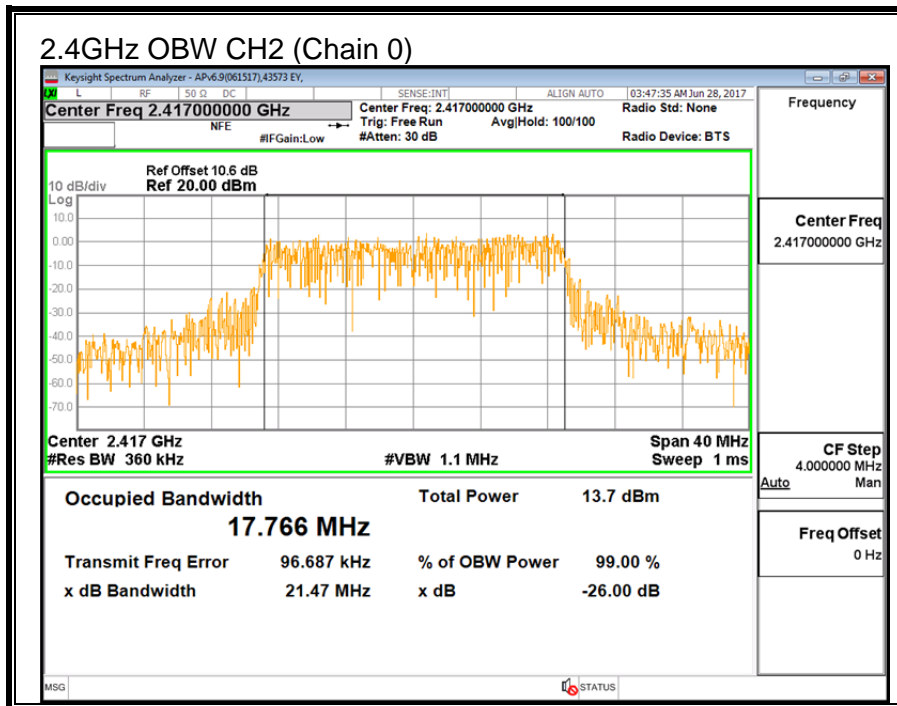

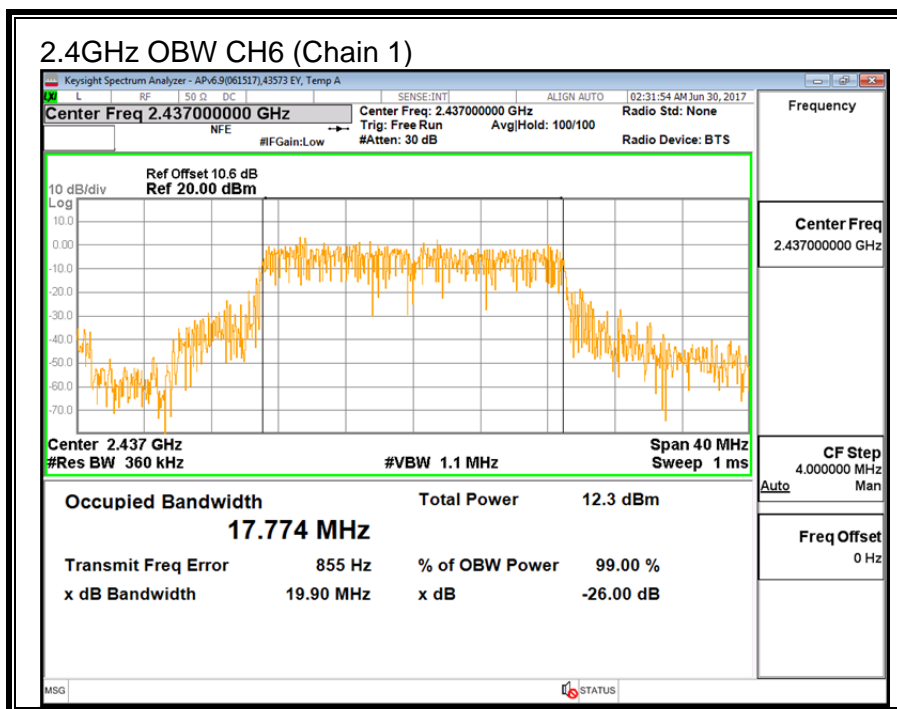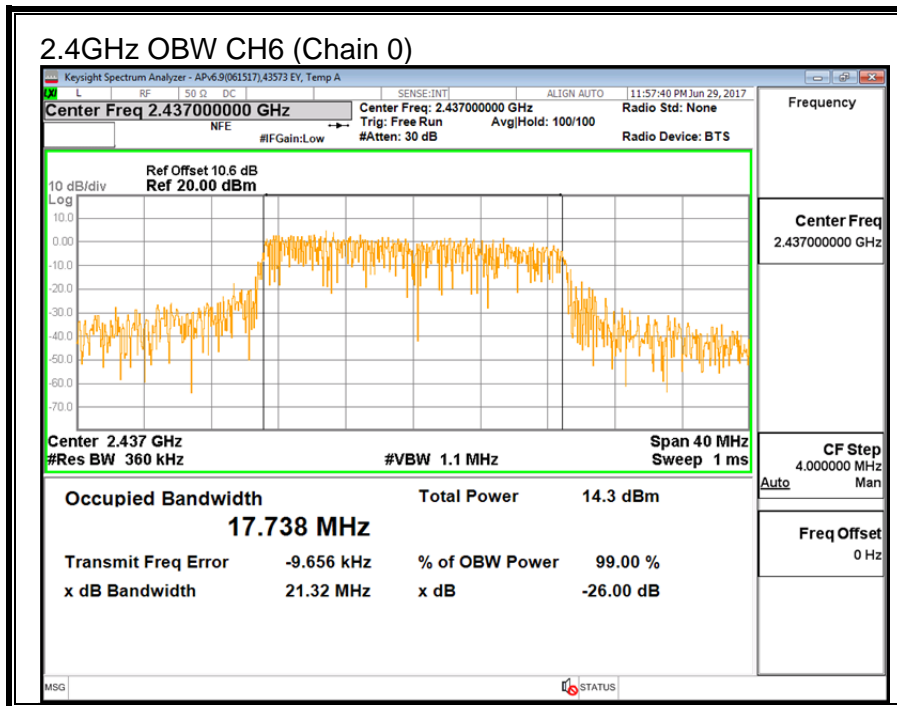

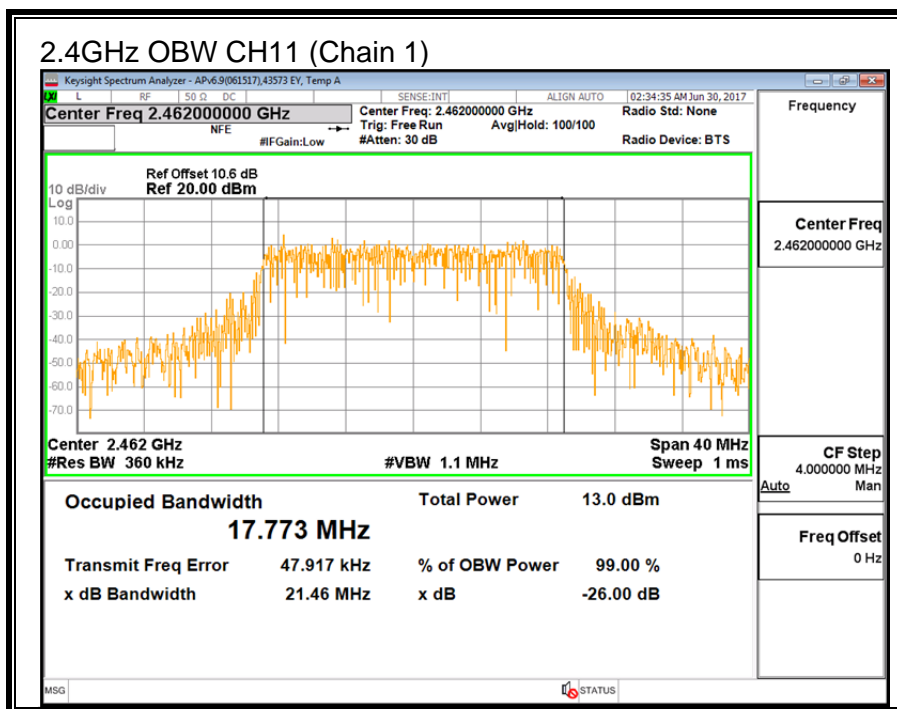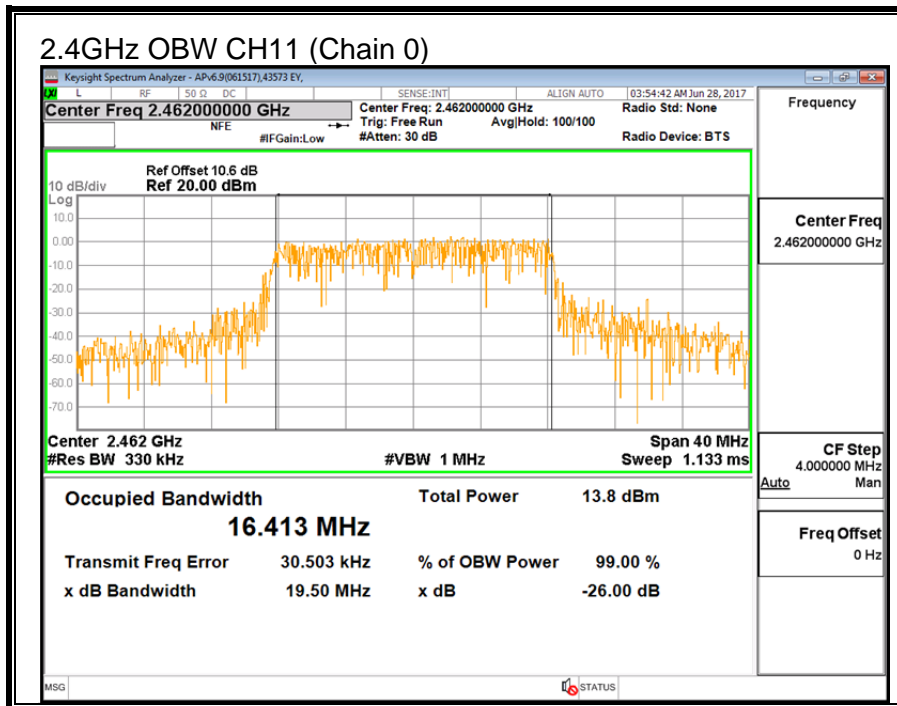

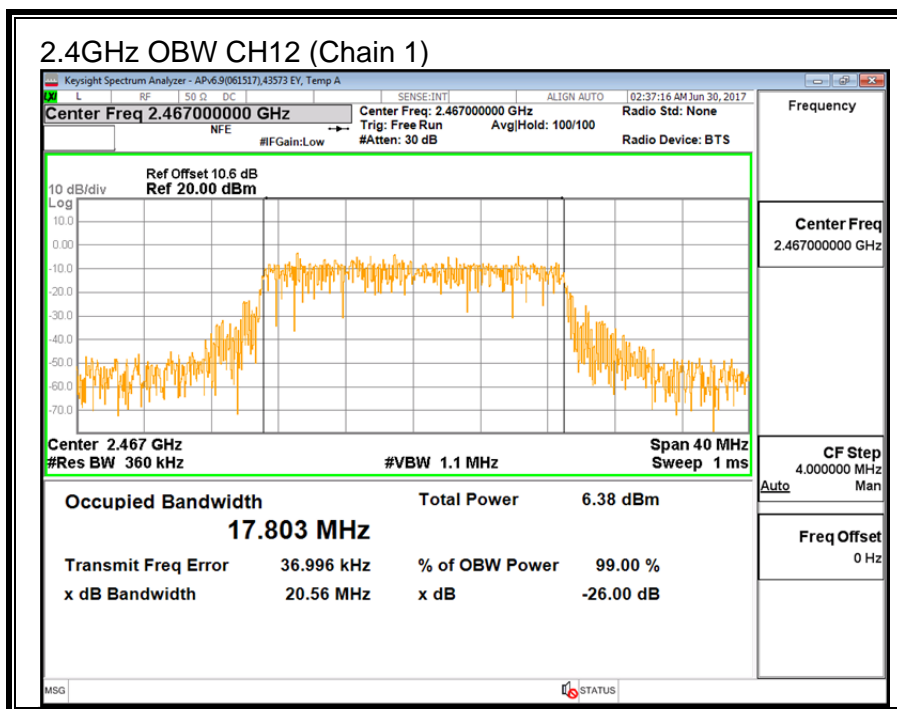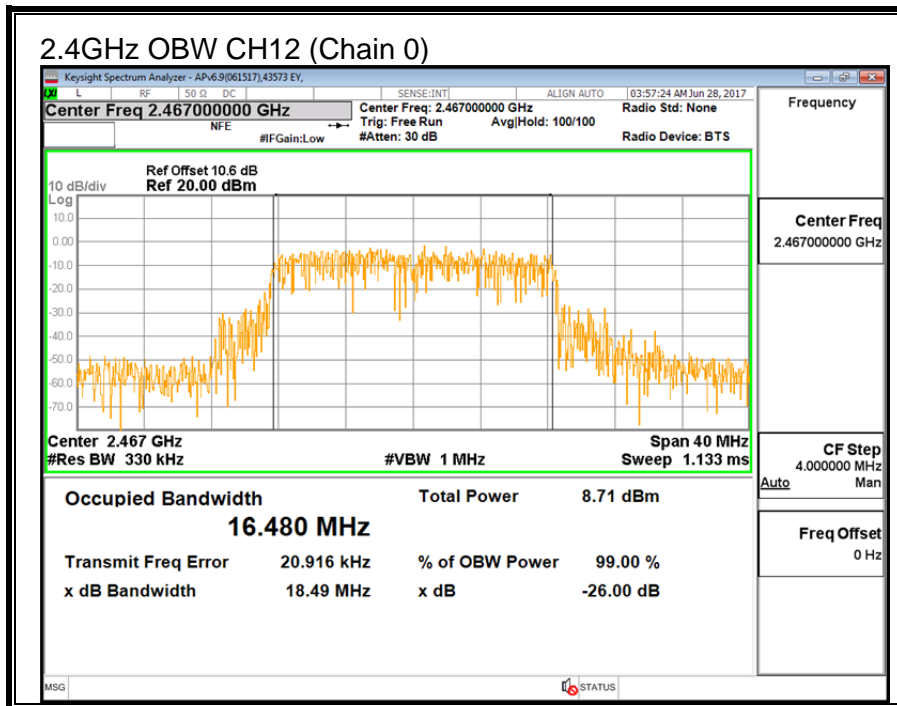

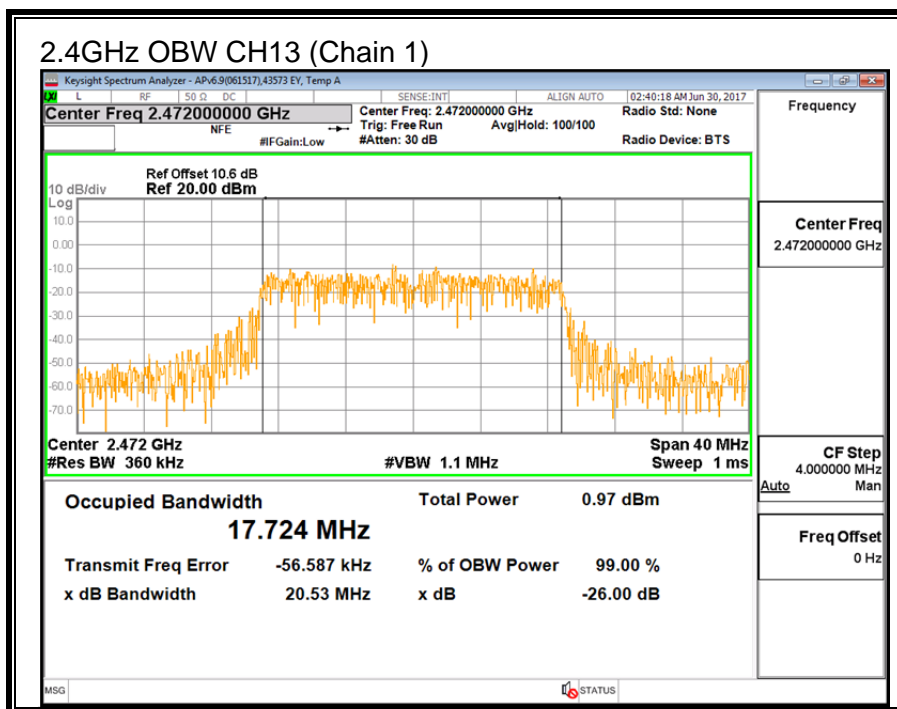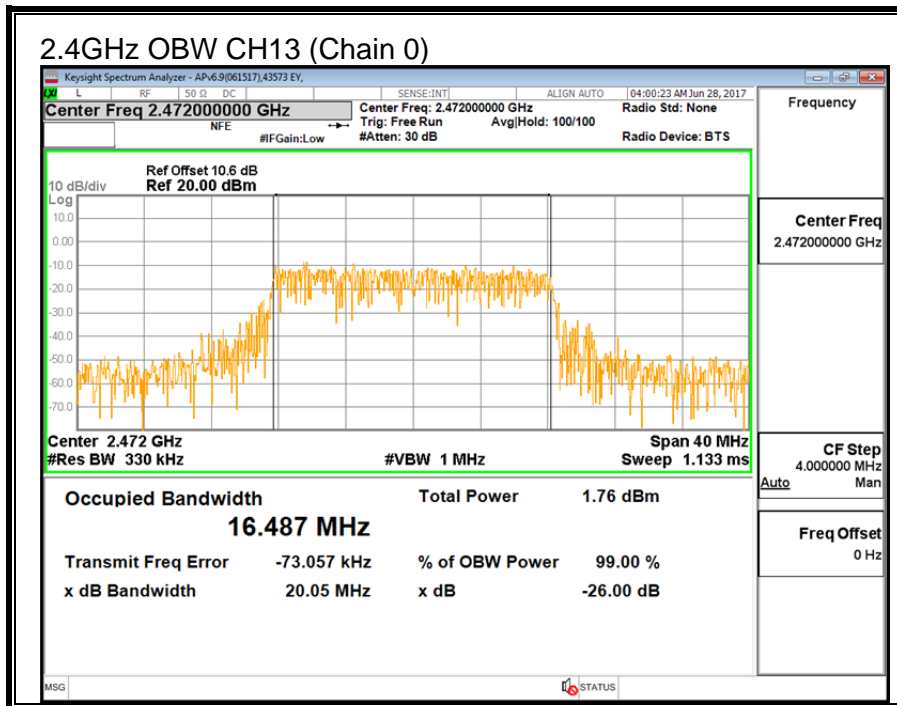

### 9.4.3. OUTPUT POWER

#### **LIMITS**

FCC §15.247 (b) (3)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

KDB 558074 D01 v04Section 9.2.3.2

#### **DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.80	-7.00	-4.41



## RESULTS

<b>ID:</b>	29435	<b>Date:</b>	06/026/2017
------------	-------	--------------	-------------

### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
CH1	2412	-4.41	30.00	30	36	30.00
CH2	2417	-4.41	30.00	30	36	30.00
CH3	2422	-4.41	30.00	30	36	30.00
CH6	2437	-4.41	30.00	30	36	30.00
CH10	2457	-4.41	30.00	30	36	30.00
CH11	2462	-4.41	30.00	30	36	30.00
CH12	2467	-4.41	30.00	30	36	30.00
CH13	2472	-4.41	30.00	30	36	30.00

### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
CH1	2412	8.09	6.95	10.57	30.00	-19.43
CH2	2417	14.03	12.21	16.22	30.00	-13.78
CH3	2422	14.04	12.45	16.33	30.00	-13.67
CH6	2437	14.36	12.73	16.63	30.00	-13.37
CH10	2457	13.10	13.84	16.50	30.00	-13.50
CH11	2462	13.18	13.91	16.57	30.00	-13.43
CH12	2467	7.82	7.76	10.80	30.00	-19.20
CH13	2472	1.79	2.25	5.04	30.00	-24.96

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

## 9.4.4. POWER SPECTRAL DENSITY



### LIMITS



FCC §15.247 (e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



### RESULTS



Duty Cycle CF (dB)		0.21	Included in Calculations of Corr'd PSD			
PSD Results						
Channel	Frequency  (MHz)	Chain 0 Meas (dBm/3kHz)	Chain 1 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit  (dBm/3kHz)	Margin  (dB)
CH1	2412	-17.46	-18.47	-14.72	8.0	-22.7
CH2	2417	-10.28	-12.89	-8.17	8.0	-16.2
CH6	2437	-9.38	-12.58	-7.47	8.0	-15.5
CH11	2462	-10.32	-12.18	-7.93	8.0	-15.9
CH12	2467	-15.79	-18.07	-13.56	8.0	-21.6
CH13	2472	-22.69	-24.37	-20.23	8.0	-28.2

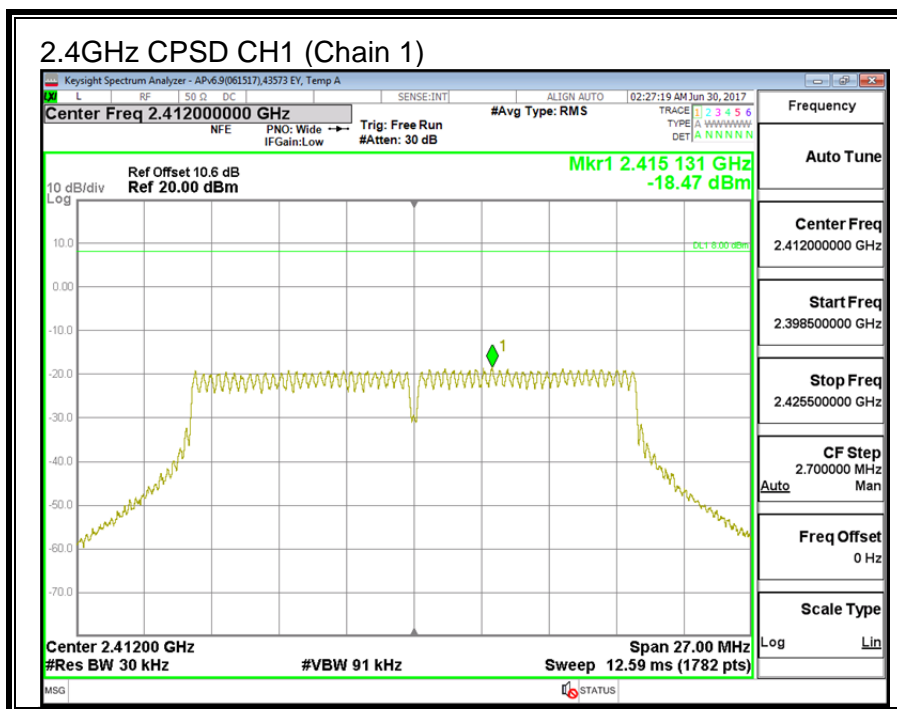
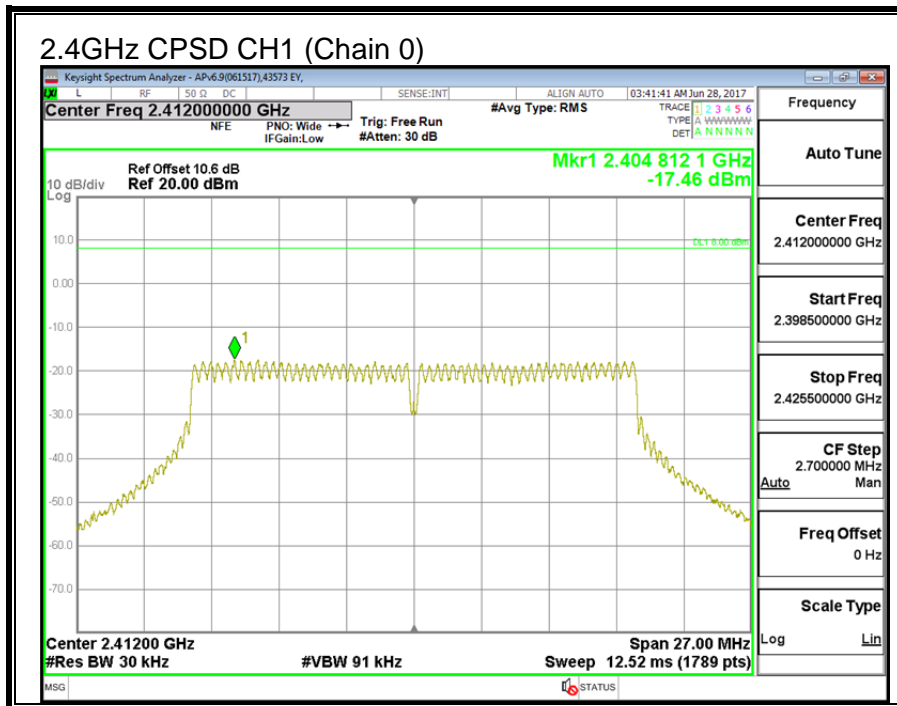


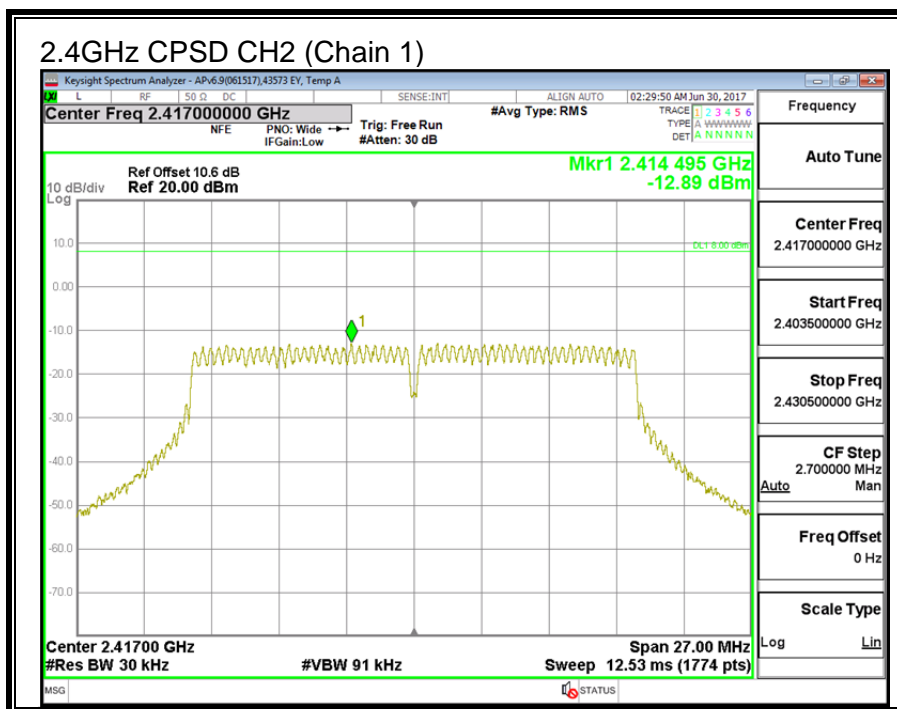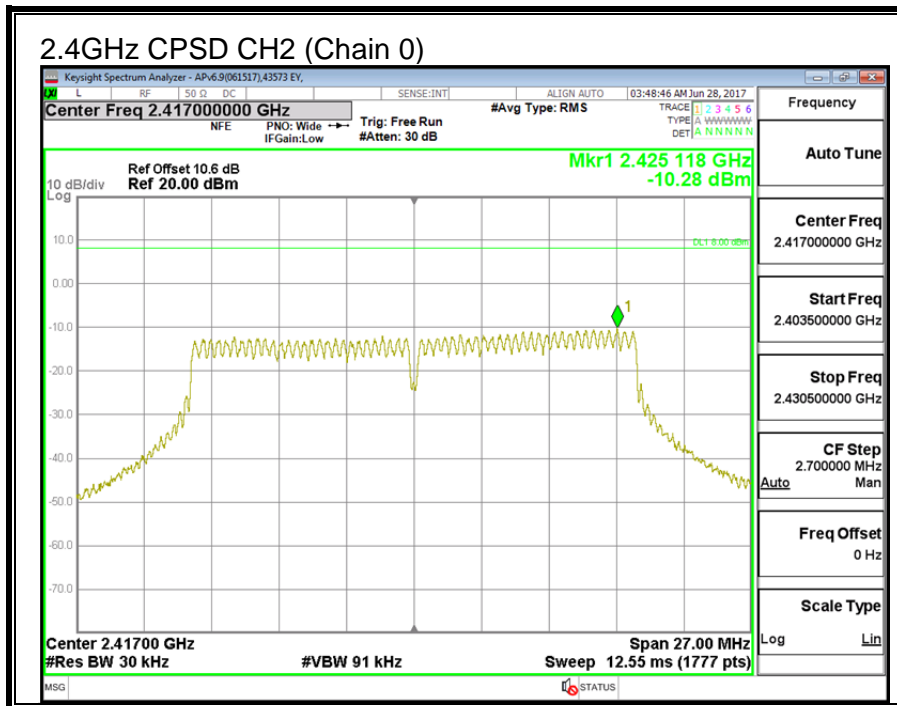

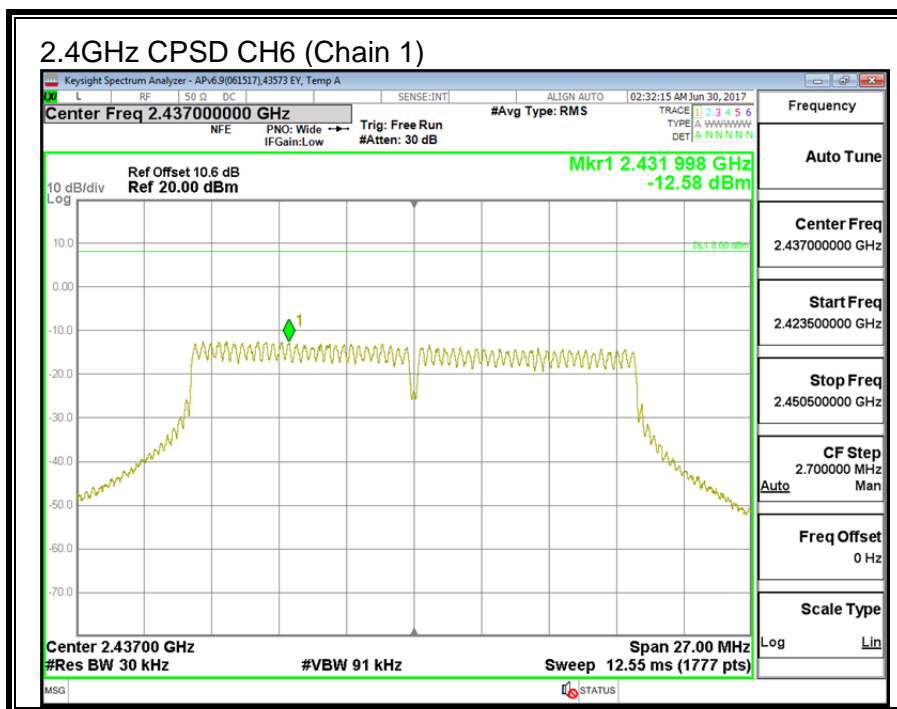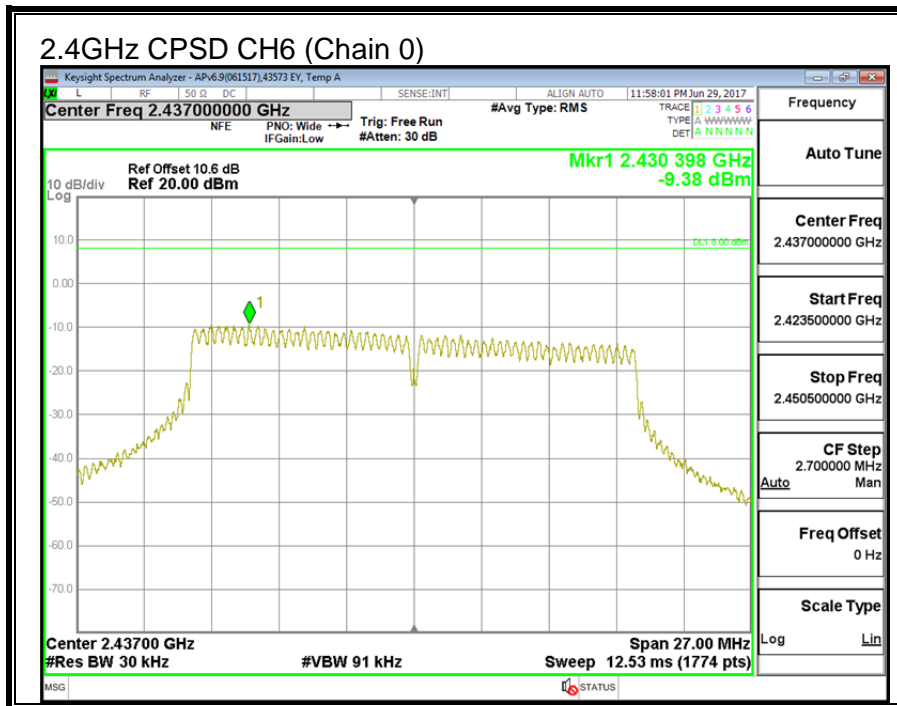

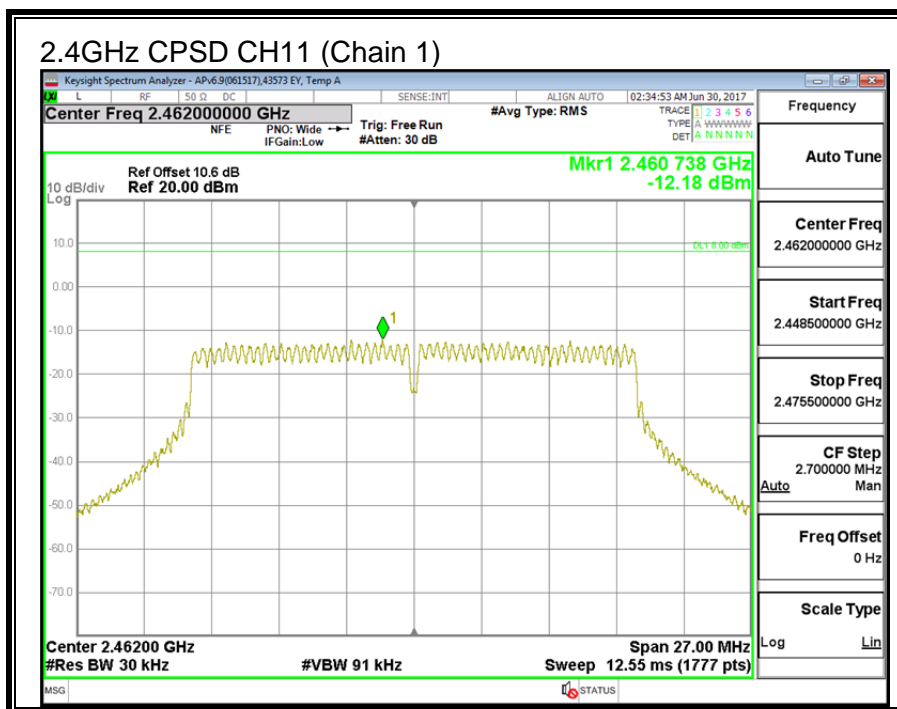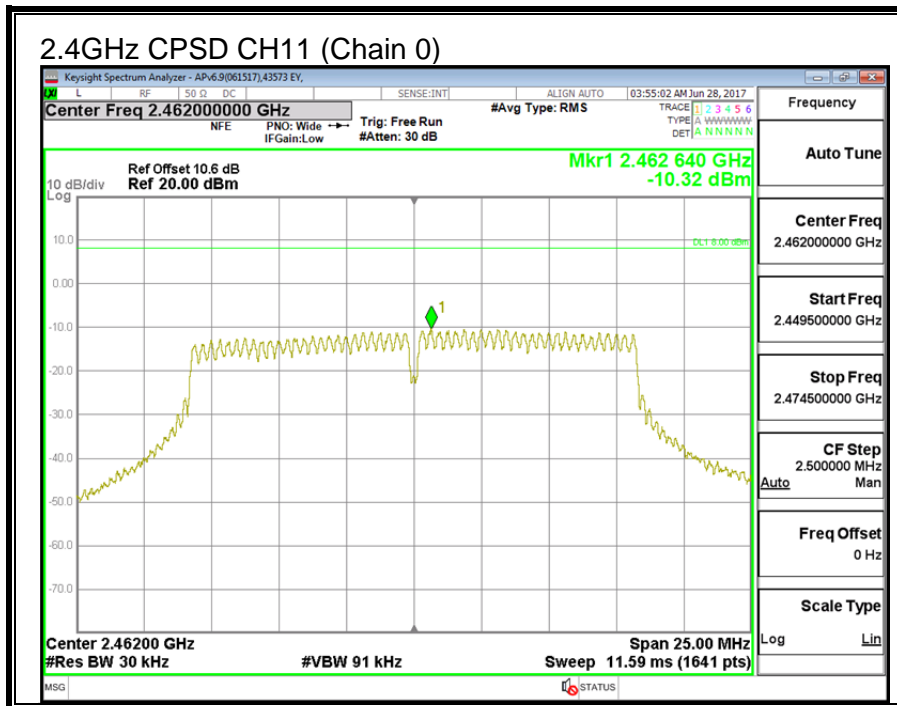

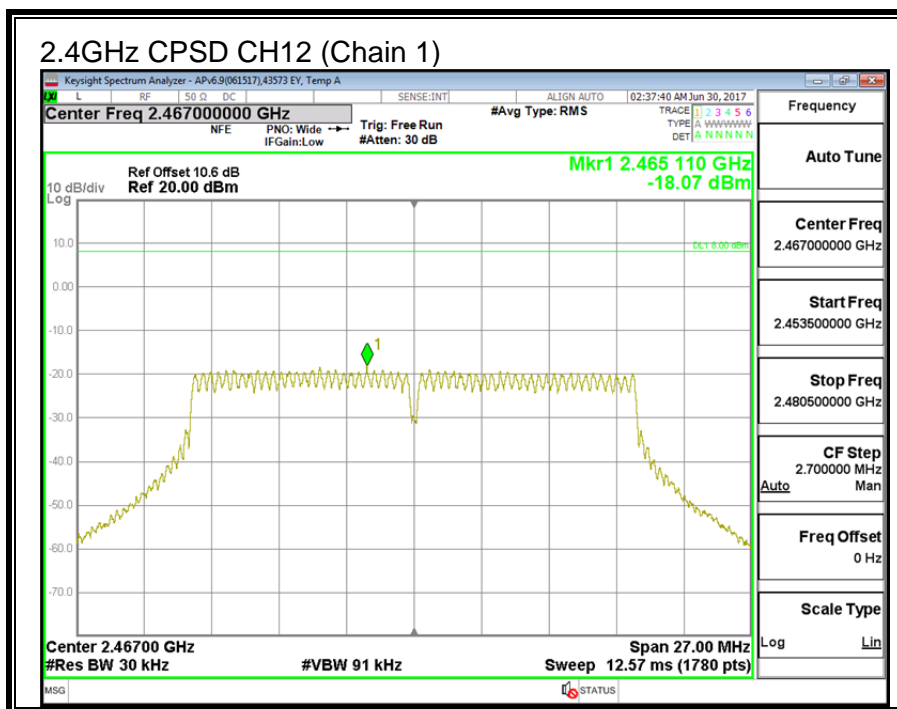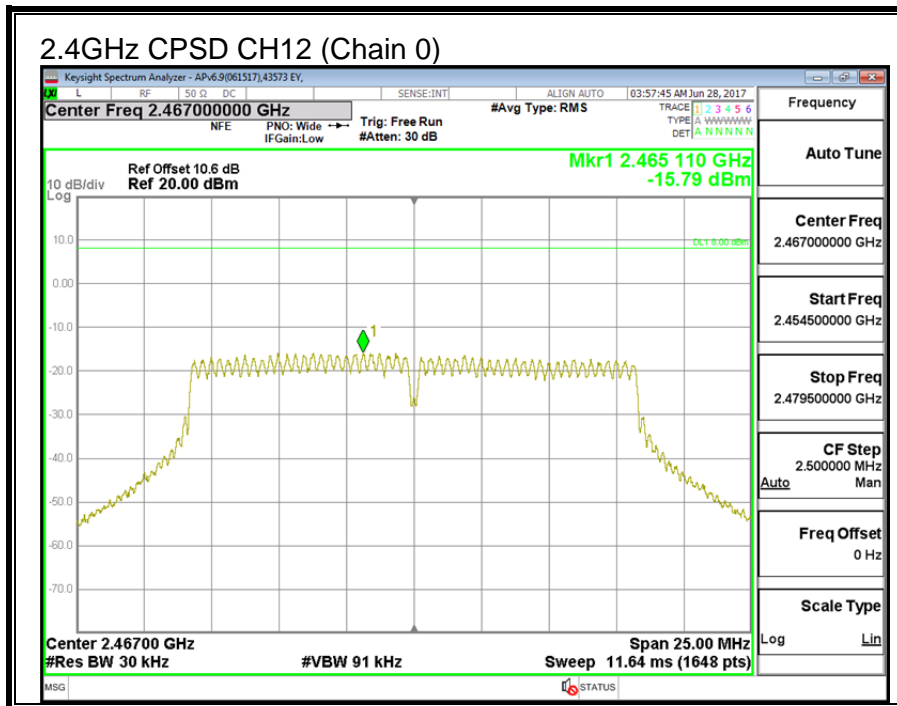


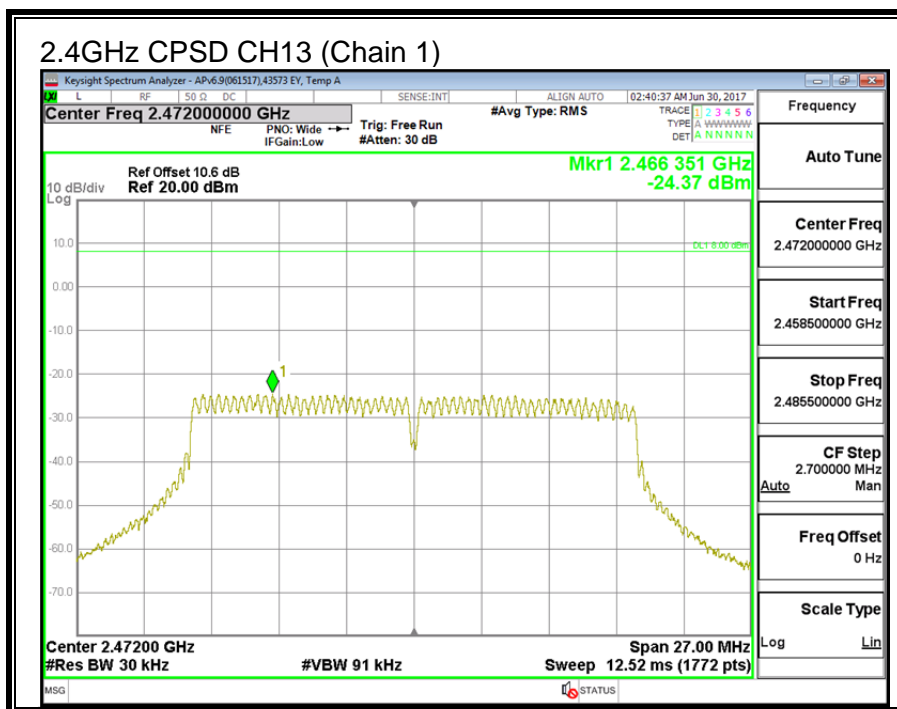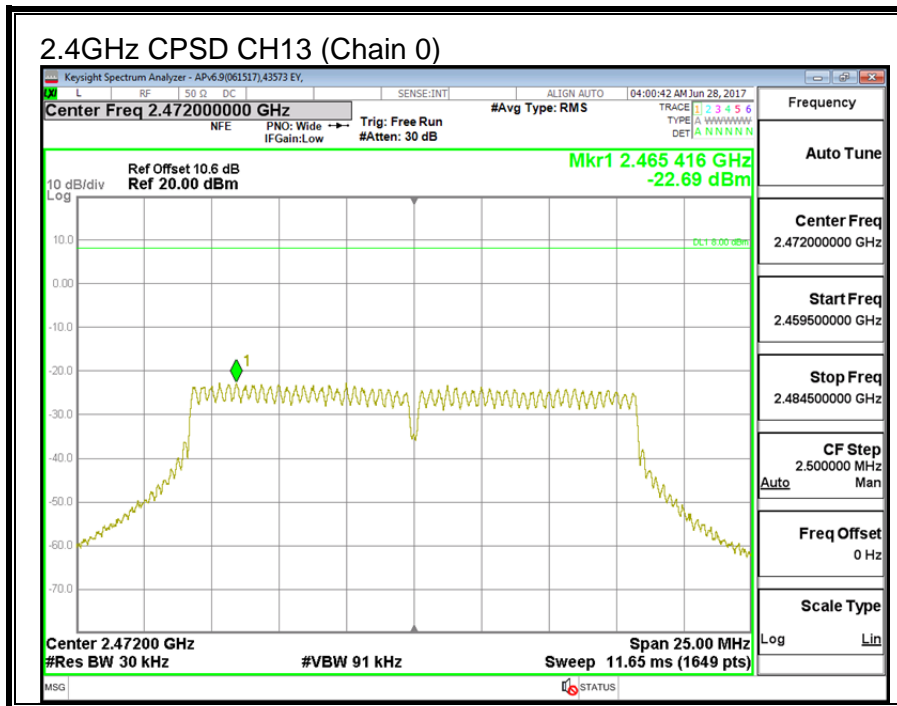



## 9.4.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS

### 2.4GHz CBE CH1 (Chain 0)

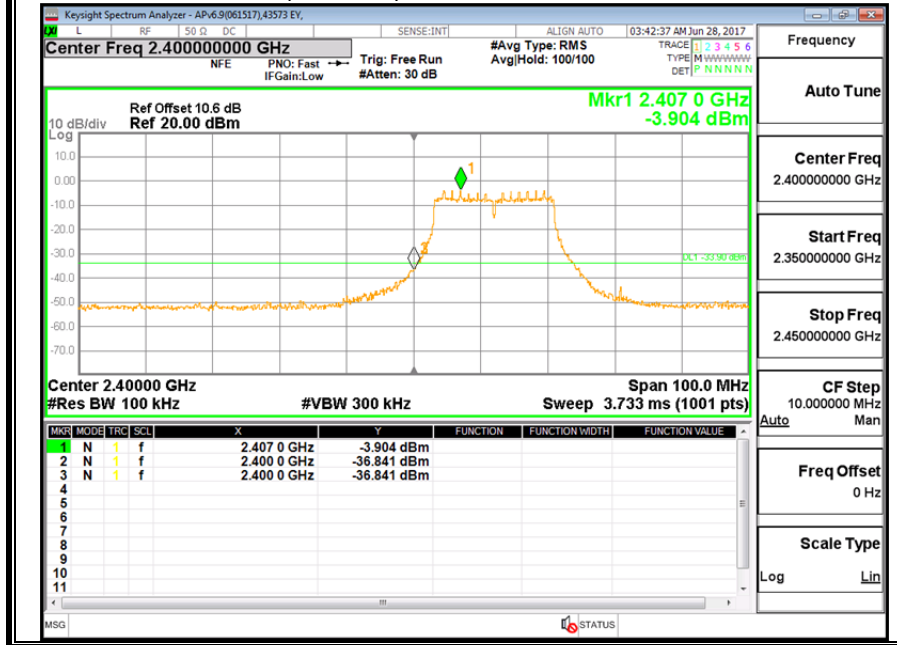

### 2.4GHz CBE CH1 (Chain 1)

