

*Testing Tomorrow's Technology*

**Application**

**For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

**And**

**Innovation Science and Economic Development Canada  
Certification per IC RSS-Gen, General Requirements for Radio Apparatus and  
RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems  
(FHSs) and License-Exempt Local Area Network (LE-LAN) Devices**

**For the**

**Inventek Systems**

**Model: ISM4343-X**

**FCC ID: O7P-4343**


**IC: 10147A-4343**

**UST Project: 18-0327**

**Issue Date: November 7, 2018**

Total Pages in This Report: 50

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
[www.ustech-lab.com](http://www.ustech-lab.com)**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Compliance Engineer – President

Date November 7, 2018



TESTING


NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004**

**PH: 770-740-0717 Fax: 770-740-1508**

**[www.ustech-lab.com](http://www.ustech-lab.com)**



Testing Tomorrow's Technology

## MEASUREMENT TECHNICAL REPORT

**COMPANY NAME:** Inventek Systems

**MODEL:** ISM4343-X

**FCC ID:** O7P-4343

**IC:** 10147A-4343

**DATE:** November 7, 2018

This report concerns (check one): Original grant   
Class II change

Equipment type: 2402-2480 MHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?    yes \_\_\_\_\_ No X

If yes, defer until: N/A  
date

agrees to notify the Commission by N/A  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech  
3505 Francis Circle  
Alpharetta, GA 30004

Phone Number: (770) 740-0717  
Fax Number: (770) 740-1508

**Table of Contents**

<b><u>Paragraph</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
<b>1</b>	<b>General Information .....</b>	<b>7</b>
1.1	Purpose of this Report .....	7
1.2	Characterization of Test Sample .....	7
1.3	Product Description.....	7
1.4	Configuration of Tested System .....	8
1.5	Test Facility .....	8
1.6	Related Submittals .....	8
1.7	Test Results .....	9
<b>2</b>	<b>Tests and Measurements .....</b>	<b>10</b>
2.1	Test Equipment.....	10
2.2	Modifications to EUT Hardware.....	11
2.3	Number of Measurements for Intentional Radiators (CFR 15.31(m),RSS-Gen 6.8)	11
2.4	Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13)..	12
2.4.1	Intentional Radiator .....	12
2.4.2	Unintentional Radiator.....	12
2.5	Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9)..	12
2.5.1	Detector Function and Associated Bandwidth.....	12
2.5.2	Corresponding Peak and Average Requirements .....	12
2.5.3	Pulsed Transmitter Averaging .....	13
2.6	EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7) .....	13
2.7	Restricted Bands of Operation (CFR 15.205, RSS-Gen 8.10) .....	15
2.8	Transmitter Duty Cycle (CFR 15.35 (c), RSS-Gen 6.10).....	15
2.9	Intentional Radiator, Power Line Conducted Emissions (CFR 15.207, RSS-Gen 8.8)	16
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.1,5.5)	17
2.10.1	Fundamental and Harmonic emissions .....	18
2.10.2	Spurious Emissions other than Fundamental and harmonics .....	22
2.10.3	Conducted Spurious Emissions.....	25
2.11	Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5) .....	34
2.12	99% and Twenty dB Bandwidth (CFR 15.247(a)(1), RSS-Gen 6.6) .....	39
2.13	Maximum Peak Conducted Output Power (CFR 15.247(b)(1), RSS-247 5.1)	43
2.14	Number of Hopping Frequencies (CFR 15.247(a), RSS-247 5.1).....	47
2.15	Frequency Separation (CRF 15.247(a)(1), RSS-247 5.1).....	48
2.16	Average Time of Occupancy (CFR 15.247(a)(1), RSS-247 5.1).....	49
2.17	Measurement Uncertainty .....	50

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

2.17.1	Conducted Emissions Measurement Uncertainty .....	50
2.17.2	Radiated Emissions Measurement Uncertainty .....	50
<b>3</b>	<b>Conclusion.....</b>	<b>50</b>

### List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration.....	14
Figure 2.	Conducted Spurious Emissions Low, 30 MHz to 1 GHz .....	25
Figure 3.	Conducted Spurious Emissions Low, 1 to 2.9 GHz.....	26
Figure 4.	Conducted Spurious Emissions Low, 2.9 GHz to 25 GHz.....	27
Figure 5.	Conducted Spurious Emissions Mid, 30 MHz to 1 GHz .....	28
Figure 6.	Conducted Spurious Emissions Mid, 1 GHz to 2.9 GHz .....	29
Figure 7.	Conducted Spurious Emissions Mid, 2.9 GHz to 25 GHz .....	30
Figure 8.	Conducted Spurious Emissions High, 30 MHz to 1 GHz.....	31
Figure 9.	Conducted Spurious Emissions High, 1 GHz to 2.9 GHz.....	32
Figure 10.	Conducted Spurious Emissions High, 2.9 GHz to 25 GHz.....	33
Figure 11.	Band Edge Compliance, Low Channel Delta – Chip Antenna.....	35
Figure 12.	Band Edge Compliance, High Channel Delta – Chip Antenna.....	36
Figure 13.	Band Edge Compliance, Low Channel Delta – External Antenna.....	37
Figure 14.	Band Edge Compliance, High Channel Delta – External Antenna .....	38
Figure 15.	99% & Twenty dB Bandwidth – Low Channel .....	40
Figure 16.	99% & Twenty dB Bandwidth – Mid Channel.....	41
Figure 17.	99% & Twenty dB Bandwidth – High Channel .....	42
Figure 18.	Peak Antenna Conducted Output Power, Low Channel.....	44
Figure 19.	Peak Antenna Conducted Output Power, Mid Channel .....	45
Figure 20.	Peak Antenna Conducted Output Power, High Channel.....	46
Figure 21.	Hopping Channels 1 through 79.....	47
Figure 22.	Channel Separation .....	48
Figure 23.	Time of Occupancy .....	49

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

### List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals .....	9
Table 2.	Test Instruments.....	10
Table 3.	Number of Test Frequencies for Intentional Radiators .....	11
Table 4.	Allowed Antenna(s) .....	13
Table 5.	Transmitter Power Line Conducted Emissions Test Data, Part 15.207 .....	16
Table 6.	Average Radiated Fundamental & Harmonic Emissions (Chip Antenna) .....	18
Table 7.	Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna) .....	19
Table 8.	Average Radiated Fundamental & Harmonic Emissions (External Antenna) ..	20
Table 9.	Peak Radiated Fundamental & Harmonic Emissions (External Antenna) .....	21
Table 10.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209), .....	22
Table 11.	Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz.....	23
Table 12.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 12.5 GHz .....	24
Table 13.	Occupied Bandwidth (99% & 20 dB) .....	39
Table 14.	Peak Antenna Conducted Output Power per Part 15.247 (b) (2) .....	43

### List of Attachments

Agency Agreement	Internal Photographs
Application Forms	External Photographs
Letter of Confidentiality	Antenna Photographs
Equipment Label(s)	Theory of Operation
Block Diagram(s)	RF Exposure
Schematic(s)	Installation Manual
Test Configuration Photographs	

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

## **1 General Information**

### **1.1 Purpose of this Report**

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 247 and Industry Canada RSS-247.

### **1.2 Characterization of Test Sample**

The sample used for testing was received by US Tech on September 15, 2018 in good operating condition.

### **1.3 Product Description**

The Equipment Under Test (EUT) is the Inventek 2.4 GHz e-BT SIP Module Model: ISM4343-WBM-L54. The EUT is an embedded wireless Bluetooth (BT) connectivity device, based on the Renesas ISM4343-WBM-L54 microcomputer incorporating the WBM-L54 CPU core and low power consumption RF transceiver supporting the Bluetooth ver.4.1 (Low Energy Single mode) specifications. The Inventek ISM4343 offers a WBM-L54 CPU core is a 3-stage pipeline CISC architecture with an integrated BLE Radio, on-board chip antenna, and 256 KB ROM. The module provides a number of features and standard peripheral interfaces, enabling connection to an embedded design. The low cost, small foot print, 11mm x 13mm 31-Pin LGA package and ease of design-in make it ideal for a range of embedded applications. The module provides UART, I<sup>2</sup>C.

Radio: Bluetooth 2  
Range: 2400-2483.5 MHz ISM Band  
Modulation: GFSK, QPSK  
RF Output Power (EIRP): +8 dBm  
Data Rate: Mbps (Max): 3 Mbps  
Channels: 79

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

#### **1.4 Configuration of Tested System**

The Test Sample was tested per *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for FCC subpart A Digital equipment Verification requirements. Also, *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* was used as a test procedure guide.

A list of the EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

#### **1.5 Test Facility**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC under designation number US5301. Additionally, this site has been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

#### **1.6 Related Submittals**

The Equipment under Test (EUT) is subject to the following FCC/IC authorizations:

- a) Certification under section 15.247/IC RSS-247 as a transmitter.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

## 1.7 Test Results

In our opinion, and as indicated by the test results documented following, when tested in the configuration as described in this report, the EUT meets the applicable requirements of FCC and IC, including: FCC Parts 2.902, 15.207, 15.209, 15.247, RSS GEN, and RSS-247.

**Table 1. EUT and Peripherals**

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID:	CABLES P/D
Inventek	ISM4343-X	Engineering Sample	FCC ID: O7P-4343 IC ID: 10147A-4343 (pending)	UD
Hewlett-Packard (Laptop)	EliteBook 8530p	2CE010000 TG	Unknown	-
Hewlett-Packard (Power Supply Adapter)	384020-001	PA-1900-08H2	Not Applicable	3.0 m UP
Antenna See antenna details	--	--	--	--

U= Unshielded  
 S= Shielded  
 P= Power  
 D= Data

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

## 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

**Table 2. Test Instruments**

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	01/25/2019
LOOP ANTENNA	SAS-200/562	A. H. Systems	142	1/22/2020 2 yr.
BICONICAL ANTENNA	3110B	EMCO	9307-1431	5/2/2019 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	5/1/2019 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	12/22/2018
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	3/7/2019
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT-PACKARD	3008A00480	2/28/2019
HIGH PASS FILTER	H3R020G2	MICROWAVE CIRCUITS	001DC9528	3/08/2019
8 dB ATTENUATOR	VAT-8 15542	MINI-CIRCUITS	30519	3/8/2019

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

## 2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

## 2.3 Number of Measurements for Intentional Radiators (CFR 15.31(m),RSS-Gen 6.8)

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

**Table 3. Number of Test Frequencies for Intentional Radiators**

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

## **2.4 Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13)**

### **2.4.1 Intentional Radiator**

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

### **2.4.2 Unintentional Radiator**

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

## **2.5 Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9)**

The radiated and conducted emissions limits shown herein are based on the following:

### **2.5.1 Detector Function and Associated Bandwidth**

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

### **2.5.2 Corresponding Peak and Average Requirements**

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

### 2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.


NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG) the duty cycle factor calculated will be applied.

### 2.6 EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)

This equipment is not available to the general public and will only be installed by a professional installer working for an approved utility. The equipment therefore meets the intent of the above requirement. Only the antennas listed in Table 4 will be used with this module.

**Table 4. Allowed Antenna(s)**

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dBi	TYPE OF CONNECTOR
Chip Antenna	Inventek Systems	Chip	W245-SC	+1.4	U.FL
External Antenna	Inventek Systems	Trace	W24P-U	+3.2	U.FL

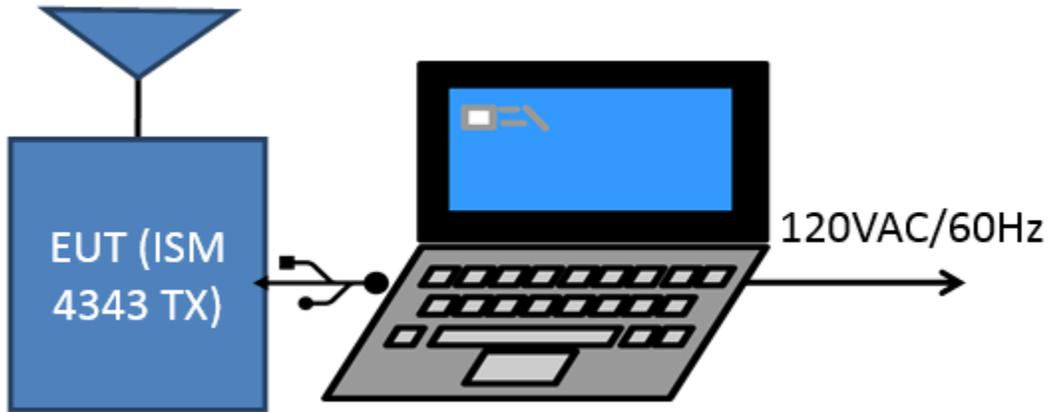

**Figure 1. Block Diagram of Test Configuration**

Note: The laptop is used for programming the radio module only.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

## **2.7 Restricted Bands of Operation (CFR 15.205, RSS-Gen 8.10)**

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement. See paragraph 2.10 of the test report.

## **2.8 Transmitter Duty Cycle (CFR 15.35 (c), RSS-Gen 6.10)**

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

In this case no duty cycle correction factor was used.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207, RSS-Gen 8.8)**

The EUT was indirectly connected to the AC mains and evaluated for compliance to 15.207, Power line conducted emissions.

**Table 5. Transmitter Power Line Conducted Emissions Test Data, Part 15.207**

150KHz to 30 MHz						
Test: Power Line Conducted Emissions				Client: Inventek Systems		
Project: 18-0327				Model: ISM4343-X		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
<b>Phase</b>						
0.1500	49.52	0.51	50.03	56.0	6.0	PK
0.6250	34.25	0.14	34.39	46.0	11.6	PK
1.3600	32.79	0.14	32.93	46.0	13.1	PK
9.5870	37.07	0.38	37.45	50.0	12.5	PK
12.4800	38.04	0.50	38.54	50.0	11.5	PK
24.2000	30.46	0.73	31.19	50.0	18.8	PK
<b>Neutral</b>						
0.1658	47.06	0.54	47.60	55.2	7.6	PK
0.5563	30.12	0.29	30.41	46.0	15.6	PK
3.9400	37.18	0.36	37.54	46.0	8.5	PK
8.8000	33.51	0.48	33.99	50.0	16.0	PK
12.4800	36.21	0.62	36.83	50.0	13.2	PK
21.1800	31.40	0.76	32.16	50.0	17.8	PK

Sample Calculation at: 0.1500 MHz

Magnitude of Measured Frequency	49.52	dBuV
+Antenna Factor + Cable Loss	0.51	dB
Corrected Result	50.03	dBuV/m

Test Date: November 6, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

## **2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.1,5.5)**

Radiated Spurious measurements: The EUT was placed into a continuous transmit mode of operation (>98% or max level possible duty cycle) and tested per ANSI C63.10:2013. The EUT was tested in three orthogonal positions to find the maximum emission position.

Radiated measurements were conducted between the frequency range of 9 kHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (not greater than 40 GHz). In the band below 150 kHz, a resolution bandwidth (RBW) of 200 Hz was used. In the band from 150 kHz to 30 MHz, a RBW of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 100/120 kHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated per CFR 15.209, General requirements for unwanted spurious emissions. The conducted spurious method as described below was used to investigate all other emissions emanating from the antenna port.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

## 2.10.1 Fundamental and Harmonic emissions

**Table 6. Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)**

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
<b>Low Channel – AVERAGE</b>							
2402.00	23.97	30.35	54.32	--	3.0m./HORZ	--	<b>AVG</b>
4804.00	27.73	2.80	30.53	54.0	3.0m./HORZ	23.5	<b>AVG</b>
7206.00	27.64	8.21	35.85	54.0	3.0m./HORZ	18.1	<b>AVG</b>
<b>Mid Channel – AVERAGE</b>							
2440.00	25.61	30.37	55.98	--	3.0m./HORZ	--	<b>AVG</b>
4880.00	29.65	1.29	30.94	54.0	3.0m./HORZ	23.06	<b>AVG</b>
7320.00	28.01	9.17	37.18	54.0	3.0m./HORZ	16.82	<b>AVG</b>
<b>High Channel – AVERAGE</b>							
2480.00	27.59	30.38	57.97	--	3.0m./HORZ	--	<b>AVG</b>
4960.00	28.12	2.39	30.51	54.0	3.0m./HORZ	23.49	<b>AVG</b>
7440.00	28.02	9.36	37.38	54.0	3.0m./HORZ	16.62	<b>AVG</b>

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4804.00 MHz:

Magnitude of Measured Frequency	27.73	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	2.80	dB/m
Corrected Result	30.53	dBuV/m

Test Date: October 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**Table 7. Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)**

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
<b>Low Channel – PK</b>							
2402.00	59.16	30.35	89.5	--	3.0m./HORZ	--	<b>PK</b>
4804.00	49.36	2.80	52.2	74.0	3.0m./HORZ	21.84	<b>PK</b>
7206.00	49.29	8.21	57.5	74.0	3.0m./HORZ	16.50	<b>PK</b>
<b>Mid Channel – PK</b>							
2440.00	65.86	30.37	96.2	--	3.0m./HORZ	--	<b>PK</b>
4880.00	48.83	1.29	50.1	74.0	3.0m./HORZ	23.88	<b>PK</b>
7320.00	49.50	9.17	58.7	74.0	3.0m./HORZ	15.33	<b>PK</b>
<b>High Channel – PK</b>							
2480.00	71.98	30.38	102.4	--	3.0m./HORZ	--	<b>PK</b>
4960.00	49.90	2.39	52.3	74.0	3.0m./HORZ	21.71	<b>PK</b>
7440.00	49.52	9.36	58.9	74.0	3.0m./HORZ	15.12	<b>PK</b>

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	59.16	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	30.35	dB/m
Corrected Result	89.51	dBuV/m

Test Date: October 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**Table 8. Average Radiated Fundamental & Harmonic Emissions (External Antenna)**

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
<b>Low Channel – AVERAGE</b>							
2402.00	27.59	30.54	58.1	--	3.0m./VERT	--	<b>AVG</b>
4804.00	27.69	2.82	30.5	54.0	3.0m./VERT	23.49	<b>AVG</b>
7206.00	27.69	8.25	35.9	54.0	3.0m./VERT	18.06	<b>AVG</b>
<b>Mid Channel – AVERAGE</b>							
2440.00	28.05	30.55	58.6	--	3.0m./VERT	--	<b>AVG</b>
4880.00	28.09	1.32	29.4	54.0	3.0m./VERT	24.6	<b>AVG</b>
7320.00	26.68	9.15	35.8	54.0	3.0m./VERT	18.2	<b>AVG</b>
<b>High Channel – AVERAGE</b>							
2480.00	28.80	30.56	59.4	--	3.0m./VERT	--	<b>AVG</b>
4960.00	27.90	2.33	30.2	54.0	3.0m./VERT	23.8	<b>AVG</b>
7440.00	26.15	9.37	35.5	54.0	3.0m./VERT	18.5	<b>AVG</b>

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4804.00 MHz:

Magnitude of Measured Frequency	27.69	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	2.82	dB/m
Corrected Result	30.51	dBuV/m

Test Date: October 25, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**Table 9. Peak Radiated Fundamental & Harmonic Emissions (External Antenna)**

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
<b>Low Channel – PK</b>							
2402.00	72.51	30.54	103.0	--	3.0m./VERT	--	<b>PK</b>
4804.00	50.10	2.82	52.9	74.0	3.0m./VERT	21.08	<b>PK</b>
7206.00	51.70	8.25	60.0	74.0	3.0m./VERT	14.05	<b>PK</b>
<b>Mid Channel – PK</b>							
2440.00	74.17	30.55	104.72	--	3.0m./VERT	--	<b>PK</b>
4880.00	50.03	1.32	51.35	74.0	3.0m./VERT	22.7	<b>PK</b>
7320.00	50.47	9.15	59.62	74.0	3.0m./VERT	14.4	<b>PK</b>
<b>High Channel – PK</b>							
2480.00	75.11	30.56	105.67	--	3.0m./VERT	--	<b>PK</b>
4960.00	49.90	2.33	52.23	74.0	3.0m./VERT	21.8	<b>PK</b>
7440.00	50.27	9.37	59.64	74.0	3.0m./VERT	14.4	<b>PK</b>

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	72.51	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	30.54	dB/m
Corrected Result	103.05	dBuV/m

Test Date: October 25, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**2.10.2 Spurious Emissions other than Fundamental and harmonics**

The EUT was placed into a mode representative of normal operation and spurious emissions measurements were performed. The spurious emissions found are other than Fundamental and harmonic measurements. The antenna port was terminated with a 50 ohm load during testing.

**Table 10. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209), 9 kHz to 30 MHz**

9 kHz to 30 MHz							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
All emissions seen were 20 dB or more below the limit.							

Tested from 9 kHz to 30 MHz

SAMPLE CALCULATION: N/A

Test Date: October 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**Table 11. Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz**

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
58.86	47.74	-17.25	30.49	40.0	3m./HORZ	9.5	PK
94.16	41.31	-16.74	24.57	43.5	3m./HORZ	18.9	PK
207.88	46.30	-13.82	32.48	43.5	3m./HORZ	11.0	PK
240.18	43.21	-13.37	29.84	46.0	3m./HORZ	16.2	PK
984.50	40.51	-1.59	38.92	54.0	3m./HORZ	15.1	PK
60.02	43.62	-17.79	25.83	40.0	3m./VERT	14.2	PK
138.96	41.61	-13.39	28.22	43.5	3m./VERT	15.3	PK
209.96	41.55	-14.52	27.03	43.5	3m./VERT	16.5	PK
500.58	43.01	-6.22	36.79	46.0	3m./VERT	9.2	PK
961.00	41.17	-1.90	39.27	54.0	3m./VERT	14.7	PK

Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 58.86 MHz:

Magnitude of Measured Frequency	47.74	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-17.25	dB
=Corrected Result	30.49	dBuV
Limit	40.00	dBuV
-Corrected Result	30.49	dBuV
Margin	9.50	dB

Test Date: October 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**Table 12. Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 12.5 GHz**

1 GHz to 12.5 GHz with Class B Limits							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
8795.00	42.39	-5.71	36.68	54.0	1.0m./HORZ	17.3	PK

\*Measurements taken above 6 GHz are performed at a distance of 1m (vs. 3m). This correction includes an additional factor of -9.5 dB to account for this change.

SAMPLE CALCULATION at 8795.00 MHz:

Magnitude of Measured Frequency	42.39	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-5.71	dB
=Corrected Result	36.68	dBuV
Limit	54.00	dBuV
-Corrected Result	36.68	dBuV
Margin	17.30	dB

Test Date: October 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

### 2.10.3 Conducted Spurious Emissions

Conducted Spurious measurements: The EUT was put into a continuous-transmit mode of operation (>98% or max level possible duty cycle) and tested per ANSI C63.10-2013 for conducted out of band emissions emanating from the antenna port over the frequency range of 9 kHz or lowest operating clock frequency to ten times the highest operating clock frequency. A conducted scan was performed on the EUT to identify and record the spurious signals that were related to the transmitter.


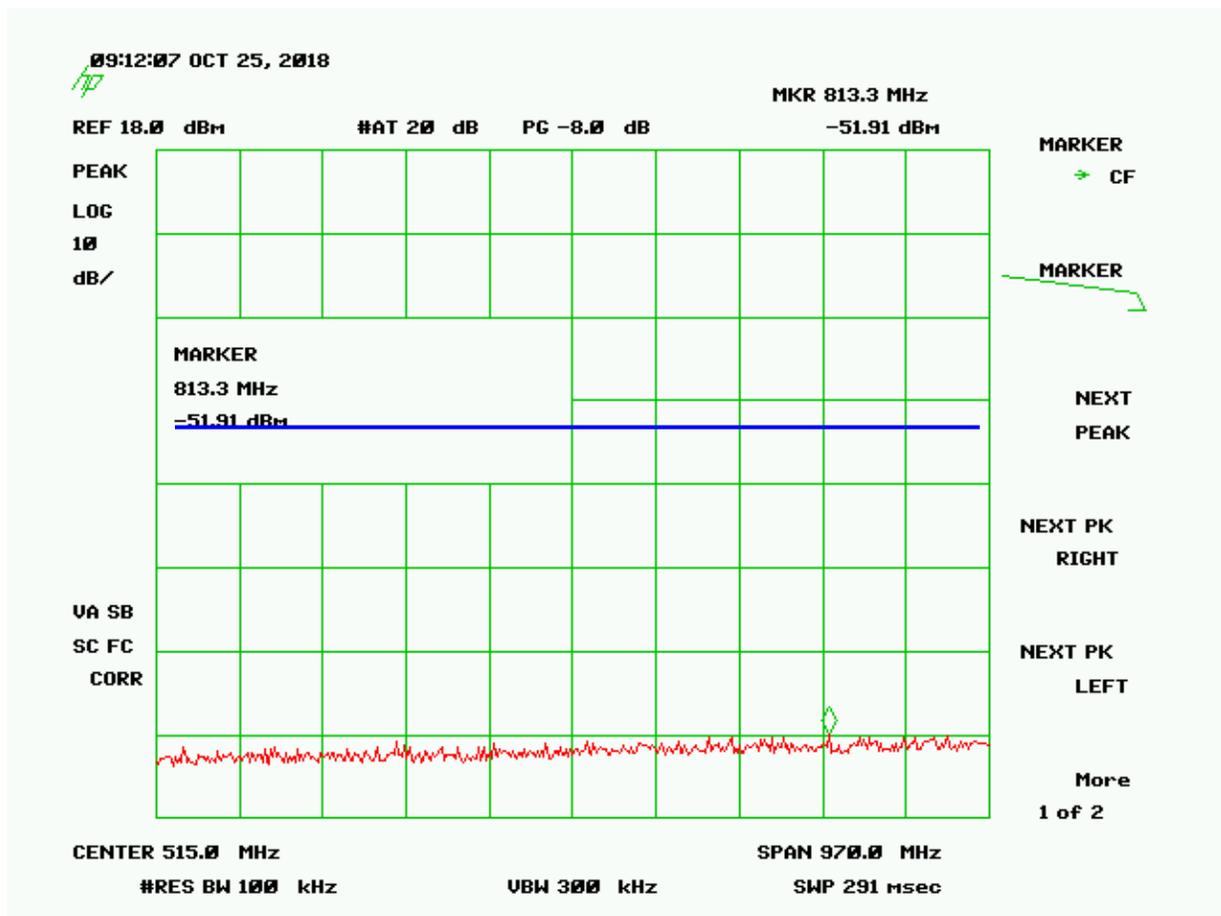


Figure 2. Conducted Spurious Emissions Low, 30 MHz to 1 GHz

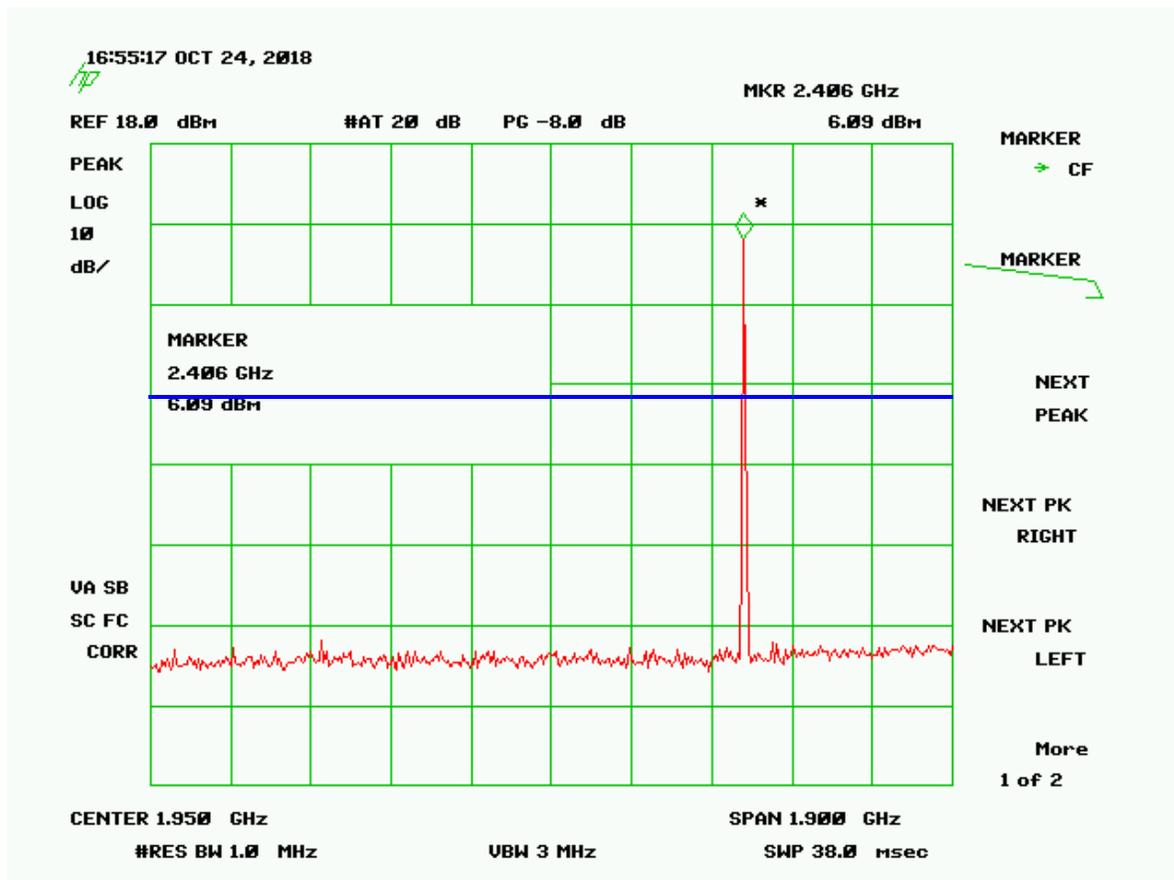

**Figure 3. Conducted Spurious Emissions Low, 1 to 2.9 GHz**

Note: Large emission seen is the fundamental emission.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

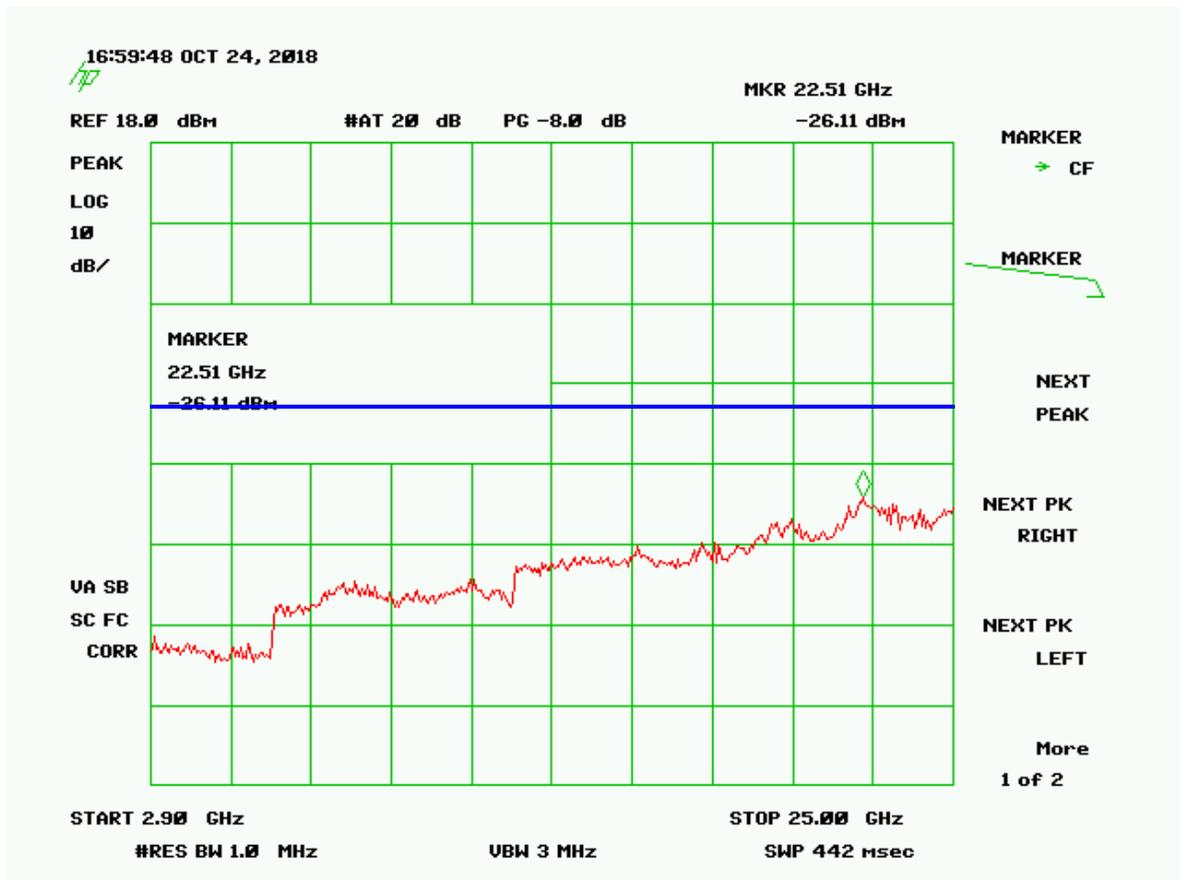


Figure 4. Conducted Spurious Emissions Low, 2.9 GHz to 25 GHz

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X


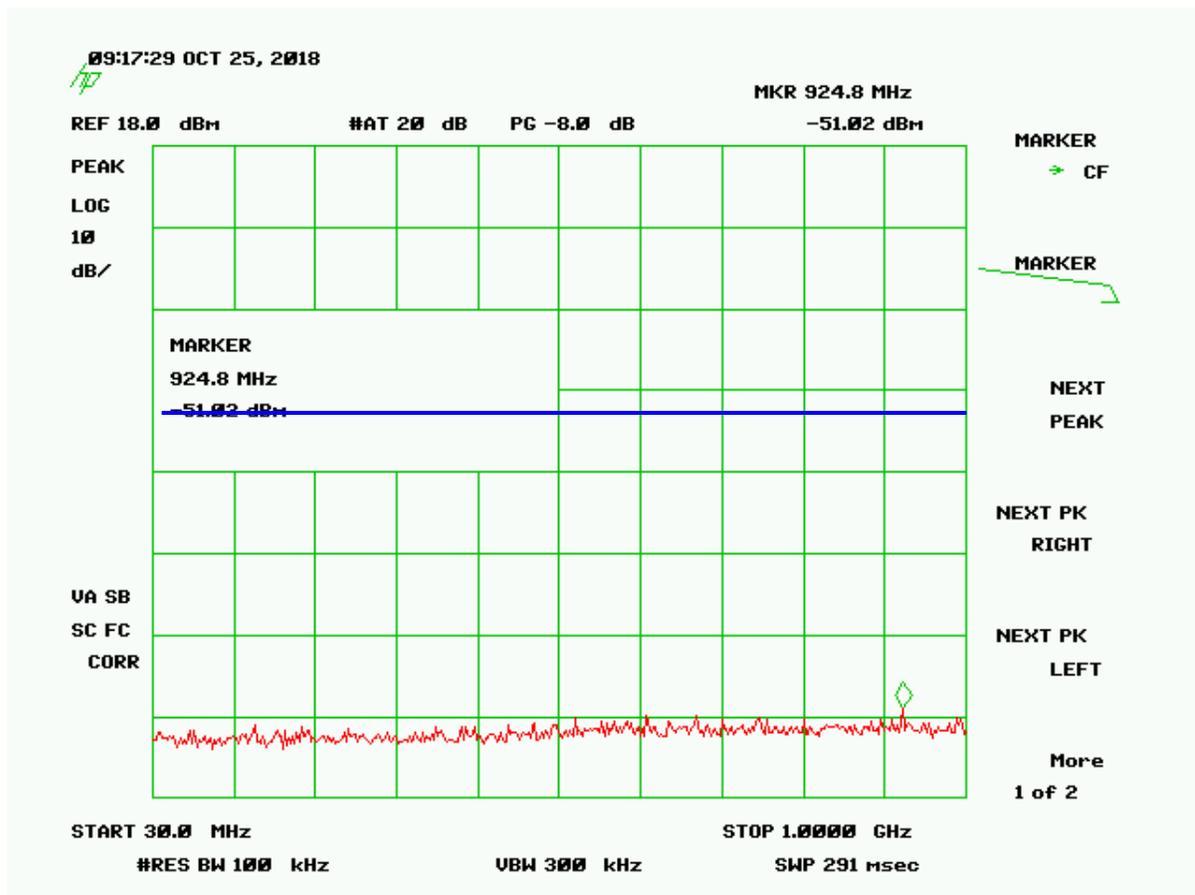


Figure 5. Conducted Spurious Emissions Mid, 30 MHz to 1 GHz

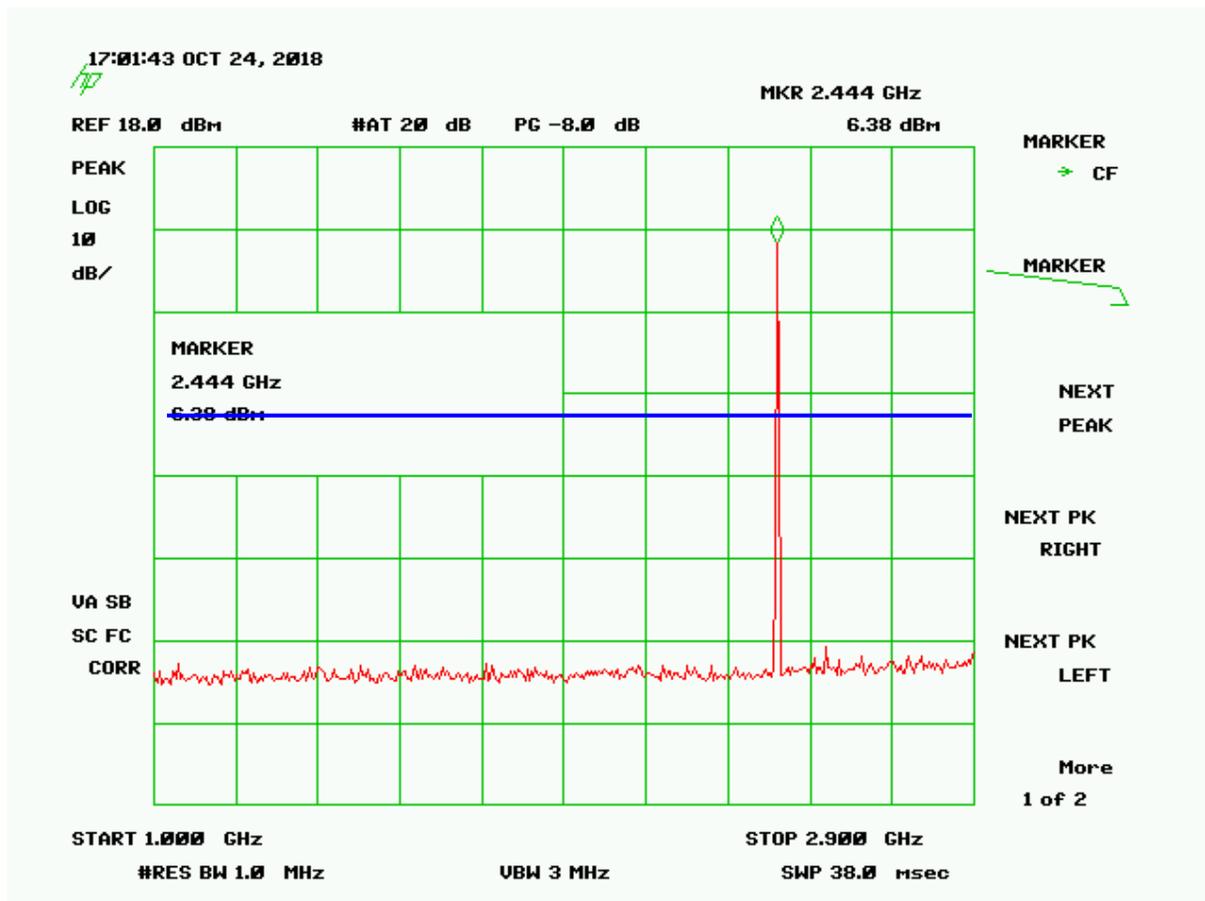

**Figure 6. Conducted Spurious Emissions Mid, 1 GHz to 2.9 GHz**

Note: Large emission seen is the fundamental emission.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

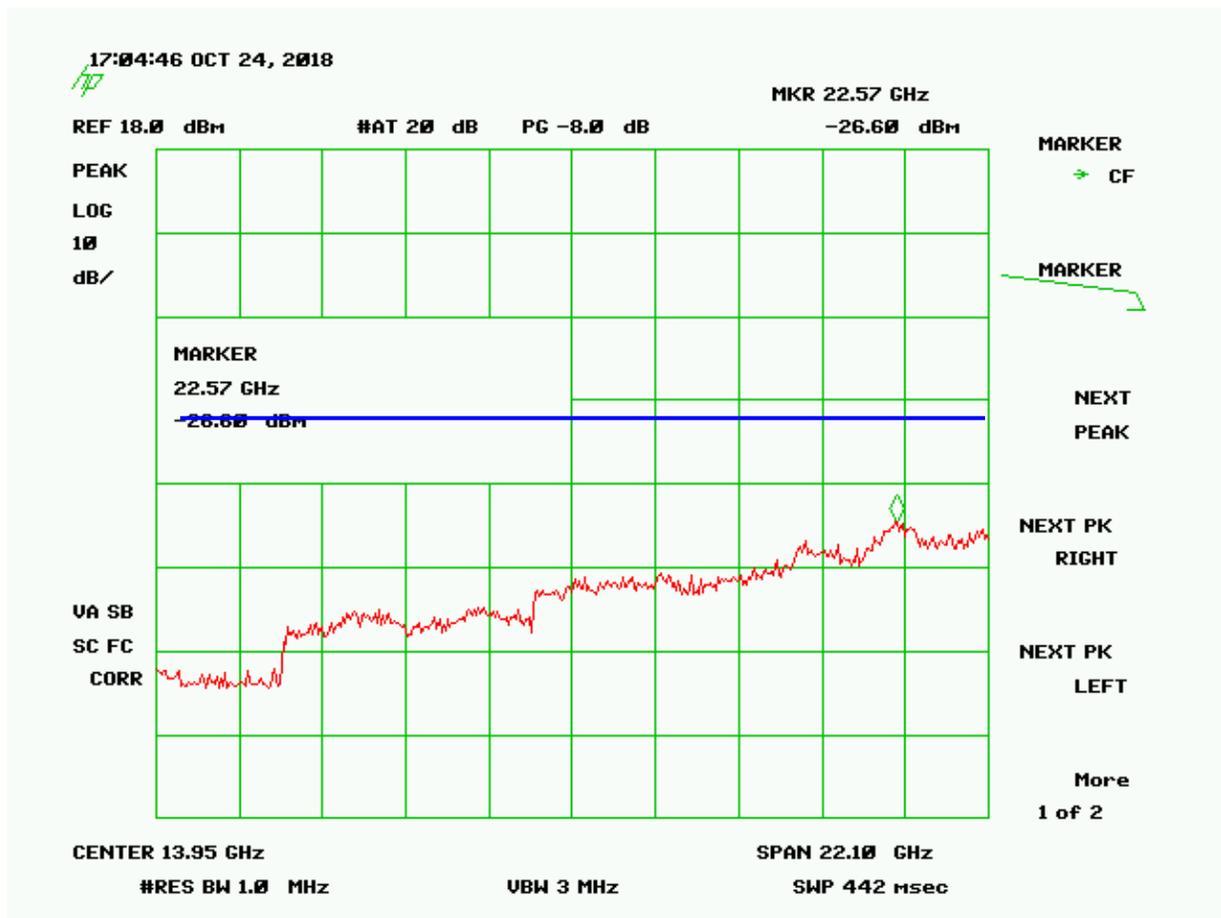


Figure 7. Conducted Spurious Emissions Mid, 2.9 GHz to 25 GHz

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

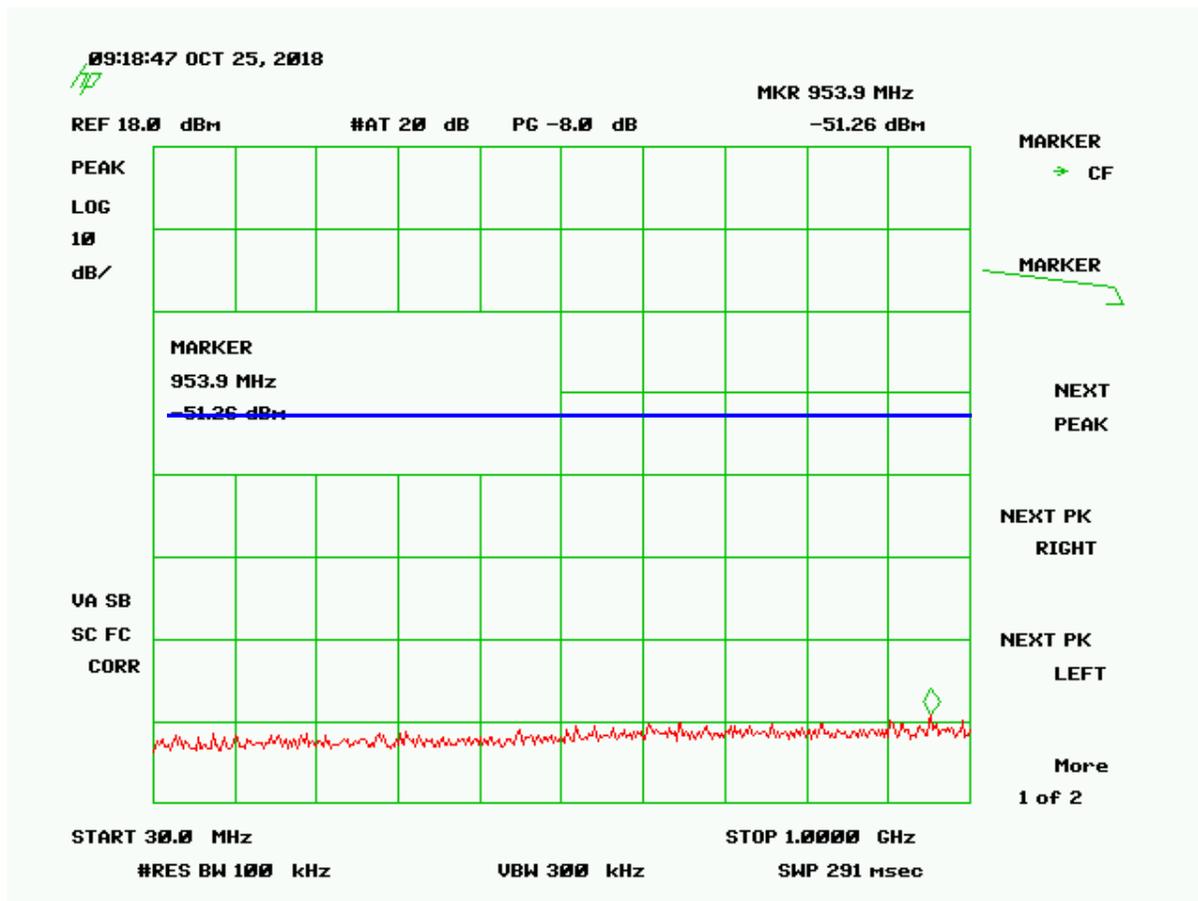


Figure 8. Conducted Spurious Emissions High, 30 MHz to 1 GHz

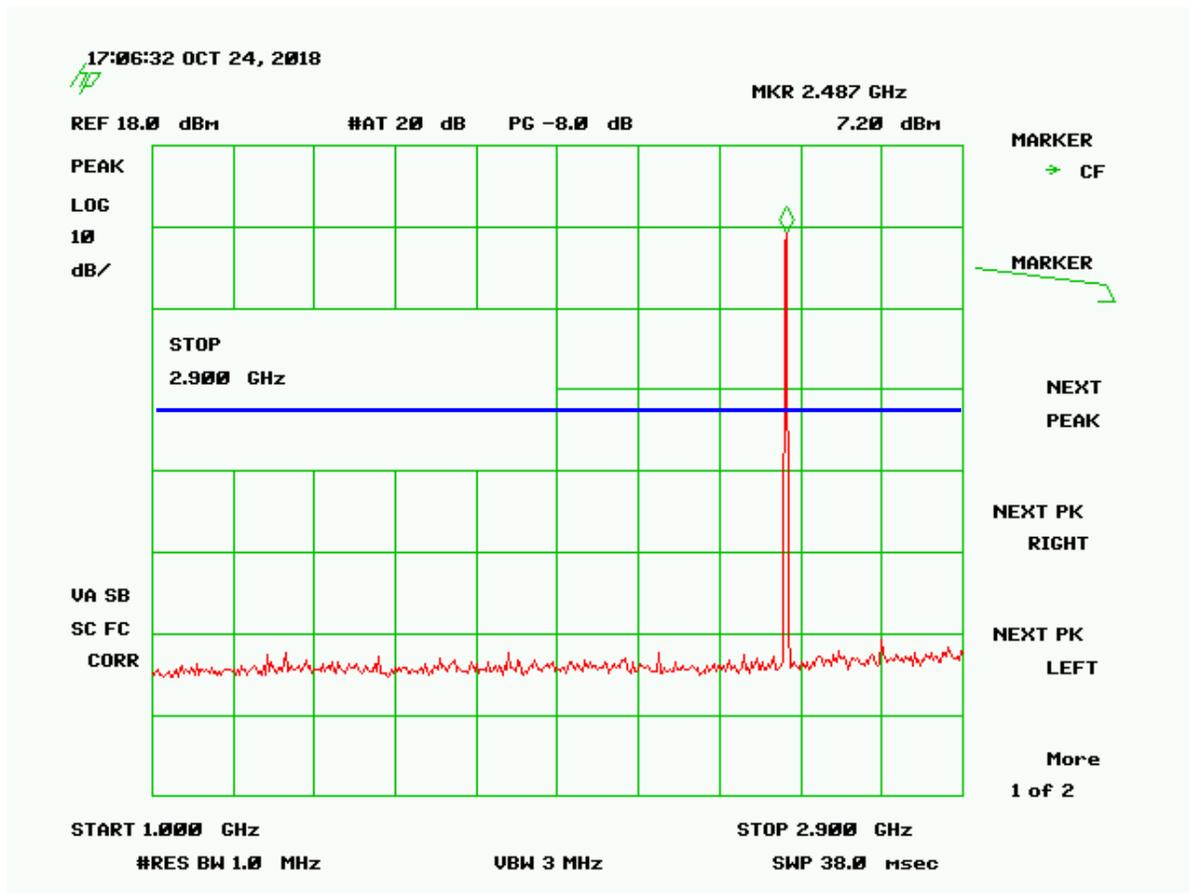


Figure 9. Conducted Spurious Emissions High, 1 GHz to 2.9 GHz

Note: Large emission seen is the fundamental emission.

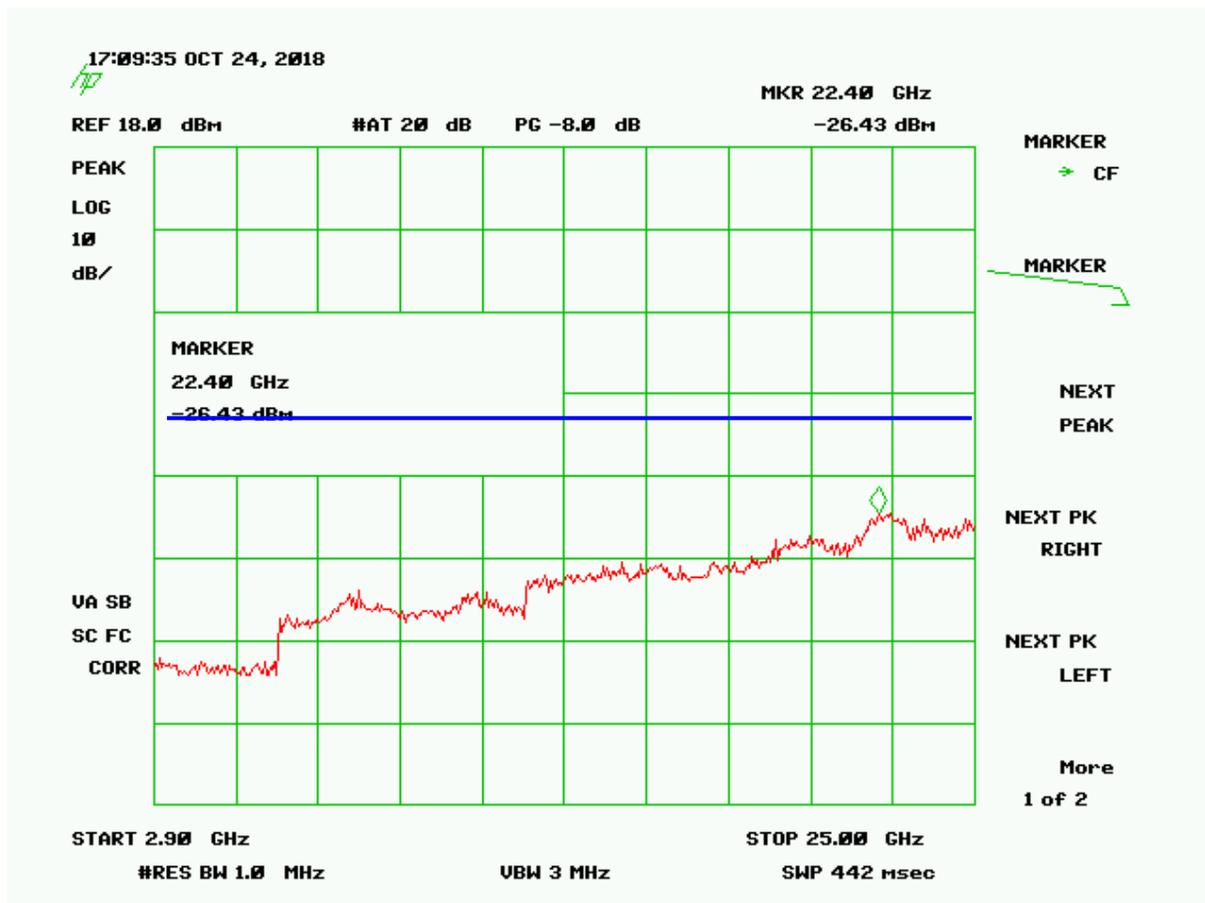


Figure 10. Conducted Spurious Emissions High, 2.9 GHz to 25 GHz

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X


---

## **2.11 Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5)**

Band Edge measurements are made, following the guidelines in ANSI 63.10-2013 for the FHSS modulation, with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed for each antenna to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).


To capture the band edge, set the Spectrum Analyzer frequency span large enough (usually around 2 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Radiated measurements are performed with RBW = 100 kHz. The VBW is set  $\geq$  RBW. See figure and calculations below for more detail.

Note: Hopping mode was enabled during testing.

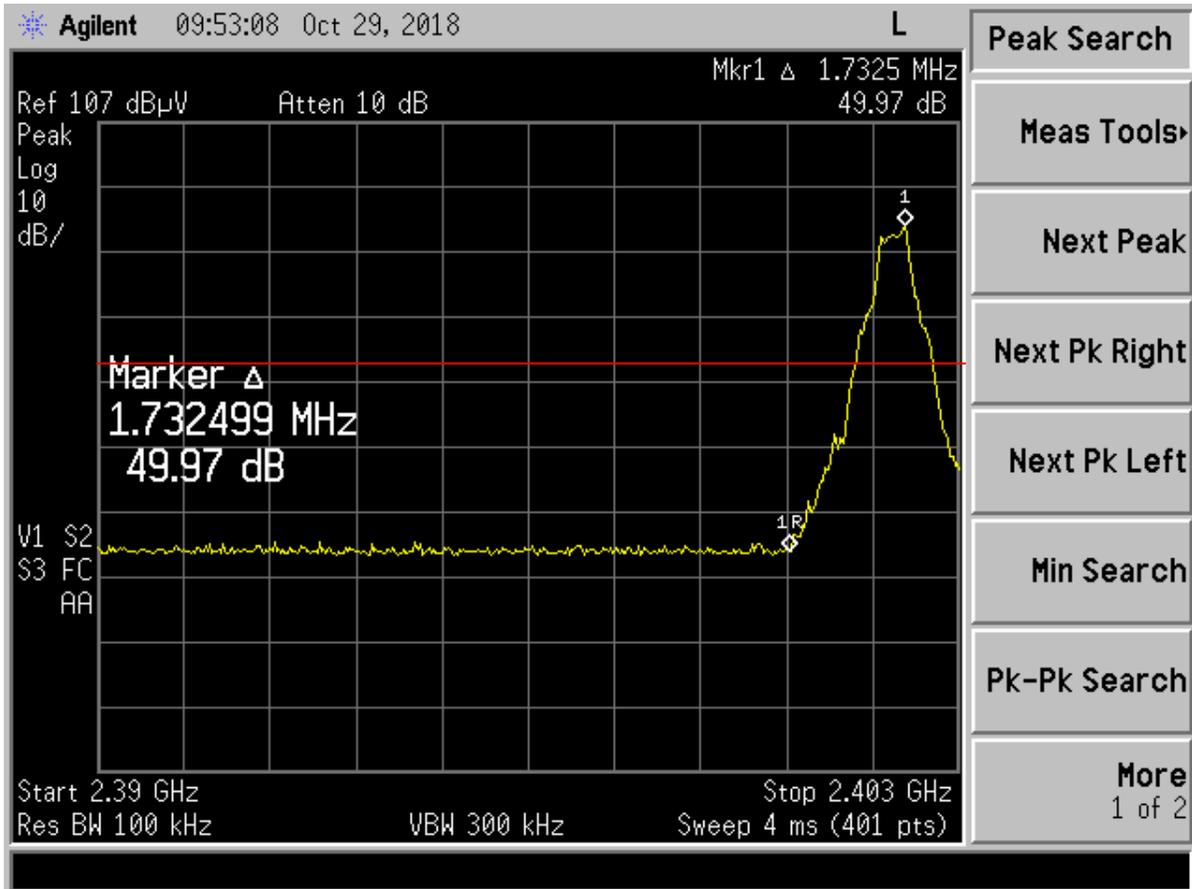


**Figure 11. Band Edge Compliance, Low Channel Delta – Chip Antenna**

Measured Delta (from Figure 11)	49.97	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	29.97	dB

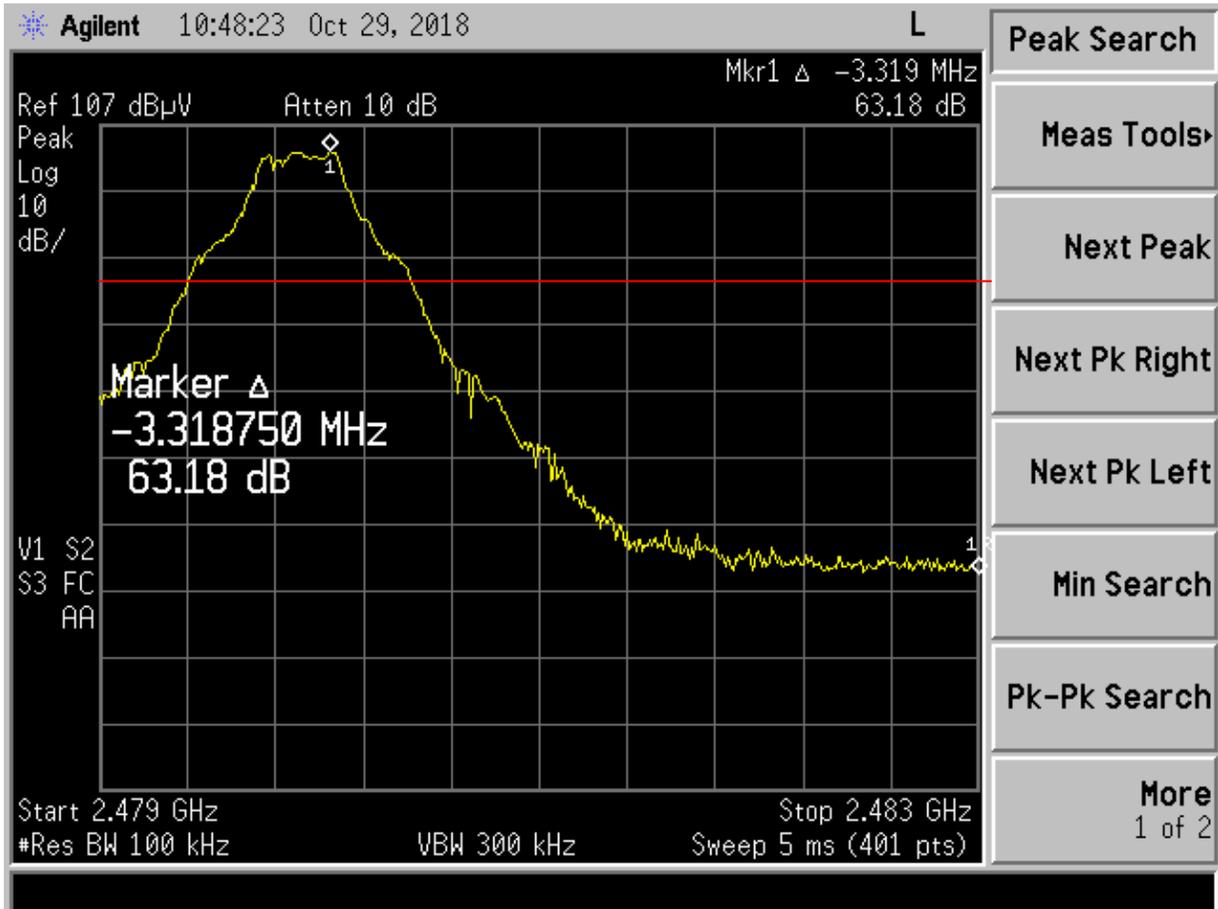


**Figure 12. Band Edge Compliance, High Channel Delta – Chip Antenna**

Measured Delta (from Figure 13)	63.18	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	43.18	dB

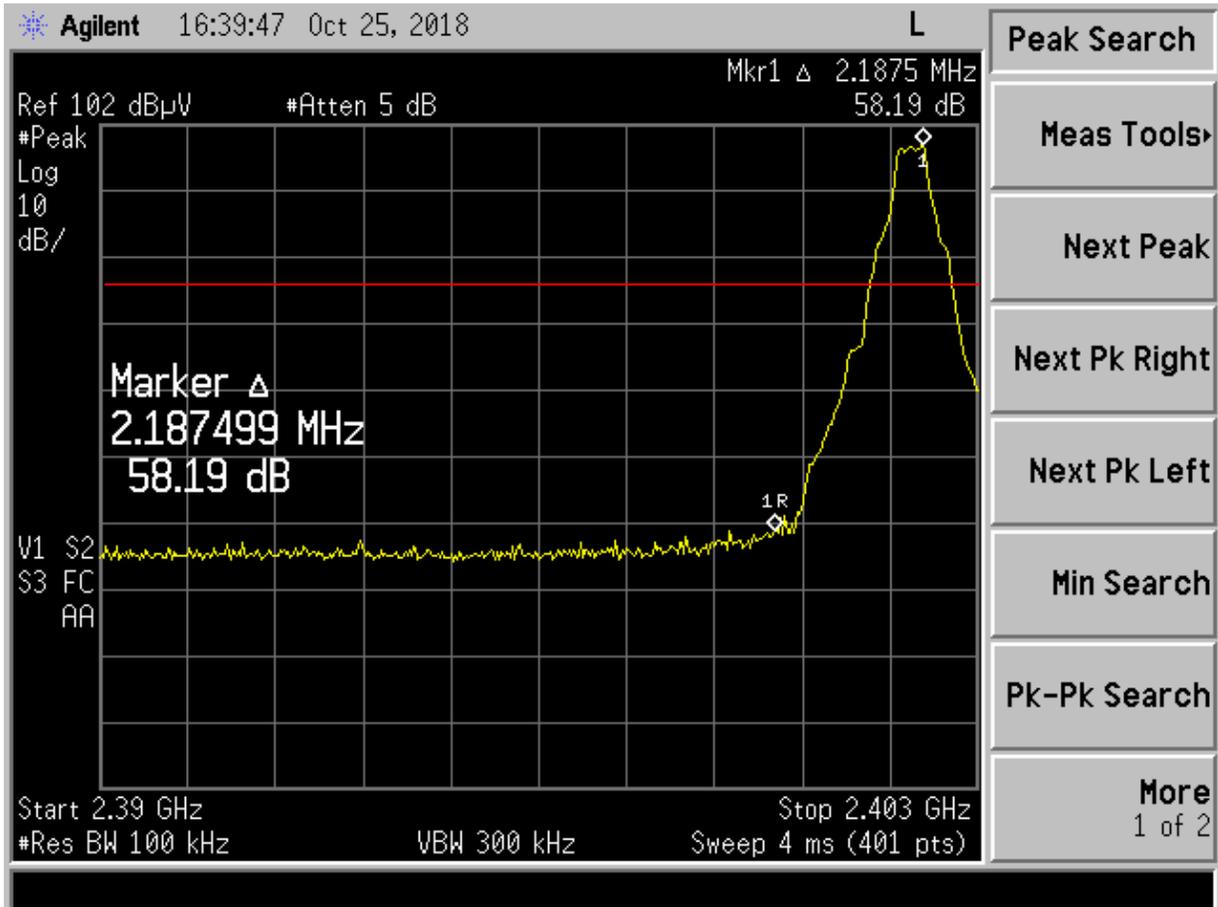

**Figure 13. Band Edge Compliance, Low Channel Delta – External Antenna**

Measured Delta (from Figure 11)	58.19	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	38.19	dB

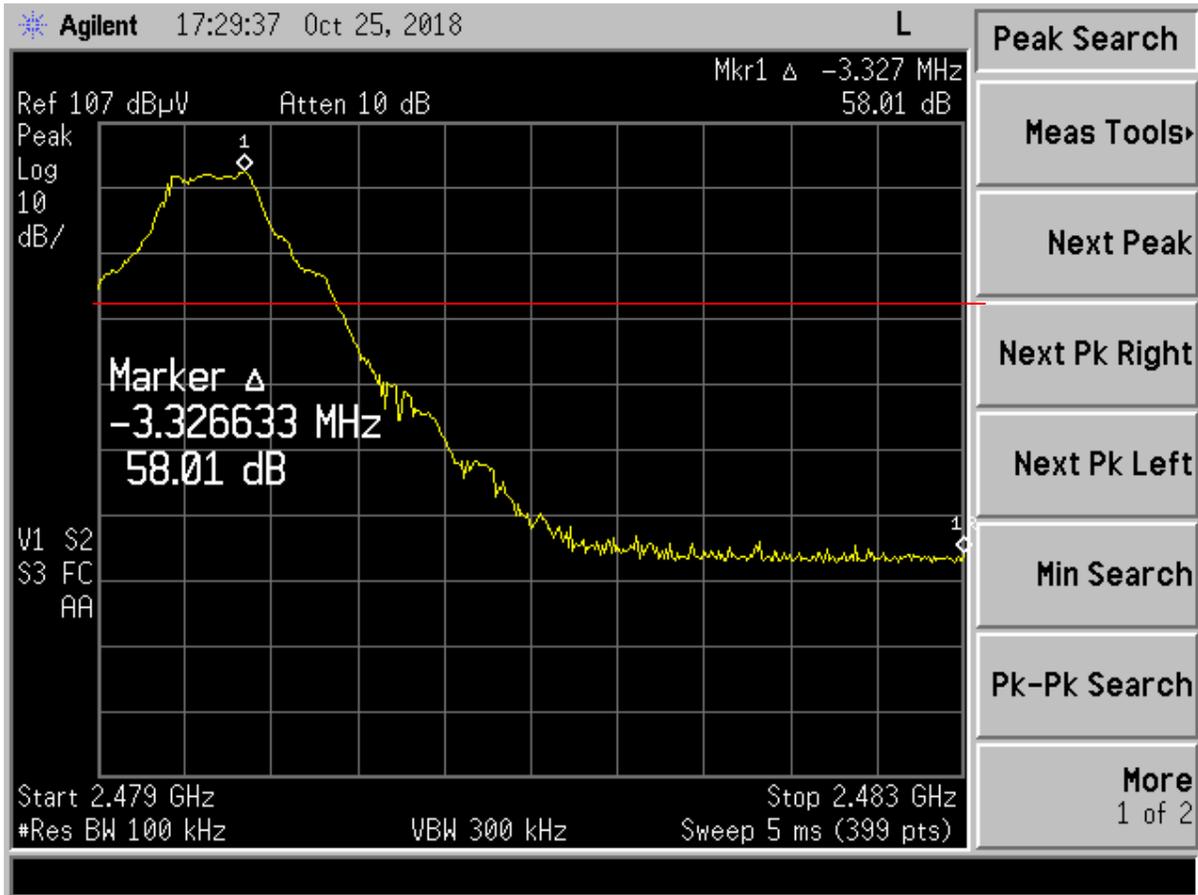

**Figure 14. Band Edge Compliance, High Channel Delta – External Antenna**

Measured Delta (from Figure 13)	58.01	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	38.01	dB

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

## 2.12 99% and Twenty dB Bandwidth (CFR 15.247(a)(1), RSS-Gen 6.6)

These measurements were performed while the EUT was in a constant transmit mode. The RBW was set to 100 kHz and with the VBW  $\geq$  RBW. The results of this test are given in Table and Figures following.

**Table 13. Occupied Bandwidth (99% & 20 dB)**

Frequency (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2402.00	1.148	1.0083
2440.00	1.137	1.0068
2480.00	1.141	1.0227

Test Date: October 31, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

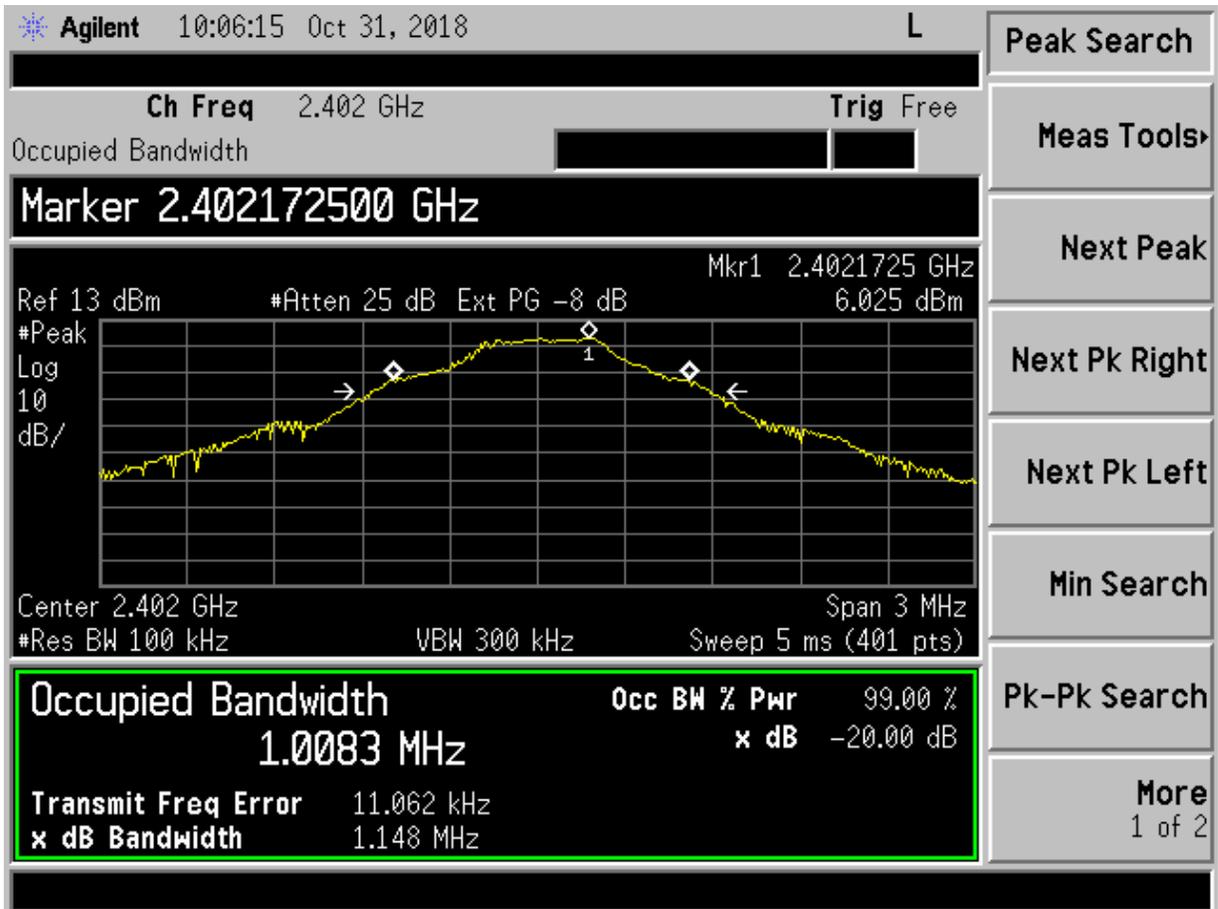


Figure 15. 99% & Twenty dB Bandwidth – Low Channel

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

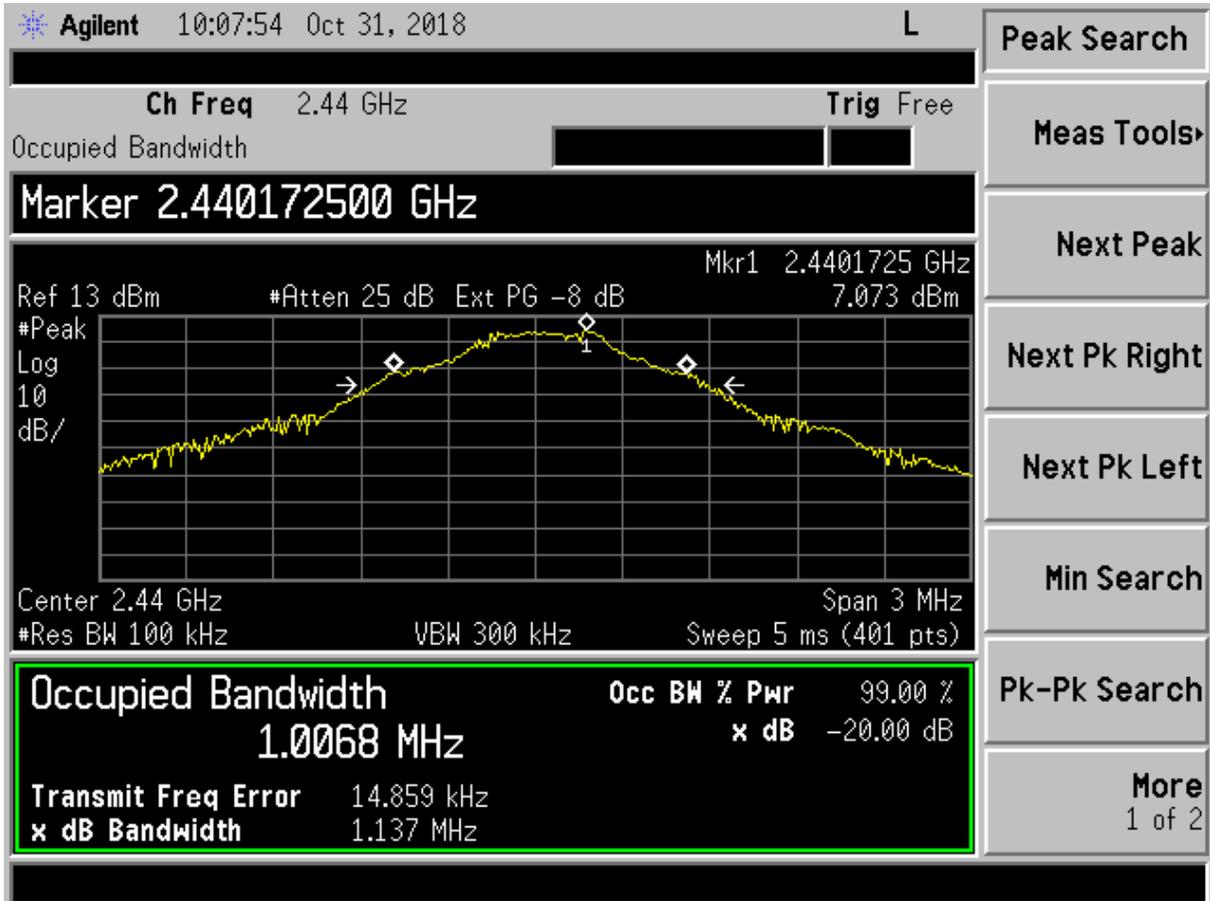


Figure 16. 99% & Twenty dB Bandwidth – Mid Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

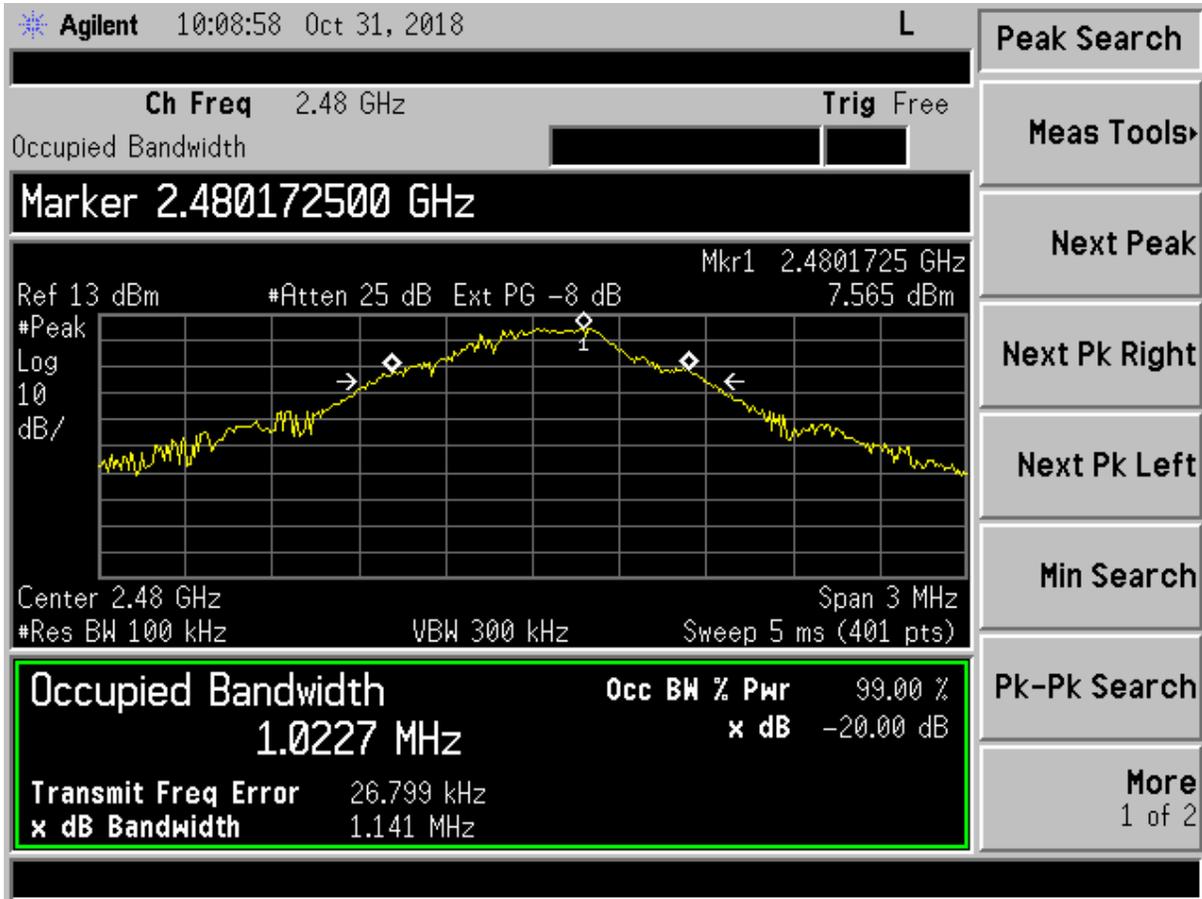


Figure 17. 99% & Twenty dB Bandwidth – High Channel

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 O7P-4343  
 10147A-4343  
 18-0327  
 November 7, 2018  
 Inventek  
 ISM4343-X

**2.13 Maximum Peak Conducted Output Power (CFR 15.247(b)(1), RSS-247 5.1)**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. This radio employs greater than 75 non-overlapping hopping channels.

Peak power within the band 2400 MHz to 2483.5 MHz was measured per ANSI C63.10-2013 as an Antenna Conducted test with a spectrum analyzer. For these measurements the EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. The setup losses were corrected by using a 8.0 dB correction factor in the analyzer measurements. Peak antenna conducted output power is tabulated in the table below.

**Table 14. Peak Antenna Conducted Output Power per Part 15.247 (b) (2)**

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)
2402.00	6.14	4.11	1000
2440.00	7.42	5.52	1000
2480.00	8.07	6.41	1000

Test Date: October 24, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

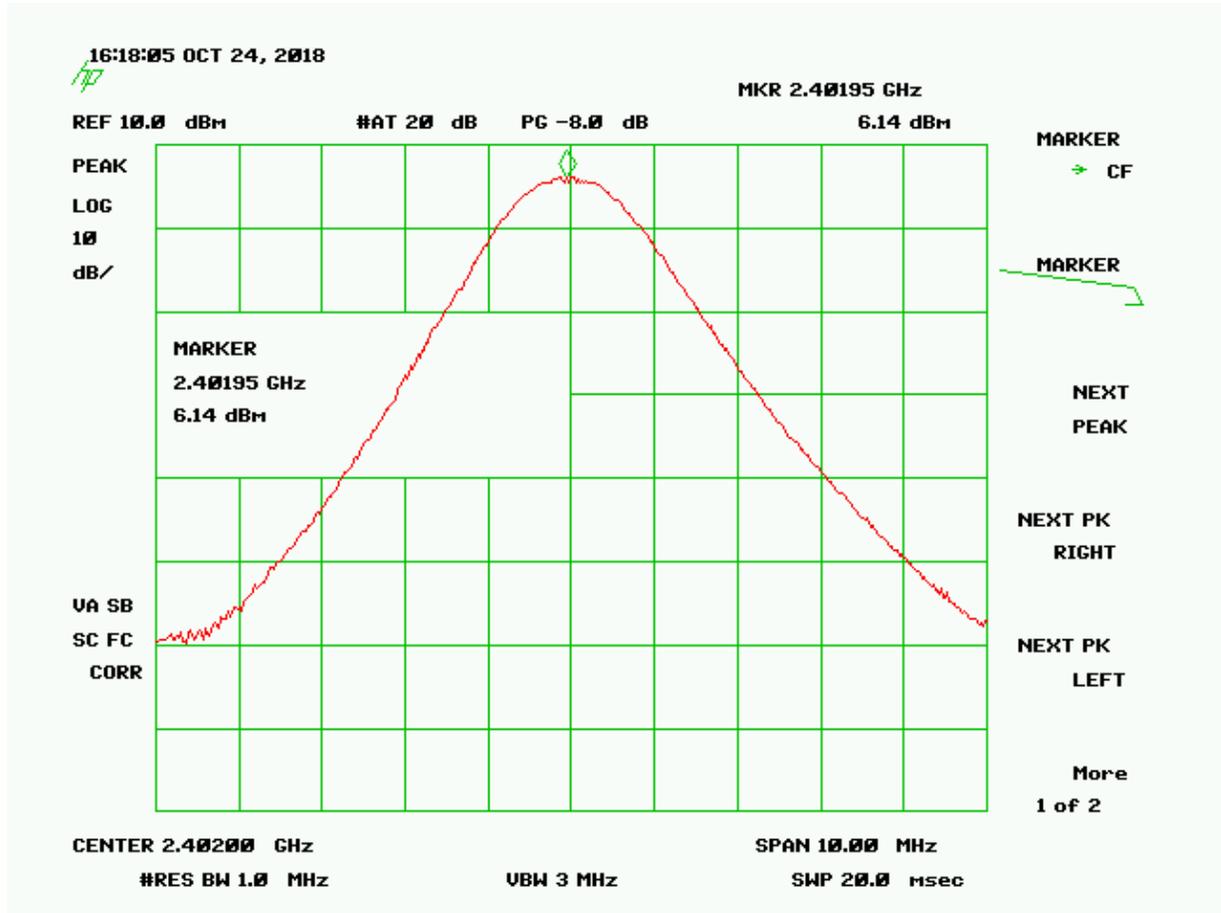


Figure 18. Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

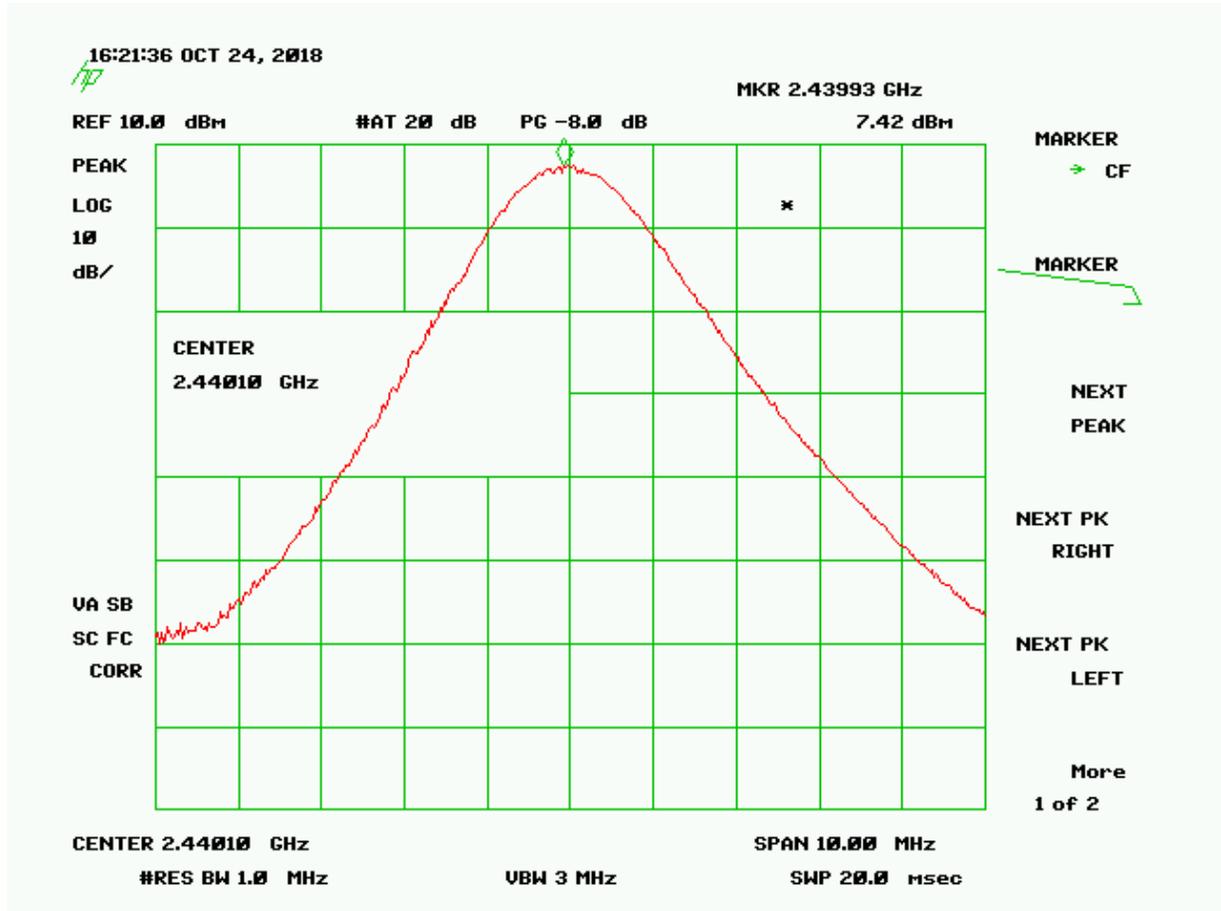


Figure 19. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

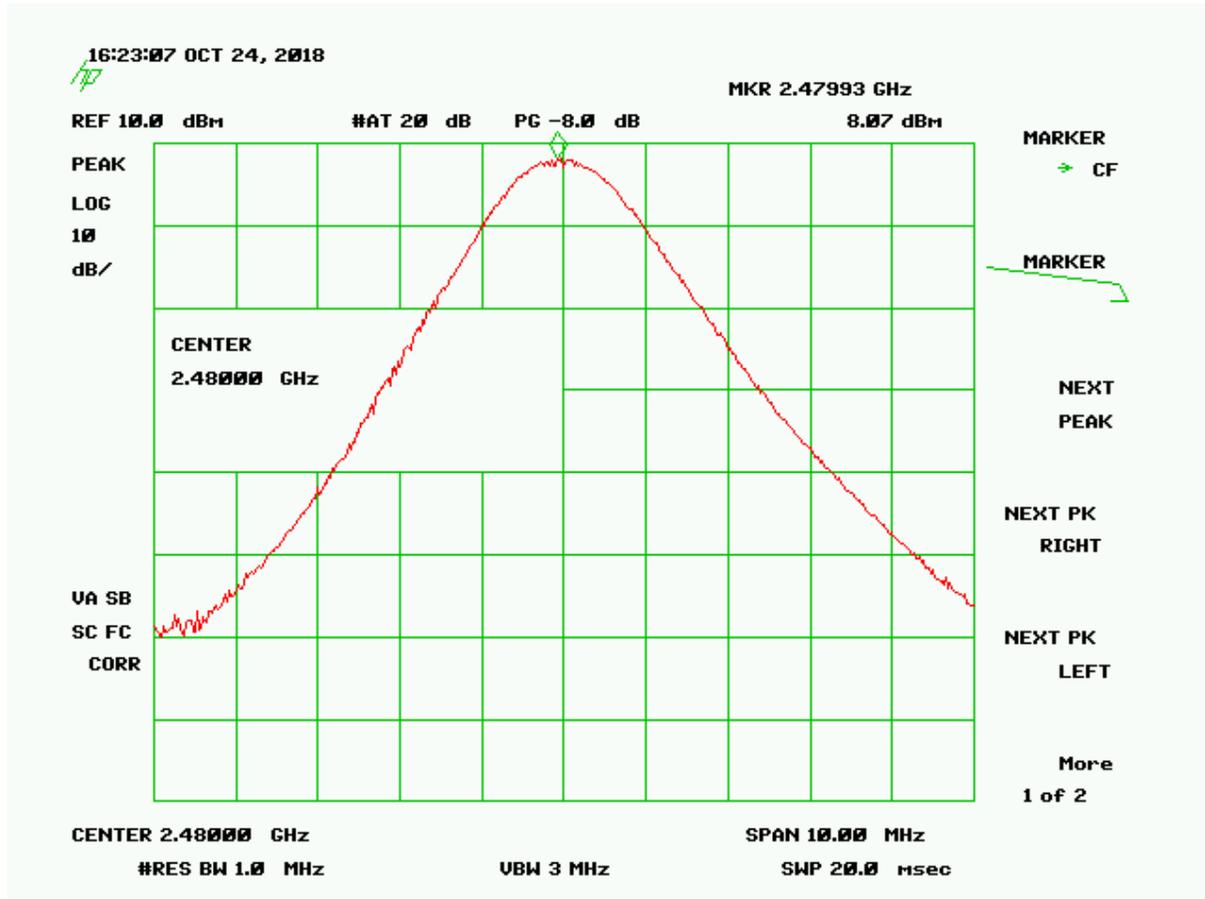


Figure 20. Peak Antenna Conducted Output Power, High Channel

## 2.14 Number of Hopping Frequencies (CFR 15.247(a), RSS-247 5.1)

The EUT employs 79 non overlapping channels. The test procedures outlined in FCC Public Notice DA 00-705 (2000) and ANSI C63.10-2013 were used to conduct measurements.

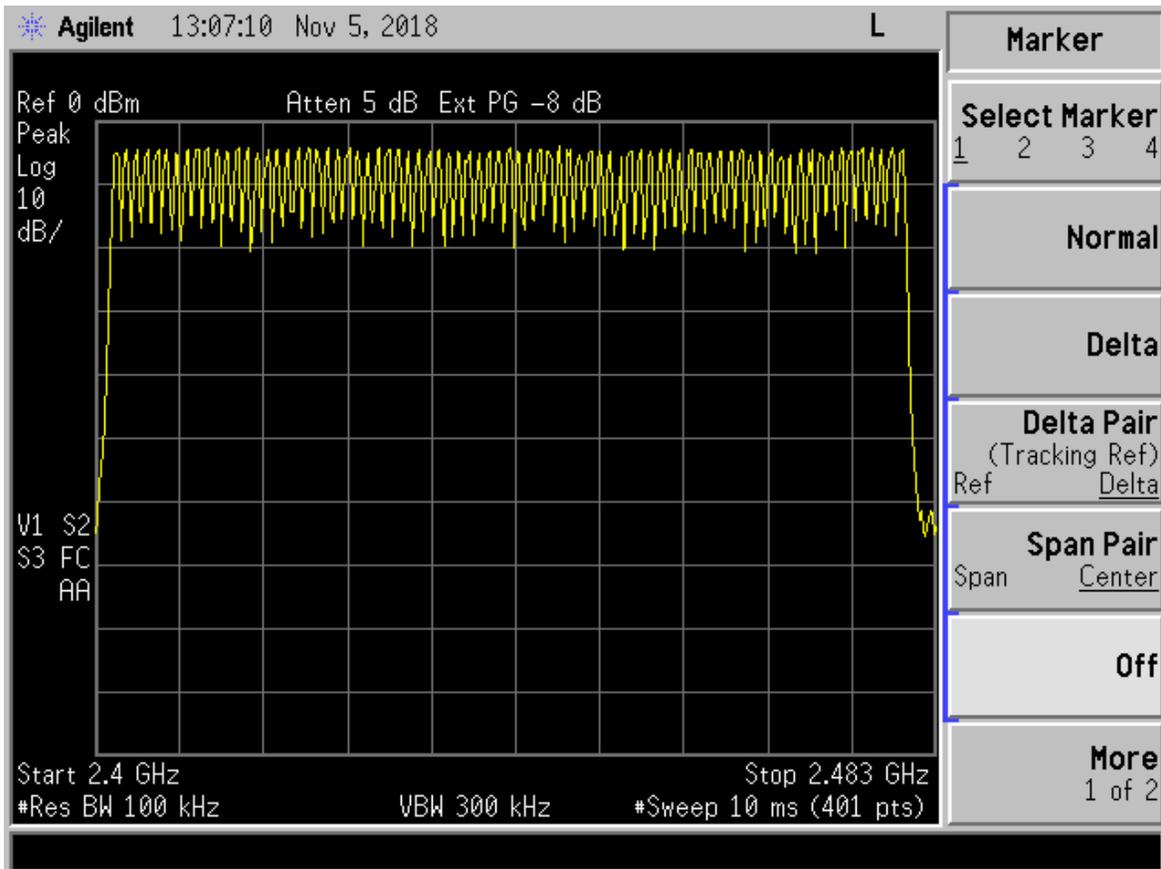



Figure 21. Hopping Channels 1 through 79

## 2.15 Frequency Separation (CRF 15.247(a)(1), RSS-247 5.1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. In this case, the 20 dB bandwidth of the Frequency hopping system is greater than 25 kHz, so the minimum requirement used was the 20 dB bandwidth, 1.183 MHz. Therefore the frequency separation must be greater than 1.183 MHz.

The EUT does meet the frequency separation requirement.

The test procedure outlined in ANSI C63.10-2013 was used to conduct measurements. The EUT hopping function was not enabled during the testing.

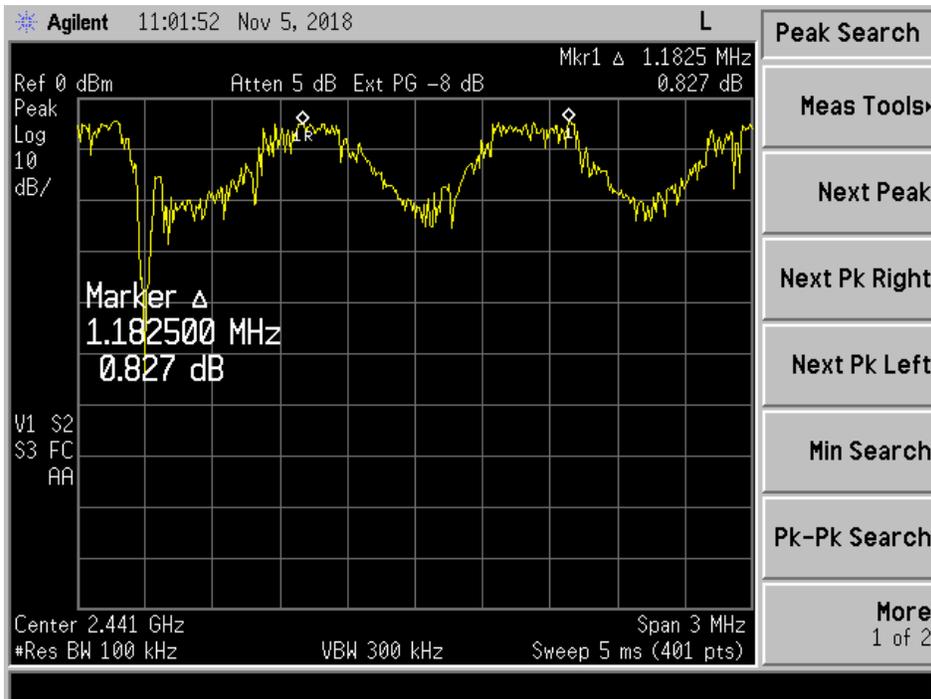

**Figure 22. Channel Separation**

Measured Delta (Figure 22 above)	1.183 MHz
-Limit (20 dB Bandwidth)	1.148 MHz
Margin	0.035 MHz

## 2.16 Average Time of Occupancy (CFR 15.247(a)(1), RSS-247 5.1)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

In normal mode, hopping rate is 300/s based on the plot recorded.

Therefore:  $300 / 79 \text{ channels} = 3.8 \text{ hops/channel rate}$

Hops/Occupancy time =  $3.8 * 31 = 120.08 \text{ hops/second}$

$120.08 * 0.280 \text{ mS} = 0.0336 \text{ Seconds or } 33.6 \text{ mSeconds}$

Dwell Time = 0.0336 seconds < 0.4 second limit

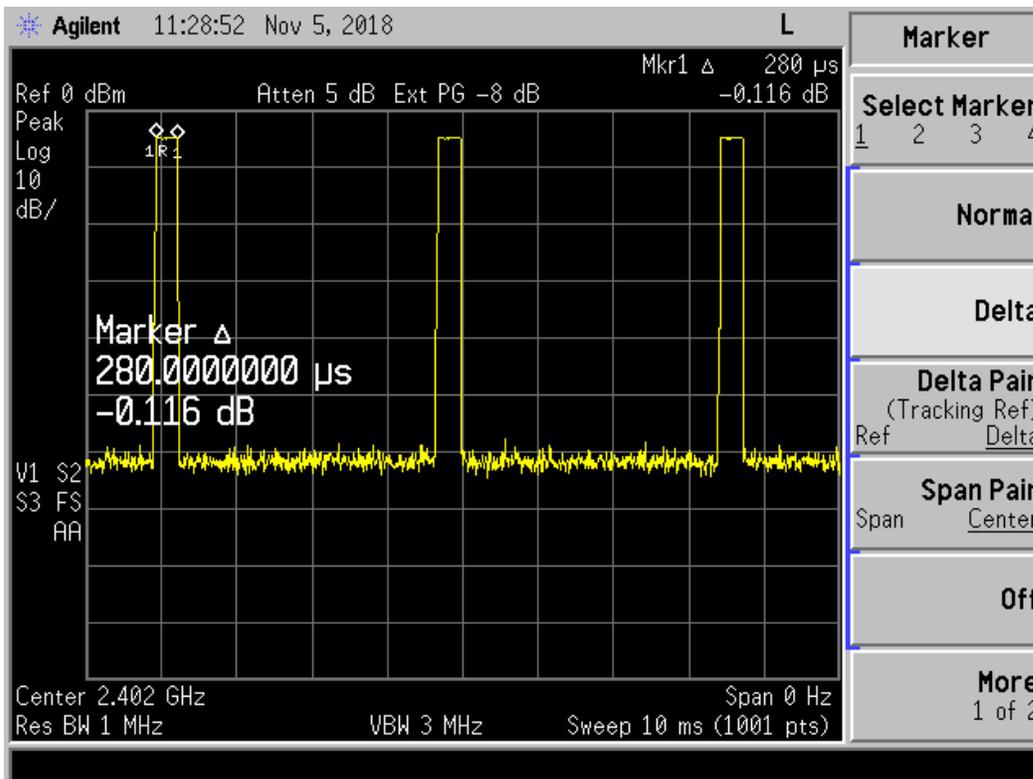


Figure 23. Time of Occupancy

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
O7P-4343  
10147A-4343  
18-0327  
November 7, 2018  
Inventek  
ISM4343-X

---

## **2.17 Measurement Uncertainty**

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2. A coverage factor of  $k=2$  was used to give a level of confidence of approximately 95%.

### **2.17.1 Conducted Emissions Measurement Uncertainty**

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm 2.78$  dB.

### **2.17.2 Radiated Emissions Measurement Uncertainty**

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm 5.3$  dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.1$  dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm 5.1$  dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

## **3 Conclusion**

The EUT meets the requirements of Part 15.247 and RSS-247 based on the test results presented in this test report.