





WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

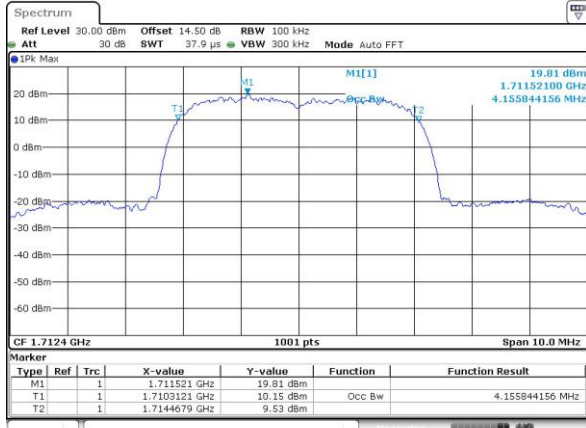

Middle Channel

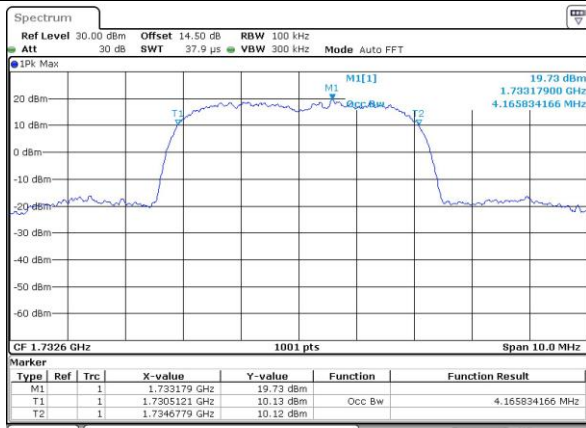

Highest Channel

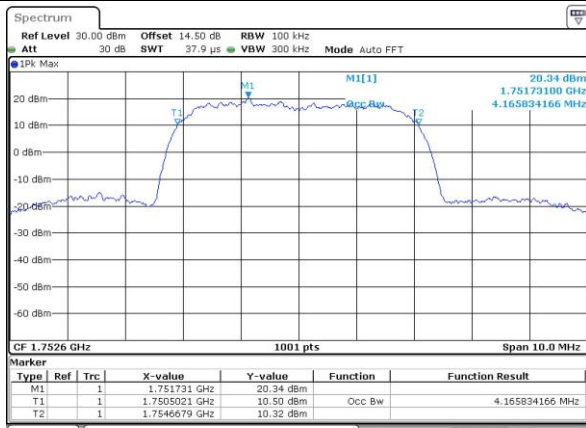



Conducted Band Edge

WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge



Date: 15.OCT.2024 15:45:48

Highest Band Edge



Date: 15.OCT.2024 15:48:56



WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge




Date: 15.OCT.2024 15:10:17

Highest Band Edge



Date: 15.OCT.2024 15:35:17

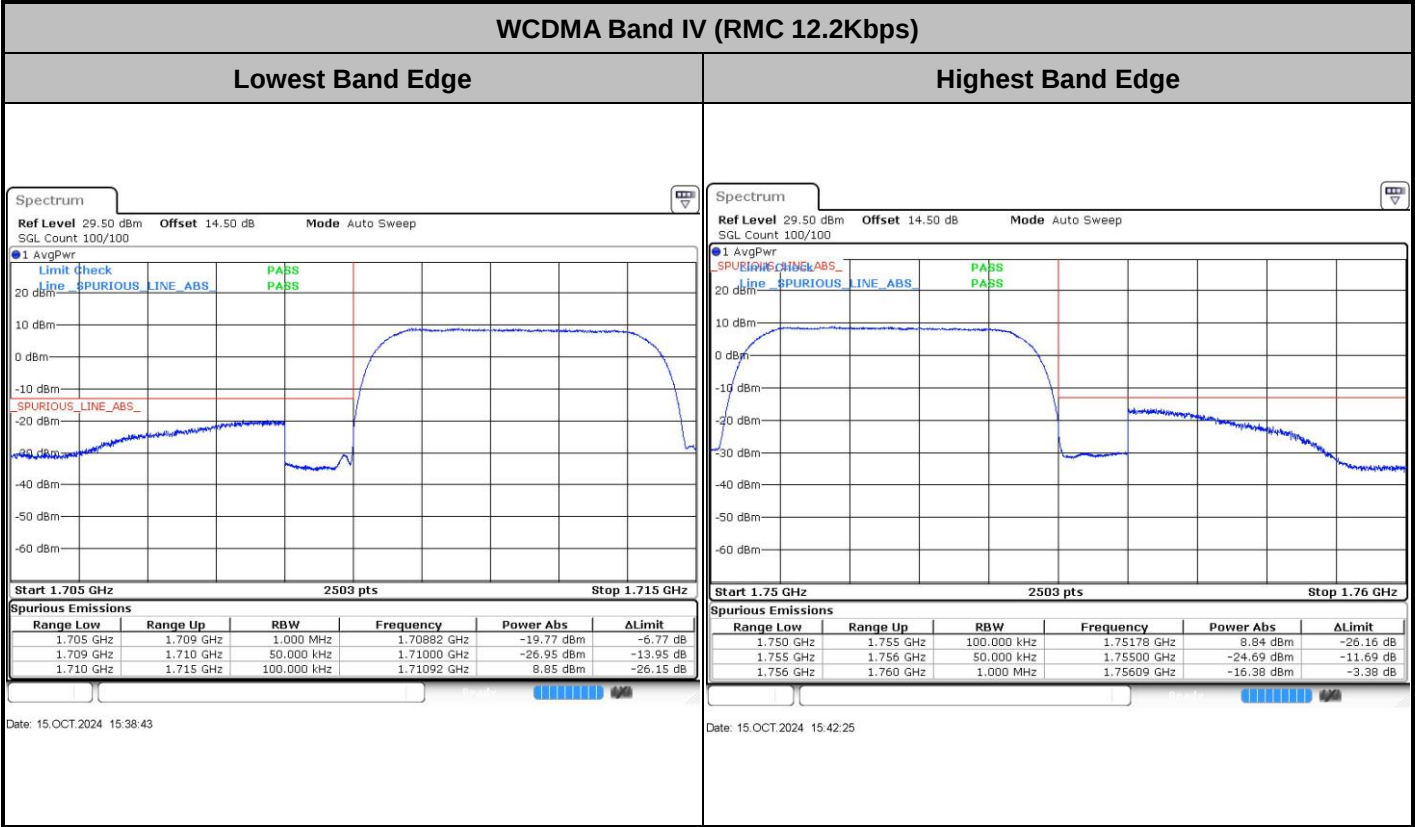




Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

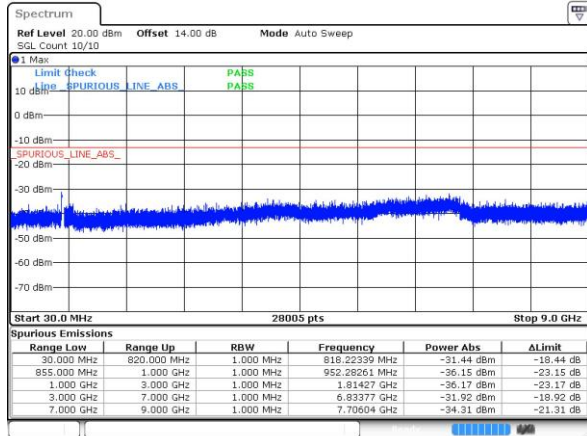

Date: 15.OCT.2024 15:46:03


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

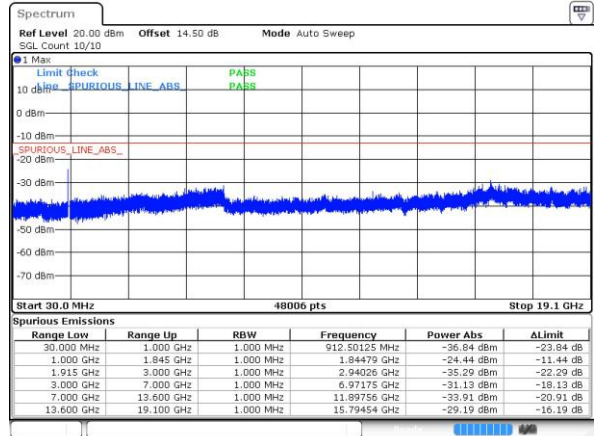


Date: 15.OCT.2024 15:10:41

Middle Channel

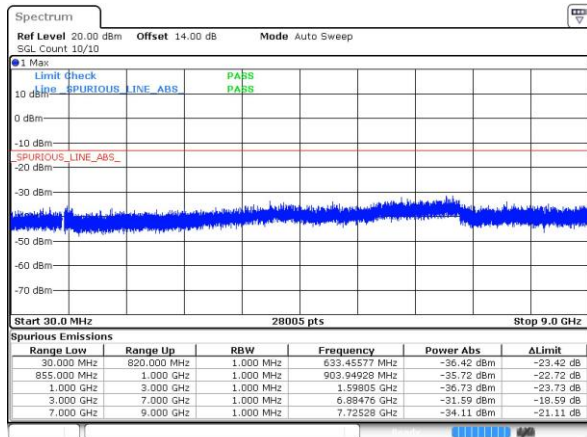


Date: 15.OCT.2024 15:47:16

Middle Channel

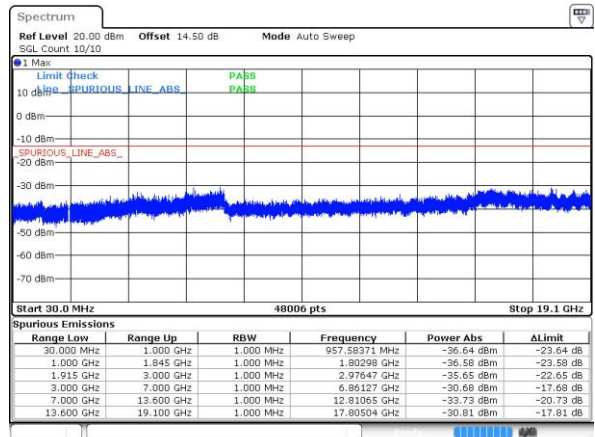


Date: 15.OCT.2024 15:32:55

Highest Channel

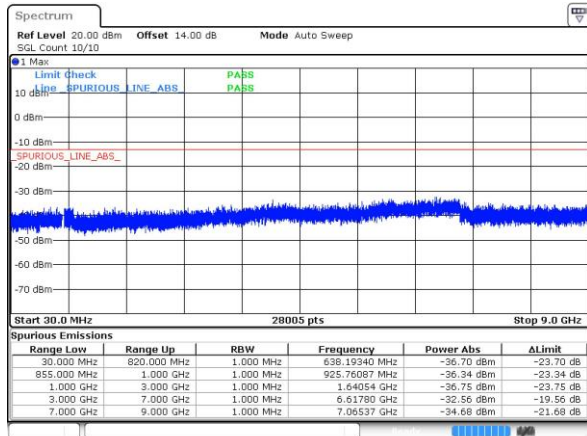

Date: 15.OCT.2024 15:48:42

Highest Channel

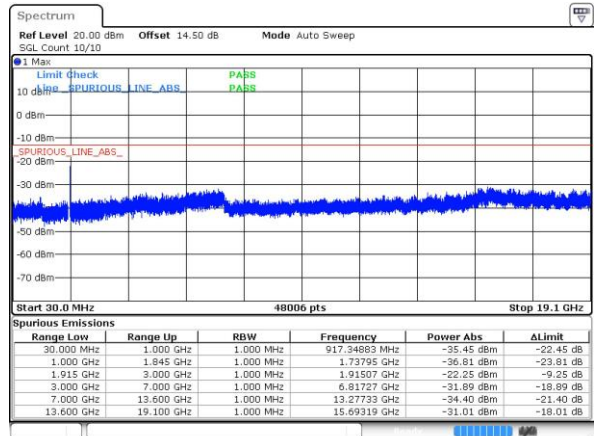


Date: 15.OCT.2024 15:35:48




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

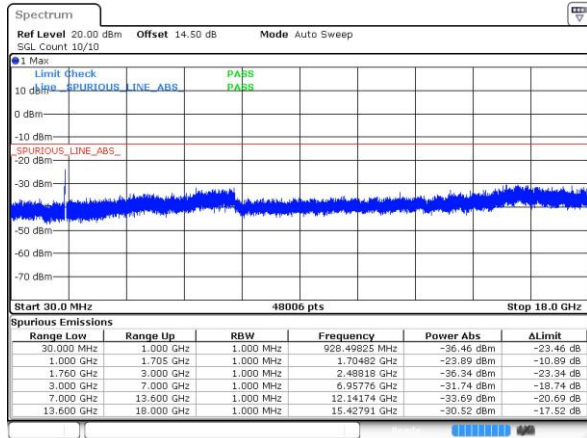


Date: 15.OCT.2024 15:39:03

Middle Channel

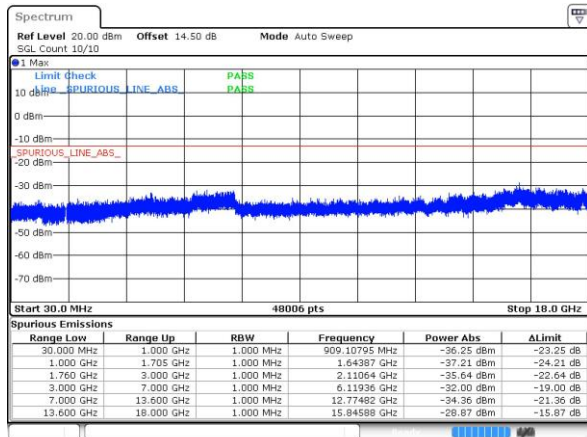

Date: 15.OCT.2024 15:40:32

Highest Channel

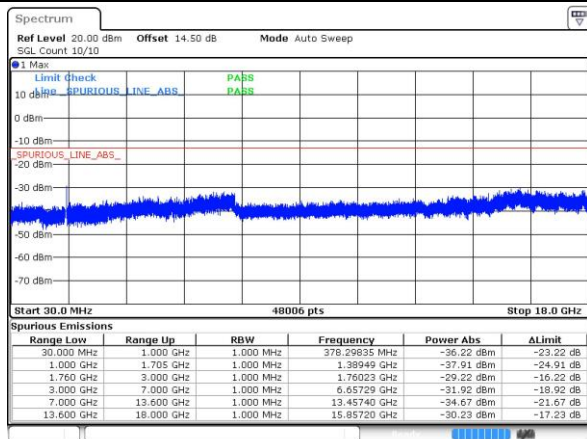

Date: 15.OCT.2024 15:42:38

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0099	
30	Normal Voltage	0.0091	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0091	
0	Normal Voltage	0.0106	
-10	Normal Voltage	0.0090	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0017	
20	Maximum Voltage	0.0088	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0007	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0047	PASS
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0044	
0	Normal Voltage	0.0043	
-10	Normal Voltage	0.0001	
-20	Normal Voltage	0.0003	
-30	Normal Voltage	0.0042	
20	Maximum Voltage	0.0043	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0038	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0044	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0040	
0	Normal Voltage	0.0042	
-10	Normal Voltage	0.0043	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0008	
20	Maximum Voltage	0.0043	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0003	

Note:

1. Normal Voltage = 3.91V. ; Minimum Voltage (BEP) = 3.6 V. ; Maximum Voltage =4.3 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

GSM850 (GSM) Ant1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-59.07	-13	-46.07	-69.03	-62.32	4.00	9.40	H
	2509.2	-51.23	-13	-38.23	-65.63	-54.80	4.88	10.60	H
	3345.6	-62.53	-13	-49.53	-78.52	-67.46	5.52	12.60	H
	1672.8	-64.43	-13	-51.43	-73.84	-67.68	4.00	9.40	V
	2509.2	-55.66	-13	-42.66	-70.02	-59.23	4.88	10.60	V
	3345.6	-62.79	-13	-49.79	-78.51	-67.72	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots) Ant1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-60.61	-13	-47.61	-70.57	-63.86	4.00	9.40	H
	2509.2	-50.46	-13	-37.46	-64.86	-54.03	4.88	10.60	H
	3345.6	-62.61	-13	-49.61	-78.60	-67.54	5.52	12.60	H
	1672.8	-65.64	-13	-52.64	-75.05	-68.89	4.00	9.40	V
	2509.2	-59.32	-13	-46.32	-73.68	-62.89	4.88	10.60	V
	3345.6	-62.90	-13	-49.90	-78.62	-67.83	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GSM) Ant2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.22	-13	-48.22	-79.85	-67.97	5.85	12.60	H
	5640	-58.93	-13	-45.93	-82.19	-64.73	7.30	13.10	H
	7520	-55.32	-13	-42.32	-82.13	-58.47	8.35	11.50	H
	3760	-61.53	-13	-48.53	-80.09	-68.28	5.85	12.60	V
	5640	-59.66	-13	-46.66	-82.17	-65.46	7.30	13.10	V
	7520	-55.44	-13	-42.44	-82.23	-58.59	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE 1 Tx slots) Ant2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.52	-13	-48.52	-80.15	-68.27	5.85	12.60	H
	5640	-59.06	-13	-46.06	-82.32	-64.86	7.30	13.10	H
	7520	-55.08	-13	-42.08	-81.89	-58.23	8.35	11.50	H
	3760	-61.50	-13	-48.50	-80.06	-68.25	5.85	12.60	V
	5640	-59.43	-13	-46.43	-81.94	-65.23	7.30	13.10	V
	7520	-55.36	-13	-42.36	-82.15	-58.51	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V(RMC 12.2Kbps) Ant1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-65.23	-13	-52.23	-75.19	-68.48	4.00	9.40	H
	2509.2	-62.66	-13	-49.66	-77.06	-66.23	4.88	10.60	H
	3345.6	-61.70	-13	-48.70	-77.69	-66.63	5.52	12.60	H
	1672.8	-65.80	-13	-52.80	-75.21	-69.05	4.00	9.40	V
	2509.2	-62.57	-13	-49.57	-76.93	-66.14	4.88	10.60	V
	3345.6	-61.97	-13	-48.97	-77.69	-66.90	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps) Ant2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.59	-13	-48.59	-80.22	-68.34	5.85	12.60	H
	5640	-58.89	-13	-45.89	-82.15	-64.69	7.30	13.10	H
	7520	-55.24	-13	-42.24	-82.05	-58.39	8.35	11.50	H
	3760	-61.60	-13	-48.60	-80.16	-68.35	5.85	12.60	V
	5640	-59.31	-13	-46.31	-81.82	-65.11	7.30	13.10	V
	7520	-55.02	-13	-42.02	-81.81	-58.17	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps) Ant2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-61.45	-13	-48.45	-78.35	-68.30	5.65	12.50	H
	5197.8	-60.63	-13	-47.63	-82.40	-66.30	7.13	12.80	H
	6930.4	-55.88	-13	-42.88	-81.68	-59.28	8.40	11.80	H
	3465.2	-61.73	-13	-48.73	-78.65	-68.58	5.65	12.50	V
	5197.8	-60.20	-13	-47.20	-82.28	-65.87	7.13	12.80	V
	6930.4	-55.77	-13	-42.77	-82.04	-59.17	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.