

FCC RF TEST REPORT
No. 180300345SHA-001

Applicant : Stanley Black & Decker, Inc.
400 Executive Blvd S, Southington, CT 06489 USA

Manufacturer : Northwest Instrument Inc.
330 Waterloo Valley Road Budd Lake NJ 07828 United States
Of America

Product Name : Laser Distance Measurer

Type/Model : DW0330S

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s) or specification:

47CFR Part 15 (2017): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 4 (November 2014): General Requirements for Compliance of Radio Apparatus

Date of issue: Mar 7, 2018

Prepared by:



Teddy Yin (Project engineer)

Reviewed by:



Daniel Zhao (Reviewer)

Description of Test Facility

Name: Intertek Testing Service Shanghai
Address: Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, P.R. China

FCC Designation Number: CN1175
IC Assigned Code: 2042B-1

Name of contact: Leah Xu
Tel: 86 21 61278200
Fax: 86 21 54262353

Content

| | |
|--|-----------|
| SUMMARY | 1 |
| DESCRIPTION OF TEST FACILITY | 2 |
| 1 GENERAL INFORMATION | 5 |
| 1.1 DESCRIPTION OF CLIENT | 5 |
| 1.2 IDENTIFICATION OF THE EUT | 5 |
| 1.3 TECHNICAL SPECIFICATION | 6 |
| 2 TEST SPECIFICATIONS | 7 |
| 2.1 STANDARDS OR SPECIFICATION | 7 |
| 2.2 MODE OF OPERATION DURING THE TEST..... | 7 |
| 2.3 TEST SOFTWARE LIST | 7 |
| 2.4 TEST PERIPHERALS LIST | 7 |
| 2.5 INSTRUMENT LIST | 8 |
| 2.6 TEST SUMMARY | 9 |
| 2.7 MEASUREMENT UNCERTAINTY | 10 |
| 3 MINIMUM 6DB BANDWIDTH | 11 |
| 3.1 LIMIT | 11 |
| 3.2 TEST CONFIGURATION | 11 |
| 3.3 TEST PROCEDURE AND TEST SETUP | 11 |
| 3.4 TEST PROTOCOL | 12 |
| 4 MAXIMUM CONDUCTED OUTPUT POWER | 13 |
| 4.1 TEST LIMIT | 13 |
| 4.2 TEST CONFIGURATION | 13 |
| 4.3 TEST PROCEDURE AND TEST SETUP | 14 |
| 4.4 TEST PROTOCOL | 15 |
| 5 POWER SPECTRUM DENSITY | 16 |
| 5.1 TEST LIMIT | 16 |
| 5.2 TEST CONFIGURATION | 16 |
| 5.3 TEST PROCEDURE AND TEST SETUP | 17 |
| 5.4 TEST PROTOCOL | 18 |
| 6 EMISSION OUTSIDE THE FREQUENCY BAND | 19 |
| 6.1 TEST LIMIT | 19 |
| 6.2 TEST CONFIGURATION | 19 |
| 6.3 TEST PROCEDURE AND TEST SETUP | 20 |
| 6.4 TEST PROTOCOL | 21 |
| 7 RADIATED EMISSIONS | 22 |
| 7.1 TEST LIMIT | 22 |
| 7.2 TEST CONFIGURATION | 22 |
| 7.3 TEST PROCEDURE AND TEST SETUP | 24 |
| 7.4 TEST PROTOCOL | 26 |
| 8 POWER LINE CONDUCTED EMISSION | 30 |
| 8.1 LIMIT | 30 |
| 8.2 TEST CONFIGURATION | 30 |
| 8.3 TEST PROCEDURE AND TEST SET UP | 31 |
| 8.4 TEST PROTOCOL | 32 |
| 9 ANTENNA REQUIREMENT | 33 |

APPENDIX A: TEST RESULTS 34

1 GENERAL INFORMATION

1.1 Description of Client

Applicant : Stanley Black & Decker, Inc.
400 Executive Blvd S, Southington, CT 06489 USA

Name of contact : Adam Rolfe

Tel : 860-406-9227

Fax :

Manufacturer : Northwest Instrument Inc.
330 Waterloo Valley Road Budd Lake NJ 07828 United States Of
America

1.2 Identification of the EUT

Product Name : Laser Distance Measurer

Type/model : DW0330S

FCC ID : 2ANWF-DW0330

IC ID : 23237-DW0330

1.3 Technical Specification

Operation Frequency : 2402~2480MHz
Band
Type of Modulation : GFSK
EUT Modes of Modulation : Bluetooth BLE
Channel Number : 40 Channels
Description of EUT : The EUT is a wireless device with Bluetooth BLE mode. We tested the 2402CH , 2440CH and 2480CH and listed the worst data in this report.
Antenna : PCB antenna, 3.3dBi gain
Rating : DC 1.5X3V
Category of EUT : Class B
EUT type : Table top
 Floor standing
Sample received date : Jan 16, 2018
Date of test : Jan 16~Mar 2, 2018

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2017)
ANSI C63.10 (2013)
KDB 558074 (v04)
RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 4 (November 2014)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The EUT is a small unlicensed wireless device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading (X axis) among the whole test procedure was recorded.

2.3 Test software list

| Test Items | Software | Manufacturer | Version |
|--------------------|----------|--------------|---------|
| Conducted emission | ESxS-K1 | R&S | V2.1.0 |
| Radiated emission | ES-K1 | R&S | V1.71 |

2.4 Test peripherals list

| Item No. | Name | Band and Model | Description |
|----------|-----------------|------------------|----------------------|
| 1 | Laptop computer | HP ProBook 6470b | 100-240V AC, 50/60Hz |

2.5 Instrument list

| Radiated Emission | | | | | |
|-------------------------------------|-----------------------------|-------------------|---------------|--------------|------------|
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESIB 26 | EC 3045 | 2018-09-12 |
| <input checked="" type="checkbox"/> | Bilog Antenna | TESEQ | CBL 6112D | EC 4206 | 2018-05-30 |
| <input checked="" type="checkbox"/> | Horn antenna | R&S | HF 906 | EC 3049 | 2018-09-23 |
| <input checked="" type="checkbox"/> | Horn antenna | TOYO | HAP18-26W | EC 4792-3 | 2018-07-09 |
| <input checked="" type="checkbox"/> | Pre-amplifier | R&S | Pre-amp 18 | EC5881 | 2018-06-19 |
| <input checked="" type="checkbox"/> | Semi-anechoic chamber | Albatross project | - | EC 3048 | 2018-09-15 |
| RF test | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | PXA Signal Analyzer | Keysight | N9030A | EC 5338 | 2018-09-10 |
| <input type="checkbox"/> | Power sensor | Agilent | U2021XA | EC 5338-1 | 2018-03-06 |
| <input type="checkbox"/> | Vector Signal Generator | Agilent | N5182B | EC 5175 | 2018-03-06 |
| <input type="checkbox"/> | MXG Analog Signal Generator | Agilent | N5181A | EC 5338-2 | 2018-03-03 |
| <input type="checkbox"/> | Mobile Test System | Litepoint | Iqxel | EC 5176 | 2019-01-11 |
| <input type="checkbox"/> | Power meter | Agilent | N1911A/N1921A | EC4318 | 2018-05-12 |
| Additional instrument | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 2323 | 2018-06-14 |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 3325 | 2018-03-23 |

2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

| TEST ITEM | FCC REFERANCE | IC Reference | RESULT |
|---|-----------------|-------------------------------|--------|
| Minimum 6dB Bandwidth& Occupied bandwidth | 15.247(a)(2) | RSS-247 Issue 2 Clause 5 | Pass |
| Maximum peak output power | 15.247(b) | RSS-247 Issue 2 Clause 5 | Pass |
| Power spectrum density | 15.247(e) | RSS-247 Issue 2 Clause 5 | Pass |
| Radiated emission | 15.205 & 15.209 | RSS-247 Issue 2 Clause 5 | Pass |
| Emission outside the frequency band | 15.247(d) | RSS-247 Issue 2 Clause 5 | Pass |
| Power line conducted emission | 15.207 | RSS-Gen Issue 4 Clause 8.8 | NA |

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item | Measurement uncertainty |
|---|-------------------------|
| Maximum peak output power | ± 0.74dB |
| Radiated Emissions in restricted frequency bands below 1GHz | ± 4.90dB |
| Radiated Emissions in restricted frequency bands above 1GHz | ± 5.02dB |
| Emission outside the frequency band | ± 2.89dB |
| Power line conducted emission | ± 3.19dB |


3 Minimum 6dB Bandwidth & Occupied bandwidth

Test result: Pass

3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Test Configuration

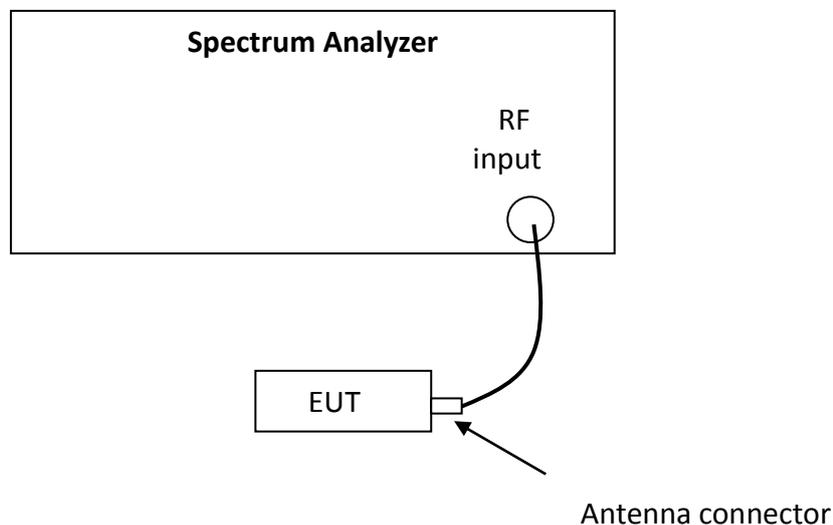

3.3 Test Procedure and test setup

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4 Test Protocol

Temperature: 25 °C

Relative Humidity: 55 %

Test Results of Minimum 6dB bandwidth & Occupied bandwidth

Please refer to Appendix A

4 Maximum Conducted Output power


Test result: Pass

4.1 Test limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
- For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt and the e.i.r.p. shall not exceed 4 W.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Test Configuration

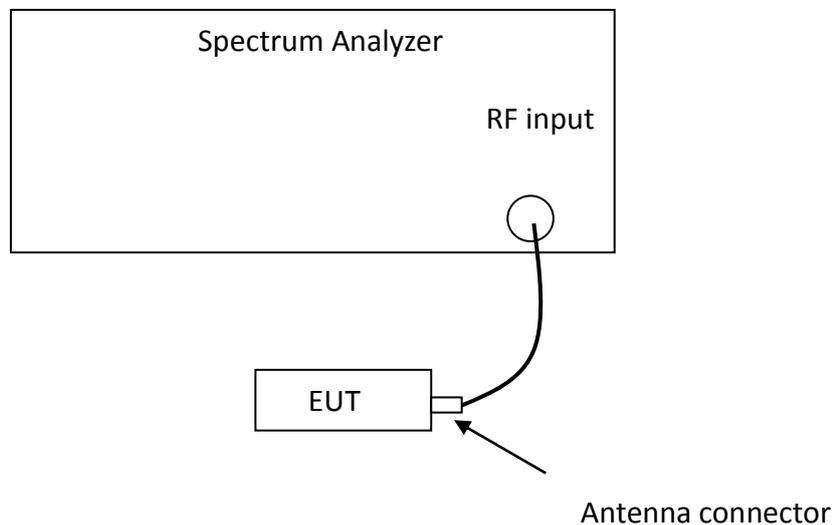

4.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 9.1.1).

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.4 Test protocol

Temperature: 25 °C

Relative Humidity: 55 %

Test Results of Maximum conducted output power

Please refer to Appendix A

Conclusion: The maximum EIRP = $-2.61 \text{ dBm} + 3.3 \text{ dBi} = 0.69 \text{ dBm} = 0.0012 \text{ W}$ which is lower than the limit of 4W listed in RSS-247.

5 Power spectrum density


Test result:Pass

5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/3kHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Test Configuration

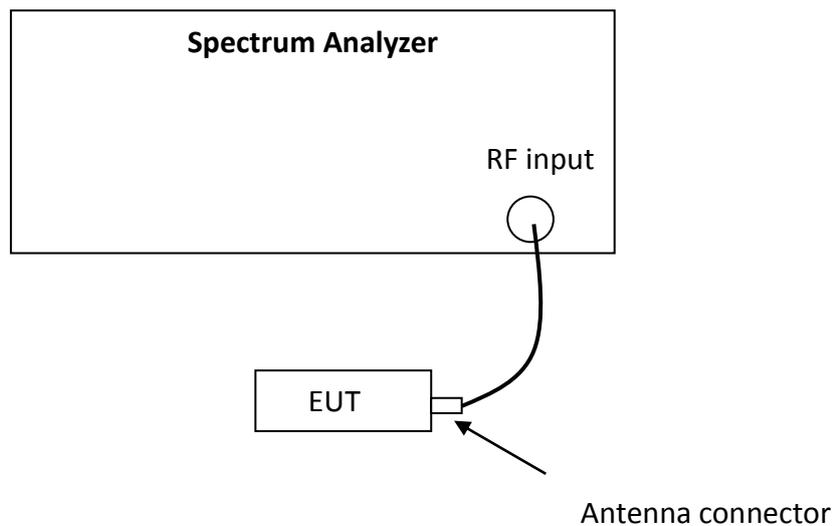

5.3 Test procedure and test setup

The power output per FCC §15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.2) for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.4 Test Protocol

Temperature: 25 °C

Relative Humidity: 55 %

Test Results of Power spectrum density

Please refer to Appendix A


6 Emission outside the frequency band

Test result: Pass

6.1 Test limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Test Configuration

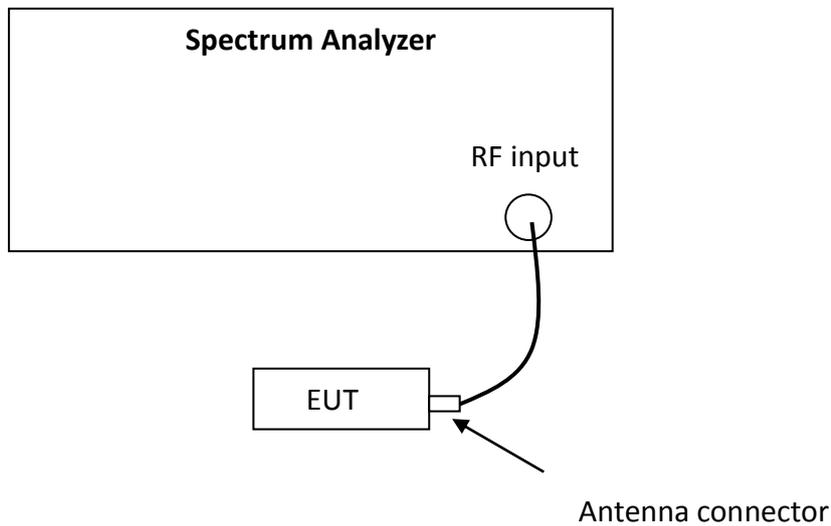

6.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the *DTS bandwidth*.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.4 Test Protocol

Temperature: 25 °C

Relative Humidity: 55 %

The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions

Test result: Pass


7.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:


| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

7.2 Test Configuration


For Radiated emission below 30MHz:

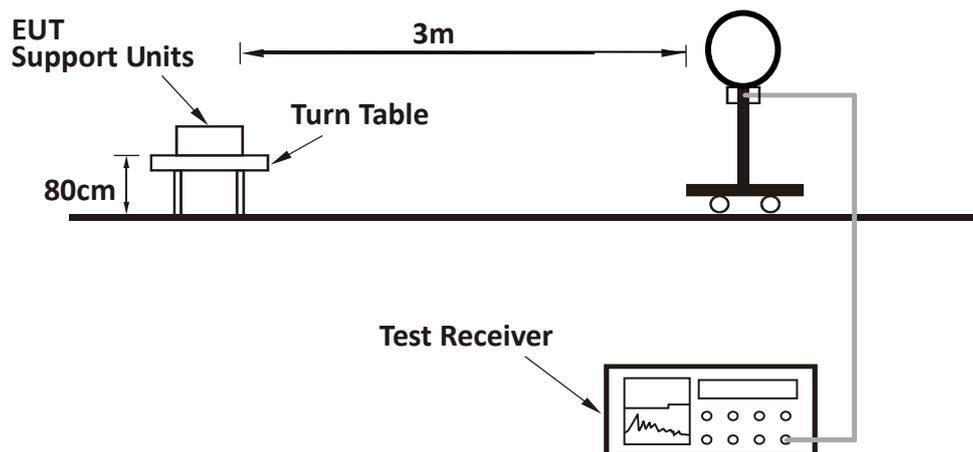

For Radiated emission 30MHz to 1GHz:

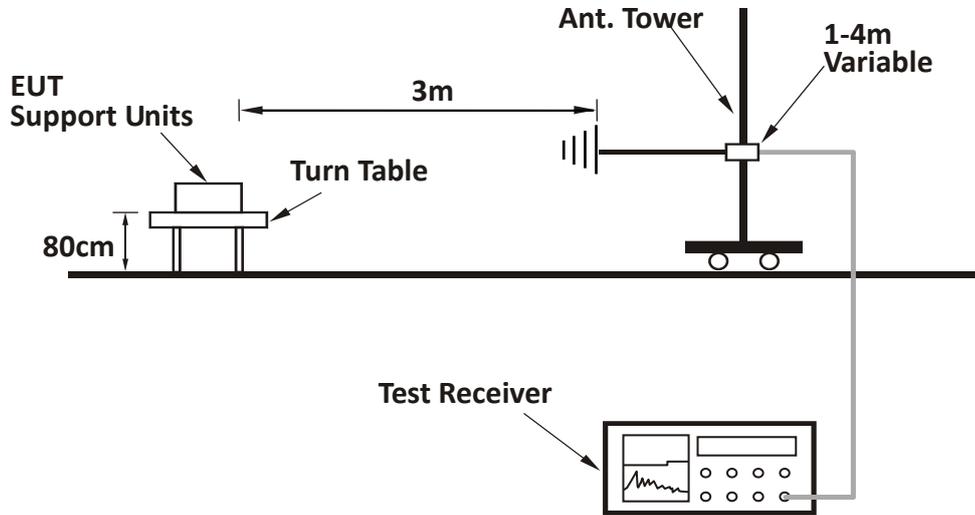

For Radiated emission above 1GHz:

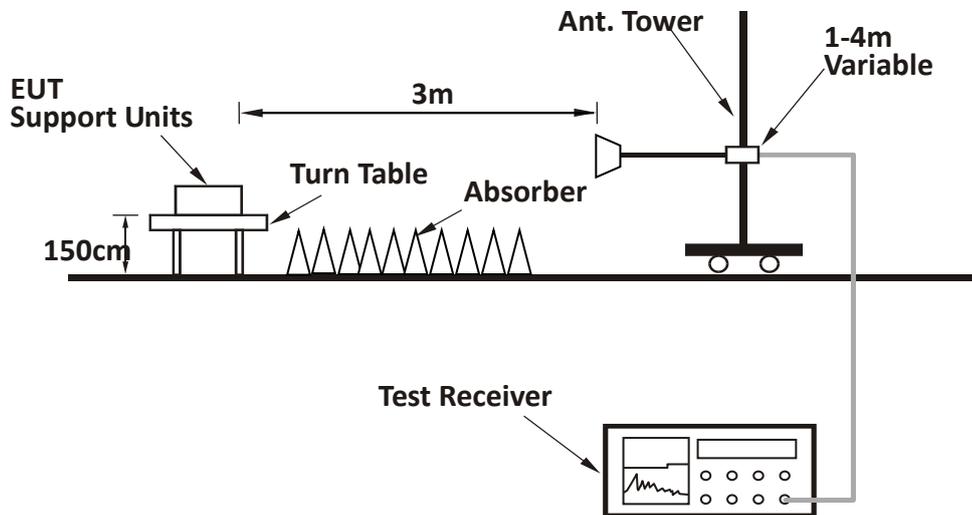

7.3 Test procedure and test setup

For Radiated emission below 30MHz:

a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.

b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c) Both X and Y axes of the antenna are set to make the measurement.

d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.


3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

7.4 Test Protocol


Temperature: 25 °C
Relative Humidity: 55 %

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

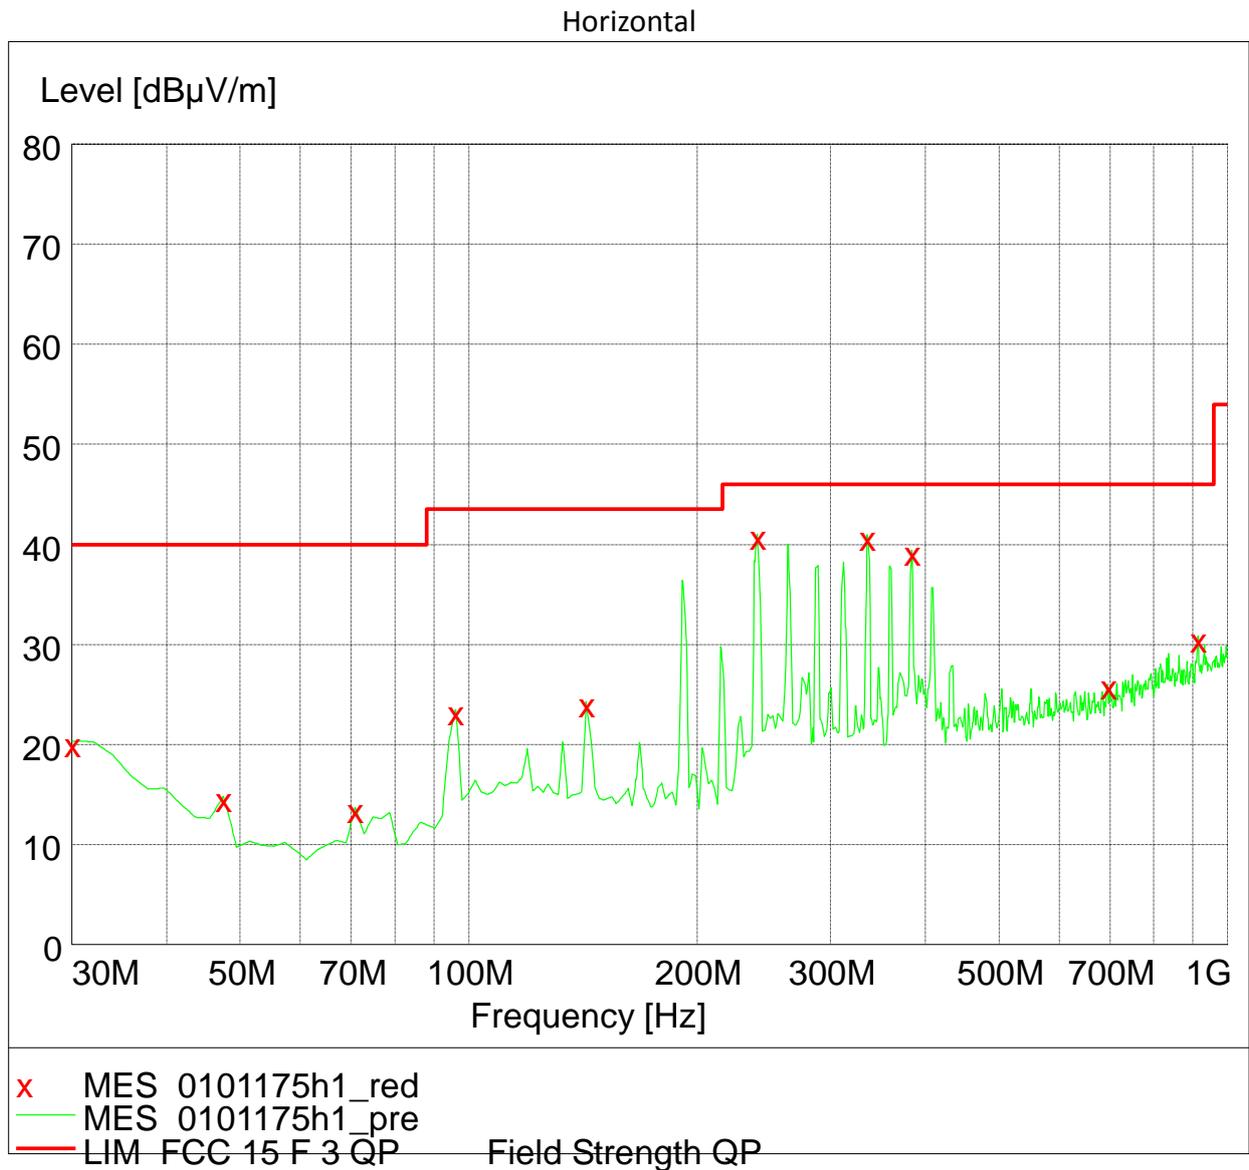

Vertical

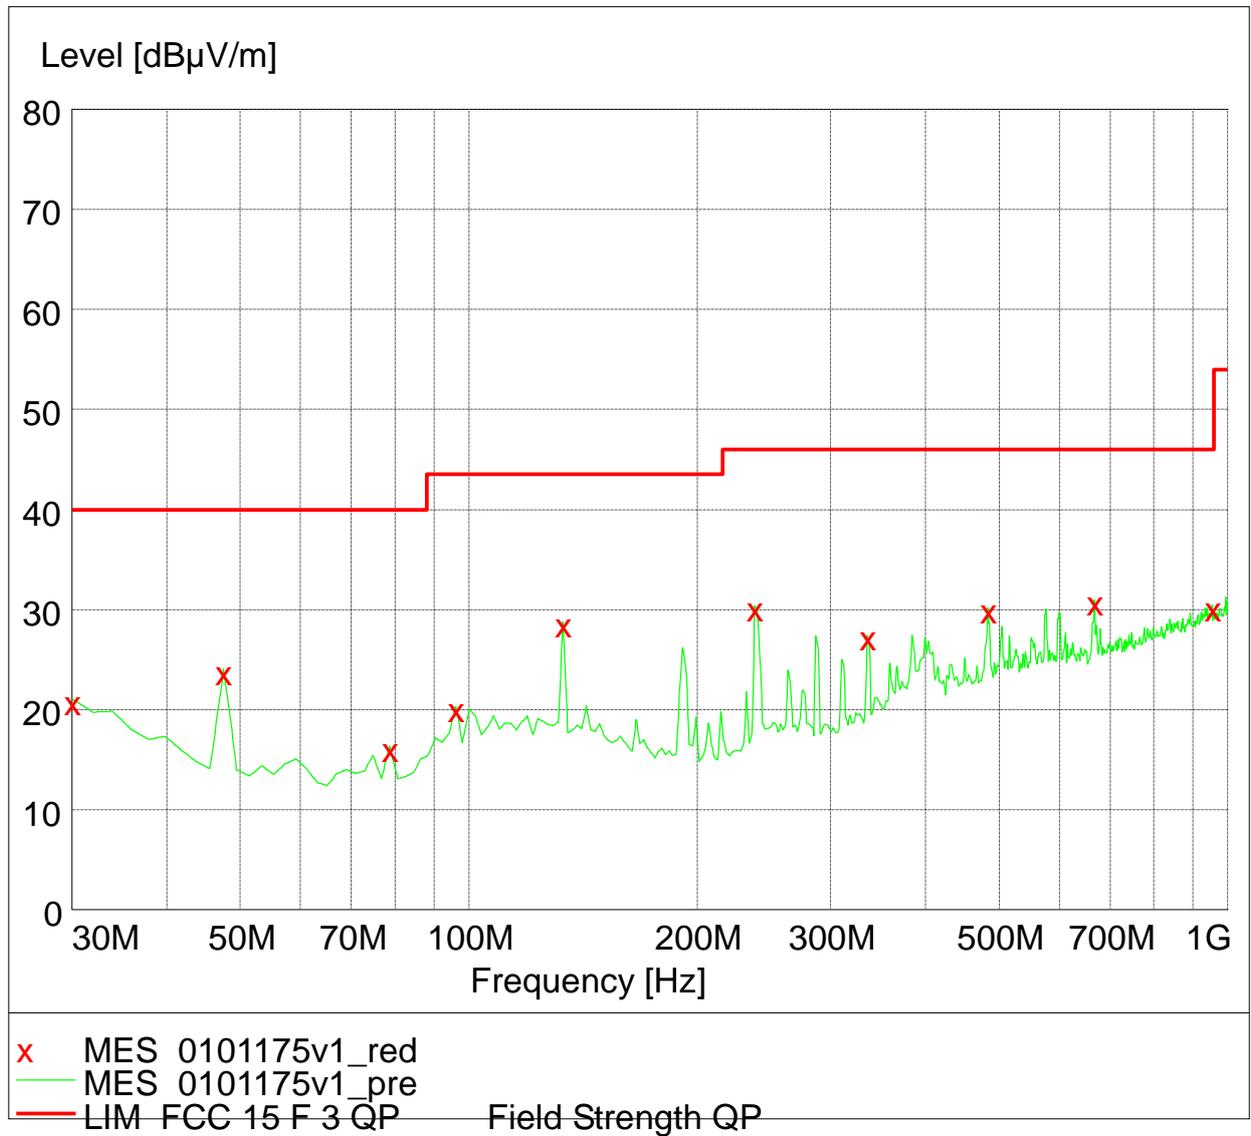

Test data 30MHz~1GHz:

| Polarization | Frequency (MHz) | Measured level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------|-----------------|-------------------------------|-----------------------|-------------|----------|
| H | 30.00 | 20.3 | 40.0 | 19.7 | PK |
| | 70.82 | 13.7 | 40.0 | 26.3 | PK |
| | 96.09 | 23.5 | 43.5 | 20.0 | PK |
| | 142.74 | 24.3 | 43.5 | 19.2 | PK |
| | 239.93 | 41.0 | 46.0 | 5.0 | PK |
| | 335.19 | 40.9 | 46.0 | 5.1 | PK |
| | 383.78 | 39.4 | 46.0 | 6.6 | PK |
| V | 30.00 | 21.0 | 40.0 | 19.0 | PK |
| | 78.59 | 16.3 | 40.0 | 23.7 | PK |
| | 96.09 | 20.3 | 43.5 | 23.2 | PK |
| | 133.02 | 28.8 | 43.5 | 14.7 | PK |
| | 237.99 | 30.4 | 46.0 | 15.6 | PK |
| | 335.19 | 27.4 | 46.0 | 18.6 | PK |
| | 482.92 | 30.2 | 46.0 | 15.8 | PK |

Note: The worst test result (30MHz to 1GHz) of channel L (2402MHz) was chosen to list in the report as representative.

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz.

| CH | Antenna | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|---------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| L | H | 2390.00 | 46.36 | 15.16 | -27.64 | 74.00 | 31.20 | PK |
| | H | 2390.00 | 37.57 | 6.37 | -16.43 | 54.00 | 31.20 | AV |
| | V | 4804.00 | 50.43 | 51.93 | -23.57 | 74.00 | -1.50 | PK |
| | V | 4804.00 | 33.25 | 34.75 | -20.75 | 54.00 | -1.50 | AV |
| | V | 7206.00 | 61.80 | 58.30 | -12.20 | 74.00 | 3.50 | PK |
| | V | 7206.00 | 46.57 | 43.07 | -7.43 | 54.00 | 3.50 | AV |
| M | V | 4880.00 | 49.35 | 50.45 | -24.65 | 74.00 | -1.10 | PK |
| | V | 4880.00 | 32.24 | 33.34 | -21.76 | 54.00 | -1.10 | AV |
| | V | 7320.00 | 59.73 | 56.13 | -14.27 | 74.00 | 3.60 | PK |
| | V | 7320.00 | 44.36 | 40.76 | -9.64 | 54.00 | 3.60 | AV |
| H | V | 2483.50 | 45.41 | 14.22 | -28.59 | 74.00 | 31.19 | PK |
| | V | 2483.50 | 36.38 | 5.19 | -17.62 | 54.00 | 31.19 | AV |
| | V | 4960.00 | 47.39 | 44.62 | -26.61 | 74.00 | 2.77 | PK |
| | V | 4960.00 | 31.88 | 29.11 | -22.12 | 54.00 | 2.77 | AV |
| | V | 7440.00 | 58.73 | 54.93 | -15.27 | 74.00 | 3.80 | PK |
| | V | 7440.00 | 43.26 | 39.46 | -10.74 | 54.00 | 3.80 | AV |

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBu

8 Power line conducted emission


Test result: NA

8.1 Limit

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|------------|
| | QP | AV |
| 0.15-0.5 | 66 to 56* | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

8.2 Test configuration

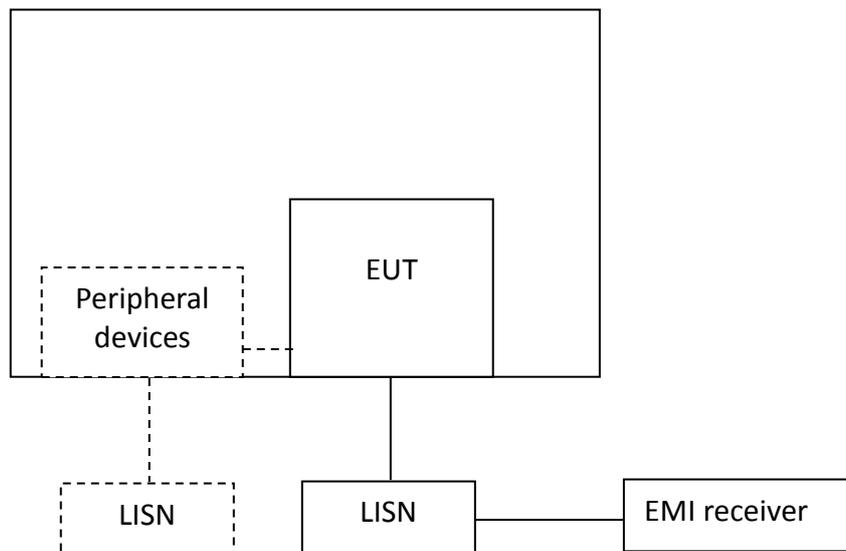

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

8.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test protocol

Temperature: °C
Relative Humidity: %

L Line

Test Data:

| Frequency (MHz) | Quasi-peak | | | Average | | |
|-----------------|--------------|--------------|-------------|--------------|--------------|-------------|
| | level dB(μV) | Limit dB(μV) | Margin (dB) | level dB(μV) | limit dB(μV) | Margin (dB) |
| 0.16 | NA | 65.3 | NA | NA | 55.3 | NA |
| 0.25 | NA | 61.9 | NA | NA | 51.9 | NA |
| 0.60 | NA | 56.0 | NA | NA | 46.0 | NA |
| 4.29 | NA | 56.0 | NA | NA | 46.0 | NA |
| 10.45 | NA | 60.0 | NA | NA | 50.0 | NA |
| 19.40 | NA | 60.0 | NA | NA | 50.0 | NA |

Note: *means margin is more than 10dB.

N Line

Test Data:

| Frequency (MHz) | Quasi-peak | | | Average | | |
|-----------------|--------------|--------------|-------------|--------------|--------------|-------------|
| | level dB(μV) | Limit dB(μV) | Margin (dB) | level dB(μV) | limit dB(μV) | Margin (dB) |
| 0.16 | NA | 65.2 | NA | NA | 55.2 | NA |
| 0.25 | NA | 61.8 | NA | NA | 51.8 | NA |
| 0.95 | NA | 56.0 | NA | NA | 46.0 | NA |
| 4.14 | NA | 56.0 | NA | NA | 46.0 | NA |
| 10.32 | NA | 60.0 | NA | NA | 50.0 | NA |
| 19.24 | NA | 60.0 | NA | NA | 50.0 | NA |

Note: *means margin is more than 10dB.

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,

Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.

Then Correct Factor = 10.00 + 2.00 = 12.00dB;

Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;

Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

9 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Result:

EUT uses PCB antenna to the intentional radiator, so it can comply with the provisions of this section.

Appendix A: Test results

1. RF Output Power

1.1 Test Result and Data

| BLE Maximum Output Power | | |
|--------------------------|-------------|--------|
| Test Frequency (MHz) | Power (dBm) | Result |
| 2402 | -2.61 | Pass |
| 2440 | -2.78 | Pass |
| 2480 | -3.07 | Pass |

2.2 Test Plots



2. Minimum 6dB bandwidth

2.1 Test Result and Data

| BLE Occupied 6dB Bandwidth | | | |
|----------------------------|--------------------------|-----------------|--------|
| Test Frequency (MHz) | Occupied Bandwidth (kHz) | Min Limit (kHz) | Result |
| 2402 | 692.1 | 500 | Pass |
| 2440 | 709.6 | 500 | Pass |
| 2480 | 706.3 | 500 | Pass |

2.2 Test Plots



3. Occupied Bandwidth
3.1 Test Result and Data

| BLE 99% Occupied Bandwidth | | | |
|----------------------------|------------------------------|--------|--|
| Test Frequency (MHz) | 99% Occupied Bandwidth (MHz) | Result | |
| 2402 | 1.038 | Pass | |
| 2440 | 1.0467 | Pass | |
| 2480 | 1.047 | Pass | |

3.2 Test Plots




4. Power Spectral Density

4.1 Test Result and Data

| BLE Peak Power Spectral Density | | | |
|---------------------------------|----------------|--------|--|
| Test Frequency (MHz) | PSD (dBm/3kHz) | Result | |
| 2402 | -20.35 | Pass | |
| 2440 | -18.21 | Pass | |
| 2480 | -18.51 | Pass | |


4.2 Test Plots

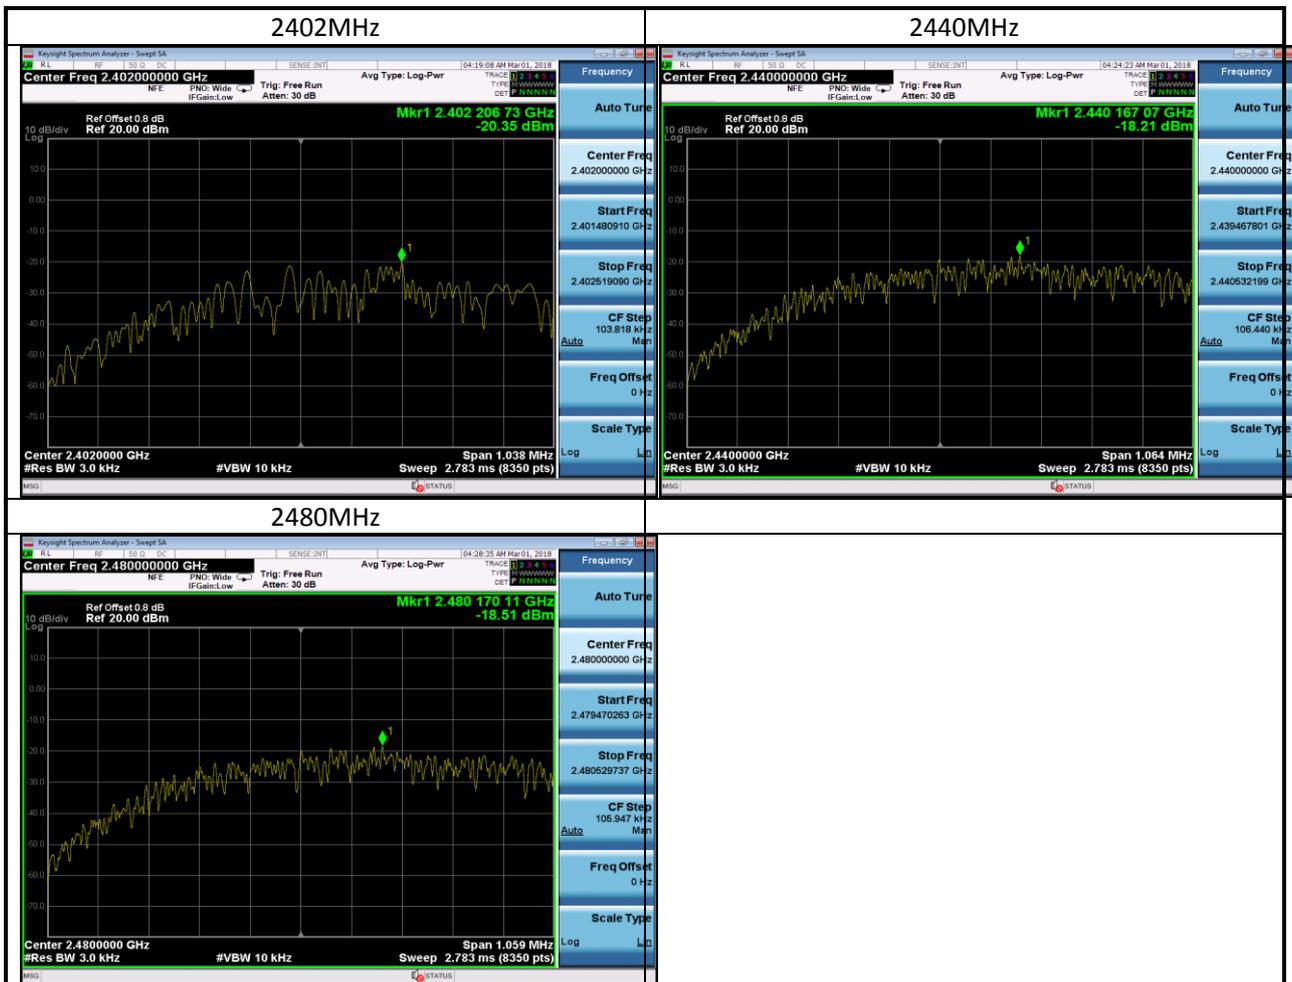


5. Emission outside the frequency band
5.1 Test Result and Data

| BLE Transmitter Spurious Emission | | | |
|-----------------------------------|------------------|-------------|--------|
| Test Frequency (MHz) | Test Range | Power (dBm) | Result |
| 2402 | 1MHz~2310MHz | -57.97 | Pass |
| 2402 | 2500MHz~5000MHz | -49.67 | Pass |
| 2402 | 5000MHz~25000MHz | -44.15 | Pass |
| 2402 | Band Edge | -49.30 | Pass |
| 2402 | Reference Level | -2.78 | Pass |
| 2440 | 1MHz~2310MHz | -54.80 | Pass |
| 2440 | 2500MHz~5000MHz | -47.35 | Pass |
| 2440 | 5000MHz~25000MHz | -43.59 | Pass |
| 2440 | Band Edge | -59.42 | Pass |
| 2440 | Reference Level | -2.98 | Pass |
| 2480 | 1MHz~2310MHz | -57.16 | Pass |
| 2480 | 2500MHz~5000MHz | -50.43 | Pass |
| 2480 | 5000MHz~25000MHz | -43.57 | Pass |
| 2480 | Band Edge | -53.72 | Pass |
| 2480 | Reference Level | -3.26 | Pass |

5.2 Test plots

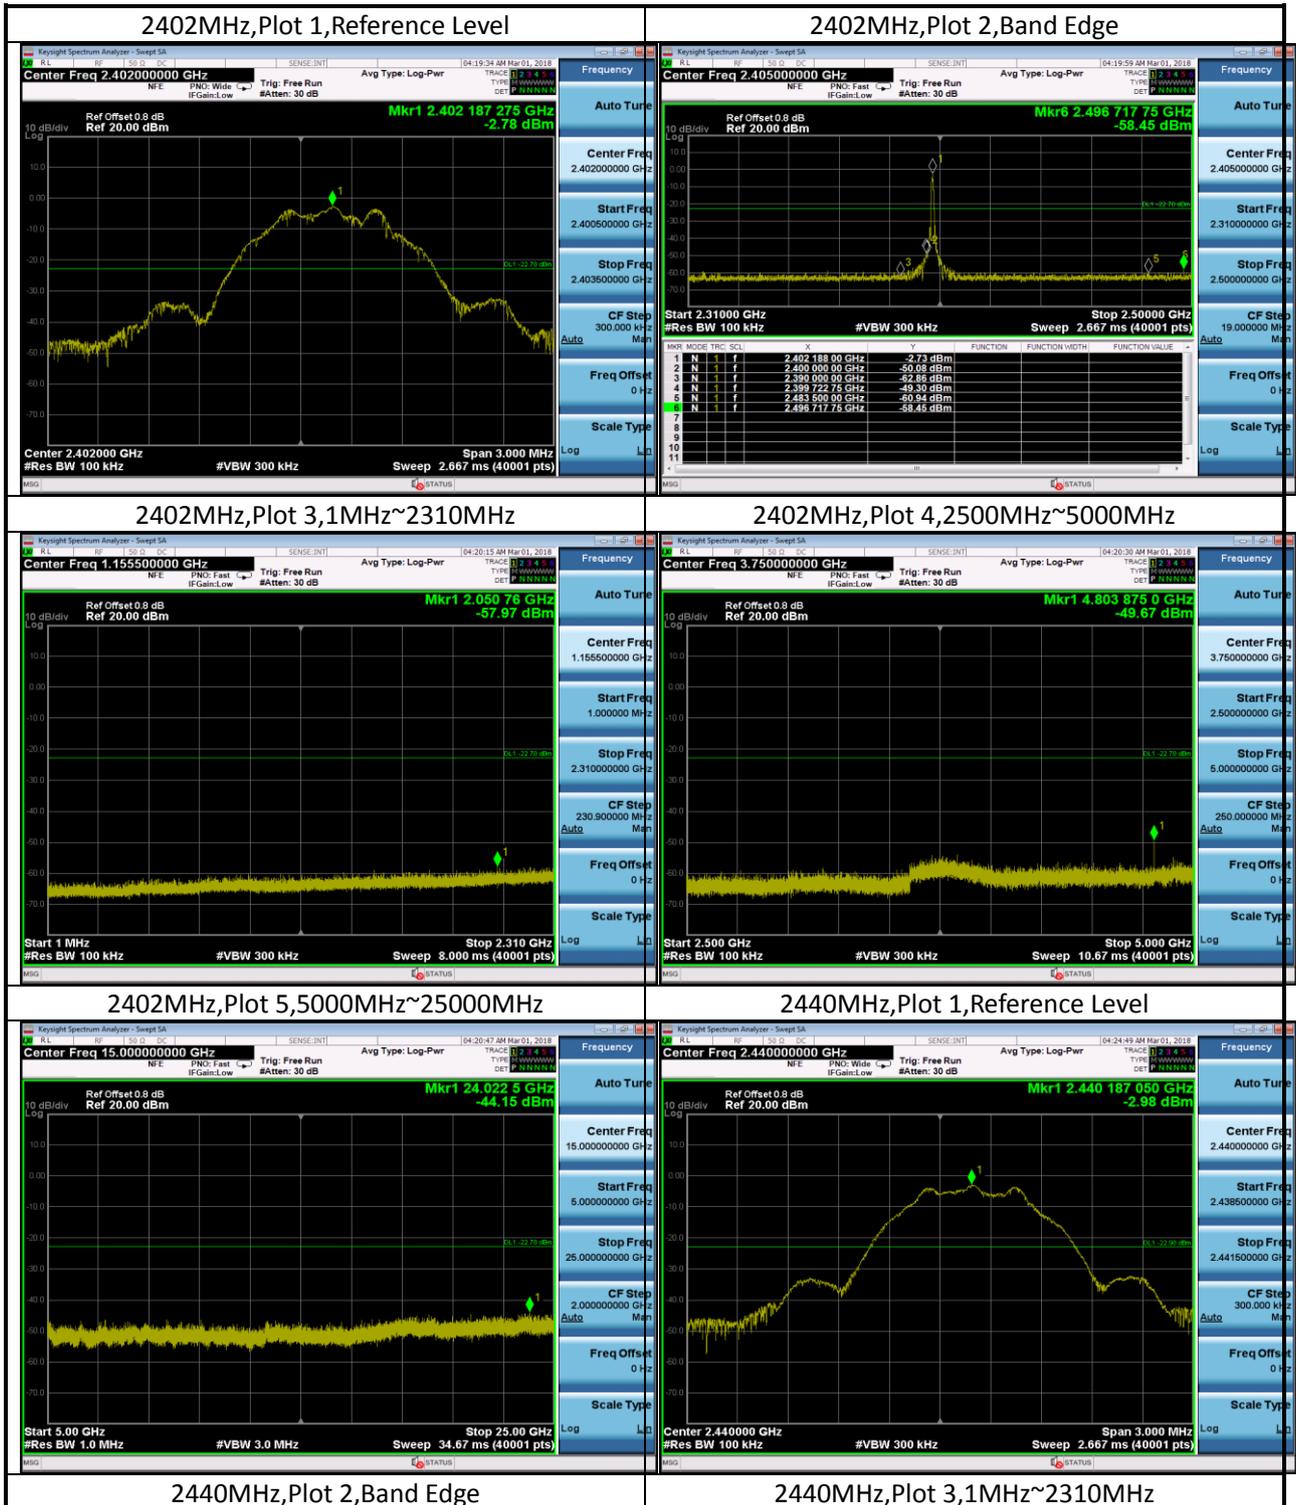



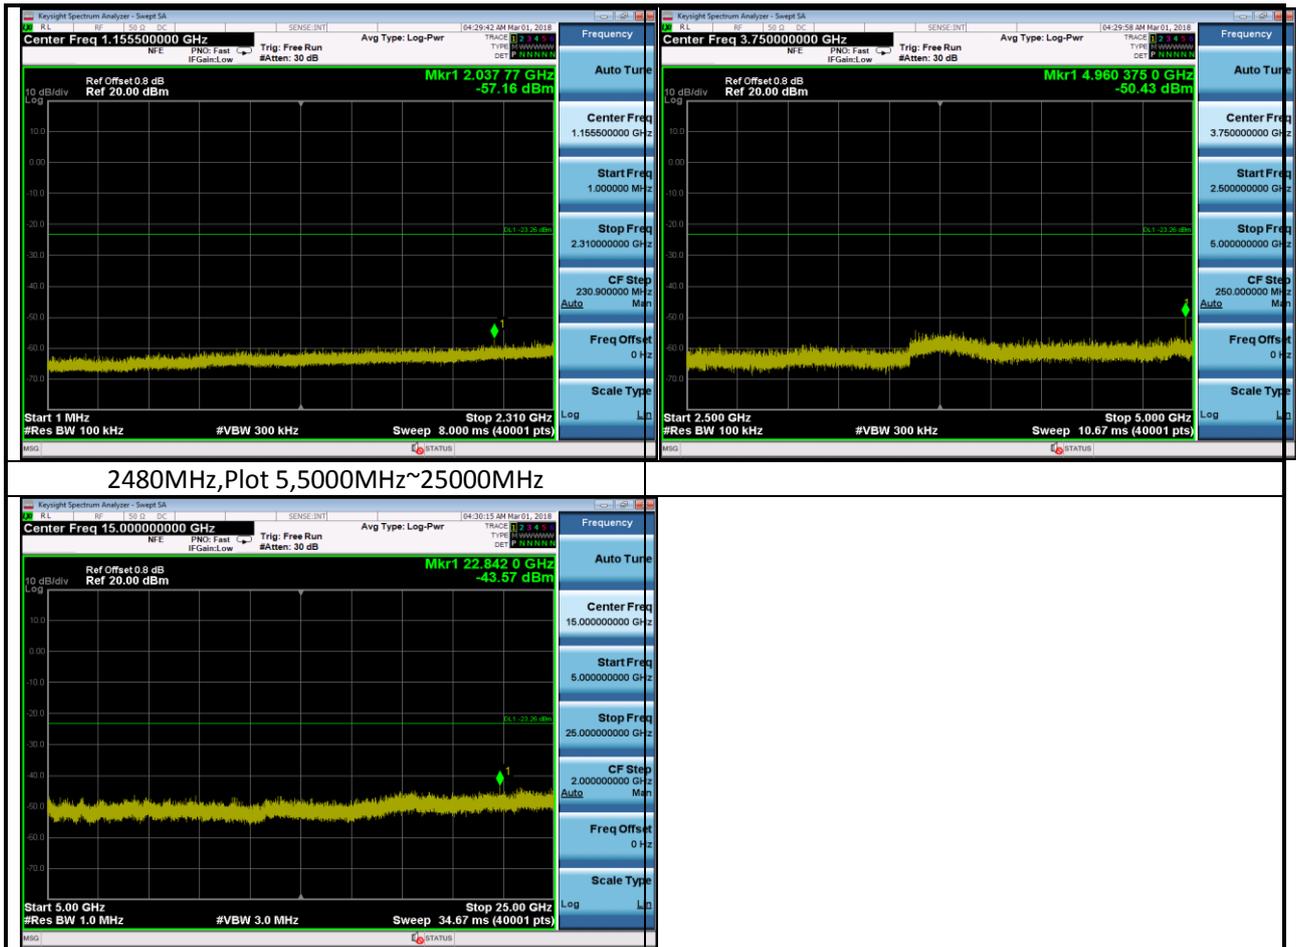

***** END *****