


Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

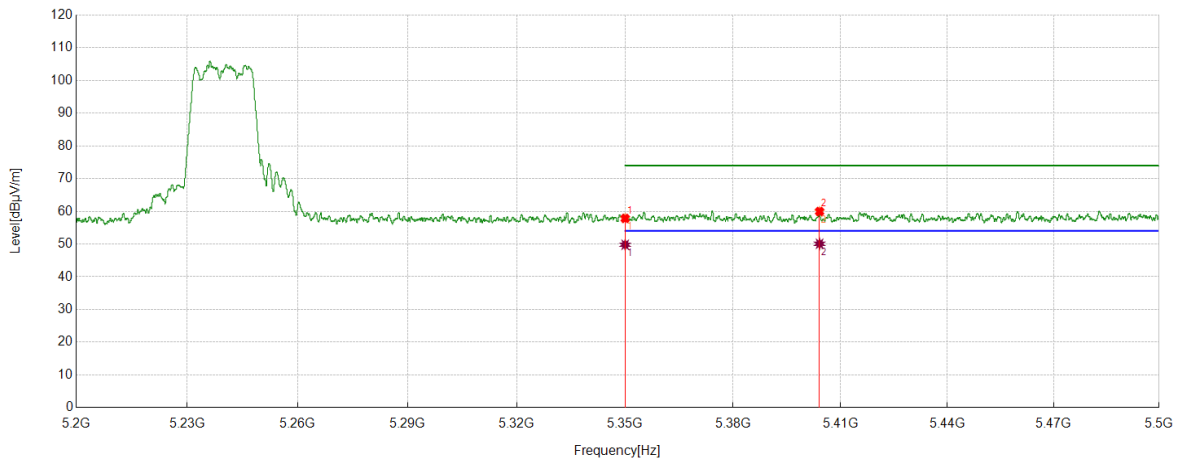

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	37.15	20.68	57.83	74.00	16.17	peak
2	5404.1404	39.15	20.80	59.95	74.00	14.05	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	29.11	20.68	49.79	54.00	4.21	AV
2	5404.1404	29.28	20.80	50.08	54.00	3.92	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

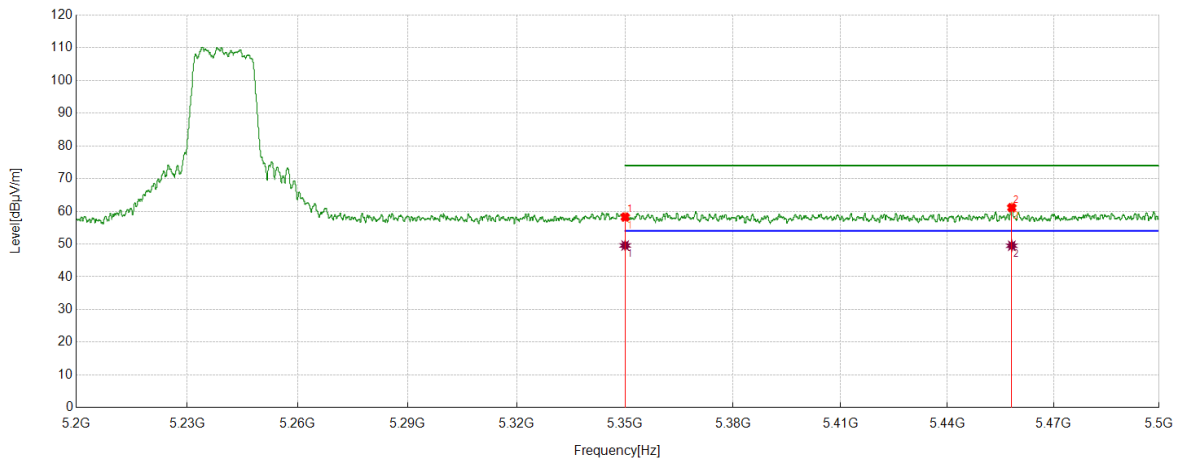

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	37.57	20.68	58.25	74.00	15.75	peak
2	5458.2058	40.42	20.73	61.15	74.00	12.85	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	28.88	20.68	49.56	54.00	4.44	AV
2	5458.2058	28.76	20.73	49.49	54.00	4.51	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

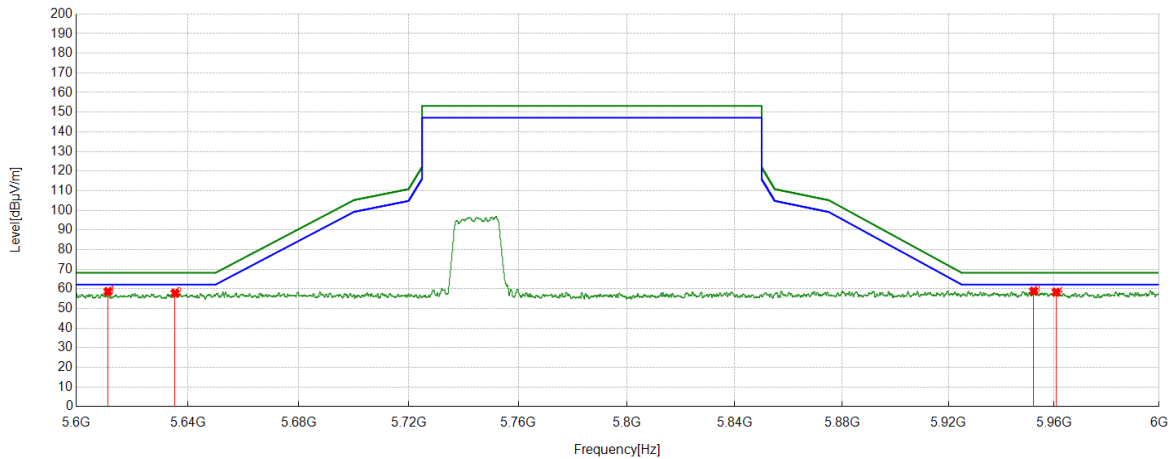


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5611.4011	38.04	20.60	58.64	68.20	9.56	peak
2	5635.4435	37.12	20.73	57.85	68.20	10.35	peak
3	5952.2352	37.47	21.37	58.84	68.20	9.36	peak
4	5960.7561	36.88	21.45	58.33	68.20	9.87	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

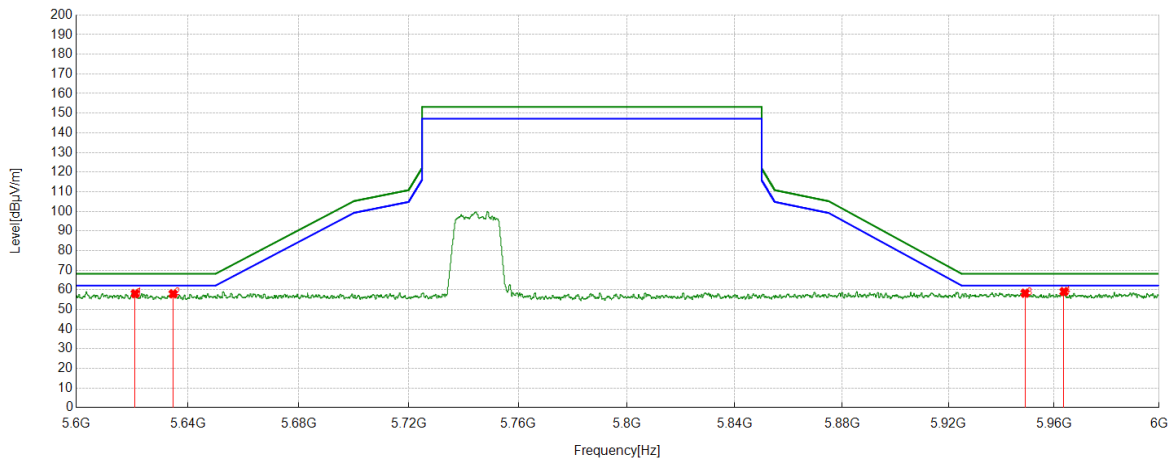


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5621.1221	37.36	20.71	58.07	68.20	10.13	peak
2	5634.7235	37.25	20.73	57.98	68.20	10.22	peak
3	5948.9949	36.92	21.36	58.28	68.20	9.92	peak
4	5963.7564	37.69	21.42	59.11	68.20	9.09	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

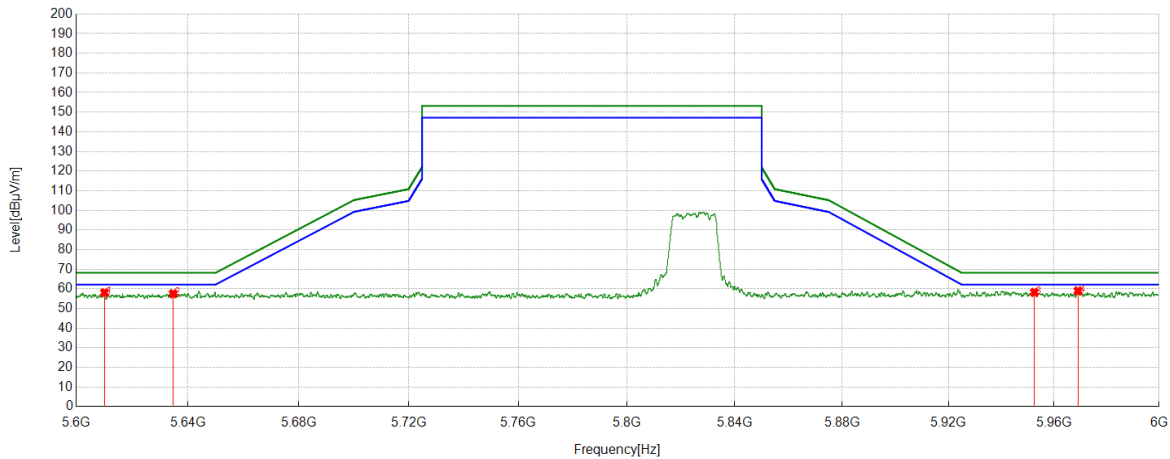


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5610.161	37.50	20.58	58.08	68.20	10.12	peak
2	5634.7635	36.82	20.73	57.55	68.20	10.65	peak
3	5952.5153	36.83	21.38	58.21	68.20	9.99	peak
4	5969.0769	37.62	21.35	58.97	68.20	9.23	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

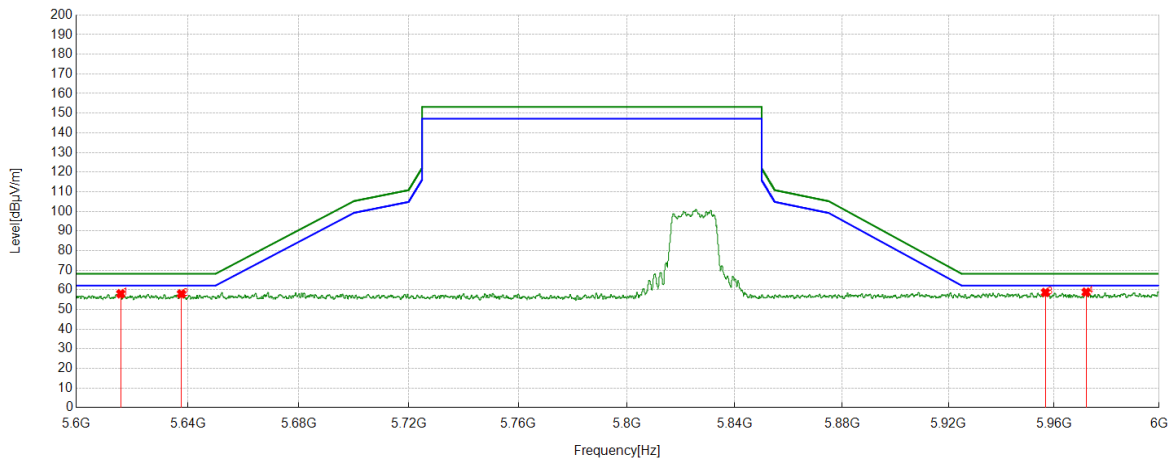


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5615.9616	37.36	20.65	58.01	68.20	10.19	peak
2	5637.6838	37.25	20.71	57.96	68.20	10.24	peak
3	5956.7157	37.26	21.42	58.68	68.20	9.52	peak
4	5972.1572	37.50	21.34	58.84	68.20	9.36	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Horizontal	PASS

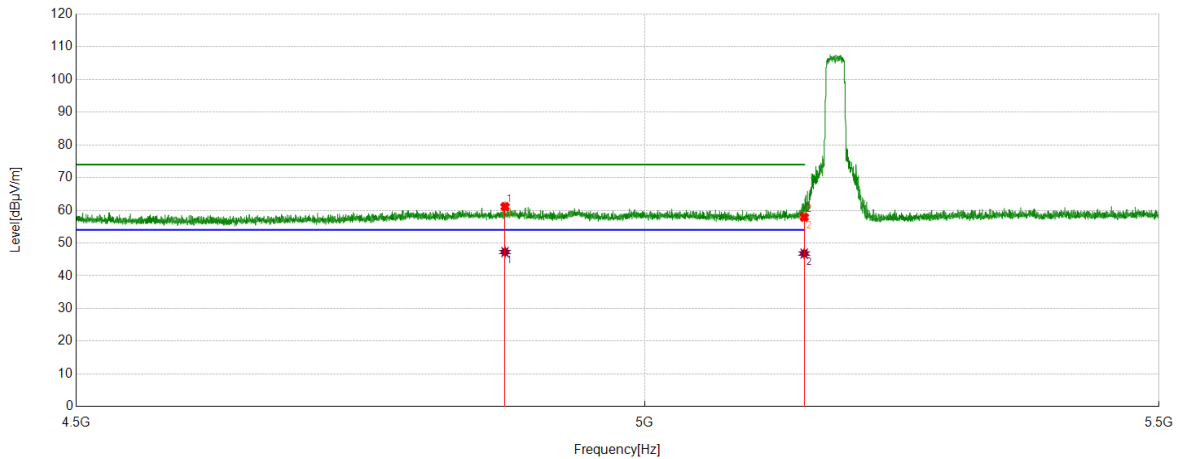

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4872.2372	41.34	19.80	61.14	74.00	12.86	peak
2	5150.0000	38.45	19.46	57.91	74.00	16.09	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4872.2372	27.46	19.80	47.26	54.00	6.74	AV
2	5150.0000	27.33	19.46	46.79	54.00	7.21	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Vertical	PASS

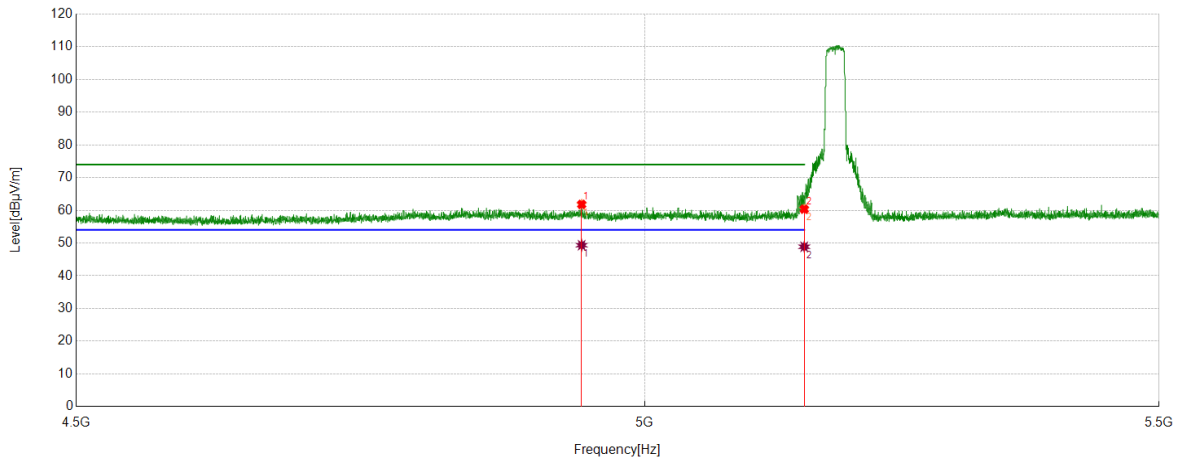

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4941.9442	41.44	20.37	61.81	74.00	12.19	peak
2	5150.0000	40.90	19.46	60.36	74.00	13.64	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4941.9442	28.97	20.37	49.34	54.00	4.66	AV
2	5150.0000	29.41	19.46	48.87	54.00	5.13	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5240	Horizontal	PASS

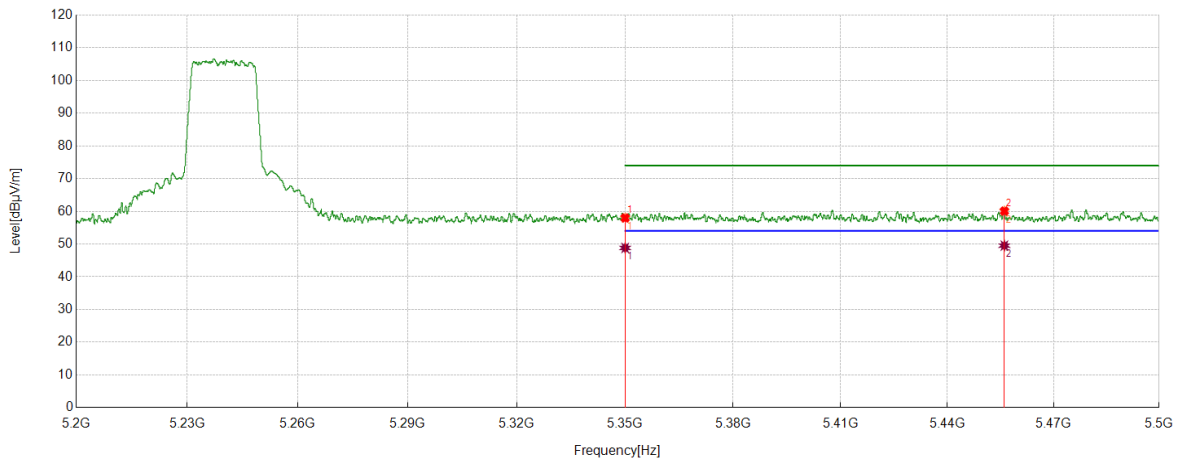

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	37.30	20.68	57.98	74.00	16.02	peak
2	5456.1056	39.32	20.75	60.07	74.00	13.93	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.14	20.68	48.82	54.00	5.18	AV
2	5456.1056	28.77	20.75	49.52	54.00	4.48	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5240	Vertical	PASS

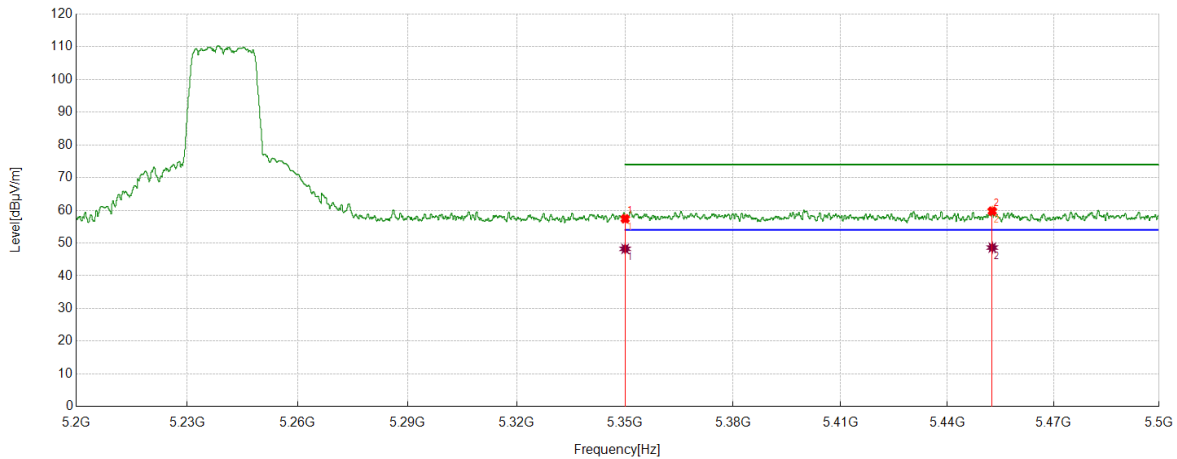

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	36.74	20.68	57.42	74.00	16.58	peak
2	5452.6853	38.97	20.79	59.76	74.00	14.24	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	27.55	20.68	48.23	54.00	5.77	AV
2	5452.6853	27.82	20.79	48.61	54.00	5.39	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

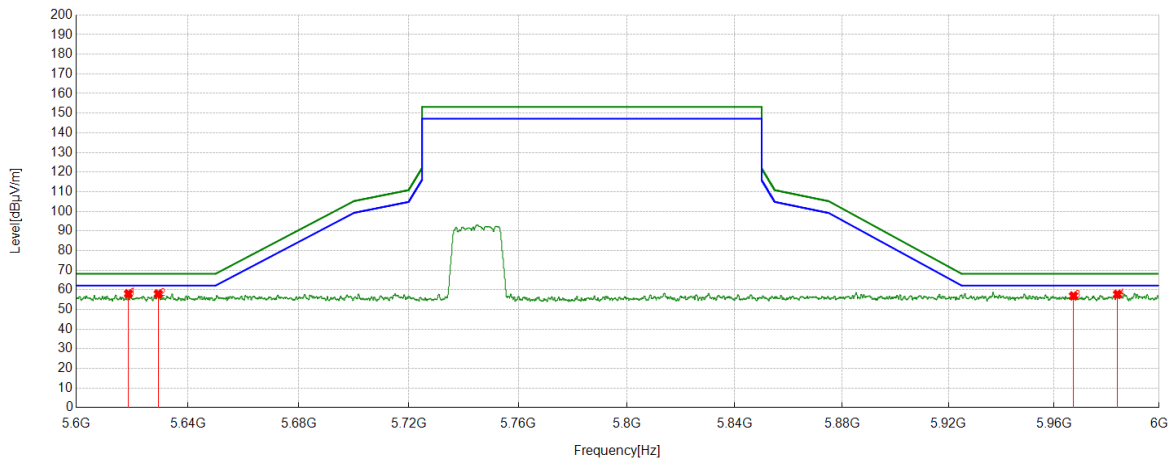


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5618.7219	37.36	20.68	58.04	68.20	10.16	peak
2	5629.4029	37.20	20.76	57.96	68.20	10.24	peak
3	5967.3567	35.55	21.37	56.92	68.20	11.28	peak
4	5984.1184	36.31	21.43	57.74	68.20	10.46	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

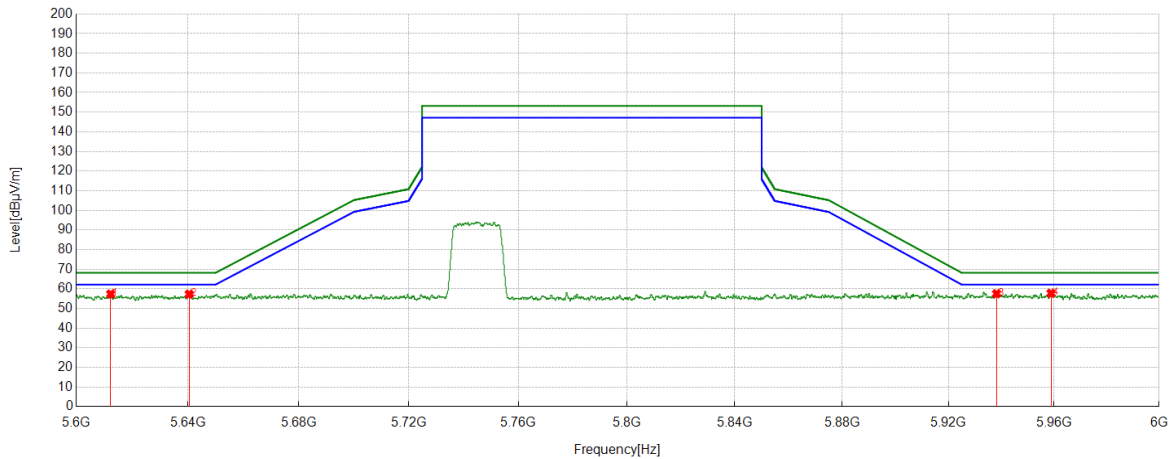


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5612.3612	36.76	20.61	57.37	68.20	10.83	peak
2	5640.484	36.60	20.70	57.30	68.20	10.90	peak
3	5938.1938	36.12	21.41	57.53	68.20	10.67	peak
4	5958.8359	36.33	21.45	57.78	68.20	10.42	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

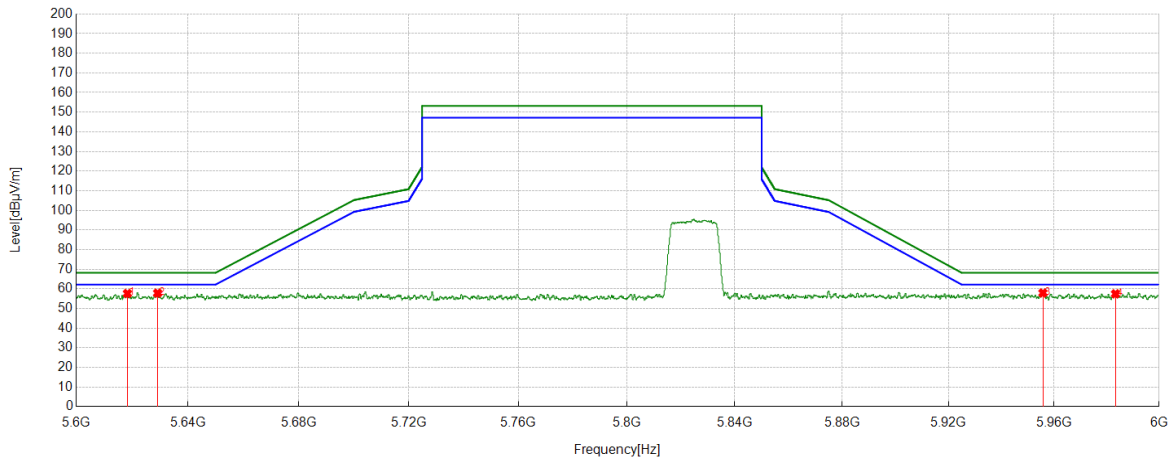


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5618.3618	36.96	20.68	57.64	68.20	10.56	peak
2	5629.1629	37.09	20.75	57.84	68.20	10.36	peak
3	5955.7556	36.51	21.41	57.92	68.20	10.28	peak
4	5983.3583	36.05	21.42	57.47	68.20	10.73	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

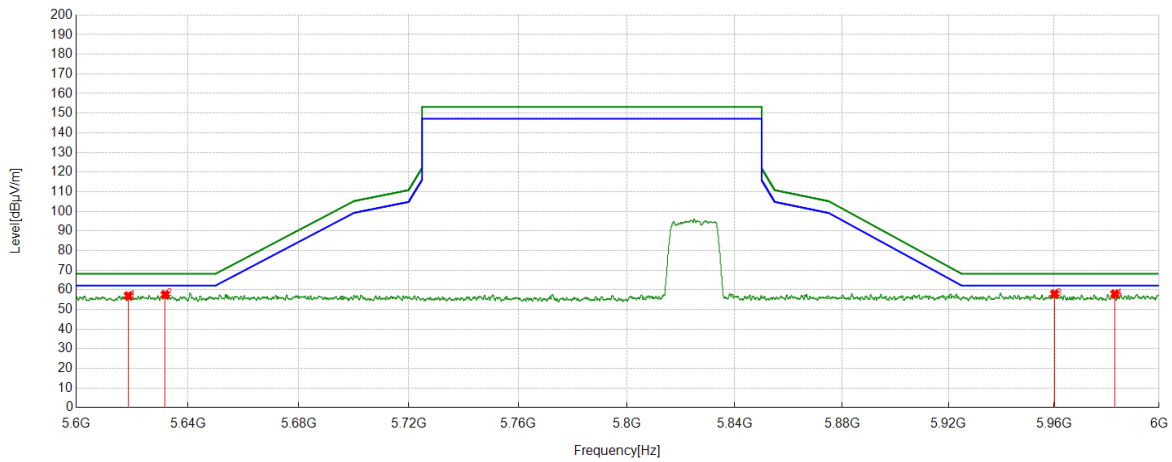


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5618.6819	36.28	20.68	56.96	68.20	11.24	peak
2	5631.8832	36.84	20.75	57.59	68.20	10.61	peak
3	5960.196	36.50	21.46	57.96	68.20	10.24	peak
4	5983.1183	36.52	21.42	57.94	68.20	10.26	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

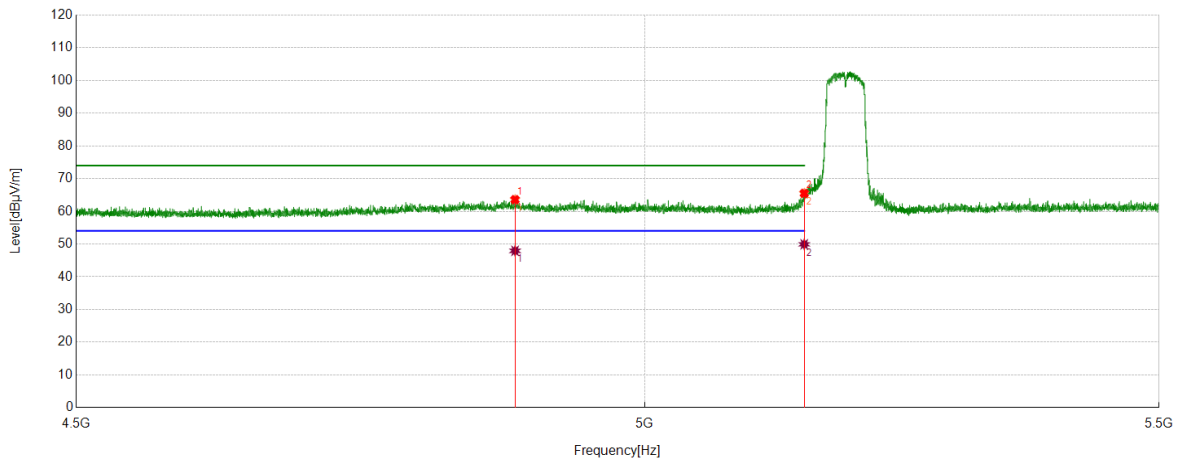

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4881.3381	43.55	20.02	63.57	74.00	10.43	peak
2	5150.0000	46.03	19.46	65.49	74.00	8.51	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4881.3381	27.91	20.02	47.93	54.00	6.07	AV
2	5150.0000	30.46	19.46	49.92	54.00	4.08	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

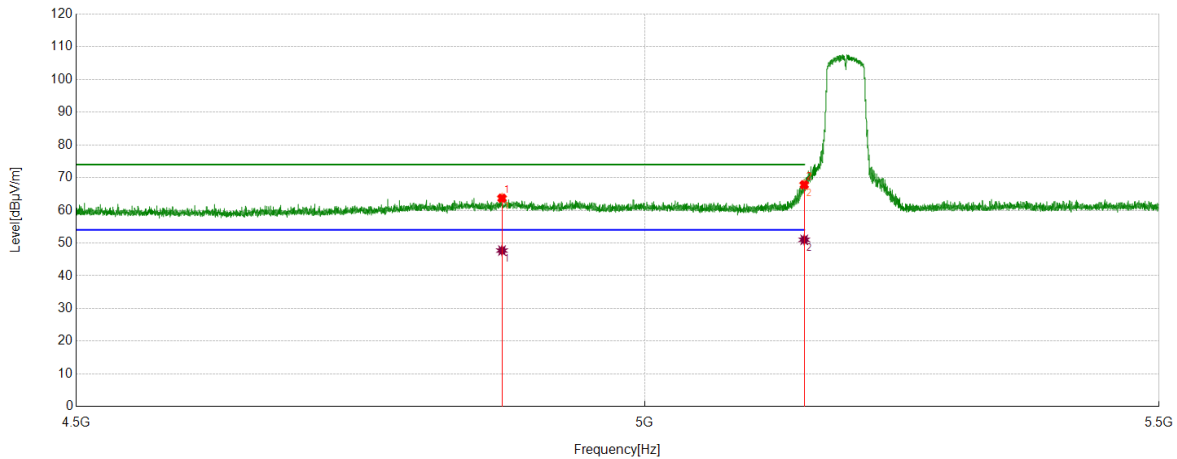

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4869.537	43.97	19.73	63.70	74.00	10.30	peak
2	5150.0000	48.35	19.46	67.81	74.00	6.19	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4869.537	27.98	19.73	47.71	54.00	6.29	AV
2	5150.0000	31.53	19.46	50.99	54.00	3.01	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5230	Horizontal	PASS

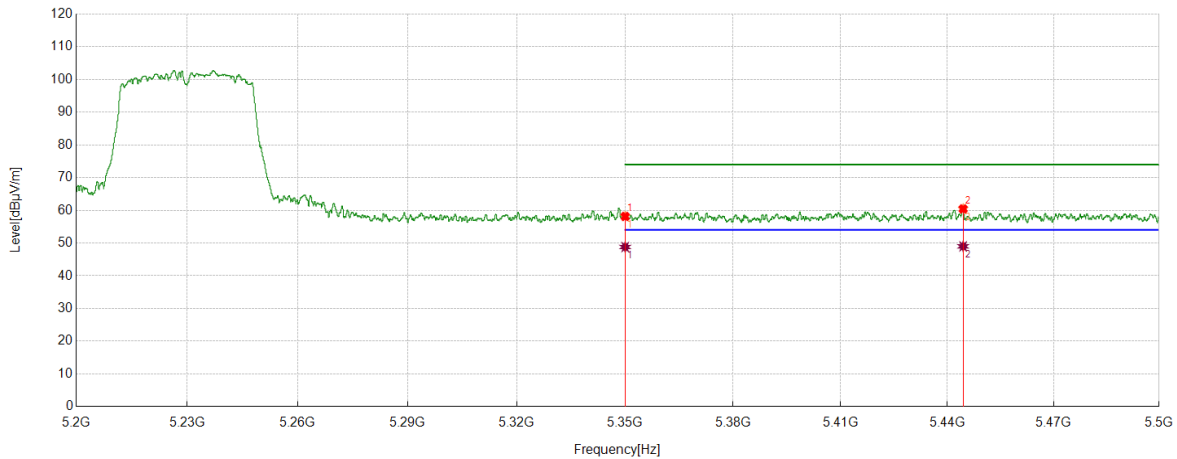

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	37.46	20.68	58.14	74.00	15.86	peak
2	5444.4644	39.58	20.86	60.44	74.00	13.56	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.11	20.68	48.79	54.00	5.21	AV
2	5444.4644	28.13	20.86	48.99	54.00	5.01	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5230	Vertical	PASS

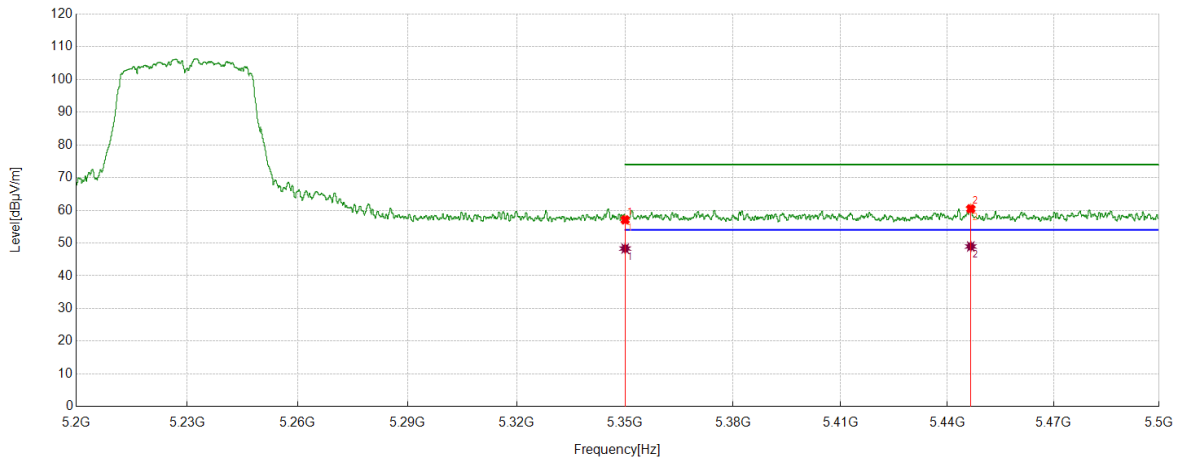

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	36.42	20.68	57.10	74.00	16.90	peak
2	5446.6247	39.62	20.85	60.47	74.00	13.53	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	27.64	20.68	48.32	54.00	5.68	AV
2	5446.6247	28.11	20.85	48.96	54.00	5.04	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5755	Horizontal	PASS

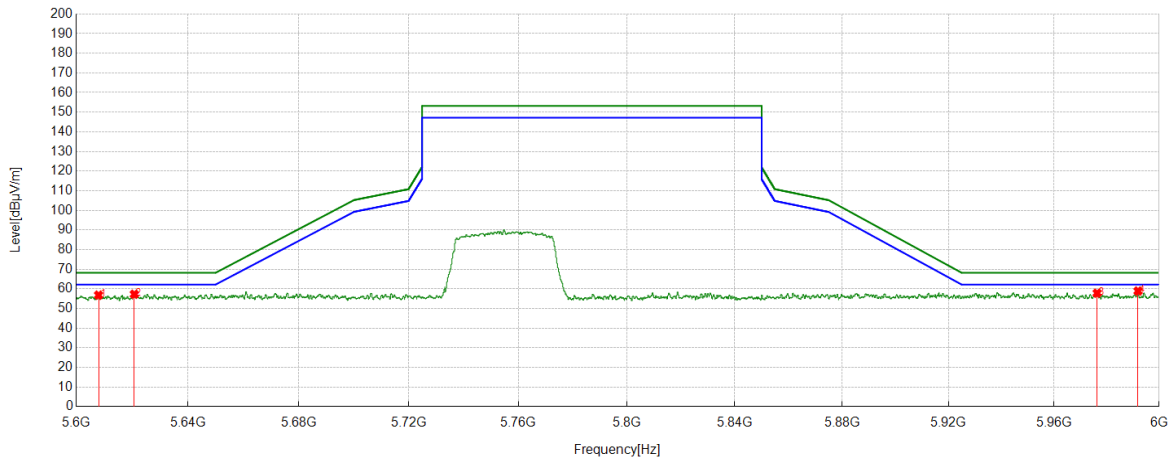


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5608.0408	36.19	20.63	56.82	68.20	11.38	peak
2	5620.8021	36.57	20.71	57.28	68.20	10.92	peak
3	5976.3576	36.45	21.36	57.81	68.20	10.39	peak
4	5991.9592	37.45	21.46	58.91	68.20	9.29	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5755	Vertical	PASS

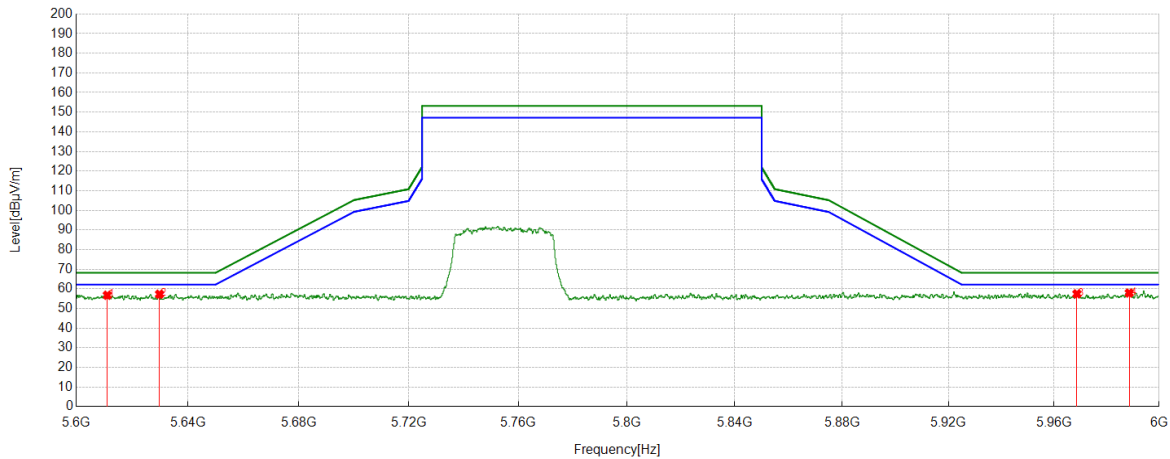


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5611.1611	36.17	20.60	56.77	68.20	11.43	peak
2	5629.843	36.53	20.76	57.29	68.20	10.91	peak
3	5968.6769	36.09	21.36	57.45	68.20	10.75	peak
4	5988.5989	36.39	21.50	57.89	68.20	10.31	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5795	Horizontal	PASS

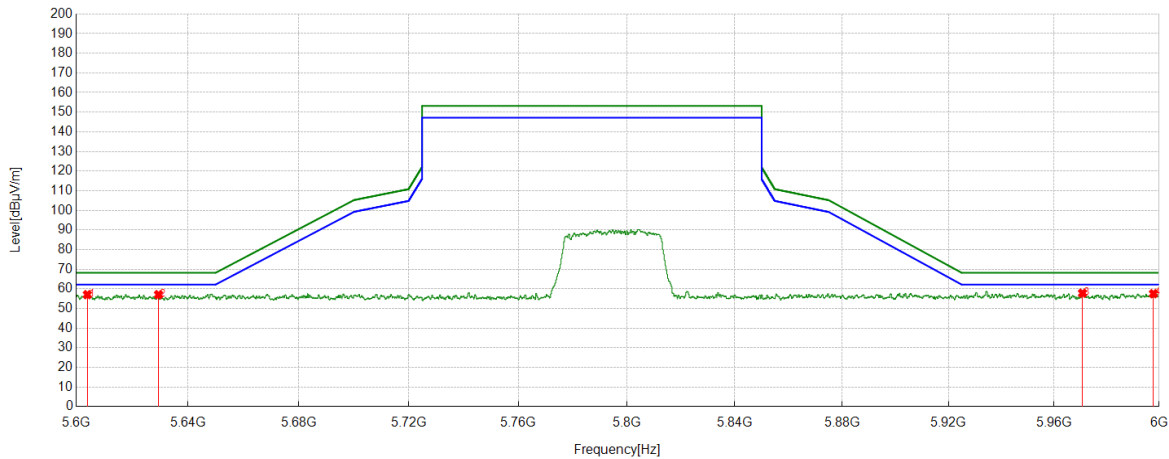


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5604.0404	36.33	20.73	57.06	68.20	11.14	peak
2	5629.4829	36.31	20.76	57.07	68.20	11.13	peak
3	5970.7971	36.47	21.34	57.81	68.20	10.39	peak
4	5997.8398	36.26	21.30	57.56	68.20	10.64	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5795	Vertical	PASS

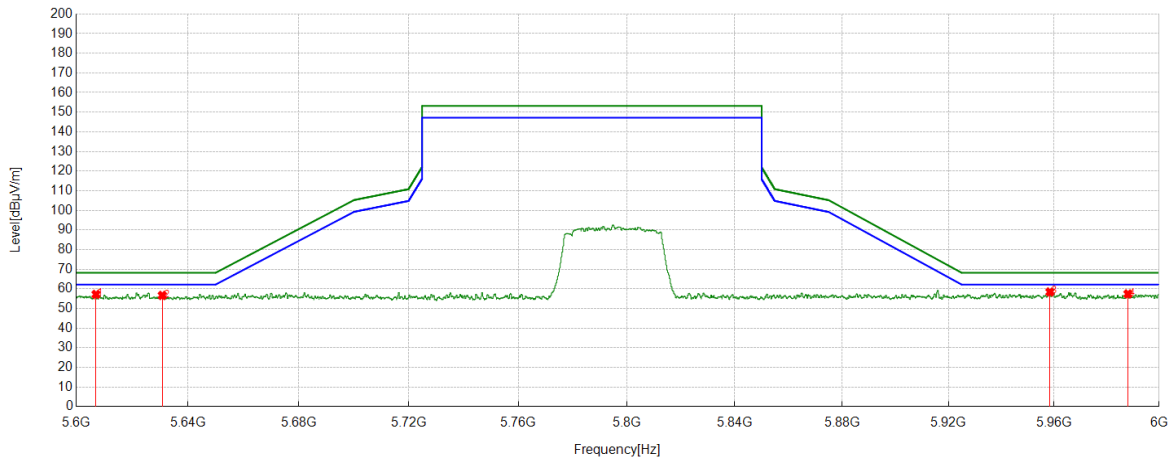


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5607.1207	36.54	20.66	57.20	68.20	11.00	peak
2	5630.8431	35.90	20.76	56.66	68.20	11.54	peak
3	5958.4358	36.98	21.45	58.43	68.20	9.77	peak
4	5988.1188	35.92	21.50	57.42	68.20	10.78	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5210-L	Horizontal	PASS

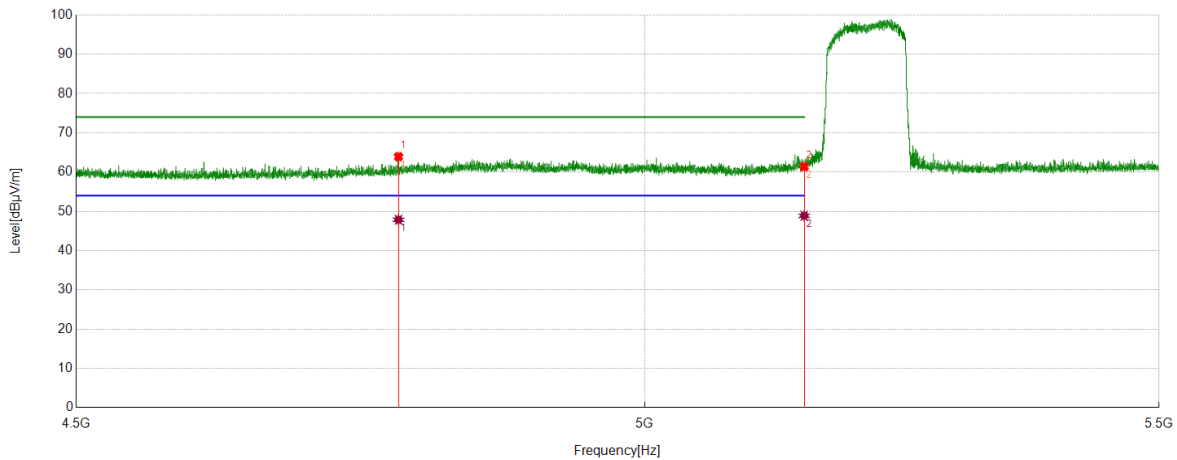

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4777.0277	44.43	19.50	63.93	74.00	10.07	peak
2	5150.0000	41.94	19.46	61.40	74.00	12.60	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4777.0277	28.36	19.50	47.86	54.00	6.14	AV
2	5150.0000	29.41	19.46	48.87	54.00	5.13	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5210-L	Vertical	PASS

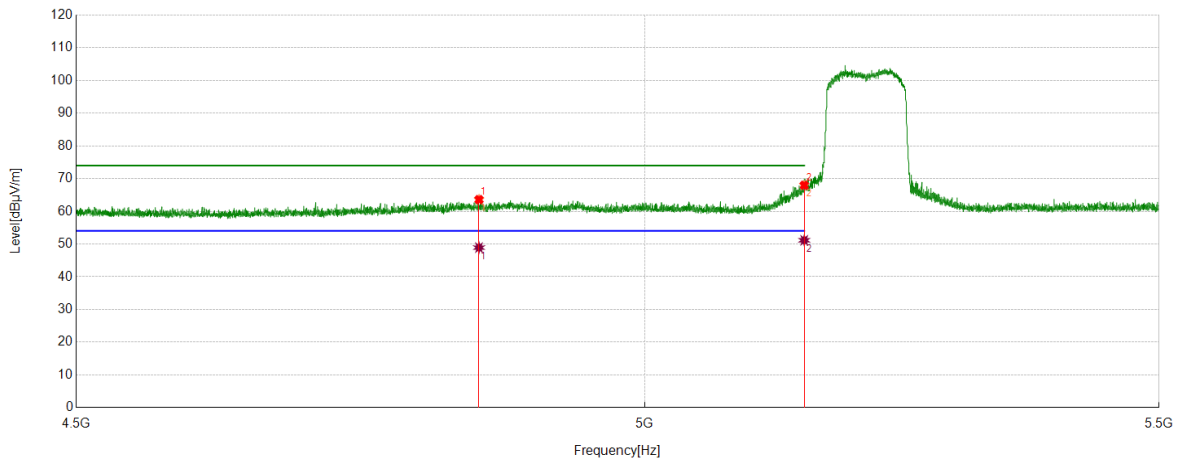

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4848.8349	43.38	20.20	63.58	74.00	10.42	peak
2	5150.0000	48.51	19.46	67.97	74.00	6.03	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4848.8349	28.72	20.20	48.92	54.00	5.08	AV
2	5150.0000	31.69	19.46	51.15	54.00	2.85	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5210-H	Horizontal	PASS

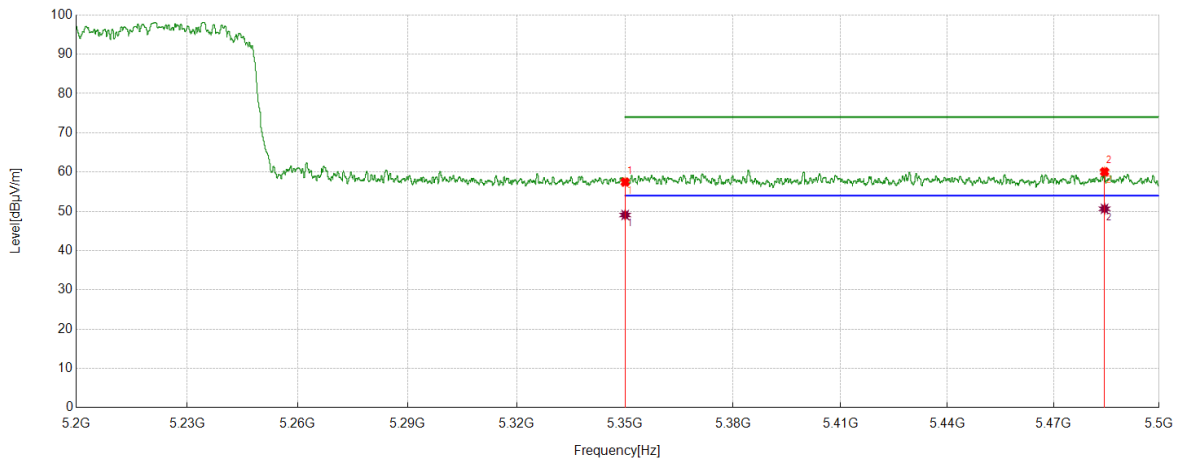

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	36.77	20.68	57.45	74.00	16.55	peak
2	5484.4884	39.30	20.77	60.07	74.00	13.93	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.39	20.68	49.07	54.00	4.93	AV
2	5484.4884	29.88	20.77	50.65	54.00	3.35	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5210-H	Vertical	PASS

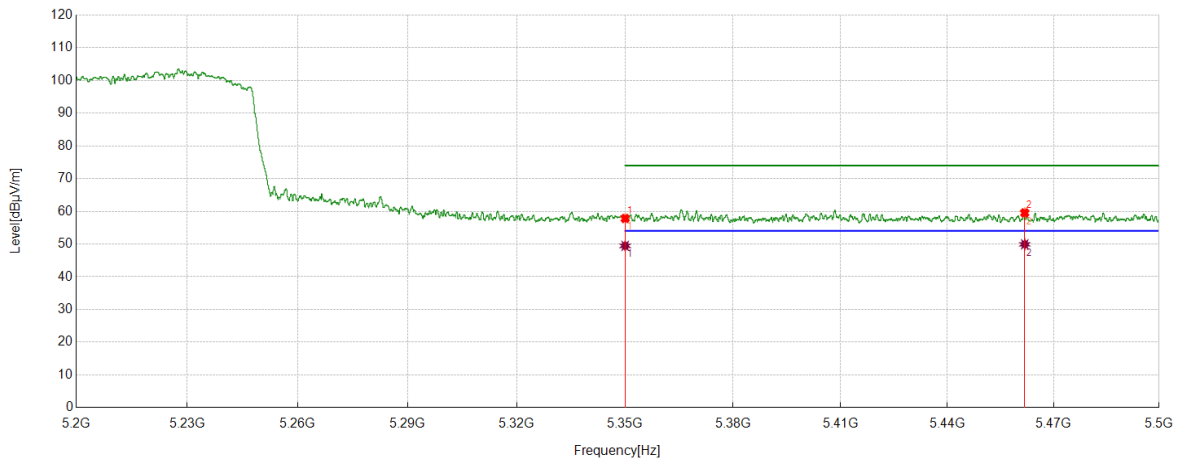

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	37.14	20.68	57.82	74.00	16.18	peak
2	5461.8662	38.86	20.68	59.54	74.00	14.46	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.77	20.68	49.45	54.00	4.55	AV
2	5461.8662	29.24	20.68	49.92	54.00	4.08	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5775	Horizontal	PASS

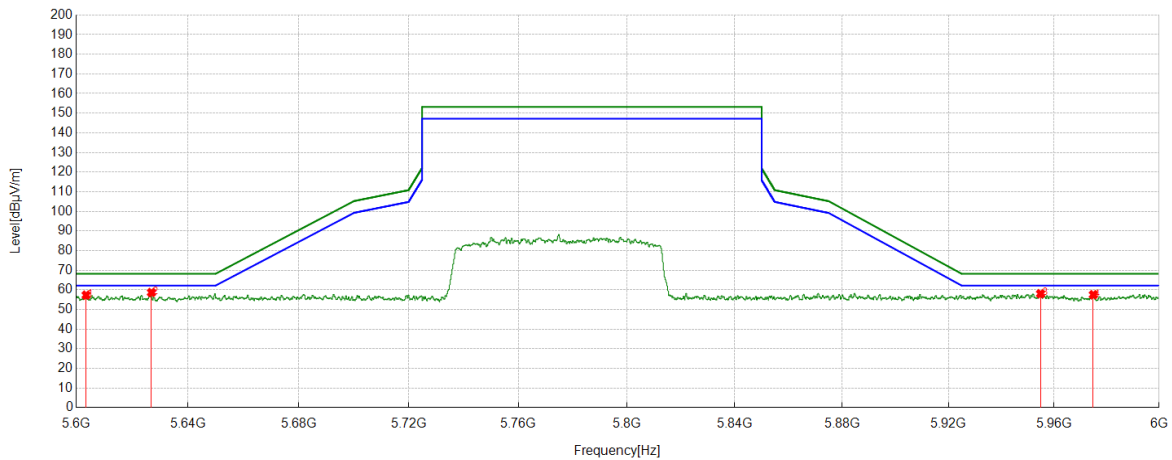


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5603.6004	36.60	20.74	57.34	68.20	10.86	peak
2	5626.9627	37.91	20.75	58.66	68.20	9.54	peak
3	5954.8755	36.63	21.40	58.03	68.20	10.17	peak
4	5974.9175	36.18	21.35	57.53	68.20	10.67	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5775	Vertical	PASS

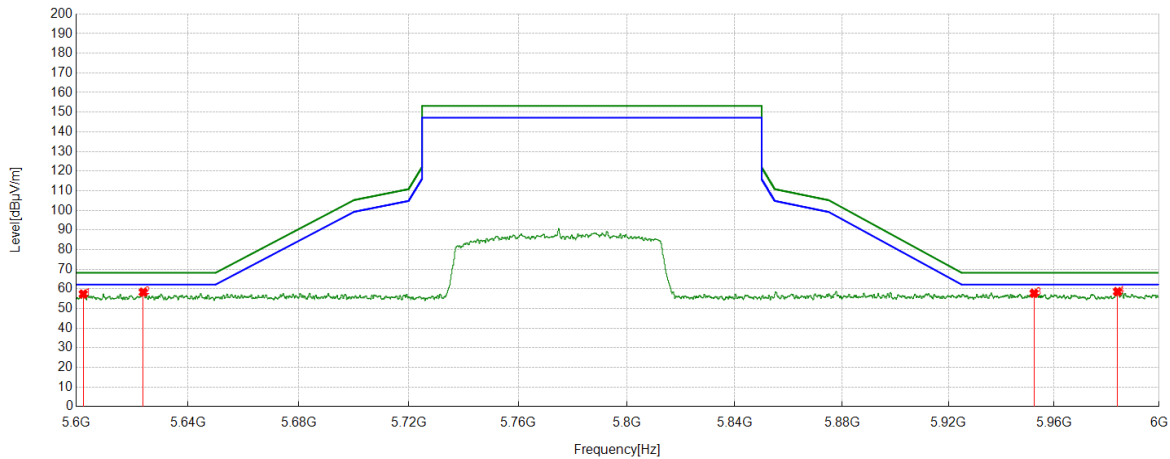

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5602.5603	36.62	20.76	57.38	68.20	10.82	peak
2	5624.0024	37.59	20.72	58.31	68.20	9.89	peak
3	5952.3952	36.38	21.37	57.75	68.20	10.45	peak
4	5984.1184	37.15	21.43	58.58	68.20	9.62	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

7.2. HARMONICS AND SPURIOUS EMISSIONS

TEST RESULT TABLE

l) For 1GHz to 6.5GHz part:

Temperature	22.0°C	Relative Humidity	53.5%
Atmosphere Pressure	102kpa	Test Voltage	DC5V

TEST RESULT TABLE

Test Mode	Antenna	Channel	Puw(dBm)	Verdict
11A	Ant1	5180	<Limit	PASS
		5200	<Limit	PASS
		5240	<Limit	PASS
		5745	<Limit	PASS
		5785	<Limit	PASS
		5825	<Limit	PASS
11AC20 MIMO	Ant1+2	5180	<Limit	PASS
		5200	<Limit	PASS
		5240	<Limit	PASS
		5745	<Limit	PASS
		5785	<Limit	PASS
		5825	<Limit	PASS
11AC40 MIMO	Ant1+2	5190	<Limit	PASS
		5230	<Limit	PASS
		5755	<Limit	PASS
		5795	<Limit	PASS
11AC80 MIMO	Ant1+2	5210	<Limit	PASS
		5775	<Limit	PASS

Remark:

- 1) Since 802.11ac VHT20/VHT40 modes are different from 802.11n HT20/HT40 only in control messages, so all the tests are performed on the worst case (802.11ac VHT20/802.11ac VHT40) mode between these 4 modes and only the worst data was recorded in this report.
- 2) Through pre-testing both antennas of 11A test mode, but only the data of worse case is included in this test report.

II) For 6.5GHz to 18GHz part:

Temperature	22.0°C	Relative Humidity	53.5%
Atmosphere Pressure	102kpa	Test Voltage	DC5V

Test Mode	Antenna	Channel	Puw(dBm)	Verdict
11A	Ant1	5180	<Limit	PASS
		5200	<Limit	PASS
		5240	<Limit	PASS
		5745	<Limit	PASS
		5785	<Limit	PASS
		5825	<Limit	PASS
11AC20 MIMO	Ant1+2	5180	<Limit	PASS
		5200	<Limit	PASS
		5240	<Limit	PASS
		5745	<Limit	PASS
		5785	<Limit	PASS
		5825	<Limit	PASS
11AC40 MIMO	Ant1+2	5190	<Limit	PASS
		5230	<Limit	PASS
		5755	<Limit	PASS
		5795	<Limit	PASS
11AC80 MIMO	Ant1+2	5210	<Limit	PASS
		5775	<Limit	PASS

Remark:

- 3) Since 802.11ac VHT20/VHT40 modes are different from 802.11n HT20/HT40 only in control messages, so all the tests are performed on the worst case (802.11ac VHT20/802.11ac VHT40) mode between these 4 modes and only the worst data was recorded in this report.
- 4) Through pre-testing both antennas of 11A test mode, but only the data of worse case is included in this test report.

III) For 18GHz to 26.5GHz part:

Temperature	22.0°C	Relative Humidity	53.5%
Atmosphere Pressure	102kpa	Test Voltage	DC5V

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11AC20 MIMO	Ant1+2	5180	<Limit	PASS

Remark:

1) Pre-testing all test modes and channels, only the data of the worst case is included in the test report

IV) For 26.5GHz to 40GHz part:

Temperature	22.0°C	Relative Humidity	53.5%
Atmosphere Pressure	102kpa	Test Voltage	DC5V

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11AC20 MIMO	Ant1+2	5180	<Limit	PASS

Remark:

1) Pre-testing all test modes and channels, only the data of the worst case is included in the test report

V) For 30MHz to 1GHz part:

Temperature	19.4°C	Relative Humidity	68.9%
Atmosphere Pressure	101kpa	Test Voltage	DC5V

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11AC20 MIMO	Ant1+2	5180	<Limit	PASS

Remark:

1) Pre-testing all test modes and channels, only the data of the worst case is included in the test report

VI) For 9kHz~30MHz

Temperature	19.4°C	Relative Humidity	68.9%
Atmosphere Pressure	101kpa	Test Voltage	DC5V

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11AC20 MIMO	Ant1+2	5180	<Limit	PASS


Remark:

1) Pre-testing all test modes and channels, only the data of the worst case is included in the test report

TEST GRAPHS:

PART I: For 1GHz to 6.5GHz:


Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

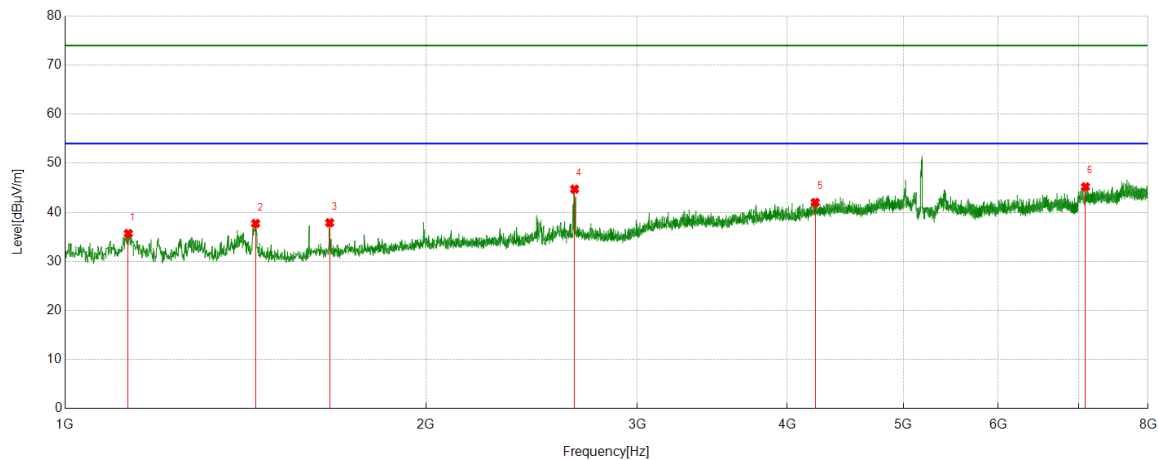

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1129.1255	56.94	-21.25	35.69	74.00	38.31	peak
2	1441.8269	57.24	-19.50	37.74	74.00	36.26	peak
3	1661.9624	55.96	-18.07	37.89	74.00	36.11	peak
4	2659.9622	57.47	-12.75	44.72	74.00	29.28	peak
5	4221.9135	47.32	-5.30	42.02	74.00	31.98	peak
6	7094.5661	44.27	0.93	45.20	74.00	28.80	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

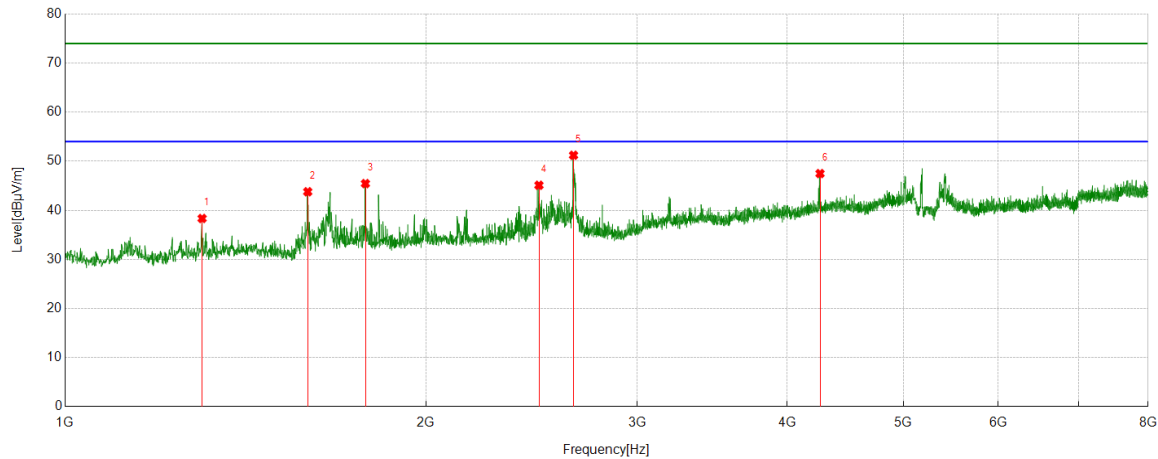

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.60	-20.26	38.34	74.00	35.66	peak
2	1593.5104	62.17	-18.38	43.79	74.00	30.21	peak
3	1780.1978	62.98	-17.53	45.45	74.00	28.55	peak
4	2484.1649	58.98	-13.87	45.11	74.00	28.89	peak
5	2654.5172	64.02	-12.80	51.22	74.00	22.78	peak
6	4261.5846	52.59	-5.10	47.49	74.00	26.51	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5200	Horizontal	PASS

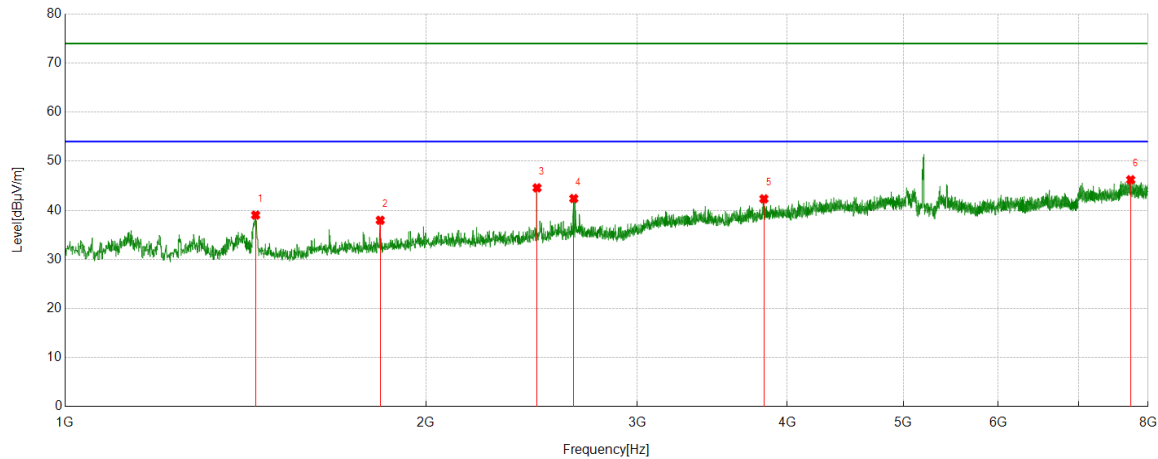

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1441.8269	58.53	-19.50	39.03	74.00	34.97	peak
2	1831.5368	55.18	-17.20	37.98	74.00	36.02	peak
3	2474.8305	58.36	-13.78	44.58	74.00	29.42	peak
4	2656.0729	55.19	-12.79	42.40	74.00	31.60	peak
5	3825.9807	49.14	-6.80	42.34	74.00	31.66	peak
6	7737.0819	43.22	3.01	46.23	74.00	27.77	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5200	Vertical	PASS

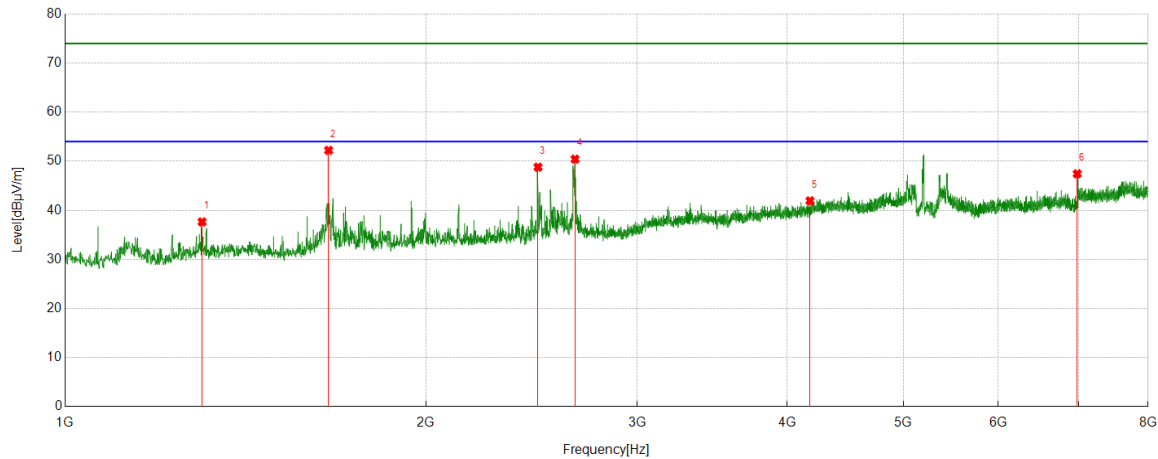

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.91	-20.26	37.65	74.00	36.35	peak
2	1658.851	70.33	-18.10	52.23	74.00	21.77	peak
3	2479.4977	62.66	-13.86	48.80	74.00	25.20	peak
4	2662.2958	63.16	-12.73	50.43	74.00	23.57	peak
5	4179.9089	47.71	-5.78	41.93	74.00	32.07	peak
6	6982.5536	47.27	0.18	47.45	74.00	26.55	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

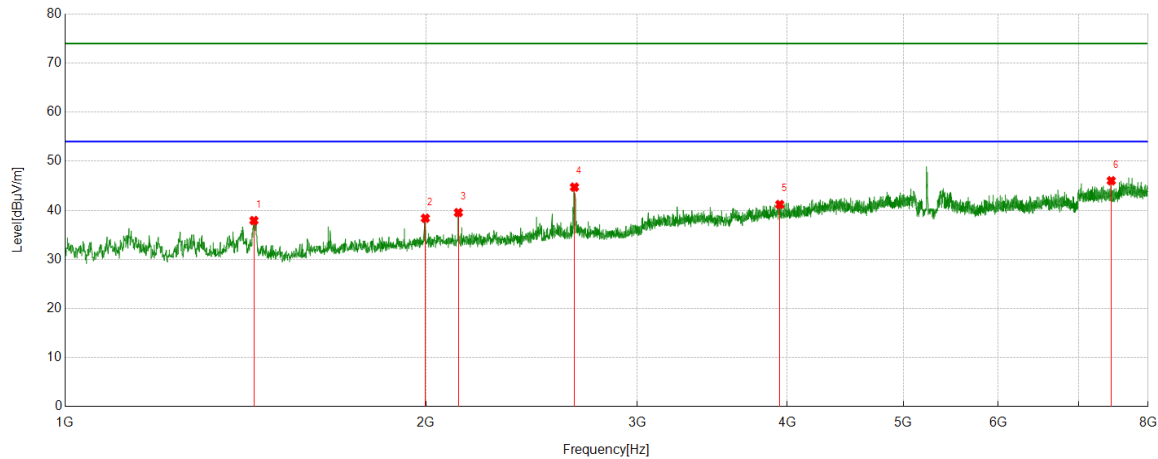

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1437.1597	57.51	-19.59	37.92	74.00	36.08	peak
2	1997.2219	54.34	-15.96	38.38	74.00	35.62	peak
3	2127.9031	55.06	-15.52	39.54	74.00	34.46	peak
4	2659.1844	57.48	-12.75	44.73	74.00	29.27	peak
5	3944.216	47.54	-6.35	41.19	74.00	32.81	peak
6	7453.9393	44.29	1.74	46.03	74.00	27.97	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

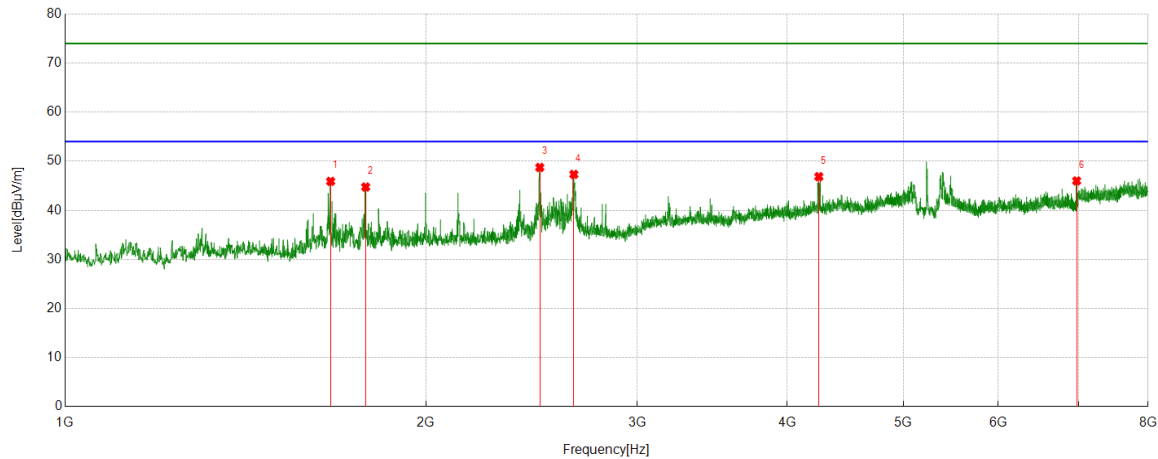

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1665.0739	63.92	-18.02	45.90	74.00	28.10	peak
2	1780.9757	62.27	-17.52	44.75	74.00	29.25	peak
3	2488.0542	62.60	-13.86	48.74	74.00	25.26	peak
4	2656.0729	60.12	-12.79	47.33	74.00	26.67	peak
5	4251.4724	51.91	-5.05	46.86	74.00	27.14	peak
6	6974.775	45.88	0.12	46.00	74.00	28.00	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

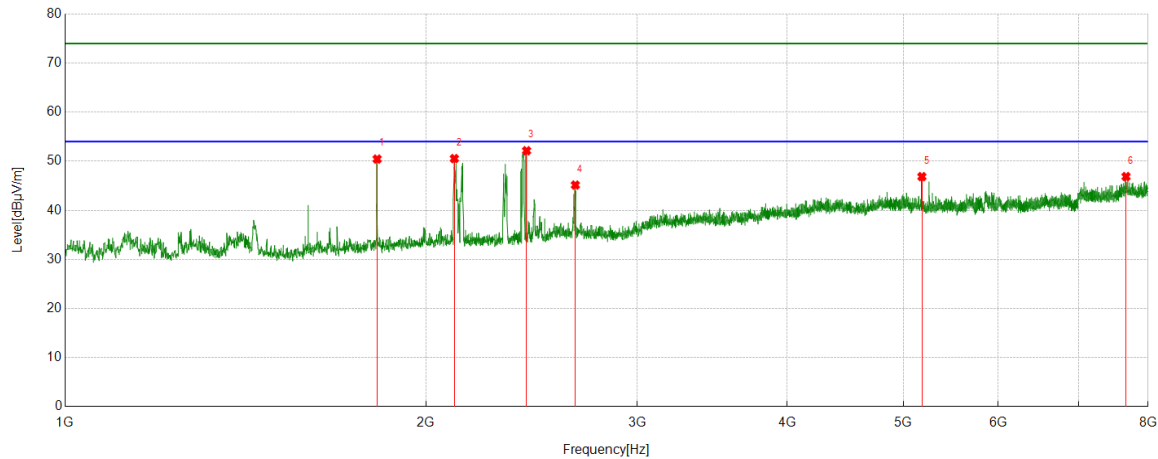

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	67.73	-17.29	50.44	74.00	23.56	peak
2	2111.568	66.14	-15.60	50.54	74.00	23.46	peak
3	2425.8251	66.57	-14.43	52.14	74.00	21.86	peak
4	2663.8515	58.03	-12.88	45.15	74.00	28.85	peak
5	5181.798	49.71	-2.85	46.86	74.00	27.14	peak
6	7668.6298	44.58	2.29	46.87	74.00	27.13	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

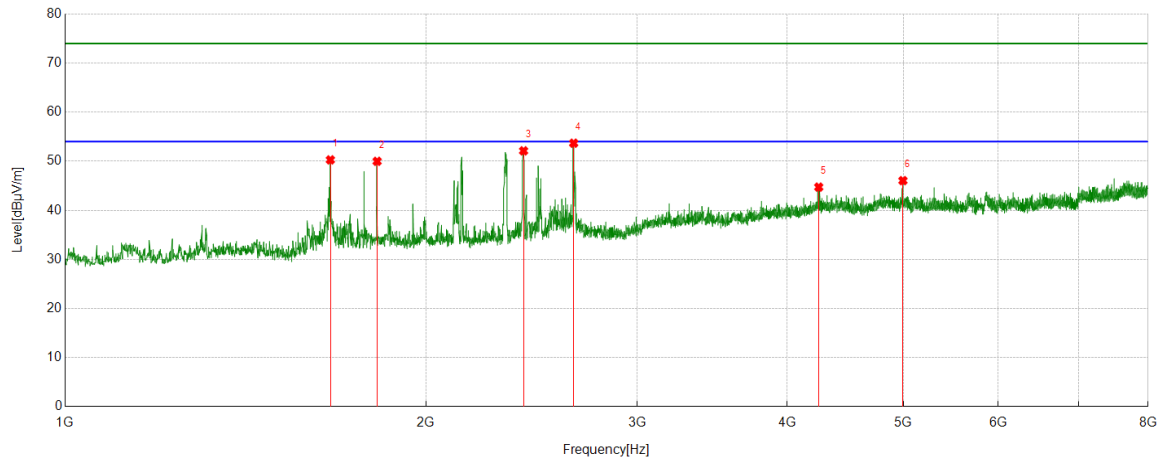

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1664.296	68.26	-17.98	50.28	74.00	23.72	peak
2	1820.6467	67.28	-17.29	49.99	74.00	24.01	peak
3	2411.8235	66.76	-14.64	52.12	74.00	21.88	peak
4	2655.295	66.56	-12.88	53.68	74.00	20.32	peak
5	4250.6945	49.49	-4.76	44.73	74.00	29.27	peak
6	4996.6663	48.77	-2.72	46.05	74.00	27.95	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5785	Horizontal	PASS

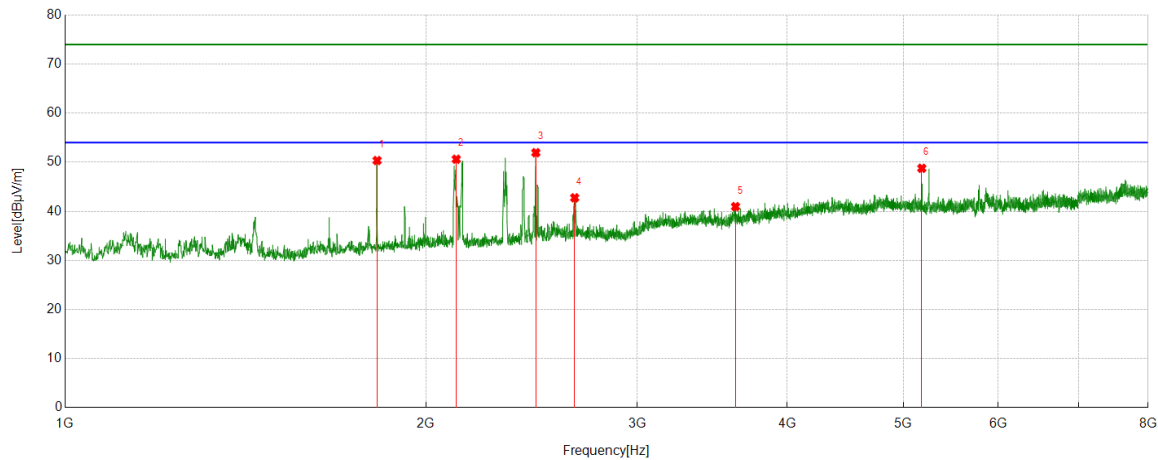

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1820.6467	67.64	-17.29	50.35	74.00	23.65	peak
2	2119.3466	66.11	-15.50	50.61	74.00	23.39	peak
3	2469.3855	65.67	-13.72	51.95	74.00	22.05	peak
4	2660.7401	55.66	-12.90	42.76	74.00	31.24	peak
5	3622.9581	49.34	-8.38	40.96	74.00	33.04	peak
6	5181.0201	51.63	-2.86	48.77	74.00	25.23	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5785	Vertical	PASS

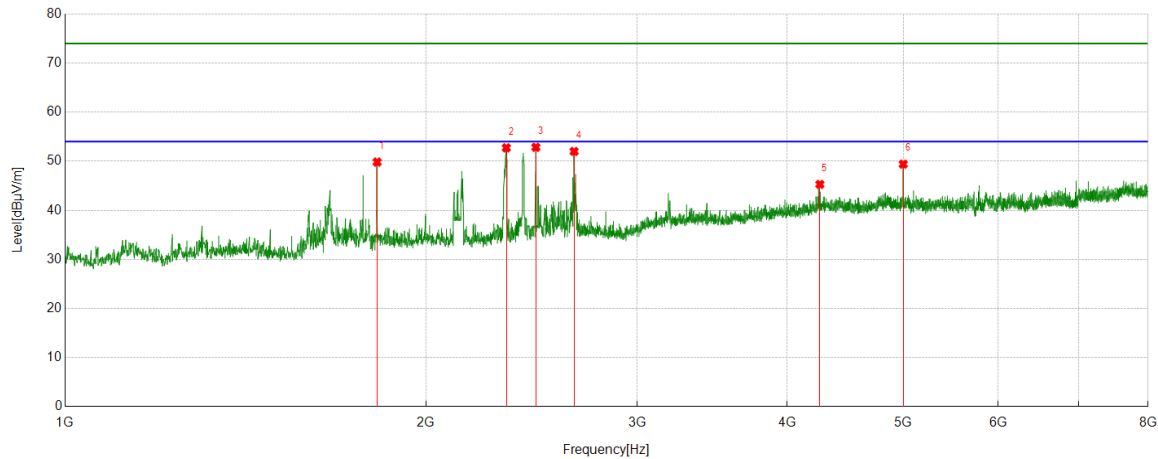

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	67.13	-17.29	49.84	74.00	24.16	peak
2	2333.2593	67.63	-14.90	52.73	74.00	21.27	peak
3	2469.3855	66.56	-13.72	52.84	74.00	21.16	peak
4	2657.6286	64.90	-12.89	52.01	74.00	21.99	peak
5	4260.0289	50.20	-4.91	45.29	74.00	28.71	peak
6	4999.7778	52.24	-2.83	49.41	74.00	24.59	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

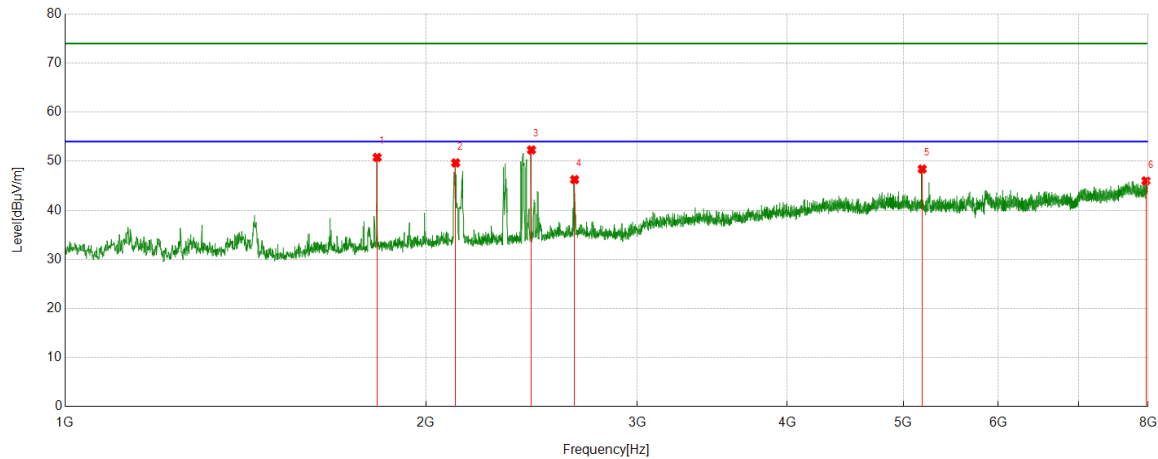

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	68.07	-17.29	50.78	74.00	23.22	peak
2	2117.013	65.19	-15.53	49.66	74.00	24.34	peak
3	2448.3832	66.44	-14.14	52.30	74.00	21.70	peak
4	2659.9622	59.17	-12.90	46.27	74.00	27.73	peak
5	5184.9094	51.21	-2.80	48.41	74.00	25.59	peak
6	7967.3297	43.70	2.31	46.01	74.00	27.99	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

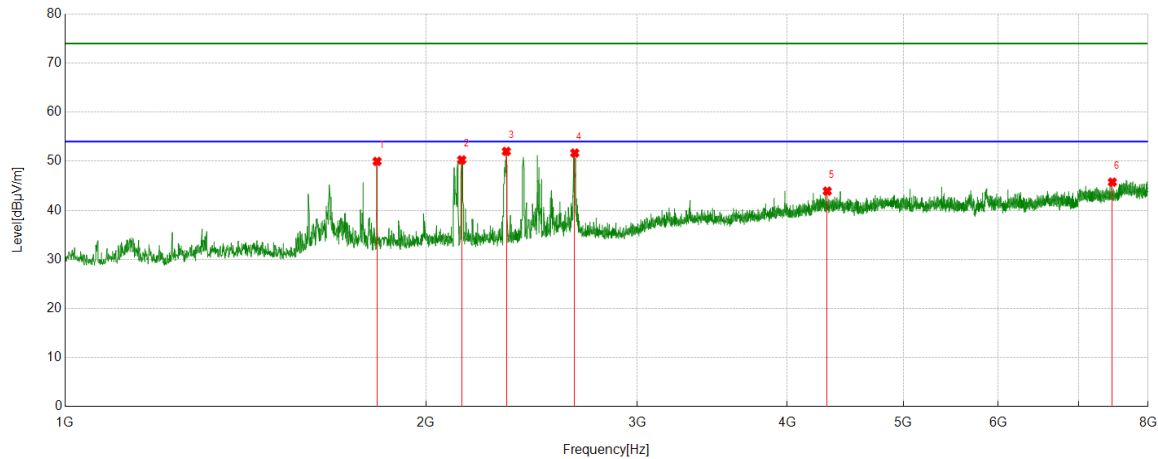

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	67.26	-17.29	49.97	74.00	24.03	peak
2	2141.9047	65.50	-15.23	50.27	74.00	23.73	peak
3	2333.2593	66.91	-14.90	52.01	74.00	21.99	peak
4	2660.7401	64.58	-12.90	51.68	74.00	22.32	peak
5	4320.7023	48.25	-4.34	43.91	74.00	30.09	peak
6	7469.4966	43.75	1.99	45.74	74.00	28.26	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5180	Horizontal	PASS

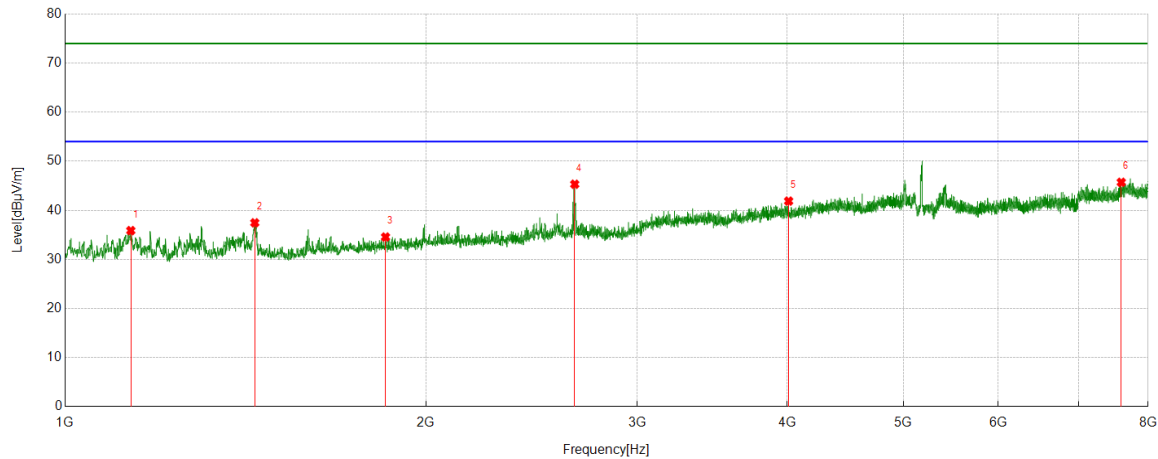

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1134.5705	57.09	-21.22	35.87	74.00	38.13	peak
2	1439.4933	57.00	-19.54	37.46	74.00	36.54	peak
3	1850.2056	51.78	-17.22	34.56	74.00	39.44	peak
4	2660.7401	58.07	-12.75	45.32	74.00	28.68	peak
5	4011.8902	48.02	-6.14	41.88	74.00	32.12	peak
6	7598.6221	43.45	2.26	45.71	74.00	28.29	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5180	Vertical	PASS

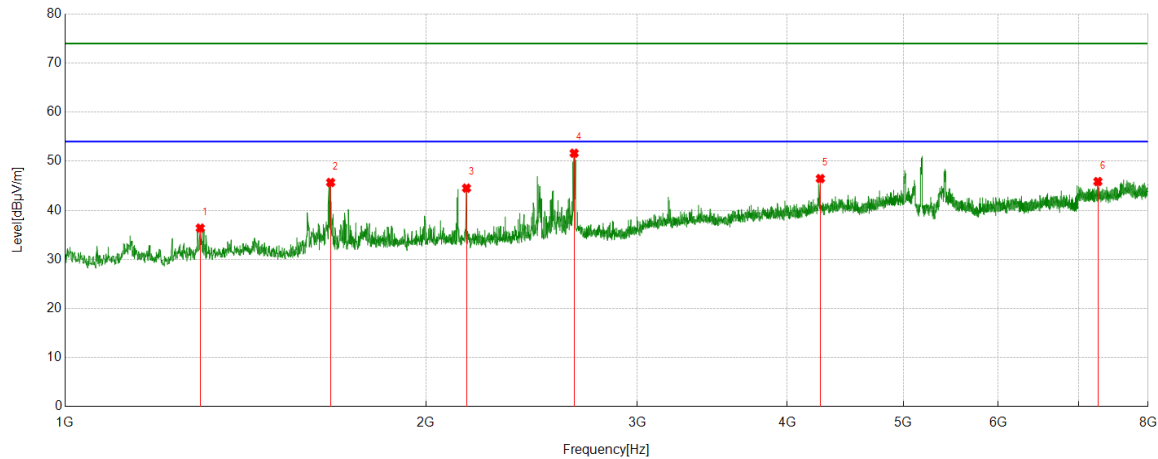

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1296.3663	56.70	-20.32	36.38	74.00	37.62	peak
2	1665.0739	63.70	-18.02	45.68	74.00	28.32	peak
3	2161.3513	60.18	-15.66	44.52	74.00	29.48	peak
4	2657.6286	64.41	-12.77	51.64	74.00	22.36	peak
5	4263.9182	51.45	-4.99	46.46	74.00	27.54	peak
6	7264.9183	45.19	0.67	45.86	74.00	28.14	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5200	Horizontal	PASS

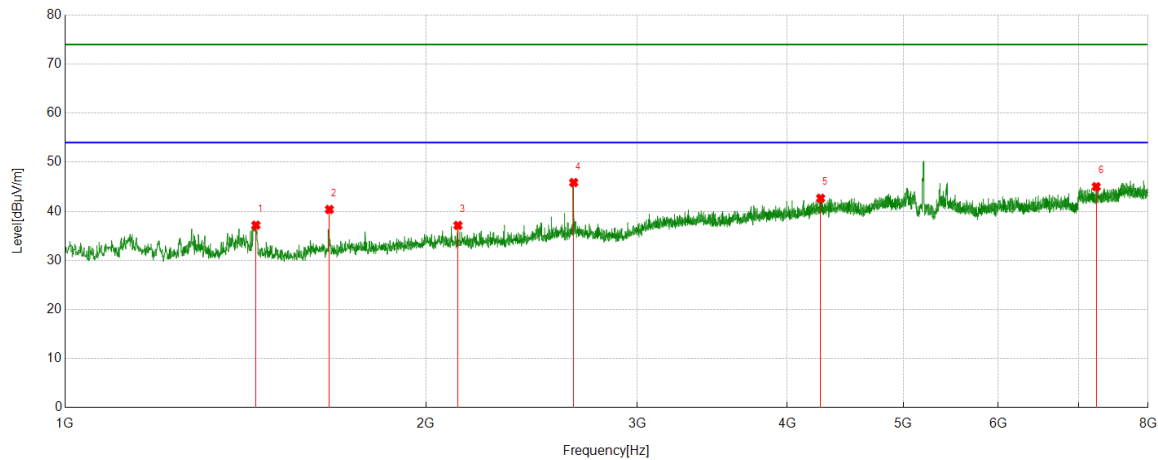

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1442.6047	56.66	-19.49	37.17	74.00	36.83	peak
2	1661.1846	58.46	-18.08	40.38	74.00	33.62	peak
3	2126.3474	52.65	-15.52	37.13	74.00	36.87	peak
4	2655.295	58.65	-12.79	45.86	74.00	28.14	peak
5	4266.2518	47.53	-4.87	42.66	74.00	31.34	peak
6	7242.3603	44.32	0.70	45.02	74.00	28.98	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5200	Vertical	PASS

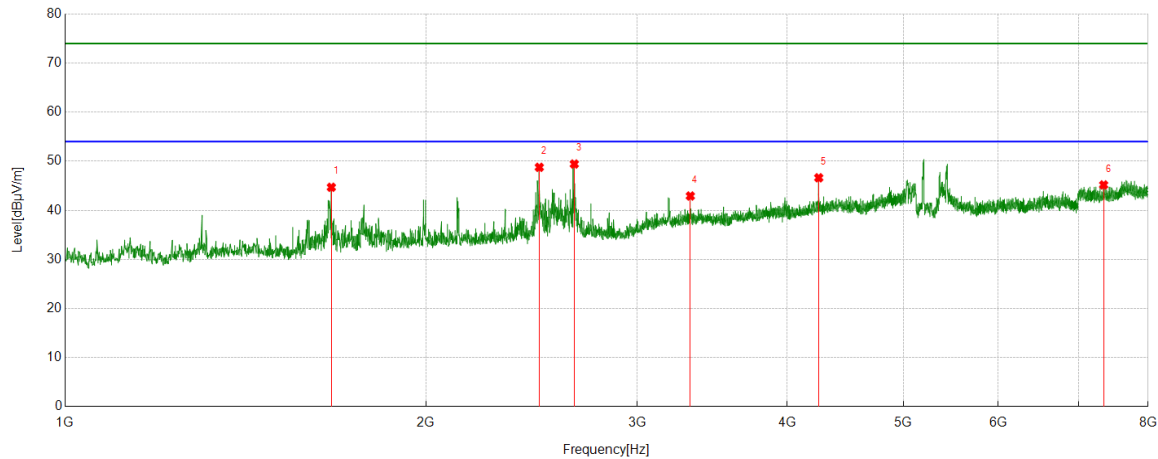

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1667.4075	62.68	-17.98	44.70	74.00	29.30	peak
2	2485.7206	62.64	-13.87	48.77	74.00	25.23	peak
3	2658.4065	62.20	-12.77	49.43	74.00	24.57	peak
4	3321.9247	52.16	-9.24	42.92	74.00	31.08	peak
5	4250.6945	51.67	-5.04	46.63	74.00	27.37	peak
6	7345.8162	43.89	1.29	45.18	74.00	28.82	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5240	Horizontal	PASS

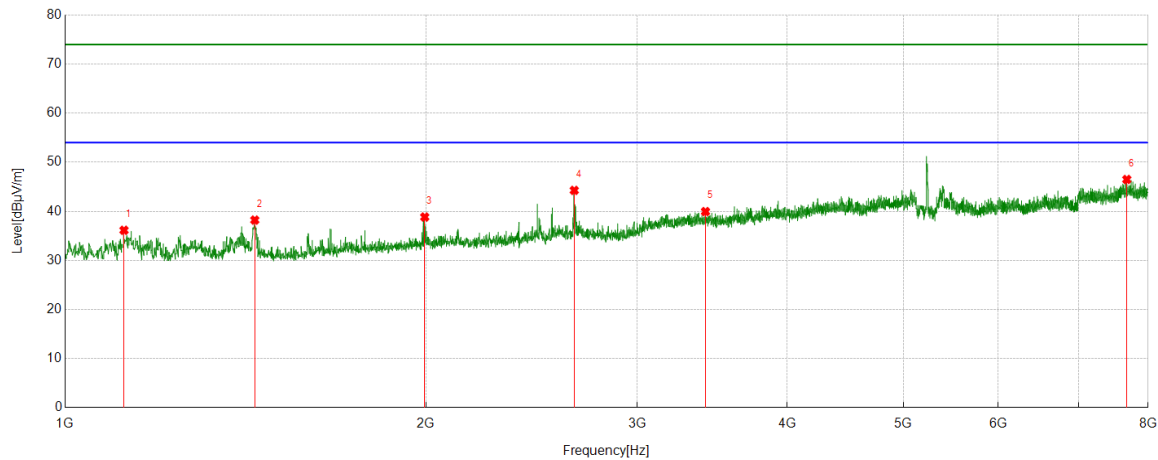

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1119.7911	57.23	-21.09	36.14	74.00	37.86	peak
2	1439.4933	57.76	-19.54	38.22	74.00	35.78	peak
3	1994.8883	54.84	-16.00	38.84	74.00	35.16	peak
4	2658.4065	57.04	-12.77	44.27	74.00	29.73	peak
5	3419.9355	48.82	-8.87	39.95	74.00	34.05	peak
6	7679.5199	44.33	2.16	46.49	74.00	27.51	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5240	Vertical	PASS

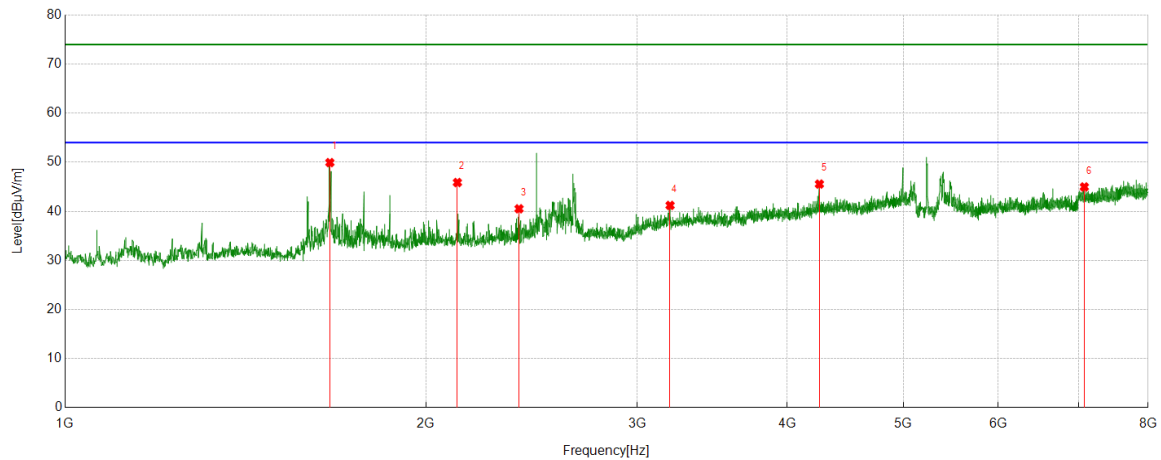

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1662.7403	67.99	-18.06	49.93	74.00	24.07	peak
2	2124.0138	61.38	-15.51	45.87	74.00	28.13	peak
3	2390.8212	55.27	-14.75	40.52	74.00	33.48	peak
4	3195.1328	51.03	-9.82	41.21	74.00	32.79	peak
5	4256.1396	50.67	-5.12	45.55	74.00	28.45	peak
6	7078.2309	44.00	0.97	44.97	74.00	29.03	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

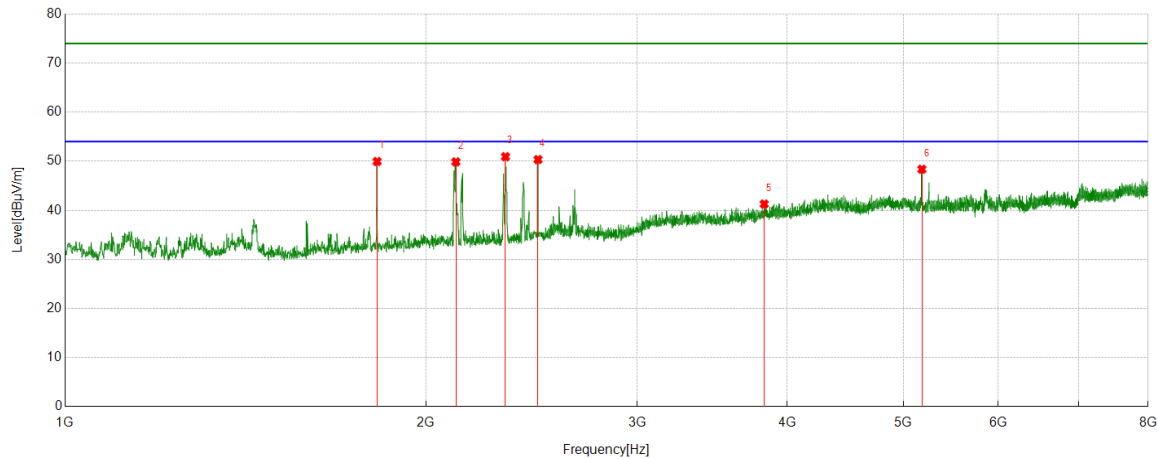

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	67.24	-17.29	49.95	74.00	24.05	peak
2	2117.7909	65.39	-15.52	49.87	74.00	24.13	peak
3	2329.3699	65.93	-15.00	50.93	74.00	23.07	peak
4	2479.4977	64.20	-13.86	50.34	74.00	23.66	peak
5	3828.3143	47.84	-6.56	41.28	74.00	32.72	peak
6	5181.798	51.22	-2.85	48.37	74.00	25.63	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

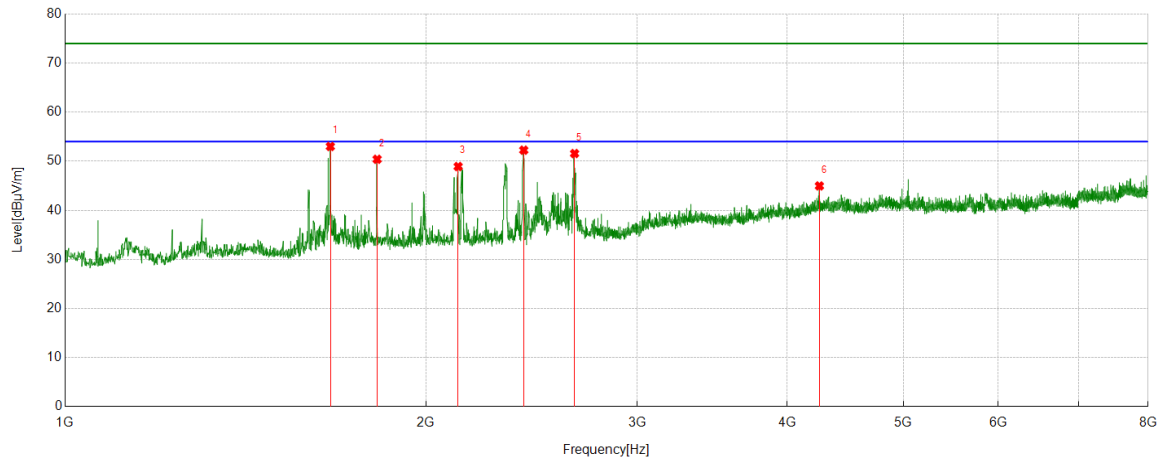

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1664.296	70.99	-17.98	53.01	74.00	20.99	peak
2	1820.6467	67.69	-17.29	50.40	74.00	23.60	peak
3	2127.1252	64.39	-15.47	48.92	74.00	25.08	peak
4	2412.6014	66.88	-14.62	52.26	74.00	21.74	peak
5	2659.9622	64.47	-12.90	51.57	74.00	22.43	peak
6	4256.1396	49.82	-4.85	44.97	74.00	29.03	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5785	Horizontal	PASS

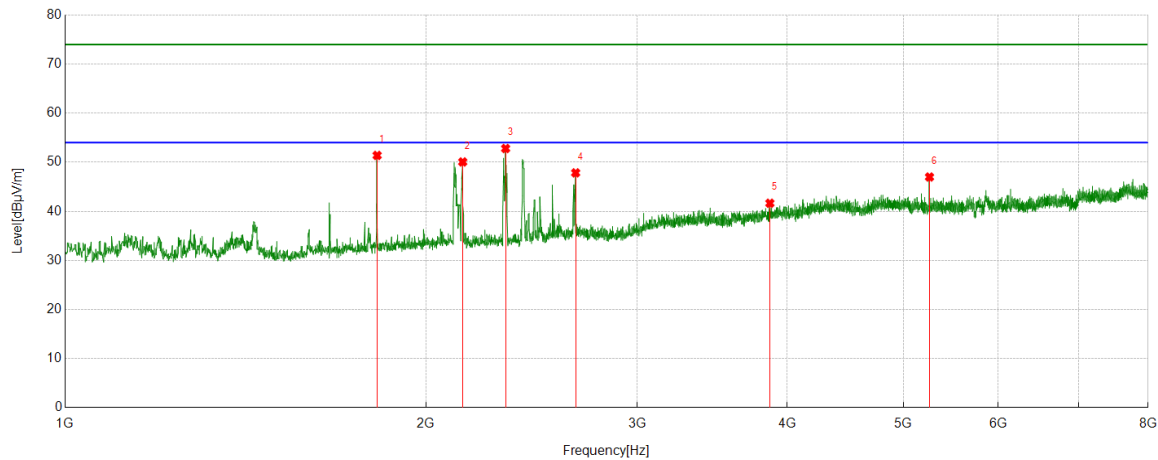

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	68.68	-17.29	51.39	74.00	22.61	peak
2	2145.794	65.28	-15.22	50.06	74.00	23.94	peak
3	2330.1478	67.80	-15.00	52.80	74.00	21.20	peak
4	2665.4073	60.73	-12.89	47.84	74.00	26.16	peak
5	3870.3189	48.02	-6.37	41.65	74.00	32.35	peak
6	5258.0287	50.32	-3.33	46.99	74.00	27.01	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5785	Vertical	PASS

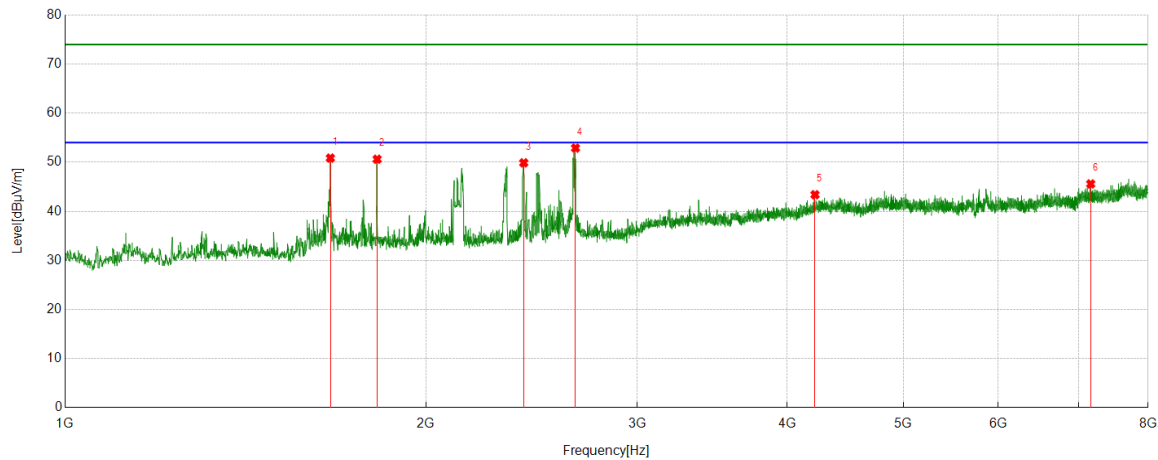

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1664.296	68.83	-17.98	50.85	74.00	23.15	peak
2	1820.6467	67.91	-17.29	50.62	74.00	23.38	peak
3	2412.6014	64.50	-14.62	49.88	74.00	24.12	peak
4	2664.6294	65.77	-12.88	52.89	74.00	21.11	peak
5	4220.3578	48.61	-5.22	43.39	74.00	30.61	peak
6	7165.3517	44.53	1.06	45.59	74.00	28.41	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

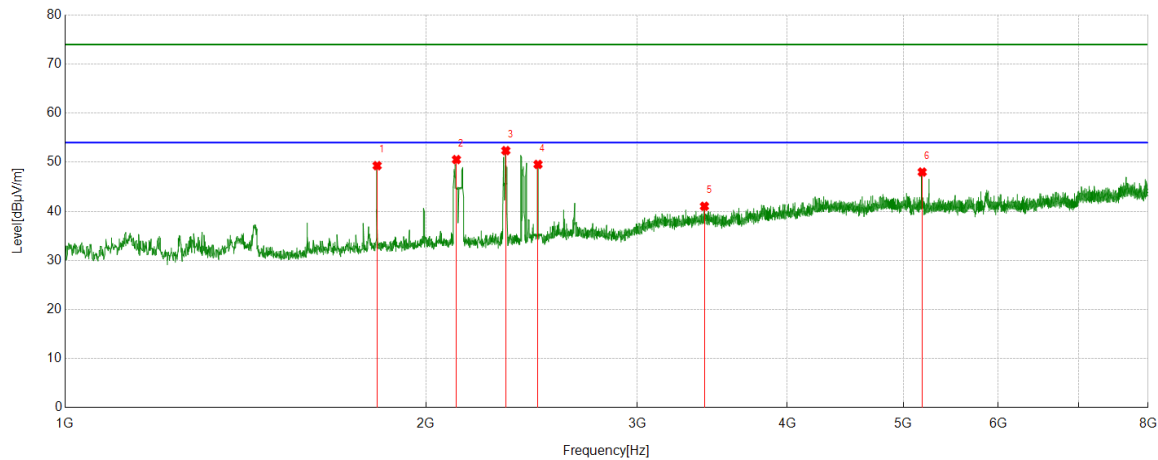

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1820.6467	66.59	-17.29	49.30	74.00	24.70	peak
2	2120.1245	66.03	-15.49	50.54	74.00	23.46	peak
3	2330.9257	67.34	-14.97	52.37	74.00	21.63	peak
4	2479.4977	63.42	-13.86	49.56	74.00	24.44	peak
5	3412.9348	50.06	-9.03	41.03	74.00	32.97	peak
6	5184.9094	50.80	-2.80	48.00	74.00	26.00	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

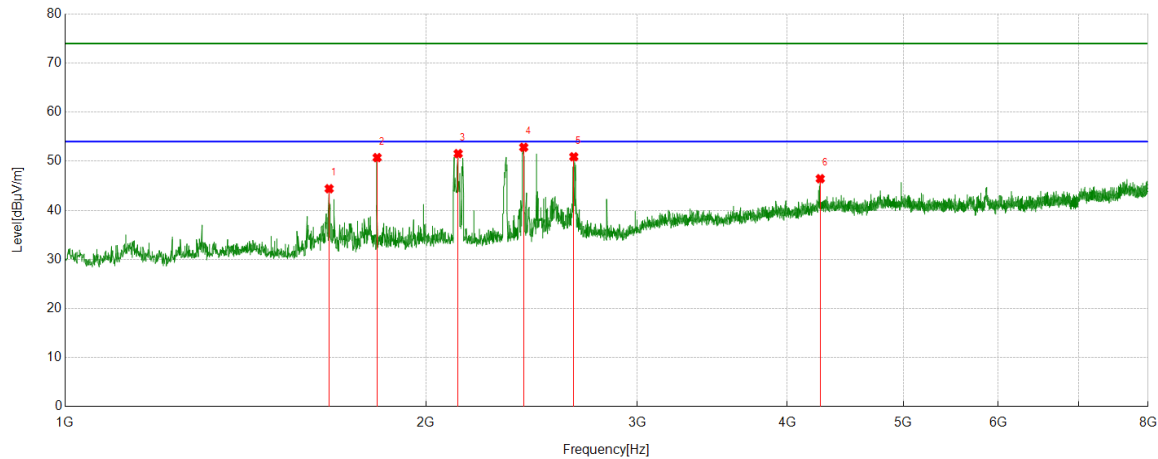

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1660.4067	62.46	-18.06	44.40	74.00	29.60	peak
2	1820.6467	68.03	-17.29	50.74	74.00	23.26	peak
3	2127.1252	67.02	-15.47	51.55	74.00	22.45	peak
4	2412.6014	67.46	-14.62	52.84	74.00	21.16	peak
5	2656.0729	63.79	-12.88	50.91	74.00	23.09	peak
6	4263.1403	51.22	-4.78	46.44	74.00	27.56	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

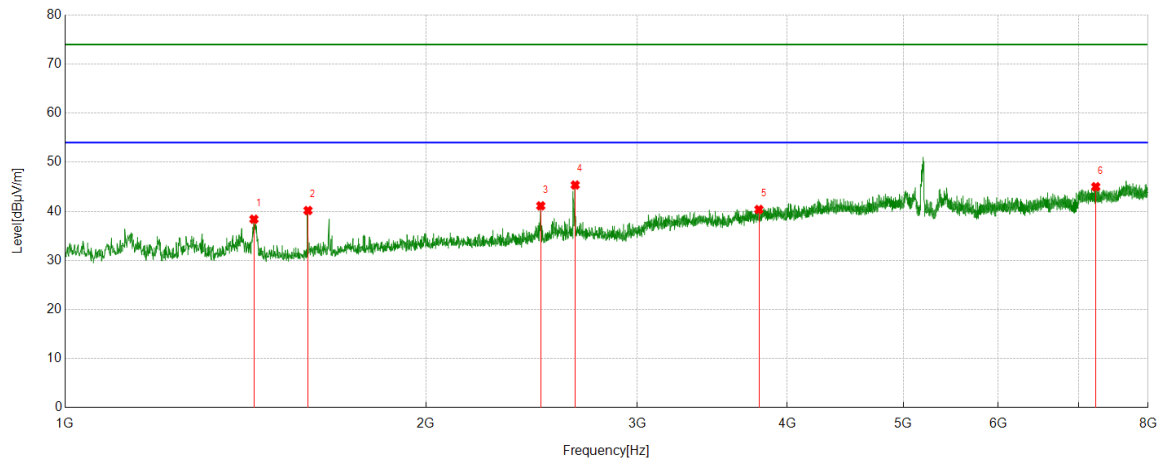

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1437.1597	57.98	-19.59	38.39	74.00	35.61	peak
2	1594.2883	58.55	-18.38	40.17	74.00	33.83	peak
3	2492.7214	54.97	-13.85	41.12	74.00	32.88	peak
4	2663.0737	58.09	-12.73	45.36	74.00	28.64	peak
5	3789.421	47.81	-7.43	40.38	74.00	33.62	peak
6	7235.3595	44.30	0.71	45.01	74.00	28.99	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

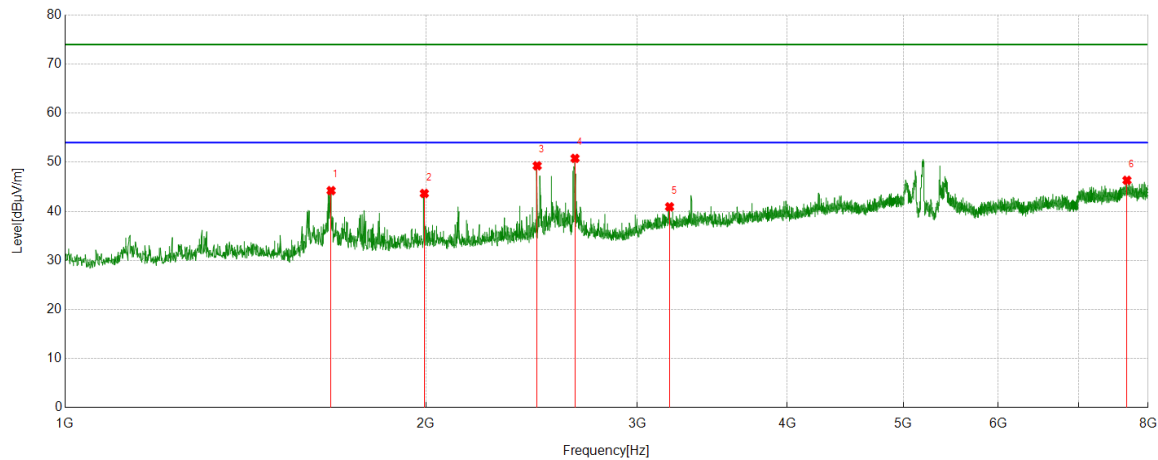

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1666.6296	62.21	-17.99	44.22	74.00	29.78	peak
2	1993.3326	59.66	-16.02	43.64	74.00	30.36	peak
3	2475.6084	63.08	-13.80	49.28	74.00	24.72	peak
4	2662.2958	63.52	-12.73	50.79	74.00	23.21	peak
5	3192.0213	50.68	-9.76	40.92	74.00	33.08	peak
6	7681.8535	44.16	2.16	46.32	74.00	27.68	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5230	Horizontal	PASS

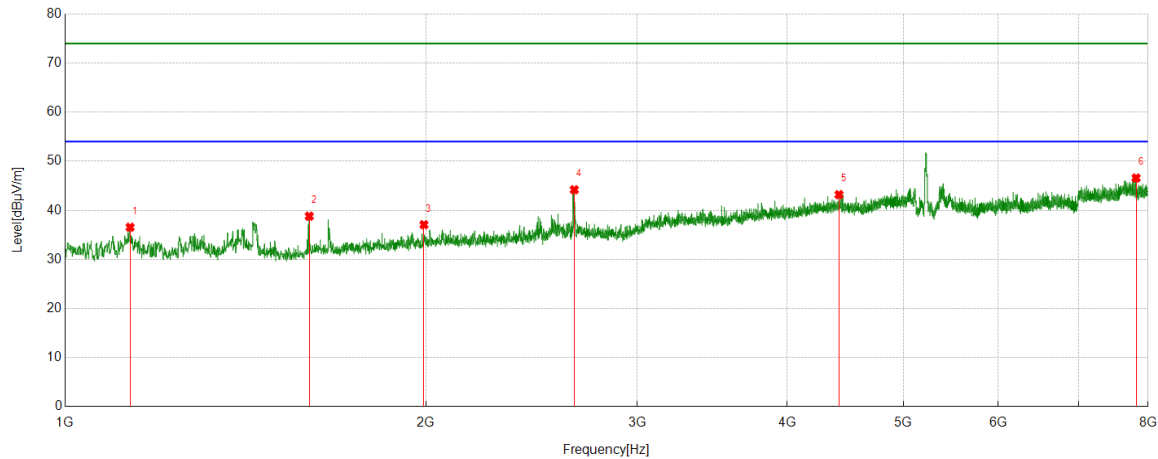

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1133.0148	57.79	-21.24	36.55	74.00	37.45	peak
2	1598.1776	57.18	-18.38	38.80	74.00	35.20	peak
3	1991.7769	53.11	-16.04	37.07	74.00	36.93	peak
4	2658.4065	56.96	-12.77	44.19	74.00	29.81	peak
5	4419.4911	47.70	-4.50	43.20	74.00	30.80	peak
6	7818.7576	44.39	2.20	46.59	74.00	27.41	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5230	Vertical	PASS

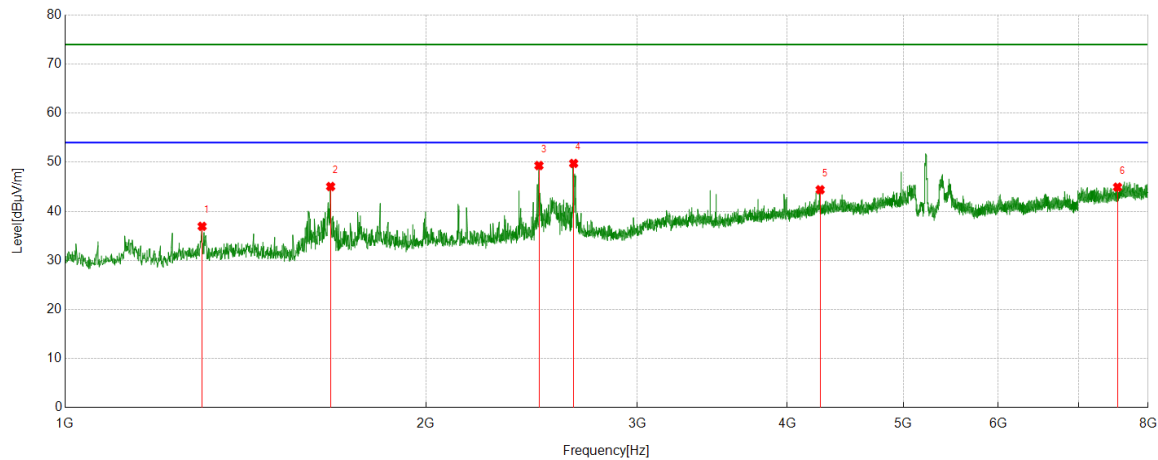

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1301.0334	57.20	-20.26	36.94	74.00	37.06	peak
2	1665.0739	63.07	-18.02	45.05	74.00	28.95	peak
3	2484.1649	63.19	-13.87	49.32	74.00	24.68	peak
4	2655.295	62.55	-12.79	49.76	74.00	24.24	peak
5	4262.3625	49.45	-5.06	44.39	74.00	29.61	peak
6	7544.1716	43.51	1.42	44.93	74.00	29.07	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5755	Horizontal	PASS

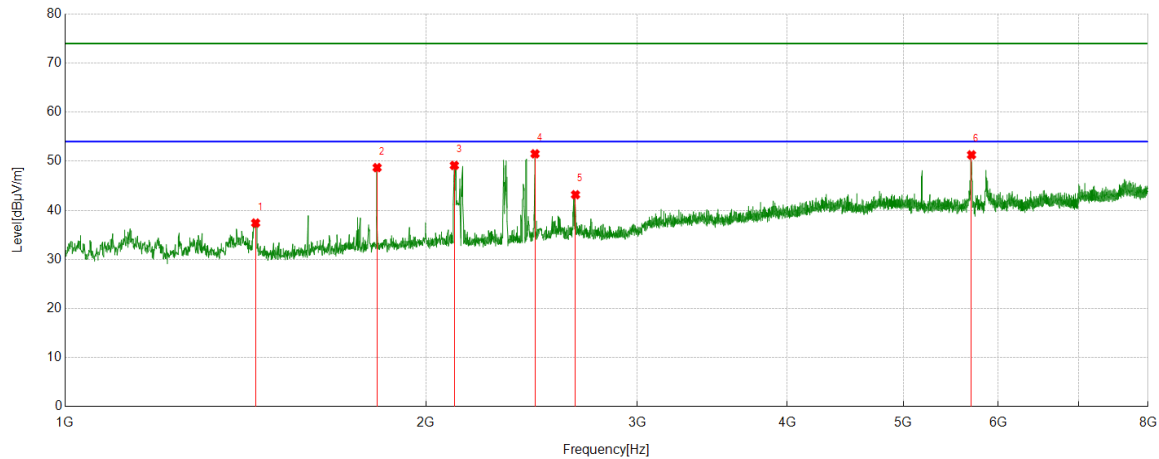

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1441.8269	56.90	-19.49	37.41	74.00	36.59	peak
2	1820.6467	65.99	-17.29	48.70	74.00	25.30	peak
3	2111.568	64.74	-15.60	49.14	74.00	24.86	peak
4	2465.4962	65.35	-13.84	51.51	74.00	22.49	peak
5	2664.6294	56.06	-12.88	43.18	74.00	30.82	peak
6	5699.8555	52.61	-1.31	51.30	74.00	22.70	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5755	Vertical	PASS

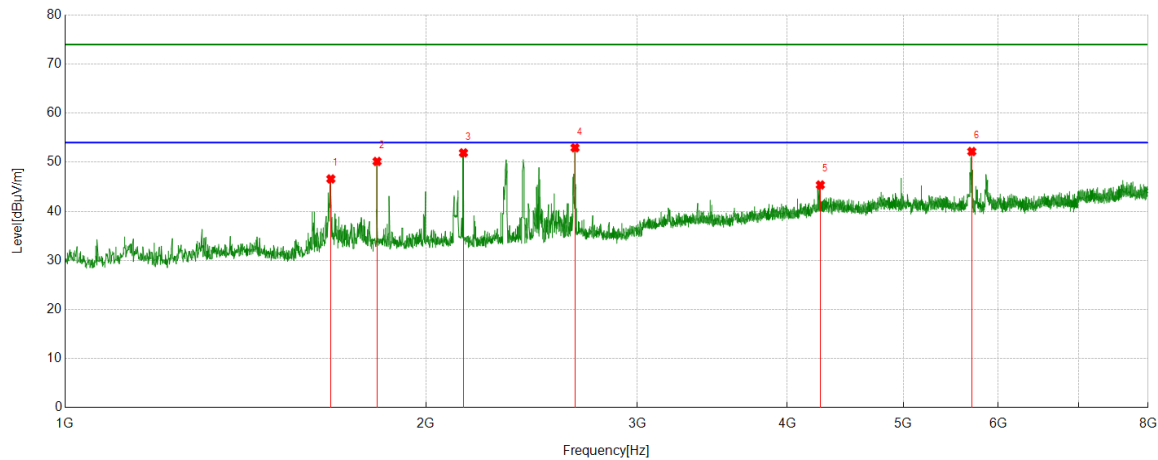

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1665.8518	64.54	-17.94	46.60	74.00	27.40	peak
2	1820.6467	67.45	-17.29	50.16	74.00	23.84	peak
3	2148.9054	67.12	-15.21	51.91	74.00	22.09	peak
4	2662.2958	65.83	-12.89	52.94	74.00	21.06	peak
5	4263.9182	50.12	-4.75	45.37	74.00	28.63	peak
6	5702.967	53.46	-1.28	52.18	74.00	21.82	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5795	Horizontal	PASS

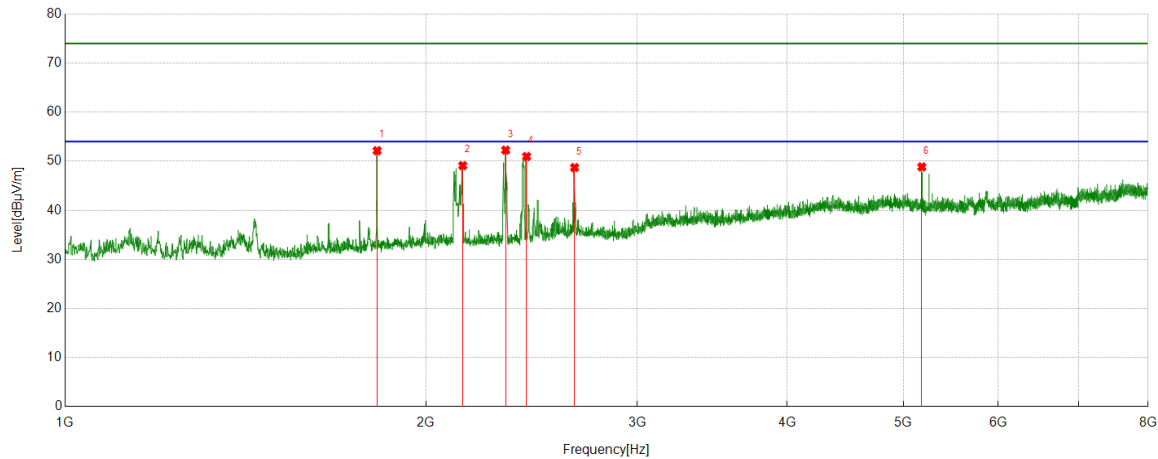

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1820.6467	69.44	-17.29	52.15	74.00	21.85	peak
2	2145.794	64.32	-15.22	49.10	74.00	24.90	peak
3	2330.1478	67.26	-15.00	52.26	74.00	21.74	peak
4	2425.8251	65.39	-14.43	50.96	74.00	23.04	peak
5	2659.9622	61.62	-12.90	48.72	74.00	25.28	peak
6	5181.0201	51.70	-2.86	48.84	74.00	25.16	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC40	5795	Vertical	PASS

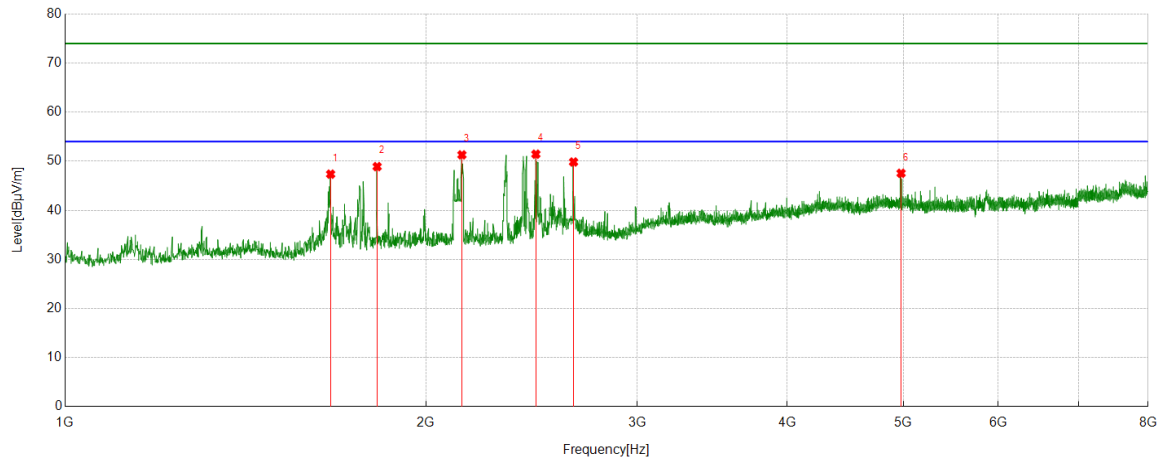

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1665.0739	65.33	-17.96	47.37	74.00	26.63	peak
2	1820.6467	66.20	-17.29	48.91	74.00	25.09	peak
3	2142.6825	66.52	-15.22	51.30	74.00	22.70	peak
4	2469.3855	65.16	-13.72	51.44	74.00	22.56	peak
5	2654.5172	62.72	-12.87	49.85	74.00	24.15	peak
6	4978.7754	50.56	-3.01	47.55	74.00	26.45	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5210	Horizontal	PASS

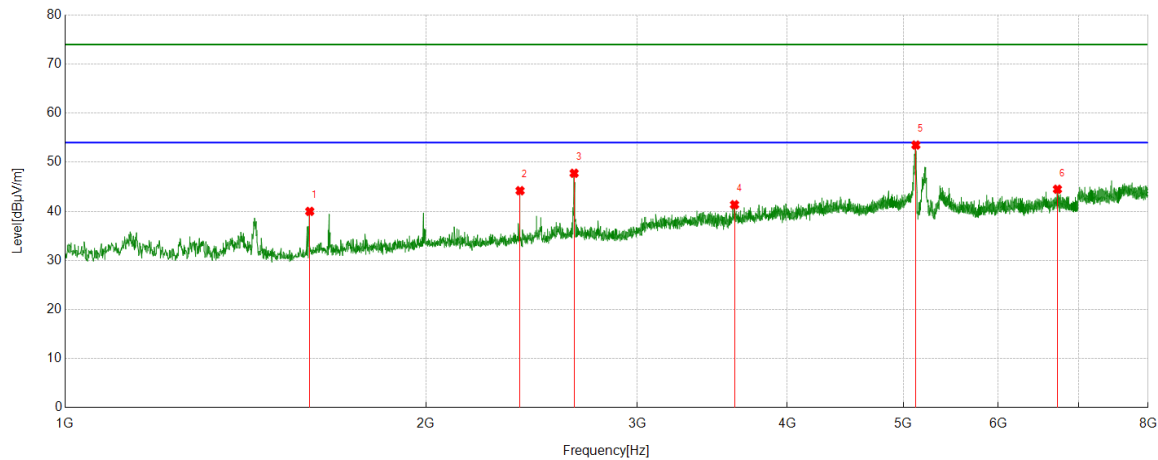

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1599.7333	58.37	-18.38	39.99	74.00	34.01	peak
2	2395.4884	58.99	-14.79	44.20	74.00	29.80	peak
3	2657.6286	60.53	-12.77	47.76	74.00	26.24	peak
4	3615.9573	49.23	-7.88	41.35	74.00	32.65	peak
5	5121.9024	55.66	-2.16	53.50	74.00	20.50	peak
6	6721.9691	44.50	0.00	44.50	74.00	29.50	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5210	Vertical	PASS

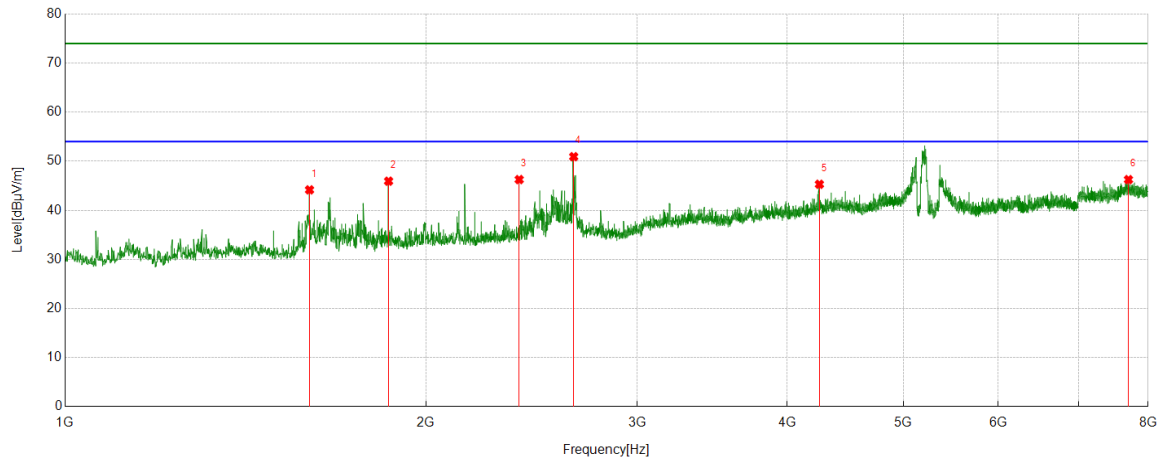

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1598.9554	62.55	-18.38	44.17	74.00	29.83	peak
2	1861.0957	63.16	-17.22	45.94	74.00	28.06	peak
3	2391.5991	61.02	-14.75	46.27	74.00	27.73	peak
4	2655.295	63.72	-12.79	50.93	74.00	23.07	peak
5	4256.1396	50.43	-5.12	45.31	74.00	28.69	peak
6	7704.4116	43.77	2.49	46.26	74.00	27.74	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
- The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AC80	5775	Horizontal	PASS

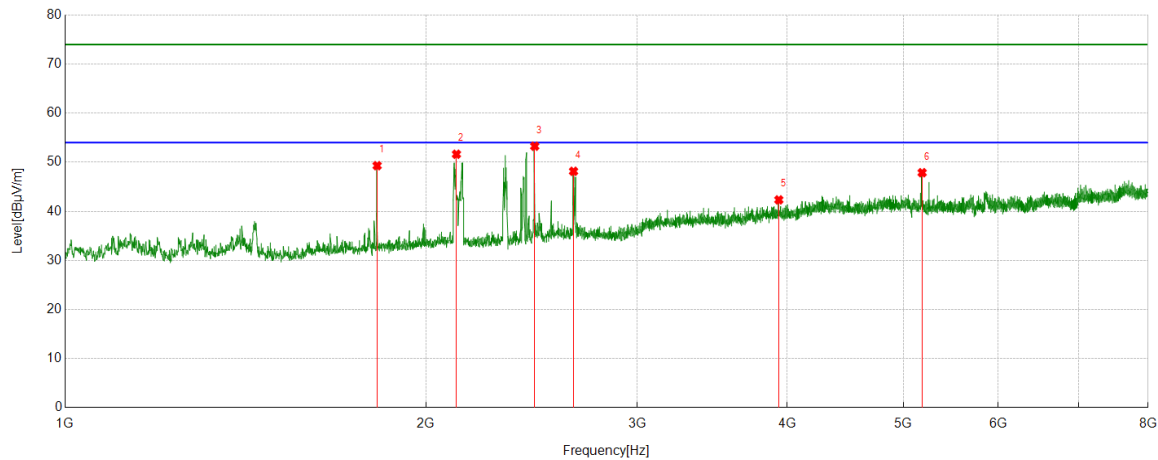

No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1820.6467	66.59	-17.29	49.30	74.00	24.70	peak
2	2120.1245	67.12	-15.49	51.63	74.00	22.37	peak
3	2463.9404	67.16	-13.89	53.27	74.00	20.73	peak
4	2654.5172	61.03	-12.87	48.16	74.00	25.84	peak
5	3937.2152	48.92	-6.58	42.34	74.00	31.66	peak
6	5184.1316	50.68	-2.81	47.87	74.00	26.13	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AC80	5775	Vertical	PASS

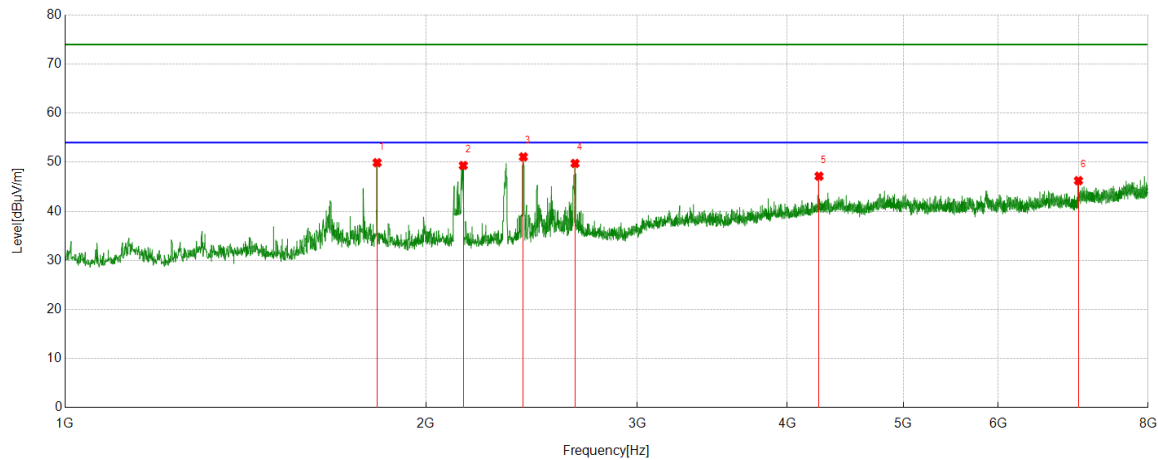


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1820.6467	67.20	-17.29	49.91	74.00	24.09	peak
2	2148.1276	64.54	-15.21	49.33	74.00	24.67	peak
3	2411.0457	65.77	-14.67	51.10	74.00	22.90	peak
4	2662.2958	62.65	-12.89	49.76	74.00	24.24	peak
5	4253.0281	51.96	-4.80	47.16	74.00	26.84	peak
6	6998.8888	45.46	0.79	46.25	74.00	27.75	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

PART II: For 6.5GHz to 18GHz:

Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

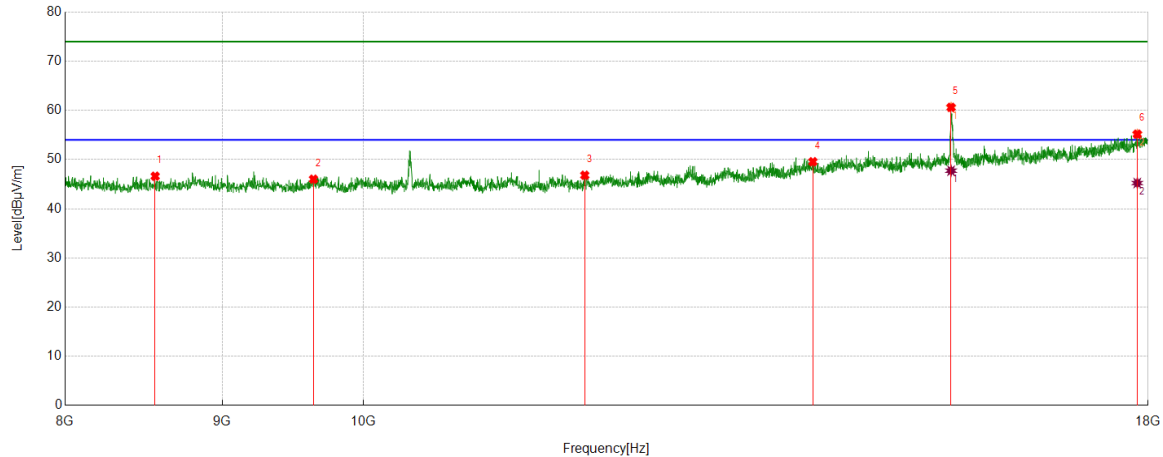

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8558.4264	43.54	3.08	46.62	74.00	27.38	peak
2	9635.2725	42.31	3.70	46.01	74.00	27.99	peak
3	11805.6343	40.56	6.25	46.81	74.00	27.19	peak
4	14004.3341	38.81	10.75	49.56	74.00	24.44	peak
5	15531.2552	47.90	12.72	60.62	74.00	13.38	peak
6	17854.9758	36.41	18.76	55.17	74.00	18.83	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	15531.2552	35.02	12.72	47.74	54.00	6.26	AV
2	17854.9758	26.47	18.76	45.23	54.00	8.77	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.