


6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6435MHz

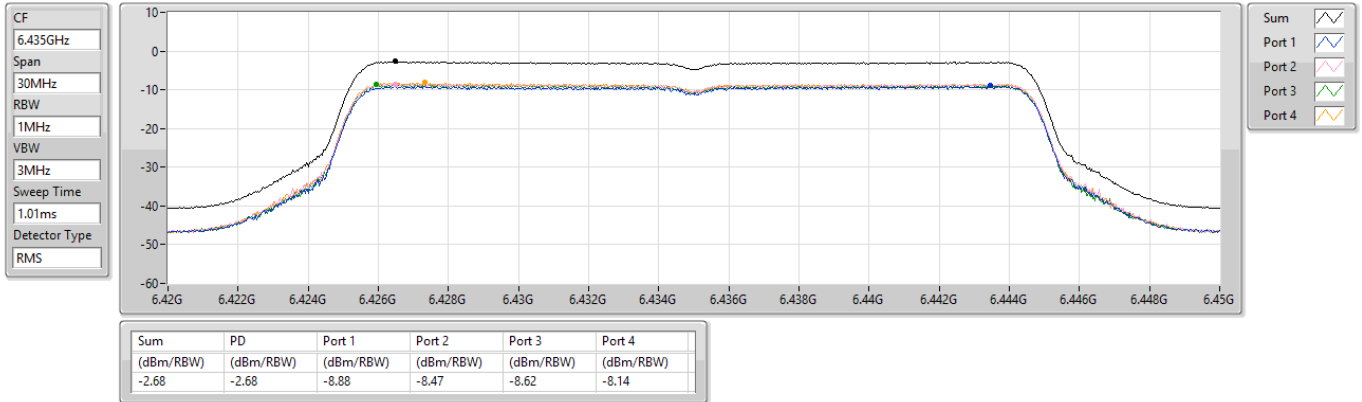

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6475MHz

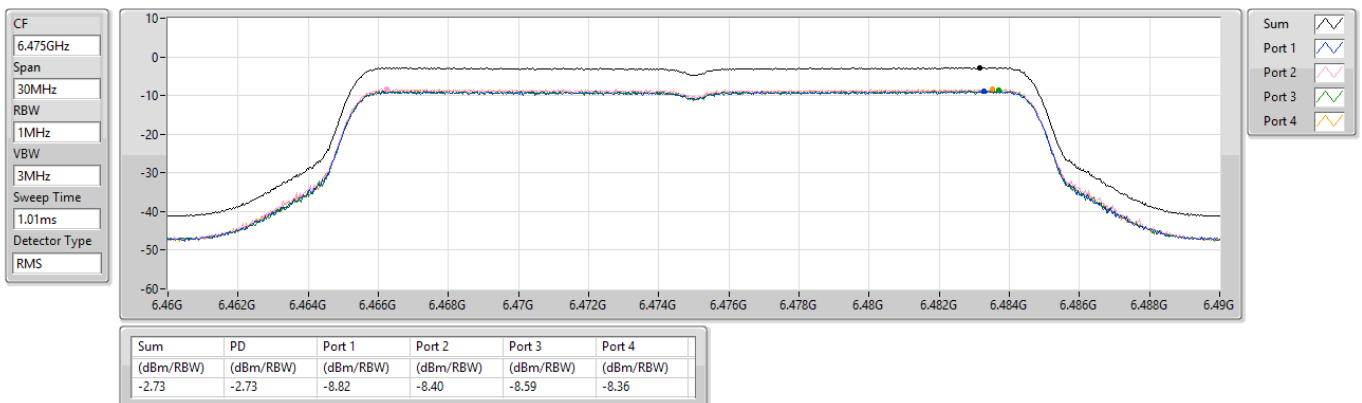

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6515MHz

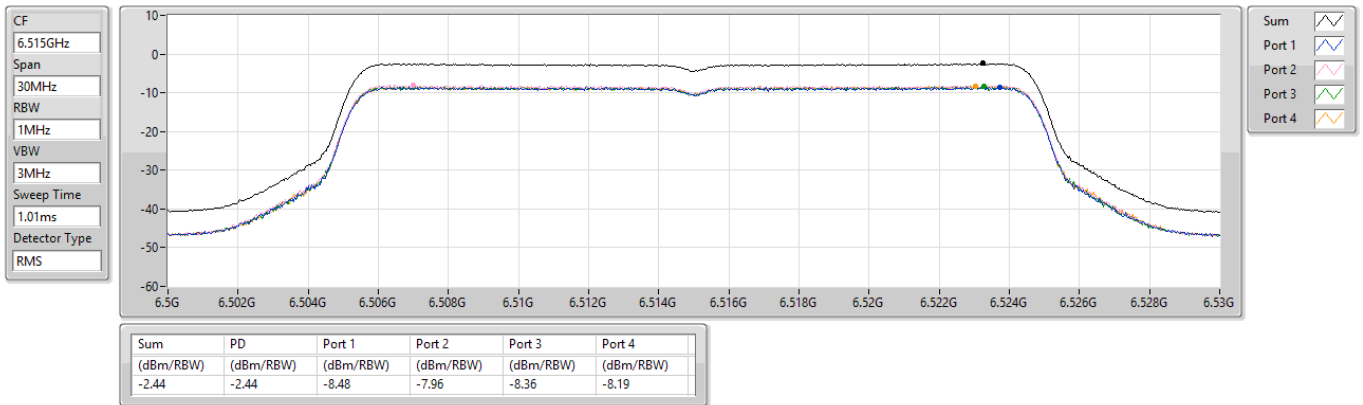

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6535MHz

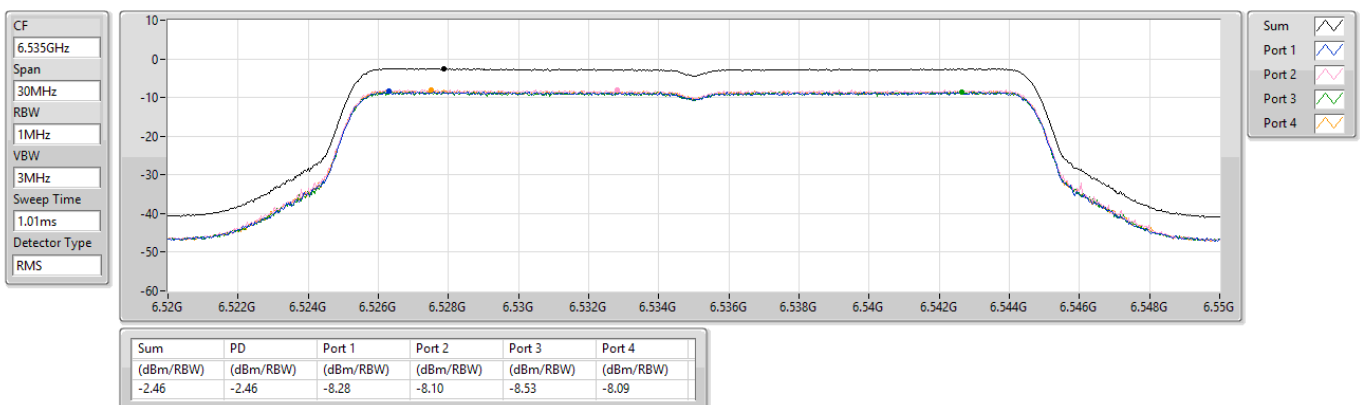

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6715MHz

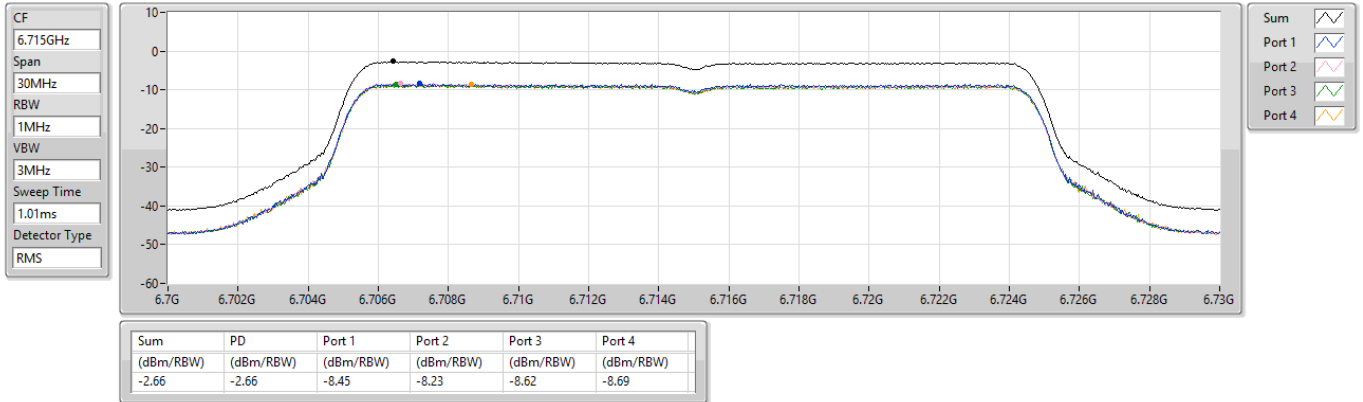

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6855MHz

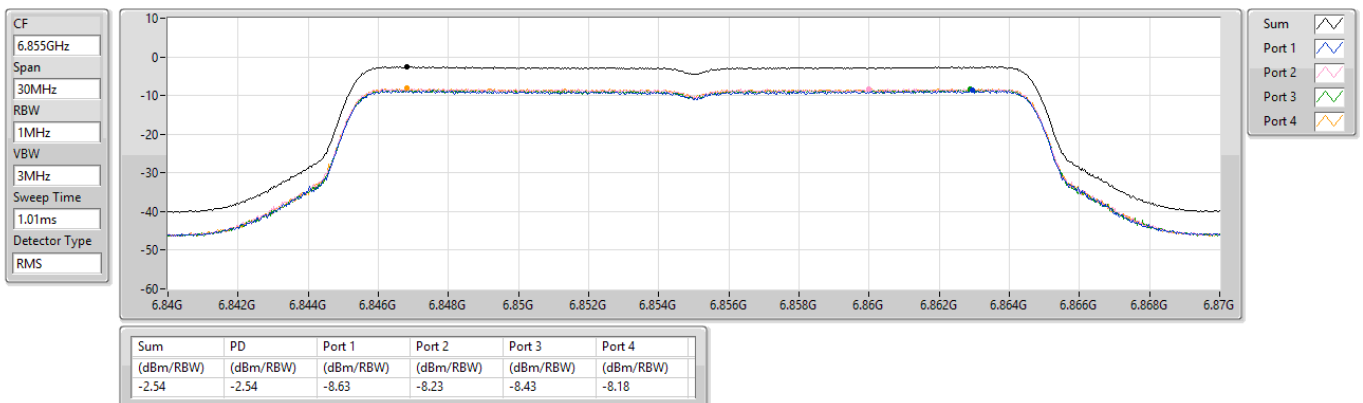

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6875MHz Straddle 6.875-7.125GHz

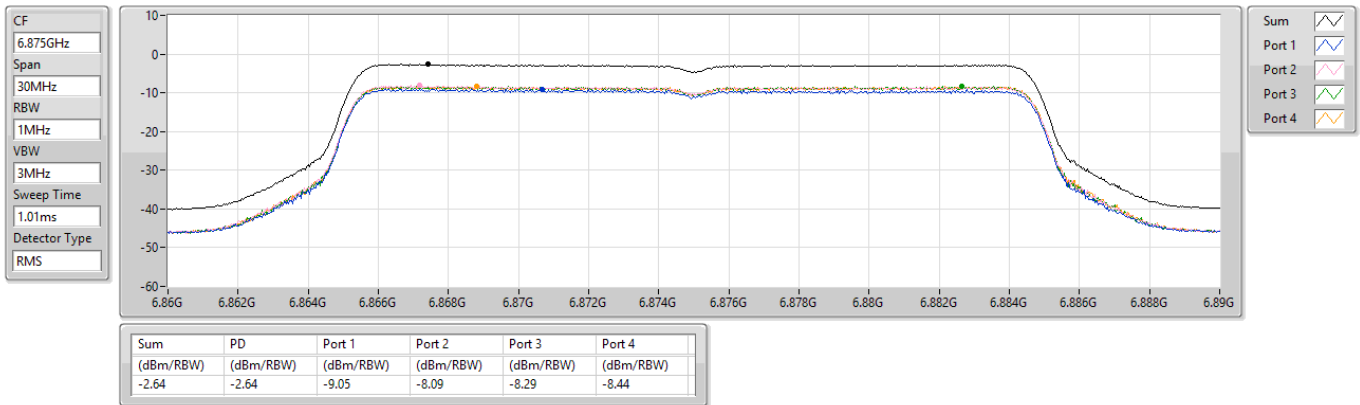

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6895MHz

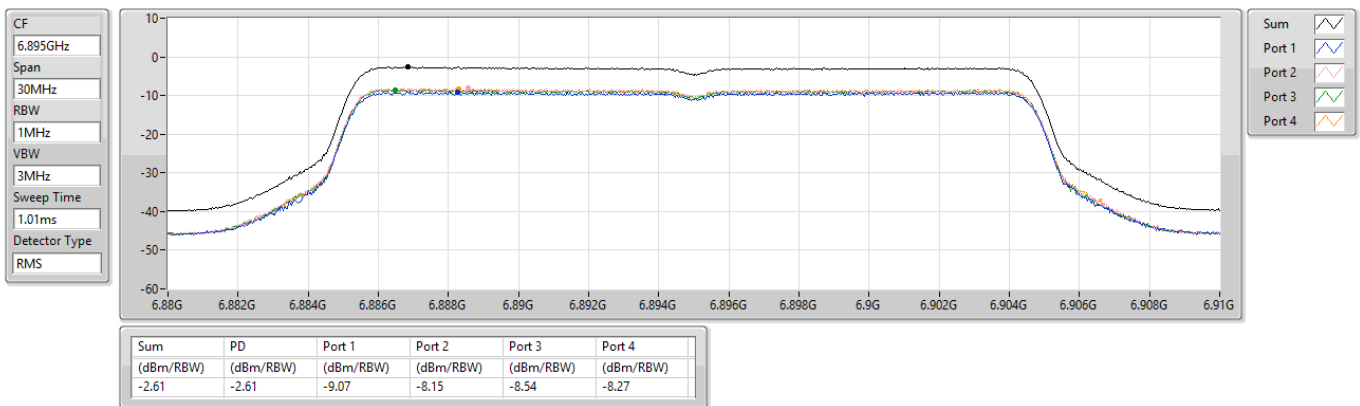

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


7015MHz

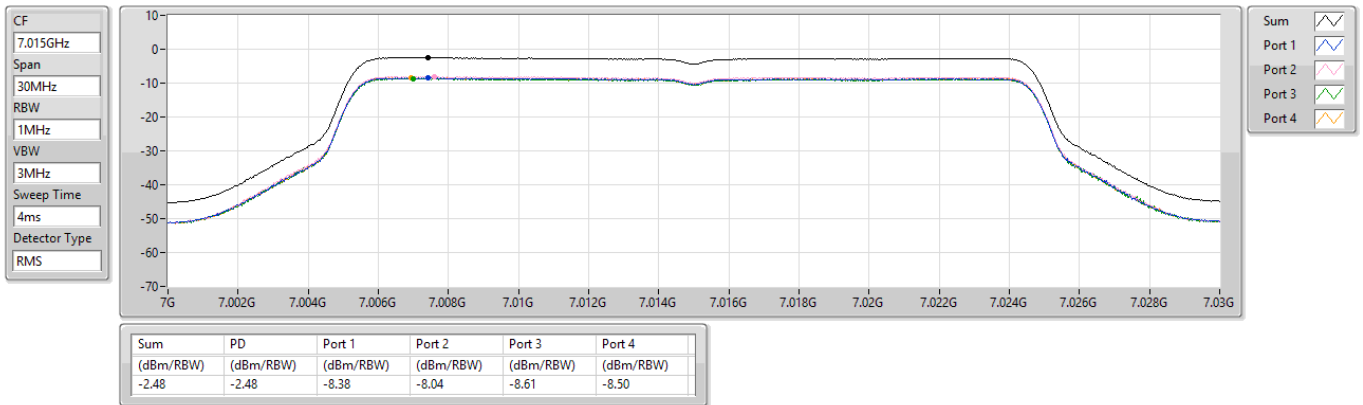

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

7095MHz

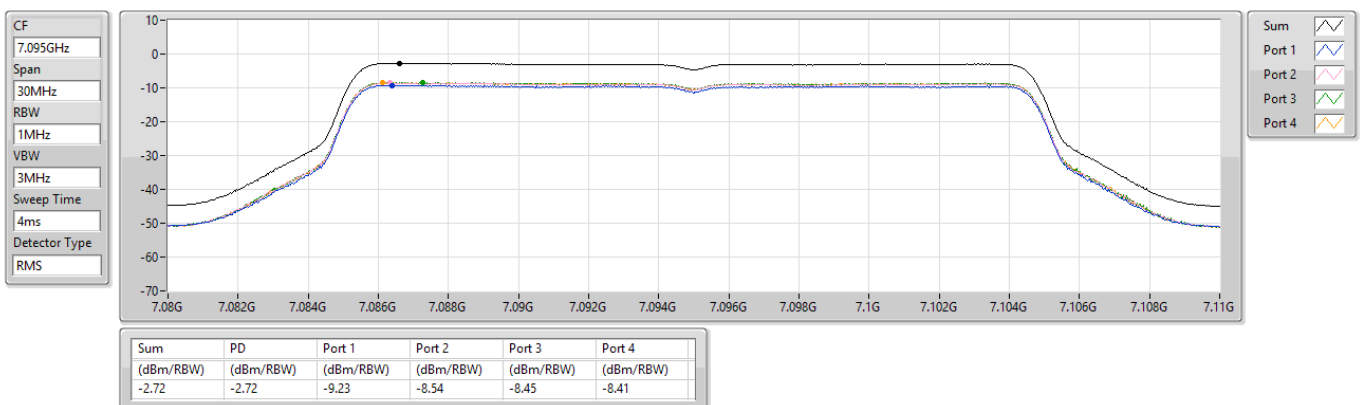




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


7115MHz

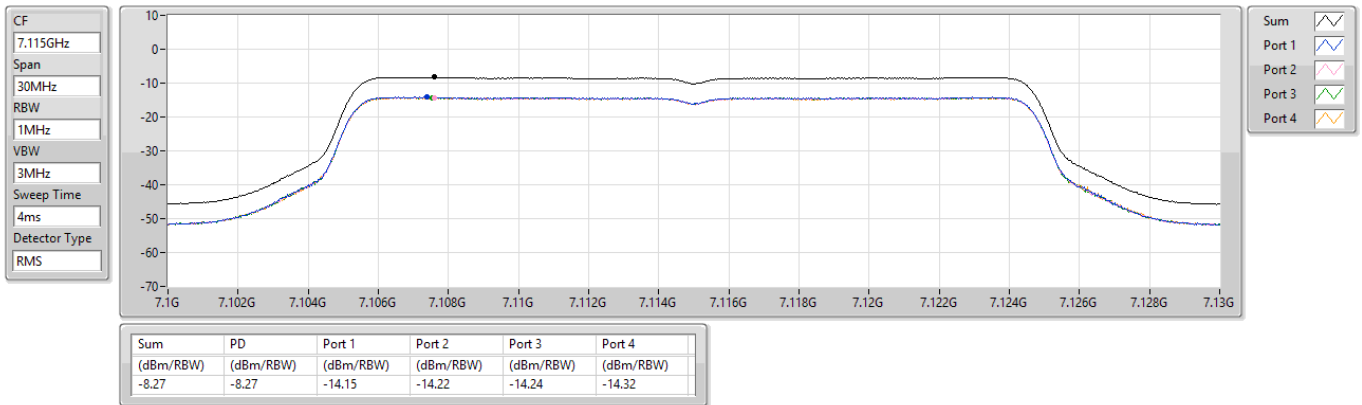

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5965MHz

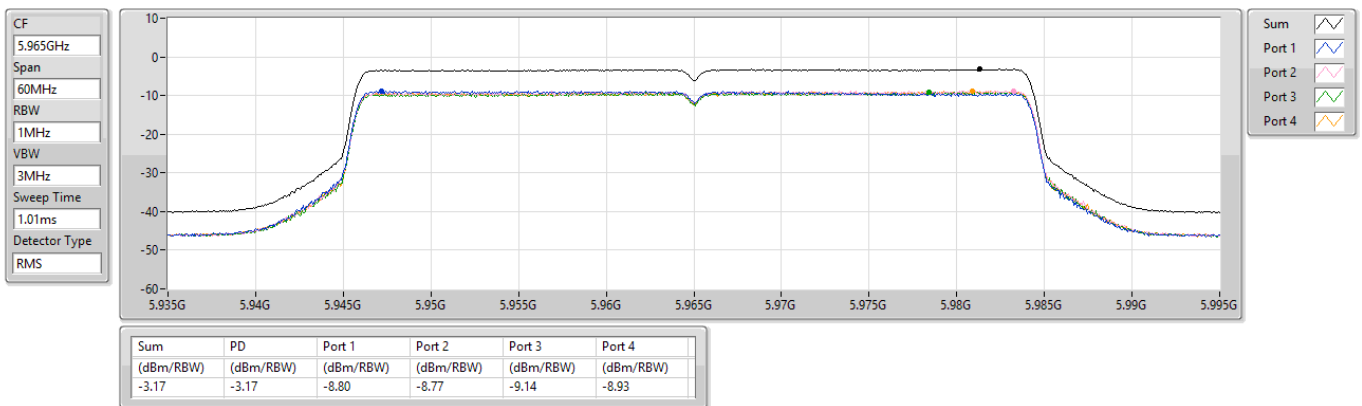

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6165MHz

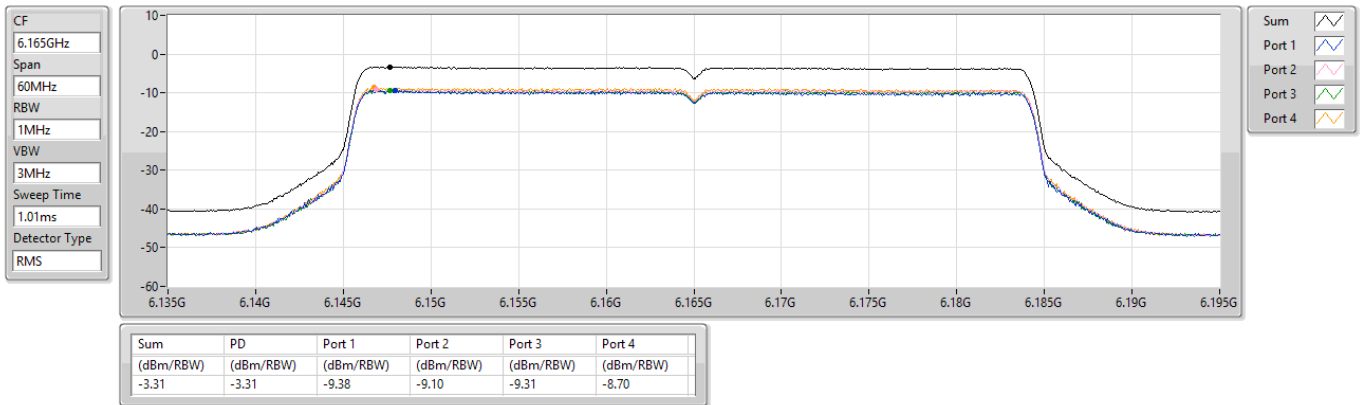

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6405MHz

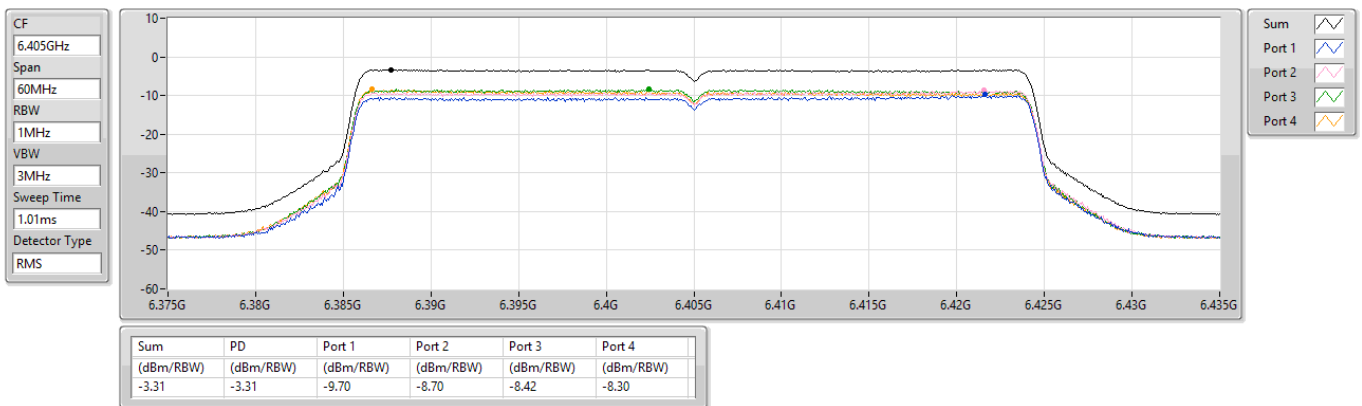

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6445MHz

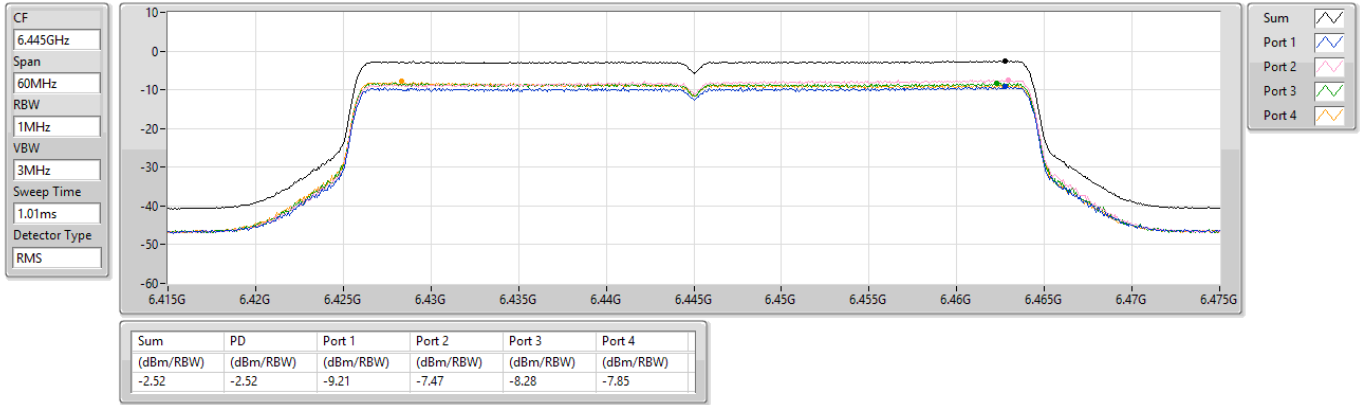

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

6485MHz

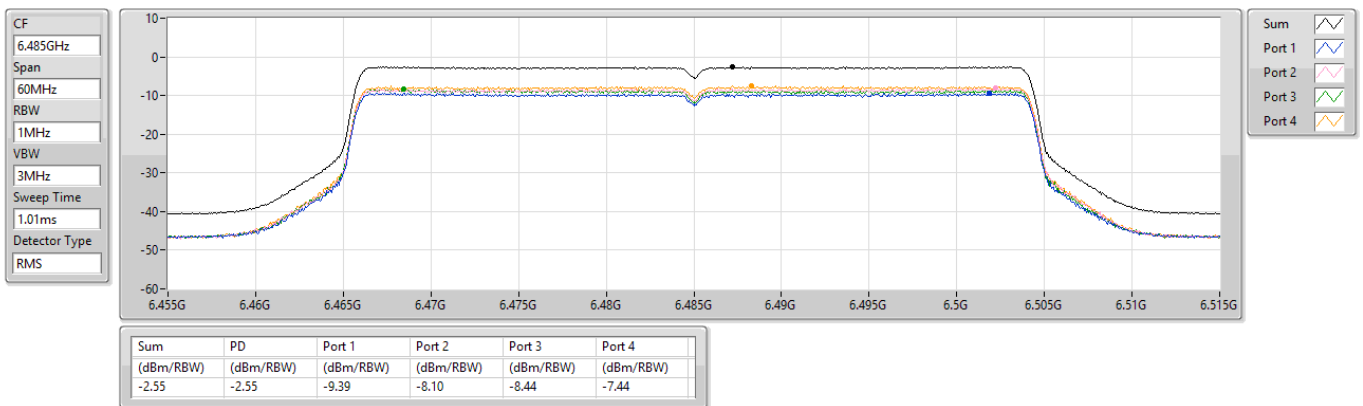




6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6525MHz Straddle 6.425-6.525GHz

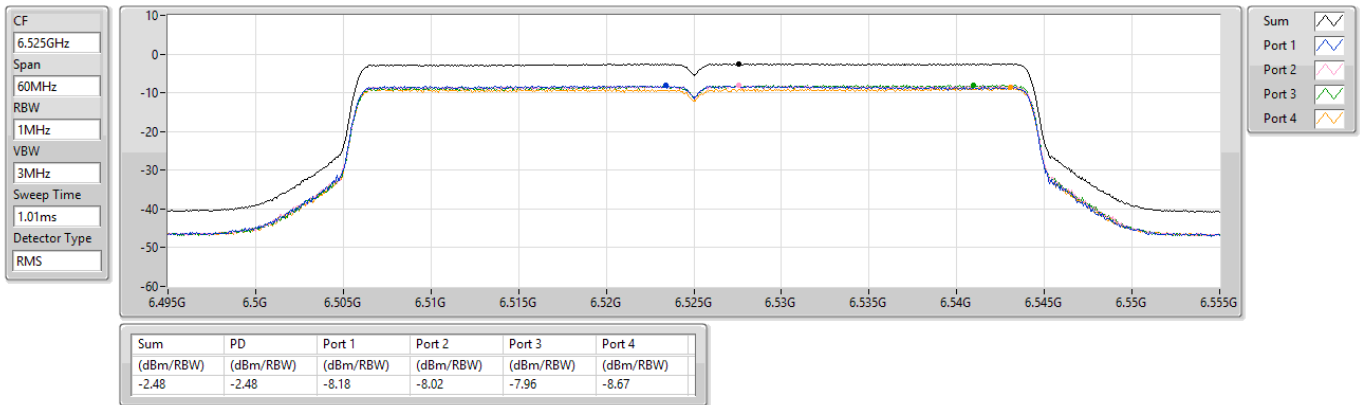

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6565MHz

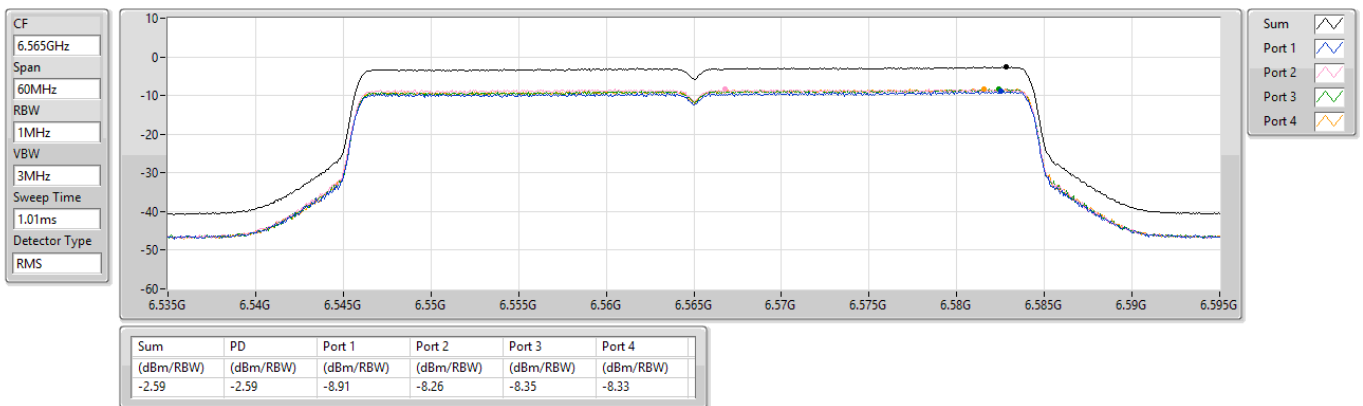

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6725MHz

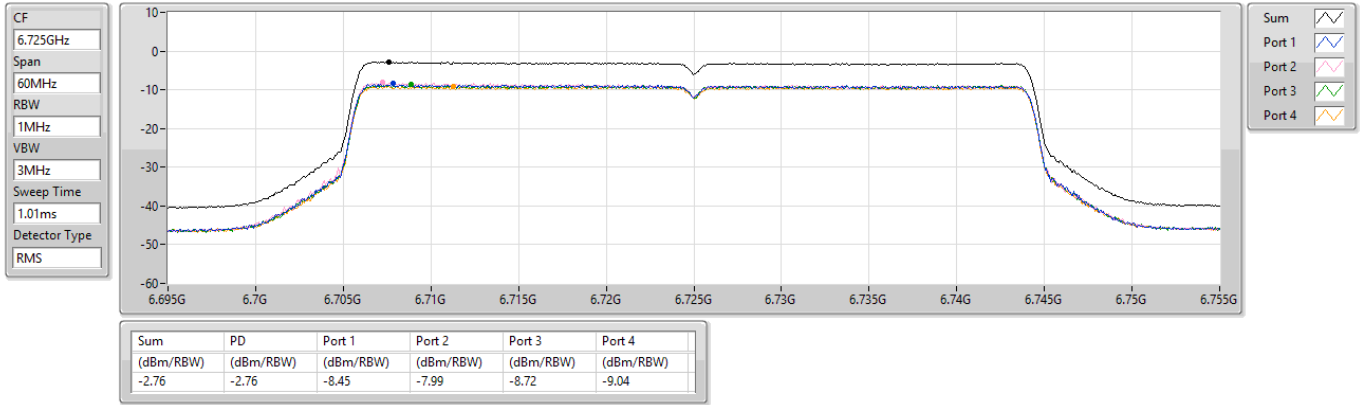

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6845MHz

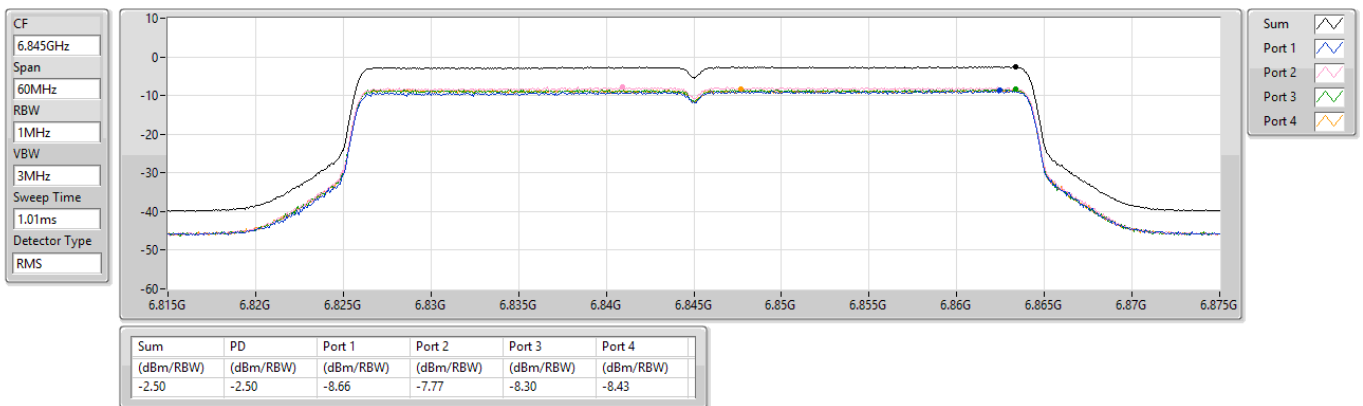

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6885MHz Straddle 6.875-7.125GHz

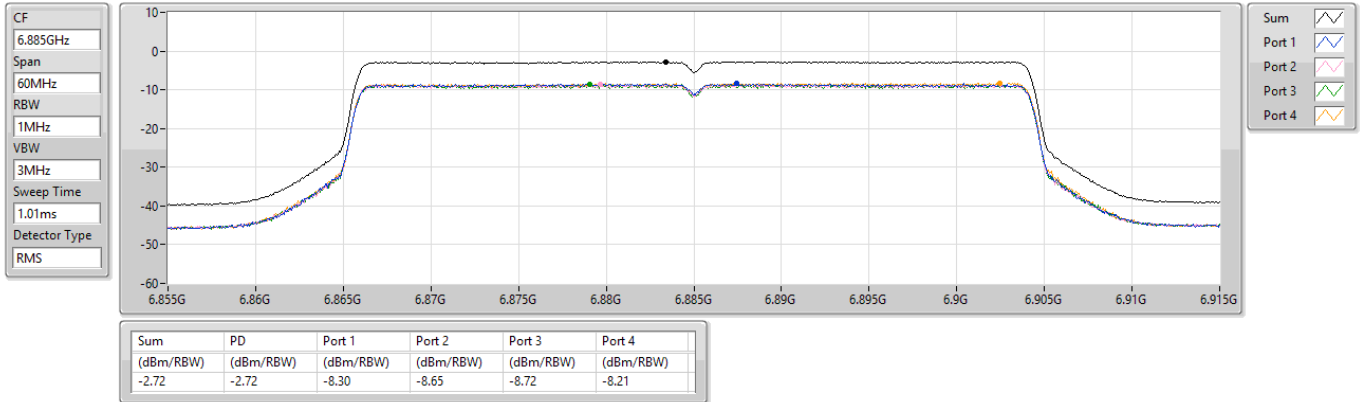

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6925MHz

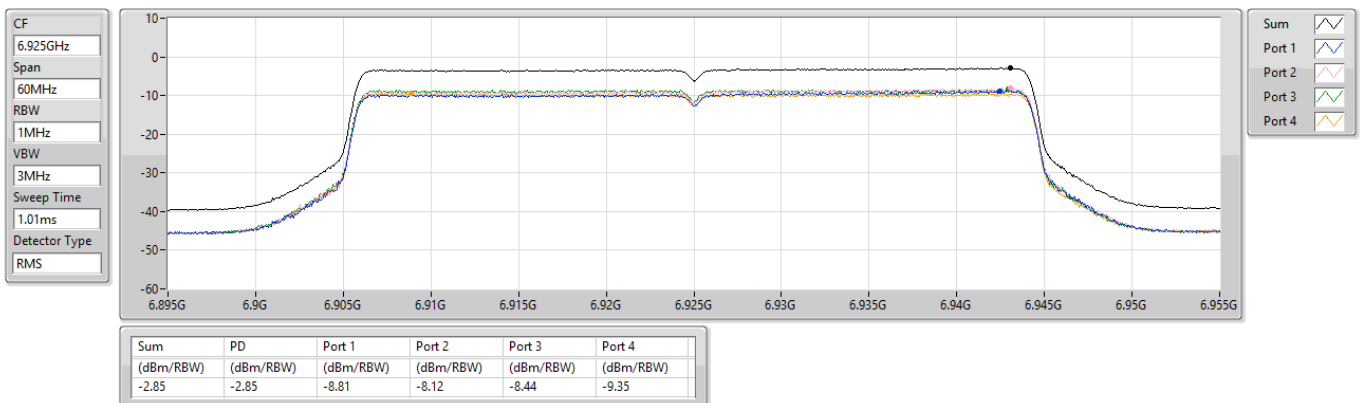

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


7005MHz

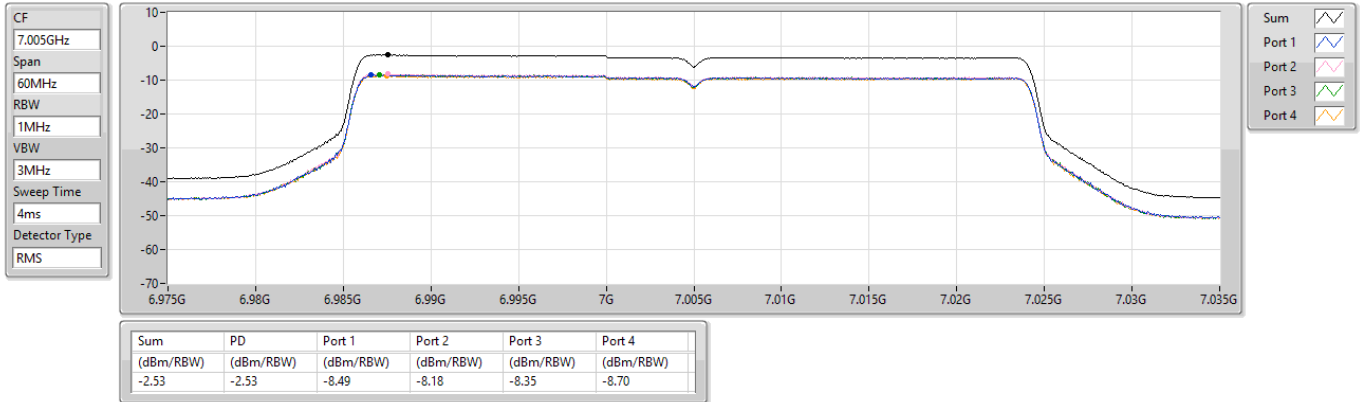

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

7085MHz

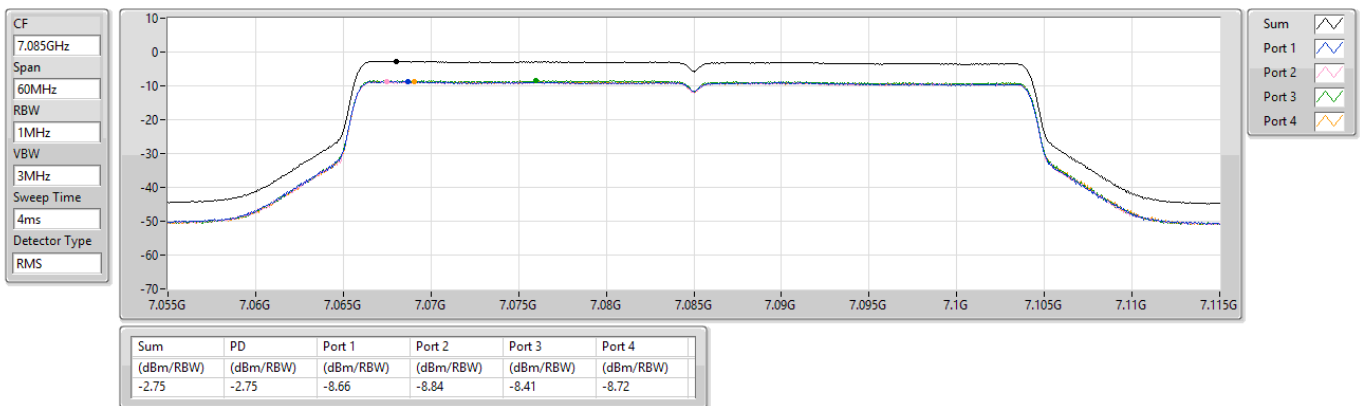


5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5985MHz

CF
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

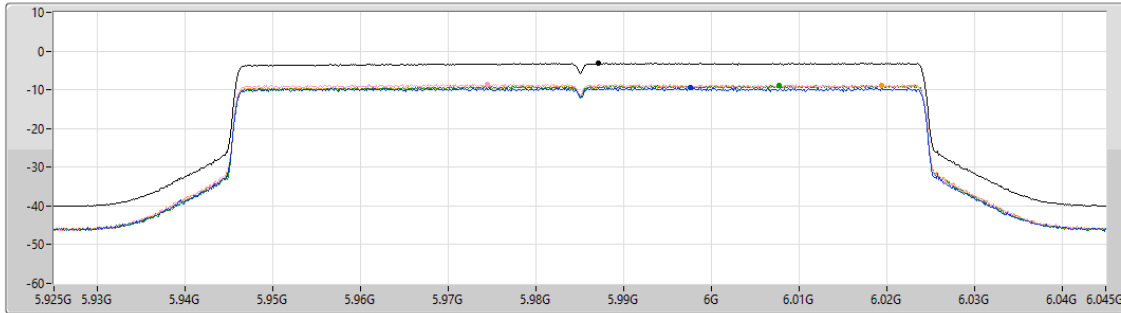

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.06	-3.06	-9.44	-8.47	-8.74	-8.76

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

6145MHz

CF
6.145GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

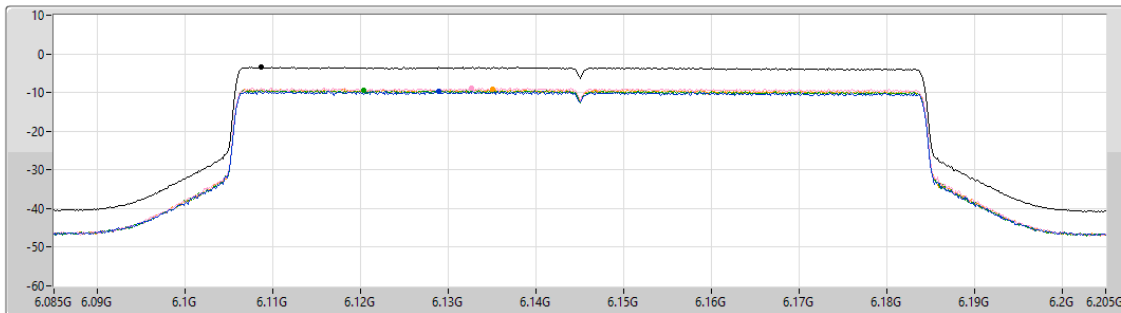

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.39	-3.39	-9.71	-8.83	-9.34	-9.15

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

6385MHz

CF
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

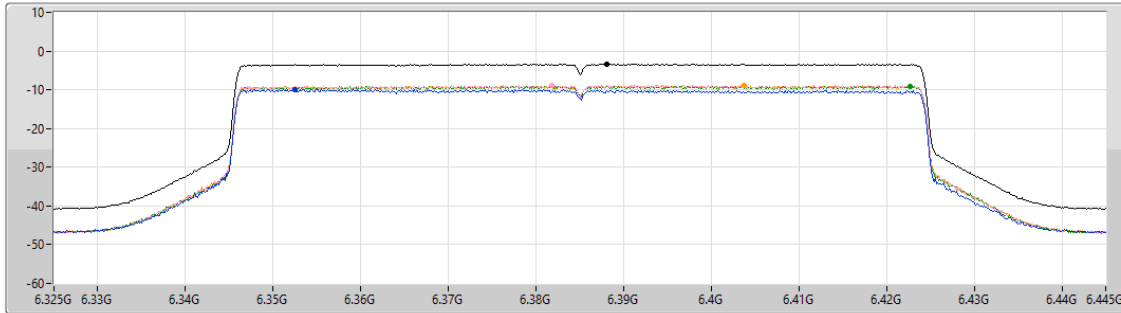

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.31	-3.31	-9.84	-8.74	-9.02	-8.80

6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

6465MHz

CF
6.465GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

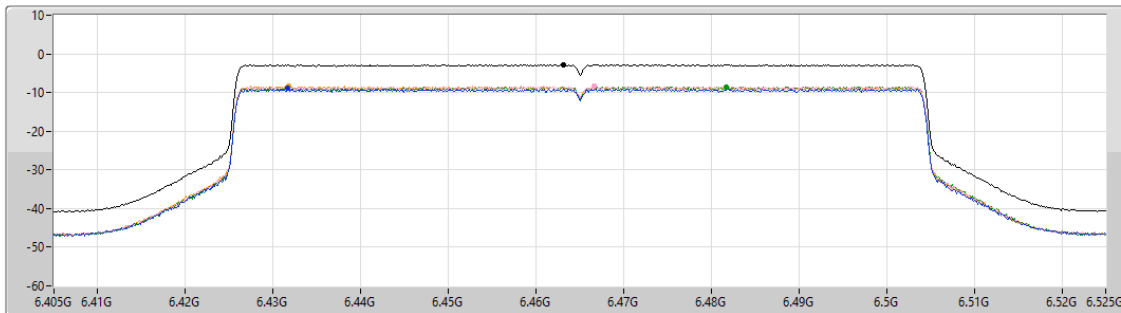

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.77	-2.77	-8.91	-8.43	-8.49	-8.37



6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6545MHz Straddle 6.425-6.525GHz

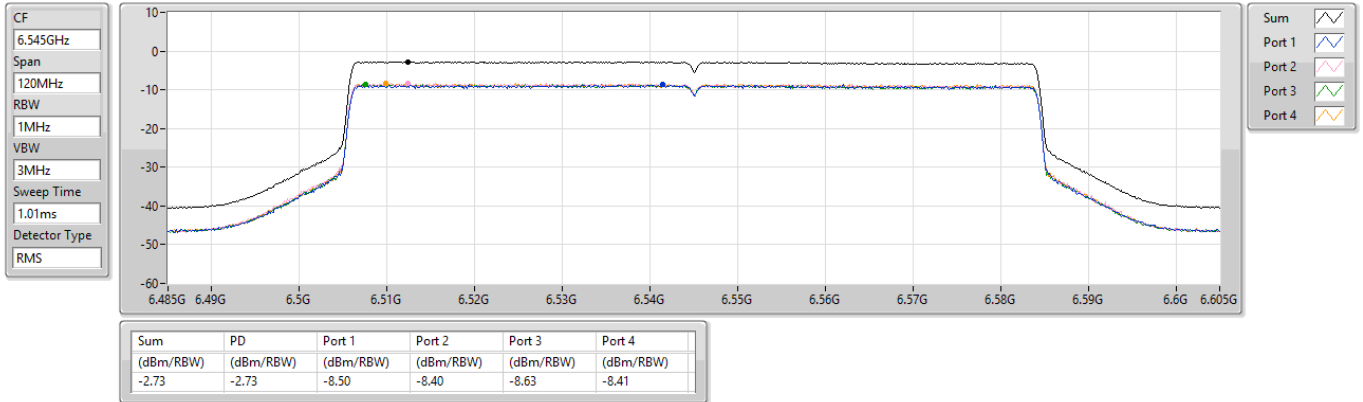

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6625MHz

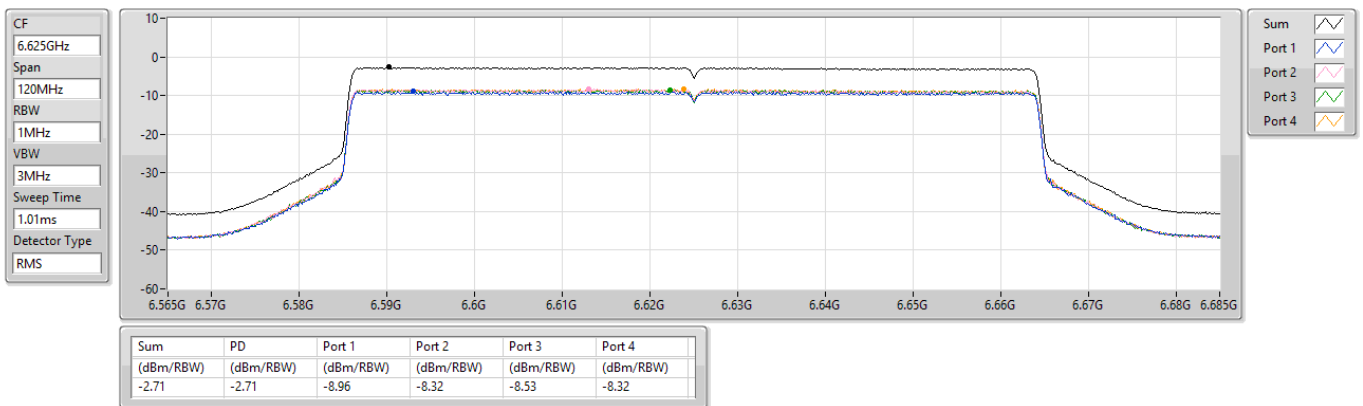

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6705MHz

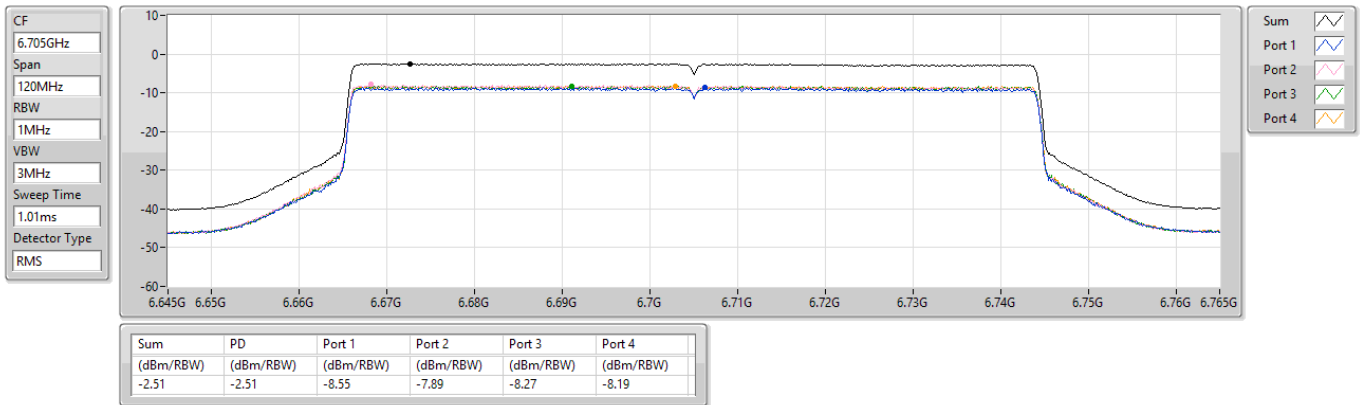

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6785MHz

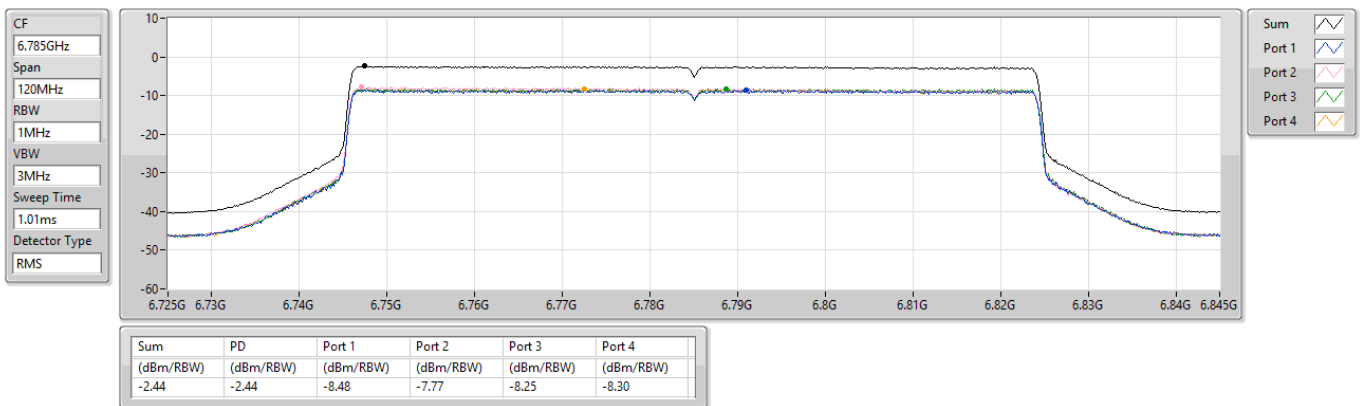

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6865MHz Straddle 6.875-7.125GHz

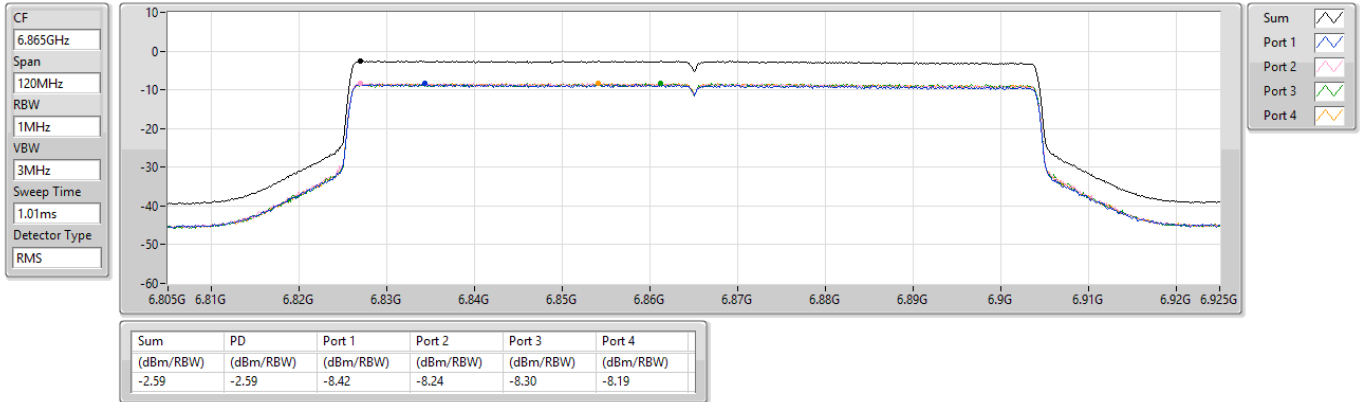

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

6945MHz

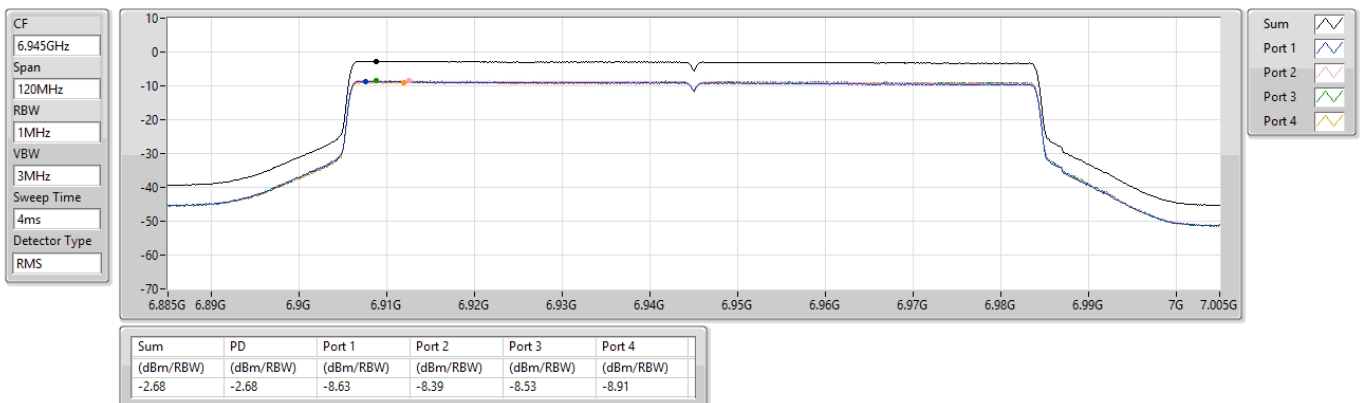


6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

7025MHz

CF
7.025GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS

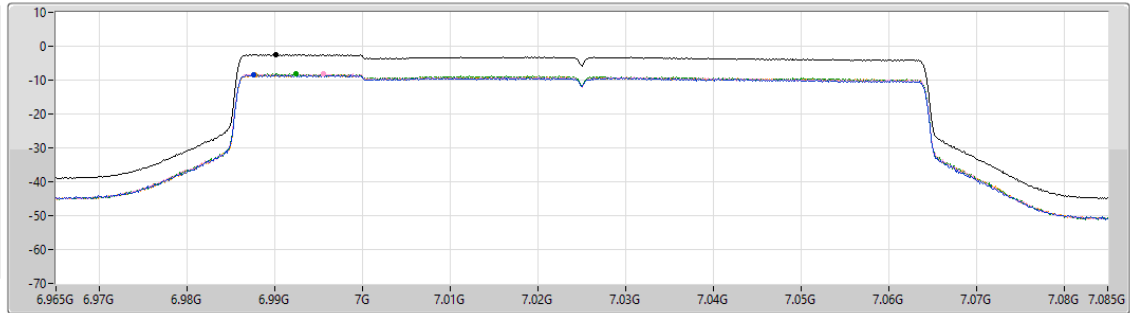

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.48	-2.48	-8.52	-8.24	-8.21	-8.47

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD

6025MHz

CF
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

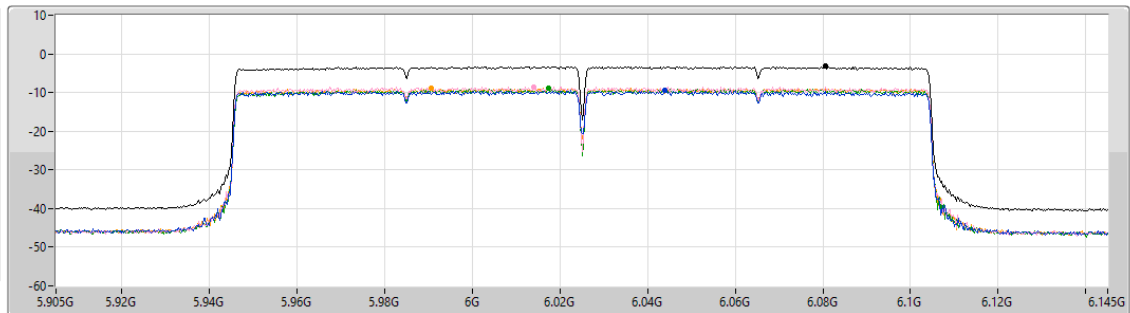

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.26	-3.26	-9.42	-8.50	-8.83	-8.81

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD

6185MHz

CF
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

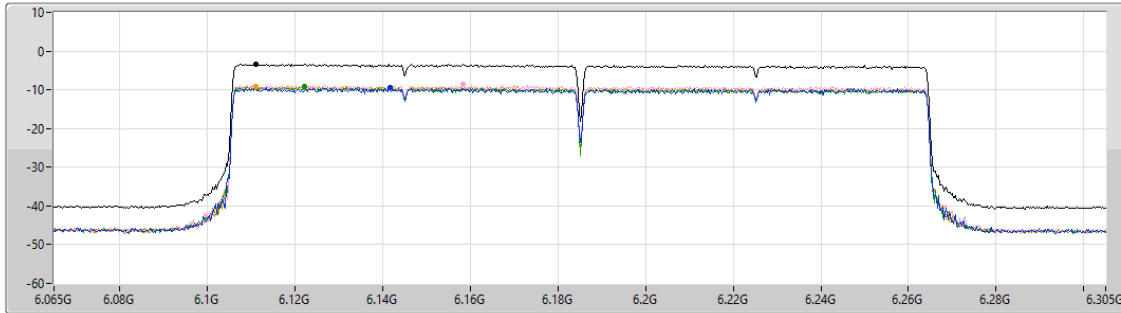

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.34	-3.34	-9.30	-8.71	-9.14	-9.06

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD

6345MHz

CF
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

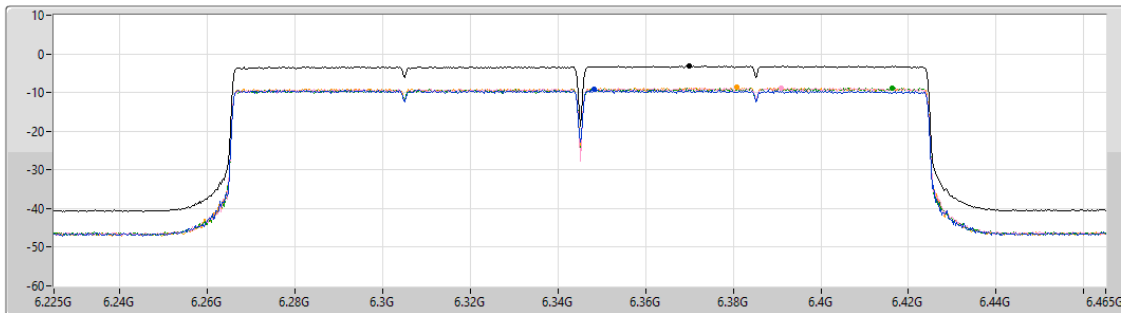


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.10	-3.10	-9.27	-8.78	-8.75	-8.71

6.425-6.525GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6505MHz Straddle 6.425-6.525GHz

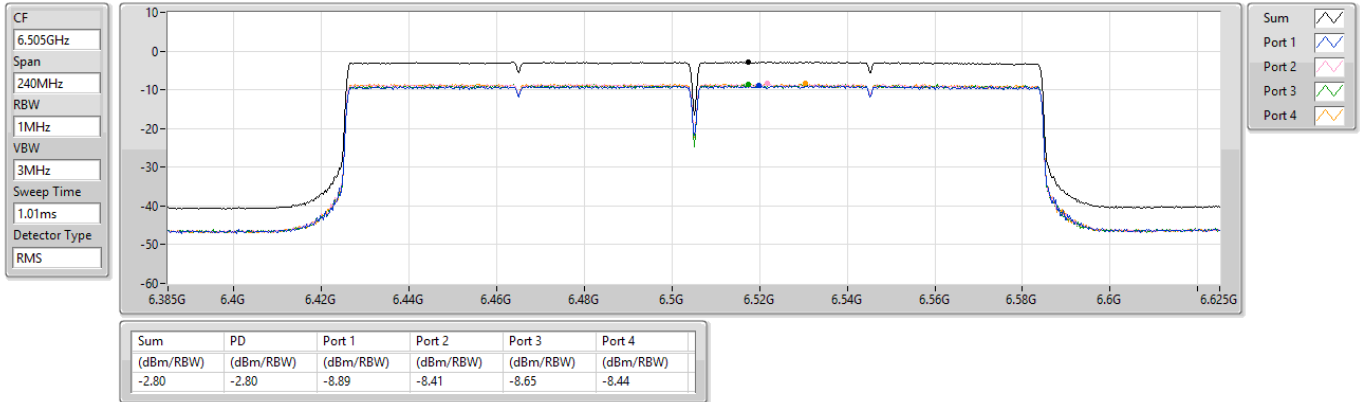

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6665MHz

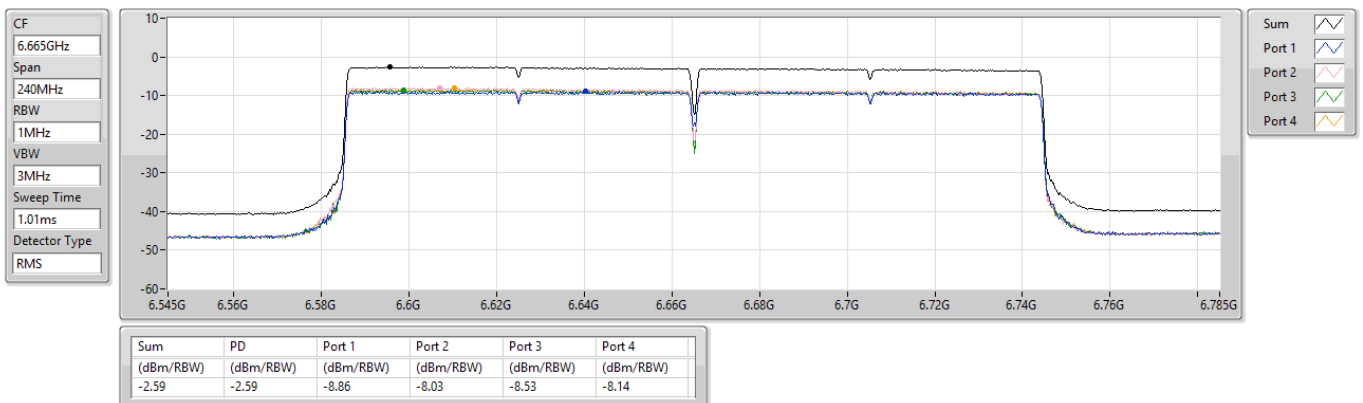

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6825MHz Straddle 6.875-7.125GHz

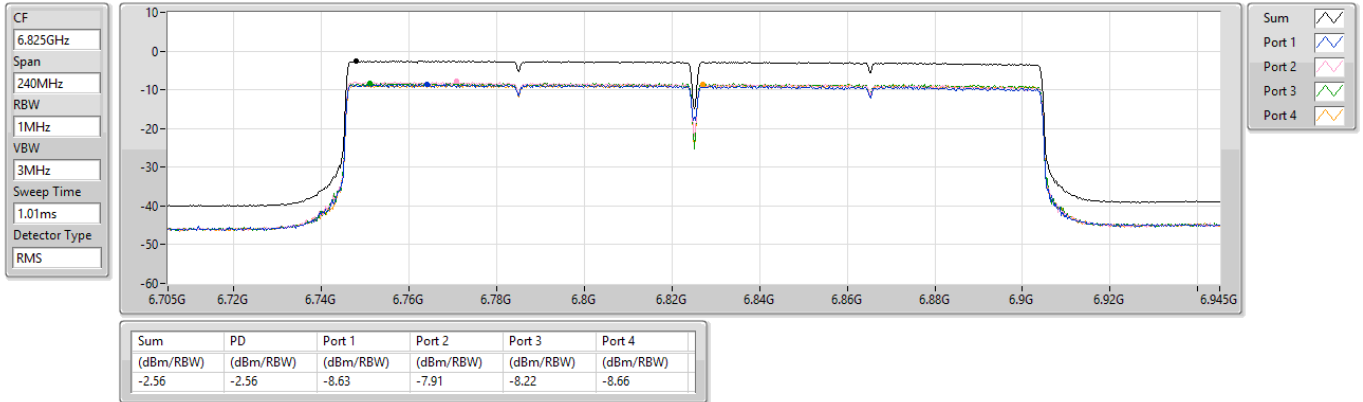

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6985MHz

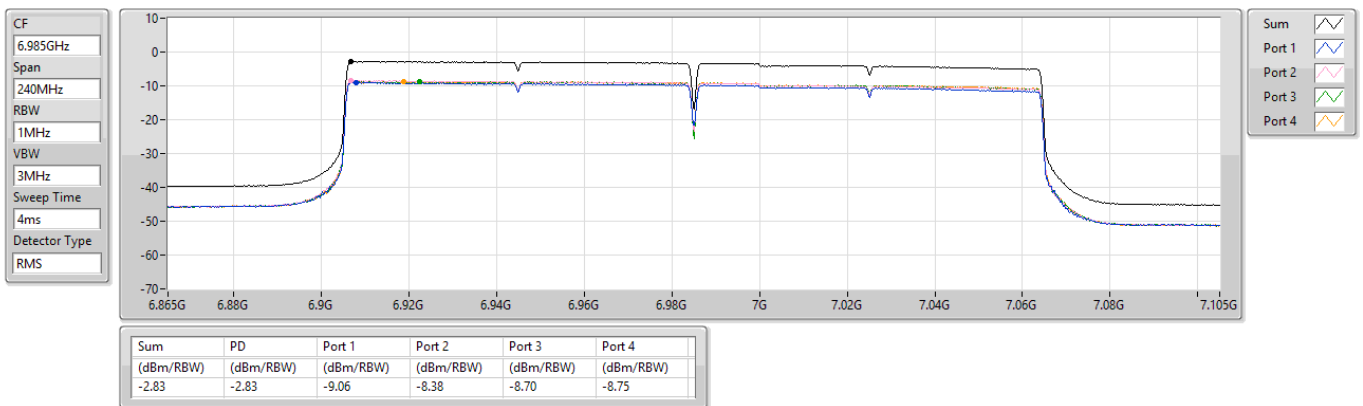

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6105MHz

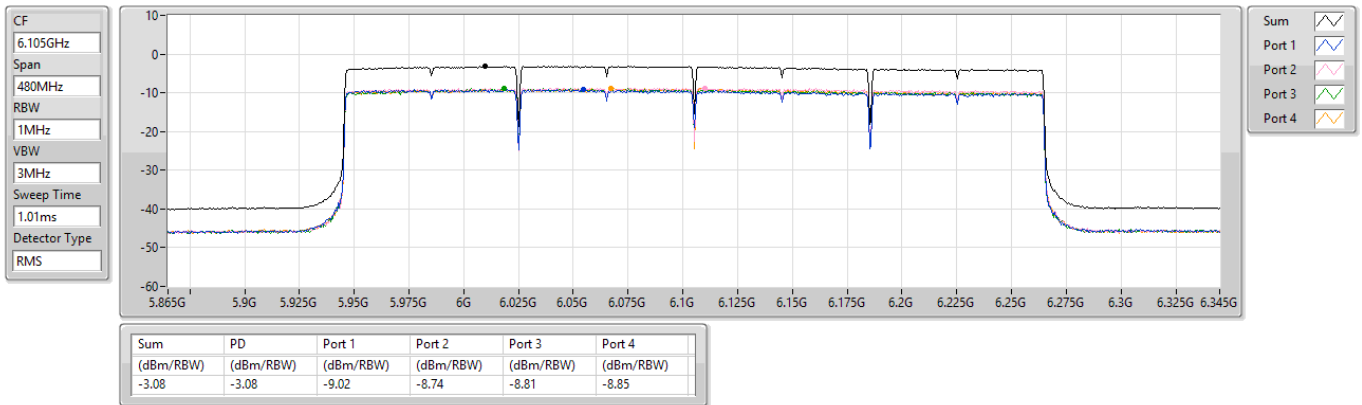

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6265MHz

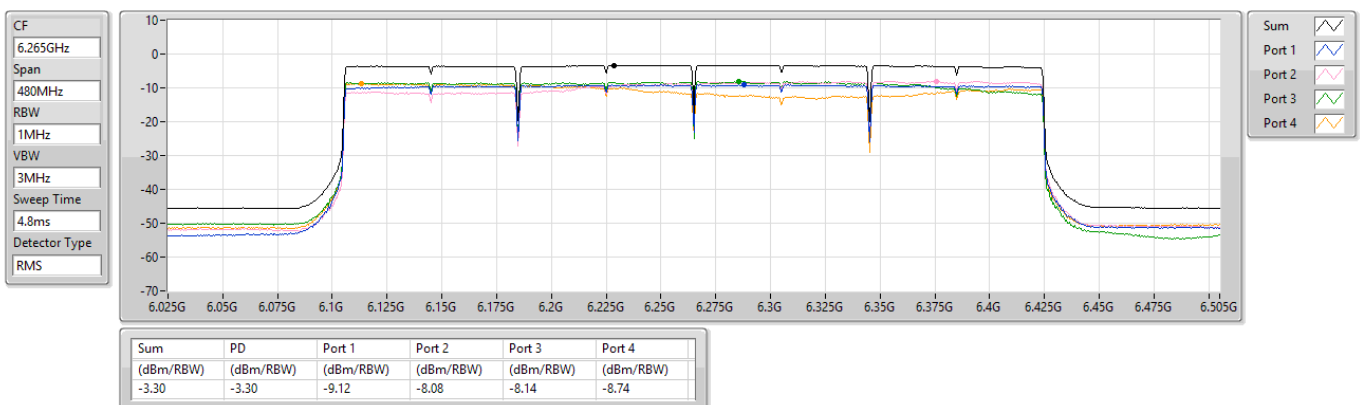

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6425MHz Straddle 5.925-6.425GHz

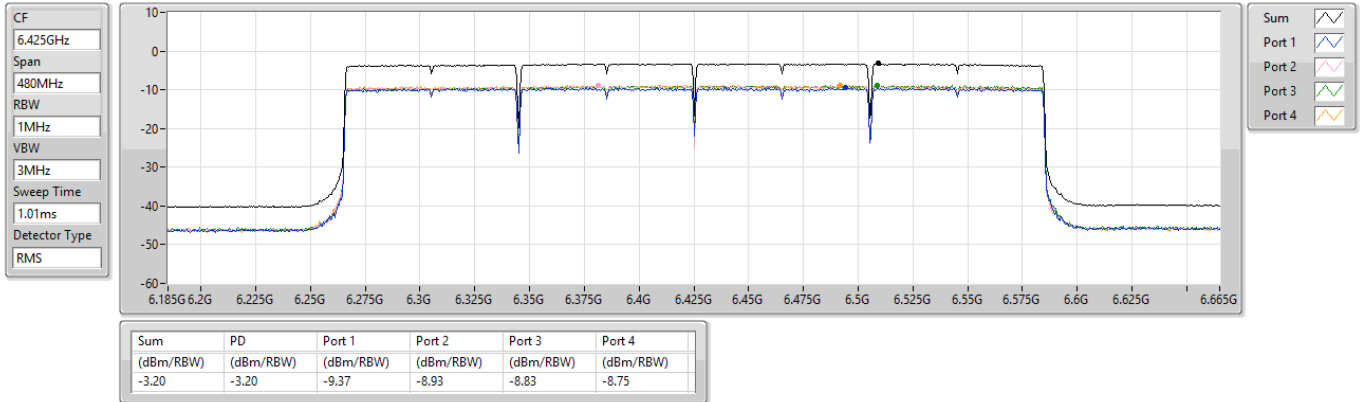

6.425-6.525GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6585MHz Straddle 6.425-6.525GHz

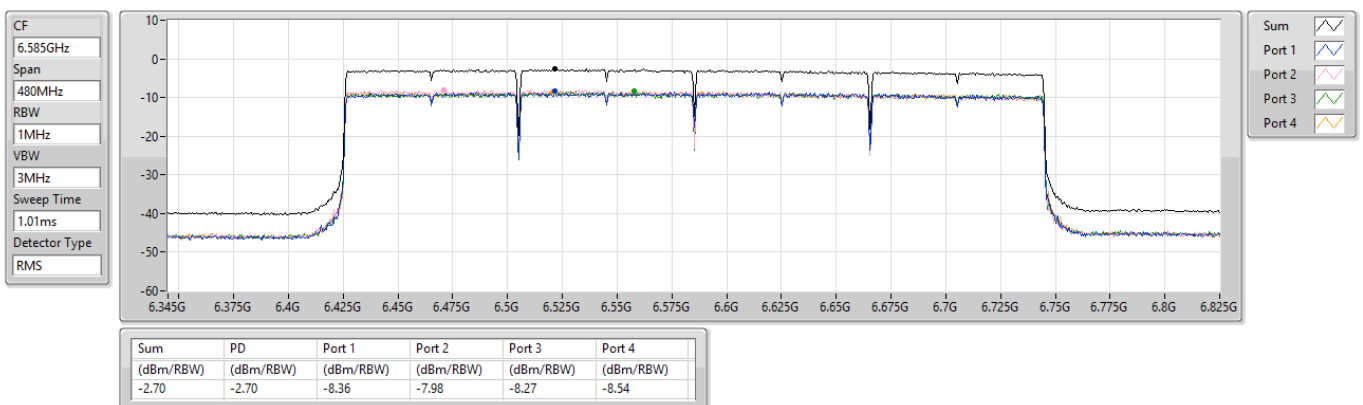

6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6745MHz Straddle 6.875-7.125GHz

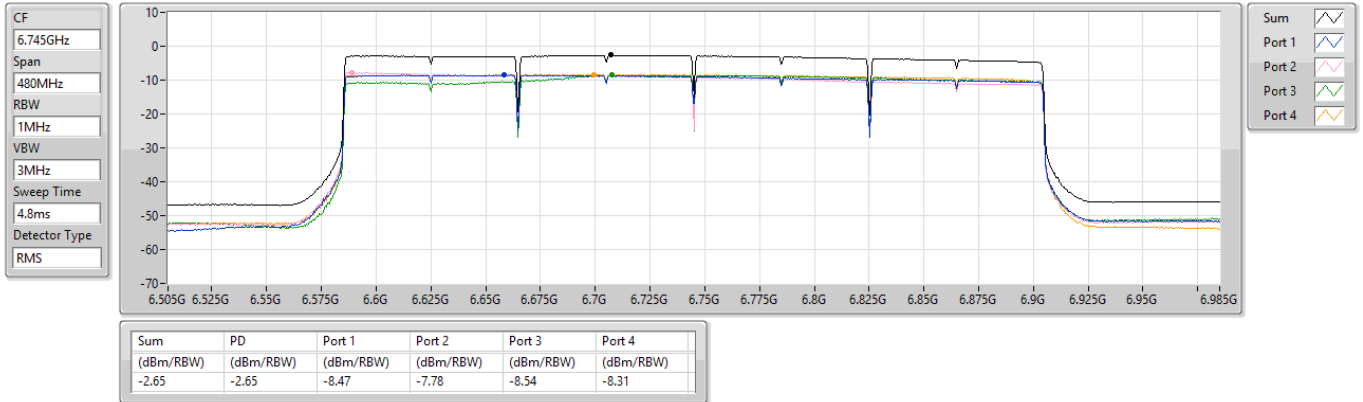

6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD

6905MHz Straddle 6.875-7.125GHz

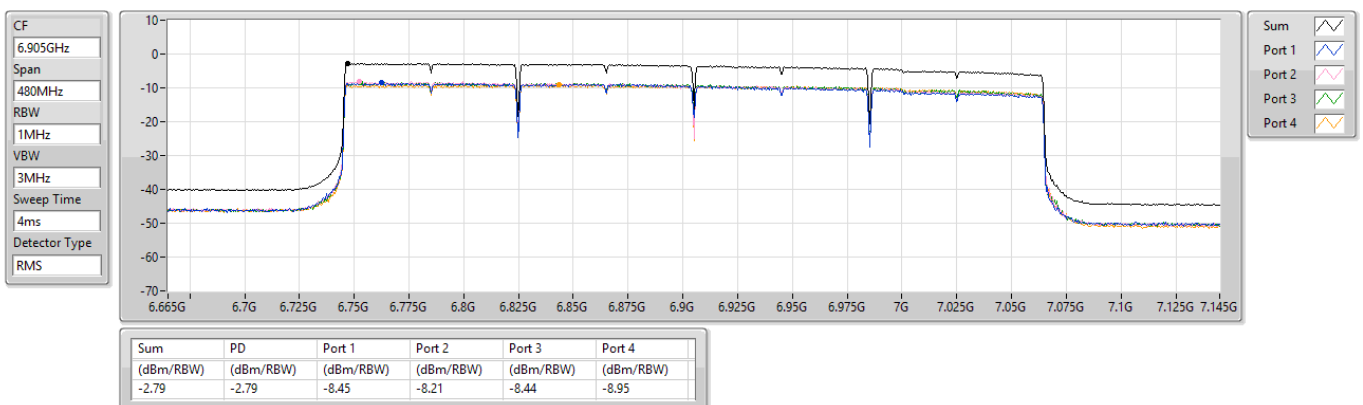



PoE mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>80.44</td><td>28.51</td><td>40.00</td><td>-11.49</td><td>41.88</td><td>-13.37</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>113.42</td><td>34.28</td><td>43.50</td><td>-9.22</td><td>45.82</td><td>-11.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>125.06</td><td>34.64</td><td>43.50</td><td>-8.86</td><td>45.21</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>159.01</td><td>32.29</td><td>43.50</td><td>-11.21</td><td>40.82</td><td>-8.53</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>30.73</td><td>46.00</td><td>-15.27</td><td>40.45</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>481.05</td><td>30.78</td><td>46.00</td><td>-15.22</td><td>33.42</td><td>-2.64</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	80.44	28.51	40.00	-11.49	41.88	-13.37	Peak	---	---	2	113.42	34.28	43.50	-9.22	45.82	-11.54	Peak	---	---	3	125.06	34.64	43.50	-8.86	45.21	-10.57	Peak	---	---	4	159.01	32.29	43.50	-11.21	40.82	-8.53	Peak	---	---	5	250.19	30.73	46.00	-15.27	40.45	-9.72	Peak	---	---	6	481.05	30.78	46.00	-15.22	33.42	-2.64	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	80.44	28.51	40.00	-11.49	41.88	-13.37	Peak	---	---																																																																
2	113.42	34.28	43.50	-9.22	45.82	-11.54	Peak	---	---																																																																
3	125.06	34.64	43.50	-8.86	45.21	-10.57	Peak	---	---																																																																
4	159.01	32.29	43.50	-11.21	40.82	-8.53	Peak	---	---																																																																
5	250.19	30.73	46.00	-15.27	40.45	-9.72	Peak	---	---																																																																
6	481.05	30.78	46.00	-15.22	33.42	-2.64	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>43.58</td><td>35.86</td><td>40.00</td><td>-4.14</td><td>44.07</td><td>-8.21</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>80.44</td><td>32.36</td><td>40.00</td><td>-7.64</td><td>45.73</td><td>-13.37</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>120.21</td><td>34.70</td><td>43.50</td><td>-8.80</td><td>45.63</td><td>-10.93</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>157.07</td><td>31.60</td><td>43.50</td><td>-11.90</td><td>40.14</td><td>-8.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>31.05</td><td>46.00</td><td>-14.95</td><td>40.77</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>389.87</td><td>30.58</td><td>46.00</td><td>-15.42</td><td>35.70</td><td>-5.12</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	43.58	35.86	40.00	-4.14	44.07	-8.21	Peak	---	---	2	80.44	32.36	40.00	-7.64	45.73	-13.37	Peak	---	---	3	120.21	34.70	43.50	-8.80	45.63	-10.93	Peak	---	---	4	157.07	31.60	43.50	-11.90	40.14	-8.54	Peak	---	---	5	250.19	31.05	46.00	-14.95	40.77	-9.72	Peak	---	---	6	389.87	30.58	46.00	-15.42	35.70	-5.12	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	43.58	35.86	40.00	-4.14	44.07	-8.21	Peak	---	---																																																																
2	80.44	32.36	40.00	-7.64	45.73	-13.37	Peak	---	---																																																																
3	120.21	34.70	43.50	-8.80	45.63	-10.93	Peak	---	---																																																																
4	157.07	31.60	43.50	-11.90	40.14	-8.54	Peak	---	---																																																																
5	250.19	31.05	46.00	-14.95	40.77	-9.72	Peak	---	---																																																																
6	389.87	30.58	46.00	-15.42	35.70	-5.12	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									




Adapter mode

Unwanted Emissions (Below 1GHz)

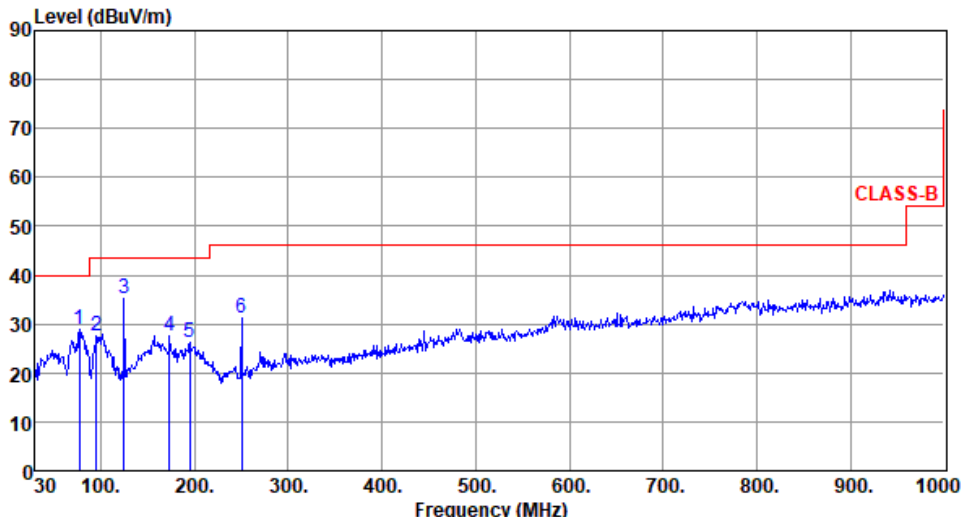Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>77.53</td><td>28.83</td><td>40.00</td><td>-11.17</td><td>41.32</td><td>-12.49</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>94.99</td><td>27.42</td><td>43.50</td><td>-16.08</td><td>41.29</td><td>-13.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>125.06</td><td>35.27</td><td>43.50</td><td>-8.23</td><td>45.84</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>173.56</td><td>27.62</td><td>43.50</td><td>-15.88</td><td>36.95</td><td>-9.33</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>194.90</td><td>26.36</td><td>43.50</td><td>-17.14</td><td>38.05</td><td>-11.69</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>31.35</td><td>46.00</td><td>-14.65</td><td>41.07</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	77.53	28.83	40.00	-11.17	41.32	-12.49	Peak	---	---	2	94.99	27.42	43.50	-16.08	41.29	-13.87	Peak	---	---	3	125.06	35.27	43.50	-8.23	45.84	-10.57	Peak	---	---	4	173.56	27.62	43.50	-15.88	36.95	-9.33	Peak	---	---	5	194.90	26.36	43.50	-17.14	38.05	-11.69	Peak	---	---	6	250.19	31.35	46.00	-14.65	41.07	-9.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	77.53	28.83	40.00	-11.17	41.32	-12.49	Peak	---	---																																																																
2	94.99	27.42	43.50	-16.08	41.29	-13.87	Peak	---	---																																																																
3	125.06	35.27	43.50	-8.23	45.84	-10.57	Peak	---	---																																																																
4	173.56	27.62	43.50	-15.88	36.95	-9.33	Peak	---	---																																																																
5	194.90	26.36	43.50	-17.14	38.05	-11.69	Peak	---	---																																																																
6	250.19	31.35	46.00	-14.65	41.07	-9.72	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

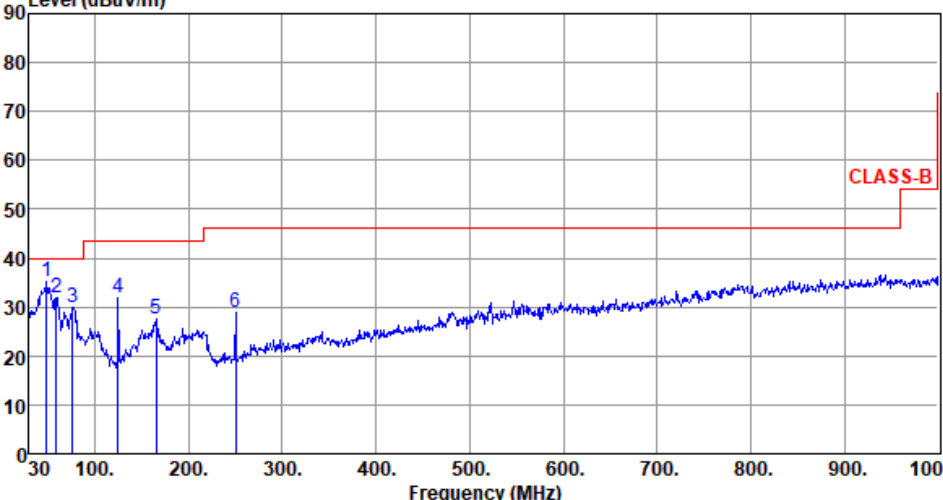


Modulation	be EHT320		Test Freq. (MHz)		6585																																																																																				
Polarization	Vertical																																																																																								
Test By :Brad Wu			Temperature(°C):26			Humidity(%):65																																																																																			
Level (dBUV/m)  CLASS-B <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>48.43</td><td>35.12</td><td>40.00</td><td>-4.88</td><td>42.99</td><td>-7.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>59.10</td><td>31.96</td><td>40.00</td><td>-8.04</td><td>40.53</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>76.56</td><td>30.02</td><td>40.00</td><td>-9.98</td><td>42.29</td><td>-12.27</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>125.06</td><td>31.83</td><td>43.50</td><td>-11.67</td><td>42.40</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>165.80</td><td>27.51</td><td>43.50</td><td>-15.99</td><td>36.31</td><td>-8.80</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>28.80</td><td>46.00</td><td>-17.20</td><td>38.52</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	48.43	35.12	40.00	-4.88	42.99	-7.87	Peak	---	---	2	59.10	31.96	40.00	-8.04	40.53	-8.57	Peak	---	---	3	76.56	30.02	40.00	-9.98	42.29	-12.27	Peak	---	---	4	125.06	31.83	43.50	-11.67	42.40	-10.57	Peak	---	---	5	165.80	27.51	43.50	-15.99	36.31	-8.80	Peak	---	---	6	250.19	28.80	46.00	-17.20	38.52	-9.72	Peak	---	---
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																
1	48.43	35.12	40.00	-4.88	42.99	-7.87	Peak	---	---																																																																																
2	59.10	31.96	40.00	-8.04	40.53	-8.57	Peak	---	---																																																																																
3	76.56	30.02	40.00	-9.98	42.29	-12.27	Peak	---	---																																																																																
4	125.06	31.83	43.50	-11.67	42.40	-10.57	Peak	---	---																																																																																
5	165.80	27.51	43.50	-15.99	36.31	-8.80	Peak	---	---																																																																																
6	250.19	28.80	46.00	-17.20	38.52	-9.72	Peak	---	---																																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																									

Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5935
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			


Modulation	be EHT20	Test Freq. (MHz)	5935																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>67.52</td><td>68.20</td><td>-0.68</td><td>66.01</td><td>1.51</td><td>Average</td><td>196</td><td>6</td></tr><tr><td>2</td><td>5925.00</td><td>80.97</td><td>88.20</td><td>-7.23</td><td>79.46</td><td>1.51</td><td>Peak</td><td>196</td><td>6</td></tr><tr><td>3 *</td><td>5935.00</td><td>88.48</td><td></td><td></td><td>86.96</td><td>1.52</td><td>Average</td><td>196</td><td>6</td></tr><tr><td>4 *</td><td>5935.00</td><td>101.35</td><td></td><td></td><td>99.83</td><td>1.52</td><td>Peak</td><td>196</td><td>6</td></tr><tr><td>5</td><td>11870.00</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>34.02</td><td>7.56</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>11870.00</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>47.40</td><td>7.56</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>7</td><td>17805.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>31.63</td><td>9.29</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>8</td><td>17805.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>44.20</td><td>9.29</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>9</td><td>23740.00</td><td>43.19</td><td>54.00</td><td>-10.81</td><td>35.96</td><td>7.23</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>10</td><td>23740.00</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>48.88</td><td>7.23</td><td>Peak</td><td>100</td><td>15</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	67.52	68.20	-0.68	66.01	1.51	Average	196	6	2	5925.00	80.97	88.20	-7.23	79.46	1.51	Peak	196	6	3 *	5935.00	88.48			86.96	1.52	Average	196	6	4 *	5935.00	101.35			99.83	1.52	Peak	196	6	5	11870.00	41.58	54.00	-12.42	34.02	7.56	Average	100	21	6	11870.00	54.96	74.00	-19.04	47.40	7.56	Peak	100	21	7	17805.00	40.92	54.00	-13.08	31.63	9.29	Average	100	28	8	17805.00	53.49	74.00	-20.51	44.20	9.29	Peak	100	28	9	23740.00	43.19	54.00	-10.81	35.96	7.23	Average	100	15	10	23740.00	56.11	74.00	-17.89	48.88	7.23	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5925.00	67.52	68.20	-0.68	66.01	1.51	Average	196	6																																																																																																								
2	5925.00	80.97	88.20	-7.23	79.46	1.51	Peak	196	6																																																																																																								
3 *	5935.00	88.48			86.96	1.52	Average	196	6																																																																																																								
4 *	5935.00	101.35			99.83	1.52	Peak	196	6																																																																																																								
5	11870.00	41.58	54.00	-12.42	34.02	7.56	Average	100	21																																																																																																								
6	11870.00	54.96	74.00	-19.04	47.40	7.56	Peak	100	21																																																																																																								
7	17805.00	40.92	54.00	-13.08	31.63	9.29	Average	100	28																																																																																																								
8	17805.00	53.49	74.00	-20.51	44.20	9.29	Peak	100	28																																																																																																								
9	23740.00	43.19	54.00	-10.81	35.96	7.23	Average	100	15																																																																																																								
10	23740.00	56.11	74.00	-17.89	48.88	7.23	Peak	100	15																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

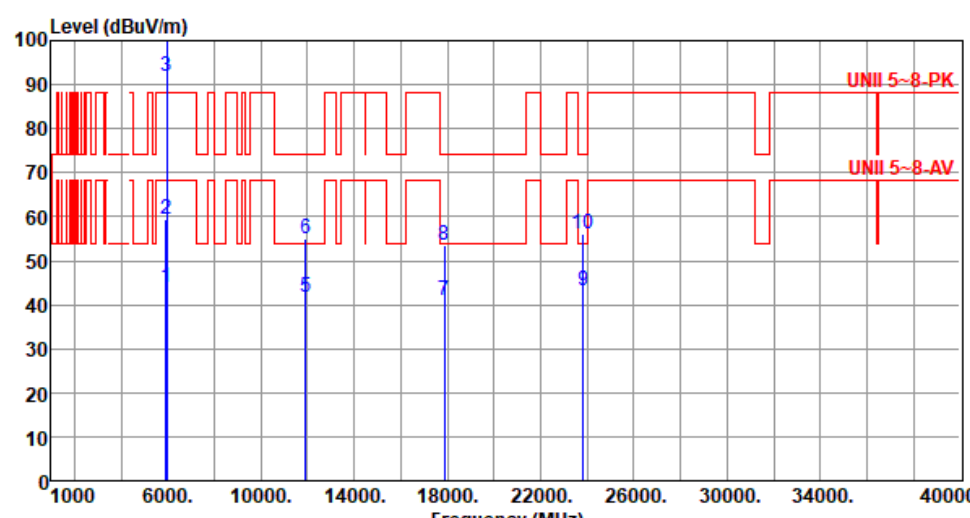

Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.80	68.20	-24.40	42.29	1.51	Average	167	3
2	5925.00	59.40	88.20	-28.80	57.89	1.51	Peak	167	3
3 *	5955.00	92.00			90.47	1.53	Average	167	3
4 *	5955.00	105.98			104.45	1.53	Peak	167	3
5	11910.00	41.60	54.00	-12.40	34.06	7.54	Average	100	36
6	11910.00	55.01	74.00	-18.99	47.47	7.54	Peak	100	36
7	17865.00	41.02	54.00	-12.98	30.96	10.06	Average	100	21
8	17865.00	53.54	74.00	-20.46	43.48	10.06	Peak	100	21
9	23820.00	43.24	54.00	-10.76	35.94	7.30	Average	100	48
10	23820.00	56.19	74.00	-17.81	48.89	7.30	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

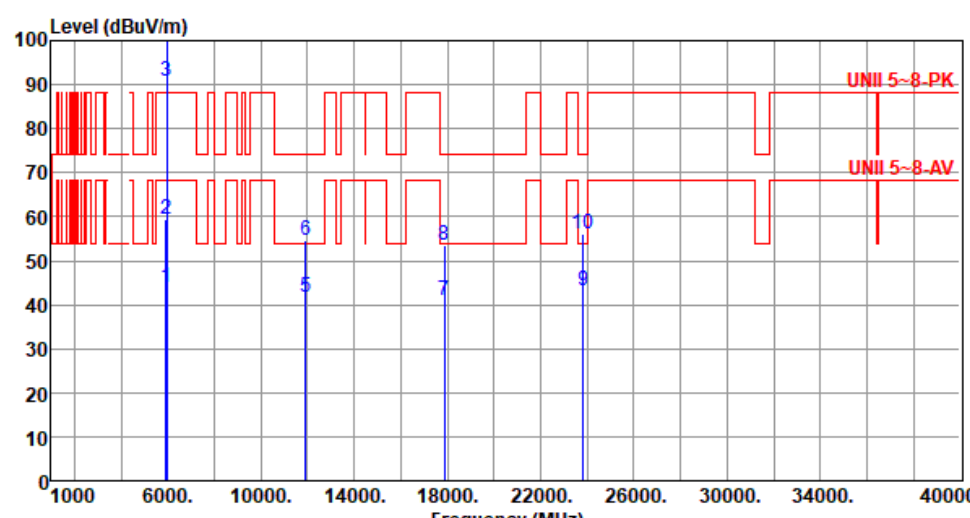


Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.76	68.20	-24.44	42.25	1.51	Average	195	8
2	5925.00	59.35	88.20	-28.85	57.84	1.51	Peak	195	8
3 *	5955.00	90.94			89.41	1.53	Average	195	8
4 *	5955.00	104.81			103.28	1.53	Peak	195	8
5	11910.00	41.59	54.00	-12.41	34.05	7.54	Average	100	29
6	11910.00	54.76	74.00	-19.24	47.22	7.54	Peak	100	29
7	17865.00	40.95	54.00	-13.05	30.89	10.06	Average	100	26
8	17865.00	53.48	74.00	-20.52	43.42	10.06	Peak	100	26
9	23820.00	43.18	54.00	-10.82	35.88	7.30	Average	100	51
10	23820.00	56.15	74.00	-17.85	48.85	7.30	Peak	100	51
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):64			
Level (dBuV/m)			

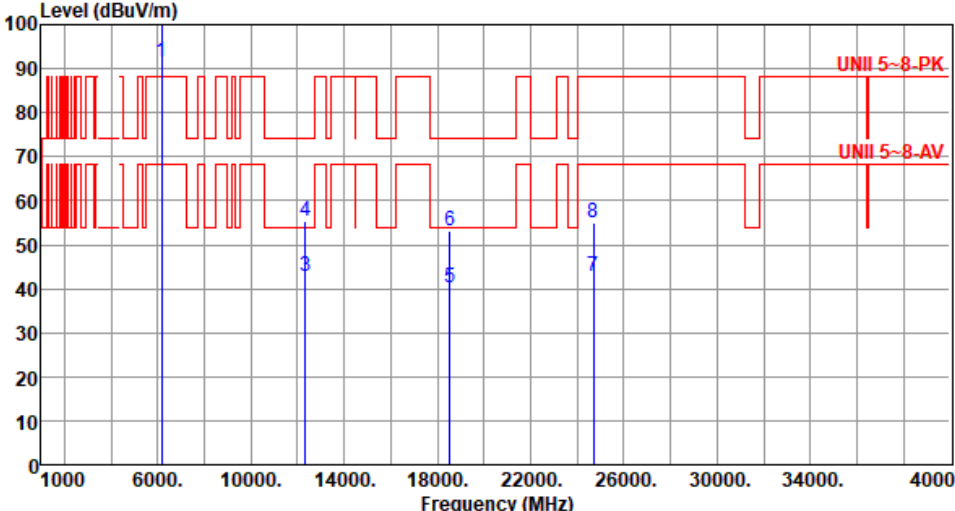


Modulation	be EHT20	Test Freq. (MHz)	6175																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6175.00</td><td>91.46</td><td></td><td></td><td>89.51</td><td>1.95</td><td>Average</td><td>194</td><td>9</td></tr><tr><td>2 *</td><td>6175.00</td><td>105.25</td><td></td><td></td><td>103.30</td><td>1.95</td><td>Peak</td><td>194</td><td>9</td></tr><tr><td>3</td><td>12350.00</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>35.50</td><td>7.29</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td>12350.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>47.89</td><td>7.29</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5</td><td>18525.00</td><td>40.19</td><td>54.00</td><td>-13.81</td><td>38.64</td><td>1.55</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>18525.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>51.41</td><td>1.55</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>7</td><td>24700.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>34.35</td><td>8.36</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>8</td><td>24700.00</td><td>55.12</td><td>88.20</td><td>-33.08</td><td>46.76</td><td>8.36</td><td>Peak</td><td>100</td><td>41</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6175.00	91.46			89.51	1.95	Average	194	9	2 *	6175.00	105.25			103.30	1.95	Peak	194	9	3	12350.00	42.79	54.00	-11.21	35.50	7.29	Average	100	29	4	12350.00	55.18	74.00	-18.82	47.89	7.29	Peak	100	29	5	18525.00	40.19	54.00	-13.81	38.64	1.55	Average	100	22	6	18525.00	52.96	74.00	-21.04	51.41	1.55	Peak	100	22	7	24700.00	42.71	68.20	-25.49	34.35	8.36	Average	100	41	8	24700.00	55.12	88.20	-33.08	46.76	8.36	Peak	100	41
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6175.00	91.46			89.51	1.95	Average	194	9																																																																																																								
2 *	6175.00	105.25			103.30	1.95	Peak	194	9																																																																																																								
3	12350.00	42.79	54.00	-11.21	35.50	7.29	Average	100	29																																																																																																								
4	12350.00	55.18	74.00	-18.82	47.89	7.29	Peak	100	29																																																																																																								
5	18525.00	40.19	54.00	-13.81	38.64	1.55	Average	100	22																																																																																																								
6	18525.00	52.96	74.00	-21.04	51.41	1.55	Peak	100	22																																																																																																								
7	24700.00	42.71	68.20	-25.49	34.35	8.36	Average	100	41																																																																																																								
8	24700.00	55.12	88.20	-33.08	46.76	8.36	Peak	100	41																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6415.00</td><td>92.20</td><td></td><td>89.05</td><td>3.15</td><td>Average</td><td>178</td><td>341</td></tr><tr><td>2</td><td>*</td><td>6415.00</td><td>105.89</td><td></td><td>102.74</td><td>3.15</td><td>Peak</td><td>178</td><td>341</td></tr><tr><td>3</td><td></td><td>12830.00</td><td>43.16</td><td>68.20 -25.04</td><td>35.59</td><td>7.57</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>4</td><td></td><td>12830.00</td><td>55.28</td><td>88.20 -32.92</td><td>47.71</td><td>7.57</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>5</td><td></td><td>19245.00</td><td>41.14</td><td>54.00 -12.86</td><td>39.39</td><td>1.75</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td></td><td>19245.00</td><td>53.52</td><td>74.00 -20.48</td><td>51.77</td><td>1.75</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>7</td><td></td><td>25660.00</td><td>43.48</td><td>68.20 -24.72</td><td>35.31</td><td>8.17</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>8</td><td></td><td>25660.00</td><td>56.39</td><td>88.20 -31.81</td><td>48.22</td><td>8.17</td><td>Peak</td><td>100</td><td>47</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6415.00	92.20		89.05	3.15	Average	178	341	2	*	6415.00	105.89		102.74	3.15	Peak	178	341	3		12830.00	43.16	68.20 -25.04	35.59	7.57	Average	100	31	4		12830.00	55.28	88.20 -32.92	47.71	7.57	Peak	100	31	5		19245.00	41.14	54.00 -12.86	39.39	1.75	Average	100	38	6		19245.00	53.52	74.00 -20.48	51.77	1.75	Peak	100	38	7		25660.00	43.48	68.20 -24.72	35.31	8.17	Average	100	47	8		25660.00	56.39	88.20 -31.81	48.22	8.17	Peak	100	47
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6415.00	92.20		89.05	3.15	Average	178	341																																																																																																								
2	*	6415.00	105.89		102.74	3.15	Peak	178	341																																																																																																								
3		12830.00	43.16	68.20 -25.04	35.59	7.57	Average	100	31																																																																																																								
4		12830.00	55.28	88.20 -32.92	47.71	7.57	Peak	100	31																																																																																																								
5		19245.00	41.14	54.00 -12.86	39.39	1.75	Average	100	38																																																																																																								
6		19245.00	53.52	74.00 -20.48	51.77	1.75	Peak	100	38																																																																																																								
7		25660.00	43.48	68.20 -24.72	35.31	8.17	Average	100	47																																																																																																								
8		25660.00	56.39	88.20 -31.81	48.22	8.17	Peak	100	47																																																																																																								

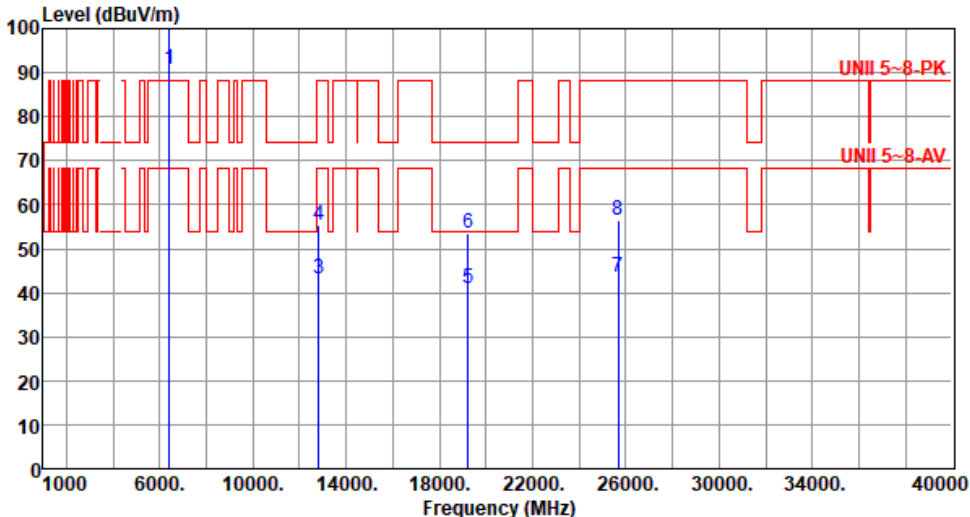


Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):64			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 1 * 2 * 3 4 5 6 7 8 6415.00 6415.00 12830.00 12830.00 19245.00 19245.00 25660.00 25660.00 90.85 103.96 43.19 55.31 41.08 53.46 43.42 56.34 68.20 88.20 54.00 74.00 68.20 88.20 -25.01 -32.89 -12.92 -20.54 -24.78 -31.86 87.70 100.81 35.62 47.74 39.33 51.71 35.25 48.17 3.15 3.15 7.57 7.57 1.75 1.75 8.17 8.17 Average Peak Average Peak Average Peak Average Peak 144 144 100 100 100 100 100 100 356 356 25 25 42 42 21 21			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency			



Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6435.00	92.69			89.48	3.21	Average	178	342
2 *	6435.00	105.84			102.63	3.21	Peak	178	342
3	12870.00	42.75	68.20	-25.45	35.15	7.60	Average	100	51
4	12870.00	55.04	88.20	-33.16	47.44	7.60	Peak	100	51
5	19305.00	41.46	54.00	-12.54	39.65	1.81	Average	100	22
6	19305.00	53.85	74.00	-20.15	52.04	1.81	Peak	100	22
7	25740.00	43.56	68.20	-24.64	35.41	8.15	Average	100	29
8	25740.00	56.31	88.20	-31.89	48.16	8.15	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

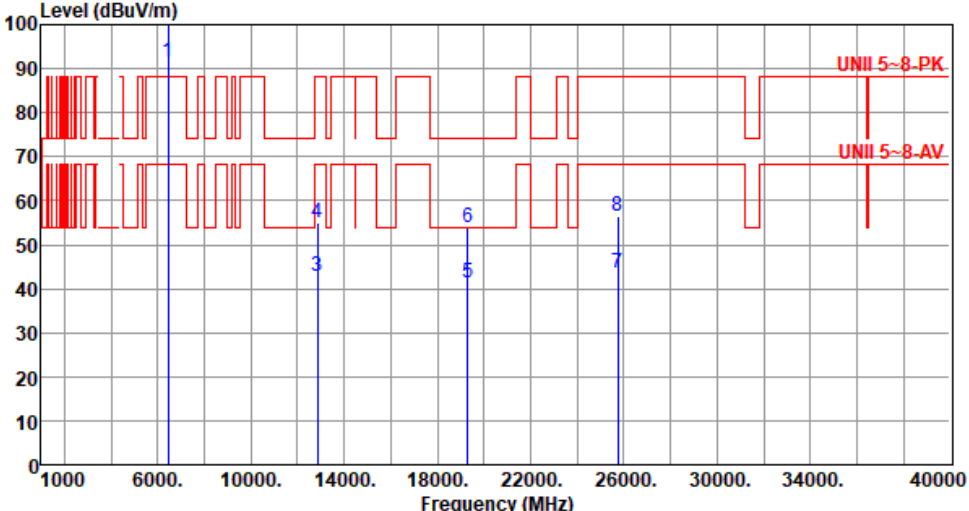


Modulation	be EHT20	Test Freq. (MHz)	6435																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
																																																																																																																	
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6435.00</td><td>91.62</td><td></td><td></td><td>88.41</td><td>3.21</td><td>Average</td><td>146</td><td>351</td></tr><tr><td>2 *</td><td>6435.00</td><td>104.75</td><td></td><td></td><td>101.54</td><td>3.21</td><td>Peak</td><td>146</td><td>351</td></tr><tr><td>3</td><td>12870.00</td><td>42.65</td><td>68.20</td><td>-25.55</td><td>35.05</td><td>7.60</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>4</td><td>12870.00</td><td>54.92</td><td>88.20</td><td>-33.28</td><td>47.32</td><td>7.60</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>5</td><td>19305.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>39.55</td><td>1.81</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>19305.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>51.97</td><td>1.81</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>7</td><td>25740.00</td><td>43.62</td><td>68.20</td><td>-24.58</td><td>35.47</td><td>8.15</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>8</td><td>25740.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>48.20</td><td>8.15</td><td>Peak</td><td>100</td><td>44</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6435.00	91.62			88.41	3.21	Average	146	351	2 *	6435.00	104.75			101.54	3.21	Peak	146	351	3	12870.00	42.65	68.20	-25.55	35.05	7.60	Average	100	43	4	12870.00	54.92	88.20	-33.28	47.32	7.60	Peak	100	43	5	19305.00	41.36	54.00	-12.64	39.55	1.81	Average	100	45	6	19305.00	53.78	74.00	-20.22	51.97	1.81	Peak	100	45	7	25740.00	43.62	68.20	-24.58	35.47	8.15	Average	100	44	8	25740.00	56.35	88.20	-31.85	48.20	8.15	Peak	100	44		
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6435.00	91.62			88.41	3.21	Average	146	351																																																																																																								
2 *	6435.00	104.75			101.54	3.21	Peak	146	351																																																																																																								
3	12870.00	42.65	68.20	-25.55	35.05	7.60	Average	100	43																																																																																																								
4	12870.00	54.92	88.20	-33.28	47.32	7.60	Peak	100	43																																																																																																								
5	19305.00	41.36	54.00	-12.64	39.55	1.81	Average	100	45																																																																																																								
6	19305.00	53.78	74.00	-20.22	51.97	1.81	Peak	100	45																																																																																																								
7	25740.00	43.62	68.20	-24.58	35.47	8.15	Average	100	44																																																																																																								
8	25740.00	56.35	88.20	-31.85	48.20	8.15	Peak	100	44																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	6475																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6475.00</td><td>93.60</td><td></td><td>90.19</td><td>3.41</td><td>Average</td><td>167</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6475.00</td><td>106.87</td><td></td><td>103.46</td><td>3.41</td><td>Peak</td><td>167</td><td>5</td></tr><tr><td>3</td><td></td><td>12950.00</td><td>43.25</td><td>68.20 -24.95</td><td>35.72</td><td>7.53</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>4</td><td></td><td>12950.00</td><td>55.48</td><td>88.20 -32.72</td><td>47.95</td><td>7.53</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>5</td><td></td><td>19425.00</td><td>41.46</td><td>54.00 -12.54</td><td>39.54</td><td>1.92</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td></td><td>19425.00</td><td>53.78</td><td>74.00 -20.22</td><td>51.86</td><td>1.92</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>7</td><td></td><td>25900.00</td><td>43.52</td><td>68.20 -24.68</td><td>35.34</td><td>8.18</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>8</td><td></td><td>25900.00</td><td>56.39</td><td>88.20 -31.81</td><td>48.21</td><td>8.18</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	*	6475.00	93.60		90.19	3.41	Average	167	5	2	*	6475.00	106.87		103.46	3.41	Peak	167	5	3		12950.00	43.25	68.20 -24.95	35.72	7.53	Average	100	46	4		12950.00	55.48	88.20 -32.72	47.95	7.53	Peak	100	46	5		19425.00	41.46	54.00 -12.54	39.54	1.92	Average	100	51	6		19425.00	53.78	74.00 -20.22	51.86	1.92	Peak	100	51	7		25900.00	43.52	68.20 -24.68	35.34	8.18	Average	100	64	8		25900.00	56.39	88.20 -31.81	48.21	8.18	Peak	100	64
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
					dBuV			cm	deg																																																																																																								
1	*	6475.00	93.60		90.19	3.41	Average	167	5																																																																																																								
2	*	6475.00	106.87		103.46	3.41	Peak	167	5																																																																																																								
3		12950.00	43.25	68.20 -24.95	35.72	7.53	Average	100	46																																																																																																								
4		12950.00	55.48	88.20 -32.72	47.95	7.53	Peak	100	46																																																																																																								
5		19425.00	41.46	54.00 -12.54	39.54	1.92	Average	100	51																																																																																																								
6		19425.00	53.78	74.00 -20.22	51.86	1.92	Peak	100	51																																																																																																								
7		25900.00	43.52	68.20 -24.68	35.34	8.18	Average	100	64																																																																																																								
8		25900.00	56.39	88.20 -31.81	48.21	8.18	Peak	100	64																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

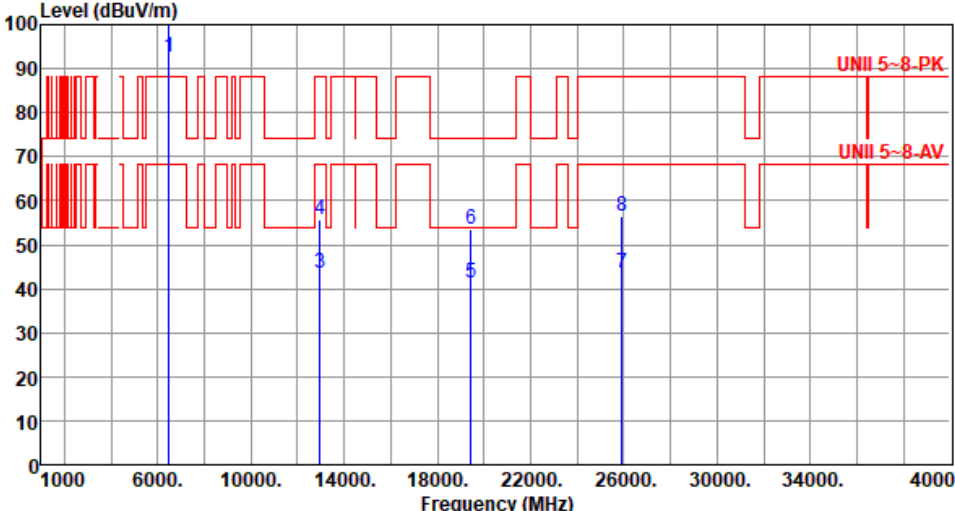


Modulation	be EHT20	Test Freq. (MHz)	6475																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6475.00</td><td>92.52</td><td></td><td></td><td>89.11</td><td>3.41</td><td>Average</td><td>141</td><td>359</td></tr><tr><td>2 *</td><td>6475.00</td><td>103.74</td><td></td><td></td><td>100.33</td><td>3.41</td><td>Peak</td><td>141</td><td>359</td></tr><tr><td>3</td><td>12950.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>35.83</td><td>7.53</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>4</td><td>12950.00</td><td>55.56</td><td>88.20</td><td>-32.64</td><td>48.03</td><td>7.53</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>5</td><td>19425.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>39.43</td><td>1.92</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>19425.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>51.77</td><td>1.92</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>7</td><td>25900.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>35.40</td><td>8.18</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>8</td><td>25900.00</td><td>56.42</td><td>88.20</td><td>-31.78</td><td>48.24</td><td>8.18</td><td>Peak</td><td>100</td><td>32</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6475.00	92.52			89.11	3.41	Average	141	359	2 *	6475.00	103.74			100.33	3.41	Peak	141	359	3	12950.00	43.36	68.20	-24.84	35.83	7.53	Average	100	27	4	12950.00	55.56	88.20	-32.64	48.03	7.53	Peak	100	27	5	19425.00	41.35	54.00	-12.65	39.43	1.92	Average	100	24	6	19425.00	53.69	74.00	-20.31	51.77	1.92	Peak	100	24	7	25900.00	43.58	68.20	-24.62	35.40	8.18	Average	100	32	8	25900.00	56.42	88.20	-31.78	48.24	8.18	Peak	100	32
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6475.00	92.52			89.11	3.41	Average	141	359																																																																																				
2 *	6475.00	103.74			100.33	3.41	Peak	141	359																																																																																				
3	12950.00	43.36	68.20	-24.84	35.83	7.53	Average	100	27																																																																																				
4	12950.00	55.56	88.20	-32.64	48.03	7.53	Peak	100	27																																																																																				
5	19425.00	41.35	54.00	-12.65	39.43	1.92	Average	100	24																																																																																				
6	19425.00	53.69	74.00	-20.31	51.77	1.92	Peak	100	24																																																																																				
7	25900.00	43.58	68.20	-24.62	35.40	8.18	Average	100	32																																																																																				
8	25900.00	56.42	88.20	-31.78	48.24	8.18	Peak	100	32																																																																																				

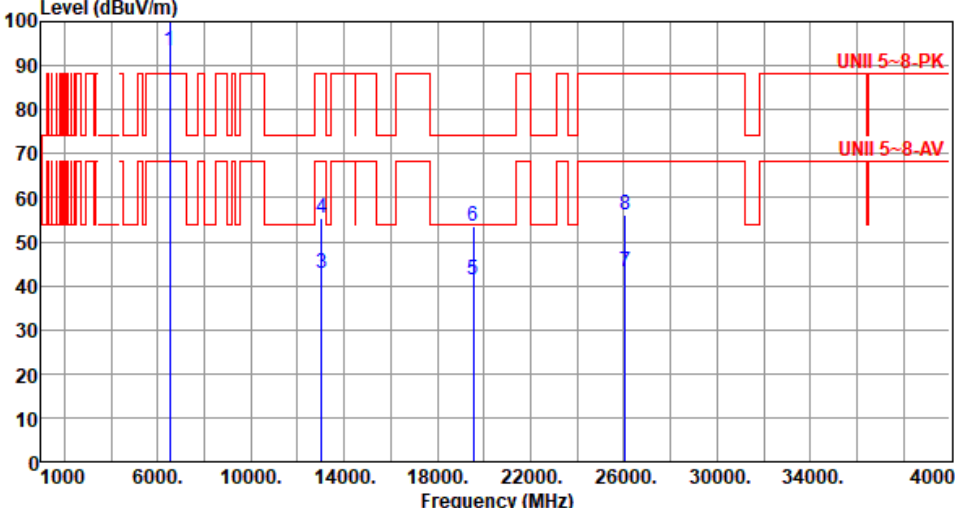


Modulation	be EHT20	Test Freq. (MHz)	6515																																																																																																			
Polarization	Horizontal																																																																																																					
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																						
 <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6515.00</td><td>93.47</td><td></td><td></td><td>89.85</td><td>3.62</td><td>Average</td><td>170</td><td>2</td></tr><tr><td>2</td><td>*</td><td>6515.00</td><td>106.69</td><td></td><td></td><td>103.07</td><td>3.62</td><td>Peak</td><td>170</td><td>2</td></tr><tr><td>3</td><td></td><td>13030.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>35.49</td><td>7.37</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>4</td><td></td><td>13030.00</td><td>55.25</td><td>88.20</td><td>-32.95</td><td>47.88</td><td>7.37</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>5</td><td></td><td>19545.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>39.15</td><td>2.01</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td></td><td>19545.00</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>51.53</td><td>2.01</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>7</td><td></td><td>26060.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>35.04</td><td>8.25</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td></td><td>26060.00</td><td>56.17</td><td>88.20</td><td>-32.03</td><td>47.92</td><td>8.25</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table>						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6515.00	93.47			89.85	3.62	Average	170	2	2	*	6515.00	106.69			103.07	3.62	Peak	170	2	3		13030.00	42.86	68.20	-25.34	35.49	7.37	Average	100	34	4		13030.00	55.25	88.20	-32.95	47.88	7.37	Peak	100	34	5		19545.00	41.16	54.00	-12.84	39.15	2.01	Average	100	28	6		19545.00	53.54	74.00	-20.46	51.53	2.01	Peak	100	28	7		26060.00	43.29	68.20	-24.91	35.04	8.25	Average	100	35	8		26060.00	56.17	88.20	-32.03	47.92	8.25	Peak	100	35
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6515.00	93.47			89.85	3.62	Average	170	2																																																																																												
2	*	6515.00	106.69			103.07	3.62	Peak	170	2																																																																																												
3		13030.00	42.86	68.20	-25.34	35.49	7.37	Average	100	34																																																																																												
4		13030.00	55.25	88.20	-32.95	47.88	7.37	Peak	100	34																																																																																												
5		19545.00	41.16	54.00	-12.84	39.15	2.01	Average	100	28																																																																																												
6		19545.00	53.54	74.00	-20.46	51.53	2.01	Peak	100	28																																																																																												
7		26060.00	43.29	68.20	-24.91	35.04	8.25	Average	100	35																																																																																												
8		26060.00	56.17	88.20	-32.03	47.92	8.25	Peak	100	35																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																						

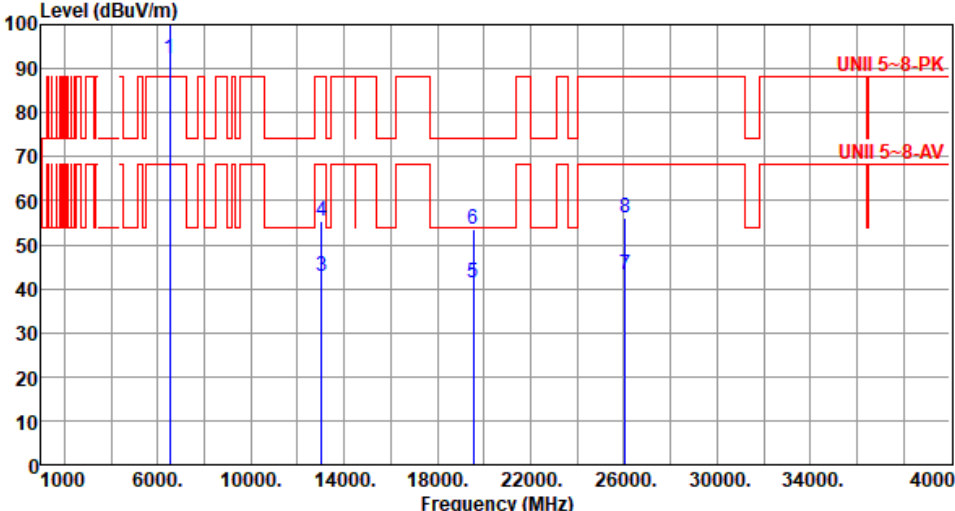


Modulation	be EHT20	Test Freq. (MHz)	6515						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	*	6515.00	92.42		88.80	3.62	Average	146	358
2	*	6515.00	105.58		101.96	3.62	Peak	146	358
3		13030.00	42.75	68.20 -25.45	35.38	7.37	Average	100	21
4		13030.00	55.18	88.20 -33.02	47.81	7.37	Peak	100	21
5		19545.00	41.22	54.00 -12.78	39.21	2.01	Average	100	36
6		19545.00	53.58	74.00 -20.42	51.57	2.01	Peak	100	36
7		26060.00	43.16	68.20 -25.04	34.91	8.25	Average	100	22
8		26060.00	56.09	88.20 -32.11	47.84	8.25	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

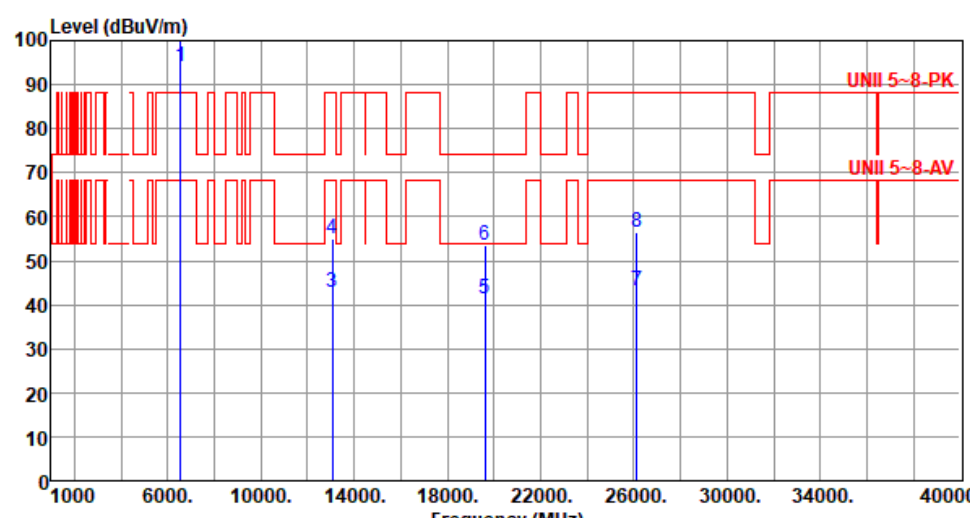

Modulation	be EHT20	Test Freq. (MHz)	6535						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6535.00	94.27			90.57	3.70	Average	196	356
2 *	6535.00	108.06			104.36	3.70	Peak	196	356
3	13070.00	42.94	68.20	-25.26	35.68	7.26	Average	100	29
4	13070.00	55.14	88.20	-33.06	47.88	7.26	Peak	100	29
5	19605.00	41.25	54.00	-12.75	39.22	2.03	Average	100	45
6	19605.00	53.67	74.00	-20.33	51.64	2.03	Peak	100	45
7	26140.00	43.35	68.20	-24.85	35.01	8.34	Average	100	41
8	26140.00	56.28	88.20	-31.92	47.94	8.34	Peak	100	41
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)									
*Factor includes antenna factor , cable loss and amplifier gain									
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									
Note 3:"*" is Peak / Average value of fundamental frequency									

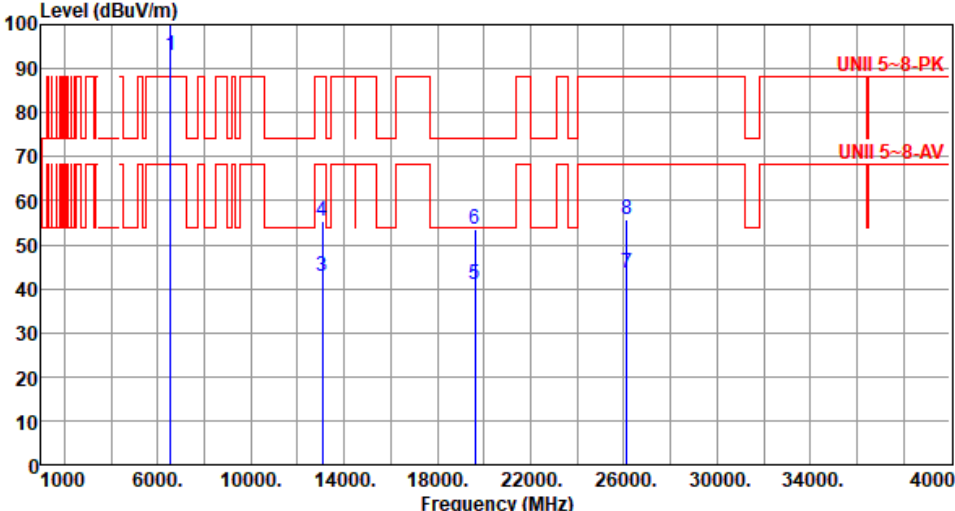

Modulation	be EHT20	Test Freq. (MHz)	6535																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																												
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6535.00</td><td>92.98</td><td></td><td></td><td>89.28</td><td>3.70</td><td>Average</td><td>145</td><td>353</td></tr><tr><td>2</td><td>*</td><td>6535.00</td><td>106.08</td><td></td><td></td><td>102.38</td><td>3.70</td><td>Peak</td><td>145</td><td>353</td></tr><tr><td>3</td><td></td><td>13070.00</td><td>42.90</td><td>68.20</td><td>-25.30</td><td>35.64</td><td>7.26</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>4</td><td></td><td>13070.00</td><td>55.26</td><td>88.20</td><td>-32.94</td><td>48.00</td><td>7.26</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>5</td><td></td><td>19605.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>38.89</td><td>2.03</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td></td><td>19605.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>51.63</td><td>2.03</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>7</td><td></td><td>26140.00</td><td>43.67</td><td>68.20</td><td>-24.53</td><td>35.33</td><td>8.34</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>8</td><td></td><td>26140.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>47.48</td><td>8.34</td><td>Peak</td><td>100</td><td>16</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6535.00	92.98			89.28	3.70	Average	145	353	2	*	6535.00	106.08			102.38	3.70	Peak	145	353	3		13070.00	42.90	68.20	-25.30	35.64	7.26	Average	100	14	4		13070.00	55.26	88.20	-32.94	48.00	7.26	Peak	100	14	5		19605.00	40.92	54.00	-13.08	38.89	2.03	Average	100	25	6		19605.00	53.66	74.00	-20.34	51.63	2.03	Peak	100	25	7		26140.00	43.67	68.20	-24.53	35.33	8.34	Average	100	16	8		26140.00	55.82	88.20	-32.38	47.48	8.34	Peak	100	16
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6535.00	92.98			89.28	3.70	Average	145	353																																																																																																																		
2	*	6535.00	106.08			102.38	3.70	Peak	145	353																																																																																																																		
3		13070.00	42.90	68.20	-25.30	35.64	7.26	Average	100	14																																																																																																																		
4		13070.00	55.26	88.20	-32.94	48.00	7.26	Peak	100	14																																																																																																																		
5		19605.00	40.92	54.00	-13.08	38.89	2.03	Average	100	25																																																																																																																		
6		19605.00	53.66	74.00	-20.34	51.63	2.03	Peak	100	25																																																																																																																		
7		26140.00	43.67	68.20	-24.53	35.33	8.34	Average	100	16																																																																																																																		
8		26140.00	55.82	88.20	-32.38	47.48	8.34	Peak	100	16																																																																																																																		




Modulation	be EHT20	Test Freq. (MHz)	6715																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6715.00</td><td>94.85</td><td></td><td></td><td>91.12</td><td>3.73</td><td>Average</td><td>180</td><td>359</td></tr><tr><td>2 *</td><td>6715.00</td><td>108.23</td><td></td><td></td><td>104.50</td><td>3.73</td><td>Peak</td><td>180</td><td>359</td></tr><tr><td>3</td><td>13430.00</td><td>44.31</td><td>68.20</td><td>-23.89</td><td>36.87</td><td>7.44</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>4</td><td>13430.00</td><td>56.46</td><td>88.20</td><td>-31.74</td><td>49.02</td><td>7.44</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>5</td><td>20145.00</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>39.09</td><td>2.43</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>6</td><td>20145.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>51.43</td><td>2.43</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>7</td><td>26860.00</td><td>43.45</td><td>68.20</td><td>-24.75</td><td>34.51</td><td>8.94</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>8</td><td>26860.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>47.53</td><td>8.94</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6715.00	94.85			91.12	3.73	Average	180	359	2 *	6715.00	108.23			104.50	3.73	Peak	180	359	3	13430.00	44.31	68.20	-23.89	36.87	7.44	Average	100	22	4	13430.00	56.46	88.20	-31.74	49.02	7.44	Peak	100	22	5	20145.00	41.52	54.00	-12.48	39.09	2.43	Average	100	36	6	20145.00	53.86	74.00	-20.14	51.43	2.43	Peak	100	36	7	26860.00	43.45	68.20	-24.75	34.51	8.94	Average	100	45	8	26860.00	56.47	88.20	-31.73	47.53	8.94	Peak	100	45
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6715.00	94.85			91.12	3.73	Average	180	359																																																																																																								
2 *	6715.00	108.23			104.50	3.73	Peak	180	359																																																																																																								
3	13430.00	44.31	68.20	-23.89	36.87	7.44	Average	100	22																																																																																																								
4	13430.00	56.46	88.20	-31.74	49.02	7.44	Peak	100	22																																																																																																								
5	20145.00	41.52	54.00	-12.48	39.09	2.43	Average	100	36																																																																																																								
6	20145.00	53.86	74.00	-20.14	51.43	2.43	Peak	100	36																																																																																																								
7	26860.00	43.45	68.20	-24.75	34.51	8.94	Average	100	45																																																																																																								
8	26860.00	56.47	88.20	-31.73	47.53	8.94	Peak	100	45																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6715.00	93.72			89.99	3.73	Average	194	352
2 *	6715.00	106.96			103.23	3.73	Peak	194	352
3	13430.00	44.28	68.20	-23.92	36.84	7.44	Average	100	25
4	13430.00	56.41	88.20	-31.79	48.97	7.44	Peak	100	25
5	20145.00	41.56	54.00	-12.44	39.13	2.43	Average	100	21
6	20145.00	53.92	74.00	-20.08	51.49	2.43	Peak	100	21
7	26860.00	43.39	68.20	-24.81	34.45	8.94	Average	100	38
8	26860.00	56.42	88.20	-31.78	47.48	8.94	Peak	100	38
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

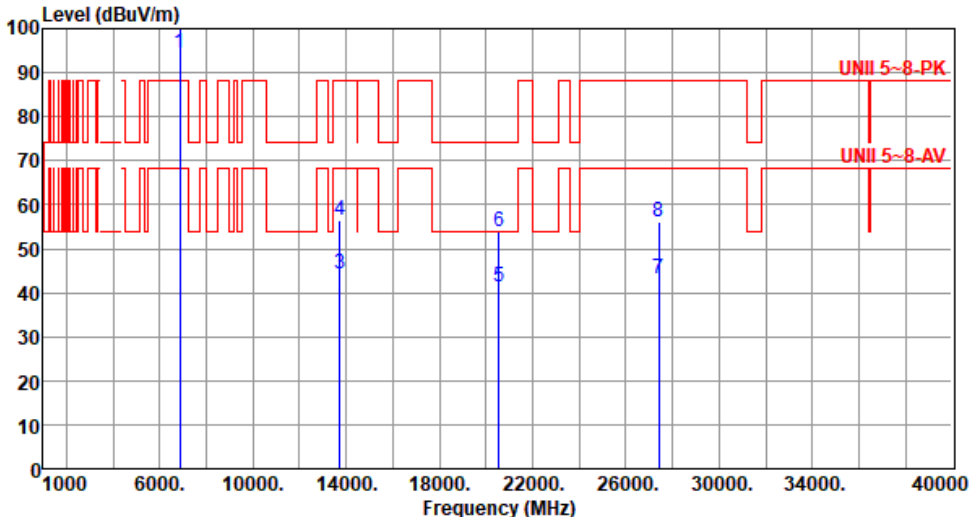


Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
																																																																																																																	
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6855.00</td><td>94.32</td><td></td><td></td><td>90.10</td><td>4.22</td><td>Average</td><td>177</td><td>1</td></tr><tr><td>2 *</td><td>6855.00</td><td>107.90</td><td></td><td></td><td>103.68</td><td>4.22</td><td>Peak</td><td>177</td><td>1</td></tr><tr><td>3</td><td>13710.00</td><td>44.15</td><td>68.20</td><td>-24.05</td><td>36.70</td><td>7.45</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td>13710.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>48.87</td><td>7.45</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td>20565.00</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>38.28</td><td>3.10</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td>20565.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>50.66</td><td>3.10</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td>27420.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.32</td><td>8.94</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>8</td><td>27420.00</td><td>56.15</td><td>88.20</td><td>-32.05</td><td>47.21</td><td>8.94</td><td>Peak</td><td>100</td><td>21</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6855.00	94.32			90.10	4.22	Average	177	1	2 *	6855.00	107.90			103.68	4.22	Peak	177	1	3	13710.00	44.15	68.20	-24.05	36.70	7.45	Average	100	41	4	13710.00	56.32	88.20	-31.88	48.87	7.45	Peak	100	41	5	20565.00	41.38	54.00	-12.62	38.28	3.10	Average	100	27	6	20565.00	53.76	74.00	-20.24	50.66	3.10	Peak	100	27	7	27420.00	43.26	68.20	-24.94	34.32	8.94	Average	100	21	8	27420.00	56.15	88.20	-32.05	47.21	8.94	Peak	100	21		
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6855.00	94.32			90.10	4.22	Average	177	1																																																																																																								
2 *	6855.00	107.90			103.68	4.22	Peak	177	1																																																																																																								
3	13710.00	44.15	68.20	-24.05	36.70	7.45	Average	100	41																																																																																																								
4	13710.00	56.32	88.20	-31.88	48.87	7.45	Peak	100	41																																																																																																								
5	20565.00	41.38	54.00	-12.62	38.28	3.10	Average	100	27																																																																																																								
6	20565.00	53.76	74.00	-20.24	50.66	3.10	Peak	100	27																																																																																																								
7	27420.00	43.26	68.20	-24.94	34.32	8.94	Average	100	21																																																																																																								
8	27420.00	56.15	88.20	-32.05	47.21	8.94	Peak	100	21																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6855.00</td><td>93.16</td><td></td><td></td><td>88.94</td><td>4.22</td><td>Average</td><td>185</td><td>355</td></tr><tr><td>2 *</td><td>6855.00</td><td>106.82</td><td></td><td></td><td>102.60</td><td>4.22</td><td>Peak</td><td>185</td><td>355</td></tr><tr><td>3</td><td>13710.00</td><td>44.08</td><td>68.20</td><td>-24.12</td><td>36.63</td><td>7.45</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>4</td><td>13710.00</td><td>56.25</td><td>88.20</td><td>-31.95</td><td>48.80</td><td>7.45</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>5</td><td>20565.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>38.22</td><td>3.10</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>20565.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>50.58</td><td>3.10</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>7</td><td>27420.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>34.35</td><td>8.94</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>8</td><td>27420.00</td><td>56.11</td><td>88.20</td><td>-32.09</td><td>47.17</td><td>8.94</td><td>Peak</td><td>100</td><td>27</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6855.00	93.16			88.94	4.22	Average	185	355	2 *	6855.00	106.82			102.60	4.22	Peak	185	355	3	13710.00	44.08	68.20	-24.12	36.63	7.45	Average	100	34	4	13710.00	56.25	88.20	-31.95	48.80	7.45	Peak	100	34	5	20565.00	41.32	54.00	-12.68	38.22	3.10	Average	100	45	6	20565.00	53.68	74.00	-20.32	50.58	3.10	Peak	100	45	7	27420.00	43.29	68.20	-24.91	34.35	8.94	Average	100	27	8	27420.00	56.11	88.20	-32.09	47.17	8.94	Peak	100	27
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6855.00	93.16			88.94	4.22	Average	185	355																																																																																																								
2 *	6855.00	106.82			102.60	4.22	Peak	185	355																																																																																																								
3	13710.00	44.08	68.20	-24.12	36.63	7.45	Average	100	34																																																																																																								
4	13710.00	56.25	88.20	-31.95	48.80	7.45	Peak	100	34																																																																																																								
5	20565.00	41.32	54.00	-12.68	38.22	3.10	Average	100	45																																																																																																								
6	20565.00	53.68	74.00	-20.32	50.58	3.10	Peak	100	45																																																																																																								
7	27420.00	43.29	68.20	-24.91	34.35	8.94	Average	100	27																																																																																																								
8	27420.00	56.11	88.20	-32.09	47.17	8.94	Peak	100	27																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

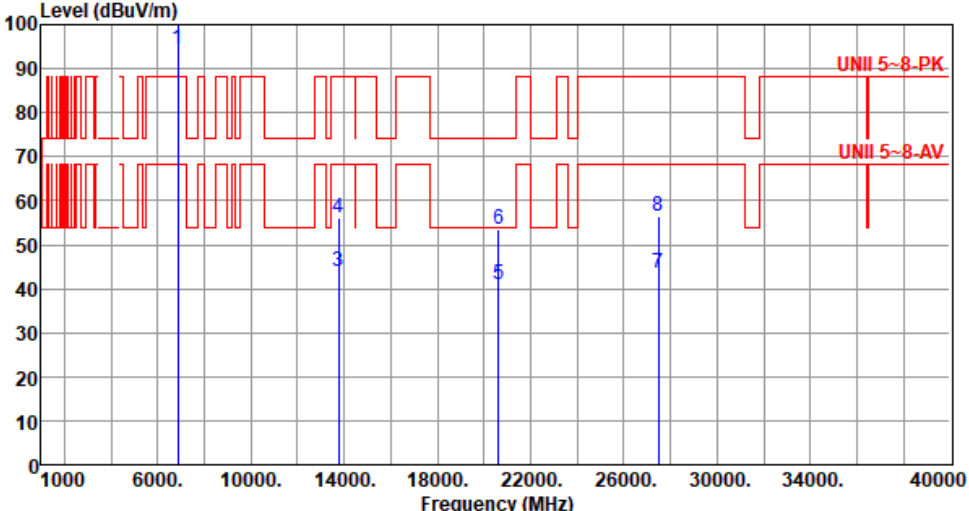


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6875.00	94.61			90.27	4.34	Average	177	2
2 *	6875.00	108.14			103.80	4.34	Peak	177	2
3	13750.00	43.84	68.20	-24.36	36.31	7.53	Average	100	25
4	13750.00	56.09	88.20	-32.11	48.56	7.53	Peak	100	25
5	20625.00	41.08	54.00	-12.92	37.92	3.16	Average	100	64
6	20625.00	53.42	74.00	-20.58	50.26	3.16	Peak	100	64
7	27500.00	43.44	68.20	-24.76	34.48	8.96	Average	100	27
8	27500.00	56.52	88.20	-31.68	47.56	8.96	Peak	100	27

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

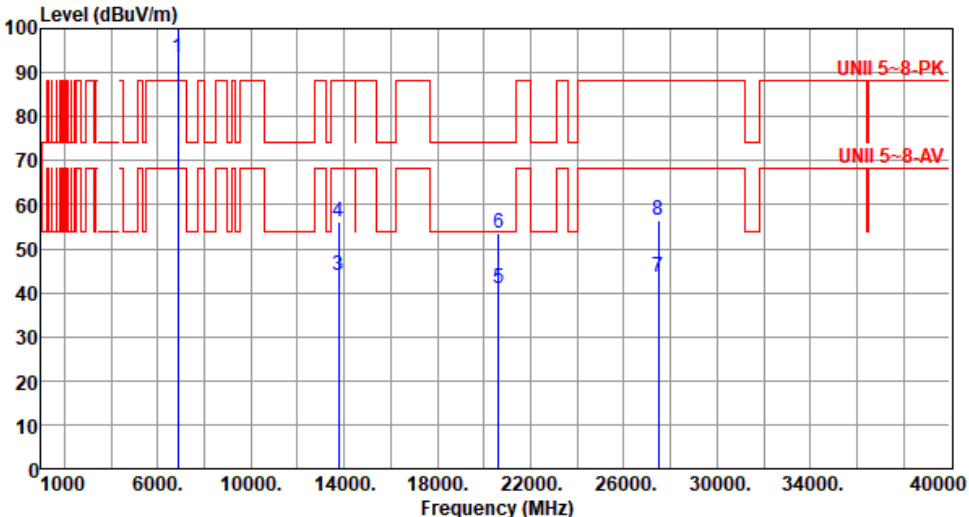


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6875.00	93.42			89.08	4.34	Average	191	9
2 *	6875.00	106.84			102.50	4.34	Peak	191	9
3	13750.00	43.86	68.20	-24.34	36.33	7.53	Average	100	24
4	13750.00	56.13	88.20	-32.07	48.60	7.53	Peak	100	24
5	20625.00	41.14	54.00	-12.86	37.98	3.16	Average	100	15
6	20625.00	53.36	74.00	-20.64	50.20	3.16	Peak	100	15
7	27500.00	43.42	68.20	-24.78	34.46	8.96	Average	100	39
8	27500.00	56.48	88.20	-31.72	47.52	8.96	Peak	100	39
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

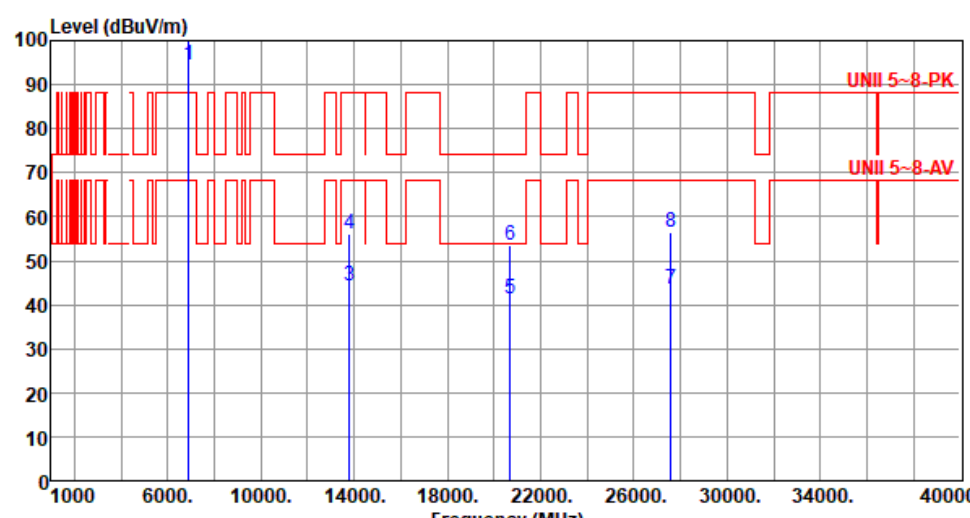


Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6895.00	94.40			89.94	4.46	Average	174	359
2 *	6895.00	107.48			103.02	4.46	Peak	174	359
3	13790.00	44.26	68.20	-23.94	36.65	7.61	Average	100	44
4	13790.00	56.27	88.20	-31.93	48.66	7.61	Peak	100	44
5	20685.00	41.31	54.00	-12.69	38.09	3.22	Average	100	56
6	20685.00	53.59	74.00	-20.41	50.37	3.22	Peak	100	56
7	27580.00	43.64	68.20	-24.56	34.61	9.03	Average	100	22
8	27580.00	56.48	88.20	-31.72	47.45	9.03	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

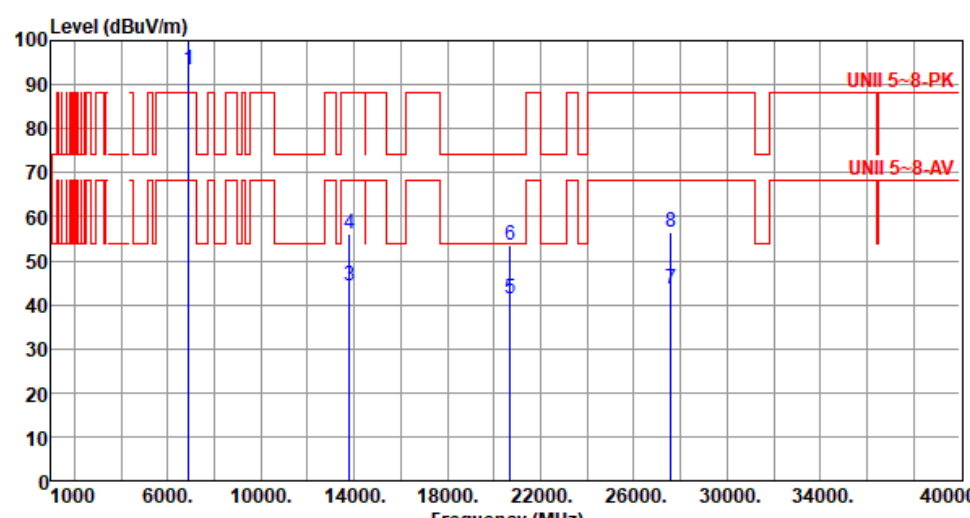

Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6895.00	93.25			88.79	4.46	Average	194	5
2 *	6895.00	106.24			101.78	4.46	Peak	194	5
3	13790.00	44.22	68.20	-23.98	36.61	7.61	Average	100	13
4	13790.00	56.21	88.20	-31.99	48.60	7.61	Peak	100	13
5	20685.00	41.25	54.00	-12.75	38.03	3.22	Average	100	31
6	20685.00	53.52	74.00	-20.48	50.30	3.22	Peak	100	31
7	27580.00	43.69	68.20	-24.51	34.66	9.03	Average	100	14
8	27580.00	56.43	88.20	-31.77	47.40	9.03	Peak	100	14
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)									
*Factor includes antenna factor , cable loss and amplifier gain									
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									
Note 3:"*" is Peak / Average value of fundamental frequency									

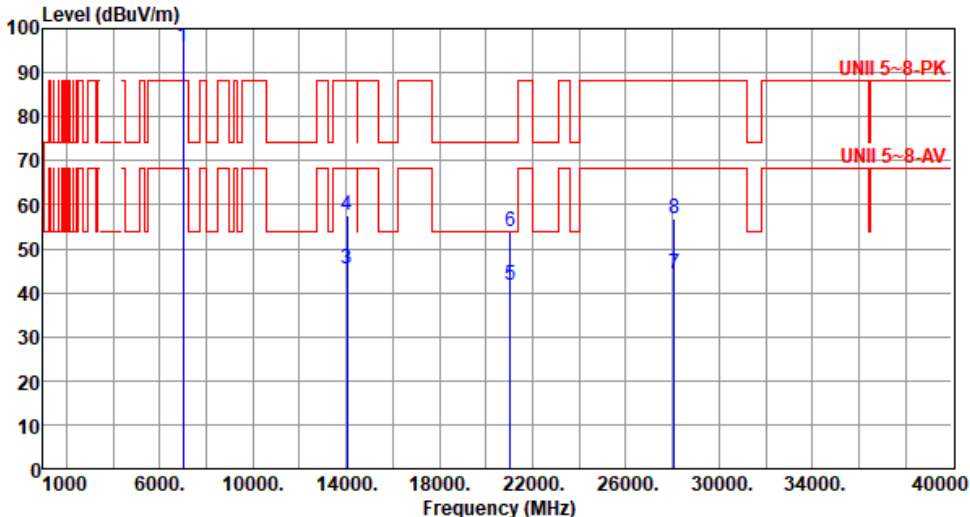

Modulation	be EHT20		Test Freq. (MHz)		7015																																																																																																																													
Polarization	Horizontal																																																																																																																																	
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																																																																		
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>7015.00</td><td>96.02</td><td></td><td></td><td>90.85</td><td>5.17</td><td>Average</td><td>182</td><td>353</td></tr><tr><td>2</td><td>*</td><td>7015.00</td><td>109.42</td><td></td><td></td><td>104.25</td><td>5.17</td><td>Peak</td><td>182</td><td>353</td></tr><tr><td>3</td><td></td><td>14030.00</td><td>45.31</td><td>68.20</td><td>-22.89</td><td>37.29</td><td>8.02</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>4</td><td></td><td>14030.00</td><td>57.62</td><td>88.20</td><td>-30.58</td><td>49.60</td><td>8.02</td><td>Peak</td><td>100</td><td>12</td></tr><tr><td>5</td><td></td><td>21045.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>37.95</td><td>3.87</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td></td><td>21045.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>49.99</td><td>3.87</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>7</td><td></td><td>28060.00</td><td>44.36</td><td>68.20</td><td>-23.84</td><td>34.92</td><td>9.44</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>8</td><td></td><td>28060.00</td><td>56.88</td><td>88.20</td><td>-31.32</td><td>47.44</td><td>9.44</td><td>Peak</td><td>100</td><td>53</td></tr></table>												Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level			reading			High	Table				dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	7015.00	96.02			90.85	5.17	Average	182	353	2	*	7015.00	109.42			104.25	5.17	Peak	182	353	3		14030.00	45.31	68.20	-22.89	37.29	8.02	Average	100	12	4		14030.00	57.62	88.20	-30.58	49.60	8.02	Peak	100	12	5		21045.00	41.82	54.00	-12.18	37.95	3.87	Average	100	21	6		21045.00	53.86	74.00	-20.14	49.99	3.87	Peak	100	21	7		28060.00	44.36	68.20	-23.84	34.92	9.44	Average	100	53	8		28060.00	56.88	88.20	-31.32	47.44	9.44	Peak	100	53
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																								
		MHz	level			reading			High	Table																																																																																																																								
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																								
1	*	7015.00	96.02			90.85	5.17	Average	182	353																																																																																																																								
2	*	7015.00	109.42			104.25	5.17	Peak	182	353																																																																																																																								
3		14030.00	45.31	68.20	-22.89	37.29	8.02	Average	100	12																																																																																																																								
4		14030.00	57.62	88.20	-30.58	49.60	8.02	Peak	100	12																																																																																																																								
5		21045.00	41.82	54.00	-12.18	37.95	3.87	Average	100	21																																																																																																																								
6		21045.00	53.86	74.00	-20.14	49.99	3.87	Peak	100	21																																																																																																																								
7		28060.00	44.36	68.20	-23.84	34.92	9.44	Average	100	53																																																																																																																								
8		28060.00	56.88	88.20	-31.32	47.44	9.44	Peak	100	53																																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																		




Modulation	be EHT20	Test Freq. (MHz)	7015																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>7015.00</td><td>94.74</td><td></td><td></td><td>89.57</td><td>5.17</td><td>Average</td><td>193</td><td>6</td></tr><tr><td>2 *</td><td>7015.00</td><td>108.09</td><td></td><td></td><td>102.92</td><td>5.17</td><td>Peak</td><td>193</td><td>6</td></tr><tr><td>3</td><td>14030.00</td><td>45.24</td><td>68.20</td><td>-22.96</td><td>37.22</td><td>8.02</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>4</td><td>14030.00</td><td>57.56</td><td>88.20</td><td>-30.64</td><td>49.54</td><td>8.02</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>5</td><td>21045.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>37.90</td><td>3.87</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>21045.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>49.94</td><td>3.87</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>7</td><td>28060.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>34.88</td><td>9.44</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>8</td><td>28060.00</td><td>56.82</td><td>88.20</td><td>-31.38</td><td>47.38</td><td>9.44</td><td>Peak</td><td>100</td><td>47</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7015.00	94.74			89.57	5.17	Average	193	6	2 *	7015.00	108.09			102.92	5.17	Peak	193	6	3	14030.00	45.24	68.20	-22.96	37.22	8.02	Average	100	23	4	14030.00	57.56	88.20	-30.64	49.54	8.02	Peak	100	23	5	21045.00	41.77	54.00	-12.23	37.90	3.87	Average	100	29	6	21045.00	53.81	74.00	-20.19	49.94	3.87	Peak	100	29	7	28060.00	44.32	68.20	-23.88	34.88	9.44	Average	100	47	8	28060.00	56.82	88.20	-31.38	47.38	9.44	Peak	100	47
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7015.00	94.74			89.57	5.17	Average	193	6																																																																																				
2 *	7015.00	108.09			102.92	5.17	Peak	193	6																																																																																				
3	14030.00	45.24	68.20	-22.96	37.22	8.02	Average	100	23																																																																																				
4	14030.00	57.56	88.20	-30.64	49.54	8.02	Peak	100	23																																																																																				
5	21045.00	41.77	54.00	-12.23	37.90	3.87	Average	100	29																																																																																				
6	21045.00	53.81	74.00	-20.19	49.94	3.87	Peak	100	29																																																																																				
7	28060.00	44.32	68.20	-23.88	34.88	9.44	Average	100	47																																																																																				
8	28060.00	56.82	88.20	-31.38	47.38	9.44	Peak	100	47																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):64			
Level (dBuV/m)			

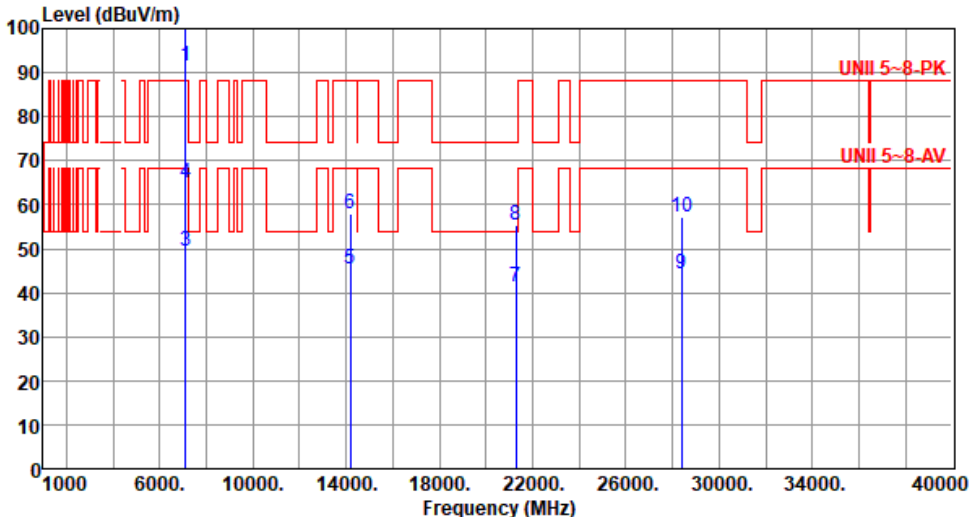

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	7095.00	91.62			86.03	5.59	Average	194	3
2 *	7095.00	104.95			99.36	5.59	Peak	194	3
3	7125.00	49.28	68.20	-18.92	43.59	5.69	Average	194	3
4	7125.00	65.11	88.20	-23.09	59.42	5.69	Peak	194	3
5	14190.00	45.48	68.20	-22.72	37.08	8.40	Average	100	22
6	14190.00	58.03	88.20	-30.17	49.63	8.40	Peak	100	22
7	21285.00	41.35	54.00	-12.65	37.24	4.11	Average	100	17
8	21285.00	55.32	74.00	-18.68	51.21	4.11	Peak	100	17
9	28380.00	44.45	68.20	-23.75	34.72	9.73	Average	100	36
10	28380.00	57.16	88.20	-31.04	47.43	9.73	Peak	100	36
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	7115																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Akun Chung Temperature(°C):24 Humidity(%):65																																																																																																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>7115.00</td><td>86.78</td><td></td><td></td><td>81.12</td><td>5.66</td><td>Average</td><td>196</td><td>10</td></tr><tr><td>2 *</td><td>7115.00</td><td>98.61</td><td></td><td></td><td>92.95</td><td>5.66</td><td>Peak</td><td>196</td><td>10</td></tr><tr><td>3</td><td>7125.00</td><td>64.00</td><td>68.20</td><td>-4.20</td><td>58.31</td><td>5.69</td><td>Average</td><td>196</td><td>10</td></tr><tr><td>4</td><td>7125.00</td><td>77.71</td><td>88.20</td><td>-10.49</td><td>72.02</td><td>5.69</td><td>Peak</td><td>196</td><td>10</td></tr><tr><td>5</td><td>14230.00</td><td>45.41</td><td>68.20</td><td>-22.79</td><td>36.96</td><td>8.45</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td>14230.00</td><td>57.98</td><td>88.20</td><td>-30.22</td><td>49.53</td><td>8.45</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td>21345.00</td><td>41.39</td><td>54.00</td><td>-12.61</td><td>37.23</td><td>4.16</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>8</td><td>21345.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>51.10</td><td>4.16</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>9</td><td>28460.00</td><td>44.37</td><td>68.20</td><td>-23.83</td><td>34.53</td><td>9.84</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>10</td><td>28460.00</td><td>57.12</td><td>88.20</td><td>-31.08</td><td>47.28</td><td>9.84</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	7115.00	86.78			81.12	5.66	Average	196	10	2 *	7115.00	98.61			92.95	5.66	Peak	196	10	3	7125.00	64.00	68.20	-4.20	58.31	5.69	Average	196	10	4	7125.00	77.71	88.20	-10.49	72.02	5.69	Peak	196	10	5	14230.00	45.41	68.20	-22.79	36.96	8.45	Average	100	27	6	14230.00	57.98	88.20	-30.22	49.53	8.45	Peak	100	27	7	21345.00	41.39	54.00	-12.61	37.23	4.16	Average	100	14	8	21345.00	55.26	74.00	-18.74	51.10	4.16	Peak	100	14	9	28460.00	44.37	68.20	-23.83	34.53	9.84	Average	100	45	10	28460.00	57.12	88.20	-31.08	47.28	9.84	Peak	100	45
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																												
		dBuV/m			dBuV			cm	deg																																																																																																																												
1 *	7115.00	86.78			81.12	5.66	Average	196	10																																																																																																																												
2 *	7115.00	98.61			92.95	5.66	Peak	196	10																																																																																																																												
3	7125.00	64.00	68.20	-4.20	58.31	5.69	Average	196	10																																																																																																																												
4	7125.00	77.71	88.20	-10.49	72.02	5.69	Peak	196	10																																																																																																																												
5	14230.00	45.41	68.20	-22.79	36.96	8.45	Average	100	27																																																																																																																												
6	14230.00	57.98	88.20	-30.22	49.53	8.45	Peak	100	27																																																																																																																												
7	21345.00	41.39	54.00	-12.61	37.23	4.16	Average	100	14																																																																																																																												
8	21345.00	55.26	74.00	-18.74	51.10	4.16	Peak	100	14																																																																																																																												
9	28460.00	44.37	68.20	-23.83	34.53	9.84	Average	100	45																																																																																																																												
10	28460.00	57.12	88.20	-31.08	47.28	9.84	Peak	100	45																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>42.55</td><td>1.51</td><td>Average</td><td>160</td><td>359</td></tr><tr><td>2</td><td>5925.00</td><td>67.14</td><td>88.20</td><td>-21.06</td><td>65.63</td><td>1.51</td><td>Peak</td><td>160</td><td>359</td></tr><tr><td>3 *</td><td>5965.00</td><td>91.93</td><td></td><td></td><td>90.43</td><td>1.50</td><td>Average</td><td>160</td><td>359</td></tr><tr><td>4 *</td><td>5965.00</td><td>105.42</td><td></td><td></td><td>103.92</td><td>1.50</td><td>Peak</td><td>160</td><td>359</td></tr><tr><td>5</td><td>11930.00</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>34.16</td><td>7.59</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>11930.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>47.67</td><td>7.59</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>7</td><td>23860.00</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>35.89</td><td>7.33</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>8</td><td>23860.00</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>48.92</td><td>7.33</td><td>Peak</td><td>100</td><td>53</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.06	68.20	-24.14	42.55	1.51	Average	160	359	2	5925.00	67.14	88.20	-21.06	65.63	1.51	Peak	160	359	3 *	5965.00	91.93			90.43	1.50	Average	160	359	4 *	5965.00	105.42			103.92	1.50	Peak	160	359	5	11930.00	41.75	54.00	-12.25	34.16	7.59	Average	100	39	6	11930.00	55.26	74.00	-18.74	47.67	7.59	Peak	100	39	7	23860.00	43.22	54.00	-10.78	35.89	7.33	Average	100	53	8	23860.00	56.25	74.00	-17.75	48.92	7.33	Peak	100	53
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	44.06	68.20	-24.14	42.55	1.51	Average	160	359																																																																																				
2	5925.00	67.14	88.20	-21.06	65.63	1.51	Peak	160	359																																																																																				
3 *	5965.00	91.93			90.43	1.50	Average	160	359																																																																																				
4 *	5965.00	105.42			103.92	1.50	Peak	160	359																																																																																				
5	11930.00	41.75	54.00	-12.25	34.16	7.59	Average	100	39																																																																																				
6	11930.00	55.26	74.00	-18.74	47.67	7.59	Peak	100	39																																																																																				
7	23860.00	43.22	54.00	-10.78	35.89	7.33	Average	100	53																																																																																				
8	23860.00	56.25	74.00	-17.75	48.92	7.33	Peak	100	53																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	5965																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.68</td><td>68.20</td><td>-24.52</td><td>42.17</td><td>1.51</td><td>Average</td><td>191</td><td>6</td></tr><tr><td>2</td><td>5925.00</td><td>66.85</td><td>88.20</td><td>-21.35</td><td>65.34</td><td>1.51</td><td>Peak</td><td>191</td><td>6</td></tr><tr><td>3 *</td><td>5965.00</td><td>90.62</td><td></td><td></td><td>89.12</td><td>1.50</td><td>Average</td><td>191</td><td>6</td></tr><tr><td>4 *</td><td>5965.00</td><td>104.16</td><td></td><td></td><td>102.66</td><td>1.50</td><td>Peak</td><td>191</td><td>6</td></tr><tr><td>5</td><td>11930.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>34.07</td><td>7.59</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>11930.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>47.62</td><td>7.59</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>7</td><td>23860.00</td><td>43.35</td><td>54.00</td><td>-10.65</td><td>36.02</td><td>7.33</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>8</td><td>23860.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>48.99</td><td>7.33</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.68	68.20	-24.52	42.17	1.51	Average	191	6	2	5925.00	66.85	88.20	-21.35	65.34	1.51	Peak	191	6	3 *	5965.00	90.62			89.12	1.50	Average	191	6	4 *	5965.00	104.16			102.66	1.50	Peak	191	6	5	11930.00	41.66	54.00	-12.34	34.07	7.59	Average	100	45	6	11930.00	55.21	74.00	-18.79	47.62	7.59	Peak	100	45	7	23860.00	43.35	54.00	-10.65	36.02	7.33	Average	100	48	8	23860.00	56.32	74.00	-17.68	48.99	7.33	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	43.68	68.20	-24.52	42.17	1.51	Average	191	6																																																																																				
2	5925.00	66.85	88.20	-21.35	65.34	1.51	Peak	191	6																																																																																				
3 *	5965.00	90.62			89.12	1.50	Average	191	6																																																																																				
4 *	5965.00	104.16			102.66	1.50	Peak	191	6																																																																																				
5	11930.00	41.66	54.00	-12.34	34.07	7.59	Average	100	45																																																																																				
6	11930.00	55.21	74.00	-18.79	47.62	7.59	Peak	100	45																																																																																				
7	23860.00	43.35	54.00	-10.65	36.02	7.33	Average	100	48																																																																																				
8	23860.00	56.32	74.00	-17.68	48.99	7.33	Peak	100	48																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6165																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6165.00</td><td>91.14</td><td></td><td></td><td>89.23</td><td>1.91</td><td>Average</td><td>158</td><td>9</td></tr><tr><td>2 *</td><td>6165.00</td><td>104.92</td><td></td><td></td><td>103.01</td><td>1.91</td><td>Peak</td><td>158</td><td>9</td></tr><tr><td>3</td><td>12330.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.46</td><td>7.38</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>4</td><td>12330.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>47.93</td><td>7.38</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>5</td><td>18495.00</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>38.87</td><td>1.54</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>18495.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>51.62</td><td>1.54</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>7</td><td>24660.00</td><td>42.34</td><td>68.20</td><td>-25.86</td><td>34.02</td><td>8.32</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>8</td><td>24660.00</td><td>54.81</td><td>88.20</td><td>-33.39</td><td>46.49</td><td>8.32</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6165.00	91.14			89.23	1.91	Average	158	9	2 *	6165.00	104.92			103.01	1.91	Peak	158	9	3	12330.00	42.84	54.00	-11.16	35.46	7.38	Average	100	36	4	12330.00	55.31	74.00	-18.69	47.93	7.38	Peak	100	36	5	18495.00	40.41	54.00	-13.59	38.87	1.54	Average	100	25	6	18495.00	53.16	74.00	-20.84	51.62	1.54	Peak	100	25	7	24660.00	42.34	68.20	-25.86	34.02	8.32	Average	100	45	8	24660.00	54.81	88.20	-33.39	46.49	8.32	Peak	100	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6165.00	91.14			89.23	1.91	Average	158	9																																																																																				
2 *	6165.00	104.92			103.01	1.91	Peak	158	9																																																																																				
3	12330.00	42.84	54.00	-11.16	35.46	7.38	Average	100	36																																																																																				
4	12330.00	55.31	74.00	-18.69	47.93	7.38	Peak	100	36																																																																																				
5	18495.00	40.41	54.00	-13.59	38.87	1.54	Average	100	25																																																																																				
6	18495.00	53.16	74.00	-20.84	51.62	1.54	Peak	100	25																																																																																				
7	24660.00	42.34	68.20	-25.86	34.02	8.32	Average	100	45																																																																																				
8	24660.00	54.81	88.20	-33.39	46.49	8.32	Peak	100	45																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	6165																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6165.00</td><td>89.82</td><td></td><td>87.91</td><td>1.91</td><td>Average</td><td>195</td><td>8</td></tr><tr><td>2</td><td>*</td><td>6165.00</td><td>103.58</td><td></td><td>101.67</td><td>1.91</td><td>Peak</td><td>195</td><td>8</td></tr><tr><td>3</td><td></td><td>12330.00</td><td>42.76</td><td>54.00 -11.24</td><td>35.38</td><td>7.38</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td></td><td>12330.00</td><td>55.24</td><td>74.00 -18.76</td><td>47.86</td><td>7.38</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td></td><td>18495.00</td><td>40.35</td><td>54.00 -13.65</td><td>38.81</td><td>1.54</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td></td><td>18495.00</td><td>53.12</td><td>74.00 -20.88</td><td>51.58</td><td>1.54</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>7</td><td></td><td>24660.00</td><td>42.29</td><td>68.20 -25.91</td><td>33.97</td><td>8.32</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>8</td><td></td><td>24660.00</td><td>54.72</td><td>88.20 -33.48</td><td>46.40</td><td>8.32</td><td>Peak</td><td>100</td><td>33</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	*	6165.00	89.82		87.91	1.91	Average	195	8	2	*	6165.00	103.58		101.67	1.91	Peak	195	8	3		12330.00	42.76	54.00 -11.24	35.38	7.38	Average	100	41	4		12330.00	55.24	74.00 -18.76	47.86	7.38	Peak	100	41	5		18495.00	40.35	54.00 -13.65	38.81	1.54	Average	100	21	6		18495.00	53.12	74.00 -20.88	51.58	1.54	Peak	100	21	7		24660.00	42.29	68.20 -25.91	33.97	8.32	Average	100	33	8		24660.00	54.72	88.20 -33.48	46.40	8.32	Peak	100	33
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
								cm	deg																																																																																																								
1	*	6165.00	89.82		87.91	1.91	Average	195	8																																																																																																								
2	*	6165.00	103.58		101.67	1.91	Peak	195	8																																																																																																								
3		12330.00	42.76	54.00 -11.24	35.38	7.38	Average	100	41																																																																																																								
4		12330.00	55.24	74.00 -18.76	47.86	7.38	Peak	100	41																																																																																																								
5		18495.00	40.35	54.00 -13.65	38.81	1.54	Average	100	21																																																																																																								
6		18495.00	53.12	74.00 -20.88	51.58	1.54	Peak	100	21																																																																																																								
7		24660.00	42.29	68.20 -25.91	33.97	8.32	Average	100	33																																																																																																								
8		24660.00	54.72	88.20 -33.48	46.40	8.32	Peak	100	33																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6405.00</td><td>91.36</td><td></td><td></td><td>88.23</td><td>3.13</td><td>Average</td><td>151</td><td>6</td></tr><tr><td>2 *</td><td>6405.00</td><td>105.17</td><td></td><td></td><td>102.04</td><td>3.13</td><td>Peak</td><td>151</td><td>6</td></tr><tr><td>3</td><td>12810.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>35.68</td><td>7.57</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>4</td><td>12810.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>47.79</td><td>7.57</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>5</td><td>19215.00</td><td>41.23</td><td>54.00</td><td>-12.77</td><td>39.46</td><td>1.77</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>6</td><td>19215.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>51.88</td><td>1.77</td><td>Peak</td><td>100</td><td>44</td></tr><tr><td>7</td><td>25620.00</td><td>43.51</td><td>68.20</td><td>-24.69</td><td>35.34</td><td>8.17</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>8</td><td>25620.00</td><td>56.44</td><td>88.20</td><td>-31.76</td><td>48.27</td><td>8.17</td><td>Peak</td><td>100</td><td>56</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6405.00	91.36			88.23	3.13	Average	151	6	2 *	6405.00	105.17			102.04	3.13	Peak	151	6	3	12810.00	43.25	68.20	-24.95	35.68	7.57	Average	100	38	4	12810.00	55.36	88.20	-32.84	47.79	7.57	Peak	100	38	5	19215.00	41.23	54.00	-12.77	39.46	1.77	Average	100	44	6	19215.00	53.65	74.00	-20.35	51.88	1.77	Peak	100	44	7	25620.00	43.51	68.20	-24.69	35.34	8.17	Average	100	56	8	25620.00	56.44	88.20	-31.76	48.27	8.17	Peak	100	56
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6405.00	91.36			88.23	3.13	Average	151	6																																																																																																								
2 *	6405.00	105.17			102.04	3.13	Peak	151	6																																																																																																								
3	12810.00	43.25	68.20	-24.95	35.68	7.57	Average	100	38																																																																																																								
4	12810.00	55.36	88.20	-32.84	47.79	7.57	Peak	100	38																																																																																																								
5	19215.00	41.23	54.00	-12.77	39.46	1.77	Average	100	44																																																																																																								
6	19215.00	53.65	74.00	-20.35	51.88	1.77	Peak	100	44																																																																																																								
7	25620.00	43.51	68.20	-24.69	35.34	8.17	Average	100	56																																																																																																								
8	25620.00	56.44	88.20	-31.76	48.27	8.17	Peak	100	56																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6405.00</td><td>90.01</td><td></td><td></td><td>86.88</td><td>3.13</td><td>Average</td><td>194</td><td>3</td></tr><tr><td>2 *</td><td>6405.00</td><td>103.94</td><td></td><td></td><td>100.81</td><td>3.13</td><td>Peak</td><td>194</td><td>3</td></tr><tr><td>3</td><td>12810.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>35.79</td><td>7.57</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>12810.00</td><td>55.42</td><td>88.20</td><td>-32.78</td><td>47.85</td><td>7.57</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5</td><td>19215.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>39.39</td><td>1.77</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>19215.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>51.81</td><td>1.77</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>7</td><td>25620.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>35.25</td><td>8.17</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>8</td><td>25620.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>48.21</td><td>8.17</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6405.00	90.01			86.88	3.13	Average	194	3	2 *	6405.00	103.94			100.81	3.13	Peak	194	3	3	12810.00	43.36	68.20	-24.84	35.79	7.57	Average	100	47	4	12810.00	55.42	88.20	-32.78	47.85	7.57	Peak	100	47	5	19215.00	41.16	54.00	-12.84	39.39	1.77	Average	100	39	6	19215.00	53.58	74.00	-20.42	51.81	1.77	Peak	100	39	7	25620.00	43.42	68.20	-24.78	35.25	8.17	Average	100	29	8	25620.00	56.38	88.20	-31.82	48.21	8.17	Peak	100	29
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6405.00	90.01			86.88	3.13	Average	194	3																																																																																																								
2 *	6405.00	103.94			100.81	3.13	Peak	194	3																																																																																																								
3	12810.00	43.36	68.20	-24.84	35.79	7.57	Average	100	47																																																																																																								
4	12810.00	55.42	88.20	-32.78	47.85	7.57	Peak	100	47																																																																																																								
5	19215.00	41.16	54.00	-12.84	39.39	1.77	Average	100	39																																																																																																								
6	19215.00	53.58	74.00	-20.42	51.81	1.77	Peak	100	39																																																																																																								
7	25620.00	43.42	68.20	-24.78	35.25	8.17	Average	100	29																																																																																																								
8	25620.00	56.38	88.20	-31.82	48.21	8.17	Peak	100	29																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

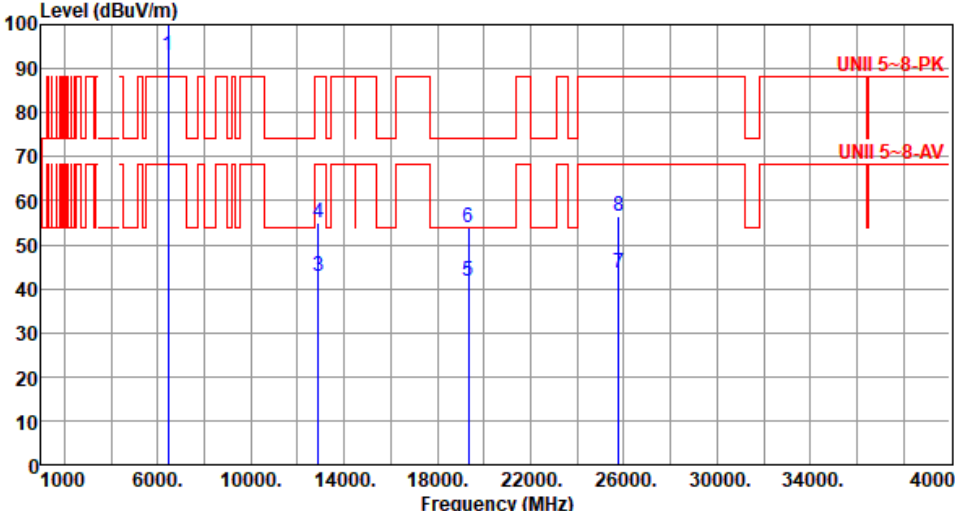


Modulation	be EHT40	Test Freq. (MHz)	6445																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																												
 <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6445.00</td><td>92.87</td><td></td><td></td><td>89.64</td><td>3.23</td><td>Average</td><td>152</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6445.00</td><td>106.91</td><td></td><td></td><td>103.68</td><td>3.23</td><td>Peak</td><td>152</td><td>5</td></tr><tr><td>3</td><td></td><td>12890.00</td><td>42.79</td><td>68.20</td><td>-25.41</td><td>35.19</td><td>7.60</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>4</td><td></td><td>12890.00</td><td>55.16</td><td>88.20</td><td>-33.04</td><td>47.56</td><td>7.60</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>5</td><td></td><td>19335.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>39.71</td><td>1.83</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td></td><td>19335.00</td><td>53.96</td><td>74.00</td><td>-20.04</td><td>52.13</td><td>1.83</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>7</td><td></td><td>25780.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>35.49</td><td>8.15</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>8</td><td></td><td>25780.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>48.23</td><td>8.15</td><td>Peak</td><td>100</td><td>41</td></tr></tbody></table>						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6445.00	92.87			89.64	3.23	Average	152	5	2	*	6445.00	106.91			103.68	3.23	Peak	152	5	3		12890.00	42.79	68.20	-25.41	35.19	7.60	Average	100	54	4		12890.00	55.16	88.20	-33.04	47.56	7.60	Peak	100	54	5		19335.00	41.54	54.00	-12.46	39.71	1.83	Average	100	28	6		19335.00	53.96	74.00	-20.04	52.13	1.83	Peak	100	28	7		25780.00	43.64	68.20	-24.56	35.49	8.15	Average	100	41	8		25780.00	56.38	88.20	-31.82	48.23	8.15	Peak	100	41
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6445.00	92.87			89.64	3.23	Average	152	5																																																																																																																		
2	*	6445.00	106.91			103.68	3.23	Peak	152	5																																																																																																																		
3		12890.00	42.79	68.20	-25.41	35.19	7.60	Average	100	54																																																																																																																		
4		12890.00	55.16	88.20	-33.04	47.56	7.60	Peak	100	54																																																																																																																		
5		19335.00	41.54	54.00	-12.46	39.71	1.83	Average	100	28																																																																																																																		
6		19335.00	53.96	74.00	-20.04	52.13	1.83	Peak	100	28																																																																																																																		
7		25780.00	43.64	68.20	-24.56	35.49	8.15	Average	100	41																																																																																																																		
8		25780.00	56.38	88.20	-31.82	48.23	8.15	Peak	100	41																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																												



Modulation	be EHT40	Test Freq. (MHz)	6445																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>6445.00</td><td>91.42</td><td></td><td></td><td>88.19</td><td>3.23</td><td>Average</td><td>199</td><td>11</td></tr><tr><td>2</td><td>6445.00</td><td>105.44</td><td></td><td></td><td>102.21</td><td>3.23</td><td>Peak</td><td>199</td><td>11</td></tr><tr><td>3</td><td>12890.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>35.03</td><td>7.60</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>12890.00</td><td>55.08</td><td>88.20</td><td>-33.12</td><td>47.48</td><td>7.60</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5</td><td>19335.00</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>39.66</td><td>1.83</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>19335.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>52.03</td><td>1.83</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>7</td><td>25780.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>35.37</td><td>8.15</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>8</td><td>25780.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>48.16</td><td>8.15</td><td>Peak</td><td>100</td><td>56</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	6445.00	91.42			88.19	3.23	Average	199	11	2	6445.00	105.44			102.21	3.23	Peak	199	11	3	12890.00	42.63	68.20	-25.57	35.03	7.60	Average	100	47	4	12890.00	55.08	88.20	-33.12	47.48	7.60	Peak	100	47	5	19335.00	41.49	54.00	-12.51	39.66	1.83	Average	100	25	6	19335.00	53.86	74.00	-20.14	52.03	1.83	Peak	100	25	7	25780.00	43.52	68.20	-24.68	35.37	8.15	Average	100	56	8	25780.00	56.31	88.20	-31.89	48.16	8.15	Peak	100	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	6445.00	91.42			88.19	3.23	Average	199	11																																																																																				
2	6445.00	105.44			102.21	3.23	Peak	199	11																																																																																				
3	12890.00	42.63	68.20	-25.57	35.03	7.60	Average	100	47																																																																																				
4	12890.00	55.08	88.20	-33.12	47.48	7.60	Peak	100	47																																																																																				
5	19335.00	41.49	54.00	-12.51	39.66	1.83	Average	100	25																																																																																				
6	19335.00	53.86	74.00	-20.14	52.03	1.83	Peak	100	25																																																																																				
7	25780.00	43.52	68.20	-24.68	35.37	8.15	Average	100	56																																																																																				
8	25780.00	56.31	88.20	-31.89	48.16	8.15	Peak	100	56																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

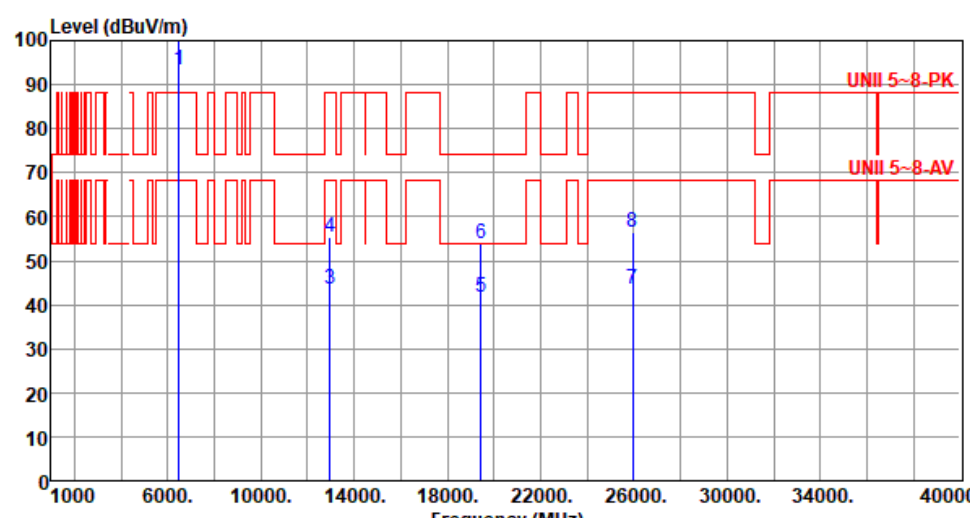

Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6485.00	93.29			89.81	3.48	Average	149	4
2 *	6485.00	106.63			103.15	3.48	Peak	149	4
3	12970.00	43.45	68.20	-24.75	35.95	7.50	Average	100	51
4	12970.00	55.52	88.20	-32.68	48.02	7.50	Peak	100	51
5	19455.00	41.55	54.00	-12.45	39.61	1.94	Average	100	38
6	19455.00	53.84	74.00	-20.16	51.90	1.94	Peak	100	38
7	25940.00	43.48	68.20	-24.72	35.29	8.19	Average	100	61
8	25940.00	56.29	88.20	-31.91	48.10	8.19	Peak	100	61
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6485.00	91.92			88.44	3.48	Average	194	356
2 *	6485.00	105.25			101.77	3.48	Peak	194	356
3	12970.00	43.52	68.20	-24.68	36.02	7.50	Average	100	24
4	12970.00	55.58	88.20	-32.62	48.08	7.50	Peak	100	24
5	19455.00	41.46	54.00	-12.54	39.52	1.94	Average	100	25
6	19455.00	53.79	74.00	-20.21	51.85	1.94	Peak	100	25
7	25940.00	43.52	68.20	-24.68	35.33	8.19	Average	100	36
8	25940.00	56.34	88.20	-31.86	48.15	8.19	Peak	100	36
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m)			

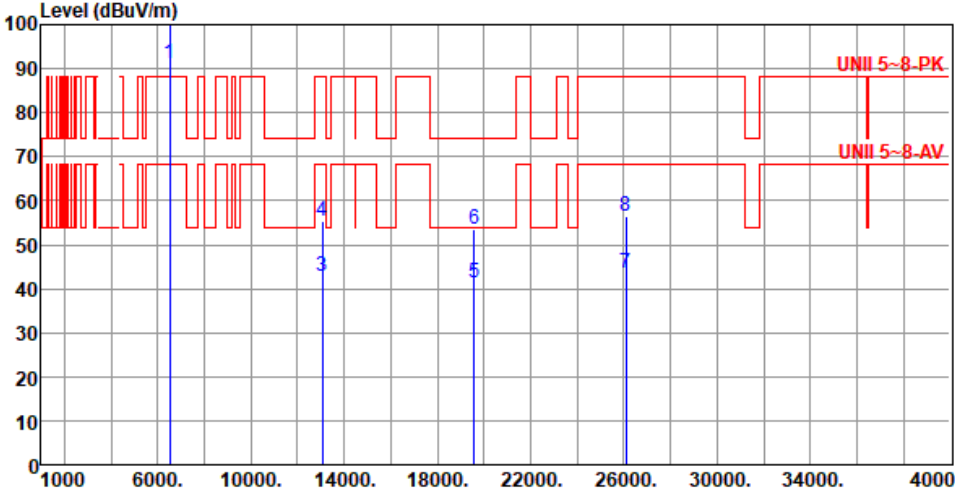


Modulation	be EHT40	Test Freq. (MHz)	6525																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6525.00</td><td>91.22</td><td></td><td></td><td>87.55</td><td>3.67</td><td>Average</td><td>189</td><td>4</td></tr><tr><td>2 *</td><td>6525.00</td><td>104.34</td><td></td><td></td><td>100.67</td><td>3.67</td><td>Peak</td><td>189</td><td>4</td></tr><tr><td>3</td><td>13050.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>35.54</td><td>7.32</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>4</td><td>13050.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>47.97</td><td>7.32</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>5</td><td>19575.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>39.31</td><td>2.02</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>19575.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>51.66</td><td>2.02</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>7</td><td>26100.00</td><td>43.44</td><td>68.20</td><td>-24.76</td><td>35.14</td><td>8.30</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>8</td><td>26100.00</td><td>56.28</td><td>88.20</td><td>-31.92</td><td>47.98</td><td>8.30</td><td>Peak</td><td>100</td><td>11</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6525.00	91.22			87.55	3.67	Average	189	4	2 *	6525.00	104.34			100.67	3.67	Peak	189	4	3	13050.00	42.86	68.20	-25.34	35.54	7.32	Average	100	21	4	13050.00	55.29	88.20	-32.91	47.97	7.32	Peak	100	21	5	19575.00	41.33	54.00	-12.67	39.31	2.02	Average	100	22	6	19575.00	53.68	74.00	-20.32	51.66	2.02	Peak	100	22	7	26100.00	43.44	68.20	-24.76	35.14	8.30	Average	100	11	8	26100.00	56.28	88.20	-31.92	47.98	8.30	Peak	100	11
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6525.00	91.22			87.55	3.67	Average	189	4																																																																																																								
2 *	6525.00	104.34			100.67	3.67	Peak	189	4																																																																																																								
3	13050.00	42.86	68.20	-25.34	35.54	7.32	Average	100	21																																																																																																								
4	13050.00	55.29	88.20	-32.91	47.97	7.32	Peak	100	21																																																																																																								
5	19575.00	41.33	54.00	-12.67	39.31	2.02	Average	100	22																																																																																																								
6	19575.00	53.68	74.00	-20.32	51.66	2.02	Peak	100	22																																																																																																								
7	26100.00	43.44	68.20	-24.76	35.14	8.30	Average	100	11																																																																																																								
8	26100.00	56.28	88.20	-31.92	47.98	8.30	Peak	100	11																																																																																																								

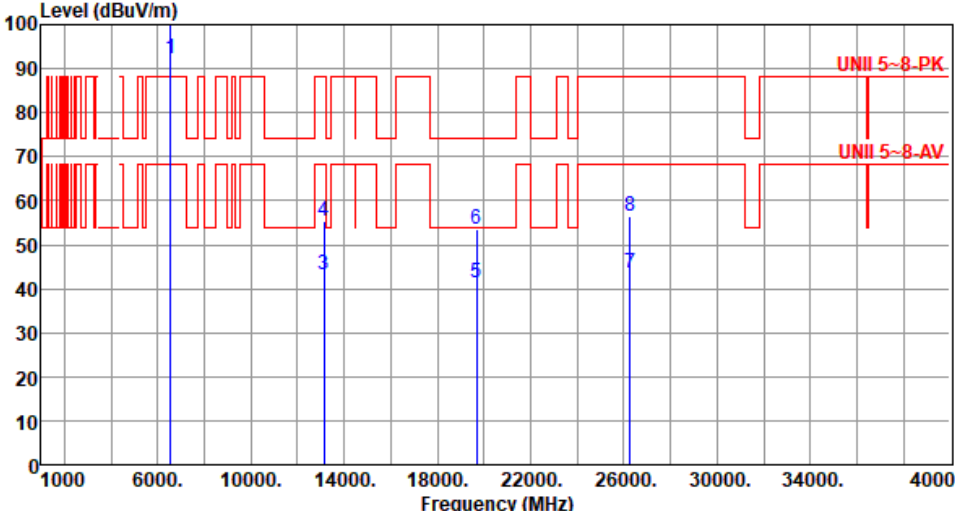


Modulation	be EHT40	Test Freq. (MHz)	6565																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																												
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6565.00</td><td>92.41</td><td></td><td></td><td>88.66</td><td>3.75</td><td>Average</td><td>166</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6565.00</td><td>106.19</td><td></td><td></td><td>102.44</td><td>3.75</td><td>Peak</td><td>166</td><td>5</td></tr><tr><td>3</td><td></td><td>13130.00</td><td>43.01</td><td>68.20</td><td>-25.19</td><td>35.81</td><td>7.20</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>4</td><td></td><td>13130.00</td><td>55.23</td><td>88.20</td><td>-32.97</td><td>48.03</td><td>7.20</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>5</td><td></td><td>19695.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>39.12</td><td>2.06</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td></td><td>19695.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>51.56</td><td>2.06</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>7</td><td></td><td>26260.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>34.96</td><td>8.46</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>8</td><td></td><td>26260.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>47.85</td><td>8.46</td><td>Peak</td><td>100</td><td>44</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6565.00	92.41			88.66	3.75	Average	166	5	2	*	6565.00	106.19			102.44	3.75	Peak	166	5	3		13130.00	43.01	68.20	-25.19	35.81	7.20	Average	100	39	4		13130.00	55.23	88.20	-32.97	48.03	7.20	Peak	100	39	5		19695.00	41.18	54.00	-12.82	39.12	2.06	Average	100	58	6		19695.00	53.62	74.00	-20.38	51.56	2.06	Peak	100	58	7		26260.00	43.42	68.20	-24.78	34.96	8.46	Average	100	44	8		26260.00	56.31	88.20	-31.89	47.85	8.46	Peak	100	44
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6565.00	92.41			88.66	3.75	Average	166	5																																																																																																																		
2	*	6565.00	106.19			102.44	3.75	Peak	166	5																																																																																																																		
3		13130.00	43.01	68.20	-25.19	35.81	7.20	Average	100	39																																																																																																																		
4		13130.00	55.23	88.20	-32.97	48.03	7.20	Peak	100	39																																																																																																																		
5		19695.00	41.18	54.00	-12.82	39.12	2.06	Average	100	58																																																																																																																		
6		19695.00	53.62	74.00	-20.38	51.56	2.06	Peak	100	58																																																																																																																		
7		26260.00	43.42	68.20	-24.78	34.96	8.46	Average	100	44																																																																																																																		
8		26260.00	56.31	88.20	-31.89	47.85	8.46	Peak	100	44																																																																																																																		

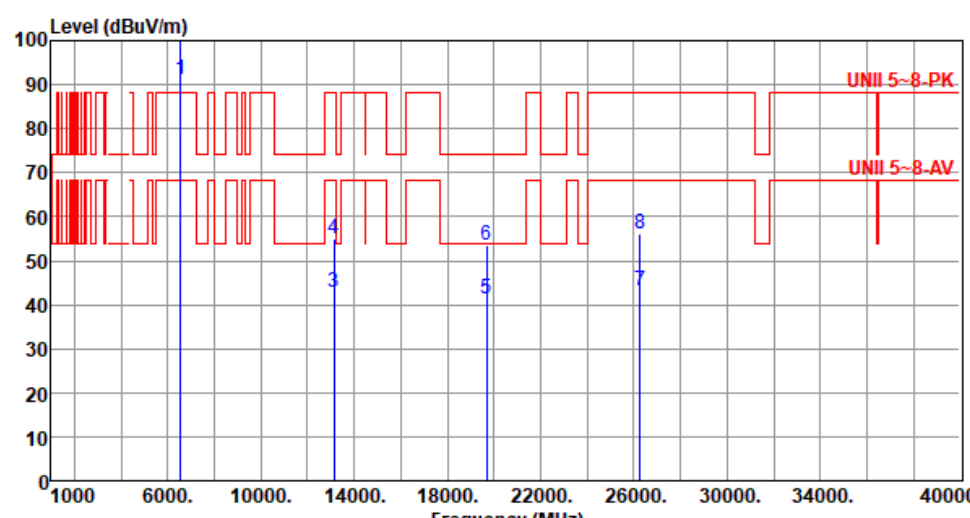


Modulation	be EHT40	Test Freq. (MHz)	6565						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6565.00	90.96			87.21	3.75	Average	191	2
2 *	6565.00	104.75			101.00	3.75	Peak	191	2
3	13130.00	42.94	68.20	-25.26	35.74	7.20	Average	100	17
4	13130.00	55.13	88.20	-33.07	47.93	7.20	Peak	100	17
5	19695.00	41.26	54.00	-12.74	39.20	2.06	Average	100	35
6	19695.00	53.69	74.00	-20.31	51.63	2.06	Peak	100	35
7	26260.00	43.34	68.20	-24.86	34.88	8.46	Average	100	26
8	26260.00	56.25	88.20	-31.95	47.79	8.46	Peak	100	26
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

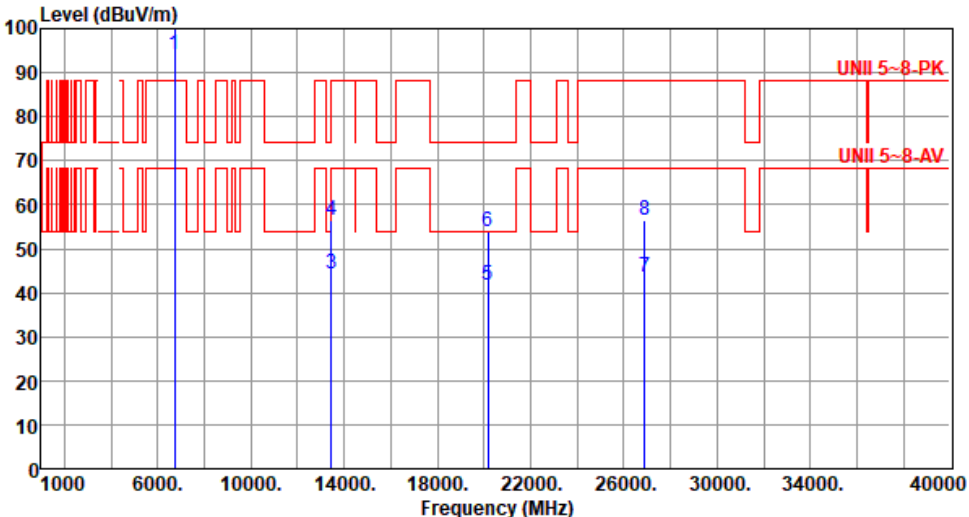

Modulation	be EHT40	Test Freq. (MHz)	6725						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6725.00	93.92			90.20	3.72	Average	166	359
2 *	6725.00	107.02			103.30	3.72	Peak	166	359
3	13450.00	44.45	68.20	-23.75	36.99	7.46	Average	100	35
4	13450.00	56.58	88.20	-31.62	49.12	7.46	Peak	100	35
5	20175.00	41.62	54.00	-12.38	39.15	2.47	Average	100	21
6	20175.00	53.91	74.00	-20.09	51.44	2.47	Peak	100	21
7	26900.00	43.52	68.20	-24.68	34.63	8.89	Average	100	55
8	26900.00	56.54	88.20	-31.66	47.65	8.89	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

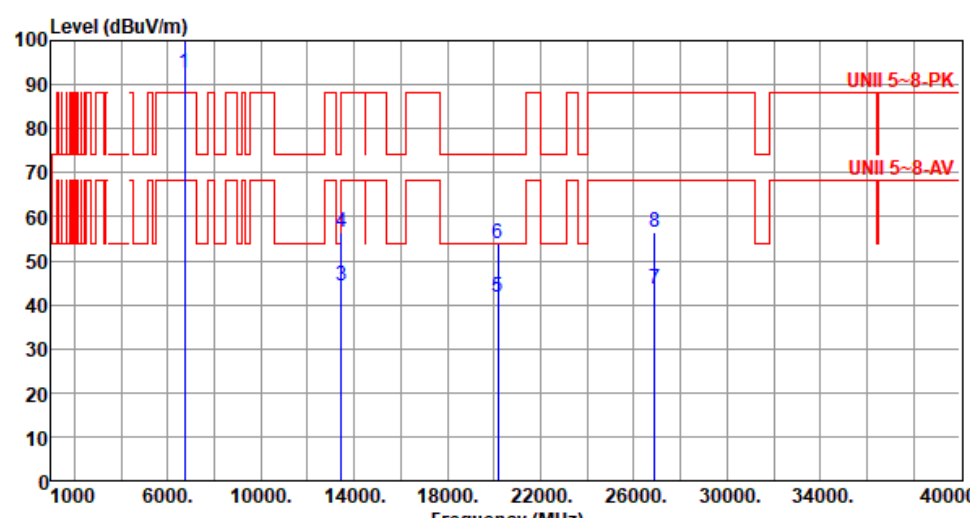

Modulation	be EHT40	Test Freq. (MHz)	6725						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6725.00	92.64			88.92	3.72	Average	189	3
2 *	6725.00	105.66			101.94	3.72	Peak	189	3
3	13450.00	44.32	68.20	-23.88	36.86	7.46	Average	100	48
4	13450.00	56.49	88.20	-31.71	49.03	7.46	Peak	100	48
5	20175.00	41.54	54.00	-12.46	39.07	2.47	Average	100	35
6	20175.00	53.85	74.00	-20.15	51.38	2.47	Peak	100	35
7	26900.00	43.46	68.20	-24.74	34.57	8.89	Average	100	49
8	26900.00	56.49	88.20	-31.71	47.60	8.89	Peak	100	49

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) <			

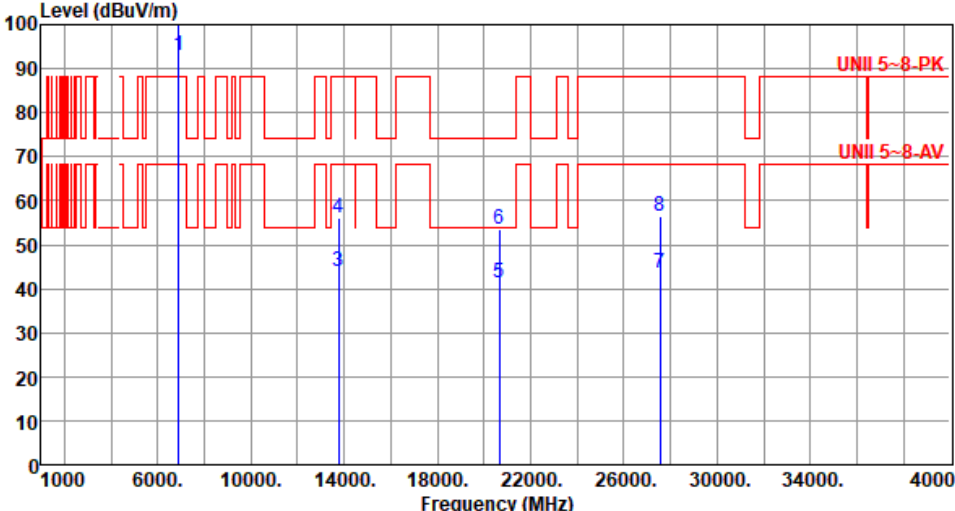


Modulation	be EHT40	Test Freq. (MHz)	6885																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>6885.00</td><td>92.88</td><td></td><td></td><td>88.48</td><td>4.40</td><td>Average</td><td>162</td><td>356</td></tr><tr><td>2</td><td>6885.00</td><td>106.45</td><td></td><td></td><td>102.05</td><td>4.40</td><td>Peak</td><td>162</td><td>356</td></tr><tr><td>3</td><td>13770.00</td><td>43.95</td><td>68.20</td><td>-24.25</td><td>36.38</td><td>7.57</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>4</td><td>13770.00</td><td>56.12</td><td>88.20</td><td>-32.08</td><td>48.55</td><td>7.57</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>5</td><td>20655.00</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>38.01</td><td>3.18</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>20655.00</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>50.33</td><td>3.18</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>7</td><td>27540.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>34.58</td><td>9.00</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>8</td><td>27540.00</td><td>56.61</td><td>88.20</td><td>-31.59</td><td>47.61</td><td>9.00</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	6885.00	92.88			88.48	4.40	Average	162	356	2	6885.00	106.45			102.05	4.40	Peak	162	356	3	13770.00	43.95	68.20	-24.25	36.38	7.57	Average	100	23	4	13770.00	56.12	88.20	-32.08	48.55	7.57	Peak	100	23	5	20655.00	41.19	54.00	-12.81	38.01	3.18	Average	100	68	6	20655.00	53.51	74.00	-20.49	50.33	3.18	Peak	100	68	7	27540.00	43.58	68.20	-24.62	34.58	9.00	Average	100	39	8	27540.00	56.61	88.20	-31.59	47.61	9.00	Peak	100	39
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	6885.00	92.88			88.48	4.40	Average	162	356																																																																																				
2	6885.00	106.45			102.05	4.40	Peak	162	356																																																																																				
3	13770.00	43.95	68.20	-24.25	36.38	7.57	Average	100	23																																																																																				
4	13770.00	56.12	88.20	-32.08	48.55	7.57	Peak	100	23																																																																																				
5	20655.00	41.19	54.00	-12.81	38.01	3.18	Average	100	68																																																																																				
6	20655.00	53.51	74.00	-20.49	50.33	3.18	Peak	100	68																																																																																				
7	27540.00	43.58	68.20	-24.62	34.58	9.00	Average	100	39																																																																																				
8	27540.00	56.61	88.20	-31.59	47.61	9.00	Peak	100	39																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6885							
Polarization	Vertical									
Test By :Brad Wu Temperature(°C):23 Humidity(%):66										
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz)										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level			reading			High	Table	
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	*	6885.00	91.42		87.02	4.40	Average	196	9	
2	*	6885.00	104.95		100.55	4.40	Peak	196	9	
3		13770.00	43.82	68.20	-24.38	36.25	7.57	Average	100	19
4		13770.00	56.04	88.20	-32.16	48.47	7.57	Peak	100	19
5		20655.00	41.25	54.00	-12.75	38.07	3.18	Average	100	51
6		20655.00	53.64	74.00	-20.36	50.46	3.18	Peak	100	51
7		27540.00	43.46	68.20	-24.74	34.46	9.00	Average	100	24
8		27540.00	56.54	88.20	-31.66	47.54	9.00	Peak	100	24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

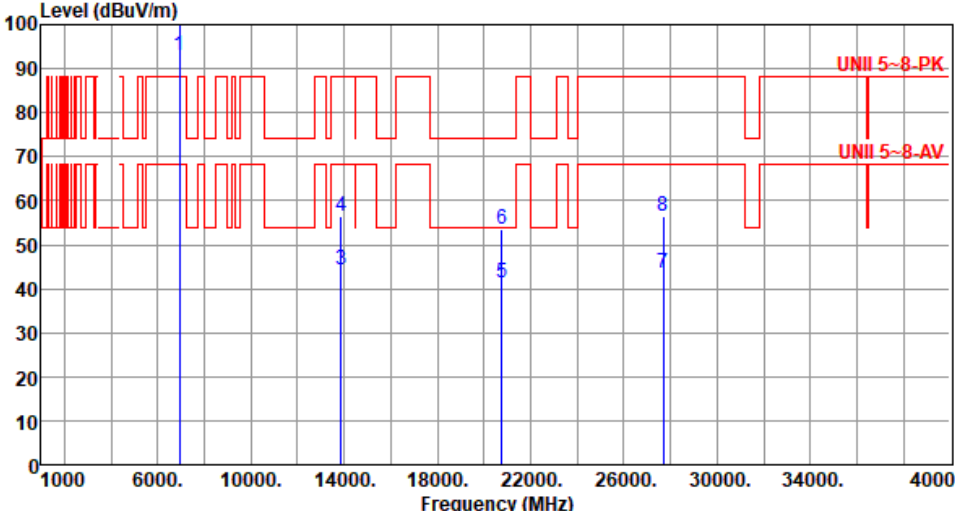

Modulation	be EHT40		Test Freq. (MHz)		6925				
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	*	6925.00	93.16		88.52	4.64	Average	153	355
2	*	6925.00	107.09		102.45	4.64	Peak	153	355
3		13850.00	44.39	68.20 -23.81	36.66	7.73	Average	100	51
4		13850.00	56.42	88.20 -31.78	48.69	7.73	Peak	100	51
5		20775.00	41.49	54.00 -12.51	38.15	3.34	Average	100	60
6		20775.00	53.68	74.00 -20.32	50.34	3.34	Peak	100	60
7		27700.00	43.69	68.20 -24.51	34.56	9.13	Average	100	29
8		27700.00	56.61	88.20 -31.59	47.48	9.13	Peak	100	29


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency

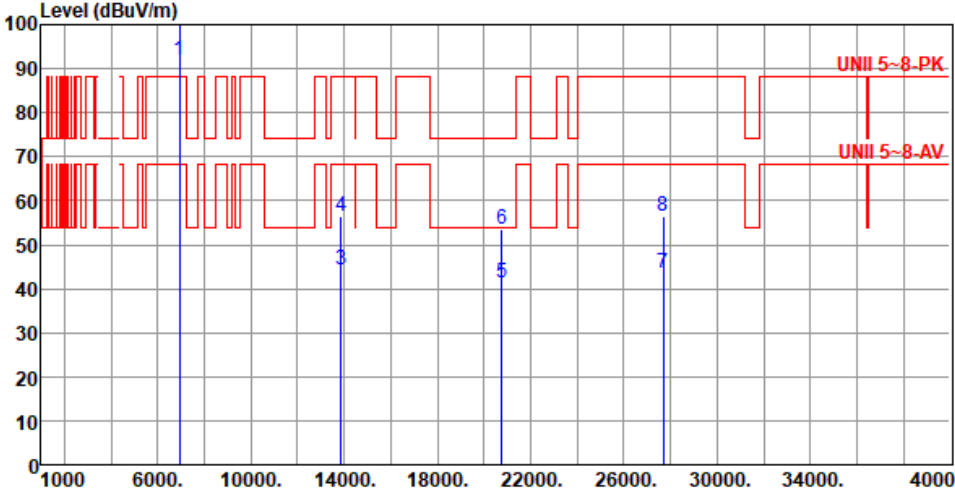


Modulation	be EHT40	Test Freq. (MHz)	6925																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																						
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6925.00</td><td>91.75</td><td></td><td></td><td>87.11</td><td>4.64</td><td>Average</td><td>194</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6925.00</td><td>105.71</td><td></td><td></td><td>101.07</td><td>4.64</td><td>Peak</td><td>194</td><td>5</td></tr><tr><td>3</td><td></td><td>13850.00</td><td>44.36</td><td>68.20</td><td>-23.84</td><td>36.63</td><td>7.73</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td></td><td>13850.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>48.62</td><td>7.73</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td></td><td>20775.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>38.01</td><td>3.34</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td></td><td>20775.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>50.25</td><td>3.34</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td></td><td>27700.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>34.51</td><td>9.13</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td></td><td>27700.00</td><td>56.59</td><td>88.20</td><td>-31.61</td><td>47.46</td><td>9.13</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6925.00	91.75			87.11	4.64	Average	194	5	2	*	6925.00	105.71			101.07	4.64	Peak	194	5	3		13850.00	44.36	68.20	-23.84	36.63	7.73	Average	100	25	4		13850.00	56.35	88.20	-31.85	48.62	7.73	Peak	100	25	5		20775.00	41.35	54.00	-12.65	38.01	3.34	Average	100	27	6		20775.00	53.59	74.00	-20.41	50.25	3.34	Peak	100	27	7		27700.00	43.64	68.20	-24.56	34.51	9.13	Average	100	35	8		27700.00	56.59	88.20	-31.61	47.46	9.13	Peak	100	35
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6925.00	91.75			87.11	4.64	Average	194	5																																																																																												
2	*	6925.00	105.71			101.07	4.64	Peak	194	5																																																																																												
3		13850.00	44.36	68.20	-23.84	36.63	7.73	Average	100	25																																																																																												
4		13850.00	56.35	88.20	-31.85	48.62	7.73	Peak	100	25																																																																																												
5		20775.00	41.35	54.00	-12.65	38.01	3.34	Average	100	27																																																																																												
6		20775.00	53.59	74.00	-20.41	50.25	3.34	Peak	100	27																																																																																												
7		27700.00	43.64	68.20	-24.56	34.51	9.13	Average	100	35																																																																																												
8		27700.00	56.59	88.20	-31.61	47.46	9.13	Peak	100	35																																																																																												




Modulation	be EHT40	Test Freq. (MHz)	7005																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>7005.00</td><td>94.47</td><td></td><td></td><td>89.35</td><td>5.12</td><td>Average</td><td>166</td><td>354</td></tr><tr><td>2 *</td><td>7005.00</td><td>108.50</td><td></td><td></td><td>103.38</td><td>5.12</td><td>Peak</td><td>166</td><td>354</td></tr><tr><td>3</td><td>14010.00</td><td>45.38</td><td>68.20</td><td>-22.82</td><td>37.42</td><td>7.96</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>4</td><td>14010.00</td><td>57.76</td><td>88.20</td><td>-30.44</td><td>49.80</td><td>7.96</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>5</td><td>21015.00</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>38.02</td><td>3.84</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>21015.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>49.91</td><td>3.84</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>7</td><td>28020.00</td><td>44.42</td><td>68.20</td><td>-23.78</td><td>35.00</td><td>9.42</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>8</td><td>28020.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>47.52</td><td>9.42</td><td>Peak</td><td>100</td><td>62</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	7005.00	94.47			89.35	5.12	Average	166	354	2 *	7005.00	108.50			103.38	5.12	Peak	166	354	3	14010.00	45.38	68.20	-22.82	37.42	7.96	Average	100	22	4	14010.00	57.76	88.20	-30.44	49.80	7.96	Peak	100	22	5	21015.00	41.86	54.00	-12.14	38.02	3.84	Average	100	43	6	21015.00	53.75	74.00	-20.25	49.91	3.84	Peak	100	43	7	28020.00	44.42	68.20	-23.78	35.00	9.42	Average	100	62	8	28020.00	56.94	88.20	-31.26	47.52	9.42	Peak	100	62
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	7005.00	94.47			89.35	5.12	Average	166	354																																																																																																								
2 *	7005.00	108.50			103.38	5.12	Peak	166	354																																																																																																								
3	14010.00	45.38	68.20	-22.82	37.42	7.96	Average	100	22																																																																																																								
4	14010.00	57.76	88.20	-30.44	49.80	7.96	Peak	100	22																																																																																																								
5	21015.00	41.86	54.00	-12.14	38.02	3.84	Average	100	43																																																																																																								
6	21015.00	53.75	74.00	-20.25	49.91	3.84	Peak	100	43																																																																																																								
7	28020.00	44.42	68.20	-23.78	35.00	9.42	Average	100	62																																																																																																								
8	28020.00	56.94	88.20	-31.26	47.52	9.42	Peak	100	62																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

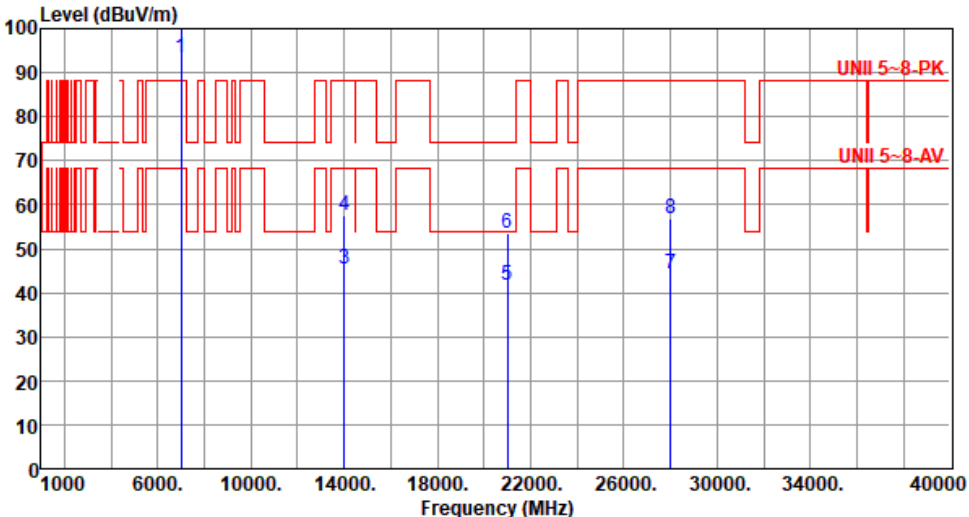

Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	7005.00	93.19			88.07	5.12	Average	194	3
2 *	7005.00	107.21			102.09	5.12	Peak	194	3
3	14010.00	45.26	68.20	-22.94	37.30	7.96	Average	100	18
4	14010.00	57.64	88.20	-30.56	49.68	7.96	Peak	100	18
5	21015.00	41.75	54.00	-12.25	37.91	3.84	Average	100	36
6	21015.00	53.68	74.00	-20.32	49.84	3.84	Peak	100	36
7	28020.00	44.35	68.20	-23.85	34.93	9.42	Average	100	51
8	28020.00	56.88	88.20	-31.32	47.46	9.42	Peak	100	51


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

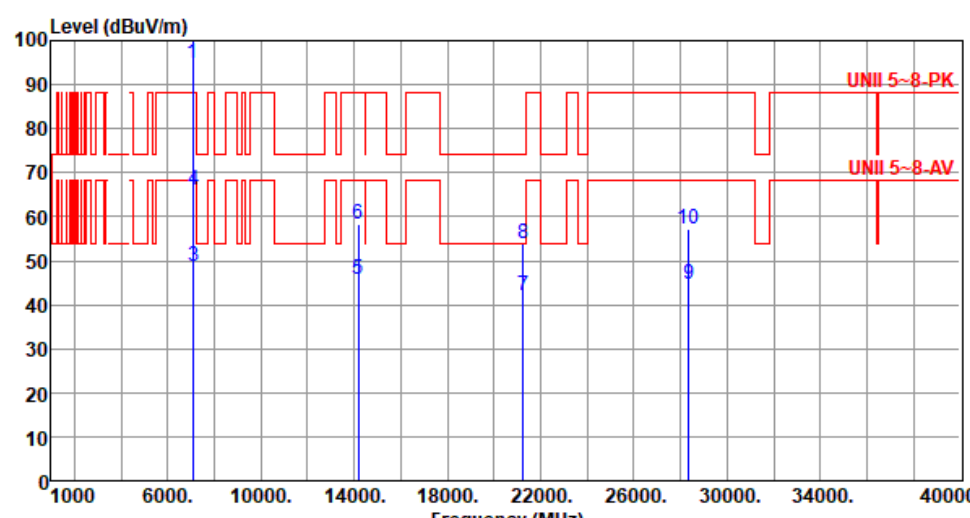

Modulation	be EHT40	Test Freq. (MHz)	7085						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	7085.00	95.01			89.47	5.54	Average	164	2
2 *	7085.00	108.50			102.96	5.54	Peak	164	2
3	7125.00	48.58	68.20	-19.62	42.89	5.69	Average	164	2
4	7125.00	66.18	88.20	-22.02	60.49	5.69	Peak	164	2
5	14170.00	45.64	68.20	-22.56	37.28	8.36	Average	100	9
6	14170.00	58.13	88.20	-30.07	49.77	8.36	Peak	100	9
7	21255.00	41.95	54.00	-12.05	37.87	4.08	Average	100	16
8	21255.00	53.84	74.00	-20.16	49.76	4.08	Peak	100	16
9	28340.00	44.69	68.20	-23.51	35.00	9.69	Average	100	31
10	28340.00	57.12	88.20	-31.08	47.43	9.69	Peak	100	31

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

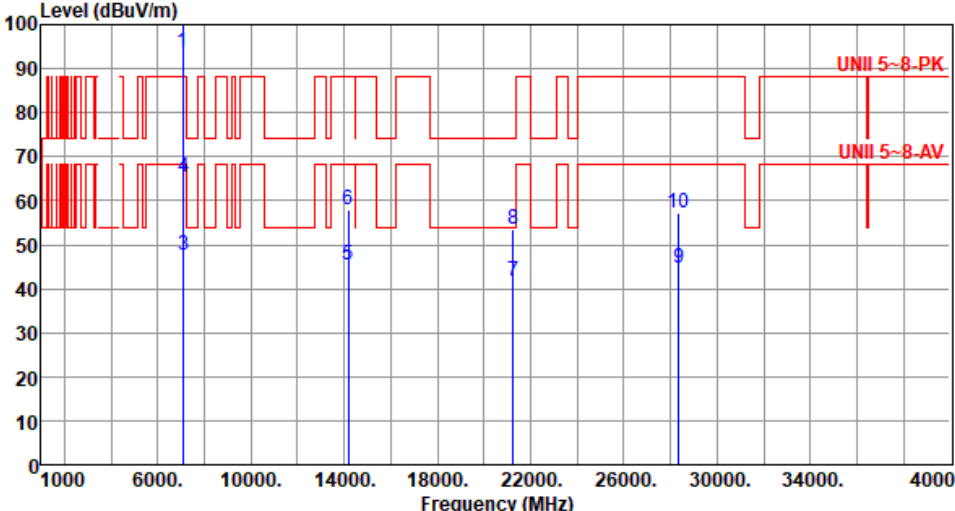

Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																																															
Polarization	Vertical																																																																																																																	
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																		
																																																																																																																		
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1 *</td><td>7085.00</td><td>93.84</td><td></td><td></td><td>88.30</td><td>5.54</td><td>Average</td><td>191</td><td>9</td></tr><tr><td>2 *</td><td>7085.00</td><td>107.26</td><td></td><td></td><td>101.72</td><td>5.54</td><td>Peak</td><td>191</td><td>9</td></tr><tr><td>3</td><td>7125.00</td><td>47.46</td><td>68.20</td><td>-20.74</td><td>41.77</td><td>5.69</td><td>Average</td><td>191</td><td>9</td></tr><tr><td>4</td><td>7125.00</td><td>65.45</td><td>88.20</td><td>-22.75</td><td>59.76</td><td>5.69</td><td>Peak</td><td>191</td><td>9</td></tr><tr><td>5</td><td>14170.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>37.15</td><td>8.36</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>14170.00</td><td>58.09</td><td>88.20</td><td>-30.11</td><td>49.73</td><td>8.36</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>7</td><td>21255.00</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>37.78</td><td>4.08</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>8</td><td>21255.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>49.60</td><td>4.08</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>9</td><td>28340.00</td><td>44.62</td><td>68.20</td><td>-23.58</td><td>34.93</td><td>9.69</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>10</td><td>28340.00</td><td>57.04</td><td>88.20</td><td>-31.16</td><td>47.35</td><td>9.69</td><td>Peak</td><td>100</td><td>11</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7085.00	93.84			88.30	5.54	Average	191	9	2 *	7085.00	107.26			101.72	5.54	Peak	191	9	3	7125.00	47.46	68.20	-20.74	41.77	5.69	Average	191	9	4	7125.00	65.45	88.20	-22.75	59.76	5.69	Peak	191	9	5	14170.00	45.51	68.20	-22.69	37.15	8.36	Average	100	23	6	14170.00	58.09	88.20	-30.11	49.73	8.36	Peak	100	23	7	21255.00	41.86	54.00	-12.14	37.78	4.08	Average	100	38	8	21255.00	53.68	74.00	-20.32	49.60	4.08	Peak	100	38	9	28340.00	44.62	68.20	-23.58	34.93	9.69	Average	100	11	10	28340.00	57.04	88.20	-31.16	47.35	9.69	Peak	100	11			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1 *	7085.00	93.84			88.30	5.54	Average	191	9																																																																																																									
2 *	7085.00	107.26			101.72	5.54	Peak	191	9																																																																																																									
3	7125.00	47.46	68.20	-20.74	41.77	5.69	Average	191	9																																																																																																									
4	7125.00	65.45	88.20	-22.75	59.76	5.69	Peak	191	9																																																																																																									
5	14170.00	45.51	68.20	-22.69	37.15	8.36	Average	100	23																																																																																																									
6	14170.00	58.09	88.20	-30.11	49.73	8.36	Peak	100	23																																																																																																									
7	21255.00	41.86	54.00	-12.14	37.78	4.08	Average	100	38																																																																																																									
8	21255.00	53.68	74.00	-20.32	49.60	4.08	Peak	100	38																																																																																																									
9	28340.00	44.62	68.20	-23.58	34.93	9.69	Average	100	11																																																																																																									
10	28340.00	57.04	88.20	-31.16	47.35	9.69	Peak	100	11																																																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																		

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>53.44</td><td>1.51</td><td>Average</td><td>152</td><td>3</td></tr><tr><td>2</td><td>5925.00</td><td>75.83</td><td>88.20</td><td>-12.37</td><td>74.32</td><td>1.51</td><td>Peak</td><td>152</td><td>3</td></tr><tr><td>3 *</td><td>5985.00</td><td>91.59</td><td></td><td></td><td>90.11</td><td>1.48</td><td>Average</td><td>152</td><td>3</td></tr><tr><td>4 *</td><td>5985.00</td><td>105.13</td><td></td><td></td><td>103.65</td><td>1.48</td><td>Peak</td><td>152</td><td>3</td></tr><tr><td>5</td><td>11970.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>34.12</td><td>7.72</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>6</td><td>11970.00</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>47.64</td><td>7.72</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>7</td><td>23940.00</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>35.70</td><td>7.41</td><td>Average</td><td>110</td><td>58</td></tr><tr><td>8</td><td>23940.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>48.78</td><td>7.41</td><td>Peak</td><td>110</td><td>58</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	54.95	68.20	-13.25	53.44	1.51	Average	152	3	2	5925.00	75.83	88.20	-12.37	74.32	1.51	Peak	152	3	3 *	5985.00	91.59			90.11	1.48	Average	152	3	4 *	5985.00	105.13			103.65	1.48	Peak	152	3	5	11970.00	41.84	54.00	-12.16	34.12	7.72	Average	100	14	6	11970.00	55.36	74.00	-18.64	47.64	7.72	Peak	100	14	7	23940.00	43.11	54.00	-10.89	35.70	7.41	Average	110	58	8	23940.00	56.19	74.00	-17.81	48.78	7.41	Peak	110	58
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	54.95	68.20	-13.25	53.44	1.51	Average	152	3																																																																																				
2	5925.00	75.83	88.20	-12.37	74.32	1.51	Peak	152	3																																																																																				
3 *	5985.00	91.59			90.11	1.48	Average	152	3																																																																																				
4 *	5985.00	105.13			103.65	1.48	Peak	152	3																																																																																				
5	11970.00	41.84	54.00	-12.16	34.12	7.72	Average	100	14																																																																																				
6	11970.00	55.36	74.00	-18.64	47.64	7.72	Peak	100	14																																																																																				
7	23940.00	43.11	54.00	-10.89	35.70	7.41	Average	110	58																																																																																				
8	23940.00	56.19	74.00	-17.81	48.78	7.41	Peak	110	58																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>52.75</td><td>68.20</td><td>-15.45</td><td>51.24</td><td>1.51</td><td>Average</td><td>192</td><td>4</td></tr><tr><td>2</td><td>5925.00</td><td>74.49</td><td>88.20</td><td>-13.71</td><td>72.98</td><td>1.51</td><td>Peak</td><td>192</td><td>4</td></tr><tr><td>3 *</td><td>5985.00</td><td>90.21</td><td></td><td></td><td>88.73</td><td>1.48</td><td>Average</td><td>192</td><td>4</td></tr><tr><td>4 *</td><td>5985.00</td><td>103.84</td><td></td><td></td><td>102.36</td><td>1.48</td><td>Peak</td><td>192</td><td>4</td></tr><tr><td>5</td><td>11970.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>34.04</td><td>7.72</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>11970.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>47.52</td><td>7.72</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>7</td><td>23940.00</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>35.61</td><td>7.41</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>8</td><td>23940.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>48.67</td><td>7.41</td><td>Peak</td><td>100</td><td>45</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	52.75	68.20	-15.45	51.24	1.51	Average	192	4	2	5925.00	74.49	88.20	-13.71	72.98	1.51	Peak	192	4	3 *	5985.00	90.21			88.73	1.48	Average	192	4	4 *	5985.00	103.84			102.36	1.48	Peak	192	4	5	11970.00	41.76	54.00	-12.24	34.04	7.72	Average	100	29	6	11970.00	55.24	74.00	-18.76	47.52	7.72	Peak	100	29	7	23940.00	43.02	54.00	-10.98	35.61	7.41	Average	100	45	8	23940.00	56.08	74.00	-17.92	48.67	7.41	Peak	100	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	52.75	68.20	-15.45	51.24	1.51	Average	192	4																																																																																				
2	5925.00	74.49	88.20	-13.71	72.98	1.51	Peak	192	4																																																																																				
3 *	5985.00	90.21			88.73	1.48	Average	192	4																																																																																				
4 *	5985.00	103.84			102.36	1.48	Peak	192	4																																																																																				
5	11970.00	41.76	54.00	-12.24	34.04	7.72	Average	100	29																																																																																				
6	11970.00	55.24	74.00	-18.76	47.52	7.72	Peak	100	29																																																																																				
7	23940.00	43.02	54.00	-10.98	35.61	7.41	Average	100	45																																																																																				
8	23940.00	56.08	74.00	-17.92	48.67	7.41	Peak	100	45																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	be EHT80	Test Freq. (MHz)	6145						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6145.00	90.71			88.89	1.82	Average	169	9
2 *	6145.00	105.00			103.18	1.82	Peak	169	9
3	12290.00	42.85	54.00	-11.15	35.33	7.52	Average	100	3
4	12290.00	55.36	74.00	-18.64	47.84	7.52	Peak	100	3
5	18435.00	40.46	54.00	-13.54	38.93	1.53	Average	100	22
6	18435.00	53.24	74.00	-20.76	51.71	1.53	Peak	100	22
7	24580.00	42.45	68.20	-25.75	34.22	8.23	Average	100	51
8	24580.00	54.86	88.20	-33.34	46.63	8.23	Peak	100	51
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)									
*Factor includes antenna factor , cable loss and amplifier gain									
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									
Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT80	Test Freq. (MHz)	6145																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6145.00</td><td>89.45</td><td></td><td></td><td>87.63</td><td>1.82</td><td>Average</td><td>198</td><td>11</td></tr><tr><td>2 *</td><td>6145.00</td><td>103.76</td><td></td><td></td><td>101.94</td><td>1.82</td><td>Peak</td><td>198</td><td>11</td></tr><tr><td>3</td><td>12290.00</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>35.25</td><td>7.52</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>4</td><td>12290.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>47.79</td><td>7.52</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>5</td><td>18435.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>39.01</td><td>1.53</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>18435.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>51.76</td><td>1.53</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>7</td><td>24580.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>34.08</td><td>8.23</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>8</td><td>24580.00</td><td>54.78</td><td>88.20</td><td>-33.42</td><td>46.55</td><td>8.23</td><td>Peak</td><td>100</td><td>47</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6145.00	89.45			87.63	1.82	Average	198	11	2 *	6145.00	103.76			101.94	1.82	Peak	198	11	3	12290.00	42.77	54.00	-11.23	35.25	7.52	Average	100	18	4	12290.00	55.31	74.00	-18.69	47.79	7.52	Peak	100	18	5	18435.00	40.54	54.00	-13.46	39.01	1.53	Average	100	39	6	18435.00	53.29	74.00	-20.71	51.76	1.53	Peak	100	39	7	24580.00	42.31	68.20	-25.89	34.08	8.23	Average	100	47	8	24580.00	54.78	88.20	-33.42	46.55	8.23	Peak	100	47
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6145.00	89.45			87.63	1.82	Average	198	11																																																																																																								
2 *	6145.00	103.76			101.94	1.82	Peak	198	11																																																																																																								
3	12290.00	42.77	54.00	-11.23	35.25	7.52	Average	100	18																																																																																																								
4	12290.00	55.31	74.00	-18.69	47.79	7.52	Peak	100	18																																																																																																								
5	18435.00	40.54	54.00	-13.46	39.01	1.53	Average	100	39																																																																																																								
6	18435.00	53.29	74.00	-20.71	51.76	1.53	Peak	100	39																																																																																																								
7	24580.00	42.31	68.20	-25.89	34.08	8.23	Average	100	47																																																																																																								
8	24580.00	54.78	88.20	-33.42	46.55	8.23	Peak	100	47																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

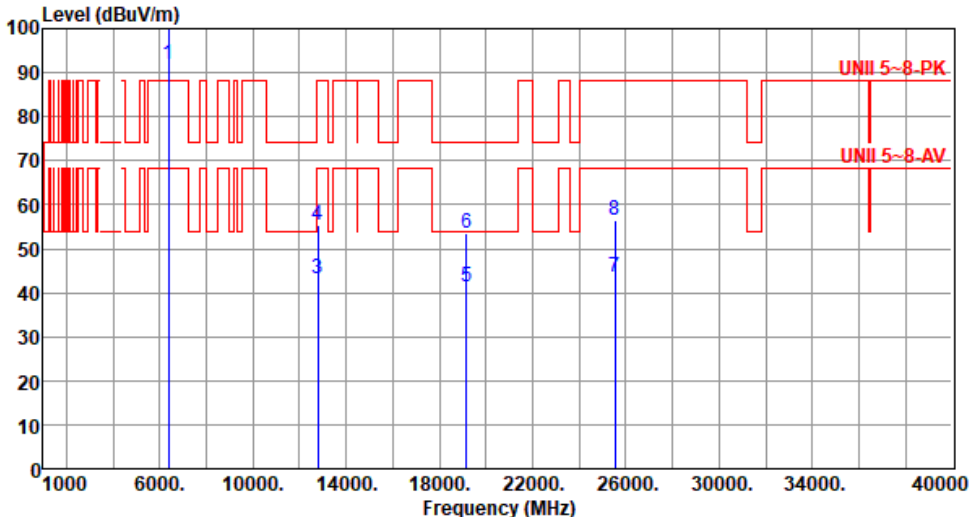


Modulation	be EHT80	Test Freq. (MHz)	6385						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6385.00	91.70			88.71	2.99	Average	158	356
2 *	6385.00	105.77			102.78	2.99	Peak	158	356
3	12770.00	43.18	68.20	-25.02	35.74	7.44	Average	100	36
4	12770.00	55.29	88.20	-32.91	47.85	7.44	Peak	100	36
5	19155.00	41.26	54.00	-12.74	39.47	1.79	Average	100	19
6	19155.00	53.54	74.00	-20.46	51.75	1.79	Peak	100	19
7	25540.00	43.46	68.20	-24.74	35.27	8.19	Average	100	61
8	25540.00	56.38	88.20	-31.82	48.19	8.19	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT80		Test Freq. (MHz)		6385																																																																																											
Polarization	Vertical																																																																																															
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6385.00</td><td>90.42</td><td></td><td></td><td>87.43</td><td>2.99</td><td>Average</td><td>189</td><td>7</td></tr><tr><td>2 *</td><td>6385.00</td><td>104.48</td><td></td><td></td><td>101.49</td><td>2.99</td><td>Peak</td><td>189</td><td>7</td></tr><tr><td>3</td><td>12770.00</td><td>43.24</td><td>68.20</td><td>-24.96</td><td>35.80</td><td>7.44</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>4</td><td>12770.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>47.91</td><td>7.44</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>5</td><td>19155.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>39.39</td><td>1.79</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>19155.00</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>51.67</td><td>1.79</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>7</td><td>25540.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>35.19</td><td>8.19</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>8</td><td>25540.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>48.13</td><td>8.19</td><td>Peak</td><td>100</td><td>44</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6385.00	90.42			87.43	2.99	Average	189	7	2 *	6385.00	104.48			101.49	2.99	Peak	189	7	3	12770.00	43.24	68.20	-24.96	35.80	7.44	Average	100	51	4	12770.00	55.35	88.20	-32.85	47.91	7.44	Peak	100	51	5	19155.00	41.18	54.00	-12.82	39.39	1.79	Average	100	21	6	19155.00	53.46	74.00	-20.54	51.67	1.79	Peak	100	21	7	25540.00	43.38	68.20	-24.82	35.19	8.19	Average	100	44	8	25540.00	56.32	88.20	-31.88	48.13	8.19	Peak	100	44
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																							
1 *	6385.00	90.42			87.43	2.99	Average	189	7																																																																																							
2 *	6385.00	104.48			101.49	2.99	Peak	189	7																																																																																							
3	12770.00	43.24	68.20	-24.96	35.80	7.44	Average	100	51																																																																																							
4	12770.00	55.35	88.20	-32.85	47.91	7.44	Peak	100	51																																																																																							
5	19155.00	41.18	54.00	-12.82	39.39	1.79	Average	100	21																																																																																							
6	19155.00	53.46	74.00	-20.54	51.67	1.79	Peak	100	21																																																																																							
7	25540.00	43.38	68.20	-24.82	35.19	8.19	Average	100	44																																																																																							
8	25540.00	56.32	88.20	-31.88	48.13	8.19	Peak	100	44																																																																																							
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																

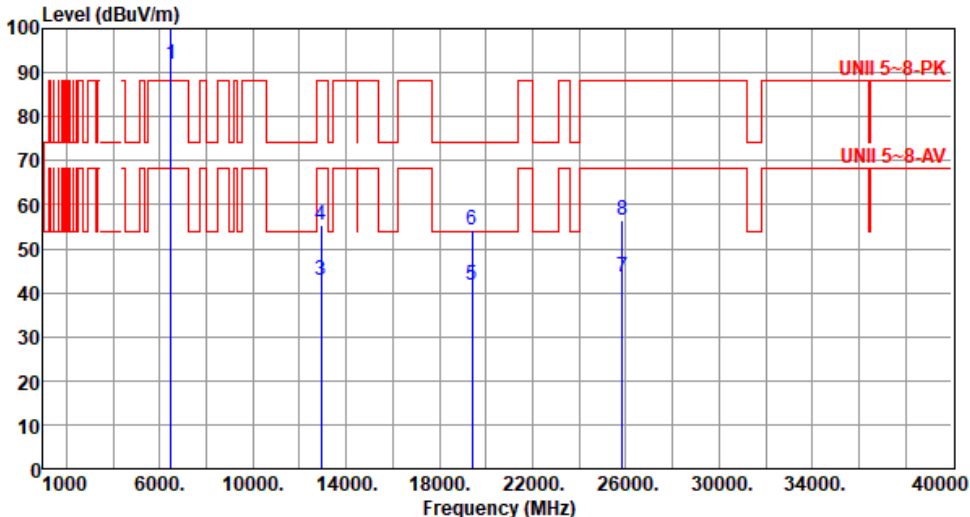

Modulation	be EHT80	Test Freq. (MHz)	6465																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6465.00</td><td>91.98</td><td></td><td>88.64</td><td>3.34</td><td>Average</td><td>169</td><td>355</td></tr><tr><td>2</td><td>*</td><td>6465.00</td><td>105.76</td><td></td><td>102.42</td><td>3.34</td><td>Peak</td><td>169</td><td>355</td></tr><tr><td>3</td><td></td><td>12930.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>35.25</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td></td><td>12930.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>47.68</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5</td><td></td><td>19395.00</td><td>41.62</td><td>54.00</td><td>-12.38</td><td>39.72</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>6</td><td></td><td>19395.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>52.21</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>7</td><td></td><td>25860.00</td><td>43.59</td><td>68.20</td><td>-24.61</td><td>35.43</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>8</td><td></td><td>25860.00</td><td>56.36</td><td>88.20</td><td>-31.84</td><td>48.20</td><td>Peak</td><td>100</td><td>38</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6465.00	91.98		88.64	3.34	Average	169	355	2	*	6465.00	105.76		102.42	3.34	Peak	169	355	3		12930.00	42.81	68.20	-25.39	35.25	Average	100	29	4		12930.00	55.24	88.20	-32.96	47.68	Peak	100	29	5		19395.00	41.62	54.00	-12.38	39.72	Average	100	35	6		19395.00	54.11	74.00	-19.89	52.21	Peak	100	35	7		25860.00	43.59	68.20	-24.61	35.43	Average	100	38	8		25860.00	56.36	88.20	-31.84	48.20	Peak	100	38
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6465.00	91.98		88.64	3.34	Average	169	355																																																																																																								
2	*	6465.00	105.76		102.42	3.34	Peak	169	355																																																																																																								
3		12930.00	42.81	68.20	-25.39	35.25	Average	100	29																																																																																																								
4		12930.00	55.24	88.20	-32.96	47.68	Peak	100	29																																																																																																								
5		19395.00	41.62	54.00	-12.38	39.72	Average	100	35																																																																																																								
6		19395.00	54.11	74.00	-19.89	52.21	Peak	100	35																																																																																																								
7		25860.00	43.59	68.20	-24.61	35.43	Average	100	38																																																																																																								
8		25860.00	56.36	88.20	-31.84	48.20	Peak	100	38																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

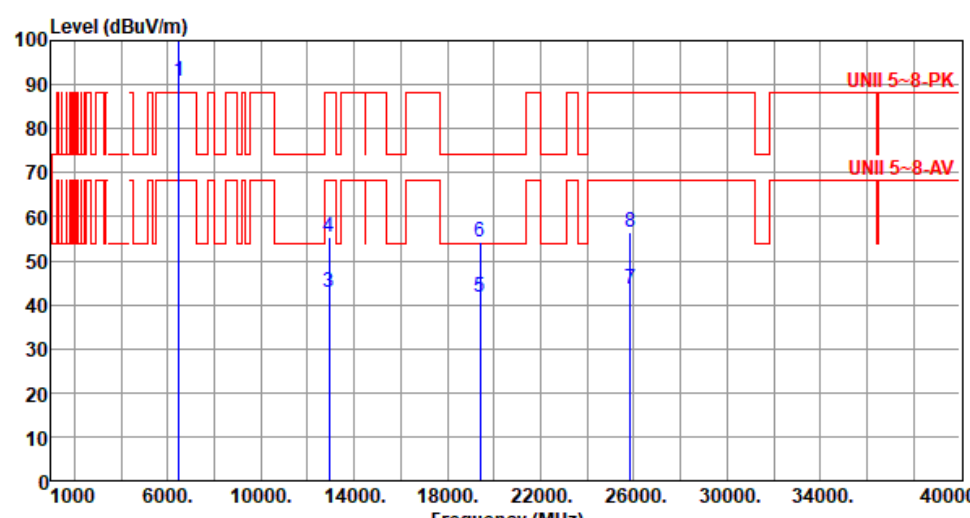

Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6465.00	90.64			87.30	3.34	Average	191	357
2 *	6465.00	104.46			101.12	3.34	Peak	191	357
3	12930.00	42.74	68.20	-25.46	35.18	7.56	Average	100	35
4	12930.00	55.19	88.20	-33.01	47.63	7.56	Peak	100	35
5	19395.00	41.54	54.00	-12.46	39.64	1.90	Average	100	28
6	19395.00	54.06	74.00	-19.94	52.16	1.90	Peak	100	28
7	25860.00	43.52	68.20	-24.68	35.36	8.16	Average	100	45
8	25860.00	56.28	88.20	-31.92	48.12	8.16	Peak	100	45
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6545.00	92.14			88.40	3.74	Average	164	4
2 *	6545.00	106.04			102.30	3.74	Peak	164	4
3	13090.00	42.98	68.20	-25.22	35.77	7.21	Average	100	33
4	13090.00	55.41	88.20	-32.79	48.20	7.21	Peak	100	33
5	19635.00	41.34	54.00	-12.66	39.29	2.05	Average	100	25
6	19635.00	53.65	74.00	-20.35	51.60	2.05	Peak	100	25
7	26180.00	43.41	68.20	-24.79	35.04	8.37	Average	100	22
8	26180.00	56.35	88.20	-31.85	47.98	8.37	Peak	100	22

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																						
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6545.00</td><td>90.76</td><td></td><td></td><td>87.02</td><td>3.74</td><td>Average</td><td>189</td><td>355</td></tr><tr><td>2</td><td>*</td><td>6545.00</td><td>104.74</td><td></td><td></td><td>101.00</td><td>3.74</td><td>Peak</td><td>189</td><td>355</td></tr><tr><td>3</td><td></td><td>13090.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>35.64</td><td>7.21</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td></td><td>13090.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>48.15</td><td>7.21</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5</td><td></td><td>19635.00</td><td>41.42</td><td>54.00</td><td>-12.58</td><td>39.37</td><td>2.05</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td></td><td>19635.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.76</td><td>2.05</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>7</td><td></td><td>26180.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>34.91</td><td>8.37</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>8</td><td></td><td>26180.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>47.92</td><td>8.37</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6545.00	90.76			87.02	3.74	Average	189	355	2	*	6545.00	104.74			101.00	3.74	Peak	189	355	3		13090.00	42.85	68.20	-25.35	35.64	7.21	Average	100	29	4		13090.00	55.36	88.20	-32.84	48.15	7.21	Peak	100	29	5		19635.00	41.42	54.00	-12.58	39.37	2.05	Average	100	39	6		19635.00	53.81	74.00	-20.19	51.76	2.05	Peak	100	39	7		26180.00	43.28	68.20	-24.92	34.91	8.37	Average	100	19	8		26180.00	56.29	88.20	-31.91	47.92	8.37	Peak	100	19
		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6545.00	90.76			87.02	3.74	Average	189	355																																																																																												
2	*	6545.00	104.74			101.00	3.74	Peak	189	355																																																																																												
3		13090.00	42.85	68.20	-25.35	35.64	7.21	Average	100	29																																																																																												
4		13090.00	55.36	88.20	-32.84	48.15	7.21	Peak	100	29																																																																																												
5		19635.00	41.42	54.00	-12.58	39.37	2.05	Average	100	39																																																																																												
6		19635.00	53.81	74.00	-20.19	51.76	2.05	Peak	100	39																																																																																												
7		26180.00	43.28	68.20	-24.92	34.91	8.37	Average	100	19																																																																																												
8		26180.00	56.29	88.20	-31.91	47.92	8.37	Peak	100	19																																																																																												




Modulation	be EHT80	Test Freq. (MHz)	6625																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1 *</td><td>6625.00</td><td>92.33</td><td></td><td></td><td>88.58</td><td>3.75</td><td>Average</td><td>163</td><td>2</td></tr><tr><td>2 *</td><td>6625.00</td><td>106.79</td><td></td><td></td><td>103.04</td><td>3.75</td><td>Peak</td><td>163</td><td>2</td></tr><tr><td>3</td><td>13250.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>35.76</td><td>7.19</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>13250.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>47.97</td><td>7.19</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5</td><td>19875.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>38.94</td><td>2.18</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td>19875.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>51.37</td><td>2.18</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>7</td><td>26500.00</td><td>43.54</td><td>68.20</td><td>-24.66</td><td>34.56</td><td>8.98</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>8</td><td>26500.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>47.40</td><td>8.98</td><td>Peak</td><td>100</td><td>41</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6625.00	92.33			88.58	3.75	Average	163	2	2 *	6625.00	106.79			103.04	3.75	Peak	163	2	3	13250.00	42.95	54.00	-11.05	35.76	7.19	Average	100	48	4	13250.00	55.16	74.00	-18.84	47.97	7.19	Peak	100	48	5	19875.00	41.12	54.00	-12.88	38.94	2.18	Average	100	26	6	19875.00	53.55	74.00	-20.45	51.37	2.18	Peak	100	26	7	26500.00	43.54	68.20	-24.66	34.56	8.98	Average	100	41	8	26500.00	56.38	88.20	-31.82	47.40	8.98	Peak	100	41
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6625.00	92.33			88.58	3.75	Average	163	2																																																																																				
2 *	6625.00	106.79			103.04	3.75	Peak	163	2																																																																																				
3	13250.00	42.95	54.00	-11.05	35.76	7.19	Average	100	48																																																																																				
4	13250.00	55.16	74.00	-18.84	47.97	7.19	Peak	100	48																																																																																				
5	19875.00	41.12	54.00	-12.88	38.94	2.18	Average	100	26																																																																																				
6	19875.00	53.55	74.00	-20.45	51.37	2.18	Peak	100	26																																																																																				
7	26500.00	43.54	68.20	-24.66	34.56	8.98	Average	100	41																																																																																				
8	26500.00	56.38	88.20	-31.82	47.40	8.98	Peak	100	41																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	be EHT80	Test Freq. (MHz)	6625																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) UNII 5~8-PK UNII 5~8-AV 1 4 6 8 3 5 7 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6625.00</td><td>90.96</td><td></td><td></td><td>87.21</td><td>3.75</td><td>Average</td><td>195</td><td>3</td></tr><tr><td>2 *</td><td>6625.00</td><td>105.34</td><td></td><td></td><td>101.59</td><td>3.75</td><td>Peak</td><td>195</td><td>3</td></tr><tr><td>3</td><td>13250.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>35.67</td><td>7.19</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>13250.00</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>47.88</td><td>7.19</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>19875.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>39.11</td><td>2.18</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>19875.00</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>53.44</td><td>2.18</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>7</td><td>26500.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>34.44</td><td>8.98</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>8</td><td>26500.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>47.33</td><td>8.98</td><td>Peak</td><td>100</td><td>18</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6625.00	90.96			87.21	3.75	Average	195	3	2 *	6625.00	105.34			101.59	3.75	Peak	195	3	3	13250.00	42.86	54.00	-11.14	35.67	7.19	Average	100	25	4	13250.00	55.07	74.00	-18.93	47.88	7.19	Peak	100	25	5	19875.00	41.29	54.00	-12.71	39.11	2.18	Average	100	38	6	19875.00	55.62	74.00	-18.38	53.44	2.18	Peak	100	38	7	26500.00	43.42	68.20	-24.78	34.44	8.98	Average	100	18	8	26500.00	56.31	88.20	-31.89	47.33	8.98	Peak	100	18
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6625.00	90.96			87.21	3.75	Average	195	3																																																																																																								
2 *	6625.00	105.34			101.59	3.75	Peak	195	3																																																																																																								
3	13250.00	42.86	54.00	-11.14	35.67	7.19	Average	100	25																																																																																																								
4	13250.00	55.07	74.00	-18.93	47.88	7.19	Peak	100	25																																																																																																								
5	19875.00	41.29	54.00	-12.71	39.11	2.18	Average	100	38																																																																																																								
6	19875.00	55.62	74.00	-18.38	53.44	2.18	Peak	100	38																																																																																																								
7	26500.00	43.42	68.20	-24.78	34.44	8.98	Average	100	18																																																																																																								
8	26500.00	56.31	88.20	-31.89	47.33	8.98	Peak	100	18																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

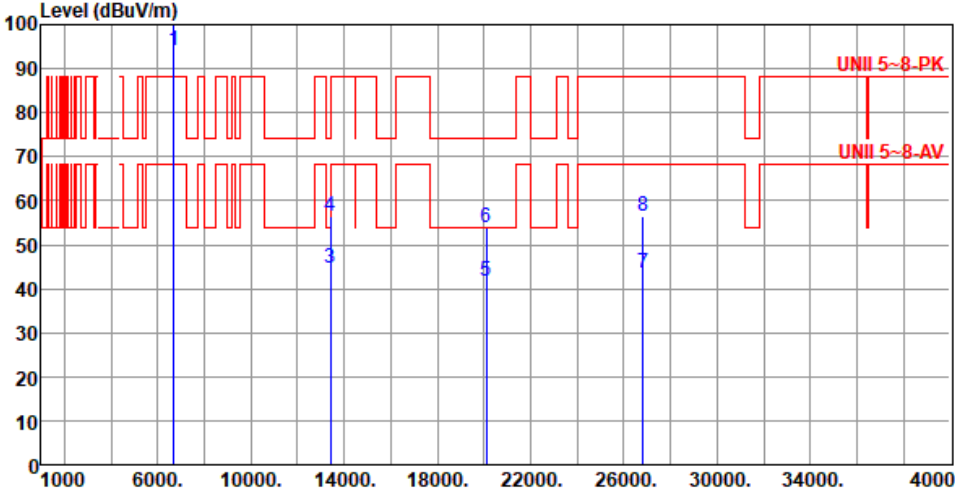

Modulation	be EHT80	Test Freq. (MHz)	6705																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6705.00</td><td>94.09</td><td></td><td></td><td>90.34</td><td>3.75</td><td>Average</td><td>165</td><td>1</td></tr><tr><td>2 *</td><td>6705.00</td><td>107.72</td><td></td><td></td><td>103.97</td><td>3.75</td><td>Peak</td><td>165</td><td>1</td></tr><tr><td>3</td><td>13410.00</td><td>44.52</td><td>68.20</td><td>-23.68</td><td>37.11</td><td>7.41</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>4</td><td>13410.00</td><td>56.61</td><td>88.20</td><td>-31.59</td><td>49.20</td><td>7.41</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>5</td><td>20115.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>39.35</td><td>2.39</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>6</td><td>20115.00</td><td>53.98</td><td>74.00</td><td>-20.02</td><td>51.59</td><td>2.39</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>7</td><td>26820.00</td><td>43.49</td><td>68.20</td><td>-24.71</td><td>34.50</td><td>8.99</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>8</td><td>26820.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>47.36</td><td>8.99</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6705.00	94.09			90.34	3.75	Average	165	1	2 *	6705.00	107.72			103.97	3.75	Peak	165	1	3	13410.00	44.52	68.20	-23.68	37.11	7.41	Average	100	38	4	13410.00	56.61	88.20	-31.59	49.20	7.41	Peak	100	38	5	20115.00	41.74	54.00	-12.26	39.35	2.39	Average	100	41	6	20115.00	53.98	74.00	-20.02	51.59	2.39	Peak	100	41	7	26820.00	43.49	68.20	-24.71	34.50	8.99	Average	100	62	8	26820.00	56.35	88.20	-31.85	47.36	8.99	Peak	100	62
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6705.00	94.09			90.34	3.75	Average	165	1																																																																																																								
2 *	6705.00	107.72			103.97	3.75	Peak	165	1																																																																																																								
3	13410.00	44.52	68.20	-23.68	37.11	7.41	Average	100	38																																																																																																								
4	13410.00	56.61	88.20	-31.59	49.20	7.41	Peak	100	38																																																																																																								
5	20115.00	41.74	54.00	-12.26	39.35	2.39	Average	100	41																																																																																																								
6	20115.00	53.98	74.00	-20.02	51.59	2.39	Peak	100	41																																																																																																								
7	26820.00	43.49	68.20	-24.71	34.50	8.99	Average	100	62																																																																																																								
8	26820.00	56.35	88.20	-31.85	47.36	8.99	Peak	100	62																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

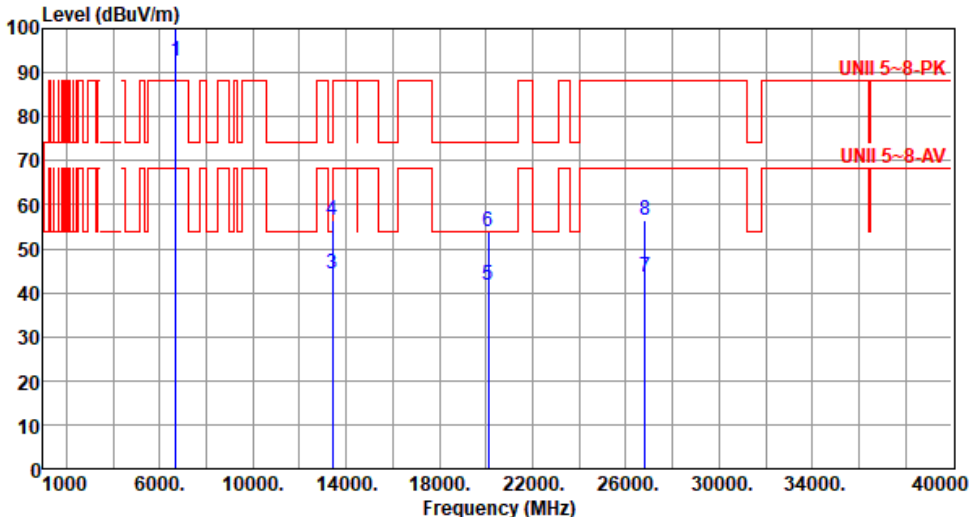

Modulation	be EHT80	Test Freq. (MHz)	6705						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6705.00	92.62			88.87	3.75	Average	187	358
2 *	6705.00	106.36			102.61	3.75	Peak	187	358
3	13410.00	44.42	68.20	-23.78	37.01	7.41	Average	100	51
4	13410.00	56.53	88.20	-31.67	49.12	7.41	Peak	100	51
5	20115.00	41.68	54.00	-12.32	39.29	2.39	Average	100	33
6	20115.00	53.82	74.00	-20.18	51.43	2.39	Peak	100	33
7	26820.00	43.55	68.20	-24.65	34.56	8.99	Average	100	41
8	26820.00	56.42	88.20	-31.78	47.43	8.99	Peak	100	41
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6785.00</td><td>93.56</td><td></td><td></td><td>89.74</td><td>3.82</td><td>Average</td><td>152</td><td>2</td></tr><tr><td>2 *</td><td>6785.00</td><td>106.93</td><td></td><td></td><td>103.11</td><td>3.82</td><td>Peak</td><td>152</td><td>2</td></tr><tr><td>3</td><td>13570.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>36.82</td><td>7.53</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>4</td><td>13570.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>48.95</td><td>7.53</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>5</td><td>20355.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>38.54</td><td>2.75</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>6</td><td>20355.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>50.96</td><td>2.75</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>7</td><td>27140.00</td><td>43.46</td><td>68.20</td><td>-24.74</td><td>34.62</td><td>8.84</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>8</td><td>27140.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>47.48</td><td>8.84</td><td>Peak</td><td>100</td><td>51</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6785.00	93.56			89.74	3.82	Average	152	2	2 *	6785.00	106.93			103.11	3.82	Peak	152	2	3	13570.00	44.35	68.20	-23.85	36.82	7.53	Average	100	23	4	13570.00	56.48	88.20	-31.72	48.95	7.53	Peak	100	23	5	20355.00	41.29	54.00	-12.71	38.54	2.75	Average	100	16	6	20355.00	53.71	74.00	-20.29	50.96	2.75	Peak	100	16	7	27140.00	43.46	68.20	-24.74	34.62	8.84	Average	100	51	8	27140.00	56.32	88.20	-31.88	47.48	8.84	Peak	100	51
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6785.00	93.56			89.74	3.82	Average	152	2																																																																																																								
2 *	6785.00	106.93			103.11	3.82	Peak	152	2																																																																																																								
3	13570.00	44.35	68.20	-23.85	36.82	7.53	Average	100	23																																																																																																								
4	13570.00	56.48	88.20	-31.72	48.95	7.53	Peak	100	23																																																																																																								
5	20355.00	41.29	54.00	-12.71	38.54	2.75	Average	100	16																																																																																																								
6	20355.00	53.71	74.00	-20.29	50.96	2.75	Peak	100	16																																																																																																								
7	27140.00	43.46	68.20	-24.74	34.62	8.84	Average	100	51																																																																																																								
8	27140.00	56.32	88.20	-31.88	47.48	8.84	Peak	100	51																																																																																																								



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6785.00</td><td>92.16</td><td></td><td>88.34</td><td>3.82</td><td>Average</td><td>191</td><td>7</td></tr><tr><td>2</td><td>*</td><td>6785.00</td><td>105.56</td><td></td><td>101.74</td><td>3.82</td><td>Peak</td><td>191</td><td>7</td></tr><tr><td>3</td><td></td><td>13570.00</td><td>44.29</td><td>68.20 -23.91</td><td>36.76</td><td>7.53</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>4</td><td></td><td>13570.00</td><td>56.39</td><td>88.20 -31.81</td><td>48.86</td><td>7.53</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>5</td><td></td><td>20355.00</td><td>41.34</td><td>54.00 -12.66</td><td>38.59</td><td>2.75</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td></td><td>20355.00</td><td>53.82</td><td>74.00 -20.18</td><td>51.07</td><td>2.75</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>7</td><td></td><td>27140.00</td><td>43.51</td><td>68.20 -24.69</td><td>34.67</td><td>8.84</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>8</td><td></td><td>27140.00</td><td>56.44</td><td>88.20 -31.76</td><td>47.60</td><td>8.84</td><td>Peak</td><td>100</td><td>45</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	*	6785.00	92.16		88.34	3.82	Average	191	7	2	*	6785.00	105.56		101.74	3.82	Peak	191	7	3		13570.00	44.29	68.20 -23.91	36.76	7.53	Average	100	14	4		13570.00	56.39	88.20 -31.81	48.86	7.53	Peak	100	14	5		20355.00	41.34	54.00 -12.66	38.59	2.75	Average	100	29	6		20355.00	53.82	74.00 -20.18	51.07	2.75	Peak	100	29	7		27140.00	43.51	68.20 -24.69	34.67	8.84	Average	100	45	8		27140.00	56.44	88.20 -31.76	47.60	8.84	Peak	100	45
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
								cm	deg																																																																																																								
1	*	6785.00	92.16		88.34	3.82	Average	191	7																																																																																																								
2	*	6785.00	105.56		101.74	3.82	Peak	191	7																																																																																																								
3		13570.00	44.29	68.20 -23.91	36.76	7.53	Average	100	14																																																																																																								
4		13570.00	56.39	88.20 -31.81	48.86	7.53	Peak	100	14																																																																																																								
5		20355.00	41.34	54.00 -12.66	38.59	2.75	Average	100	29																																																																																																								
6		20355.00	53.82	74.00 -20.18	51.07	2.75	Peak	100	29																																																																																																								
7		27140.00	43.51	68.20 -24.69	34.67	8.84	Average	100	45																																																																																																								
8		27140.00	56.44	88.20 -31.76	47.60	8.84	Peak	100	45																																																																																																								




Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	6865																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																												
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6865.00</td><td>92.08</td><td></td><td></td><td>87.81</td><td>4.27</td><td>Average</td><td>194</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6865.00</td><td>105.18</td><td></td><td></td><td>100.91</td><td>4.27</td><td>Peak</td><td>194</td><td>5</td></tr><tr><td>3</td><td></td><td>13730.00</td><td>44.29</td><td>68.20</td><td>-23.91</td><td>36.80</td><td>7.49</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>4</td><td></td><td>13730.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>48.82</td><td>7.49</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>5</td><td></td><td>20595.00</td><td>41.14</td><td>54.00</td><td>-12.86</td><td>38.02</td><td>3.12</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td></td><td>20595.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>50.26</td><td>3.12</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>7</td><td></td><td>27460.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>34.62</td><td>8.95</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>8</td><td></td><td>27460.00</td><td>56.58</td><td>88.20</td><td>-31.62</td><td>47.63</td><td>8.95</td><td>Peak</td><td>100</td><td>11</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6865.00	92.08			87.81	4.27	Average	194	5	2	*	6865.00	105.18			100.91	4.27	Peak	194	5	3		13730.00	44.29	68.20	-23.91	36.80	7.49	Average	100	36	4		13730.00	56.31	88.20	-31.89	48.82	7.49	Peak	100	36	5		20595.00	41.14	54.00	-12.86	38.02	3.12	Average	100	26	6		20595.00	53.38	74.00	-20.62	50.26	3.12	Peak	100	26	7		27460.00	43.57	68.20	-24.63	34.62	8.95	Average	100	11	8		27460.00	56.58	88.20	-31.62	47.63	8.95	Peak	100	11
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6865.00	92.08			87.81	4.27	Average	194	5																																																																																																																		
2	*	6865.00	105.18			100.91	4.27	Peak	194	5																																																																																																																		
3		13730.00	44.29	68.20	-23.91	36.80	7.49	Average	100	36																																																																																																																		
4		13730.00	56.31	88.20	-31.89	48.82	7.49	Peak	100	36																																																																																																																		
5		20595.00	41.14	54.00	-12.86	38.02	3.12	Average	100	26																																																																																																																		
6		20595.00	53.38	74.00	-20.62	50.26	3.12	Peak	100	26																																																																																																																		
7		27460.00	43.57	68.20	-24.63	34.62	8.95	Average	100	11																																																																																																																		
8		27460.00	56.58	88.20	-31.62	47.63	8.95	Peak	100	11																																																																																																																		

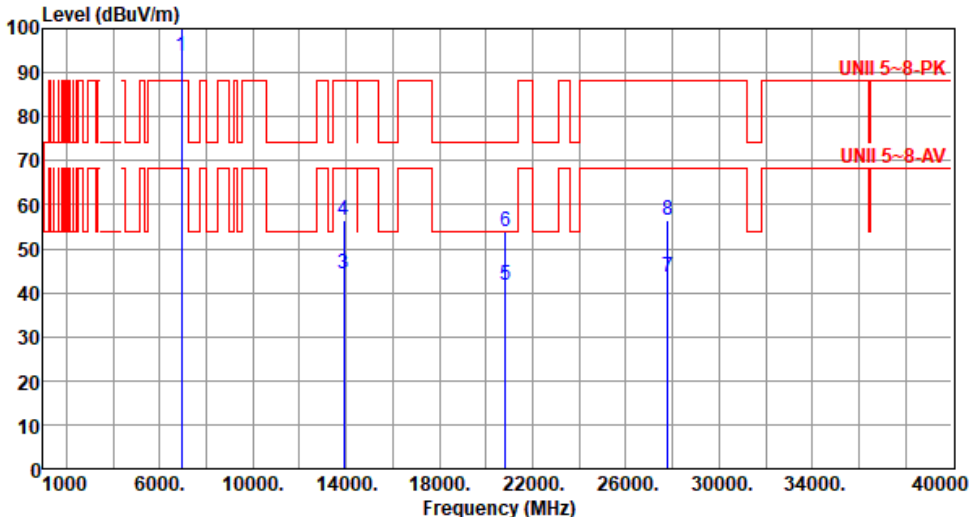

Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6945.00	93.69			88.93	4.76	Average	170	359
2 *	6945.00	106.76			102.00	4.76	Peak	170	359
3	13890.00	44.29	68.20	-23.91	36.48	7.81	Average	100	26
4	13890.00	56.32	88.20	-31.88	48.51	7.81	Peak	100	26
5	20835.00	41.55	54.00	-12.45	38.08	3.47	Average	100	44
6	20835.00	53.72	74.00	-20.28	50.25	3.47	Peak	100	44
7	27780.00	43.61	68.20	-24.59	34.41	9.20	Average	100	36
8	27780.00	56.52	88.20	-31.68	47.32	9.20	Peak	100	36
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT80	Test Freq. (MHz)	6945																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6945.00</td><td>92.16</td><td></td><td></td><td>87.40</td><td>4.76</td><td>Average</td><td>194</td><td>359</td></tr><tr><td>2 *</td><td>6945.00</td><td>105.31</td><td></td><td></td><td>100.55</td><td>4.76</td><td>Peak</td><td>194</td><td>359</td></tr><tr><td>3</td><td>13890.00</td><td>44.45</td><td>68.20</td><td>-23.75</td><td>36.64</td><td>7.81</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>4</td><td>13890.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>48.67</td><td>7.81</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>5</td><td>20835.00</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>38.02</td><td>3.47</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td>20835.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>50.18</td><td>3.47</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td>27780.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>34.35</td><td>9.20</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>8</td><td>27780.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>47.28</td><td>9.20</td><td>Peak</td><td>100</td><td>42</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6945.00	92.16			87.40	4.76	Average	194	359	2 *	6945.00	105.31			100.55	4.76	Peak	194	359	3	13890.00	44.45	68.20	-23.75	36.64	7.81	Average	100	14	4	13890.00	56.48	88.20	-31.72	48.67	7.81	Peak	100	14	5	20835.00	41.49	54.00	-12.51	38.02	3.47	Average	100	27	6	20835.00	53.65	74.00	-20.35	50.18	3.47	Peak	100	27	7	27780.00	43.55	68.20	-24.65	34.35	9.20	Average	100	42	8	27780.00	56.48	88.20	-31.72	47.28	9.20	Peak	100	42
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6945.00	92.16			87.40	4.76	Average	194	359																																																																																																								
2 *	6945.00	105.31			100.55	4.76	Peak	194	359																																																																																																								
3	13890.00	44.45	68.20	-23.75	36.64	7.81	Average	100	14																																																																																																								
4	13890.00	56.48	88.20	-31.72	48.67	7.81	Peak	100	14																																																																																																								
5	20835.00	41.49	54.00	-12.51	38.02	3.47	Average	100	27																																																																																																								
6	20835.00	53.65	74.00	-20.35	50.18	3.47	Peak	100	27																																																																																																								
7	27780.00	43.55	68.20	-24.65	34.35	9.20	Average	100	42																																																																																																								
8	27780.00	56.48	88.20	-31.72	47.28	9.20	Peak	100	42																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m)			

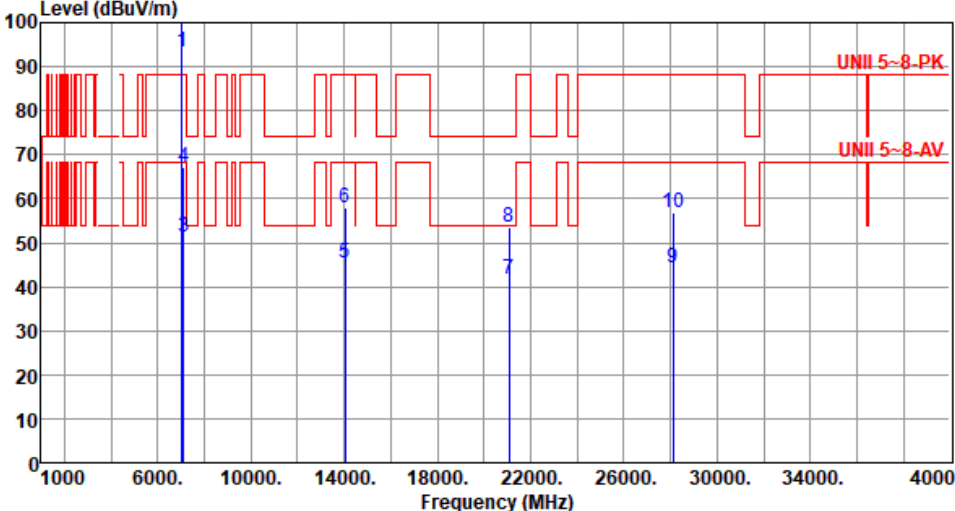


Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7025.00</td><td>93.52</td><td></td><td></td><td>88.30</td><td>5.22</td><td>Average</td><td>191</td><td>3</td></tr><tr><td>2</td><td>7025.00</td><td>105.08</td><td></td><td></td><td>99.86</td><td>5.22</td><td>Peak</td><td>191</td><td>3</td></tr><tr><td>3</td><td>7125.00</td><td>51.11</td><td>68.20</td><td>-17.09</td><td>45.42</td><td>5.69</td><td>Average</td><td>191</td><td>3</td></tr><tr><td>4</td><td>7125.00</td><td>67.02</td><td>88.20</td><td>-21.18</td><td>61.33</td><td>5.69</td><td>Peak</td><td>191</td><td>3</td></tr><tr><td>5</td><td>14050.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>37.43</td><td>8.08</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>14050.00</td><td>57.86</td><td>88.20</td><td>-30.34</td><td>49.78</td><td>8.08</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>7</td><td>21075.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>37.79</td><td>3.90</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>8</td><td>21075.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>49.68</td><td>3.90</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>9</td><td>28100.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>34.84</td><td>9.48</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>10</td><td>28100.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>47.47</td><td>9.48</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7025.00	93.52			88.30	5.22	Average	191	3	2	7025.00	105.08			99.86	5.22	Peak	191	3	3	7125.00	51.11	68.20	-17.09	45.42	5.69	Average	191	3	4	7125.00	67.02	88.20	-21.18	61.33	5.69	Peak	191	3	5	14050.00	45.51	68.20	-22.69	37.43	8.08	Average	100	34	6	14050.00	57.86	88.20	-30.34	49.78	8.08	Peak	100	34	7	21075.00	41.69	54.00	-12.31	37.79	3.90	Average	100	22	8	21075.00	53.58	74.00	-20.42	49.68	3.90	Peak	100	22	9	28100.00	44.32	68.20	-23.88	34.84	9.48	Average	100	19	10	28100.00	56.95	88.20	-31.25	47.47	9.48	Peak	100	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	7025.00	93.52			88.30	5.22	Average	191	3																																																																																																								
2	7025.00	105.08			99.86	5.22	Peak	191	3																																																																																																								
3	7125.00	51.11	68.20	-17.09	45.42	5.69	Average	191	3																																																																																																								
4	7125.00	67.02	88.20	-21.18	61.33	5.69	Peak	191	3																																																																																																								
5	14050.00	45.51	68.20	-22.69	37.43	8.08	Average	100	34																																																																																																								
6	14050.00	57.86	88.20	-30.34	49.78	8.08	Peak	100	34																																																																																																								
7	21075.00	41.69	54.00	-12.31	37.79	3.90	Average	100	22																																																																																																								
8	21075.00	53.58	74.00	-20.42	49.68	3.90	Peak	100	22																																																																																																								
9	28100.00	44.32	68.20	-23.88	34.84	9.48	Average	100	19																																																																																																								
10	28100.00	56.95	88.20	-31.25	47.47	9.48	Peak	100	19																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

Unwanted Emissions (Above 1GHz) for be EHT160

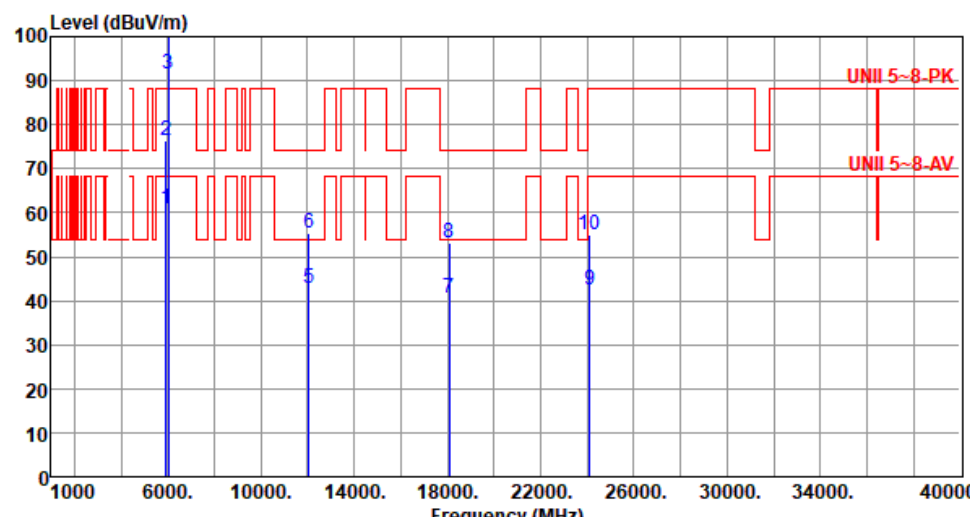
Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Akun Chung Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>61.06</td><td>68.20</td><td>-7.14</td><td>59.55</td><td>1.51</td><td>Average</td><td>169</td><td>3</td></tr><tr><td>2</td><td>5925.00</td><td>76.46</td><td>88.20</td><td>-11.74</td><td>74.95</td><td>1.51</td><td>Peak</td><td>169</td><td>3</td></tr><tr><td>3 *</td><td>6025.00</td><td>91.55</td><td></td><td></td><td>90.03</td><td>1.52</td><td>Average</td><td>169</td><td>3</td></tr><tr><td>4 *</td><td>6025.00</td><td>104.76</td><td></td><td></td><td>103.24</td><td>1.52</td><td>Peak</td><td>169</td><td>3</td></tr><tr><td>5</td><td>12050.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>35.04</td><td>7.84</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>6</td><td>12050.00</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>47.52</td><td>7.84</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>7</td><td>18075.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>39.00</td><td>1.49</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>8</td><td>18075.00</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>51.75</td><td>1.49</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>9</td><td>24100.00</td><td>42.44</td><td>68.20</td><td>-25.76</td><td>34.86</td><td>7.58</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>10</td><td>24100.00</td><td>54.81</td><td>88.20</td><td>-33.39</td><td>47.23</td><td>7.58</td><td>Peak</td><td>100</td><td>13</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	61.06	68.20	-7.14	59.55	1.51	Average	169	3	2	5925.00	76.46	88.20	-11.74	74.95	1.51	Peak	169	3	3 *	6025.00	91.55			90.03	1.52	Average	169	3	4 *	6025.00	104.76			103.24	1.52	Peak	169	3	5	12050.00	42.88	54.00	-11.12	35.04	7.84	Average	100	13	6	12050.00	55.36	74.00	-18.64	47.52	7.84	Peak	100	13	7	18075.00	40.49	54.00	-13.51	39.00	1.49	Average	100	28	8	18075.00	53.24	74.00	-20.76	51.75	1.49	Peak	100	28	9	24100.00	42.44	68.20	-25.76	34.86	7.58	Average	100	13	10	24100.00	54.81	88.20	-33.39	47.23	7.58	Peak	100	13
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5925.00	61.06	68.20	-7.14	59.55	1.51	Average	169	3																																																																																																								
2	5925.00	76.46	88.20	-11.74	74.95	1.51	Peak	169	3																																																																																																								
3 *	6025.00	91.55			90.03	1.52	Average	169	3																																																																																																								
4 *	6025.00	104.76			103.24	1.52	Peak	169	3																																																																																																								
5	12050.00	42.88	54.00	-11.12	35.04	7.84	Average	100	13																																																																																																								
6	12050.00	55.36	74.00	-18.64	47.52	7.84	Peak	100	13																																																																																																								
7	18075.00	40.49	54.00	-13.51	39.00	1.49	Average	100	28																																																																																																								
8	18075.00	53.24	74.00	-20.76	51.75	1.49	Peak	100	28																																																																																																								
9	24100.00	42.44	68.20	-25.76	34.86	7.58	Average	100	13																																																																																																								
10	24100.00	54.81	88.20	-33.39	47.23	7.58	Peak	100	13																																																																																																								

Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			

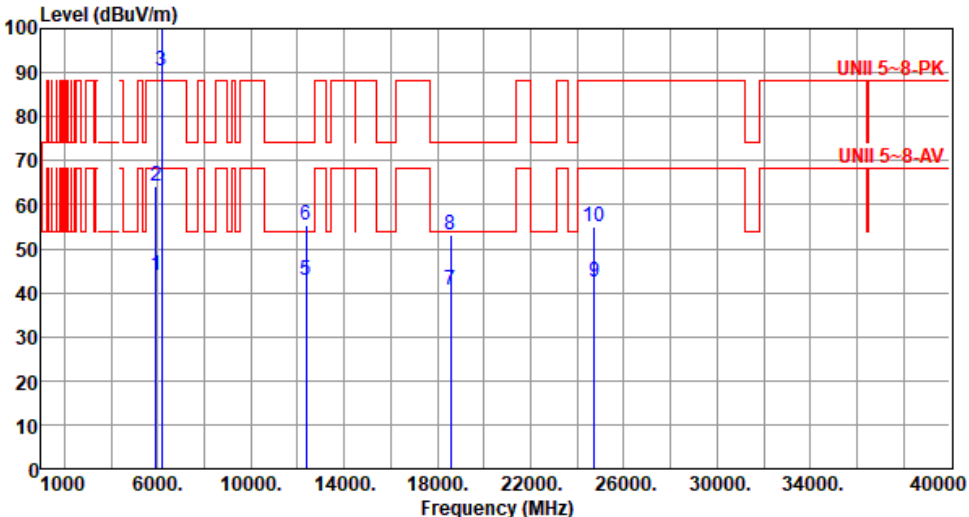

Modulation	be EHT160	Test Freq. (MHz)	6185																																																																																																															
Polarization	Horizontal																																																																																																																	
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																		
																																																																																																																		
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.98</td><td>68.20</td><td>-24.22</td><td>42.47</td><td>1.51</td><td>Average</td><td>161</td><td>8</td></tr><tr><td>2</td><td>5925.00</td><td>64.17</td><td>88.20</td><td>-24.03</td><td>62.66</td><td>1.51</td><td>Peak</td><td>161</td><td>8</td></tr><tr><td>3 *</td><td>6185.00</td><td>90.39</td><td></td><td></td><td>88.40</td><td>1.99</td><td>Average</td><td>161</td><td>8</td></tr><tr><td>4 *</td><td>6185.00</td><td>103.83</td><td></td><td></td><td>101.84</td><td>1.99</td><td>Peak</td><td>161</td><td>8</td></tr><tr><td>5</td><td>12370.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>35.71</td><td>7.20</td><td>Average</td><td>100</td><td>8</td></tr><tr><td>6</td><td>12370.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>48.24</td><td>7.20</td><td>Peak</td><td>100</td><td>8</td></tr><tr><td>7</td><td>18555.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>38.95</td><td>1.57</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>8</td><td>18555.00</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>51.74</td><td>1.57</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>9</td><td>24740.00</td><td>42.51</td><td>68.20</td><td>-25.69</td><td>34.11</td><td>8.40</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>10</td><td>24740.00</td><td>54.93</td><td>88.20</td><td>-33.27</td><td>46.53</td><td>8.40</td><td>Peak</td><td>100</td><td>46</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.98	68.20	-24.22	42.47	1.51	Average	161	8	2	5925.00	64.17	88.20	-24.03	62.66	1.51	Peak	161	8	3 *	6185.00	90.39			88.40	1.99	Average	161	8	4 *	6185.00	103.83			101.84	1.99	Peak	161	8	5	12370.00	42.91	54.00	-11.09	35.71	7.20	Average	100	8	6	12370.00	55.44	74.00	-18.56	48.24	7.20	Peak	100	8	7	18555.00	40.52	54.00	-13.48	38.95	1.57	Average	100	34	8	18555.00	53.31	74.00	-20.69	51.74	1.57	Peak	100	34	9	24740.00	42.51	68.20	-25.69	34.11	8.40	Average	100	46	10	24740.00	54.93	88.20	-33.27	46.53	8.40	Peak	100	46			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1	5925.00	43.98	68.20	-24.22	42.47	1.51	Average	161	8																																																																																																									
2	5925.00	64.17	88.20	-24.03	62.66	1.51	Peak	161	8																																																																																																									
3 *	6185.00	90.39			88.40	1.99	Average	161	8																																																																																																									
4 *	6185.00	103.83			101.84	1.99	Peak	161	8																																																																																																									
5	12370.00	42.91	54.00	-11.09	35.71	7.20	Average	100	8																																																																																																									
6	12370.00	55.44	74.00	-18.56	48.24	7.20	Peak	100	8																																																																																																									
7	18555.00	40.52	54.00	-13.48	38.95	1.57	Average	100	34																																																																																																									
8	18555.00	53.31	74.00	-20.69	51.74	1.57	Peak	100	34																																																																																																									
9	24740.00	42.51	68.20	-25.69	34.11	8.40	Average	100	46																																																																																																									
10	24740.00	54.93	88.20	-33.27	46.53	8.40	Peak	100	46																																																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																		

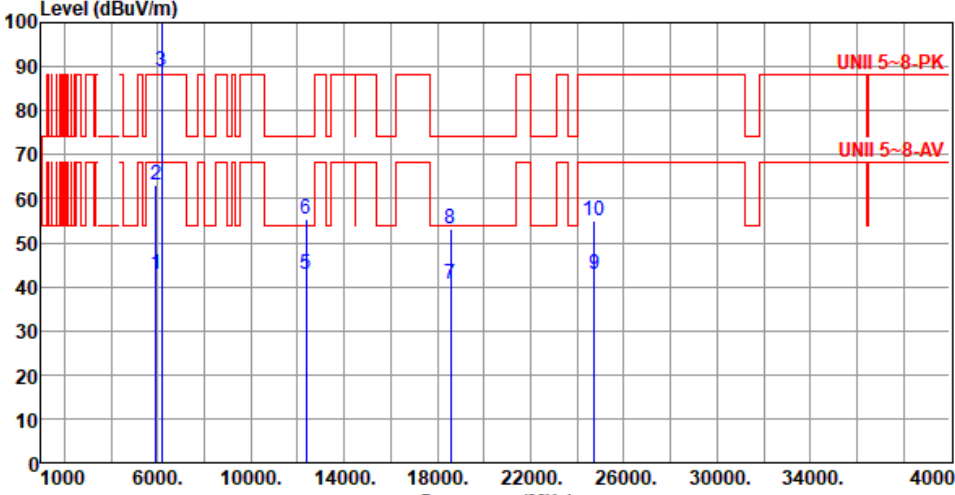

Modulation	be EHT160	Test Freq. (MHz)	6185																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>41.35</td><td>1.51</td><td>Average</td><td>196</td><td>358</td></tr><tr><td>2</td><td>5925.00</td><td>62.95</td><td>88.20</td><td>-25.25</td><td>61.44</td><td>1.51</td><td>Peak</td><td>196</td><td>358</td></tr><tr><td>3 *</td><td>6185.00</td><td>88.95</td><td></td><td></td><td>86.96</td><td>1.99</td><td>Average</td><td>196</td><td>358</td></tr><tr><td>4 *</td><td>6185.00</td><td>102.34</td><td></td><td></td><td>100.35</td><td>1.99</td><td>Peak</td><td>196</td><td>358</td></tr><tr><td>5</td><td>12370.00</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>35.65</td><td>7.20</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>6</td><td>12370.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>48.11</td><td>7.20</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>7</td><td>18555.00</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>38.84</td><td>1.57</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>8</td><td>18555.00</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>51.67</td><td>1.57</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>9</td><td>24740.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>34.23</td><td>8.40</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>10</td><td>24740.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>46.64</td><td>8.40</td><td>Peak</td><td>100</td><td>51</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	42.86	68.20	-25.34	41.35	1.51	Average	196	358	2	5925.00	62.95	88.20	-25.25	61.44	1.51	Peak	196	358	3 *	6185.00	88.95			86.96	1.99	Average	196	358	4 *	6185.00	102.34			100.35	1.99	Peak	196	358	5	12370.00	42.85	54.00	-11.15	35.65	7.20	Average	100	19	6	12370.00	55.31	74.00	-18.69	48.11	7.20	Peak	100	19	7	18555.00	40.41	54.00	-13.59	38.84	1.57	Average	100	46	8	18555.00	53.24	74.00	-20.76	51.67	1.57	Peak	100	46	9	24740.00	42.63	68.20	-25.57	34.23	8.40	Average	100	51	10	24740.00	55.04	88.20	-33.16	46.64	8.40	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5925.00	42.86	68.20	-25.34	41.35	1.51	Average	196	358																																																																																																								
2	5925.00	62.95	88.20	-25.25	61.44	1.51	Peak	196	358																																																																																																								
3 *	6185.00	88.95			86.96	1.99	Average	196	358																																																																																																								
4 *	6185.00	102.34			100.35	1.99	Peak	196	358																																																																																																								
5	12370.00	42.85	54.00	-11.15	35.65	7.20	Average	100	19																																																																																																								
6	12370.00	55.31	74.00	-18.69	48.11	7.20	Peak	100	19																																																																																																								
7	18555.00	40.41	54.00	-13.59	38.84	1.57	Average	100	46																																																																																																								
8	18555.00	53.24	74.00	-20.76	51.67	1.57	Peak	100	46																																																																																																								
9	24740.00	42.63	68.20	-25.57	34.23	8.40	Average	100	51																																																																																																								
10	24740.00	55.04	88.20	-33.16	46.64	8.40	Peak	100	51																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6345.00</td><td>89.96</td><td></td><td></td><td>87.30</td><td>2.66</td><td>Average</td><td>148</td><td>6</td></tr><tr><td>2 *</td><td>6345.00</td><td>103.90</td><td></td><td></td><td>101.24</td><td>2.66</td><td>Peak</td><td>148</td><td>6</td></tr><tr><td>3</td><td>12690.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>36.11</td><td>7.13</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>4</td><td>12690.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>48.18</td><td>7.13</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>5</td><td>19035.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>39.56</td><td>1.80</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>6</td><td>19035.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>51.82</td><td>1.80</td><td>Peak</td><td>100</td><td>12</td></tr><tr><td>7</td><td>25380.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>35.11</td><td>8.21</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>8</td><td>25380.00</td><td>56.24</td><td>88.20</td><td>-31.96</td><td>48.03</td><td>8.21</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6345.00	89.96			87.30	2.66	Average	148	6	2 *	6345.00	103.90			101.24	2.66	Peak	148	6	3	12690.00	43.24	54.00	-10.76	36.11	7.13	Average	100	28	4	12690.00	55.31	74.00	-18.69	48.18	7.13	Peak	100	28	5	19035.00	41.36	54.00	-12.64	39.56	1.80	Average	100	12	6	19035.00	53.62	74.00	-20.38	51.82	1.80	Peak	100	12	7	25380.00	43.32	68.20	-24.88	35.11	8.21	Average	100	55	8	25380.00	56.24	88.20	-31.96	48.03	8.21	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6345.00	89.96			87.30	2.66	Average	148	6																																																																																																								
2 *	6345.00	103.90			101.24	2.66	Peak	148	6																																																																																																								
3	12690.00	43.24	54.00	-10.76	36.11	7.13	Average	100	28																																																																																																								
4	12690.00	55.31	74.00	-18.69	48.18	7.13	Peak	100	28																																																																																																								
5	19035.00	41.36	54.00	-12.64	39.56	1.80	Average	100	12																																																																																																								
6	19035.00	53.62	74.00	-20.38	51.82	1.80	Peak	100	12																																																																																																								
7	25380.00	43.32	68.20	-24.88	35.11	8.21	Average	100	55																																																																																																								
8	25380.00	56.24	88.20	-31.96	48.03	8.21	Peak	100	55																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 4 6 8 3 5 7 UNI 5~8-PK UNI 5~8-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6345.00</td><td>88.56</td><td></td><td>85.90</td><td>2.66</td><td>Average</td><td>191</td><td>5</td></tr><tr><td>2</td><td>*</td><td>6345.00</td><td>102.44</td><td></td><td>99.78</td><td>2.66</td><td>Peak</td><td>191</td><td>5</td></tr><tr><td>3</td><td></td><td>12690.00</td><td>43.39</td><td>54.00 -10.61</td><td>36.26</td><td>7.13</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td></td><td>12690.00</td><td>55.48</td><td>74.00 -18.52</td><td>48.35</td><td>7.13</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td></td><td>19035.00</td><td>41.22</td><td>54.00 -12.78</td><td>39.42</td><td>1.80</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td></td><td>19035.00</td><td>53.58</td><td>74.00 -20.42</td><td>51.78</td><td>1.80</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td></td><td>25380.00</td><td>43.17</td><td>68.20 -25.03</td><td>34.96</td><td>8.21</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>8</td><td></td><td>25380.00</td><td>56.11</td><td>88.20 -32.09</td><td>47.90</td><td>8.21</td><td>Peak</td><td>100</td><td>16</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	6345.00	88.56		85.90	2.66	Average	191	5	2	*	6345.00	102.44		99.78	2.66	Peak	191	5	3		12690.00	43.39	54.00 -10.61	36.26	7.13	Average	100	41	4		12690.00	55.48	74.00 -18.52	48.35	7.13	Peak	100	41	5		19035.00	41.22	54.00 -12.78	39.42	1.80	Average	100	27	6		19035.00	53.58	74.00 -20.42	51.78	1.80	Peak	100	27	7		25380.00	43.17	68.20 -25.03	34.96	8.21	Average	100	16	8		25380.00	56.11	88.20 -32.09	47.90	8.21	Peak	100	16
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	*	6345.00	88.56		85.90	2.66	Average	191	5																																																																																																								
2	*	6345.00	102.44		99.78	2.66	Peak	191	5																																																																																																								
3		12690.00	43.39	54.00 -10.61	36.26	7.13	Average	100	41																																																																																																								
4		12690.00	55.48	74.00 -18.52	48.35	7.13	Peak	100	41																																																																																																								
5		19035.00	41.22	54.00 -12.78	39.42	1.80	Average	100	27																																																																																																								
6		19035.00	53.58	74.00 -20.42	51.78	1.80	Peak	100	27																																																																																																								
7		25380.00	43.17	68.20 -25.03	34.96	8.21	Average	100	16																																																																																																								
8		25380.00	56.11	88.20 -32.09	47.90	8.21	Peak	100	16																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

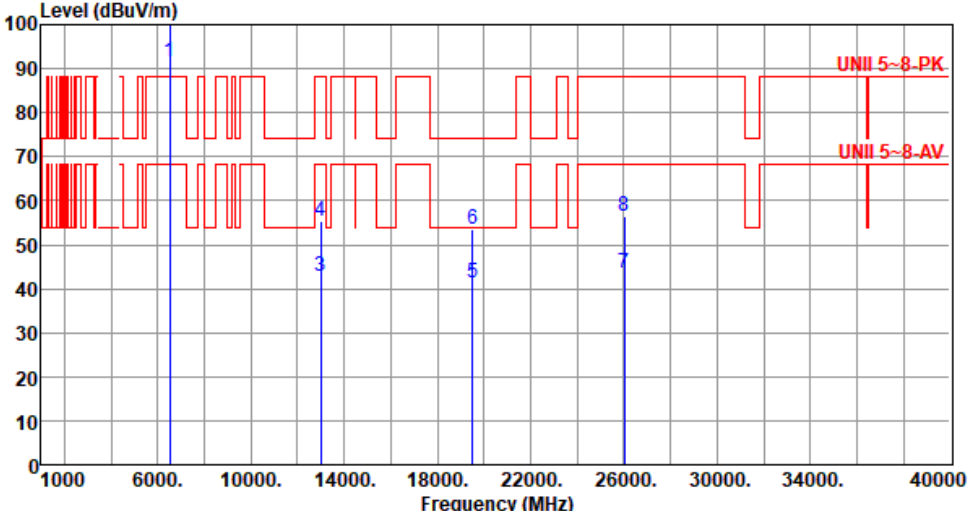


Modulation	be EHT160	Test Freq. (MHz)	6505																																																																																																															
Polarization	Horizontal																																																																																																																	
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																		
																																																																																																																		
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6505.00</td><td>91.66</td><td></td><td></td><td>88.07</td><td>3.59</td><td>Average</td><td>163</td><td>6</td></tr><tr><td>2 *</td><td>6505.00</td><td>105.02</td><td></td><td></td><td>101.43</td><td>3.59</td><td>Peak</td><td>163</td><td>6</td></tr><tr><td>3</td><td>13010.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>35.42</td><td>7.43</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td>13010.00</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>47.91</td><td>7.43</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td>19515.00</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>39.45</td><td>1.99</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td>19515.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>51.69</td><td>1.99</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>7</td><td>26020.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>35.30</td><td>8.22</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>8</td><td>26020.00</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>48.27</td><td>8.22</td><td>Peak</td><td>100</td><td>16</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6505.00	91.66			88.07	3.59	Average	163	6	2 *	6505.00	105.02			101.43	3.59	Peak	163	6	3	13010.00	42.85	68.20	-25.35	35.42	7.43	Average	100	41	4	13010.00	55.34	88.20	-32.86	47.91	7.43	Peak	100	41	5	19515.00	41.44	54.00	-12.56	39.45	1.99	Average	100	27	6	19515.00	53.68	74.00	-20.32	51.69	1.99	Peak	100	27	7	26020.00	43.52	68.20	-24.68	35.30	8.22	Average	100	16	8	26020.00	56.49	88.20	-31.71	48.27	8.22	Peak	100	16			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																									
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																									
		dBuV/m			dBuV			cm	deg																																																																																																									
1 *	6505.00	91.66			88.07	3.59	Average	163	6																																																																																																									
2 *	6505.00	105.02			101.43	3.59	Peak	163	6																																																																																																									
3	13010.00	42.85	68.20	-25.35	35.42	7.43	Average	100	41																																																																																																									
4	13010.00	55.34	88.20	-32.86	47.91	7.43	Peak	100	41																																																																																																									
5	19515.00	41.44	54.00	-12.56	39.45	1.99	Average	100	27																																																																																																									
6	19515.00	53.68	74.00	-20.32	51.69	1.99	Peak	100	27																																																																																																									
7	26020.00	43.52	68.20	-24.68	35.30	8.22	Average	100	16																																																																																																									
8	26020.00	56.49	88.20	-31.71	48.27	8.22	Peak	100	16																																																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																		

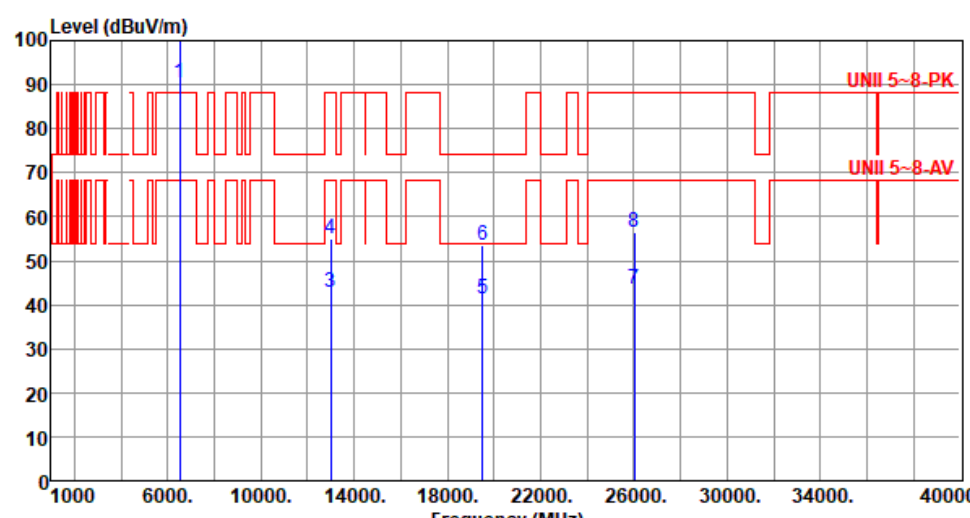

Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6505.00	90.24			86.65	3.59	Average	189	354
2 *	6505.00	103.62			100.03	3.59	Peak	189	354
3	13010.00	42.71	68.20	-25.49	35.28	7.43	Average	100	19
4	13010.00	55.08	88.20	-33.12	47.65	7.43	Peak	100	19
5	19515.00	41.29	54.00	-12.71	39.30	1.99	Average	100	36
6	19515.00	53.52	74.00	-20.48	51.53	1.99	Peak	100	36
7	26020.00	43.44	68.20	-24.76	35.22	8.22	Average	100	29
8	26020.00	56.42	88.20	-31.78	48.20	8.22	Peak	100	29
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

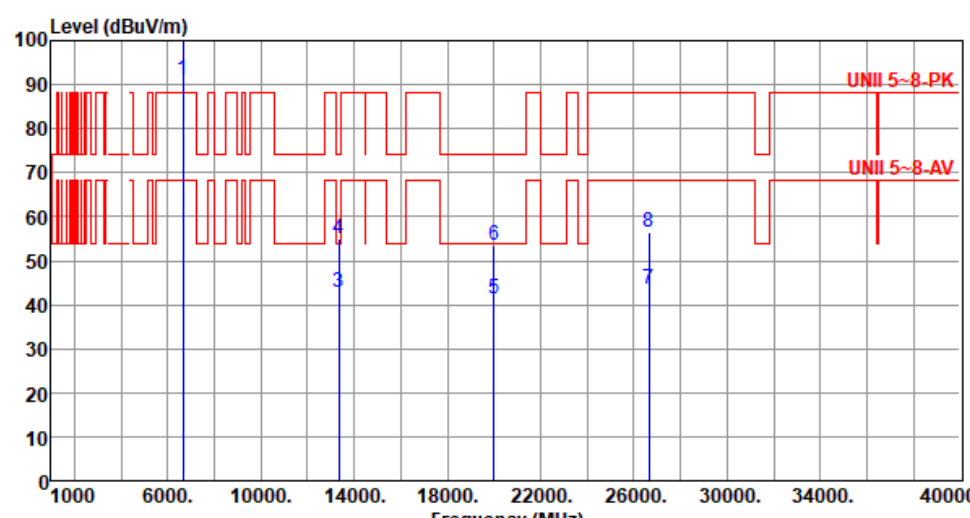

Modulation	be EHT160	Test Freq. (MHz)	6665						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6665.00	91.26			87.50	3.76	Average	156	14
2 *	6665.00	105.53			101.77	3.76	Peak	156	14
3	13330.00	42.88	54.00	-11.12	35.65	7.23	Average	100	47
4	13330.00	55.14	74.00	-18.86	47.91	7.23	Peak	100	47
5	19995.00	41.22	54.00	-12.78	38.95	2.27	Average	100	11
6	19995.00	53.49	74.00	-20.51	51.22	2.27	Peak	100	11
7	26660.00	43.62	68.20	-24.58	34.58	9.04	Average	100	38
8	26660.00	56.45	88.20	-31.75	47.41	9.04	Peak	100	38
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT160	Test Freq. (MHz)	6665																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) UNI 5~8-PK UNI 5~8-AV 1 3 4 5 6 7 8 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6665.00</td><td>89.84</td><td></td><td></td><td>86.08</td><td>3.76</td><td>Average</td><td>199</td><td>4</td></tr><tr><td>2 *</td><td>6665.00</td><td>104.05</td><td></td><td></td><td>100.29</td><td>3.76</td><td>Peak</td><td>199</td><td>4</td></tr><tr><td>3</td><td>13330.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>35.52</td><td>7.23</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>4</td><td>13330.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>47.85</td><td>7.23</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>5</td><td>19995.00</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>39.07</td><td>2.27</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td>19995.00</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>51.29</td><td>2.27</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>7</td><td>26660.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>34.54</td><td>9.04</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>8</td><td>26660.00</td><td>56.39</td><td>88.20</td><td>-31.81</td><td>47.35</td><td>9.04</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	6665.00	89.84			86.08	3.76	Average	199	4	2 *	6665.00	104.05			100.29	3.76	Peak	199	4	3	13330.00	42.75	54.00	-11.25	35.52	7.23	Average	100	39	4	13330.00	55.08	74.00	-18.92	47.85	7.23	Peak	100	39	5	19995.00	41.34	54.00	-12.66	39.07	2.27	Average	100	26	6	19995.00	53.56	74.00	-20.44	51.29	2.27	Peak	100	26	7	26660.00	43.58	68.20	-24.62	34.54	9.04	Average	100	29	8	26660.00	56.39	88.20	-31.81	47.35	9.04	Peak	100	29
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	6665.00	89.84			86.08	3.76	Average	199	4																																																																																																								
2 *	6665.00	104.05			100.29	3.76	Peak	199	4																																																																																																								
3	13330.00	42.75	54.00	-11.25	35.52	7.23	Average	100	39																																																																																																								
4	13330.00	55.08	74.00	-18.92	47.85	7.23	Peak	100	39																																																																																																								
5	19995.00	41.34	54.00	-12.66	39.07	2.27	Average	100	26																																																																																																								
6	19995.00	53.56	74.00	-20.44	51.29	2.27	Peak	100	26																																																																																																								
7	26660.00	43.58	68.20	-24.62	34.54	9.04	Average	100	29																																																																																																								
8	26660.00	56.39	88.20	-31.81	47.35	9.04	Peak	100	29																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6825.00	92.06			88.03	4.03	Average	189	3
2 *	6825.00	104.64			100.61	4.03	Peak	189	3
3	7125.00	47.34	68.20	-20.86	41.65	5.69	Average	189	3
4	7125.00	66.26	88.20	-21.94	60.57	5.69	Peak	189	3
5	13650.00	44.35	68.20	-23.85	36.87	7.48	Average	100	39
6	13650.00	56.42	88.20	-31.78	48.94	7.48	Peak	100	39
7	20475.00	41.29	54.00	-12.71	38.30	2.99	Average	100	56
8	20475.00	53.42	74.00	-20.58	50.43	2.99	Peak	100	56
9	27300.00	43.48	68.20	-24.72	34.56	8.92	Average	100	11
10	27300.00	56.47	88.20	-31.73	47.55	8.92	Peak	100	11
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

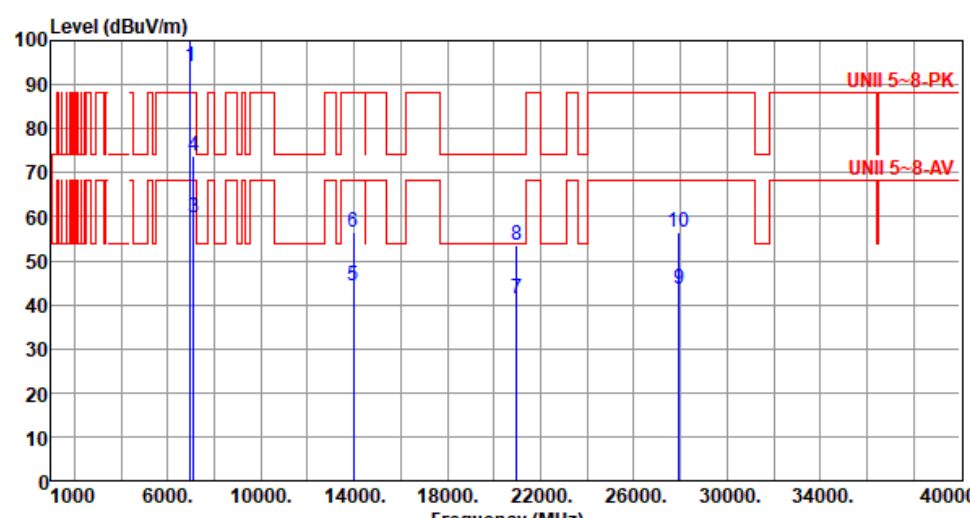
Modulation	be EHT160	Test Freq. (MHz)	6985						
Polarization	Horizontal								
Test By :Akun Chung Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6985.00	94.16			89.15	5.01	Average	164	358
2 *	6985.00	107.04			102.03	5.01	Peak	164	358
3	7125.00	59.86	68.20	-8.34	54.17	5.69	Average	164	358
4	7125.00	73.77	88.20	-14.43	68.08	5.69	Peak	164	358
5	13970.00	44.33	68.20	-23.87	36.43	7.90	Average	100	45
6	13970.00	56.41	88.20	-31.79	48.51	7.90	Peak	100	45
7	20955.00	41.26	54.00	-12.74	37.53	3.73	Average	100	18
8	20955.00	53.42	74.00	-20.58	49.69	3.73	Peak	100	18
9	27940.00	43.45	68.20	-24.75	34.10	9.35	Average	100	44
10	27940.00	56.49	88.20	-31.71	47.14	9.35	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

Unwanted Emissions (Above 1GHz) for be EHT320

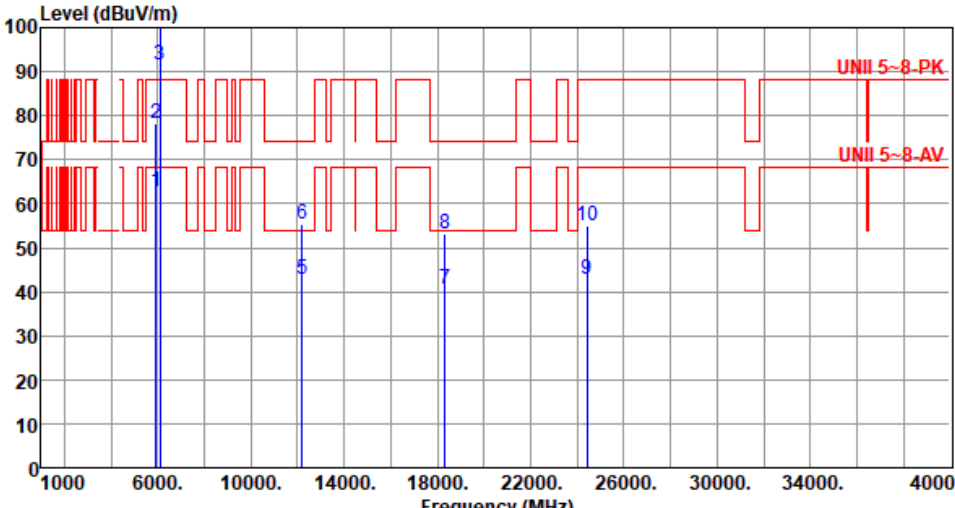
Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>62.85</td><td>68.20</td><td>-5.35</td><td>61.34</td><td>1.51</td><td>Average</td><td>153</td><td>4</td></tr><tr><td>2</td><td>5925.00</td><td>78.24</td><td>88.20</td><td>-9.96</td><td>76.73</td><td>1.51</td><td>Peak</td><td>153</td><td>4</td></tr><tr><td>3 *</td><td>6105.00</td><td>91.54</td><td></td><td></td><td>89.90</td><td>1.64</td><td>Average</td><td>153</td><td>4</td></tr><tr><td>4 *</td><td>6105.00</td><td>104.81</td><td></td><td></td><td>103.17</td><td>1.64</td><td>Peak</td><td>153</td><td>4</td></tr><tr><td>5</td><td>12210.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>35.28</td><td>7.63</td><td>Average</td><td>100</td><td>8</td></tr><tr><td>6</td><td>12210.00</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>47.80</td><td>7.63</td><td>Peak</td><td>100</td><td>8</td></tr><tr><td>7</td><td>18315.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>38.96</td><td>1.55</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>8</td><td>18315.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>51.74</td><td>1.55</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>9</td><td>24420.00</td><td>42.66</td><td>68.20</td><td>-25.54</td><td>34.63</td><td>8.03</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>10</td><td>24420.00</td><td>54.95</td><td>88.20</td><td>-33.25</td><td>46.92</td><td>8.03</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	62.85	68.20	-5.35	61.34	1.51	Average	153	4	2	5925.00	78.24	88.20	-9.96	76.73	1.51	Peak	153	4	3 *	6105.00	91.54			89.90	1.64	Average	153	4	4 *	6105.00	104.81			103.17	1.64	Peak	153	4	5	12210.00	42.91	54.00	-11.09	35.28	7.63	Average	100	8	6	12210.00	55.43	74.00	-18.57	47.80	7.63	Peak	100	8	7	18315.00	40.51	54.00	-13.49	38.96	1.55	Average	100	14	8	18315.00	53.29	74.00	-20.71	51.74	1.55	Peak	100	14	9	24420.00	42.66	68.20	-25.54	34.63	8.03	Average	100	35	10	24420.00	54.95	88.20	-33.25	46.92	8.03	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5925.00	62.85	68.20	-5.35	61.34	1.51	Average	153	4																																																																																																								
2	5925.00	78.24	88.20	-9.96	76.73	1.51	Peak	153	4																																																																																																								
3 *	6105.00	91.54			89.90	1.64	Average	153	4																																																																																																								
4 *	6105.00	104.81			103.17	1.64	Peak	153	4																																																																																																								
5	12210.00	42.91	54.00	-11.09	35.28	7.63	Average	100	8																																																																																																								
6	12210.00	55.43	74.00	-18.57	47.80	7.63	Peak	100	8																																																																																																								
7	18315.00	40.51	54.00	-13.49	38.96	1.55	Average	100	14																																																																																																								
8	18315.00	53.29	74.00	-20.71	51.74	1.55	Peak	100	14																																																																																																								
9	24420.00	42.66	68.20	-25.54	34.63	8.03	Average	100	35																																																																																																								
10	24420.00	54.95	88.20	-33.25	46.92	8.03	Peak	100	35																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	

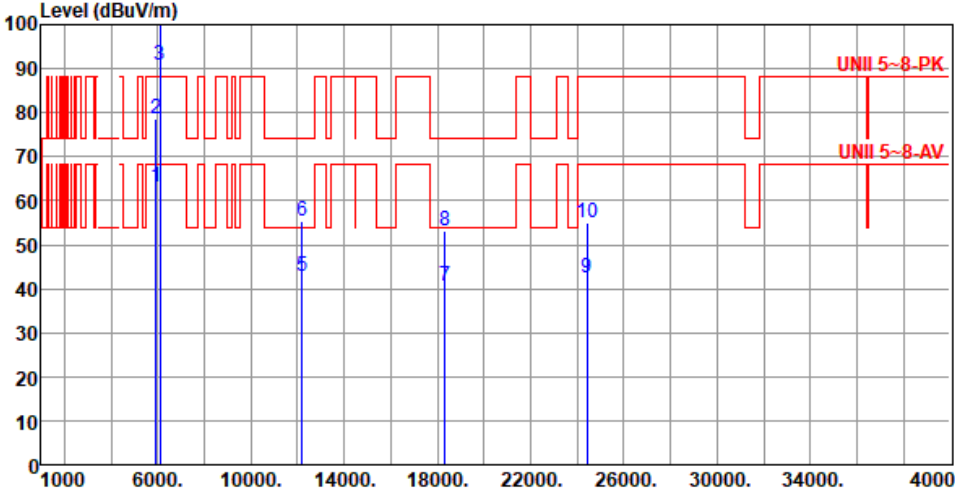

Modulation	be EHT320	Test Freq. (MHz)	6105						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	63.28	68.20	-4.92	61.77	1.51	Average	162	3
2	5925.00	78.53	88.20	-9.67	77.02	1.51	Peak	162	3
3 *	6105.00	90.95			89.31	1.64	Average	162	3
4 *	6105.00	103.35			101.71	1.64	Peak	162	3
5	12210.00	42.84	54.00	-11.16	35.21	7.63	Average	100	12
6	12210.00	55.36	74.00	-18.64	47.73	7.63	Peak	100	12
7	18315.00	40.42	54.00	-13.58	38.87	1.55	Average	100	26
8	18315.00	53.14	74.00	-20.86	51.59	1.55	Peak	100	26
9	24420.00	42.58	68.20	-25.62	34.55	8.03	Average	100	47
10	24420.00	54.86	88.20	-33.34	46.83	8.03	Peak	100	47

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

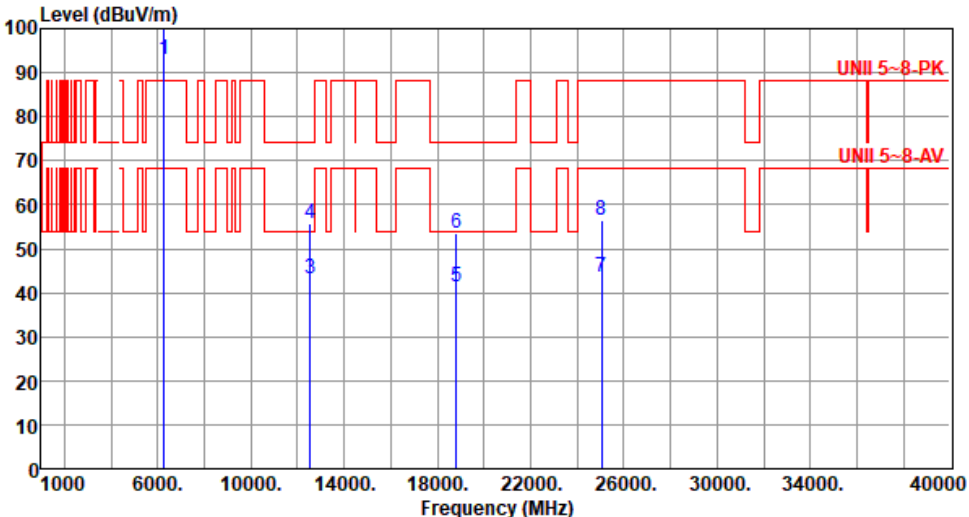


Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6265.00	93.15			90.80	2.35	Average	161	8
2 *	6265.00	106.68			104.33	2.35	Peak	161	8
3	12530.00	43.21	54.00	-10.79	36.20	7.01	Average	100	36
4	12530.00	55.62	74.00	-18.38	48.61	7.01	Peak	100	36
5	18795.00	41.44	54.00	-12.56	39.70	1.74	Average	100	25
6	18795.00	53.68	74.00	-20.32	51.94	1.74	Peak	100	25
7	25060.00	43.41	68.20	-24.79	35.08	8.33	Average	100	35
8	25060.00	56.52	88.20	-31.68	48.19	8.33	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6265																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6265.00</td><td>92.21</td><td></td><td></td><td>89.86</td><td>2.35</td><td>Average</td><td>181</td><td>349</td></tr><tr><td>2 *</td><td>6265.00</td><td>105.38</td><td></td><td></td><td>103.03</td><td>2.35</td><td>Peak</td><td>181</td><td>349</td></tr><tr><td>3</td><td>12530.00</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>36.05</td><td>7.01</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td>12530.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>48.48</td><td>7.01</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td>18795.00</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>39.84</td><td>1.74</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>6</td><td>18795.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>52.12</td><td>1.74</td><td>Peak</td><td>100</td><td>15</td></tr><tr><td>7</td><td>25060.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>35.05</td><td>8.33</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>8</td><td>25060.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>47.98</td><td>8.33</td><td>Peak</td><td>100</td><td>48</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6265.00	92.21			89.86	2.35	Average	181	349	2 *	6265.00	105.38			103.03	2.35	Peak	181	349	3	12530.00	43.06	54.00	-10.94	36.05	7.01	Average	100	41	4	12530.00	55.49	74.00	-18.51	48.48	7.01	Peak	100	41	5	18795.00	41.58	54.00	-12.42	39.84	1.74	Average	100	15	6	18795.00	53.86	74.00	-20.14	52.12	1.74	Peak	100	15	7	25060.00	43.38	68.20	-24.82	35.05	8.33	Average	100	48	8	25060.00	56.31	88.20	-31.89	47.98	8.33	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6265.00	92.21			89.86	2.35	Average	181	349																																																																																																								
2 *	6265.00	105.38			103.03	2.35	Peak	181	349																																																																																																								
3	12530.00	43.06	54.00	-10.94	36.05	7.01	Average	100	41																																																																																																								
4	12530.00	55.49	74.00	-18.51	48.48	7.01	Peak	100	41																																																																																																								
5	18795.00	41.58	54.00	-12.42	39.84	1.74	Average	100	15																																																																																																								
6	18795.00	53.86	74.00	-20.14	52.12	1.74	Peak	100	15																																																																																																								
7	25060.00	43.38	68.20	-24.82	35.05	8.33	Average	100	48																																																																																																								
8	25060.00	56.31	88.20	-31.89	47.98	8.33	Peak	100	48																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

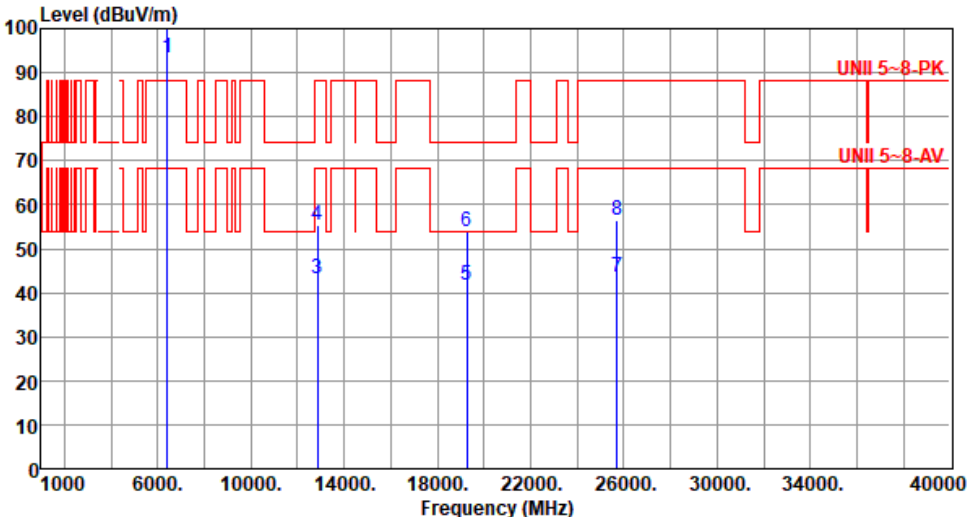

Modulation	be EHT320	Test Freq. (MHz)	6425						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6425.00	93.48			90.29	3.19	Average	159	6
2 *	6425.00	106.96			103.77	3.19	Peak	159	6
3	12850.00	43.18	68.20	-25.02	35.59	7.59	Average	100	39
4	12850.00	55.52	88.20	-32.68	47.93	7.59	Peak	100	39
5	19275.00	41.62	54.00	-12.38	39.84	1.78	Average	100	25
6	19275.00	53.94	74.00	-20.06	52.16	1.78	Peak	100	25
7	25700.00	43.41	68.20	-24.79	35.25	8.16	Average	100	46
8	25700.00	56.35	88.20	-31.85	48.19	8.16	Peak	100	46

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6425																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																												
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6425.00</td><td>92.56</td><td></td><td></td><td>89.37</td><td>3.19</td><td>Average</td><td>182</td><td>341</td></tr><tr><td>2</td><td>*</td><td>6425.00</td><td>105.64</td><td></td><td></td><td>102.45</td><td>3.19</td><td>Peak</td><td>182</td><td>341</td></tr><tr><td>3</td><td></td><td>12850.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>35.59</td><td>7.59</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td></td><td>12850.00</td><td>55.53</td><td>88.20</td><td>-32.67</td><td>47.94</td><td>7.59</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5</td><td></td><td>19275.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>39.88</td><td>1.78</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td></td><td>19275.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>52.14</td><td>1.78</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>7</td><td></td><td>25700.00</td><td>43.34</td><td>68.20</td><td>-24.86</td><td>35.18</td><td>8.16</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>8</td><td></td><td>25700.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>48.13</td><td>8.16</td><td>Peak</td><td>100</td><td>11</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6425.00	92.56			89.37	3.19	Average	182	341	2	*	6425.00	105.64			102.45	3.19	Peak	182	341	3		12850.00	43.18	68.20	-25.02	35.59	7.59	Average	100	29	4		12850.00	55.53	88.20	-32.67	47.94	7.59	Peak	100	29	5		19275.00	41.66	54.00	-12.34	39.88	1.78	Average	100	34	6		19275.00	53.92	74.00	-20.08	52.14	1.78	Peak	100	34	7		25700.00	43.34	68.20	-24.86	35.18	8.16	Average	100	11	8		25700.00	56.29	88.20	-31.91	48.13	8.16	Peak	100	11
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6425.00	92.56			89.37	3.19	Average	182	341																																																																																																																		
2	*	6425.00	105.64			102.45	3.19	Peak	182	341																																																																																																																		
3		12850.00	43.18	68.20	-25.02	35.59	7.59	Average	100	29																																																																																																																		
4		12850.00	55.53	88.20	-32.67	47.94	7.59	Peak	100	29																																																																																																																		
5		19275.00	41.66	54.00	-12.34	39.88	1.78	Average	100	34																																																																																																																		
6		19275.00	53.92	74.00	-20.08	52.14	1.78	Peak	100	34																																																																																																																		
7		25700.00	43.34	68.20	-24.86	35.18	8.16	Average	100	11																																																																																																																		
8		25700.00	56.29	88.20	-31.91	48.13	8.16	Peak	100	11																																																																																																																		