



# FCC PART 15.247 & IC RSS-247 2.4 GHz DTS Test Report

<b>APPLICANT</b>	ADEMCO INC.
<b>ADDRESS</b>	2 CORPORATE CENTER DRIVE SUITE 1009040, MELVILLE NY 11747
<b>FCC ID</b>	CFS8DL-GRIPAI05A
<b>IC</b>	573F-GRIPAI05A
<b>MODEL NUMBER</b>	ADT5AIO-2
<b>PRODUCT DESCRIPTION</b>	AIO 5" PANEL
<b>DATE SAMPLE RECEIVED</b>	8/01/2019
<b>FINAL TEST DATE</b>	8/28/2019
<b>TESTED BY</b>	Tim Royer
<b>APPROVED BY</b>	Franklin Rose
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
2152UT19_Simultaneous_TestReport_	Rev1	Initial Issue	10/17/2019
	Rev2	Updated Lower bandedge plot	2/3/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS .....</b>	<b>1</b>
<b>GENERAL INFORMATION .....</b>	<b>2</b>
EUT INFORMATION .....	2
PERIPHERALS USED IN TESTING .....	2
TEST RESULTS SUMMARY .....	3
FREQUENCY RANGE(S) OF EUT .....	3
DEFINITION OF EUT .....	4
<b>MEASUREMENT STANDARDS.....</b>	<b>5</b>
<b>FREQUENCY RANGE OF RADIATED MEASUREMENTS.....</b>	<b>6</b>
<b>METHOD OF MEASUREMENT .....</b>	<b>7</b>
<b>BANDEDGE .....</b>	<b>8</b>
TEST DATA: UPPER BAND EDGE PLOT .....	9
TEST DATA: UPPER BAND EDGE TABLE.....	9
TEST DATA: LOWER BAND EDGE PLOT .....	11
<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>12</b>
TEST DATA: FIELD STRENGTH OF THE FUNDAMENTAL .....	18
TEST DATA: RESTRICTED BAND, PEAK DETECTOR FIELD STRENGTH TABLE .....	18
TEST DATA: RESTRICTED BAND, AVERAGE DETECTOR FIELD STRENGTH TABLE .....	18
TEST DATA: NON-RESTRICTED BAND, PEAK DETECTOR FIELD STRENGTH TABLE .....	19
TEST DATA: NON-RESTRICTED BAND, PEAK DETECTOR FIELD STRENGTH PLOTS.....	20
<b>TEST EQUIPMENT LIST .....</b>	<b>21</b>
<b>STATE OF THE MEASUREMENT UNCERTAINTY .....</b>	<b>22</b>

## GENERAL REMARKS

### Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**  
**Designation #: US1070**

### Tested by:



**Name and Title** Tim Royer, Project Manager / EMC Testing Engineer

**Date** 08/28/2019

### Reviewed and Approved by:



**Name and Title** Franklin Rose, Project Manager / EMC Specialist

**Date** 08/28/2019

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A  
Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

## GENERAL INFORMATION

### EUT Information

<b>EUT Description</b>	AIO 5" PANEL		
<b>FCC ID</b>	CFS8DL-GRIPAI05A		
<b>IC</b>	573F-GRIPAI05A		
<b>Model Number</b>	ADT5AIO-2		
<b>EUT Power Source</b>	<input type="checkbox"/> 110-120Vac, 50-60Hz	<input checked="" type="checkbox"/> DC Power	<input type="checkbox"/> Battery Operated
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable
<b>Antenna Connector</b>	None		
<b>Test Conditions</b>	The temperature was 26°C Relative humidity of 50%.		
<b>Test Configuration</b>	Simultaneous operation		
<b>Modification to the EUT</b>	No Modification to EUT.		
<b>Applicable Standards</b>	FCC CFR 47 Part 2, Part 15, RSS-GEN Issue 5, RSS-247, Issue 2, Referring to ANSI C63.10-2013 for Test Procedures		
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070 ISED Test Site Registration: 2056-A		

### Peripherals Used in Testing

Description	Type	Connector	Length
n/a	n/a	n/a	n/a

## Test Results Summary

FCC Rule Part No.	IC Rule Part No.	Requirement	Test Item	Result
15.247(d)	RSS-247 § 5.5	Unwanted Emissions	Bandedge	<b>Pass</b>
			Radiated Spurious	<b>Pass</b>

## Frequency Range(s) of EUT

<b>Operating Frequency Band 1</b>	2405 – 2475 MHz
<b>RF6 Test Frequencies</b>	2405, 2445, 2475 MHz
<b>BLE Test Frequencies</b>	2402, 2440, 2480 MHz

## Definition of EUT

### RULE PART NO.: FCC PART 15.3

(i) *Class B digital device.* A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.

NOTE: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.

(k) *Digital device.* (Previously defined as a computing device). An unintentional radiator (device or system) that generates and uses timing signals or pulses at a rate in excess of 9,000 pulses (cycles) per second and uses digital techniques; inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio frequency energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer. A radio frequency device that is specifically subject to an emanation requirement in any other FCC Rule part or an intentional radiator subject to subpart C of this part that contains a digital device is not subject to the standards for digital devices, provided the digital device is used only to enable operation of the radio frequency device and the digital device does not control additional functions or capabilities.

NOTE: Computer terminals and peripherals that are intended to be connected to a computer are digital devices.

(o) *Intentional radiator.* A device that intentionally generates and emits radio frequency energy by radiation or induction.

## MEASUREMENT STANDARDS

### RULE PART NO.: FCC PART 15.31

(a) The following measurement procedures are used by the Commission to determine compliance with the technical requirements in this part. Except where noted, copies of these procedures are available from the Commission's current duplicating contractor whose name and address are available from the Commission's Consumer and Governmental Affairs Bureau at 1-888-CALL-FCC (1-888-225-5322).

(2) Unlicensed Personal Communications Service (UPCS) devices are to be measured for compliance using ANSI C63.17-2013: "American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices" (incorporated by reference, see §15.38).

(3) Other intentional radiators are to be measured for compliance using the following procedure: ANSI C63.10-2013 (incorporated by reference, see §15.38).

(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(l) Measurements of radio frequency emissions conducted to the public utility power lines shall be performed using a 50 ohm/50 uH line-impedance stabilization network (LISN).

(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle.
1 to 10 MHz	2	1 near top and 1 near bottom.
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom.

(o) The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## **FREQUENCY RANGE OF RADIATED MEASUREMENTS**

### **RULE PART NO.: FCC PART 15.33**

#### **§15.33 Frequency range of radiated measurements.**

(a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.



## METHOD OF MEASUREMENT

### RULE PART NO.: FCC PART 15.35

#### §15.35 Measurement detector functions and bandwidths.

The conducted and radiated emission limits shown in this part are based on the following, unless otherwise specified in this part:

(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrumentation using the CISPR quasi-peak detector can be found in ANSI C63.4-2014, clause 4 (incorporated by reference, see §15.38). As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function as long as the same bandwidth as indicated for CISPR quasi-peak measurements are employed.

(b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, *e.g.*, see §§15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, *e.g.*, the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

(c) Unless otherwise specified, *e.g.*, §§15.255(b), and 15.256(l)(5), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to Supplier's Declaration of Conformity.

## BANDEDGE

**Rule Part No.:** FCC 15.247(d), IC RSS 247 Section 5.5

### Requirements:

#### §15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS 247, Section 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under [section 5.4\(d\)](#), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**Test Method:** ANSI C63.10 § 6.10.4 Authorized band-edge relative method (non-restricted)  
ANSI C63.10 § 6.10.6 Marker Delta Method (restricted band edge)  
ANSI C63.10 § 6.3 Radiated Emissions testing- Common

### Setup: Radiated

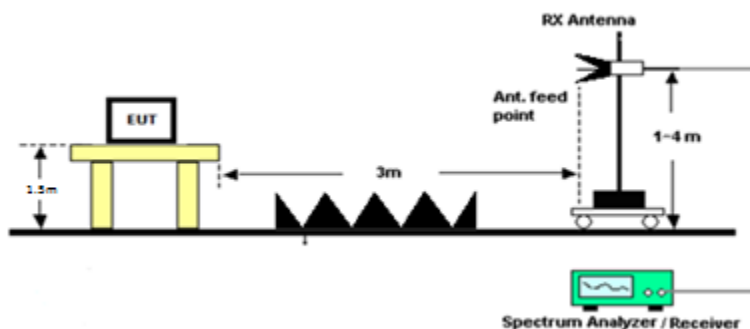


Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAIO5A  
IC: 573F-GRIPAIO5A  
Report: 2152UT19\_Simultaneous\_TestReport\_Rev2



## BANDEDGE

### Test Data: Lower Band Edge Plot

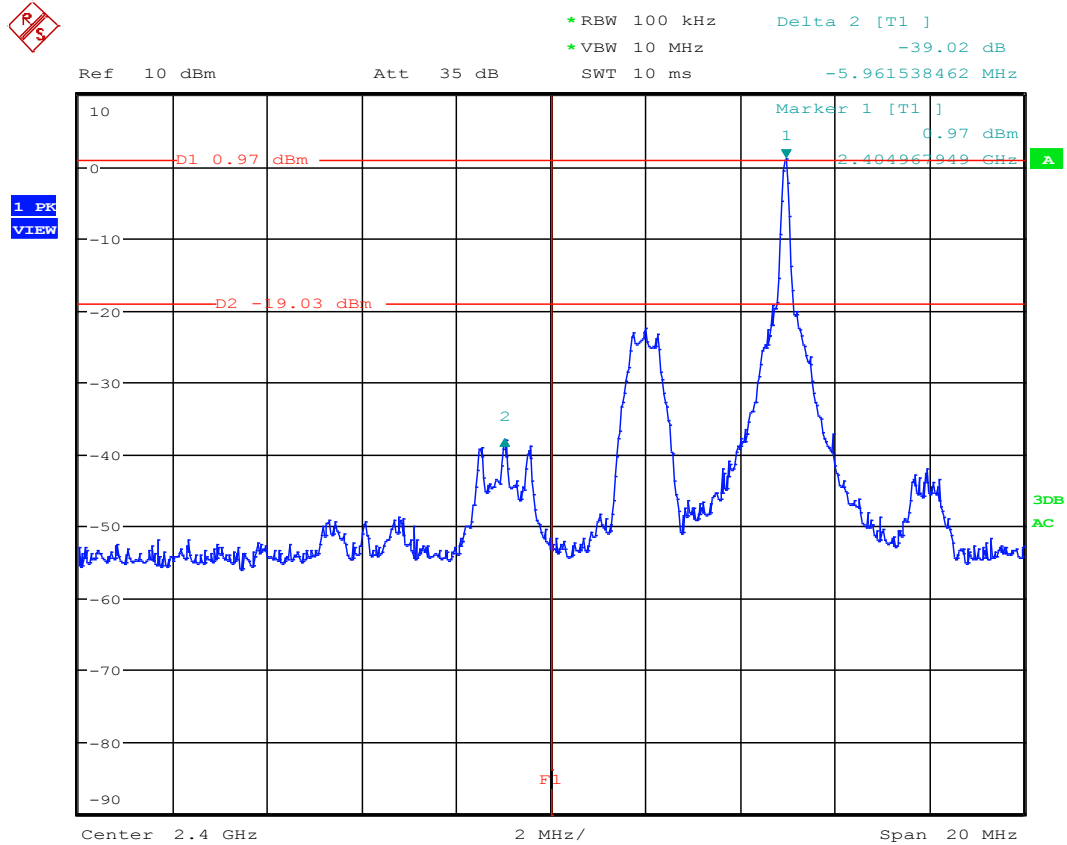


Date: 5.FEB.2020 13:13:45

### RESULT: Meets Requirements

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A  
Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

## BANDEDGE

### Test Data: Lower Restricted Band Plot

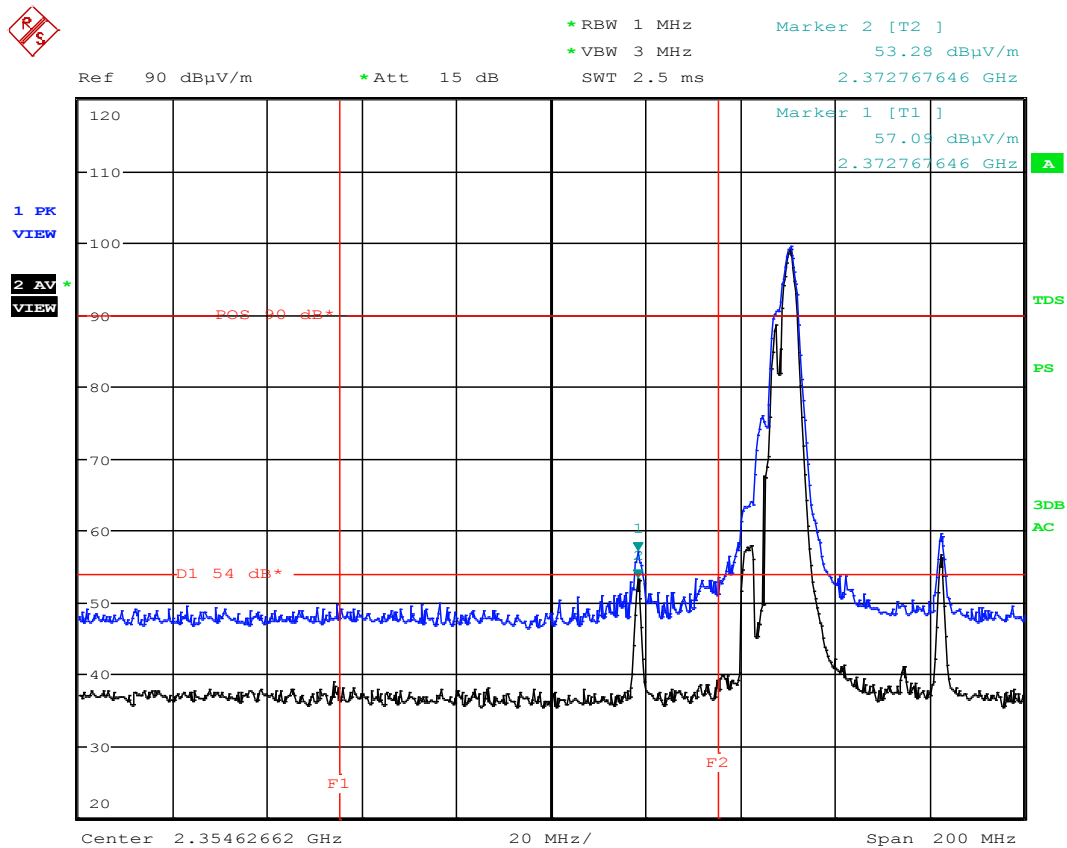

Date: 5.FEB.2020 13:07:36

Blue Trace = Peak Trace  
Black Trace = Average Trace

**RESULT: Meets Requirements**

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A  
Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

## **RADIATED SPURIOUS EMISSIONS**

**RULE PART NO.:** FCC part 15.247(d), 15.205, 15.209, IC RSS 247 s5.5, RSS GEN Section 8.9

### **Requirements:**

#### **§15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.**

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **RSS 247, Section 5.5:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under [section 5.4\(d\)](#), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## RADIATED SPURIOUS EMISSIONS

### §15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

## RADIATED SPURIOUS EMISSIONS

### §15.31 Measurement standards.

(f) To the extent practicable, the device under test shall be measured at the distance specified in the appropriate rule section. The distance specified corresponds to the horizontal distance between the measurement antenna and the closest point of the equipment under test, support equipment or interconnecting cables as determined by the boundary defined by an imaginary straight line periphery describing a simple geometric configuration enclosing the system containing the equipment under test. The equipment under test, support equipment and any interconnecting cables shall be included within this boundary.

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

### §15.209 Radiated emission limits; general requirements.

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Limit ( $\mu\text{V/m}$ )	15.31 Extrapolation factor (dB)	3m Limit (dB $\mu\text{V/m}$ )
9 kHz – 30 kHz	2400/F(in kHz) @ 300m	80 dB	-31.48 to -41.94
30 kHz – 300 kHz	2400/F(in kHz) @ 300m	80 dB	-41.94 to -61.94
300 kHz – 490 kHz	2400/F(in kHz) @ 300m	80 dB	-61.94 to -66.2
490 kHz – 1.705 MHz	24000/F(in kHz) @ 30m	40 dB	-6.2 to -17.03
1.705 MHz – 3 MHz	30.0 @ 30 m	40 dB	-10.46
3 MHz – 30 MHz	30.0 @ 30 m	40 dB	-10.46



## RADIATED SPURIOUS EMISSIONS

(1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

### §15.209 Radiated emission limits; general requirements.

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Limit ( $\mu\text{V}/\text{m}$ )	3m Limit ( $\text{dB}\mu\text{V}/\text{m}$ )
30 – 88	100.0	40.00
88 – 216	150.0	43.52
216 – 960	200.0	46.02
Above 960	500.0	53.98

### §15.35 Measurement detector functions and bandwidths.

(b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

## RADIATED SPURIOUS EMISSIONS

**Test Procedure:** ANSI C63.4 § Annex D Validation of radiated emissions standard test sites  
ANSI C63.10 § 6.3 Common requirements radiated emissions  
ANSI C63.10 § 6.4 Emissions below 30 MHz  
ANSI C63.10 § 6.5 Emissions between 30 & 1000 MHz  
ANSI C63.10 § 6.6 Emissions above 1 GHz


### Radiated Emissions Test Setup:

EUT setup and arrangement was completed as described in ANSI C63.4. Exploratory measurements were taken following different peripheral placement and cable manipulations as described in ANSI C63.4. A photo is provided of the Test setup to record the exact peripheral equipment and cable manipulation arrangement found to produce the highest possible level of radiated emissions.

The test procedure used for radiated emissions is described ANSI C63.10 using a spectrum analyzer. The resolution bandwidth used was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. All cable loss and antenna factors were calibrated to provide plots with correction factors applied to results using the formula and example described below. The video bandwidth of the analyzer was always greater than or equal to the resolution bandwidth, and a peak detector with max hold was used.

The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The frequency was scanned from 30 MHz to 1.0 GHz. The EUT was measured in three parts of the tunable band of EUT and (3) orthogonal planes when necessary.

### EUT Orientation(s):

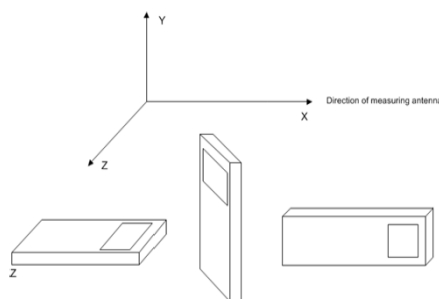

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A  
Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

## RADIATED SPURIOUS EMISSIONS

### Formula of Conversion Factors:


The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

### Field Strength Correction Factor Conversion Example:


Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB/m	+0.40 dB	=30.76 dB $\mu$ V/m @ 3m

### Test Setup:

#### Emissions 30 – 1000 MHz

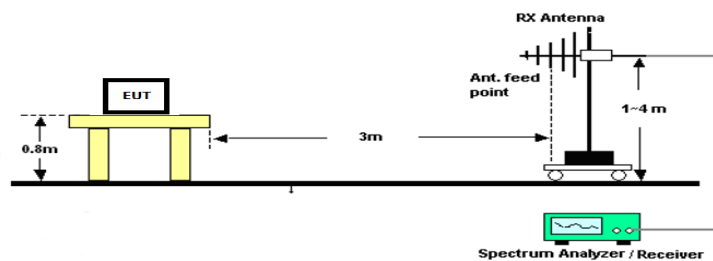

#### Emissions above 1 GHz

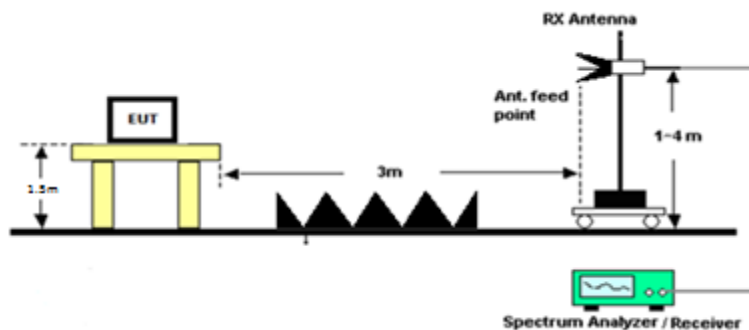

## RADIATED SPURIOUS EMISSIONS

### Test Data: Field Strength of the Fundamental

#### Field Strength (dBμV/m) 15.247 & 15.249 Fundamental

Tuned Frequency (MHz)	Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)
2475.00	PK	68.70	H	5.62	0.00	32.06	3.00	106.38
2475.00	AV	16.17	H	5.62	0.00	32.06	3.00	53.85

### Test Data: Restricted Band, Peak Detector Field Strength table

#### Field Strength (dBμV/m) 15.247 & 15.249 Restricted Bands, Peak

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	15.35 Limit (dBμV/m)	Margin (dBm)
2405.00	4810.00	PK	8.31	H	7.10	0.00	33.93	3.00	49.34	74.00	24.66
2405.00	4810.00	PK	6.61	V	7.10	0.00	33.93	3.00	47.64	74.00	26.36
2405.00	12025.00	PK	-3.95	H	12.42	0.00	39.09	3.00	47.56	74.00	26.44
2405.00	12025.00	PK	-3.66	V	12.42	0.00	39.09	3.00	47.85	74.00	26.15
2402.00	4804.00	PK	5.89	H	7.08	0.00	33.93	3.00	46.90	74.00	27.10
2402.00	4804.00	PK	3.79	V	7.08	0.00	33.93	3.00	44.80	74.00	29.20
2402.00	12010.00	PK	-5.39	V	12.45	0.00	39.08	3.00	46.14	74.00	27.86
2402.00	12010.00	PK	-5.85	H	12.45	0.00	39.08	3.00	45.68	74.00	28.32
2440.00	4880.00	PK	4.79	V	7.29	0.00	33.93	3.00	46.01	74.00	27.99
2440.00	4880.00	PK	3.66	H	7.29	0.00	33.93	3.00	44.88	74.00	29.12
2440.00	7320.00	PK	-0.72	V	9.47	0.00	36.24	3.00	44.99	74.00	29.01
2440.00	7320.00	PK	-1.52	H	9.47	0.00	36.24	3.00	44.19	74.00	29.81
2440.00	12200.00	PK	-4.68	H	12.35	0.00	39.23	3.00	46.90	74.00	27.10
2440.00	12200.00	PK	-5.26	V	12.35	0.00	39.23	3.00	46.32	74.00	27.68
2480.00	4960.00	PK	-0.46	H	7.49	0.00	33.96	3.00	40.99	74.00	33.01
2480.00	4960.00	PK	-2.46	V	7.49	0.00	33.96	3.00	38.99	74.00	35.01
2480.00	7440.00	PK	-4.83	H	9.56	0.00	36.01	3.00	40.74	74.00	33.26
2480.00	7440.00	PK	-5.16	V	9.56	0.00	36.01	3.00	40.41	74.00	33.59
2480.00	12400.00	PK	-7.64	V	12.42	0.00	39.23	3.00	44.01	74.00	29.99
2480.00	12400.00	PK	-9.45	H	12.42	0.00	39.23	3.00	42.20	74.00	31.80

### Test Data: Restricted Band, Average Detector Field Strength table

N/A – All Peak Detector results were compliant with the Average Limit.

## RADIATED SPURIOUS EMISSIONS

### Test Data: Non-restricted Band, Peak Detector Field Strength table

**Field Strength (dBμV/m) 15.247 Non-restricted Bands**


Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dBm)
2405.00	7215.00	PK	5.90	H	9.48	0.00	36.38	3.00	51.76	86.37	34.61
2405.00	7215.00	PK	7.93	V	9.48	0.00	36.38	3.00	53.79	86.37	32.58
2405.00	9620.00	PK	21.20	V	10.72	0.00	36.67	3.00	68.59	86.37	17.78
2405.00	9620.00	PK	24.54	V	10.72	0.00	36.67	3.00	71.93	86.37	14.44
2405.00	9620.00	PK	19.79	V	10.72	0.00	36.67	3.00	67.18	86.37	19.19
2405.00	9620.00	PK	15.00	V	10.72	0.00	36.67	3.00	62.39	86.37	23.98
2405.00	14430.00	PK	-6.60	H	13.51	0.00	39.79	3.00	46.70	86.37	39.67
2405.00	14430.00	PK	-6.59	V	13.51	0.00	39.79	3.00	46.71	86.37	39.66
2405.00	16835.00	PK	-6.33	V	14.48	0.00	42.36	3.00	50.51	86.37	35.86
2405.00	16835.00	PK	-6.65	H	14.48	0.00	42.36	3.00	50.19	86.37	36.18
2402.00	7206.00	PK	4.13	V	9.47	0.00	36.39	3.00	49.99	86.37	36.38
2402.00	7206.00	PK	1.74	H	9.47	0.00	36.39	3.00	47.60	86.37	38.77
2402.00	9608.00	PK	0.72	H	10.72	0.00	36.62	3.00	48.06	86.37	38.31
2402.00	9608.00	PK	-3.89	V	10.72	0.00	36.62	3.00	43.45	86.37	42.92
2402.00	14412.00	PK	-7.63	H	13.49	0.00	39.75	3.00	45.61	86.37	40.76
2402.00	14412.00	PK	-7.95	V	13.49	0.00	39.75	3.00	45.29	86.37	41.08
2402.00	16814.00	PK	-9.40	V	14.53	0.00	42.34	3.00	47.47	86.37	38.90
2402.00	16814.00	PK	-8.27	H	14.53	0.00	42.34	3.00	48.60	86.37	37.77
2440.00	9760.00	PK	-3.29	V	10.95	0.00	36.83	3.00	44.49	86.37	41.88
2440.00	9760.00	PK	-3.56	H	10.95	0.00	36.83	3.00	44.22	86.37	42.15
2440.00	14640.00	PK	-8.16	V	13.73	0.00	40.27	3.00	45.84	86.37	40.53
2440.00	14640.00	PK	-8.67	H	13.73	0.00	40.27	3.00	45.33	86.37	41.04
2440.00	17080.00	PK	-9.83	H	14.79	0.00	42.43	3.00	47.39	86.37	38.98
2440.00	17080.00	PK	-9.52	V	14.79	0.00	42.43	3.00	47.70	86.37	38.67
2480.00	9920.00	PK	-6.80	V	11.12	0.00	37.08	3.00	41.40	86.37	44.97
2480.00	9920.00	PK	-5.85	H	11.12	0.00	37.08	3.00	42.35	86.37	44.02
2480.00	14880.00	PK	-10.04	V	13.68	0.00	40.29	3.00	43.93	86.37	42.44
2480.00	14880.00	PK	-8.71	H	13.68	0.00	40.29	3.00	45.26	86.37	41.11
2480.00	17360.00	PK	-12.80	H	14.97	0.00	42.52	3.00	44.69	86.37	41.68
2480.00	17360.00	PK	-12.80	V	14.97	0.00	42.52	3.00	44.69	86.37	41.68

### Result: Meets Requirements

Applicant: ADEMCO, INC.  
 FCC ID: CFS8DL-GRIPAI05A  
 IC: 573F-GRIPAI05A  
 Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

# RADIATED SPURIOUS EMISSIONS

## Test Data: Non-restricted Band, Peak Detector Field Strength Plots

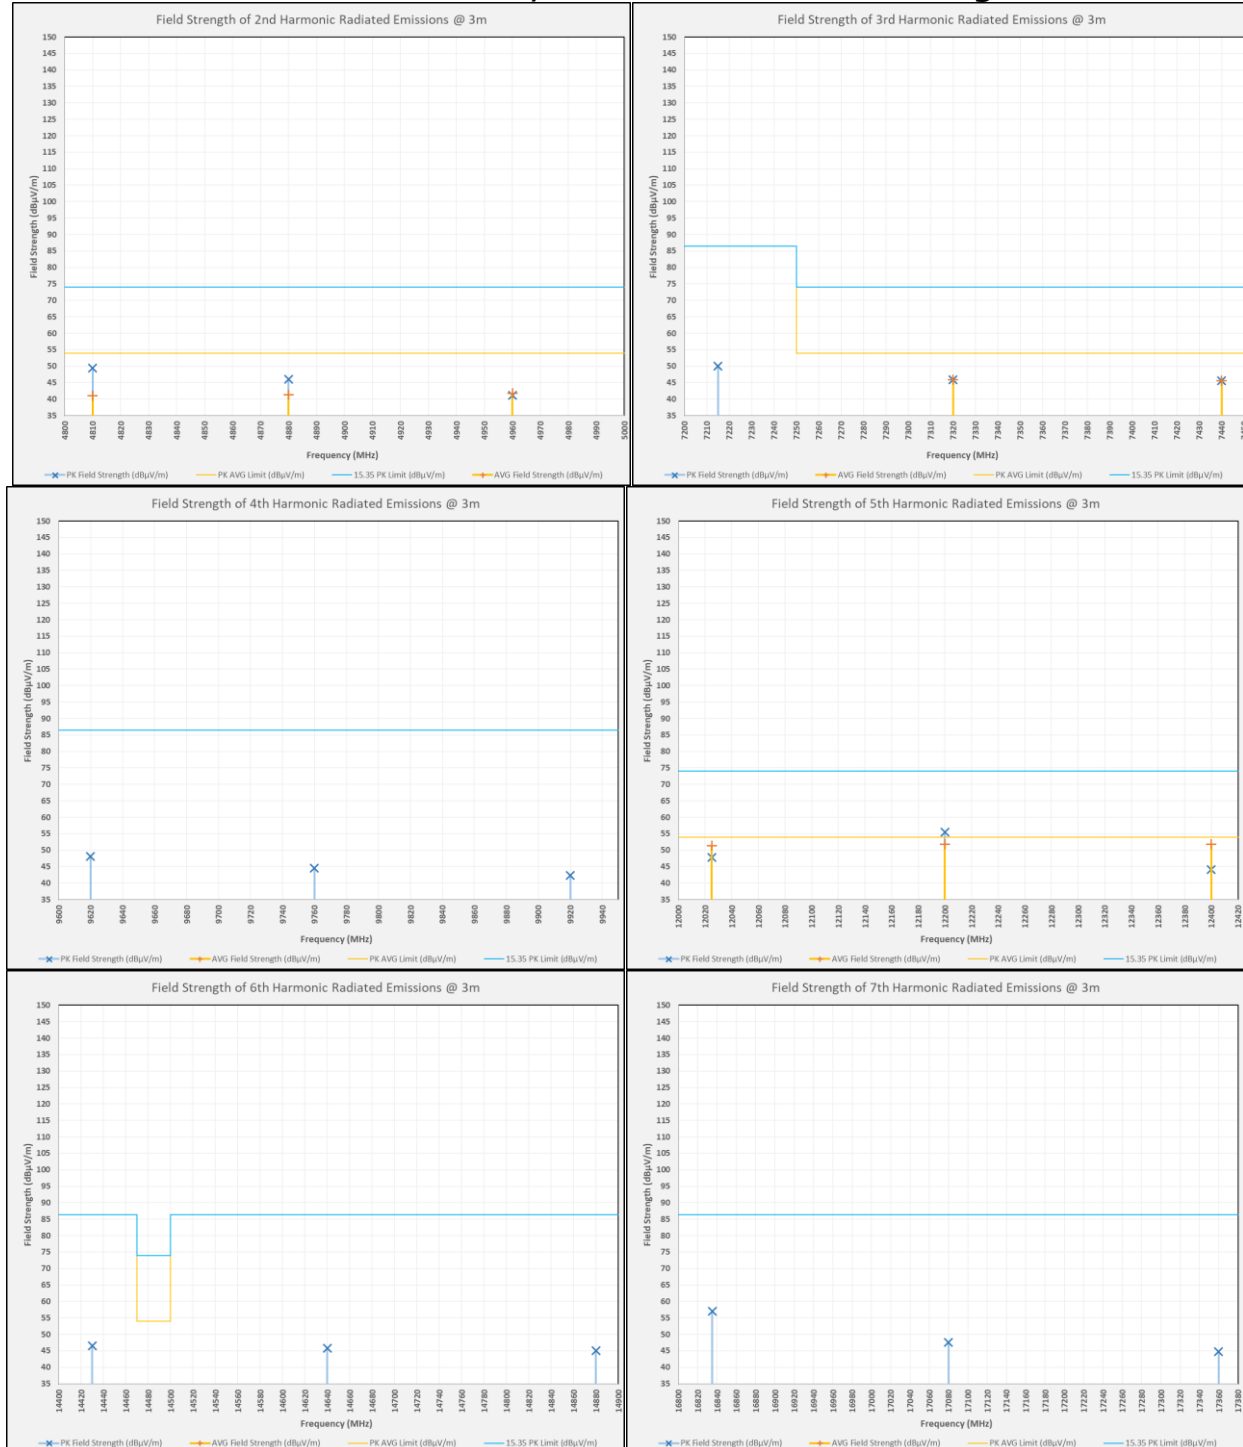

Applicant: ADEMCO, INC.  
 FCC ID: CFS8DL-GRIPAIO5A  
 IC: 573F-GRIPAIO5A  
 Report: 2152UT19\_Simultaneous\_TestReport\_Rev2

## TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Active Loop	ETS-Lindgren	6502	62529	12/11/2017	12/11/2019
Antenna: Biconical 1057	Eaton	94455-1	1057	12/13/2017	12/13/2019
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	7/26/2017	7/26/2020
CHAMBER	Panashield	3M	N/A	3/15/2019	3/15/2021
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	08/28/18	08/28/2021
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	41534	3/1/2017	3/1/2020
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-01 KMKM-0670-00 KFKF-0198-01	4/12/2019	4/12/2021
Band Reject Filter 2.4 GHz	Micro-Tronics	BRM50702-02	0	4/12/2019	4/12/2021
Pre-amp	RF-LAMBDA	RLNA00M45GA	N/A	2/27/2019	2/27/2021
Antenna: Double-Ridged Horn 18-40 GHz	EMCO	3116	9011-2145	12/8/2017	12/8/2019

### \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

## STATE OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	$\pm 49.5$ Hz	(1)
RF Conducted Power	$\pm 0.93$ dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	$\pm 1.86$ dB	
Occupied Bandwidth	$\pm 2.65\%$	
Audio Frequency Response	$\pm 1.86$ dB	
Modulation limiting	$\pm 1.88\%$	
Radiated RF Power	$\pm 1.4$ dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq. Within 6kHz and 25kHz of audio Freq.	$\pm 1.88\%$ $\pm 2.04\%$	
Rad Emissions Sub Meth up to 26.5GHz	$\pm 2.14$ dB	
Adjacent channel power	$\pm 1.47$ dB	(1)
Transient Frequency Response	$\pm 1.88\%$	
Temperature	$\pm 1.0^{\circ}\text{C}$	(1)
Humidity	$\pm 5.0\%$	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## END OF REPORT

Applicant: ADEMCO, INC.  
 FCC ID: CFS8DL-GRIPAI05A  
 IC: 573F-GRIPAI05A  
 Report: 2152UT19\_Simultaneous\_TestReport\_Rev2



### Report Template Revision History

Document Name	Description of Change	Revision Date	Approved By
PT 15109 Ver Rpt	Initial Issue	150812	SS Sanders
	Added Document History to Template	160920	G Greene
_15.247_TestReport_	Revised Template to new company standards	180625	FROSE


[\\timco-file\tesys2\TimcoOffice\Templates\TestReports\FCC\UnlicensedDevices\PT 15109 Ver Rpt\\_160920.docx](\\timco-file\tesys2\TimcoOffice\Templates\TestReports\FCC\UnlicensedDevices\PT 15109 Ver Rpt_160920.docx)

## EQUIPMENT UNDER TEST PHOTOGRAPHS

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A

## Radiated Emissions Test Setup Photographs

### Radiated Emissions

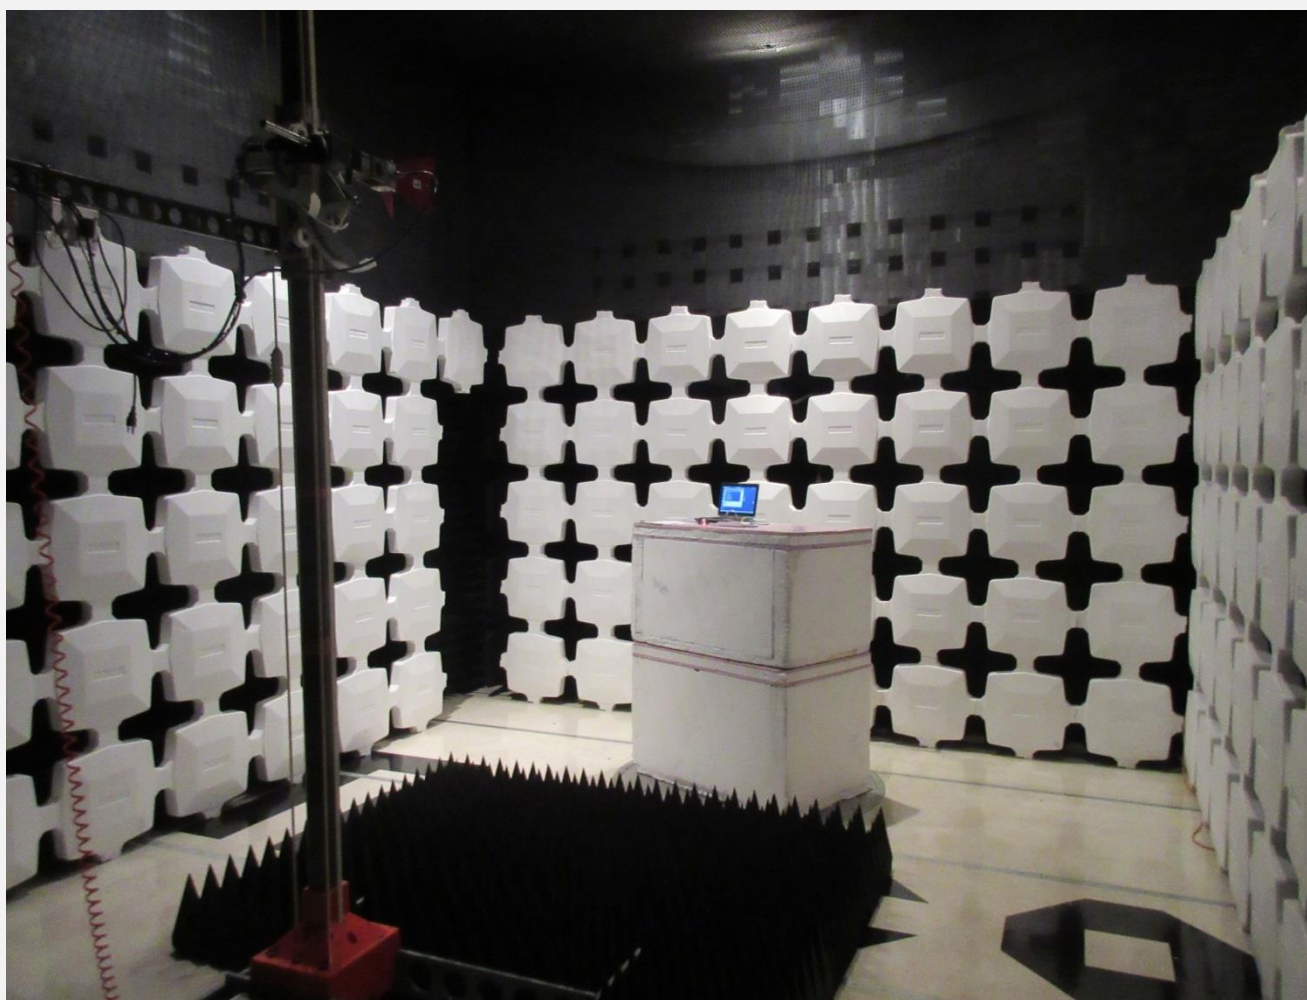

Applicant: ADEMCO, INC.  
FCC ID: CFS8DL-GRIPAI05A  
IC: 573F-GRIPAI05A