

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CNFC_RM-1039_01.docx	Date of Report:	11-Sep-2014
Number of pages:	11	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Microsoft Tampere Laboratory P.O.Box 403 Visiokatu 3 FIN-33101 TAMPERE, FINLAND Tel. +358 71 800 8000 Fax. +358 71 804 6880	Customer:	Microsoft Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Battery BV-T5A / AC charger AC-301E / Wireless charger DT-900 / Wireless charging cover CC-3086		
FCC ID:	QTLRM-1039	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2009), IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	09-Jul-2014
Testing completed	08-Aug-2014
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-1039\TestPlan\RS_Testplan_RM-1039.xlsm
Notes	-
Document name	Y:\Projects\RM-1039\EMC\Temp\Jan\FCC15CNFC_RM-1039_01.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1039	004402479477972	0241	-	02032.00000.14271.24000	43203
Battery	BV-T5A	417534224c10101093;0670738	Proto_V5	-	-	43205
AC charger	AC-301E	4090492355020302324;0675638	-	-	-	43196
Wireless charger	DT-900	0677090246236800395	-	-	-	43197
Wireless charging cover	CC-3086	-	-	-	-	43209

1.2. Summary of Test Results

NFC:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.209	2.6	Radiated emission below 30 MHz	PASSED
15.209	A2.6	Radiated emission above 30 MHz	PASSED
15.225(a-d)	A2.6	Field strength in the 13.56 MHz band	PASSED
	4.6.1	Occupied Bandwidth	NP
15.225(e)	A2.6	Frequency stability, temperature variation	NP
15.225(e)	A2.6	Frequency stability, voltage variation	NP
15.207	7.2.2	AC power line conducted emission	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Microsoft Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emission below 30 MHz (FCC 15.209, RSS-210 2.6)	4
2.2. Test method and limit	4
2.3. NFC test results	5
3. Radiated emission above 30 MHz (FCC 15.209, RSS-210 A2.6)	6
3.2. Test method and limit	6
3.3. NFC test results	7
4. Field strength in the 13.56 MHz band.....	8
4.2. Test method and limit	8
4.3. NFC test results	9
5. Test Equipment.....	10
5.1. Conducted measurements	10
5.2. Radiated measurements	10

2. Radiated emission below 30 MHz (FCC 15.209, RSS-210 2.6)

EUT with DUT number	RM-1039, DUT 43203
Accessories with DUT numbers	BV-T5A, DUT 43205 ; AC-301E, DUT 43196 ; DT-900, DUT 43197 ; CC-3086, DUT 43209
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 54 / 98-101
Date of measurements	07-Aug-2014
Measured by	Jan-Erik Lilja

2.1.1 Test setup

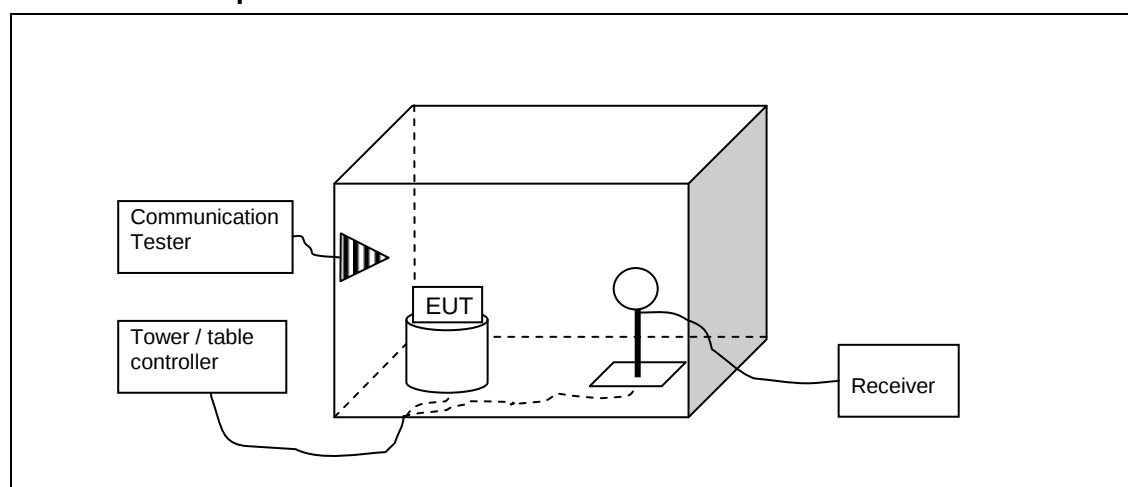

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2009 and RSS-GEN as follows:

The measurement distance is 3 m.

The limit line has been adjusted with the distance correction factor (+40 dB for 30 m distance, +80 dB for 300 m distance).

The measurement is divided into the Preliminary Measurement and the Final Measurement. The suspected frequencies are searched for in Preliminary Measurement with measuring antenna at fixed height using 2-axis EUT position system, set on the turntable, which is rotated 360 degrees. For all identified emissions, the antenna is adjusted for maximum reading.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + 20 \text{ dB } [1/m] + L_{CABLES}$$

Where U_{RX} is receiver reading, 20 dB the antenna factor of the loop antenna and L the cable attenuation.

Limits for radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Distance [m]	Detector	RBW [kHz]
0.009 - 0.09	2400 / f[kHz]	300	Pk & Avg*	0.2
0.09 - 0.11	2400 / f[kHz]	300	QP	0.2
0.11 - 0.15	2400 / f[kHz]	300	Pk & Avg	0.2
0.15 - 0.49	2400 / f[kHz]	300	Pk & Avg*	9
0.49 - 1.705	24000 / f[kHz]	30	QP	9
1.705 - 30	30	30	QP	9

* These are average limits. The peak limit is 20 dB above the average limit.

2.3. NFC test results

Transmit

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Limit [dB $\mu\text{V/m}$]	Margin	Results
41.112	25.23	18.26	49.93	-24.7	40	14.77	PASSED
41.335	25.2	18.197	50	-24.8	40	14.8	PASSED
908.822	19.7	9.661	38.3	-18.6	46	26.32	PASSED

MaxPeak

Frequency [MHz]	Reading [dB $\mu\text{V/m}$]	Limit [$\mu\text{V/m}$]	Distance CF [dB]	Limit @ 3m [dB $\mu\text{V/m}$]	Height [cm]	Pol	Results
0.0295	56.18	81.36	80	138.24	171	H	PASSED
0.1353	74.4	17.74	80	124.99	171	H	PASSED
0.1354	73.15	17.73	80	124.98	171	H	PASSED
0.1355	74.34	17.71	80	124.97	171	H	PASSED
0.175	78.43	13.71	80	122.75	171	H	PASSED


Average

Frequency [MHz]	Reading [dB $\mu\text{V/m}$]	Limit [$\mu\text{V/m}$]	Distance CF [dB]	Limit @ 3m [dB $\mu\text{V/m}$]	Height [cm]	Pol	Results
0.0295	55.4	81.36	80	118.24	171	H	PASSED
0.1353	44.09	17.74	80	104.99	171	H	PASSED
0.1354	39	17.73	80	104.98	171	H	PASSED
0.1355	38.06	17.71	80	104.97	171	H	PASSED
0.175	63.95	13.71	80	102.75	171	H	PASSED

3. Radiated emission above 30 MHz (FCC 15.209, RSS-210 A2.6)

EUT with DUT number	RM-1039, DUT 43203
Accessories with DUT numbers	BV-T5A, DUT 43205 ; AC-301E, DUT 43196 ; DT-900, DUT 43197 ; CC-3086, DUT 43209
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 54 / 98-101
Date of measurements	07-Aug-2014
Measured by	Jan-Erik Lilja

3.1.1 Test setup

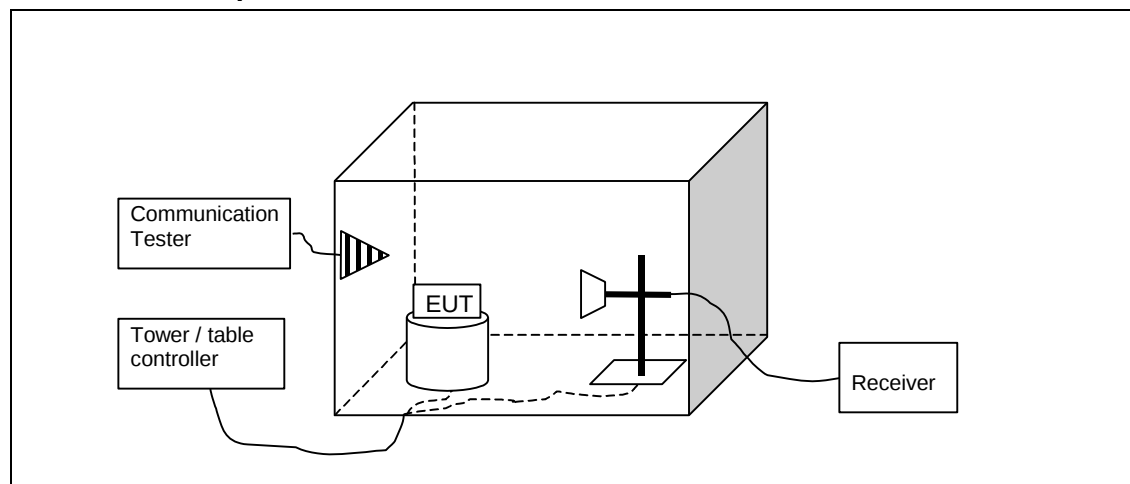

3.2. Test method and limit

The measurement is made according to the ANSI C63.4-2009 and RSS-GEN as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. NFC test results

Transmit

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U_{RX} [dB μV]	A_{TOT} [dB]	Limit [dB $\mu\text{V/m}$]	Margin	Results
41.112	25.23	18.26	49.93	-24.7	40	14.77	PASSED
41.335	25.2	18.197	50	-24.8	40	14.8	PASSED
908.822	19.7	9.661	38.3	-18.6	46	26.32	PASSED

Transmit


Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U_{RX} [dB μV]	A_{TOT} [dB]	Limit [dB $\mu\text{V/m}$]	Margin	Results
41.112	25.23	18.26	49.93	-24.7	40	14.77	PASSED
41.335	25.2	18.197	50	-24.8	40	14.8	PASSED
908.822	19.7	9.661	38.3	-18.6	46	26.32	PASSED

4. Field strength in the 13.56 MHz band

EUT with DUT number	RM-1039, DUT 43203
Accessories with DUT numbers	BV-T5A, DUT 43205 ; AC-301E, DUT 43196 ; DT-900, DUT 43197 ; CC-3086, DUT 43209
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 54 / 98-101
Date of measurements	08-Aug-2014
Measured by	Jan-Erik Lilja

4.1.1 Test setup

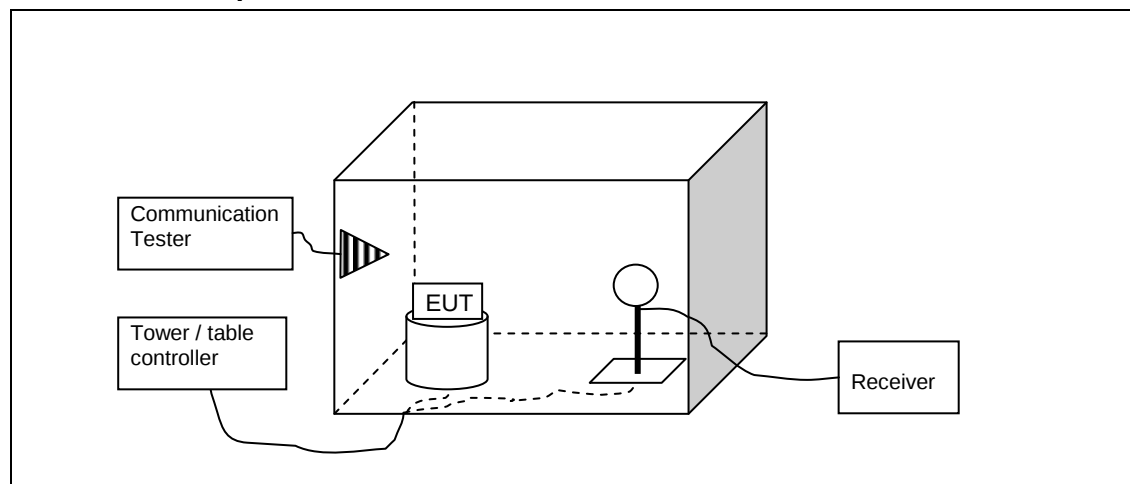

4.2. Test method and limit

The measurement is made according to EN 302 291-01, Section 7.1.1
The measuring distance was 3 meter in RF anechoic chamber.


The Result [dBμA/m] is derived from formula:

Result [dBμA/m] = Result [dBμV/m] – 31.5 dBOhm.

Where -31.5 stands for magnetic field to electric field conversion for HFH2-Z4 loop antenna.

4.3. NFC test results

Radiated H-Field, 3 meter distance

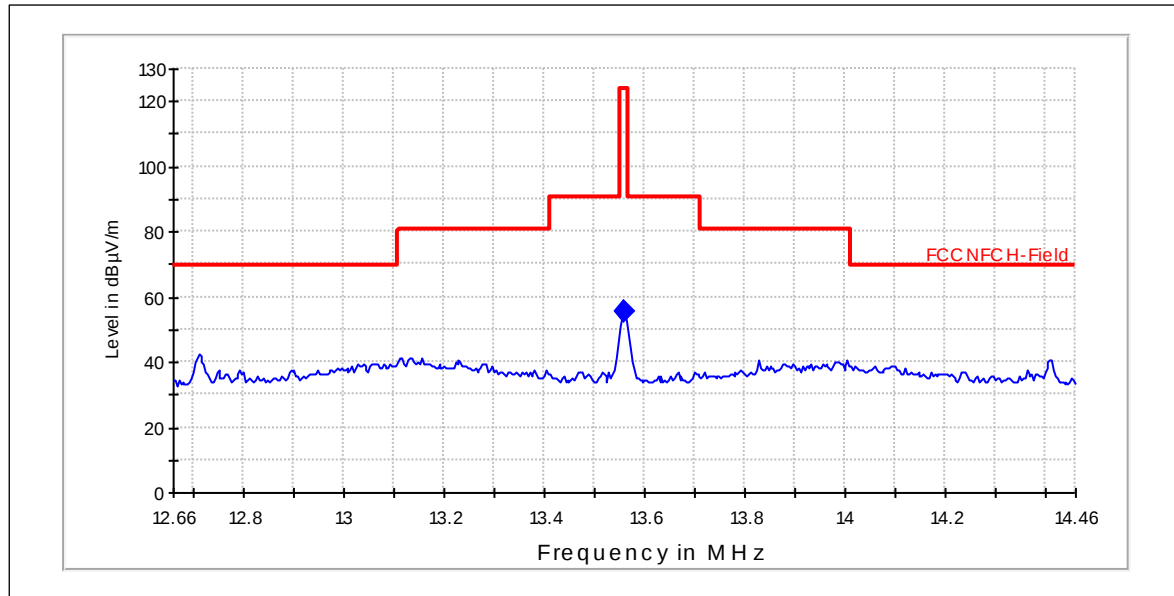

QuasiPeak

Frequency [MHz]	Result [dBµV/m]	Limit [dBµV/m]	Result [dBµA/m]	Pol	Results
13.558	55.44	124	23.94	H	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
-	Bluetooth tester	CBT	R&S	15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Bluetooth tester	CBT	R&S	15C, 15B