



# FCC RF Test Report

APPLICANT : Sinocastel Co.,Ltd.  
EQUIPMENT : OBD GPS Tracker  
BRAND NAME : OBD-Smart  
MODEL NAME : IDD-213N  
FCC ID : S8U213N  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Mar. 19, 2014 and testing was completed on Jan. 07, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,  
Nanshan District, Shenzhen, Guangdong, P. R. China



## TABLE OF CONTENTS

|                                                                                       |            |
|---------------------------------------------------------------------------------------|------------|
| <b>REVISION HISTORY.....</b>                                                          | <b>3</b>   |
| <b>SUMMARY OF TEST RESULT .....</b>                                                   | <b>4</b>   |
| <b>1 GENERAL DESCRIPTION .....</b>                                                    | <b>5</b>   |
| 1.1 Applicant.....                                                                    | 5          |
| 1.2 Manufacturer .....                                                                | 5          |
| 1.3 Product Feature of Equipment Under Test .....                                     | 5          |
| 1.4 Product Specification subjective to this standard.....                            | 6          |
| 1.5 Modification of EUT .....                                                         | 6          |
| 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....        | 7          |
| 1.7 Testing Location .....                                                            | 7          |
| 1.8 Applicable Standards .....                                                        | 8          |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>                             | <b>9</b>   |
| 2.1 Test Mode.....                                                                    | 9          |
| 2.2 Connection Diagram of Test System .....                                           | 10         |
| 2.3 Support Unit used in test configuration .....                                     | 11         |
| 2.4 Measurement Results Explanation Example .....                                     | 12         |
| <b>3 TEST RESULT .....</b>                                                            | <b>13</b>  |
| 3.1 Conducted Output Power Measurement.....                                           | 13         |
| 3.2 Peak-to-Average Ratio .....                                                       | 15         |
| 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... | 24         |
| 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....                        | 30         |
| 3.5 Band Edge Measurement.....                                                        | 50         |
| 3.6 Conducted Spurious Emission Measurement.....                                      | 58         |
| 3.7 Field Strength of Spurious Radiation Measurement .....                            | 75         |
| 3.8 Frequency Stability Measurement.....                                              | 95         |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                                            | <b>100</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                                              | <b>101</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                                                  |            |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FG431904   | Rev. 01 | Initial issue of report | Jan. 08, 2015 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                            | Description                                         | Limit                                           | Result | Remark                                       |
|----------------|-------------------------------------|-----------------------------------------------------|-------------------------------------------------|--------|----------------------------------------------|
| 3.1            | §2.1046                             | Conducted Output Power                              | N/A                                             | PASS   | -                                            |
| 3.2            | §24.232(d)                          | Peak-to-Average Ratio                               | <13 dB                                          | PASS   | -                                            |
| 3.3            | §22.913(a)(2)                       | Effective Radiated Power                            | < 7 Watts                                       | PASS   | -                                            |
|                | §24.232(c)                          | Equivalent Isotropic Radiated Power                 | < 2 Watts                                       | PASS   | -                                            |
| 3.4            | §2.1049<br>§22.917(b)<br>§24.238(b) | Occupied Bandwidth                                  | N/A                                             | PASS   | -                                            |
| 3.5            | §2.1051<br>§22.917(a)<br>§24.238(a) | Band Edge Measurement                               | $< 43 + 10\log_{10}(P[\text{Watts}])$           | PASS   | -                                            |
| 3.6            | §2.1051<br>§22.917(a)<br>§24.238(a) | Conducted Spurious Emission                         | $< 43 + 10\log_{10}(P[\text{Watts}])$           | PASS   | -                                            |
| 3.7            | §2.1053<br>§22.917(a)<br>§24.238(a) | Field Strength of Spurious Radiation                | $< 43 + 10\log_{10}(P[\text{Watts}])$           | PASS   | Under limit<br>3.47 dB at<br>1648.400<br>MHz |
| 3.8            | §2.1055<br>§22.355                  | Frequency Stability<br>for Temperature &<br>Voltage | < 2.5 ppm for Part 22<br>Within Authorized Band | PASS   | -                                            |
|                | §2.1055<br>§24.235                  |                                                     |                                                 |        |                                              |



# 1 General Description

## 1.1 Applicant

**Sinocastel Co.,Ltd.**

5F, 5th Building, Software Park, No.2 Gaoxin C.3rd Road, Nanshan District, Shezhen, China

## 1.2 Manufacturer

**Sinocastel Co.,Ltd.**

5F, 5th Building, Software Park, No.2 Gaoxin C.3rd Road, Nanshan District, Shezhen, China

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                       |
|---------------------------------|-----------------------|
| Equipment                       | OBD GPS Tracker       |
| Brand Name                      | OBD-Smart             |
| Model Name                      | IDD-213N              |
| FCC ID                          | S8U213N               |
| EUT supports Radios application | GPRS/EGPRS/WCDMA/HSPA |
| HW Version                      | C                     |
| SW Version                      | V2.2.5                |
| EUT Stage                       | Identical Prototype   |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |                                                                                                                                                    |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                               | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz  |
| <b>Rx Frequency</b>                               | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz |
| <b>Maximum Output Power to Antenna</b>            | GSM850 : 31.16 dBm<br>GSM1900 : 29.38 dBm<br>WCDMA Band V : 23.23 dBm<br>WCDMA Band II : 21.38 dBm                                                 |
| <b>Antenna Type</b>                               | PIFA Antenna                                                                                                                                       |
| <b>Type of Modulation</b>                         | GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: QPSK (Uplink)<br>HSUPA: QPSK (Uplink)                                            |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 22  | GSM850 GPRS class 10       | GMSK               | 0.74                 | 0.0371 ppm                | 245KGXW             |
| Part 22  | GSM850 EDGE class 8        | 8PSK               | 0.19                 | 0.0060 ppm                | 253KG7W             |
| Part 22  | WCDMA Band V RMC 12.2Kbps  | QPSK               | 0.09                 | 0.0299 ppm                | 4M07F9W             |
| Part 24  | GSM1900 GPRS class 10      | GMSK               | 0.70                 | 0.0053 ppm                | 245KGXW             |
| Part 24  | GSM1900 EDGE class 10      | 8PSK               | 0.27                 | 0.0059 ppm                | 249KG7W             |
| Part 24  | WCDMA Band II RMC 12.2Kbps | QPSK               | 0.15                 | 0.0436 ppm                | 4M08F9W             |

## 1.7 Testing Location

|                           |                                                                                                                                                                                    |          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                                                                                                                              |          |
| <b>Test Site Location</b> | 1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China<br>TEL: +86-755-8637-9589<br>FAX: +86-755-8637-9595 |          |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                            |          |
|                           | TH01-SZ                                                                                                                                                                            | OTA02-SZ |

|                           |                                                                                                                                                                 |                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                                                                                                           |                             |
| <b>Test Site Location</b> | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China<br>TEL: +86-755- 3320-2398 |                             |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                         | <b>FCC Registration No.</b> |
|                           | 03CH01-SZ                                                                                                                                                       | 831040                      |



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


| Test Modes    |                      |                      |
|---------------|----------------------|----------------------|
| Band          | Radiated TCs         | Conducted TCs        |
| GSM 850       | ■ GPRS class 10 Link | ■ GPRS class 10 Link |
|               | ■ EDGE class 8 Link  | ■ EDGE class 8 Link  |
| GSM 1900      | ■ GPRS class 10 Link | ■ GPRS class 10 Link |
|               | ■ EDGE class 10 Link | ■ EDGE class 10 Link |
| WCDMA Band V  | ■ RMC 12.2Kbps Link  | ■ RMC 12.2Kbps Link  |
| WCDMA Band II | ■ RMC 12.2Kbps Link  | ■ RMC 12.2Kbps Link  |

**Conducted Power Measurement Results:**

| Conducted Power (*Unit: dBm) |        |       |       |         |        |        |
|------------------------------|--------|-------|-------|---------|--------|--------|
| Band                         | GSM850 |       |       | GSM1900 |        |        |
| Channel                      | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency                    | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GPRS class 8                 | 30.86  | 30.72 | 30.75 | 29.35   | 28.99  | 28.17  |
| GPRS class 10                | 31.16  | 31.08 | 31.15 | 29.38   | 28.99  | 28.16  |
| EGPRS class 8                | 25.85  | 25.75 | 25.83 | 25.15   | 24.76  | 24.03  |
| EGPRS class 10               | 25.81  | 25.70 | 25.80 | 25.33   | 25.04  | 24.30  |

| Conducted Power (*Unit: dBm) |              |       |       |               |        |        |
|------------------------------|--------------|-------|-------|---------------|--------|--------|
| Band                         | WCDMA Band V |       |       | WCDMA Band II |        |        |
| Channel                      | 4132         | 4182  | 4233  | 9262          | 9400   | 9538   |
| Frequency                    | 826.4        | 836.4 | 846.6 | 1852.4        | 1880.0 | 1907.6 |
| RMC 12.2K                    | 23.23        | 22.90 | 22.49 | 21.38         | 21.12  | 21.13  |
| HSDPA Subtest-1              | 22.93        | 22.61 | 22.16 | 21.32         | 21.00  | 21.10  |
| HSDPA Subtest-2              | 22.22        | 21.89 | 21.42 | 21.30         | 20.84  | 21.01  |
| HSDPA Subtest-3              | 21.96        | 21.67 | 21.18 | 20.50         | 20.12  | 20.77  |
| HSDPA Subtest-4              | 21.72        | 21.42 | 20.94 | 20.36         | 19.87  | 20.51  |
| HSUPA Subtest-1              | 22.14        | 21.82 | 21.32 | 20.82         | 20.25  | 20.67  |
| HSUPA Subtest-2              | 20.17        | 19.84 | 19.35 | 18.90         | 18.28  | 18.67  |
| HSUPA Subtest-3              | 21.06        | 20.75 | 20.24 | 19.92         | 19.23  | 19.70  |
| HSUPA Subtest-4              | 20.30        | 19.98 | 19.50 | 19.02         | 18.43  | 18.87  |
| HSUPA Subtest-5              | 22.25        | 21.92 | 21.46 | 20.93         | 20.40  | 20.86  |

## 2.2 Connection Diagram of Test System

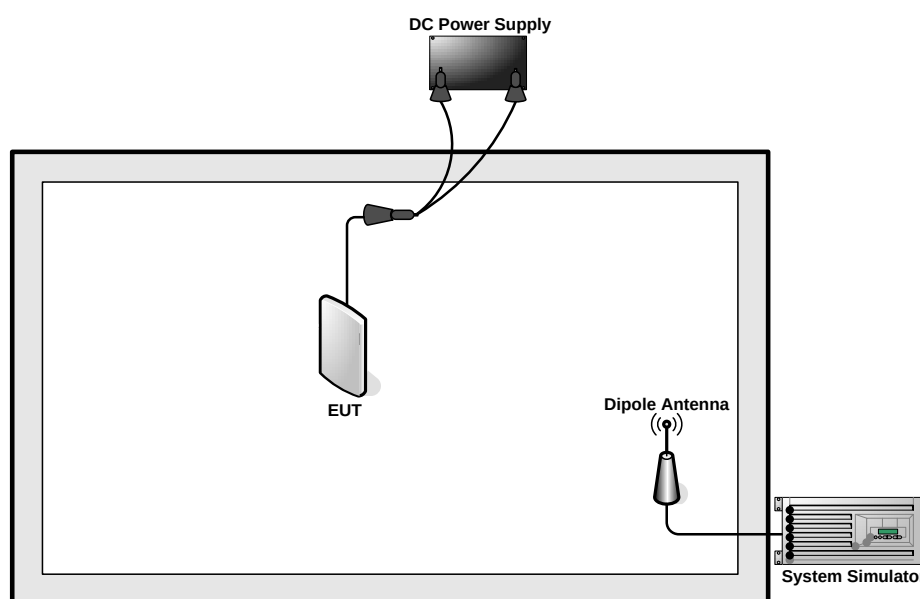



## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | DC Power Supply  | TOPWORD    | 3303DR    | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

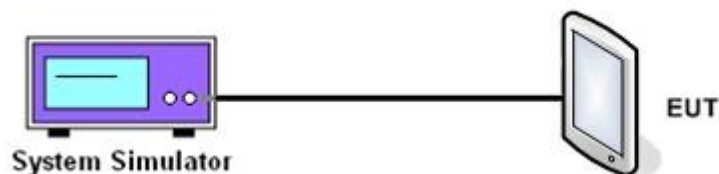

### 3.1.5 Test Result of Conducted Output Power

| Cellular Band                 |                        |              |               |                       |              |               |                             |               |                |
|-------------------------------|------------------------|--------------|---------------|-----------------------|--------------|---------------|-----------------------------|---------------|----------------|
| Modes                         | GSM850 (GPRS class 10) |              |               | GSM850 (EDGE class 8) |              |               | WCDMA Band V (RMC 12.2Kbps) |               |                |
| Channel                       | 128<br>(Low)           | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) | 4132<br>(Low)               | 4182<br>(Mid) | 4233<br>(High) |
| Frequency<br>(MHz)            | 824.2                  | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         | 826.4                       | 836.4         | 846.6          |
| Conducted<br>Power<br>(dBm)   | 31.16                  | 31.08        | 31.15         | 25.85                 | 25.75        | 25.83         | 23.23                       | 22.90         | 22.49          |
| Conducted<br>Power<br>(Watts) | 1.31                   | 1.28         | 1.30          | 0.38                  | 0.38         | 0.38          | 0.21                        | 0.19          | 0.18           |

| PCS Band                      |                         |              |               |                         |              |               |                              |               |                |
|-------------------------------|-------------------------|--------------|---------------|-------------------------|--------------|---------------|------------------------------|---------------|----------------|
| Modes                         | GSM1900 (GPRS class 10) |              |               | GSM1900 (EDGE class 10) |              |               | WCDMA Band II (RMC 12.2Kbps) |               |                |
| Channel                       | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) | 9262<br>(Low)                | 9400<br>(Mid) | 9538<br>(High) |
| Frequency<br>(MHz)            | 1850.2                  | 1880         | 1909.8        | 1850.2                  | 1880         | 1909.8        | 1852.4                       | 1880          | 1907.6         |
| Conducted<br>Power<br>(dBm)   | 29.38                   | 28.99        | 28.16         | 25.33                   | 25.04        | 24.3          | 21.38                        | 21.12         | 21.13          |
| Conducted<br>Power<br>(Watts) | 0.87                    | 0.79         | 0.65          | 0.34                    | 0.32         | 0.27          | 0.14                         | 0.13          | 0.13           |

**Note:** maximum burst average power for GSM, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

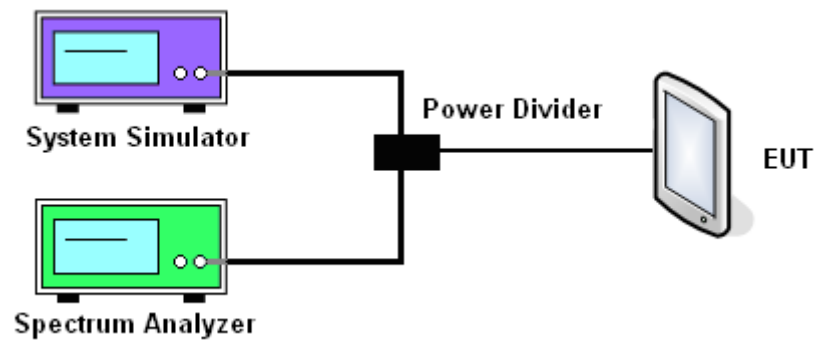





### 3.2.5 Test Result of Peak-to-Average Ratio

| PCS Band                      |                         |              |               |                         |              |               |                                 |               |                |
|-------------------------------|-------------------------|--------------|---------------|-------------------------|--------------|---------------|---------------------------------|---------------|----------------|
| Modes                         | GSM1900 (GPRS class 10) |              |               | GSM1900 (EDGE class 10) |              |               | WCDMA Band II<br>(RMC 12.2Kbps) |               |                |
| Channel                       | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) | 9262<br>(Low)                   | 9400<br>(Mid) | 9538<br>(High) |
| Frequency<br>(MHz)            | 1850.2                  | 1880         | 1909.8        | 1850.2                  | 1880         | 1909.8        | 1852.4                          | 1880          | 1907.6         |
| Peak-to-Average<br>Ratio (dB) | 0.19                    | 0.19         | 0.20          | 2.68                    | 2.75         | 2.95          | 2.70                            | 2.35          | 2.49           |


### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio

|               |          |                    |                           |
|---------------|----------|--------------------|---------------------------|
| <b>Band :</b> | GSM 1900 | <b>Test Mode :</b> | GPRS class 10 Link (GMSK) |
|---------------|----------|--------------------|---------------------------|

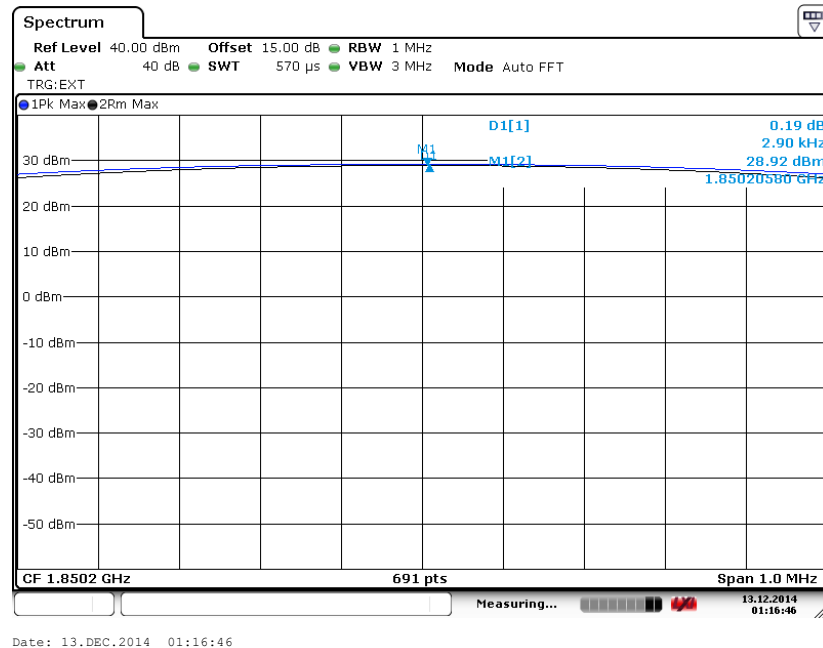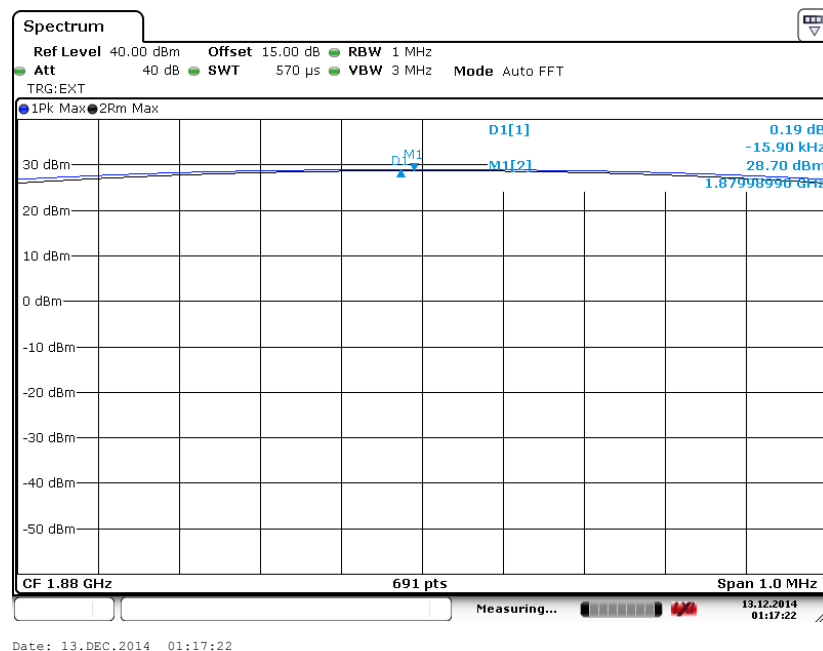**Peak-to-Average Ratio on Channel 512 (1850.2 MHz)**

**Peak-to-Average Ratio on Channel 661 (1880.0 MHz)**

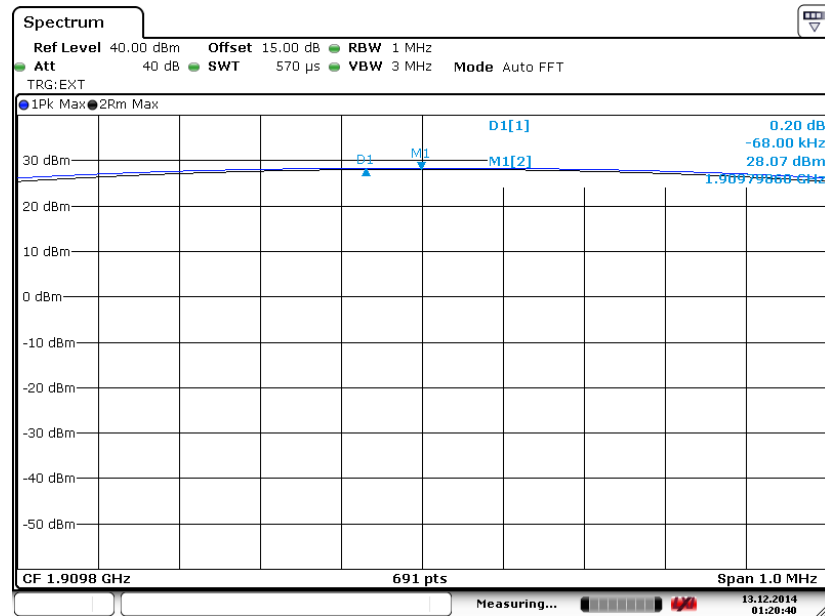


Peak-to-Average Ratio on Channel 810 (1909.8 MHz)




Date: 13.DEC.2014 01:20:40




|        |          |             |                           |
|--------|----------|-------------|---------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 10 Link (8PSK) |
|--------|----------|-------------|---------------------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

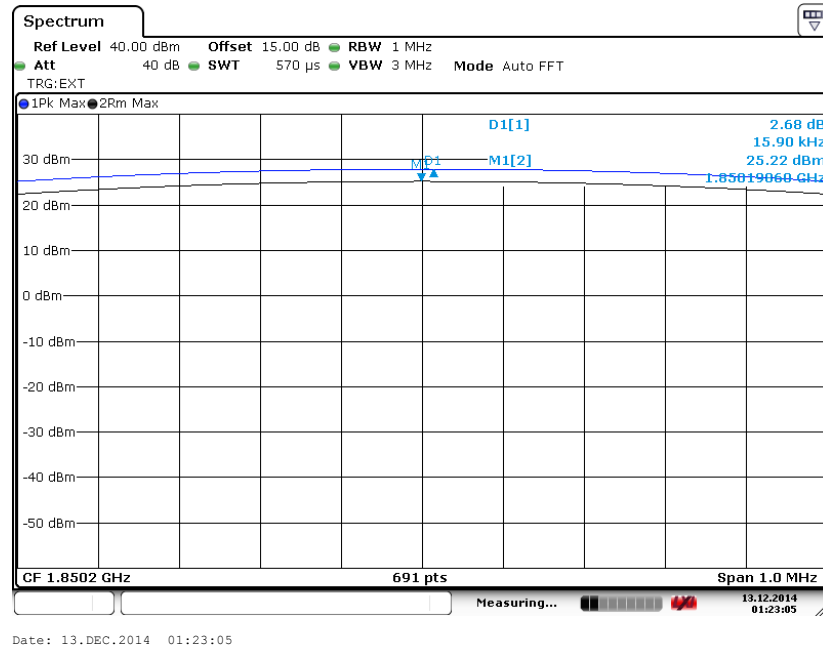


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

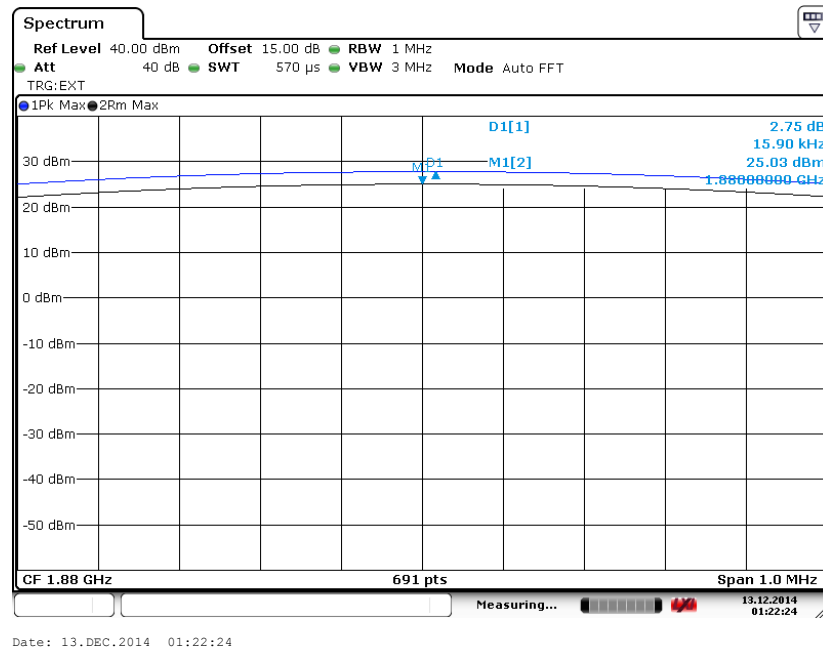





Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

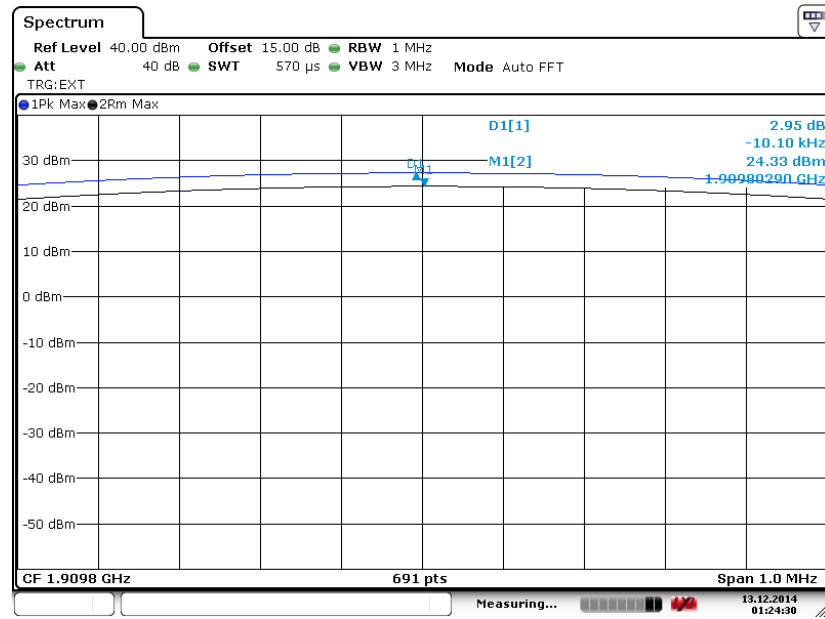


Date: 13.DEC.2014 01:24:29



|               |               |                    |                          |
|---------------|---------------|--------------------|--------------------------|
| <b>Band :</b> | WCDMA Band II | <b>Test Mode :</b> | RMC 12.2Kbps Link (QPSK) |
|---------------|---------------|--------------------|--------------------------|

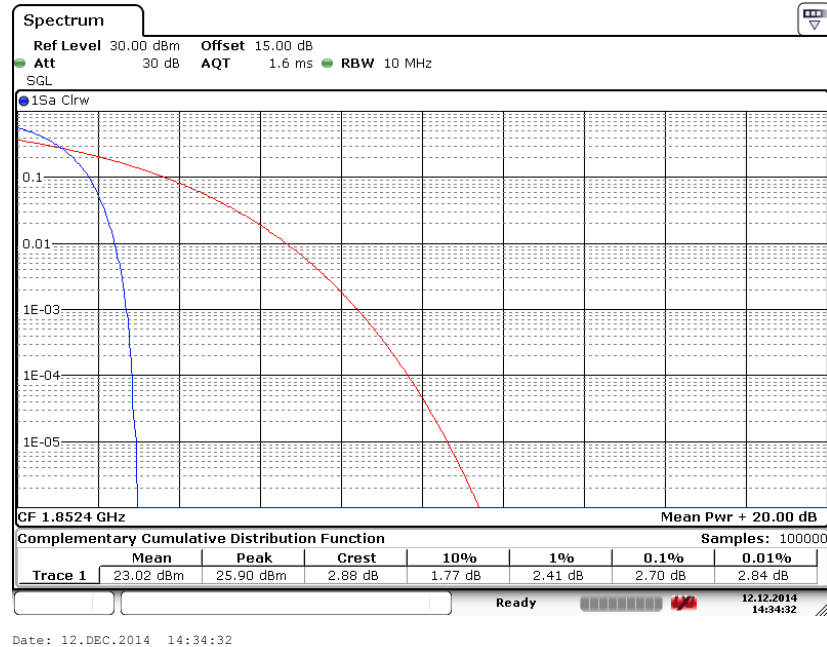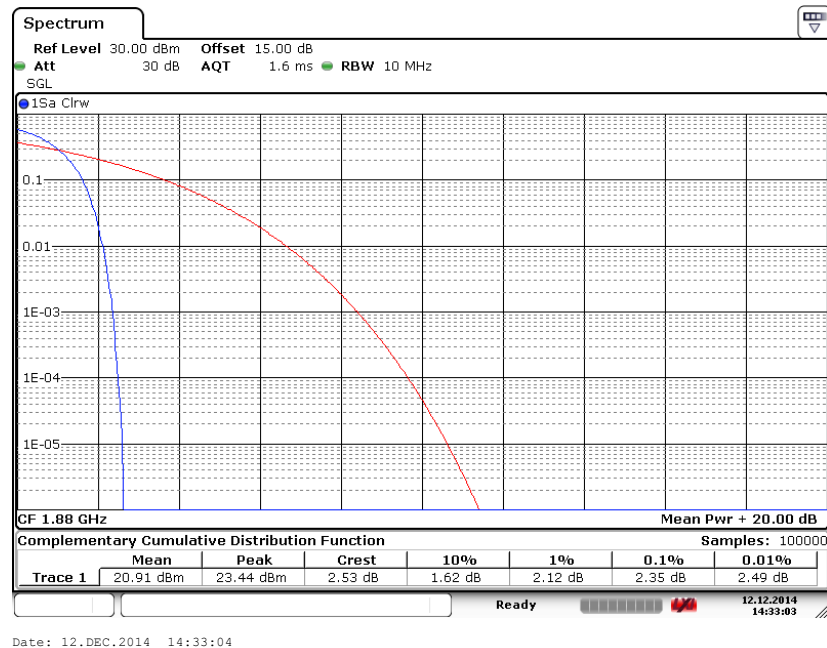**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)****Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

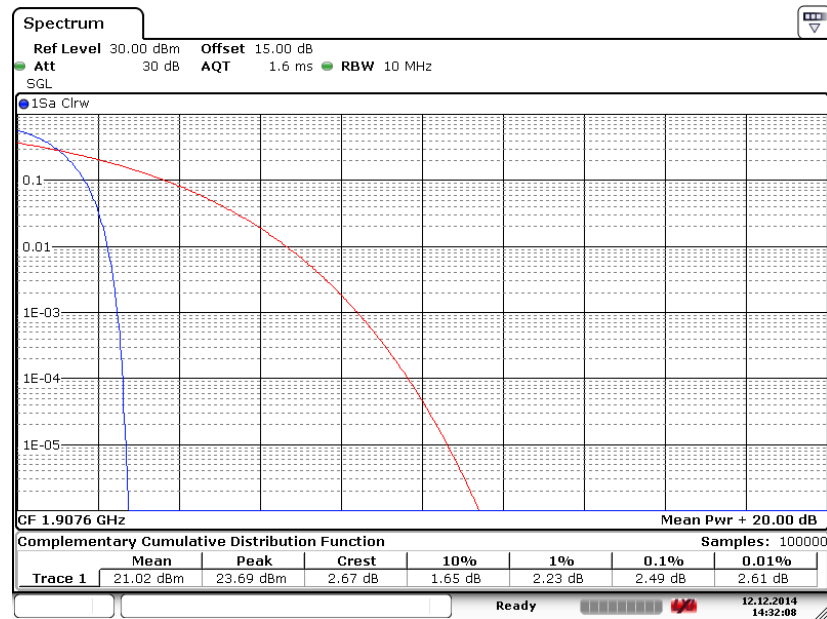**Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)**


Date: 12.DEC.2014 14:32:08

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

#### 3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
3. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;  
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
5. The table was rotated 360 degrees to determine the position of the highest radiated power.
6. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
7. Taking the record of maximum ERP/EIRP.
8. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
9. The conducted power at the terminal of the dipole antenna is measured.
10. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
11.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$   
 $P_s$  (dBm) : Input power to substitution antenna.  
 $G_s$  (dBi or dBd) : Substitution antenna Gain.  
 $E_t = R_t + AF$   
 $E_s = R_s + AF$   
 $AF$  (dB/m) : Receive antenna factor  
 $R_t$  : The highest received signal in spectrum analyzer for EUT.  
 $R_s$  : The highest received signal in spectrum analyzer for substitution antenna.



### 3.3.4 Test Setup

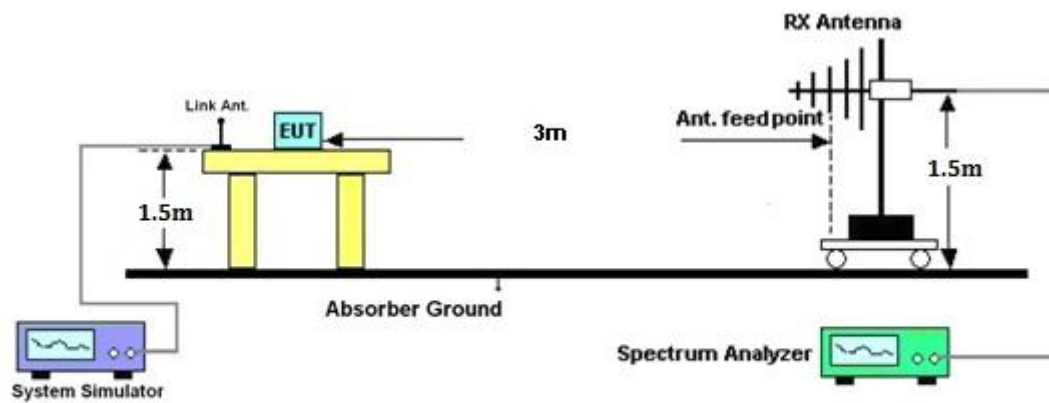

### 3.3.5 Test Result of ERP

| GSM850 (GPRS class 10) Radiated Power ERP |          |          |          |          |           |         |
|-------------------------------------------|----------|----------|----------|----------|-----------|---------|
| Horizontal Polarization                   |          |          |          |          |           |         |
| Frequency (MHz)                           | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 824.20                                    | -19.85   | -48.12   | 0.00     | -1.08    | 27.19     | 0.52    |
| 836.40                                    | -20.02   | -48.28   | 0.00     | -0.93    | 27.33     | 0.54    |
| 848.80                                    | -19.98   | -48.35   | 0.00     | -0.76    | 27.61     | 0.58    |
| Vertical Polarization                     |          |          |          |          |           |         |
| Frequency (MHz)                           | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 824.20                                    | -19.65   | -47.97   | 0.00     | -1.08    | 27.24     | 0.53    |
| 836.40                                    | -18.77   | -48.01   | 0.00     | -0.93    | 28.31     | 0.68    |
| 848.80                                    | -18.62   | -48.05   | 0.00     | -0.76    | 28.67     | 0.74    |

| GSM850 (EDGE class 8) Radiated Power ERP |          |          |          |          |           |         |
|------------------------------------------|----------|----------|----------|----------|-----------|---------|
| Horizontal Polarization                  |          |          |          |          |           |         |
| Frequency (MHz)                          | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 824.20                                   | -24.96   | -48.12   | 0.00     | -1.08    | 22.08     | 0.16    |
| 836.40                                   | -24.92   | -48.28   | 0.00     | -0.93    | 22.43     | 0.17    |
| 848.80                                   | -24.78   | -48.35   | 0.00     | -0.76    | 22.81     | 0.19    |
| Vertical Polarization                    |          |          |          |          |           |         |
| Frequency (MHz)                          | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 824.20                                   | -25.13   | -47.97   | 0.00     | -1.08    | 21.76     | 0.15    |
| 836.40                                   | -25.05   | -48.01   | 0.00     | -0.93    | 22.03     | 0.16    |
| 848.80                                   | -24.57   | -48.05   | 0.00     | -0.76    | 22.72     | 0.19    |

| WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP |          |          |          |          |           |         |
|------------------------------------------------|----------|----------|----------|----------|-----------|---------|
| Horizontal Polarization                        |          |          |          |          |           |         |
| Frequency (MHz)                                | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 826.40                                         | -27.66   | -48.12   | 0.00     | -1.08    | 19.38     | 0.09    |
| 836.40                                         | -28.65   | -48.28   | 0.00     | -0.93    | 18.70     | 0.07    |
| 846.60                                         | -29.72   | -48.35   | 0.00     | -0.76    | 17.87     | 0.06    |
| Vertical Polarization                          |          |          |          |          |           |         |
| Frequency (MHz)                                | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBd) | ERP (dBm) | ERP (W) |
| 826.40                                         | -27.30   | -47.97   | 0.00     | -1.08    | 19.59     | 0.09    |
| 836.40                                         | -28.01   | -48.01   | 0.00     | -0.93    | 19.07     | 0.08    |
| 846.60                                         | -28.63   | -48.05   | 0.00     | -0.76    | 18.66     | 0.07    |

### 3.3.6 Test Result of EIRP

| GSM1900 (GPRS class 10) Radiated Power EIRP |          |          |          |          |            |          |
|---------------------------------------------|----------|----------|----------|----------|------------|----------|
| Horizontal Polarization                     |          |          |          |          |            |          |
| Frequency (MHz)                             | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | EIRP (W) |
| 1850.20                                     | -25.68   | -51.88   | 0.00     | 1.96     | 28.16      | 0.65     |
| 1880.00                                     | -26.55   | -52.99   | 0.00     | 2.00     | 28.44      | 0.70     |
| 1909.80                                     | -27.87   | -54.28   | 0.00     | 1.98     | 28.39      | 0.69     |
| Vertical Polarization                       |          |          |          |          |            |          |
| Frequency (MHz)                             | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | EIRP (W) |
| 1850.20                                     | -27.42   | -52.13   | 0.00     | 1.96     | 26.67      | 0.46     |
| 1880.00                                     | -27.91   | -53.17   | 0.00     | 2.00     | 27.26      | 0.53     |
| 1909.80                                     | -28.32   | -54.13   | 0.00     | 1.98     | 27.79      | 0.60     |

| GSM1900 (EDGE class 10) Radiated Power EIRP |          |          |          |          |            |          |
|---------------------------------------------|----------|----------|----------|----------|------------|----------|
| Horizontal Polarization                     |          |          |          |          |            |          |
| Frequency (MHz)                             | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | EIRP (W) |
| 1850.20                                     | -31.47   | -51.88   | 0.00     | 1.96     | 22.37      | 0.17     |
| 1880.00                                     | -31.08   | -52.99   | 0.00     | 2.00     | 23.91      | 0.25     |
| 1909.80                                     | -31.93   | -54.28   | 0.00     | 1.98     | 24.34      | 0.27     |
| Vertical Polarization                       |          |          |          |          |            |          |
| Frequency (MHz)                             | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | EIRP (W) |
| 1850.20                                     | -30.18   | -52.13   | 0.00     | 1.96     | 23.91      | 0.25     |
| 1880.00                                     | -31.08   | -53.17   | 0.00     | 2.00     | 24.09      | 0.26     |
| 1909.80                                     | -32.03   | -54.13   | 0.00     | 1.98     | 24.08      | 0.26     |



| WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP |             |             |             |             |               |             |
|--------------------------------------------------|-------------|-------------|-------------|-------------|---------------|-------------|
| Horizontal Polarization                          |             |             |             |             |               |             |
| Frequency<br>(MHz)                               | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1852.40                                          | -33.51      | -51.88      | 0.00        | 1.96        | 20.33         | 0.11        |
| 1880.00                                          | -33.67      | -52.99      | 0.00        | 2.00        | 21.32         | 0.14        |
| 1907.60                                          | -35.15      | -54.28      | 0.00        | 1.98        | 21.11         | 0.13        |
| Vertical Polarization                            |             |             |             |             |               |             |
| Frequency<br>(MHz)                               | Rt<br>(dBm) | Rs<br>(dBm) | Ps<br>(dBm) | Gs<br>(dBi) | EIRP<br>(dBm) | EIRP<br>(W) |
| 1852.40                                          | -33.76      | -52.13      | 0.00        | 1.96        | 20.33         | 0.11        |
| 1880.00                                          | -33.95      | -53.17      | 0.00        | 2.00        | 21.23         | 0.13        |
| 1907.60                                          | -34.35      | -54.13      | 0.00        | 1.98        | 21.76         | 0.15        |

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

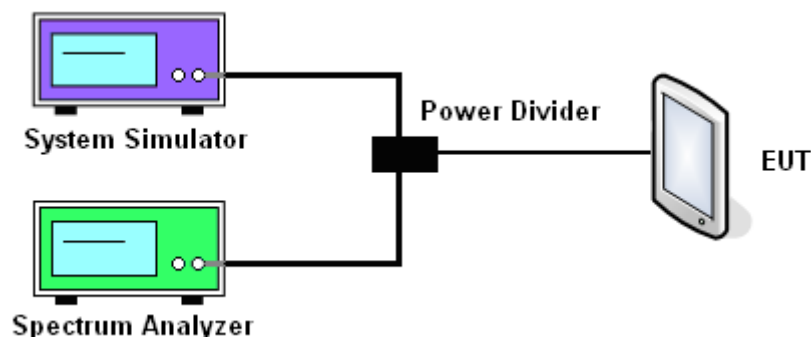

**3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth**

| Cellular Band   |                        |              |               |                       |              |               |
|-----------------|------------------------|--------------|---------------|-----------------------|--------------|---------------|
| Modes           | GSM850 (GPRS class 10) |              |               | GSM850 (EDGE class 8) |              |               |
| Channel         | 128<br>(Low)           | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) |
| Frequency (MHz) | 824.2                  | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         |
| 99% OBW (kHz)   | 243.13                 | 243.13       | 244.57        | 248.91                | 251.81       | 253.26        |
| 26dB BW (kHz)   | 314.00                 | 308.20       | 314.00        | 303.90                | 290.90       | 308.20        |

| PCS Band        |                         |              |               |                         |              |               |
|-----------------|-------------------------|--------------|---------------|-------------------------|--------------|---------------|
| Modes           | GSM1900 (GPRS class 10) |              |               | GSM1900 (EDGE class 10) |              |               |
| Channel         | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)            | 661<br>(Mid) | 810<br>(High) |
| Frequency (MHz) | 1850.2                  | 1880         | 1909.8        | 1850.2                  | 1880         | 1909.8        |
| 99% OBW (kHz)   | 240.23                  | 244.57       | 241.68        | 248.91                  | 248.91       | 247.47        |
| 26dB BW (kHz)   | 308.20                  | 315.50       | 314.00        | 314.00                  | 305.40       | 289.40        |

| Cellular Band   |                             |            |             |
|-----------------|-----------------------------|------------|-------------|
| Modes           | WCDMA Band V (RMC 12.2Kbps) |            |             |
| Channel         | 4132 (Low)                  | 4182 (Mid) | 4233 (High) |
| Frequency (MHz) | 826.4                       | 836.4      | 846.6       |
| 99% OBW (MHz)   | 4.05                        | 4.07       | 4.07        |
| 26dB BW (MHz)   | 4.62                        | 4.60       | 4.62        |


| PCS Band        |                              |            |             |
|-----------------|------------------------------|------------|-------------|
| Modes           | WCDMA Band II (RMC 12.2Kbps) |            |             |
| Channel         | 9262 (Low)                   | 9400 (Mid) | 9538 (High) |
| Frequency (MHz) | 1852.4                       | 1880       | 1907.6      |
| 99% OBW (MHz)   | 4.08                         | 4.08       | 4.08        |
| 26dB BW (MHz)   | 4.62                         | 4.66       | 4.65        |



## 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


|        |         |             |                           |
|--------|---------|-------------|---------------------------|
| Band : | GSM 850 | Test Mode : | GPRS class 10 Link (GMSK) |
|--------|---------|-------------|---------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

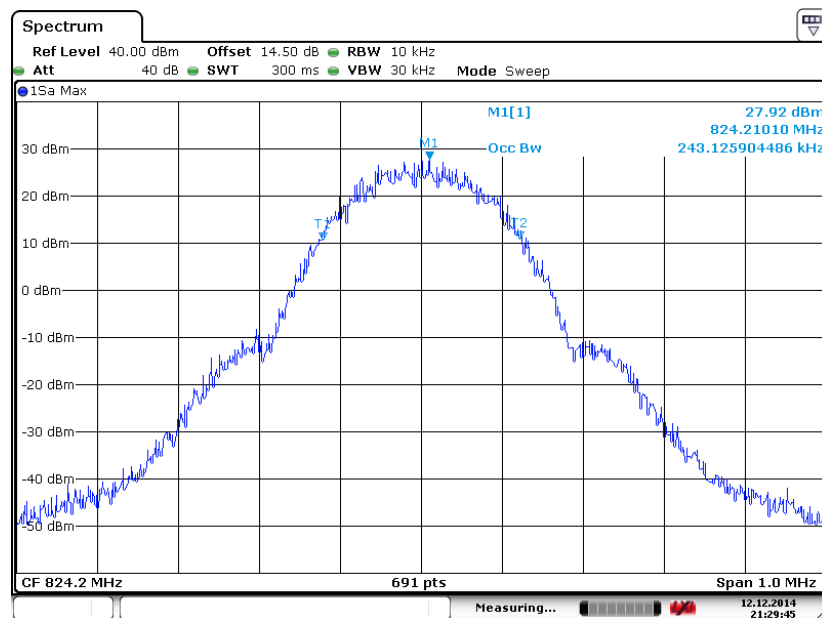

Date: 12.DEC.2014 21:29:46

## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

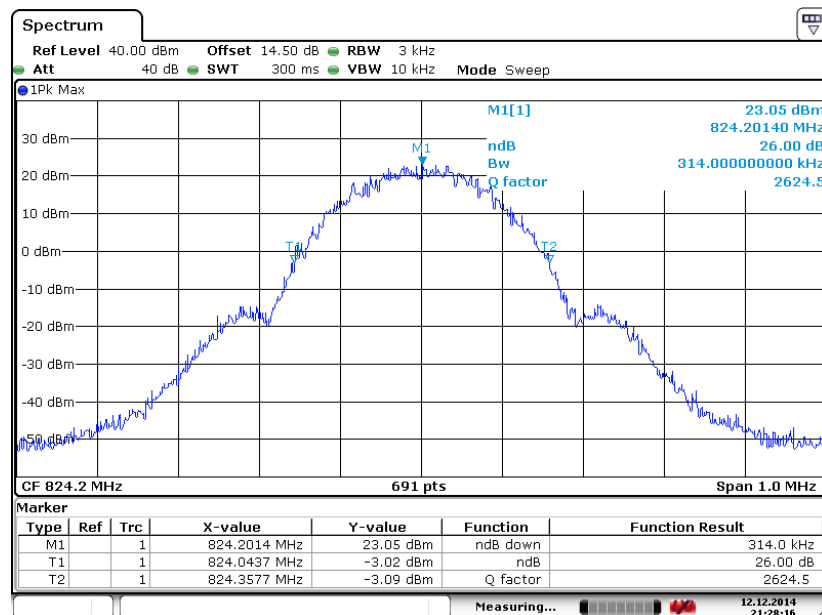


Date: 12.DEC.2014 21:28:16






### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

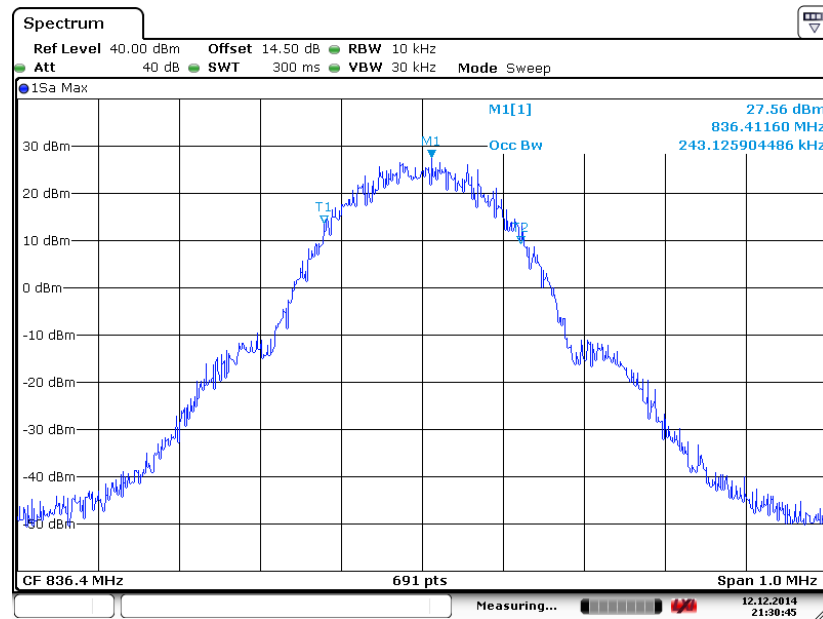

Date: 12.DEC.2014 21:30:44


### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

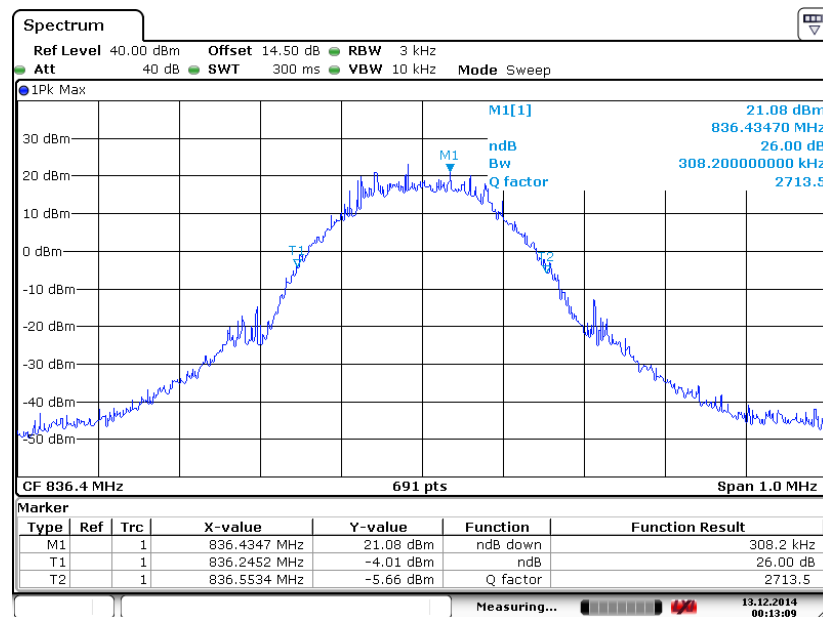

Date: 13.DEC.2014 00:13:08




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

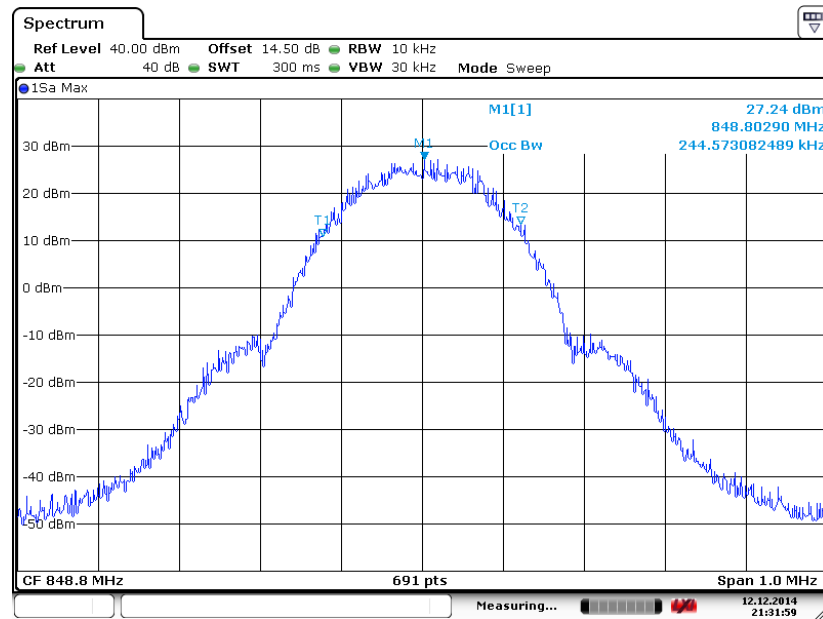

Date: 12.DEC.2014 21:32:00

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

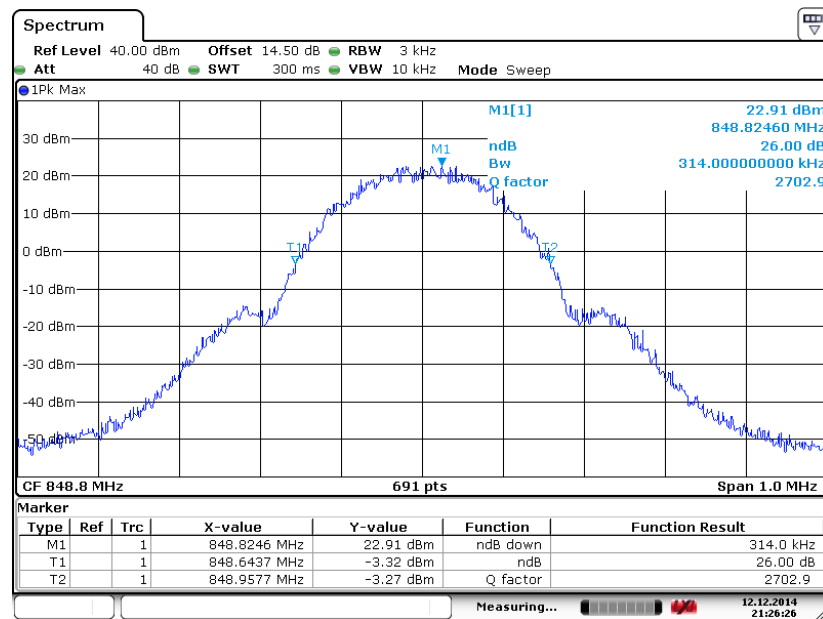


Date: 12.DEC.2014 21:26:27




|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

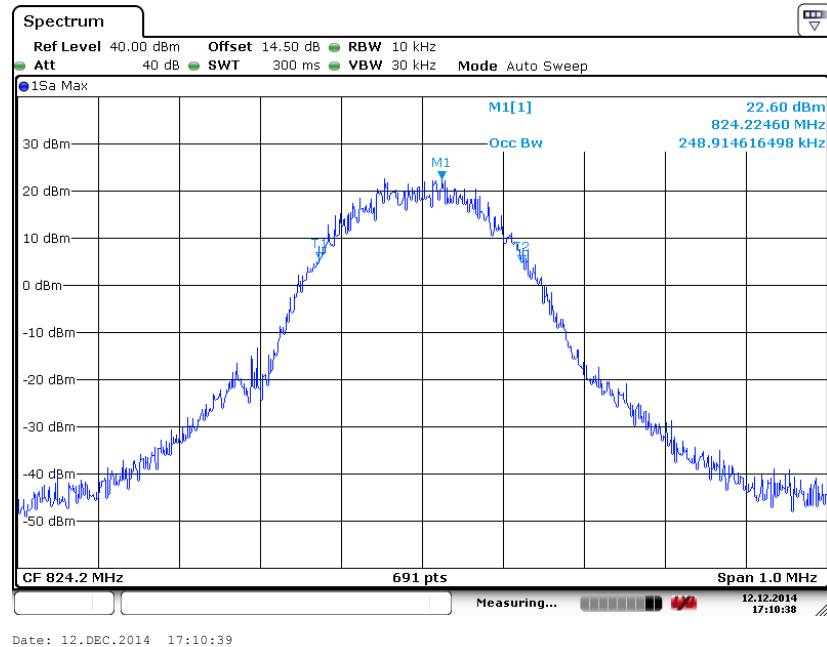


## 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

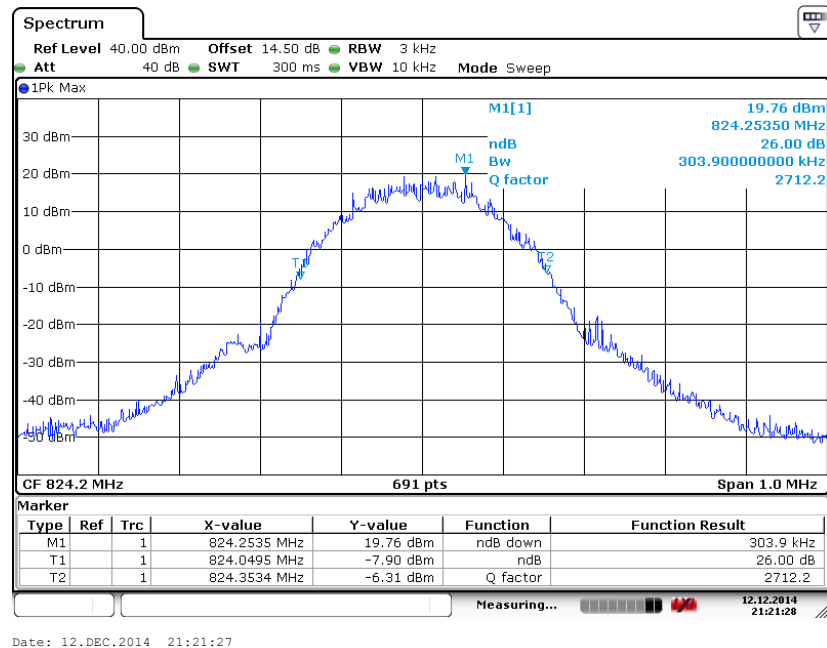




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

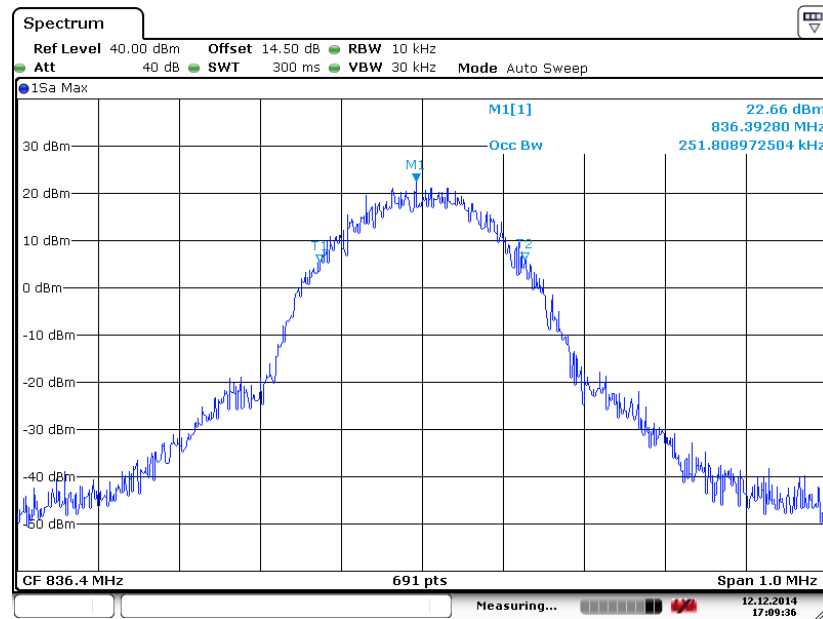

Date: 12.DEC.2014 17:09:37


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

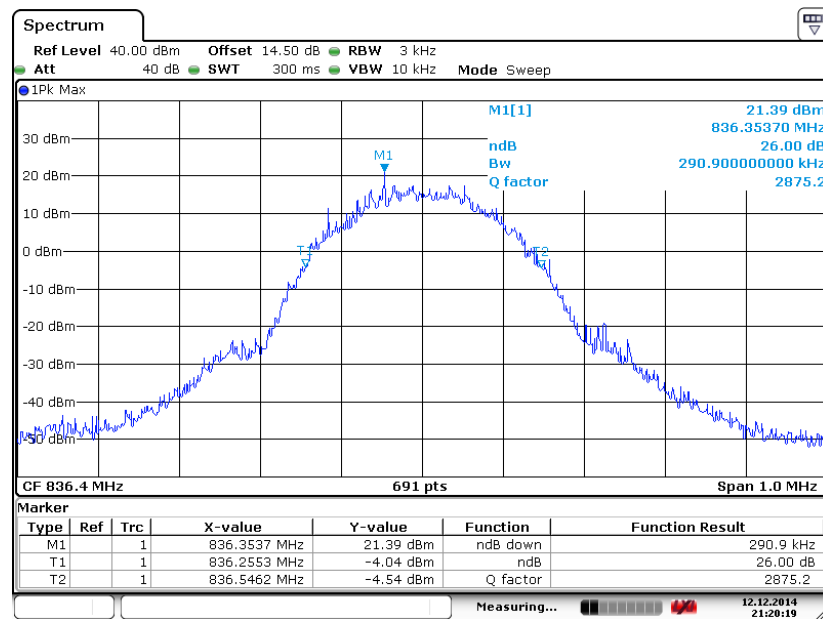

Date: 12.DEC.2014 21:20:20




## 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

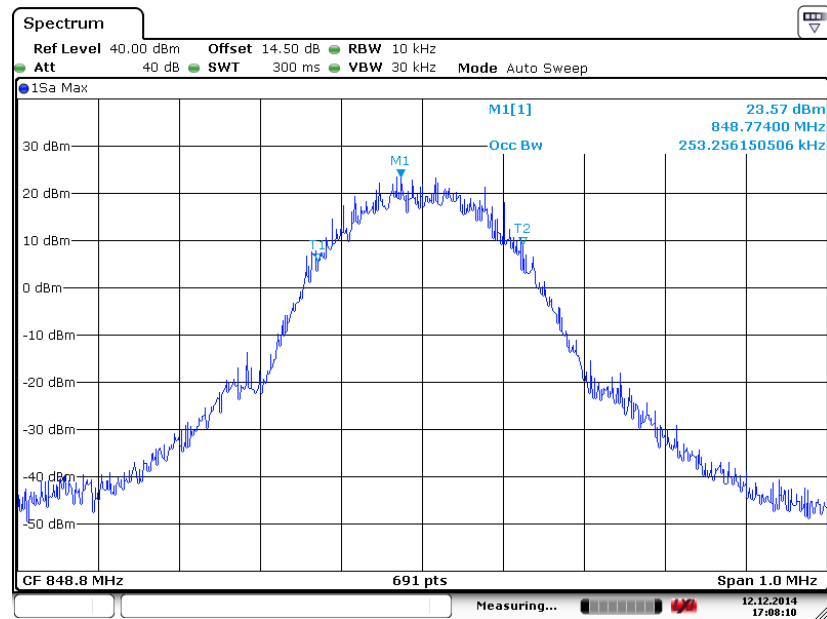

Date: 12.DEC.2014 17:08:11

## 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

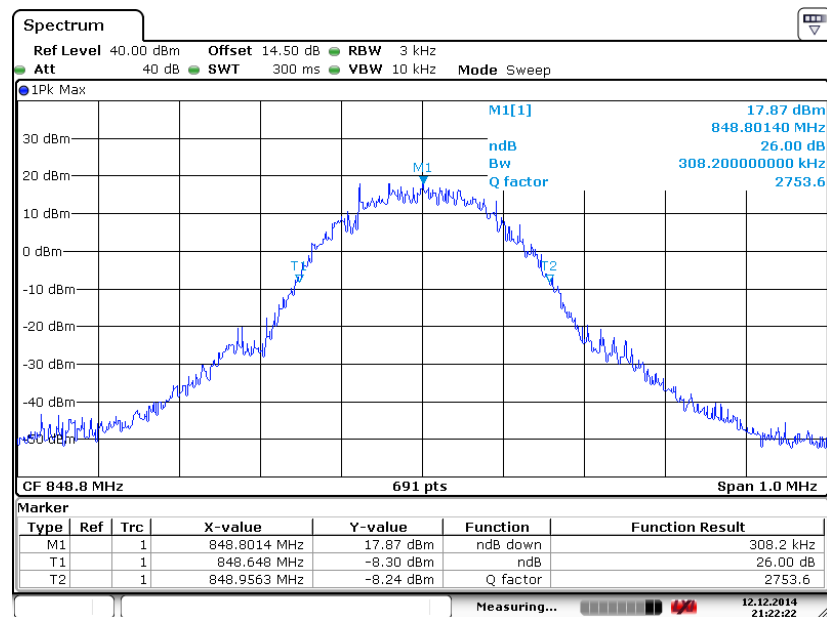


Date: 12.DEC.2014 21:22:23




|        |          |             |                           |
|--------|----------|-------------|---------------------------|
| Band : | GSM 1900 | Test Mode : | GPRS class 10 Link (GMSK) |
|--------|----------|-------------|---------------------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

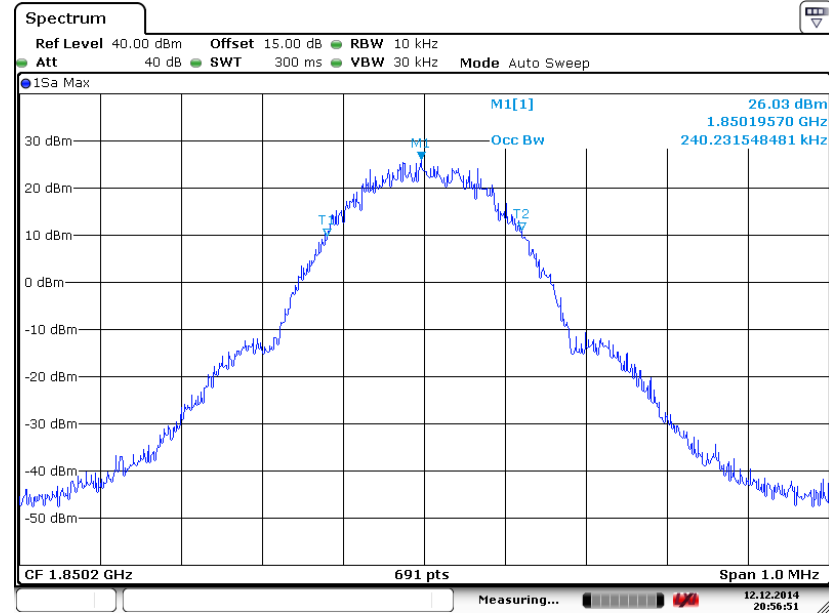

Date: 12.DEC.2014 20:56:52


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

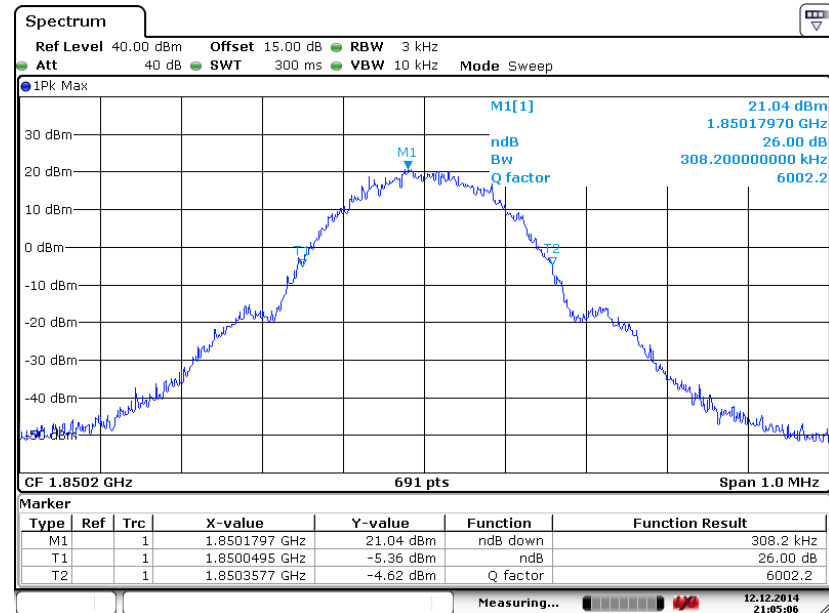

Date: 12.DEC.2014 21:05:06




## 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

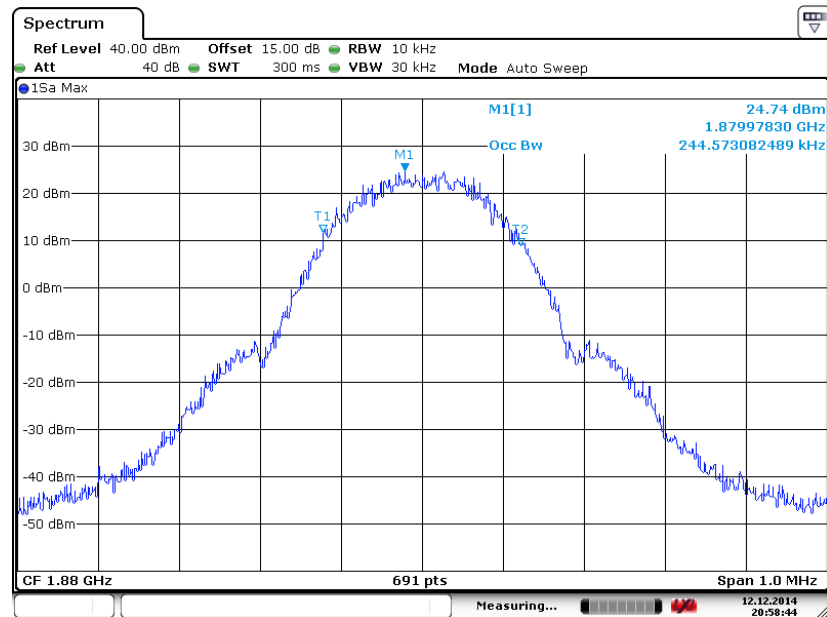

Date: 12.DEC.2014 20:58:45


## 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

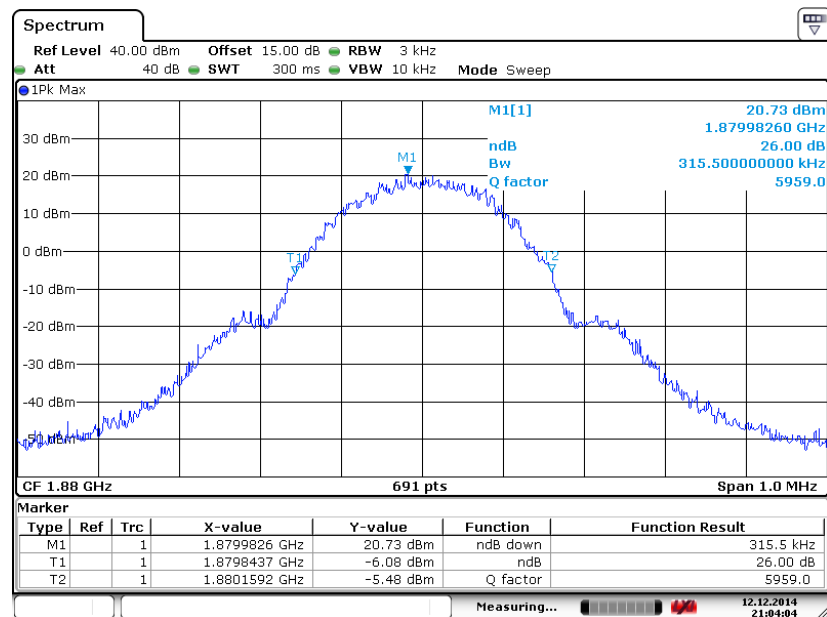

Date: 12.DEC.2014 21:04:05




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

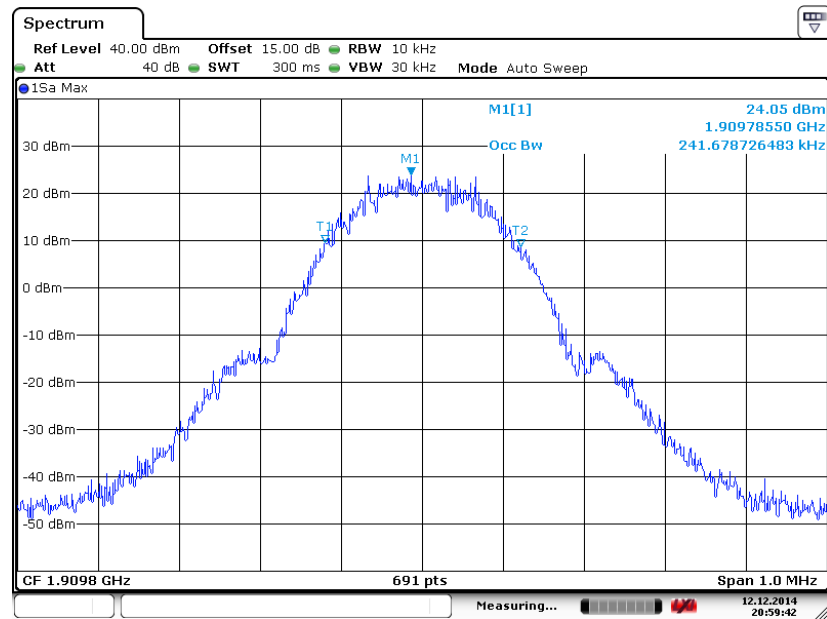

Date: 12.DEC.2014 20:59:43

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

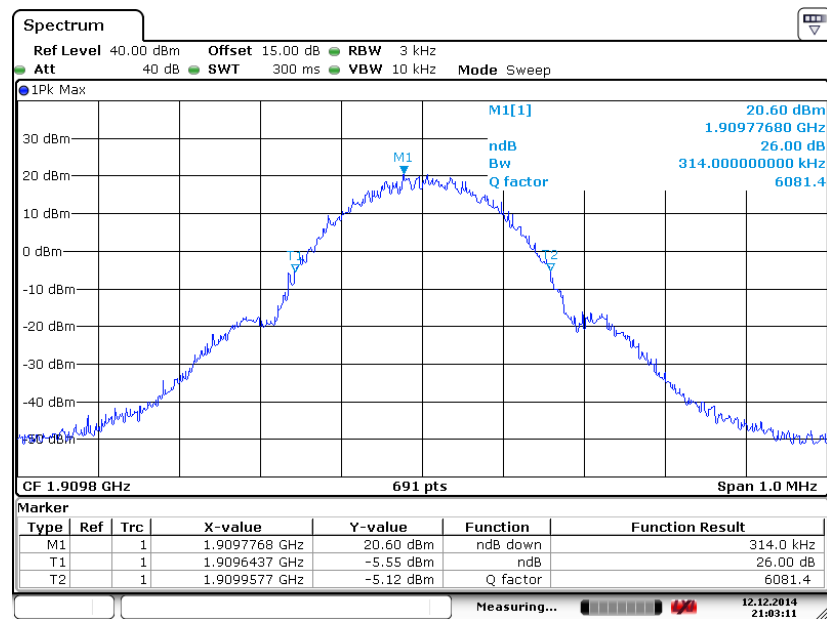


Date: 12.DEC.2014 21:03:12






|        |          |             |                           |
|--------|----------|-------------|---------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 10 Link (8PSK) |
|--------|----------|-------------|---------------------------|

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

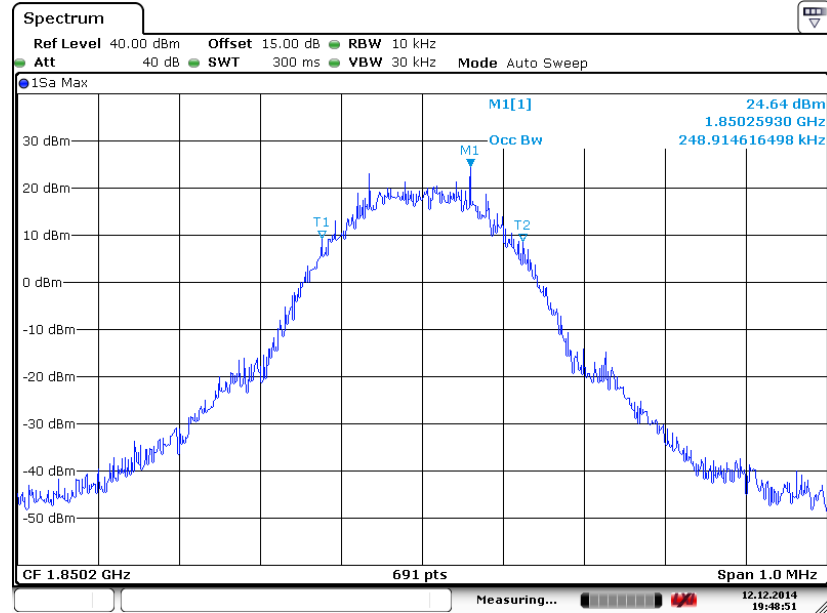

Date: 12.DEC.2014 19:48:51


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

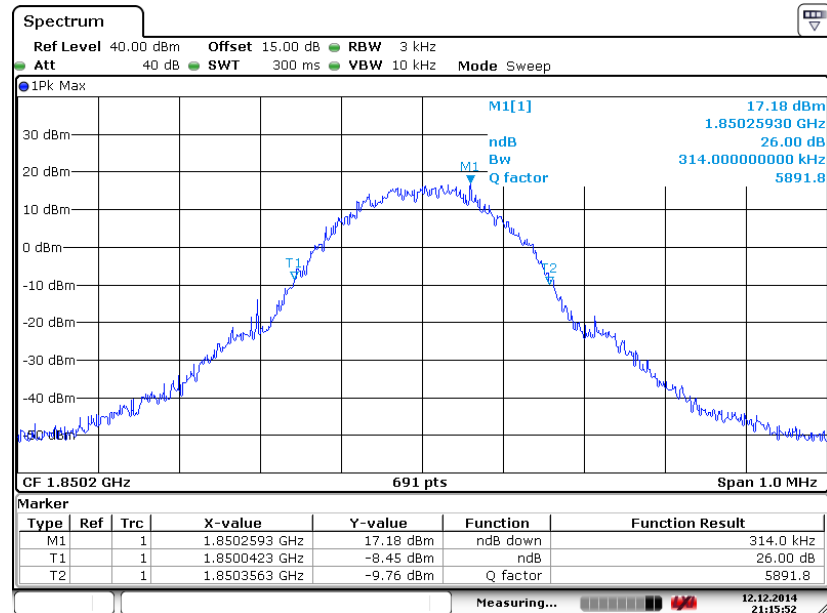

Date: 12.DEC.2014 21:15:52




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

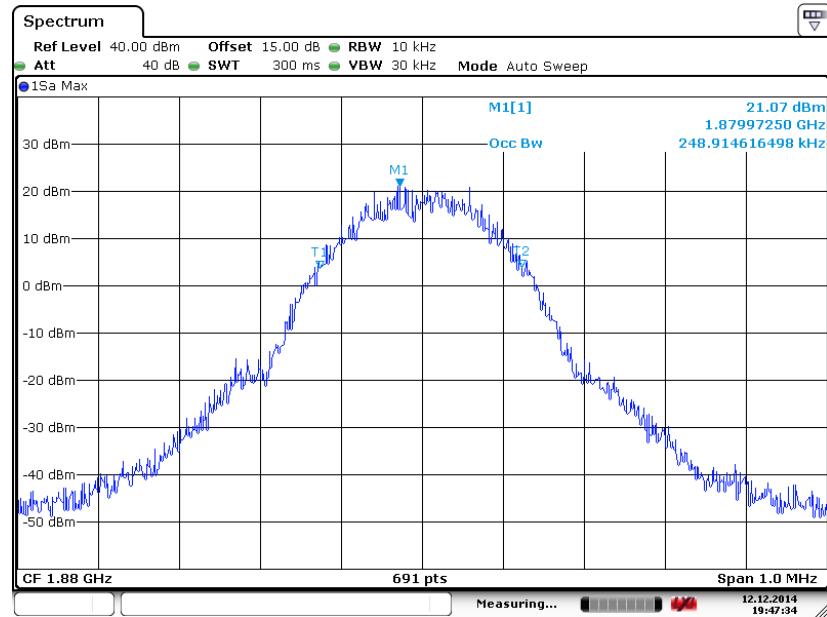

Date: 12.DEC.2014 19:47:35


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

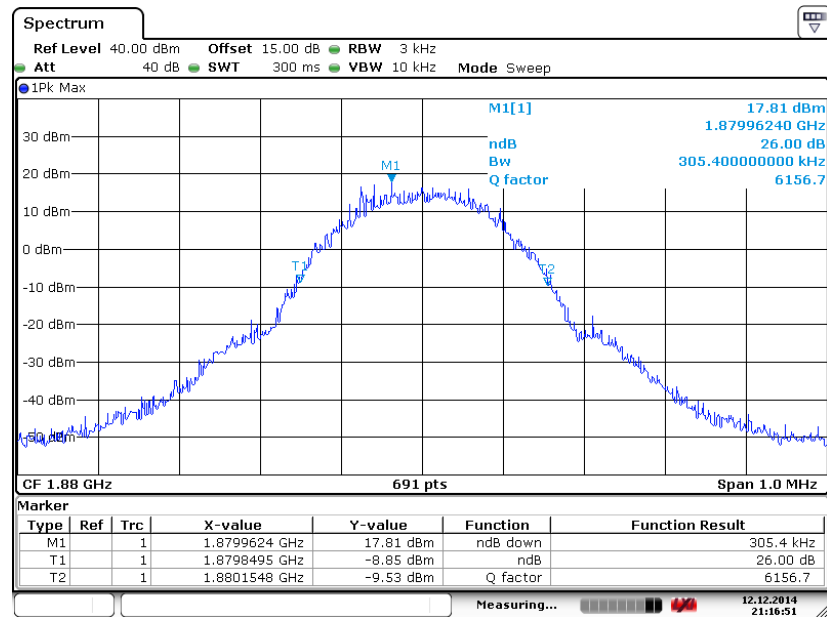

Date: 12.DEC.2014 21:16:51




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

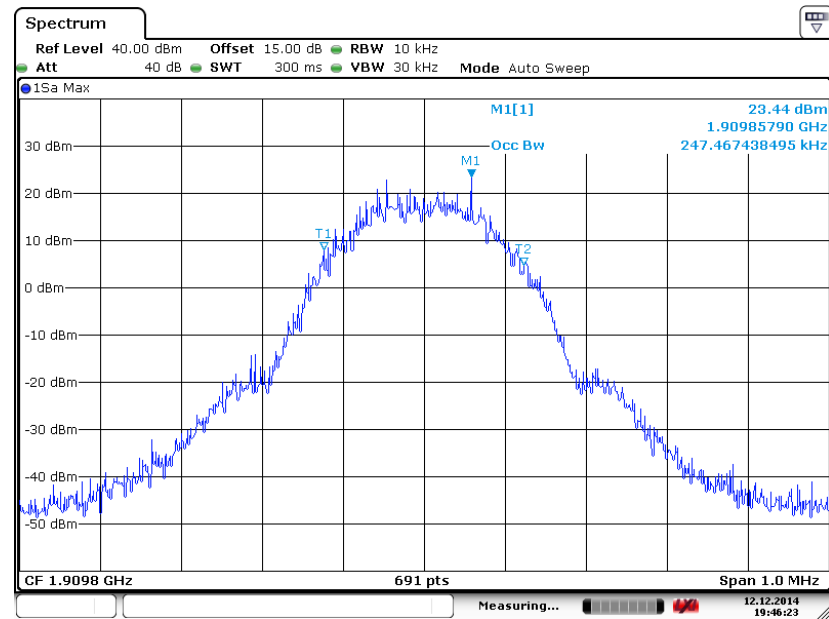

Date: 12.DEC.2014 19:46:24

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

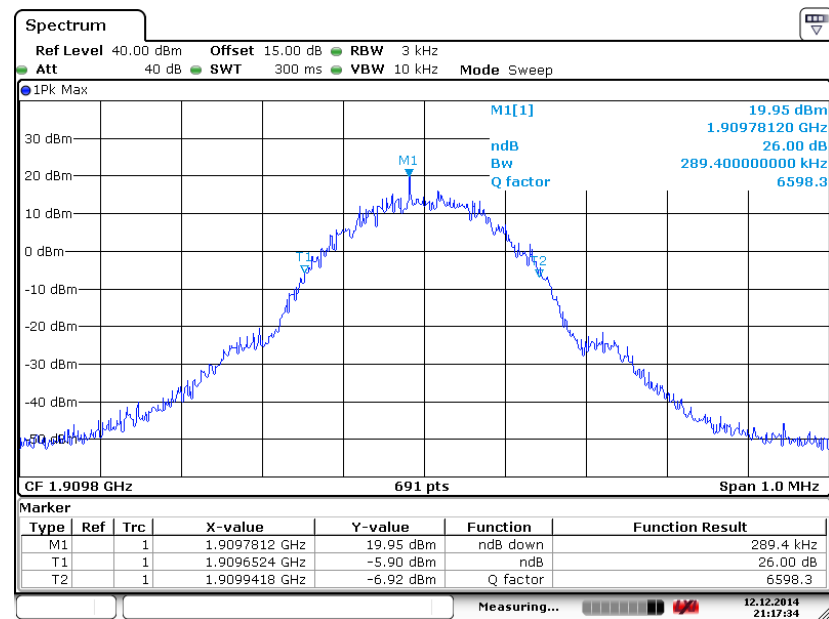


Date: 12.DEC.2014 21:17:35




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

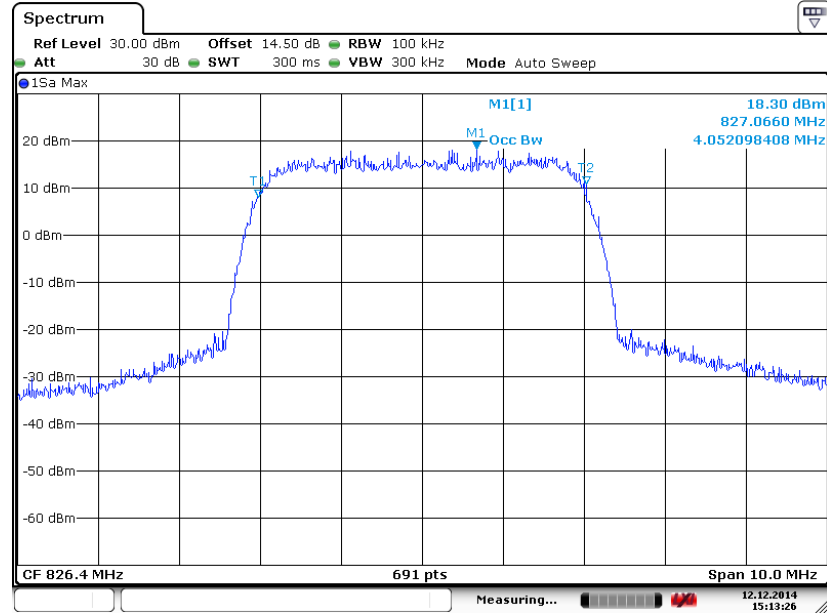

Date: 12.DEC.2014 15:13:25


## 26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

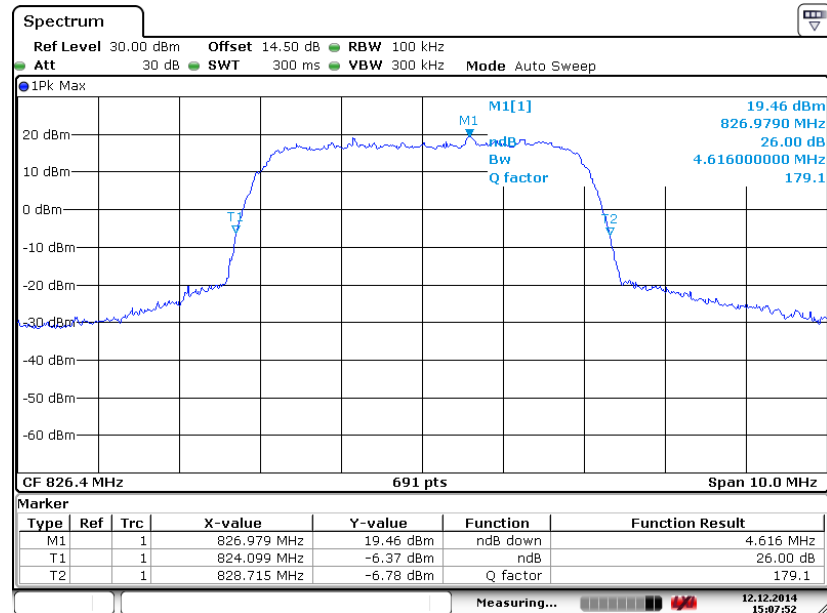

Date: 12.DEC.2014 15:07:53




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

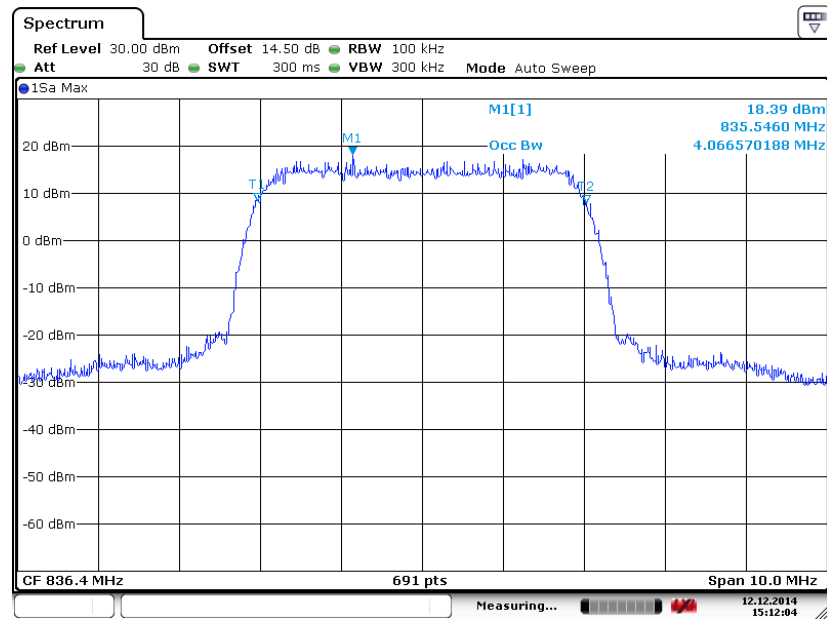

Date: 12.DEC.2014 15:12:04


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

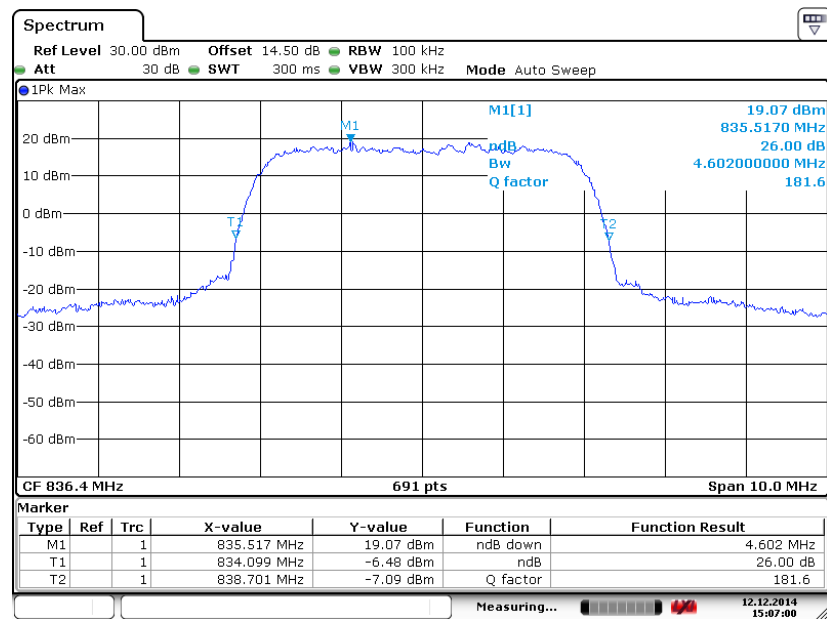

Date: 12.DEC.2014 15:07:01




## 99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

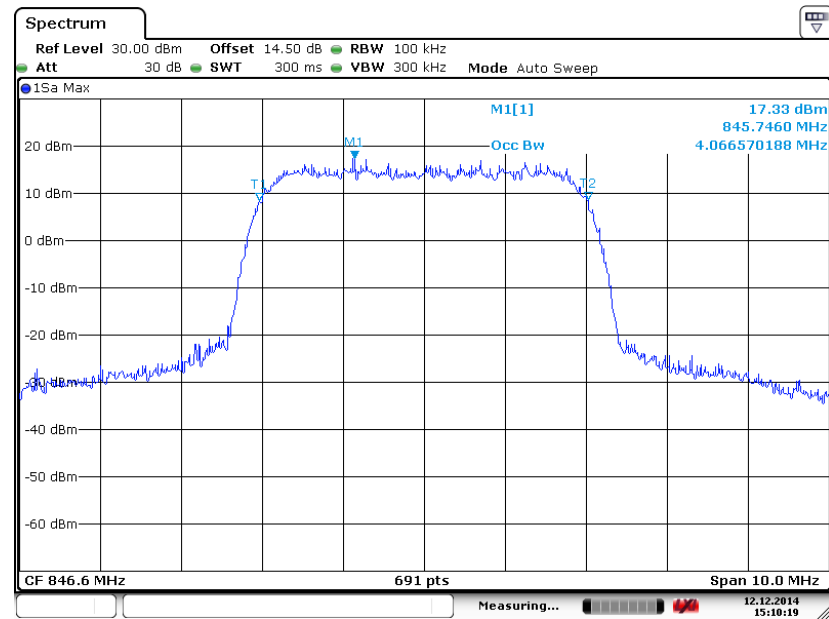

Date: 12.DEC.2014 15:10:20

## 26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

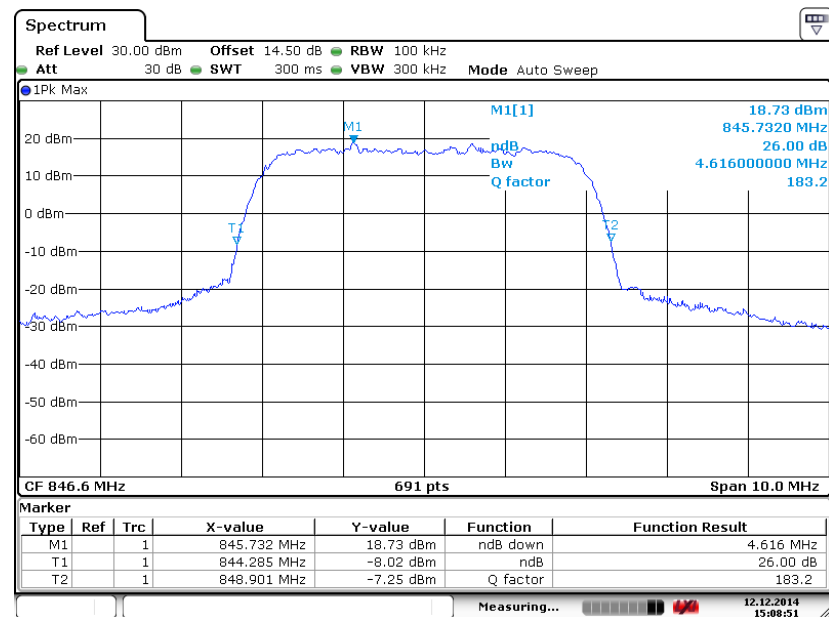


Date: 12.DEC.2014 15:08:52




|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

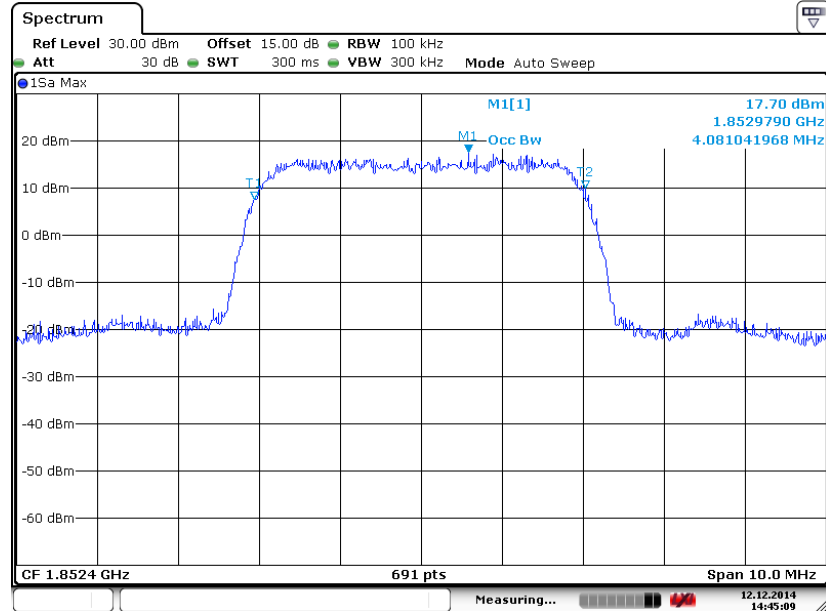

Date: 12.DEC.2014 14:45:10


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

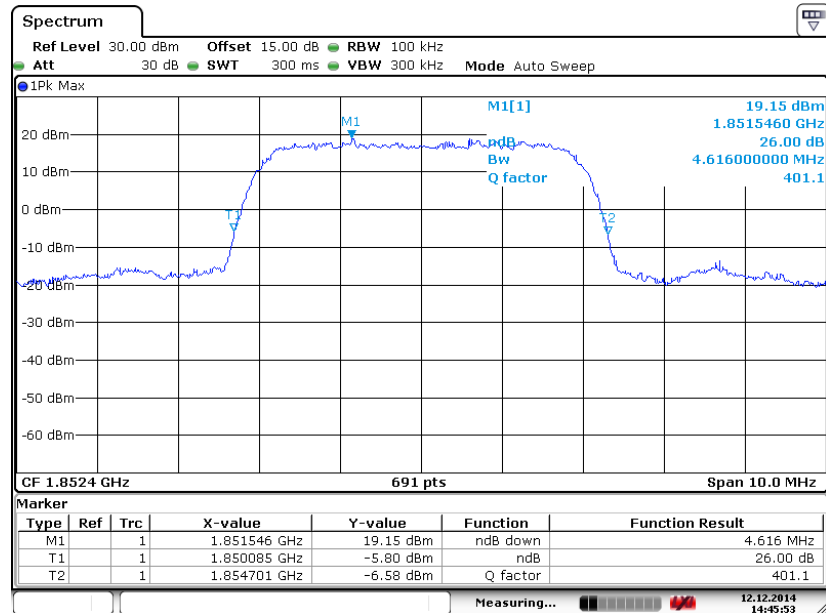

Date: 12.DEC.2014 14:45:54




## 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

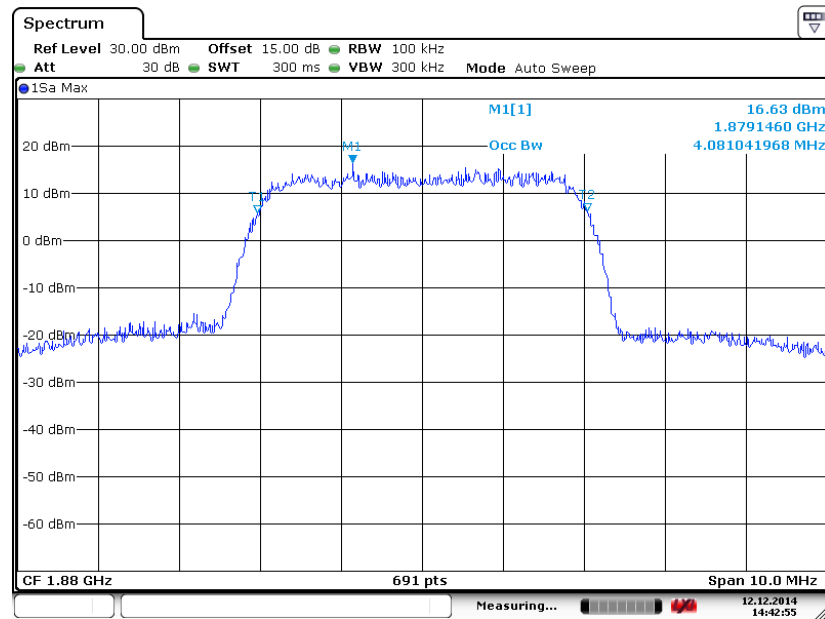

Date: 12.DEC.2014 14:42:56

## 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

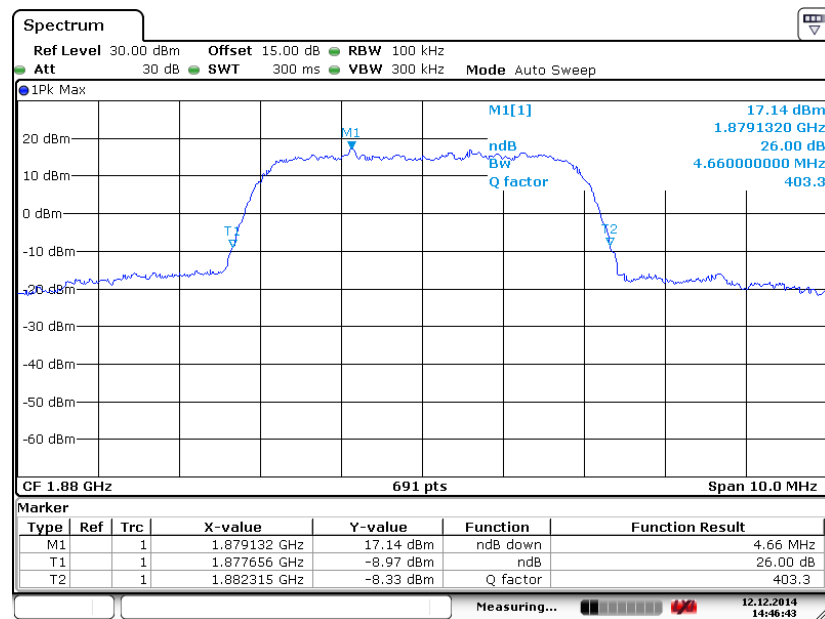


Date: 12.DEC.2014 14:46:44






## 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

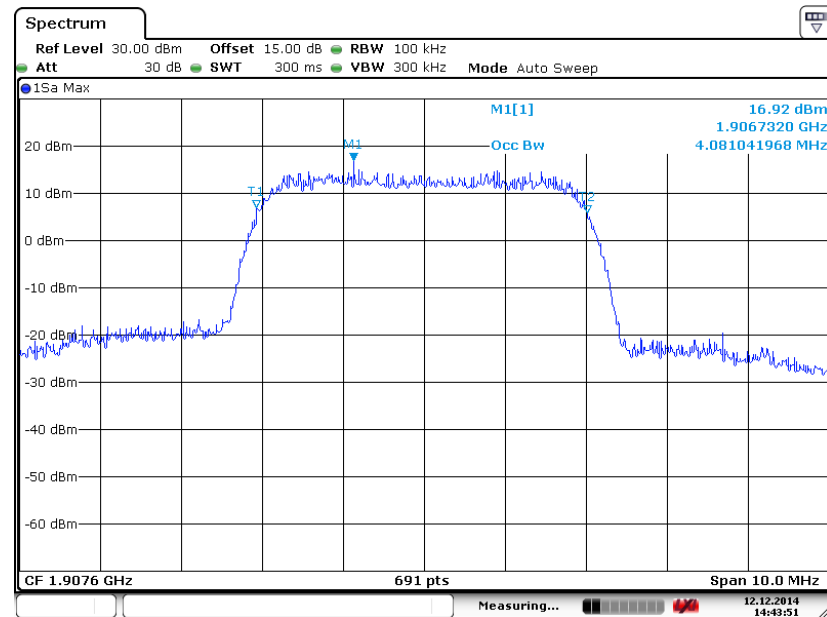

Date: 12.DEC.2014 14:43:51

## 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

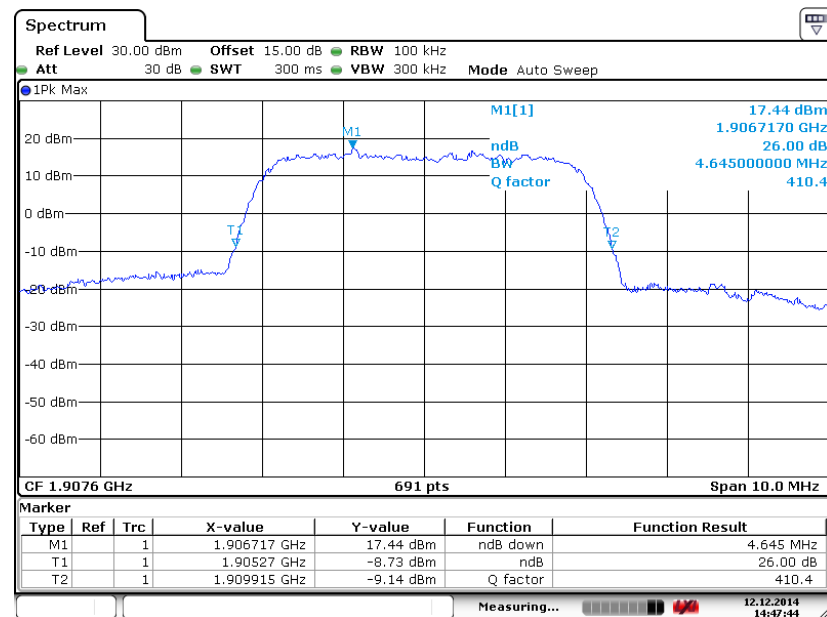

Date: 12.DEC.2014 14:47:45

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.5.4 Test Setup

<Conducted Band Edge >

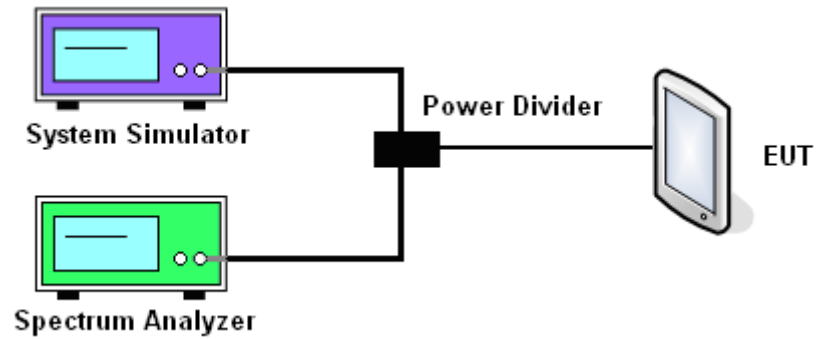





## 3.5.5 Test Result (Plots) of Conducted Band Edge

|        |        |             |                           |
|--------|--------|-------------|---------------------------|
| Band : | GSM850 | Test Mode : | GPRS class 10 Link (GMSK) |
|--------|--------|-------------|---------------------------|

Lower Band Edge Plot on Channel 128 (824.2 MHz)

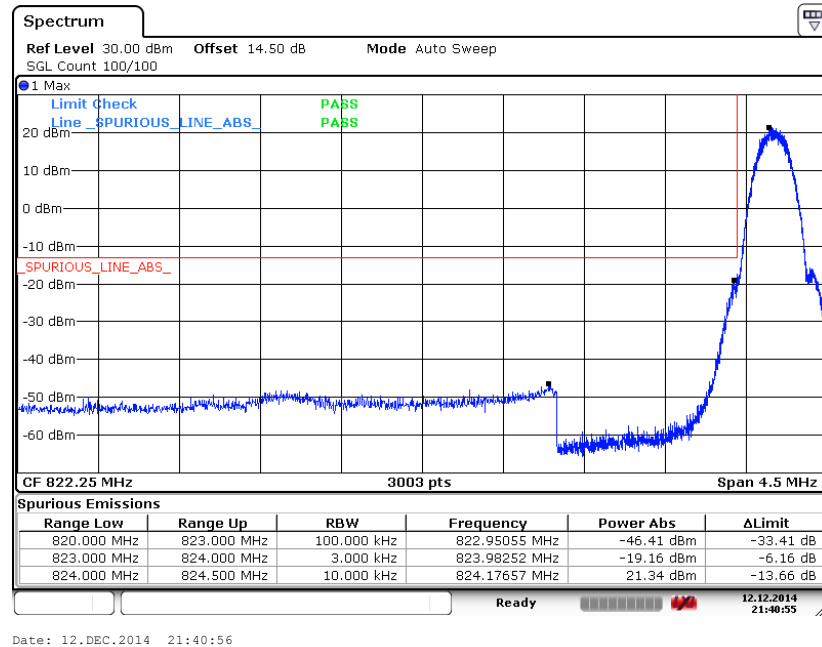


Higher Band Edge Plot on Channel 251 (848.8 MHz)

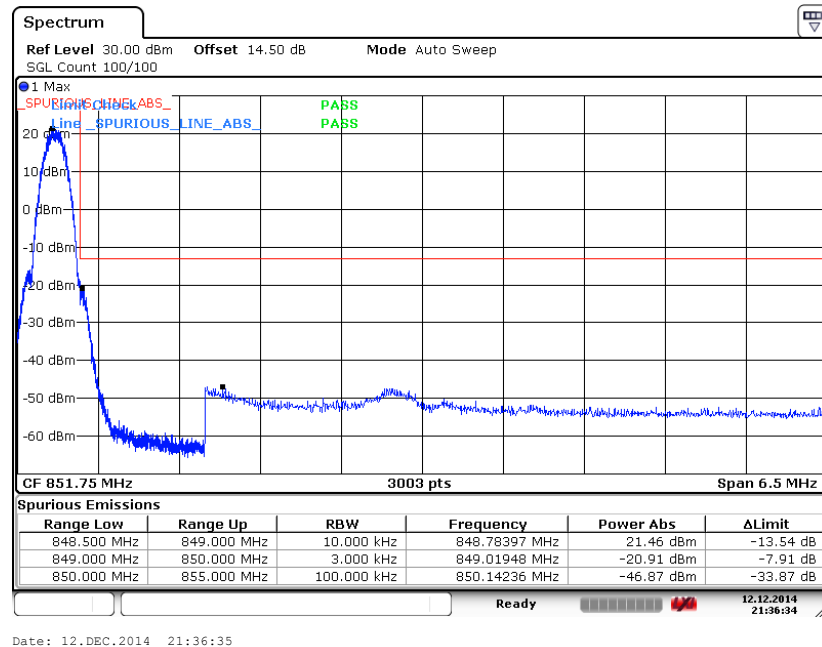




|        |        |             |                          |
|--------|--------|-------------|--------------------------|
| Band : | GSM850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|--------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 128 (824.2 MHz)

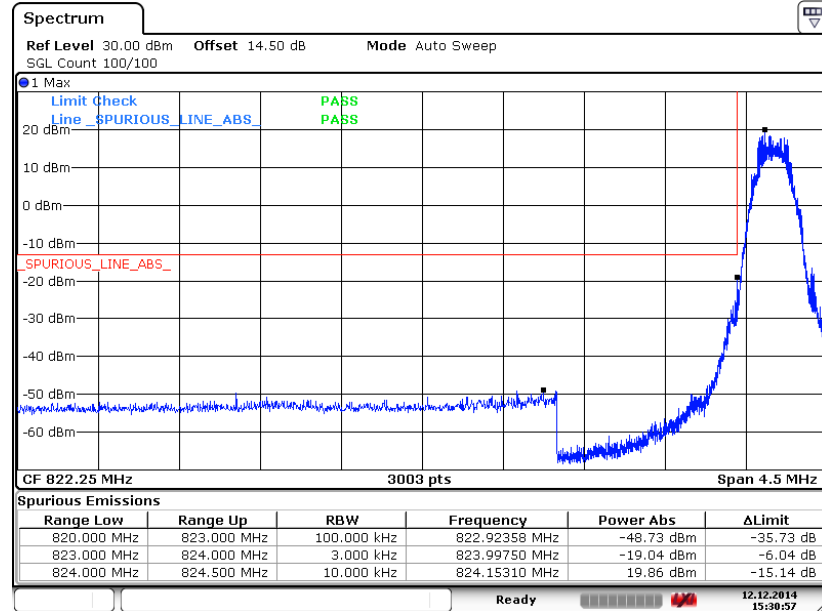

Date: 12.DEC.2014 15:30:57

## Higher Band Edge Plot on Channel 251 (848.8 MHz)

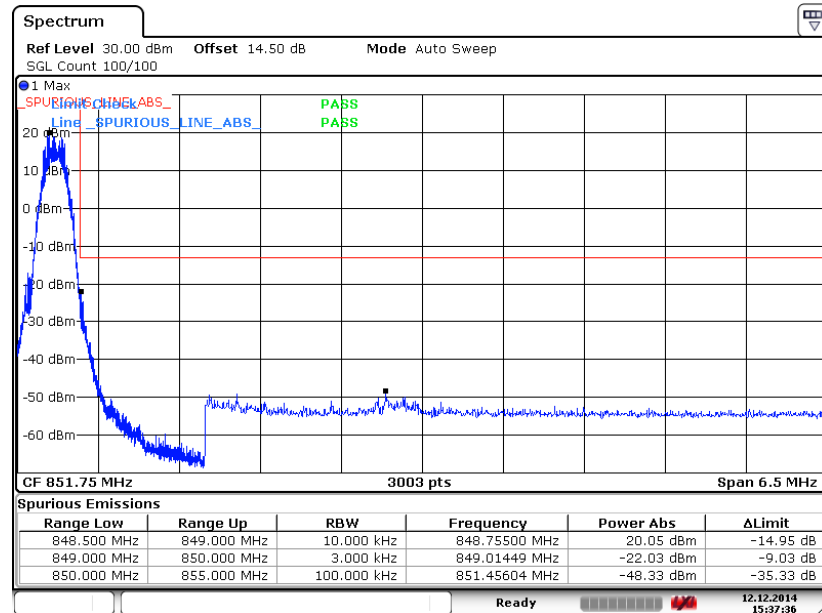


Date: 12.DEC.2014 15:37:36




|        |         |             |                           |
|--------|---------|-------------|---------------------------|
| Band : | GSM1900 | Test Mode : | GPRS class 10 Link (GMSK) |
|--------|---------|-------------|---------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

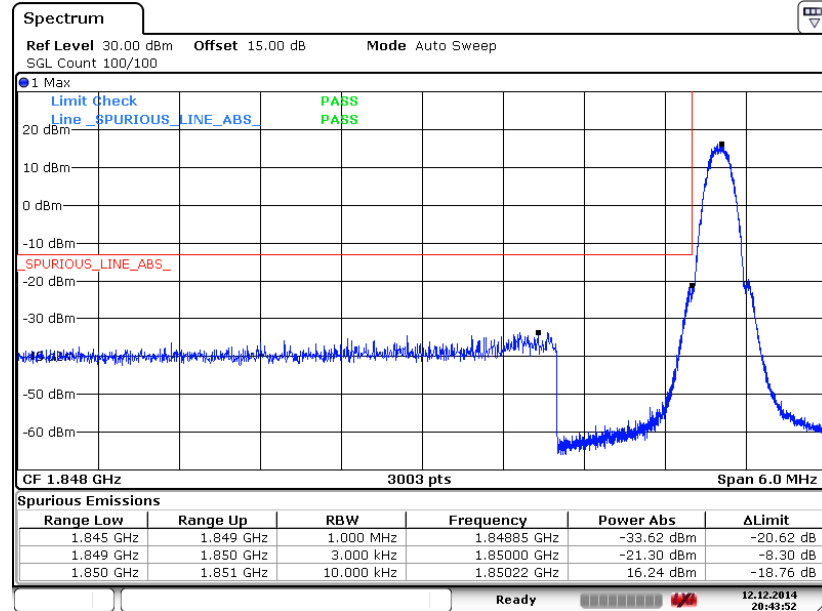

Date: 12.DEC.2014 20:43:53

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

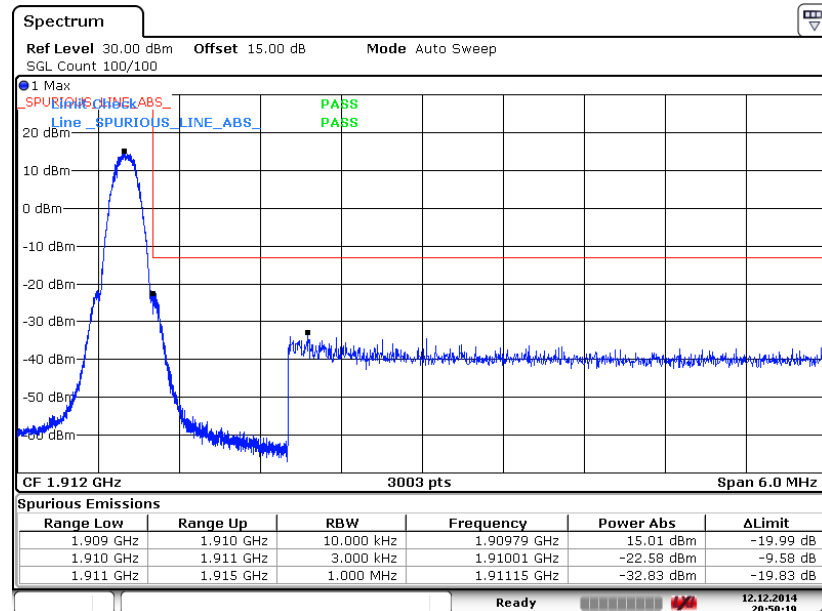


Date: 12.DEC.2014 20:50:20




|        |         |             |                           |
|--------|---------|-------------|---------------------------|
| Band : | GSM1900 | Test Mode : | EDGE class 10 Link (8PSK) |
|--------|---------|-------------|---------------------------|

## Lower Band Edge Plot on Channel 512 (1850.2 MHz)

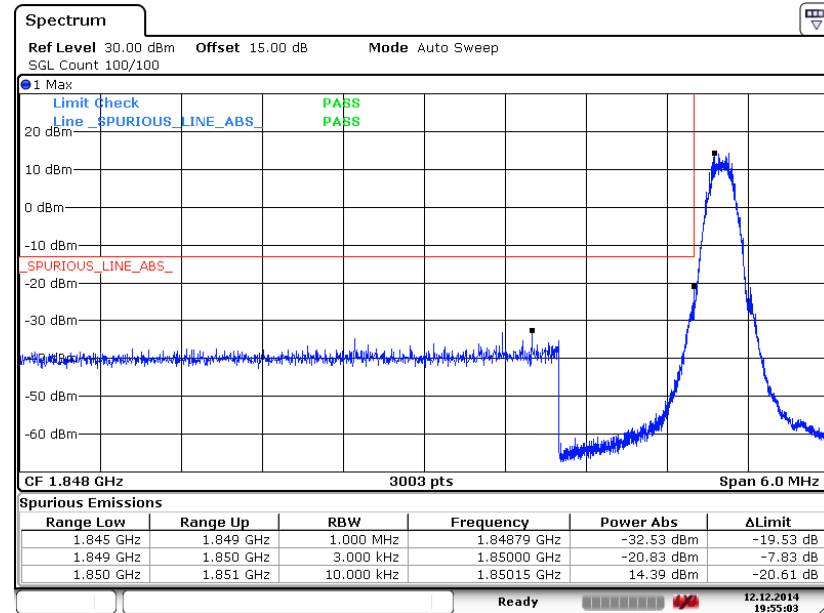

Date: 12.DEC.2014 19:55:03

## Higher Band Edge Plot on Channel 810 (1909.8 MHz)

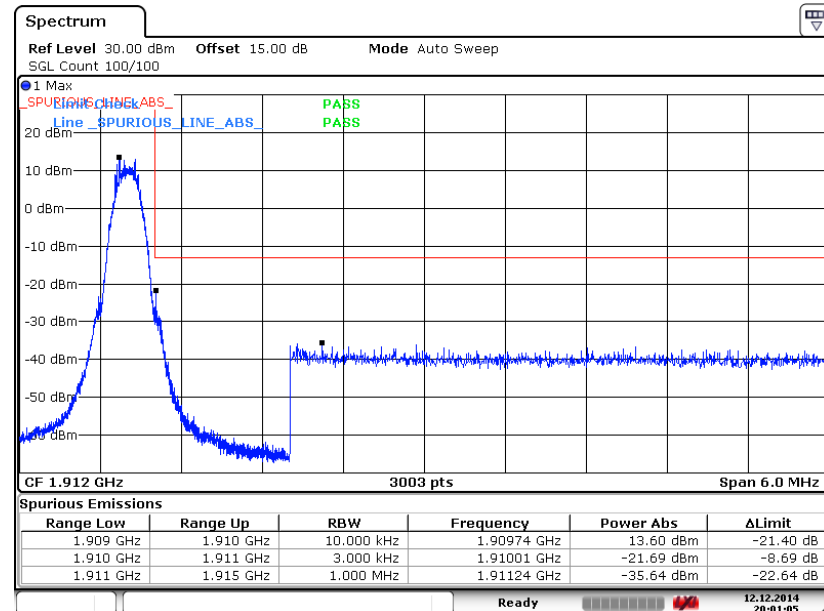


Date: 12.DEC.2014 20:01:05




|        |              |             |                          |
|--------|--------------|-------------|--------------------------|
| Band : | WCDMA Band V | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|--------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 4132 (826.4 MHz)

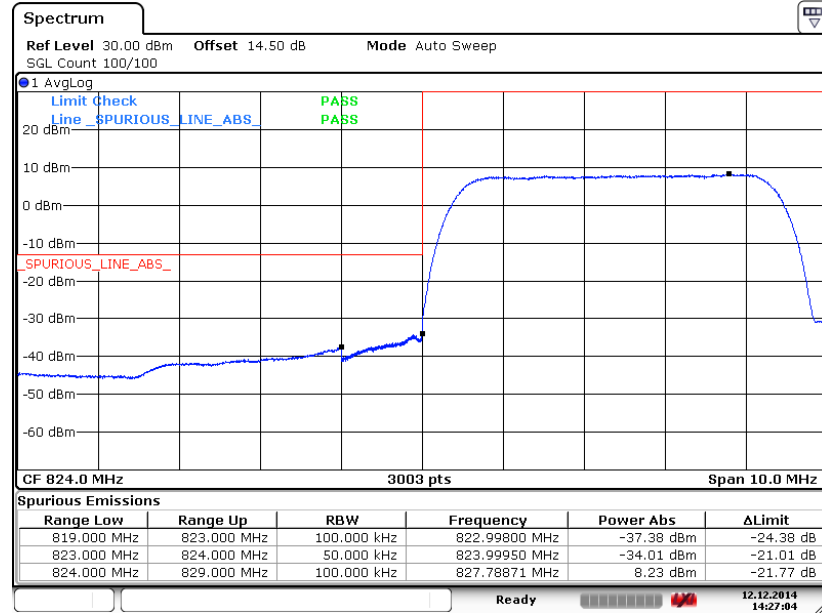

Date: 12.DEC.2014 14:27:05

## Higher Band Edge Plot on Channel 4233 (846.6 MHz)

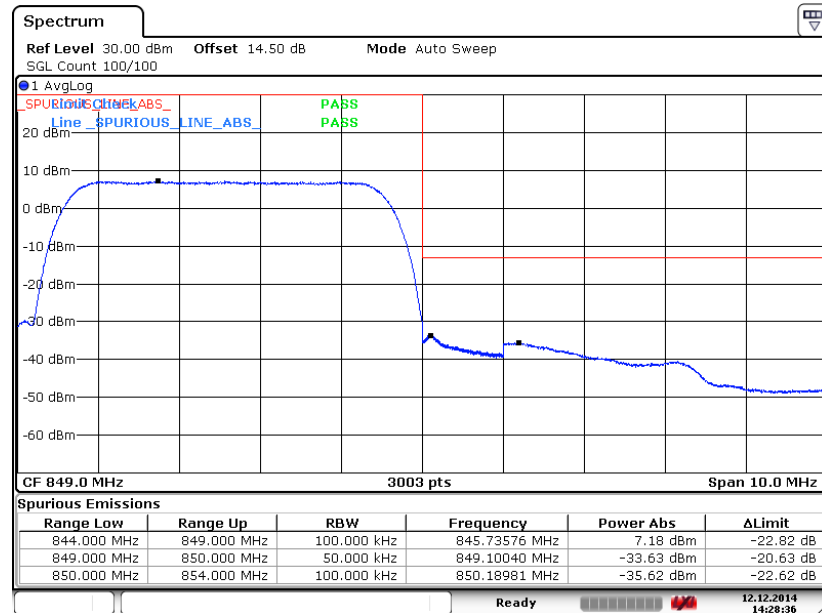


Date: 12.DEC.2014 14:28:37






|        |               |             |                          |
|--------|---------------|-------------|--------------------------|
| Band : | WCDMA Band II | Test Mode : | RMC 12.2Kbps Link (QPSK) |
|--------|---------------|-------------|--------------------------|

## Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

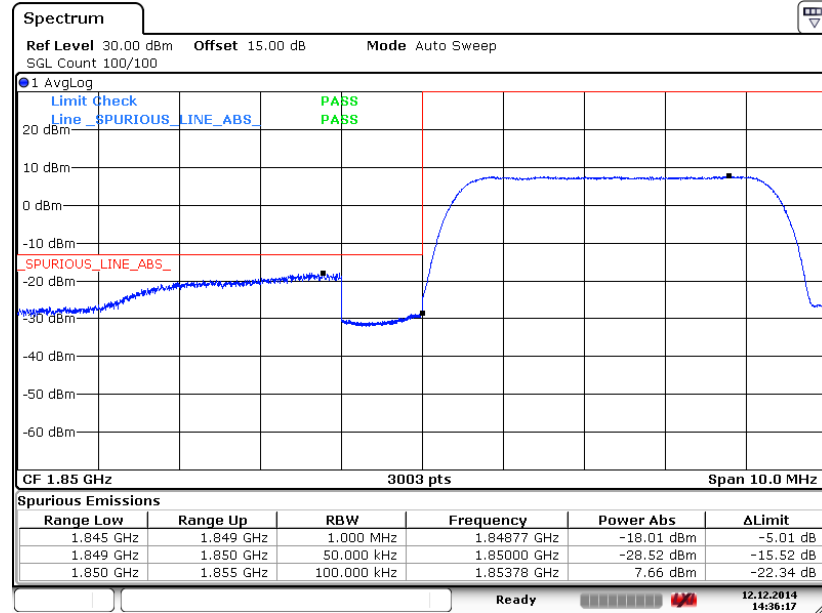

Date: 12.DEC.2014 14:36:16

## Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

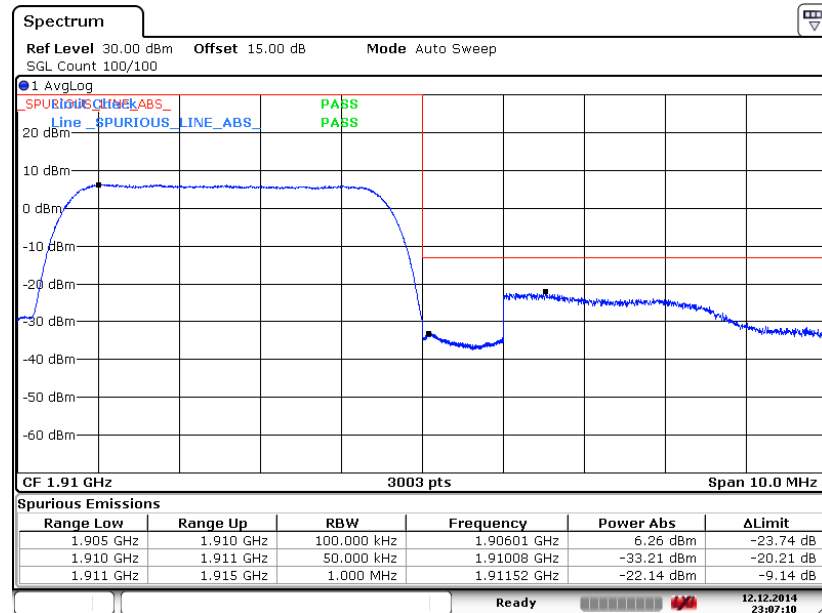

Date: 12.DEC.2014 23:07:10

## 3.6 Conducted Spurious Emission Measurement

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .


### 3.6.4 Test Setup

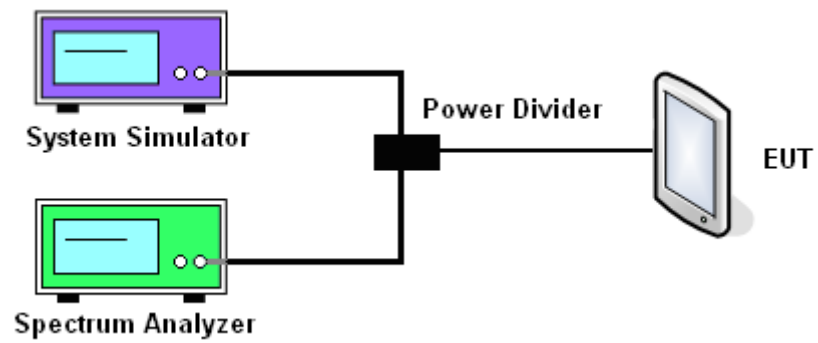


### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

|                    |                           |                    |           |
|--------------------|---------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                    | <b>Channel :</b>   | CH189     |
| <b>Test Mode :</b> | GPRS class 10 Link (GMSK) | <b>Frequency :</b> | 836.4 MHz |

**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

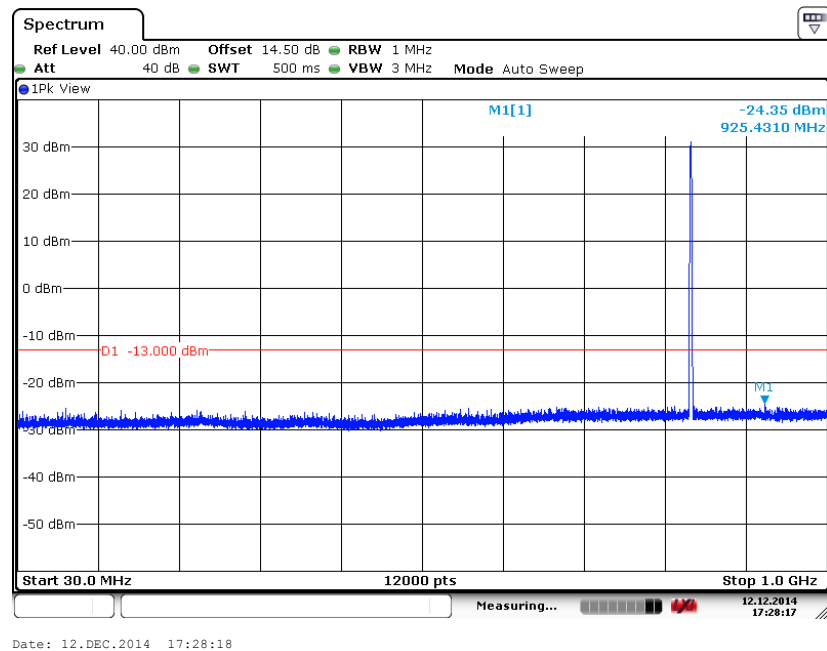


**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

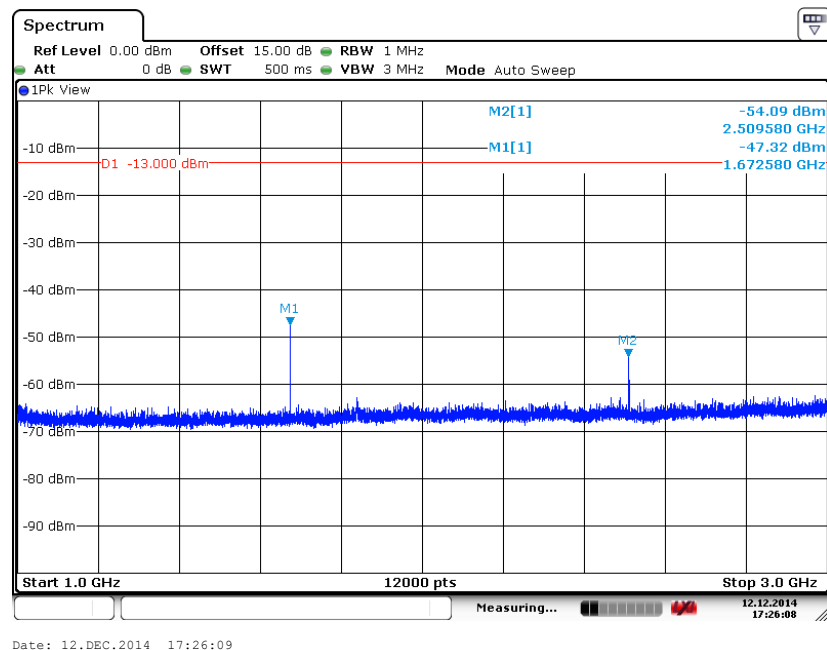




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

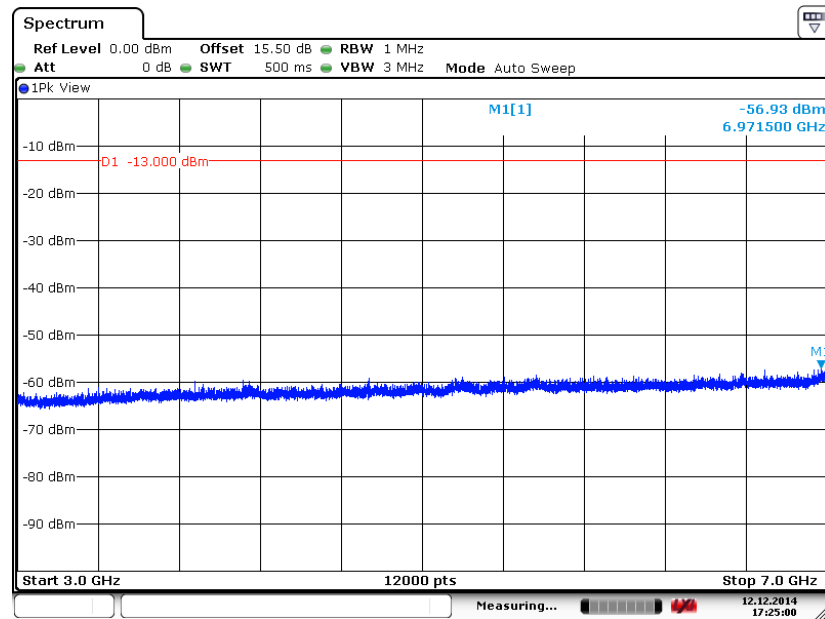

Date: 12.DEC.2014 17:25:01

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

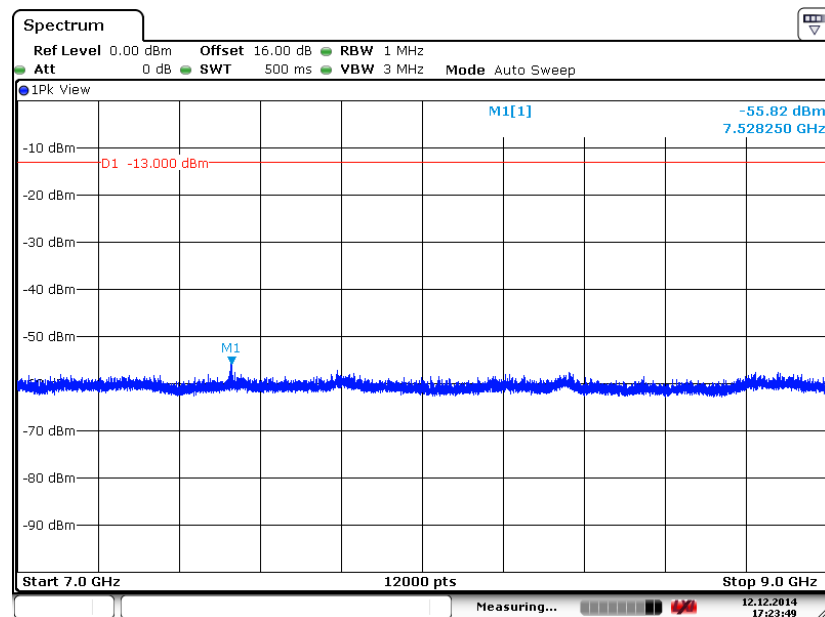


Date: 12.DEC.2014 17:23:50




|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH189     |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 836.4 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

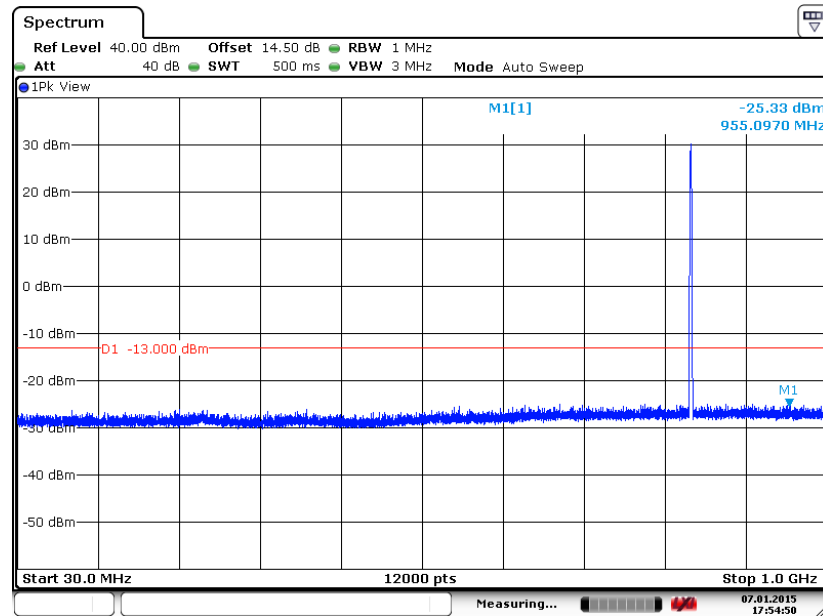

Date: 7.JAN.2015 17:54:51


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

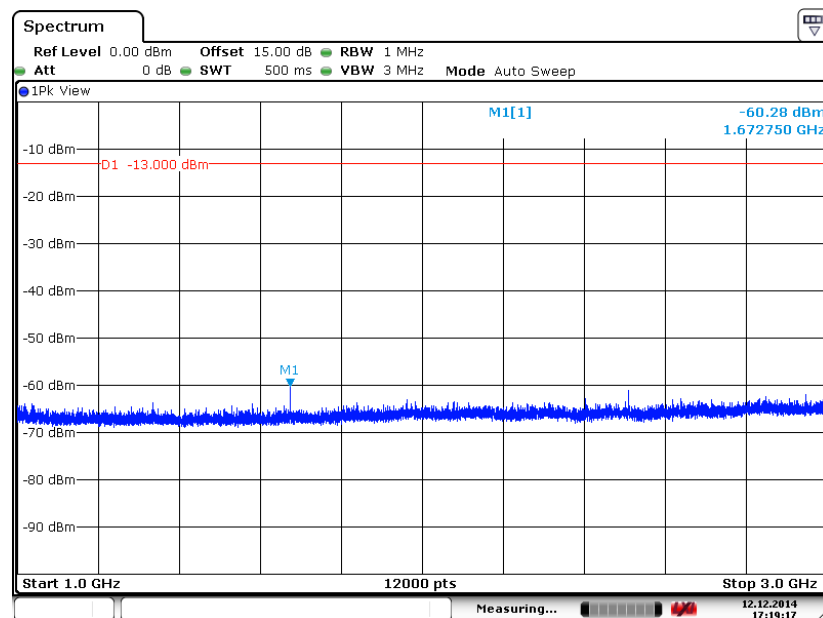

Date: 12.DEC.2014 17:19:17




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

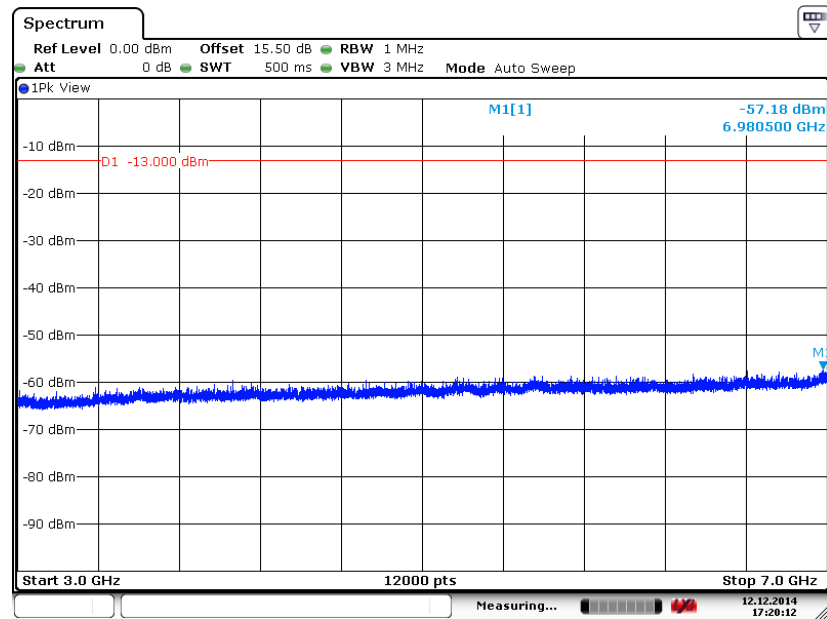

Date: 12.DEC.2014 17:20:13


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

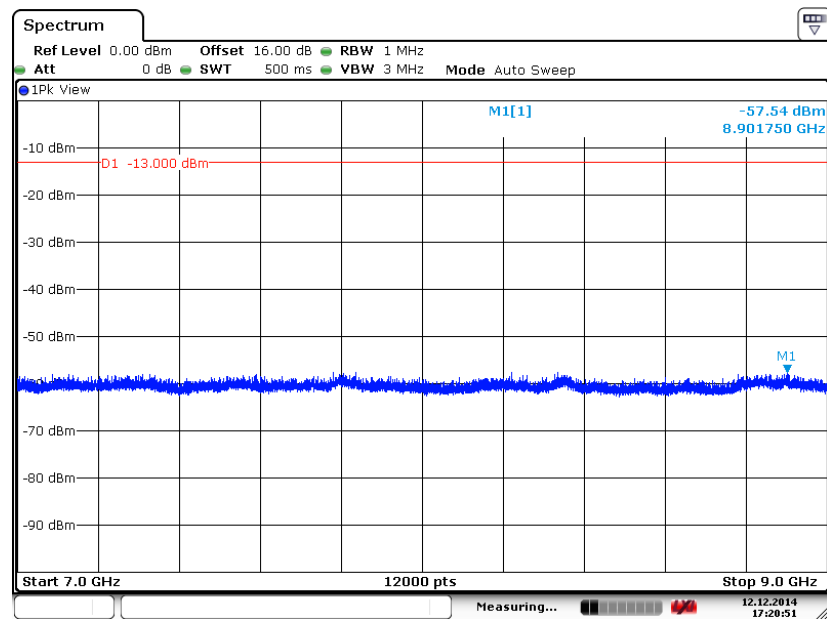


Date: 12.DEC.2014 17:20:51



|                    |                              |                    |            |
|--------------------|------------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                      | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | GPRS class 10 Link<br>(GMSK) | <b>Frequency :</b> | 1880.0 MHz |

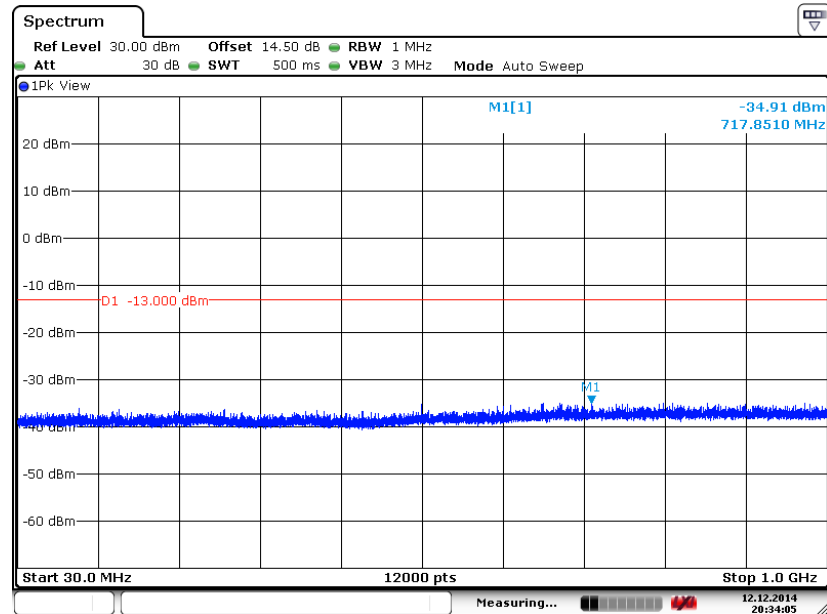**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

Date: 12.DEC.2014 20:34:06

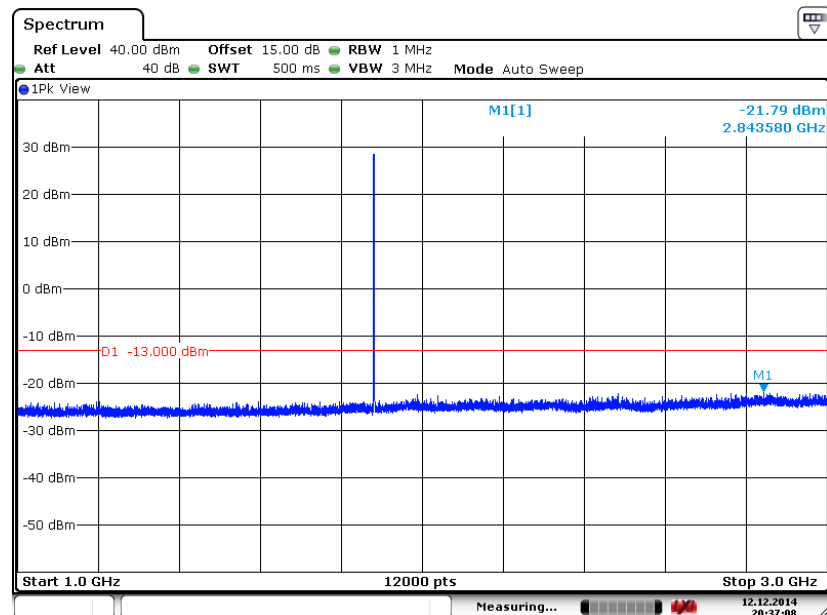
**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

Date: 12.DEC.2014 20:37:09






### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

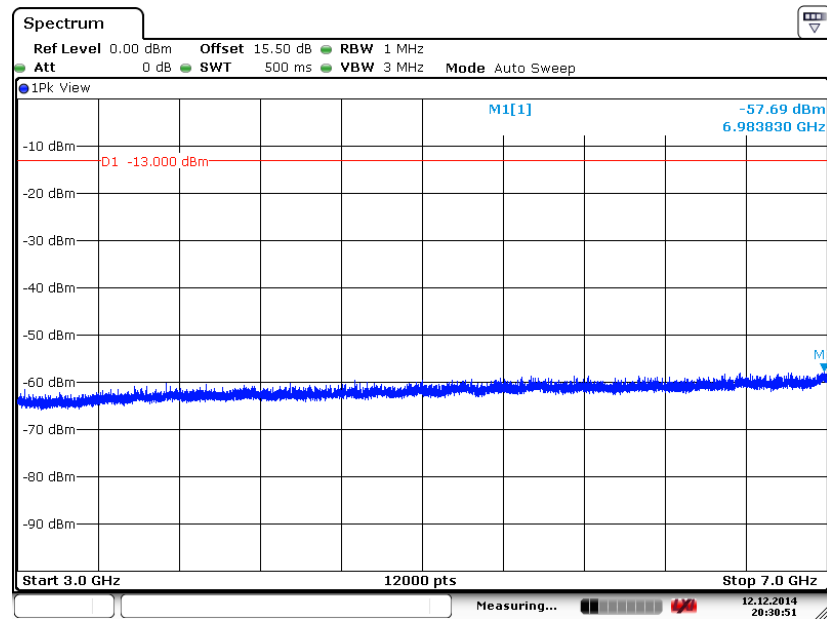

Date: 12.DEC.2014 20:30:52


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

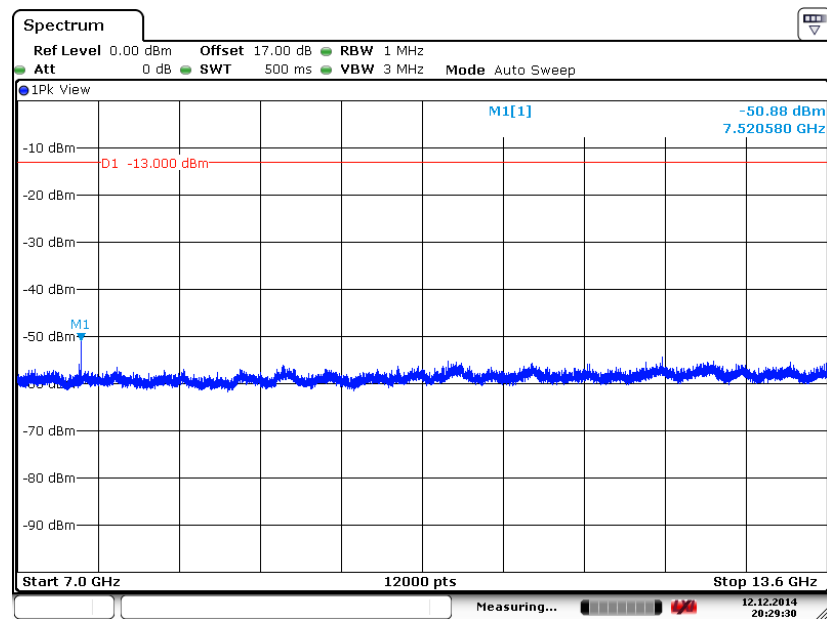

Date: 12.DEC.2014 20:29:31



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

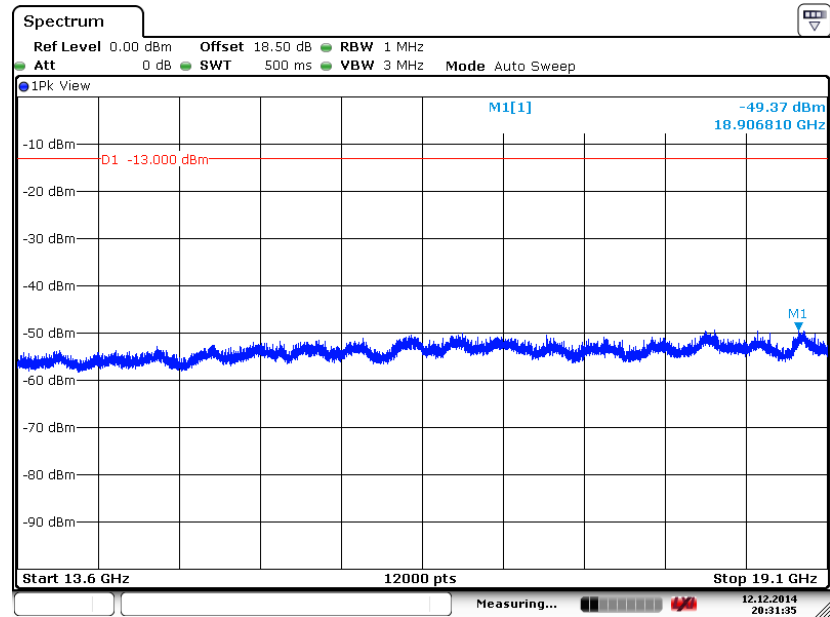


Date: 12.DEC.2014 20:31:35




|             |                           |             |            |
|-------------|---------------------------|-------------|------------|
| Band :      | GSM1900                   | Channel :   | CH661      |
| Test Mode : | EDGE class 10 Link (8PSK) | Frequency : | 1880.0 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

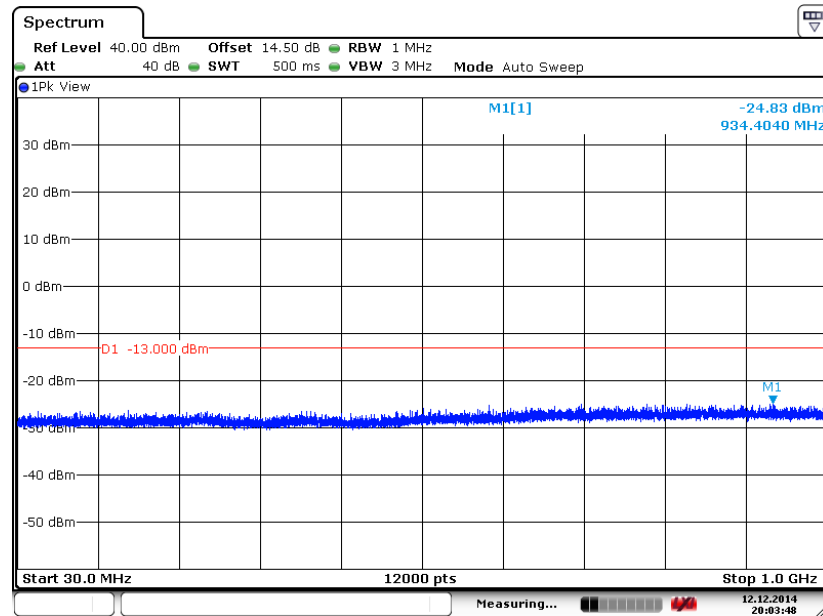

Date: 12.DEC.2014 20:03:47


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

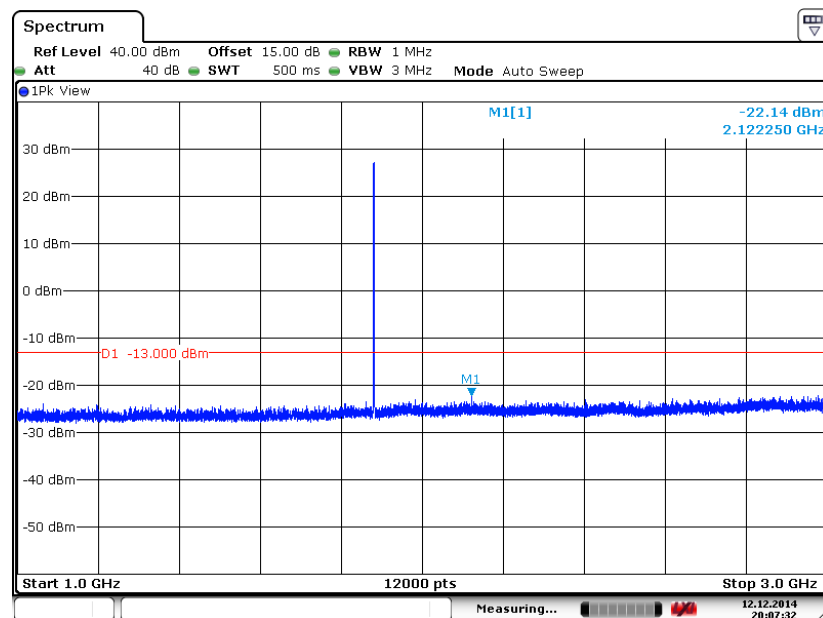

Date: 12.DEC.2014 20:07:33




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

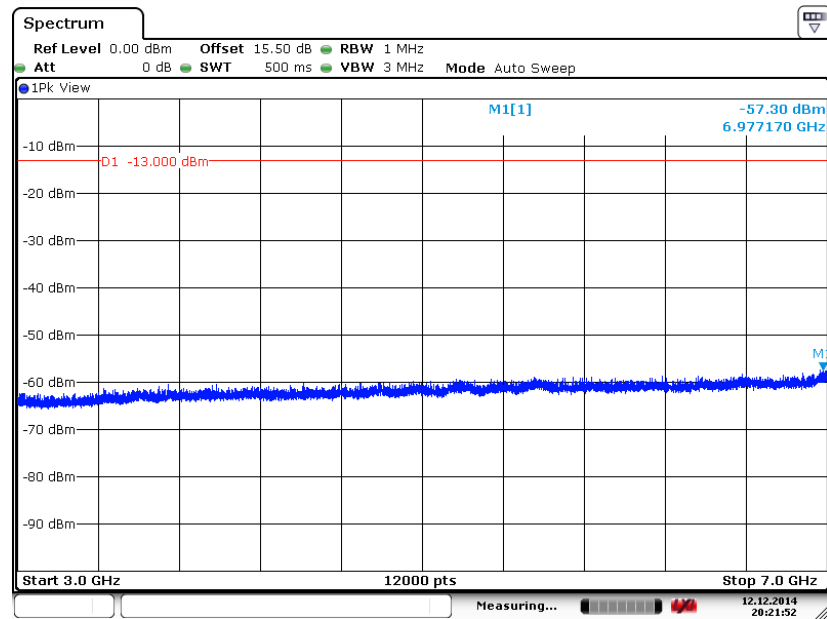

Date: 12.DEC.2014 20:21:53


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

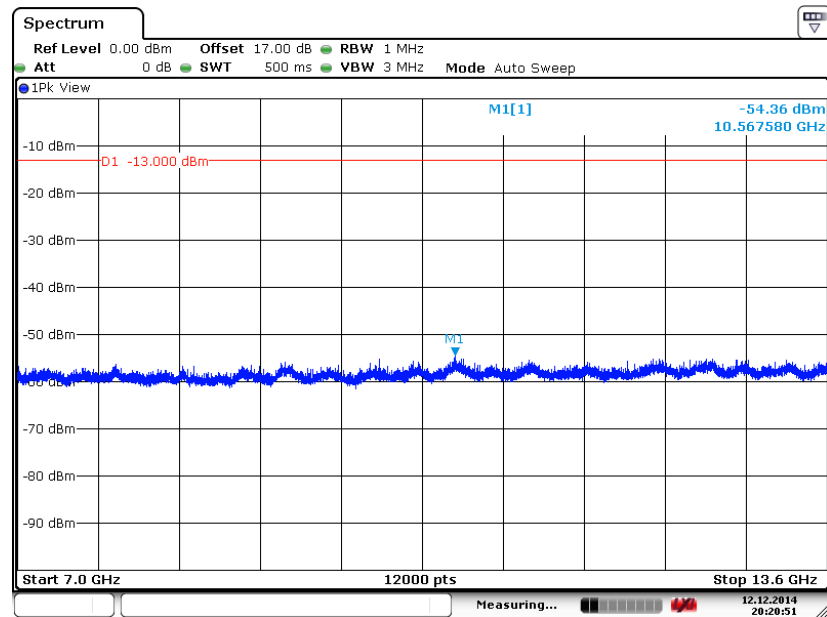

Date: 12.DEC.2014 20:20:52



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

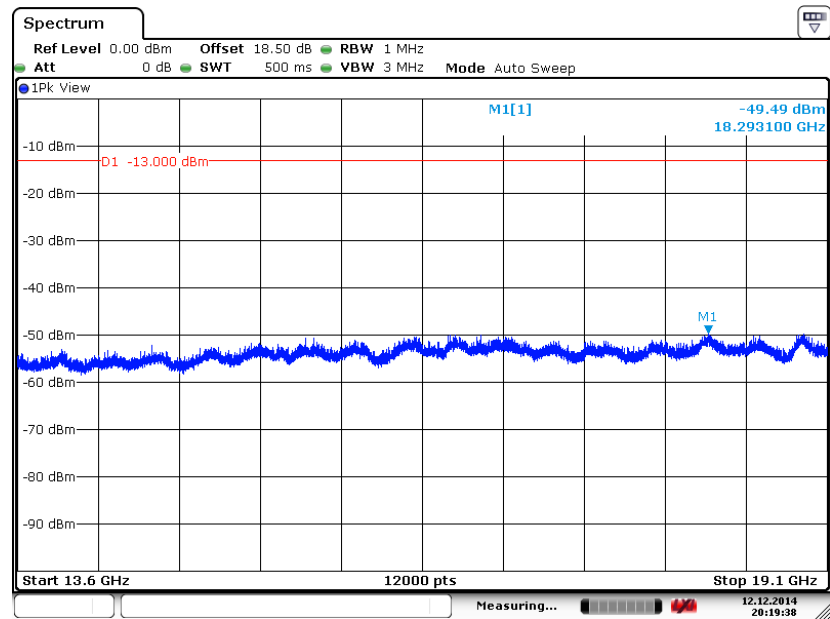


Date: 12.DEC.2014 20:19:39




|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | WCDMA Band V             | Channel :   | CH4182    |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 836.4 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

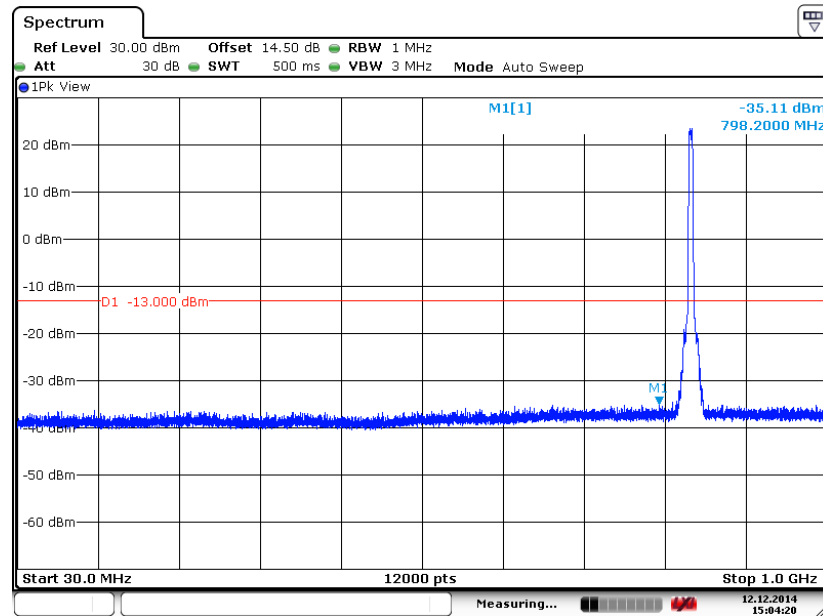

Date: 12.DEC.2014 15:04:20


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

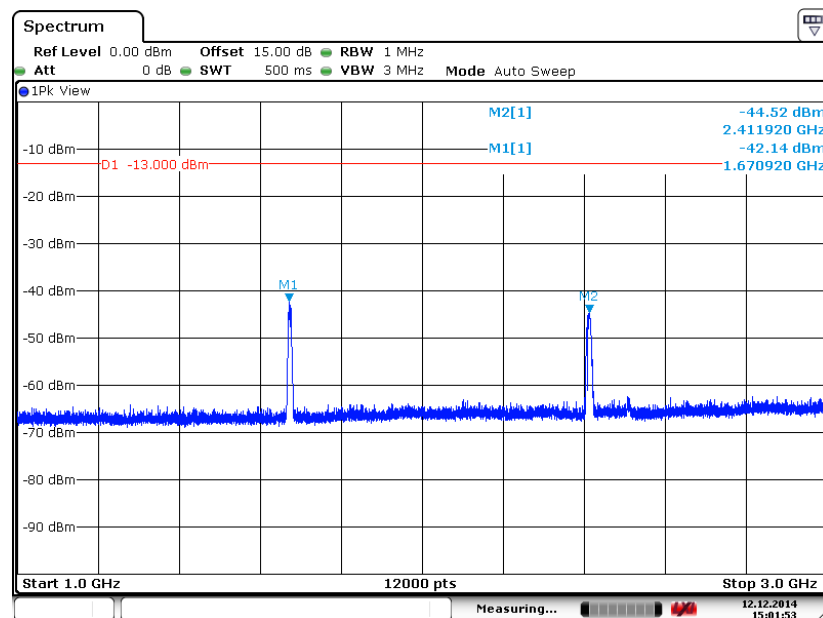

Date: 12.DEC.2014 15:01:54




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

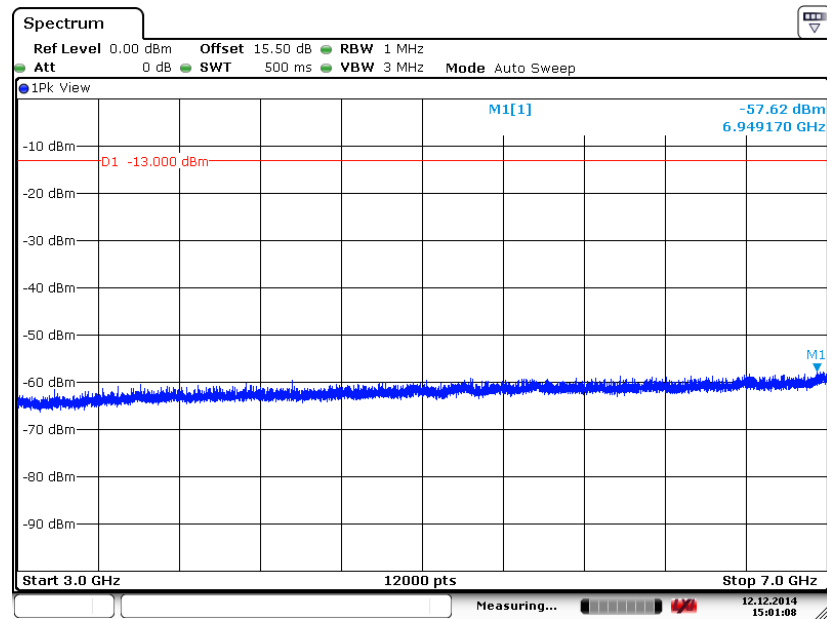

Date: 12.DEC.2014 15:01:08

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

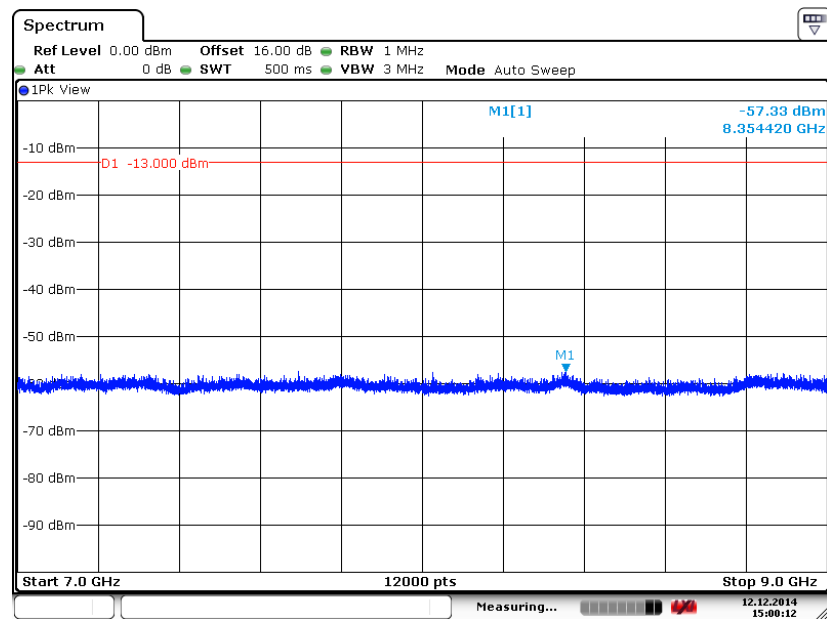


Date: 12.DEC.2014 15:00:11




|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | WCDMA Band II            | Channel :   | CH9400     |
| Test Mode : | RMC 12.2Kbps Link (QPSK) | Frequency : | 1880.0 MHz |

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

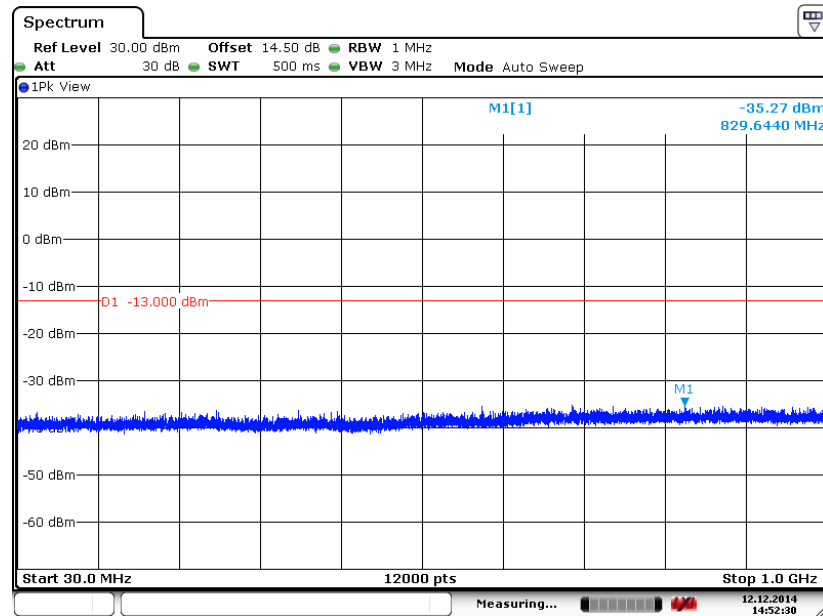

Date: 12.DEC.2014 14:52:30

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

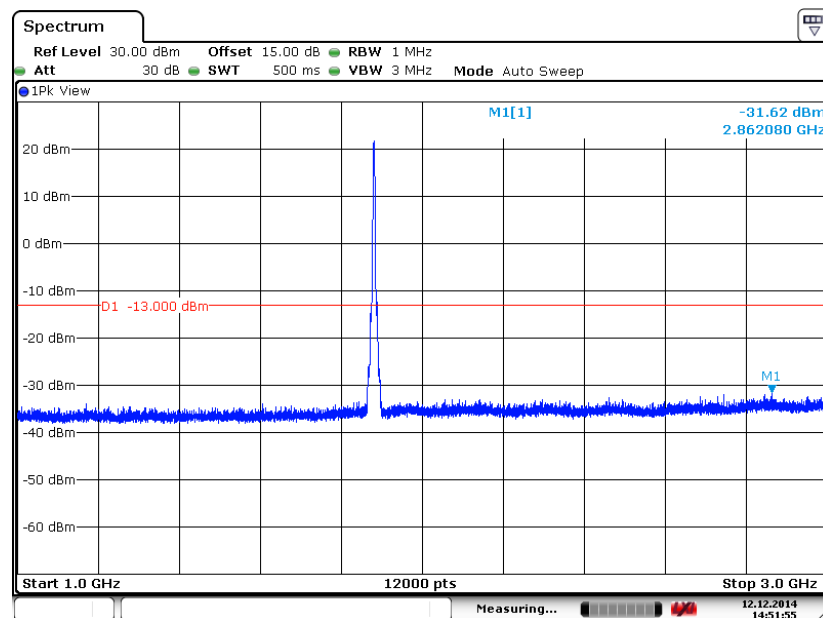


Date: 12.DEC.2014 14:51:55






### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

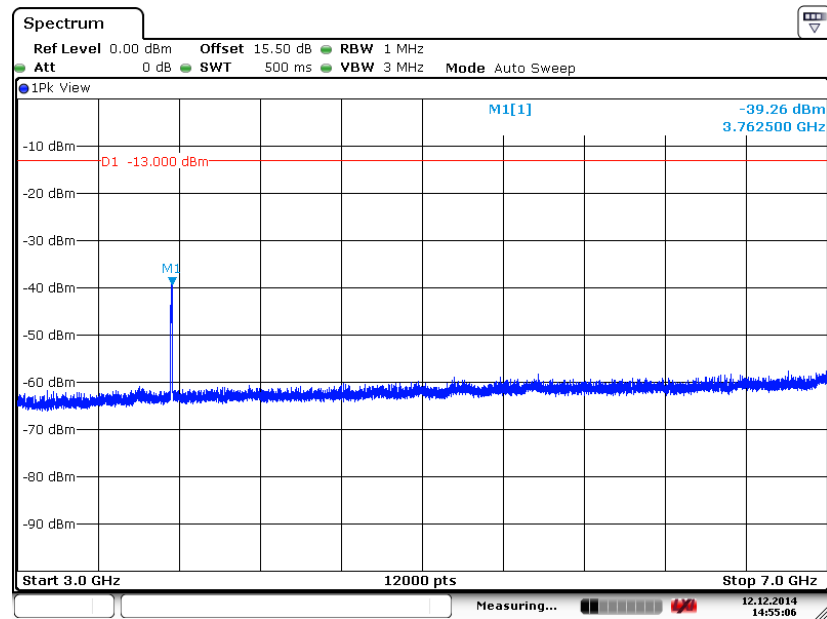

Date: 12.DEC.2014 14:55:07


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

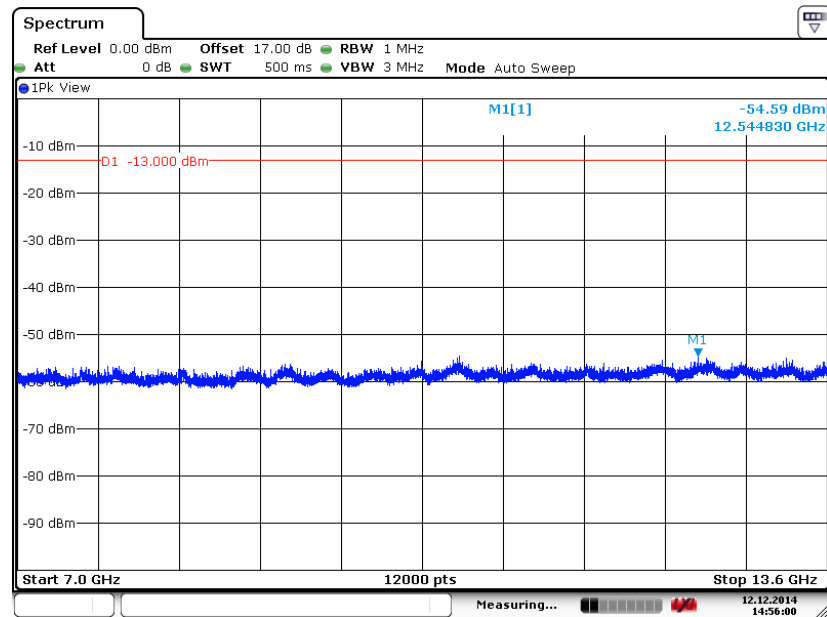

Date: 12.DEC.2014 14:56:00



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

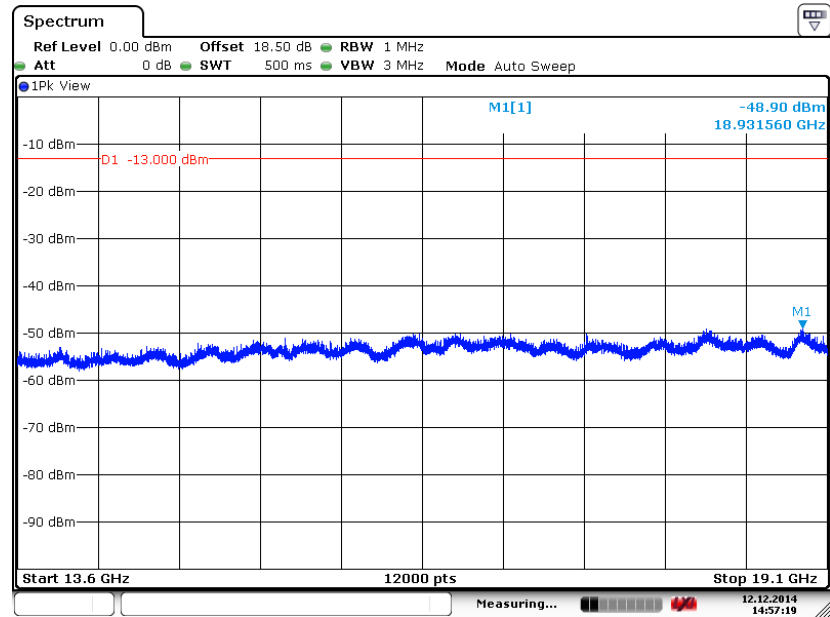

Date: 12.DEC.2014 14:57:20

## **3.7 Field Strength of Spurious Radiation Measurement**

### **3.7.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **3.7.2 Measuring Instruments**


The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Procedures**


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
     $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
     $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
     $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

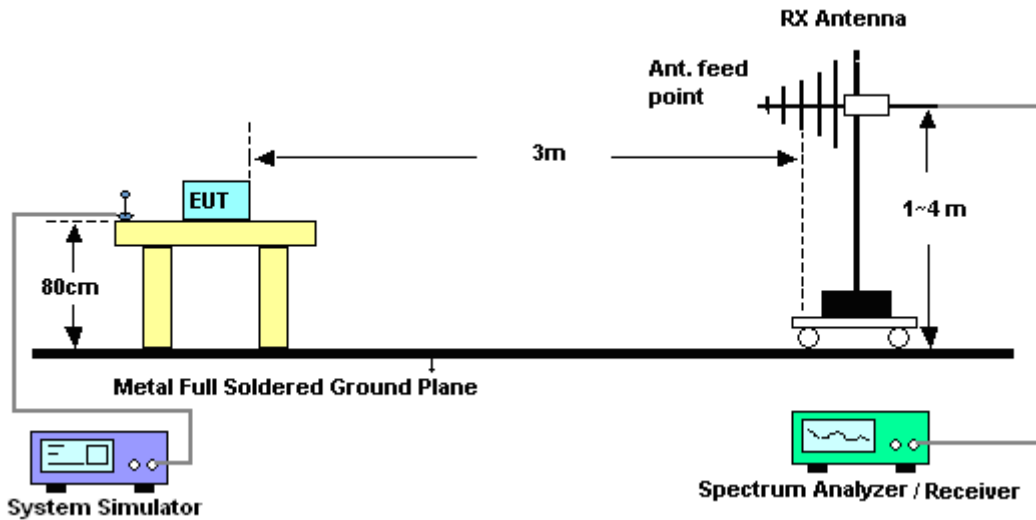

For radiated emissions above 1GHz

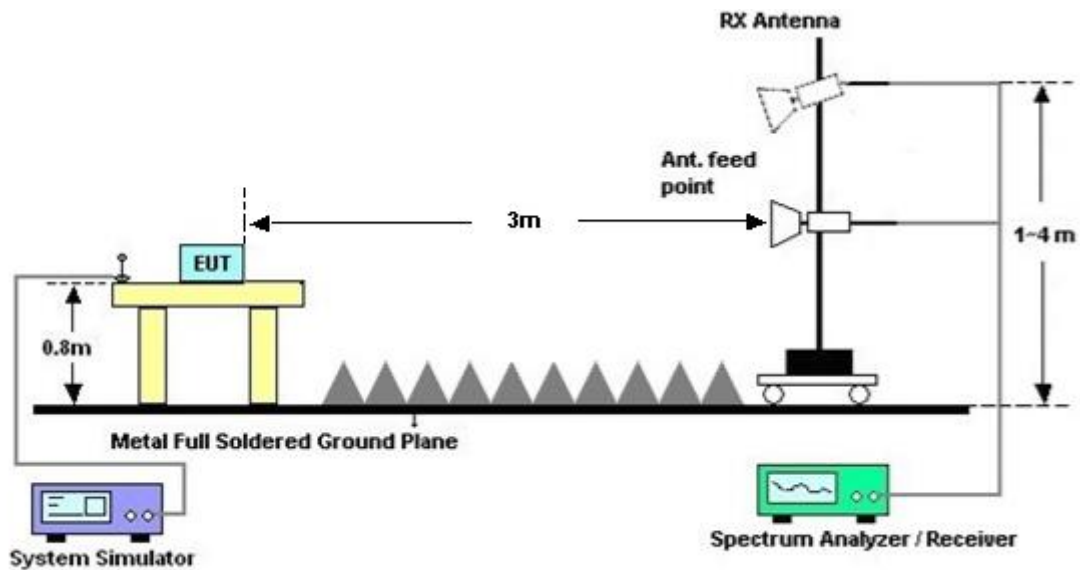

### 3.7.5 Test Result of Field Strength of Spurious Radiated

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH128                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1648.4          | -21.22                                                                       | -13     | -8.22           | -38.06             | -27.90           | 0.57                | 9.40            | H            | Pass   |
| 2472.6          | -21.66                                                                       | -13     | -8.66           | -46.45             | -29.36           | 0.75                | 10.60           | H            | Pass   |
| 3296.8          | -34.57                                                                       | -13     | -21.57          | -63.27             | -44.15           | 0.87                | 12.60           | H            | Pass   |
| 4121            | -22.72                                                                       | -13     | -9.72           | -55.32             | -32.24           | 0.93                | 12.60           | H            | Pass   |
| 4945.2          | -29.52                                                                       | -13     | -16.52          | -63.16             | -39.08           | 0.99                | 12.70           | H            | Pass   |
| 5769.4          | -27.05                                                                       | -13     | -14.05          | -61.13             | -36.78           | 1.12                | 13.00           | H            | Pass   |
| 6593.6          | -34.23                                                                       | -13     | -21.23          | -67.85             | -42.62           | 1.16                | 11.70           | H            | Pass   |
| 7417.8          | -39.17                                                                       | -13     | -26.17          | -73.06             | -46.45           | 1.87                | 11.30           | H            | Pass   |
| 8242            | -40.70                                                                       | -13     | -27.70          | -73.80             | -48.09           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH128                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1648.4          | -16.47                                                                       | -13     | -3.47           | -34.13             | -23.15           | 0.57                | 9.40            | V            | Pass   |
| 2472.6          | -20.64                                                                       | -13     | -7.64           | -47.68             | -28.34           | 0.75                | 10.60           | V            | Pass   |
| 3296.8          | -29.13                                                                       | -13     | -16.13          | -61.61             | -38.71           | 0.87                | 12.60           | V            | Pass   |
| 4121            | -20.23                                                                       | -13     | -7.23           | -54.87             | -29.75           | 0.93                | 12.60           | V            | Pass   |
| 4945.2          | -30.66                                                                       | -13     | -17.66          | -65.04             | -40.22           | 0.99                | 12.70           | V            | Pass   |
| 5769.4          | -20.28                                                                       | -13     | -7.28           | -55.99             | -30.01           | 1.12                | 13.00           | V            | Pass   |
| 6593.6          | -35.20                                                                       | -13     | -22.20          | -68.74             | -43.59           | 1.16                | 11.70           | V            | Pass   |
| 7417.8          | -36.17                                                                       | -13     | -23.17          | -70.45             | -43.45           | 1.87                | 11.30           | V            | Pass   |
| 8242            | -40.62                                                                       | -13     | -27.62          | -74.72             | -48.01           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH189                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Leo Liao                                                                     |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -18.29                                                                       | -13     | -5.29           | -35.21             | -24.97           | 0.57                | 9.40            | H            | Pass   |
| 2510            | -19.08                                                                       | -13     | -6.08           | -43.49             | -26.78           | 0.75                | 10.60           | H            | Pass   |
| 3346            | -36.00                                                                       | -13     | -23.00          | -64.33             | -45.58           | 0.87                | 12.60           | H            | Pass   |
| 4182            | -24.13                                                                       | -13     | -11.13          | -56.67             | -33.65           | 0.93                | 12.60           | H            | Pass   |
| 5018            | -28.32                                                                       | -13     | -15.32          | -62.20             | -37.88           | 0.99                | 12.70           | H            | Pass   |
| 5854            | -25.92                                                                       | -13     | -12.92          | -60.36             | -35.65           | 1.12                | 13.00           | H            | Pass   |
| 6691            | -36.51                                                                       | -13     | -23.51          | -69.46             | -44.90           | 1.16                | 11.70           | H            | Pass   |
| 7528            | -37.23                                                                       | -13     | -24.23          | -71.12             | -44.51           | 1.87                | 11.30           | H            | Pass   |
| 8364            | -39.00                                                                       | -13     | -26.00          | -72.10             | -46.39           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH189                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -16.68                                                                       | -13     | -3.68           | -34.32             | -23.36           | 0.57                | 9.40            | V            | Pass   |
| 2510            | -20.39                                                                       | -13     | -7.39           | -47.43             | -28.09           | 0.75                | 10.60           | V            | Pass   |
| 3346            | -25.98                                                                       | -13     | -12.98          | -58.77             | -35.56           | 0.87                | 12.60           | V            | Pass   |
| 4182            | -20.81                                                                       | -13     | -7.81           | -55.55             | -30.33           | 0.93                | 12.60           | V            | Pass   |
| 5018            | -33.24                                                                       | -13     | -20.24          | -67.14             | -42.80           | 0.99                | 12.70           | V            | Pass   |
| 5854            | -20.83                                                                       | -13     | -7.83           | -56.50             | -30.56           | 1.12                | 13.00           | V            | Pass   |
| 6691            | -32.99                                                                       | -13     | -19.99          | -66.91             | -41.38           | 1.16                | 11.70           | V            | Pass   |
| 7528            | -35.27                                                                       | -13     | -22.27          | -70.04             | -42.55           | 1.87                | 11.30           | V            | Pass   |
| 8364            | -40.80                                                                       | -13     | -27.80          | -74.90             | -48.19           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH251                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Leo Liao                                                                     |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1697.6          | -19.64                                                                       | -13     | -6.64           | -36.52             | -26.32           | 0.57                | 9.40            | H            | Pass   |
| 2546.4          | -20.51                                                                       | -13     | -7.51           | -45.22             | -28.21           | 0.75                | 10.60           | H            | Pass   |
| 3395.2          | -35.73                                                                       | -13     | -22.73          | -64.15             | -45.31           | 0.87                | 12.60           | H            | Pass   |
| 4244            | -21.01                                                                       | -13     | -8.01           | -53.51             | -30.53           | 0.93                | 12.60           | H            | Pass   |
| 5092.8          | -25.35                                                                       | -13     | -12.35          | -59.61             | -34.91           | 0.99                | 12.70           | H            | Pass   |
| 5941.6          | -25.35                                                                       | -13     | -12.35          | -59.78             | -35.08           | 1.12                | 13.00           | H            | Pass   |
| 6790.4          | -36.09                                                                       | -13     | -23.09          | -69.23             | -44.48           | 1.16                | 11.70           | H            | Pass   |
| 7639.2          | -37.56                                                                       | -13     | -24.56          | -71.45             | -44.84           | 1.87                | 11.30           | H            | Pass   |
| 8488            | -39.61                                                                       | -13     | -26.61          | -72.71             | -47.00           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH251                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1697.6          | -17.27                                                                       | -13     | -4.27           | -34.94             | -23.95           | 0.57                | 9.40            | V            | Pass   |
| 2546.4          | -16.78                                                                       | -13     | -3.78           | -43.57             | -24.48           | 0.75                | 10.60           | V            | Pass   |
| 3395.2          | -26.84                                                                       | -13     | -13.84          | -59.63             | -36.42           | 0.87                | 12.60           | V            | Pass   |
| 4244            | -18.93                                                                       | -13     | -5.93           | -53.75             | -28.45           | 0.93                | 12.60           | V            | Pass   |
| 5092.8          | -26.47                                                                       | -13     | -13.47          | -61.32             | -36.03           | 0.99                | 12.70           | V            | Pass   |
| 5941.6          | -21.84                                                                       | -13     | -8.84           | -57.40             | -31.57           | 1.12                | 13.00           | V            | Pass   |
| 6790.4          | -33.63                                                                       | -13     | -20.63          | -67.70             | -42.02           | 1.16                | 11.70           | V            | Pass   |
| 7639.2          | -37.48                                                                       | -13     | -24.48          | -71.44             | -44.76           | 1.87                | 11.30           | V            | Pass   |
| 8488            | -33.46                                                                       | -13     | -20.46          | -68.27             | -40.85           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH128                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1648.4          | -16.76                                                                       | -13     | -3.76           | -33.80             | -23.44           | 0.57                | 9.40            | H            | Pass   |
| 2472.6          | -28.53                                                                       | -13     | -15.53          | -53.19             | -36.23           | 0.75                | 10.60           | H            | Pass   |
| 3296.8          | -42.68                                                                       | -13     | -29.68          | -69.42             | -52.26           | 0.87                | 12.60           | H            | Pass   |
| 4121            | -36.19                                                                       | -13     | -23.19          | -67.23             | -45.71           | 0.93                | 12.60           | H            | Pass   |
| 4945.2          | -35.46                                                                       | -13     | -22.46          | -67.91             | -45.02           | 0.99                | 12.70           | H            | Pass   |
| 5769.4          | -28.34                                                                       | -13     | -15.34          | -62.40             | -38.07           | 1.12                | 13.00           | H            | Pass   |
| 6593.6          | -36.34                                                                       | -13     | -23.34          | -69.37             | -44.73           | 1.16                | 11.70           | H            | Pass   |
| 7417.8          | -40.41                                                                       | -13     | -27.41          | -74.30             | -47.69           | 1.87                | 11.30           | H            | Pass   |
| 8242            | -42.21                                                                       | -13     | -29.21          | -75.31             | -49.60           | 1.76                | 11.30           | H            | Pass   |

| Band :          | GSM850 for CH128                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1648.4          | -18.20                                                                       | -13     | -5.20           | -35.97             | -24.88           | 0.57                | 9.40            | V            | Pass   |
| 2472.6          | -27.46                                                                       | -13     | -14.46          | -54.83             | -35.16           | 0.75                | 10.60           | V            | Pass   |
| 3296.8          | -38.43                                                                       | -13     | -25.43          | -68.97             | -48.01           | 0.87                | 12.60           | V            | Pass   |
| 4121            | -33.09                                                                       | -13     | -20.09          | -66.07             | -42.61           | 0.93                | 12.60           | V            | Pass   |
| 4945.2          | -40.73                                                                       | -13     | -27.73          | -72.10             | -50.29           | 0.99                | 12.70           | V            | Pass   |
| 5769.4          | -23.68                                                                       | -13     | -10.68          | -59.15             | -33.41           | 1.12                | 13.00           | V            | Pass   |
| 6593.6          | -38.56                                                                       | -13     | -25.56          | -71.21             | -46.95           | 1.16                | 11.70           | V            | Pass   |
| 7417.8          | -41.11                                                                       | -13     | -28.11          | -74.99             | -48.39           | 1.87                | 11.30           | V            | Pass   |
| 8242            | -41.21                                                                       | -13     | -28.21          | -75.31             | -48.60           | 1.76                | 11.30           | V            | Pass   |





|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH189                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -18.29                                                                       | -13     | -5.29           | -35.21             | -24.97           | 0.57                | 9.40            | H            | Pass   |
| 2510            | -19.08                                                                       | -13     | -6.08           | -43.49             | -26.78           | 0.75                | 10.60           | H            | Pass   |
| 3346            | -36.00                                                                       | -13     | -23.00          | -64.33             | -45.58           | 0.87                | 12.60           | H            | Pass   |
| 4182            | -38.47                                                                       | -13     | -25.47          | -69.28             | -47.99           | 0.93                | 12.60           | H            | Pass   |
| 5018            | -32.76                                                                       | -13     | -19.76          | -65.97             | -42.32           | 0.99                | 12.70           | H            | Pass   |
| 5854            | -26.15                                                                       | -13     | -13.15          | -60.54             | -35.88           | 1.12                | 13.00           | H            | Pass   |
| 6691            | -37.82                                                                       | -13     | -24.82          | -70.55             | -46.21           | 1.16                | 11.70           | H            | Pass   |
| 7528            | -40.80                                                                       | -13     | -27.80          | -74.69             | -48.08           | 1.87                | 11.30           | H            | Pass   |
| 8364            | -41.34                                                                       | -13     | -28.34          | -74.44             | -48.73           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH189                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -19.78                                                                       | -13     | -6.78           | -37.52             | -26.46           | 0.57                | 9.40            | V            | Pass   |
| 2510            | -25.88                                                                       | -13     | -12.88          | -53.24             | -33.58           | 0.75                | 10.60           | V            | Pass   |
| 3346            | -36.56                                                                       | -13     | -23.56          | -67.23             | -46.14           | 0.87                | 12.60           | V            | Pass   |
| 4182            | -38.86                                                                       | -13     | -25.86          | -70.51             | -48.38           | 0.93                | 12.60           | V            | Pass   |
| 5018            | -33.25                                                                       | -13     | -20.25          | -67.15             | -42.81           | 0.99                | 12.70           | V            | Pass   |
| 5854            | -21.31                                                                       | -13     | -8.31           | -56.94             | -31.04           | 1.12                | 13.00           | V            | Pass   |
| 6691            | -36.29                                                                       | -13     | -23.29          | -69.58             | -44.68           | 1.16                | 11.70           | V            | Pass   |
| 7528            | -41.21                                                                       | -13     | -28.21          | -75.09             | -48.49           | 1.87                | 11.30           | V            | Pass   |
| 8364            | -42.18                                                                       | -13     | -29.18          | -76.28             | -49.57           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | GSM850 for CH251                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1697.6          | -23.53                                                                       | -13     | -10.53          | -40.30             | -30.21           | 0.57                | 9.40            | H            | Pass   |
| 2546.4          | -19.22                                                                       | -13     | -6.22           | -43.72             | -26.92           | 0.75                | 10.60           | H            | Pass   |
| 3395.2          | -37.32                                                                       | -13     | -24.32          | -65.44             | -46.90           | 0.87                | 12.60           | H            | Pass   |
| 4244            | -28.92                                                                       | -13     | -15.92          | -61.31             | -38.44           | 0.93                | 12.60           | H            | Pass   |
| 5092.8          | -29.53                                                                       | -13     | -16.53          | -63.17             | -39.09           | 0.99                | 12.70           | H            | Pass   |
| 5941.6          | -27.92                                                                       | -13     | -14.92          | -61.96             | -37.65           | 1.12                | 13.00           | H            | Pass   |
| 6790.4          | -38.94                                                                       | -13     | -25.94          | -71.67             | -47.33           | 1.16                | 11.70           | H            | Pass   |
| 7639.2          | -39.68                                                                       | -13     | -26.68          | -73.57             | -46.96           | 1.87                | 11.30           | H            | Pass   |
| 8488            | -41.94                                                                       | -13     | -28.94          | -75.04             | -49.33           | 1.76                | 11.30           | H            | Pass   |

| Band :          | GSM850 for CH251                                                             |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Test Mode :     | EDGE class 8 Link (8PSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | ( H/V )      |        |
| 1697.6          | -17.68                                                                       | -13     | -4.68           | -35.42             | -24.36           | 0.57                | 9.40            | V            | Pass   |
| 2546.4          | -20.76                                                                       | -13     | -7.76           | -47.80             | -28.46           | 0.75                | 10.60           | V            | Pass   |
| 3395.2          | -36.39                                                                       | -13     | -23.39          | -67.14             | -45.97           | 0.87                | 12.60           | V            | Pass   |
| 4244            | -31.37                                                                       | -13     | -18.37          | -64.86             | -40.89           | 0.93                | 12.60           | V            | Pass   |
| 5092.8          | -27.01                                                                       | -13     | -14.01          | -61.99             | -36.57           | 0.99                | 12.70           | V            | Pass   |
| 5941.6          | -23.02                                                                       | -13     | -10.02          | -58.63             | -32.75           | 1.12                | 13.00           | V            | Pass   |
| 6790.4          | -33.96                                                                       | -13     | -20.96          | -68.01             | -42.35           | 1.16                | 11.70           | V            | Pass   |
| 7639.2          | -40.55                                                                       | -13     | -27.55          | -74.43             | -47.83           | 1.87                | 11.30           | V            | Pass   |
| 8488            | -38.57                                                                       | -13     | -25.57          | -72.67             | -45.96           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |                     |            |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH512                                                            | Temperature :       | 23~25°C    |         |         |          |            |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%     |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                              |                     | Limit      | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )     | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3700.4          | -42.61                                                                       | -13                 | -29.61     | -71.25  | -54.34  | 0.87     | 12.60      | H            | Pass   |
| 5550.6          | -41.09                                                                       | -13                 | -28.09     | -71.41  | -53.12  | 1.07     | 13.10      | H            | Pass   |
| 7400.8          | -41.25                                                                       | -13                 | -28.25     | -72.91  | -50.68  | 1.87     | 11.30      | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH512                                                            | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3700.4          | -36.11                                                                       | -13                 | -23.11   | -67.13  | -47.84  | 0.87     | 12.6       | V            | Pass   |
| 5550.6          | -33.18                                                                       | -13                 | -20.18   | -66.88  | -45.21  | 1.07     | 13.1       | V            | Pass   |
| 7400.8          | -38.43                                                                       | -13                 | -25.43   | -71.37  | -47.86  | 1.87     | 11.3       | V            | Pass   |

|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900 for CH661                                                            | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3760            | -25.96                                                                       | -13                 | -12.96          | -62.22           | -37.69           | 0.87           | 12.60         | H            | Pass   |
| 5640            | -35.15                                                                       | -13                 | -22.15          | -67.08           | -47.18           | 1.07           | 13.10         | H            | Pass   |
| 7520            | -41.27                                                                       | -13                 | -28.27          | -72.93           | -50.70           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH661                                                            | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                              |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3760            | -30.22                                                                       | -13                 | -17.22   | -63.44  | -41.95  | 0.87     | 12.6       | V            | Pass   |
| 5640            | -30.40                                                                       | -13                 | -17.40   | -64.92  | -42.43  | 1.07     | 13.1       | V            | Pass   |
| 7520            | -36.82                                                                       | -13                 | -23.82   | -70.73  | -46.25  | 1.87     | 11.3       | V            | Pass   |

|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900 for CH810                                                            | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819.6          | -23.24                                                                       | -13                 | -10.24          | -59.83           | -34.97           | 0.87           | 12.60         | H            | Pass   |
| 5729.4          | -27.79                                                                       | -13                 | -14.79          | -61.94           | -39.82           | 1.07           | 13.10         | H            | Pass   |
| 7639.2          | -42.54                                                                       | -13                 | -29.54          | -74.20           | -51.97           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH810                                                            | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | GPRS class 10 Link (GMSK)                                                    | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                              |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3819.6          | -24.90                                                                       | -13                 | -11.90   | -59.38  | -36.63  | 0.87     | 12.6       | V            | Pass   |
| 5729.4          | -26.35                                                                       | -13                 | -13.35   | -61.42  | -38.38  | 1.07     | 13.1       | V            | Pass   |
| 7639.2          | -41.27                                                                       | -13                 | -28.27   | -73.16  | -50.70  | 1.87     | 11.3       | V            | Pass   |



|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900 for CH512                                                            | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3700.4          | -44.85                                                                       | -13                 | -31.85          | -73.49           | -56.58           | 0.87           | 12.60         | H            | Pass   |
| 5550.6          | -43.66                                                                       | -13                 | -30.66          | -73.98           | -55.69           | 1.07           | 13.10         | H            | Pass   |
| 7400.8          | -44.37                                                                       | -13                 | -31.37          | -76.03           | -53.80           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH512                                                            | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                              |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3700.4          | -44.70                                                                       | -13                 | -31.70   | -73.15  | -56.43  | 0.87     | 12.6       | V            | Pass   |
| 5550.6          | -42.21                                                                       | -13                 | -29.21   | -73.34  | -54.24  | 1.07     | 13.1       | V            | Pass   |
| 7400.8          | -44.16                                                                       | -13                 | -31.16   | -76.05  | -53.59  | 1.87     | 11.3       | V            | Pass   |

|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900 for CH661                                                            | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3760            | -32.84                                                                       | -13                 | -19.84          | -66.82           | -44.57           | 0.87           | 12.60         | H            | Pass   |
| 5640            | -36.03                                                                       | -13                 | -23.03          | -67.75           | -48.06           | 1.07           | 13.10         | H            | Pass   |
| 7520            | -44.79                                                                       | -13                 | -31.79          | -76.45           | -54.22           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |            |        |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|------------|--------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH661                                                            | Temperature :       | 23~25°C    |        |         |          |            |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%     |        |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical   |        |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |            |        |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over Limit | SPA    | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )     | (dBm)  | ( dBm ) | loss     | Gain       | (H/V)        |        |
| 3760            | -37.24                                                                       | -13                 | -24.24     | -68.18 | -48.97  | 0.87     | 12.6       | V            | Pass   |
| 5640            | -37.13                                                                       | -13                 | -24.13     | -68.89 | -49.16  | 1.07     | 13.1       | V            | Pass   |
| 7520            | -44.75                                                                       | -13                 | -31.75     | -76.64 | -54.18  | 1.87     | 11.3       | V            | Pass   |



|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | GSM1900 for CH810                                                            | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3819.6          | -25.69                                                                       | -13                 | -12.69          | -62.01           | -37.42           | 0.87           | 12.60         | H            | Pass   |
| 5729.4          | -31.47                                                                       | -13                 | -18.47          | -64.67           | -43.50           | 1.07           | 13.10         | H            | Pass   |
| 7639.2          | -44.46                                                                       | -13                 | -31.46          | -76.12           | -53.89           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |            |        |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|------------|--------|---------|----------|------------|--------------|--------|
| Band :          | GSM1900 for CH810                                                            | Temperature :       | 23~25°C    |        |         |          |            |              |        |
| Test Mode :     | EDGE class 10 Link (8PSK)                                                    | Relative Humidity : | 48~52%     |        |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical   |        |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |            |        |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over Limit | SPA    | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )     | (dBm)  | ( dBm ) | loss     | Gain       | (H/V)        |        |
| 3819.6          | -27.83                                                                       | -13                 | -14.83     | -61.19 | -39.56  | 0.87     | 12.6       | V            | Pass   |
| 5729.4          | -28.82                                                                       | -13                 | -15.82     | -63.89 | -40.85  | 1.07     | 13.1       | V            | Pass   |
| 7639.2          | -43.82                                                                       | -13                 | -30.82     | -75.71 | -53.25  | 1.87     | 11.3       | V            | Pass   |





|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4132                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1652.8          | -20.51                                                                       | -13     | -7.51           | -37.36             | -27.19           | 0.57                | 9.40            | H            | Pass   |
| 2479.2          | -24.43                                                                       | -13     | -11.43          | -49.14             | -32.13           | 0.75                | 10.60           | H            | Pass   |
| 3305.6          | -44.36                                                                       | -13     | -31.36          | -70.29             | -53.94           | 0.87                | 12.60           | H            | Pass   |
| 4140            | -37.19                                                                       | -13     | -24.19          | -68.14             | -46.71           | 0.93                | 12.60           | H            | Pass   |
| 4966.4          | -42.17                                                                       | -13     | -29.17          | -72.42             | -51.73           | 0.99                | 12.70           | H            | Pass   |
| 5792.8          | -34.36                                                                       | -13     | -21.36          | -67.35             | -44.09           | 1.12                | 13.00           | H            | Pass   |
| 6619.2          | -41.09                                                                       | -13     | -28.09          | -73.82             | -49.48           | 1.16                | 11.70           | H            | Pass   |
| 7445.6          | -40.44                                                                       | -13     | -27.44          | -74.33             | -47.72           | 1.87                | 11.30           | H            | Pass   |
| 8272            | -42.44                                                                       | -13     | -29.44          | -75.54             | -49.83           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4132                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1652.8          | -20.73                                                                       | -13     | -7.73           | -38.42             | -27.41           | 0.57                | 9.40            | V            | Pass   |
| 2479.2          | -24.26                                                                       | -13     | -11.26          | -51.69             | -31.96           | 0.75                | 10.60           | V            | Pass   |
| 3305.6          | -40.01                                                                       | -13     | -27.01          | -70.04             | -49.59           | 0.87                | 12.60           | V            | Pass   |
| 4140            | -39.04                                                                       | -13     | -26.04          | -70.62             | -48.56           | 0.93                | 12.60           | V            | Pass   |
| 4966.4          | -40.42                                                                       | -13     | -27.42          | -71.81             | -49.98           | 0.99                | 12.70           | V            | Pass   |
| 5792.8          | -28.73                                                                       | -13     | -15.73          | -63.65             | -38.46           | 1.12                | 13.00           | V            | Pass   |
| 6619.2          | -40.98                                                                       | -13     | -27.98          | -73.63             | -49.37           | 1.16                | 11.70           | V            | Pass   |
| 7445.6          | -41.13                                                                       | -13     | -28.13          | -75.01             | -48.41           | 1.87                | 11.30           | V            | Pass   |
| 8272            | -40.53                                                                       | -13     | -27.53          | -74.63             | -47.92           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4182                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -25.06                                                                       | -13     | -12.06          | -41.91             | -31.74           | 0.57                | 9.40            | H            | Pass   |
| 2510            | -29.52                                                                       | -13     | -16.52          | -54.15             | -37.22           | 0.75                | 10.60           | H            | Pass   |
| 3346            | -44.49                                                                       | -13     | -31.49          | -70.42             | -54.07           | 0.87                | 12.60           | H            | Pass   |
| 4182            | -38.83                                                                       | -13     | -25.83          | -69.65             | -48.35           | 0.93                | 12.60           | H            | Pass   |
| 5018            | -41.86                                                                       | -13     | -28.86          | -72.26             | -51.42           | 0.99                | 12.70           | H            | Pass   |
| 5854            | -31.87                                                                       | -13     | -18.87          | -65.39             | -41.60           | 1.12                | 13.00           | H            | Pass   |
| 6691            | -41.16                                                                       | -13     | -28.16          | -73.89             | -49.55           | 1.16                | 11.70           | H            | Pass   |
| 7528            | -41.58                                                                       | -13     | -28.58          | -75.47             | -48.86           | 1.87                | 11.30           | H            | Pass   |
| 8364            | -42.83                                                                       | -13     | -29.83          | -75.93             | -50.22           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4182                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1672            | -21.49                                                                       | -13     | -8.49           | -39.20             | -28.17           | 0.57                | 9.40            | V            | Pass   |
| 2510            | -23.42                                                                       | -13     | -10.42          | -50.80             | -31.12           | 0.75                | 10.60           | V            | Pass   |
| 3346            | -39.38                                                                       | -13     | -26.38          | -69.82             | -48.96           | 0.87                | 12.60           | V            | Pass   |
| 4182            | -41.91                                                                       | -13     | -28.91          | -72.11             | -51.43           | 0.93                | 12.60           | V            | Pass   |
| 5018            | -41.28                                                                       | -13     | -28.28          | -72.57             | -50.84           | 0.99                | 12.70           | V            | Pass   |
| 5854            | -28.62                                                                       | -13     | -15.62          | -63.54             | -38.35           | 1.12                | 13.00           | V            | Pass   |
| 6691            | -40.55                                                                       | -13     | -27.55          | -73.20             | -48.94           | 1.16                | 11.70           | V            | Pass   |
| 7528            | -41.70                                                                       | -13     | -28.70          | -75.58             | -48.98           | 1.87                | 11.30           | V            | Pass   |
| 8364            | -41.79                                                                       | -13     | -28.79          | -75.89             | -49.18           | 1.76                | 11.30           | V            | Pass   |



|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4233                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Horizontal      |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1693.2          | -25.51                                                                       | -13     | -12.51          | -42.32             | -32.19           | 0.57                | 9.40            | H            | Pass   |
| 2539.8          | -32.96                                                                       | -13     | -19.96          | -57.06             | -40.66           | 0.75                | 10.60           | H            | Pass   |
| 3386.4          | -44.16                                                                       | -13     | -31.16          | -70.09             | -53.74           | 0.87                | 12.60           | H            | Pass   |
| 4233            | -42.11                                                                       | -13     | -29.11          | -71.07             | -51.63           | 0.93                | 12.60           | H            | Pass   |
| 5079.6          | -42.55                                                                       | -13     | -29.55          | -72.68             | -52.11           | 0.99                | 12.70           | H            | Pass   |
| 5926.2          | -34.25                                                                       | -13     | -21.25          | -67.25             | -43.98           | 1.12                | 13.00           | H            | Pass   |
| 6772.8          | -41.92                                                                       | -13     | -28.92          | -74.65             | -50.31           | 1.16                | 11.70           | H            | Pass   |
| 7619.4          | -41.99                                                                       | -13     | -28.99          | -75.88             | -49.27           | 1.87                | 11.30           | H            | Pass   |
| 8466            | -44.07                                                                       | -13     | -31.07          | -77.17             | -51.46           | 1.76                | 11.30           | H            | Pass   |

|                 |                                                                              |         |                 |                    |                  |                     |                 |              |        |
|-----------------|------------------------------------------------------------------------------|---------|-----------------|--------------------|------------------|---------------------|-----------------|--------------|--------|
| Band :          | WCDMA Band V for CH4233                                                      |         |                 |                    |                  | Temperature :       | 23~25°C         |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     |         |                 |                    |                  | Relative Humidity : | 48~52%          |              |        |
| Test Engineer : | Kaer Huang                                                                   |         |                 |                    |                  | Polarization :      | Vertical        |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |         |                 |                    |                  |                     |                 |              |        |
| Frequency       | ERP                                                                          | Limit   | Over            | SPA                | S.G.             | TX Cable            | TX Antenna      | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm ) | Limit<br>( dB ) | Reading<br>( dBm ) | Power<br>( dBm ) | loss<br>( dB )      | Gain<br>( dBi ) | (H/V)        |        |
| 1693.2          | -22.76                                                                       | -13     | -9.76           | -40.45             | -29.44           | 0.57                | 9.40            | V            | Pass   |
| 2539.8          | -27.43                                                                       | -13     | -14.43          | -54.79             | -35.13           | 0.75                | 10.60           | V            | Pass   |
| 3386.4          | -39.79                                                                       | -13     | -26.79          | -69.96             | -49.37           | 0.87                | 12.60           | V            | Pass   |
| 4233            | -42.56                                                                       | -13     | -29.56          | -72.43             | -52.08           | 0.93                | 12.60           | V            | Pass   |
| 5079.6          | -40.89                                                                       | -13     | -27.89          | -72.24             | -50.45           | 0.99                | 12.70           | V            | Pass   |
| 5926.2          | -30.88                                                                       | -13     | -17.88          | -65.53             | -40.61           | 1.12                | 13.00           | V            | Pass   |
| 6772.8          | -36.15                                                                       | -13     | -23.15          | -74.86             | -44.54           | 1.16                | 11.70           | V            | Pass   |
| 7619.4          | -41.84                                                                       | -13     | -28.84          | -75.72             | -49.12           | 1.87                | 11.30           | V            | Pass   |
| 8466            | -42.75                                                                       | -13     | -29.75          | -76.85             | -50.14           | 1.76                | 11.30           | V            | Pass   |



| Band :          | WCDMA Band II for CH9262                                                     | Temperature :       | 23~25°C    |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|------------|---------|---------|----------|------------|--------------|--------|
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%     |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |            |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over       | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit      | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dBm )                                                                      | ( dB )              | ( dBm )    | ( dBm ) | ( dBm ) | ( dB )   | ( dBi)     |              |        |
| 3704.8          | -43.99                                                                       | -13                 | -30.99     | -72.63  | -55.72  | 0.87     | 12.60      | H            | Pass   |
| 5557.2          | -43.70                                                                       | -13                 | -30.70     | -74.02  | -55.73  | 1.07     | 13.10      | H            | Pass   |
| 7409.6          | -43.58                                                                       | -13                 | -30.58     | -75.24  | -53.01  | 1.87     | 11.30      | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II for CH9262                                                     | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       |              |        |
|                 |                                                                              |                     | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3704.8          | -43.10                                                                       | -13                 | -30.10   | -71.55  | -54.83  | 0.87     | 12.6       | V            | Pass   |
| 5557.2          | -42.83                                                                       | -13                 | -29.83   | -73.96  | -54.86  | 1.07     | 13.1       | V            | Pass   |
| 7409.6          | -44.50                                                                       | -13                 | -31.50   | -76.39  | -53.93  | 1.87     | 11.3       | V            | Pass   |

|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band II for CH9400                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3760            | -32.08                                                                       | -13                 | -19.08          | -66.39           | -43.81           | 0.87           | 12.60         | H            | Pass   |
| 5640            | -42.66                                                                       | -13                 | -29.66          | -72.98           | -54.69           | 1.07           | 13.10         | H            | Pass   |
| 7520            | -43.92                                                                       | -13                 | -30.92          | -75.58           | -53.35           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II for CH9400                                                     | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
|                 |                                                                              |                     | Limit    | Reading | Power   | loss     | Gain       |              |        |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | ( dB )   | (dBm)   | ( dBm ) | ( dB )   | (dBi)      | (H/V)        |        |
| 3760            | -37.95                                                                       | -13                 | -24.95   | -68.65  | -49.68  | 0.87     | 12.6       | V            | Pass   |
| 5640            | -41.94                                                                       | -13                 | -28.94   | -73.07  | -53.97  | 1.07     | 13.1       | V            | Pass   |
| 7520            | -43.96                                                                       | -13                 | -30.96   | -75.85  | -53.39  | 1.87     | 11.3       | V            | Pass   |



|                 |                                                                              |                     |                 |                  |                  |                |               |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|-----------------|------------------|------------------|----------------|---------------|--------------|--------|
| Band :          | WCDMA Band II for CH9538                                                     | Temperature :       | 23~25°C         |                  |                  |                |               |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%          |                  |                  |                |               |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Horizontal      |                  |                  |                |               |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |                 |                  |                  |                |               |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over            | SPA              | S.G.             | TX Cable       | TX Antenna    | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit<br>( dB ) | Reading<br>(dBm) | Power<br>( dBm ) | loss<br>( dB ) | Gain<br>(dBi) | (H/V)        |        |
| 3815.2          | -32.98                                                                       | -13                 | -19.98          | -66.90           | -44.71           | 0.87           | 12.60         | H            | Pass   |
| 5722.8          | -43.93                                                                       | -13                 | -30.93          | -74.25           | -55.96           | 1.07           | 13.10         | H            | Pass   |
| 7630.4          | -43.77                                                                       | -13                 | -30.77          | -75.43           | -53.20           | 1.87           | 11.30         | H            | Pass   |

|                 |                                                                              |                     |          |         |         |          |            |              |        |
|-----------------|------------------------------------------------------------------------------|---------------------|----------|---------|---------|----------|------------|--------------|--------|
| Band :          | WCDMA Band II for CH9538                                                     | Temperature :       | 23~25°C  |         |         |          |            |              |        |
| Test Mode :     | RMC 12.2Kbps Link (QPSK)                                                     | Relative Humidity : | 48~52%   |         |         |          |            |              |        |
| Test Engineer : | Kaer Huang                                                                   | Polarization :      | Vertical |         |         |          |            |              |        |
| Remark :        | Spurious emissions below 1000MHz were found more than 20dB below limit line. |                     |          |         |         |          |            |              |        |
| Frequency       | EIRP                                                                         | Limit               | Over     | SPA     | S.G.    | TX Cable | TX Antenna | Polarization | Result |
| ( MHz )         | ( dBm )                                                                      | ( dBm )             | Limit    | Reading | Power   | loss     | Gain       | (H/V)        |        |
| ( dB )          | ( dB )                                                                       | ( dB )              | ( dB )   | ( dBm ) | ( dBm ) | ( dB )   | ( dBi )    |              |        |
| 3815.2          | -39.58                                                                       | -13                 | -26.58   | -69.37  | -51.31  | 0.87     | 12.6       | V            | Pass   |
| 5722.8          | -42.28                                                                       | -13                 | -29.28   | -73.41  | -54.31  | 1.07     | 13.1       | V            | Pass   |
| 7630.4          | -44.51                                                                       | -13                 | -31.51   | -76.4   | -53.94  | 1.87     | 11.3       | V            | Pass   |

### 3.8 Frequency Stability Measurement

#### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

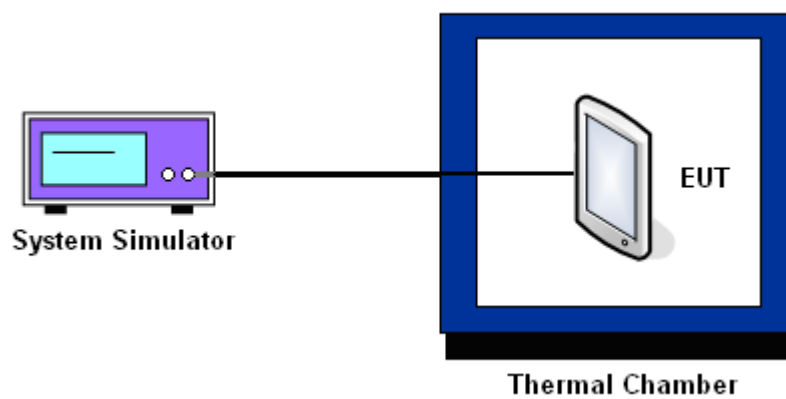



### 3.8.6 Test Result of Temperature Variation

|                      |         |                    |           |
|----------------------|---------|--------------------|-----------|
| <b>Band :</b>        | GSM 850 | <b>Channel :</b>   | 189       |
| <b>Limit (ppm) :</b> | 2.5     | <b>Frequency :</b> | 836.4 MHz |

| Temperature (°C) | GPRS class 10   |                 | EDGE class 8    |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| 50 °C            | 11              | 0.0048          | 12              | 0.0036          | PASS   |
| 40 °C            | 13              | 0.0024          | 13              | 0.0024          |        |
| 30 °C            | 14              | 0.0012          | 14              | 0.0012          |        |
| 20(Ref.)         | 15              | 0.0000          | 15              | 0.0000          |        |
| 10 °C            | 9               | 0.0072          | 15              | 0.0000          |        |
| 0 °C             | 5               | 0.0120          | 16              | 0.0012          |        |
| -10 °C           | -3              | 0.0215          | 16              | 0.0012          |        |
| -20 °C           | -11             | 0.0311          | 17              | 0.0024          |        |
| -30 °C           | -16             | 0.0371          | 17              | 0.0024          |        |

|                      |                        |                    |            |
|----------------------|------------------------|--------------------|------------|
| <b>Band :</b>        | GSM 1900               | <b>Channel :</b>   | 661        |
| <b>Limit (ppm) :</b> | within authorized band | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | GPRS class 10   |                 | EDGE class 10   |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| 50 °C            | 30              | 0.0053          | 29              | 0.0059          | PASS   |
| 40 °C            | 26              | 0.0032          | 23              | 0.0027          |        |
| 30 °C            | 23              | 0.0016          | 20              | 0.0011          |        |
| 20(Ref.)         | 20              | 0.0000          | 18              | 0.0000          |        |
| 10 °C            | 21              | 0.0005          | 19              | 0.0005          |        |
| 0 °C             | 19              | 0.0005          | 20              | 0.0011          |        |
| -10 °C           | 20              | 0.0000          | 22              | 0.0021          |        |
| -20 °C           | 21              | 0.0005          | 24              | 0.0032          |        |
| -30 °C           | 22              | 0.0011          | 23              | 0.0027          |        |

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

|                      |              |                    |           |
|----------------------|--------------|--------------------|-----------|
| <b>Band :</b>        | WCDMA Band V | <b>Channel :</b>   | 4182      |
| <b>Limit (ppm) :</b> | 2.5          | <b>Frequency :</b> | 836.4 MHz |

| Temperature (°C) | RMC 12.2Kbps    |                 | Result |
|------------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) |        |
| 50 °C            | -60             | 0.0299          | PASS   |
| 40 °C            | -52             | 0.0203          |        |
| 30 °C            | -47             | 0.0143          |        |
| 20(Ref.)         | -35             | 0.0000          |        |
| 10 °C            | -34             | 0.0012          |        |
| 0 °C             | -33             | 0.0024          |        |
| -10 °C           | -32             | 0.0036          |        |
| -20 °C           | -31             | 0.0048          |        |
| -30 °C           | -29             | 0.0072          |        |

|                      |                        |                    |            |
|----------------------|------------------------|--------------------|------------|
| <b>Band :</b>        | WCDMA Band II          | <b>Channel :</b>   | 9400       |
| <b>Limit (ppm) :</b> | within authorized band | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | RMC 12.2Kbps    |                 | Result |
|------------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) |        |
| 50 °C            | -61             | 0.0436          | PASS   |
| 40 °C            | -35             | 0.0298          |        |
| 30 °C            | -14             | 0.0186          |        |
| 20(Ref.)         | 21              | 0.0000          |        |
| 10 °C            | 25              | 0.0021          |        |
| 0 °C             | 29              | 0.0043          |        |
| -10 °C           | 32              | 0.0059          |        |
| -20 °C           | 35              | 0.0074          |        |
| -30 °C           | 38              | 0.0090          |        |

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

### 3.8.7 Test Result of Voltage Variation

| Band & Channel          | Mode             | Voltage (Volt) | Freq. Dev. (Hz) | Deviation (ppm) | Limit (ppm) | Result |
|-------------------------|------------------|----------------|-----------------|-----------------|-------------|--------|
| GSM 850<br>CH189        | GPRS<br>class 10 | 9.00           | 12              | 0.0036          | 2.5         | PASS   |
|                         |                  | 12.00          | 15              | 0.0000          |             |        |
|                         |                  | 36.00          | 10              | 0.0060          |             |        |
|                         | EDGE<br>class 8  | 9.00           | 10              | 0.0060          |             |        |
|                         |                  | 12.00          | 15              | 0.0000          |             |        |
|                         |                  | 36.00          | 14              | 0.0012          |             |        |
| GSM 1900<br>CH661       | GPRS<br>class 10 | 9.00           | 18              | 0.0011          | (Note)      |        |
|                         |                  | 12.00          | 20              | 0.0000          |             |        |
|                         |                  | 36.00          | 13              | 0.0037          |             |        |
|                         | EDGE<br>class 10 | 9.00           | 22              | 0.0021          |             |        |
|                         |                  | 12.00          | 18              | 0.0000          |             |        |
|                         |                  | 36.00          | 23              | 0.0027          |             |        |
| WCDMA Band V<br>CH4182  | RMC<br>12.2Kbps  | 9.00           | -32             | 0.0036          | 2.5         |        |
|                         |                  | 12.00          | -35             | 0.0000          |             |        |
|                         |                  | 36.00          | -49             | 0.0167          |             |        |
| WCDMA Band II<br>CH9400 | RMC<br>12.2Kbps  | 9.00           | 14              | 0.0037          | (Note)      |        |
|                         |                  | 12.00          | 21              | 0.0000          |             |        |
|                         |                  | 36.00          | -42             | 0.0335          |             |        |

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4 List of Measuring Equipment

| Instrument                 | Manufacturer   | Model No. | Serial No.       | Characteristics | Calibration Date | Test Date                       | Due Date      | Remark                |
|----------------------------|----------------|-----------|------------------|-----------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer          | R&S            | FSV40     | 101078           | 10Hz~40GHz      | May 08, 2014     | Dec. 12, 2014~<br>Jan. 07, 2015 | May 07, 2015  | Conducted (TH01-SZ)   |
| Thermal Chamber            | Hongzhan       | LP-150U   | HD20120425       | -40℃~150℃       | Feb. 21, 2014    | Dec. 12, 2014~<br>Jan. 07, 2015 | Feb. 20, 2015 | Conducted (TH01-SZ)   |
| ESCIO TEST Receiver        | R&S            | ESCI      | 100724           | 9kHz~3GHz       | Feb. 21, 2014    | Dec. 23, 2014                   | Feb. 20, 2015 | Radiation (03CH01-SZ) |
| Spectrum Analyzer          | Agilent        | N9038A    | MY52260185       | 20Hz~26.5GHz    | May 26, 2014     | Dec. 23, 2014                   | May 25, 2015  | Radiation (03CH01-SZ) |
| Bilog Antenna              | TESEQ          | CBL 6112D | 37877            | 30MHz~2GHz      | Oct. 15, 2014    | Dec. 23, 2014                   | Oct. 14, 2015 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna  | ETS Lindgren   | 3117      | 00119436         | 1GHz~18GHz      | Oct. 15, 2014    | Dec. 23, 2014                   | Oct. 14, 2015 | Radiation (03CH01-SZ) |
| Double Ridged Horn Antenna | COM-POWER      | AH-840    | 101073           | 18GHz~40GHz     | Jun. 09, 2014    | Dec. 23, 2014                   | Jun. 08, 2015 | Radiation (03CH01-SZ) |
| Amplifier                  | ADVANTEST      | BB525C    | E9007003         | 9kHz~3000MHz    | Feb. 21, 2014    | Dec. 23, 2014                   | Feb. 20, 2015 | Radiation (03CH01-SZ) |
| Amplifier                  | Yiai           | AV3860B   | 04030            | 2GHz~26.5GHz    | May 08, 2014     | Dec. 23, 2014                   | May 07, 2015  | Radiation (03CH01-SZ) |
| AC Source(AVR)             | Chroma         | 61601     | 61601000198<br>5 | 100Vac~250Vac   | Mar. 25, 2014    | Dec. 23, 2014                   | Mar. 24, 2015 | Radiation (03CH01-SZ) |
| Turn Table                 | EM Electronics | EM 1000   | N/A              | 0~360 degree    | NCR              | Dec. 23, 2014                   | NCR           | Radiation (03CH01-SZ) |
| Antenna Mast               | EM Electronics | EM 1000   | N/A              | 1 m~4 m         | NCR              | Dec. 23, 2014                   | NCR           | Radiation (03CH01-SZ) |
| Spectrum Analyzer          | R&S            | FSP 7     | 100818           | 9kHz~7GHz       | Jul. 17, 2014    | Dec. 22, 2014                   | Jul. 16, 2015 | ERP/EIRP (OTA02-SZ)   |
| Quad-Ridged Horn           | ETS-Lindgren   | 3164-08   | 00102954         | 700MHz~10000MHz | N/A              | Dec. 22, 2014                   | N/A           | ERP/EIRP (OTA02-SZ)   |
| Multi-Devices Controller   | ETS-Lindgren   | 2090-OPT1 | 00108147         | N/A             | N/A              | Dec. 22, 2014                   | N/A           | ERP/EIRP (OTA02-SZ)   |
| Switch Control Mainframe   | Agilent        | 3499A     | MY42005451       | N/A             | N/A              | Dec. 22, 2014                   | N/A           | ERP/EIRP (OTA02-SZ)   |



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |       |
|--------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.9dB |
|--------------------------------------------------------------------------|-------|