



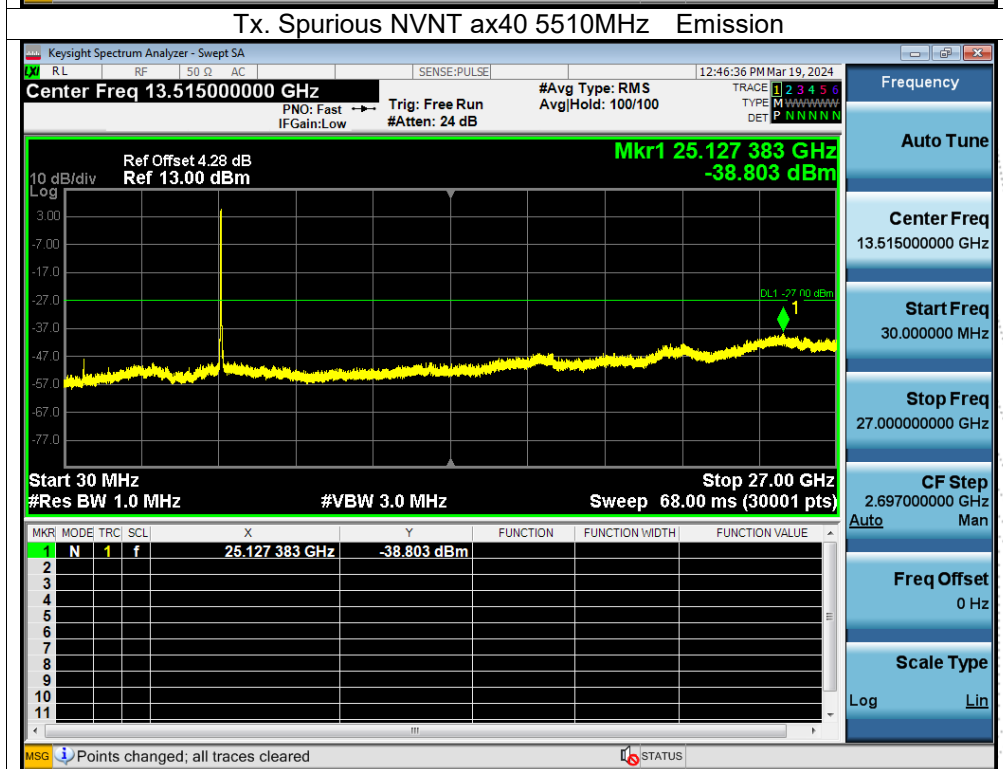
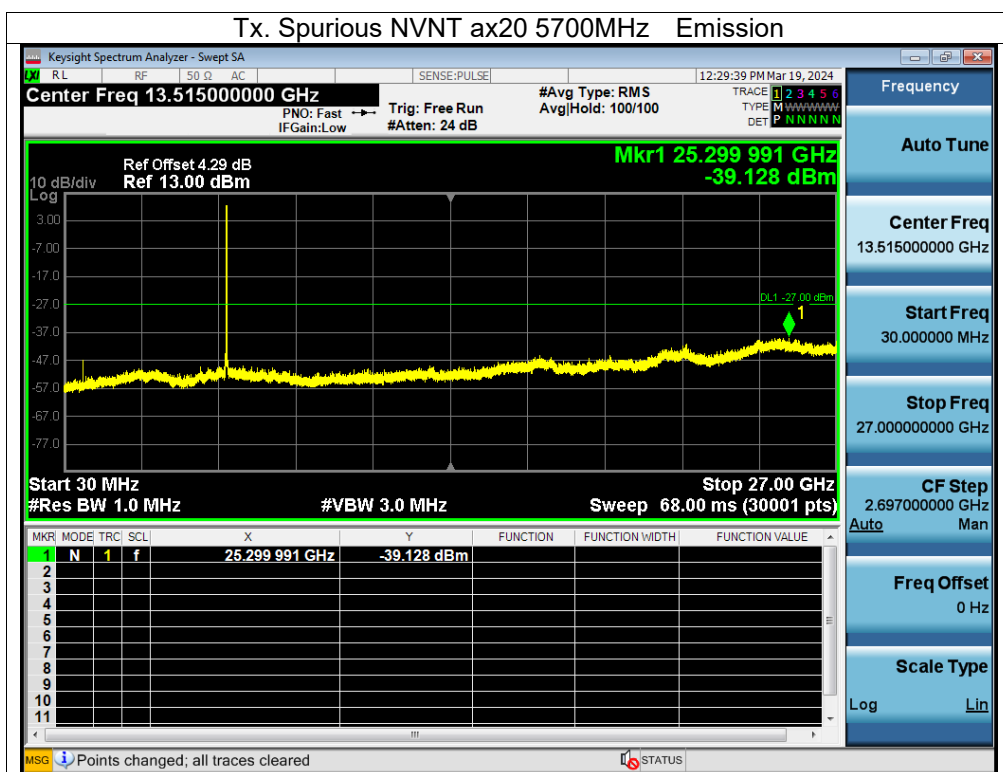



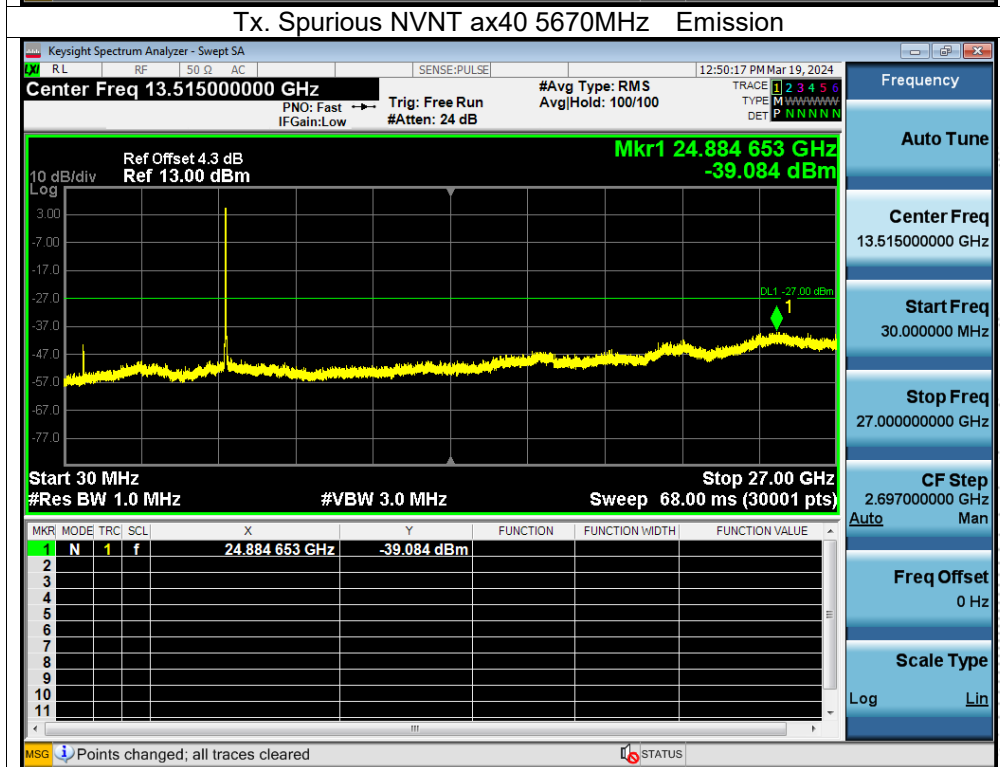



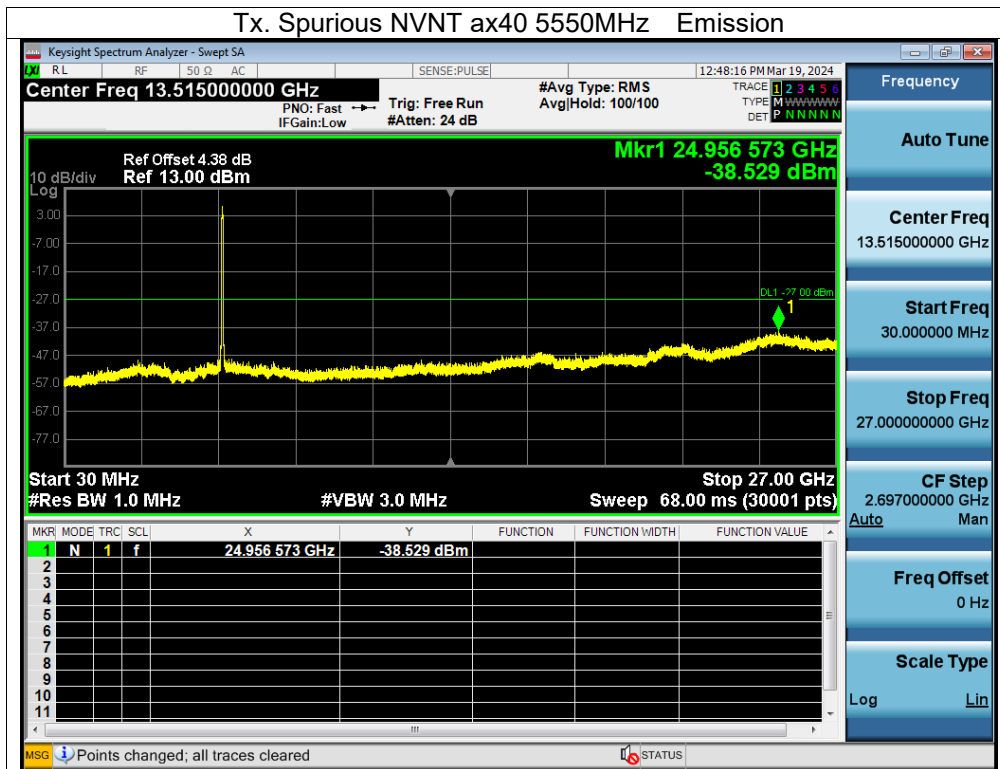



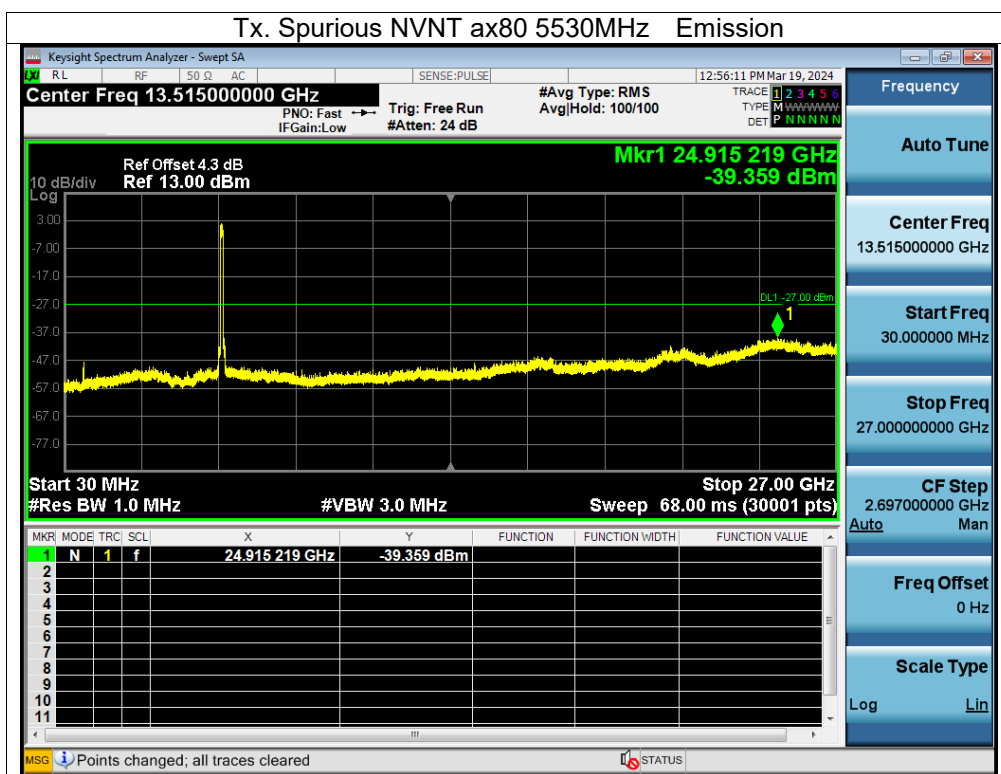




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot. Antenna A: 5745-5825 MHz


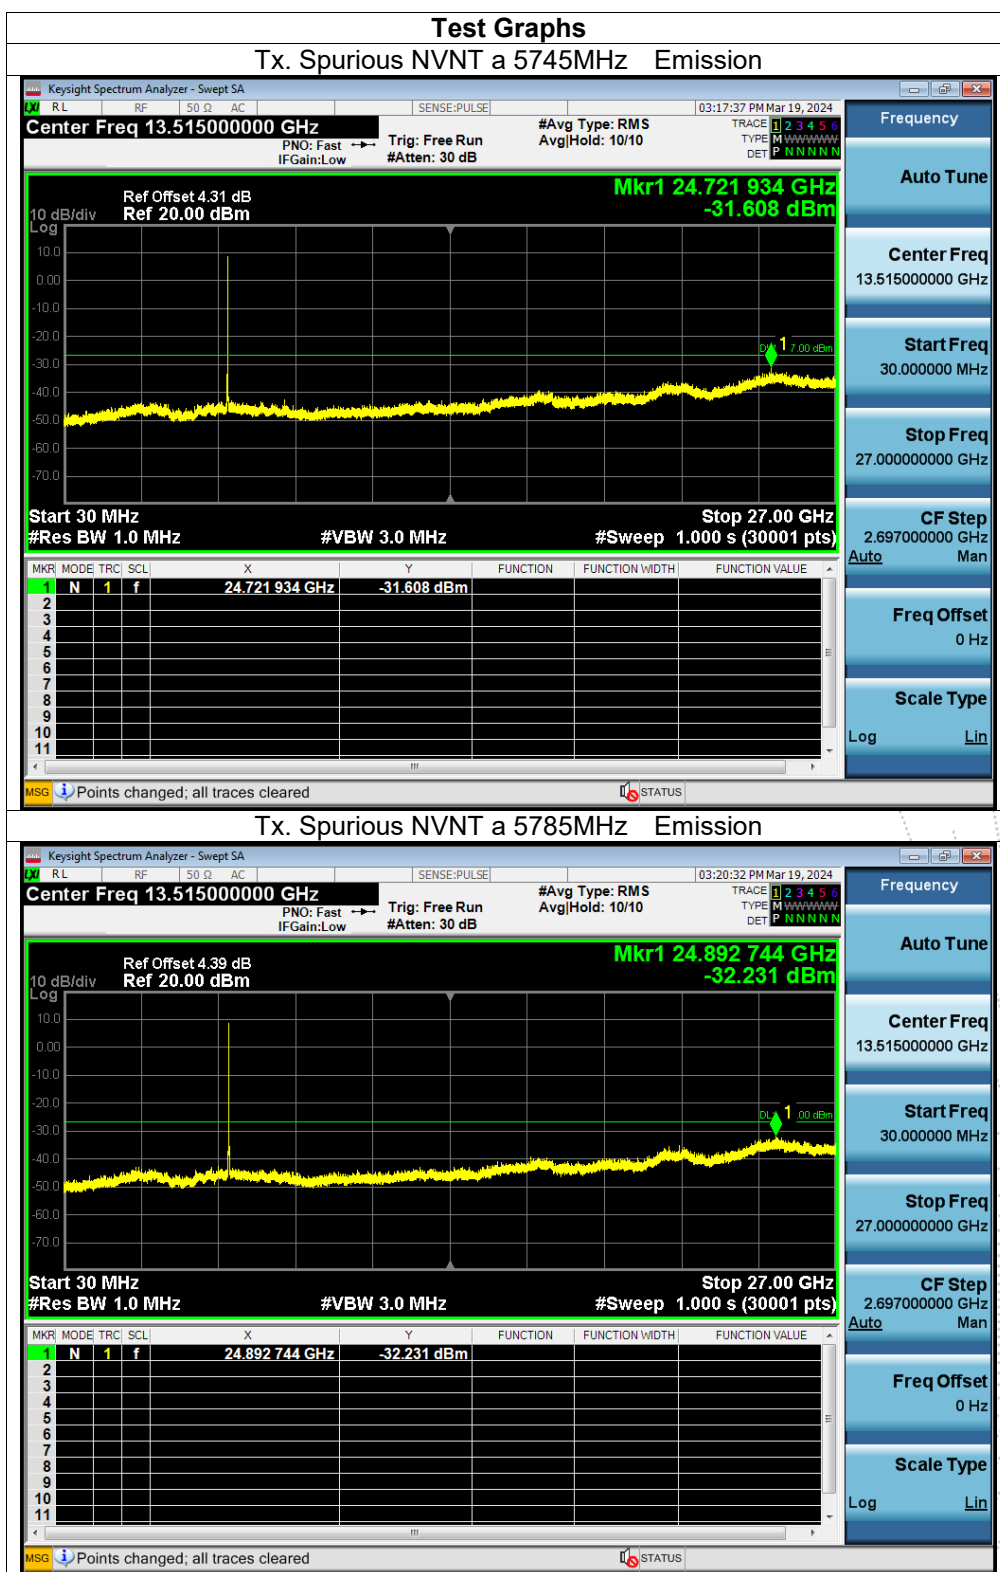


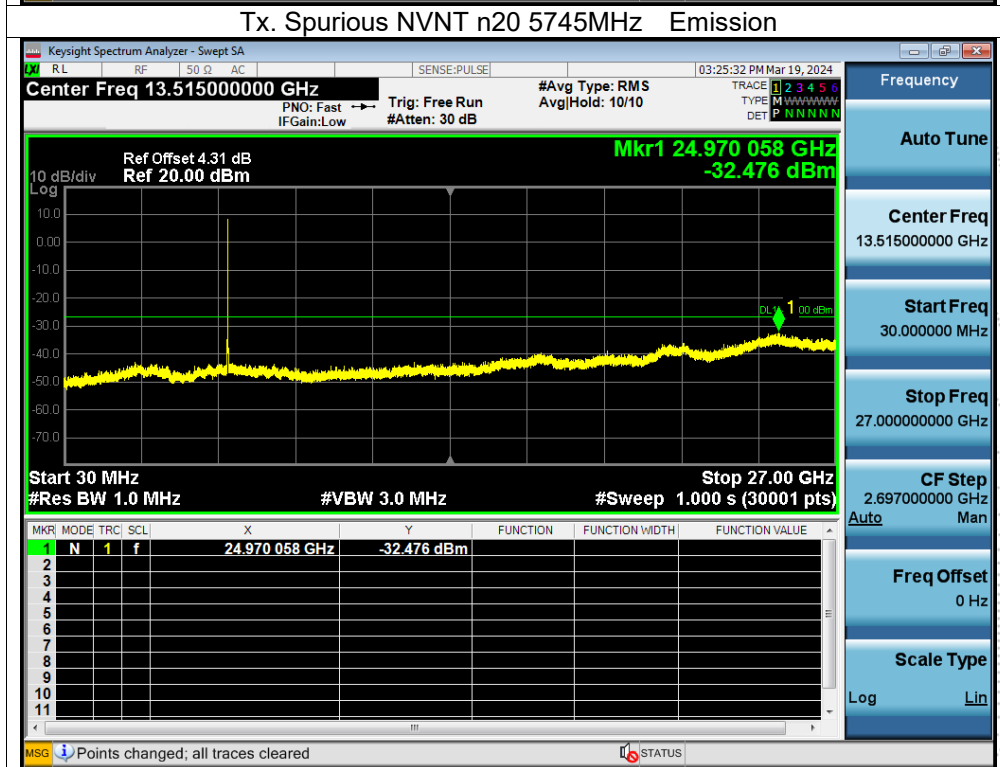
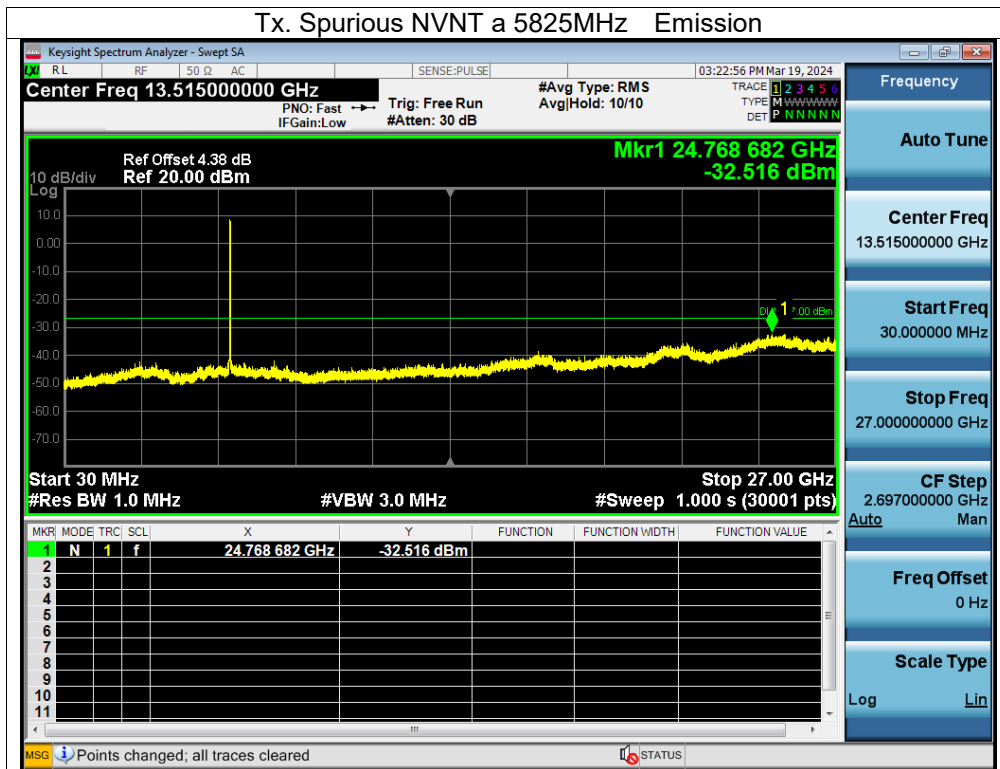


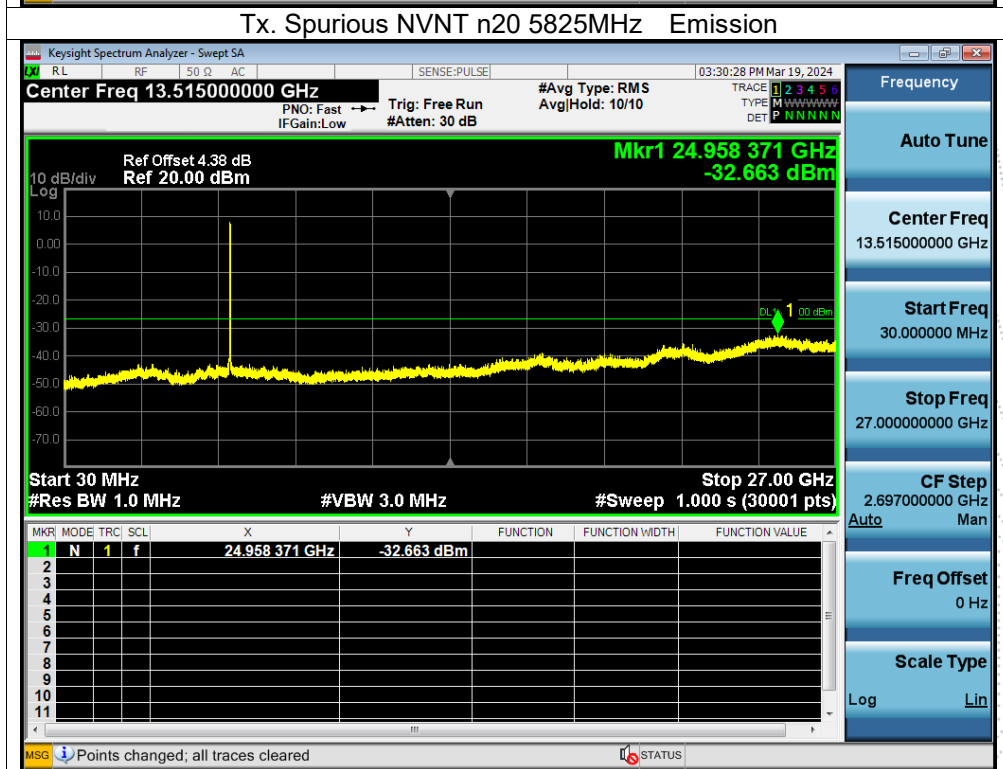
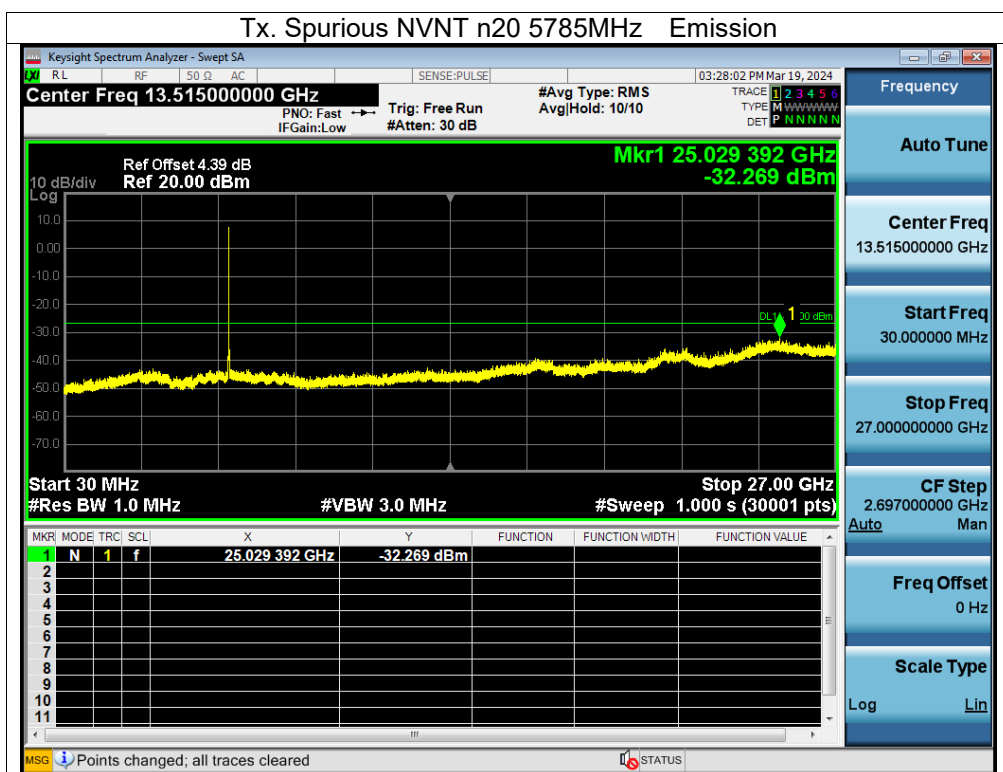


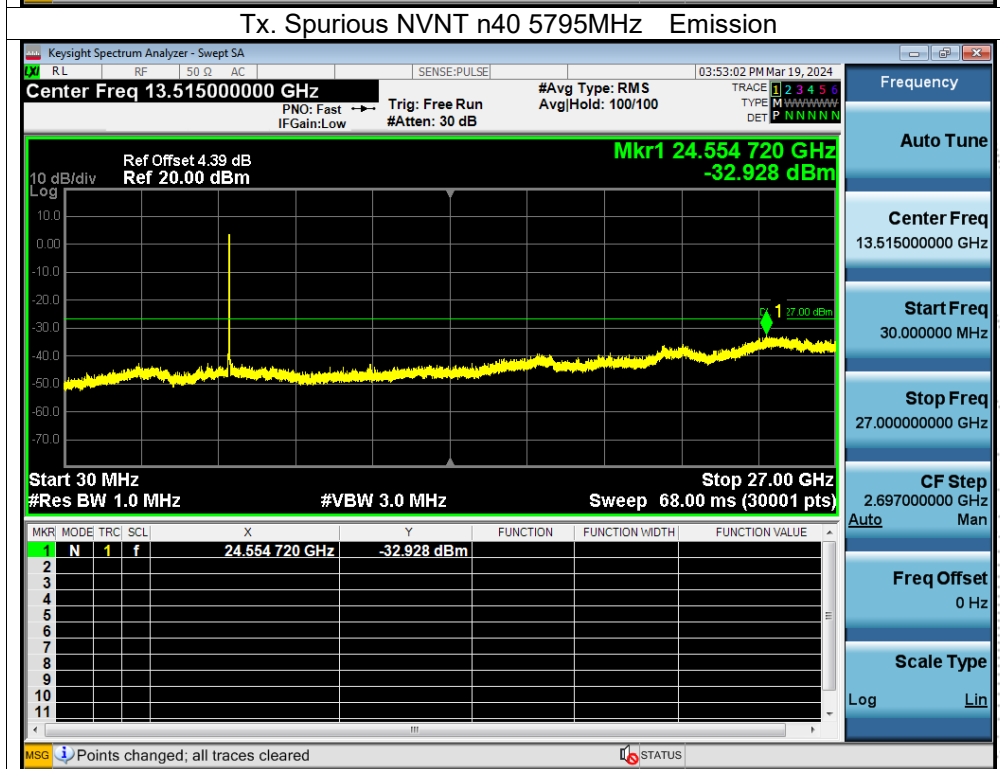
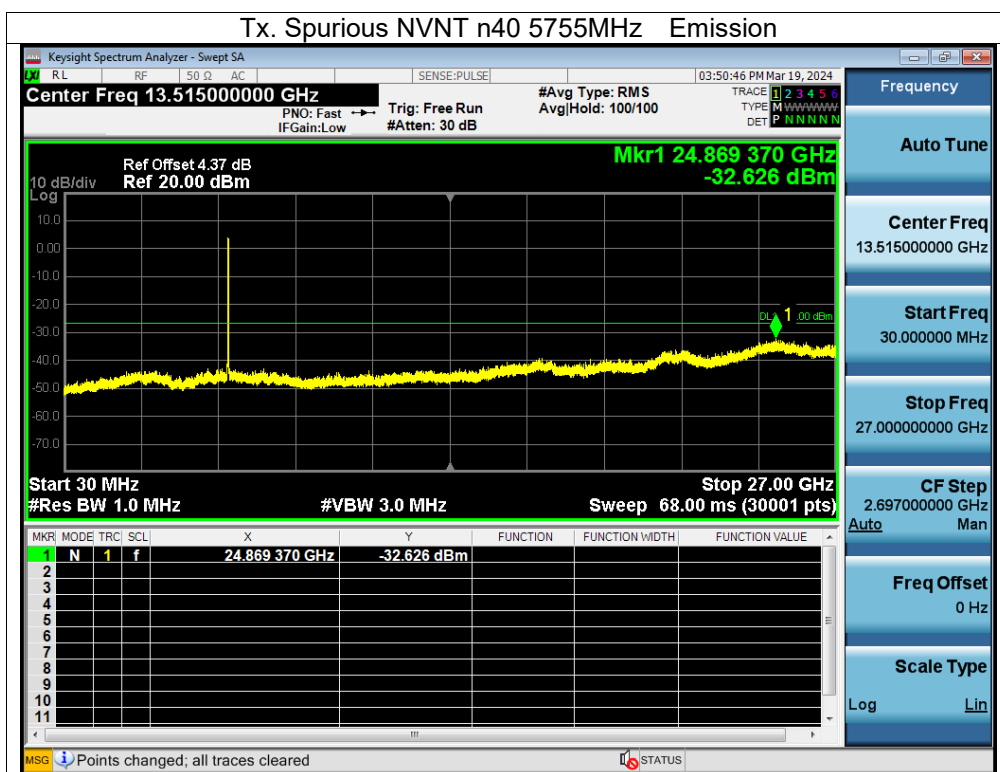


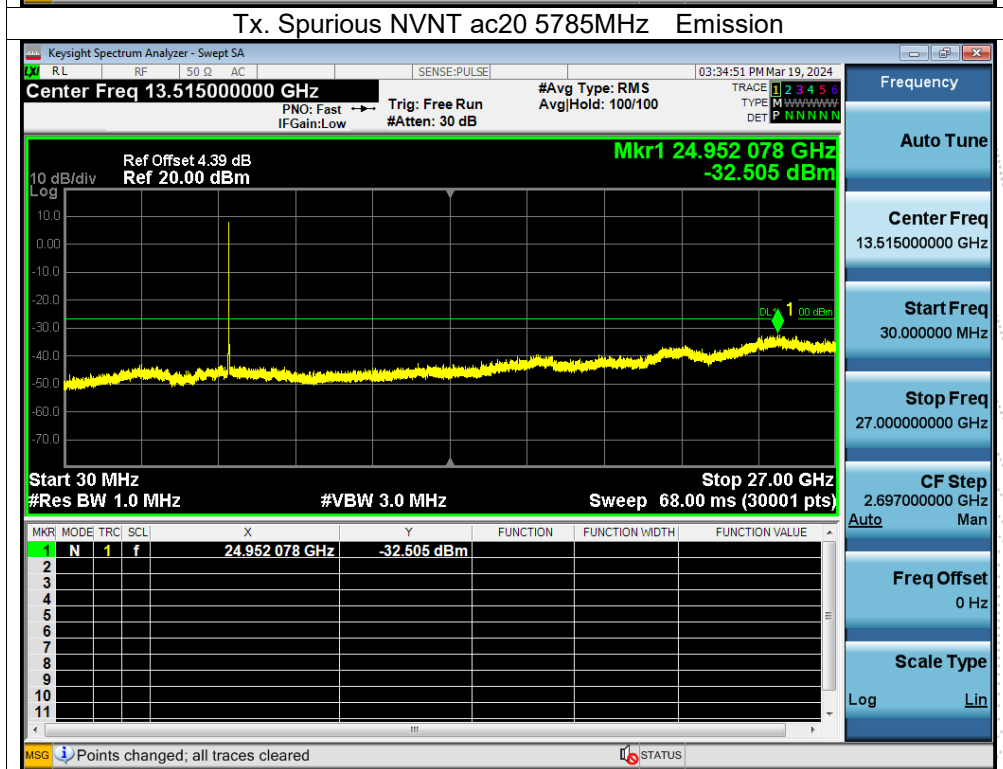
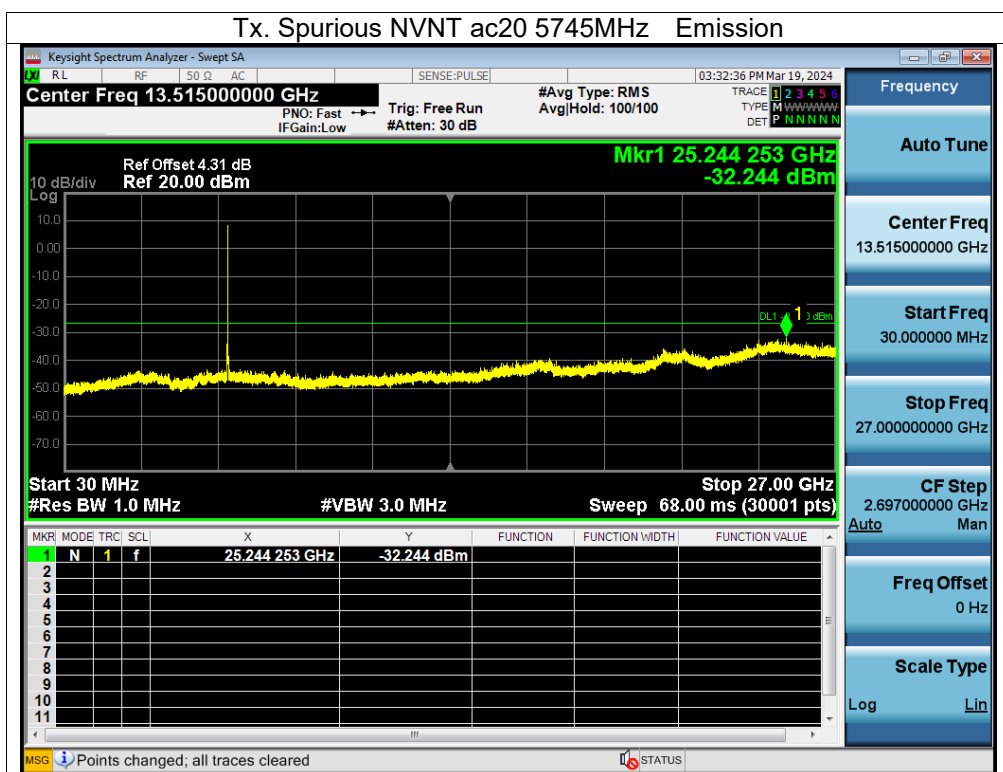


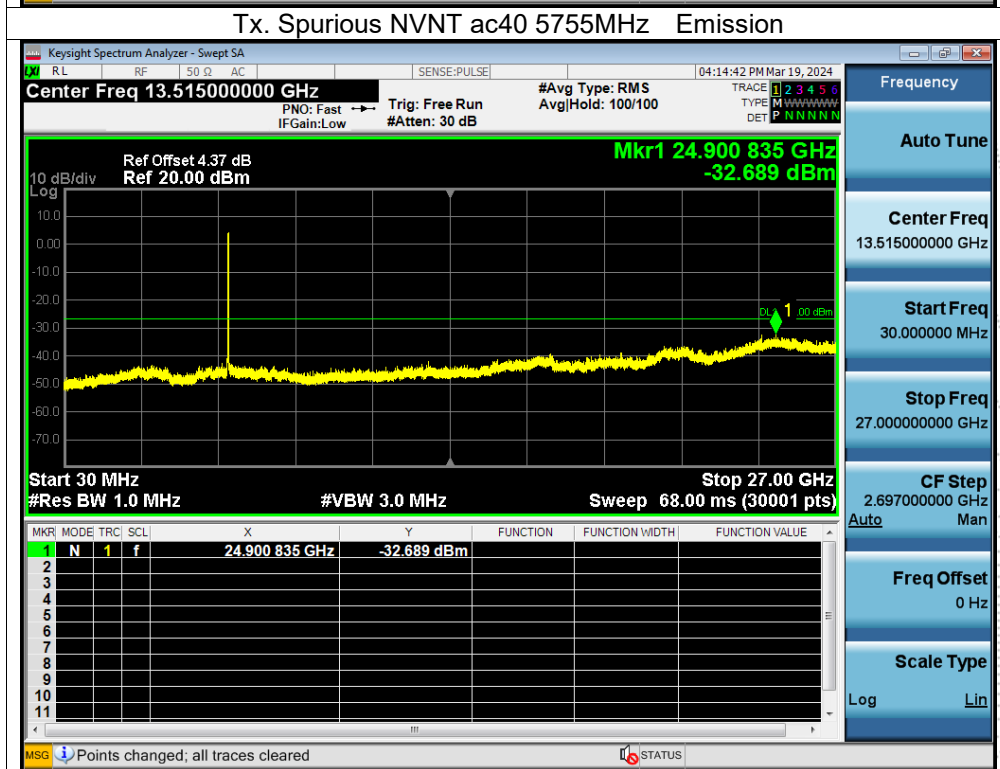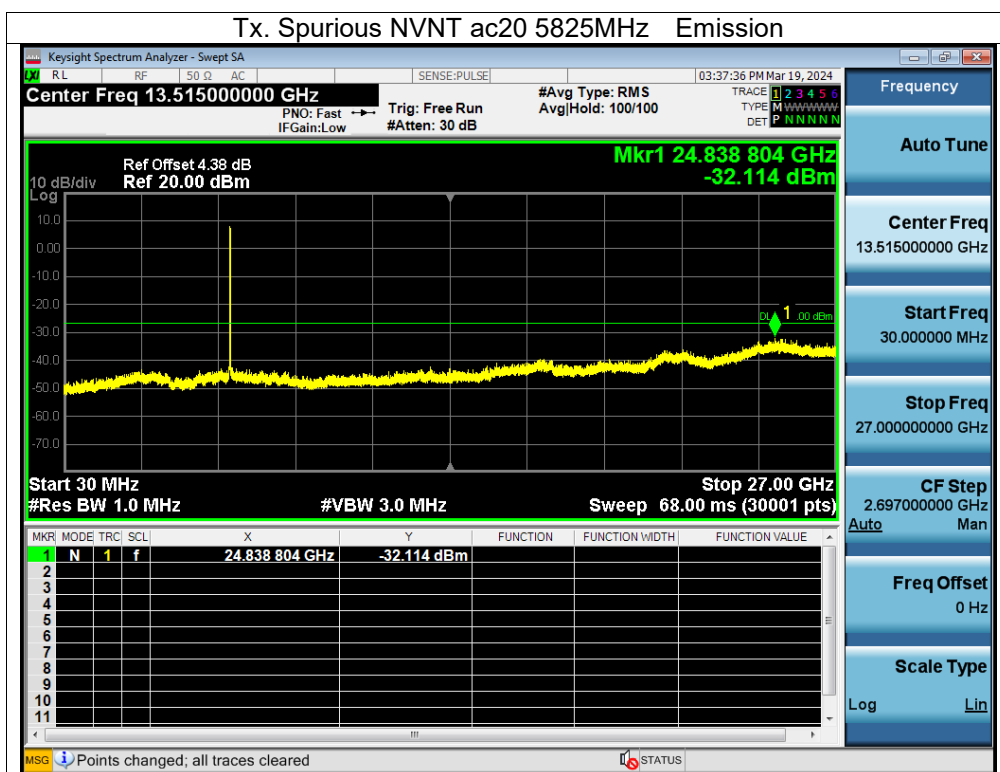

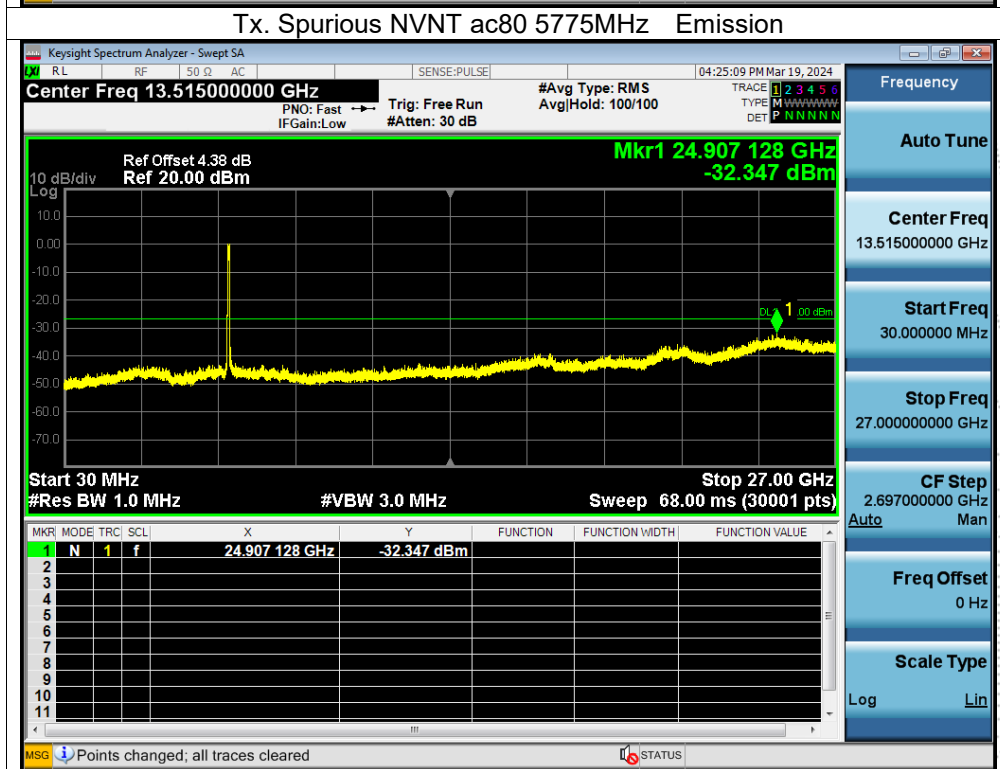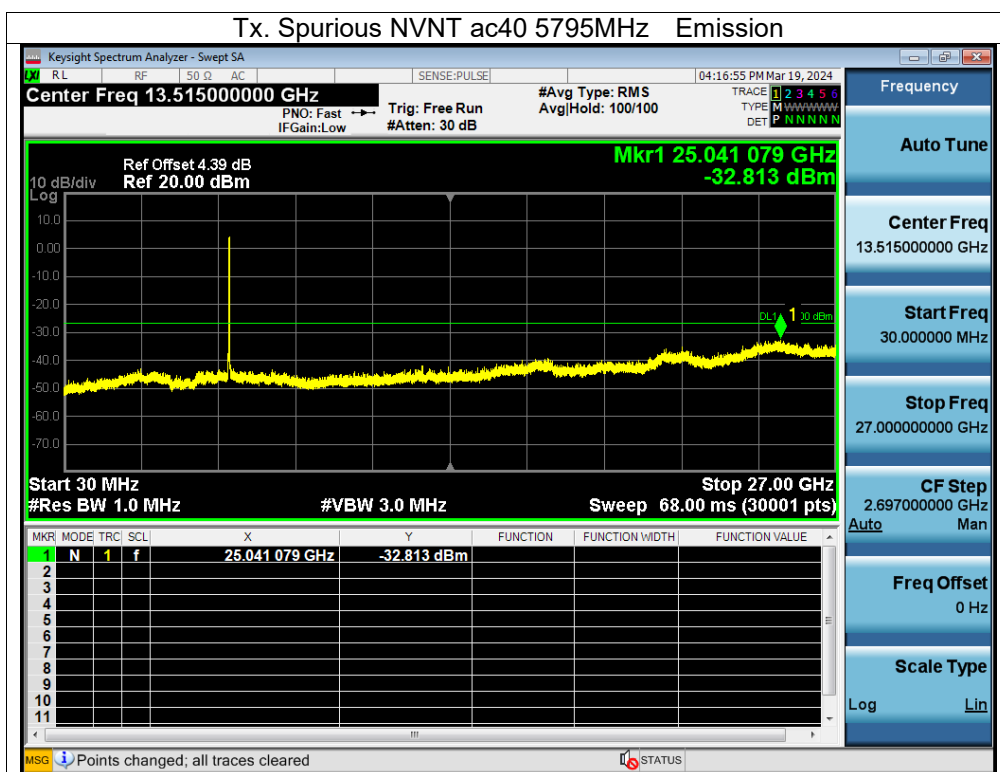

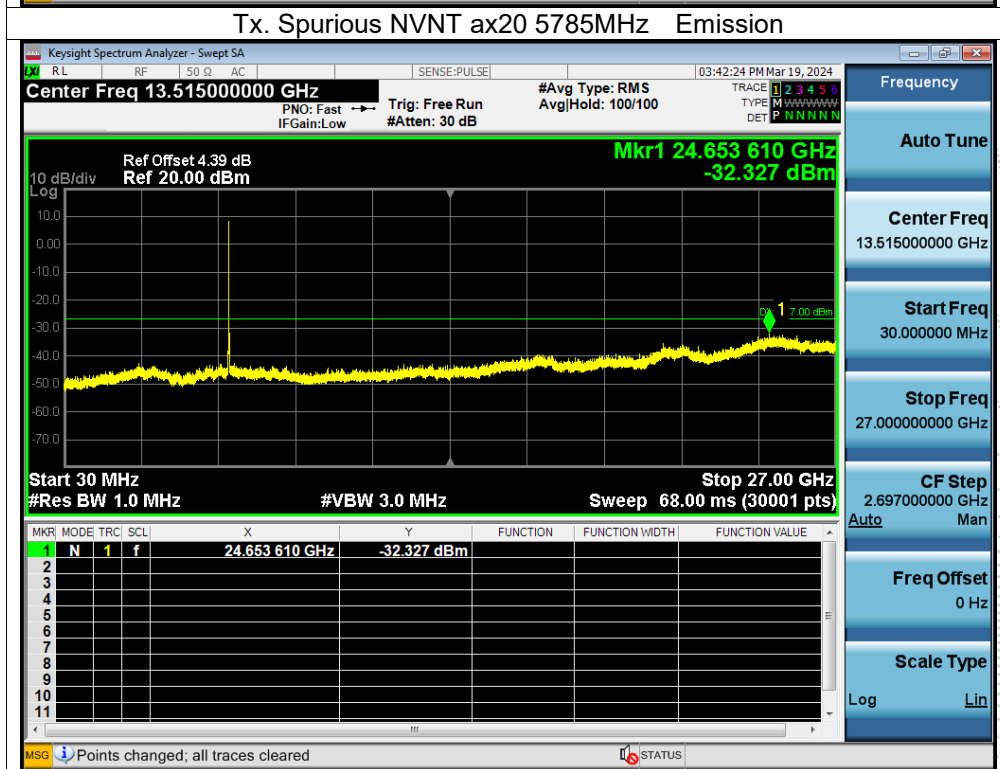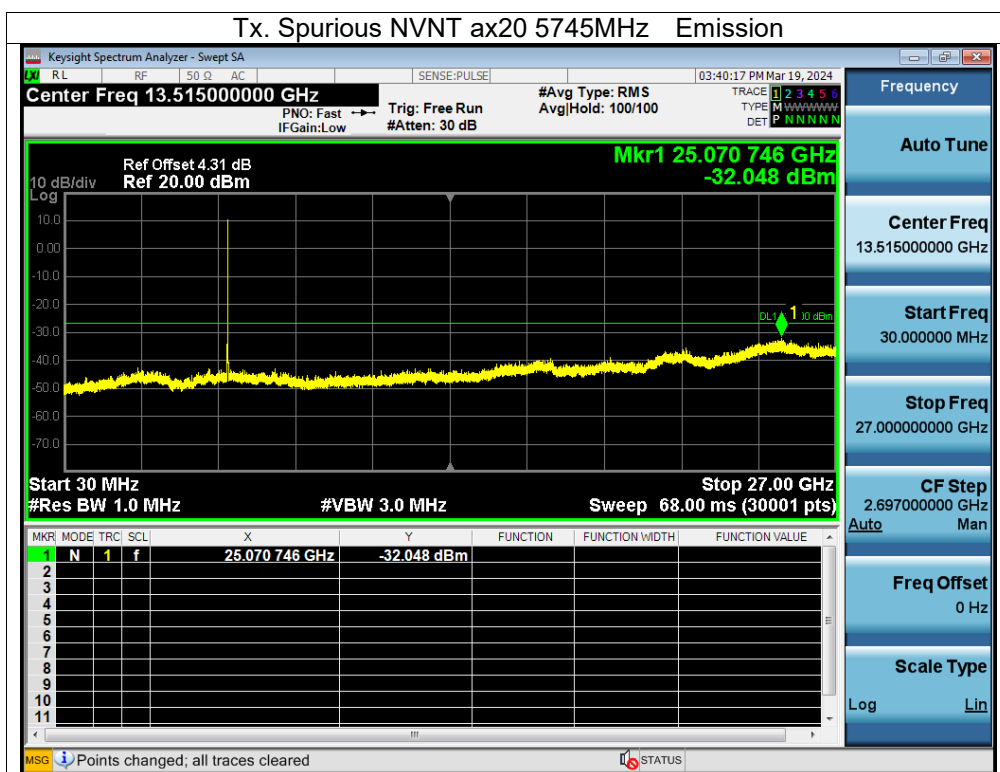

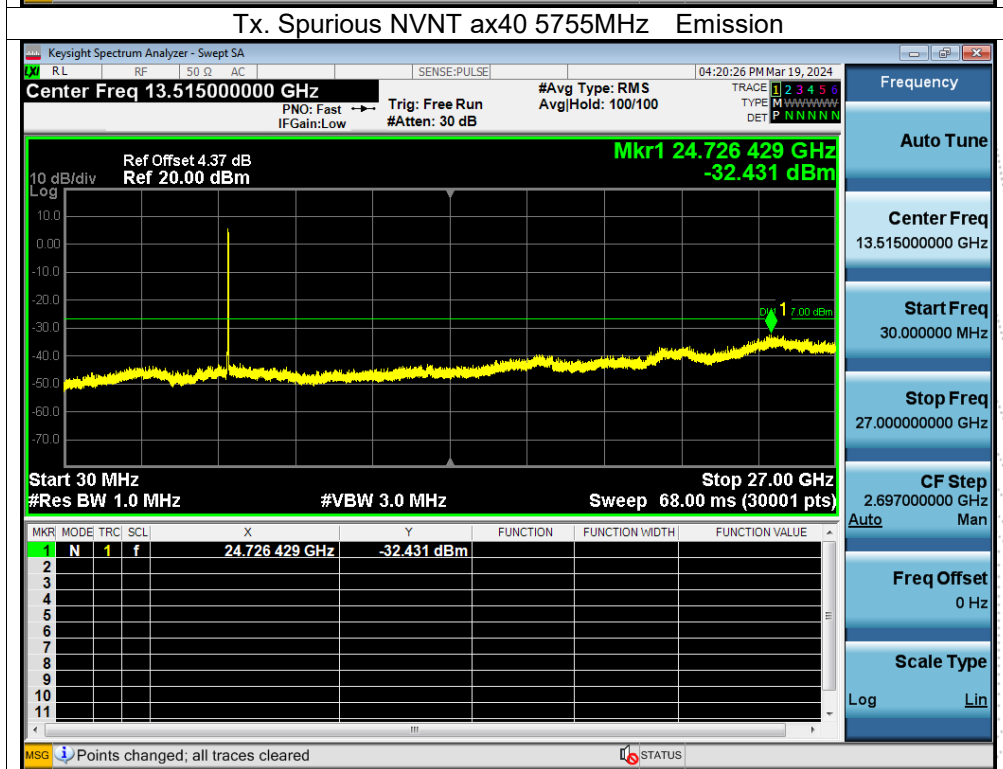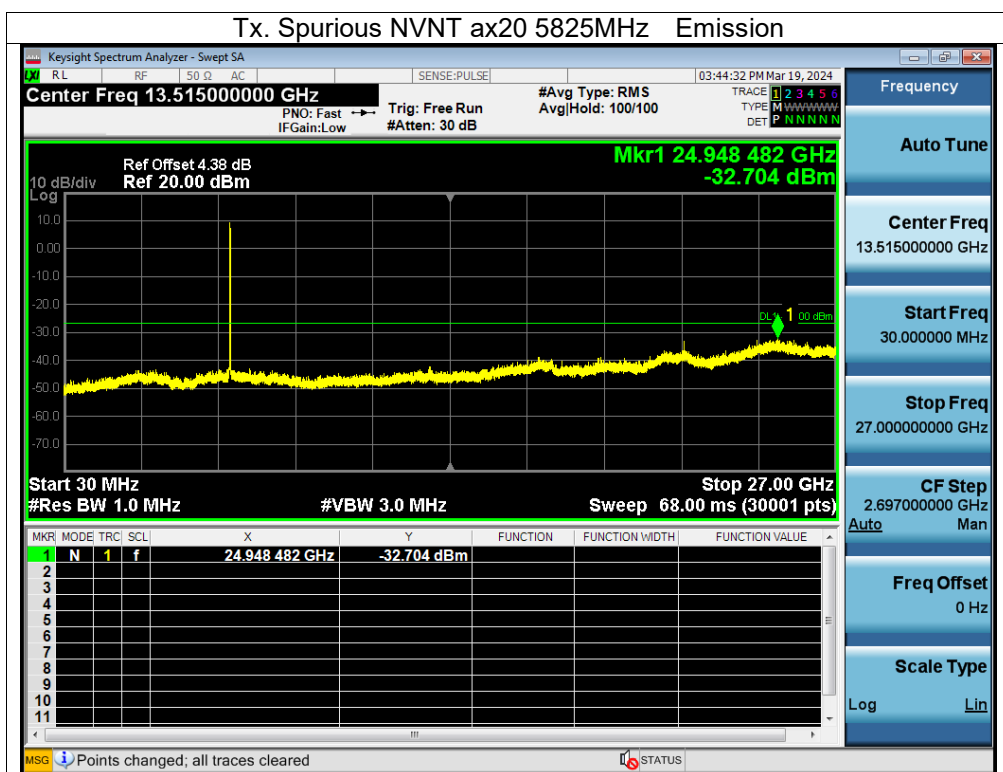

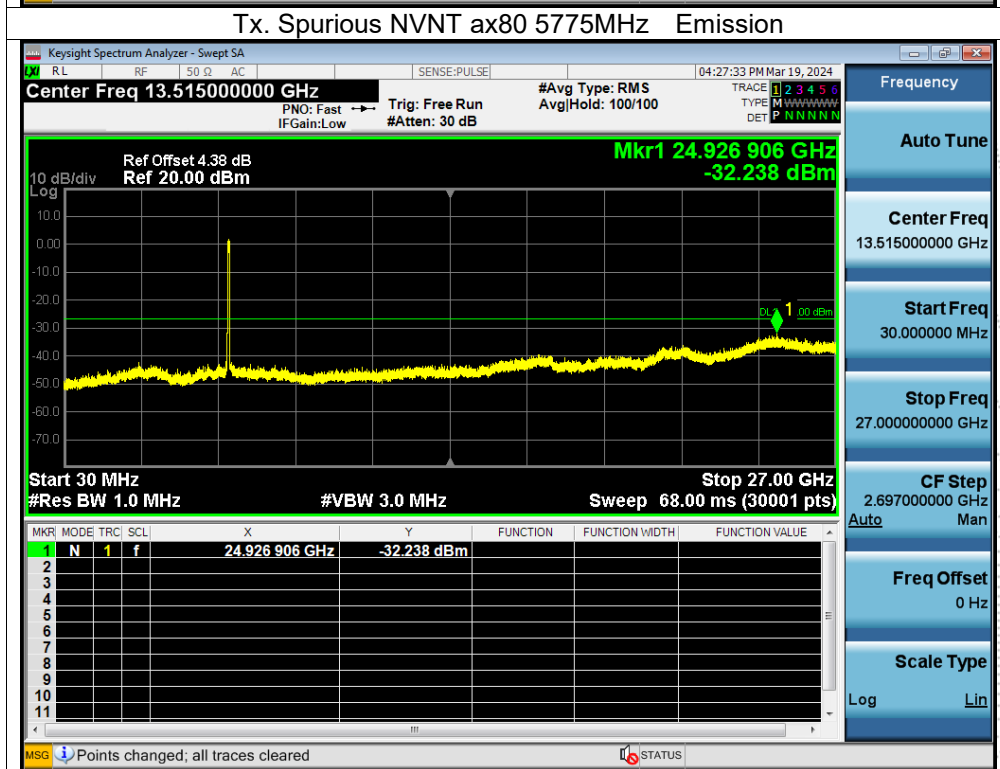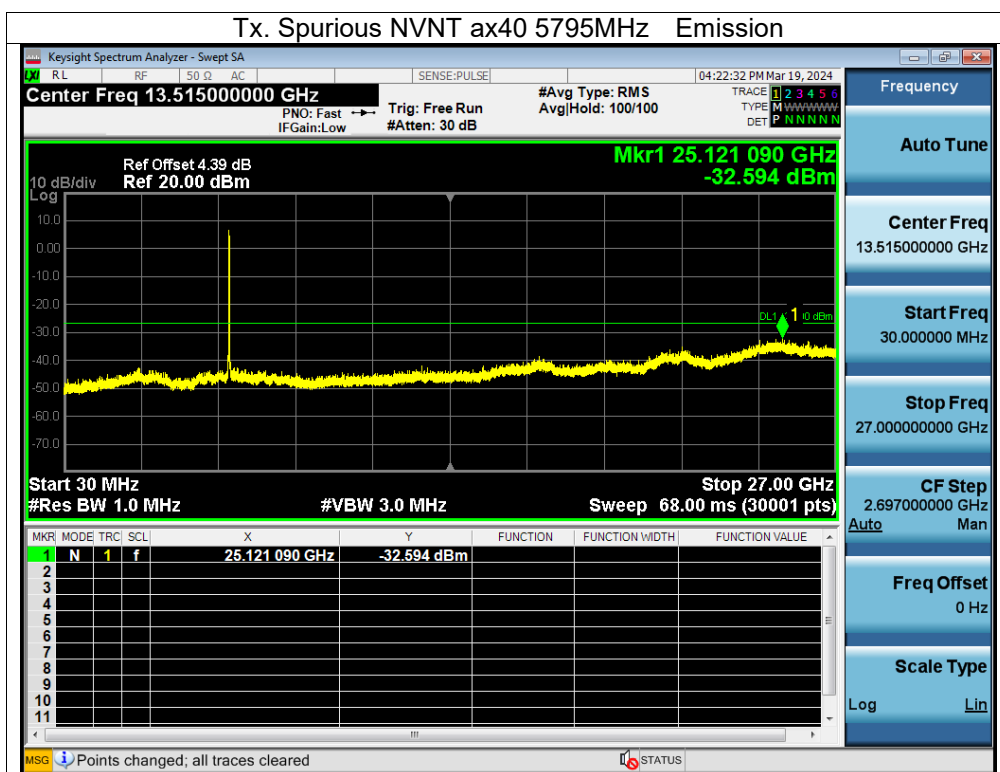

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup



13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0048	5180	0.0048	0.9266
		V max (V)	138.00	5180.0033	5180	0.0033	0.6371
		V min (V)	102.00	5180.0052	5180	0.0052	1.0039
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0043	5180	0.0043	0.8301
		T (°C)	-10	5180.0066	5180	0.0066	1.2741
		T (°C)	0	5180.0055	5180	0.0055	1.0618
		T (°C)	10	5180.0022	5180	0.0022	0.4247
		T (°C)	20	5180.0000	5180	0.0000	0.0000
		T (°C)	30	5180.0066	5180	0.0066	1.2741
		T (°C)	40	5180.0131	5180	0.0131	2.5290
		T (°C)	50	5180.0134	5180	0.0134	2.5869
		T (°C)	60	5180.0048	5180	0.0048	0.9266
		T (°C)	70	5180.0115	5180	0.0115	2.2201
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0060	5200	0.0060	1.1538
		V max (V)	138.00	5200.0121	5200	0.0121	2.3269
		V min (V)	102.00	5200.0015	5200	0.0015	0.2885
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00160	5200	0.00160	0.3077
		T (°C)	-10	5200.01170	5200	0.01170	2.2500
		T (°C)	0	5200.00580	5200	0.00580	1.1154
		T (°C)	10	5200.00050	5200	0.00050	0.0962
		T (°C)	20	5200.00880	5200	0.00880	1.6923
		T (°C)	30	5200.01330	5200	0.01330	2.5577
		T (°C)	40	5200.01250	5200	0.01250	2.4038
		T (°C)	50	5200.00910	5200	0.00910	1.7500
		T (°C)	60	5200.00760	5200	0.00760	1.4615
		T (°C)	70	5200.00810	5200	0.00810	1.5577
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0046	5240	0.0046	0.8779
		V max (V)	138.00	5240.0040	5240	0.0040	0.7634
		V min (V)	102.00	5240.0009	5240	0.0009	0.1718
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0025	5240	0.0025	0.4771
		T (°C)	-10	5240.0007	5240	0.0007	0.1336
		T (°C)	0	5240.0008	5240	0.0008	0.1527
		T (°C)	10	5240.0100	5240	0.0100	1.9084
		T (°C)	20	5240.0014	5240	0.0014	0.2672
		T (°C)	30	5240.0089	5240	0.0089	1.6985
		T (°C)	40	5240.0125	5240	0.0125	2.3855
		T (°C)	50	5240.0020	5240	0.0020	0.3817
		T (°C)	60	5240.0045	5240	0.0045	0.8588
		T (°C)	70	5240.0091	5240	0.0091	1.7366
Limits				5150-5250 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.3G) Mode Frequency U-NII-2A (5260-5320MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5260.0128	5260	0.0128	2.4335
		V max (V)	138.00	5260.0054	5260	0.0054	1.0266
		V min (V)	102.00	5260.0121	5260	0.0121	2.3004
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5260.0050	5260	0.0050	0.9506
		T (°C)	-10	5260.0102	5260	0.0102	1.9392
		T (°C)	0	5260.0056	5260	0.0056	1.0646
		T (°C)	10	5260.0105	5260	0.0105	1.9962
		T (°C)	20	5260.0038	5260	0.0038	0.7224
		T (°C)	30	5260.0123	5260	0.0123	2.3384
		T (°C)	40	5260.0025	5260	0.0025	0.4753
		T (°C)	50	5260.0044	5260	0.0044	0.8365
		T (°C)	60	5260.0024	5260	0.0024	0.4563
		T (°C)	70	5260.0000	5260	0.0000	0.0000
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5280.0044	5280	0.0044	0.8333
		V max (V)	138.00	5280.0010	5280	0.0010	0.1894
		V min (V)	102.00	5280.0050	5280	0.0050	0.9470
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5280.00460	5280	0.00460	0.8712
		T (°C)	-10	5280.00490	5280	0.00490	0.9280
		T (°C)	0	5280.01010	5280	0.01010	1.9129
		T (°C)	10	5280.00770	5280	0.00770	1.4583
		T (°C)	20	5280.00440	5280	0.00440	0.8333
		T (°C)	30	5280.00830	5280	0.00830	1.5720
		T (°C)	40	5280.01040	5280	0.01040	1.9697
		T (°C)	50	5280.01340	5280	0.01340	2.5379
		T (°C)	60	5280.00880	5280	0.00880	1.6667
		T (°C)	70	5280.00630	5280	0.00630	1.1932
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5320.0060	5320	0.0060	1.1278
		V max (V)	138.00	5320.0072	5320	0.0072	1.3534
		V min (V)	102.00	5320.0120	5320	0.0120	2.2556
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5320.0024	5320	0.0024	0.4511
		T (°C)	-10	5320.0080	5320	0.0080	1.5038
		T (°C)	0	5320.0001	5320	0.0001	0.0188
		T (°C)	10	5320.0027	5320	0.0027	0.5075
		T (°C)	20	5320.0066	5320	0.0066	1.2406
		T (°C)	30	5320.0032	5320	0.0032	0.6015
		T (°C)	40	5320.0111	5320	0.0111	2.0865
		T (°C)	50	5320.0046	5320	0.0046	0.8647
		T (°C)	60	5320.0017	5320	0.0017	0.3195
		T (°C)	70	5320.0129	5320	0.0129	2.4248
Limits				5260-5320 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.6G) Mode Frequency U-NII-2C (5500-5700MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5500.0070	5500	0.0070	1.2727
		V max (V)	138.00	5500.0043	5500	0.0043	0.7818
		V min (V)	102.00	5500.0052	5500	0.0052	0.9455
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5500.0101	5500	0.0101	1.8364
		T (°C)	-10	5500.0108	5500	0.0108	1.9636
		T (°C)	0	5500.0067	5500	0.0067	1.2182
		T (°C)	10	5500.0097	5500	0.0097	1.7636
		T (°C)	20	5500.0053	5500	0.0053	0.9636
		T (°C)	30	5500.0023	5500	0.0023	0.4182
		T (°C)	40	5500.0047	5500	0.0047	0.8545
		T (°C)	50	5500.0105	5500	0.0105	1.9091
		T (°C)	60	5500.0028	5500	0.0028	0.5091
		T (°C)	70	5500.0029	5500	0.0029	0.5273
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5580.0056	5580	0.0056	1.0036
		V max (V)	138.00	5580.0134	5580	0.0134	2.4014
		V min (V)	102.00	5580.0099	5580	0.0099	1.7742
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5580.00240	5580	0.00240	0.4301
		T (°C)	-10	5580.01120	5580	0.01120	2.0072
		T (°C)	0	5580.00760	5580	0.00760	1.3620
		T (°C)	10	5580.01100	5580	0.01100	1.9713
		T (°C)	20	5580.00800	5580	0.00800	1.4337
		T (°C)	30	5580.00590	5580	0.00590	1.0573
		T (°C)	40	5580.01040	5580	0.01040	1.8638
		T (°C)	50	5580.01340	5580	0.01340	2.4014
		T (°C)	60	5580.00720	5580	0.00720	1.2903
		T (°C)	70	5580.00170	5580	0.00170	0.3047
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5700.0015	5700	0.0015	0.2632
		V max (V)	138.00	5700.0075	5700	0.0075	1.3158
		V min (V)	102.00	5700.0039	5700	0.0039	0.6842
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5700.0045	5700	0.0045	0.7895
		T (°C)	-10	5700.0121	5700	0.0121	2.1228
		T (°C)	0	5700.0010	5700	0.0010	0.1754
		T (°C)	10	5700.0038	5700	0.0038	0.6667
		T (°C)	20	5700.0005	5700	0.0005	0.0877
		T (°C)	30	5700.0100	5700	0.0100	1.7544
		T (°C)	40	5700.0006	5700	0.0006	0.1053
		T (°C)	50	5700.0048	5700	0.0048	0.8421
		T (°C)	60	5700.0107	5700	0.0107	1.8772
		T (°C)	70	5700.0079	5700	0.0079	1.3860
Limits				5725-5850 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.01040	5745	0.01040	1.8103
		V max (V)	138.00	5745.00850	5745	0.00850	1.4795
		V min (V)	102.00	5745.00580	5745	0.00580	1.0096
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.00080	5745	0.00080	0.1393
		T (°C)	-10	5745.00050	5745	0.00050	0.0870
		T (°C)	0	5745.01060	5745	0.01060	1.8451
		T (°C)	10	5745.00140	5745	0.00140	0.2437
		T (°C)	20	5745.01050	5745	0.01050	1.8277
		T (°C)	30	5745.01350	5745	0.01350	2.3499
		T (°C)	40	5745.00610	5745	0.00610	1.0618
		T (°C)	50	5745.00780	5745	0.00780	1.3577
		T (°C)	60	5745.00450	5745	0.00450	0.7833
		T (°C)	70	5745.01330	5745	0.01330	2.3151
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.00840	5785	0.00840	1.4520
		V max (V)	138.00	5785.00120	5785	0.00120	0.2074
		V min (V)	102.00	5785.01080	5785	0.01080	1.8669
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.00310	5785	0.00310	0.5359
		T (°C)	-10	5785.00890	5785	0.00890	1.5385
		T (°C)	0	5785.01200	5785	0.01200	2.0743
		T (°C)	10	5785.00050	5785	0.00050	0.0864
		T (°C)	20	5785.01060	5785	0.01060	1.8323
		T (°C)	30	5785.00340	5785	0.00340	0.5877
		T (°C)	40	5785.01170	5785	0.01170	2.0225
		T (°C)	50	5785.01020	5785	0.01020	1.7632
		T (°C)	60	5785.00280	5785	0.00280	0.4840
		T (°C)	70	5785.00530	5785	0.00530	0.9162
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5825.00500	5825	0.00500	0.8584
		V max (V)	138.00	5825.00010	5825	0.00010	0.0172
		V min (V)	102.00	5825.01270	5825	0.01270	2.1803
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.00520	5825	0.00520	0.8927
		T (°C)	-10	5825.01300	5825	0.01300	2.2318
		T (°C)	0	5825.01290	5825	0.01290	2.2146
		T (°C)	10	5825.00040	5825	0.00040	0.0687
		T (°C)	20	5825.01100	5825	0.01100	1.8884
		T (°C)	30	5825.01140	5825	0.01140	1.9571
		T (°C)	40	5825.00840	5825	0.00840	1.4421
		T (°C)	50	5825.00810	5825	0.00810	1.3906
		T (°C)	60	5825.00600	5825	0.00600	1.0300
		T (°C)	70	5825.00730	5825	0.00730	1.2532
Limits				5725-5850 MHz			
Result				Complies			

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result



Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	a	5200	100	0	0
NVNT	a	5240	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n20	5200	100	0	0
NVNT	n20	5240	100	0	0
NVNT	n40	5190	100	0	0
NVNT	n40	5230	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac20	5200	100	0	0
NVNT	ac20	5240	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac40	5230	100	0	0
NVNT	ac80	5210	100	0	0
NVNT	ax20	5180	100	0	0
NVNT	ax20	5200	100	0	0
NVNT	ax20	5240	100	0	0
NVNT	ax40	5190	100	0	0
NVNT	ax40	5230	100	0	0
NVNT	ax80	5210	100	0	0



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.


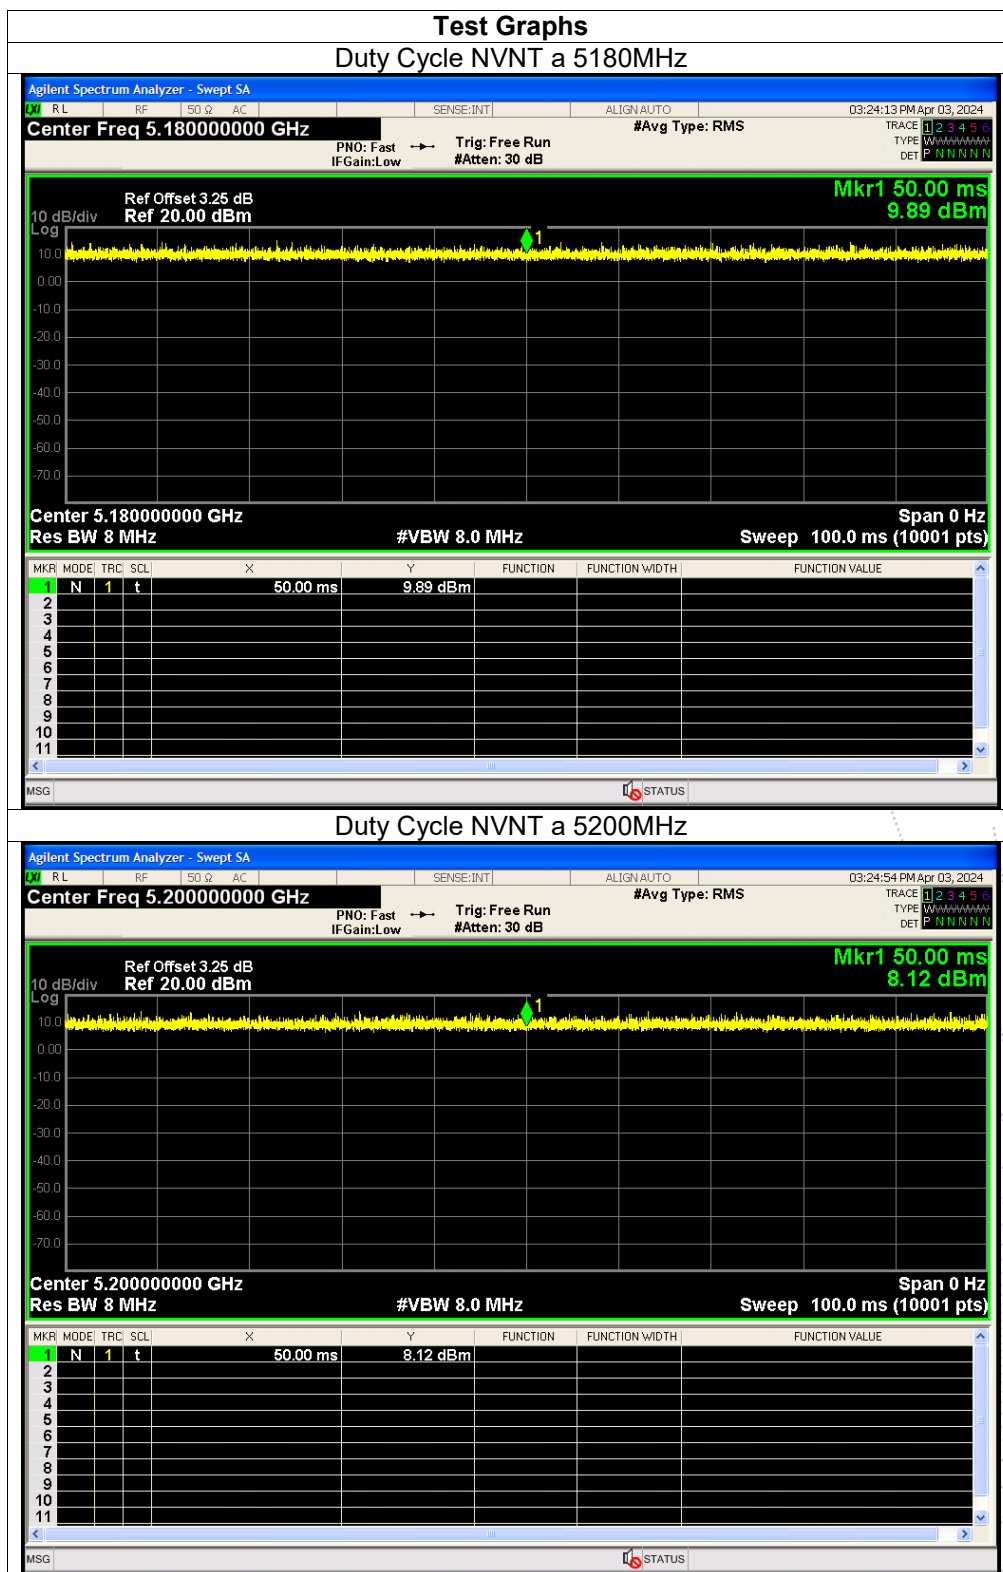


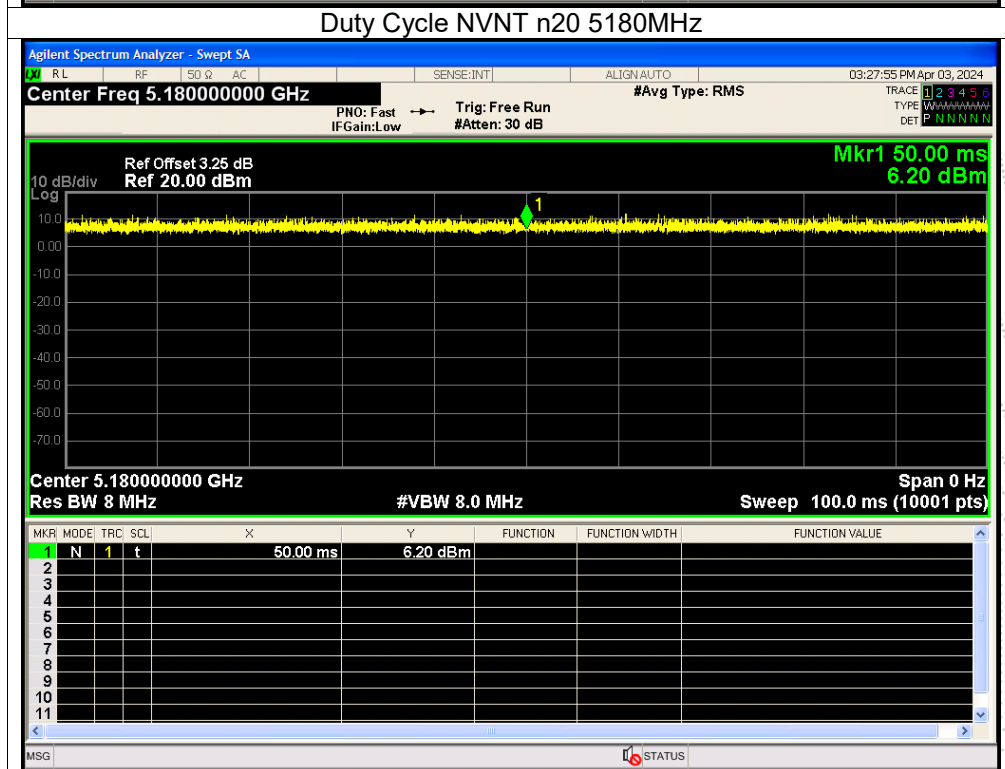
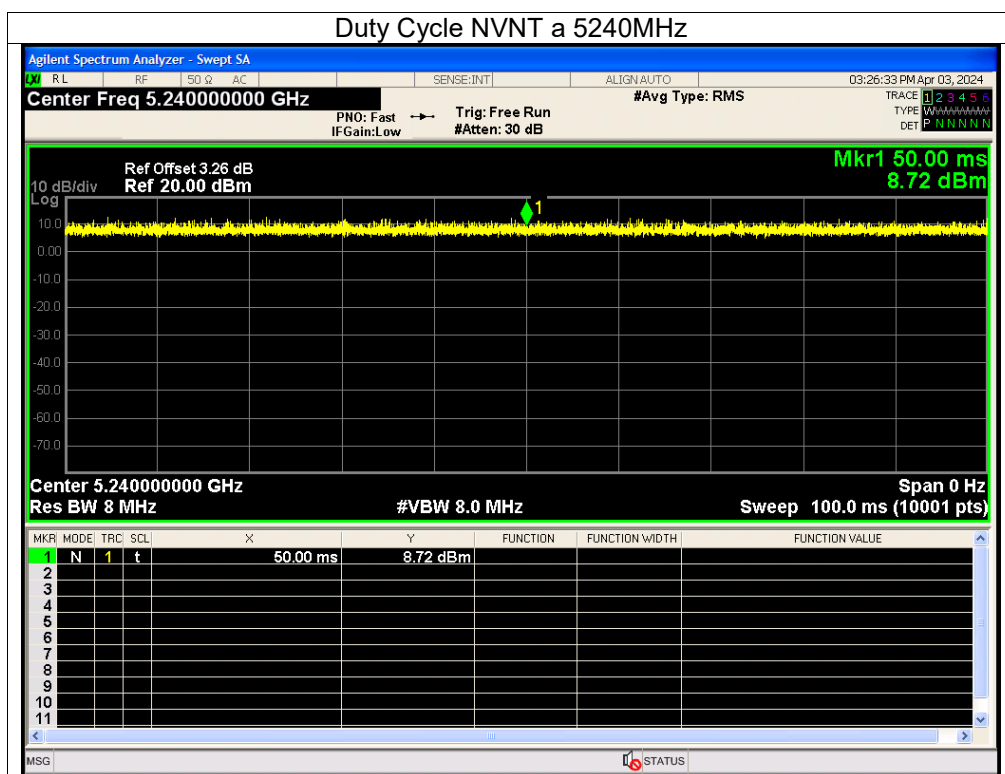


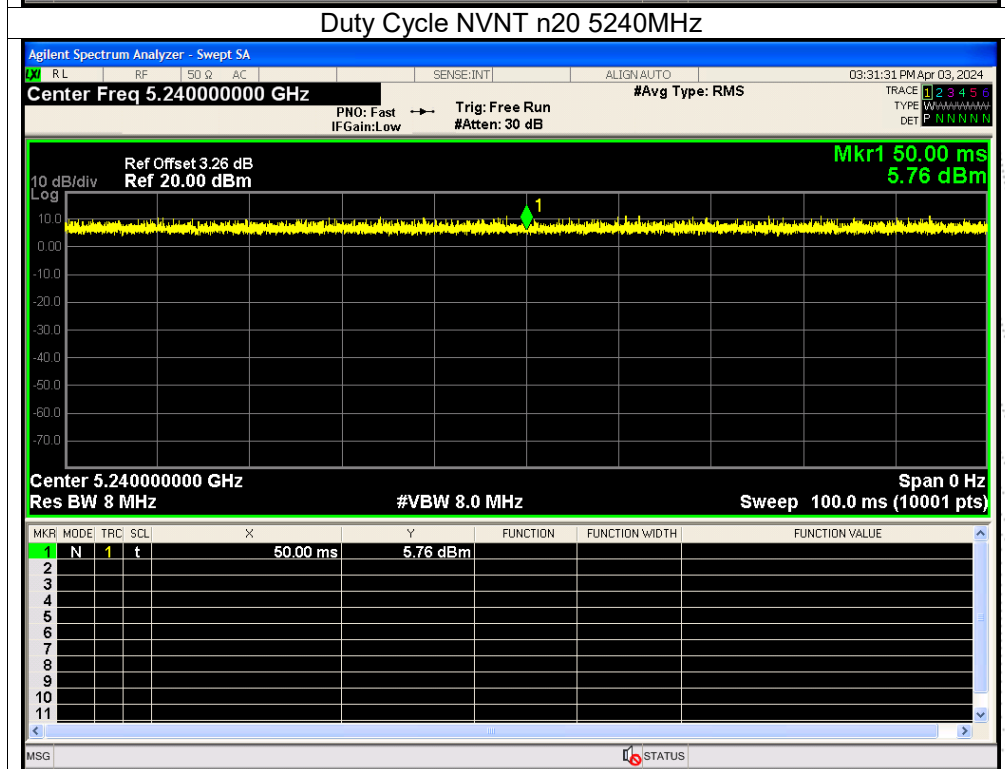
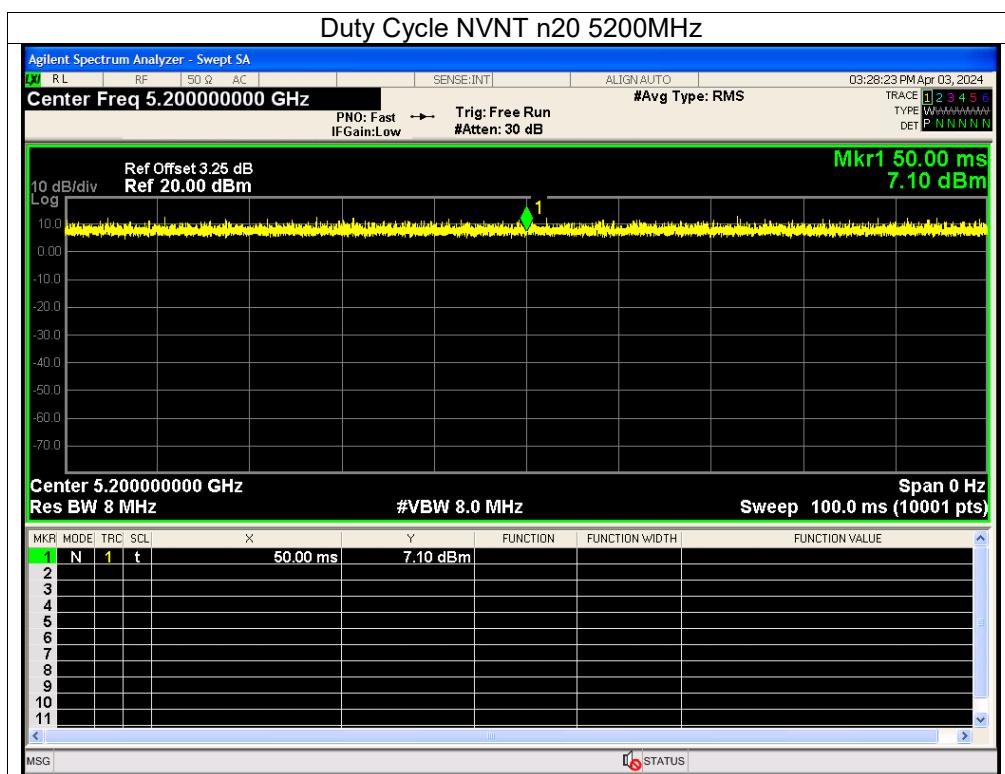


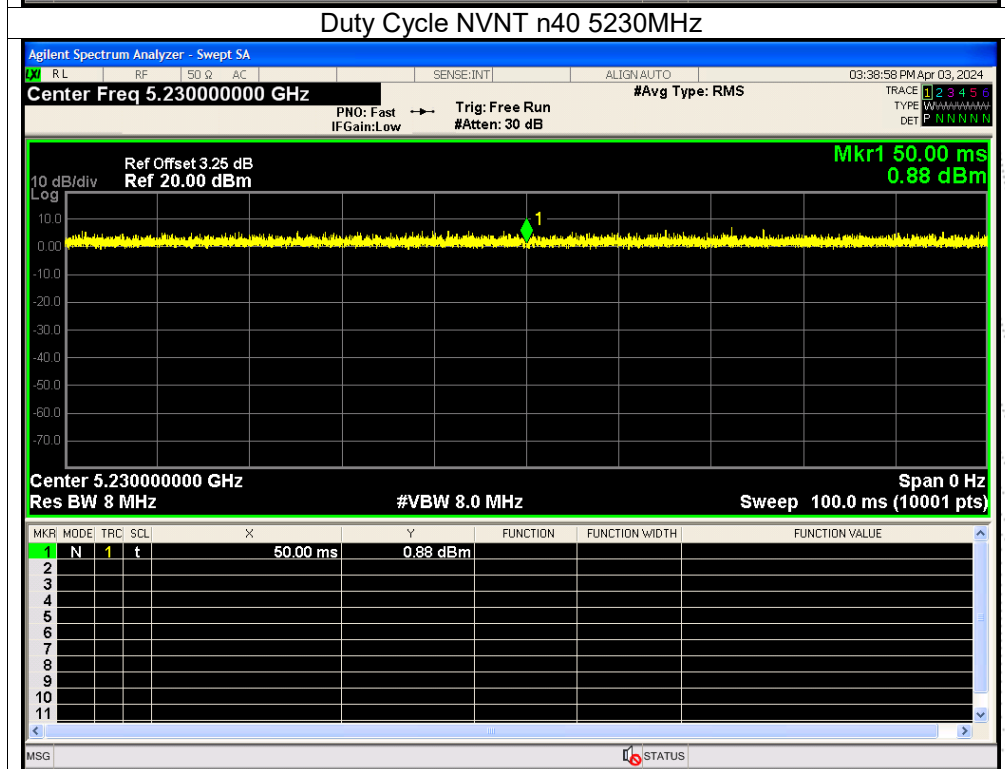
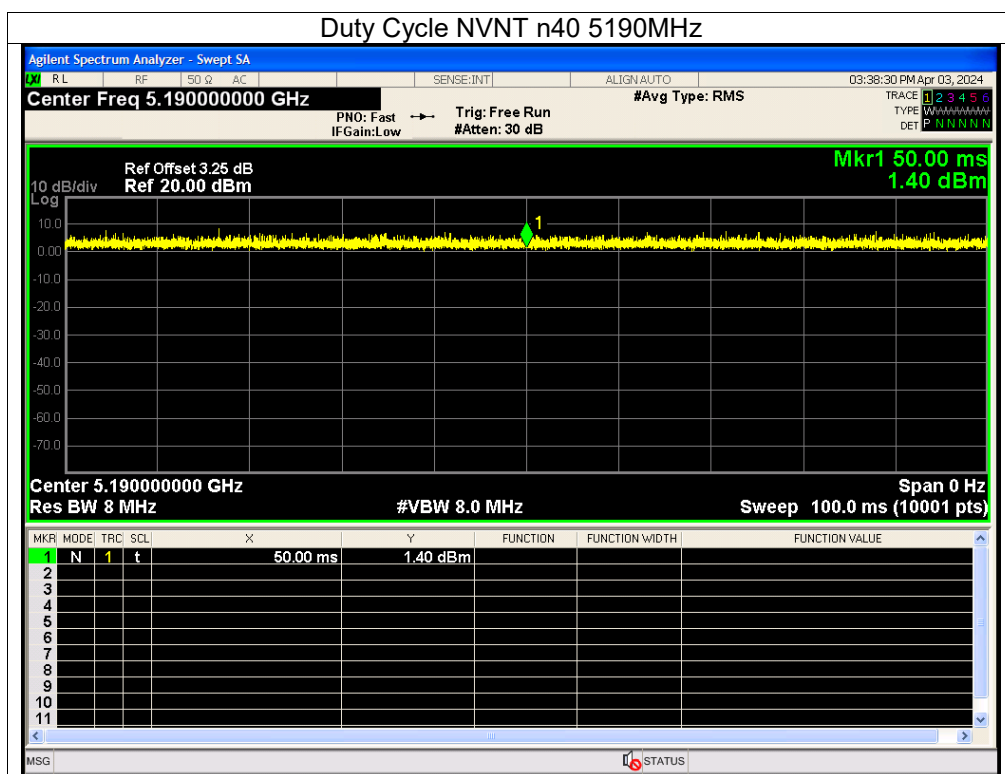


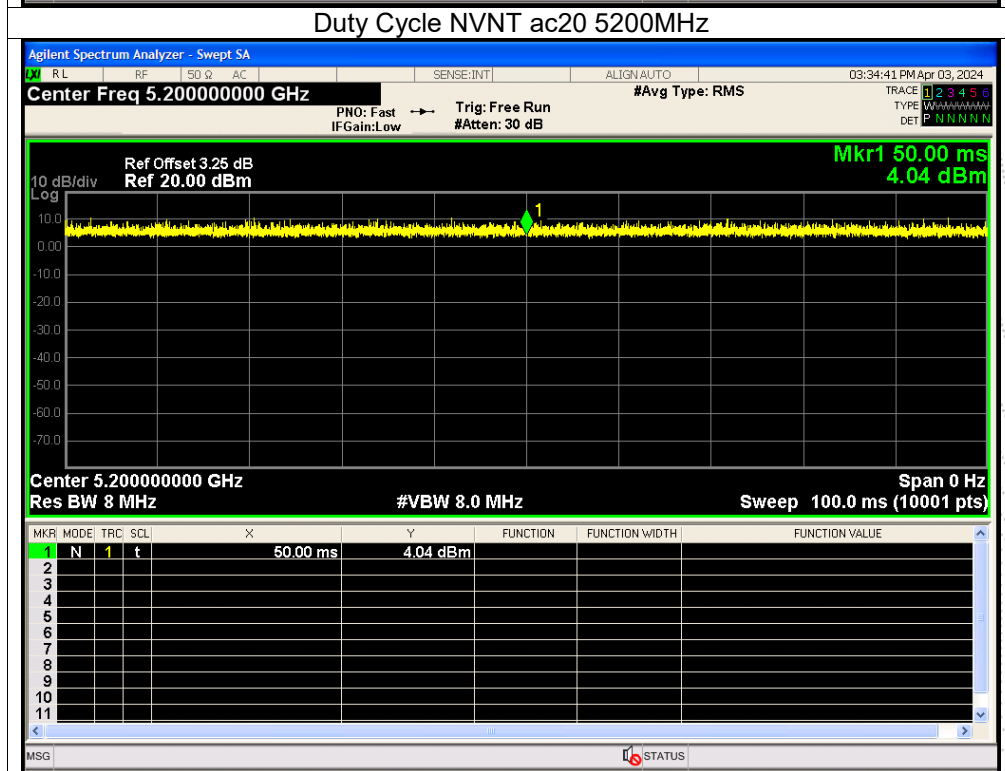
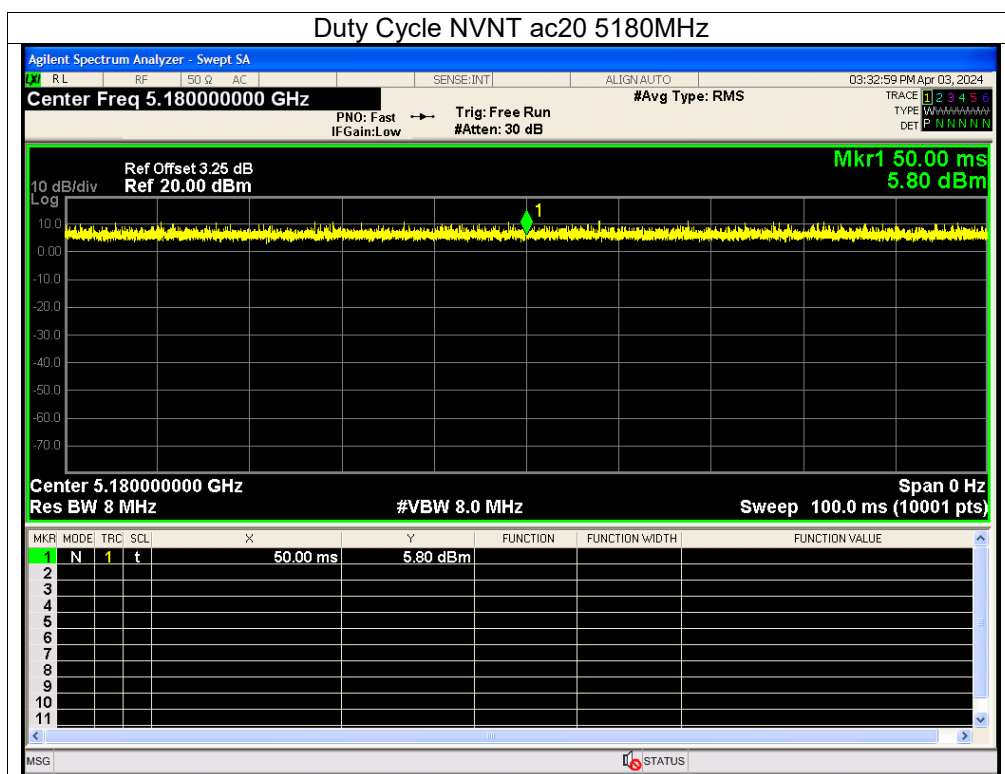


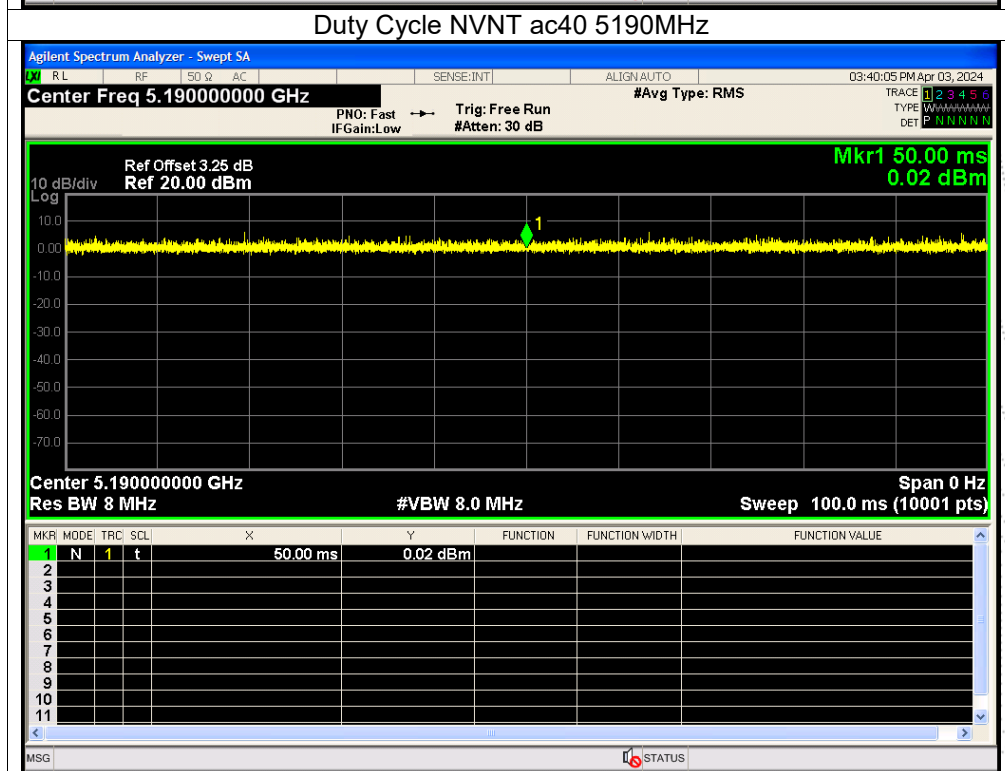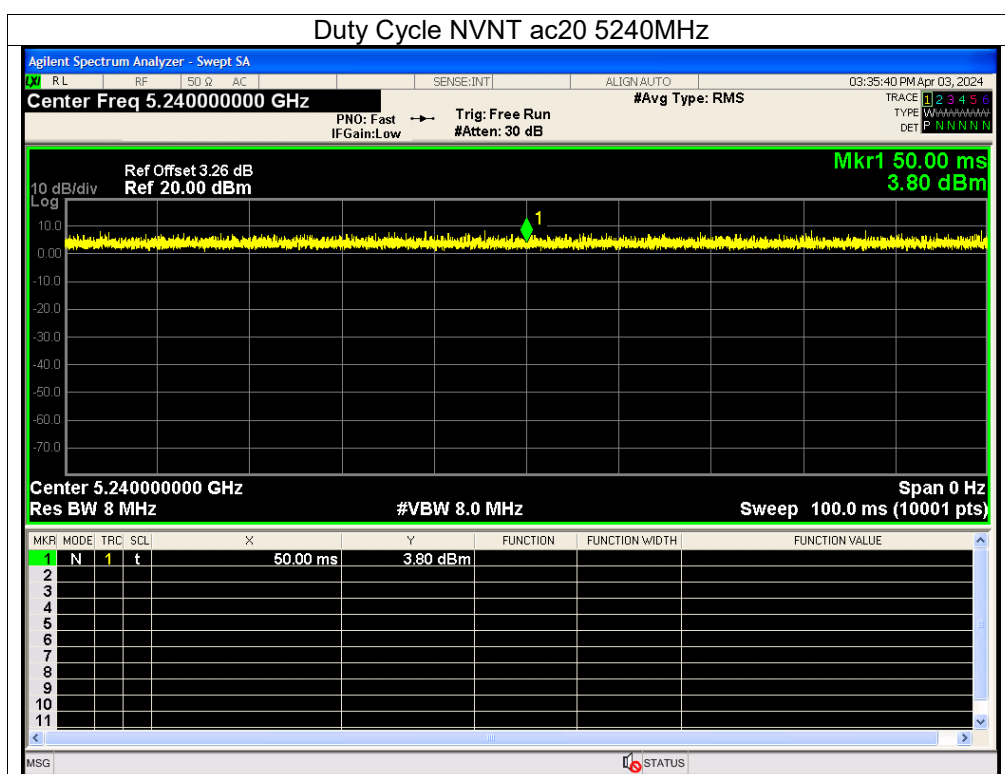

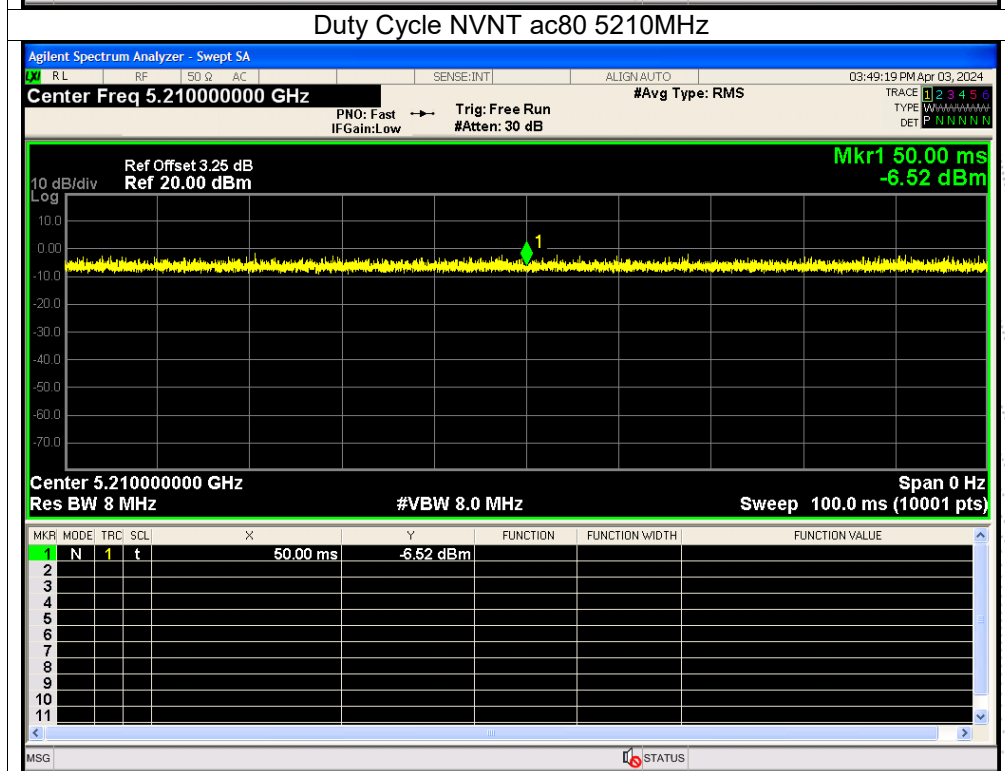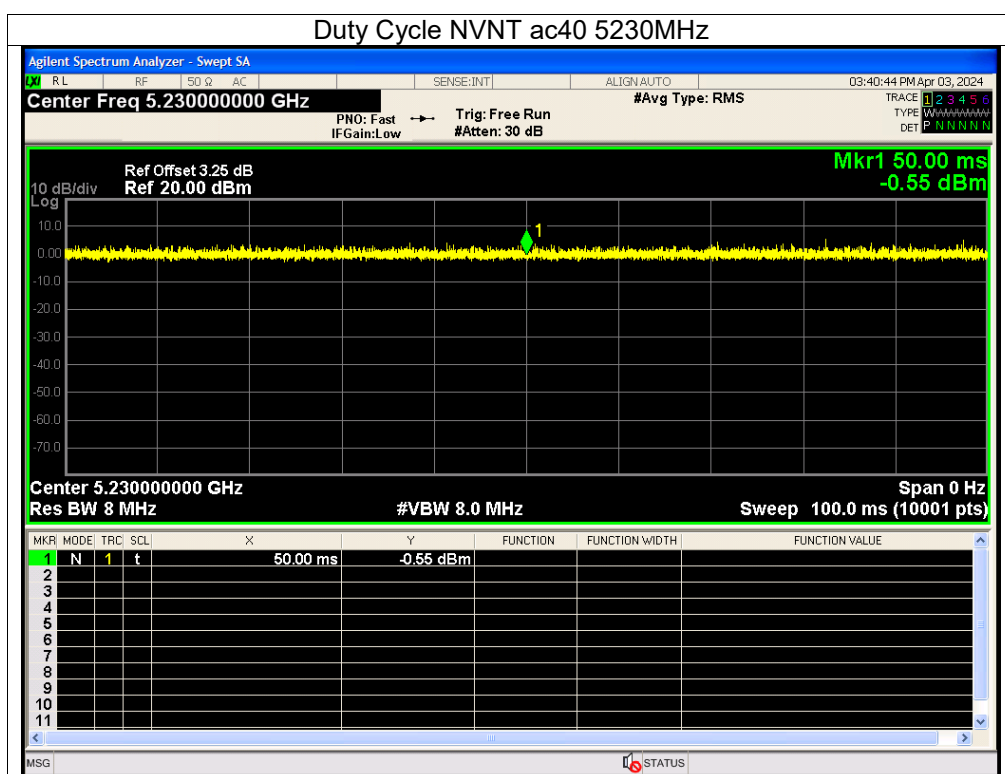

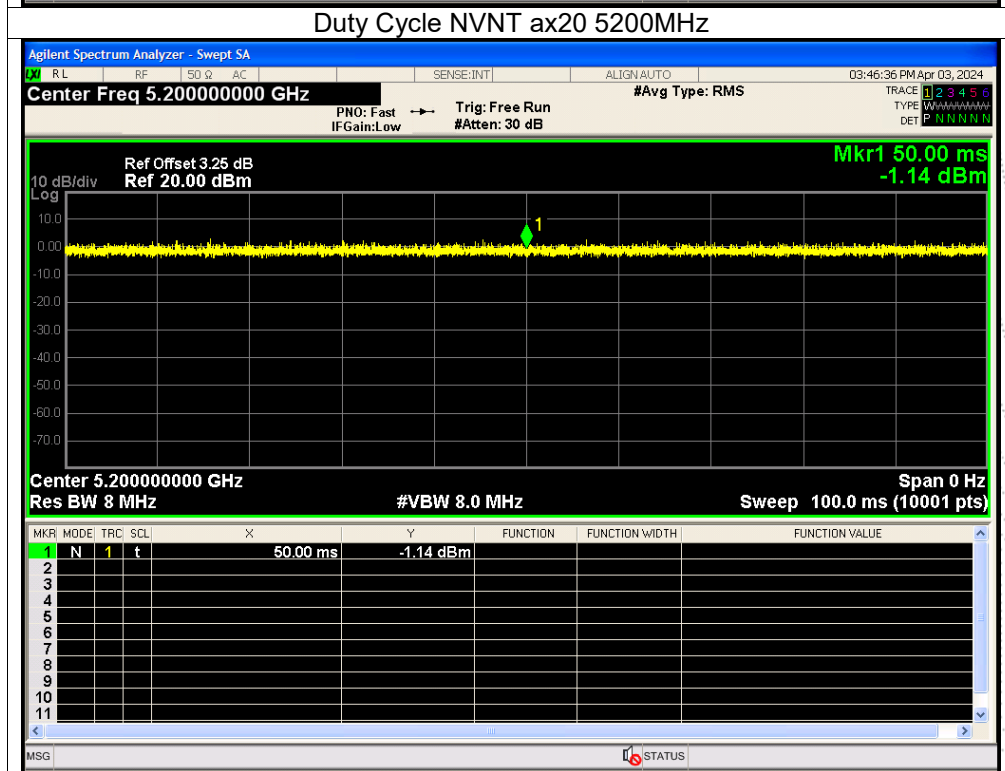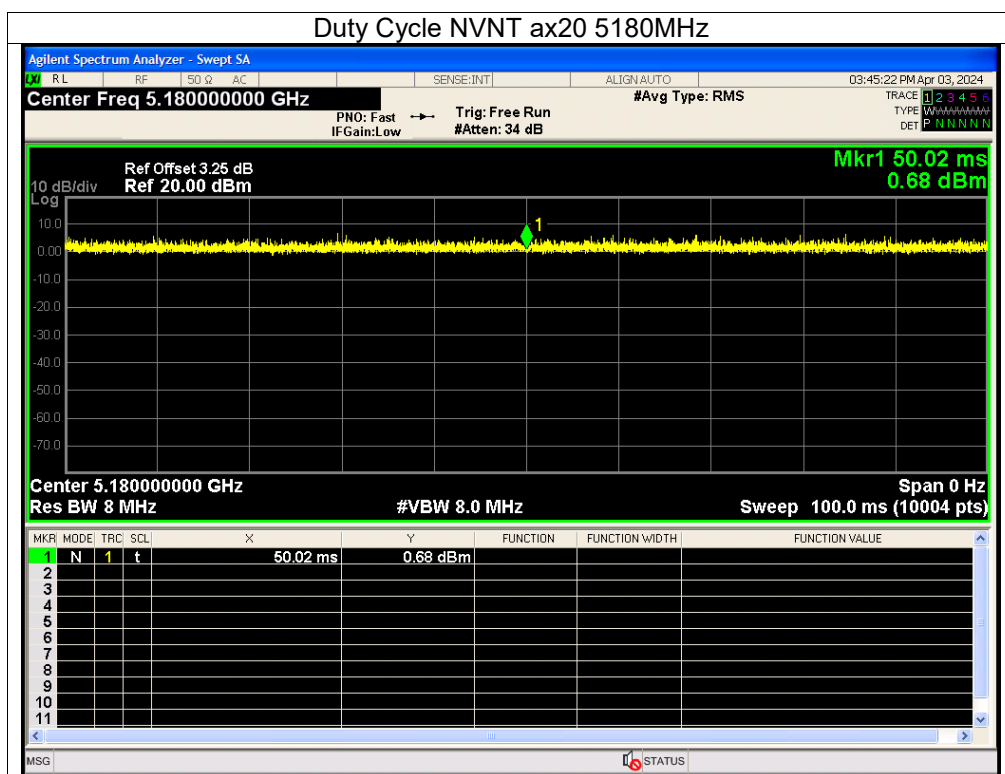


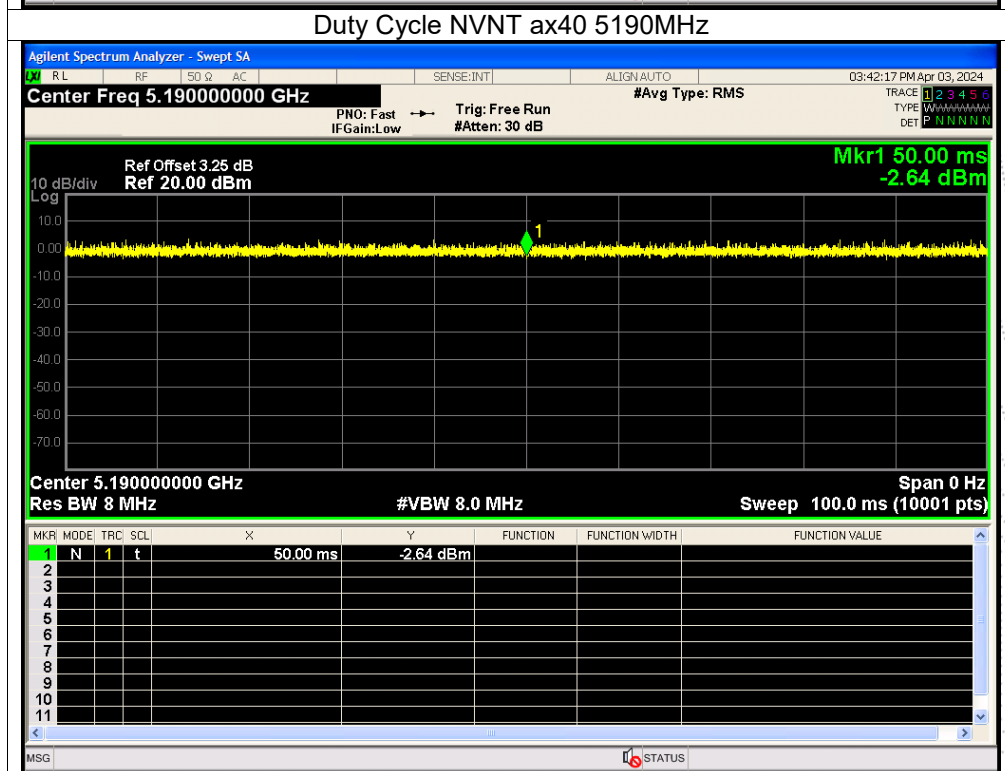
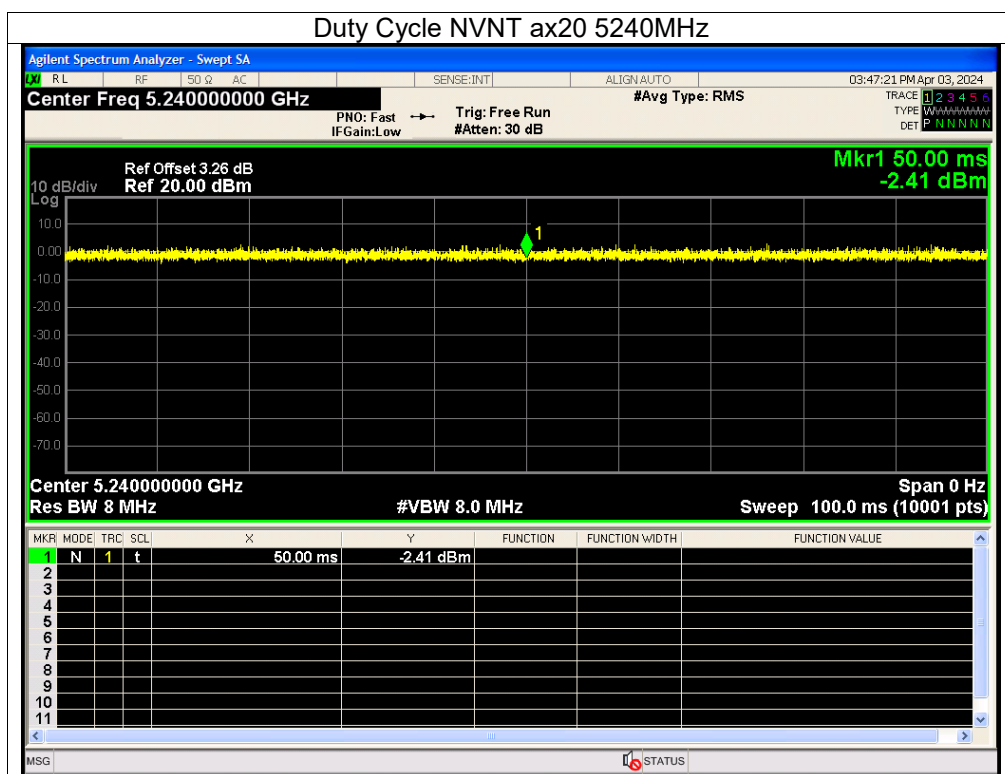


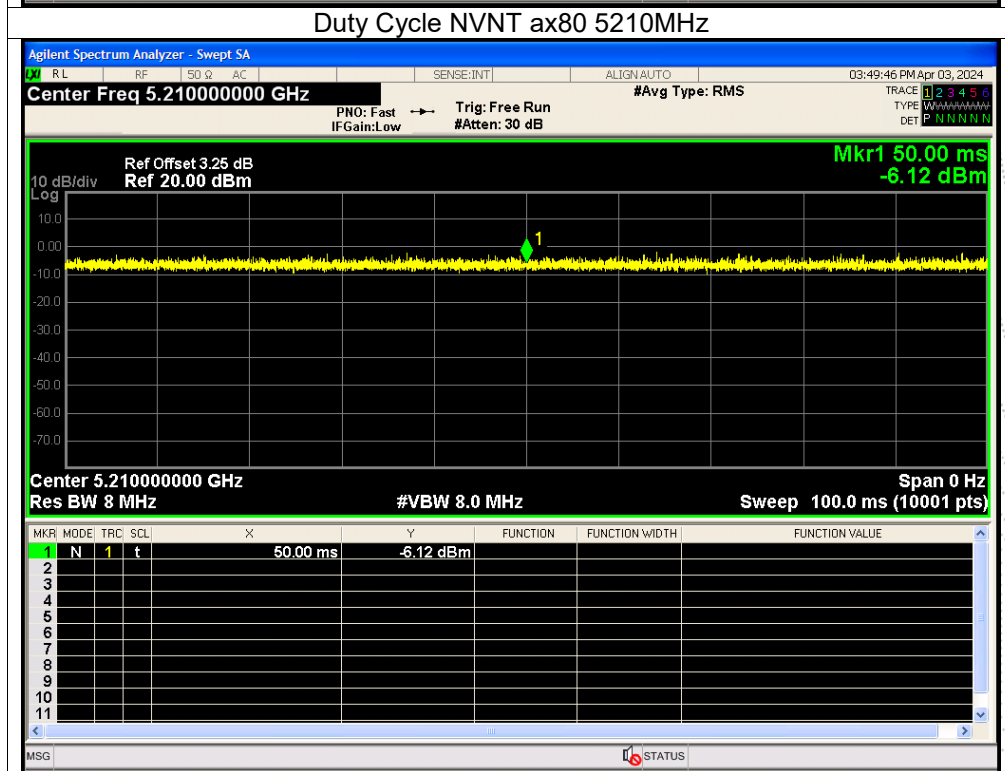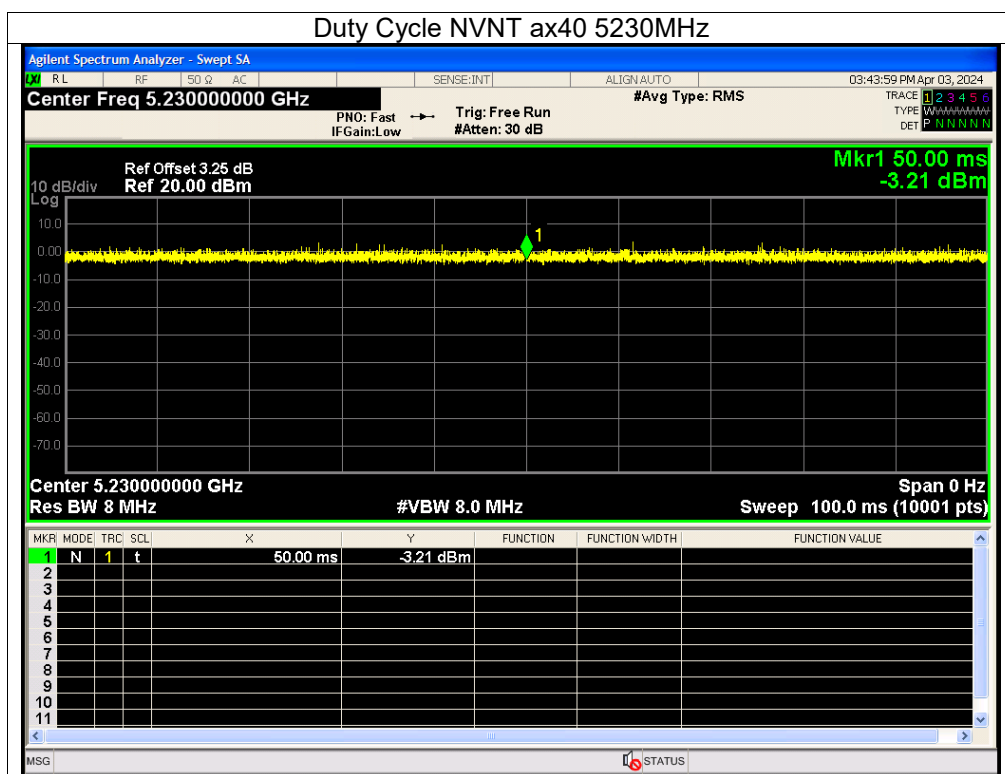



Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	100	0	0
NVNT	a	5280	100	0	0
NVNT	a	5320	100	0	0
NVNT	n20	5260	100	0	0
NVNT	n20	5280	100	0	0
NVNT	n20	5320	100	0	0
NVNT	n40	5270	100	0	0
NVNT	n40	5310	100	0	0
NVNT	ac20	5260	100	0	0
NVNT	ac20	5280	100	0	0
NVNT	ac20	5320	100	0	0
NVNT	ac40	5270	100	0	0
NVNT	ac40	5310	100	0	0
NVNT	ac80	5290	100	0	0
NVNT	ax20	5260	100	0	0
NVNT	ax20	5280	100	0	0
NVNT	ax20	5320	100	0	0
NVNT	ax40	5270	100	0	0
NVNT	ax40	5310	100	0	0
NVNT	ax80	5290	100	0	0



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.

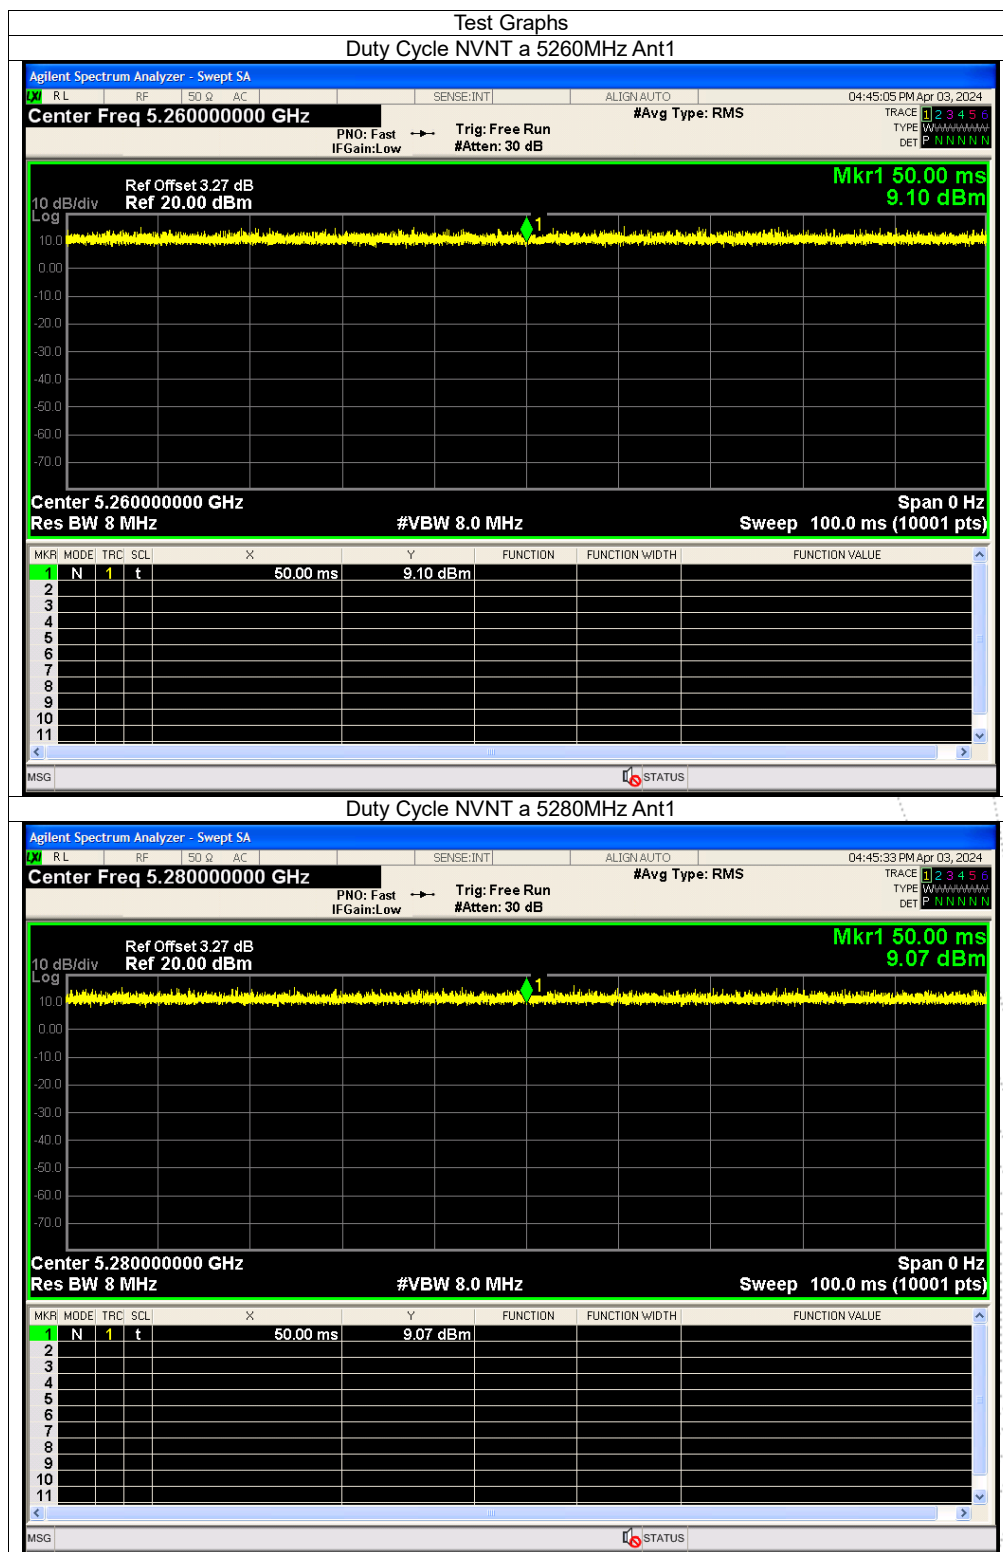


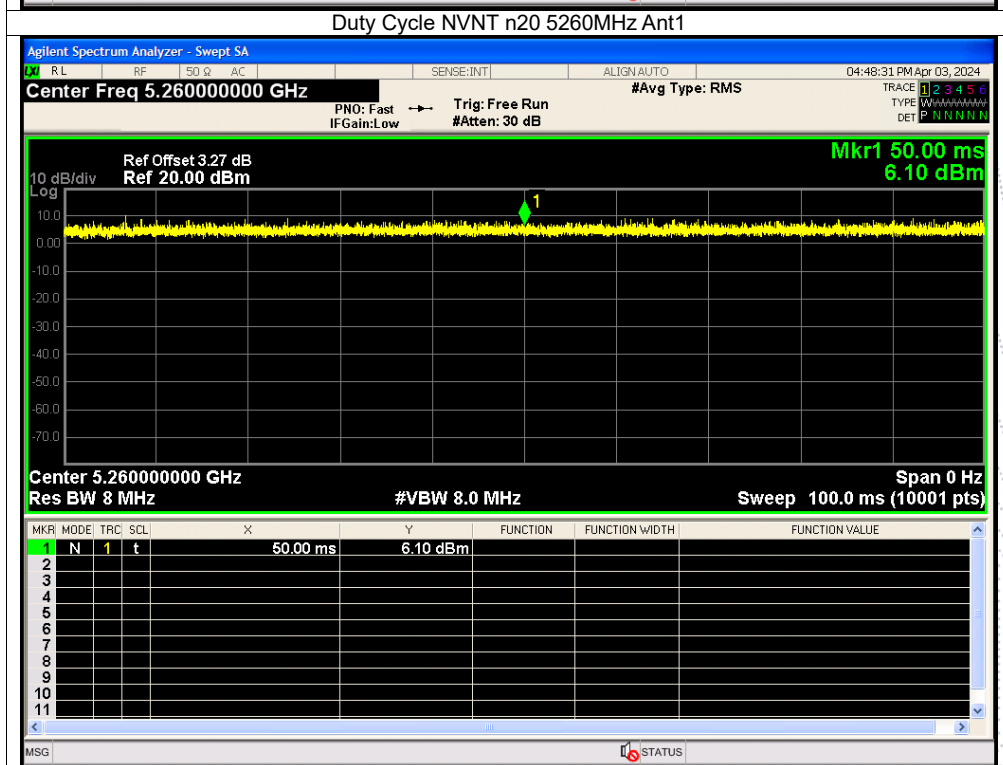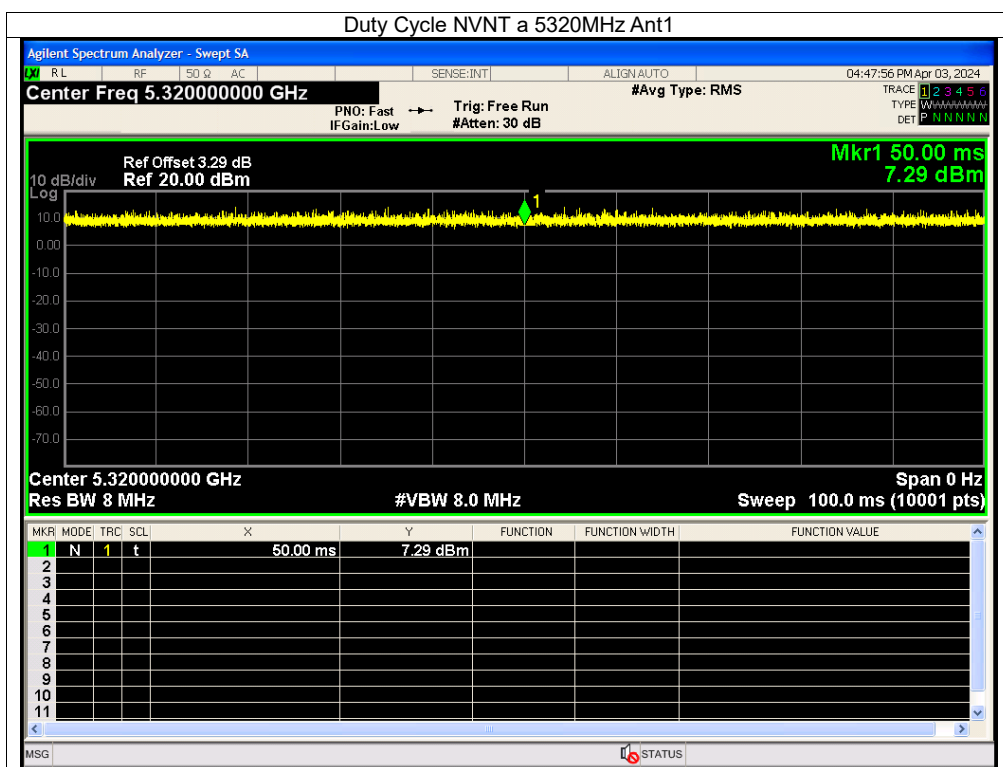


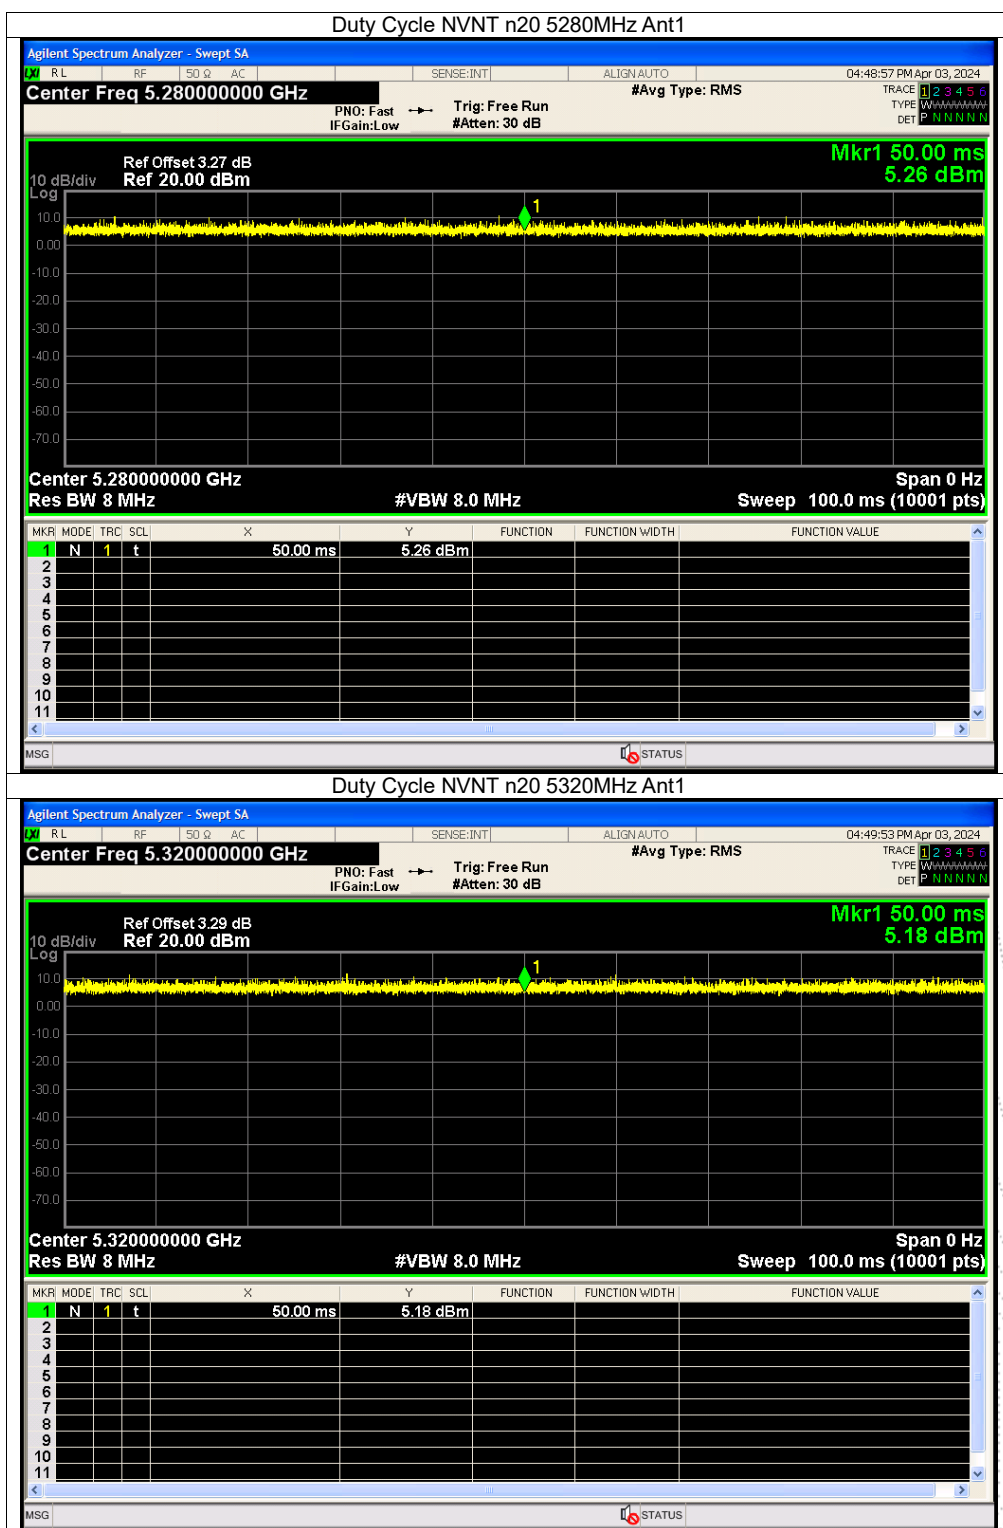


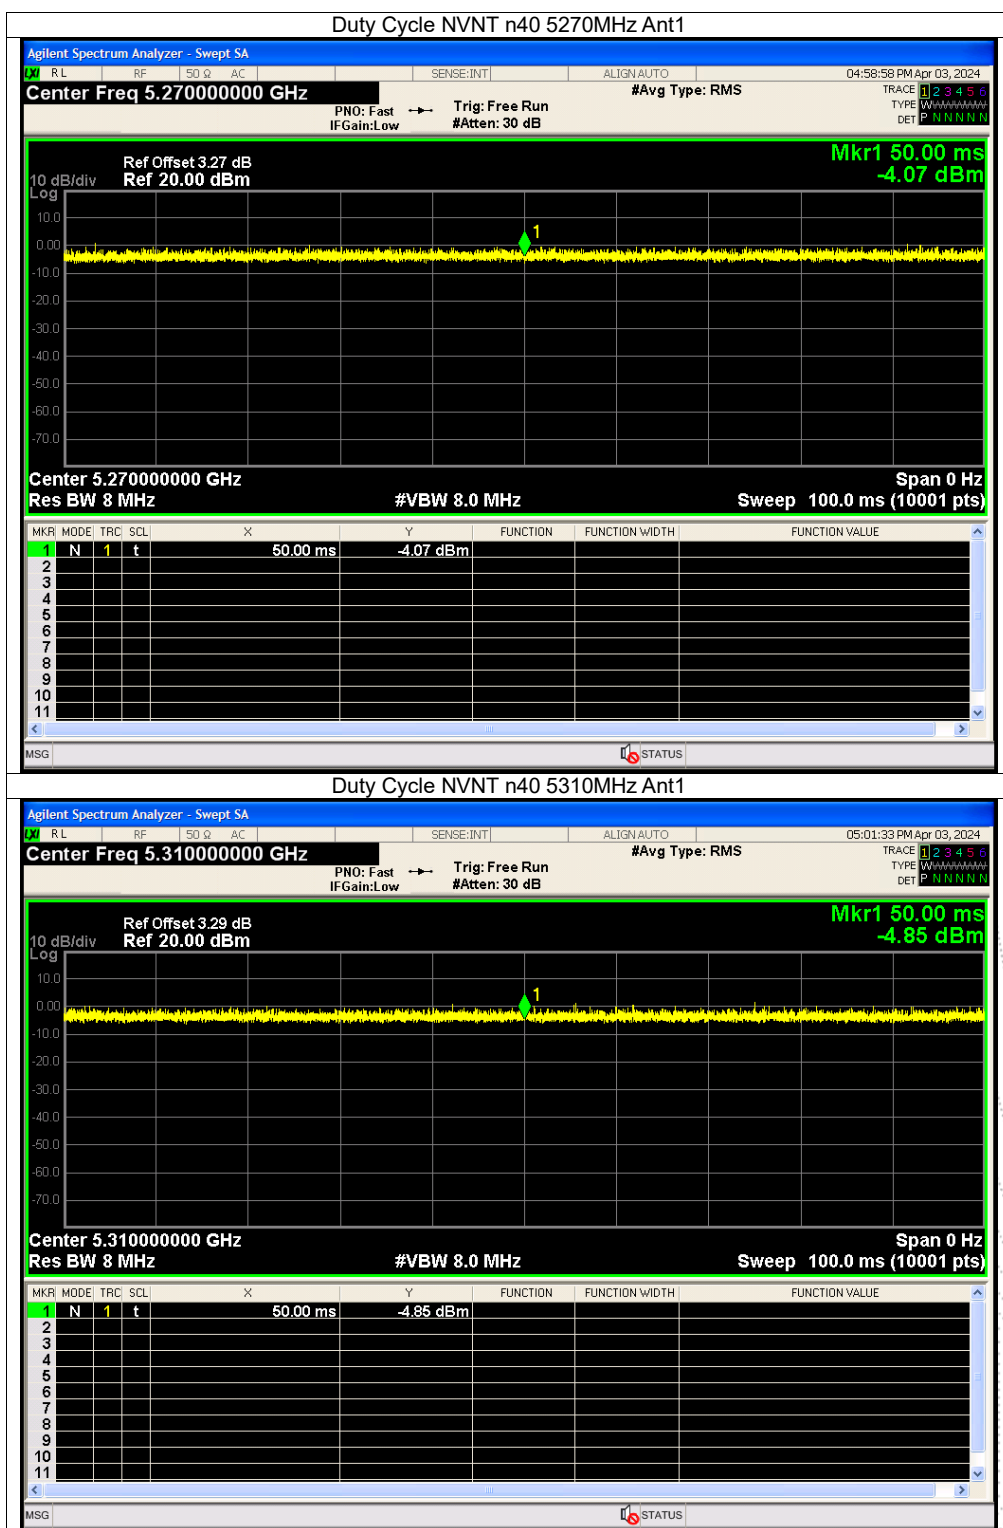


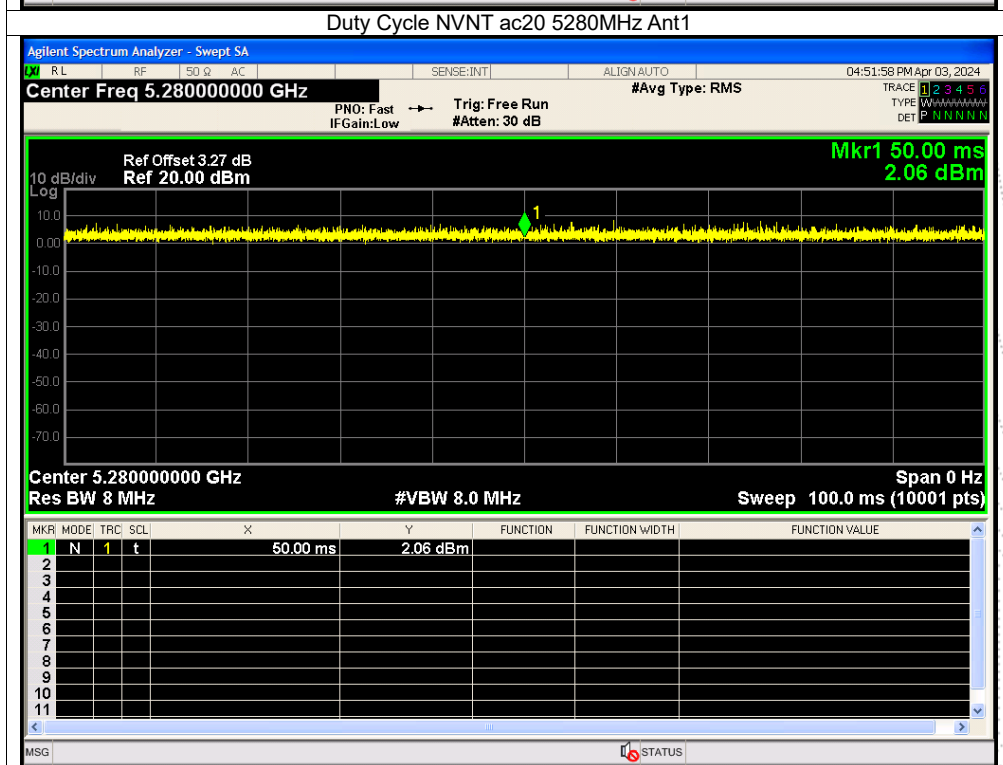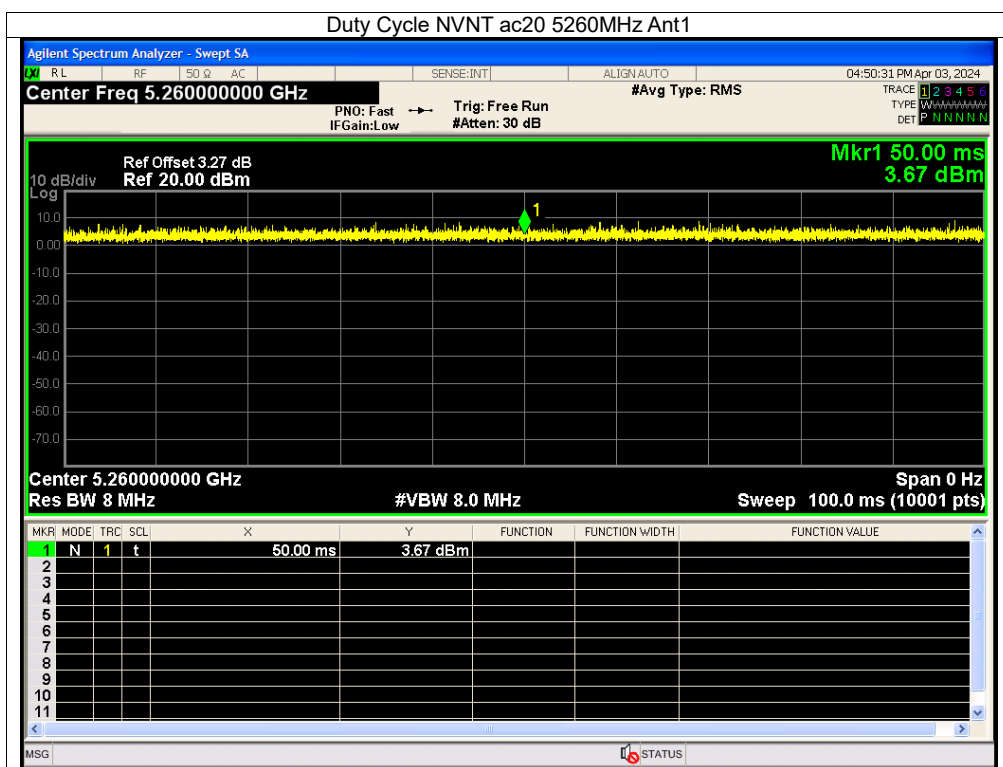


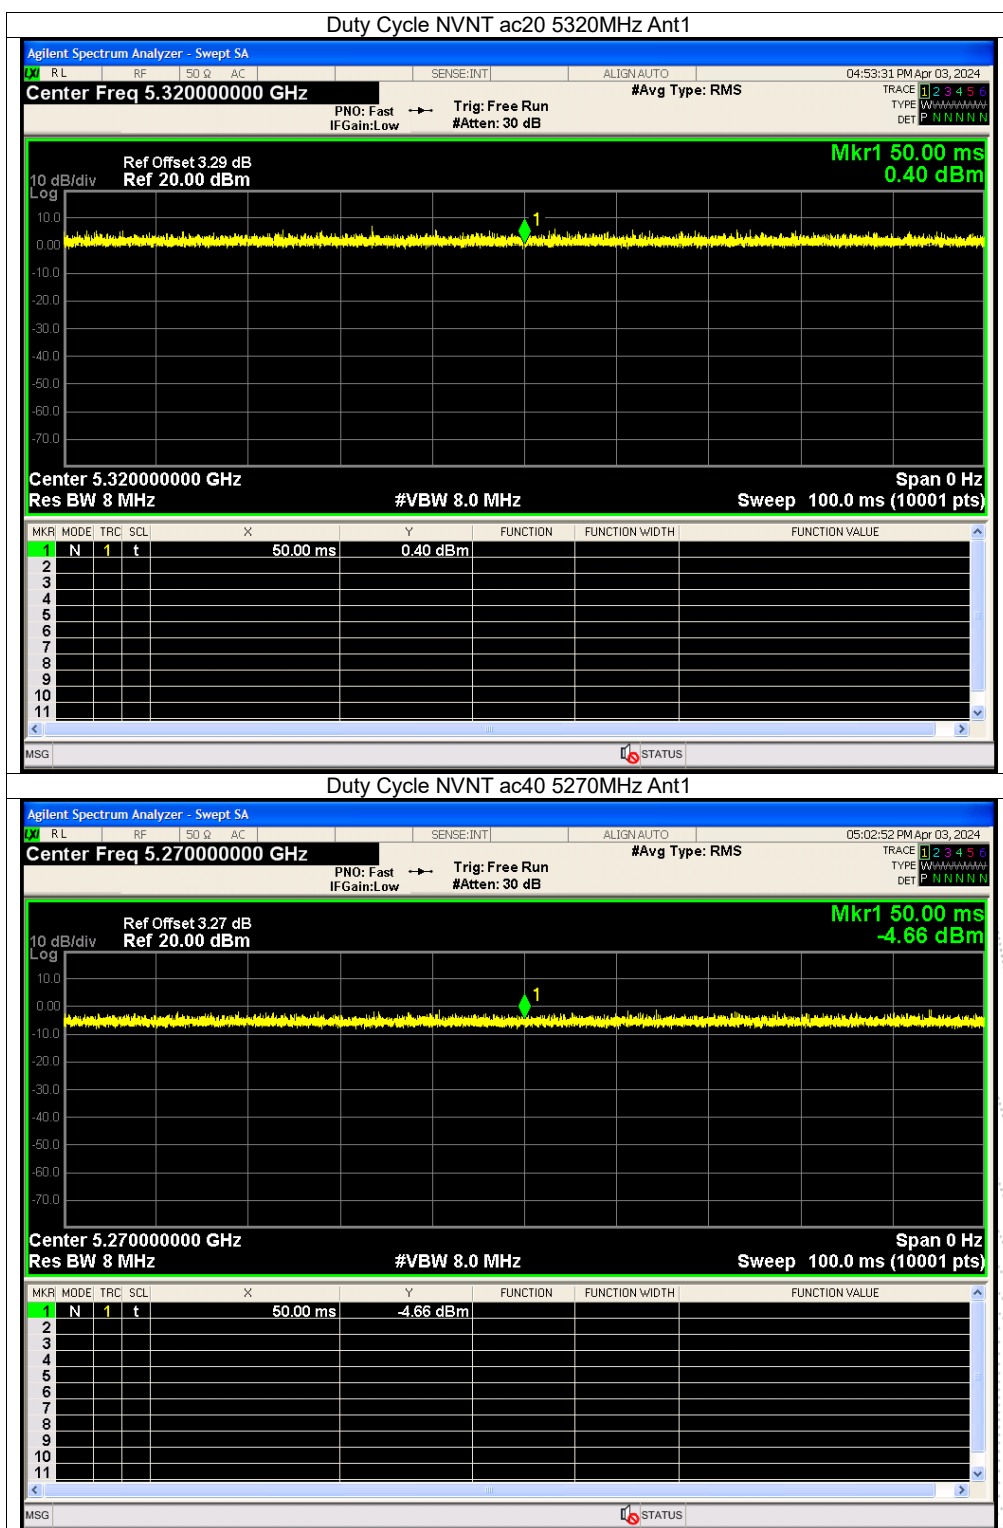

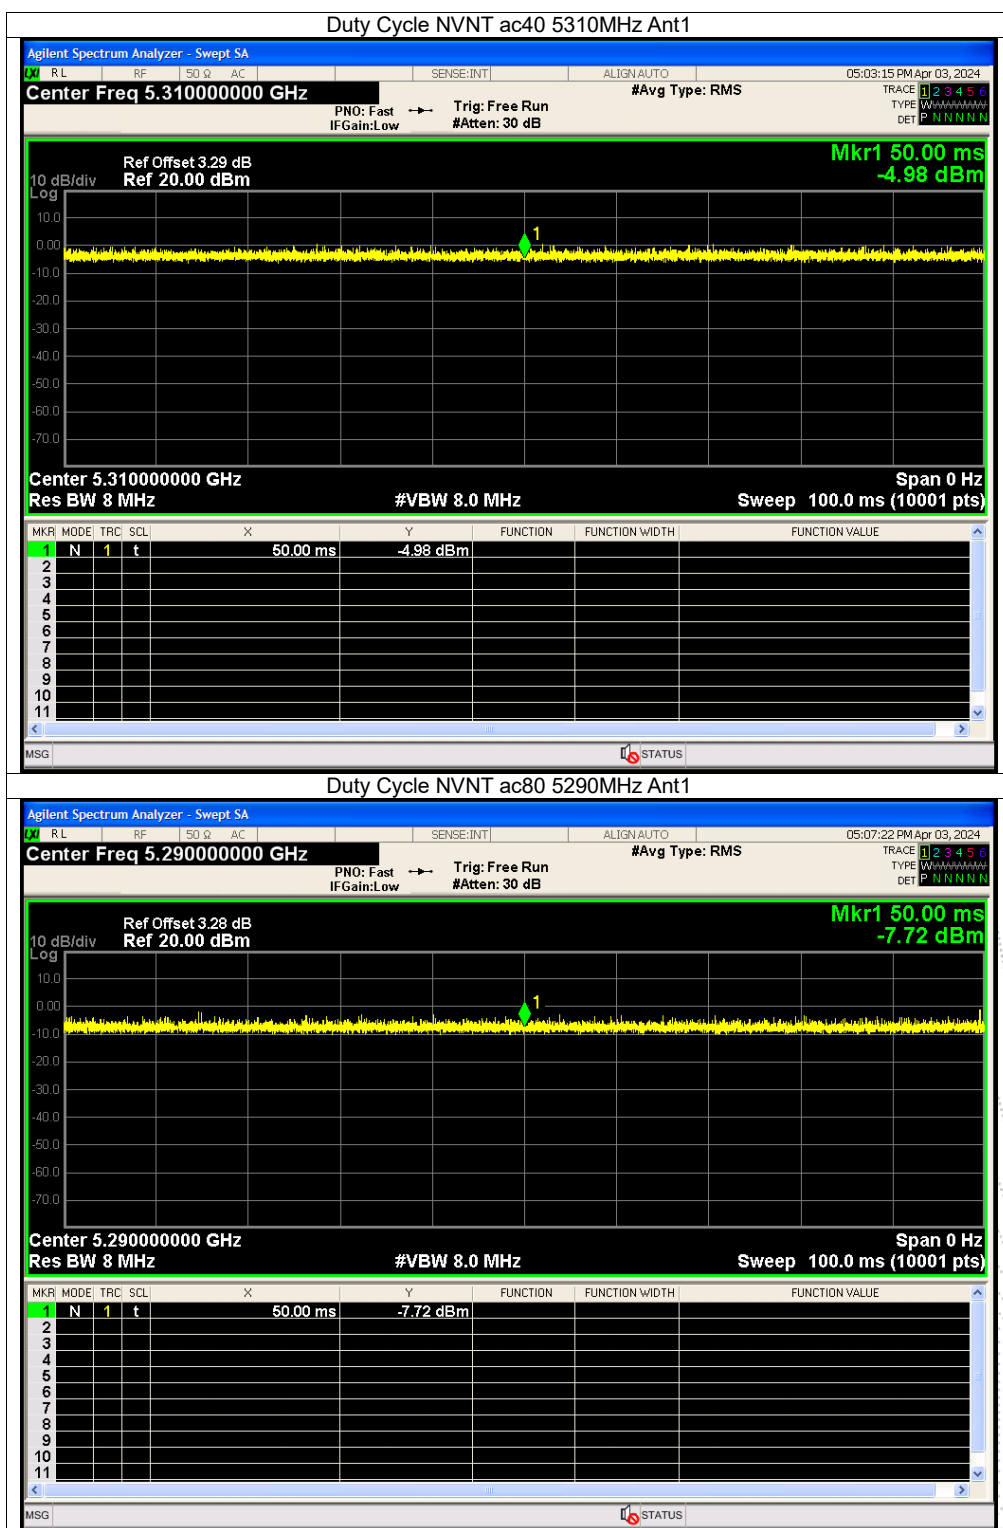

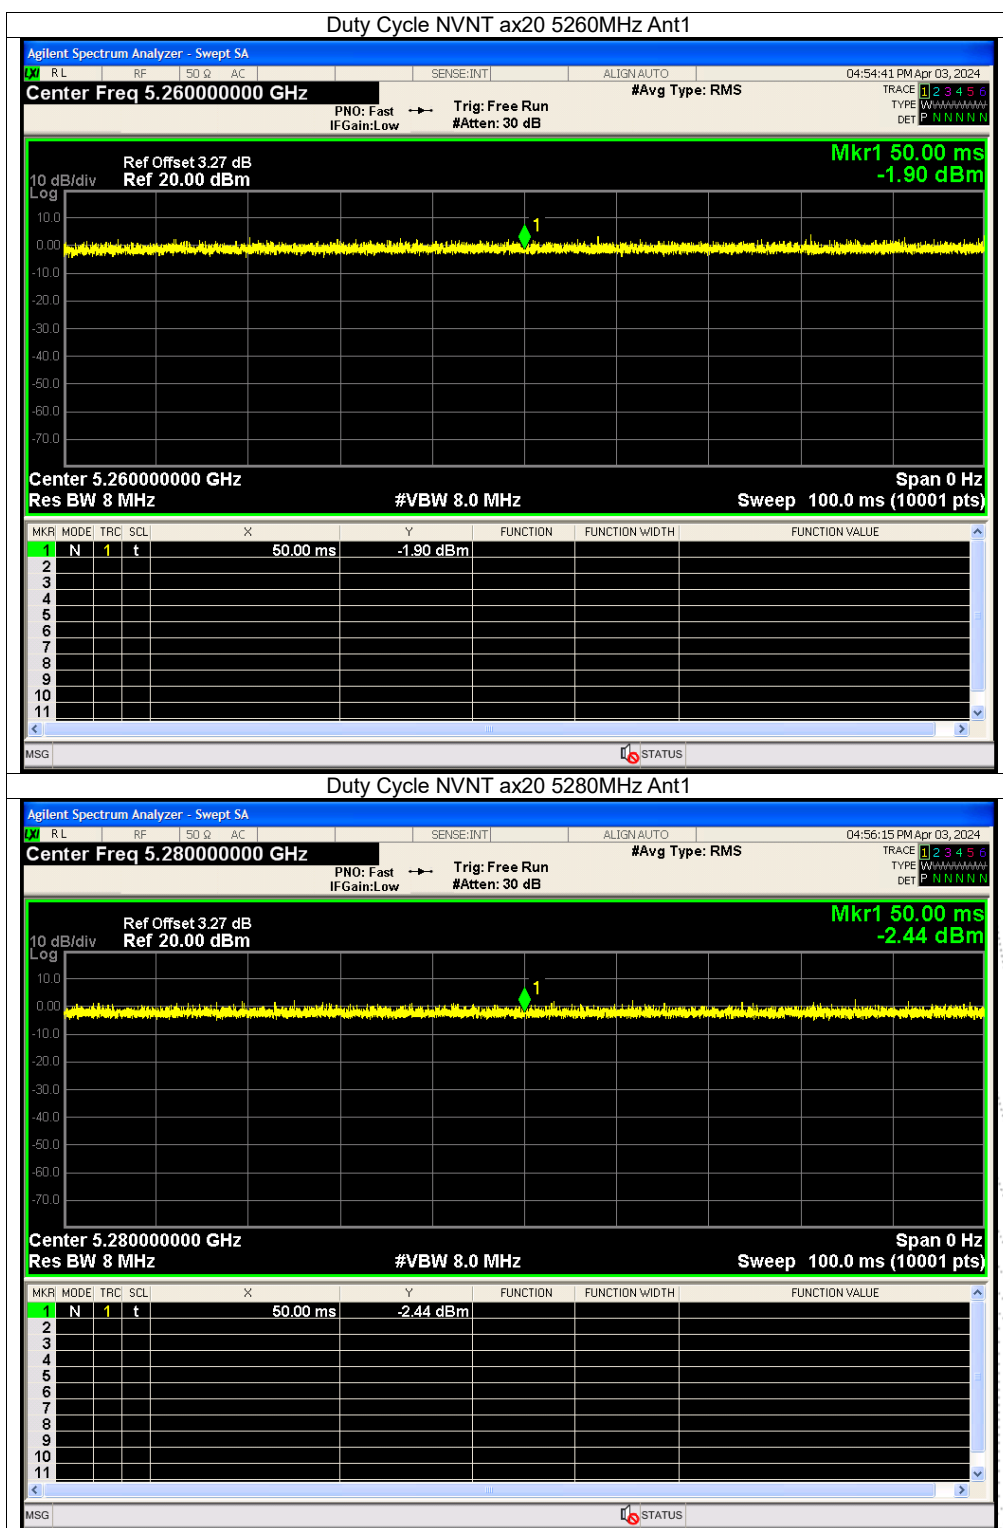



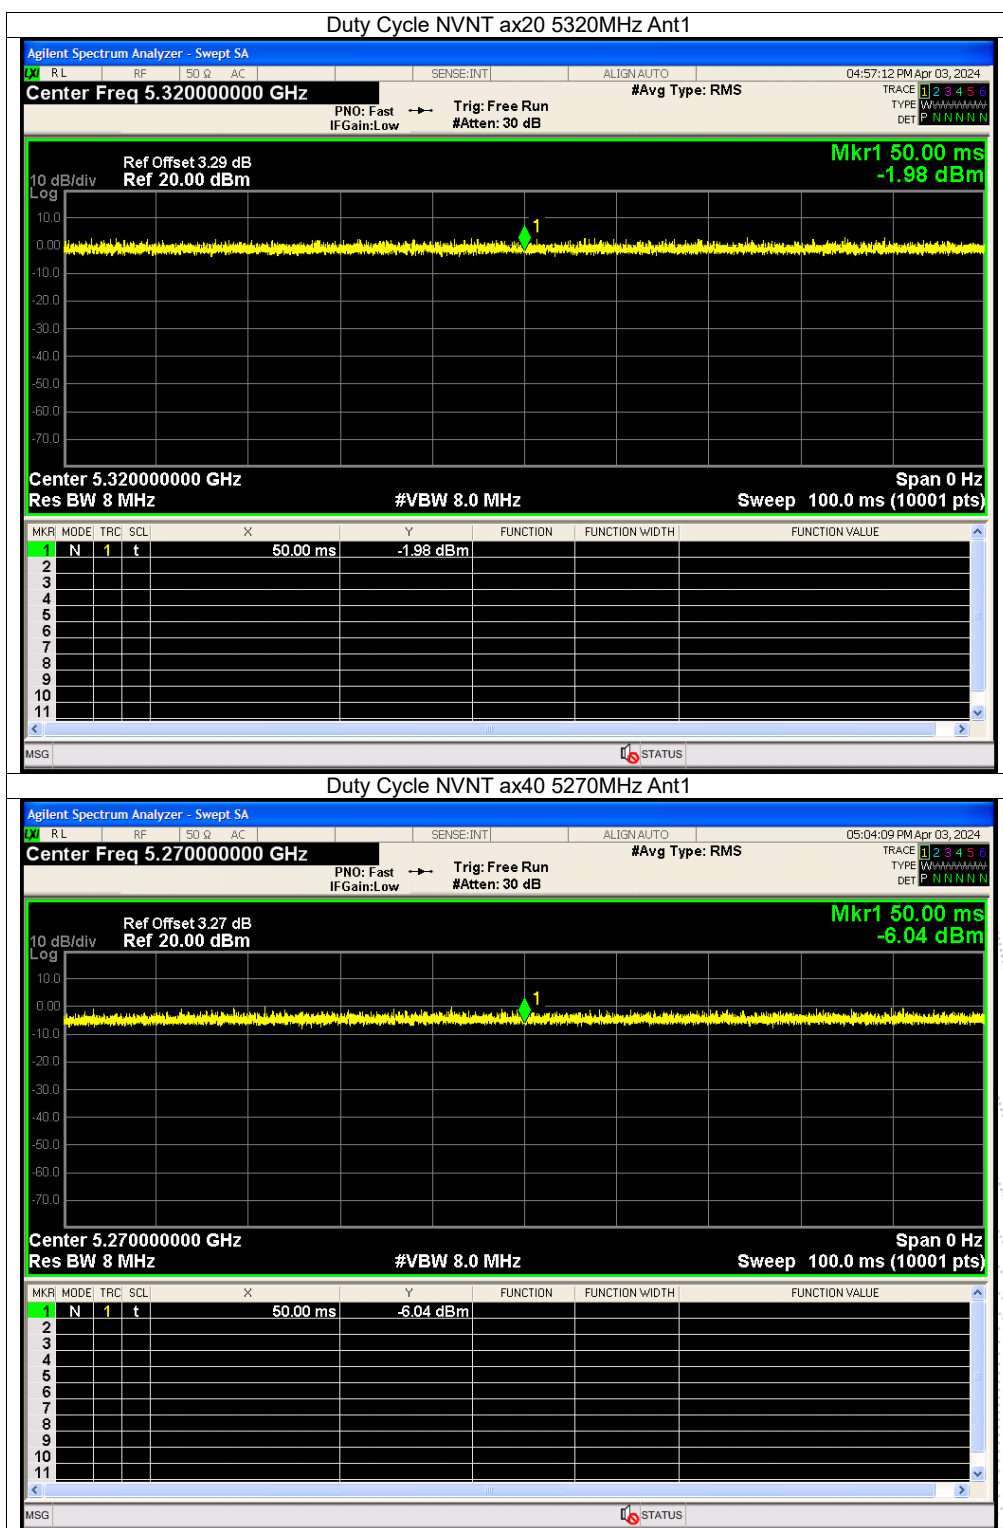



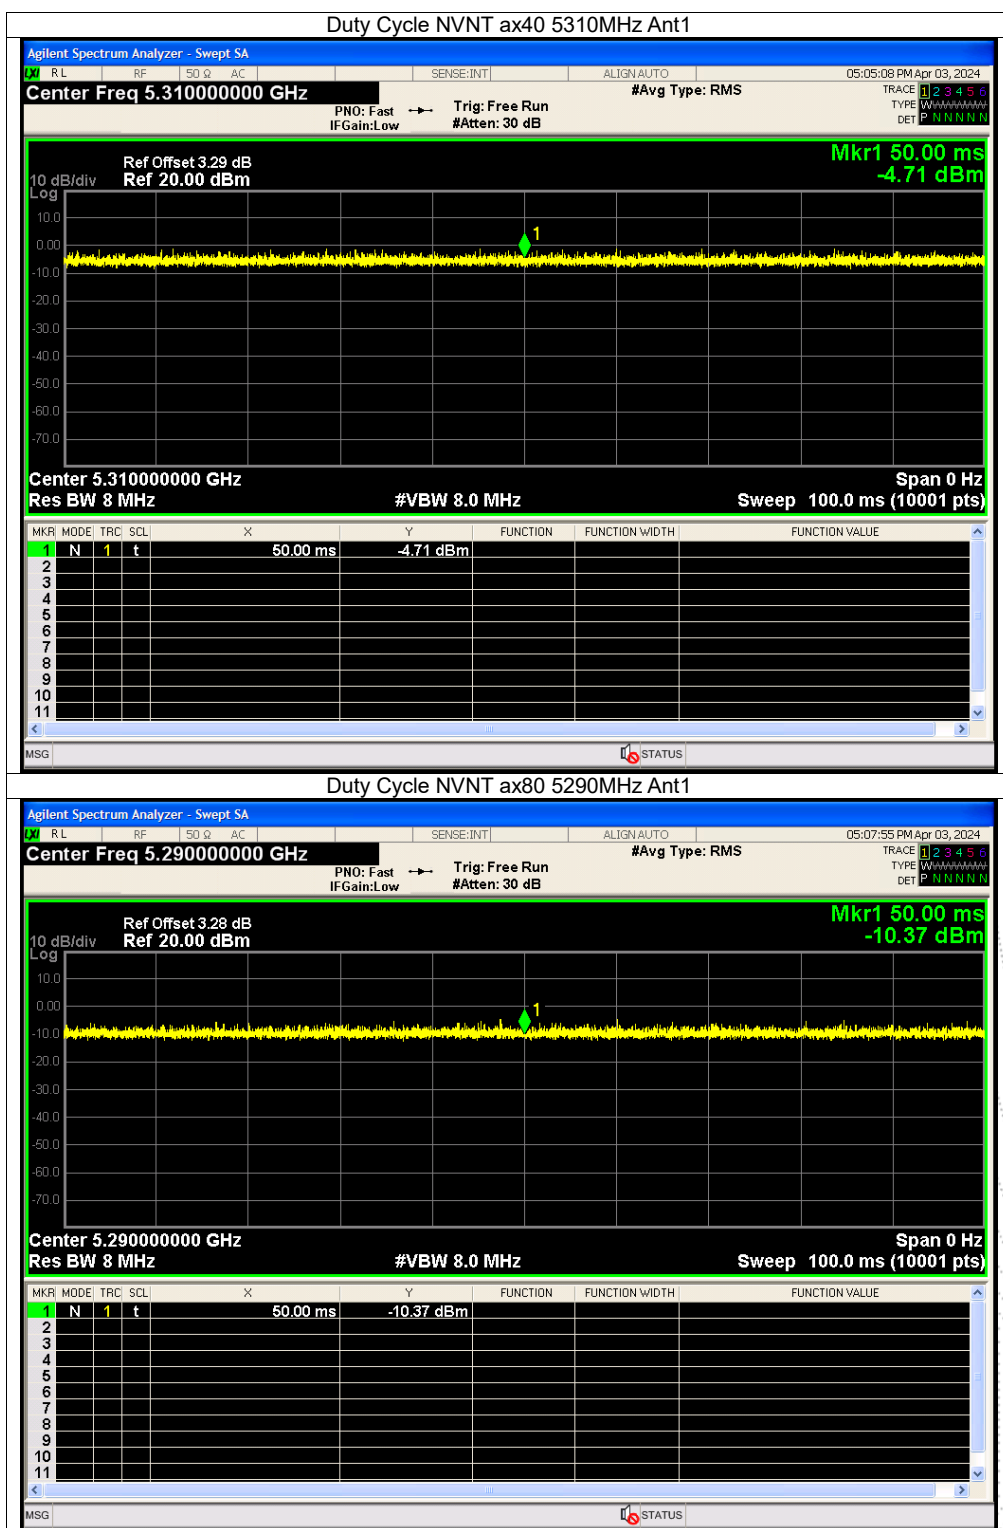




Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5500	100	0	0
NVNT	a	5580	100	0	0
NVNT	a	5700	100	0	0
NVNT	n20	5500	100	0	0
NVNT	n20	5580	100	0	0
NVNT	n20	5700	100	0	0
NVNT	n40	5510	100	0	0
NVNT	n40	5550	100	0	0
NVNT	n40	5670	100	0	0
NVNT	ac20	5500	100	0	0
NVNT	ac20	5580	100	0	0
NVNT	ac20	5700	100	0	0
NVNT	ac40	5510	100	0	0
NVNT	ac40	5550	100	0	0
NVNT	ac40	5670	100	0	0
NVNT	ac80	5530	100	0	0
NVNT	ax20	5500	100	0	0
NVNT	ax20	5580	100	0	0
NVNT	ax20	5700	100	0	0
NVNT	ax40	5510	100	0	0
NVNT	ax40	5550	100	0	0
NVNT	ax40	5670	100	0	0
NVNT	ax80	5530	100	0	0



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.


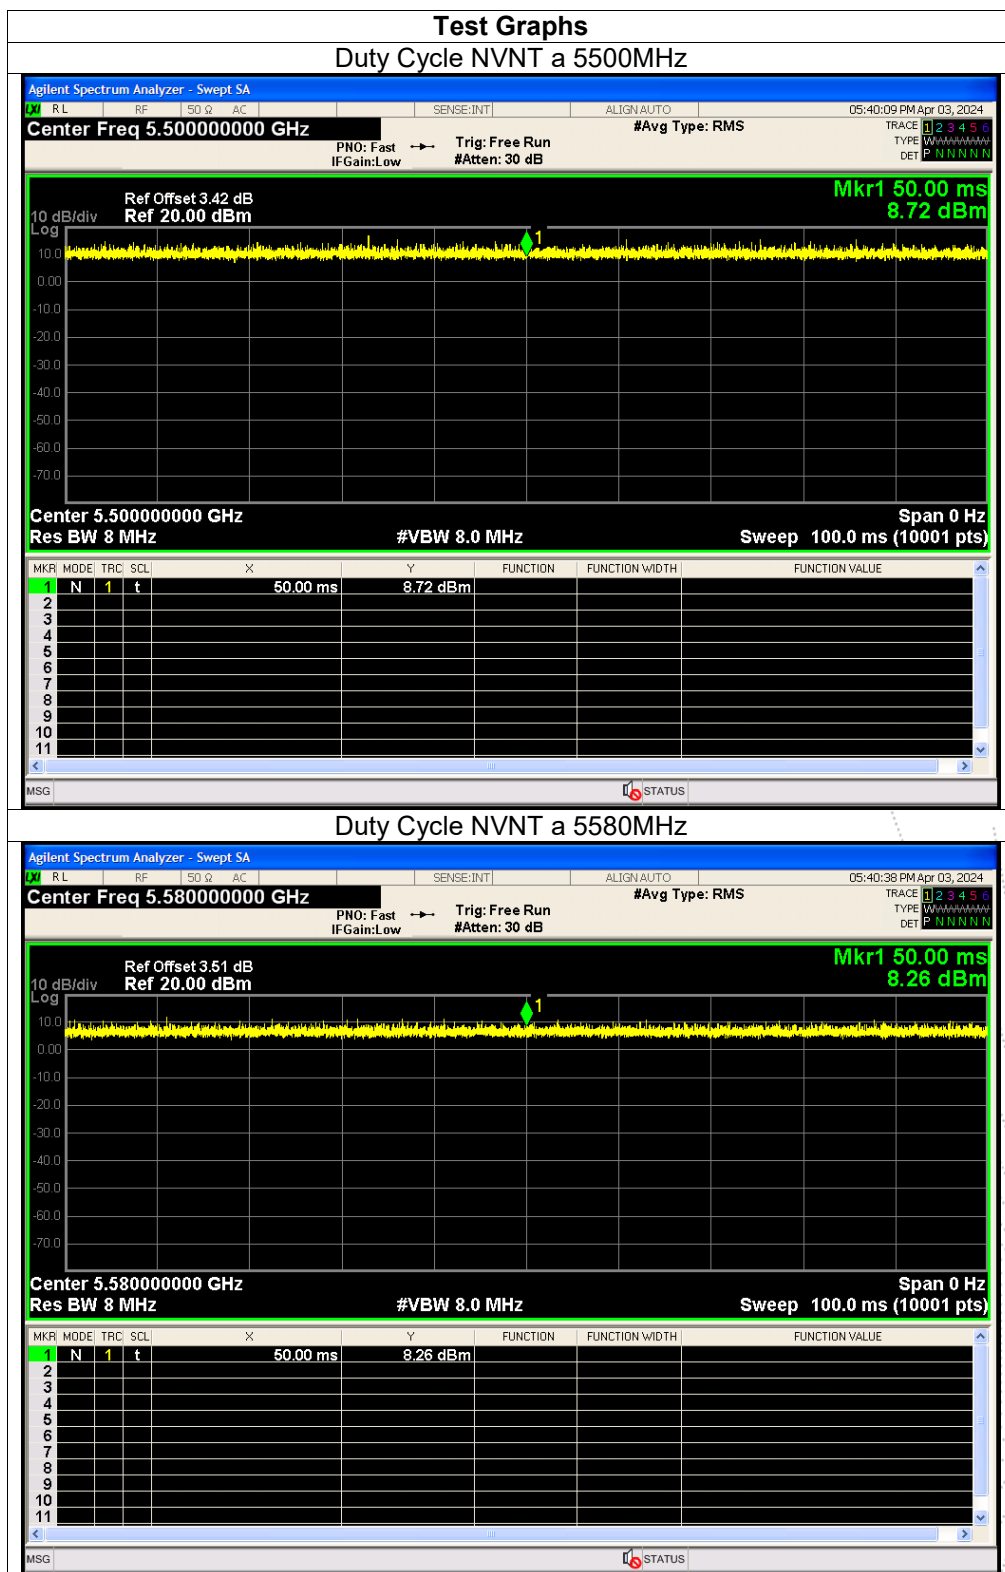


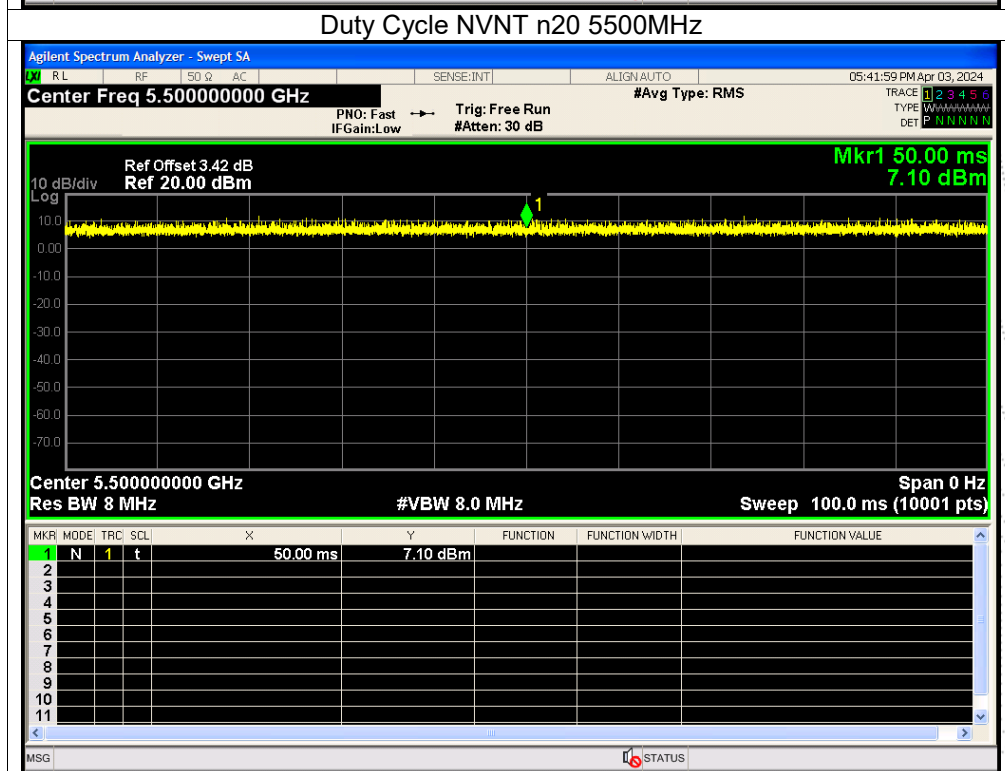
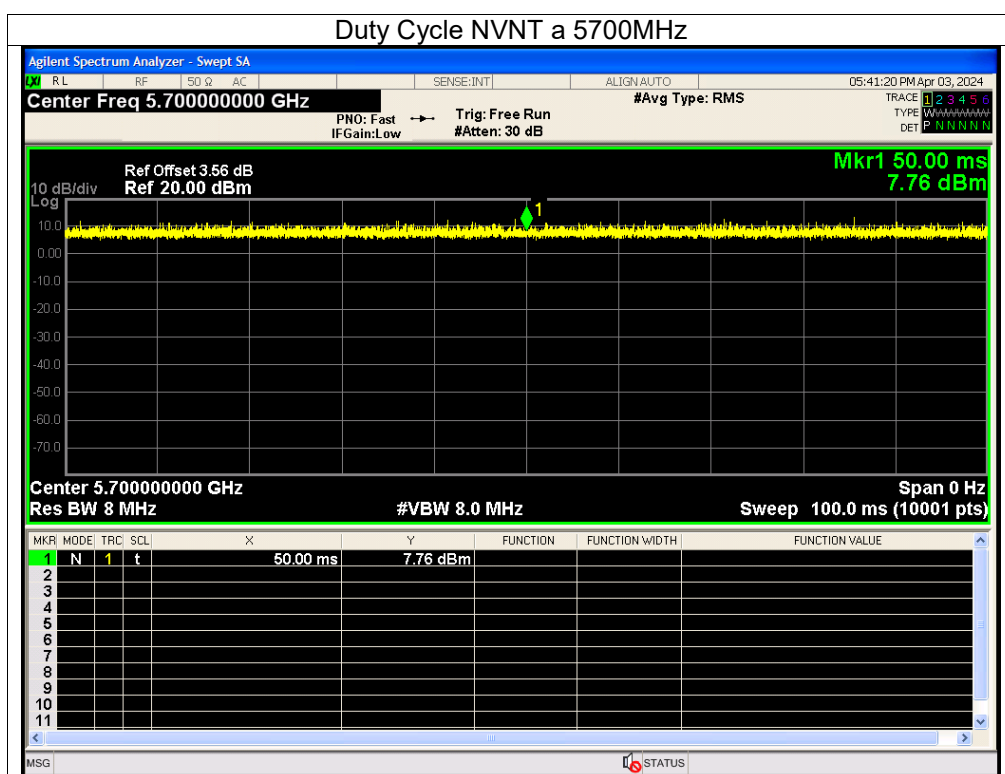


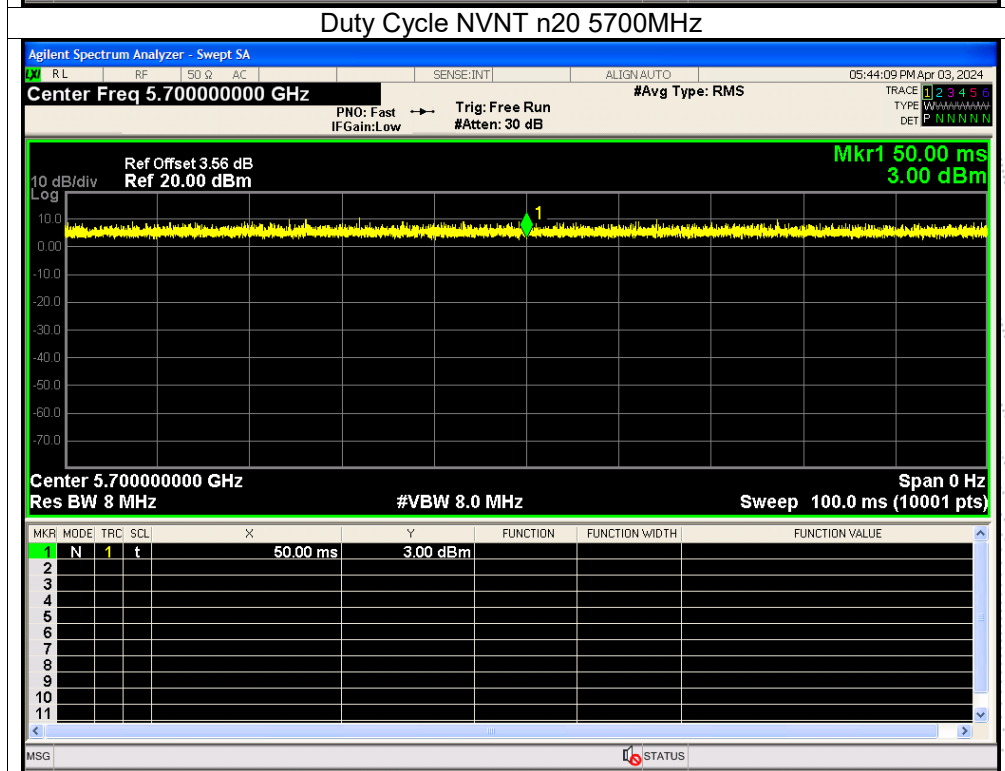
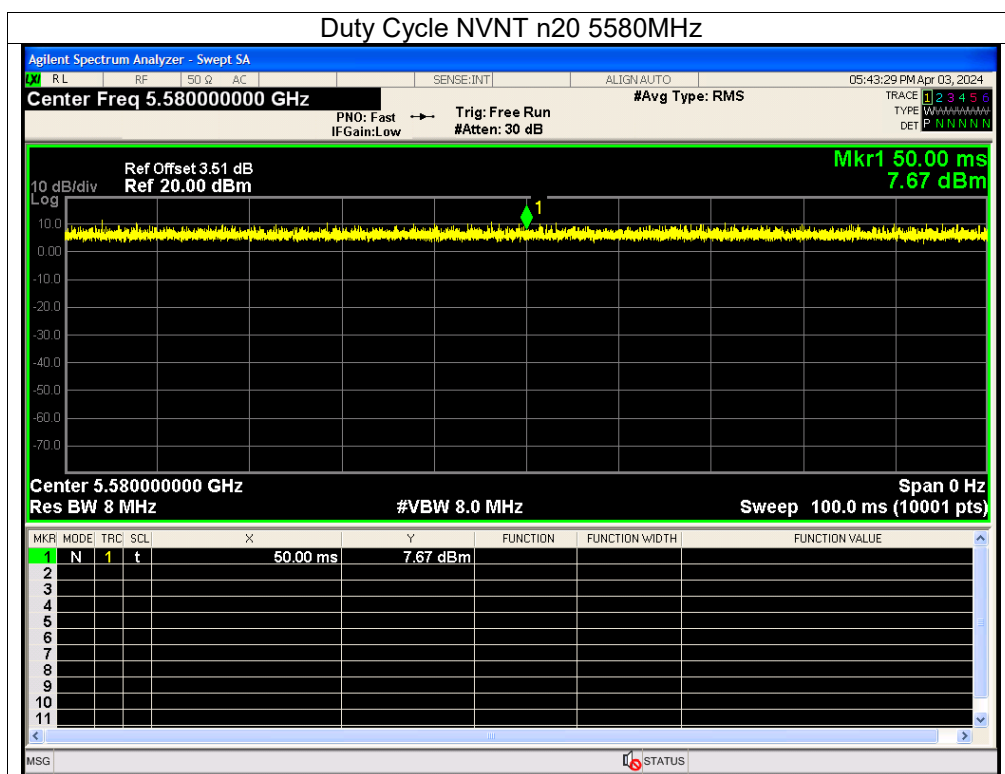


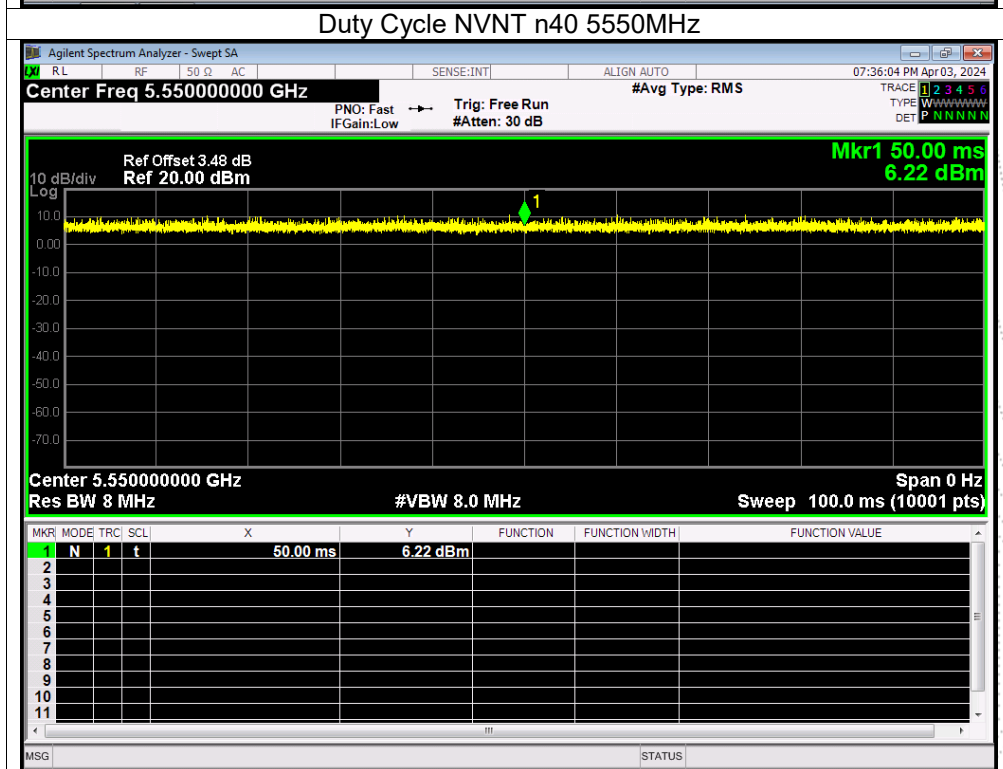
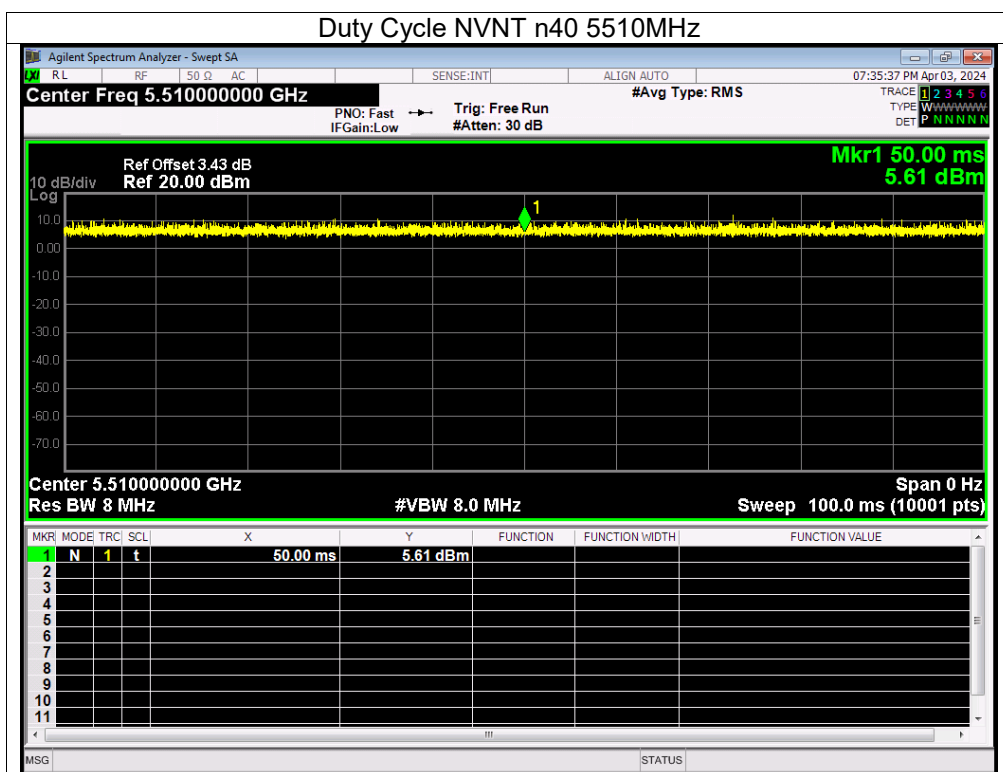


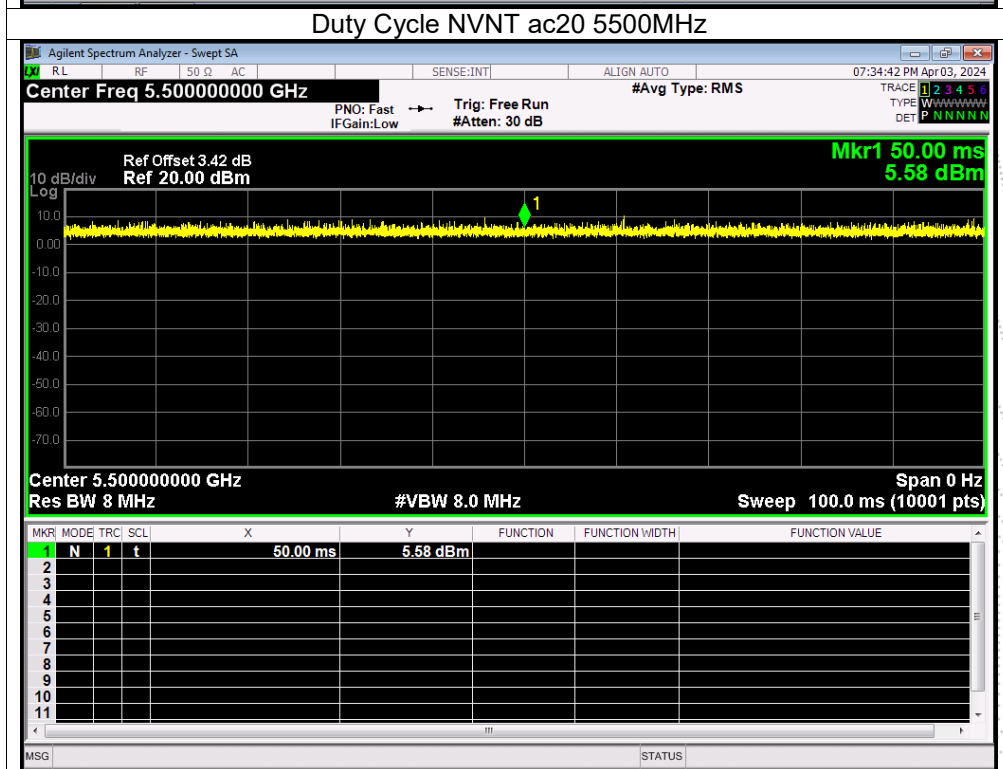
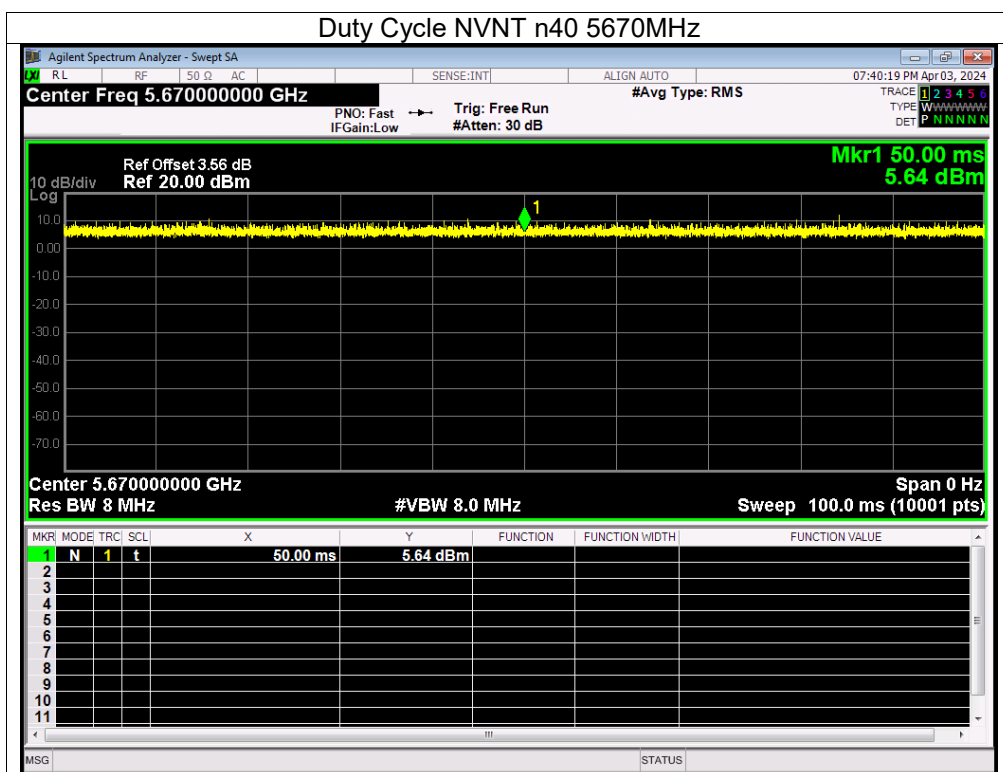


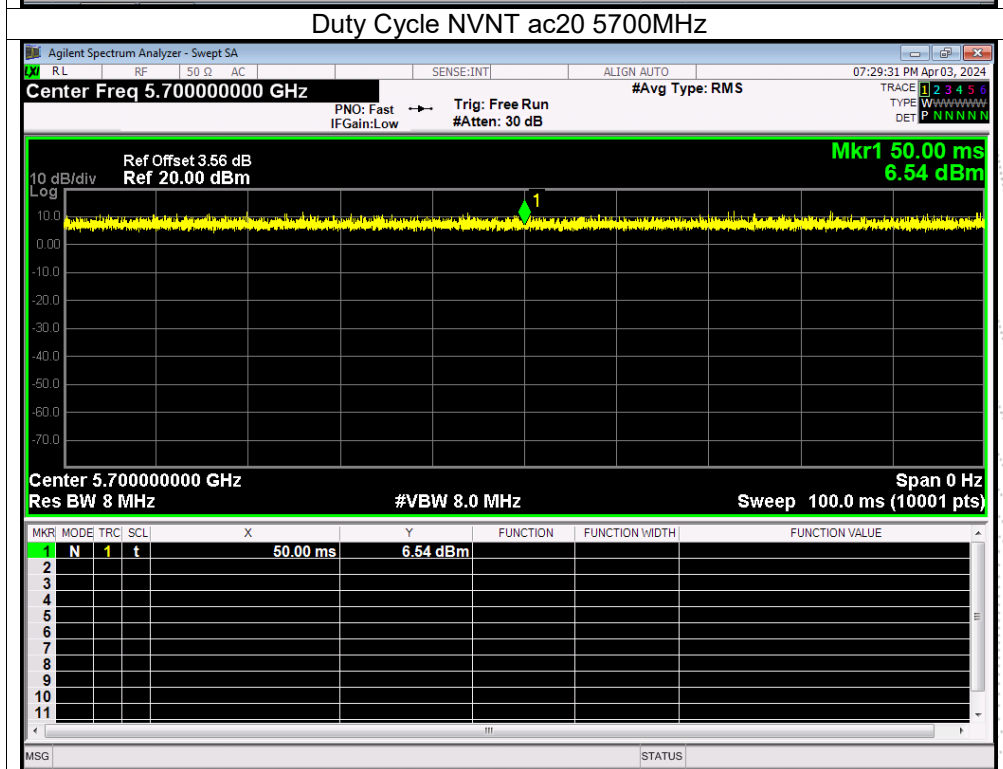
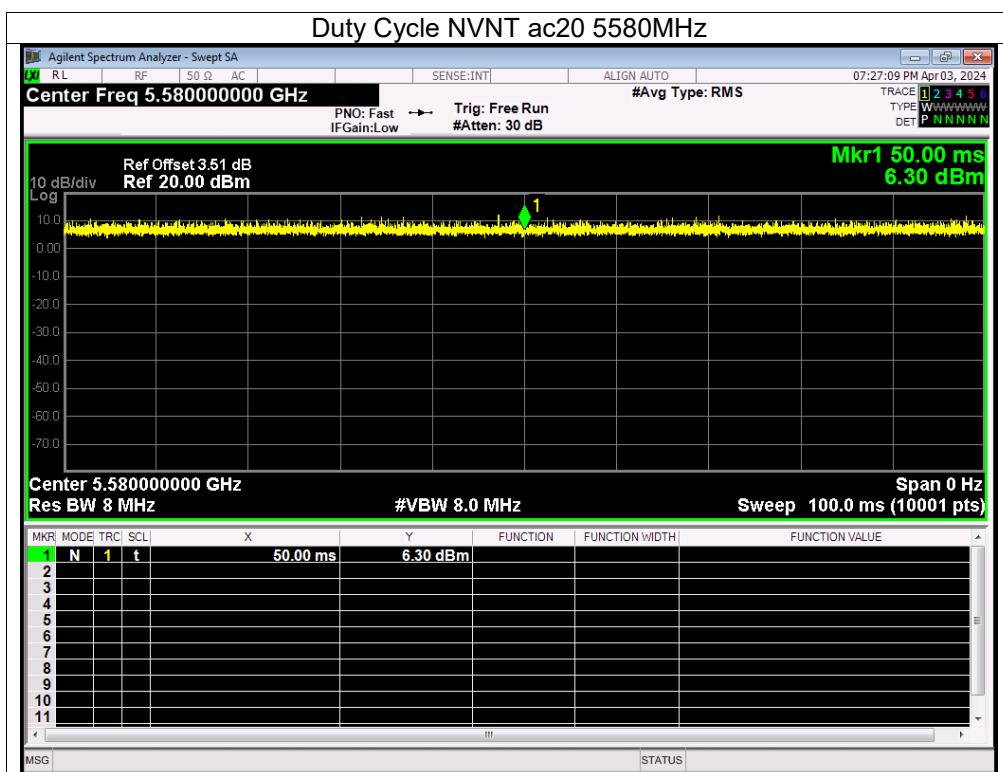


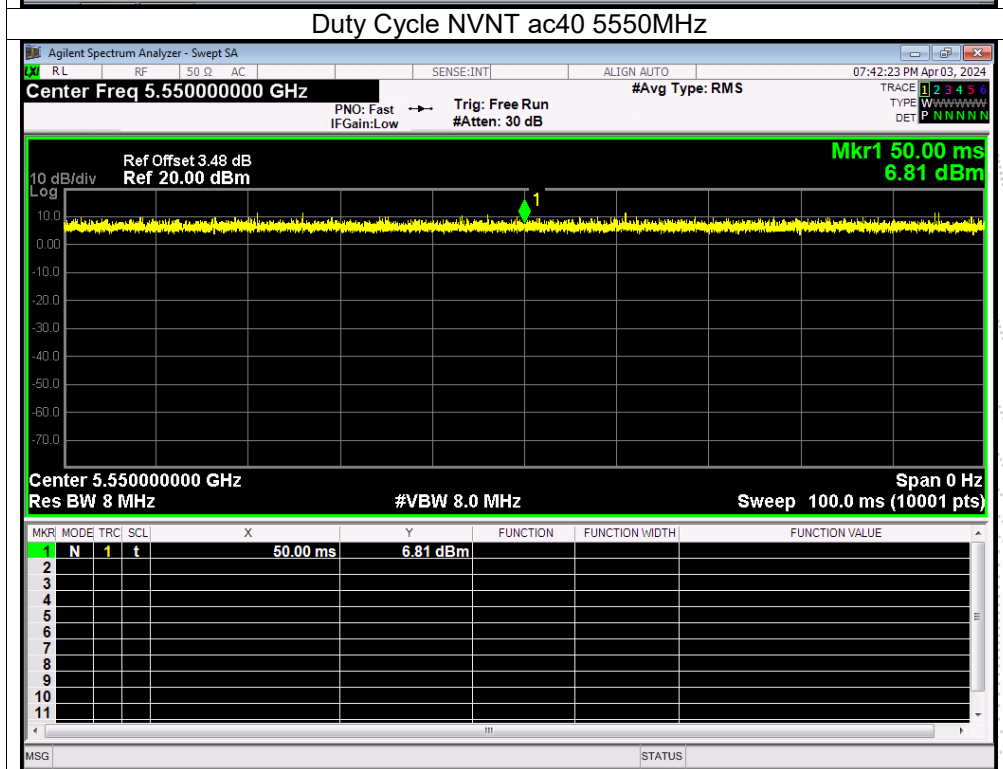
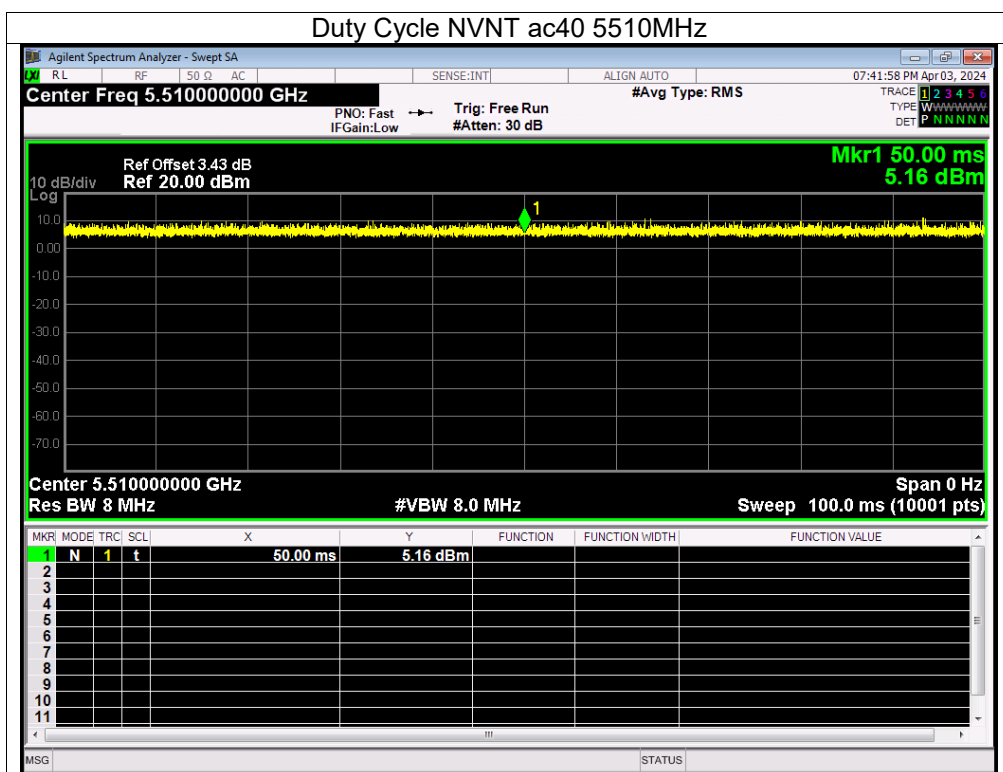


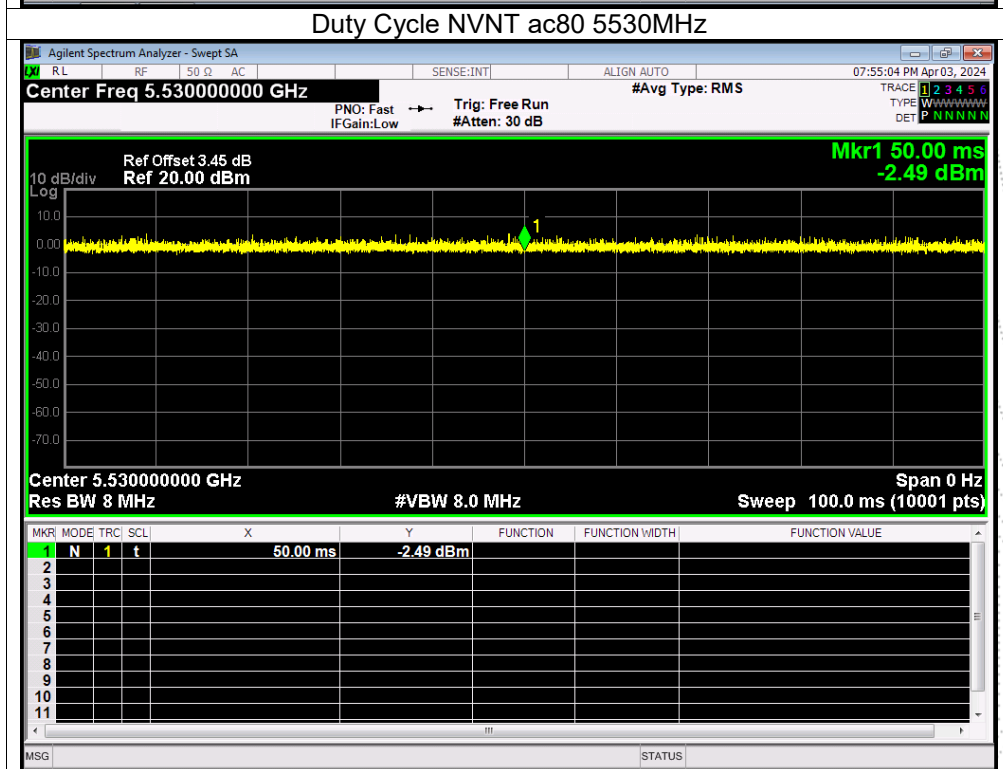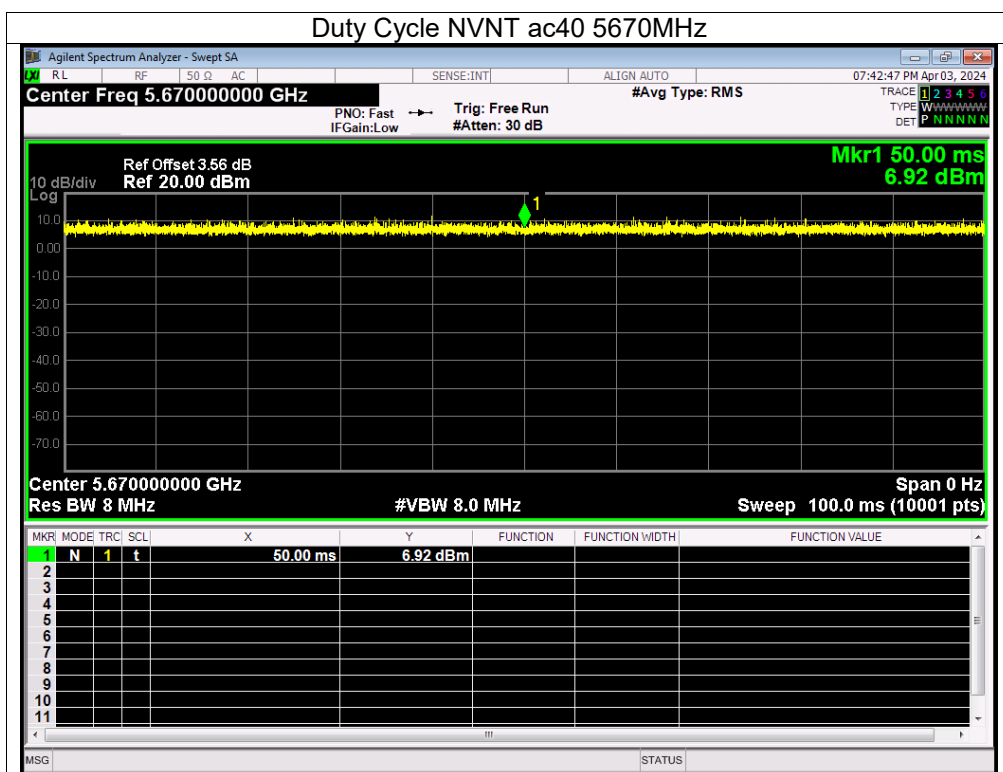

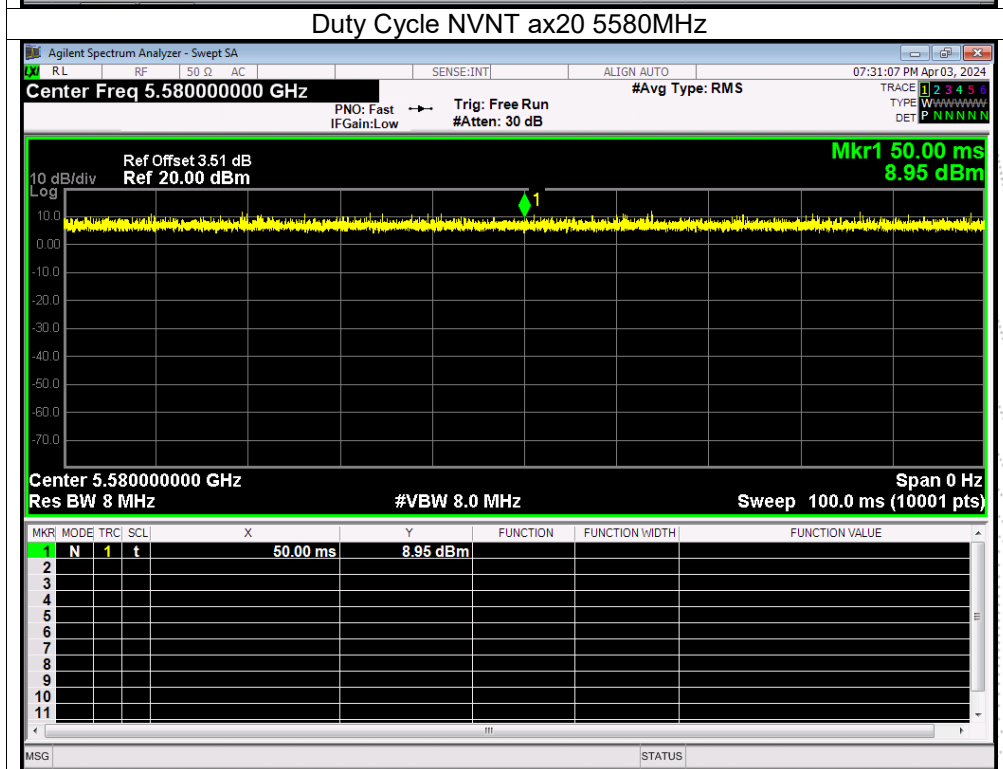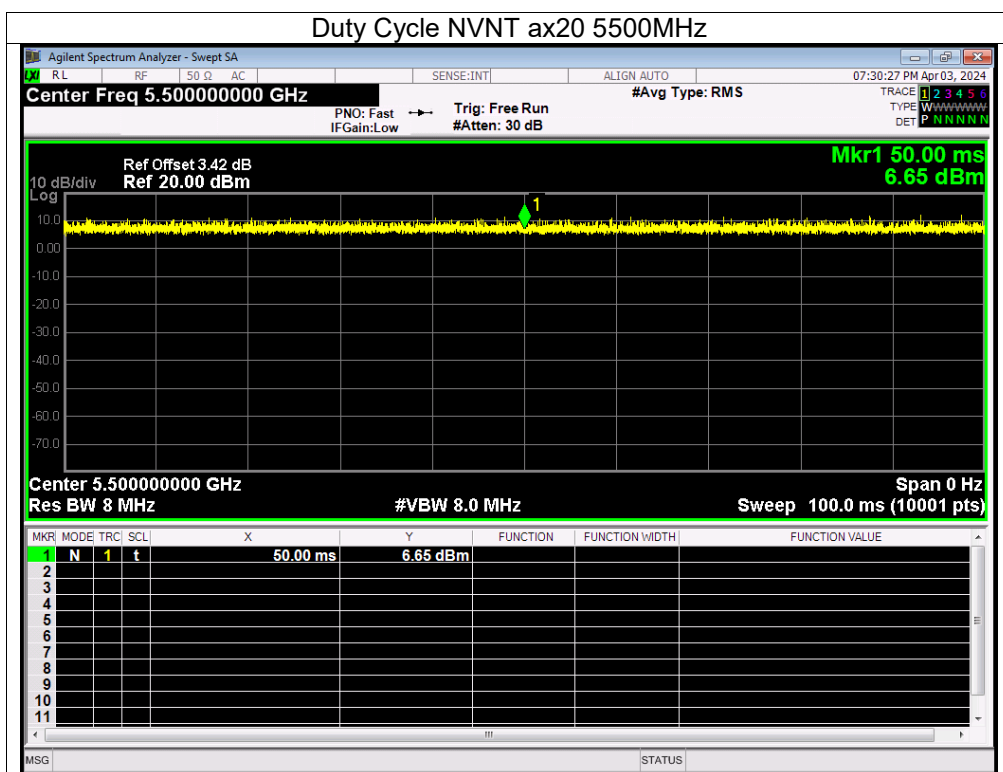


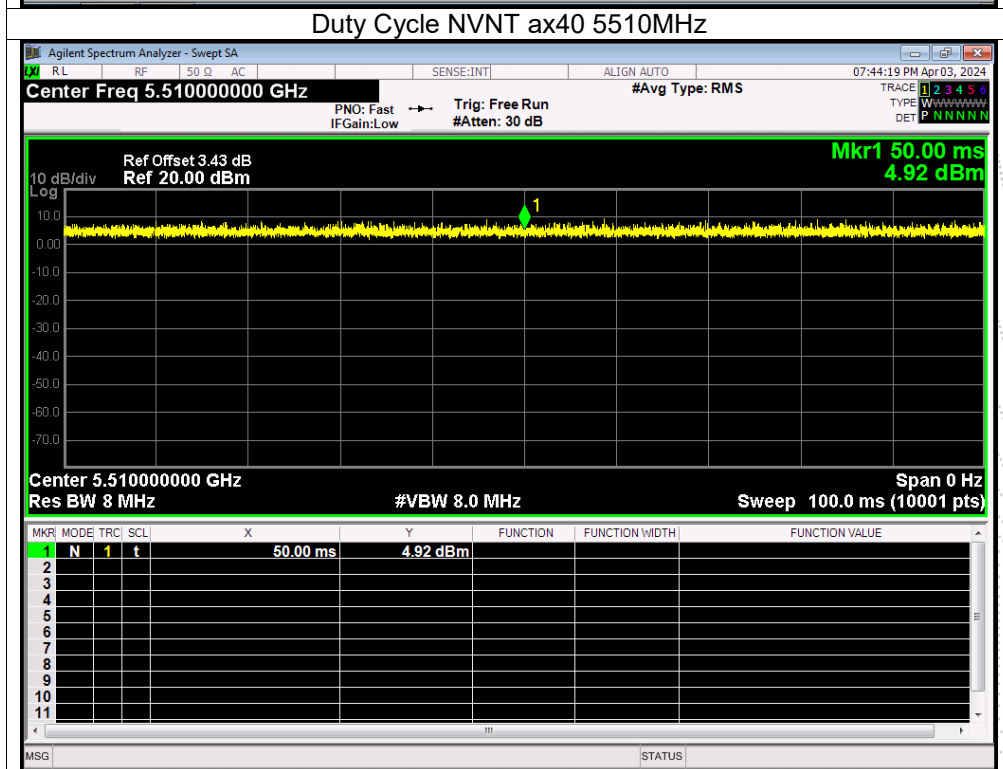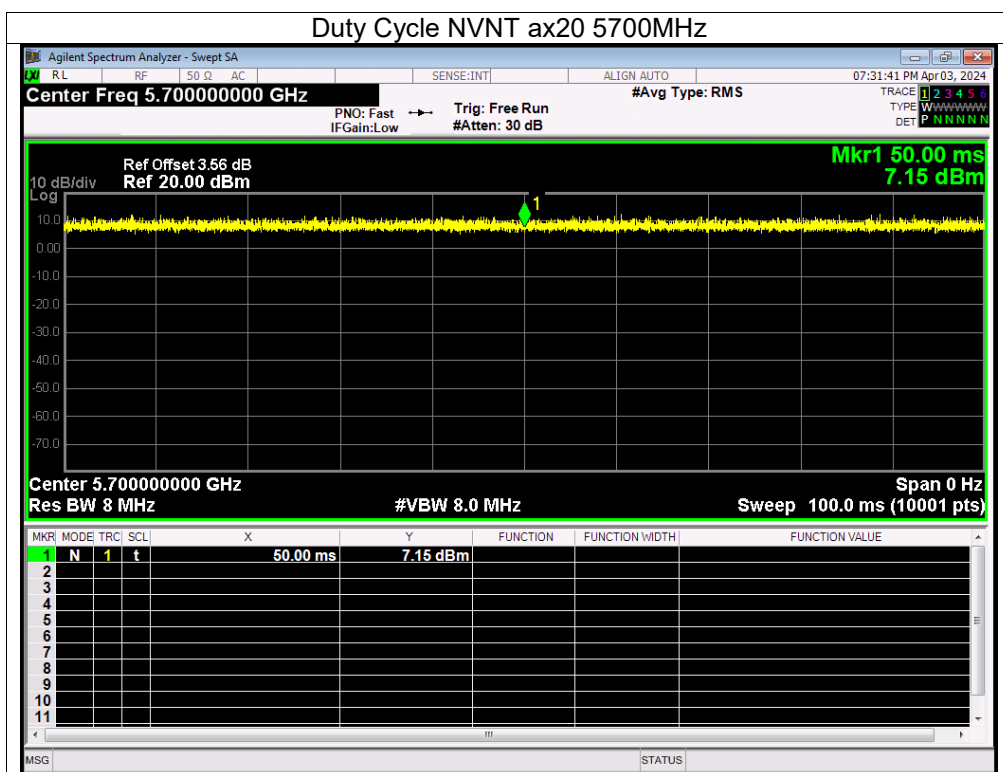

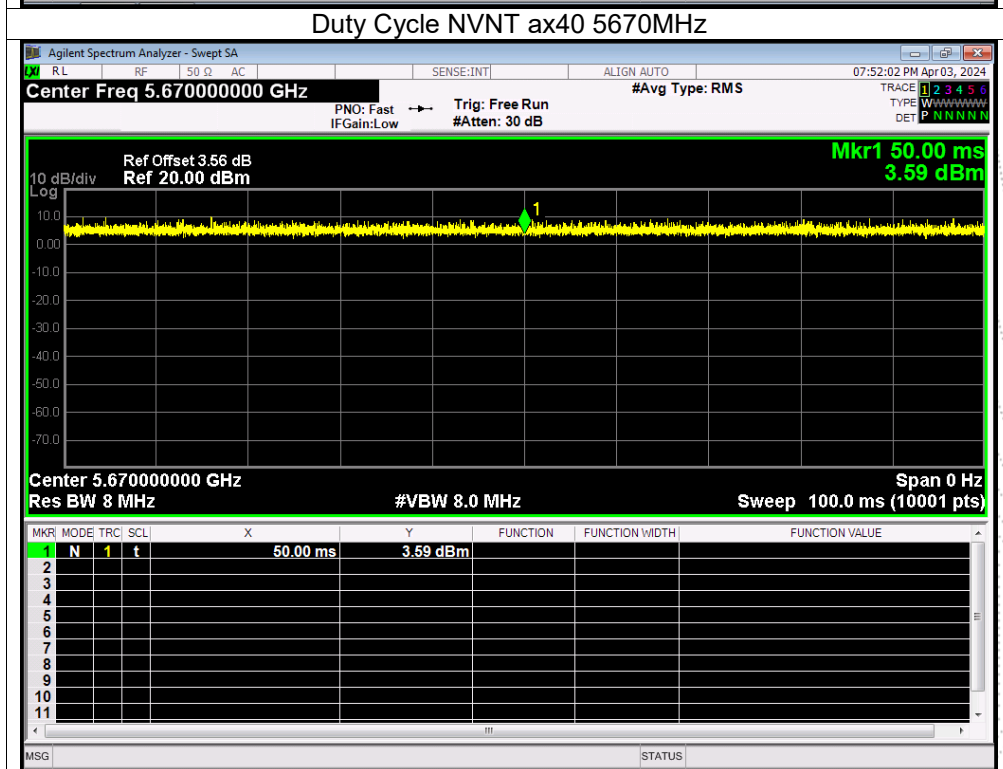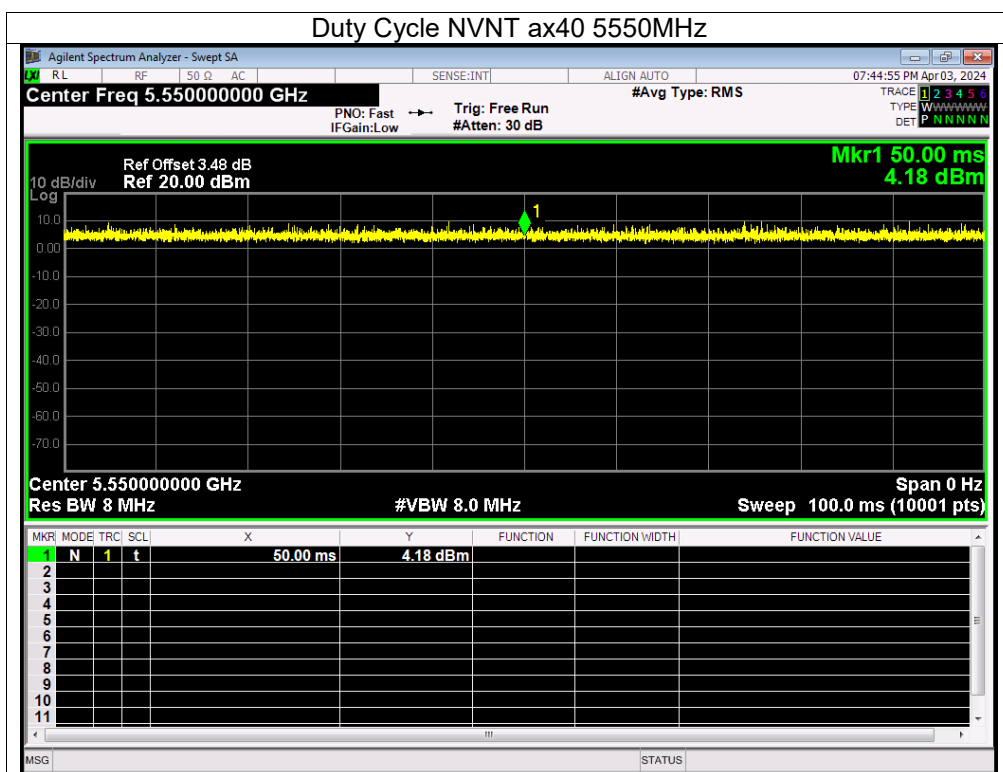

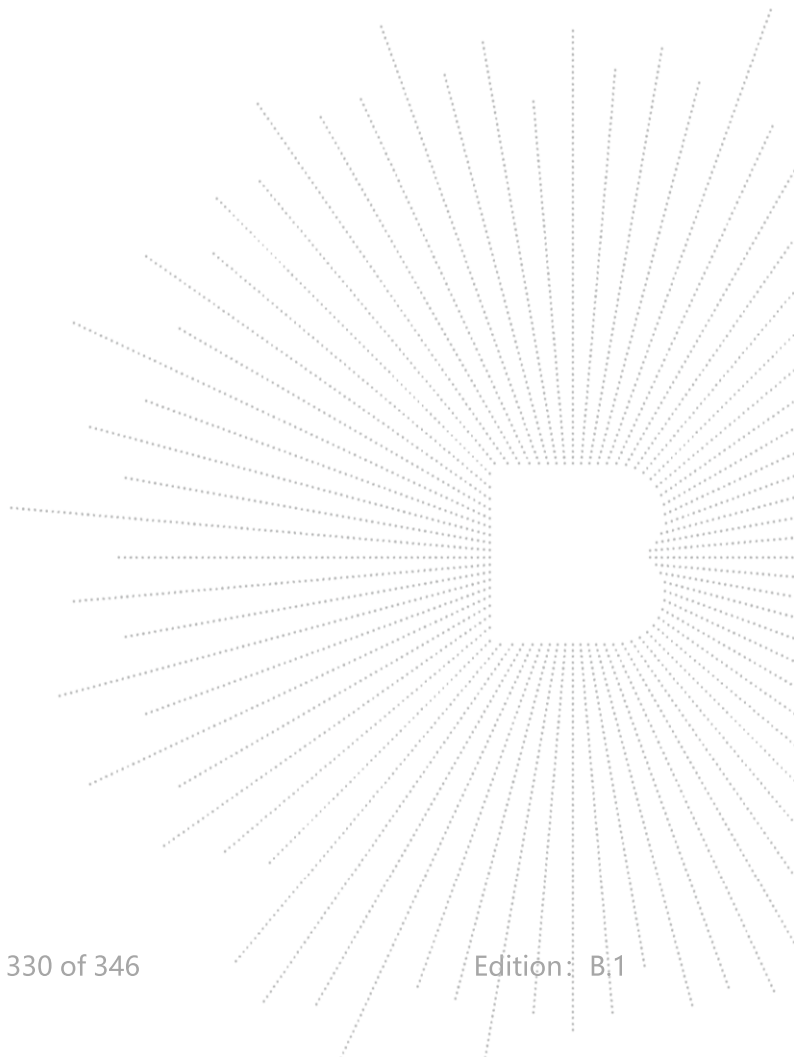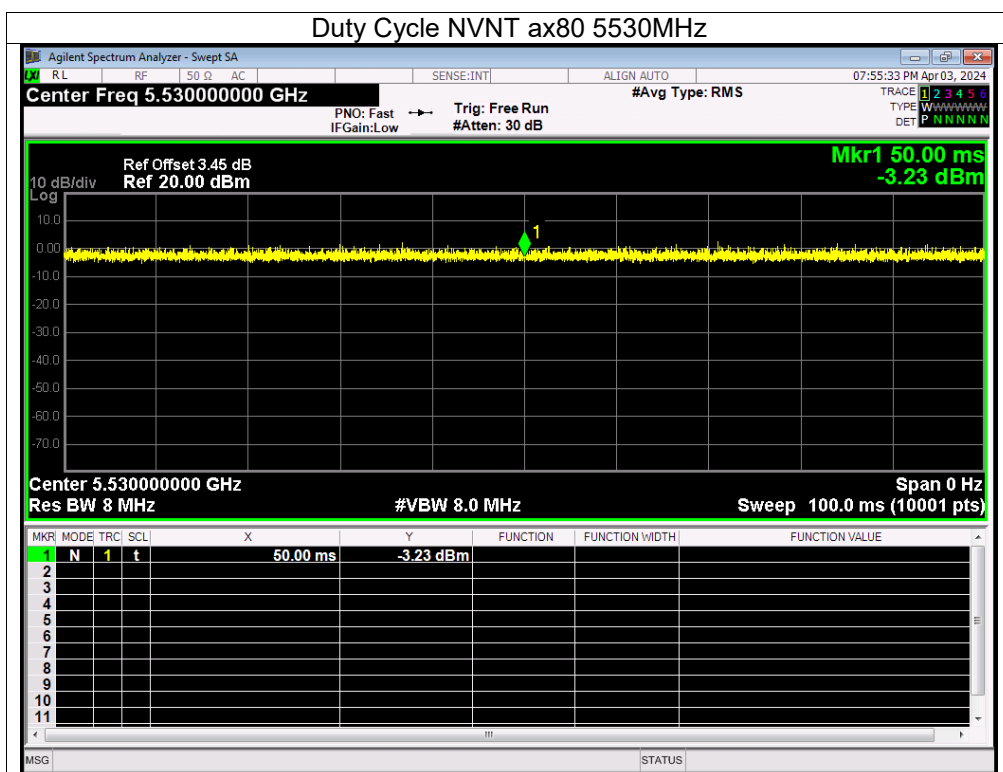

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	100	0	0
NVNT	a	5785	100	0	0
NVNT	a	5825	100	0	0
NVNT	n20	5745	100	0	0
NVNT	n20	5785	100	0	0
NVNT	n20	5825	100	0	0
NVNT	n40	5755	100	0	0
NVNT	n40	5795	100	0	0
NVNT	ac20	5745	100	0	0
NVNT	ac20	5785	100	0	0
NVNT	ac20	5825	100	0	0
NVNT	ac40	5755	100	0	0
NVNT	ac40	5795	100	0	0
NVNT	ac80	5775	100	0	0
NVNT	ax20	5745	100	0	0
NVNT	ax20	5785	100	0	0
NVNT	ax20	5825	100	0	0
NVNT	ax40	5755	100	0	0
NVNT	ax40	5795	100	0	0
NVNT	ax80	5775	100	0	0

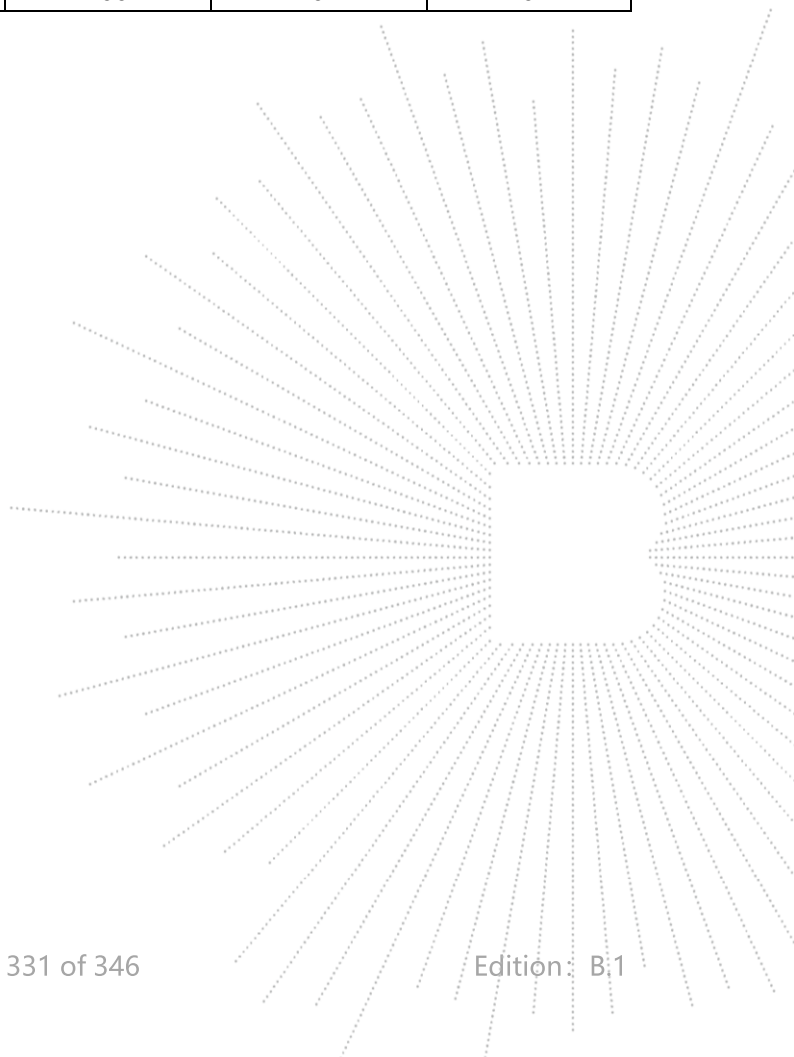

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.

