

FCC TEST REPORT

REPORT NO.: RF941109H03A
MODEL NO.: CG-WLBARGS
RECEIVED: March 7, 2006
TESTED: March 8 to 15, 2006
ISSUED: March 17, 2006

APPLICANT: Alpha Networks Inc.

ADDRESS: NO.8,Li Hsing Rd VII ,SCIENCE-BASED
INDUSTRIAL PARK,HSINCHU,TAIWAN,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5	DESCRIPTION OF SUPPORT UNITS	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST	13
4	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS	17
4.1.6	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	TEST SETUP	23
4.2.5	EUT OPERATING CONDITIONS	24
4.2.6	TEST RESULTS	25
4.2.7	TEST RESULTS – DSSS	26
4.2.8	TEST RESULTS – OFDM	29
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	TEST SETUP	34
4.3.5	EUT OPERATING CONDITIONS	34
4.3.6	TEST RESULTS –DSSS	35
4.3.7	TEST RESULTS-OFDM	38
4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	TEST SETUP	44
4.4.5	EUT OPERATING CONDITIONS	44



4.4.6	TEST RESULTS – DSSS.....	45
4.4.7	TEST RESULTS –OFDM.....	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	47
4.5.2	TEST INSTRUMENTS.....	47
4.5.3	TEST PROCEDURE.....	48
4.5.4	TEST SETUP	48
4.5.5	EUT OPERATING CONDITIONS	48
4.5.6	TEST RESULTS –DSSS.....	49
4.5.7	TEST RESULTS –OFDM.....	52
4.6	BAND EDGES MEASUREMENT	57
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	57
4.6.2	TEST INSTRUMENTS.....	57
4.6.3	TEST PROCEDURE.....	57
4.6.4	EUT OPERATING CONDITION.....	57
4.6.5	TEST RESULTS – DSSS.....	58
4.6.6	TEST RESULTS –OFDM.....	62
4.7	ANTENNA REQUIREMENT	70
4.7.1	STANDARD APPLICABLE	70
4.7.2	ANTENNA CONNECTED CONSTRUCTION	70
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	71
6	INFORMATION ON THE TESTING LABORATORIES	73
	APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT : 802.11g Wireless Router
BRAND NAME : corega
MODEL NO. : CG-WLBARGS
TESTED: March 8 to 15, 2006
APPLICANT : Alpha Networks Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: CG-WLBARGS) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** March 17, 2006
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** March 17, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** March 17, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is –16.98 dB at 2.638 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is –1.10 dB at 1641.00 MHz and 2386.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g Wireless Router
MODEL NO.	CG-WLBARGS
FCC ID	RRK-WRGG15CA1
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 3)
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 (1 for 802.11g Turbo mode)
CHANNEL SPACING	802.11b & 802.11g: 5MHz
OUTPUT POWER	802.11b: 95.499mW 802.11g: 112.202mW
ANTENNA TYPE	Please see note 3 (on next page)
DATA CABLE	NA
I/O PORTS	LAN Port x 4; WAN Port x 1
ASSOCIATED DEVICES	Adapter x 1 Cradle x 1

NOTE:

1. The EUT operates in both the 2.4GHz Bands and compatibility with 802.11b, 802.11g technology.
2. The EUT is capable of providing data rates of up to 108 Mbps in 802.11g Turbo mode depending upon reception quality.

3. There are three antennas provided to this EUT, please refer to the following table:

No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector	Remark
1	NA	-2.0 dBi	Printed Antenna	NA	RX only
2	IW-241RS-120-1	2.0 dBi	Dipole Antenna	R-SMA	TX/ RX
3	SA2-05035-A5	4.5 dBi	Dipole Antenna	R-SMA	TX/ RX

From the above antennas, antenna 1 and 3 were selected as representative antennas for the test and their data were recorded in this report.

4. The EUT was powered by following power adapter:

Brand:	JENTEC TECHNOLOGY CO., LTD
Model No.:	JTA0302D
Input power :	100~240Vac/0.5A 50~60Hz
Output power :	5.0V/2.0A 1.8m, non-shielded

5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g turbo mode: One channel is provided to this EUT

Channel	Frequency
6	2437 MHz

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11g Wireless Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	DELL	4600	00043-517-542-487	FCC DoC
2	MONITOR	ADI	G1000	240058T00100081	NA
3	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
4	MODEM	ACEEX	1414	0206026779	IFAXDM1414
5	KEYBOARD	BTC	KB-5200T	F24800412	E5XKB5122WTH0110
6	MOUSE	BTC	M851	G00347024425	NA
7	NOTEBOOK	DELL	PP01L	TW-09c748-12800-165-3171	FCC DoC
8	NOTEBOOK	ASUS	A2400H	49NG038481	NA
9	HUB	AVSYS	110H8	01-20E-000002	FCC DoC

No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.1m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.1 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.7 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	1.5 m foil shielded wire, terminated with PS2 connector via drain wire, w/o core.
7	NA
8	NA
9	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For Radiated Emission:

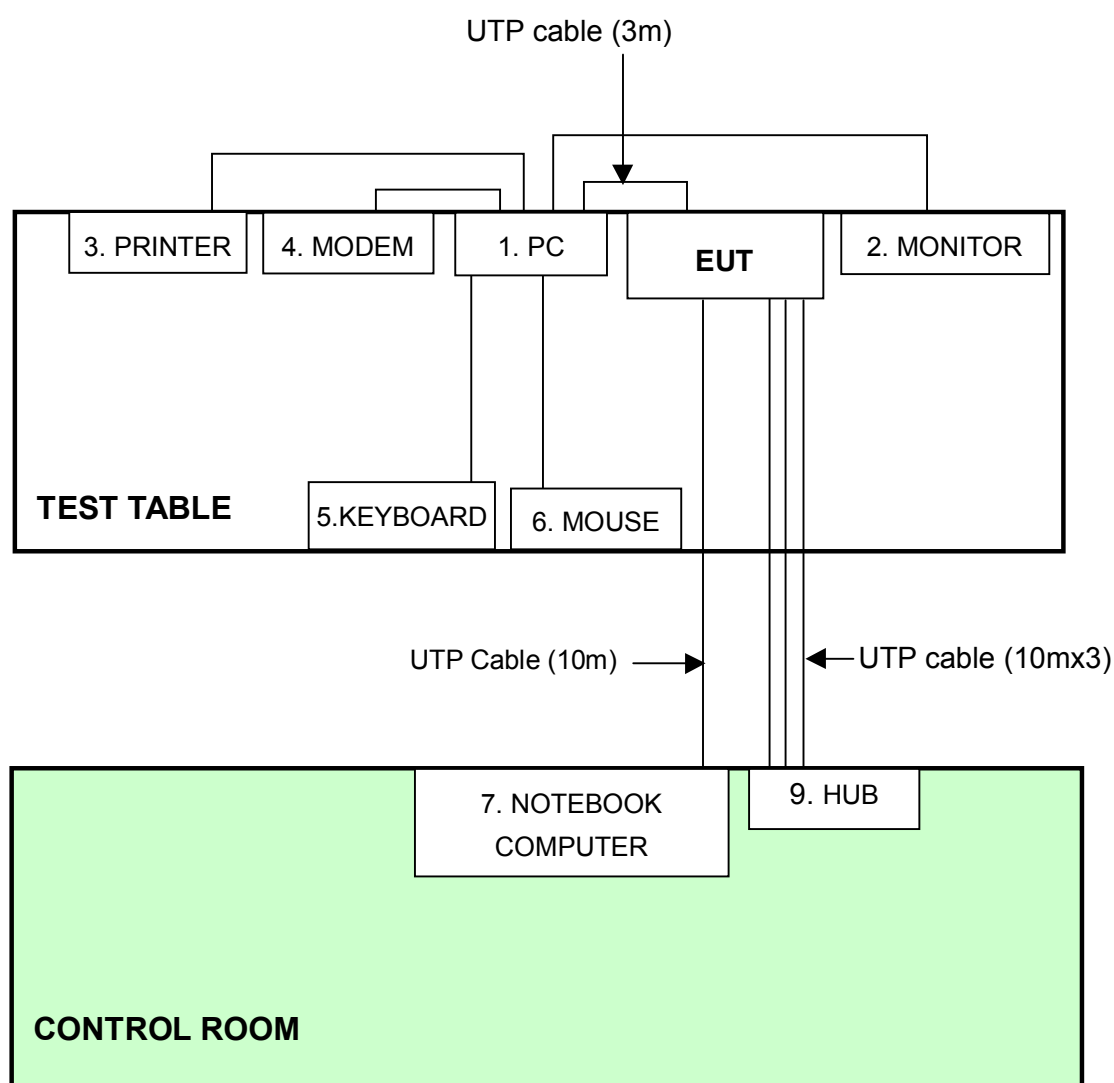

- NOTE:**
1. Support unit 7 and 9 were kept in the control room during the test.
 2. Please refer to the photos of test configuration in Item 5 also.

For Conducted Emission:

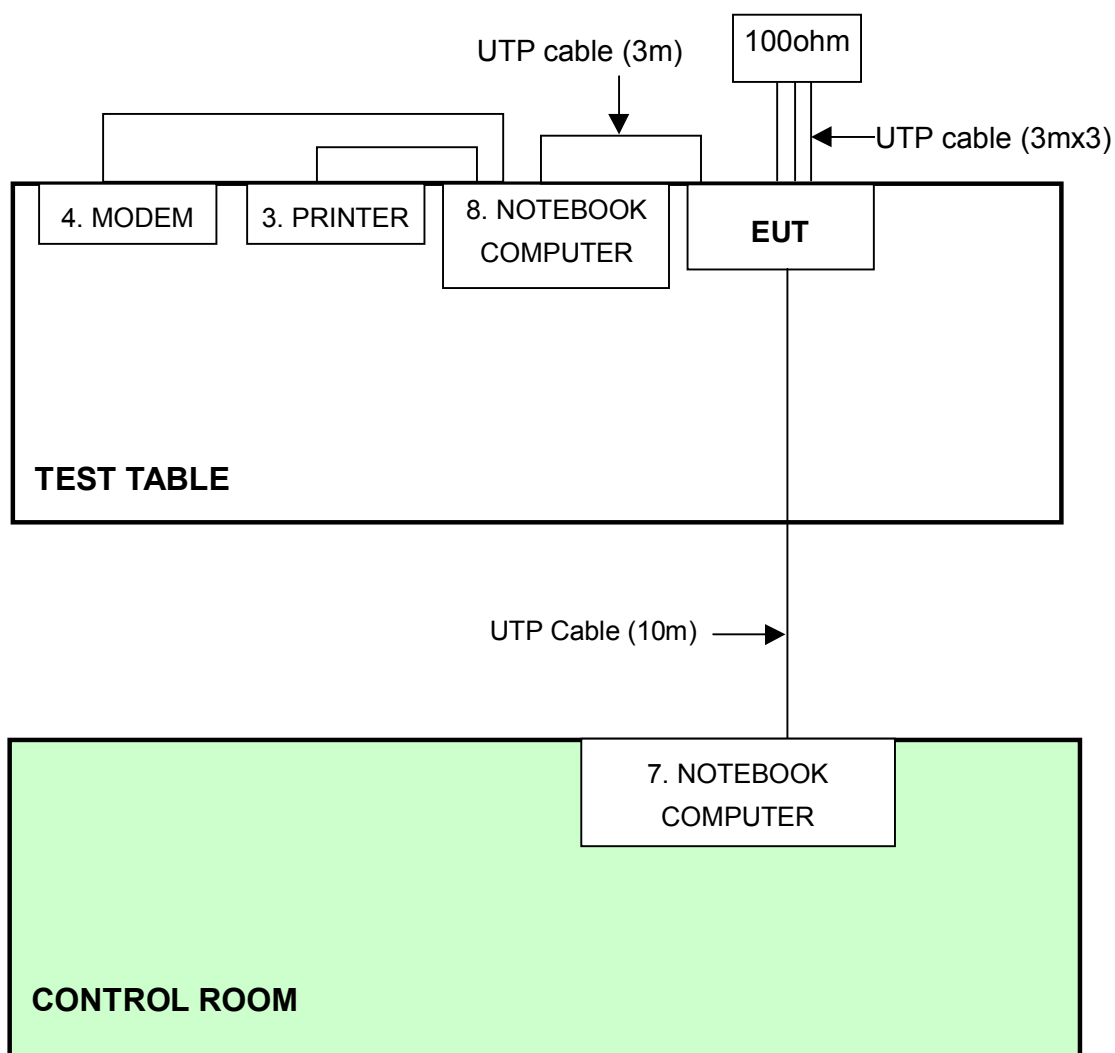

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	KNW-407	8/1395/12	Jul. 19, 2006
RF Signal Cable	RG233/U	Cable_CA_02	Dec. 10, 2006
Terminator(for KYORITSU)	50	2	Oct. 08, 2006
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

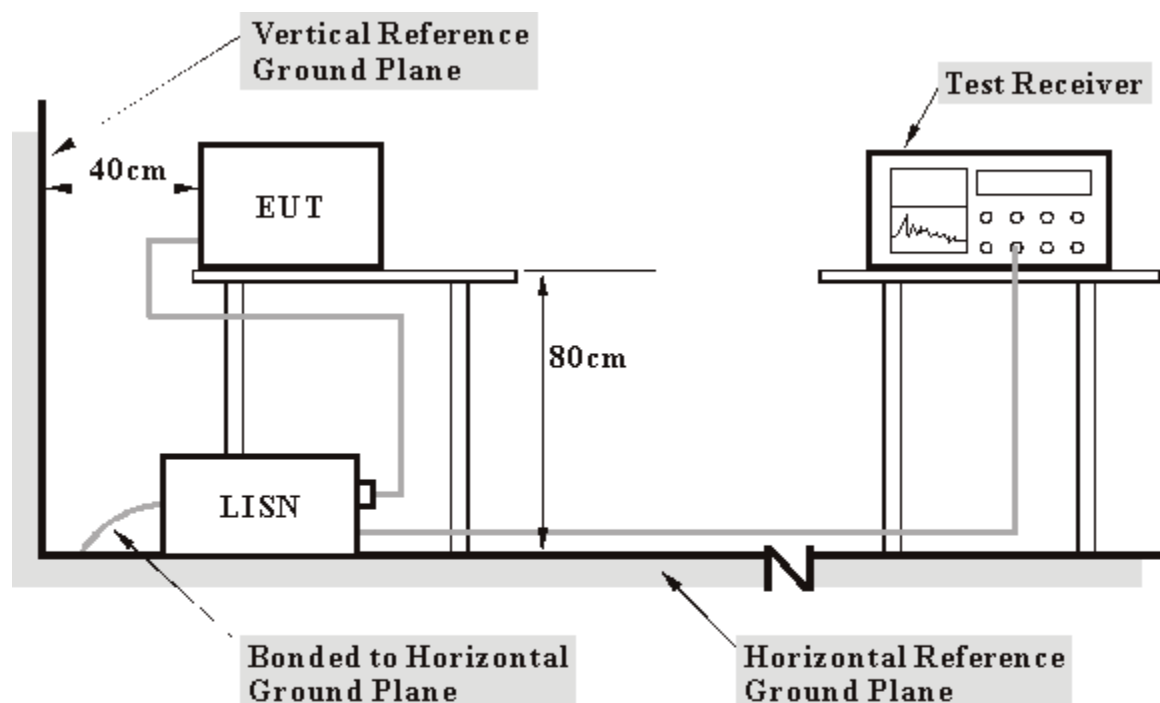

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. The support units (3,4 and 8) act as a Server PC system to communicate with EUT via UTP cable.
- c. Prepared other computer system (support unit 7) to act as a communication partner and placed it outside of testing area.
- d. The communication partner runs test program "Art 52Build10" to enable EUT under transmission/receiving condition continuously via one UTP cable.
- e. Notebook computer sends "H" messages to modem.
- f. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS

TEST MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 63% RH, 973 hPa	TESTED BY:	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	9.29	35.31	-	44.60	-	64.25	54.25	-19.65	-
2	0.369	9.20	26.55	-	35.75	-	58.53	48.53	-22.78	-
3	0.552	9.19	24.27	-	33.46	-	56.00	46.00	-22.54	-
4	2.084	9.24	26.66	-	35.90	-	56.00	46.00	-20.10	-
5	2.638	9.28	29.10	-	38.38	-	56.00	46.00	-17.62	-
6	25.008	9.86	27.03	-	36.89	-	60.00	50.00	-23.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

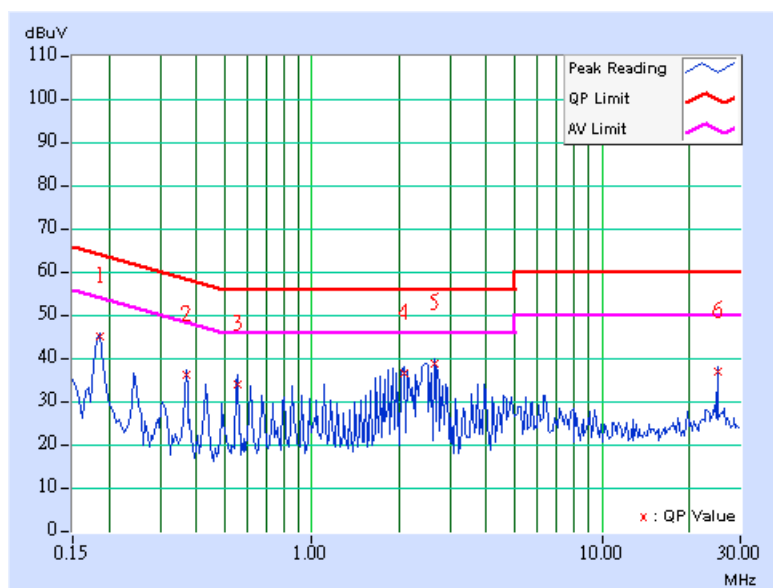

TEST MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 63% RH, 973 hPa	TESTED BY: Eric Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	9.19	37.07	-	46.26	-	64.25	54.25	-17.99	-
2	0.369	9.22	30.18	-	39.40	-	58.53	48.53	-19.13	-
3	0.548	9.23	24.19	-	33.42	-	56.00	46.00	-22.58	-
4	1.904	9.29	28.56	-	37.85	-	56.00	46.00	-18.15	-
5	2.638	9.34	29.68	-	39.02	-	56.00	46.00	-16.98	-
6	25.008	9.88	26.71	-	36.59	-	60.00	50.00	-23.41	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

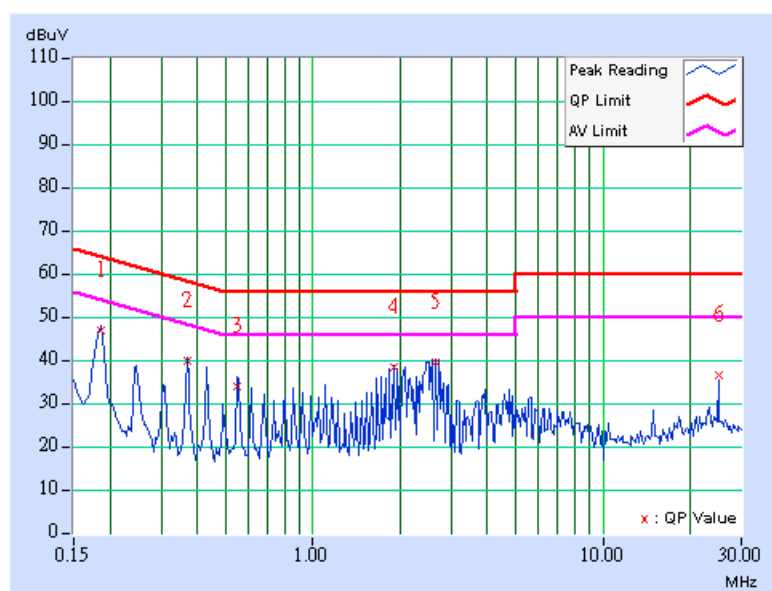

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 16, 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

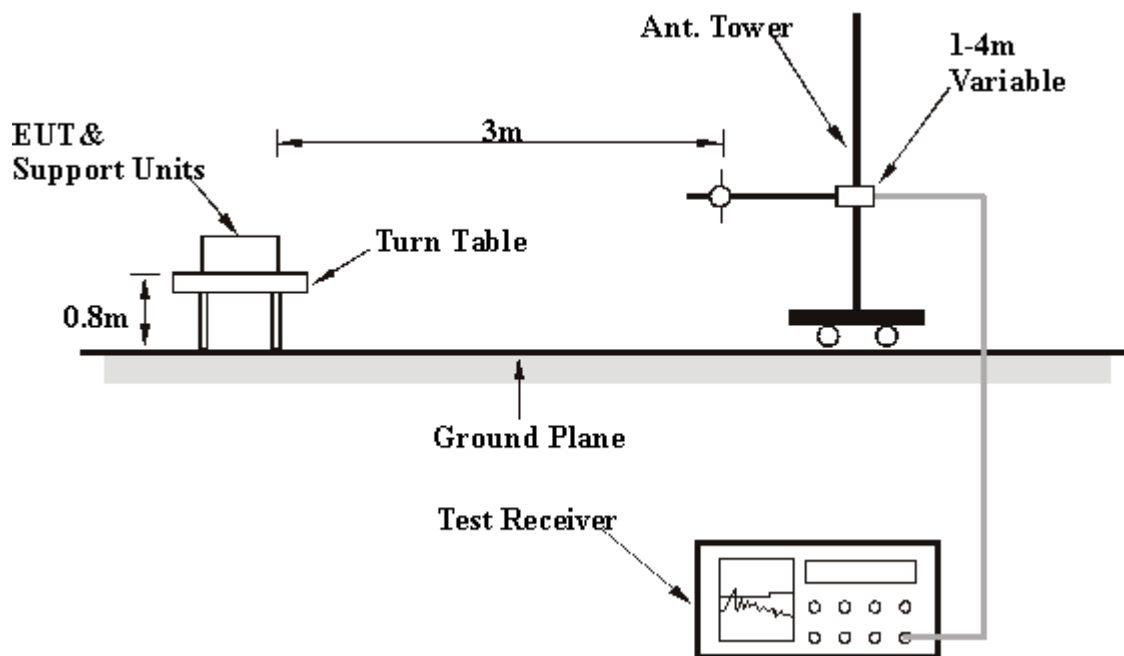

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. The support units (1-6) act as a Server PC system to communicate with EUT via UTP cable.
- c. Prepared other computer system (support unit 7) to act as a communication partner and placed it outside of testing area.
- d. The communication partner runs test program "Art 52Build10" to enable EUT under transmission/receiving condition continuously via one UTP cable.
- e. PC sends "H" messages to modem.
- f. PC sends "H" messages to printer, and the printer prints them on paper.

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	28.50 QP	43.50	-15.00	1.51 H	326	16.60	11.90
2	184.00	35.70 QP	43.50	-7.80	1.72 H	317	23.40	12.30
3	250.01	33.80 QP	46.00	-12.20	1.36 H	348	20.50	13.30
4	276.00	39.70 QP	46.00	-6.30	1.04 H	294	24.60	15.10
5	375.01	40.10 QP	46.00	-5.90	1.00 H	247	22.50	17.60
6	500.02	40.00 QP	46.00	-6.00	1.00 H	303	19.10	20.90
7	625.04	37.90 QP	46.00	-8.10	1.27 H	106	14.20	23.80
8	750.03	36.30 QP	46.00	-9.70	1.66 H	16	10.00	26.40
9	850.06	34.20 QP	46.00	-11.80	1.12 H	178	6.80	27.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	32.50 QP	43.50	-11.00	1.00 V	318	20.60	11.90
2	184.00	36.60 QP	43.50	-6.90	1.00 V	265	24.30	12.30
3	250.00	33.60 QP	46.00	-12.40	1.00 V	61	20.40	13.30
4	276.00	34.20 QP	46.00	-11.80	1.00 V	54	19.10	15.10
5	375.02	38.20 QP	46.00	-7.80	1.00 V	109	20.60	17.60
6	500.03	40.00 QP	46.00	-6.00	1.25 V	23	19.20	20.90
7	625.03	37.90 QP	46.00	-8.10	1.39 V	25	14.10	23.80
8	750.00	34.50 QP	46.00	-11.50	1.68 V	208	8.10	26.40
9	875.06	35.60 QP	46.00	-10.40	1.03 V	354	8.00	27.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS – DSSS 802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.30 PK	74.00	-32.70	1.21 H	45	14.00	27.40
1	1608.00	37.30 AV	54.00	-16.70	1.21 H	45	10.00	27.40
2	2386.00	53.90 PK	74.00	-20.10	1.02 H	299	21.40	32.50
2	2386.00	45.80 AV	54.00	-8.20	1.02 H	299	13.30	32.50
3	2390.00	52.50 PK	74.00	-21.50	1.02 H	299	18.80	33.70
3	2390.00	44.10 AV	54.00	-9.90	1.02 H	299	10.40	33.70
4	*2412.00	107.60 PK			1.02 H	299	77.80	29.80
4	*2412.00	100.20 AV			1.02 H	299	70.40	29.80
5	3216.00	42.50 PK	74.00	-31.50	1.04 H	313	10.50	32.00
5	3216.00	36.80 AV	54.00	-17.20	1.04 H	313	4.80	32.00
6	4824.00	43.00 PK	74.00	-31.00	1.43 H	178	7.90	35.10
6	4824.00	31.90 AV	54.00	-22.10	1.43 H	178	-3.20	35.10
7	7236.00	47.90 PK	74.00	-26.10	1.57 H	342	7.40	40.50
7	7236.00	36.10 AV	54.00	-17.90	1.57 H	342	-4.40	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	47.50 PK	74.00	-26.50	1.15 V	328	20.20	27.40
1	1608.00	44.50 AV	54.00	-9.50	1.15 V	328	17.20	27.40
2	2386.00	61.50 PK	74.00	-12.50	1.25 V	324	29.00	32.50
2	2386.00	52.90 AV	54.00	-1.10	1.25 V	324	20.40	32.50
3	2390.00	60.10 PK	74.00	-13.90	1.25 V	324	26.40	33.70
3	2390.00	51.20 AV	54.00	-2.80	1.25 V	324	17.50	33.70
4	*2412.00	115.20 PK			1.25 V	324	85.40	29.80
4	*2412.00	107.30 AV			1.25 V	324	77.50	29.80
5	3216.00	45.20 PK	74.00	-28.80	1.04 V	286	13.20	32.00
5	3216.00	38.20 AV	54.00	-15.80	1.04 V	286	6.20	32.00
6	4824.00	45.00 PK	74.00	-29.00	1.54 V	332	9.90	35.10
6	4824.00	33.90 AV	54.00	-20.10	1.54 V	332	-1.20	35.10
7	7236.00	49.00 PK	74.00	-25.00	1.31 V	343	8.50	40.50
7	7236.00	37.20 AV	54.00	-16.80	1.31 V	343	-3.30	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	43.00 PK	74.00	-31.00	1.12 H	39	15.60	27.40
1	1624.50	39.50 AV	54.00	-14.50	1.12 H	39	12.10	27.40
2	*2437.00	108.00 PK			1.05 H	307	78.10	29.90
2	*2437.00	100.40 AV			1.05 H	307	70.50	29.90
3	3249.00	43.30 PK	74.00	-30.70	1.06 H	284	11.20	32.10
3	3249.00	37.60 AV	54.00	-16.40	1.06 H	284	5.50	32.10
4	4874.00	43.00 PK	74.00	-31.00	1.51 H	36	7.70	35.30
4	4874.00	31.60 AV	54.00	-22.40	1.51 H	36	-3.70	35.30
5	7311.00	48.30 PK	74.00	-25.70	1.46 H	287	7.60	40.70
5	7311.00	36.60 AV	54.00	-17.40	1.46 H	287	-4.10	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	53.50 PK	74.00	-20.50	1.12 V	339	26.10	27.40
1	1624.50	51.80 AV	54.00	-2.20	1.12 V	339	24.40	27.40
2	*2437.00	115.10 PK			1.23 V	341	85.20	29.90
2	*2437.00	107.20 AV			1.23 V	341	77.30	29.90
3	3249.00	44.70 PK	74.00	-29.30	1.04 V	284	12.60	32.10
3	3249.00	38.80 AV	54.00	-15.20	1.04 V	284	6.70	32.10
4	4874.00	45.10 PK	74.00	-28.90	1.57 V	312	9.80	35.30
4	4874.00	33.80 AV	54.00	-20.20	1.57 V	312	-1.50	35.30
5	7311.00	49.80 PK	74.00	-24.20	1.25 V	36	9.10	40.70
5	7311.00	37.70 AV	54.00	-16.30	1.25 V	36	-3.00	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	46.40 PK	74.00	-27.60	1.08 H	53	19.00	27.40
1	1641.00	43.50 AV	54.00	-10.50	1.08 H	53	16.10	27.40
2	*2462.00	108.30 PK			1.09 H	304	78.30	30.00
2	*2462.00	100.60 AV			1.09 H	304	70.60	30.00
3	2483.50	52.10 PK	74.00	-21.90	1.09 H	304	22.00	30.10
3	2483.50	40.00 AV	54.00	-14.00	1.09 H	304	9.90	30.10
4	3282.00	44.30 PK	74.00	-29.70	1.08 H	293	12.20	32.20
4	3282.00	38.40 AV	54.00	-15.60	1.08 H	293	6.30	32.20
5	4924.00	43.60 PK	74.00	-30.40	1.62 H	343	8.00	35.50
5	4924.00	32.10 AV	54.00	-21.90	1.62 H	343	-3.50	35.50
6	7386.00	48.70 PK	74.00	-25.30	1.47 H	315	7.90	40.80
6	7386.00	37.00 AV	54.00	-17.00	1.47 H	315	-3.80	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	53.20 PK	74.00	-20.80	1.14 V	325	25.80	27.40
1	1641.00	51.60 AV	54.00	-2.40	1.14 V	325	24.20	27.40
2	*2462.00	115.60 PK			1.21 V	27	85.60	30.00
2	*2462.00	107.70 AV			1.21 V	27	77.70	30.00
3	2483.50	59.40 PK	74.00	-14.60	1.21 V	27	29.30	30.10
3	2483.50	47.10 AV	54.00	-6.90	1.21 V	27	17.00	30.10
4	3282.00	45.90 PK	74.00	-28.10	1.00 V	284	13.80	32.20
4	3282.00	40.00 AV	54.00	-14.00	1.00 V	284	7.90	32.20
5	4924.00	44.60 PK	74.00	-29.40	1.61 V	287	9.00	35.50
5	4924.00	33.40 AV	54.00	-20.60	1.61 V	287	-2.20	35.50
6	7386.00	49.00 PK	74.00	-25.00	1.22 V	89	8.20	40.80
6	7386.00	37.30 AV	54.00	-16.70	1.22 V	89	-3.50	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS – OFDM

802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	43.10 PK	74.00	-30.90	1.19 H	43	15.80	27.40
1	1608.00	39.50 AV	54.00	-14.50	1.19 H	43	12.20	27.40
2	2390.00	55.30 PK	74.00	-18.70	1.02 H	298	21.60	33.70
2	2390.00	45.10 AV	54.00	-8.90	1.02 H	298	11.40	33.70
3	*2412.00	101.90 PK			1.02 H	298	72.10	29.80
3	*2412.00	93.10 AV			1.02 H	298	63.30	29.80
4	3216.00	43.00 PK	74.00	-31.00	1.03 H	309	11.00	32.00
4	3216.00	37.50 AV	54.00	-16.50	1.03 H	309	5.50	32.00
5	4824.00	42.90 PK	74.00	-31.10	1.48 H	29	7.80	35.10
5	4824.00	31.40 AV	54.00	-22.60	1.48 H	29	-3.70	35.10
6	7236.00	47.90 PK	74.00	-26.10	1.52 H	337	7.40	40.50
6	7236.00	36.40 AV	54.00	-17.60	1.52 H	337	-4.10	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	49.60 PK	74.00	-24.40	1.15 V	329	22.30	27.40
1	1608.00	47.10 AV	54.00	-6.90	1.15 V	329	19.80	27.40
2	2390.00	62.00 PK	74.00	-12.00	1.24 V	326	28.30	33.70
2	2390.00	52.00 AV	54.00	-2.00	1.24 V	326	18.30	33.70
3	*2412.00	108.60 PK			1.24 V	326	78.80	29.80
3	*2412.00	100.00 AV			1.24 V	326	70.20	29.80
4	3216.00	44.70 PK	74.00	-29.30	1.05 V	289	12.70	32.00
4	3216.00	38.00 AV	54.00	-16.00	1.05 V	289	6.00	32.00
5	4824.00	43.90 PK	74.00	-30.10	1.51 V	328	8.80	35.10
5	4824.00	32.50 AV	54.00	-21.50	1.51 V	328	-2.60	35.10
6	7236.00	48.10 PK	74.00	-25.90	1.27 V	331	7.60	40.50
6	7236.00	36.70 AV	54.00	-17.30	1.27 V	331	-3.80	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	45.30 PK	74.00	-28.70	1.11 H	37	17.90	27.40
1	1624.50	42.20 AV	54.00	-11.80	1.11 H	37	14.80	27.40
2	*2437.00	109.20 PK			1.07 H	311	79.30	29.90
2	*2437.00	98.70 AV			1.07 H	311	68.80	29.90
3	3249.00	43.70 PK	74.00	-30.30	1.05 H	282	11.60	32.10
3	3249.00	37.90 AV	54.00	-16.10	1.05 H	282	5.80	32.10
4	4824.00	42.50 PK	74.00	-31.50	1.54 H	23	7.40	35.10
4	4824.00	31.20 AV	54.00	-22.80	1.54 H	23	-3.90	35.10
5	7311.00	47.80 PK	74.00	-26.20	1.43 H	292	7.10	40.70
5	7311.00	36.30 AV	54.00	-17.70	1.43 H	292	-4.40	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	50.80 PK	74.00	-23.20	1.13 V	340	23.40	27.40
1	1624.50	49.00 AV	54.00	-5.00	1.13 V	340	21.60	27.40
2	*2437.00	115.50 PK			1.23 V	329	85.60	29.90
2	*2437.00	105.50 AV			1.23 V	329	75.60	29.90
3	3249.00	44.50 PK	74.00	-29.50	1.03 V	286	12.40	32.10
3	3249.00	38.50 AV	54.00	-15.50	1.03 V	286	6.40	32.10
4	4824.00	43.80 PK	74.00	-30.20	1.58 V	315	8.70	35.10
4	4824.00	32.10 AV	54.00	-21.90	1.58 V	315	-3.00	35.10
5	7311.00	48.60 PK	74.00	-25.40	1.24 V	34	7.90	40.70
5	7311.00	37.20 AV	54.00	-16.80	1.24 V	34	-3.50	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	49.80 PK	74.00	-24.20	1.09 H	54	22.40	27.40
1	1641.00	48.10 AV	54.00	-5.90	1.09 H	54	20.70	27.40
2	*2462.00	104.70 PK			1.08 H	307	74.70	30.00
2	*2462.00	95.60 AV			1.08 H	307	65.60	30.00
3	2483.50	57.40 PK	74.00	-16.60	1.08 H	307	27.30	30.10
3	2483.50	45.40 AV	54.00	-8.60	1.08 H	307	15.30	30.10
4	3282.00	44.20 PK	74.00	-29.80	1.07 H	294	12.10	32.20
4	3282.00	38.30 AV	54.00	-15.70	1.07 H	294	6.20	32.20
5	4924.00	43.30 PK	74.00	-30.70	1.59 H	328	7.70	35.50
5	4924.00	31.70 AV	54.00	-22.30	1.59 H	328	-3.90	35.50
6	7386.00	48.10 PK	74.00	-25.90	1.46 H	321	7.30	40.80
6	7386.00	36.60 AV	54.00	-17.40	1.46 H	321	-4.20	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	55.00 PK	74.00	-19.00	1.13 V	323	27.60	27.40
1	1641.00	52.90 AV	54.00	-1.10	1.13 V	323	25.50	27.40
2	*2462.00	110.80 PK			1.20 V	31	80.80	30.00
2	*2462.00	102.30 AV			1.20 V	31	72.30	30.00
3	2483.50	63.80 PK	74.00	-10.20	1.20 V	31	33.70	30.10
3	2483.50	52.10 AV	54.00	-1.90	1.20 V	31	22.00	30.10
4	3282.00	45.30 PK	74.00	-28.70	1.01 V	288	13.20	32.20
4	3282.00	37.90 AV	54.00	-16.10	1.01 V	288	5.80	32.20
5	4924.00	43.90 PK	74.00	-30.10	1.58 V	264	8.30	35.50
5	4924.00	32.90 AV	54.00	-21.10	1.58 V	264	-2.70	35.50
6	7386.00	48.50 PK	74.00	-25.50	1.24 V	113	7.70	40.80
6	7386.00	37.00 AV	54.00	-17.00	1.24 V	113	-3.80	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

802.11g Turbo OFDM modulation



MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 53%RH, 973 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	45.60 PK	74.00	-28.40	1.27 H	38	18.20	27.40
1	1624.00	42.80 AV	54.00	-11.20	1.27 H	38	15.40	27.40
2	2390.00	56.30 PK	74.00	-17.70	1.21 H	38	22.60	33.70
2	2390.00	40.00 AV	54.00	-14.00	1.21 H	38	6.30	33.70
3	*2437.00	101.90 PK			1.38 H	130	72.00	29.90
3	*2437.00	92.50 AV			1.38 H	130	62.60	29.90
4	2483.50	41.20 PK	74.00	-32.80	1.34 H	120	11.10	30.10
4	2483.50	30.40 AV	54.00	-23.60	1.34 H	120	0.30	30.10
5	3249.00	41.60 PK	74.00	-32.40	1.37 H	209	9.50	32.10
5	3249.00	31.90 AV	54.00	-22.10	1.37 H	209	-0.20	32.10
6	4874.00	42.40 PK	74.00	-31.60	1.14 H	310	7.10	35.30
6	4874.00	29.40 AV	54.00	-24.60	1.14 H	310	-5.90	35.30
7	7311.00	47.60 PK	74.00	-26.40	1.40 H	247	6.90	40.70
7	7311.00	34.70 AV	54.00	-19.30	1.40 H	247	-6.00	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	51.70 PK	74.00	-22.30	1.00 V	154	24.20	27.40
1	1624.00	49.50 AV	54.00	-4.50	1.00 V	154	22.10	27.40
2	2390.00	67.20 PK	74.00	-6.80	1.01 V	124	33.50	33.70
2	2390.00	50.10 AV	54.00	-3.90	1.01 V	124	16.40	33.70
3	*2437.00	112.50 PK			1.09 V	56	82.60	29.90
3	*2437.00	103.80 AV			1.09 V	56	73.80	29.90
4	2491.00	57.20 PK	74.00	-16.80	1.16 V	117	21.60	35.60
4	2491.00	44.10 AV	54.00	-9.90	1.16 V	117	8.50	35.60
5	3249.00	43.50 PK	74.00	-30.50	1.27 V	172	11.40	32.10
5	3249.00	35.60 AV	54.00	-18.40	1.27 V	172	3.50	32.10
6	4874.00	43.40 PK	74.00	-30.60	1.13 V	90	8.10	35.30
6	4874.00	30.70 AV	54.00	-23.30	1.13 V	90	-4.60	35.30
7	7311.00	52.80 PK	74.00	-21.20	1.24 V	123	12.10	40.70
7	7311.00	38.60 AV	54.00	-15.40	1.24 V	123	-2.00	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.16	0.5	PASS
6	2437	12.15	0.5	PASS
11	2462	12.15	0.5	PASS

CH1

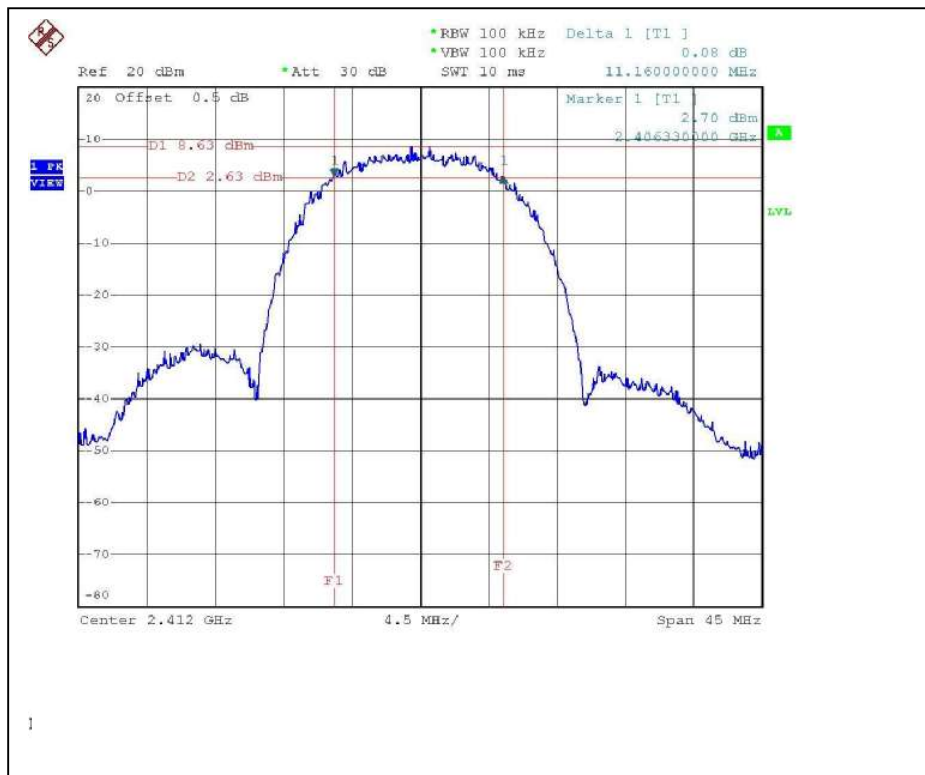

CH6



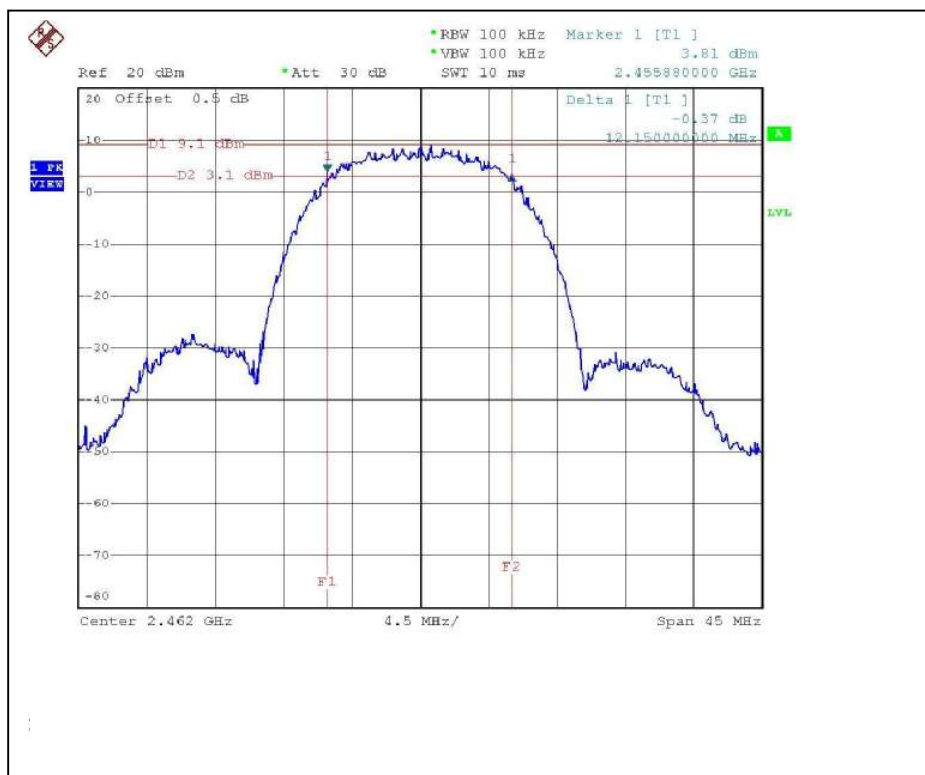


4.3.7 TEST RESULTS-OFDM

802.11g Normal OFDM modulation


INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.38	0.5	PASS

CH1

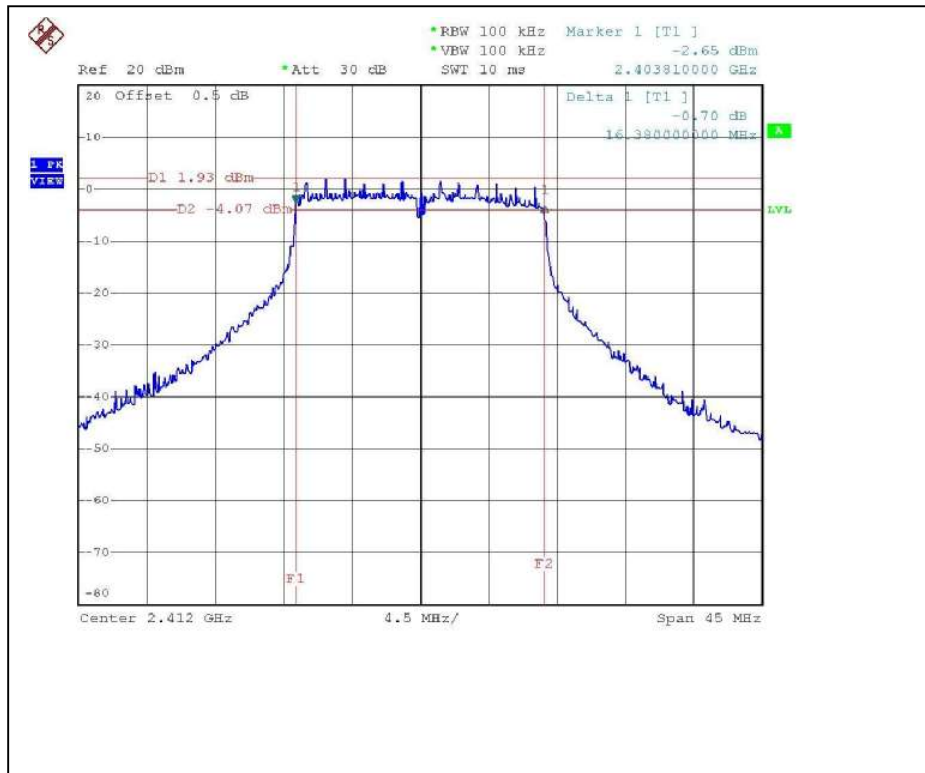

CH6

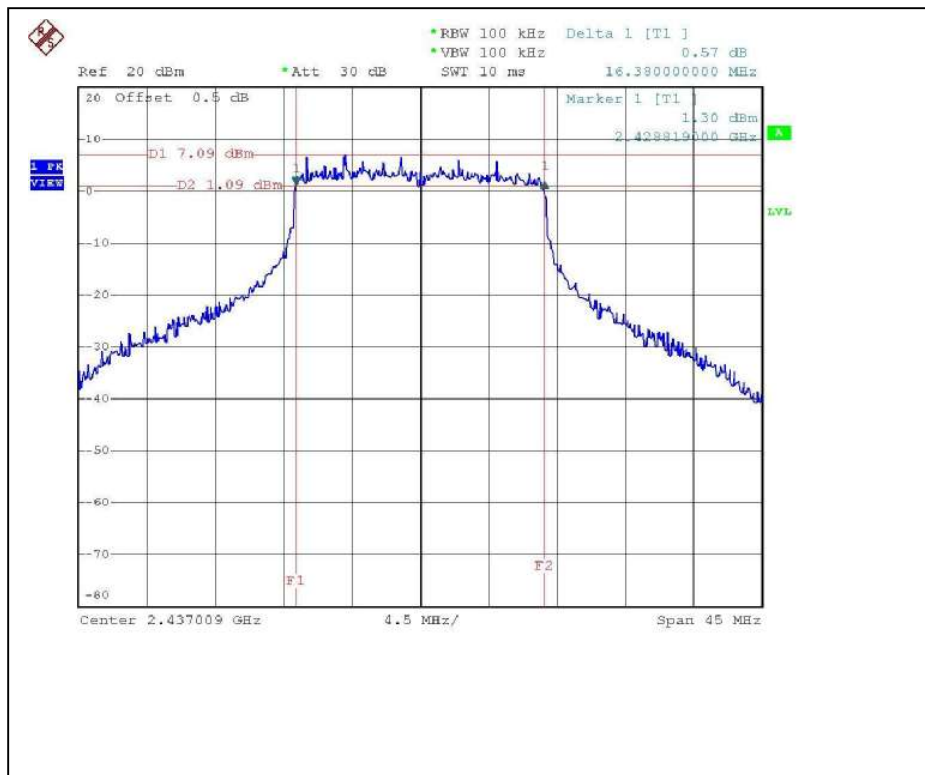

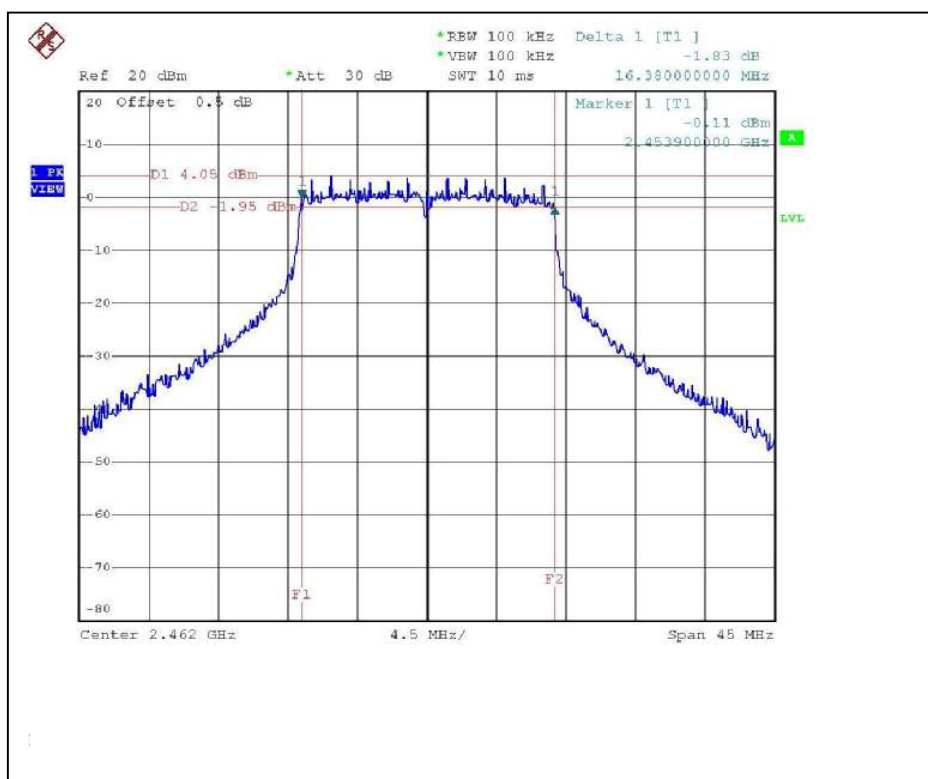




802.11g Turbo OFDM modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	31.32	0.5	PASS

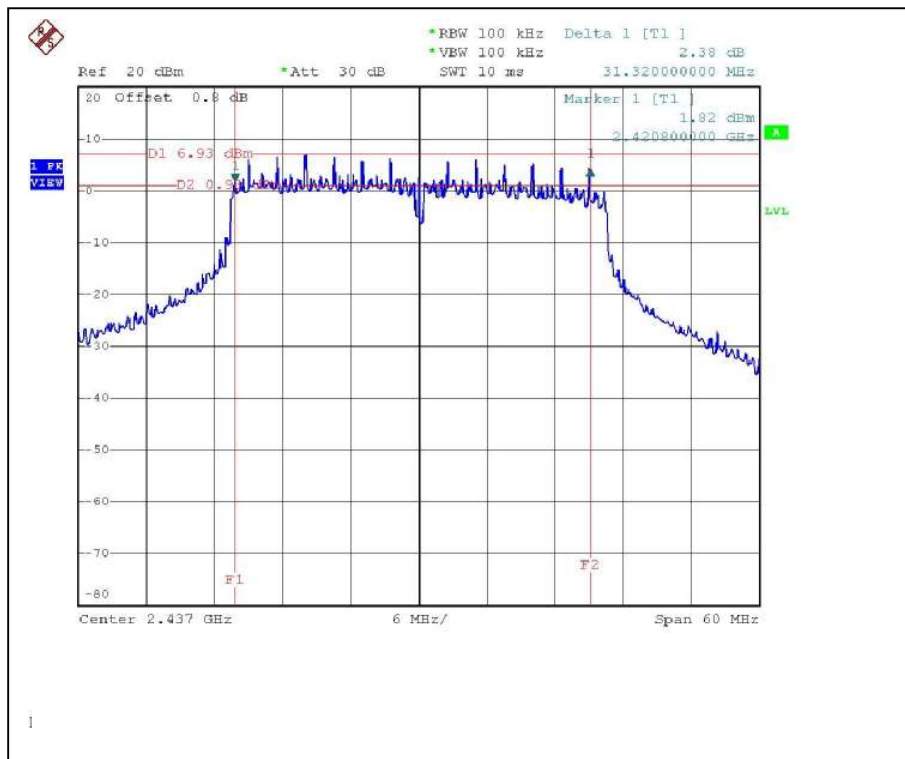

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	89.125	19.5	30	PASS
6	2437	91.201	19.6	30	PASS
11	2462	95.499	19.8	30	PASS

4.4.7 TEST RESULTS –OFDM

802.11g Normal OFDM modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	52.481	17.2	30	PASS
6	2437	112.202	20.5	30	PASS
11	2462	72.444	18.6	30	PASS

802.11g Turbo OFDM modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	107.152	20.3	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5


4.5.6 TEST RESULTS –DSSS

802.11b DSSS modulation


INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-0.17	8	PASS
6	2437	-1.92	8	PASS
11	2462	-1.69	8	PASS


CH1

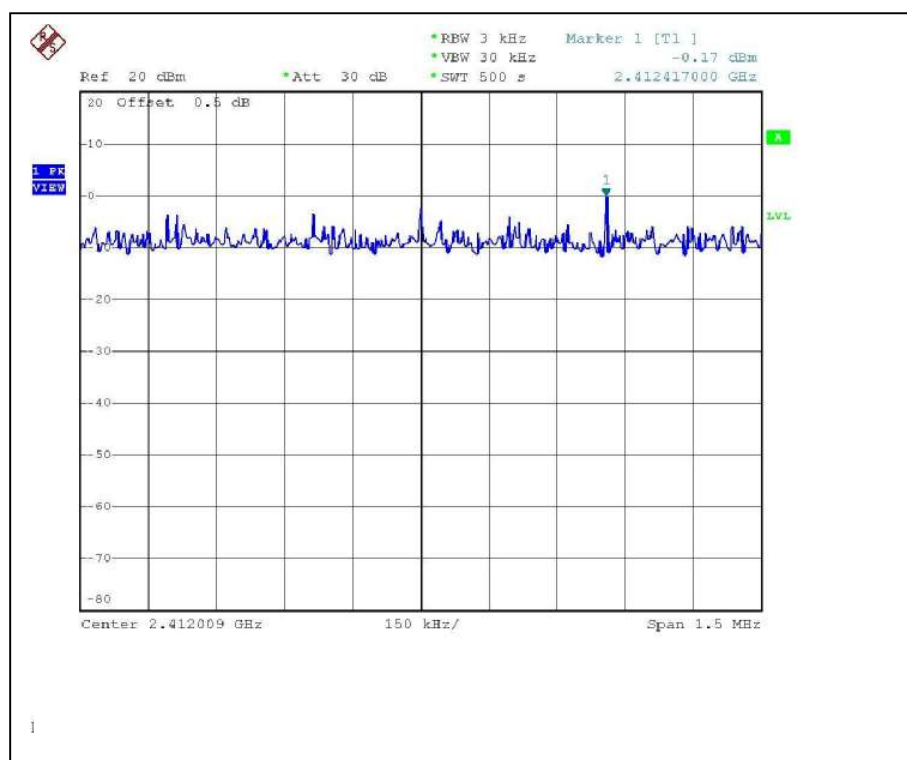

CH6

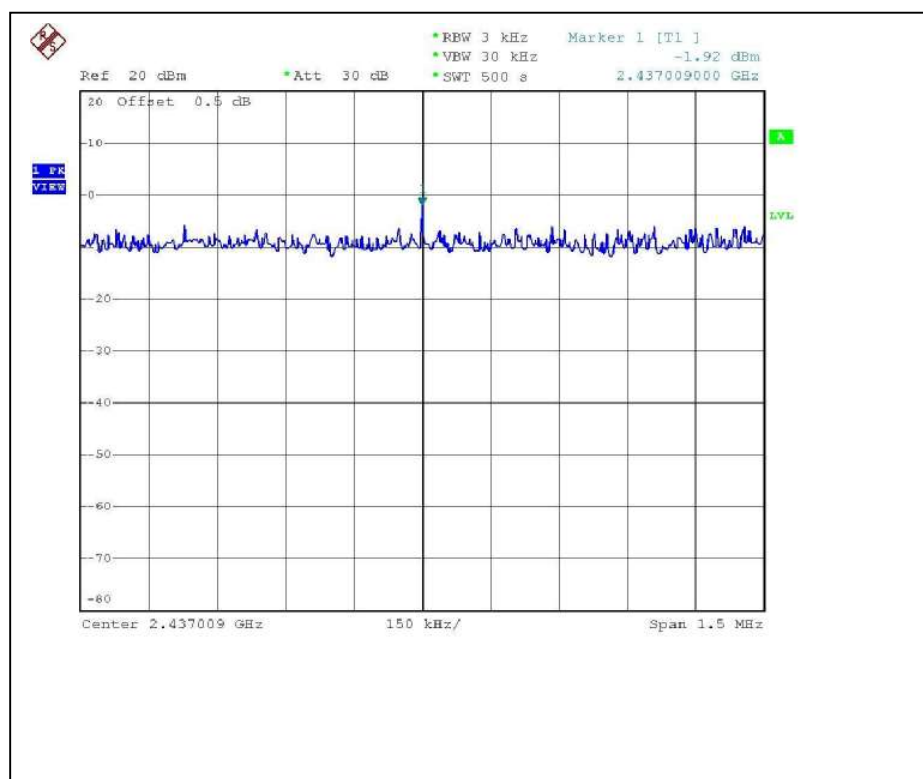

CH11

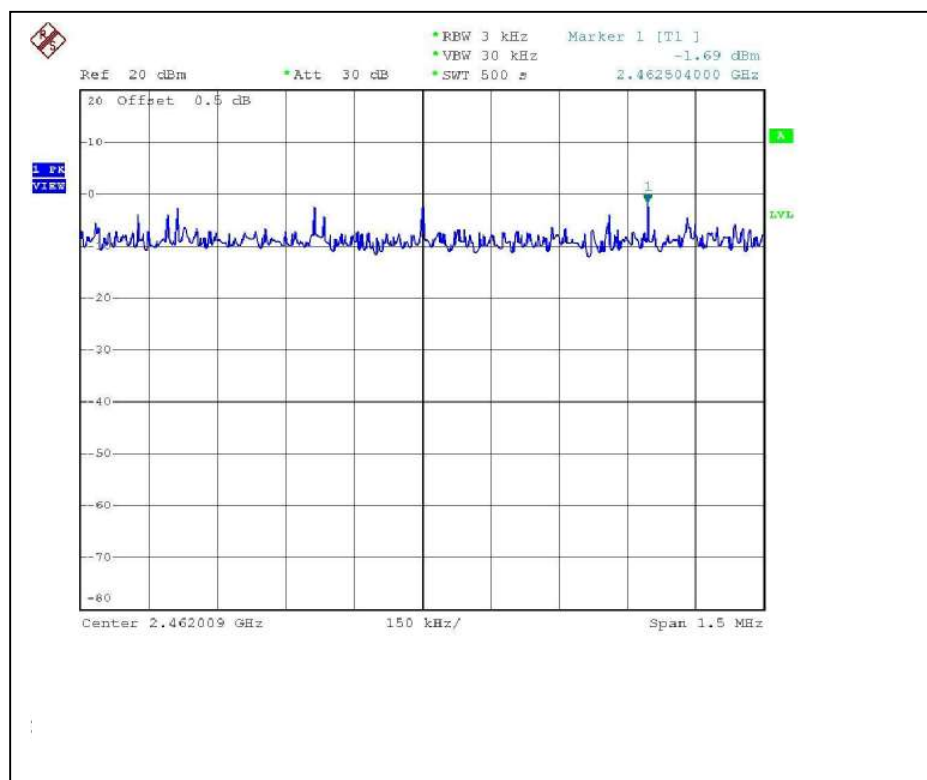


4.5.7 TEST RESULTS –OFDM

802.11g Normal OFDM modulation


INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-3.55	8	PASS
6	2437	0.67	8	PASS
11	2462	-0.96	8	PASS


CH1

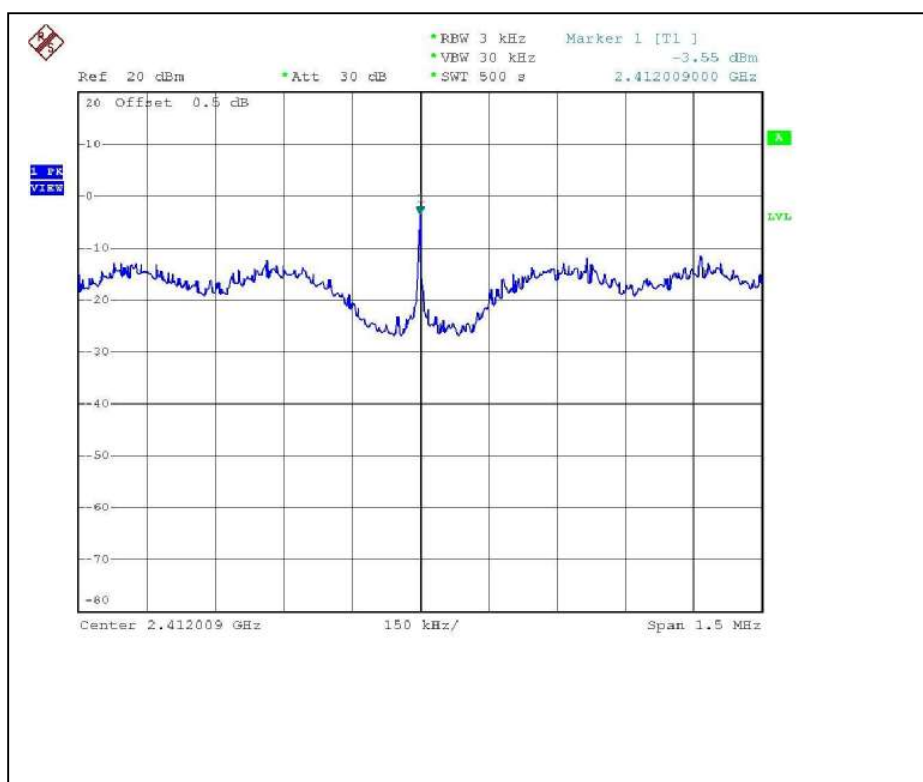

CH6

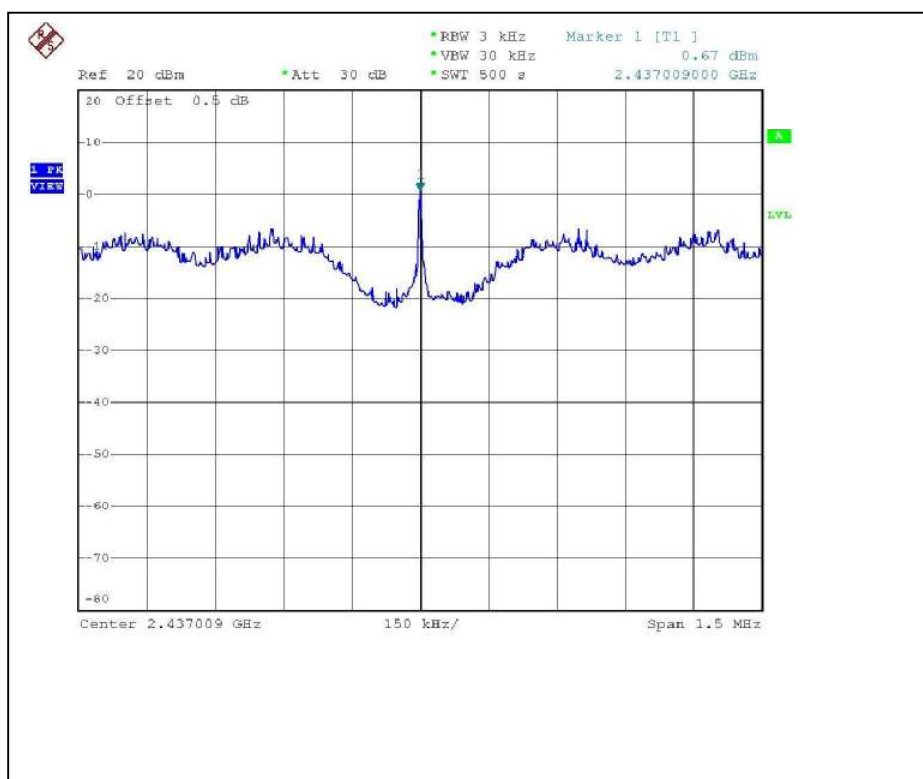

CH11

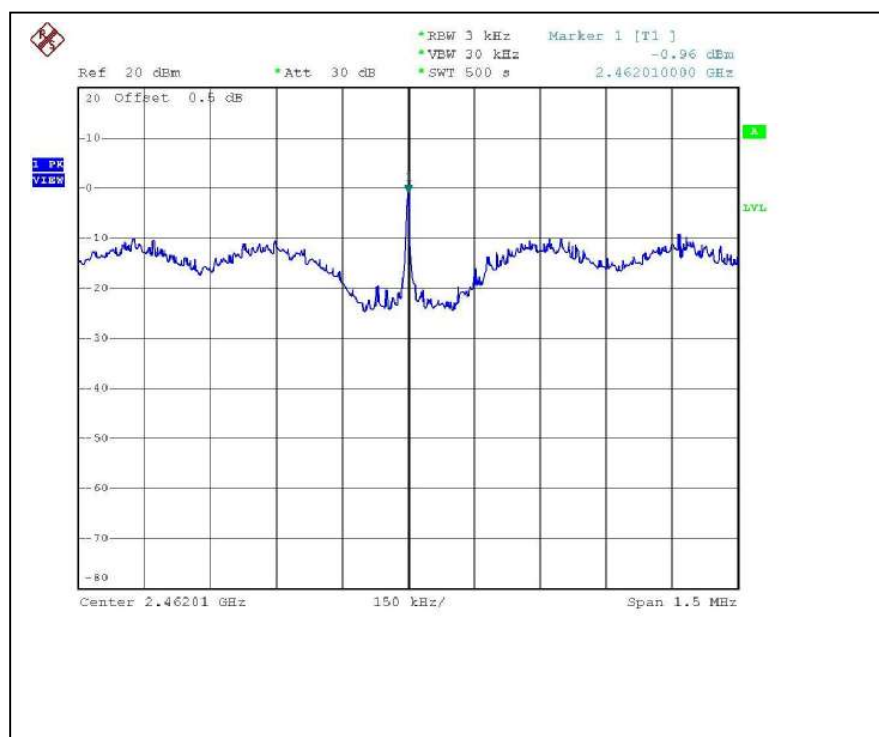




802.11g Turbo OFDM modulation

INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 68%RH, 973 hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	0.38	8	PASS

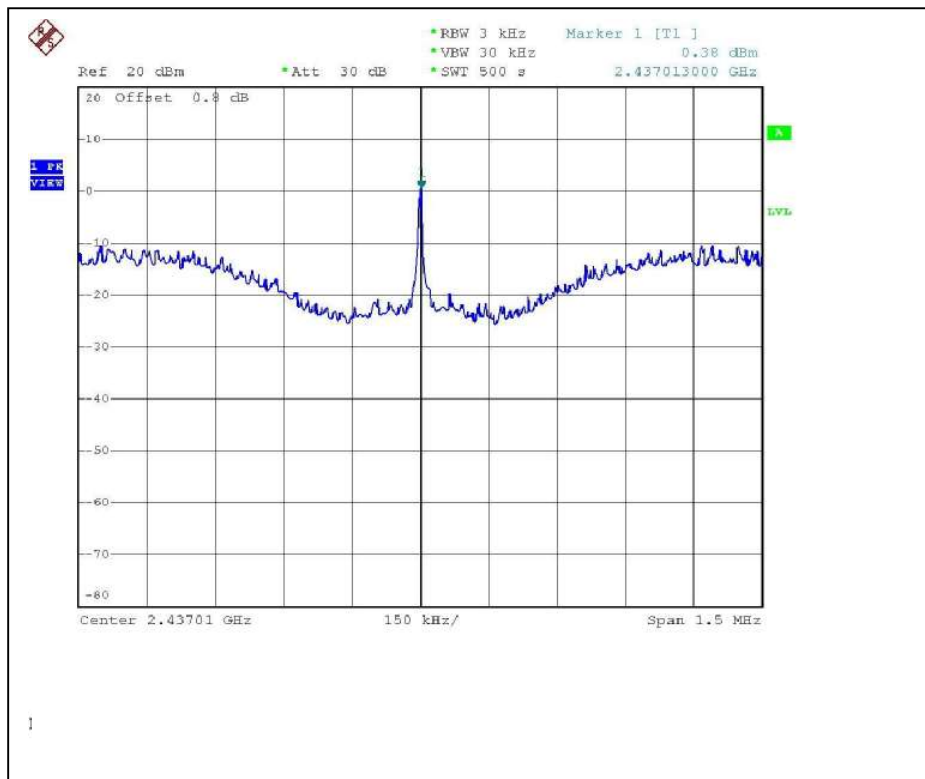

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS – DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 55.09dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 115.2dBuV/m, so the maximum field strength in restrict band is $115.2 - 55.09 = 60.11$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 56.18dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 115.6dBuV/m, so the maximum field strength in restrict band is $115.6 - 56.18 = 59.42$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 56.10dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 107.3dBuV/m, so the maximum field strength in restrict band is $107.3 - 56.10 = 51.20$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 60.63dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 107.70dBuV/m, so the maximum field strength in restrict band is $107.70 - 60.63 = 47.07$ dBuV/m which is under 54 dBuV/m limit.


CH1

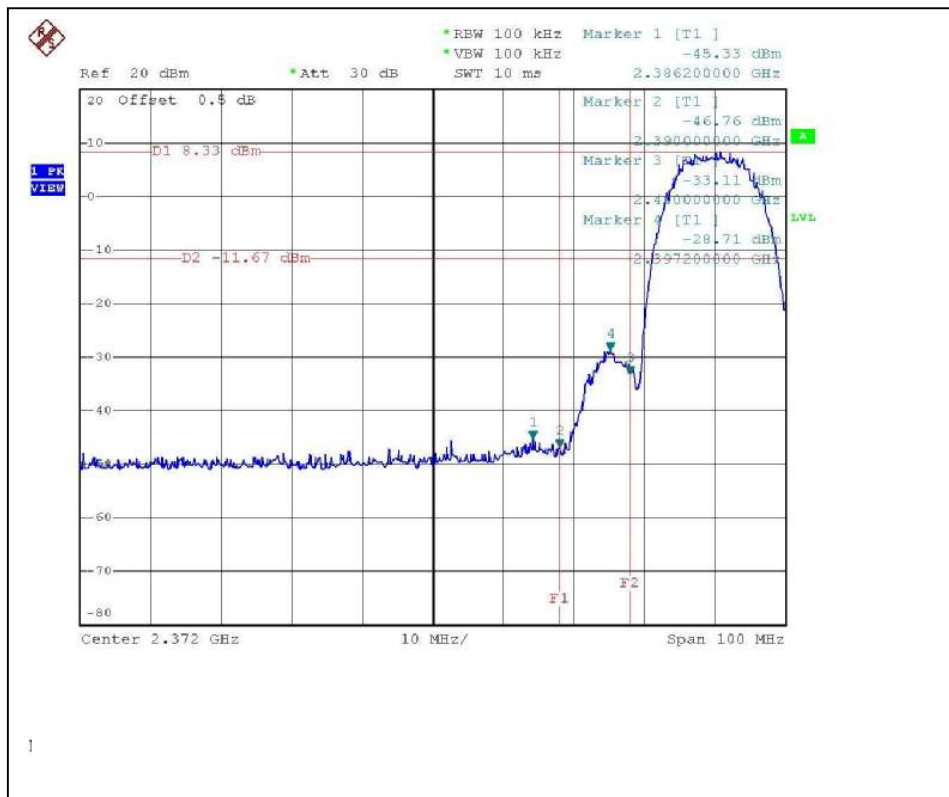


CH11

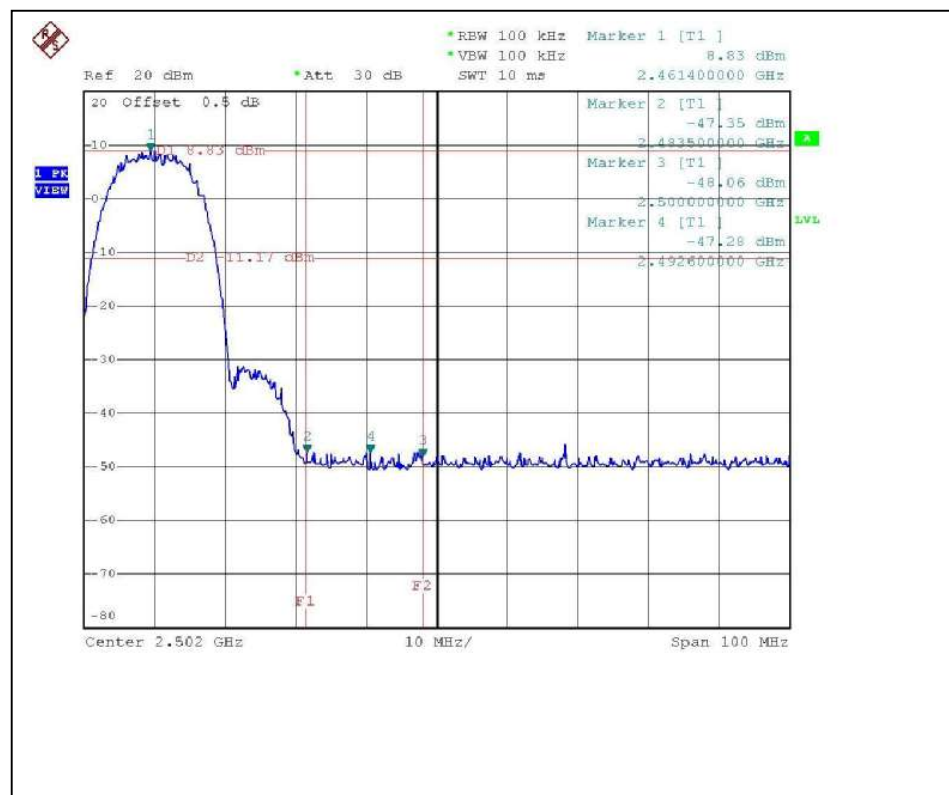


CH1

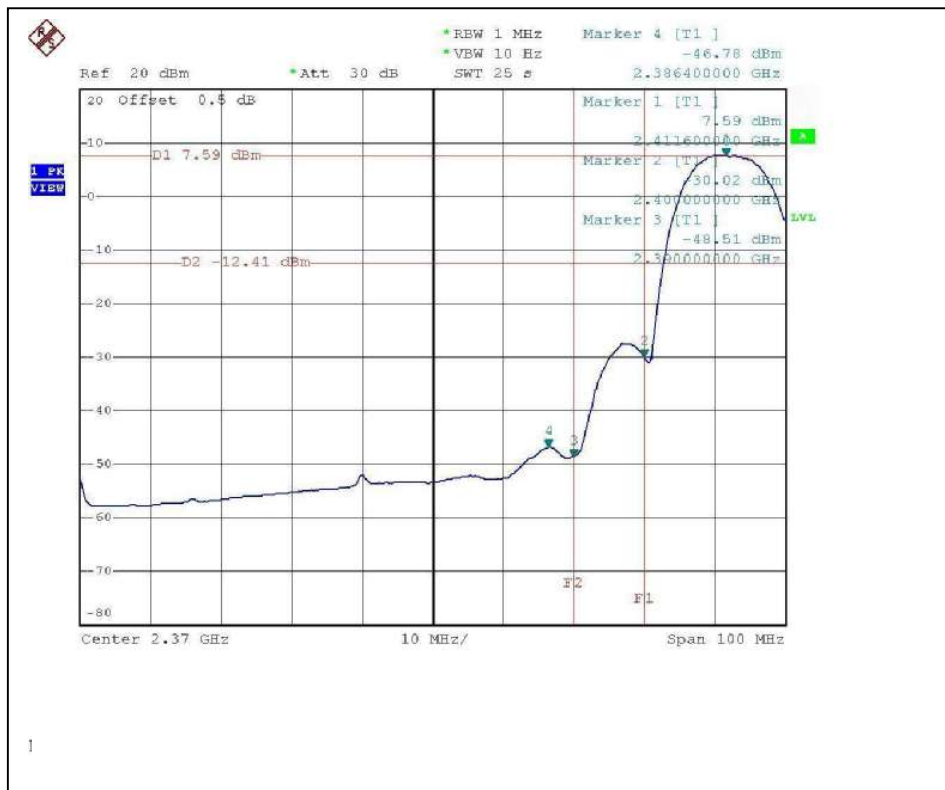


CH11

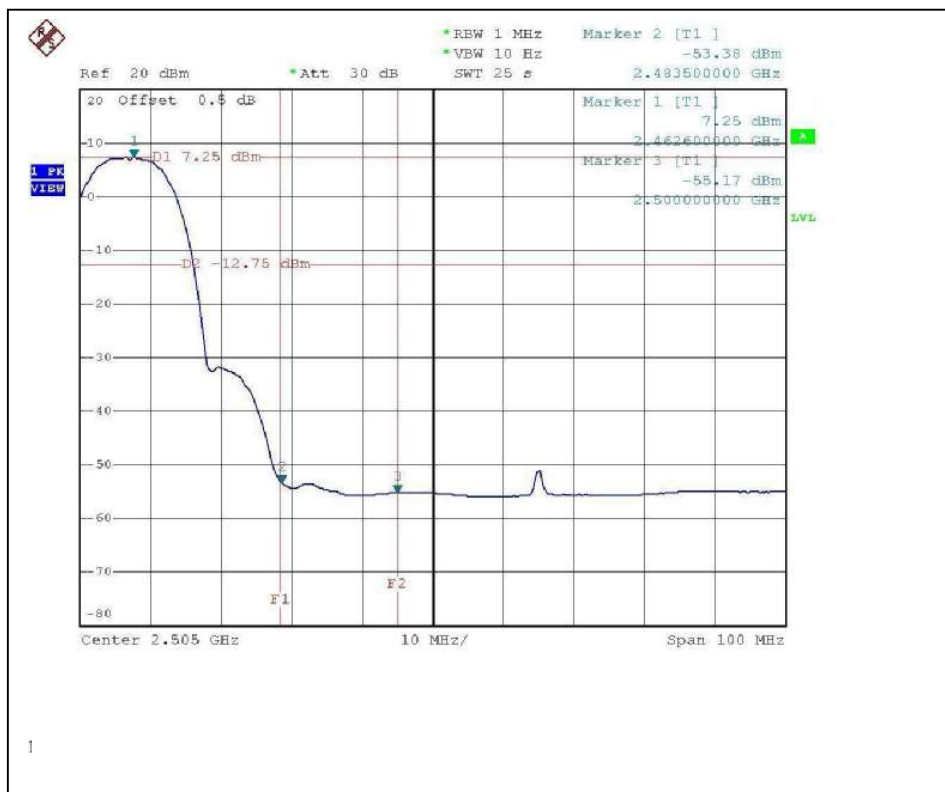

CH1

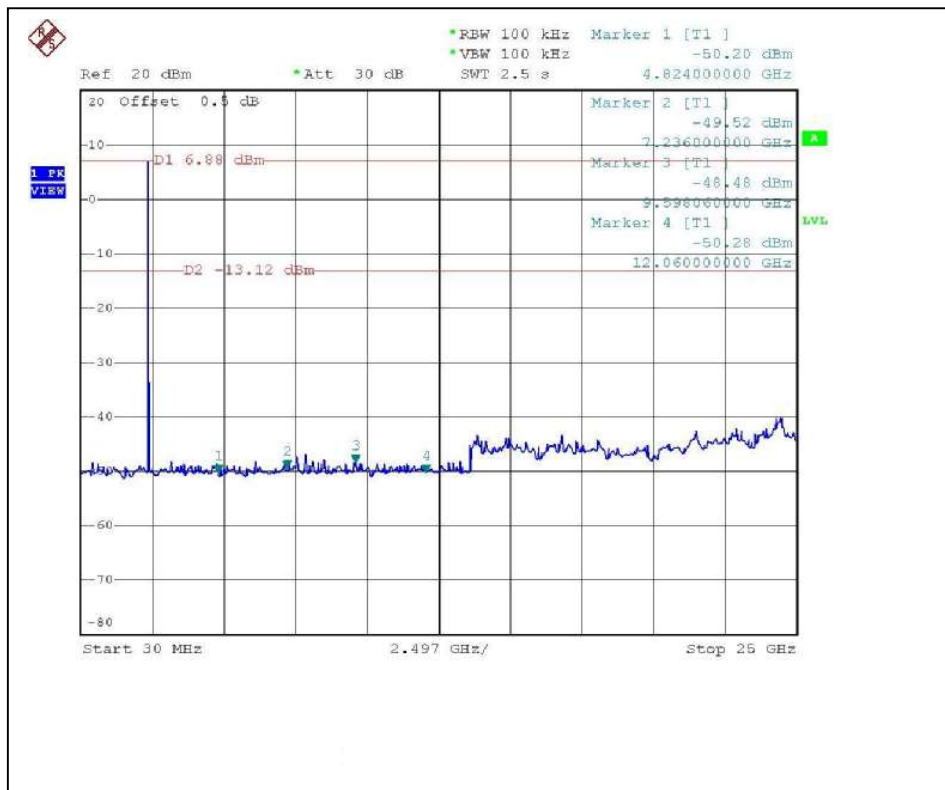

CH11

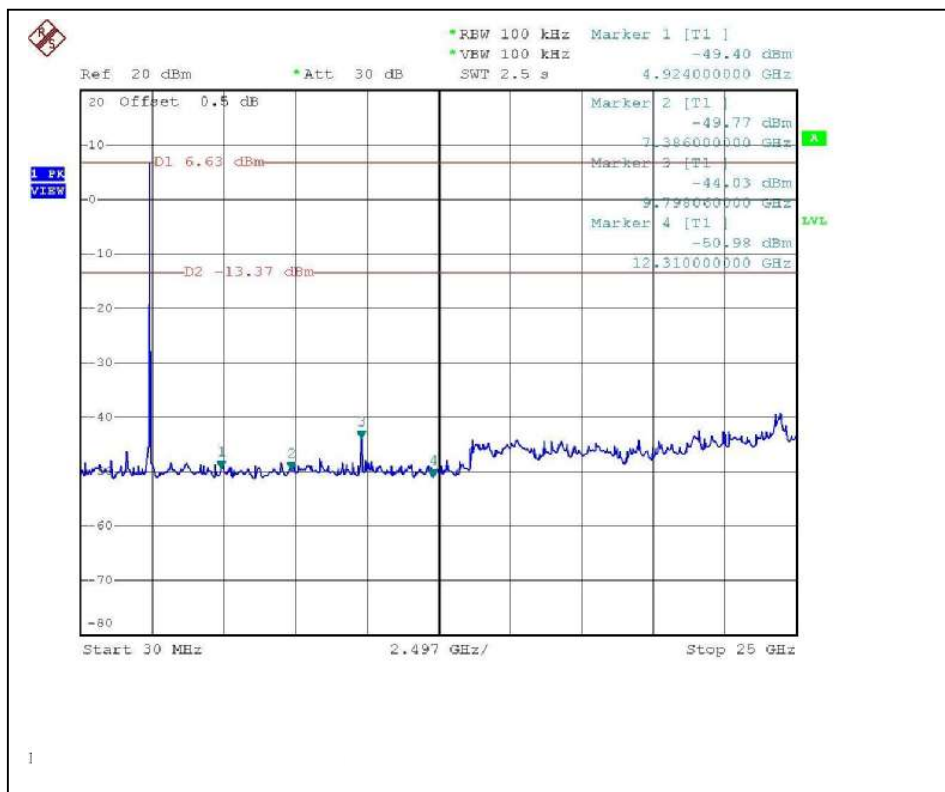

4.6.6 TEST RESULTS –OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 46.61dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 108.6dBuV/m, so the maximum field strength in restrict band is $108.6 - 46.61 = 61.99$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 47.01dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 110.8dBuV/m, so the maximum field strength in restrict band is $110.8 - 47.01 = 63.79$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 48.04dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 100.0dBuV/m, so the maximum field strength in restrict band is $100.0 - 48.04 = 51.96$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 50.19dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 102.30dBuV/m, so the maximum field strength in restrict band is $102.30 - 50.19 = 52.11$ dBuV/m which is under 54 dBuV/m limit.


CH1

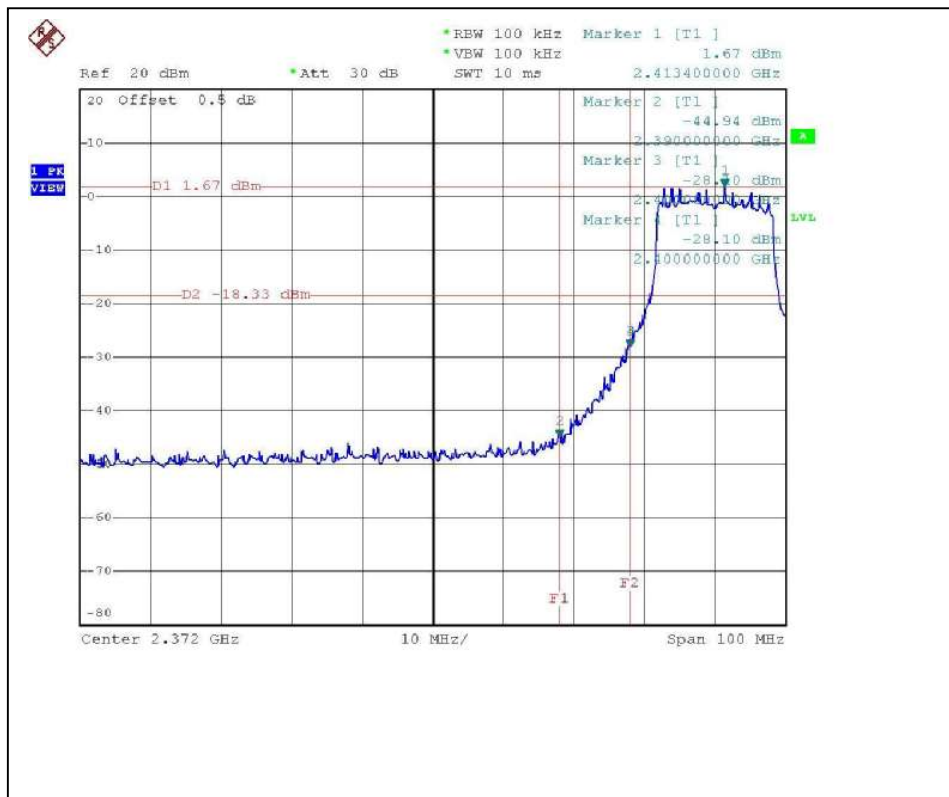


CH11

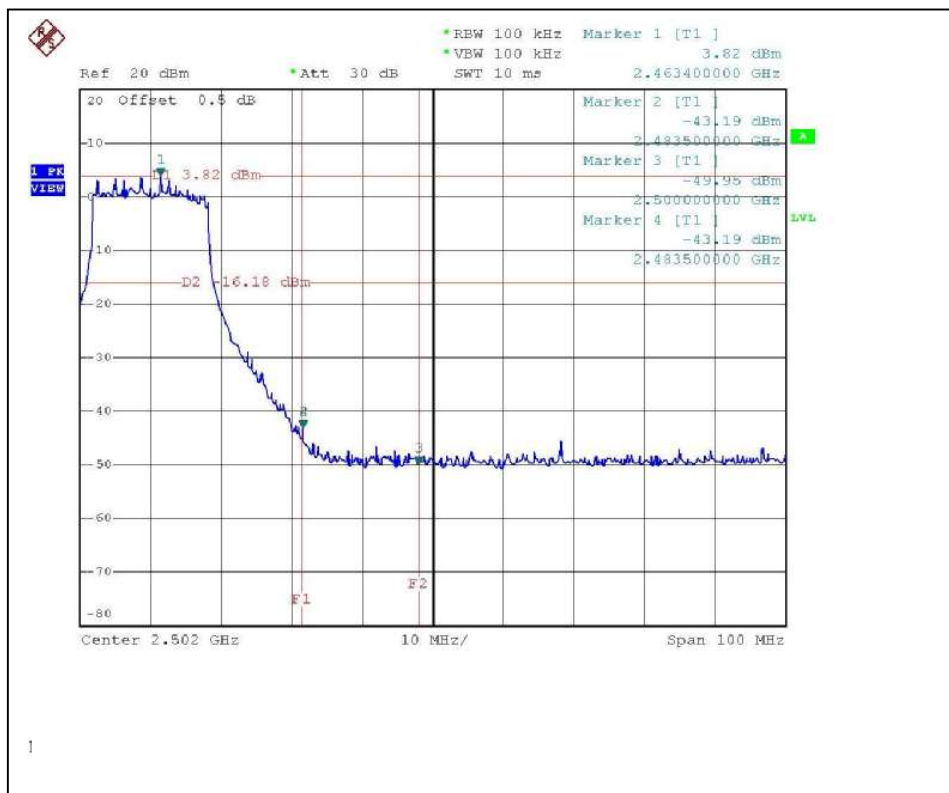


CH1

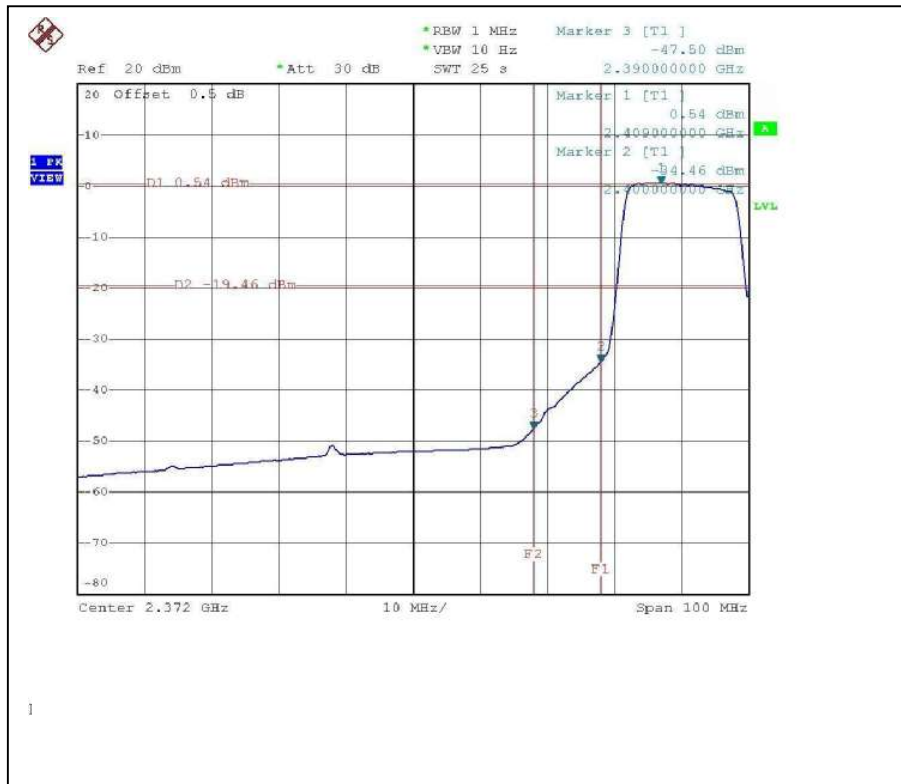


CH11

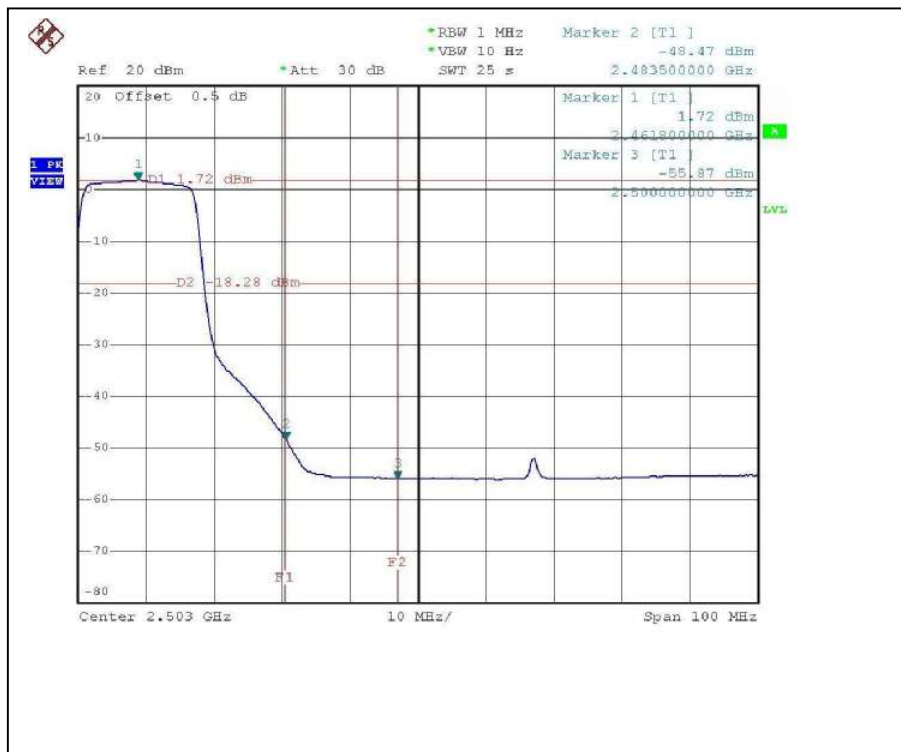

CH1

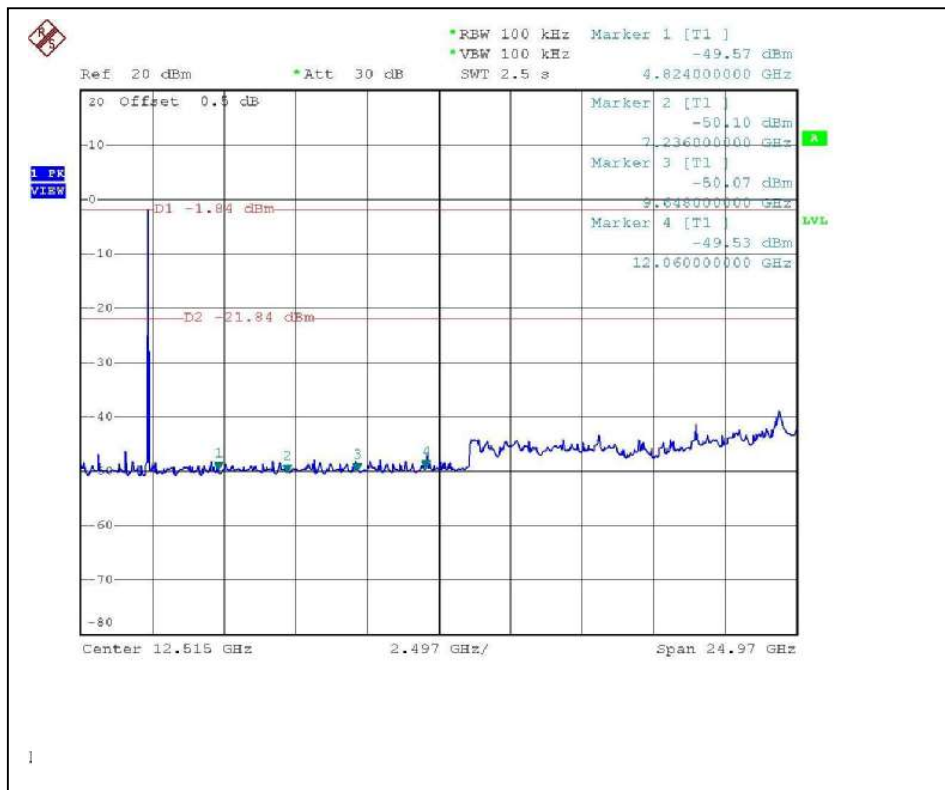

CH11

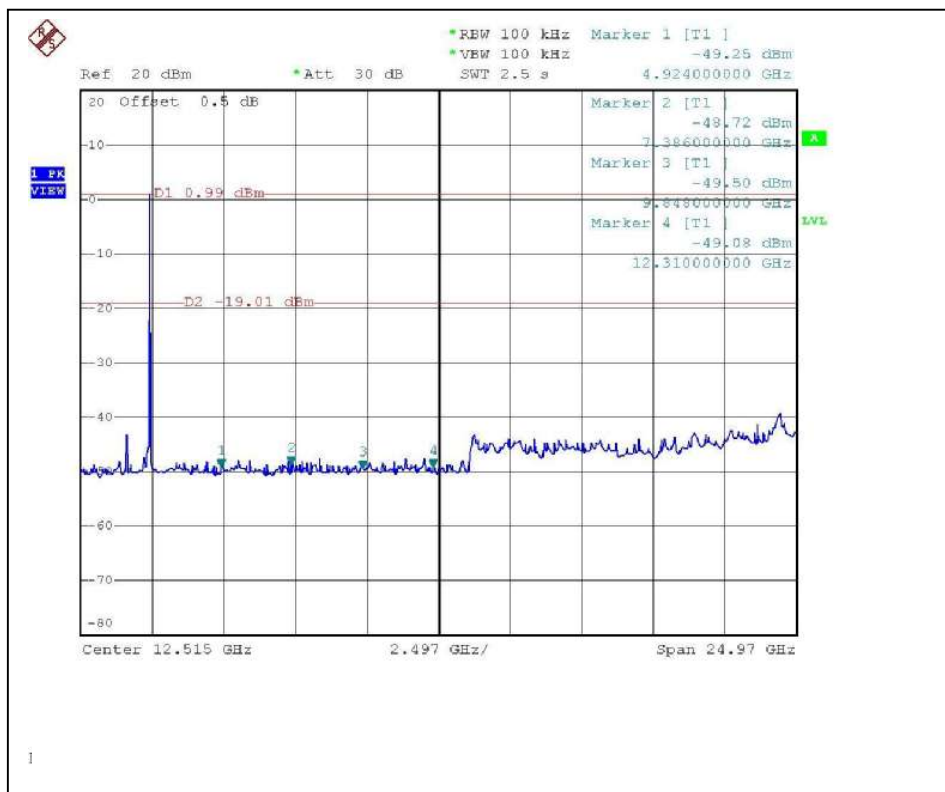

802.11g Turbo OFDM modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 51.36dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 112.5dBuV/m, so the maximum field strength in restrict band is $112.5 - 51.36 = 61.14$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 53.65dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 112.5dBuV/m, so the maximum field strength in restrict band is $112.5 - 53.65 = 58.85$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 50.51dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 103.8dBuV/m, so the maximum field strength in restrict band is $103.8 - 50.51 = 53.29$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 54.68dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 103.8dBuV/m, so the maximum field strength in restrict band is $103.8 - 54.68 = 49.12$ dBuV/m which is under 54 dBuV/m limit.


CH6

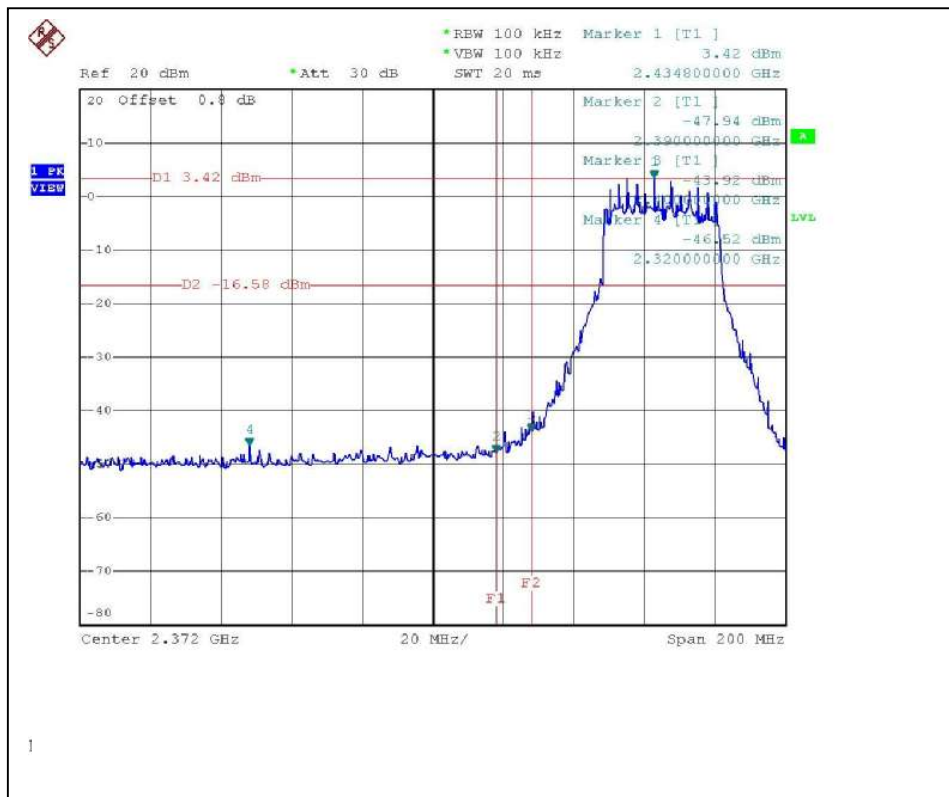


CH6

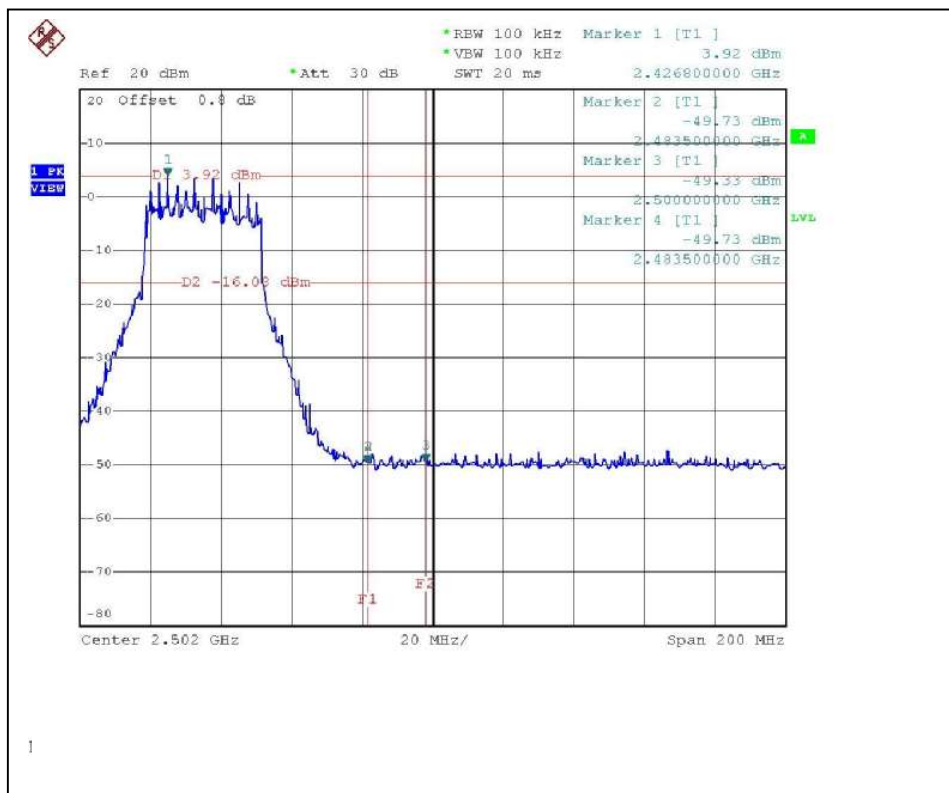


CH6

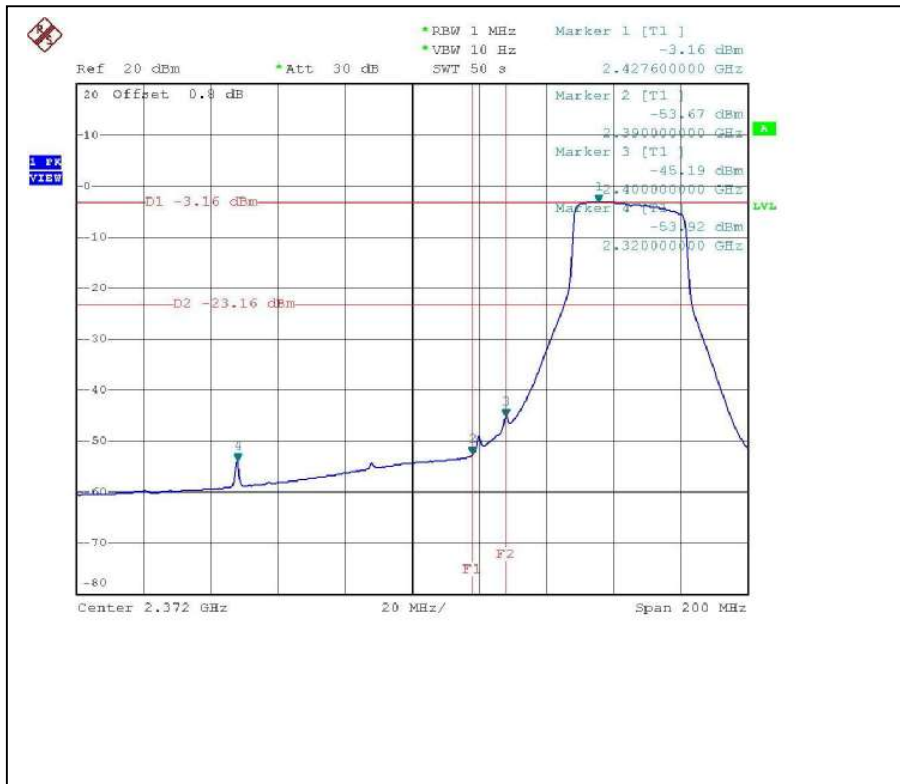

CH6

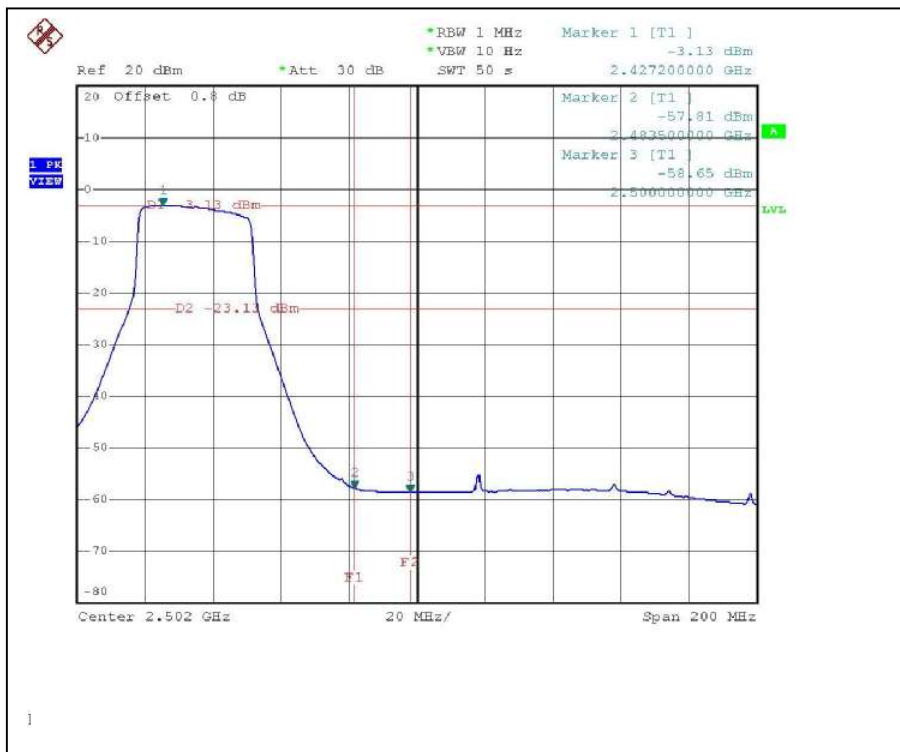

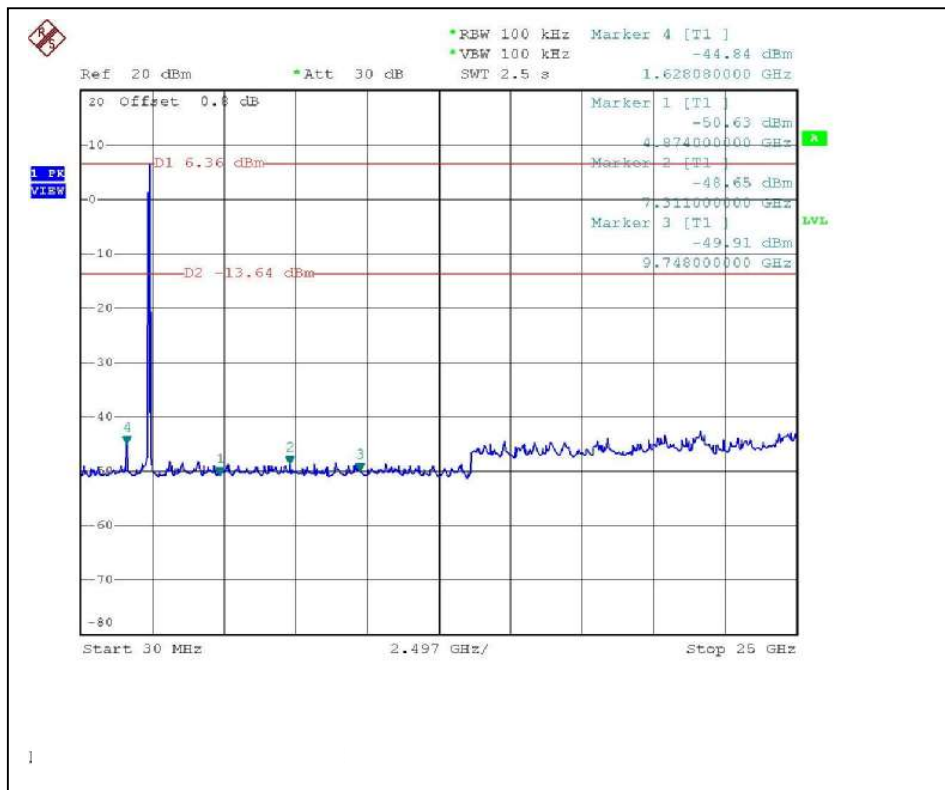

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are as below:

No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector	Remark
1	NA	-2.0 dBi	Printed Antenna	NA	RX only
2	IW-241RS-120-1	2.0 dBi	Dipole Antenna	R-SMA	TX/ RX
3	SA2-05035-A5	4.5 dBi	Dipole Antenna	R-SMA	TX/ RX

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

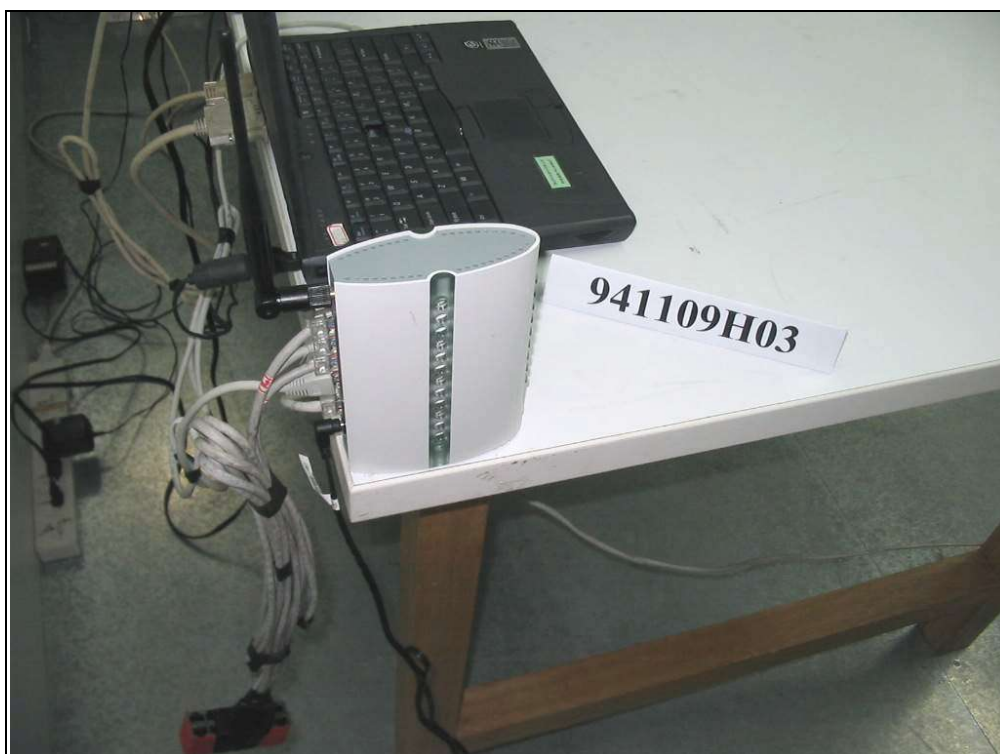

RADIATED EMISSION TEST



6 INFORMATION ON THE TESTING LABORATORIES



We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.