

FCC Radio Test Report

FCC ID: TE7A6

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1808C223
Equipment : AC1200 Wireless MU-MIMO Gigabit Router
Test Model : Archer A6
Series Model : Archer C6
Applicant : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd,
Nanshan, Shenzhen,China

Date of Receipt : Aug. 27, 2018
Date of Test : Oct. 08, 2018 ~ Oct. 23, 2018
Issued Date : Nov. 20, 2018
Tested by : BTL Inc.

Testing Engineer : Welly Zhou
(Welly Zhou)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 . EMC EMISSION TEST	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	16
4.1.2 TEST PROCEDURE	16
4.1.3 DEVIATION FROM TEST STANDARD	16
4.1.4 TEST SETUP	17
4.1.5 EUT OPERATING CONDITIONS	17
4.1.6 EUT TEST CONDITIONS	17
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 TEST PROCEDURE	19
4.2.3 DEVIATION FROM TEST STANDARD	19
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9 KHZ TO 30 MHZ)	21
4.2.8 TEST RESULTS (30 MHZ TO 1000 MHZ)	21
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	21
5 . BANDWIDTH TEST	22
5.1 APPLIED PROCEDURES	22
5.1.1 TEST PROCEDURE	22
5.1.2 DEVIATION FROM STANDARD	22
5.1.3 TEST SETUP	22
5.1.4 EUT OPERATION CONDITIONS	22
5.1.5 EUT TEST CONDITIONS	22
5.1.6 TEST RESULTS	22
6 . MAXIMUM AVERAGE OUTPUT POWER TEST	23

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	23
6.1.1 TEST PROCEDURE	23
6.1.2 DEVIATION FROM STANDARD	23
6.1.3 TEST SETUP	23
6.1.4 EUT OPERATION CONDITIONS	23
6.1.5 EUT TEST CONDITIONS	23
6.1.6 TEST RESULTS	23
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	24
7.1 APPLIED PROCEDURES / LIMIT	24
7.1.1 TEST PROCEDURE	24
7.1.2 DEVIATION FROM STANDARD	24
7.1.3 TEST SETUP	24
7.1.4 EUT OPERATION CONDITIONS	24
7.1.5 EUT TEST CONDITIONS	24
7.1.6 TEST RESULTS	24
8 . POWER SPECTRAL DENSITY TEST	25
8.1 APPLIED PROCEDURES / LIMIT	25
8.1.1 TEST PROCEDURE	25
8.1.2 DEVIATION FROM STANDARD	25
8.1.3 TEST SETUP	25
8.1.4 EUT OPERATION CONDITIONS	25
8.1.5 EUT TEST CONDITIONS	25
8.1.6 TEST RESULTS	25
9 . MEASUREMENT INSTRUMENTS LIST	26
10 . EUT TEST PHOTO	28
APPENDIX A - CONDUCTED EMISSION	32
APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)	35
APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	40
APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)	47
APPENDIX E - BANDWIDTH	132
APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER	149
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	154
APPENDIX H - POWER SPECTRAL DENSITY	227

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 20, 2018

1. CERTIFICATION

Equipment : AC1200 Wireless MU-MIMO Gigabit Router
Brand Name : tp-link
Test Model : Archer A6
Series Model : Archer C6
Applicant : TP-Link Technologies Co., Ltd.
Manufacturer : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Date of Test : Oct. 08, 2018 ~ Oct. 23, 2018
Test Sample : Engineering Sample No.: D180807213 for conducted, D180807212 for radiated.
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1808C223) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the WLAN 2.4G part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	Bandwidth	PASS	
15.247(b)(3)	Maximum average output power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MH~200 MHz	H	3.78
		200 MHz~1,000 MHz	V	4.10
		200 MHz~1,000 MHz	H	4.06
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT




Equipment	AC1200 Wireless MU-MIMO Gigabit Router	
Brand Name	tp-link	
Test Model	Archer A6	
Series Model	Archer C6	
Model Difference(s)	Only differ in model name.	
Product Description	Operation Frequency	2412MHz ~ 2462MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 450 Mbps
	Average Output Power (Max.)	802.11b: 23.98 dBm 802.11g: 24.56 dBm 802.11n(20 MHz): 24.65 dBm 802.11n(40 MHz): 19.23 dBm
Power Source	DC voltage supplied from AC/DC adapter. Brand/ Model: tp-link/ T120100-2B1	
Power Rating	I/P: 100-240V~ 50/60Hz 0.3A O/P: 12V--- 1A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20 MHz) CH03 - CH09 for 802.11n(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain(dBi)
1		3101502122	PCB	Weld	4.65
2		3101502035	Dipole	Weld	4.71
3		3101502129	Dipole	Weld	4.71

Note:

This EUT supports MIMO 3X3, any transmit signals are correlated with each other, so Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain = $10\log[(10^{4.65/20} + 10^{4.71/20} + 10^{4.71/20})^2 / 3]$ dBi = 9.46. So, the average out power limit is $30 - 9.46 + 6 = 26.54$, the power density limit is $8 - 9.46 + 6 = 4.54$.

4. The worst case for 3TX as follow:

Operating Mode	TX Mode	3TX
802.11b		V (ANT 1+ANT 2+ANT 3)
802.11g		V (ANT 1+ANT 2+ANT 3)
802.11n(20 MHz)		V (ANT 1+ANT 2+ANT 3)
802.11n(40 MHz)		V (ANT 1+ANT 2+ANT 3)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX Mode
Mode 6	TX B Mode Channel 01/02/06/10/11
Mode 7	TX G Mode Channel 01/02/06/10/11
Mode 8	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 9	TX N-40 MHz Mode Channel 03/04/06/08/09

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode:	Description
Mode 5	TX Mode

For Radiated Test	
Final Test Mode:	Description
Mode 6	TX B Mode Channel 01/02/06/10/11
Mode 7	TX G Mode Channel 01/02/06/10/11
Mode 8	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 9	TX N-40 MHz Mode Channel 03/04/06/08/09

For Band Edge Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Spectrum Bandwidth	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Average Output Power	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Power Spectral Density	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1 Mbps)
802.11g mode: OFDM (6 Mbps)
802.11n HT20 mode : BPSK (19.5 Mbps)
802.11n HT40 mode : BPSK (40.5 Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated 30 MHz to 1000 MHz test, the 802.11b is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	cart		
Frequency (MHz)	2412	2437	2462
802.11b	18	18	18
802.11g	13	19.5	16
802.11n(20 MHz)	12	20	15
Frequency (MHz)	2422	2437	2452
802.11n(40 MHz)	9	13.5	11

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

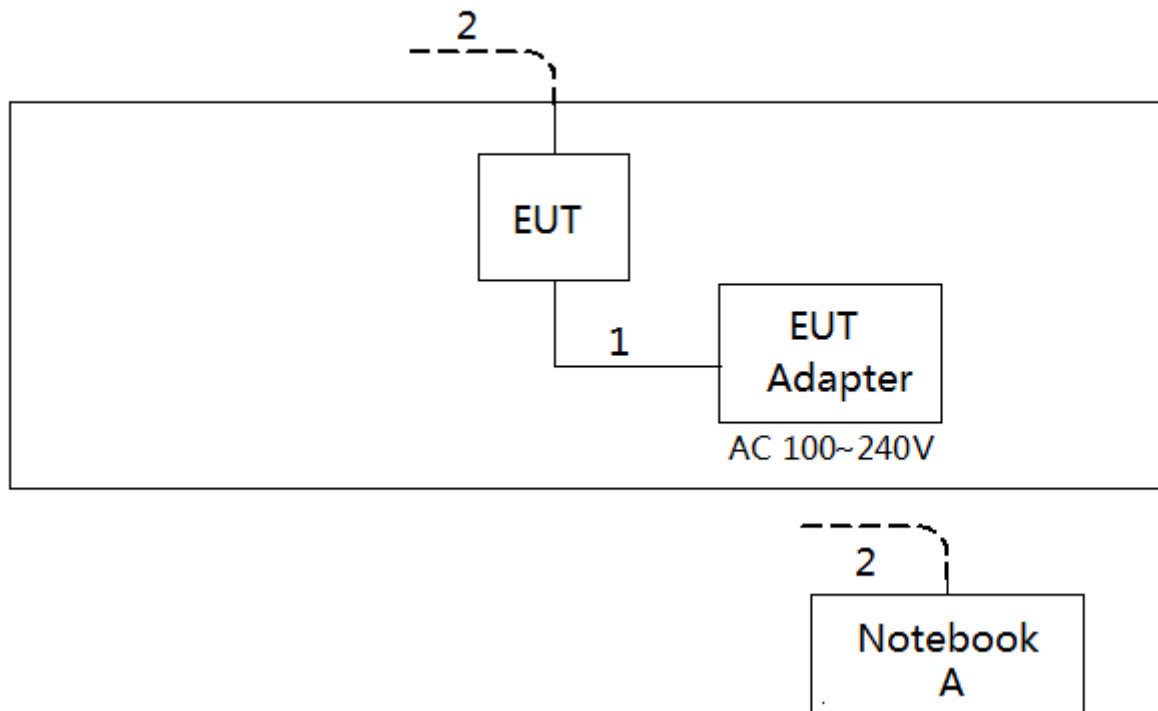

4

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	Lenovo	G410	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable
2	NO	NO	10m	RJ45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150 kHz-30 MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

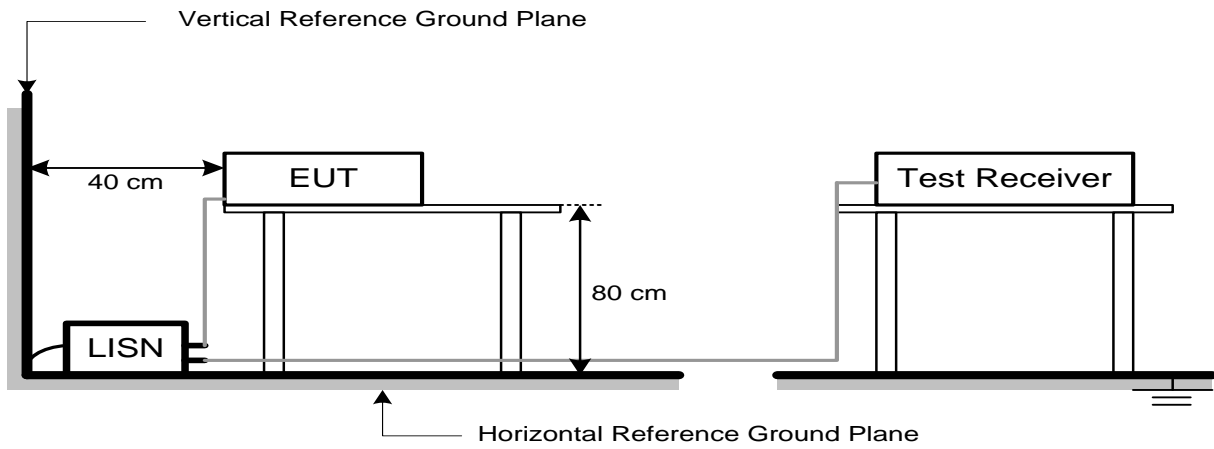

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

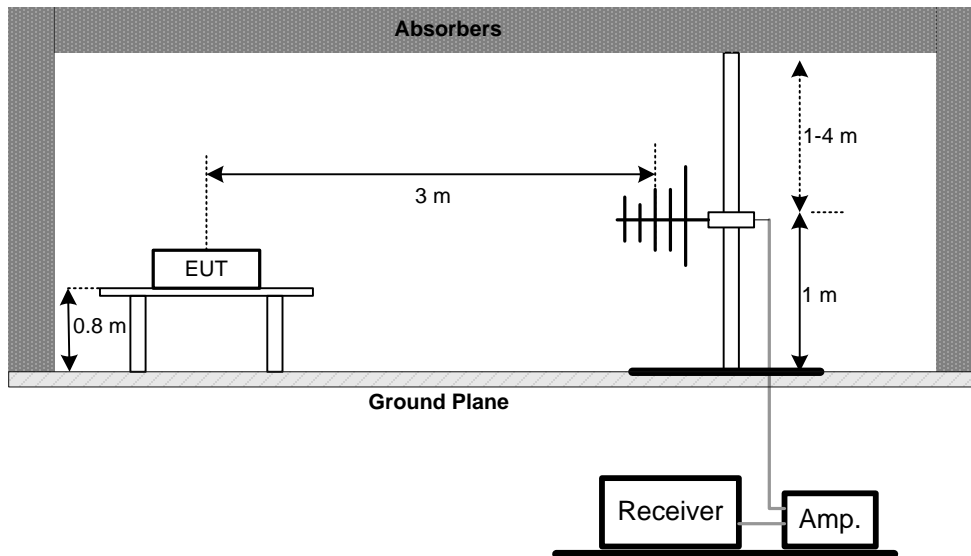

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

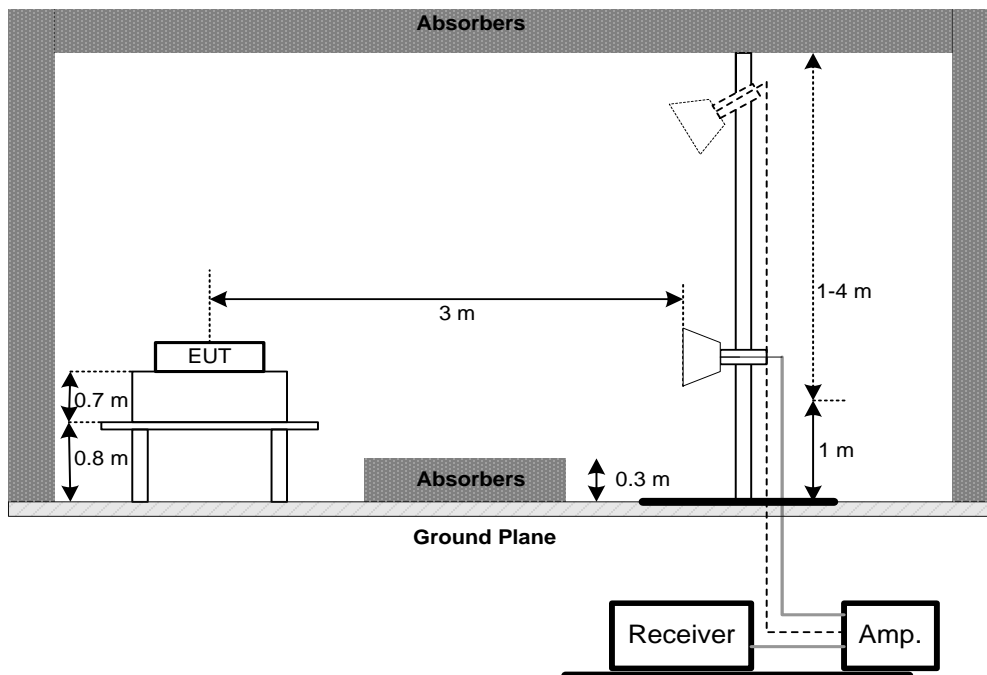

(C) For Radiated Emissions 9 kHz-30 MHz

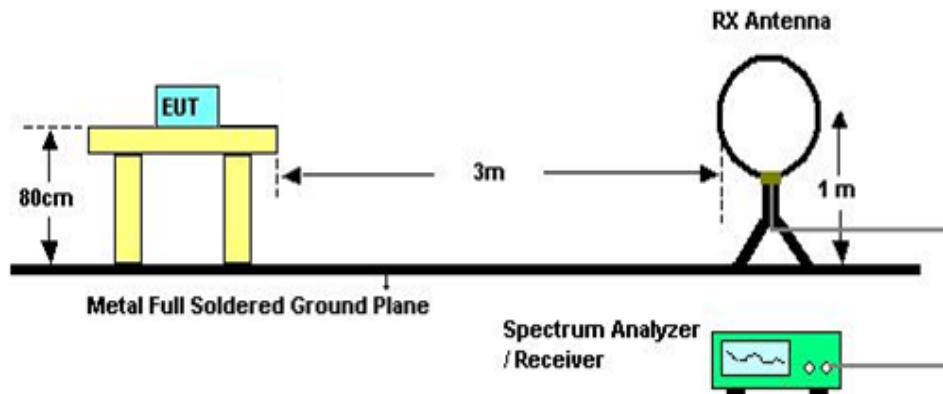

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9 kHz TO 30 MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 MHz TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	6dB Bandwidth	2400-2483.5	PASS
	99% OBW		


5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The bandwidth was performed in accordance with method 11.8 of ANSI C63.10-2013.
- For 6dB Bandwidth Spectrum setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.
For 99% OBW Spectrum Setting: For B,G.N20 mode: RBW= 300KHz, VBW=1MHz,For N40 mode: RBW= 1MHz, VBW=3MHz Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

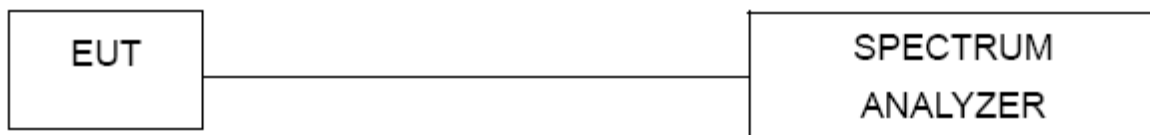

5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM AVERAGE OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Average Output Power	1 Watt or 30 dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted (average) output power was performed in accordance with method 11.9.2.3 of ANSI C63.10-2013.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 23, 2019

Radiated Emission Measurement-9 kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement-30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Maximum average output power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 11, 2019
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 11, 2019

Antenna Conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


10. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

9 kHz to 30 MHz

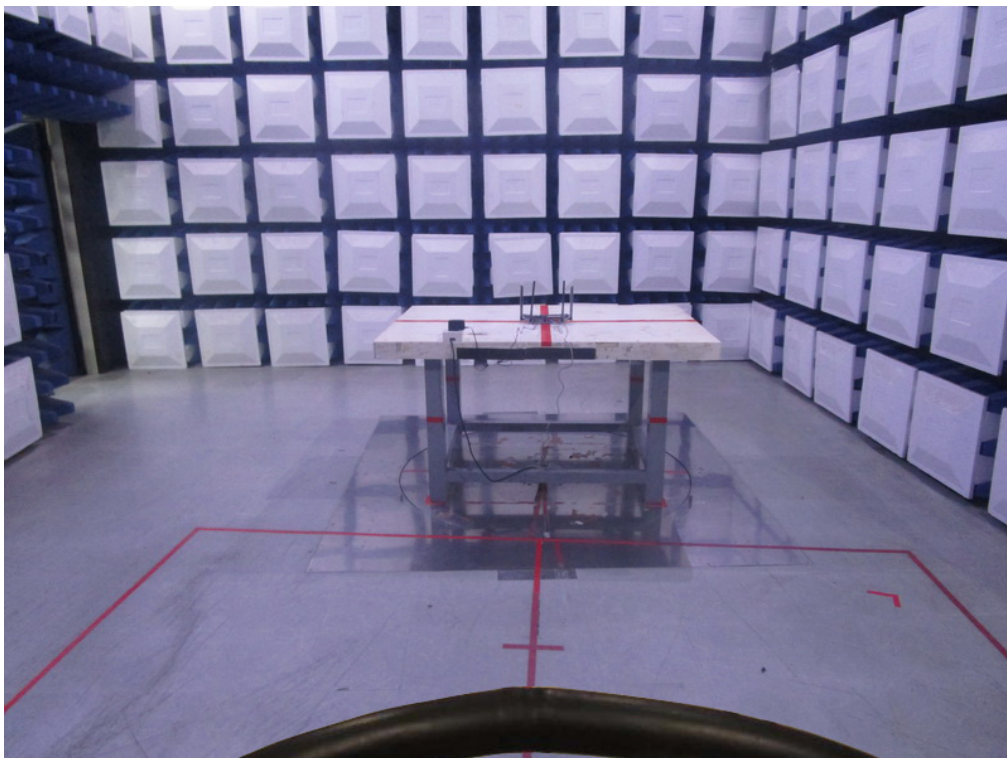


Radiated Measurement Photos

30 MHz to 1000 MHz

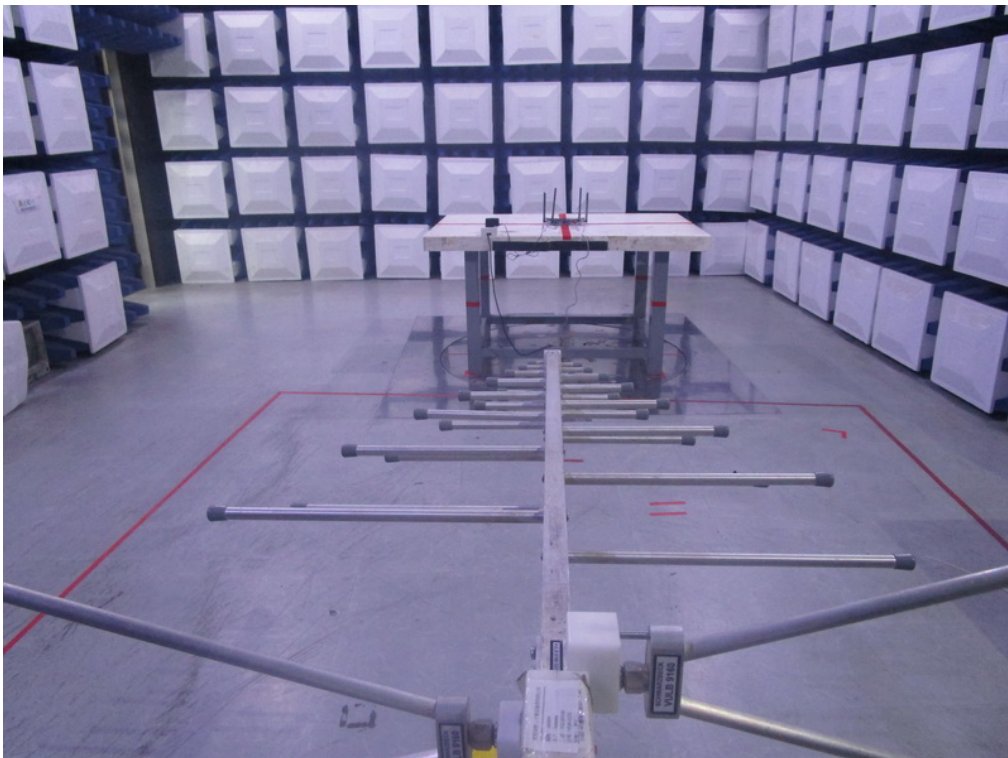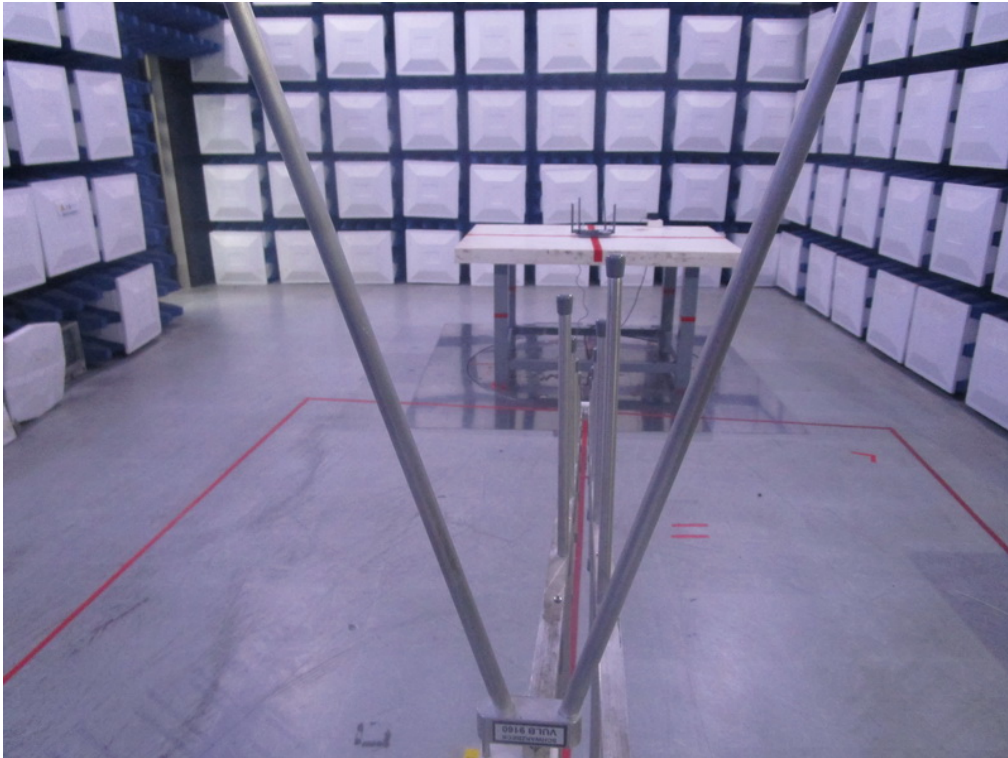

Radiated Measurement Photos


Above 1000 MHz

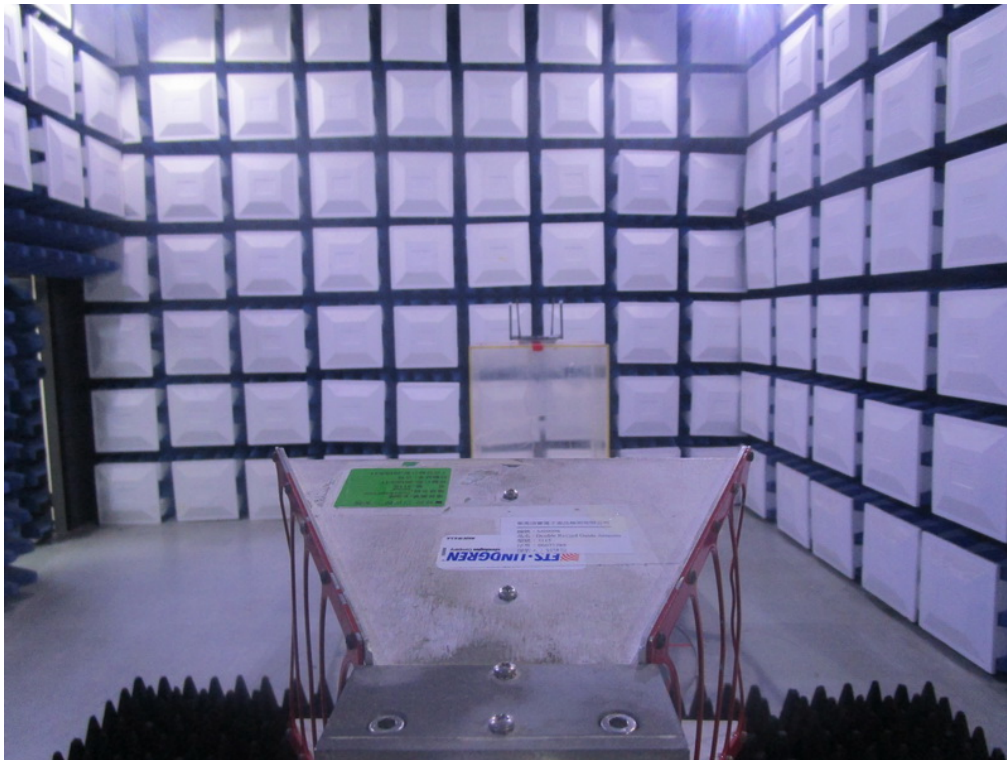

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

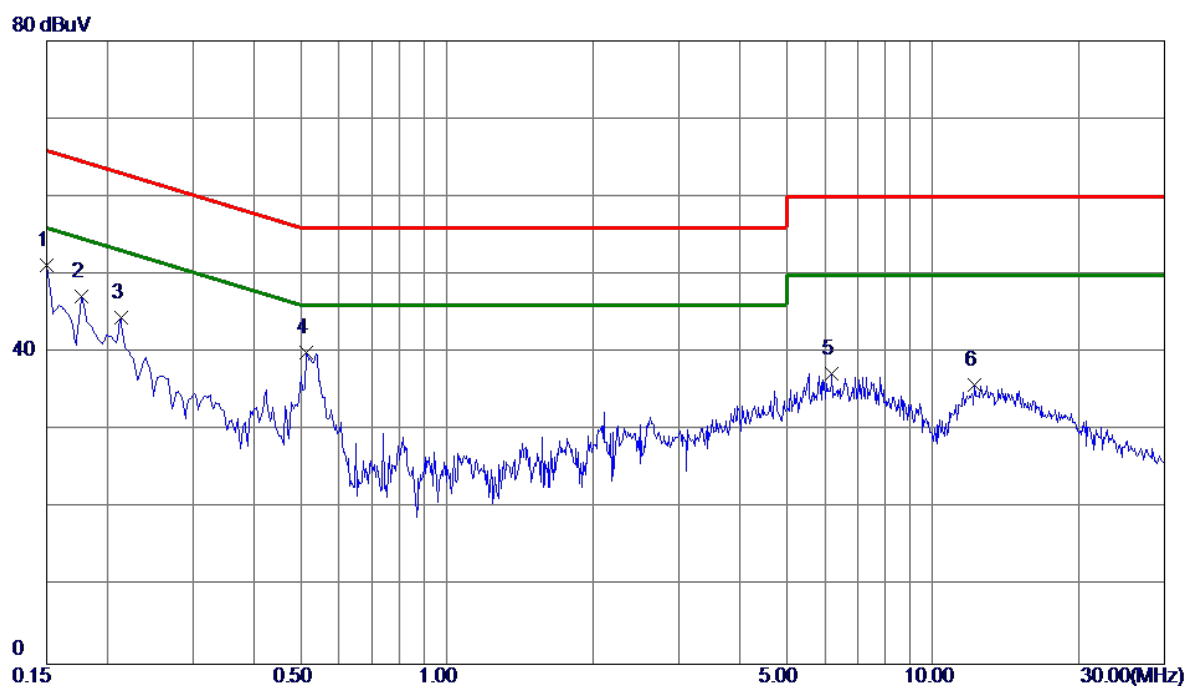

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	41.41	9.82	51.23	66.00	-14.77	Peak	
2	0.1770	37.39	9.82	47.21	64.63	-17.42	Peak	
3	0.2130	34.62	9.82	44.44	63.09	-18.65	Peak	
4	0.5144	30.27	9.80	40.07	56.00	-15.93	Peak	
5	6.2070	27.02	10.27	37.29	60.00	-22.71	Peak	
6	12.2235	25.28	10.61	35.89	60.00	-24.11	Peak	

Test Mode: TX Mode

Neutral

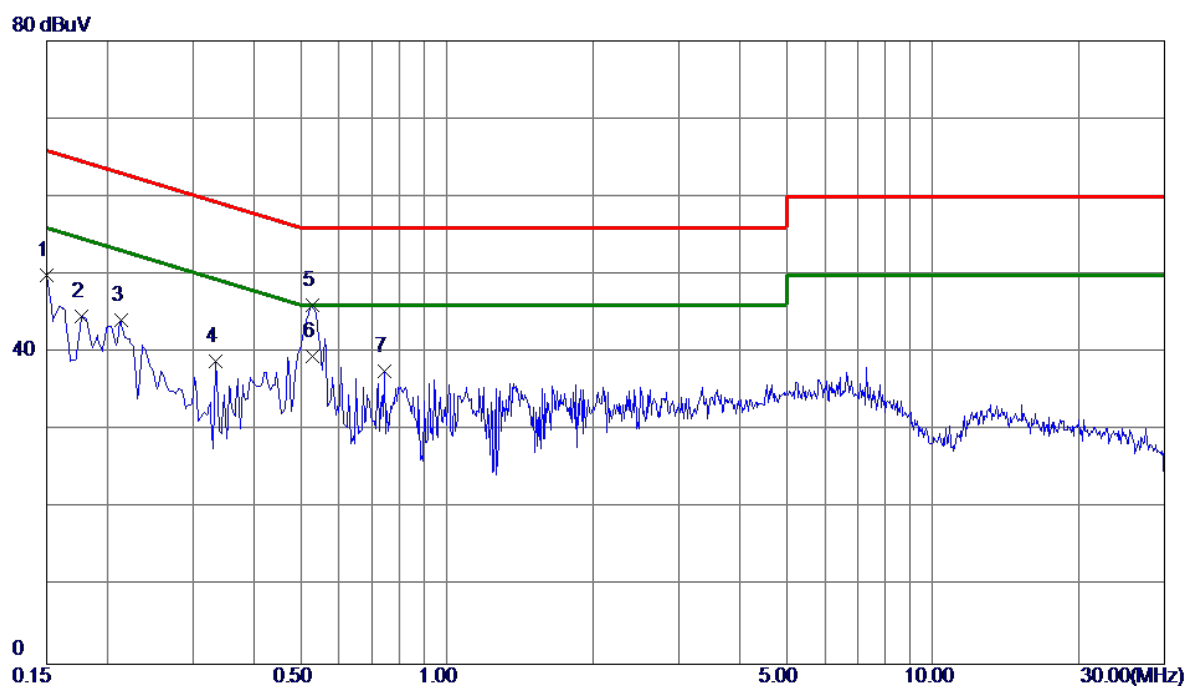


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	40.07	9.91	49.98	66.00	-16.02	Peak	
2	0.1770	34.74	9.91	44.65	64.63	-19.98	Peak	
3	0.2130	34.20	9.91	44.11	63.09	-18.98	Peak	
4	0.3345	28.90	9.94	38.84	59.34	-20.50	Peak	
5	0.5280	36.06	9.95	46.01	56.00	-9.99	Peak	
6 *	0.5280	29.60	9.95	39.55	46.00	-6.45	AVG	
7	0.7440	27.47	10.06	37.53	56.00	-18.47	Peak	

APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

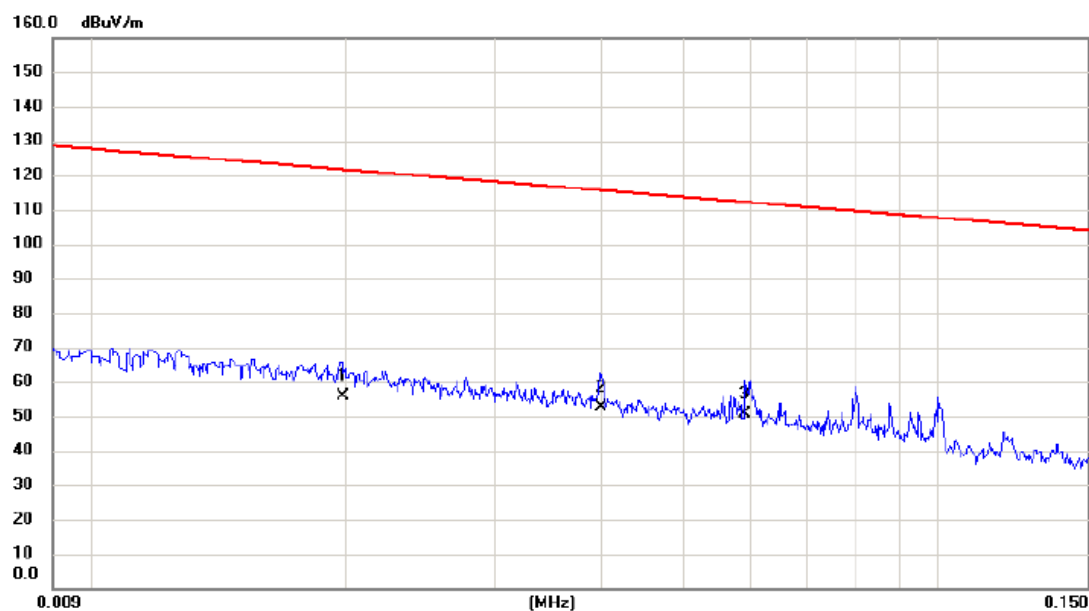

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0198	35.70	20.05	55.75	121.67	-65.92	AVG	
2		0.0400	32.80	19.69	52.49	115.56	-63.07	AVG	
3	*	0.0591	31.30	19.35	50.65	112.17	-61.52	AVG	

Test Mode: TX Mode


Ant 0°

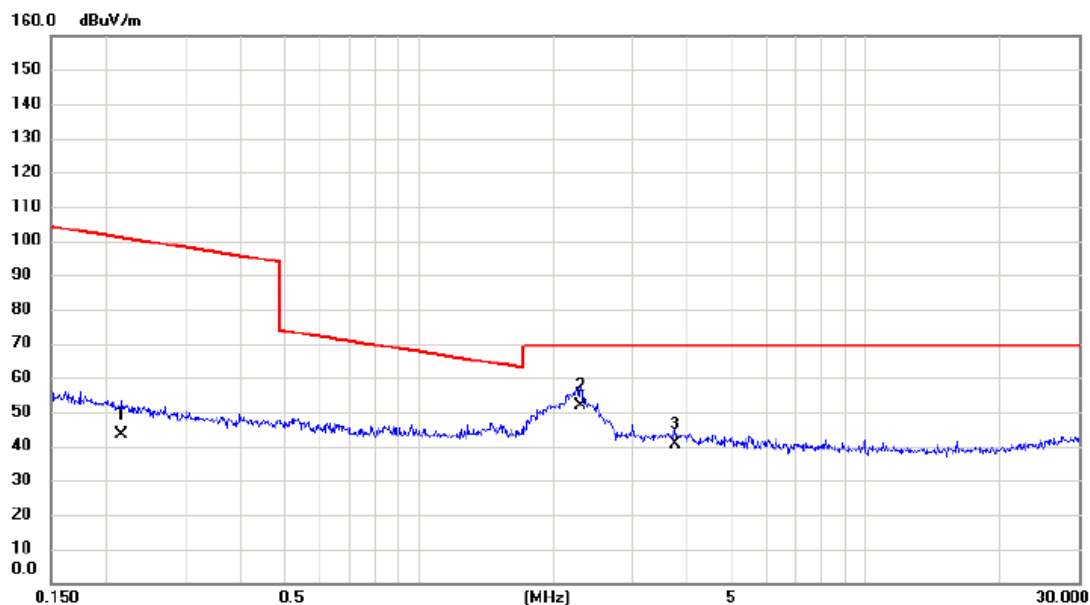

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2162	26.20	17.12	43.32	100.91	-57.59	AVG	
2	*	2.2968	34.80	16.94	51.74	69.54	-17.80	QP	
3		3.7395	24.70	15.95	40.65	69.54	-28.89	QP	

Test Mode: TX Mode


Ant 90°

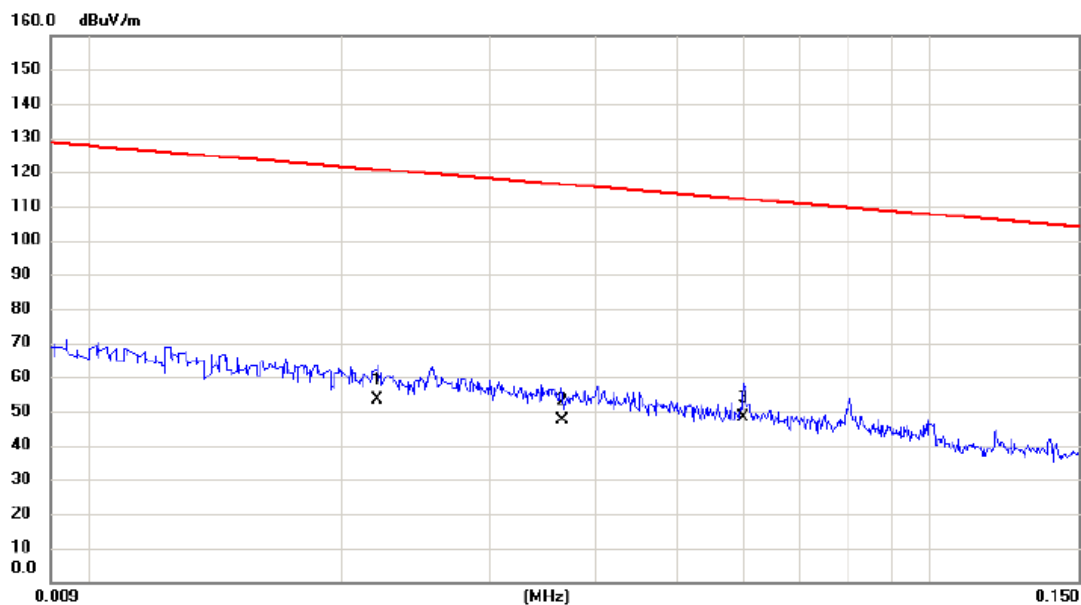

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0220	33.50	19.99	53.49	120.76	-67.27	AVG	
2		0.0365	27.60	19.75	47.35	116.36	-69.01	AVG	
3	*	0.0600	28.90	19.33	48.23	112.04	-63.81	AVG	

Test Mode: TX Mode

Ant 90°

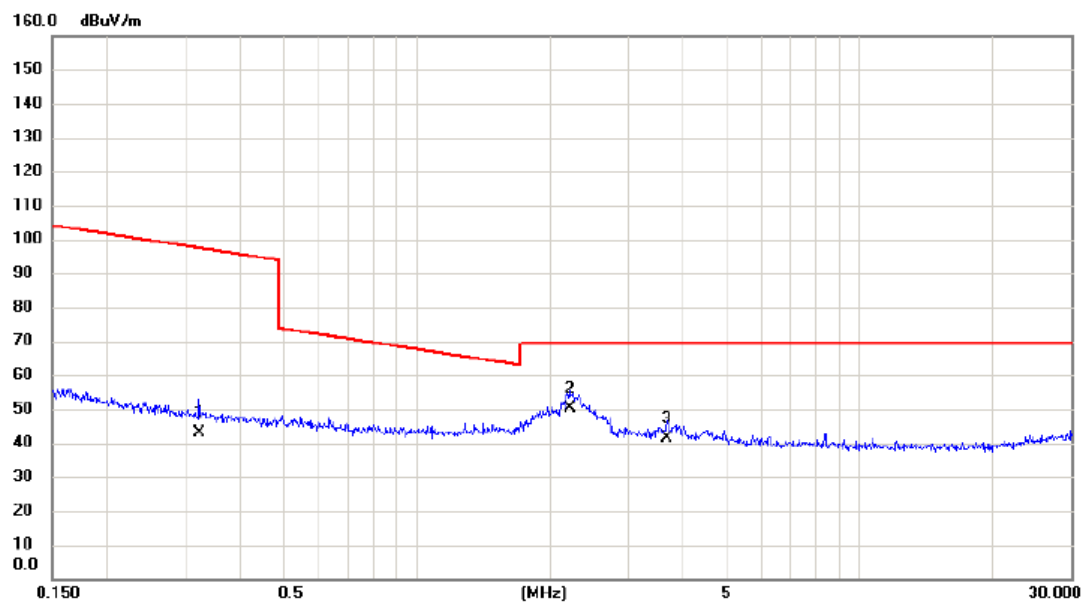


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3217	25.80	17.03	42.83	97.46	-54.63	AVG	
2	*	2.2132	33.40	16.98	50.38	69.54	-19.16	QP	
3		3.6611	25.30	16.01	41.31	69.54	-28.23	QP	

APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: TX B Mode Channel 01

Vertical

80 dBuV/m

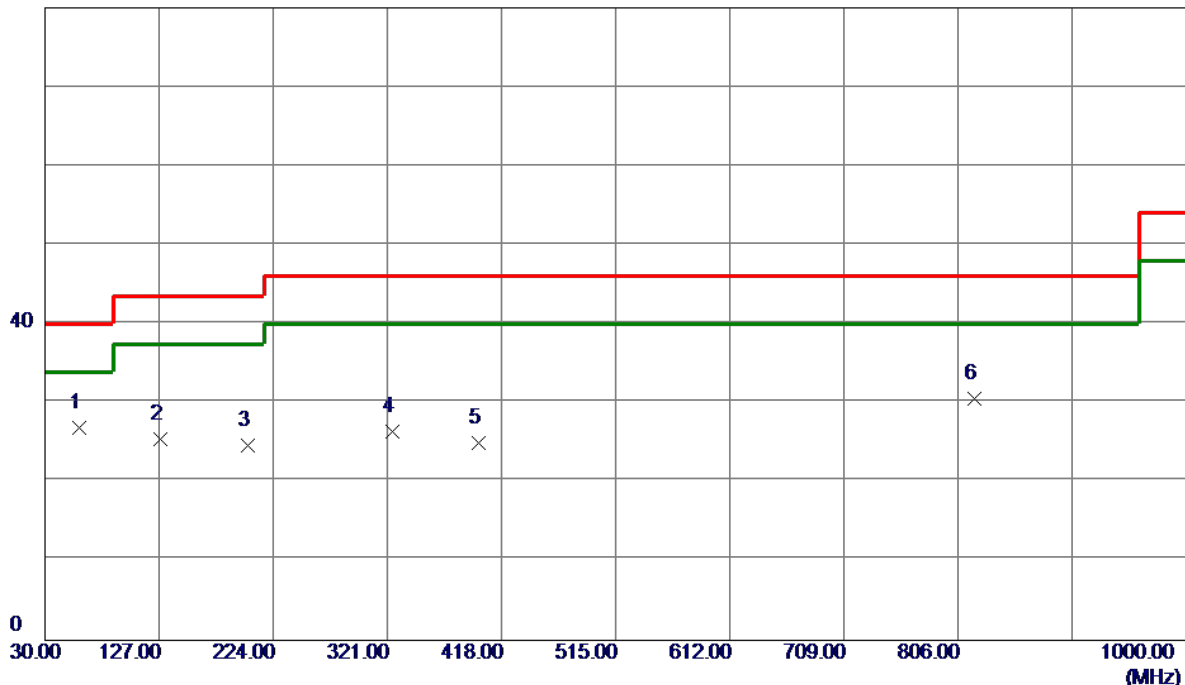


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	42.49	-15.56	26.93	40.00	-13.07	Peak	
2	127.9700	39.09	-13.65	25.44	43.50	-18.06	Peak	
3	202.6600	39.85	-15.21	24.64	43.50	-18.86	Peak	
4	324.8800	37.16	-10.72	26.44	46.00	-19.56	Peak	
5	399.0850	34.30	-9.41	24.89	46.00	-21.11	Peak	
6	820.0650	31.98	-1.35	30.63	46.00	-15.37	Peak	

Test Mode: TX B Mode Channel 01

Horizontal

80 dBuV/m

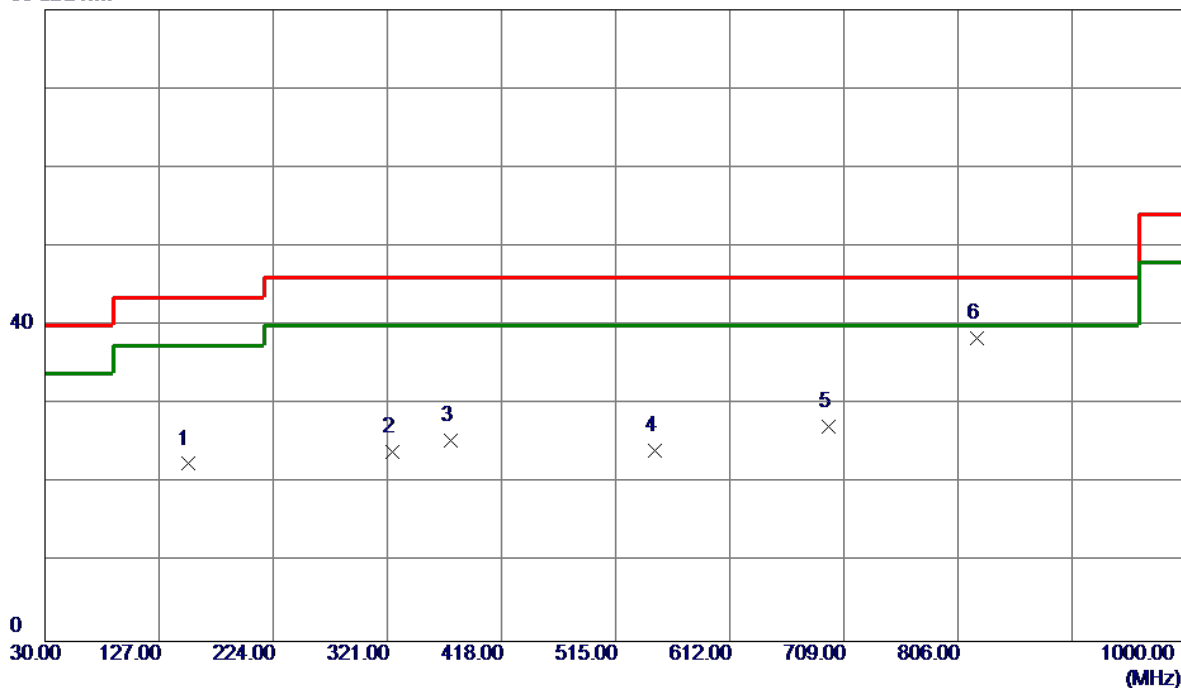


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	151.2500	33.86	-11.38	22.48	43.50	-21.02	Peak	
2	324.8800	34.72	-10.72	24.00	46.00	-22.00	Peak	
3	375.3200	35.67	-10.22	25.45	46.00	-20.55	Peak	
4	548.4650	29.69	-5.56	24.13	46.00	-21.87	Peak	
5	695.9050	30.08	-2.94	27.14	46.00	-18.86	Peak	
6 *	822.0050	39.80	-1.38	38.42	46.00	-7.58	Peak	

Test Mode: TX B Mode Channel 06

Vertical


80 dBuV/m

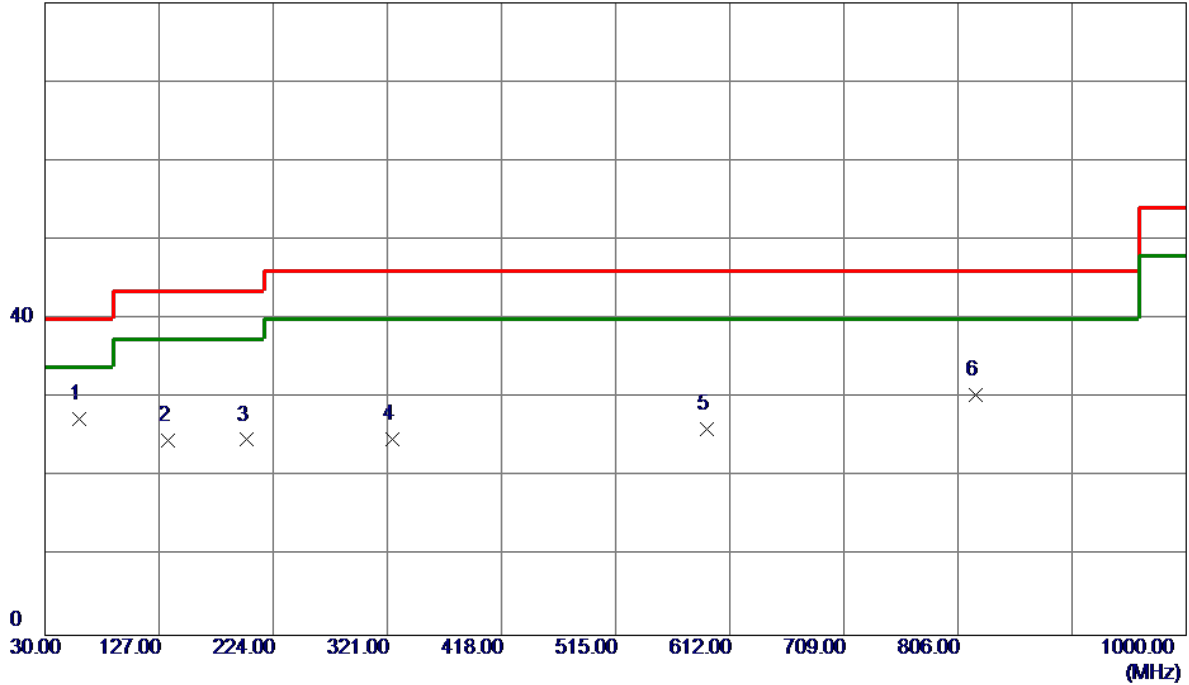

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.6150	42.85	-15.49	27.36	40.00	-12.64	Peak	
2	134.2750	37.41	-12.83	24.58	43.50	-18.92	Peak	
3	201.2050	39.93	-15.21	24.72	43.50	-18.78	Peak	
4	324.8800	35.48	-10.72	24.76	46.00	-21.24	Peak	
5	592.1150	32.28	-6.17	26.11	46.00	-19.89	Peak	
6	821.5200	31.76	-1.38	30.38	46.00	-15.62	Peak	

Test Mode: TX B Mode Channel 06

Horizontal

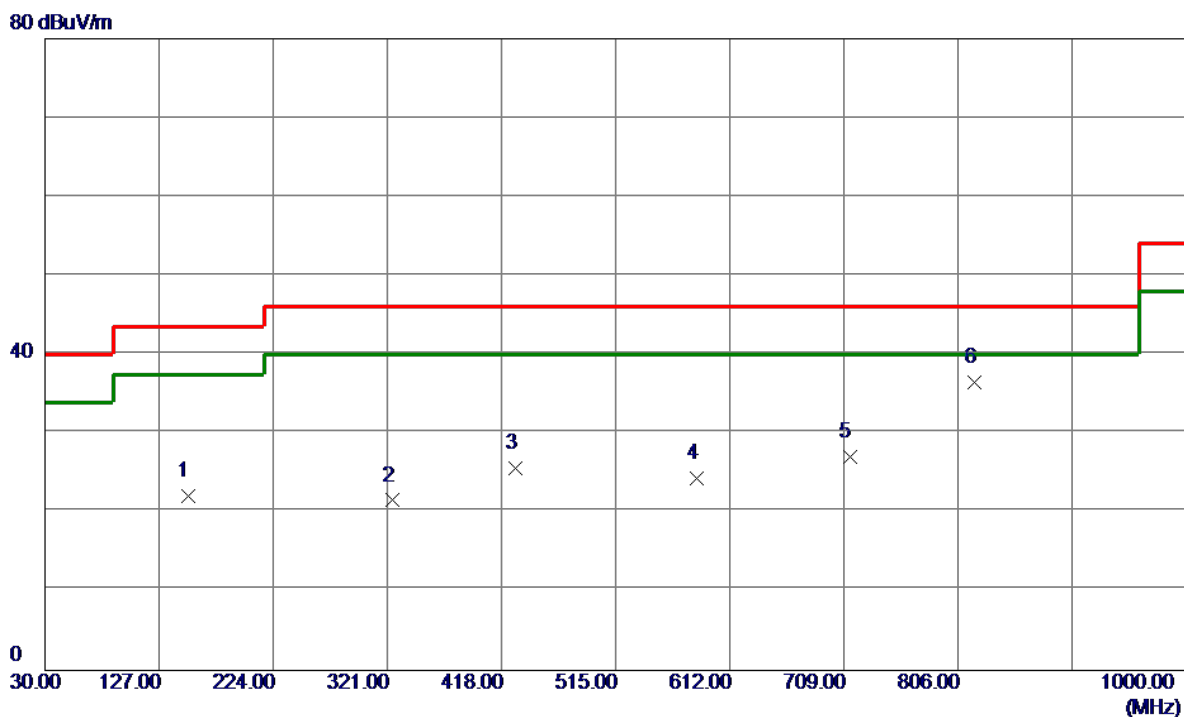


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	151.2500	33.44	-11.38	22.06	43.50	-21.44	Peak	
2	324.8800	32.24	-10.72	21.52	46.00	-24.48	Peak	
3	430.1250	33.83	-8.19	25.64	46.00	-20.36	Peak	
4	584.3550	30.39	-6.04	24.35	46.00	-21.65	Peak	
5	713.8500	30.09	-3.10	26.99	46.00	-19.01	Peak	
6 *	819.5800	37.77	-1.35	36.42	46.00	-9.58	Peak	

Test Mode: TX B Mode Channel 11

Vertical


80 dBuV/m

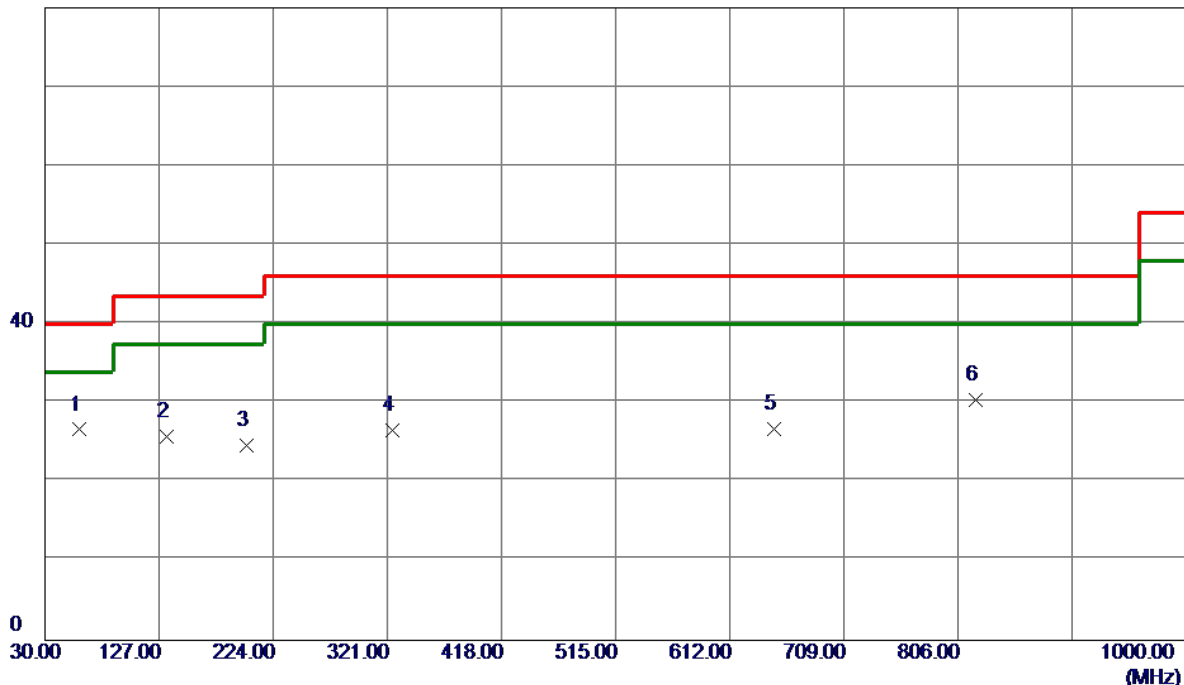

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	42.20	-15.56	26.64	40.00	-13.36	Peak	
2	133.7899	38.68	-12.90	25.78	43.50	-17.72	Peak	
3	201.2050	39.91	-15.21	24.70	43.50	-18.80	Peak	
4	324.8800	37.21	-10.72	26.49	46.00	-19.51	Peak	
5	649.8300	31.91	-5.18	26.73	46.00	-19.27	Peak	
6	821.5200	31.80	-1.38	30.42	46.00	-15.58	Peak	

Test Mode: TX B Mode Channel 11

Horizontal

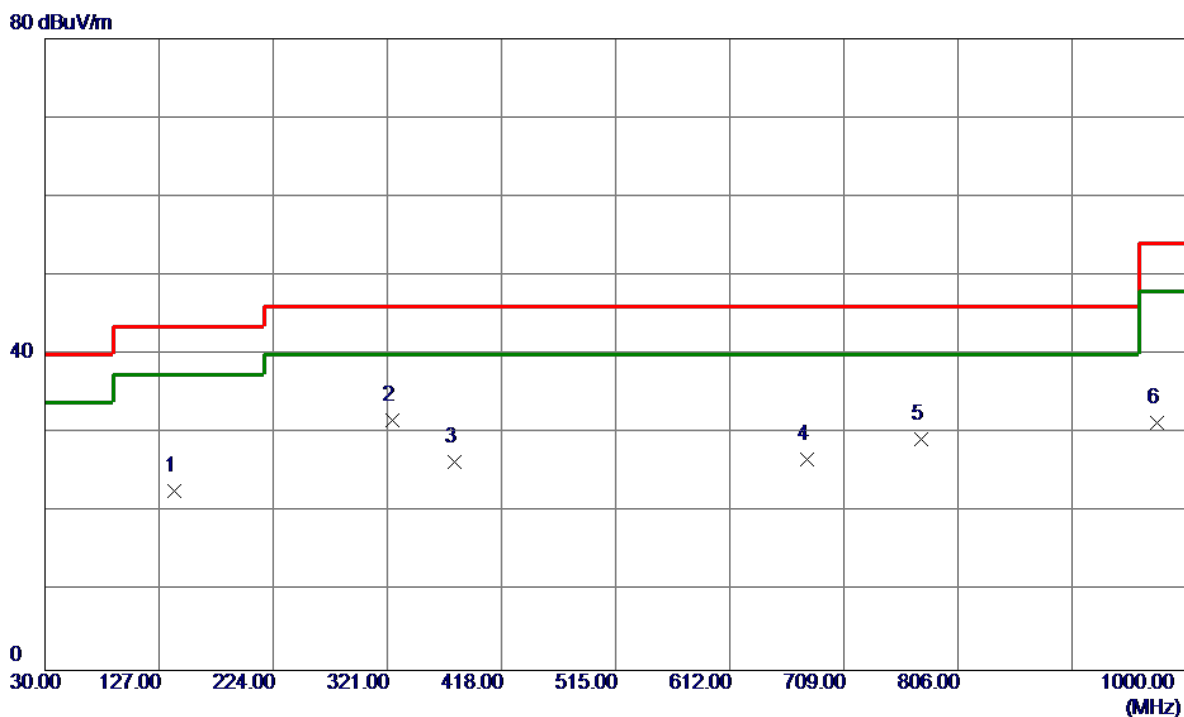


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	140.0950	34.78	-12.09	22.69	43.50	-20.81	Peak	
2 *	324.8800	42.43	-10.72	31.71	46.00	-14.29	Peak	
3	378.2300	36.48	-10.12	26.36	46.00	-19.64	Peak	
4	677.4750	30.58	-3.84	26.74	46.00	-19.26	Peak	
5	774.9600	31.80	-2.54	29.26	46.00	-16.74	Peak	
6	975.2650	30.52	0.81	31.33	54.00	-22.67	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

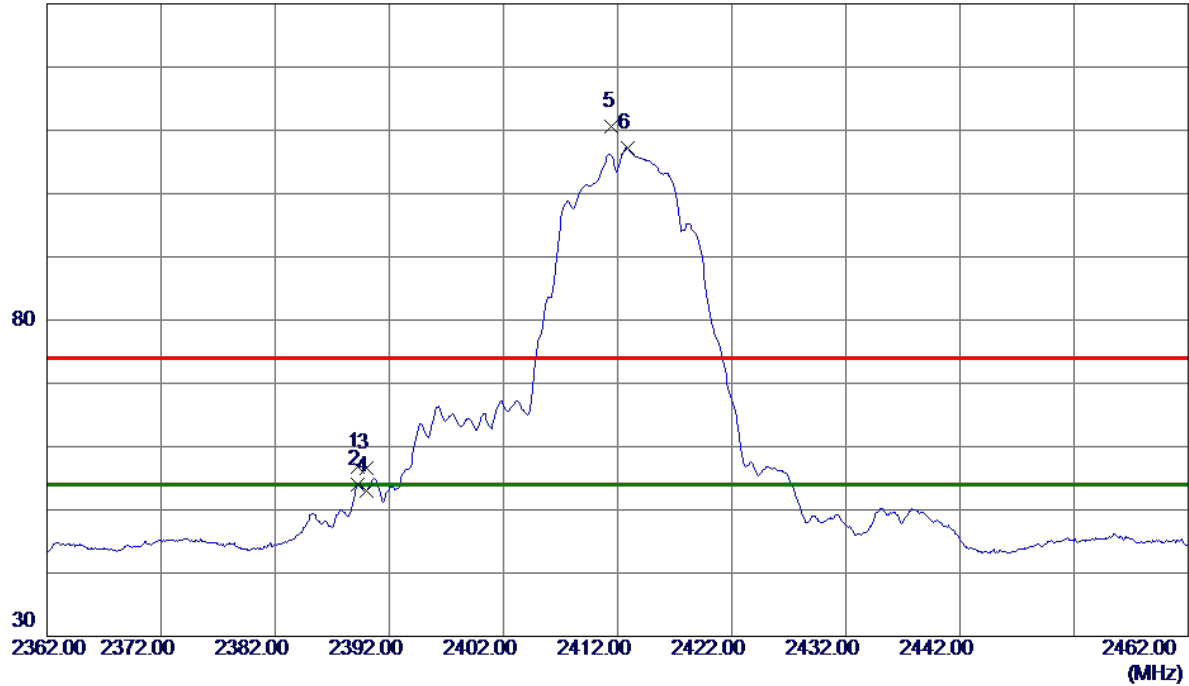


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2500	50.11	6.62	56.73	74.00	-17.27	Peak	
2	2389.2500	47.33	6.62	53.95	54.00	-0.05	AVG	
3	2390.0000	49.96	6.62	56.58	74.00	-17.42	Peak	
4	2390.0000	46.41	6.62	53.03	54.00	-0.97	AVG	
5	2411.5000	103.92	6.62	110.54	74.00	36.54	Peak	No Limit
6 *	2412.9000	100.56	6.62	107.18	54.00	53.18	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical


80 dBuV/m

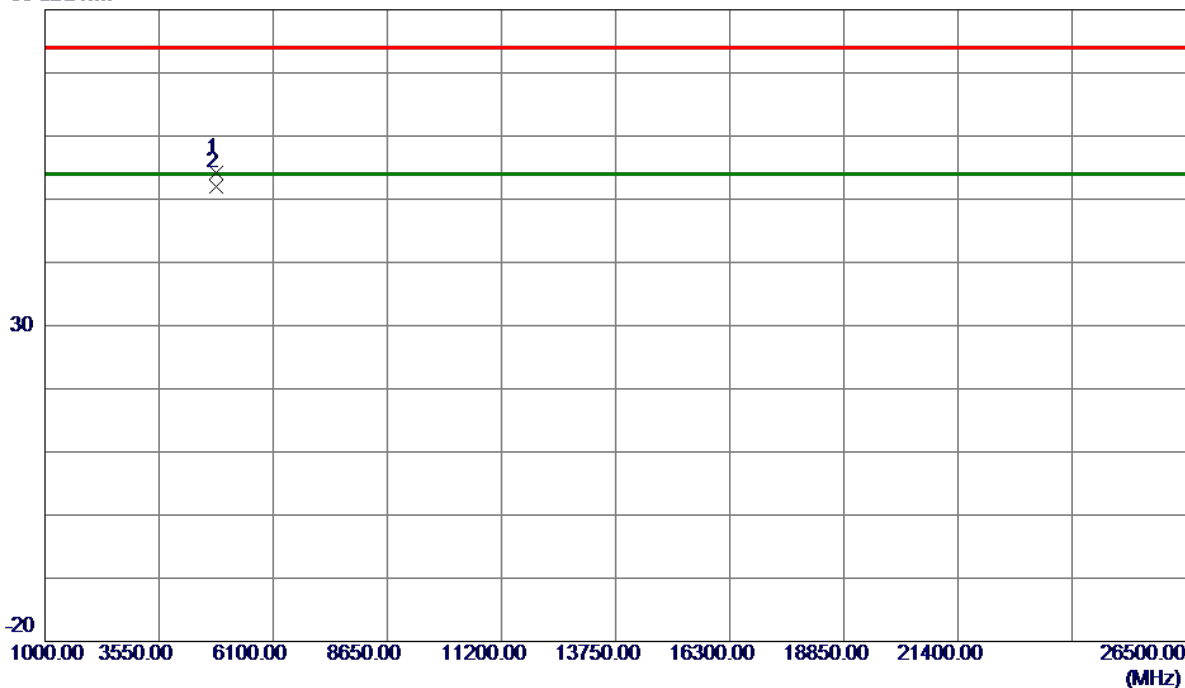

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.0110	50.54	3.57	54.11	74.00	-19.89	Peak	
2 *	4824.0170	48.47	3.57	52.04	54.00	-1.96	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

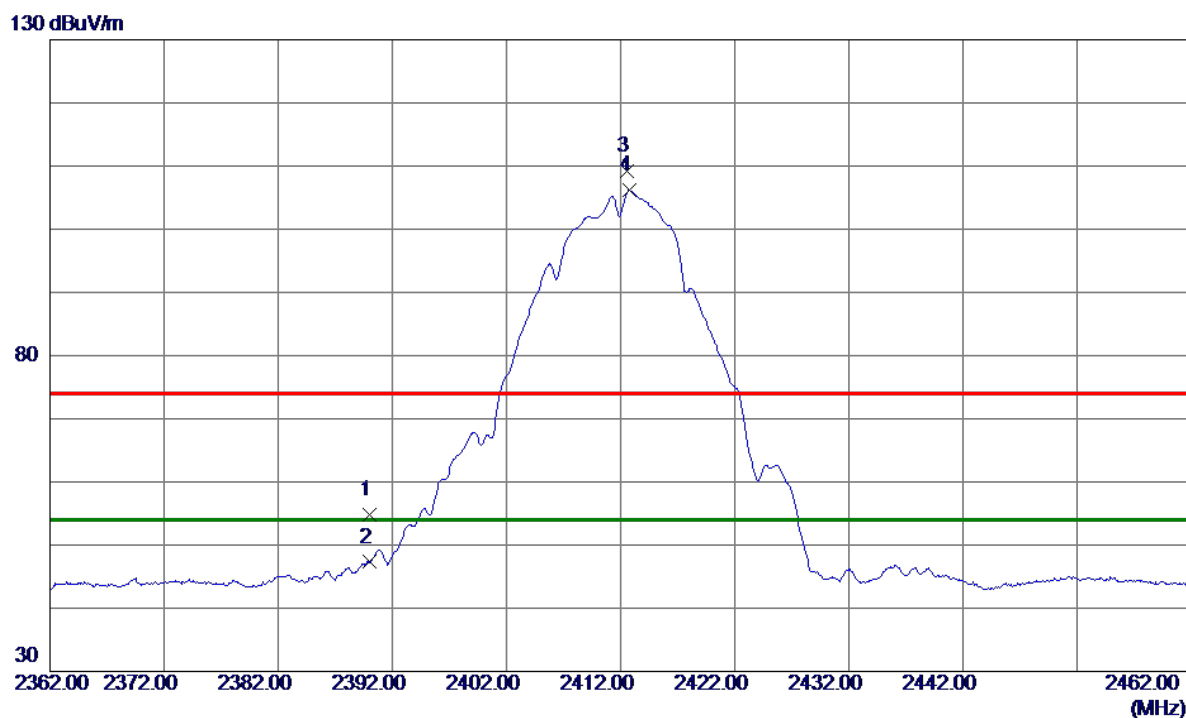


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	48.15	6.62	54.77	74.00	-19.23	Peak	
2	2390.0000	40.68	6.62	47.30	54.00	-6.70	AVG	
3	2412.5500	102.55	6.62	109.17	74.00	35.17	Peak	No Limit
4 *	2412.8000	99.58	6.62	106.20	54.00	52.20	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal


80 dBuV/m

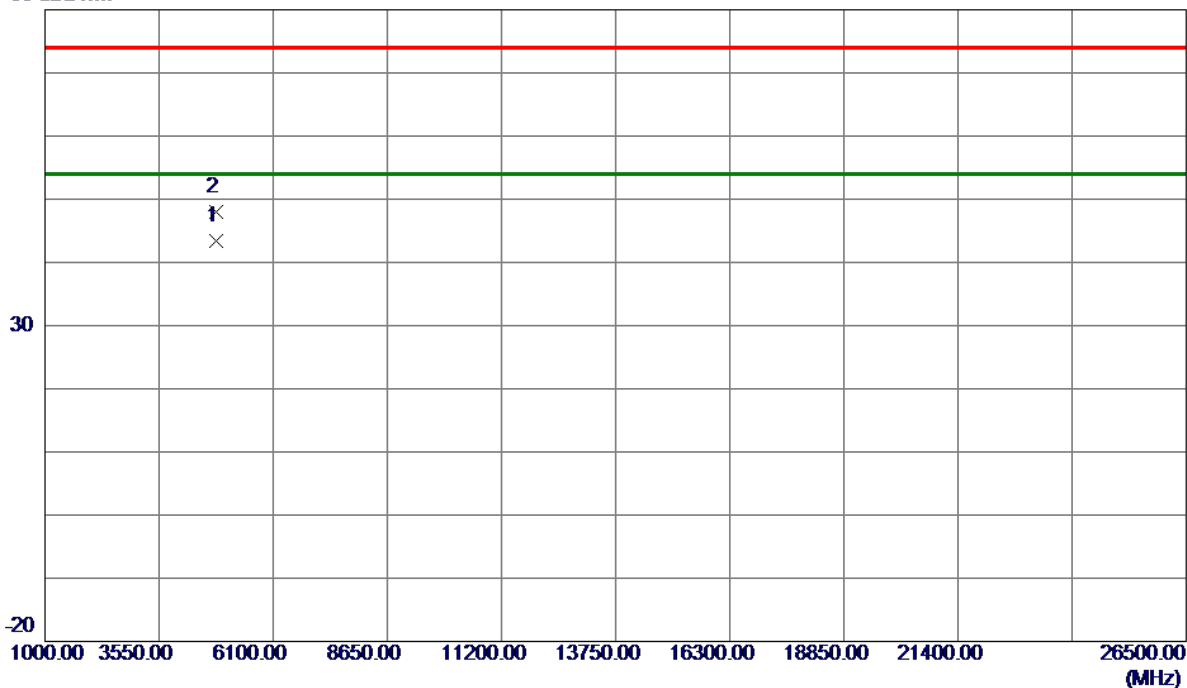

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9250	39.76	3.57	43.33	54.00	-10.67	AVG	
2	4823.9480	44.38	3.57	47.95	74.00	-26.05	Peak	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2417 MHz


Vertical

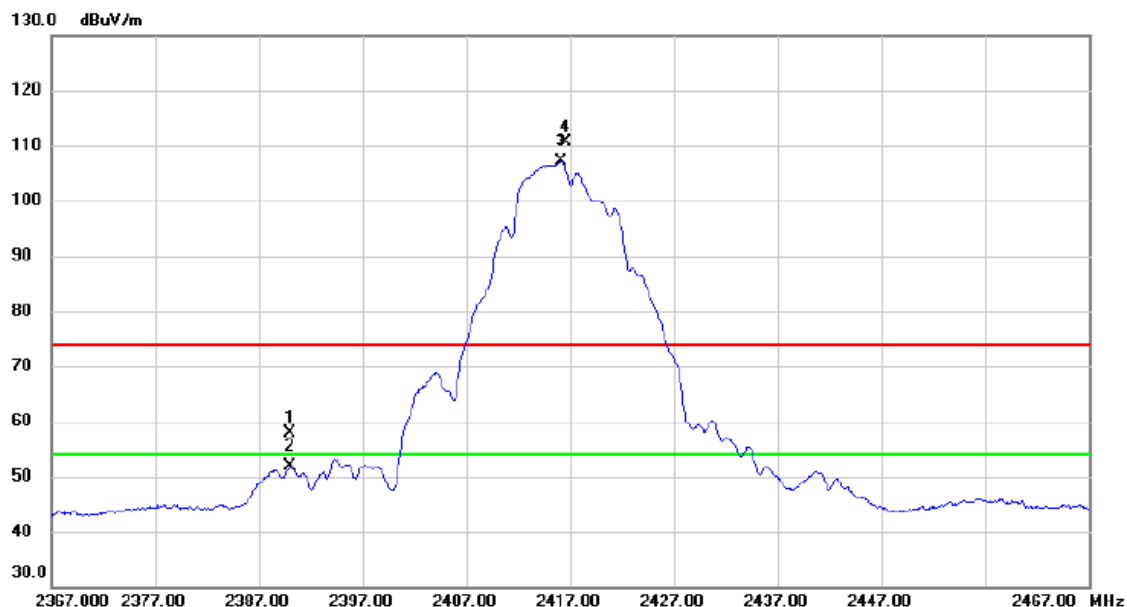

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	51.21	6.62	57.83	74.00	-16.17	peak	
2		2390.000	45.24	6.62	51.86	54.00	-2.14	AVG	
3	*	2416.150	100.63	6.62	107.25	54.00	53.25	AVG	No Limit
4	X	2416.500	103.93	6.62	110.55	74.00	36.55	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B Mode 2417 MHz


Vertical

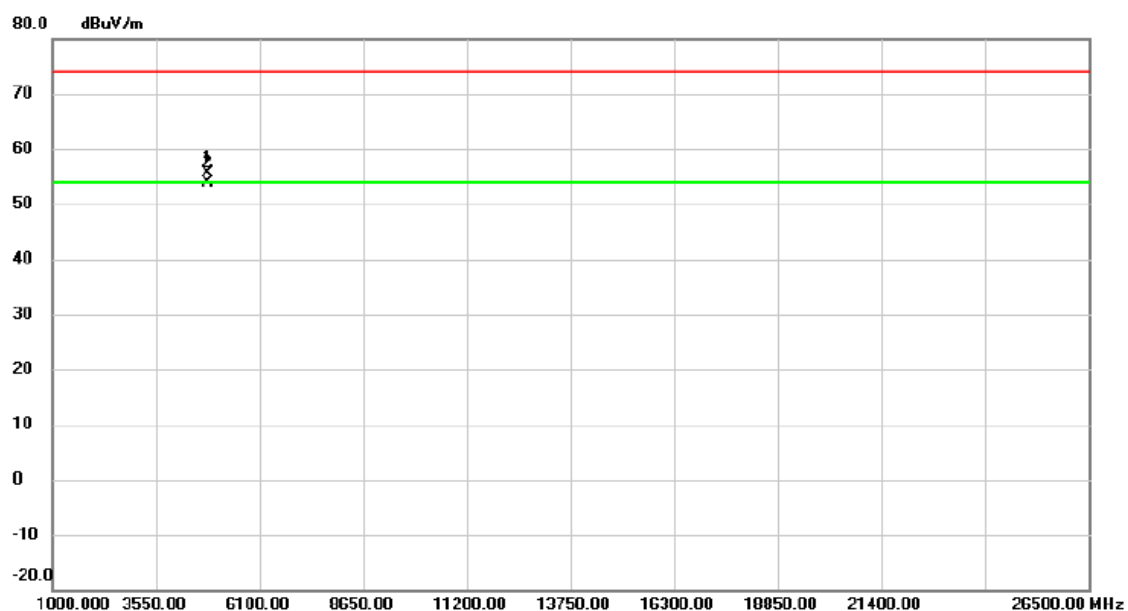

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4833.975	52.08	3.59	55.67	74.00	-18.33	peak	
2	*	4833.993	50.38	3.59	53.97	54.00	-0.03	AVG	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2417 MHz


Horizontal

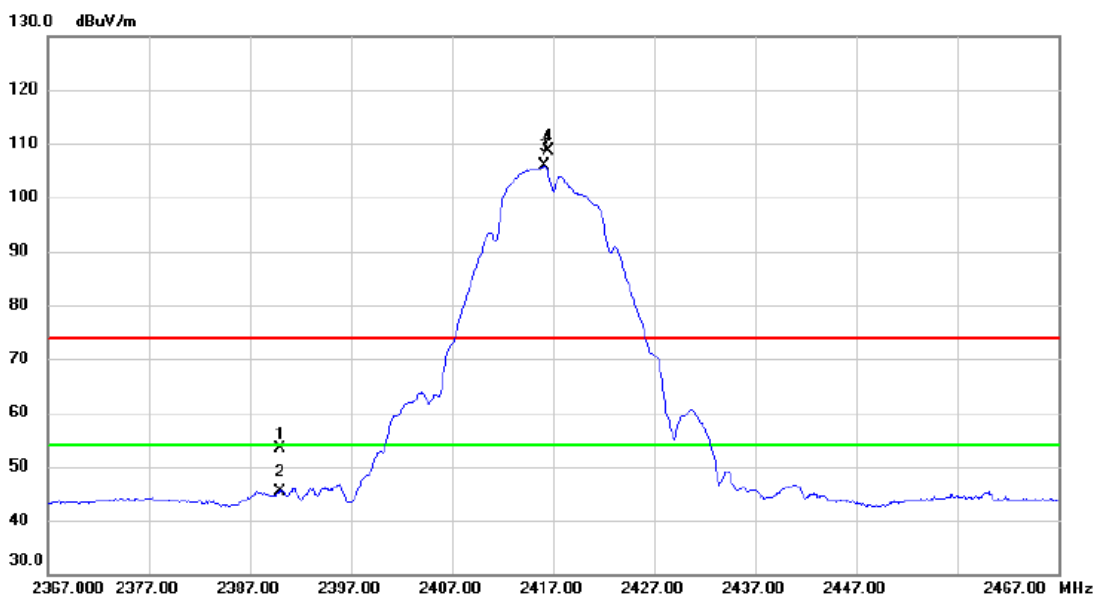

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.73	6.62	53.35	74.00	-20.65	peak	
2		2390.000	38.85	6.62	45.47	54.00	-8.53	AVG	
3	*	2416.150	99.24	6.62	105.86	54.00	51.86	AVG	No Limit
4	X	2416.500	101.94	6.62	108.56	74.00	34.56	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B Mode 2417 MHz

Horizontal

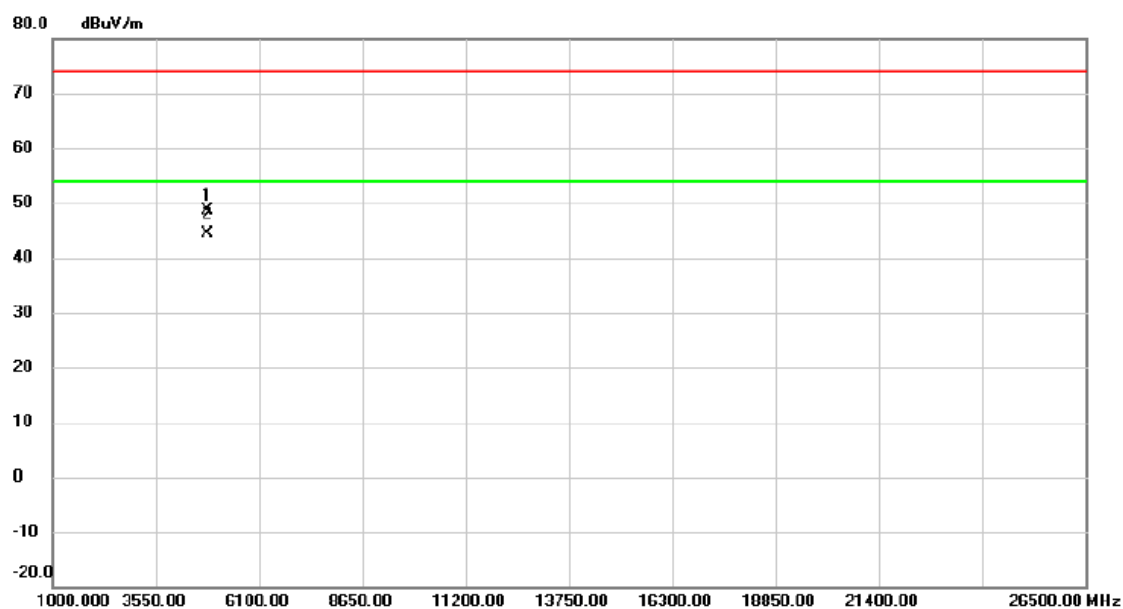


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4833.898	44.97	3.59	48.56	74.00	-25.44	peak	
2	*	4834.004	40.74	3.59	44.33	54.00	-9.67	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

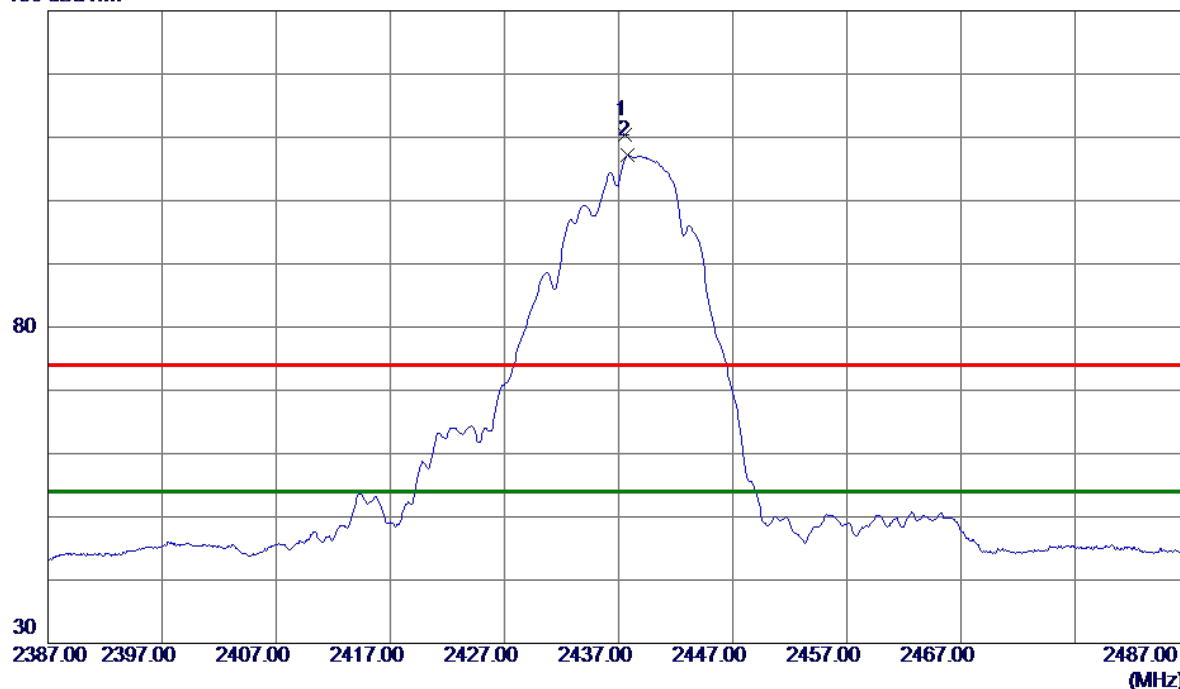


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2437.5500	103.83	6.61	110.44	74.00	36.44	Peak	No Limit
2 *	2437.8000	100.57	6.61	107.18	54.00	53.18	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical


80 dBuV/m

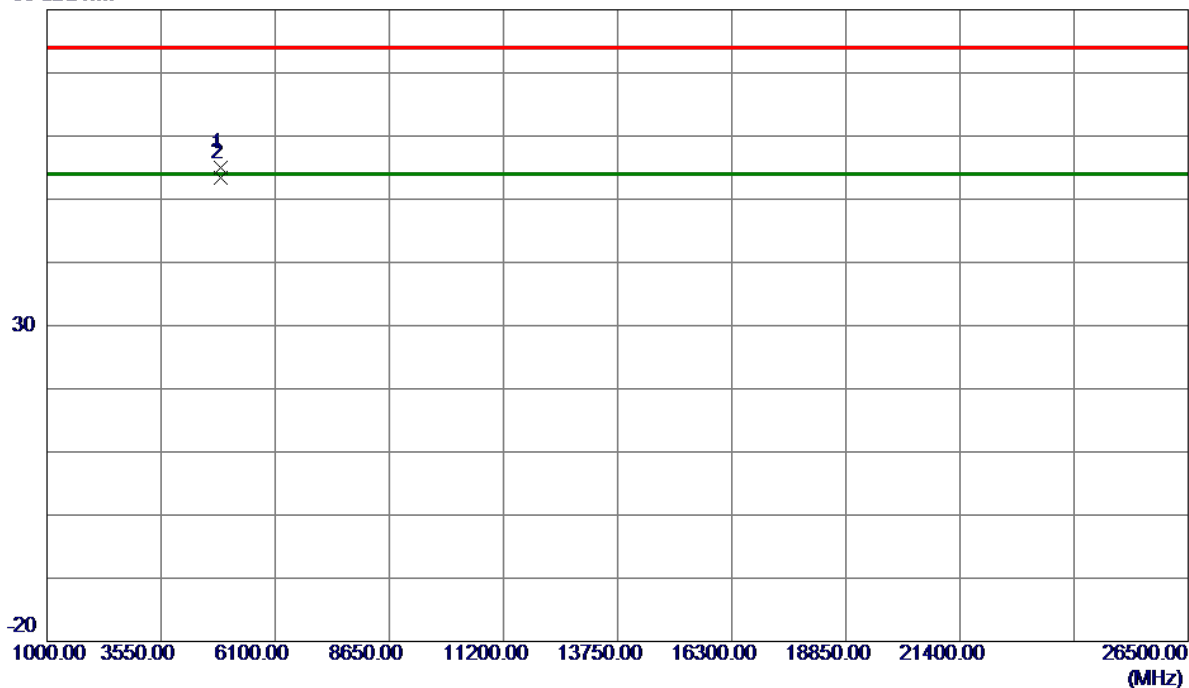

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9640	51.30	3.68	54.98	74.00	-19.02	Peak	
2 *	4873.9890	49.65	3.68	53.33	54.00	-0.67	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

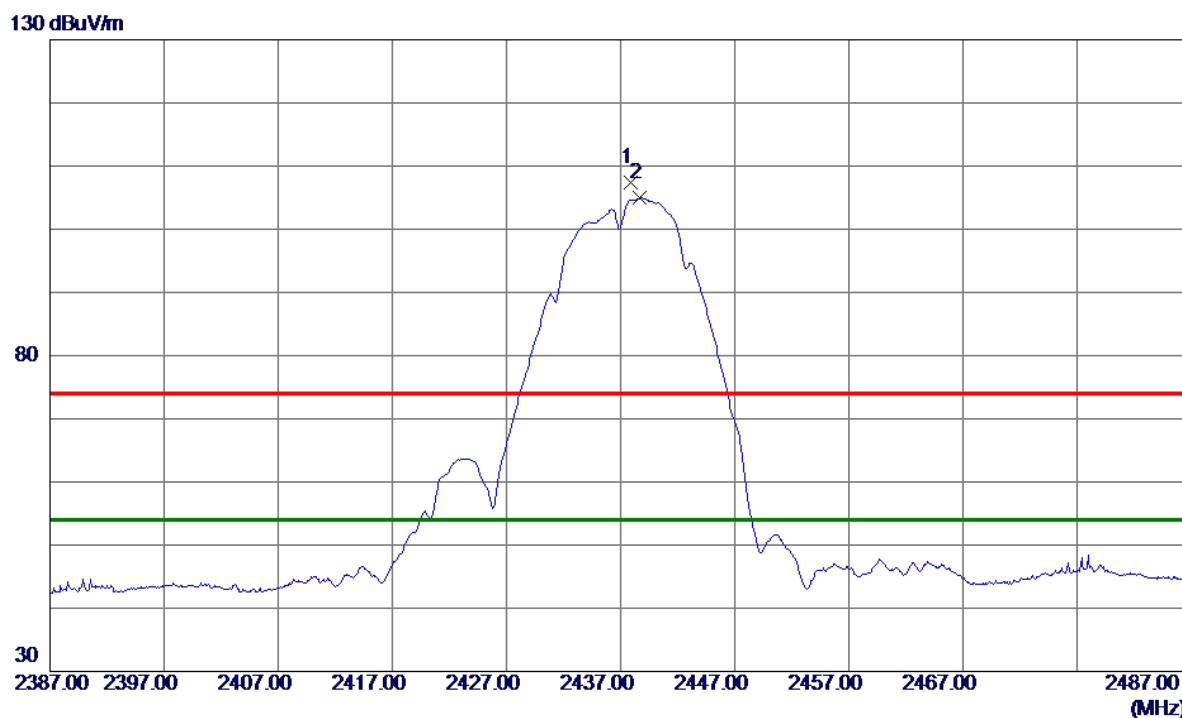


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2437.8500	100.82	6.61	107.43	74.00	33.43	Peak	No Limit
2 *	2438.7000	98.41	6.61	105.02	54.00	51.02	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

80 dBuV/m

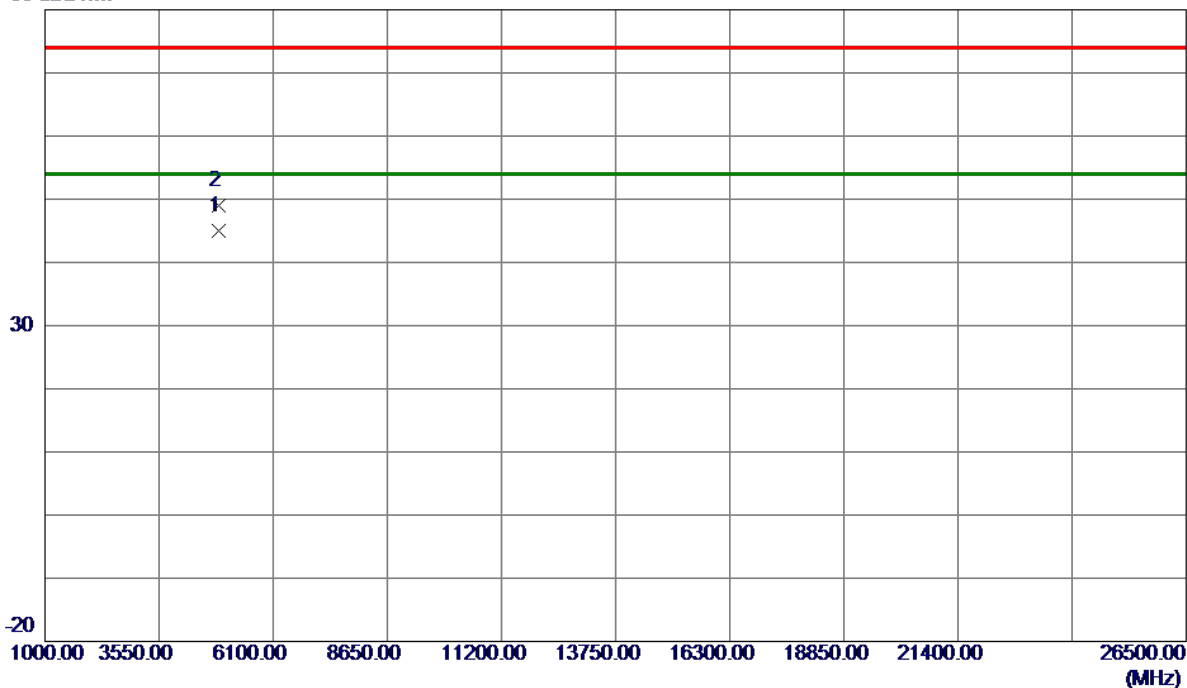

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9820	41.35	3.68	45.03	54.00	-8.97	AVG	
2	4874.0080	45.41	3.68	49.09	74.00	-24.91	Peak	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2457 MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2457.500	103.69	6.62	110.31	74.00	36.31	peak	No Limit
2	*	2457.850	100.47	6.62	107.09	54.00	53.09	AVG	No Limit
3		2483.500	51.90	6.61	58.51	74.00	-15.49	peak	
4		2483.500	45.45	6.61	52.06	54.00	-1.94	AVG	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2457 MHz


Vertical

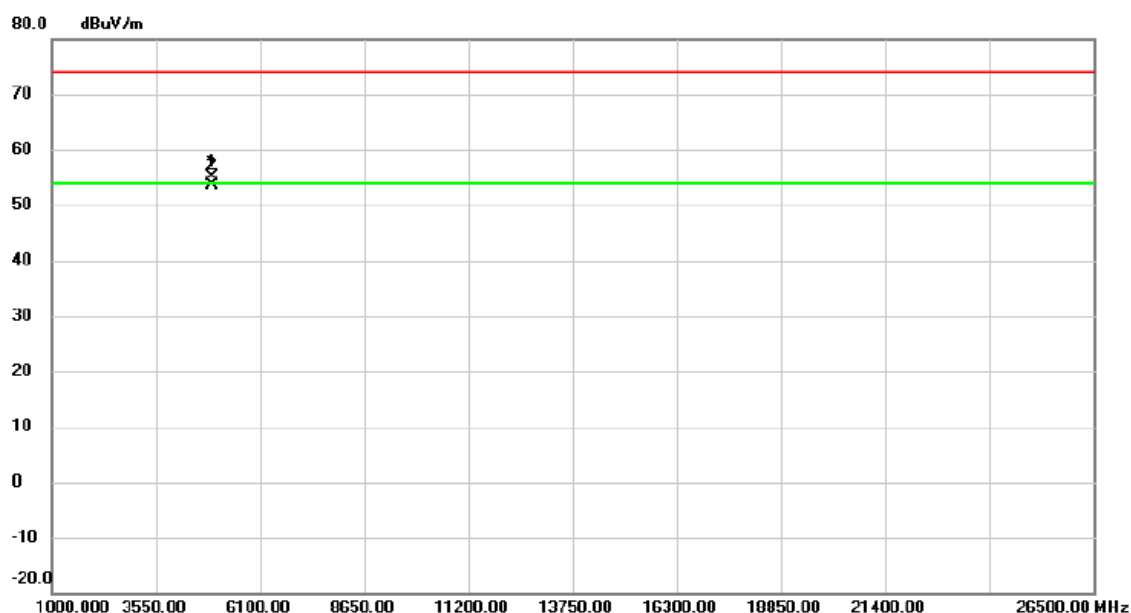

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4913.923	51.42	3.77	55.19	74.00	-18.81	peak	
2	*	4914.034	49.76	3.77	53.53	54.00	-0.47	AVG	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2457 MHz


Horizontal

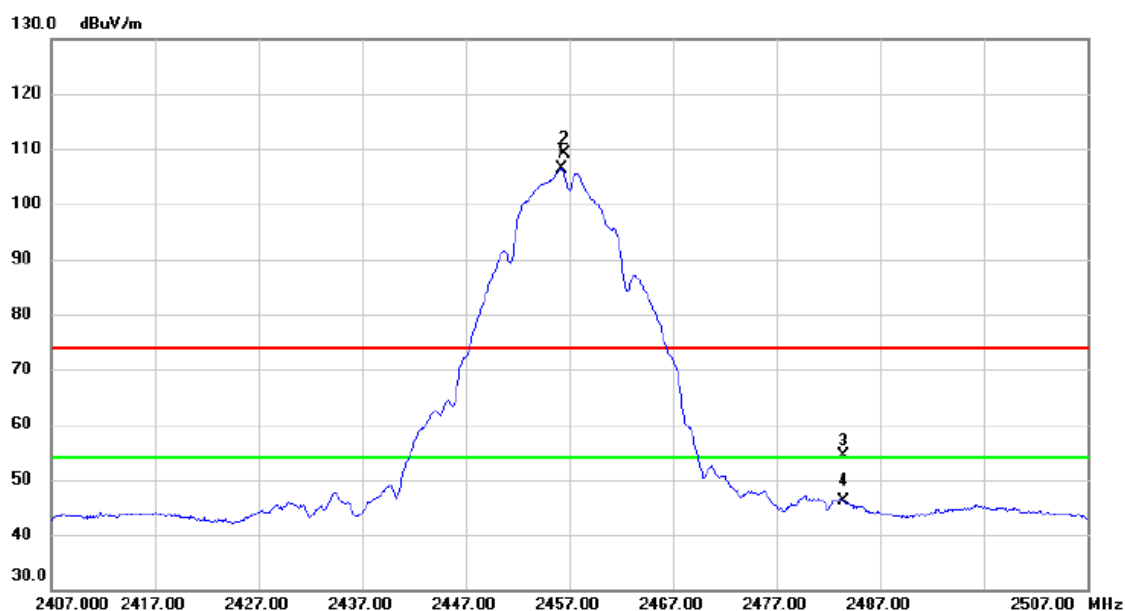

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.300	99.84	6.62	106.46	54.00	52.46	AVG	No Limit
2	X	2456.500	102.63	6.62	109.25	74.00	35.25	peak	No Limit
3		2483.500	47.83	6.61	54.44	74.00	-19.56	peak	
4		2483.500	39.52	6.61	46.13	54.00	-7.87	AVG	

Orthogonal Axis :	X
Test Mode :	TX B Mode 2457 MHz

Horizontal

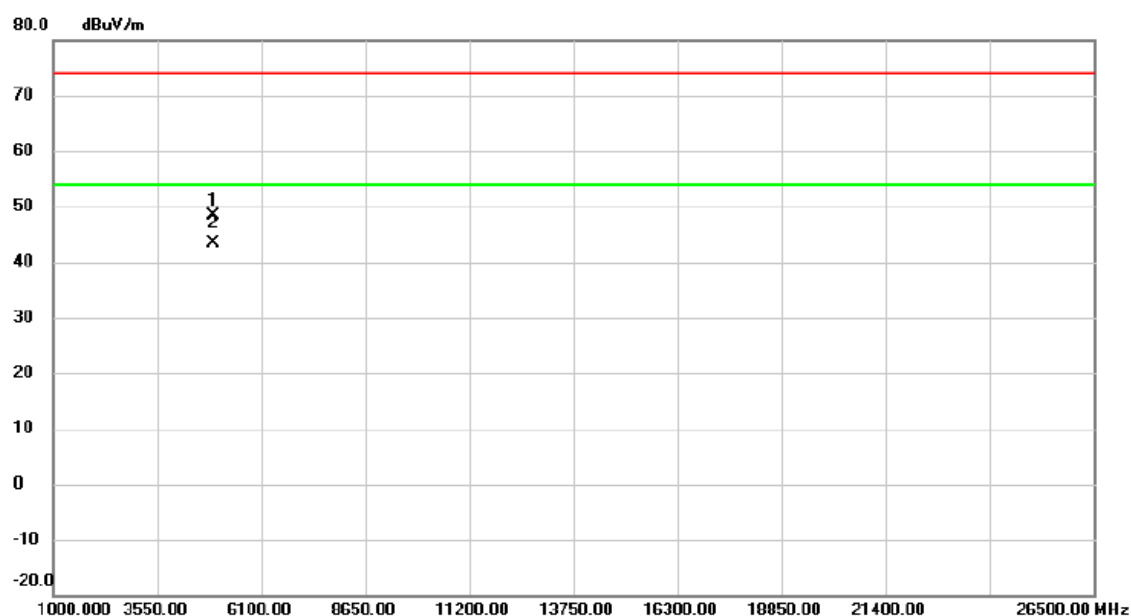


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4913.959	44.51	3.77	48.28	74.00	-25.72	peak	
2	*	4913.975	39.60	3.77	43.37	54.00	-10.63	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

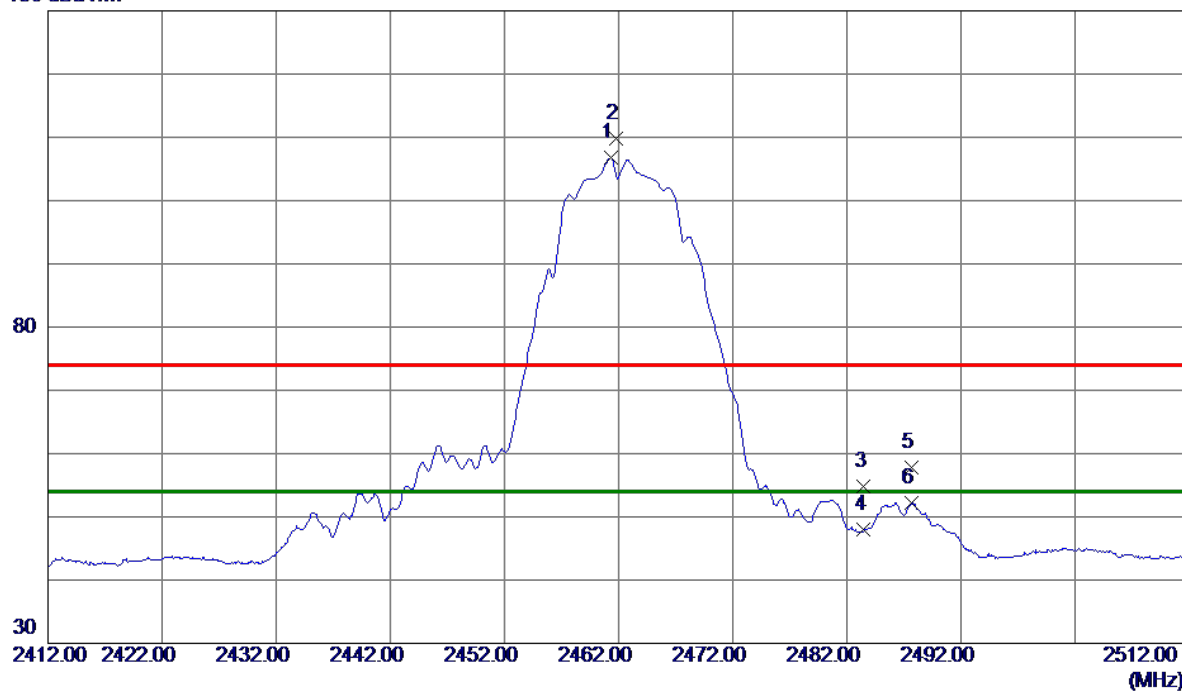


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.3000	100.11	6.61	106.72	54.00	52.72	AVG	No Limit
2	2461.8000	103.18	6.61	109.79	74.00	35.79	Peak	No Limit
3	2483.5000	48.17	6.61	54.78	74.00	-19.22	Peak	
4	2483.5000	41.37	6.61	47.98	54.00	-6.02	AVG	
5	2487.7000	51.27	6.61	57.88	74.00	-16.12	Peak	
6	2487.7000	45.57	6.61	52.18	54.00	-1.82	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical


80 dBuV/m

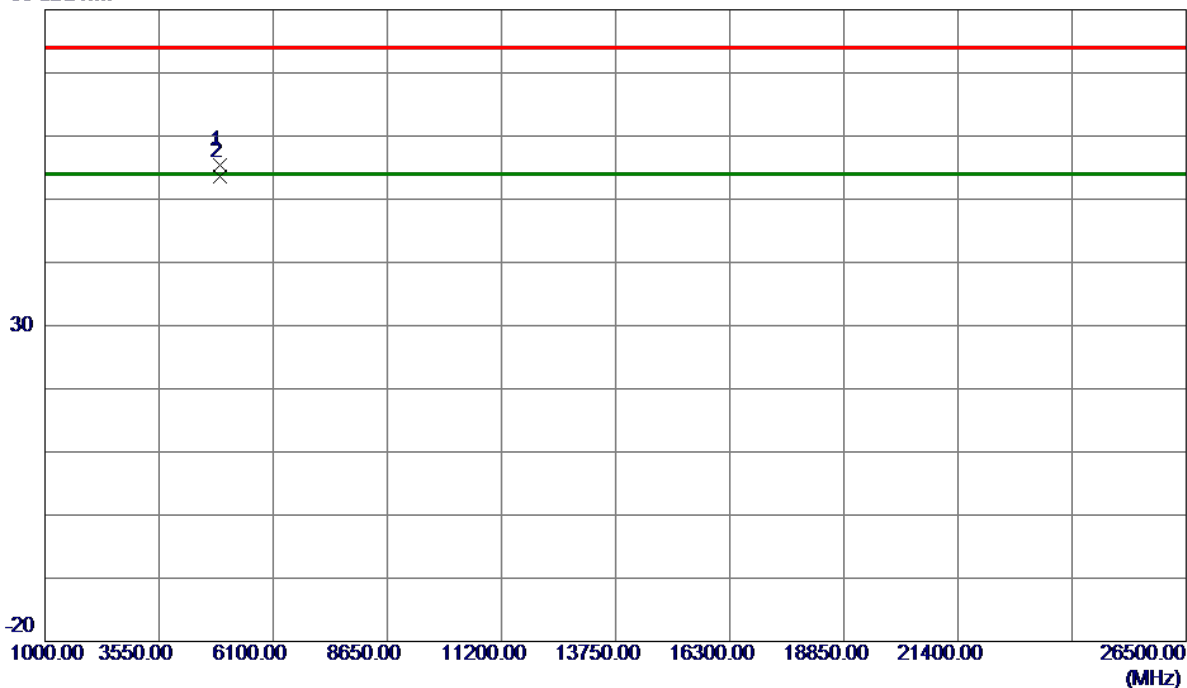

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9740	51.52	3.79	55.31	74.00	-18.69	Peak	
2 *	4924.0290	49.79	3.79	53.58	54.00	-0.42	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

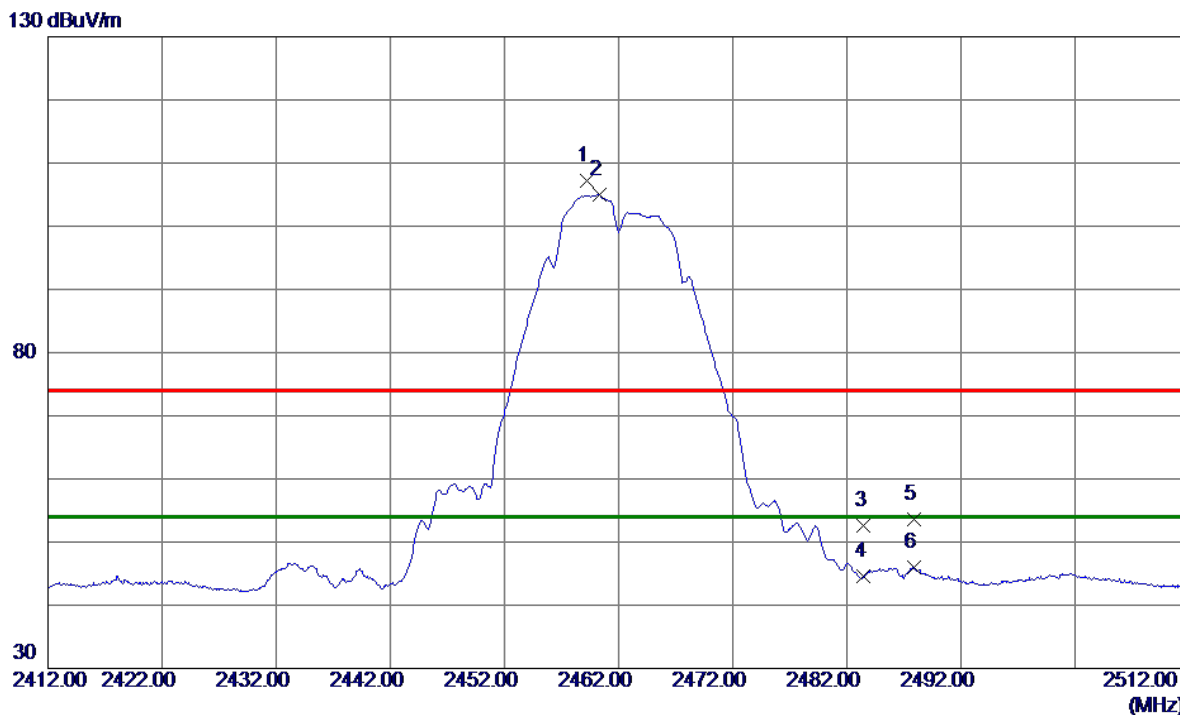


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.2000	100.59	6.61	107.20	74.00	33.20	Peak	No Limit
2 *	2460.3500	98.37	6.61	104.98	54.00	50.98	AVG	No Limit
3	2483.5000	45.94	6.61	52.55	74.00	-21.45	Peak	
4	2483.5000	37.99	6.61	44.60	54.00	-9.40	AVG	
5	2487.9000	47.07	6.61	53.68	74.00	-20.32	Peak	
6	2487.9000	39.38	6.61	45.99	54.00	-8.01	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

80 dBuV/m

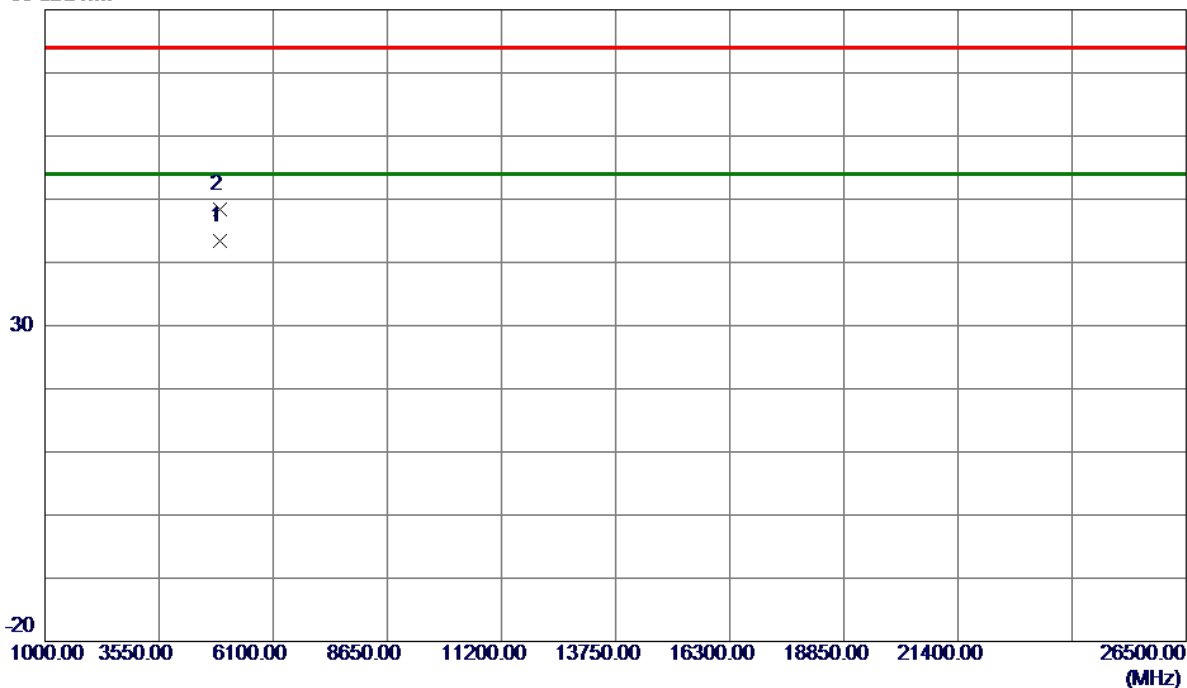


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9320	39.66	3.79	43.45	54.00	-10.55	AVG	
2	4924.0299	44.67	3.79	48.46	74.00	-25.54	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

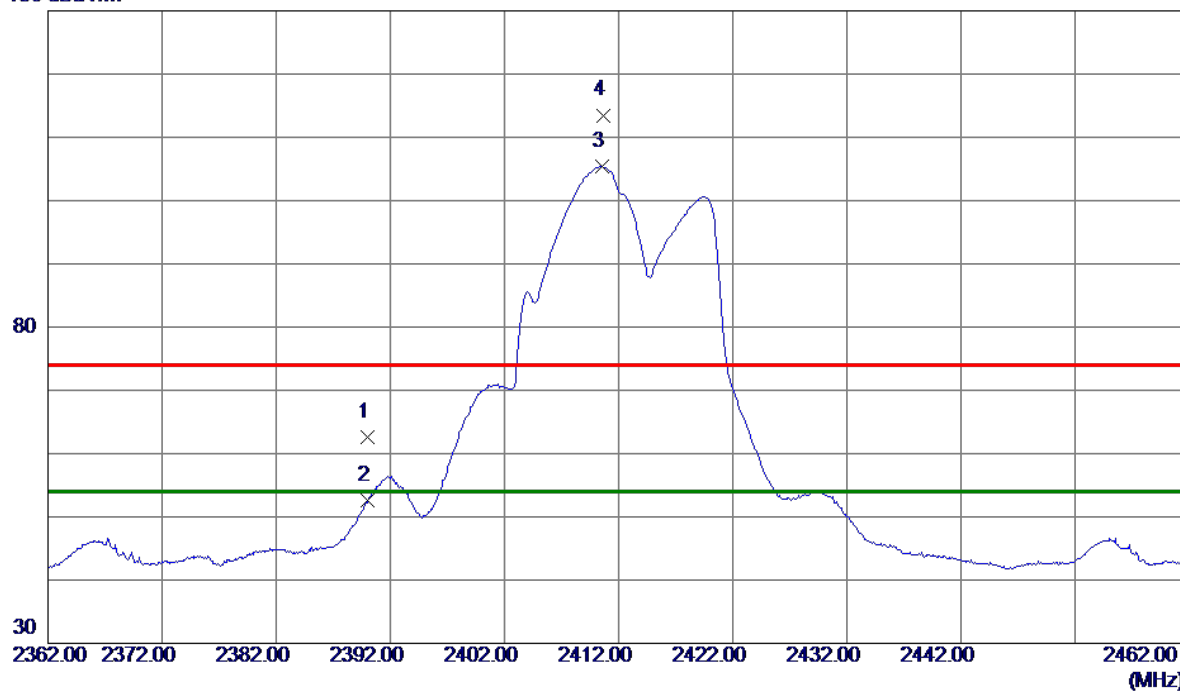


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	56.06	6.62	62.68	74.00	-11.32	Peak	
2	2390.0000	46.01	6.62	52.63	54.00	-1.37	AVG	
3 *	2410.6000	98.80	6.62	105.42	54.00	51.42	AVG	No Limit
4	2410.6500	106.88	6.62	113.50	74.00	39.50	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical


80 dBuV/m

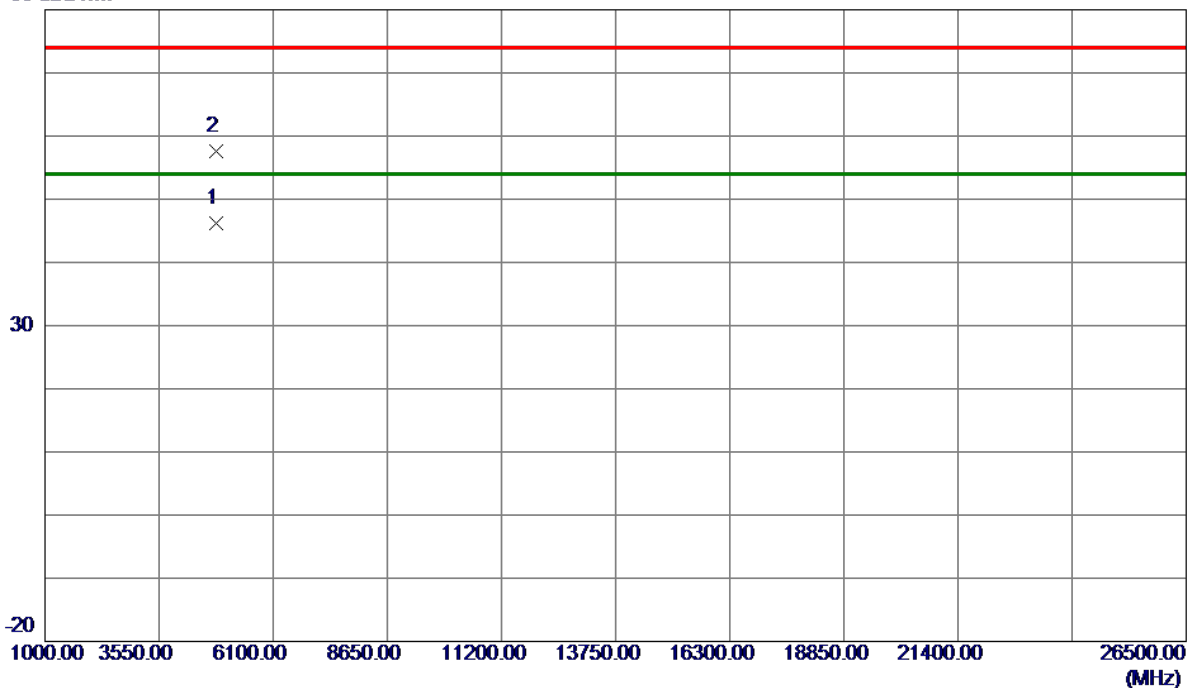

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.4650	42.62	3.57	46.19	54.00	-7.81	AVG	
2	4823.6150	54.08	3.57	57.65	74.00	-16.35	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

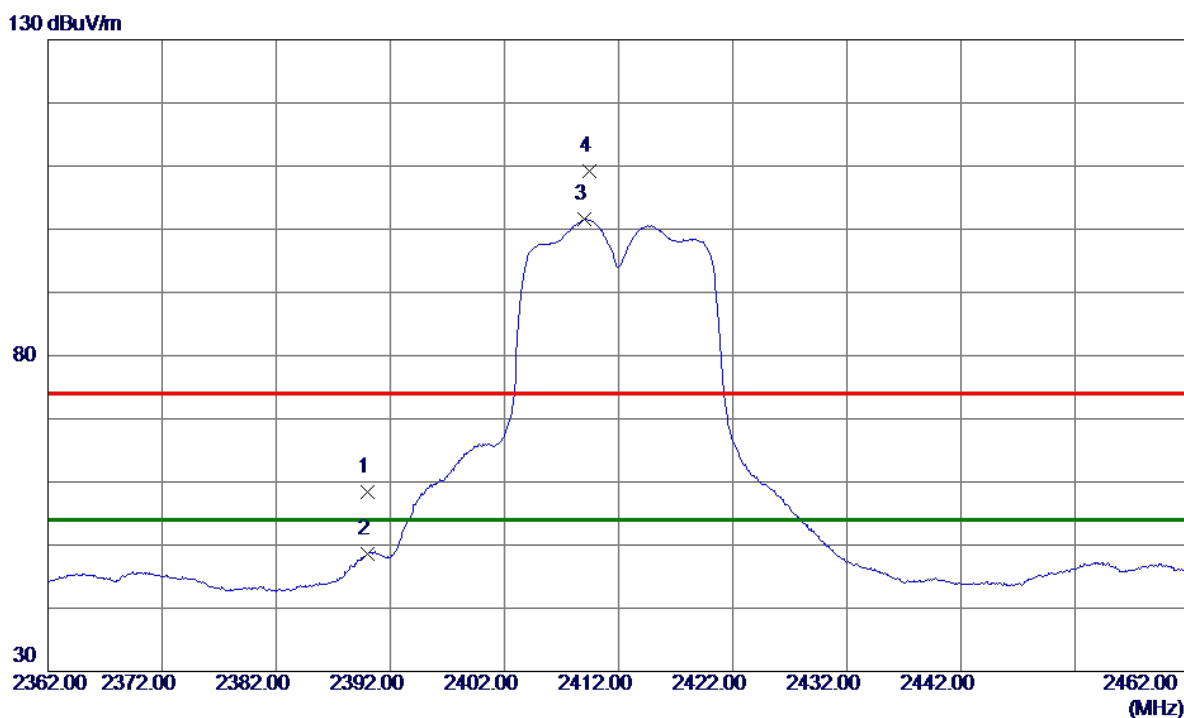


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	51.79	6.62	58.41	74.00	-15.59	Peak	
2	2390.0000	41.91	6.62	48.53	54.00	-5.47	AVG	
3 *	2409.0500	94.96	6.62	101.58	54.00	47.58	AVG	No Limit
4	2409.4500	102.59	6.62	109.21	74.00	35.21	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal


80 dBuV/m

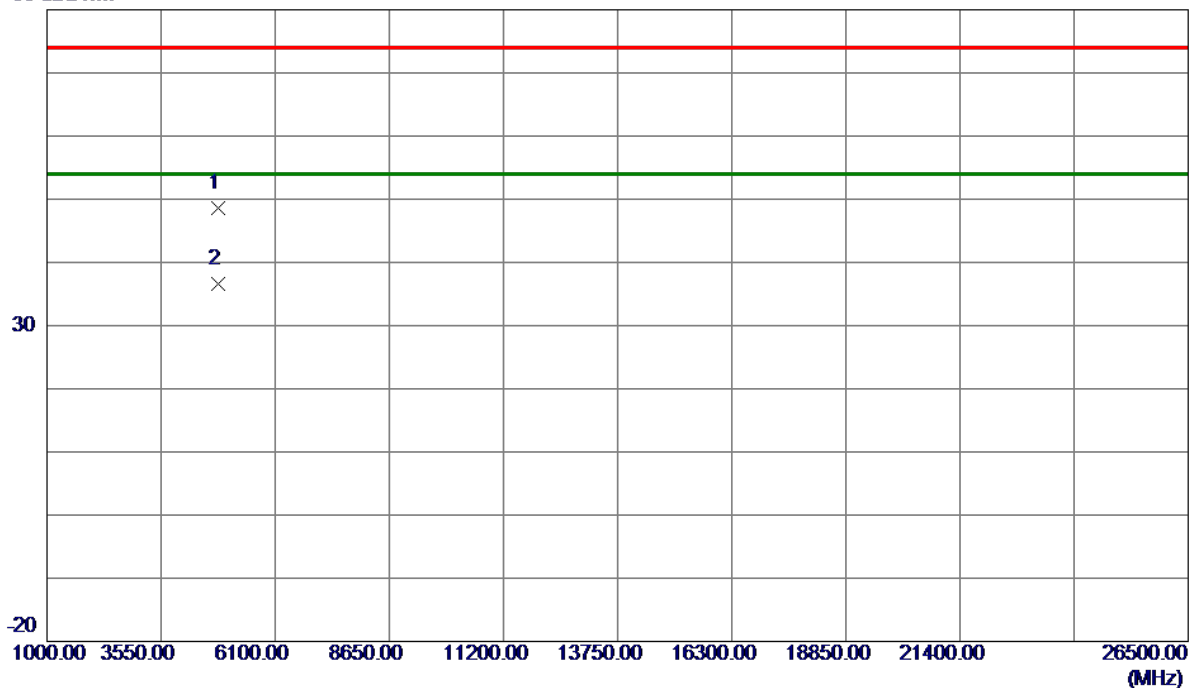

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4822.7970	44.94	3.57	48.51	74.00	-25.49	Peak	
2 *	4823.4580	32.98	3.57	36.55	54.00	-17.45	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2417 MHz


Vertical

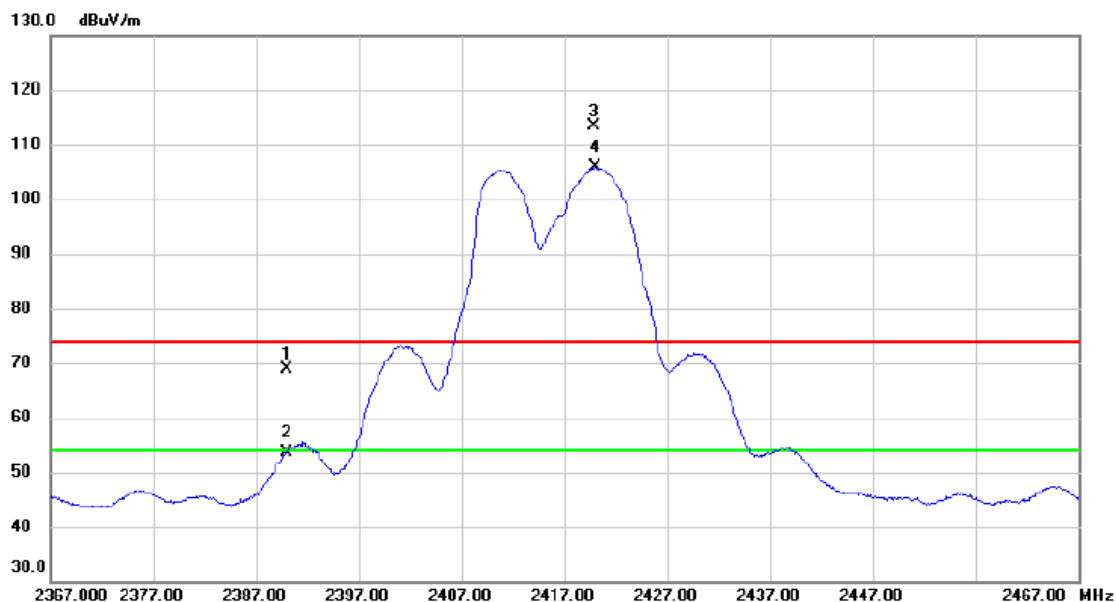

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	62.15	6.62	68.77	74.00	-5.23	peak	
2		2390.000	46.91	6.62	53.53	54.00	-0.47	AVG	
3	X	2419.800	106.65	6.62	113.27	74.00	39.27	peak	No Limit
4	*	2420.000	99.19	6.62	105.81	54.00	51.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G Mode 2417 MHz


Vertical

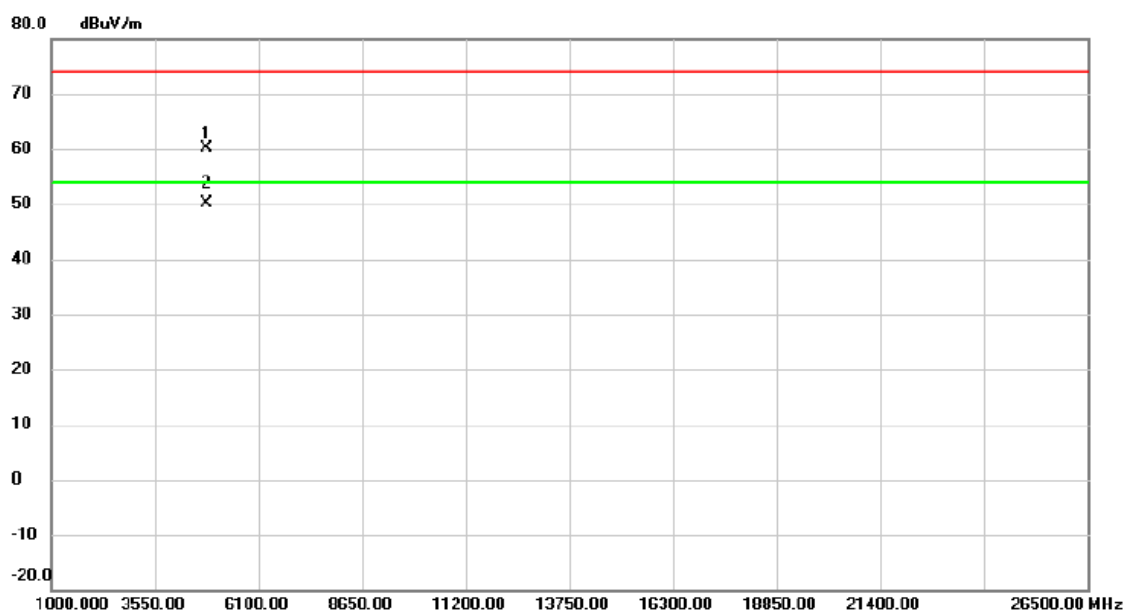

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4833.265	56.47	3.59	60.06	74.00	-13.94	peak	
2	*	4833.525	46.46	3.59	50.05	54.00	-3.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2417 MHz


Horizontal

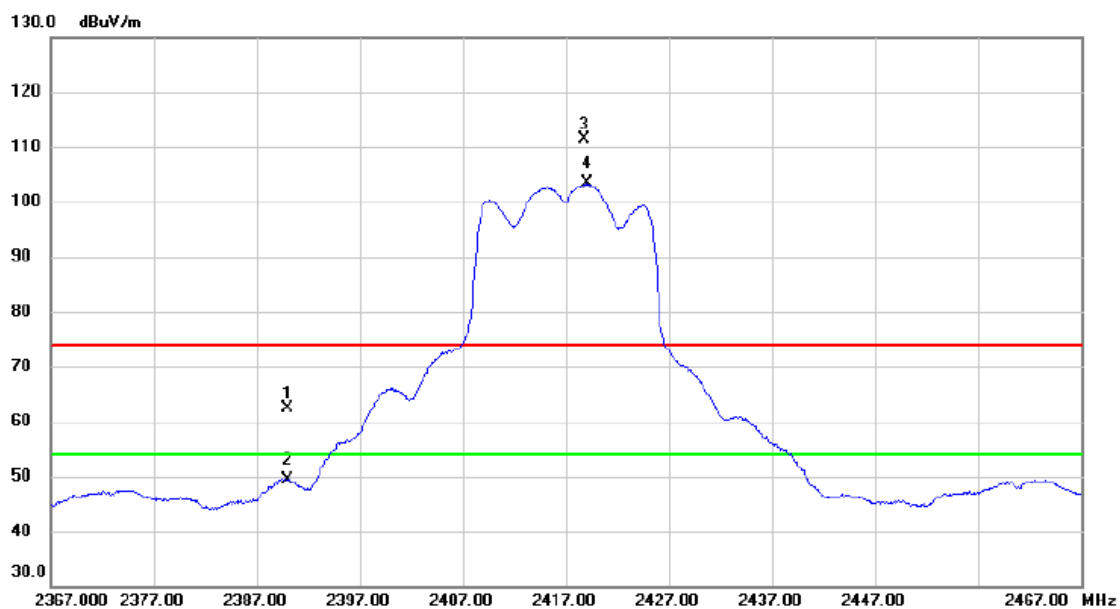

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.76	6.62	62.38	74.00	-11.62	peak	
2		2390.000	42.82	6.62	49.44	54.00	-4.56	AVG	
3	X	2418.800	104.65	6.62	111.27	74.00	37.27	peak	No Limit
4	*	2419.050	96.70	6.62	103.32	54.00	49.32	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G Mode 2417 MHz

Horizontal

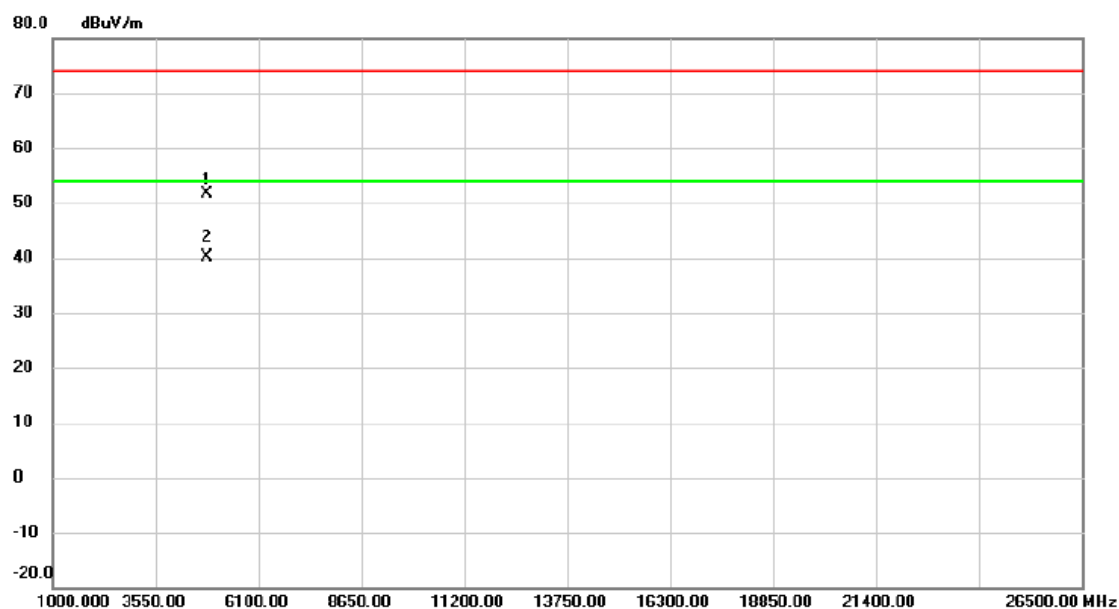


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4832.795	48.06	3.59	51.65	74.00	-22.35	peak	
2	*	4833.645	36.45	3.59	40.04	54.00	-13.96	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

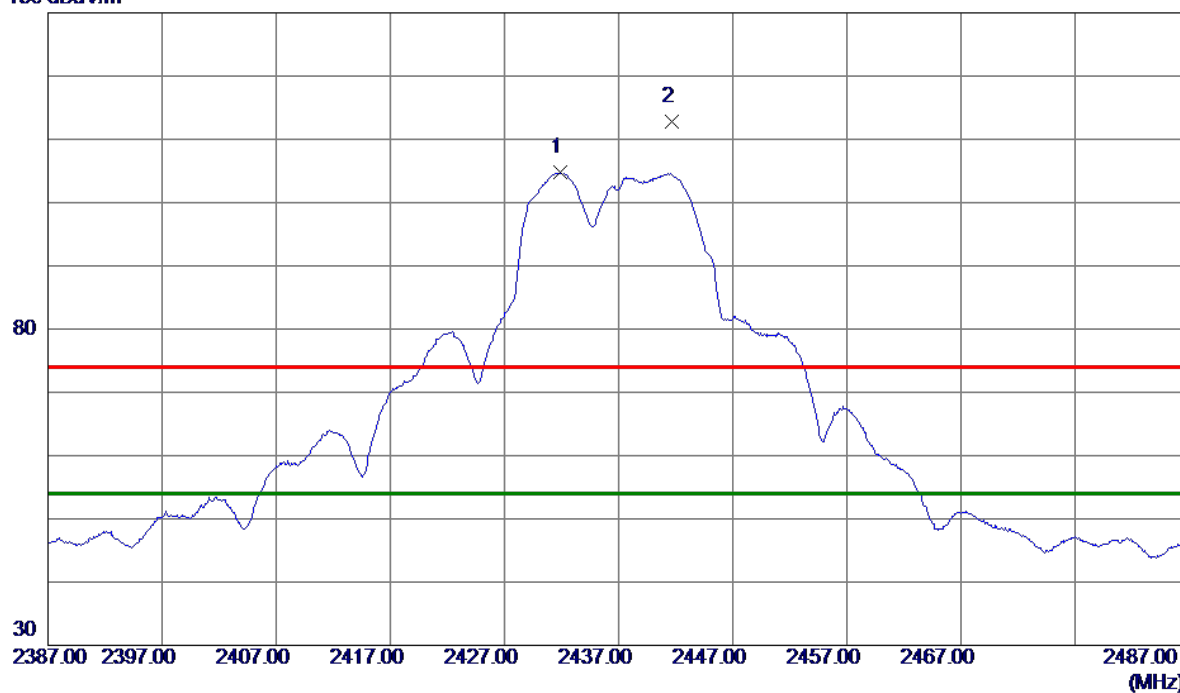


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2431.8500	98.11	6.62	104.73	54.00	50.73	AVG	No Limit
2	2441.6500	106.21	6.61	112.82	74.00	38.82	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical


80 dBuV/m

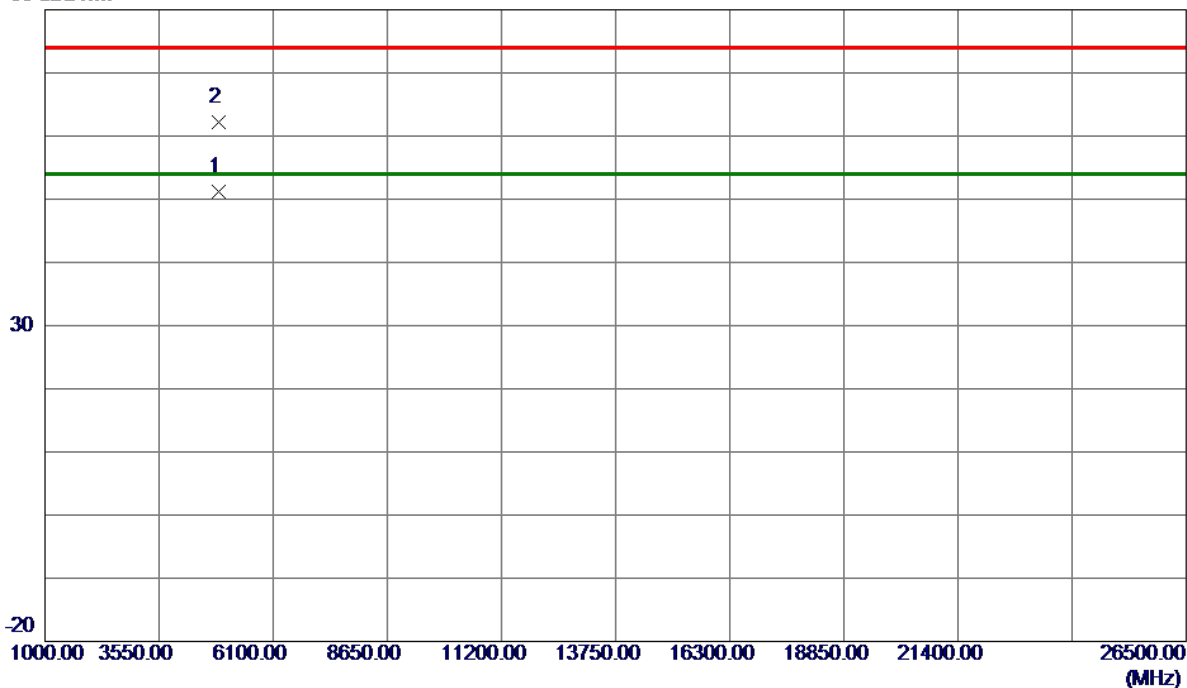

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.7300	47.59	3.68	51.27	54.00	-2.73	AVG	
2	4873.7799	58.44	3.68	62.12	74.00	-11.88	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

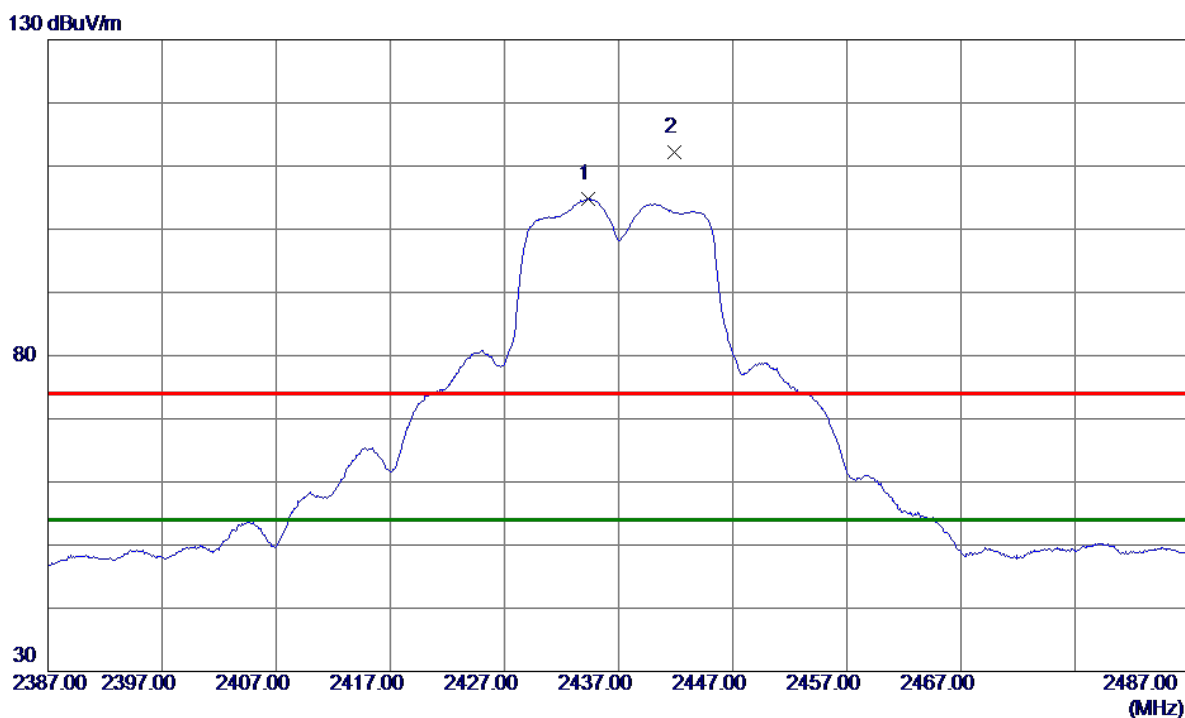


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2434.3500	98.19	6.61	104.80	54.00	50.80	AVG	No Limit
2	2441.8500	105.51	6.61	112.12	74.00	38.12	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal


80 dBuV/m

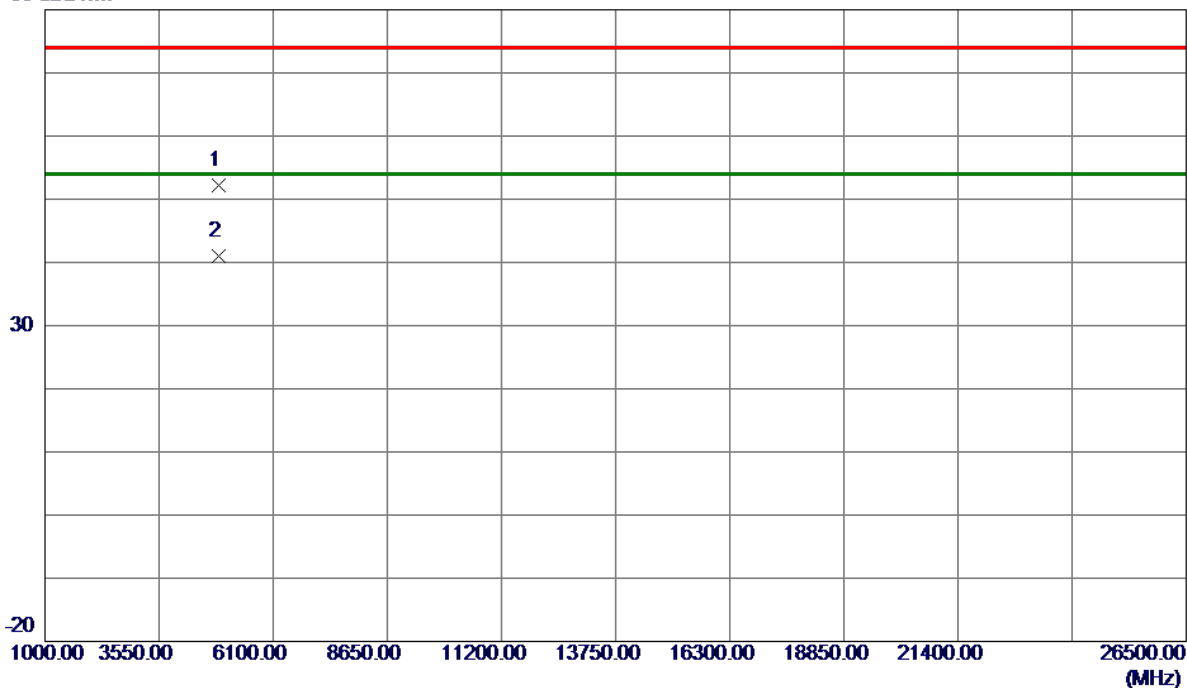

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.1530	48.54	3.68	52.22	74.00	-21.78	Peak	
2 *	4873.4450	37.41	3.68	41.09	54.00	-12.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2457 MHz


Vertical

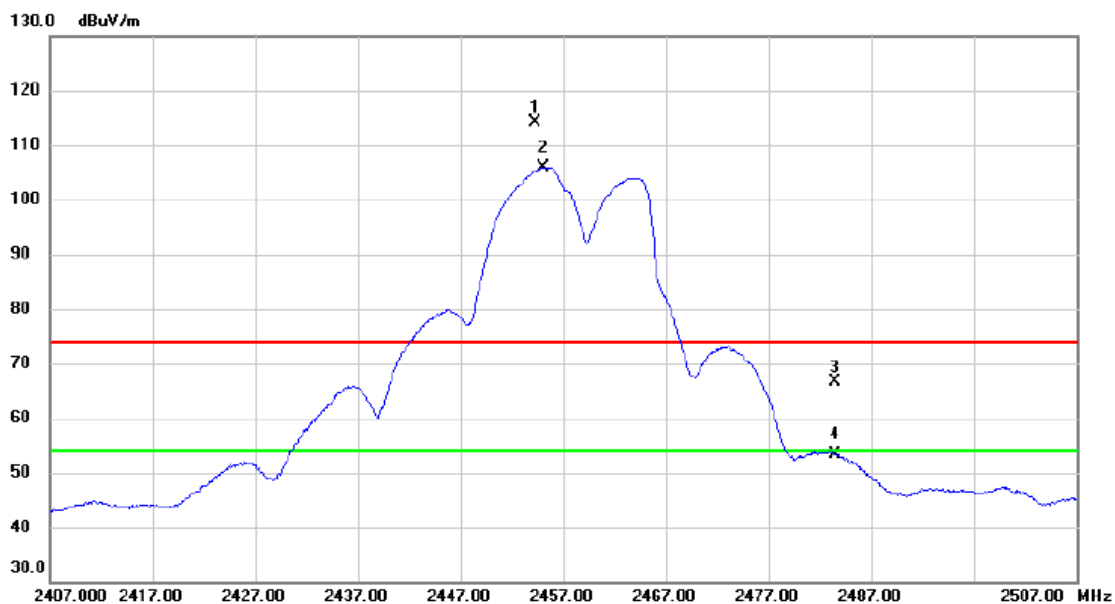

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.250	107.48	6.60	114.08	74.00	40.08	peak	No Limit
2	*	2455.100	99.38	6.60	105.98	54.00	51.98	AVG	No Limit
3		2483.500	60.03	6.61	66.64	74.00	-7.36	peak	
4		2483.500	46.87	6.61	53.48	54.00	-0.52	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2457 MHz


Vertical

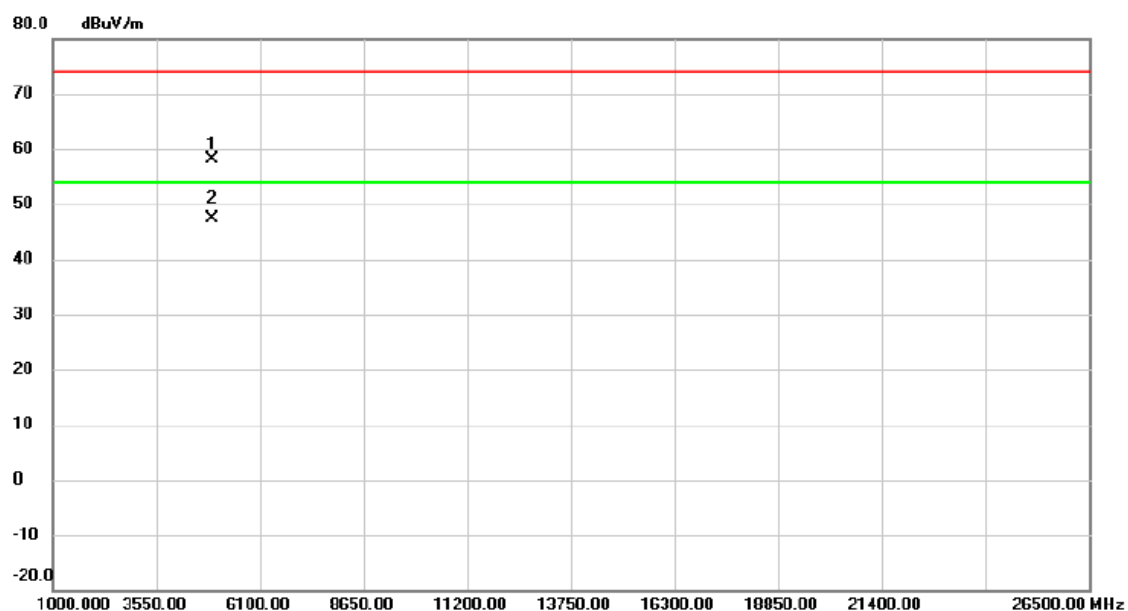

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4913.590	54.33	3.76	58.09	74.00	-15.91	peak	
2	*	4913.680	43.71	3.76	47.47	54.00	-6.53	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2457 MHz


Horizontal

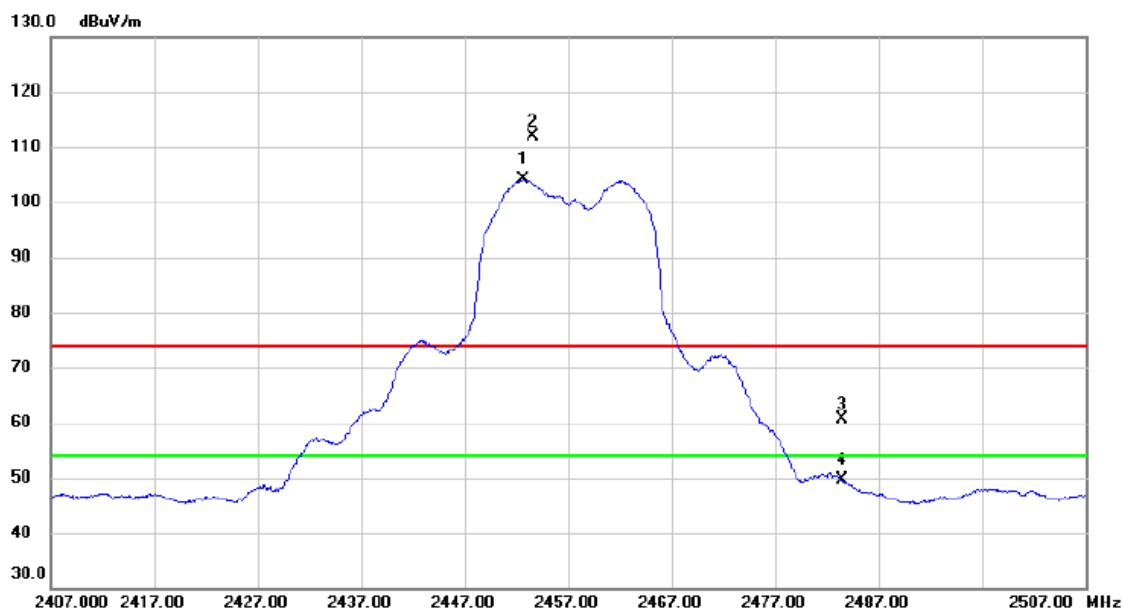

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2452.700	97.40	6.61	104.01	54.00	50.01	AVG	No Limit
2	X	2453.600	105.25	6.60	111.85	74.00	37.85	peak	No Limit
3		2483.500	54.06	6.61	60.67	74.00	-13.33	peak	
4		2483.500	43.07	6.61	49.68	54.00	-4.32	AVG	

Orthogonal Axis :	X
Test Mode :	TX G Mode 2457 MHz

Horizontal

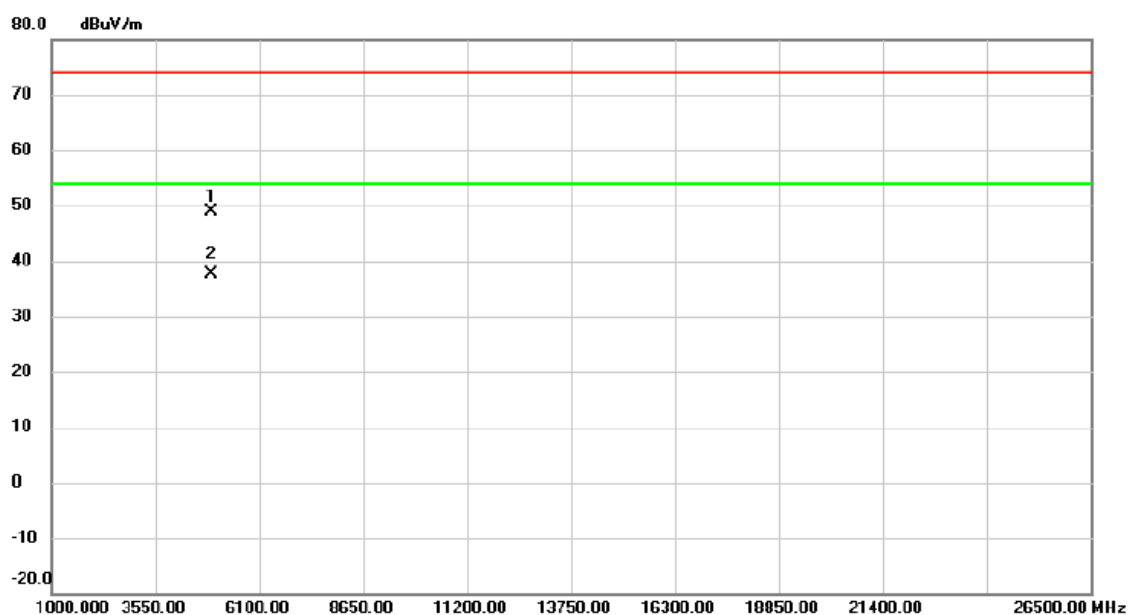


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4913.398	45.17	3.76	48.93	74.00	-25.07	peak	
2	*	4913.672	33.94	3.76	37.70	54.00	-16.30	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

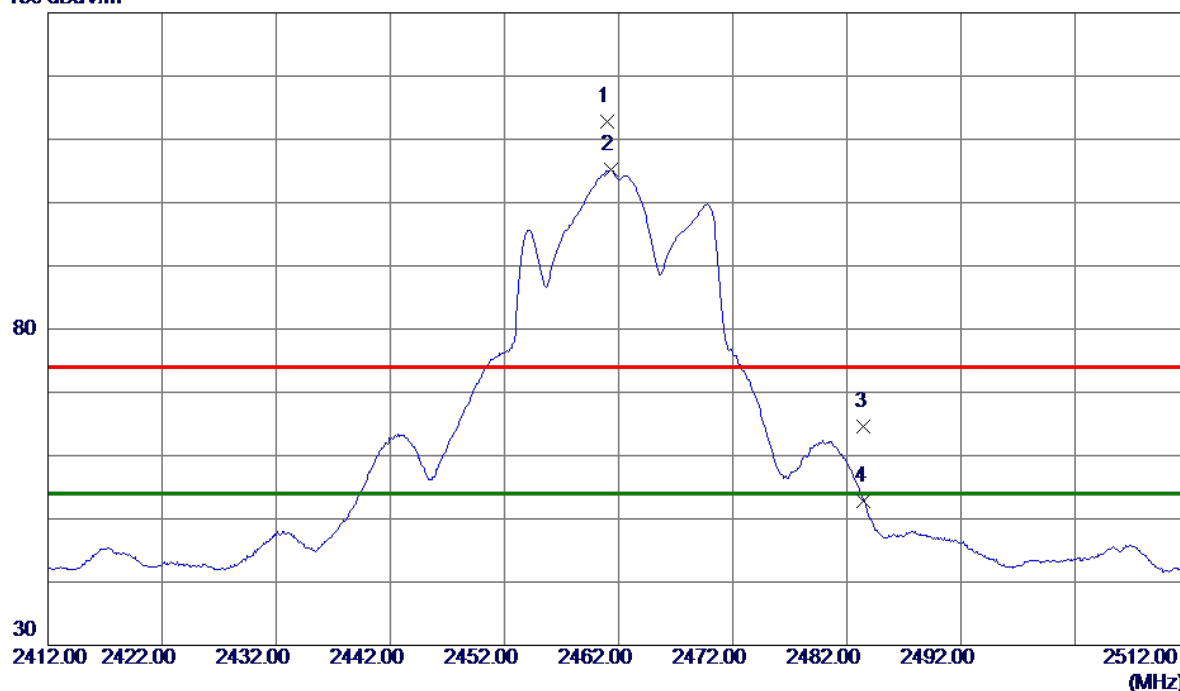


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.0500	106.18	6.61	112.79	74.00	38.79	Peak	No Limit
2 *	2461.3000	98.52	6.61	105.13	54.00	51.13	AVG	No Limit
3	2483.5000	57.90	6.61	64.51	74.00	-9.49	Peak	
4	2483.5000	46.22	6.61	52.83	54.00	-1.17	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

80 dBuV/m

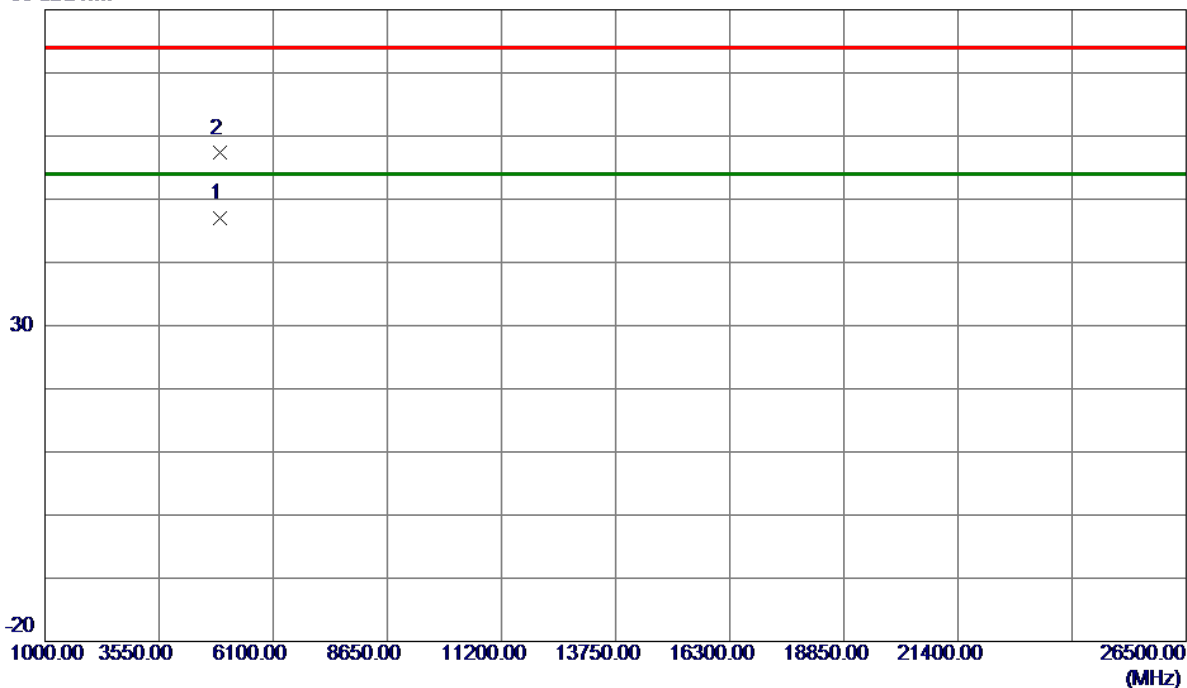


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.5500	43.25	3.79	47.04	54.00	-6.96	AVG	
2	4923.9350	53.51	3.79	57.30	74.00	-16.70	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

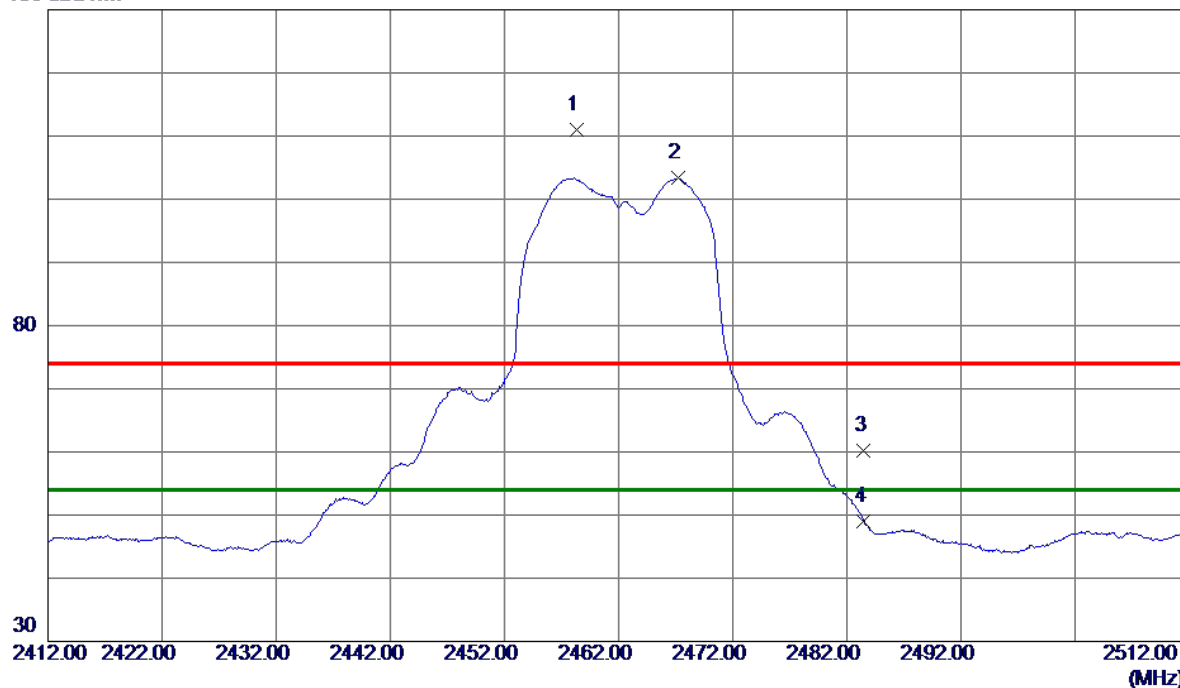


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2458.3500	104.35	6.61	110.96	74.00	36.96	Peak	No Limit
2 *	2467.2000	96.73	6.61	103.34	54.00	49.34	AVG	No Limit
3	2483.5000	53.66	6.61	60.27	74.00	-13.73	Peak	
4	2483.5000	42.40	6.61	49.01	54.00	-4.99	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

80 dBuV/m

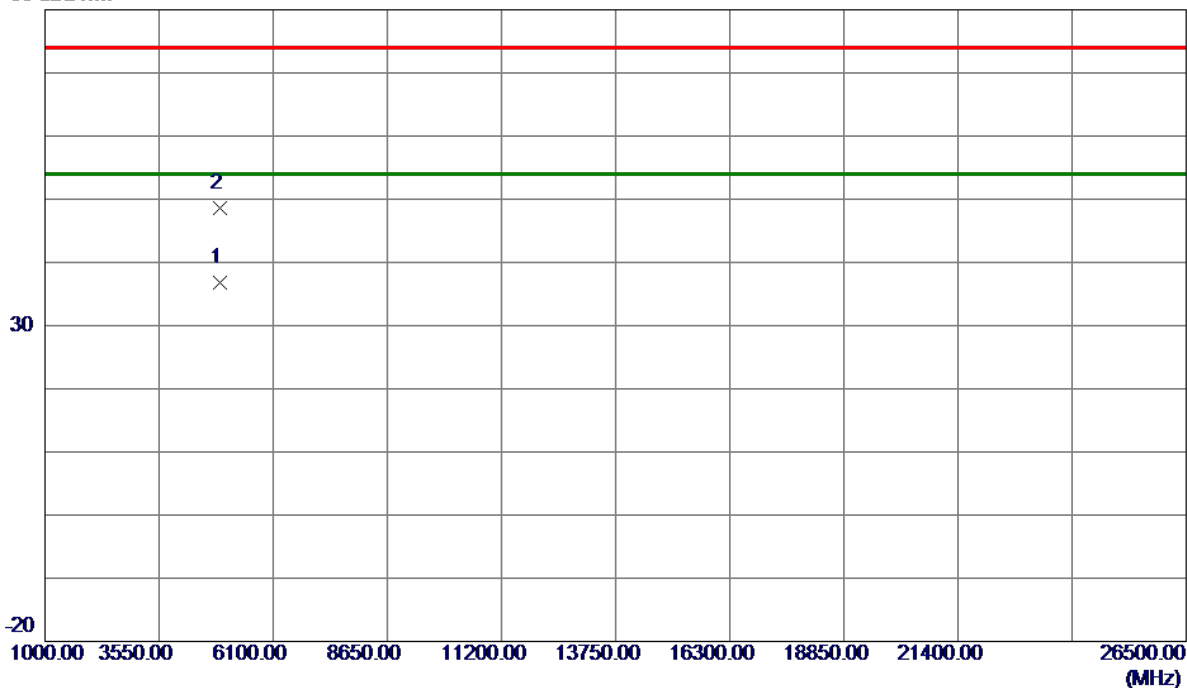


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.3750	33.08	3.79	36.87	54.00	-17.13	AVG	
2	4923.5920	44.78	3.79	48.57	74.00	-25.43	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

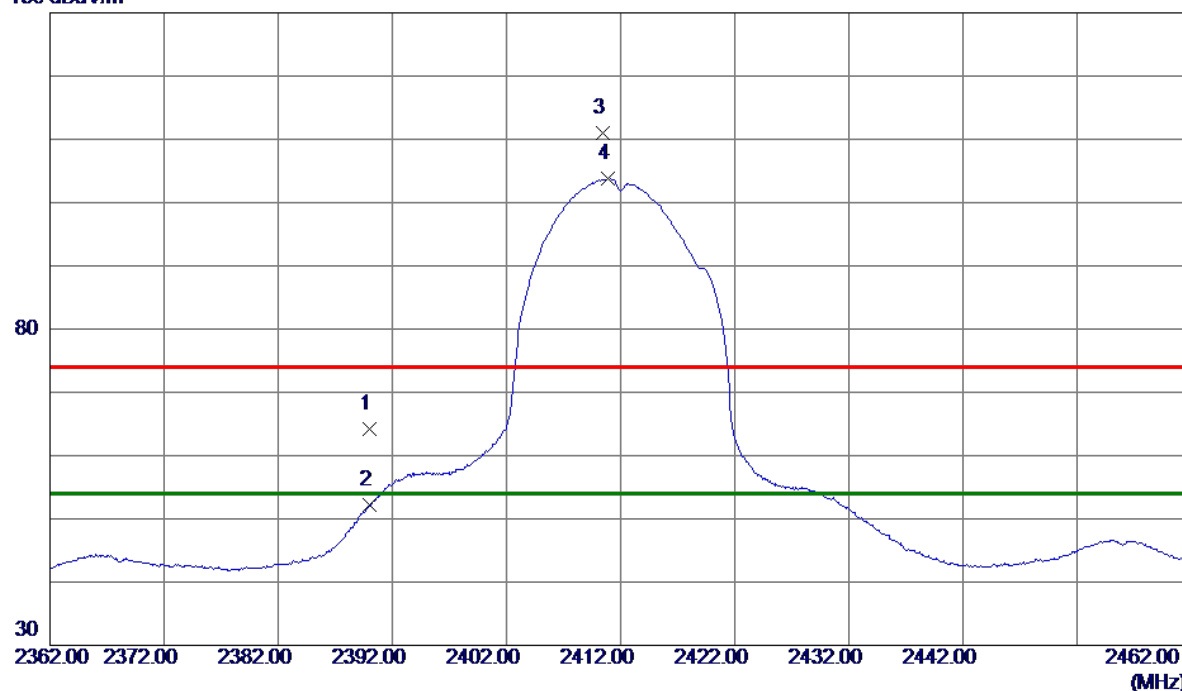


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.58	6.62	64.20	74.00	-9.80	Peak	
2	2390.0000	45.58	6.62	52.20	54.00	-1.80	AVG	
3	2410.4500	104.32	6.62	110.94	74.00	36.94	Peak	No Limit
4 *	2410.9000	97.21	6.62	103.83	54.00	49.83	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical


80 dBuV/m

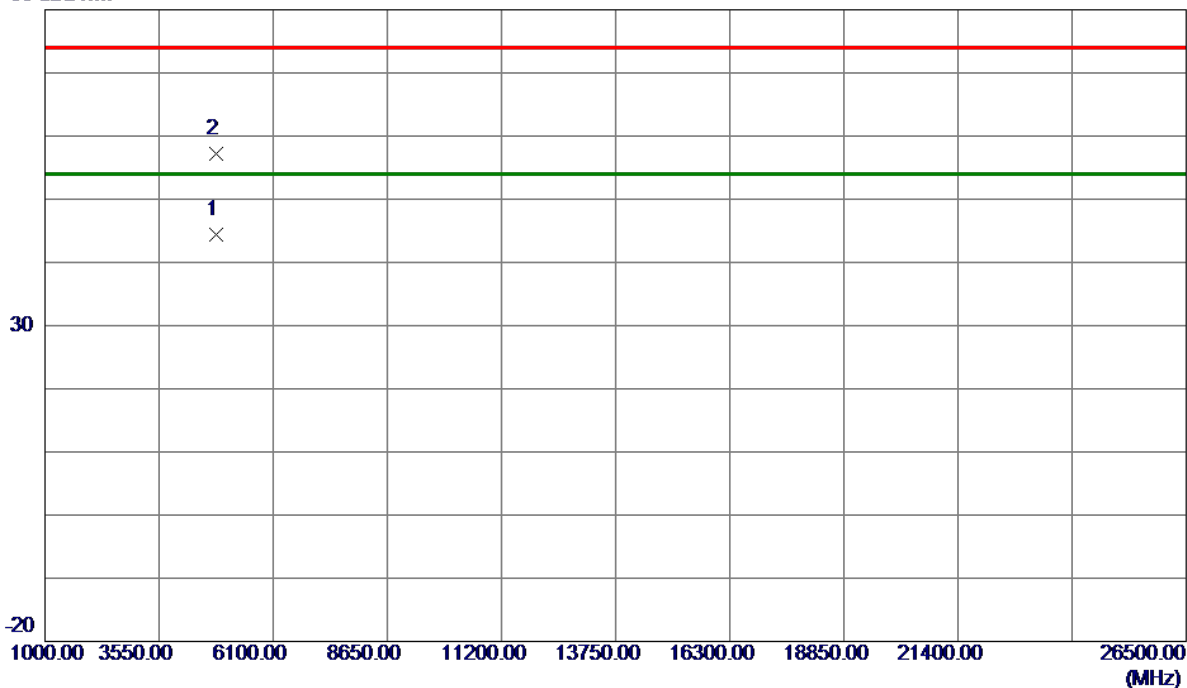

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4822.8950	40.78	3.57	44.35	54.00	-9.65	AVG	
2	4824.0050	53.66	3.57	57.23	74.00	-16.77	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

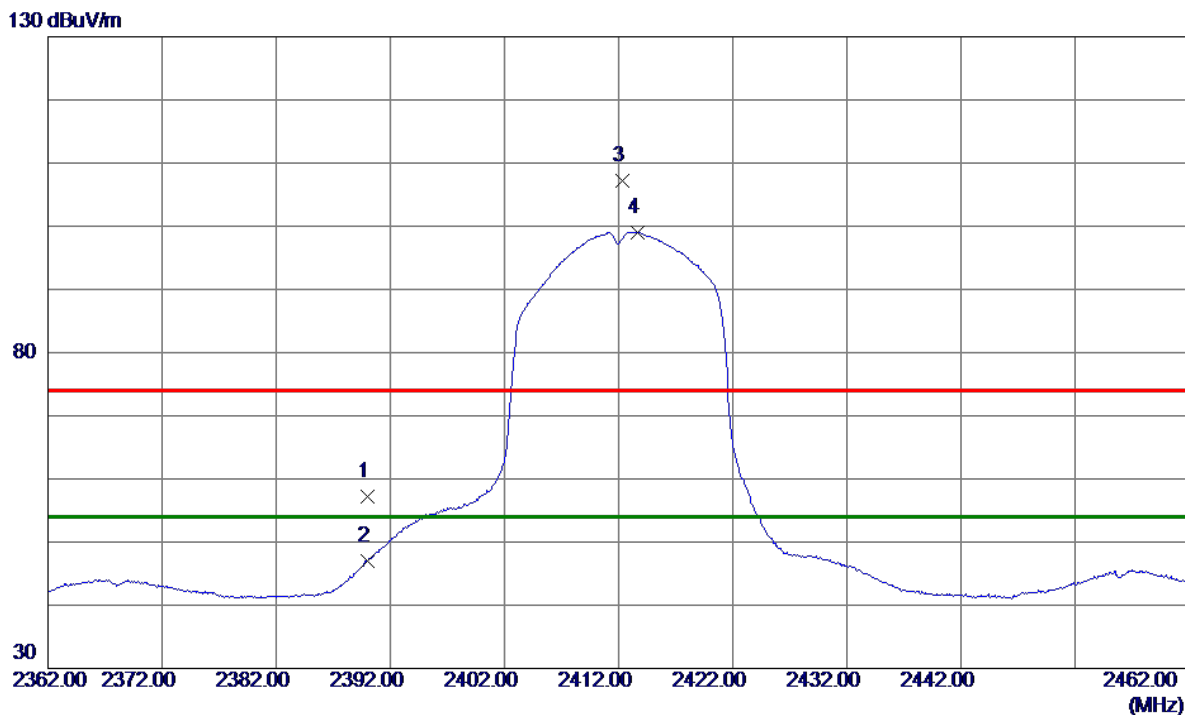


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.62	6.62	57.24	74.00	-16.76	Peak	
2	2390.0000	40.38	6.62	47.00	54.00	-7.00	AVG	
3	2412.3500	100.57	6.62	107.19	74.00	33.19	Peak	No Limit
4 *	2413.6500	92.44	6.62	99.06	54.00	45.06	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal


80 dBuV/m

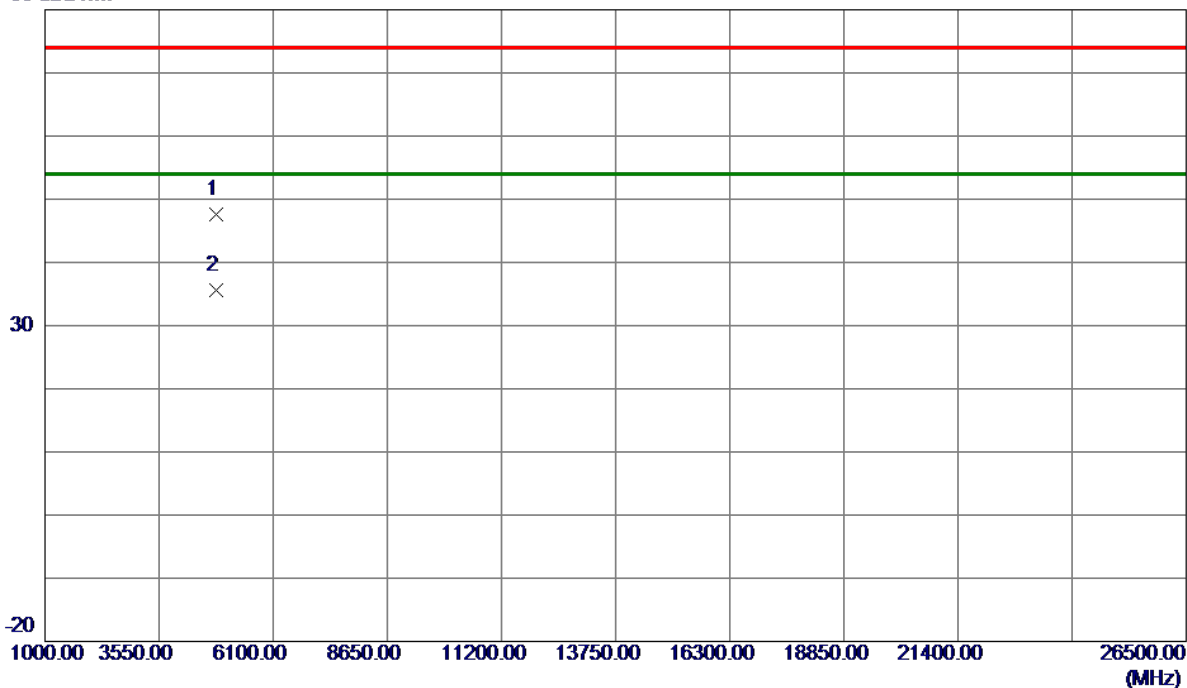

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4822.8900	44.08	3.57	47.65	74.00	-26.35	Peak	
2 *	4822.9750	32.05	3.57	35.62	54.00	-18.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2417 MHz


Vertical

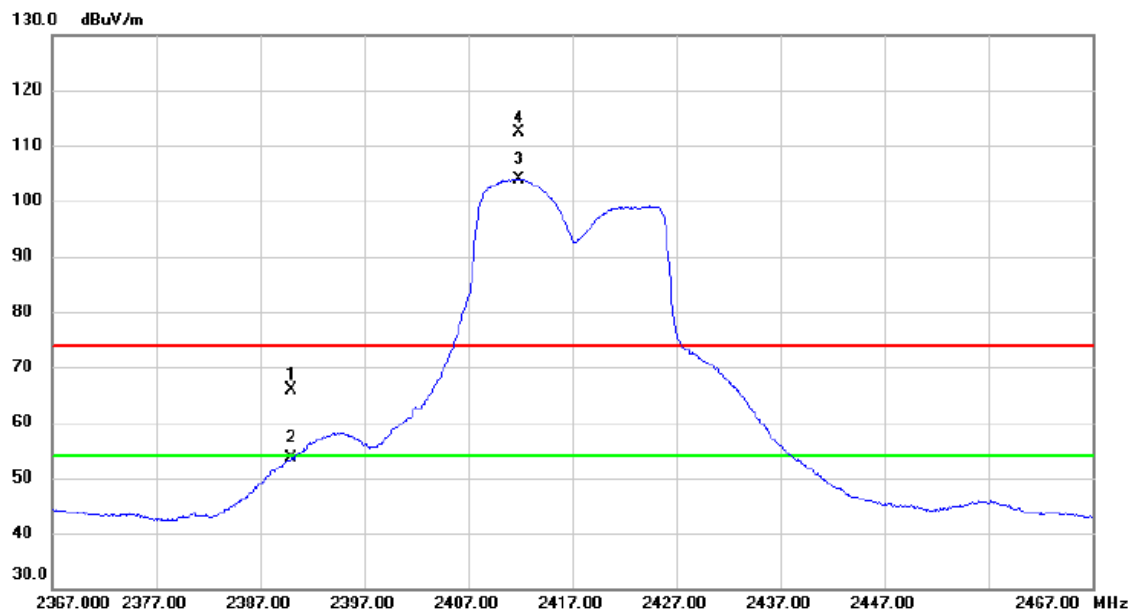

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.35	6.62	65.97	74.00	-8.03	peak	
2		2390.000	47.00	6.62	53.62	54.00	-0.38	AVG	
3	*	2411.800	97.38	6.62	104.00	54.00	50.00	AVG	No Limit
4	X	2411.900	105.66	6.62	112.28	74.00	38.28	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2417 MHz


Vertical

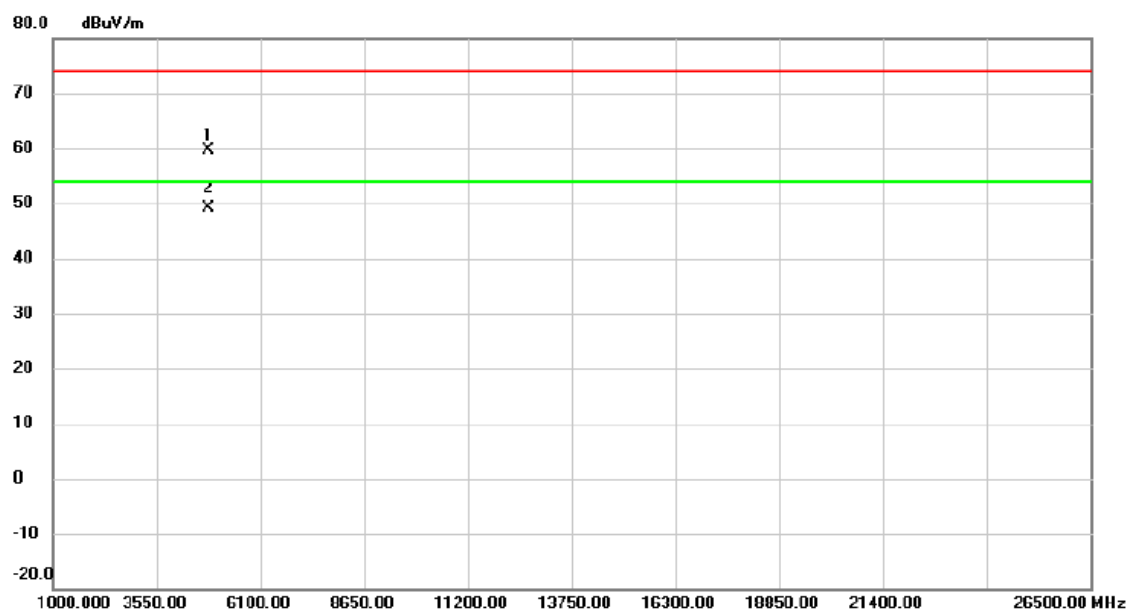

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4832.515	56.14	3.59	59.73	74.00	-14.27	peak	
2	*	4833.200	45.51	3.59	49.10	54.00	-4.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2417 MHz


Horizontal

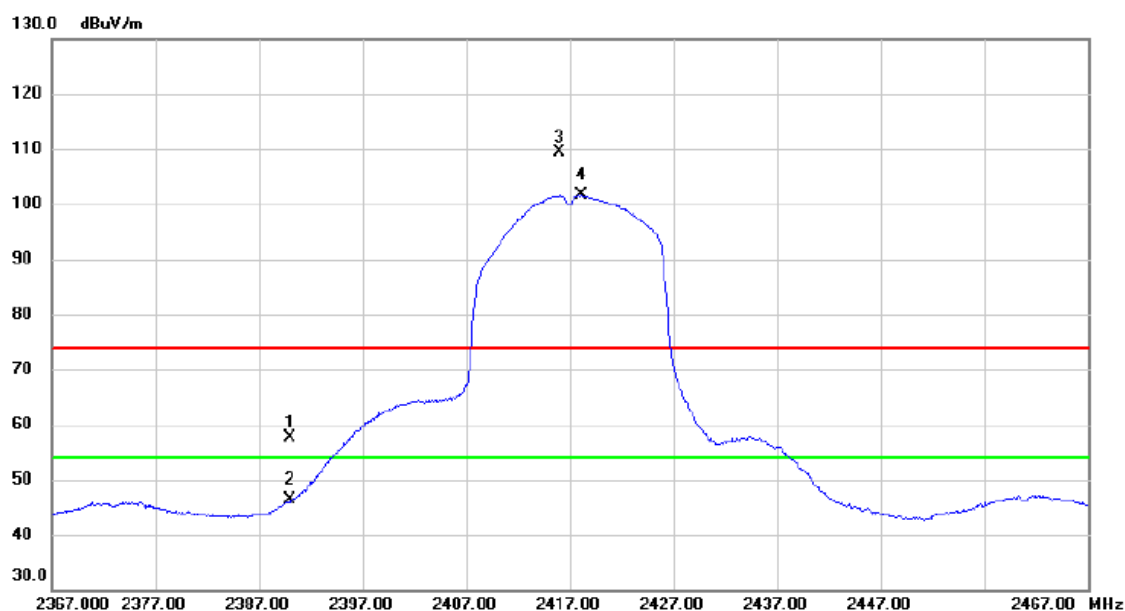

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	51.04	6.62	57.66	74.00	-16.34	peak	
2		2390.050	39.65	6.62	46.27	54.00	-7.73	AVG	
3	X	2416.000	102.68	6.62	109.30	74.00	35.30	peak	No Limit
4	*	2418.100	95.00	6.61	101.61	54.00	47.61	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2417 MHz

Horizontal

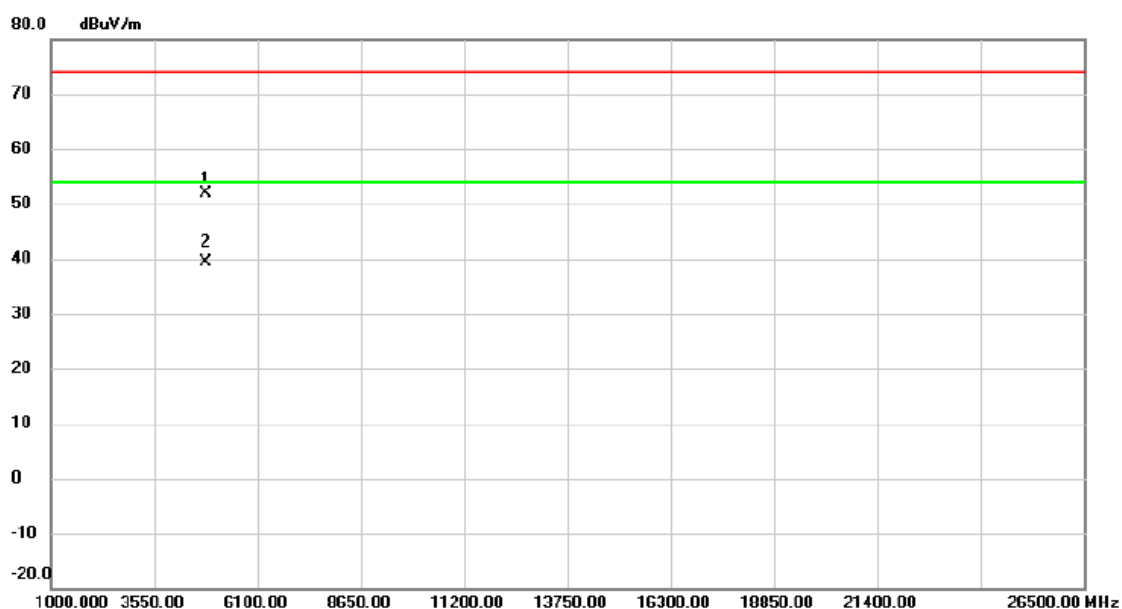


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4831.120	48.30	3.59	51.89	74.00	-22.11	peak	
2	*	4833.185	35.73	3.59	39.32	54.00	-14.68	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

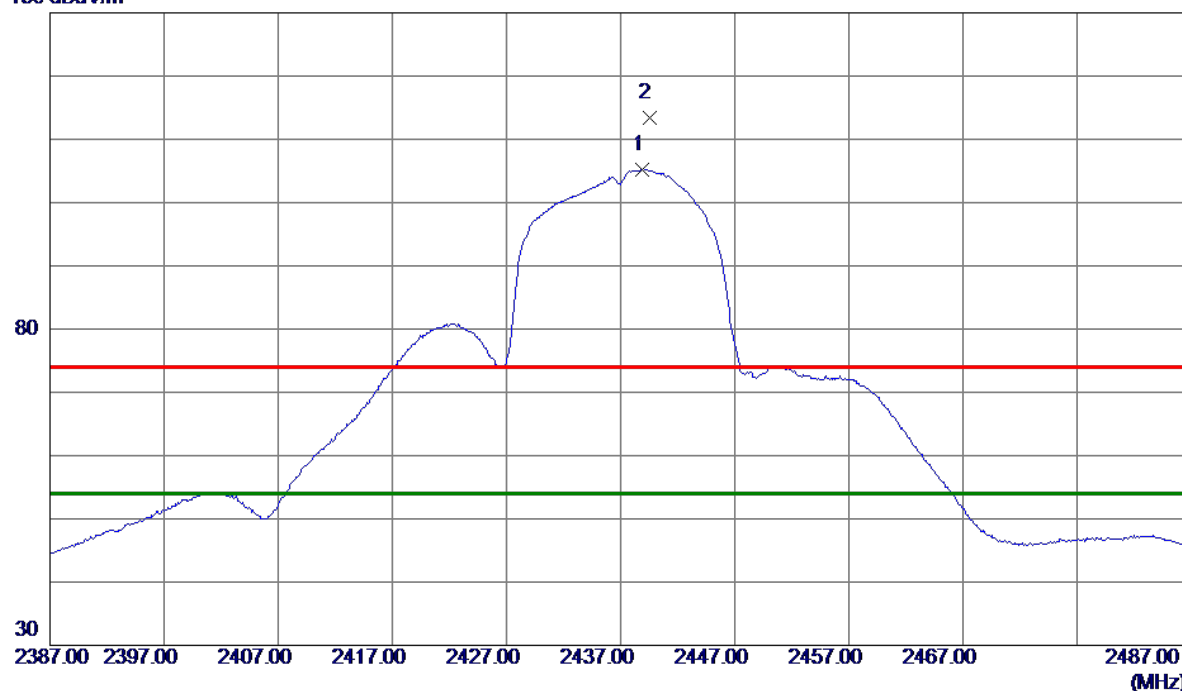


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.9000	98.62	6.61	105.23	54.00	51.23	AVG	No Limit
2	2439.5000	106.86	6.61	113.47	74.00	39.47	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical


80 dBuV/m

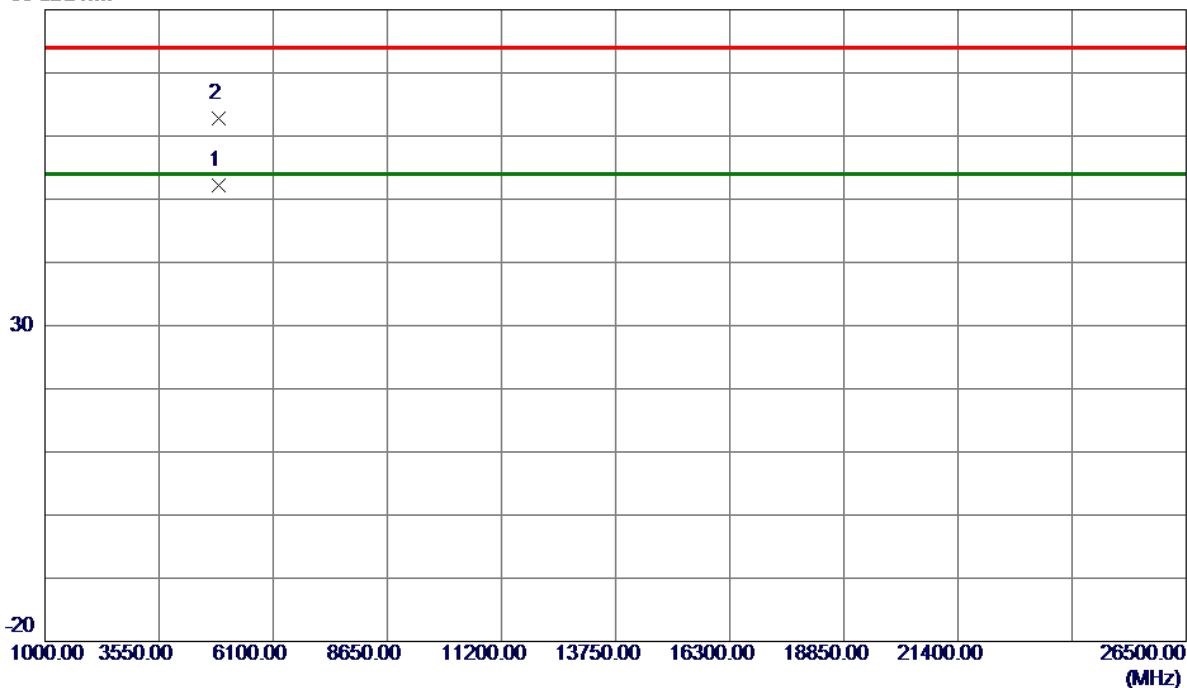

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.5250	48.47	3.68	52.15	54.00	-1.85	AVG	
2	4873.8900	59.12	3.68	62.80	74.00	-11.20	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

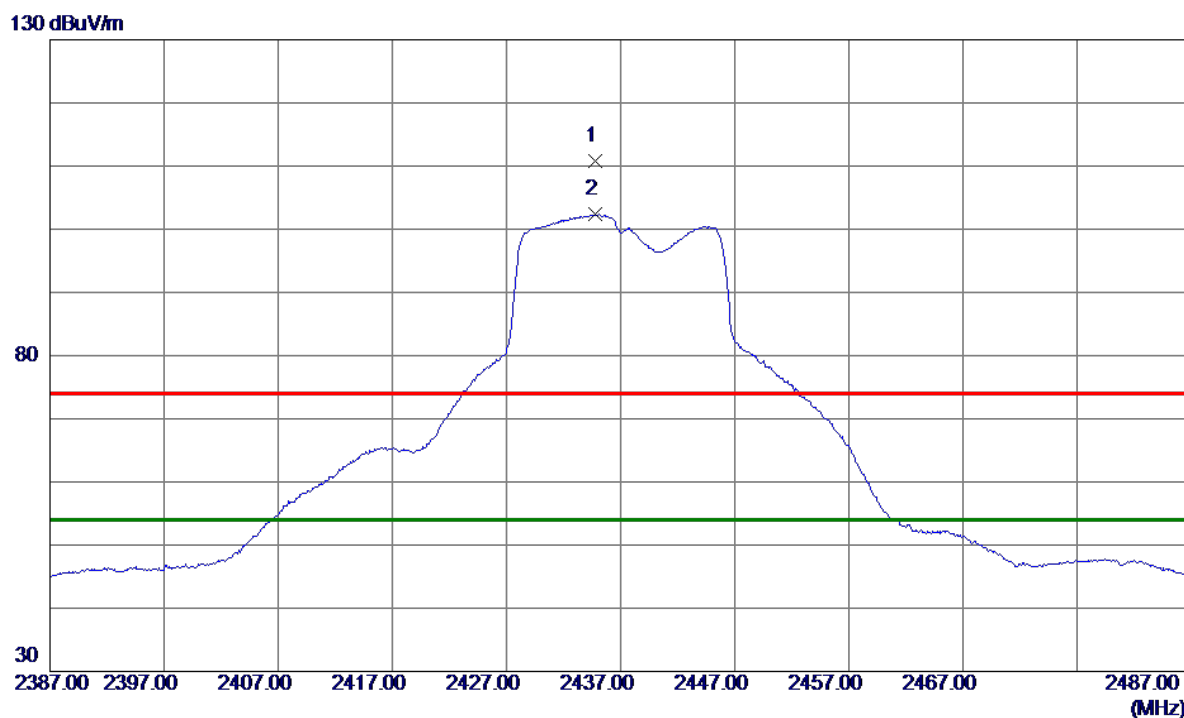


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.7500	104.27	6.61	110.88	74.00	36.88	Peak	No Limit
2 *	2434.7500	95.73	6.61	102.34	54.00	48.34	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal


80 dBuV/m

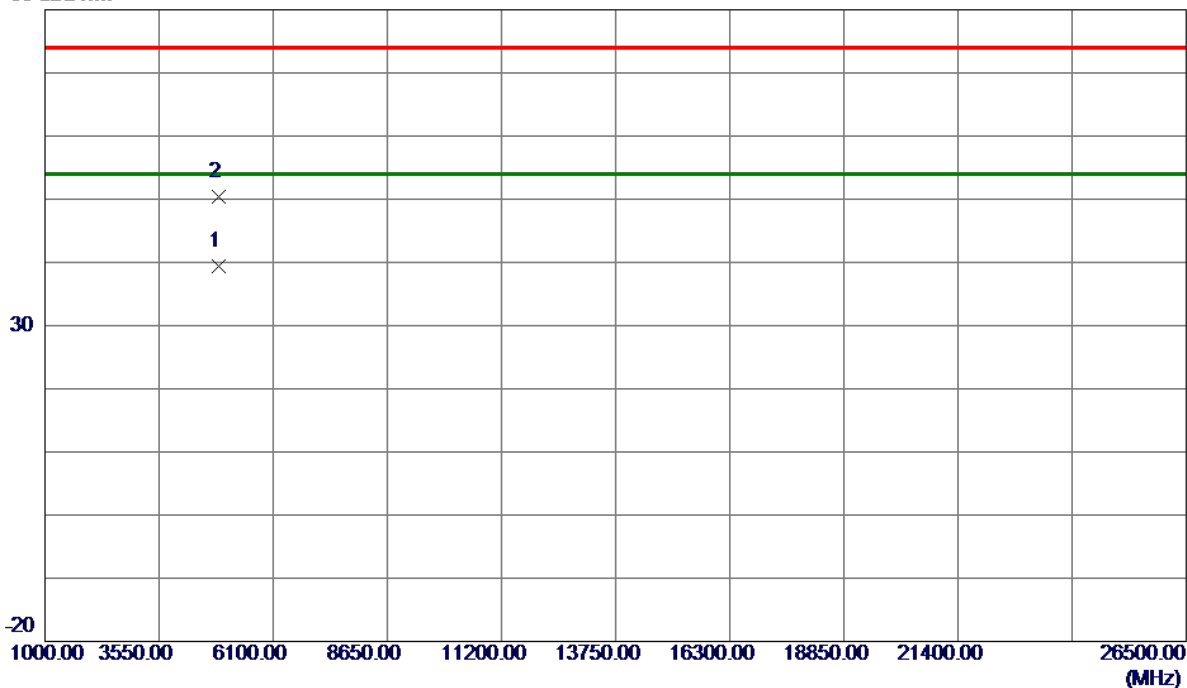

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.1150	35.78	3.68	39.46	54.00	-14.54	AVG	
2	4873.4100	46.68	3.68	50.36	74.00	-23.64	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2457 MHz


Vertical

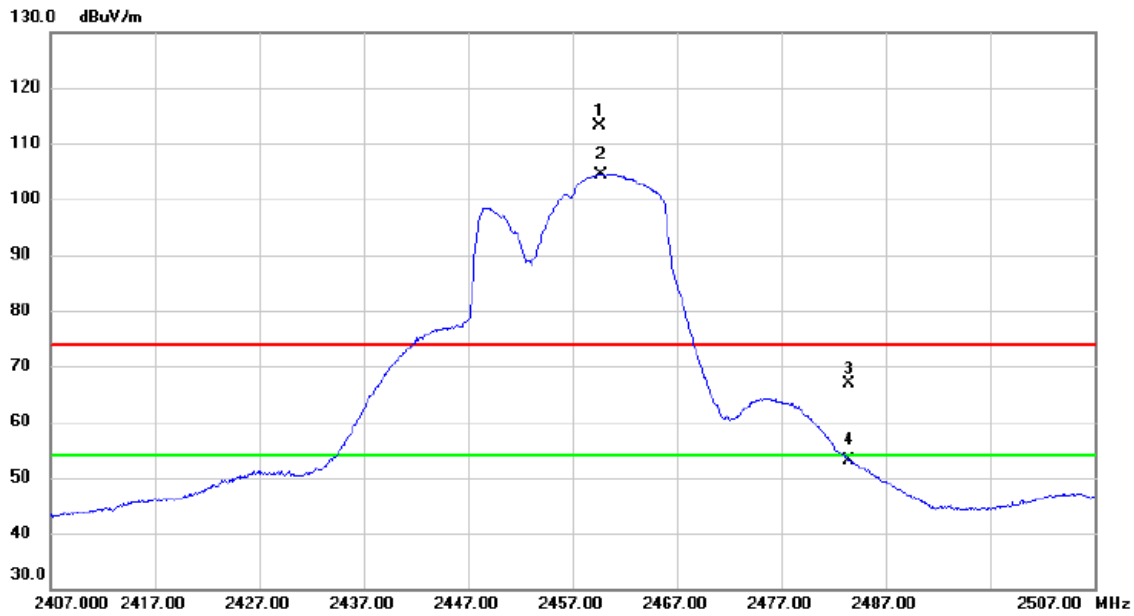

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2459.550	106.56	6.62	113.18	74.00	39.18	peak	No Limit
2	*	2459.700	97.82	6.62	104.44	54.00	50.44	AVG	No Limit
3		2483.500	60.27	6.61	66.88	74.00	-7.12	peak	
4		2483.500	46.50	6.61	53.11	54.00	-0.89	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2457 MHz


Vertical

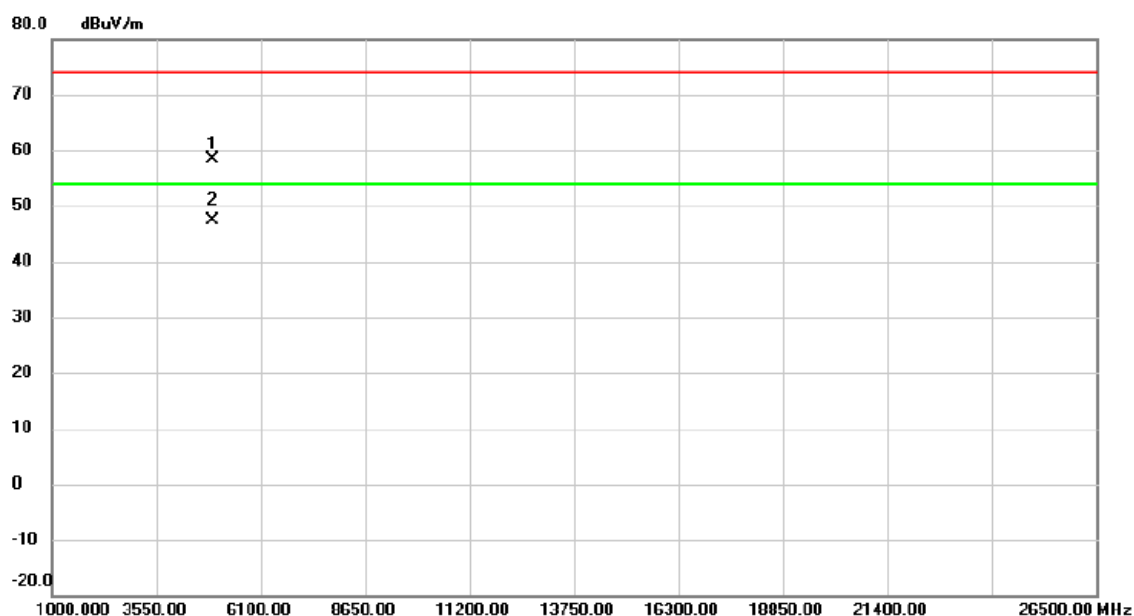

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4912.555	54.73	3.76	58.49	74.00	-15.51	peak	
2	*	4912.840	43.70	3.76	47.46	54.00	-6.54	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2457 MHz


Horizontal

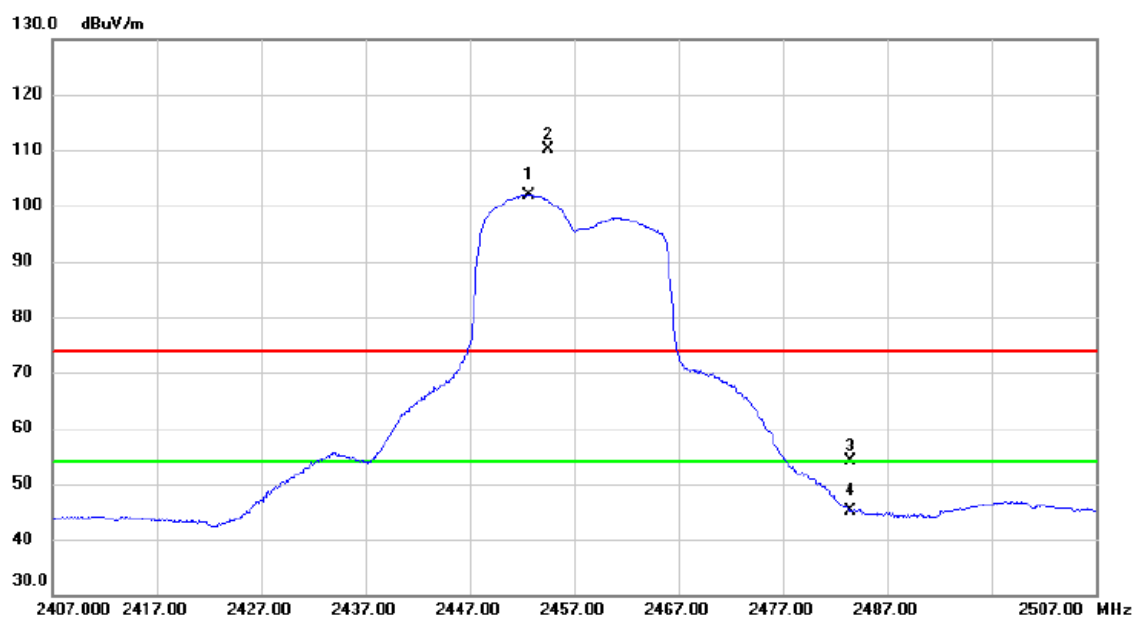

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2452.650	95.34	6.61	101.95	54.00	47.95	AVG	No Limit
2	X	2454.500	103.49	6.60	110.09	74.00	36.09	peak	No Limit
3		2483.500	47.52	6.61	54.13	74.00	-19.87	peak	
4		2483.500	38.64	6.61	45.25	54.00	-8.75	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M Mode 2457 MHz

Horizontal

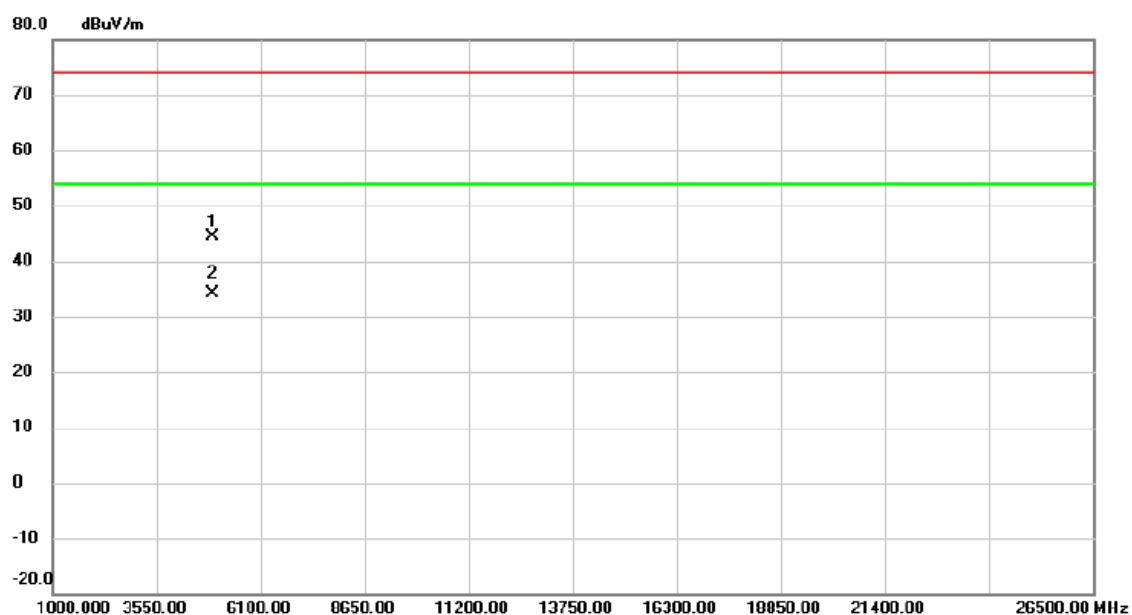


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4913.335	40.74	3.76	44.50	74.00	-29.50	peak	
2	*	4914.080	30.46	3.77	34.23	54.00	-19.77	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

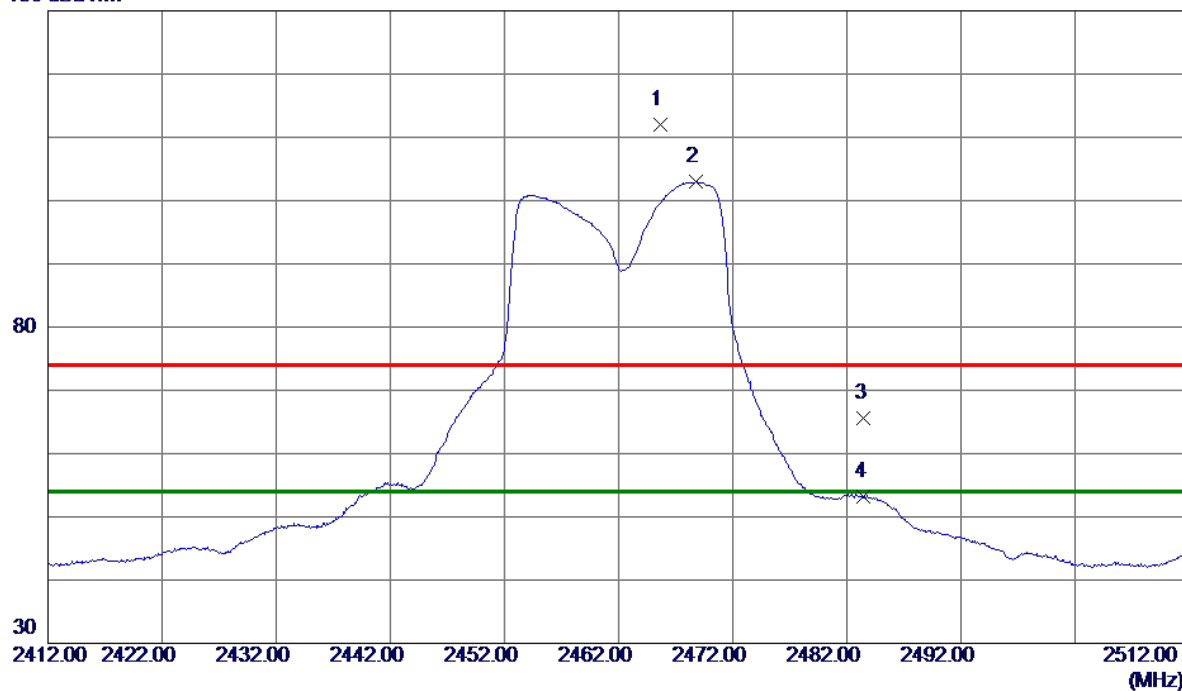


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2465.7000	105.43	6.61	112.04	74.00	38.04	Peak	No Limit
2 *	2468.8000	96.37	6.61	102.98	54.00	48.98	AVG	No Limit
3	2483.5000	58.95	6.61	65.56	74.00	-8.44	Peak	
4	2483.5000	46.55	6.61	53.16	54.00	-0.84	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical


80 dBuV/m

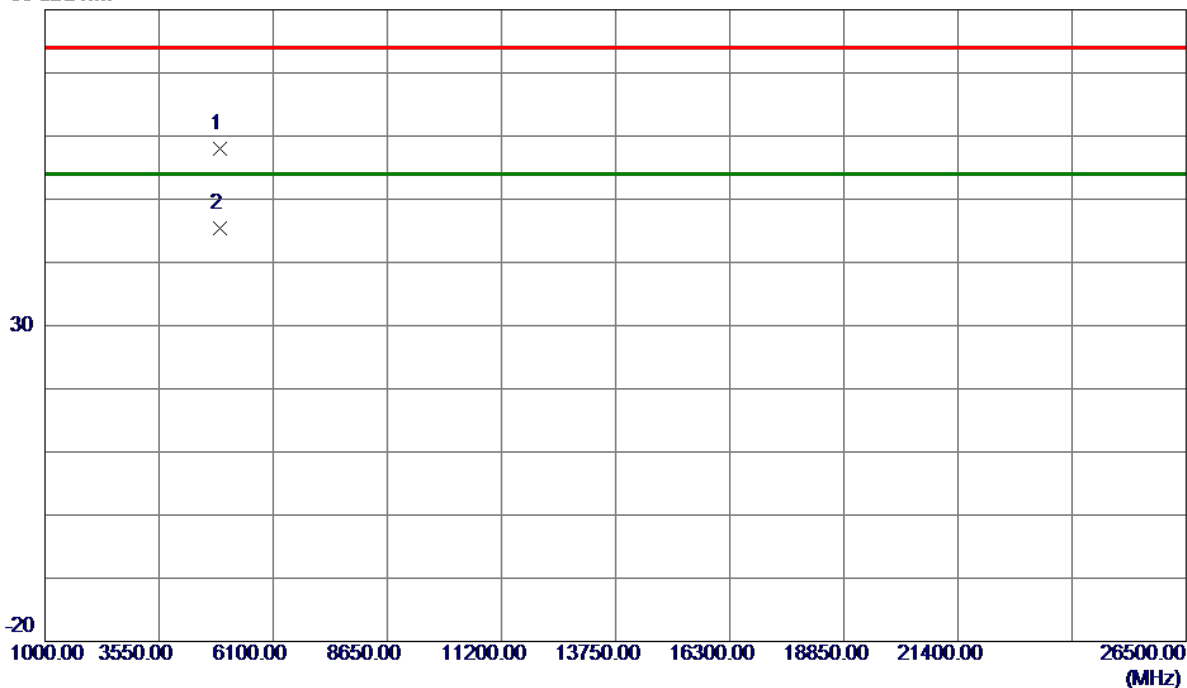

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4922.2200	54.16	3.79	57.95	74.00	-16.05	Peak	
2 *	4922.8550	41.64	3.79	45.43	54.00	-8.57	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

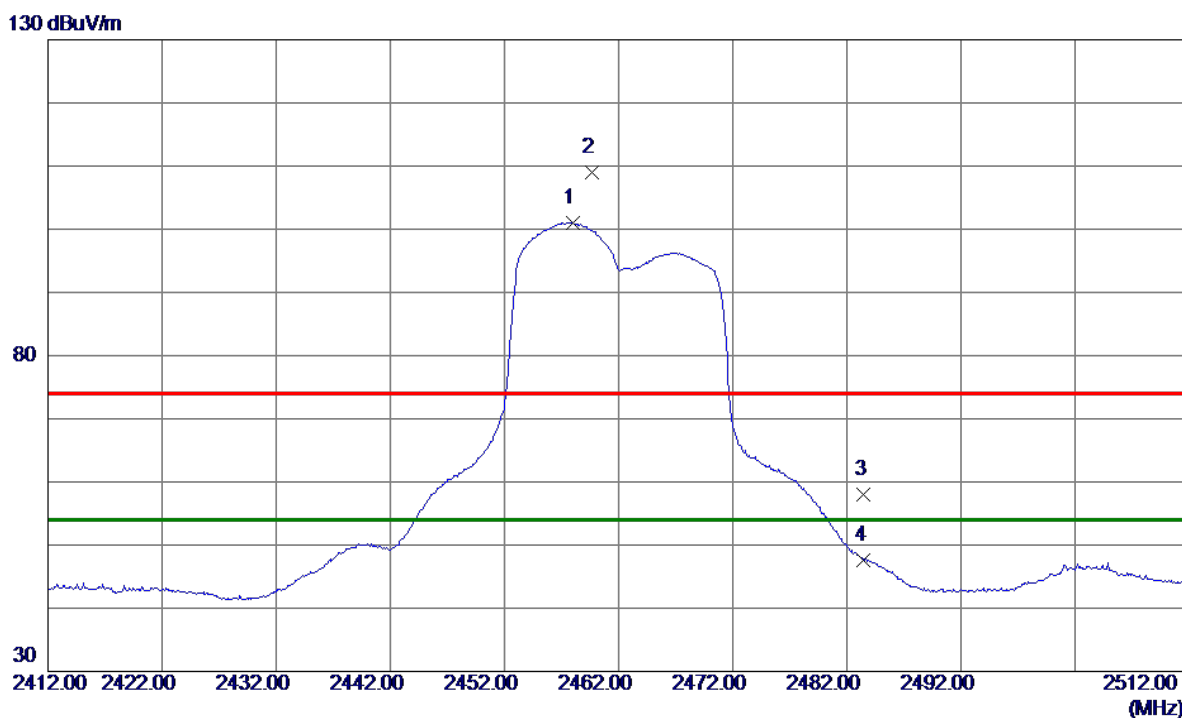


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2458.0000	94.47	6.61	101.08	54.00	47.08	AVG	No Limit
2	2459.7000	102.49	6.61	109.10	74.00	35.10	Peak	No Limit
3	2483.5000	51.41	6.61	58.02	74.00	-15.98	Peak	
4	2483.5000	41.03	6.61	47.64	54.00	-6.36	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

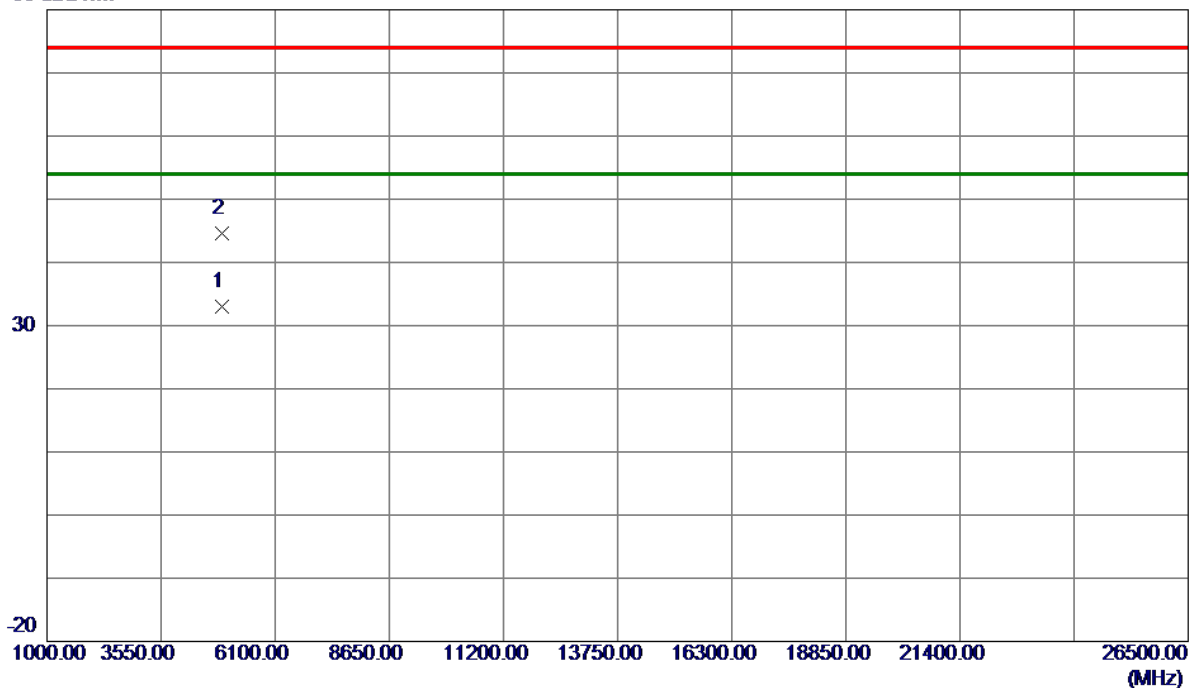


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9850	29.25	3.79	33.04	54.00	-20.96	AVG	
2	4924.1549	40.74	3.79	44.53	74.00	-29.47	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

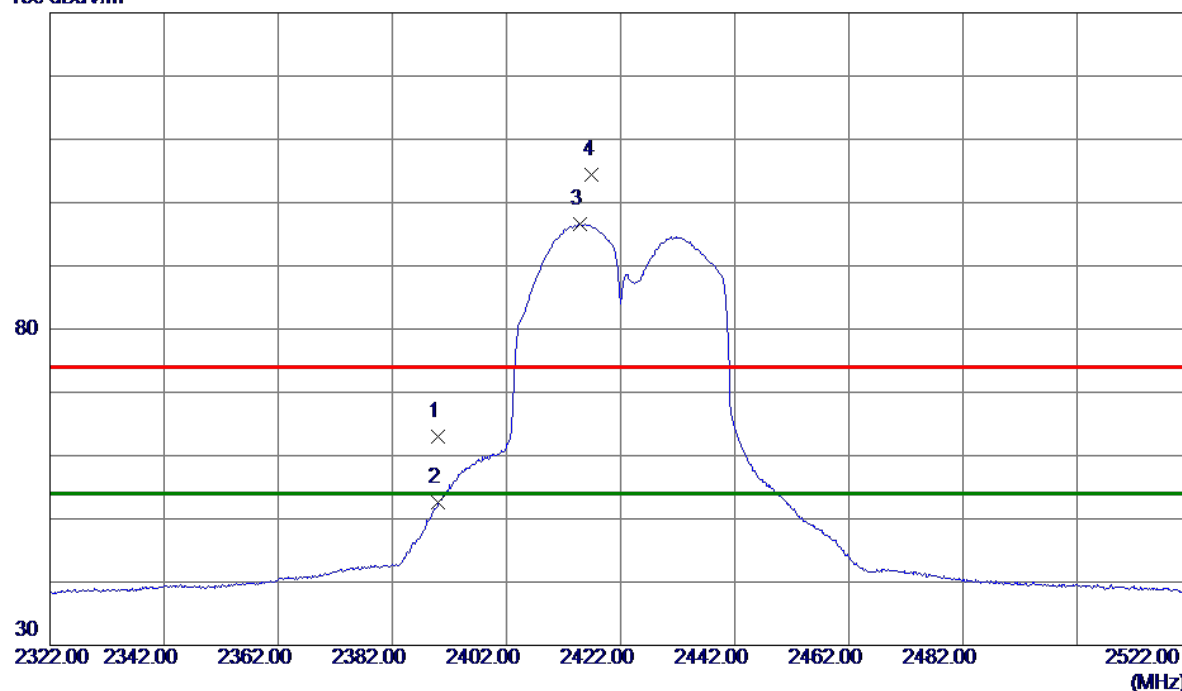


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	56.34	6.62	62.96	74.00	-11.04	Peak	
2	2390.0000	46.01	6.62	52.63	54.00	-1.37	AVG	
3 *	2414.8000	90.03	6.62	96.65	54.00	42.65	AVG	No Limit
4	2417.0000	97.79	6.62	104.41	74.00	30.41	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

80 dBuV/m

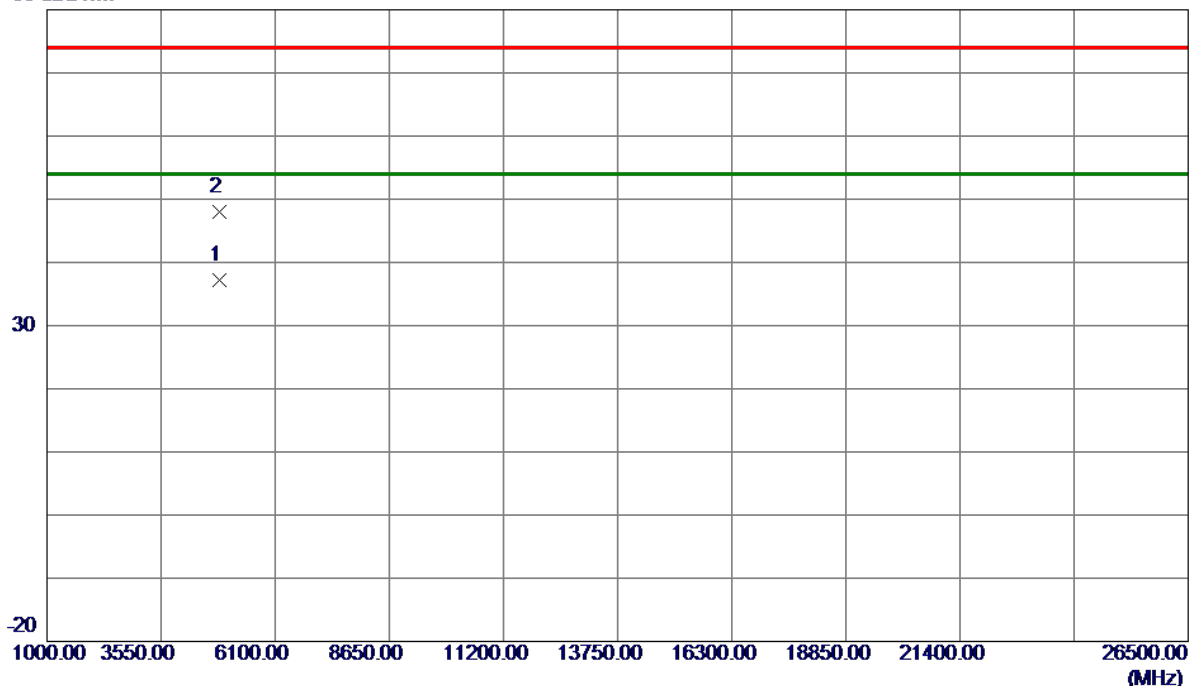


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4843.8100	33.65	3.61	37.26	54.00	-16.74	AVG	
2	4843.9750	44.34	3.62	47.96	74.00	-26.04	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

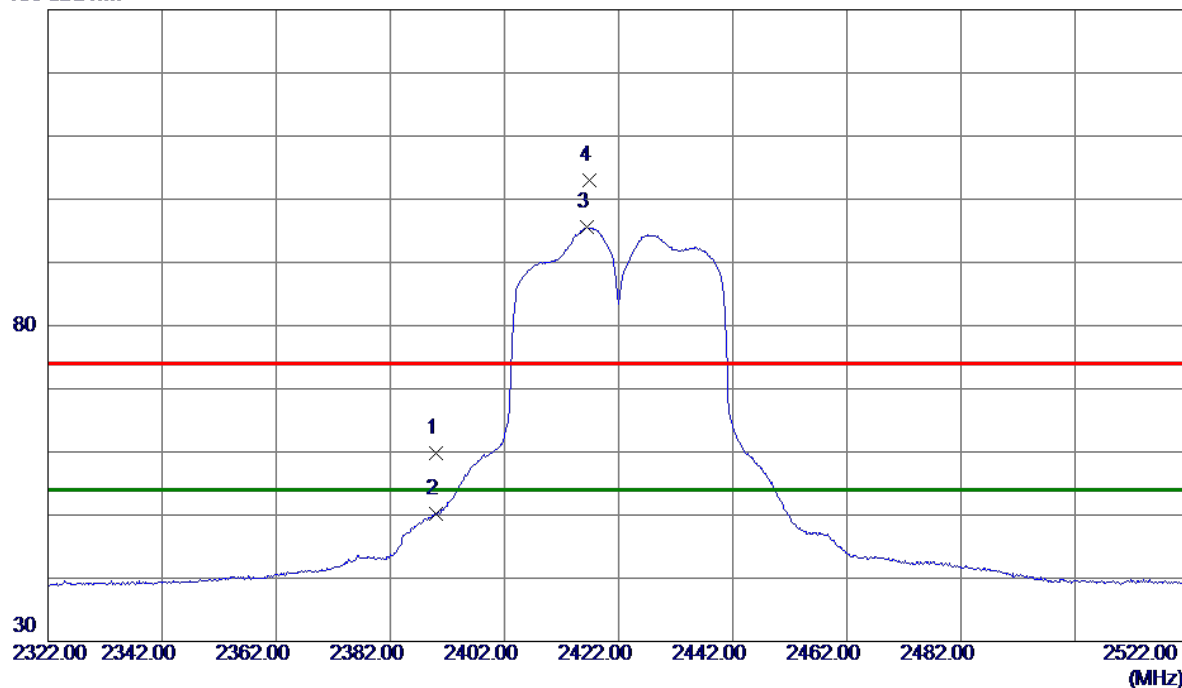


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	53.24	6.62	59.86	74.00	-14.14	Peak	
2	2390.0000	43.59	6.62	50.21	54.00	-3.79	AVG	
3 *	2416.4000	88.98	6.62	95.60	54.00	41.60	AVG	No Limit
4	2416.8000	96.31	6.62	102.93	74.00	28.93	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal


80 dBuV/m

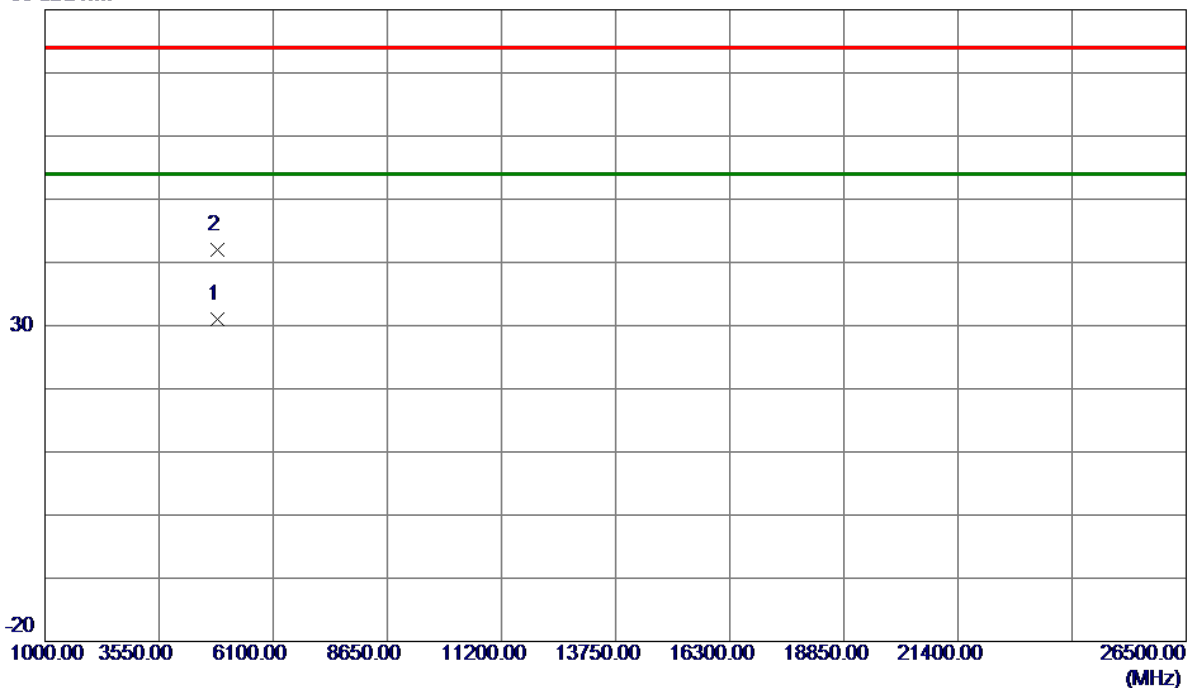

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4842.3849	27.43	3.61	31.04	54.00	-22.96	AVG	
2	4844.9150	38.47	3.62	42.09	74.00	-31.91	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2427 MHz


Vertical

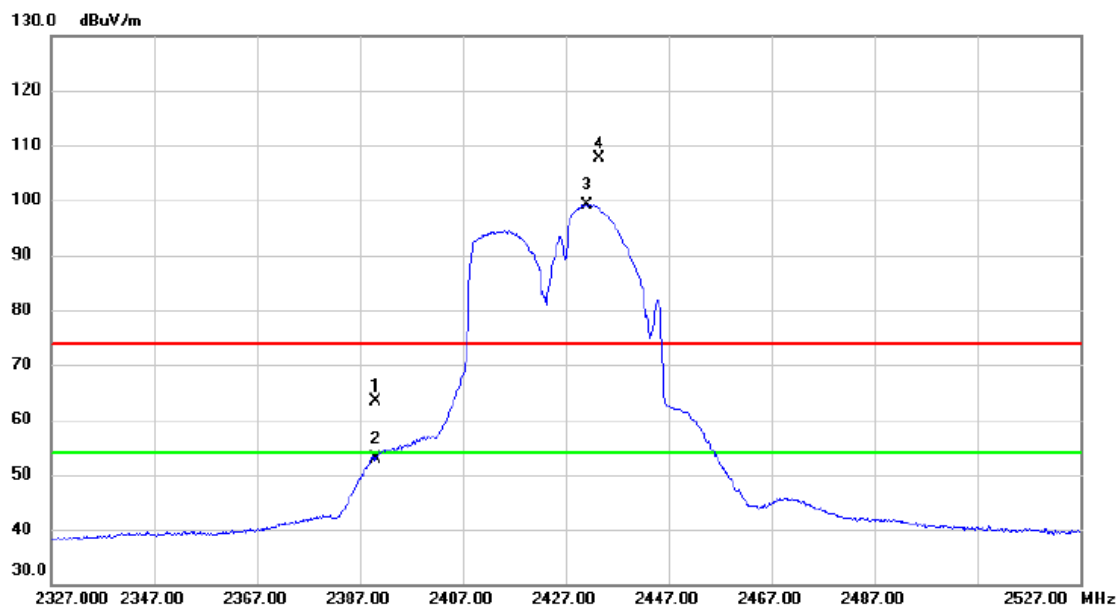

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.77	6.62	63.39	74.00	-10.61	peak	
2		2390.000	46.15	6.62	52.77	54.00	-1.23	AVG	
3	*	2431.100	92.58	6.61	99.19	54.00	45.19	AVG	No Limit
4	X	2433.400	100.92	6.62	107.54	74.00	33.54	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2427 MHz


Vertical

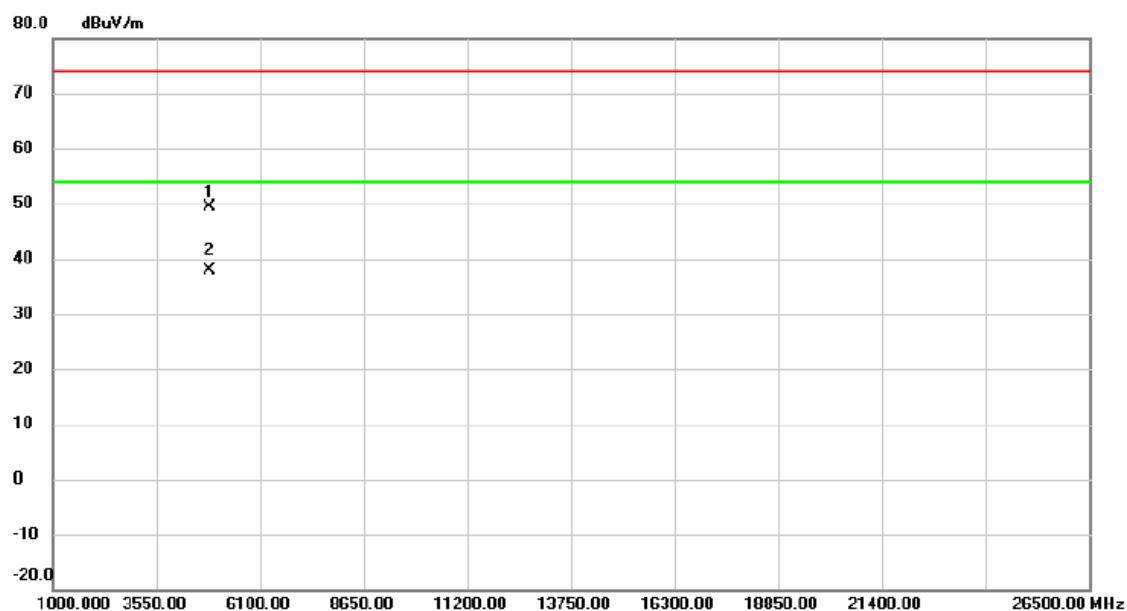

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4852.555	45.82	3.63	49.45	74.00	-24.55	peak	
2	*	4852.930	34.25	3.64	37.89	54.00	-16.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2427 MHz


Horizontal

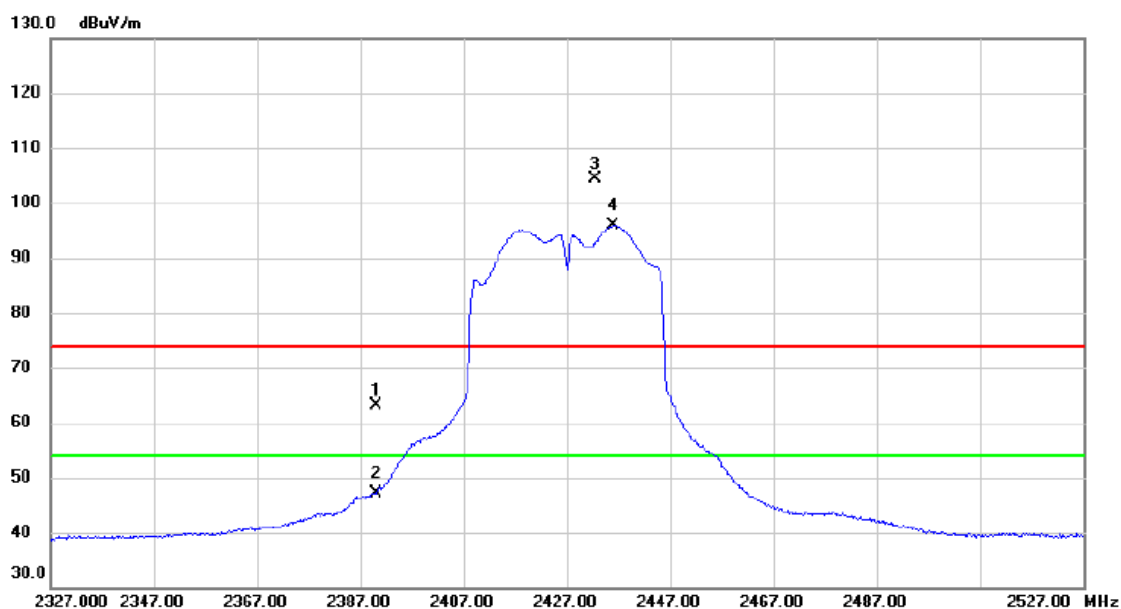

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.49	6.62	63.11	74.00	-10.89	peak	
2		2390.000	40.45	6.62	47.07	54.00	-6.93	AVG	
3	X	2432.500	97.74	6.61	104.35	74.00	30.35	peak	No Limit
4	*	2436.000	89.25	6.62	95.87	54.00	41.87	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2427 MHz

Horizontal

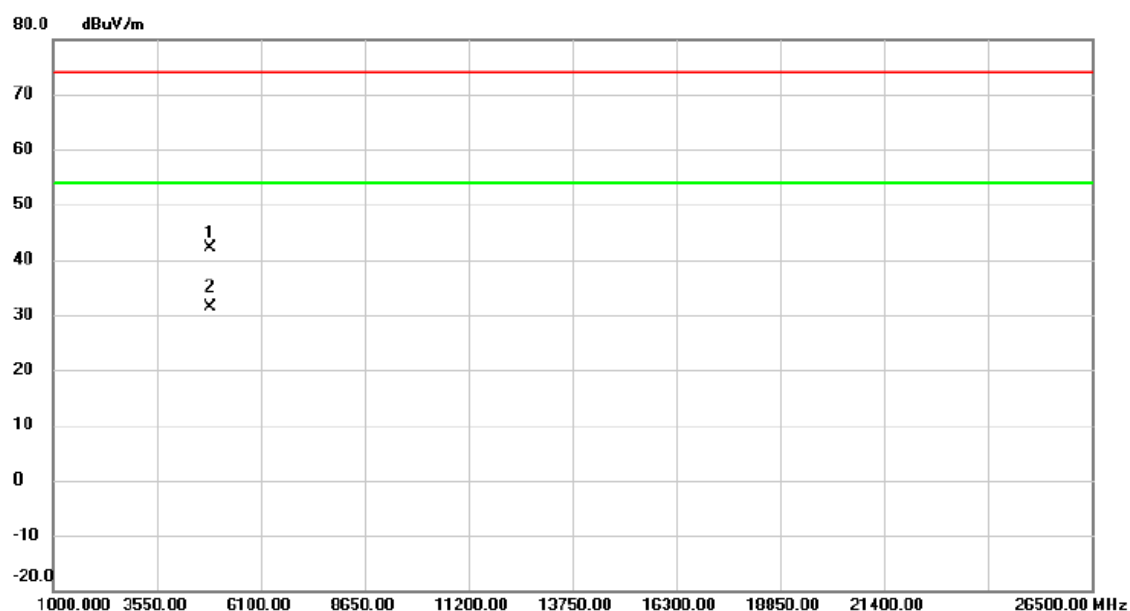


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4851.085	38.62	3.63	42.25	74.00	-31.75	peak	
2	*	4852.750	27.67	3.63	31.30	54.00	-22.70	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

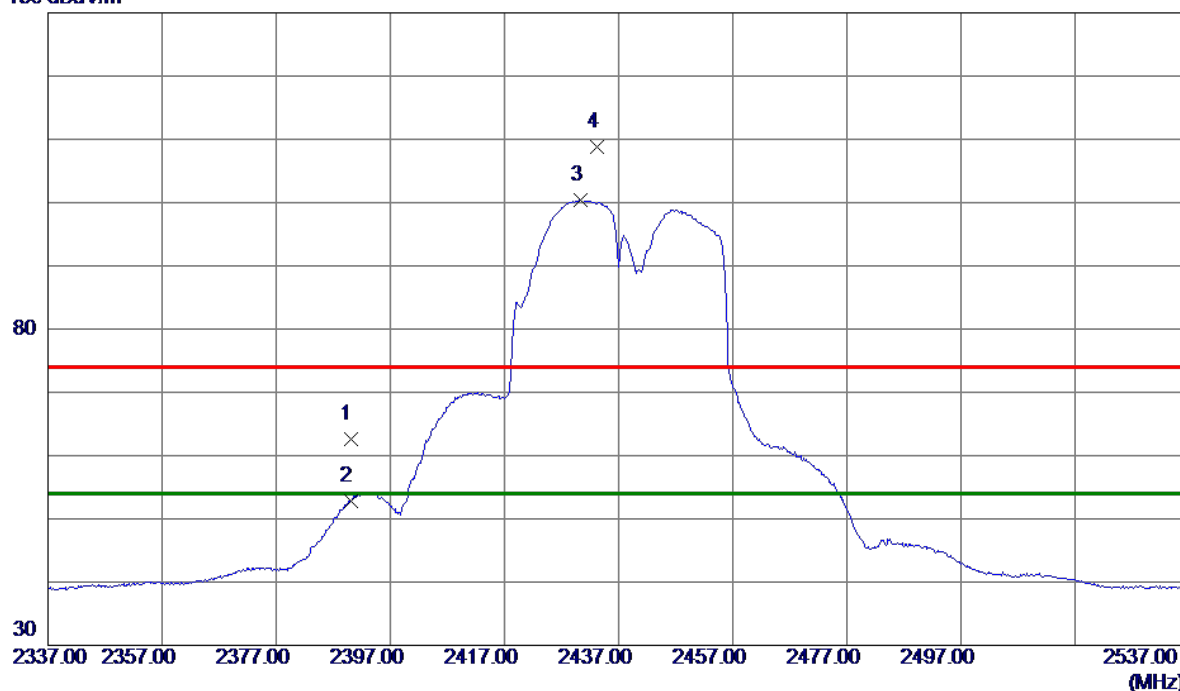


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.97	6.62	62.59	74.00	-11.41	Peak	
2	2390.0000	46.15	6.62	52.77	54.00	-1.23	AVG	
3 *	2430.4000	93.78	6.62	100.40	54.00	46.40	AVG	No Limit
4	2433.3000	102.15	6.62	108.77	74.00	34.77	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical


80 dBuV/m

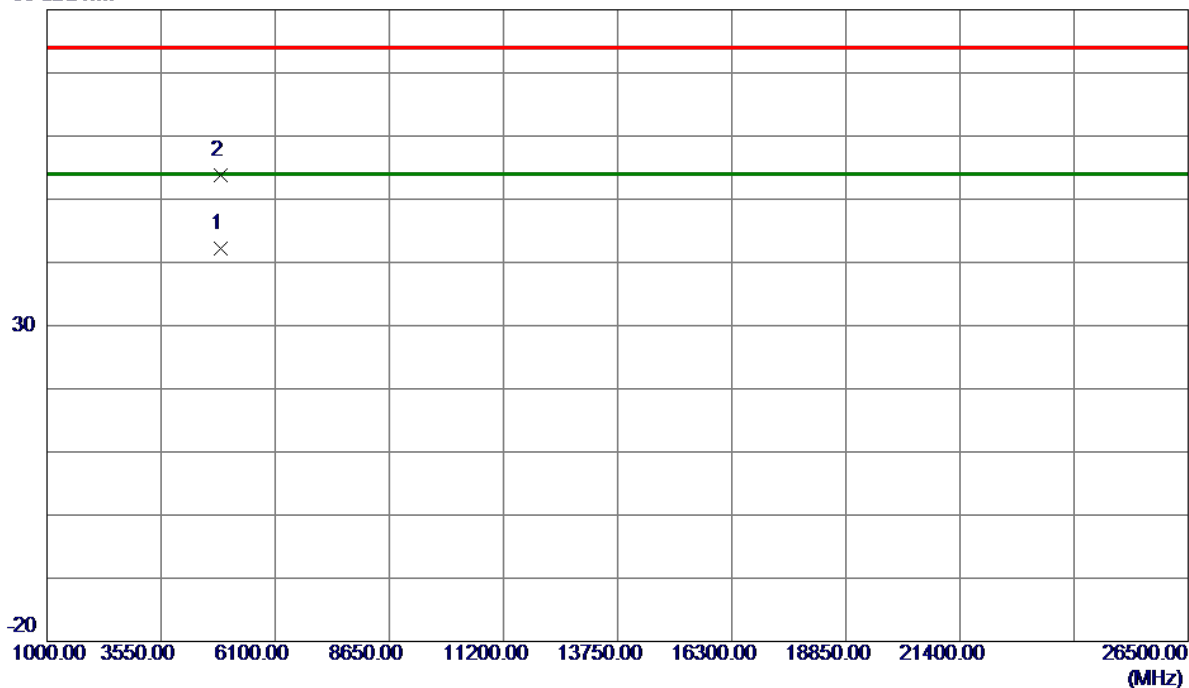

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.1100	38.52	3.68	42.20	54.00	-11.80	AVG	
2	4873.2599	50.04	3.68	53.72	74.00	-20.28	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

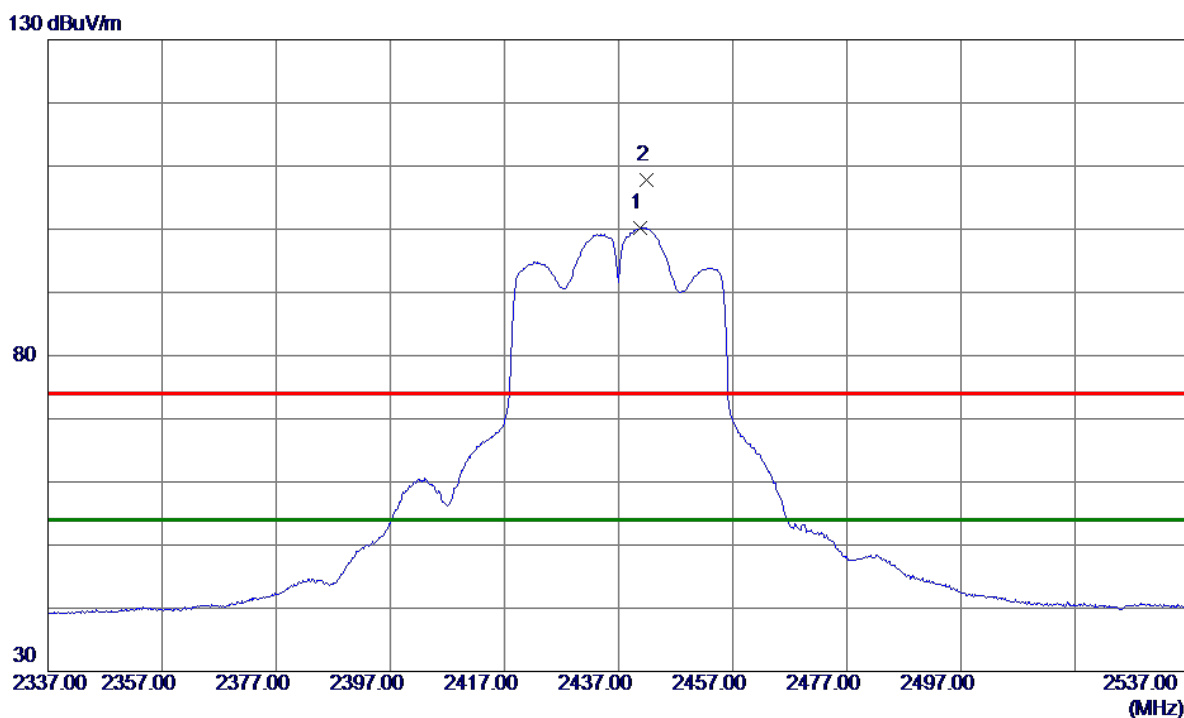


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2440.8000	93.66	6.61	100.27	54.00	46.27	AVG	No Limit
2	2441.8000	101.24	6.61	107.85	74.00	33.85	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal


80 dBuV/m

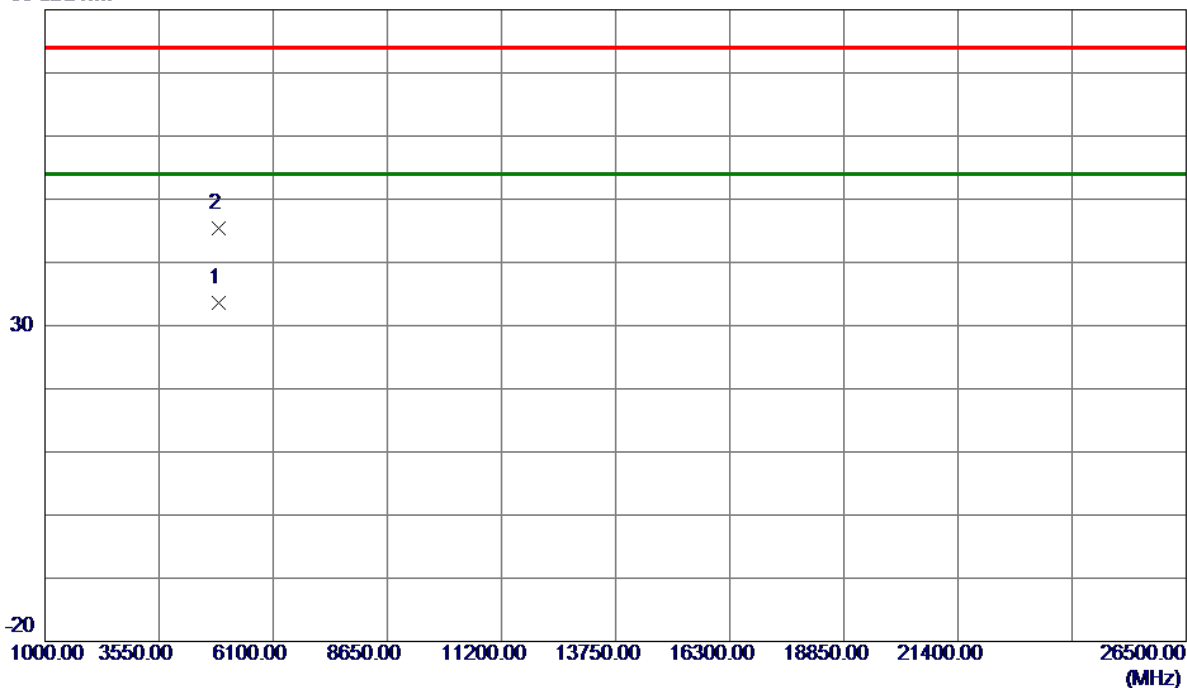

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.2850	29.90	3.68	33.58	54.00	-20.42	AVG	
2	4874.5150	41.77	3.68	45.45	74.00	-28.55	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2447 MHz


Vertical

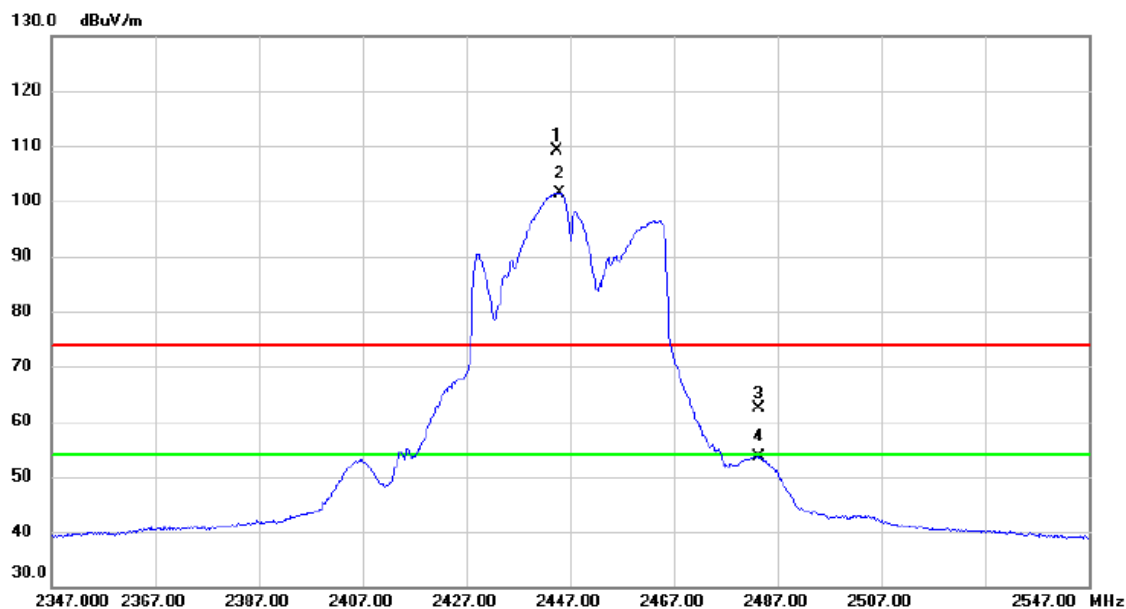

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2444.600	102.42	6.62	109.04	74.00	35.04	peak	No Limit
2	*	2445.000	94.83	6.62	101.45	54.00	47.45	AVG	No Limit
3		2483.500	55.66	6.61	62.27	74.00	-11.73	peak	
4		2483.500	46.92	6.61	53.53	54.00	-0.47	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2447 MHz


Vertical

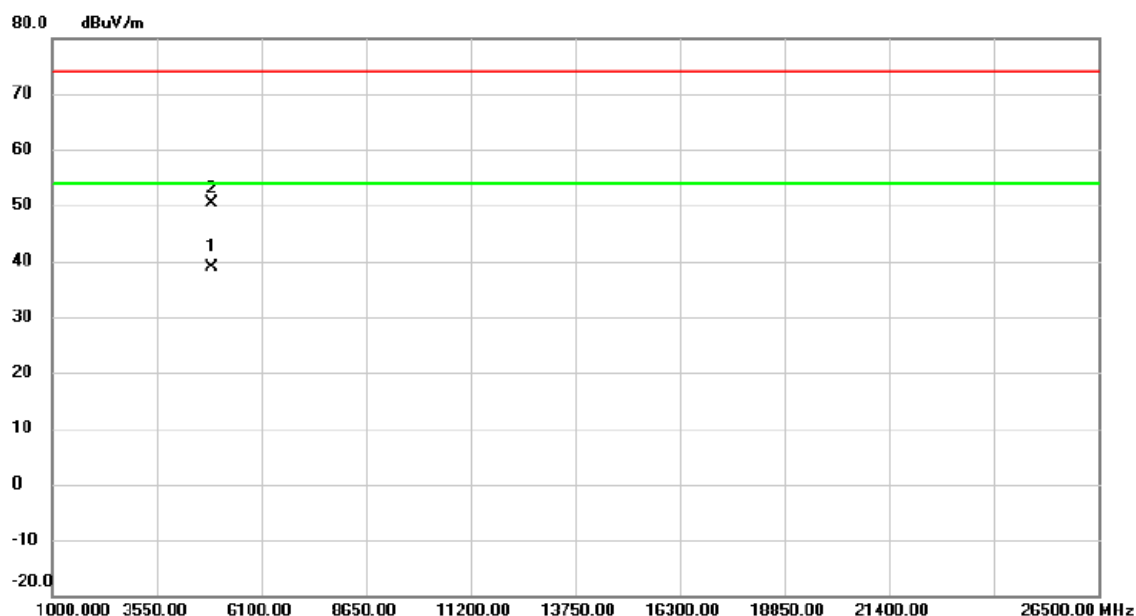

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4892.845	35.23	3.73	38.96	54.00	-15.04	AVG	
2		4893.050	46.70	3.73	50.43	74.00	-23.57	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2447 MHz


Horizontal

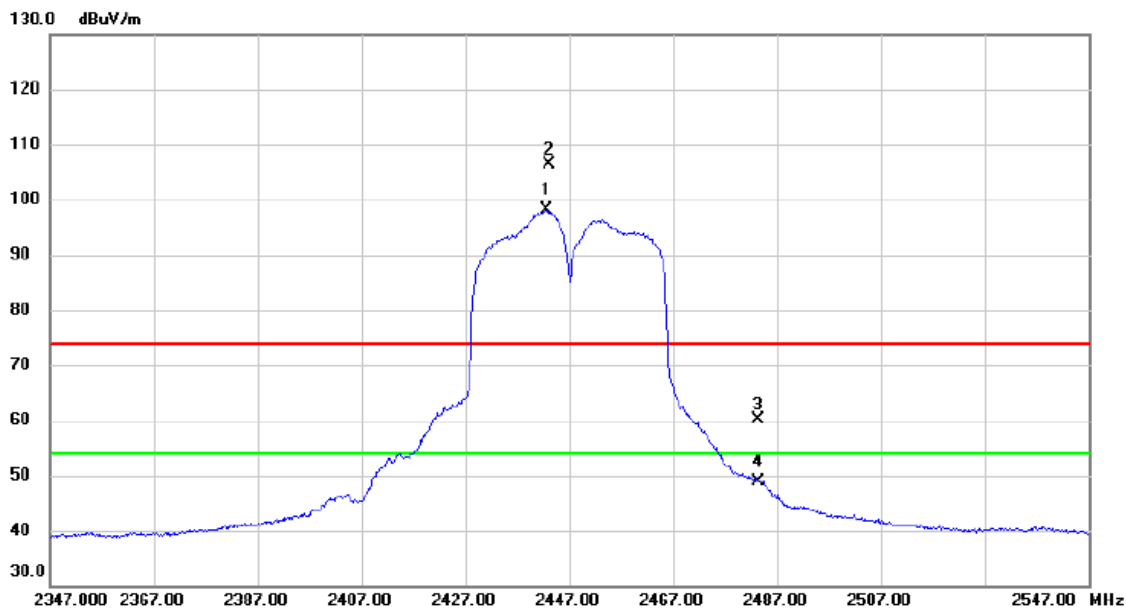

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2442.700	91.46	6.61	98.07	54.00	44.07	AVG	No Limit
2	X	2443.000	99.77	6.61	106.38	74.00	32.38	peak	No Limit
3		2483.500	53.54	6.61	60.15	74.00	-13.85	peak	
4		2483.500	42.20	6.61	48.81	54.00	-5.19	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M Mode 2447 MHz

Horizontal

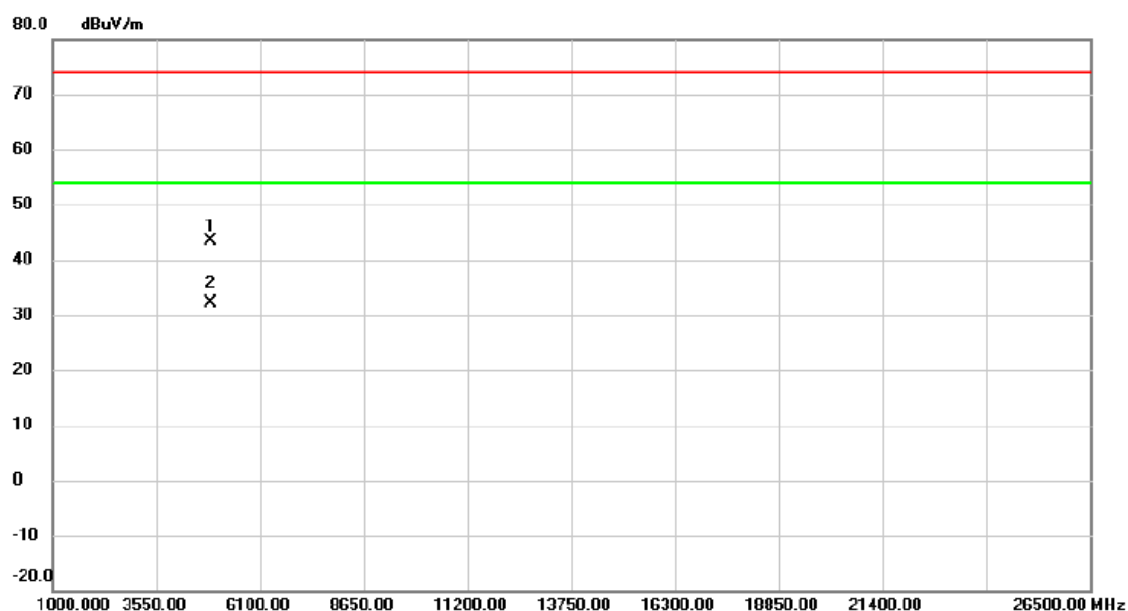


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4891.070	39.63	3.72	43.35	74.00	-30.65	peak	
2	*	4893.625	28.49	3.73	32.22	54.00	-21.78	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

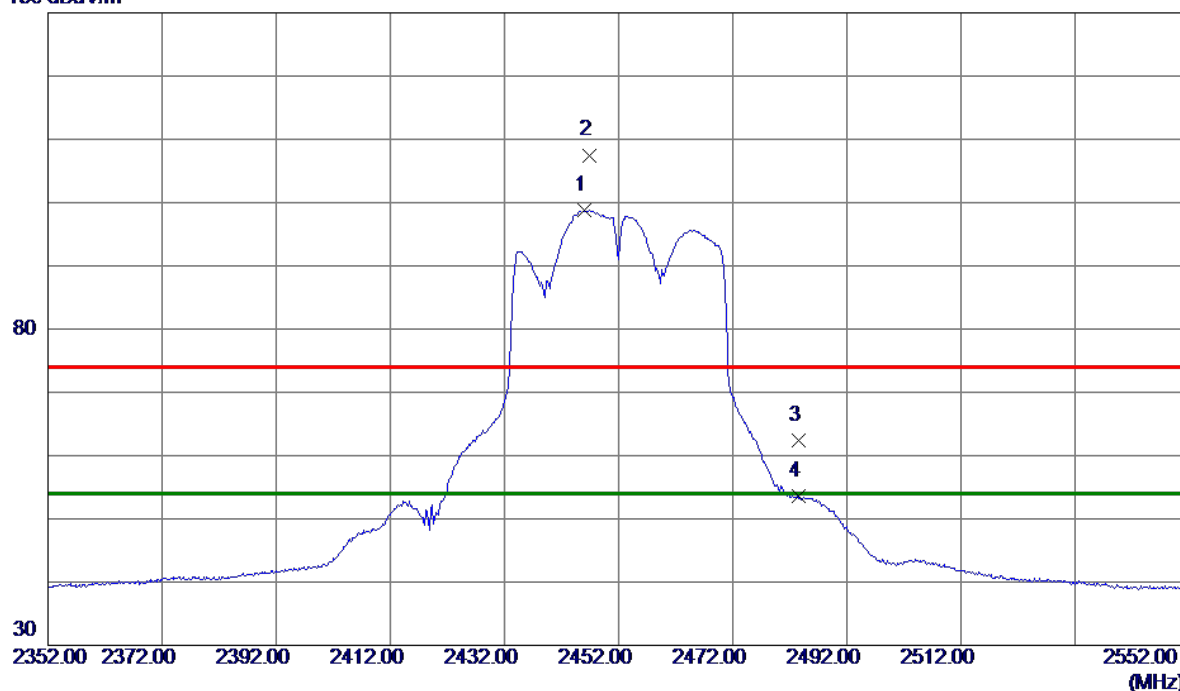


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2446.0000	92.17	6.61	98.78	54.00	44.78	AVG	No Limit
2	2446.8000	100.89	6.61	107.50	74.00	33.50	Peak	No Limit
3	2483.5000	55.86	6.61	62.47	74.00	-11.53	Peak	
4	2483.5000	46.91	6.61	53.52	54.00	-0.48	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

80 dBuV/m

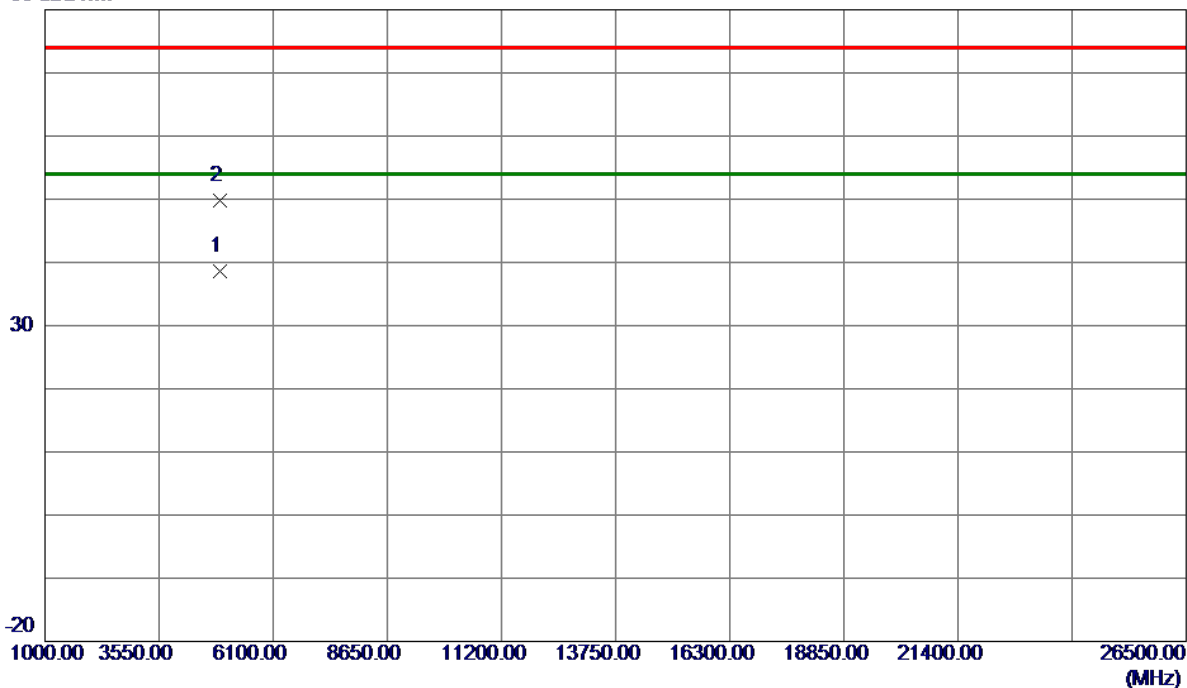


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4902.4100	34.88	3.74	38.62	54.00	-15.38	AVG	
2	4905.0250	46.07	3.75	49.82	74.00	-24.18	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

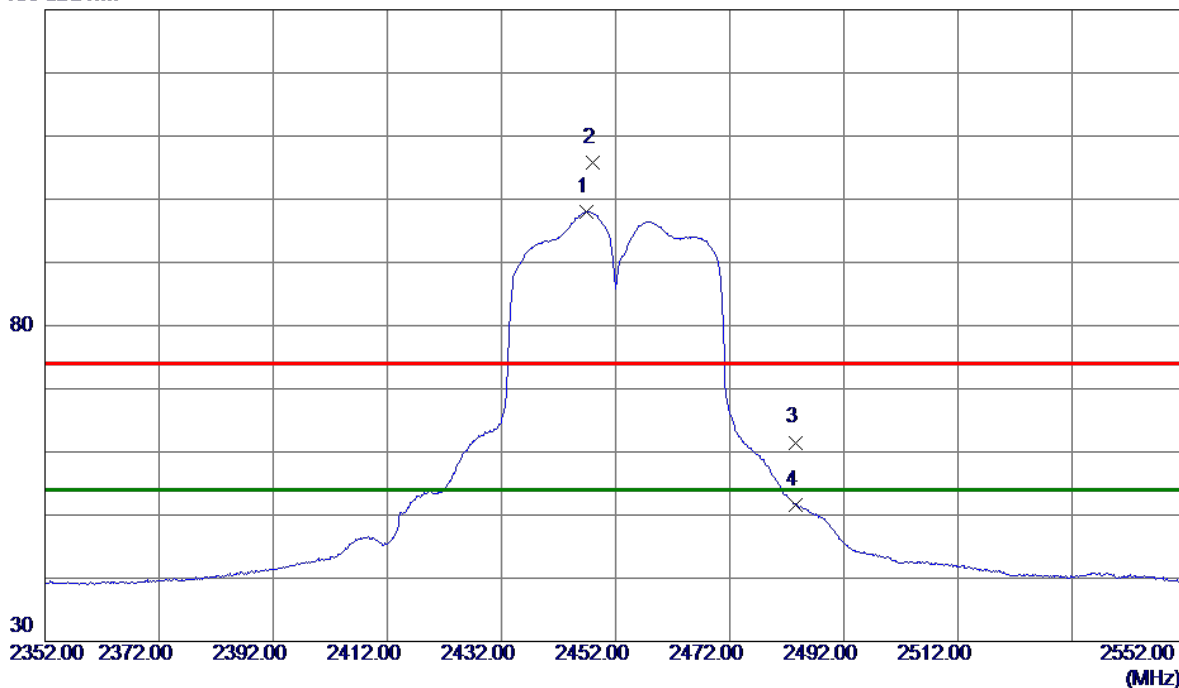


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2446.9000	91.36	6.61	97.97	54.00	43.97	AVG	No Limit
2	2448.0000	99.28	6.61	105.89	74.00	31.89	Peak	No Limit
3	2483.5000	54.89	6.61	61.50	74.00	-12.50	Peak	
4	2483.5000	44.98	6.61	51.59	54.00	-2.41	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

80 dBuV/m

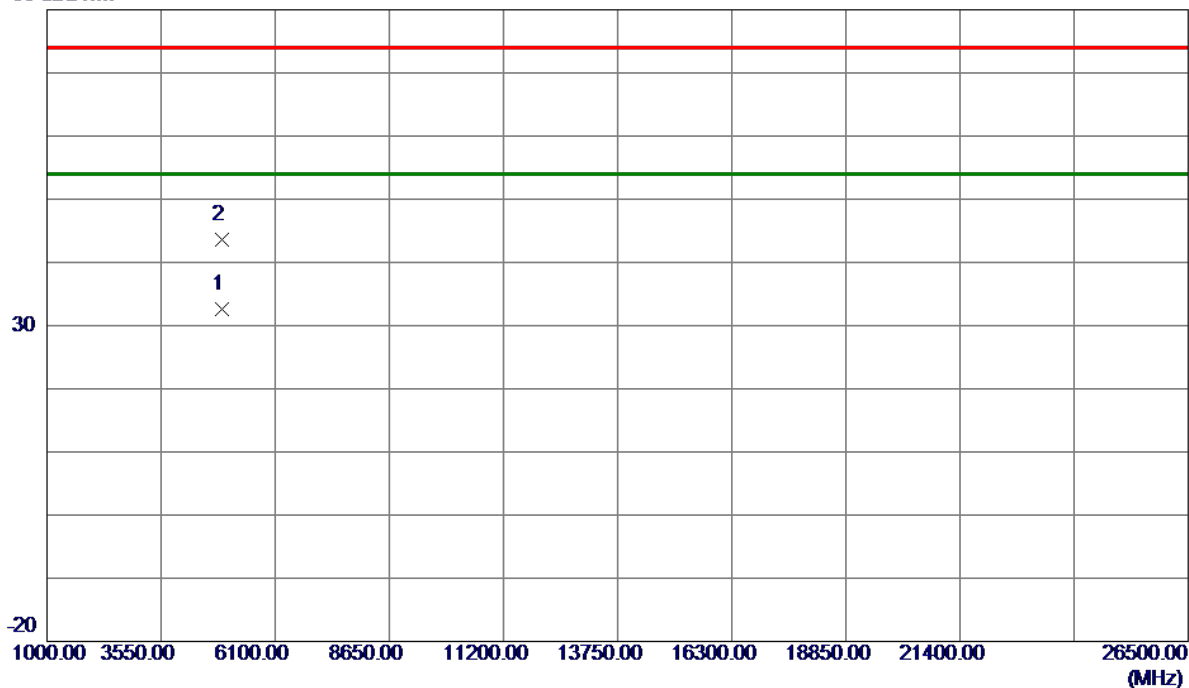

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.3050	28.81	3.75	32.56	54.00	-21.44	AVG	
2	4904.7050	39.91	3.75	43.66	74.00	-30.34	Peak	

TX B Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.00 msec

T_{Total} : 1.00 msec

Duty cycle: 100.0%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

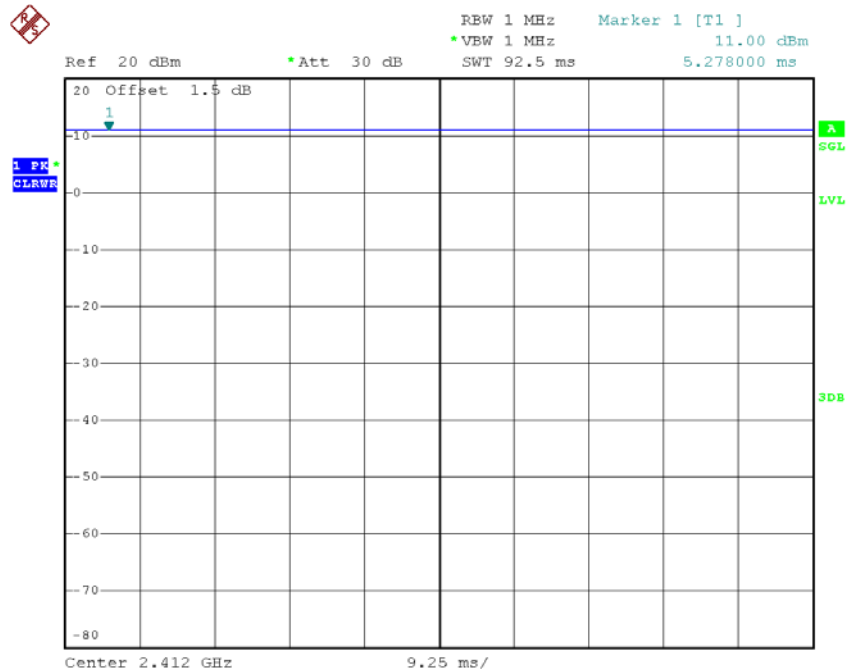

Date: 3.SEP.2018 18:55:39

Note: The duty cycle is $\geq 98\%$ no need to calculated as Duty Factor.

TX G Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.024msec

T_{Total} : 2.080 msec

Duty cycle: 97.308%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.12

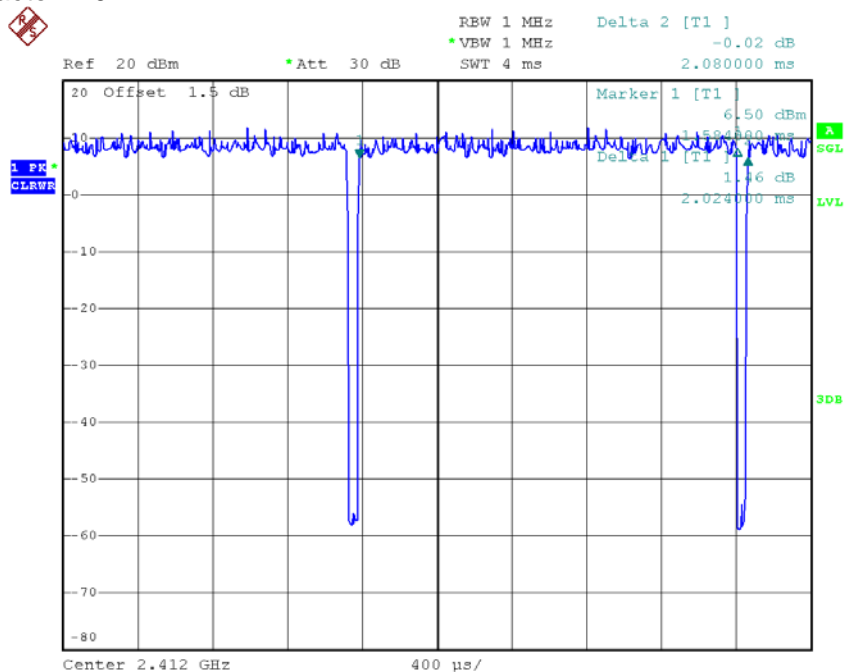

Date: 3.SEP.2018 18:51:19

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX 2412 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.888 msec

T_{Total} : 1.952 msec

Duty cycle: 96.721%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.14

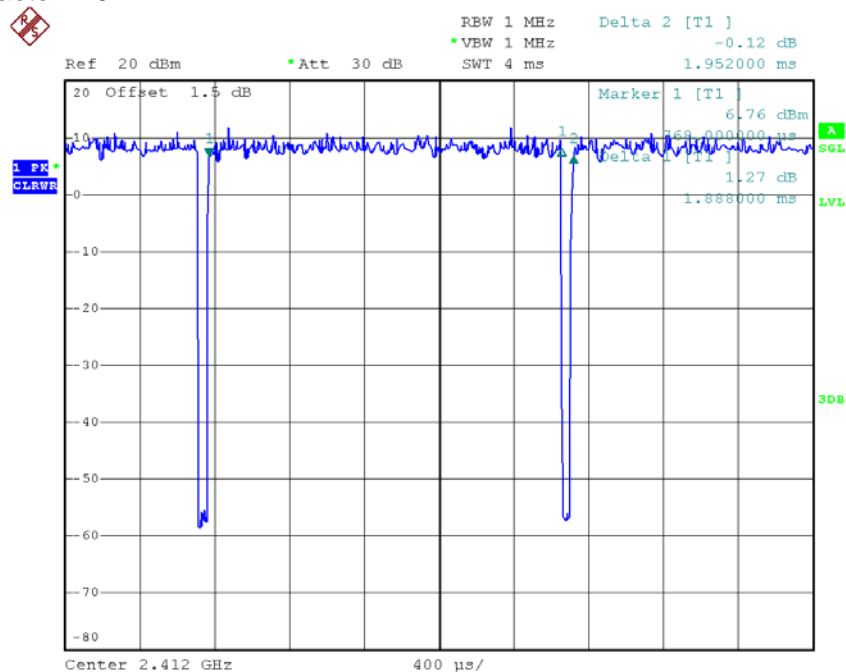

Date: 3.SEP.2018 18:51:42

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX 2422MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.925 msec

T_{Total} : 0.970 msec

Duty cycle: 95.361%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.21

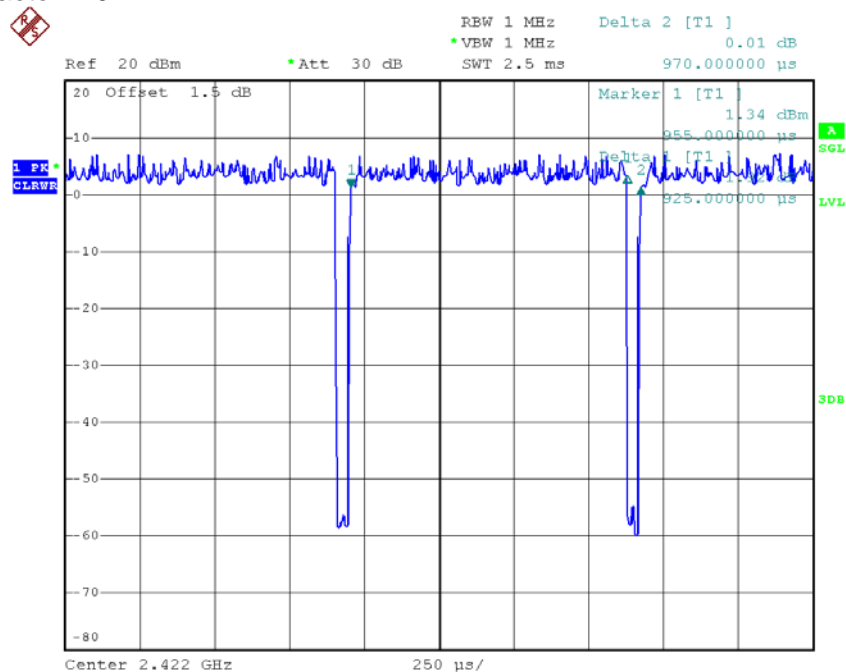

Date: 3.SEP.2018 18:52:07


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH

Test Mode: TX B Mode_CH01/06/11


Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	6.16	500	Complies
2437	6.60	500	Complies
2462	6.60	500	Complies

TX CH01

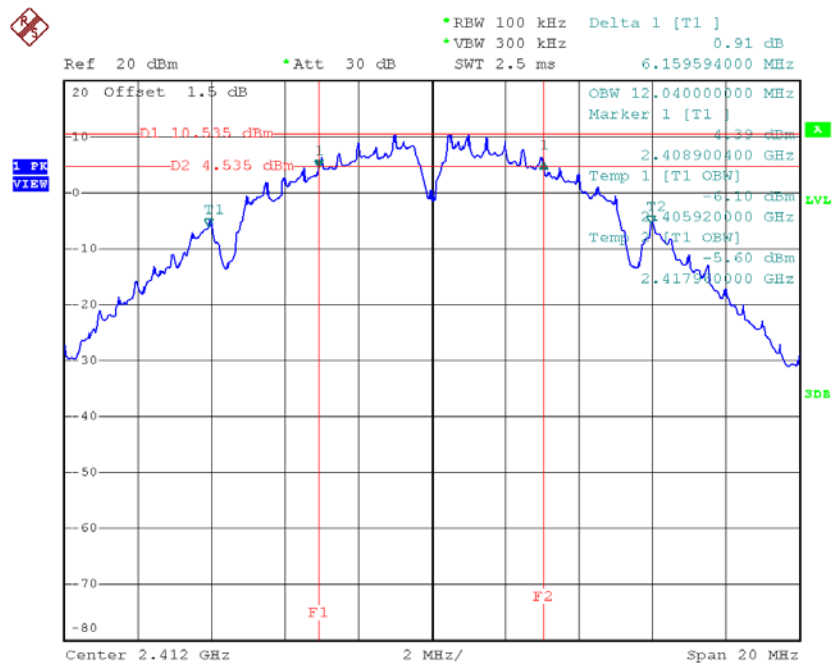


Date: 11.OCT.2018 10:08:40

TX CH06

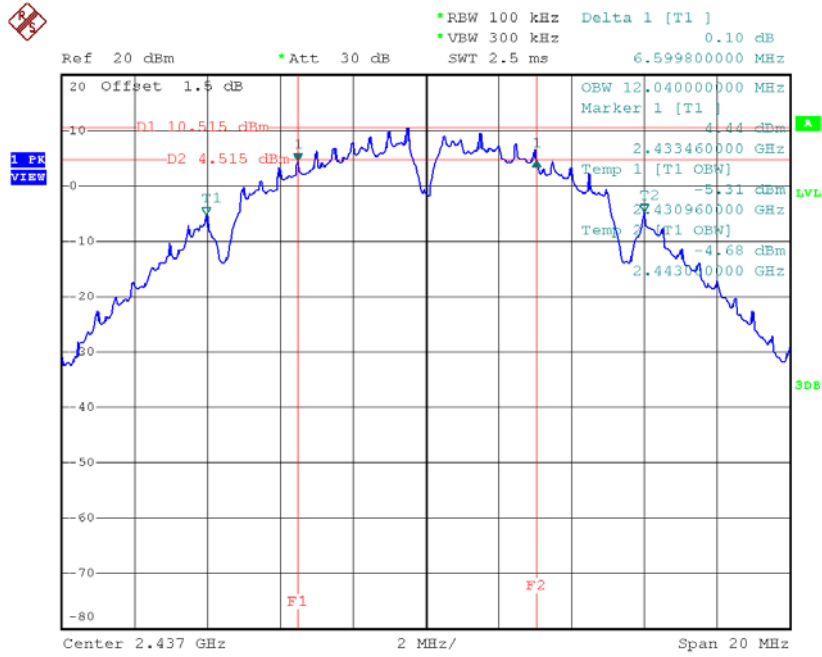

Date: 11.OCT.2018 10:10:15

TX CH11

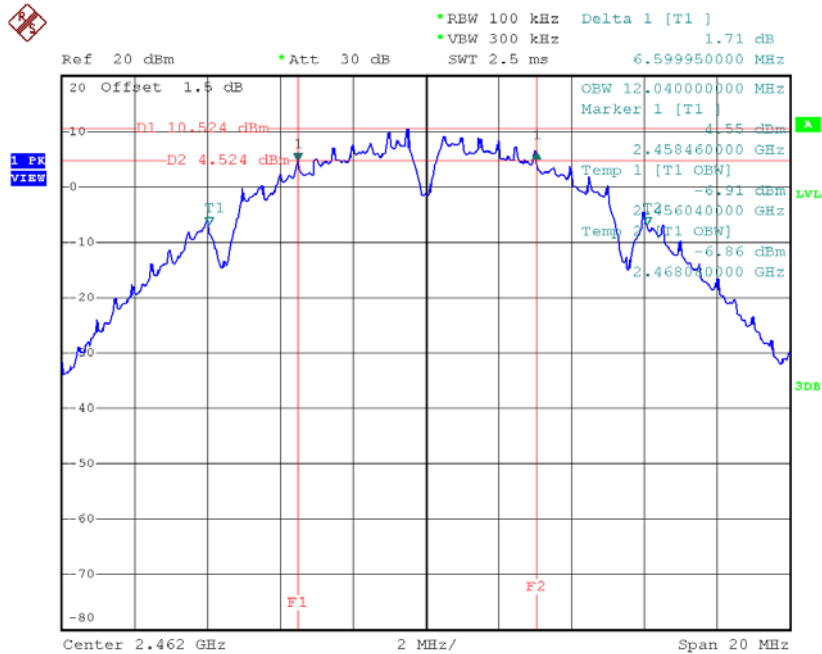


Date: 11.OCT.2018 10:11:14

Test Mode: TX B Mode_CH01/06/11


Frequency (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	12.24	500	Complies
2437	12.16	500	Complies
2462	12.16	500	Complies

TX CH01

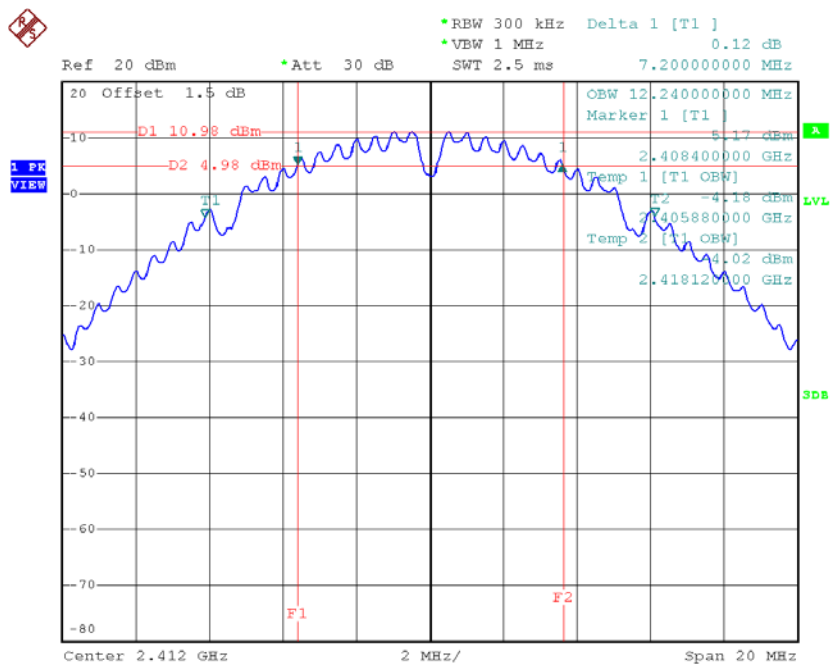


Date: 11.OCT.2018 11:30:46

TX CH06

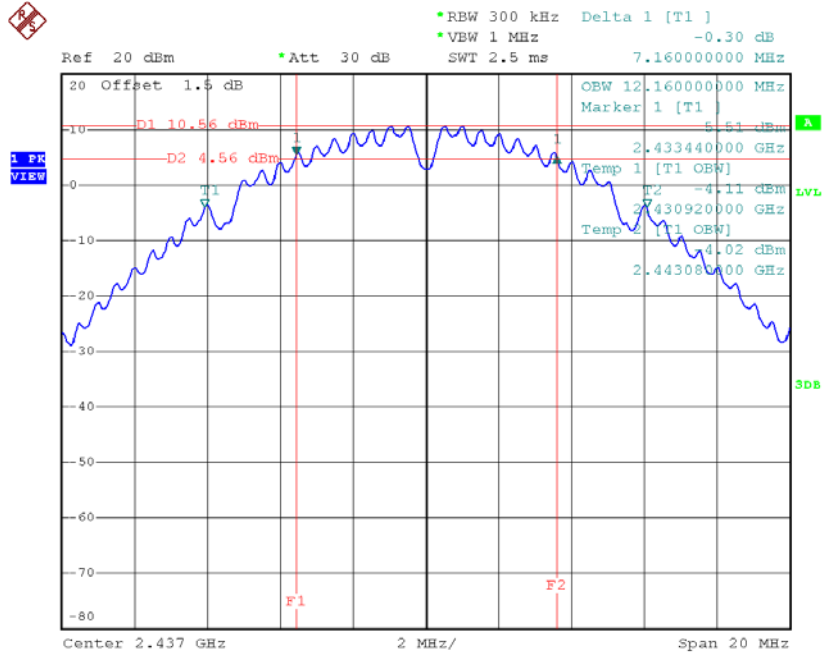

Date: 11.OCT.2018 11:23:16

TX CH11

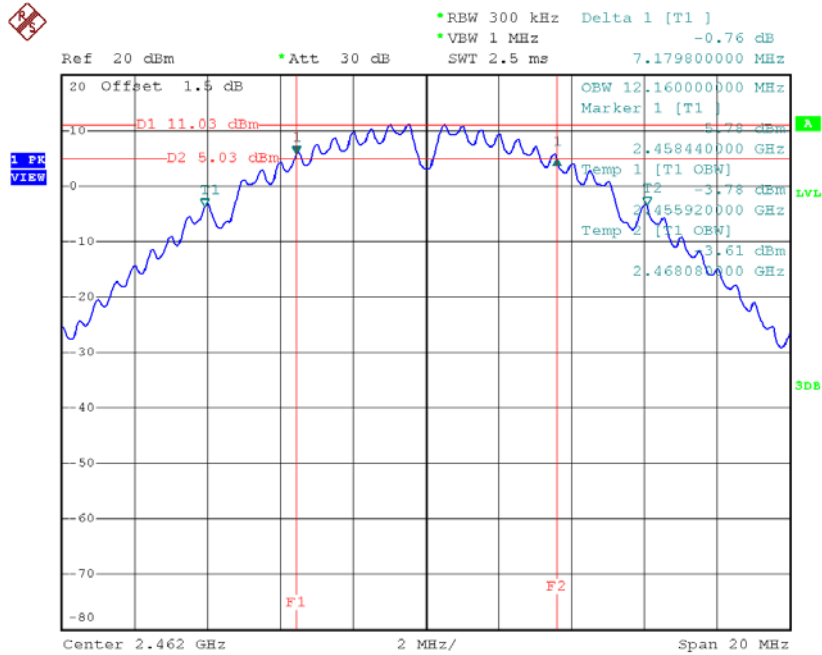


Date: 11.OCT.2018 11:21:25

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	15.13	500	Complies
2437	13.51	500	Complies
2462	15.06	500	Complies

TX CH01

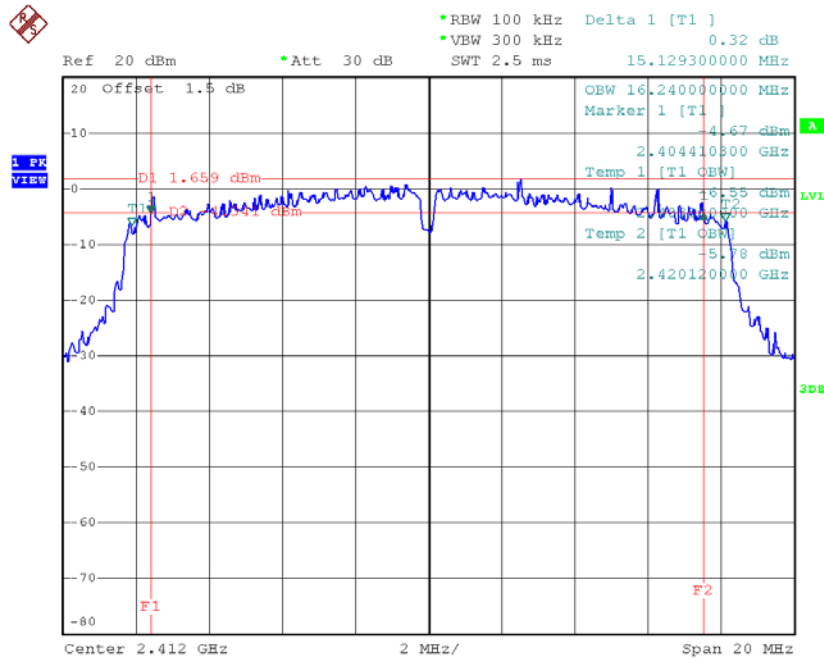


Date: 11.OCT.2018 10:12:07

TX CH06

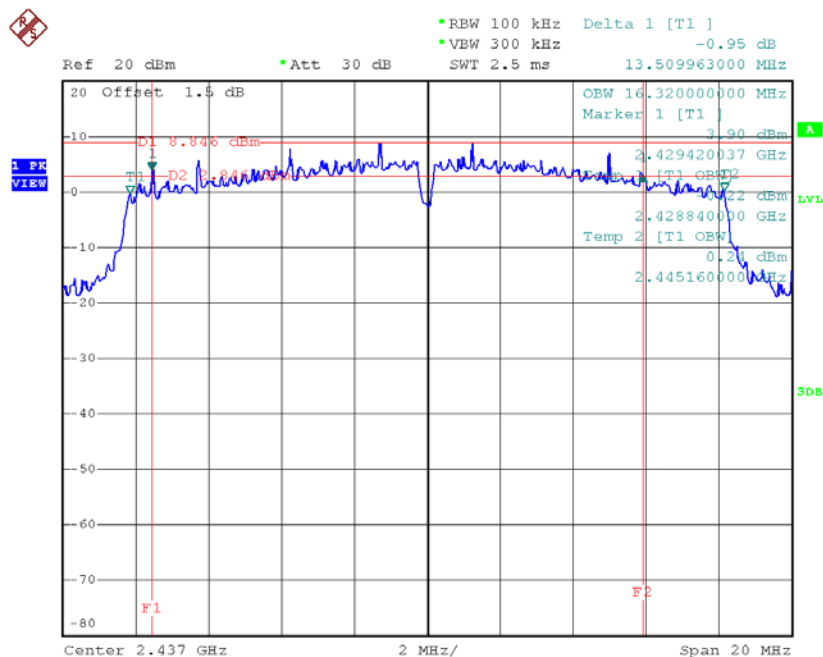

Date: 11.OCT.2018 10:12:59

TX CH11

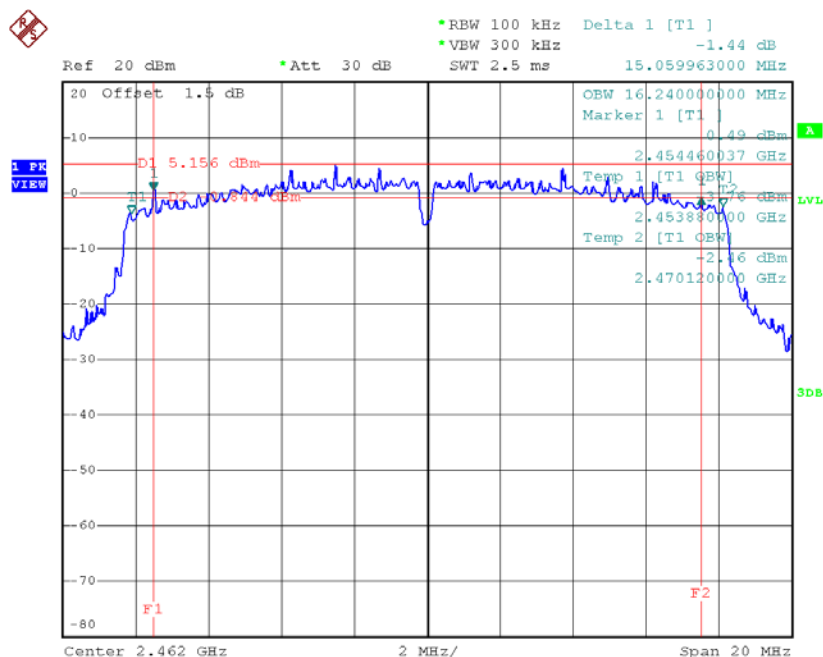


Date: 11.OCT.2018 10:13:39

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.24	500	Complies
2437	16.48	500	Complies
2462	16.32	500	Complies

TX CH01

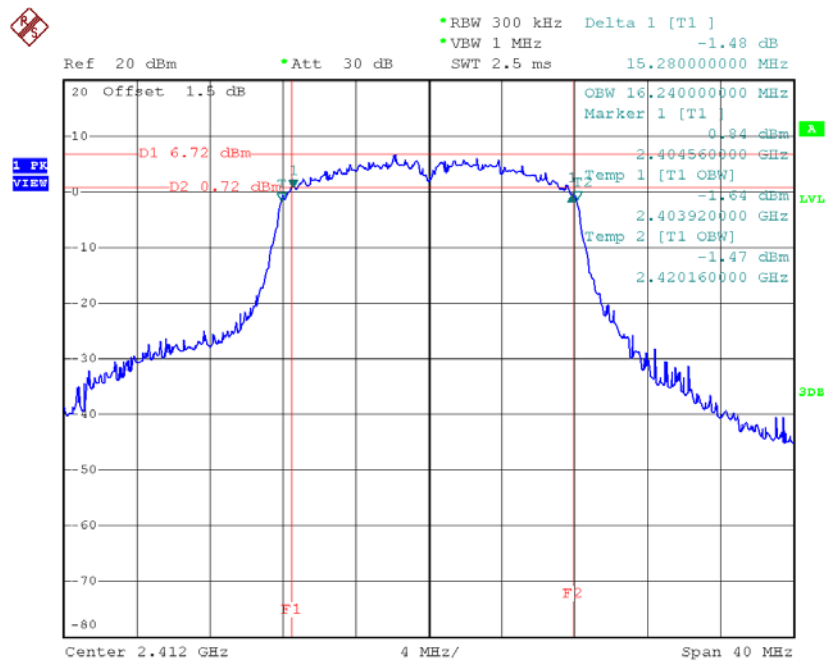


Date: 18.SEP.2018 20:29:49

TX CH06

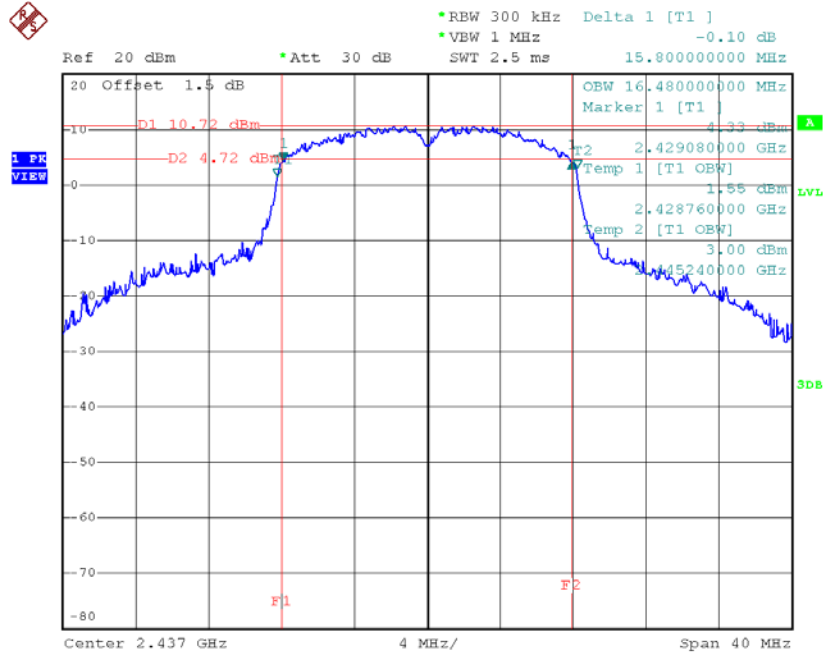

Date: 18.SEP.2018 20:31:18

TX CH11

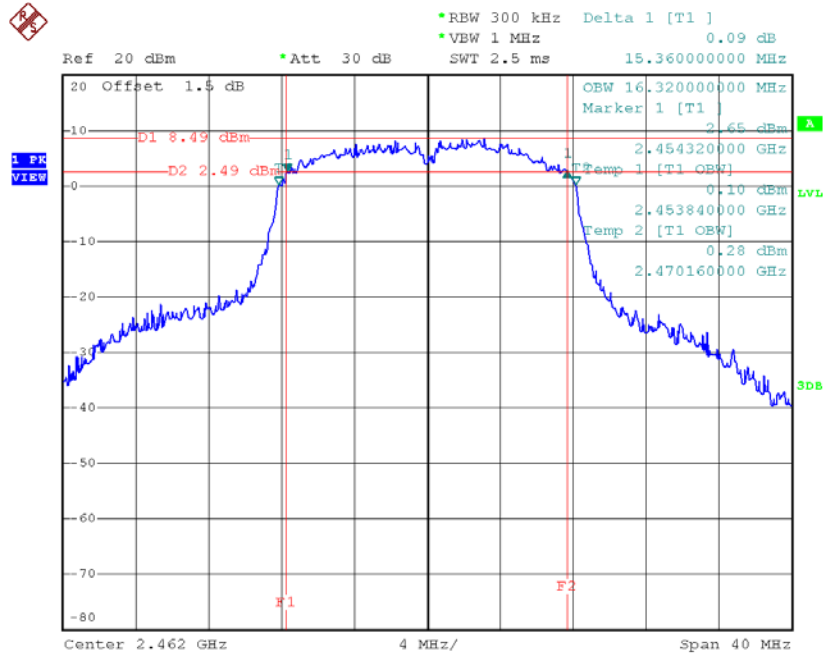


Date: 18.SEP.2018 20:33:47

Test Mode: TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2412	13.92	500	Complies
2437	13.91	500	Complies
2462	15.14	500	Complies

TX CH01

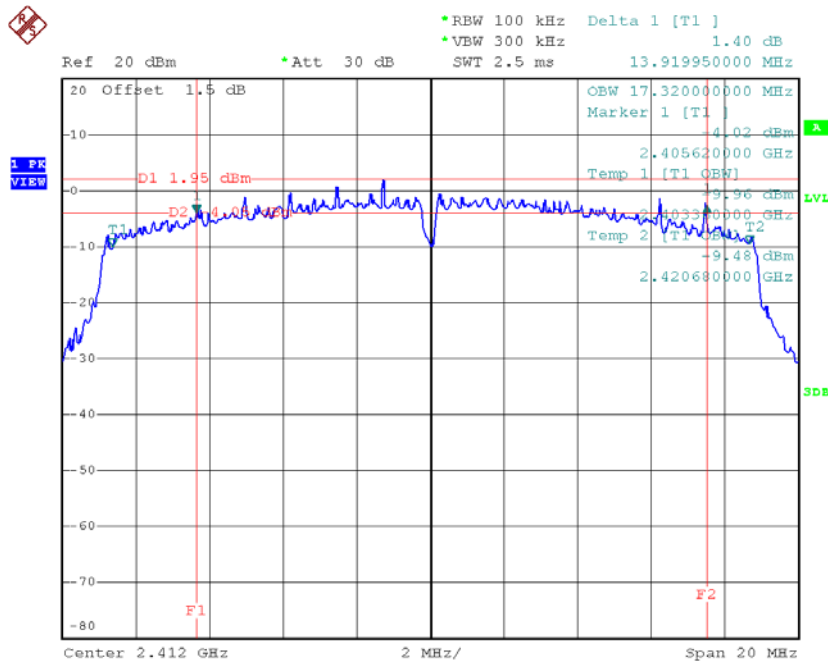


Date: 11.OCT.2018 10:14:33

TX CH06

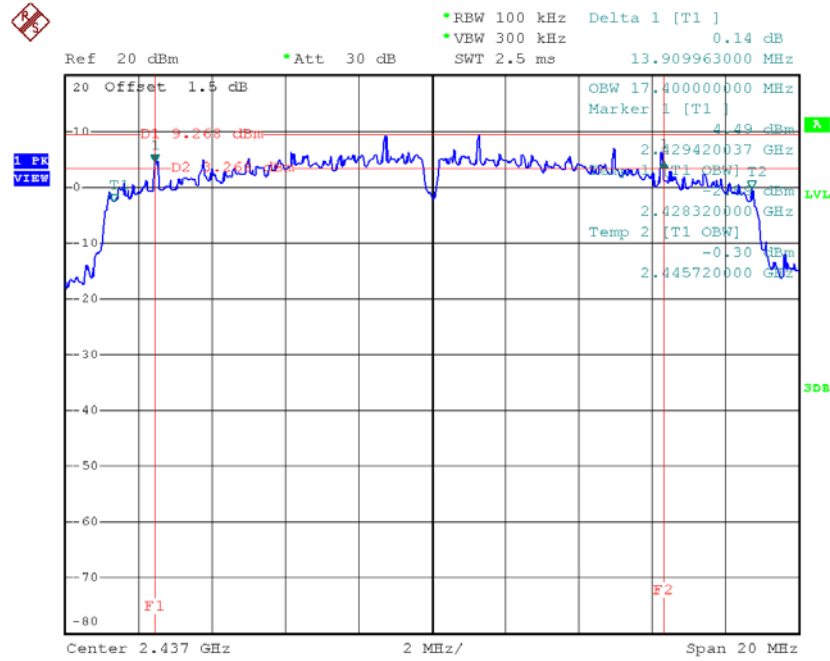

Date: 11.OCT.2018 10:15:26

TX CH11

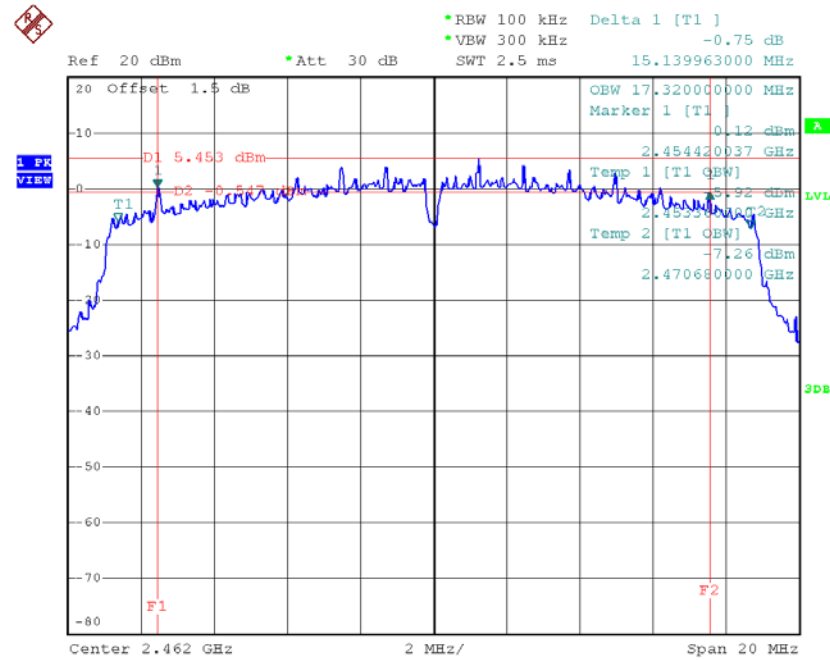

Date: 11.OCT.2018 10:16:03