

# WA-F-LA-03-295 Specification

## 1. Explanation of part number :

WA    -    F    -    LA    -    03    -    295  
(1)        (2)        (3)        (4)        (5)

(1) Product Type : Wireless Antenna

(2) Material: FPC+Cable

(3) Frequency : 2.4GHz-2.5GHz

(4) Coaxial Cable Type : 03

(5) Suffix :295

## 2. Storage Condition:

Temperature                      -40 to +70 °C  
Humidity                         65±20 % RH

## 3. Operating Condition:

Temperature                      -40 to +70 °C  
Humidity                         65±20 % RH

## 4. Electrical Specification :

*Those specifications were specially defined for 佳德 Norteck ITP8, ITP12 BT model, and all characteristics were measured under the model's handset testing.*

### 4-1. Frequency Band:

Frequency Band	MHz
BT	2400-2500

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±                      X.X=±                      X.XX=±  
ANGLES=±                      HOLEDIA=±



佳邦科技股份有限公司  
INPAQ TECHNOLOGY CO., LTD.

SCALE :                      UNIT : mm

DRAWN BY : 靳静                      CHECKED BY : 赵付辉

DESIGNED BY : 董明辰                      APPROVED BY : 赵付辉

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-LA-03-295 Specification

DOCUMENT  
NO.

PAGE REV.  
P1

## 4-2. Impedance

50 ohm nominal

## 4-3. Matching circuit

None


## 4-4. VSWR

### 4-4.1 Measuring Method

- 1.A 50 $\Omega$  coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2.Keeping this jig away from metal at least 20cm

### 4-4.2 Measurement frequency points and VSWR value

Frequency (Unit MHz)		2400	2450	2500
VSWR	BT	2.29	1.62	1.67

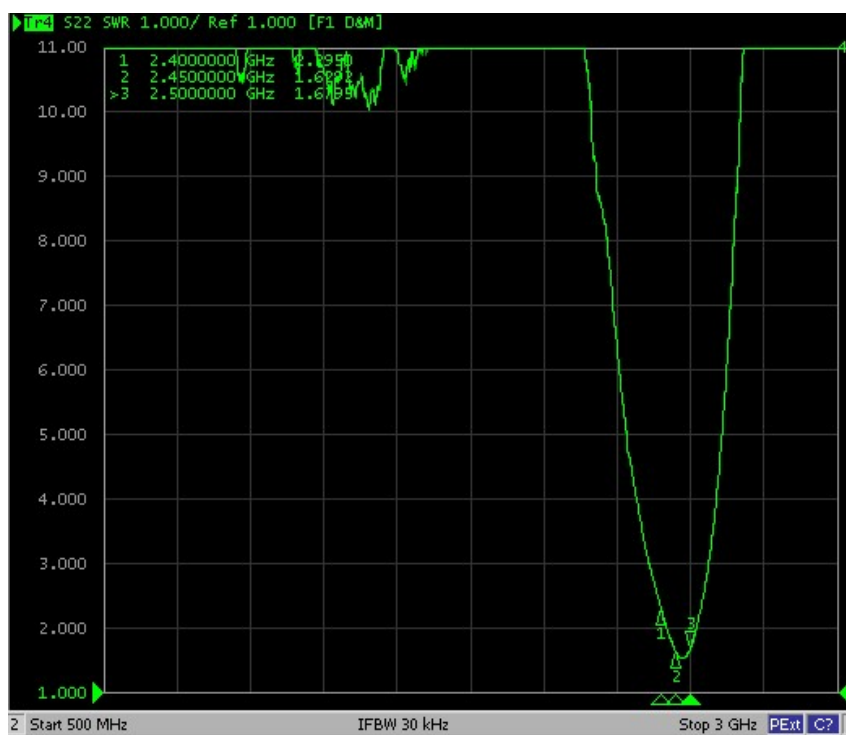

## 4-5. Efficiency and Gain

### 4-5.1 Measure method

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±      X.X=±      X.XX=±

ANGLES=±      HOLEDIA=±

SCALE :      UNIT : mm

DRAWN BY : 靳静      CHECKED BY : 赵付辉

DESIGNED BY : 董明辰      APPROVED BY : 赵付辉

TITLE : WA-F-LA-03-295 Specification



佳邦科技股份有限公司  
INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT  
NO.

PAGE REV.  
P1

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data


#### 4-5.2 Chamber definition

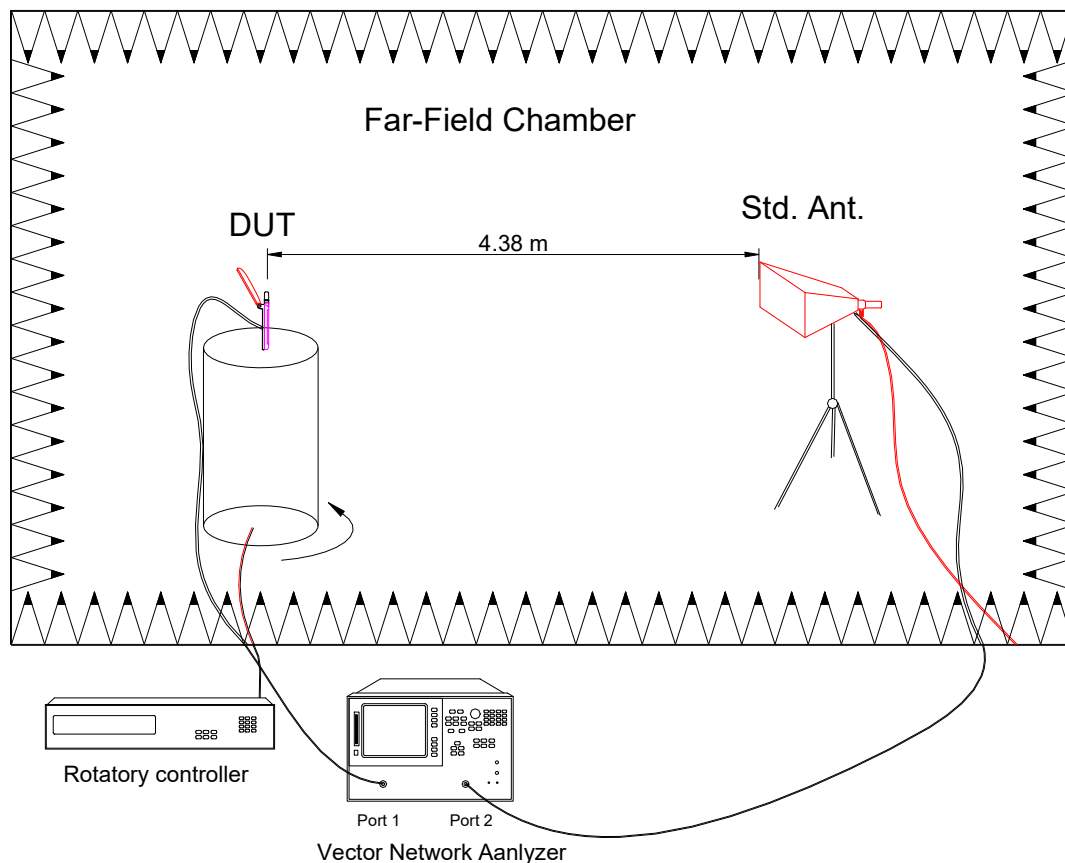

1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)


#### 4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.


UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 靳静	CHECKED BY : 赵付辉		
DESIGNED BY : 董明辰	APPROVED BY : 赵付辉		
TITLE : WA-F-LA-03-295 Specification		DOCUMENT NO.	PAGE REV.
			P1


Frequency (MHz)	2400.0	2450.0	2500.0
Efficiency (%)	40.85	45.59	41.8
Gain (dBi)	2.48	3.3	3.26

## 5. 3D Radiation Pattern Results-2450MHz

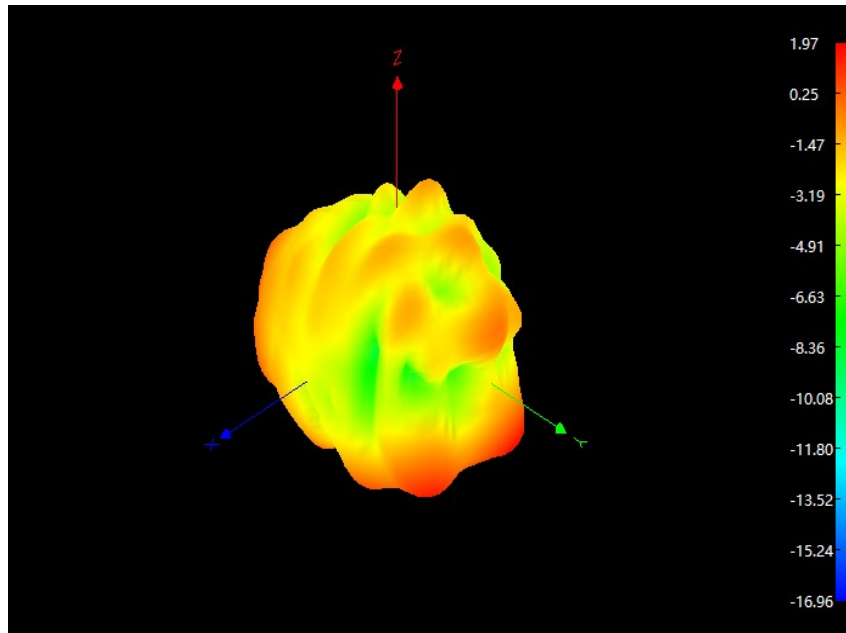


## 6. 2D Radiation Pattern Results-2450MHz


UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 靳静	CHECKED BY : 赵付辉		
DESIGNED BY : 董明辰	APPROVED BY : 赵付辉		
TITLE : WA-F-LA-03-295 Specification		DOCUMENT NO.	PAGE REV.
			P1

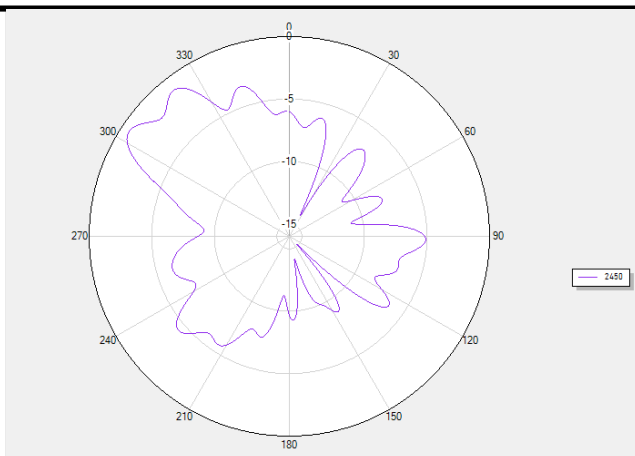

**XY-H-plane**

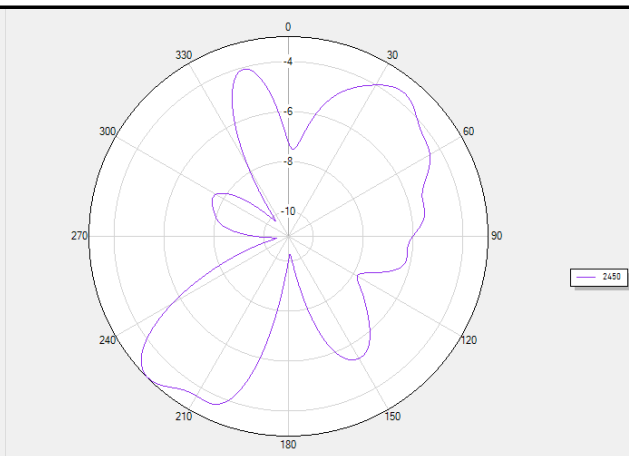

**XZ-E1-plane**

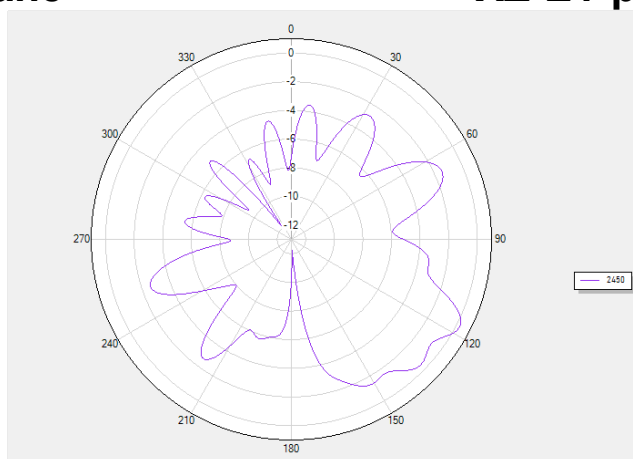


**YZ-E2-plane**

## 7. Mechanical Specification:

### 7-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 靳静	CHECKED BY : 赵付辉		
DESIGNED BY : 董明辰	APPROVED BY : 赵付辉		
TITLE : WA-F-LA-03-295 Specification		DOCUMENT NO.	PAGE REV.
			P1


制造商：禾邦電子(蘇州)有限公司

**INPAQ Technology (Suzhou) Co., Ltd.**

地址：苏州相城区黄埭镇潘阳工业园春秋路 5 号

**No.5,Chunqiu Road,Panyang Industrial Park**

**Huangdai Town,Xiangcheng Zone,Suzhou**

UNLESS OTHER SPECIFIED TOLERANCES ON :			 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=±	X.X=±	X.XX=±		
ANGLES=±		HOLEDIA=±		
SCALE :	UNIT : mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 靳静	CHECKED BY : 赵付辉			
DESIGNED BY : 董明辰	APPROVED BY : 赵付辉			
TITLE : WA-F-LA-03-295 Specification			DOCUMENT NO.	PAGE REV. P1
			PAGE 6	OF 7