

Test Plot 1#: GSM 850_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.180 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.664 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

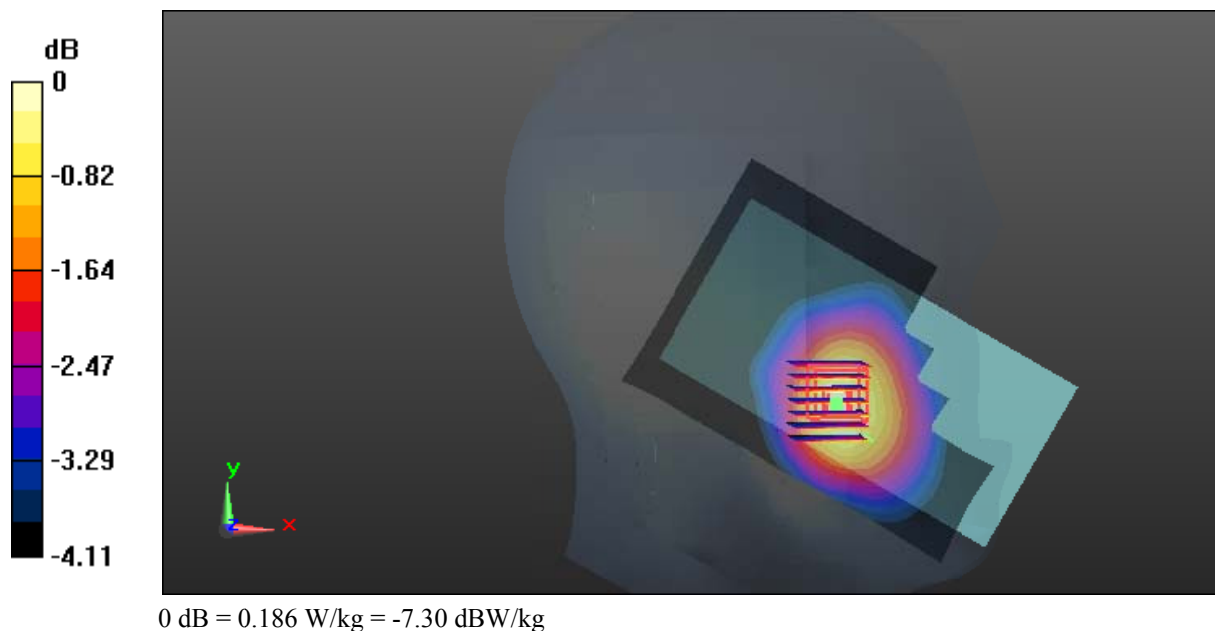

Test Plot 2#: GSM 850_Head Left Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0631 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.021 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0655 W/kg

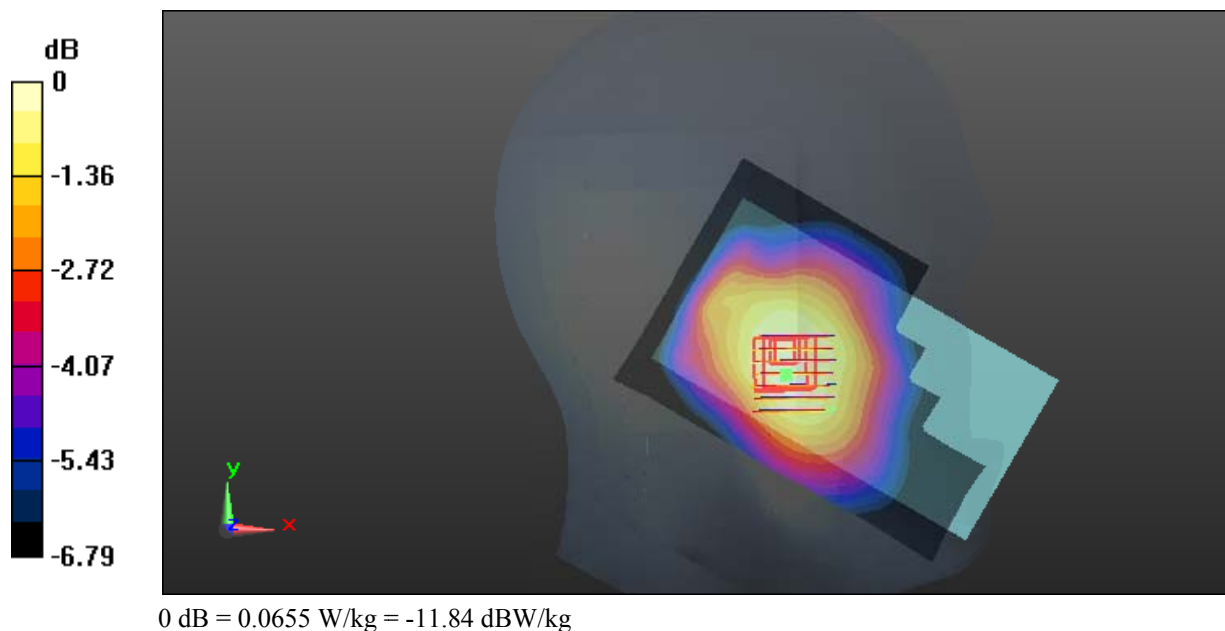

Test Plot 3#: GSM 850_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.179 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

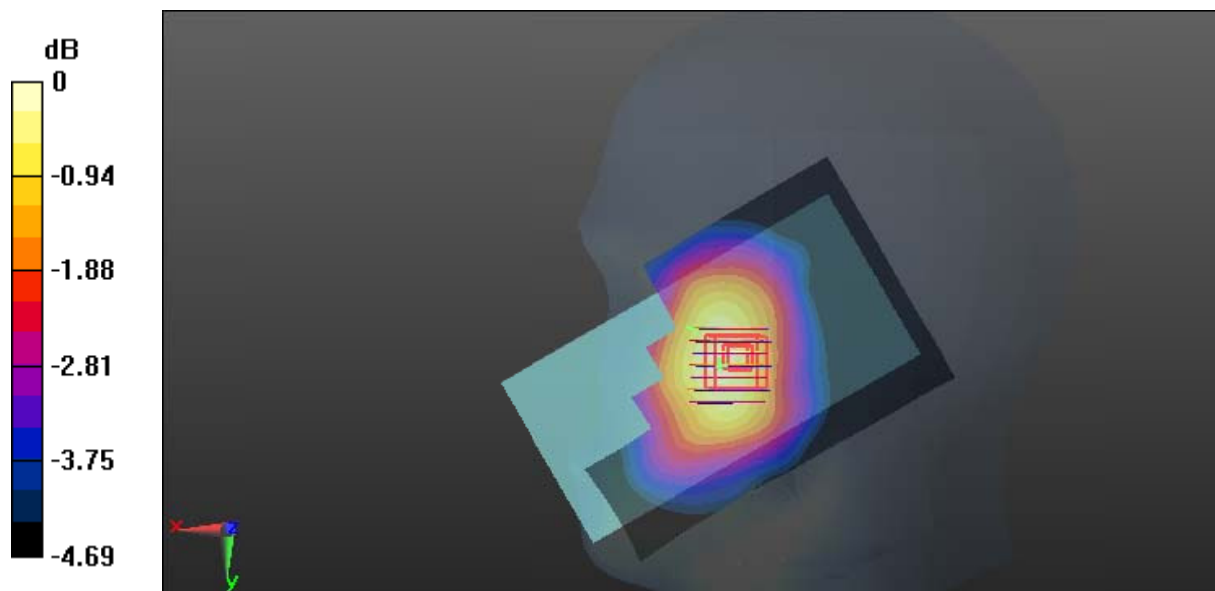

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0586 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.659 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0630 W/kg

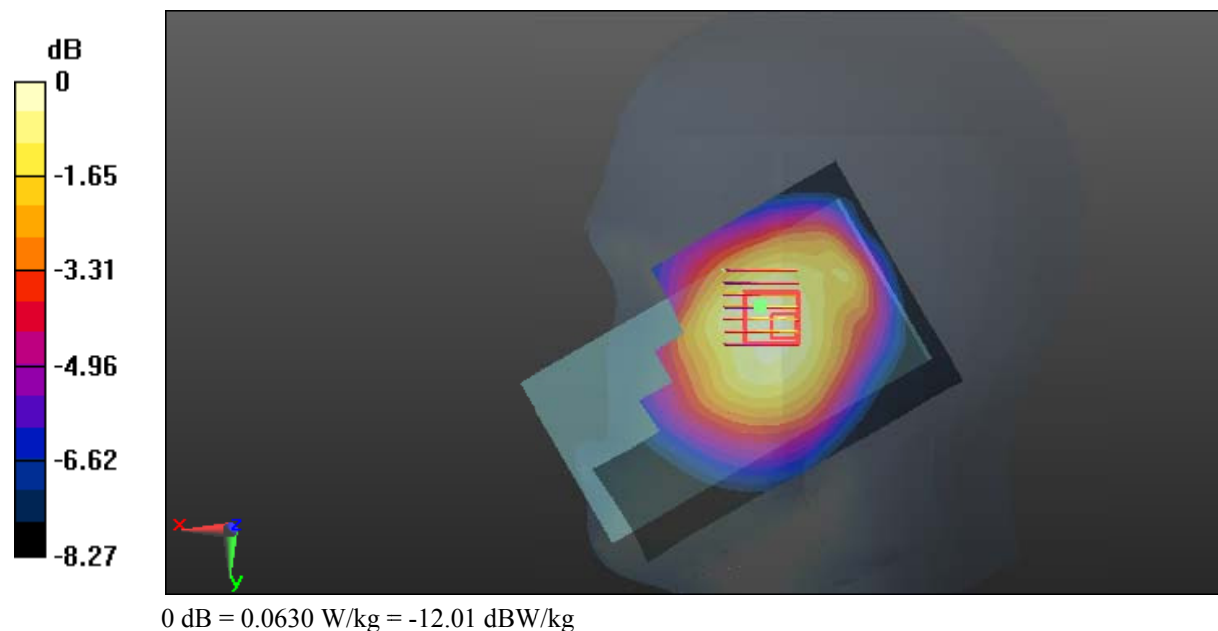

Test Plot 5#: GSM 850_Body Worn Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.259 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.85 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

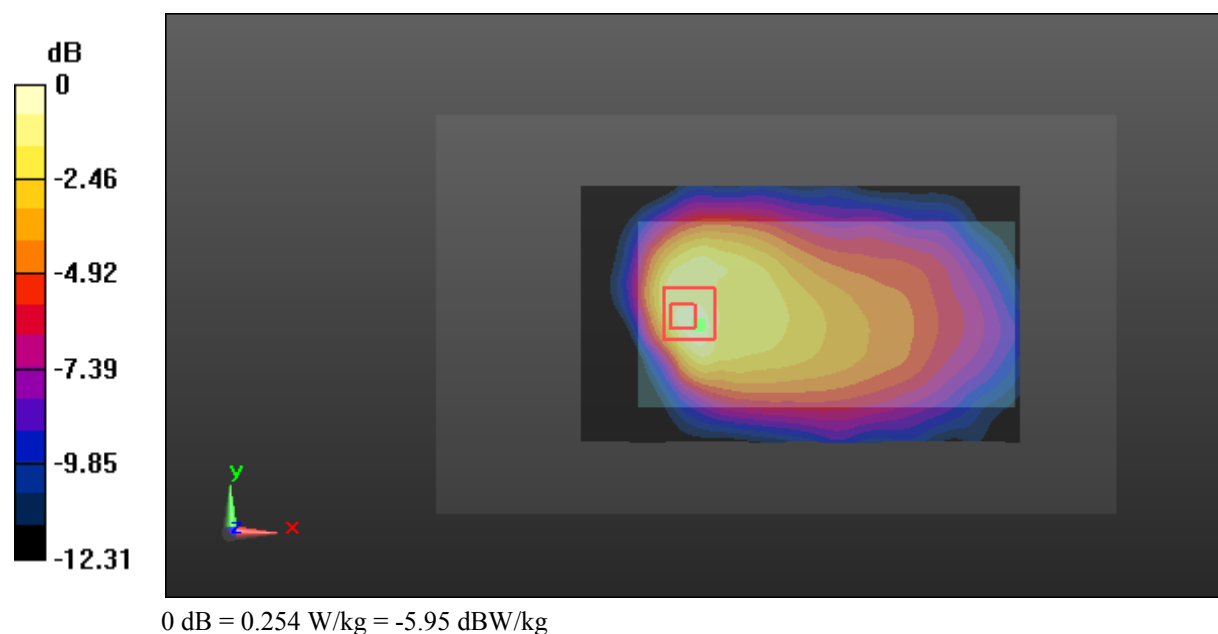

Test Plot 6#: GSM 850_Body Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.422 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.31 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

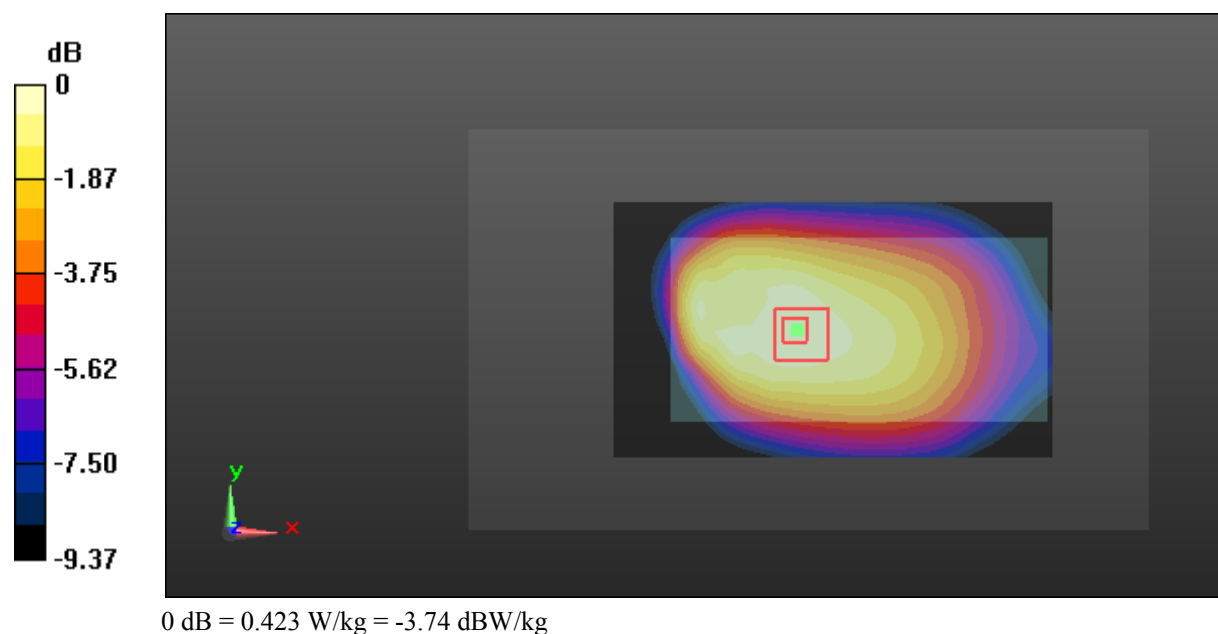

Test Plot 7#: GSM 850_Body Left_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0868 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.266 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0866 W/kg

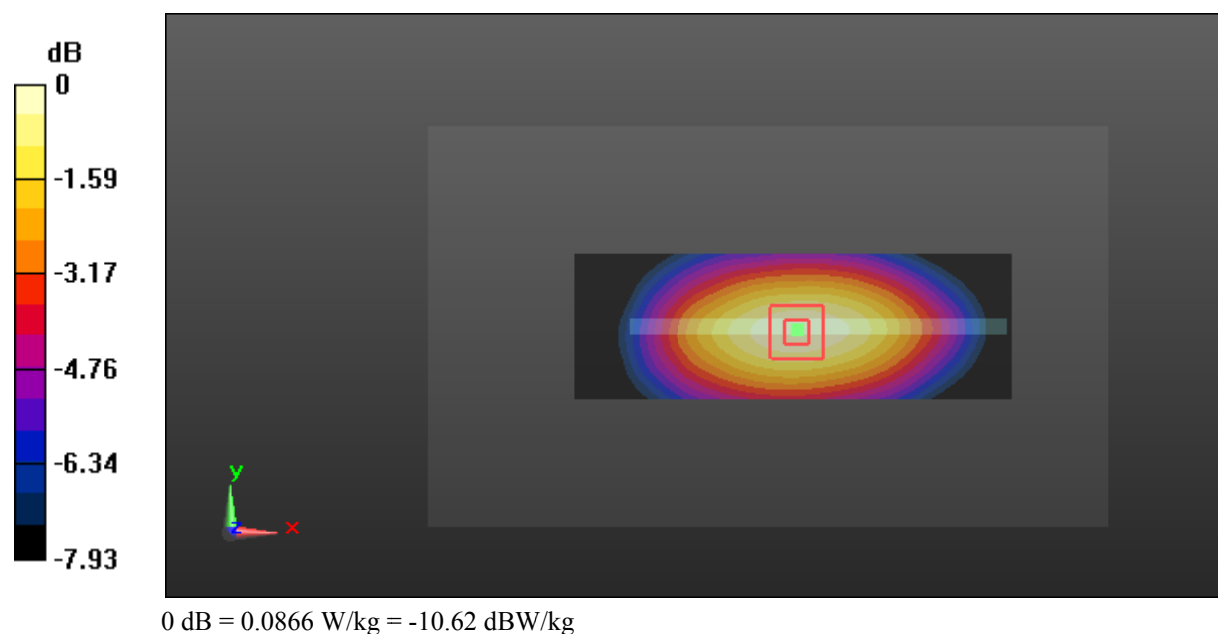

Test Plot 8#: GSM 850_Body Right_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0634 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.834 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0636 W/kg

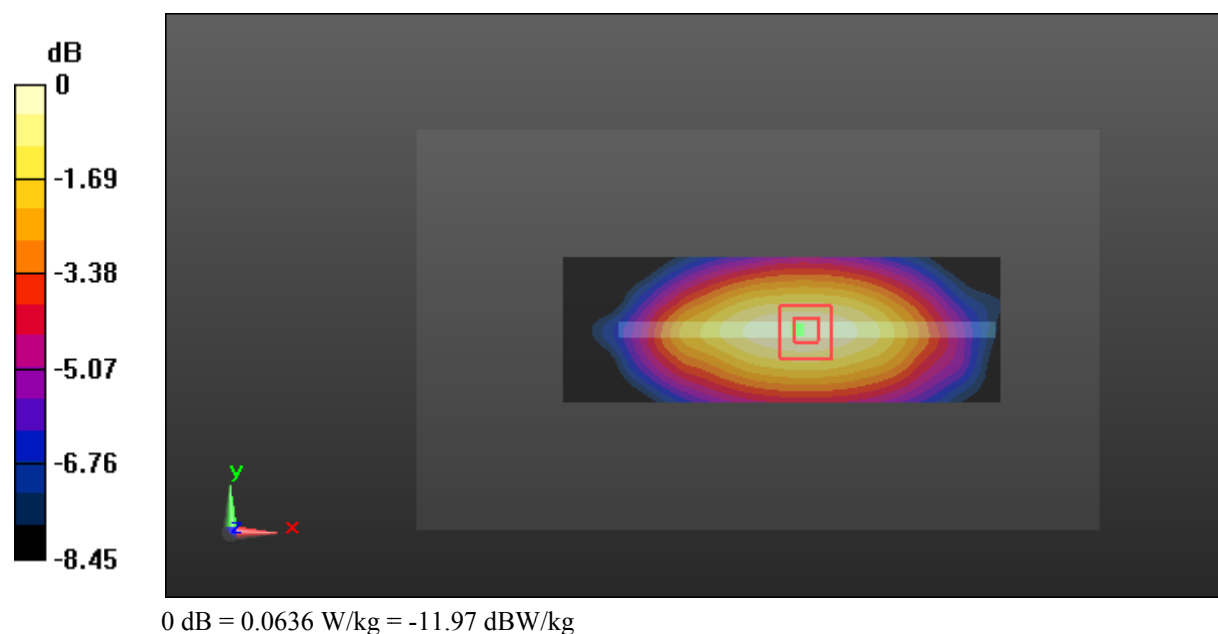

Test Plot 9#: GSM 850_Body Bottom_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0364 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.924 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0373 W/kg

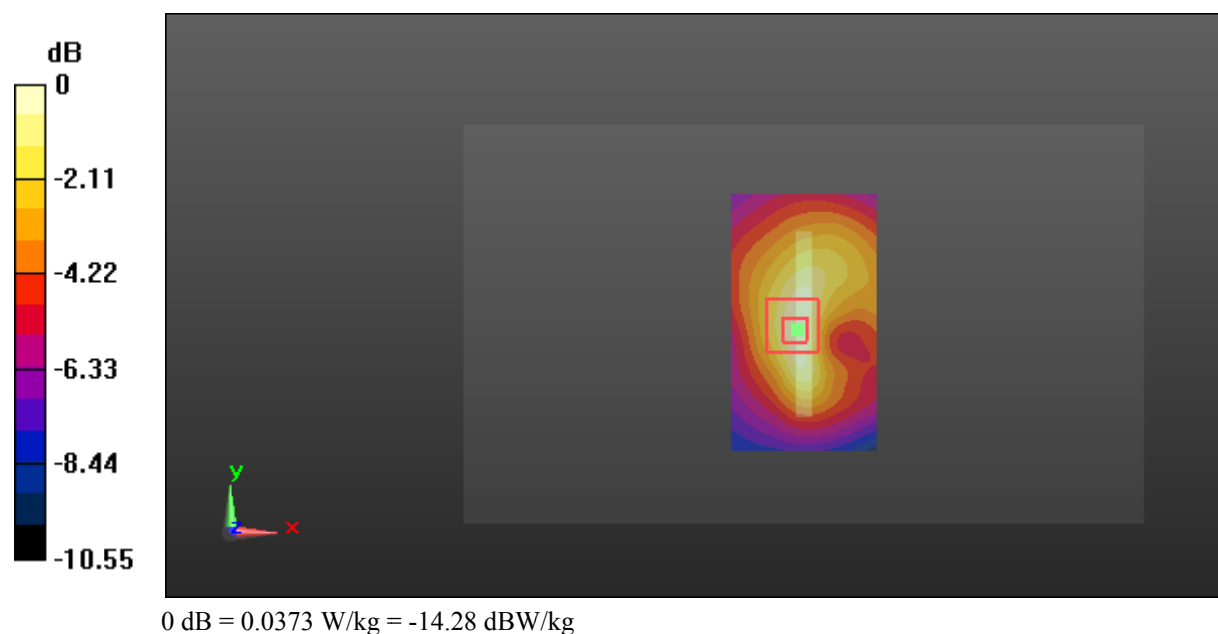

Test Plot 10#: GSM 1900_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.869 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

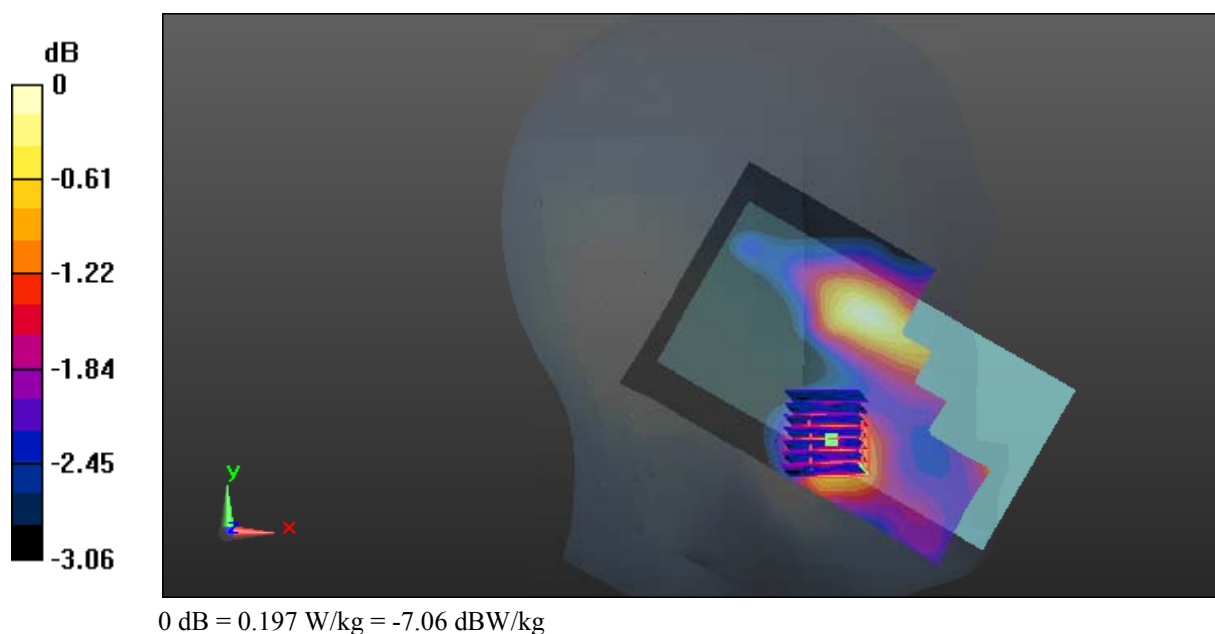


Test Plot 11#: GSM 1900_Head Left Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: 1880 MHz; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 40.891$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

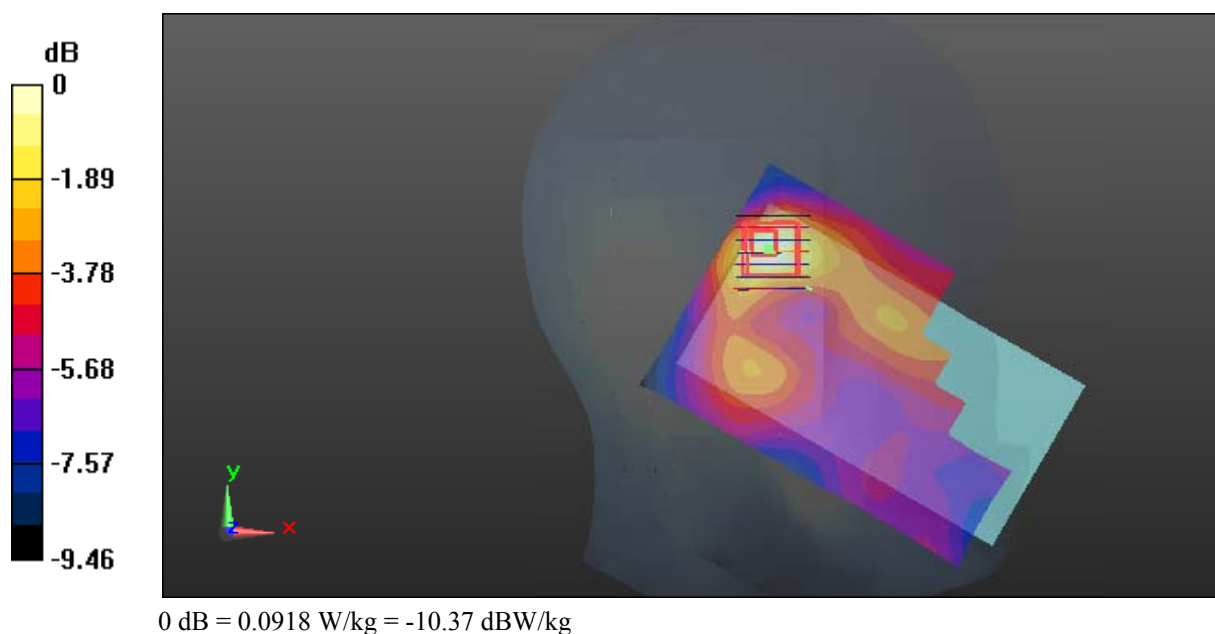Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0991 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.842 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.185 W/kg **SAR(1 g) = 0.086 W/kg ; SAR(10 g) = 0.047 W/kg** Maximum value of SAR (measured) = 0.0918 W/kg 

Test Plot 12#: GSM 1900_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.618 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

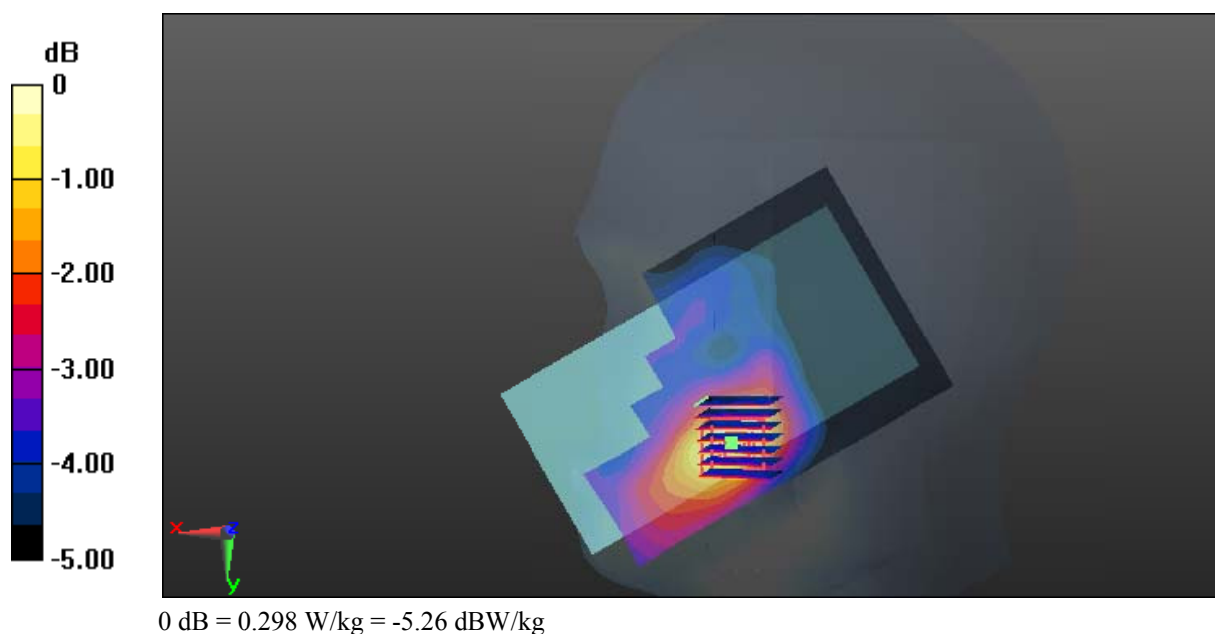

Test Plot 13#: GSM 1900_Head Right Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0788 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.778 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0780 W/kg

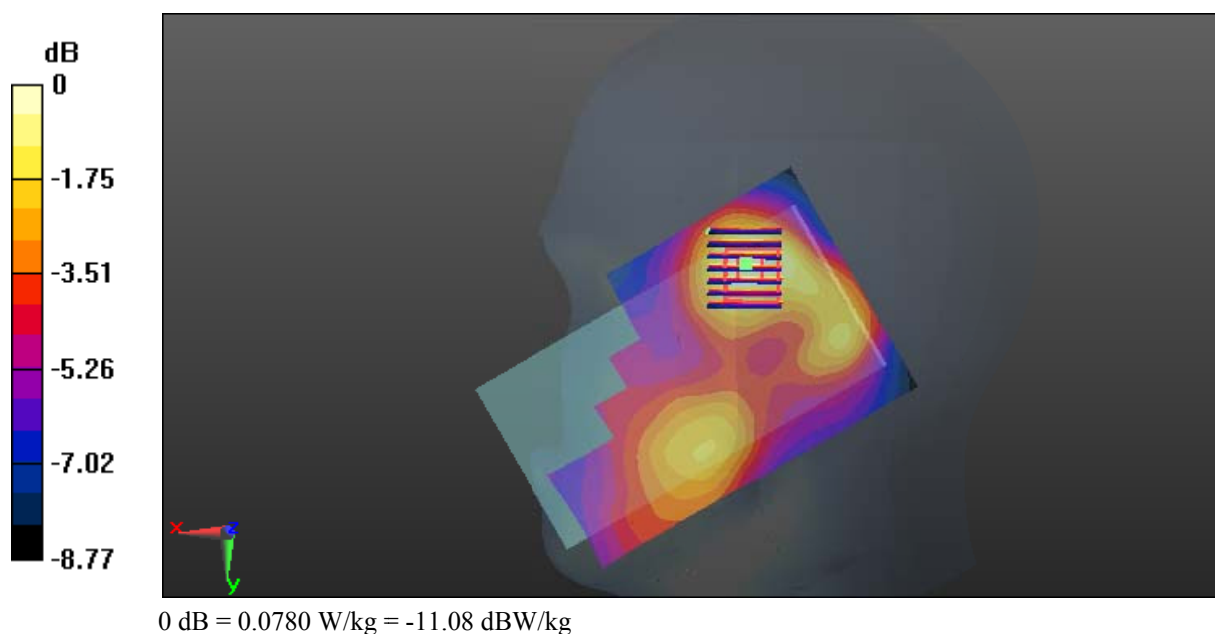

Test Plot 14#: GSM 1900_Body Worn Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.574 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

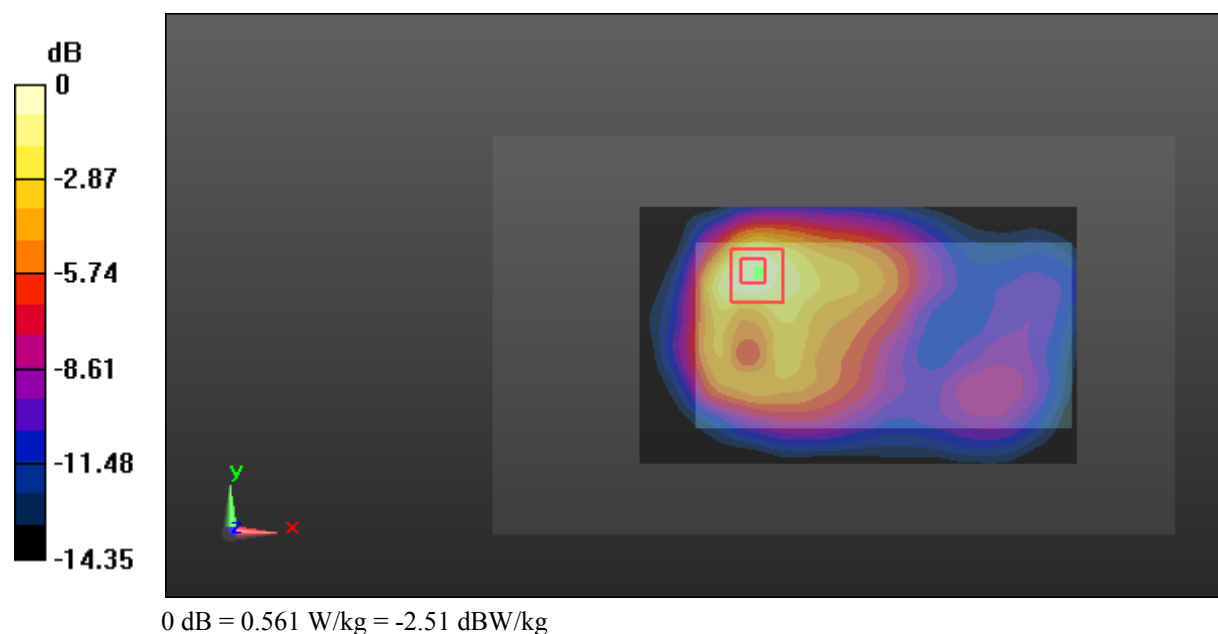

Test Plot 15#: GSM 1900_Body Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.894 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.59 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.400 W/kg

Maximum value of SAR (measured) = 0.789 W/kg

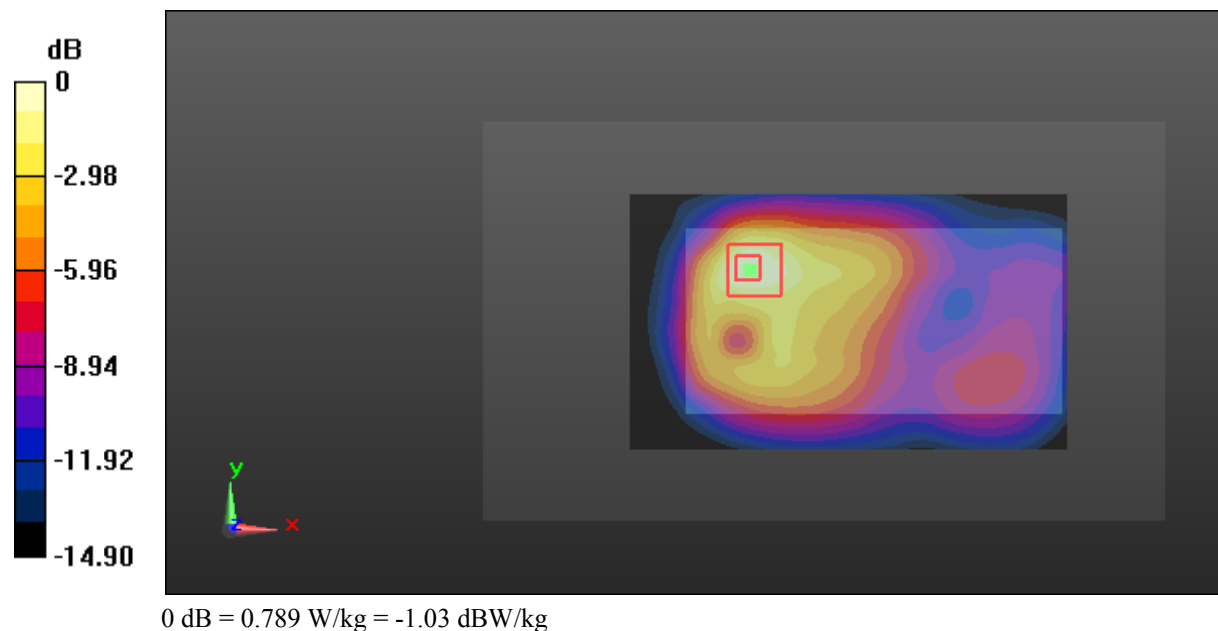

Test Plot 16#: GSM 1900_Body Left_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.06 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

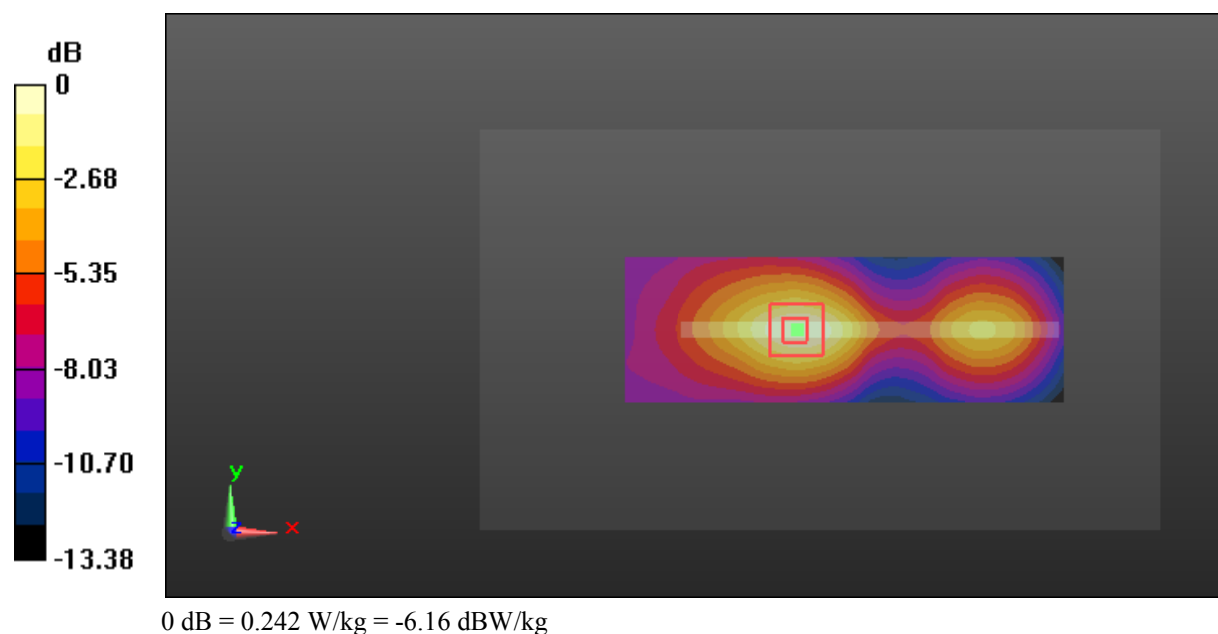

Test Plot 17#: GSM 1900_Body Right_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.27 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

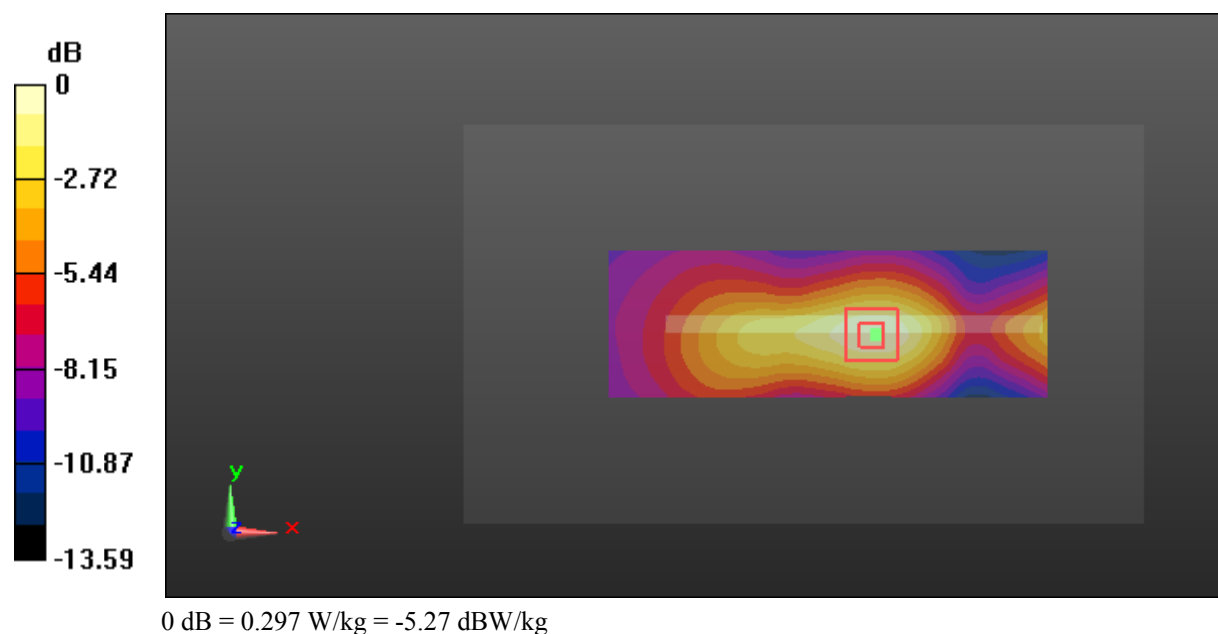

Test Plot 18#: GSM 1900_Body Bottom_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic GPRS-3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.390 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.62 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

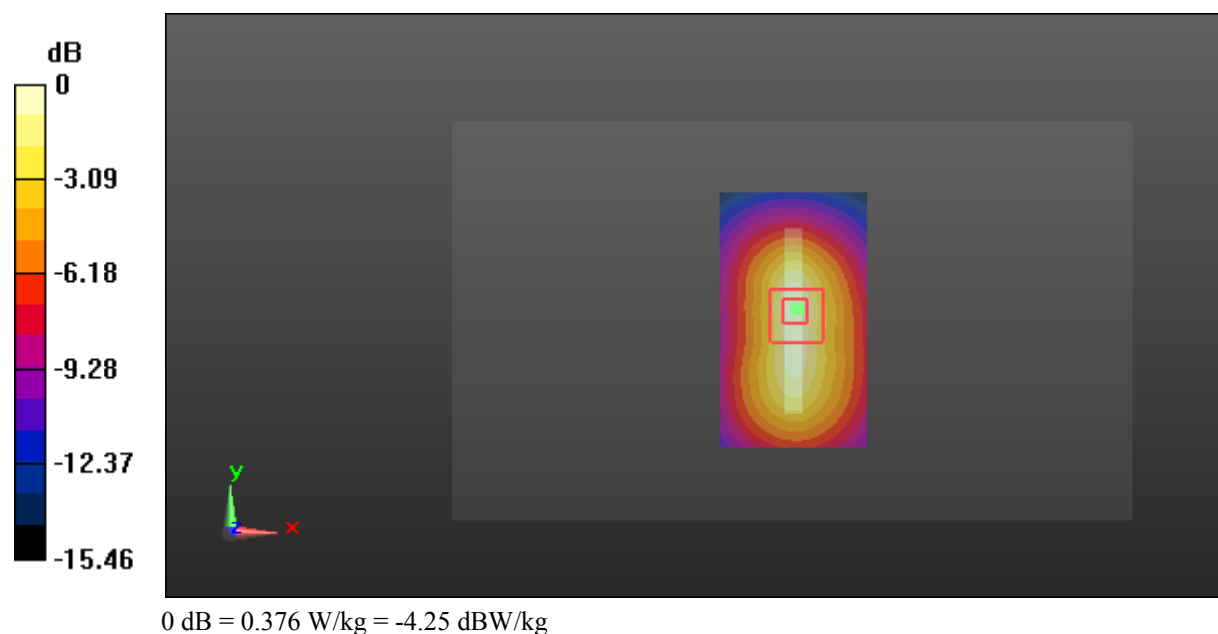

Test Plot 19#: WCDMA Band 2_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.408 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

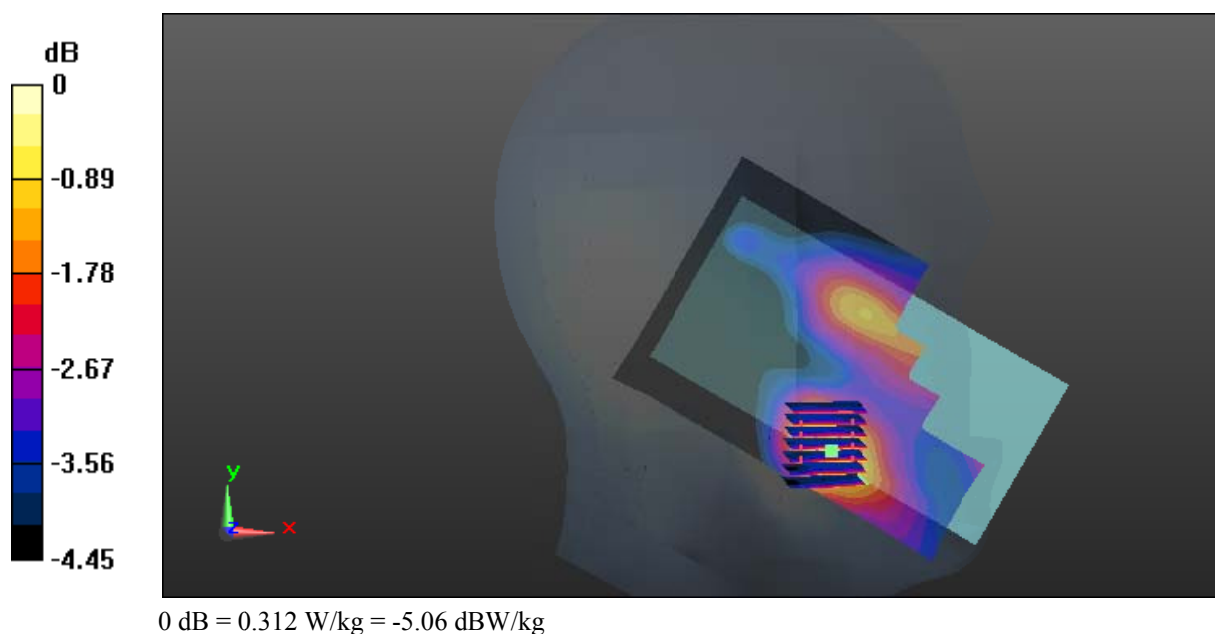

Test Plot 20#: WCDMA Band 2_Head Left Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.146 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.333 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

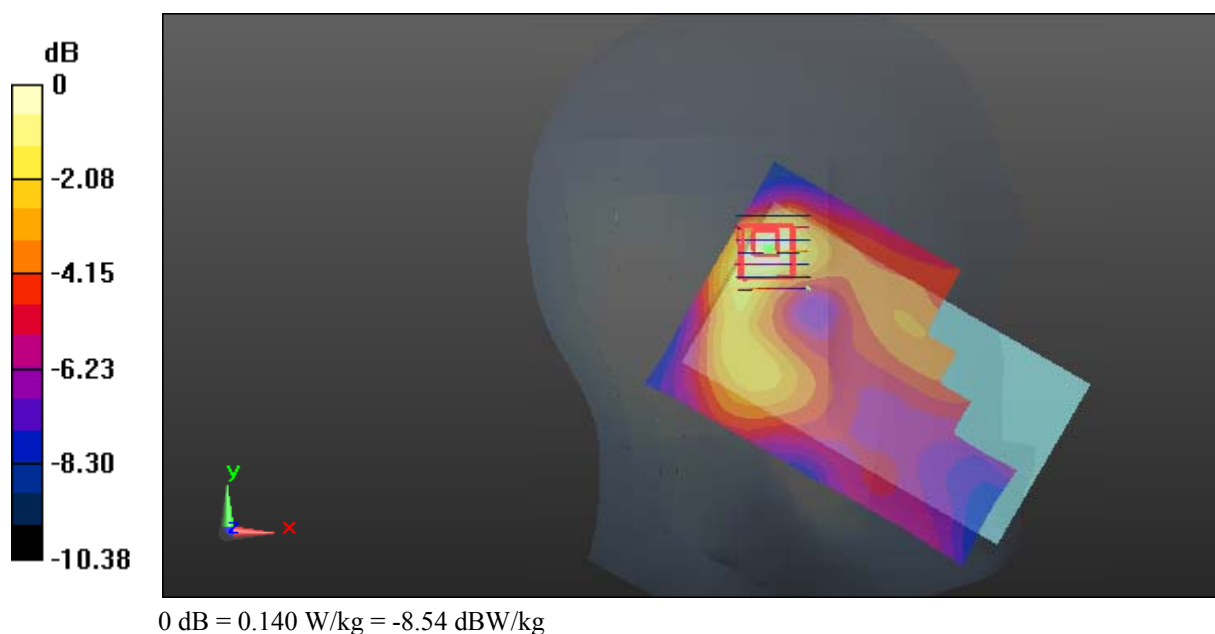

Test Plot 21#: WCDMA Band 2_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.446 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.195 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

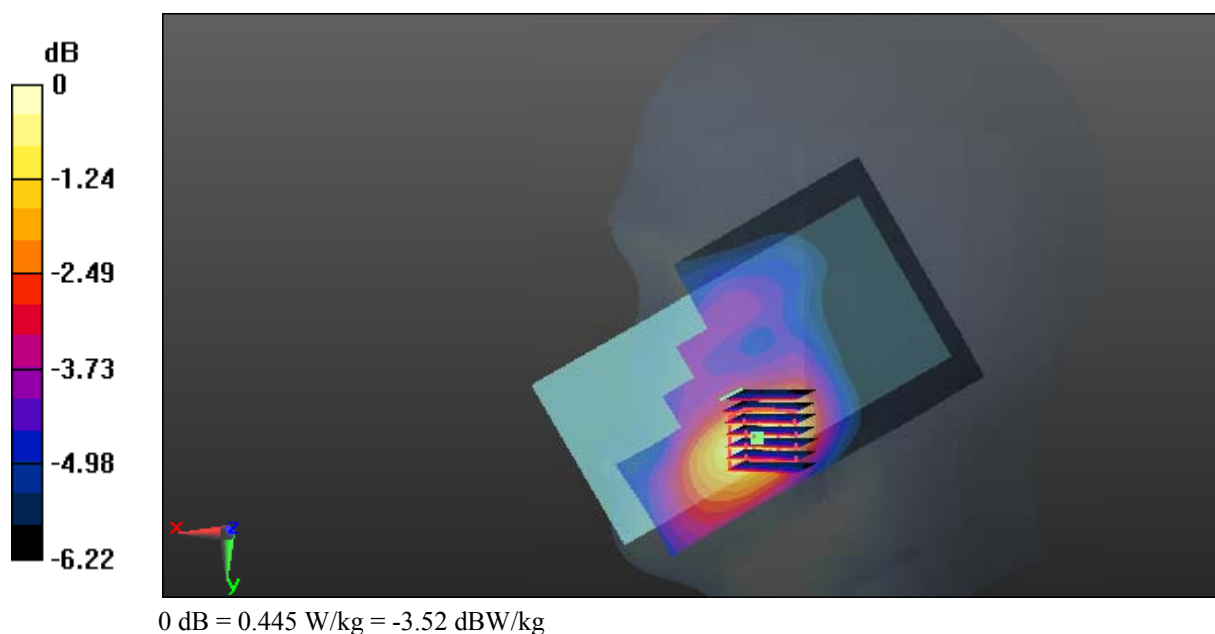

Test Plot 22#: WCDMA Band 2_Head Right Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.142 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.603 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

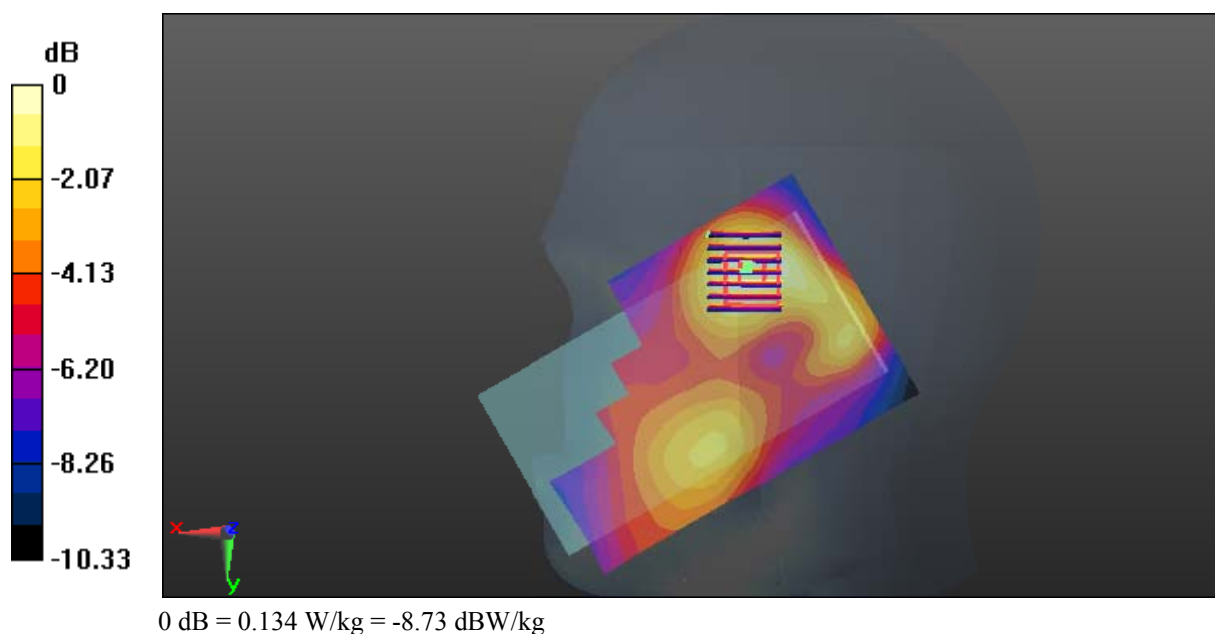

Test Plot 23#: WCDMA Band 2_Body Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.460 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.03 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

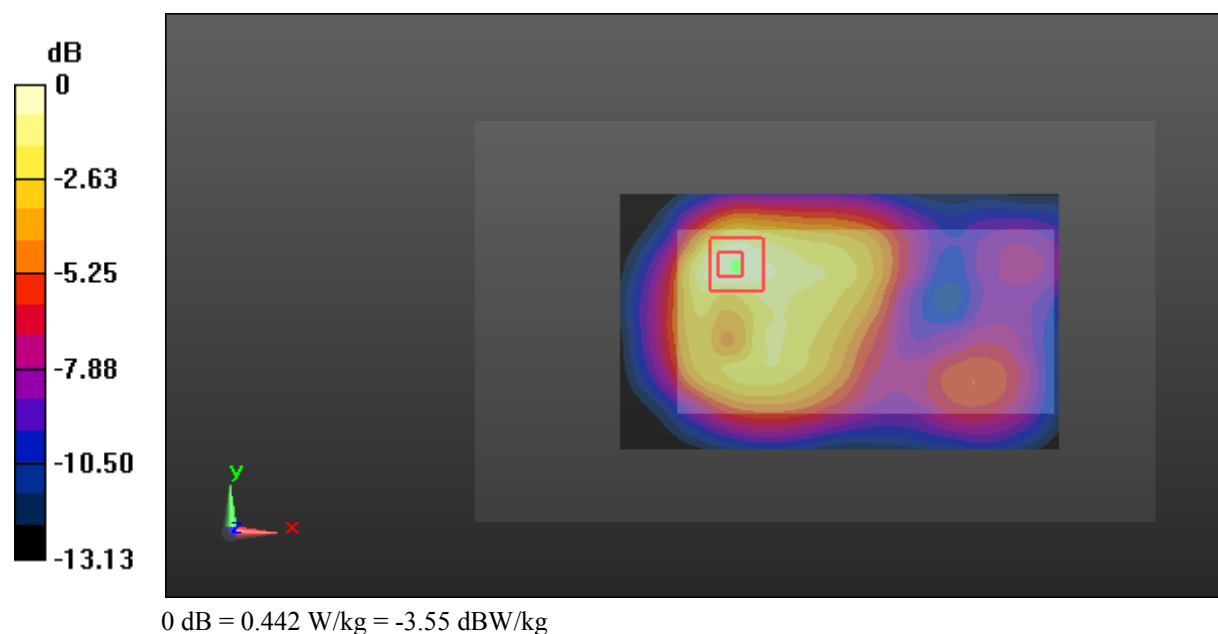

Test Plot 24#: WCDMA Band 2_Body Left_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.234 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

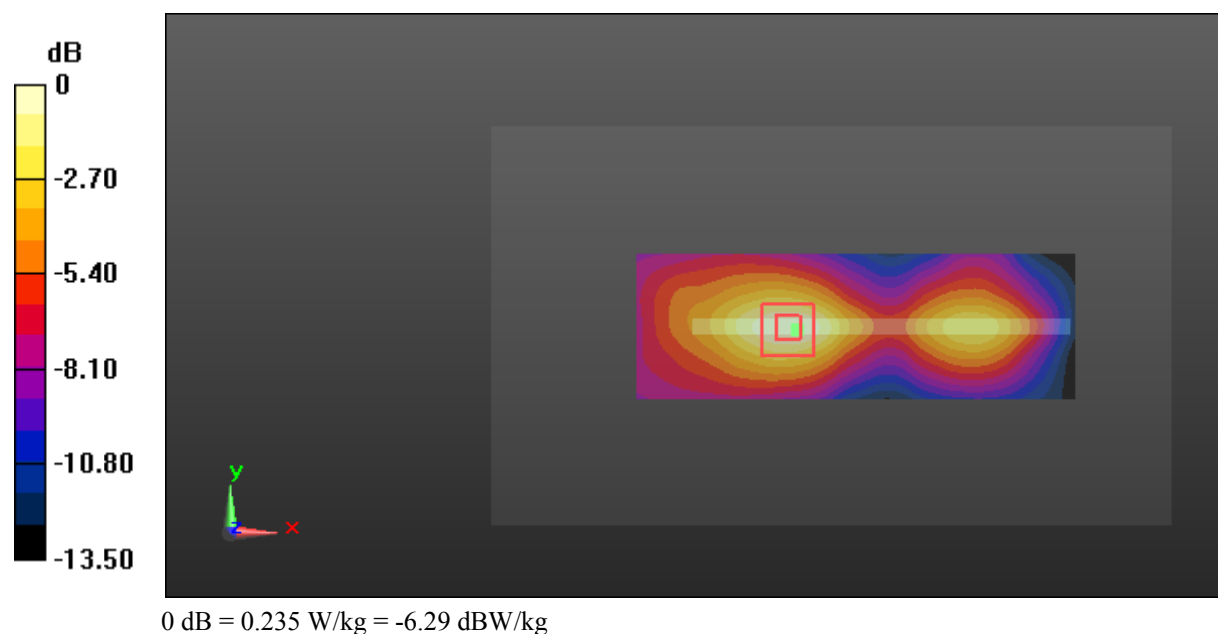

Test Plot 25#: WCDMA Band 2_Body Right_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

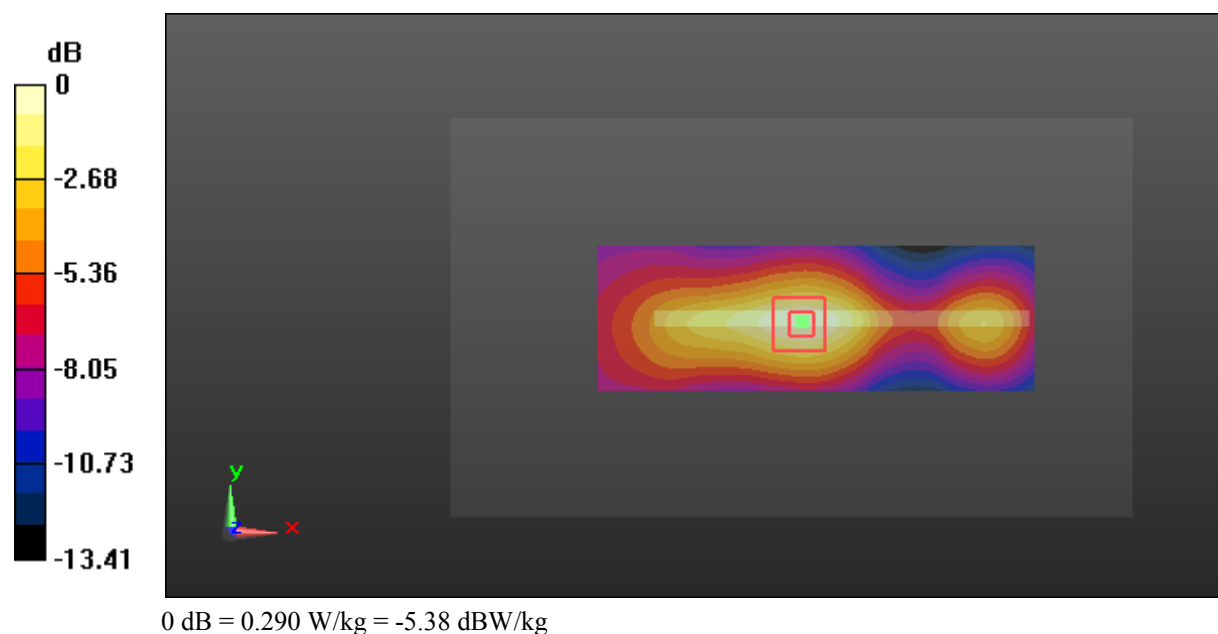

Test Plot 26#: WCDMA Band 2_Body Bottom_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.321 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

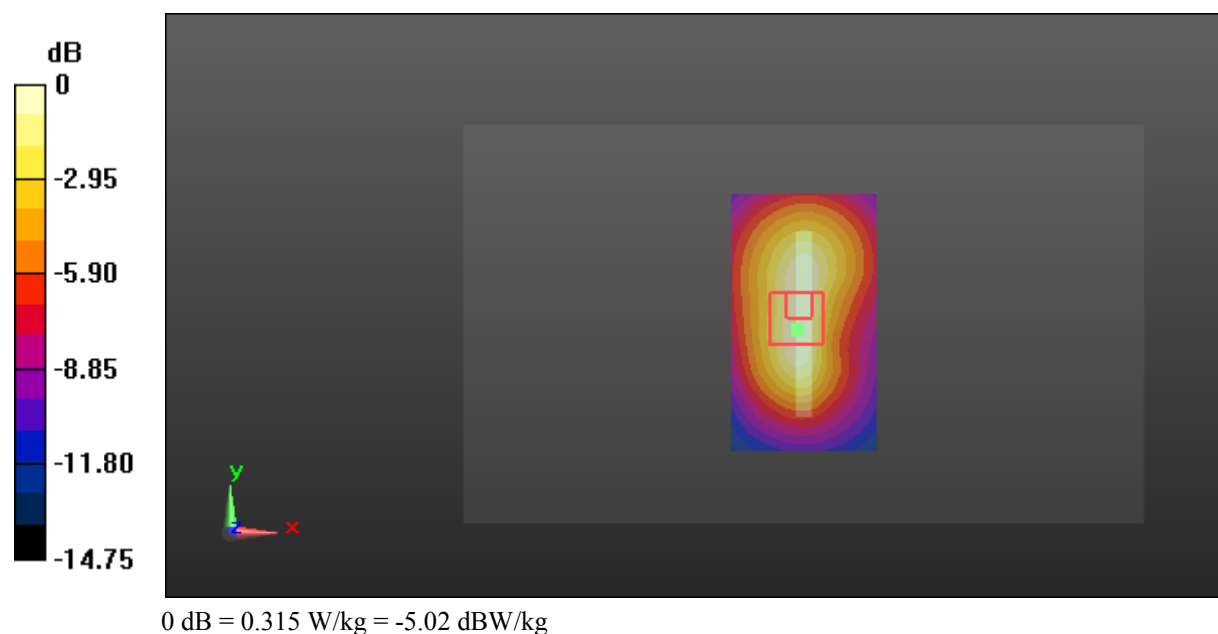

Test Plot 27#: WCDMA Band 4_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.434$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.096 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

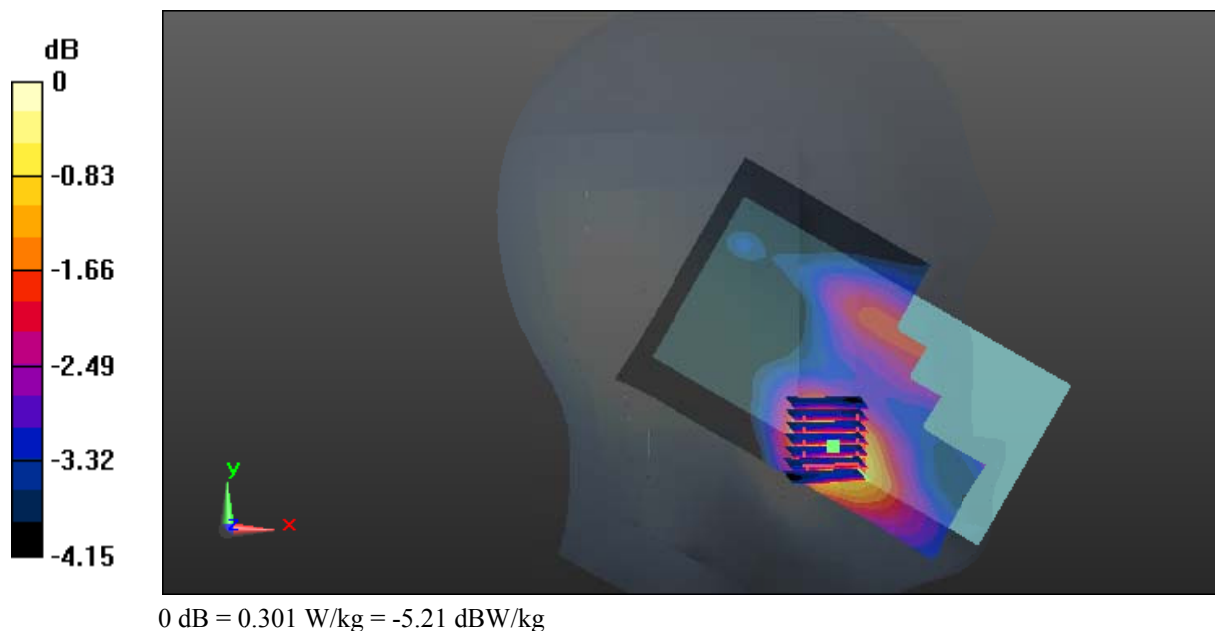

Test Plot 28#: WCDMA Band 4_Head Left Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.434$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.124 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.126 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

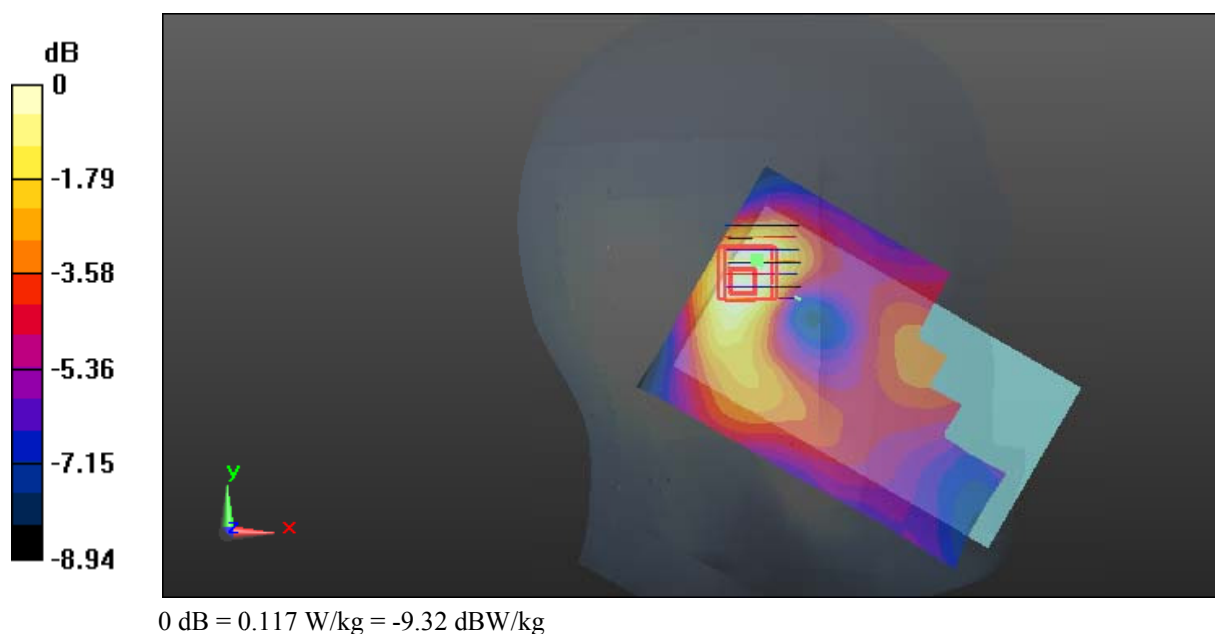

Test Plot 29#: WCDMA Band 4_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.434$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.380 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.694 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

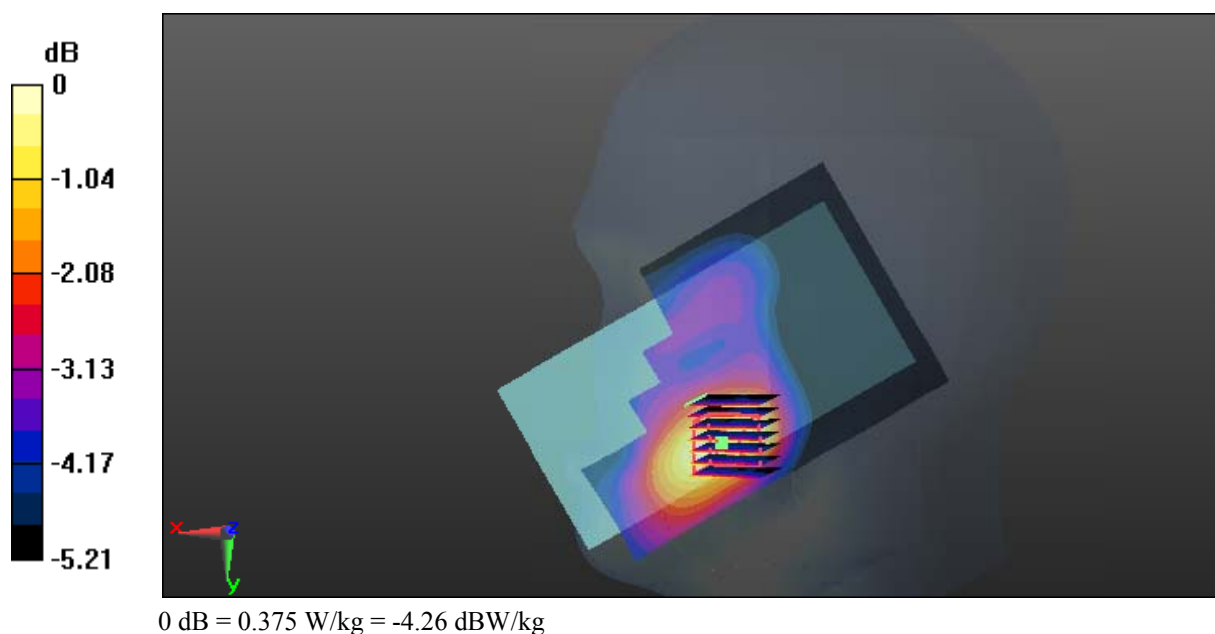

Test Plot 30#: WCDMA Band 4_Head Right Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.434$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.389 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

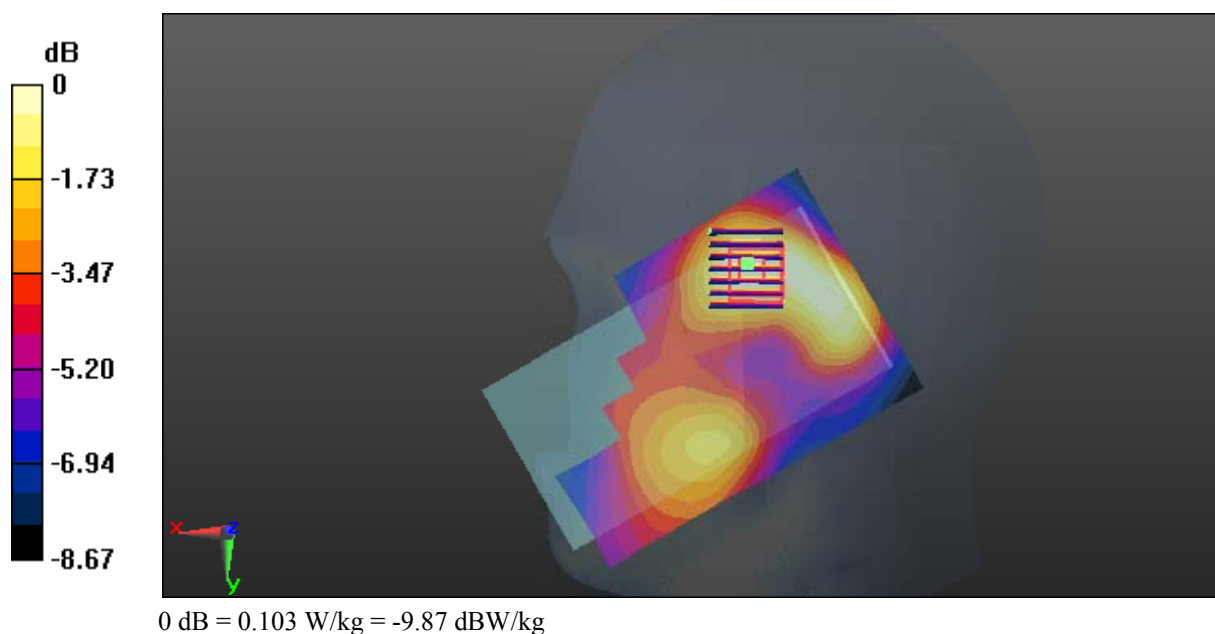

Test Plot 31#: WCDMA Band 4_Body Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.452$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.546 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.92 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.508 W/kg

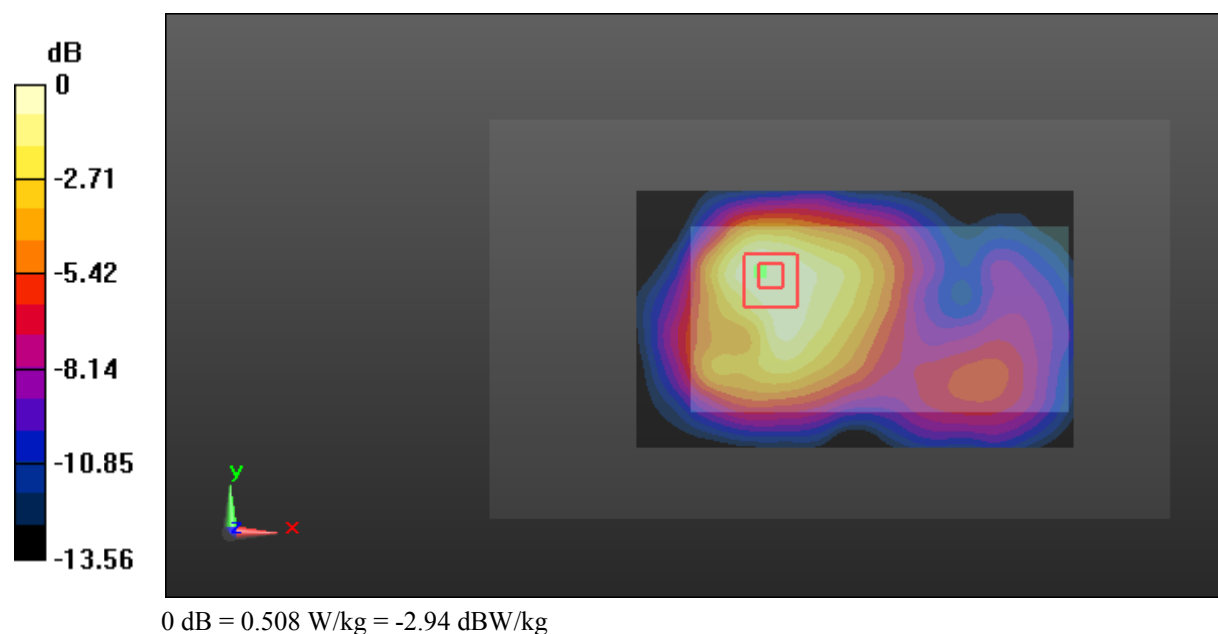

Test Plot 32#: WCDMA Band 4_Body Left_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.452$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.150 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.703 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

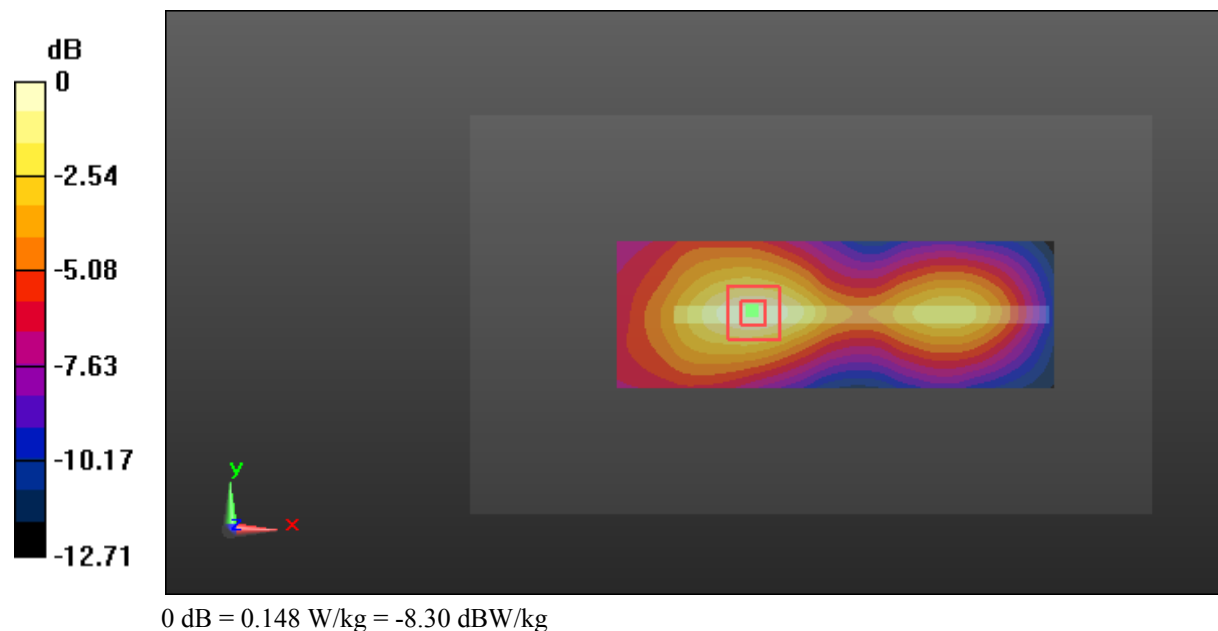

Test Plot 33#: WCDMA Band 4_Body Right_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.452$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.289 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.15 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

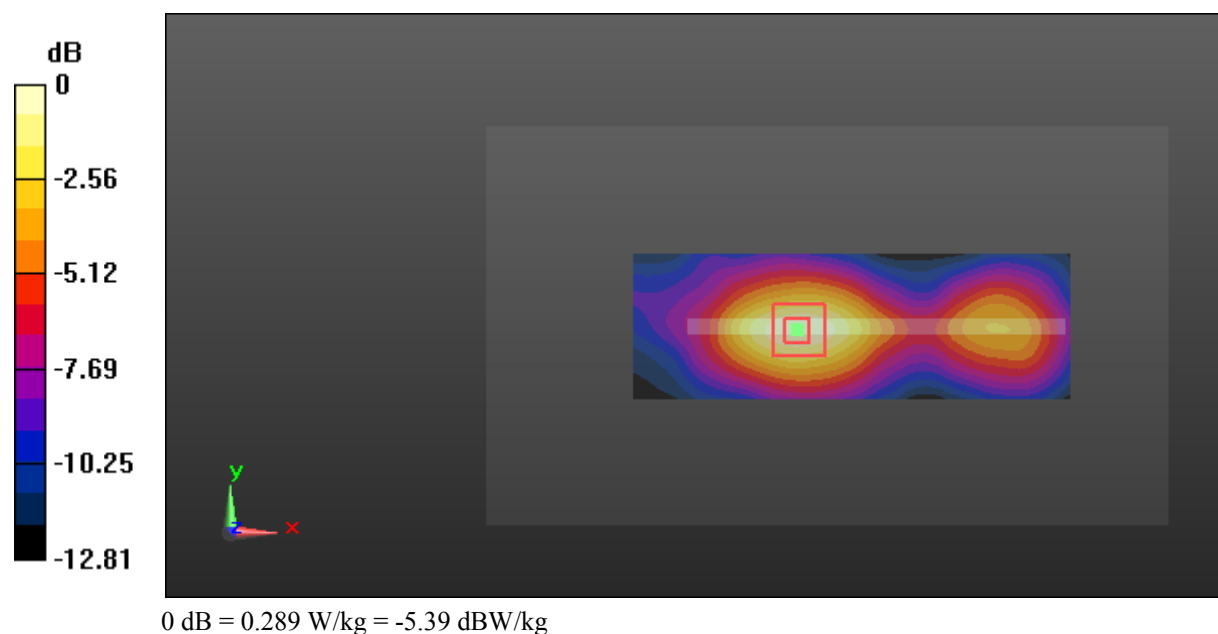

Test Plot 34#: WCDMA Band 4_Body Bottom_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.6 MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.452$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.333 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.77 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

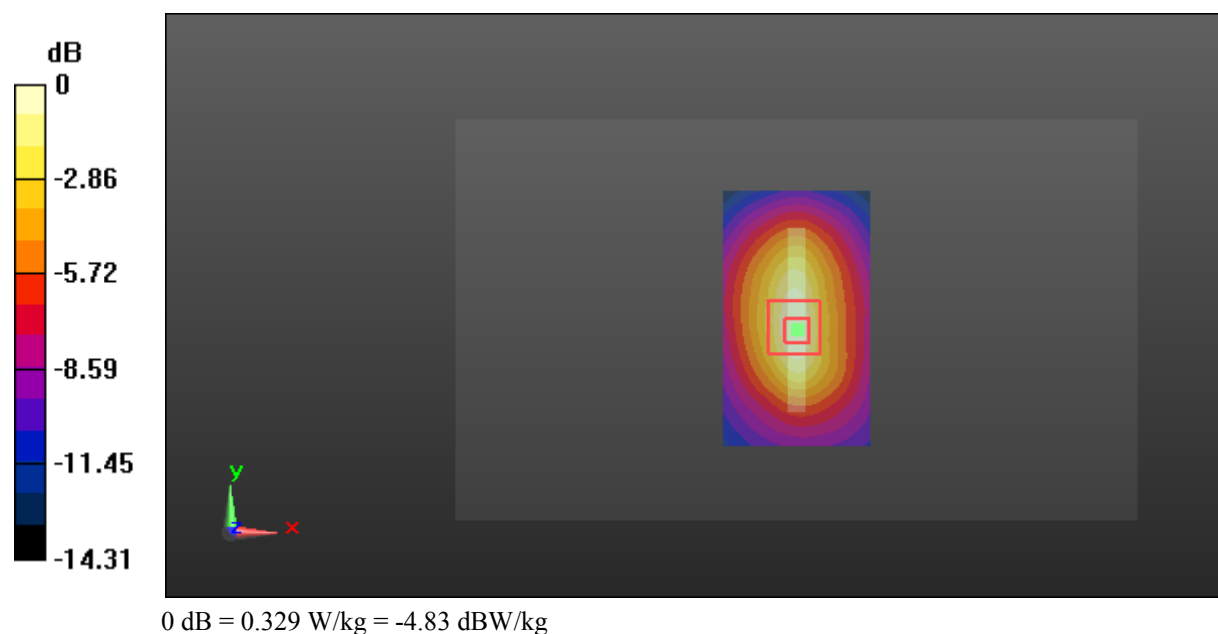

Test Plot 35#: WCDMA Band 5_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0893 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.715 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.0938 W/kg

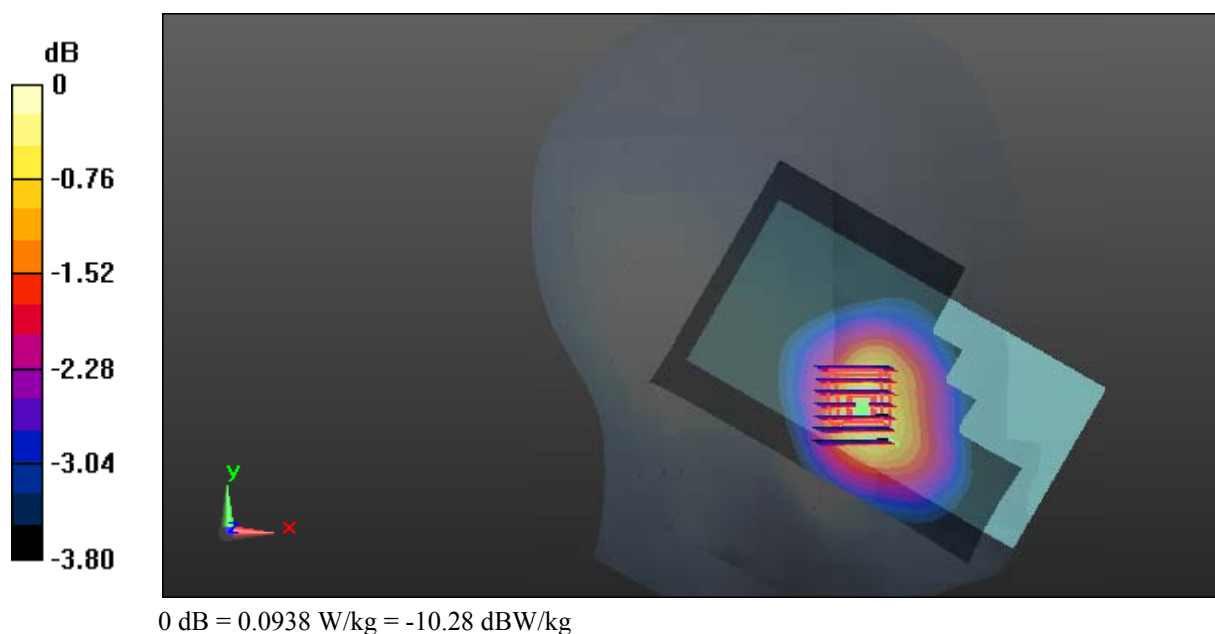

Test Plot 36#: WCDMA Band 5_Head Left Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0330 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.305 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0347 W/kg

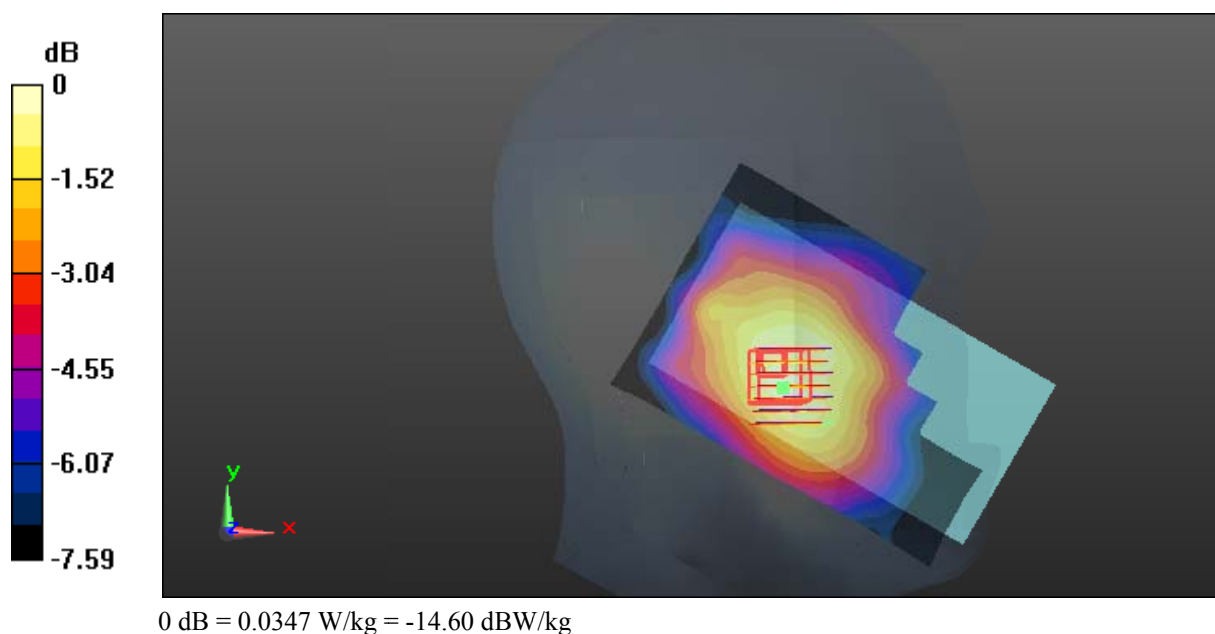

Test Plot 37#: WCDMA Band 5_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0643 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.362 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0625 W/kg

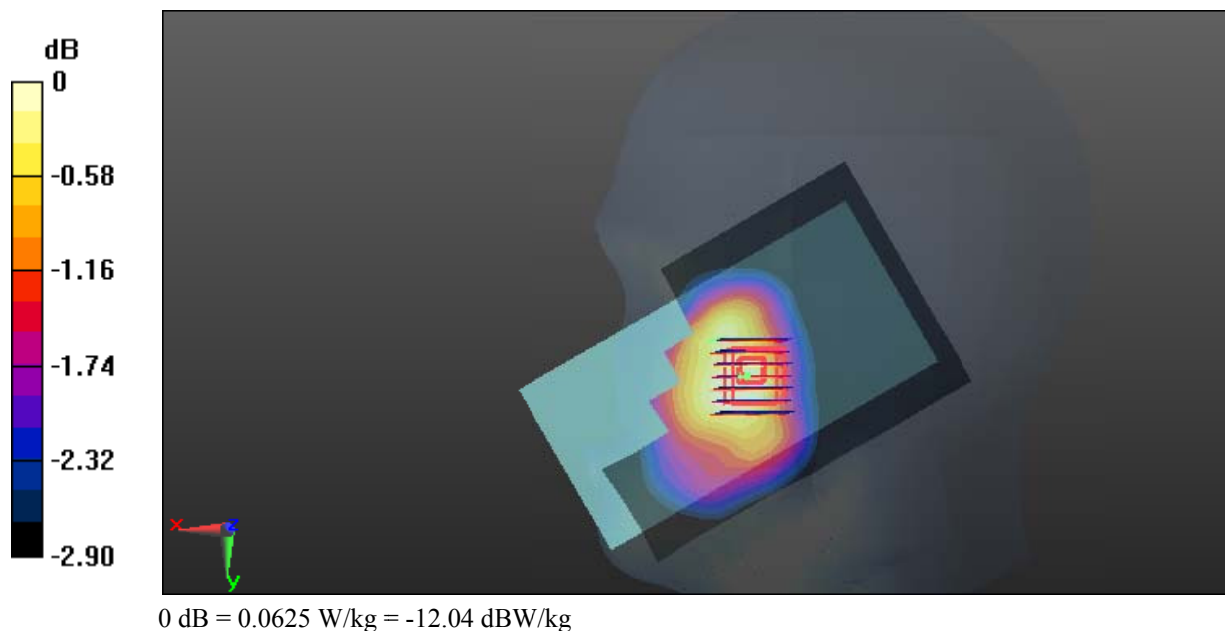

Test Plot 38#: WCDMA Band 5_Head Right Tilt_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0323 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.337 V/m; Power Drift = -0.53 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0292 W/kg

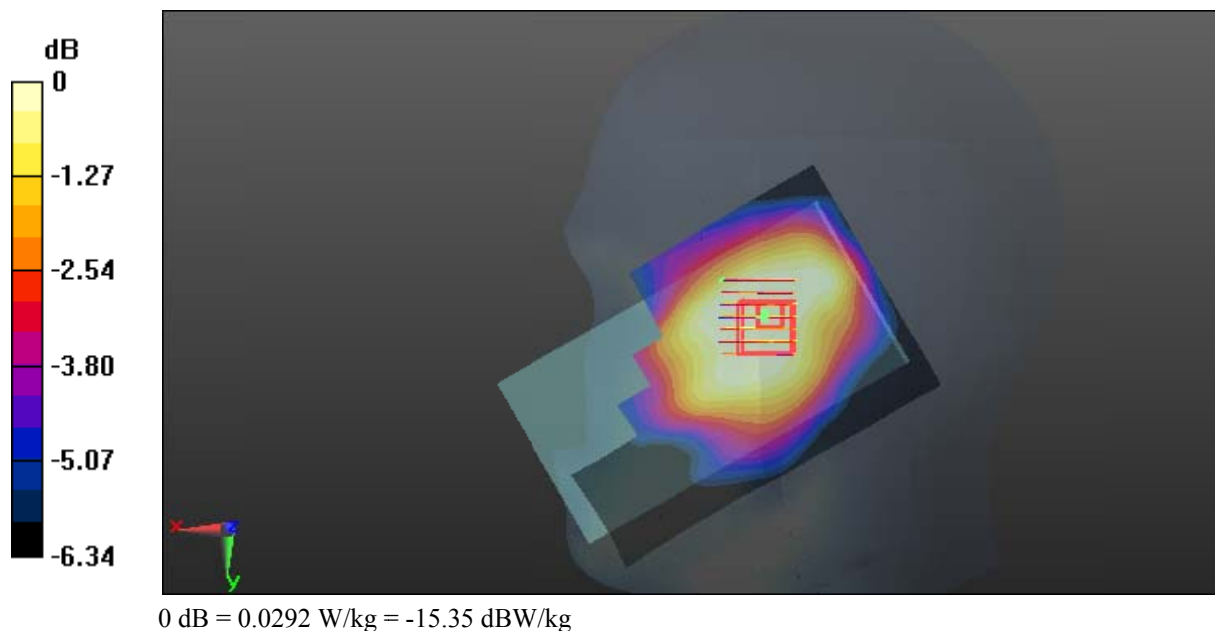

Test Plot 39#: WCDMA Band 5_Body Back_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

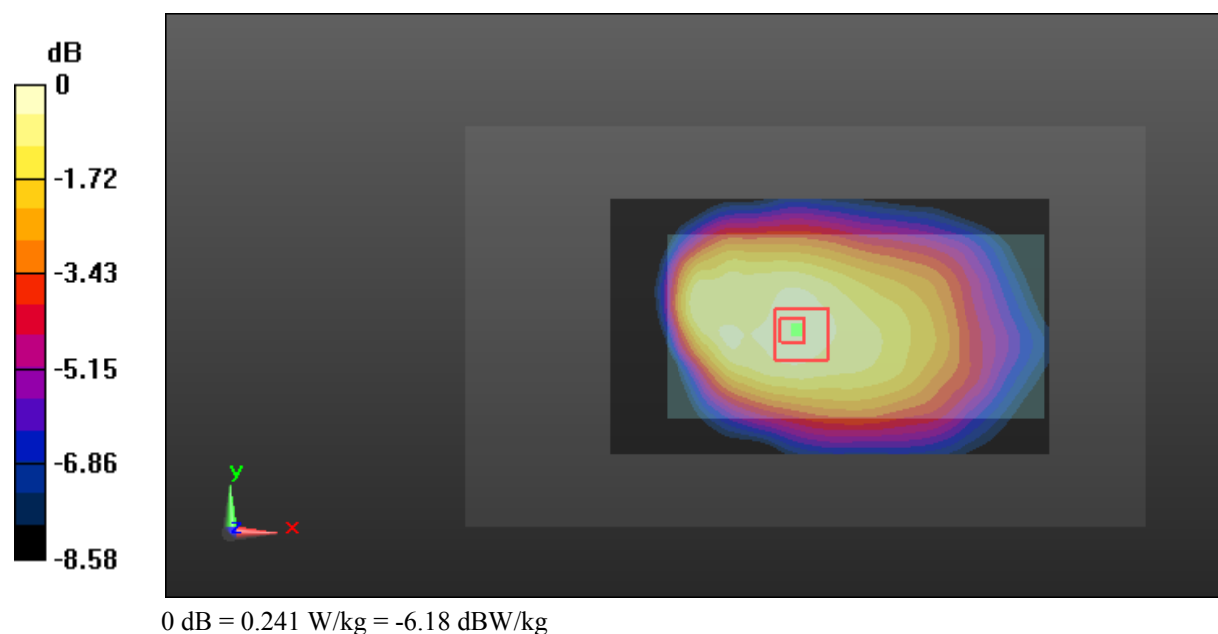

Test Plot 40#: WCDMA Band 5_Body Left_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0427 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.262 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0435 W/kg

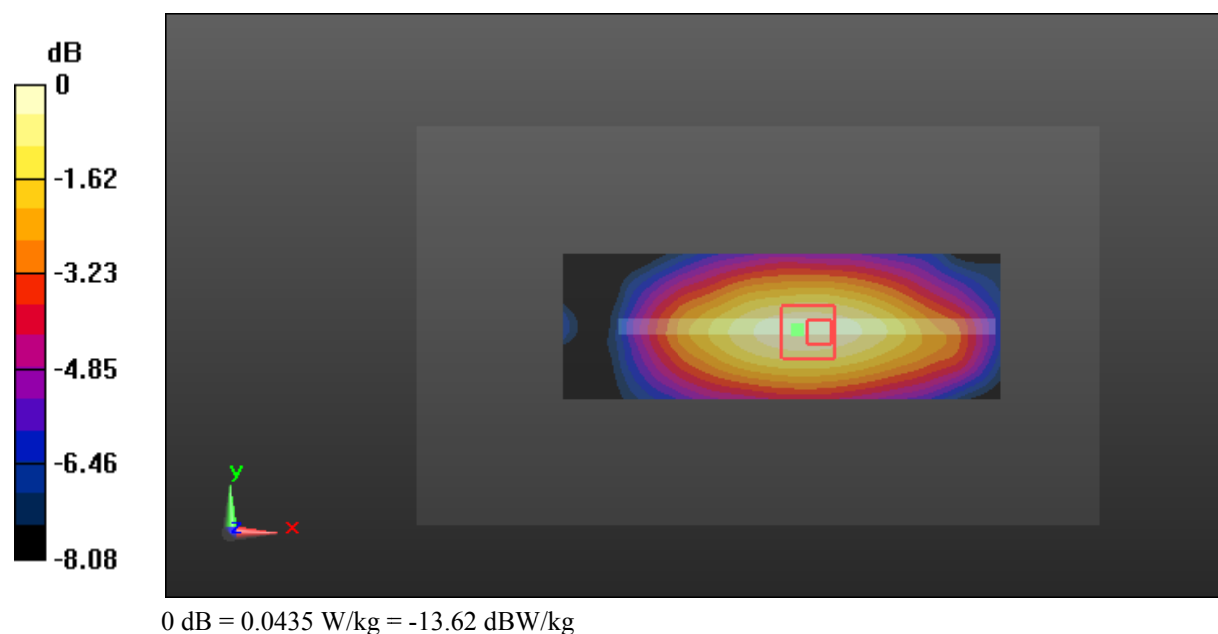

Test Plot 41#: WCDMA Band 5_Body Right_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0362 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.764 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0397 W/kg

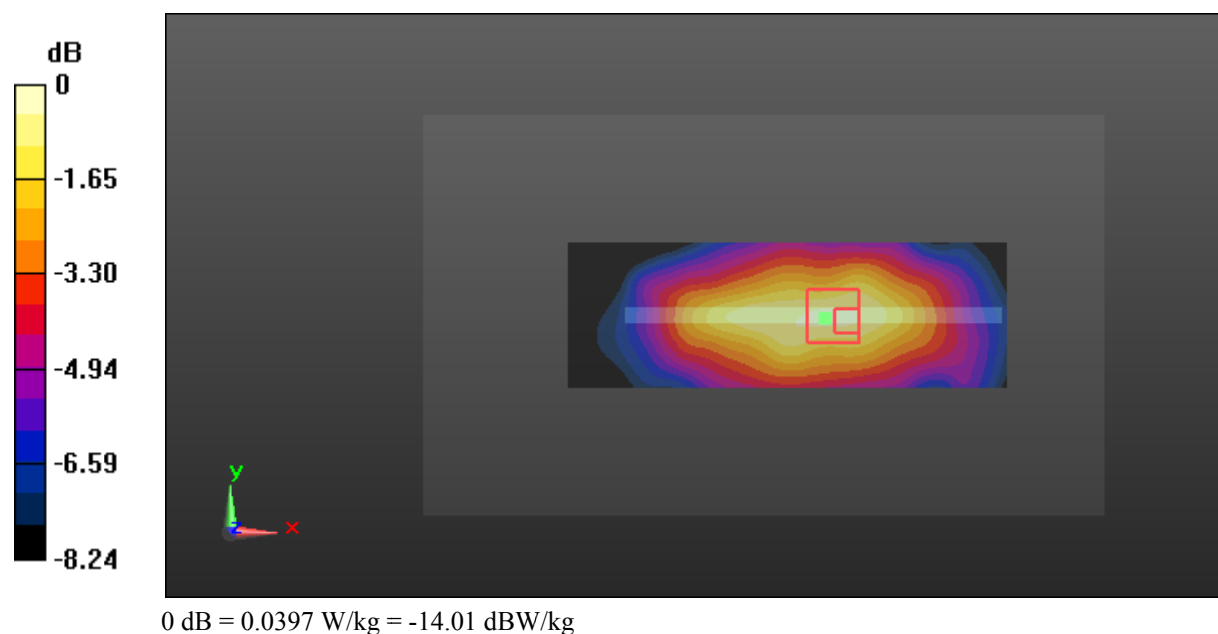

Test Plot 42#: WCDMA Band 5_Body Bottom_Middle Channel**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.605$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0185 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.204 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0200 W/kg

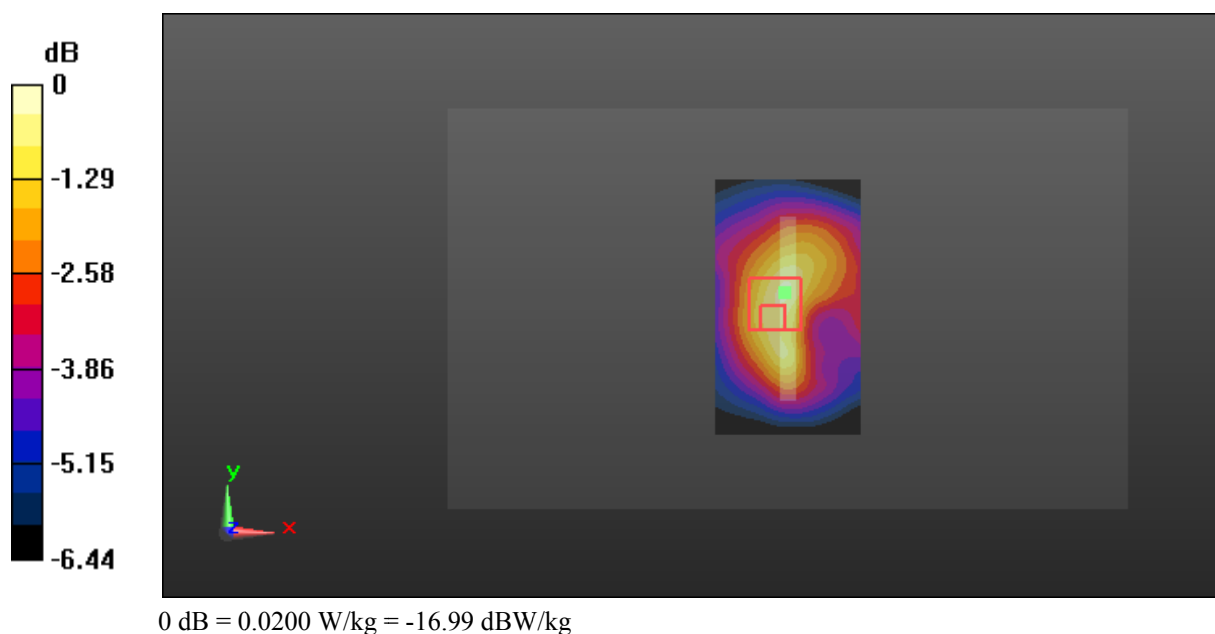

Test Plot 43#: LTE Band 2_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.816 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

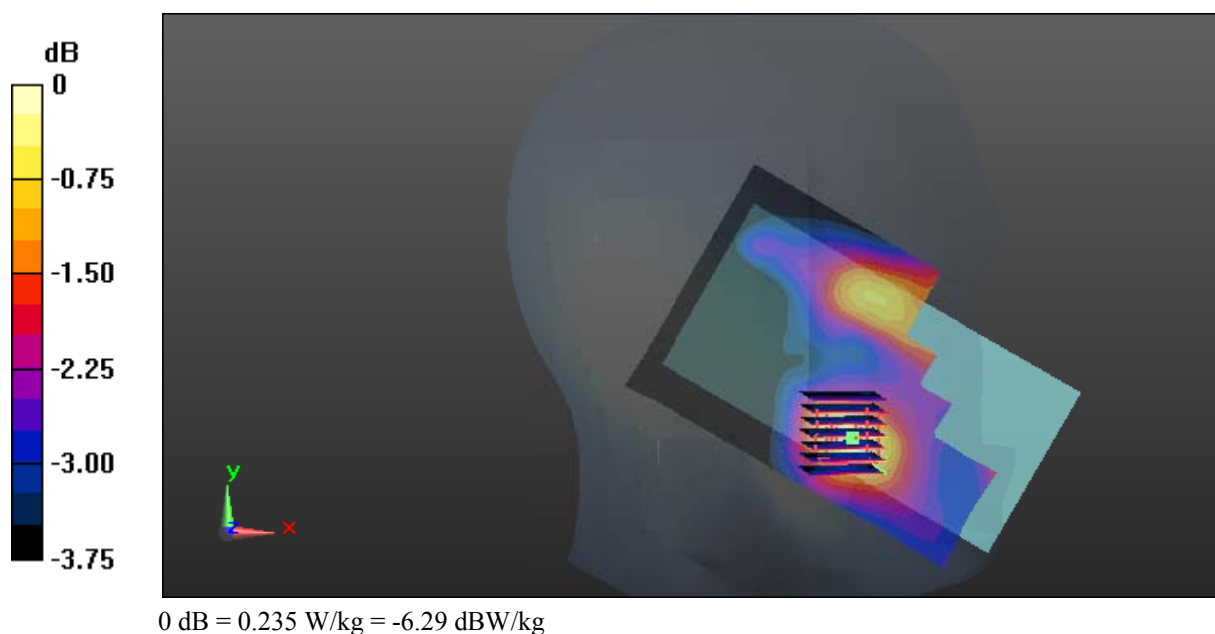

Test Plot 44#: LTE Band 2_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.574 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

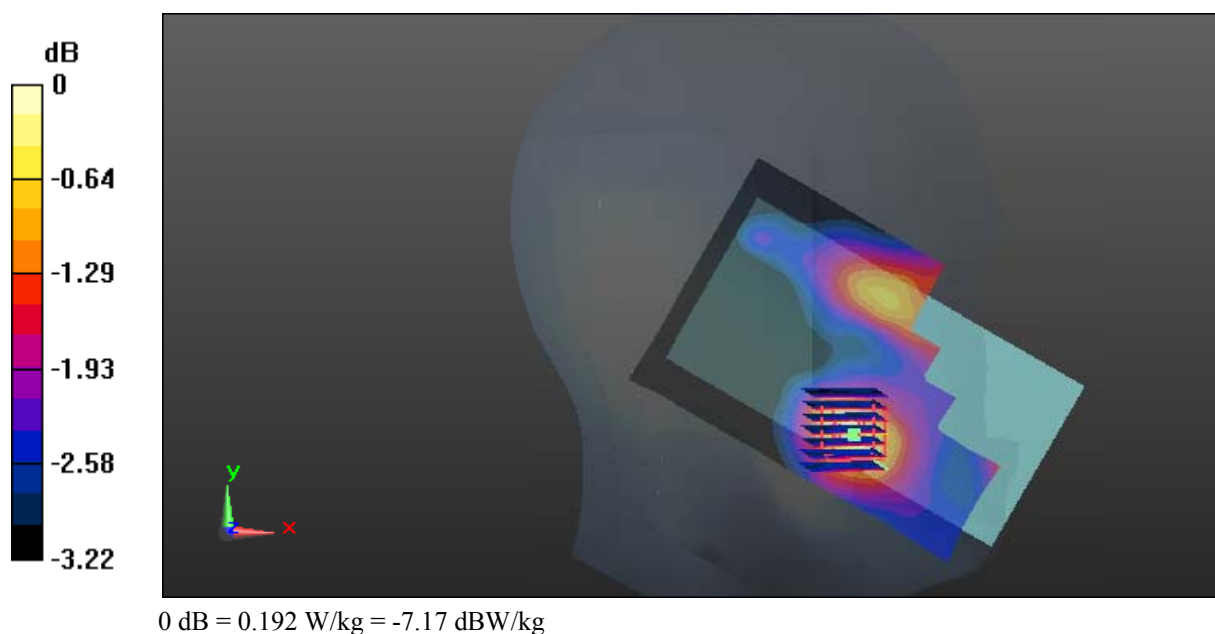

Test Plot 45#: LTE Band 2_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.127 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.914 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

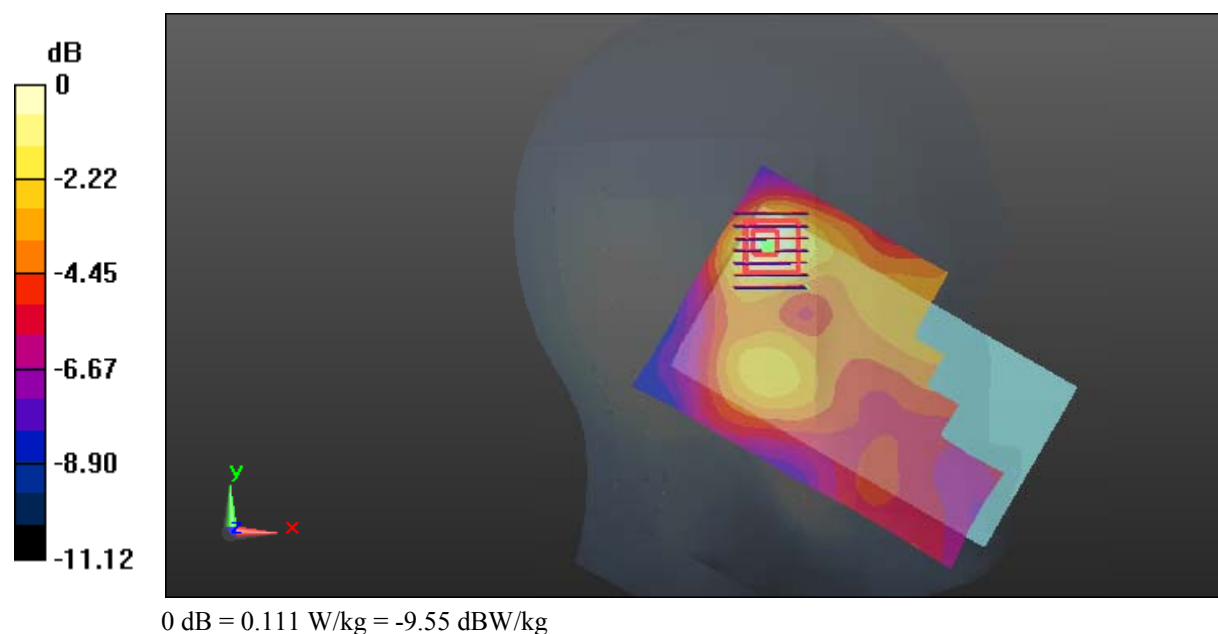

Test Plot 46#: LTE Band 2_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0878 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.156 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0829 W/kg

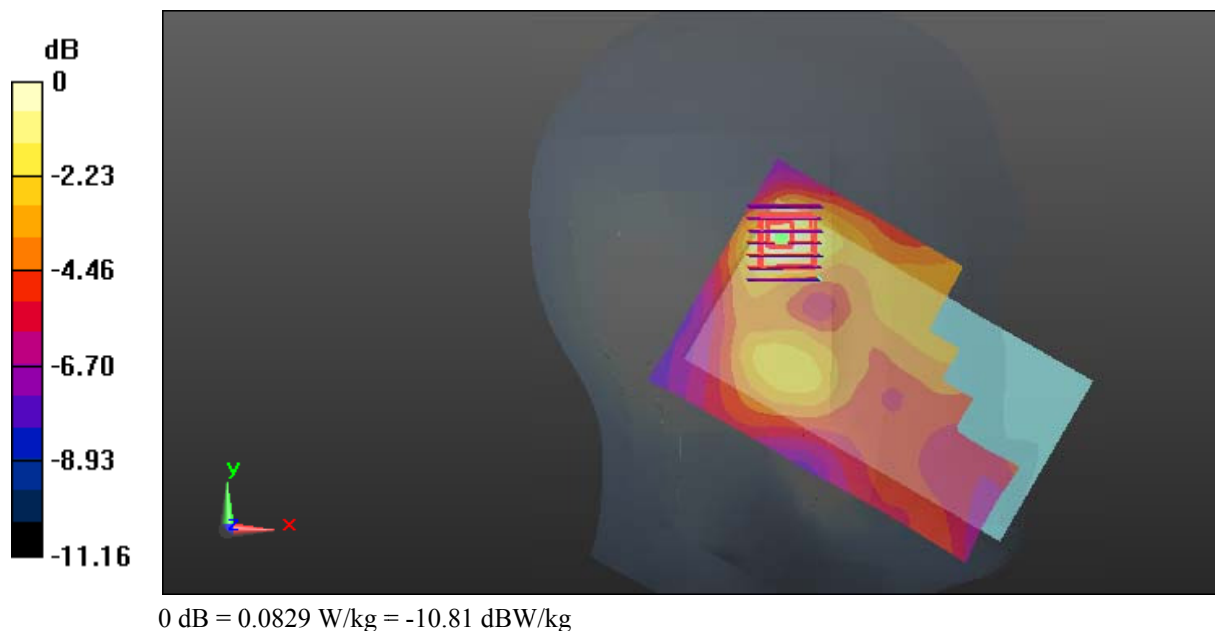

Test Plot 47#: LTE Band 2_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.330 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.975 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

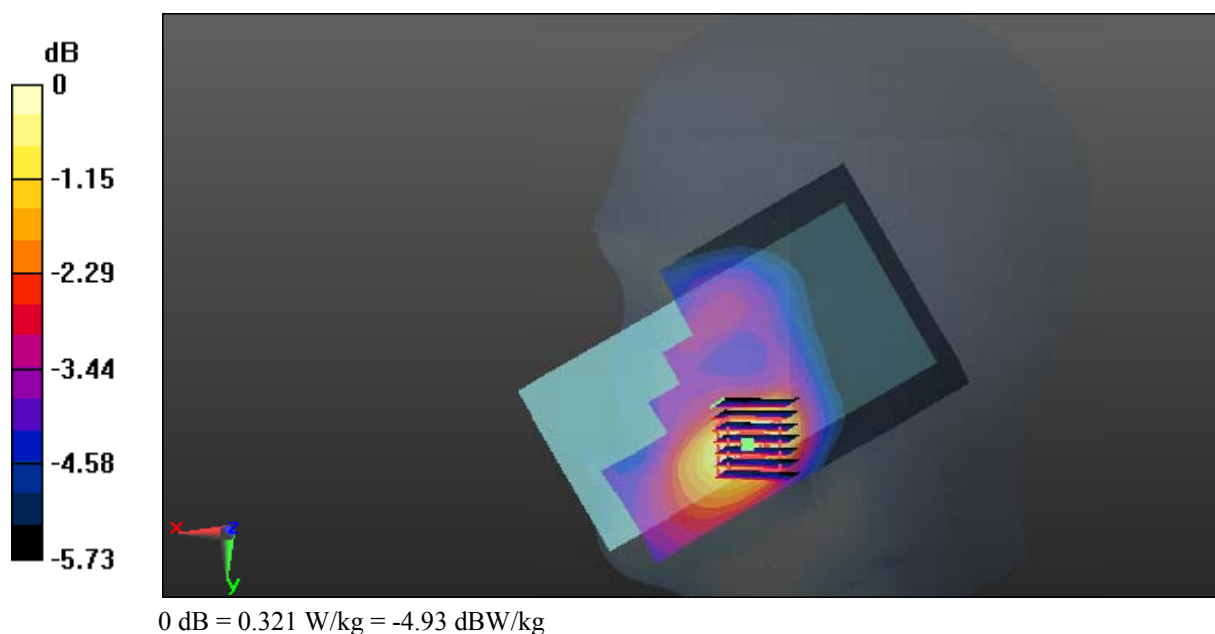

Test Plot 48#: LTE Band 2_Head Right Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.888 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

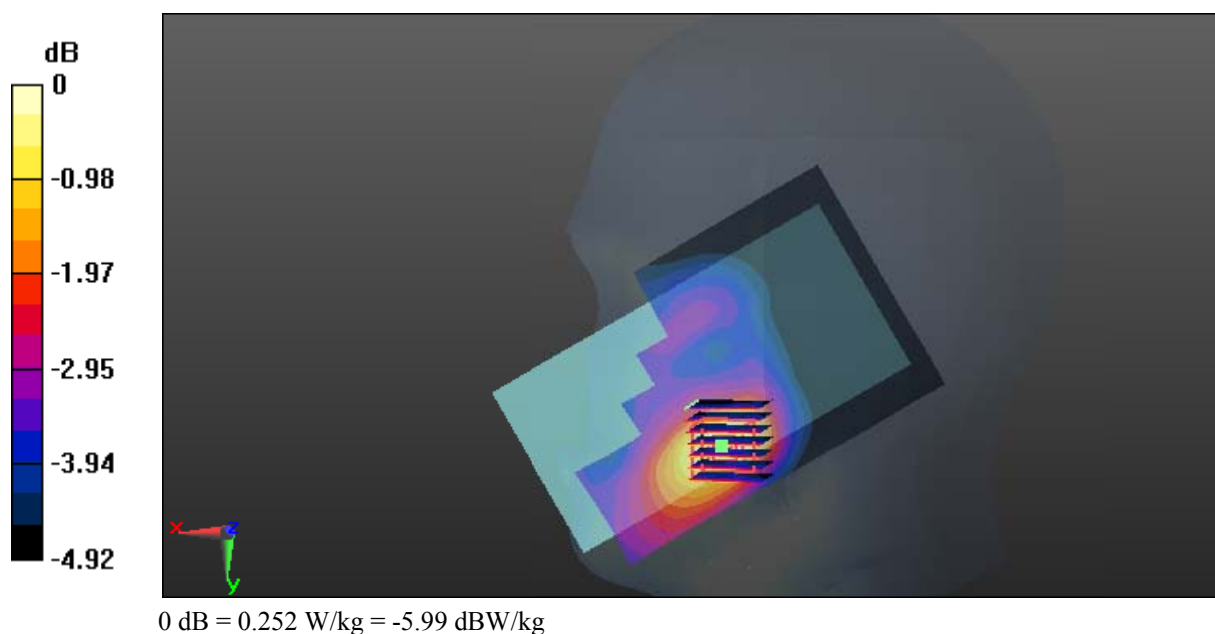

Test Plot 49#: LTE Band 2_Head Right Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 40.891$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.280 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

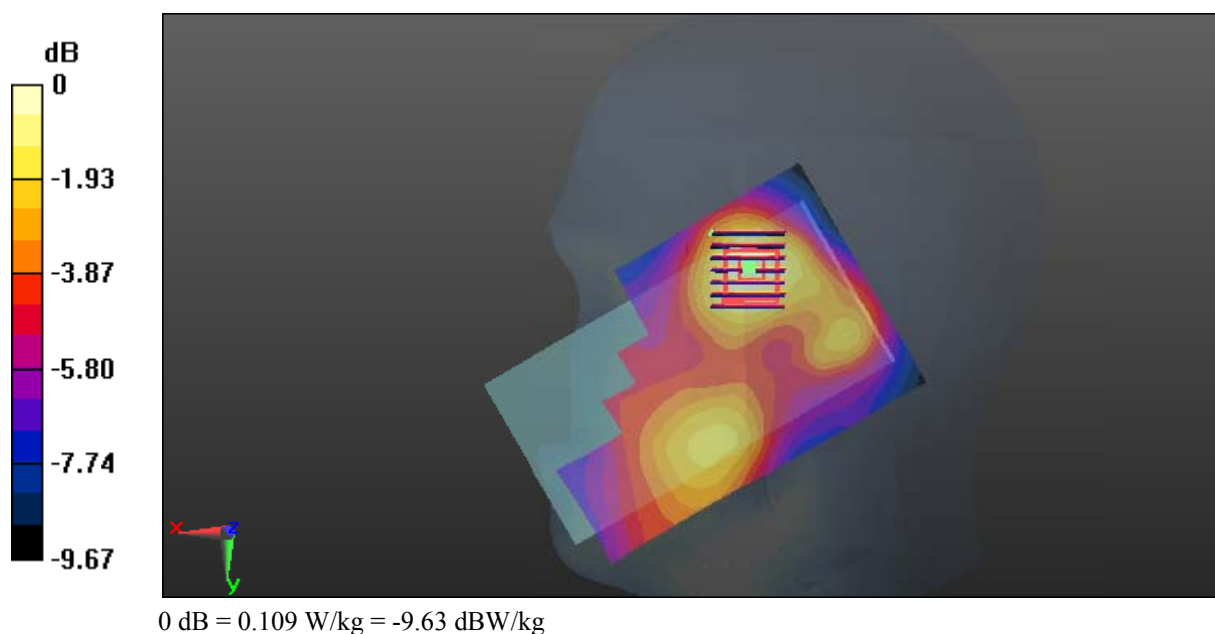

Test Plot 50#: LTE Band 2_Head Right Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0777 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.225 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0789 W/kg

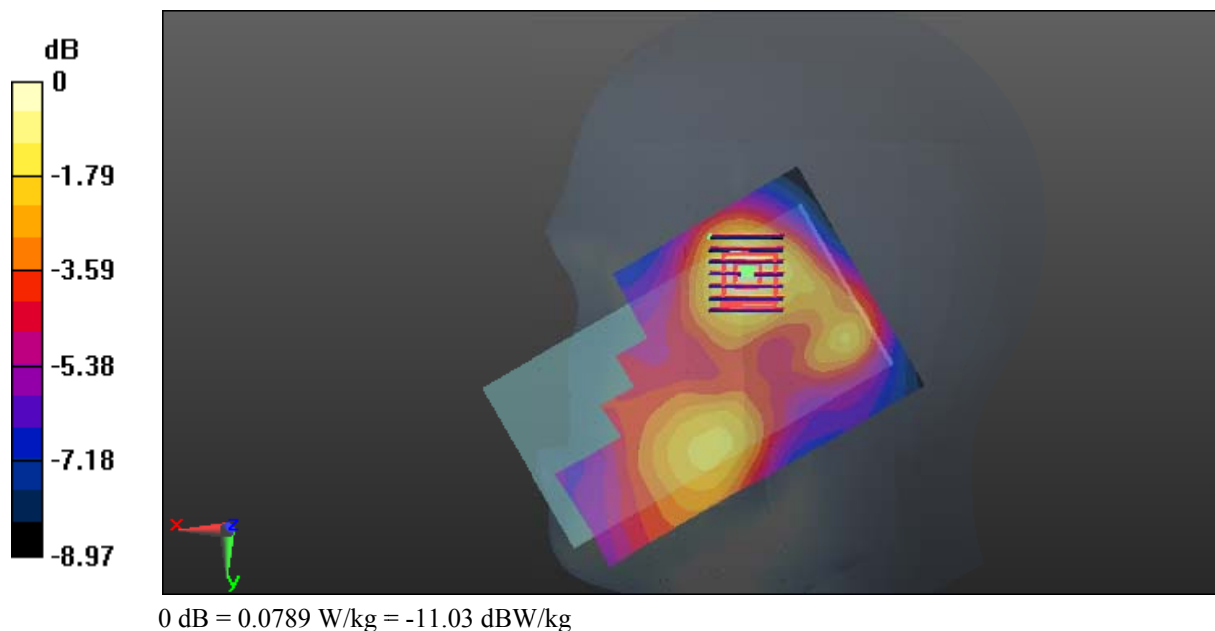

Test Plot 51#: LTE Band 2_Body Back_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.419 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.65 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

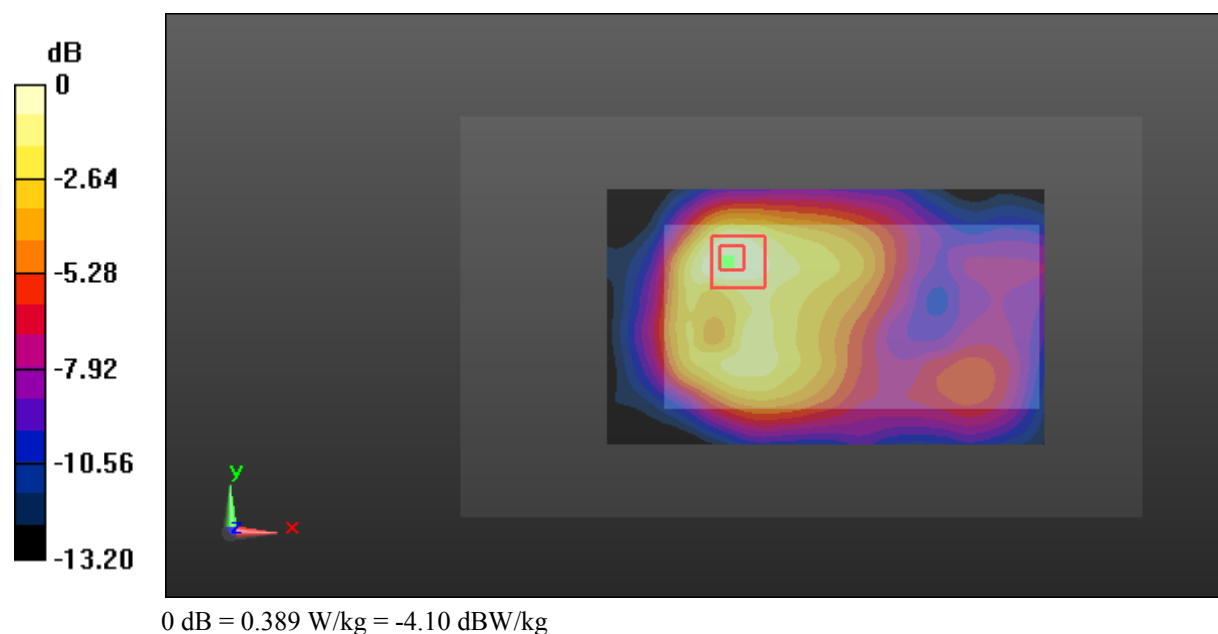

Test Plot 52#: LTE Band 2_Body Back_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.300 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.04 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

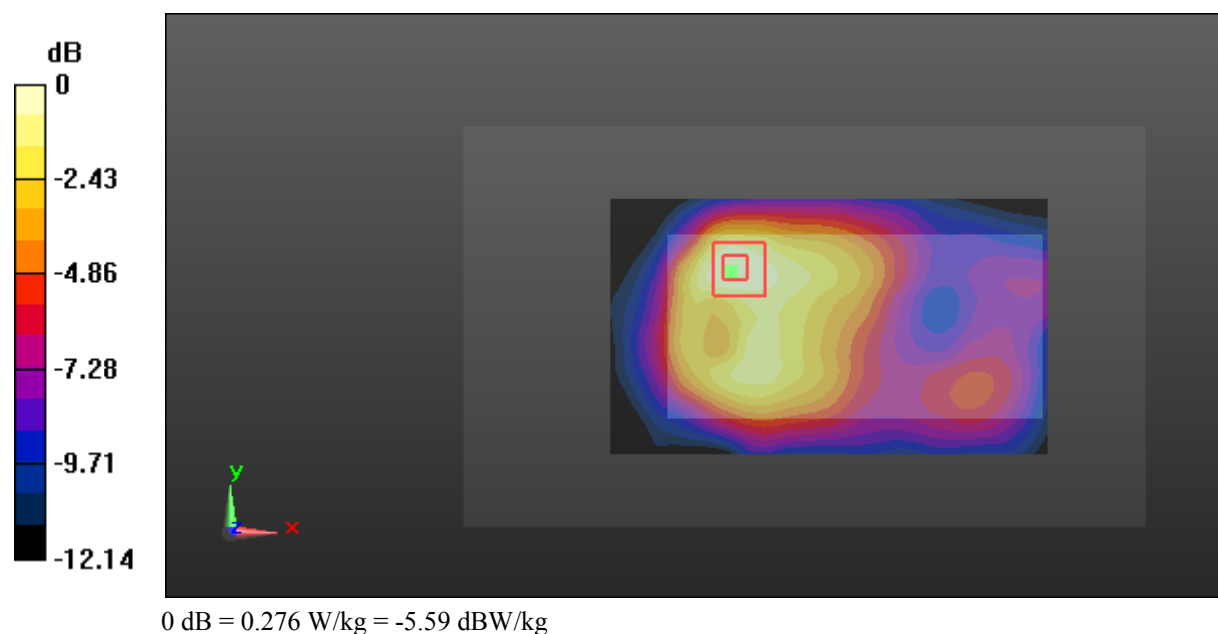

Test Plot 53#: LTE Band 2_Body Left_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.920 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

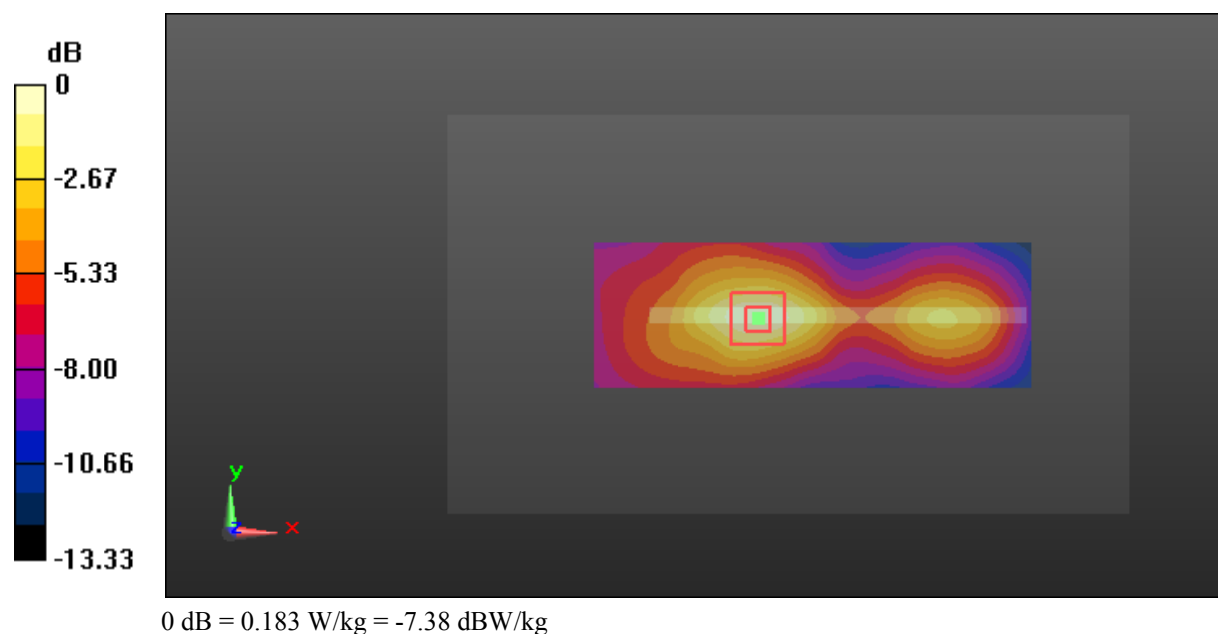

Test Plot 54#: LTE Band 2_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.496 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

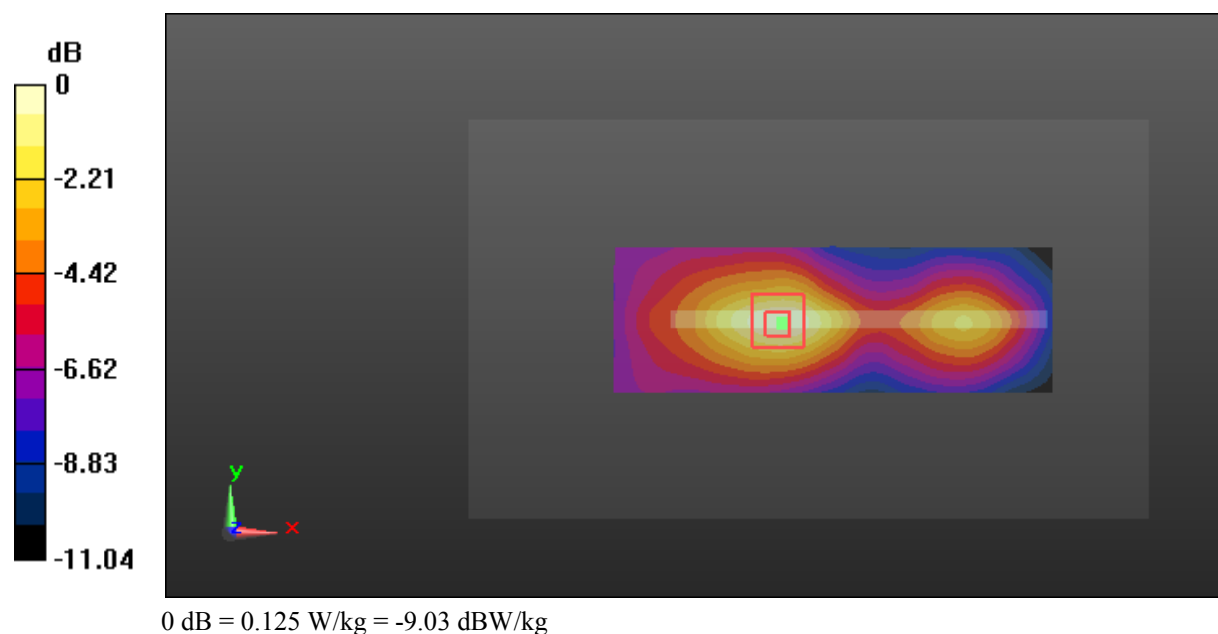

Test Plot 55#: LTE Band 2_Body Right_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.207 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.68 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

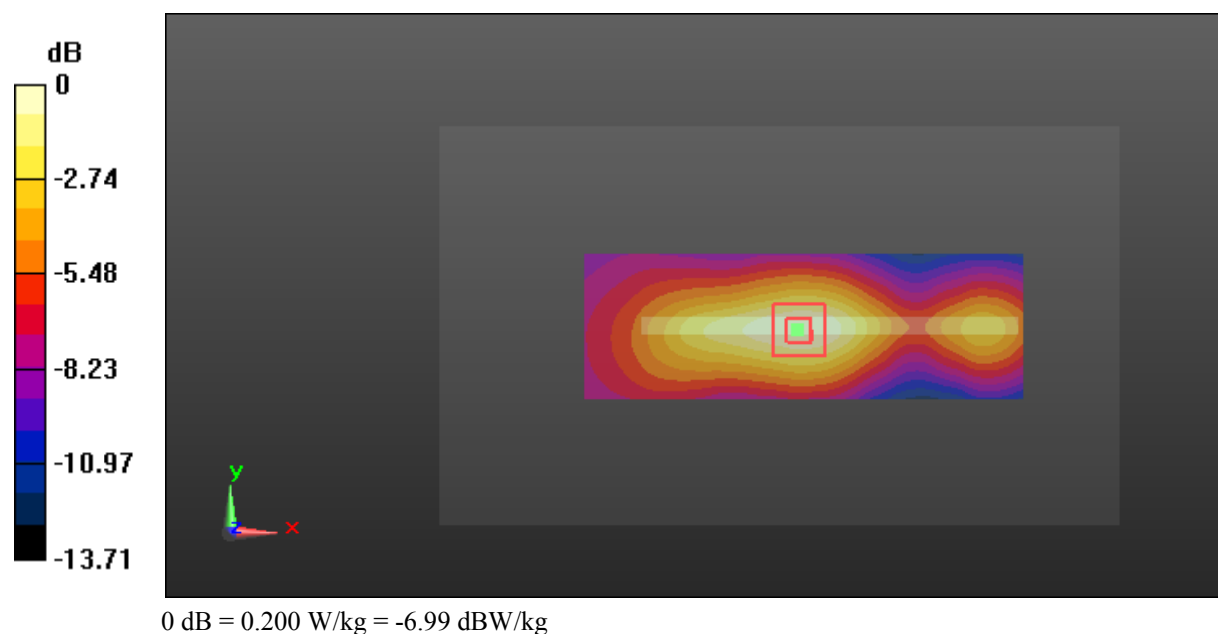

Test Plot 56#: LTE Band 2_Body Right_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.38 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.165 W/kg

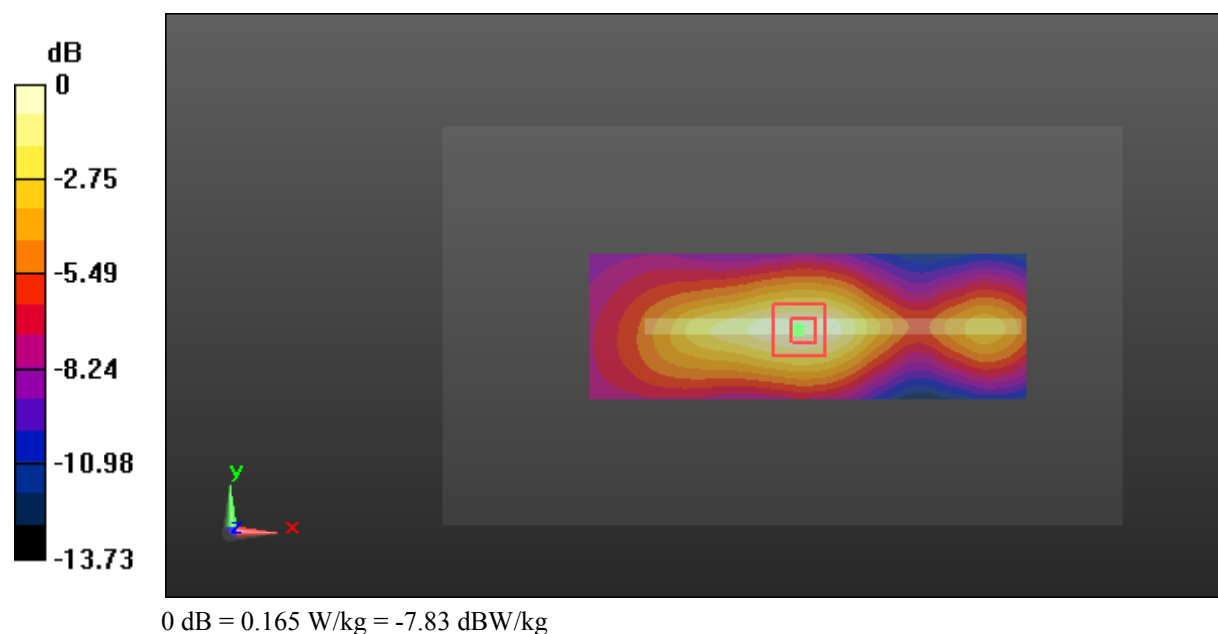

Test Plot 57#: LTE Band 2_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.284 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.54 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

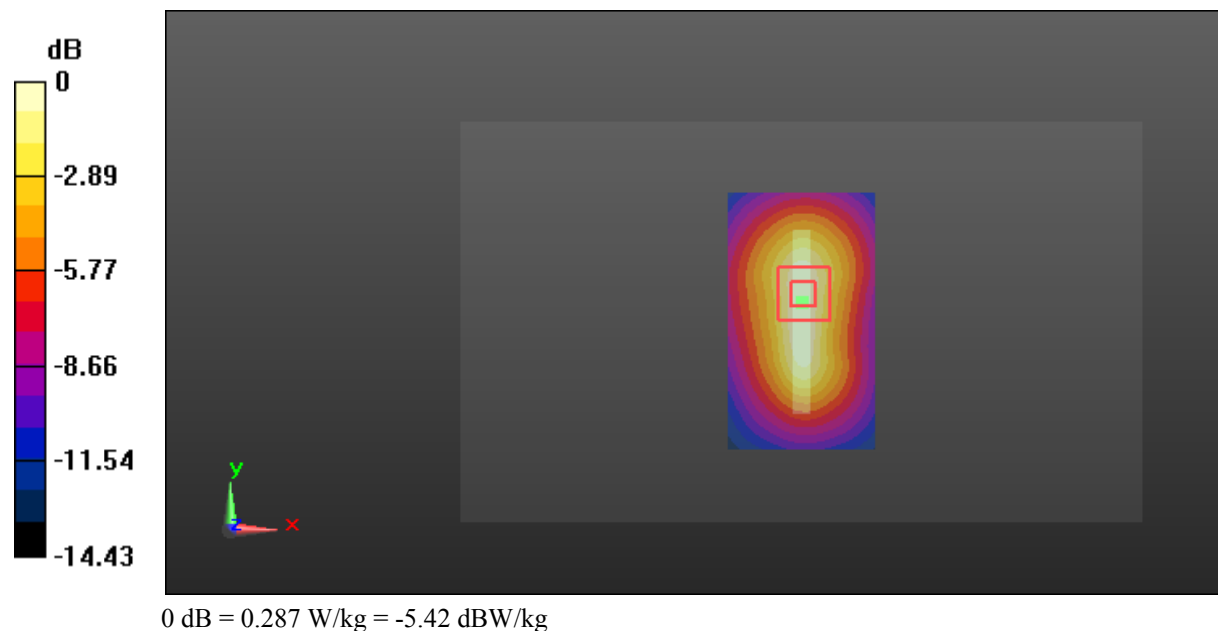

Test Plot 58#: LTE Band 2_Body Bottom_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 52.784$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

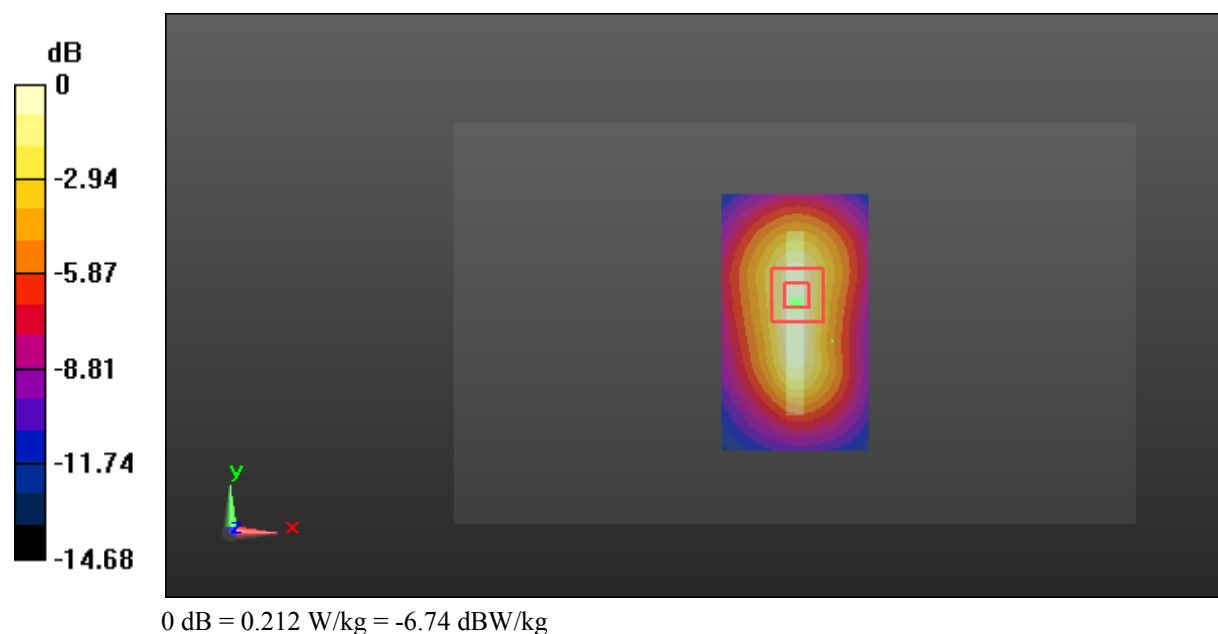

Test Plot 59#: LTE Band 4_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.924 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

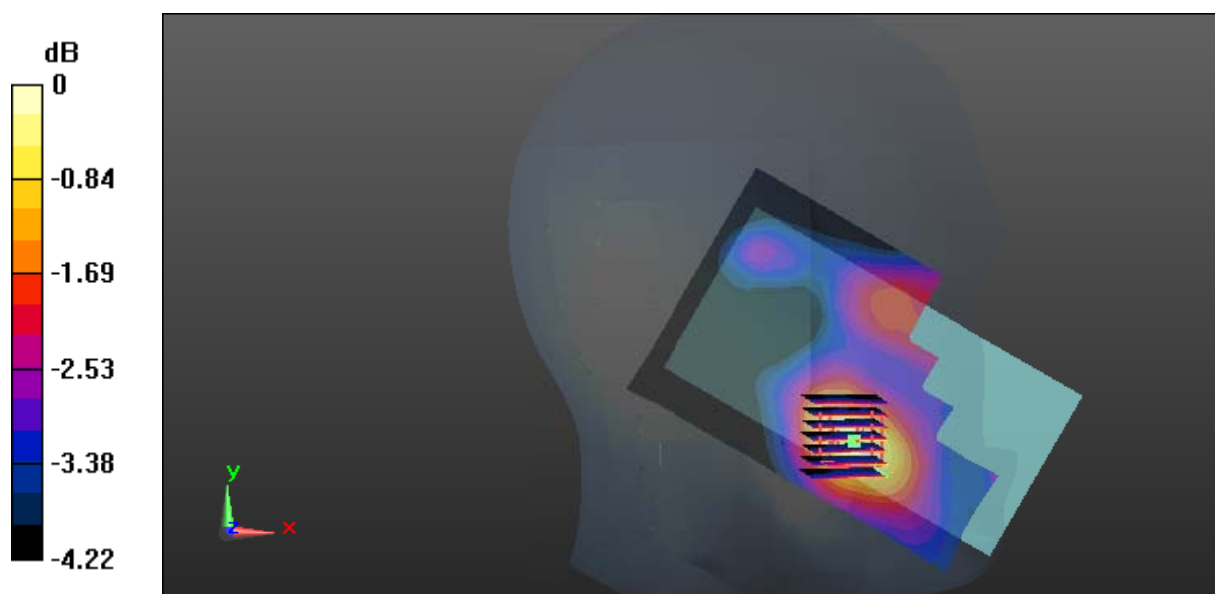

0 dB = 0.269 W/kg = -5.70 dBW/kg

Test Plot 60#: LTE Band 4_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.226 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.553 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

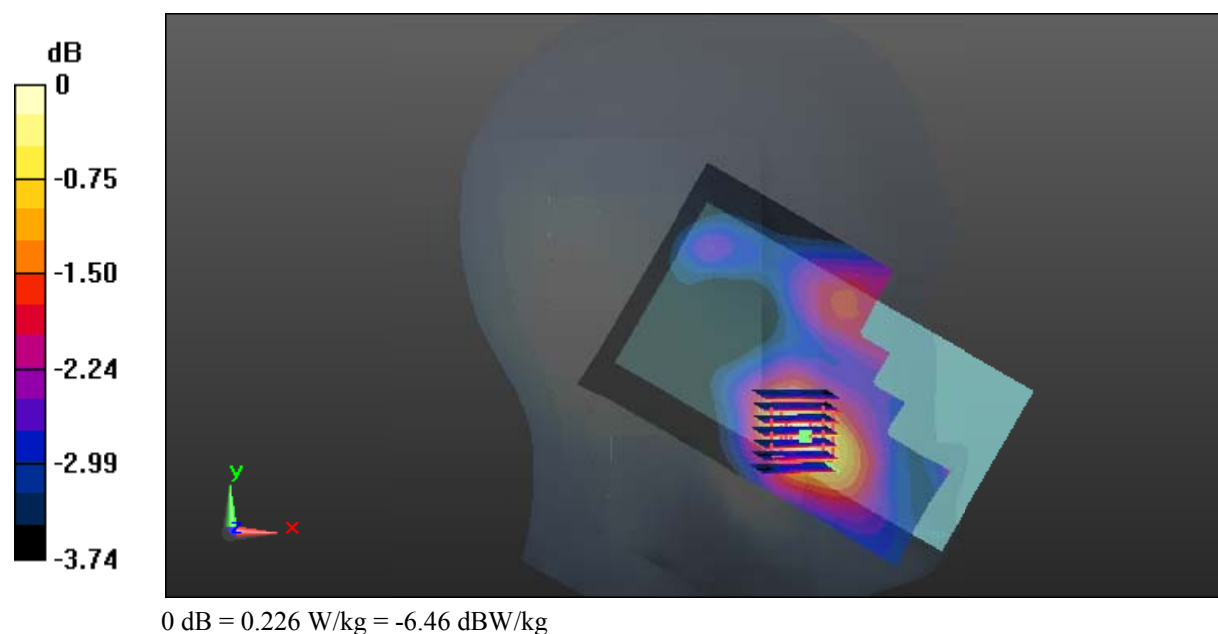

Test Plot 61#: LTE Band 4_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.264 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

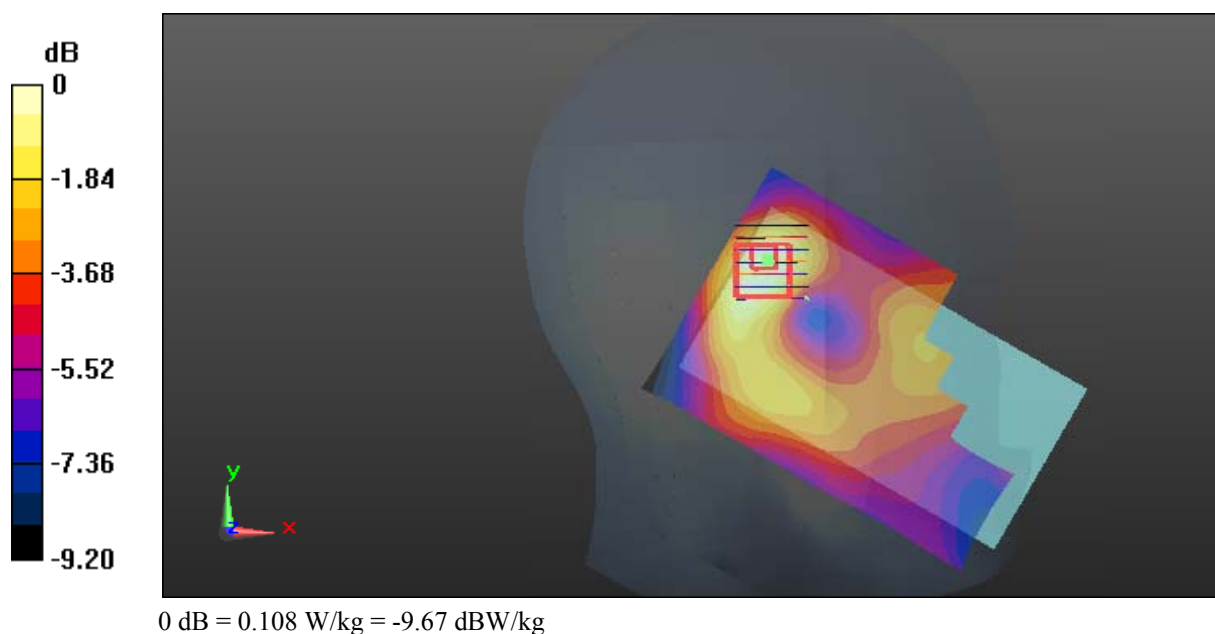

Test Plot 62#: LTE Band 4_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0962 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.427 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0837 W/kg

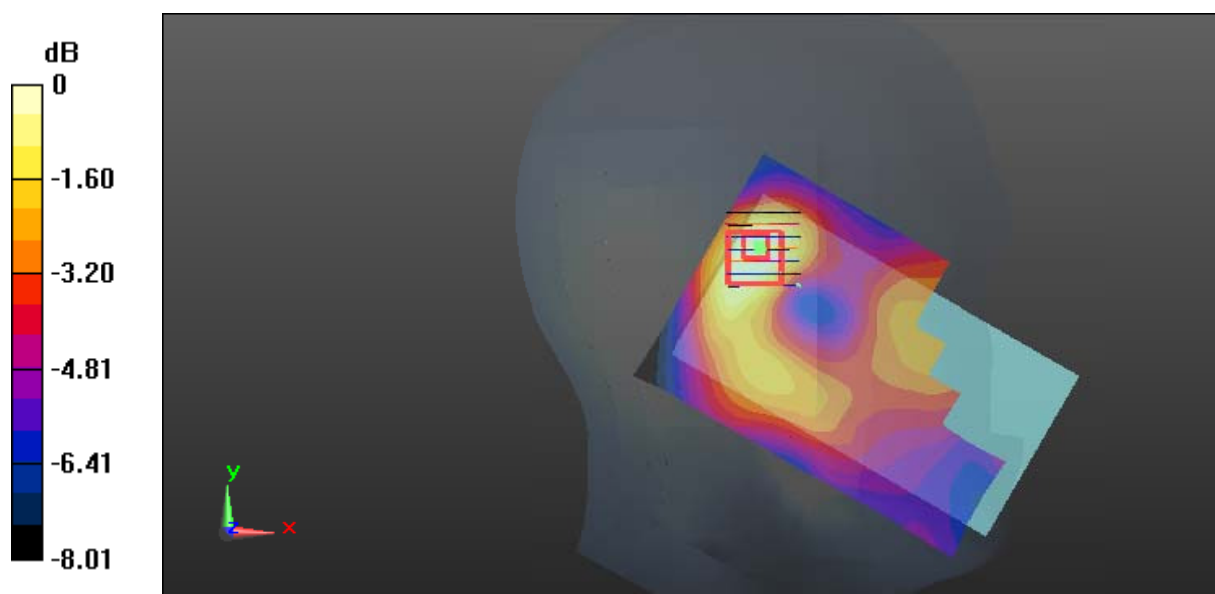

0 dB = 0.0837 W/kg = -10.77 dBW/kg

Test Plot 63#: LTE Band 4_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.395 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.628 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

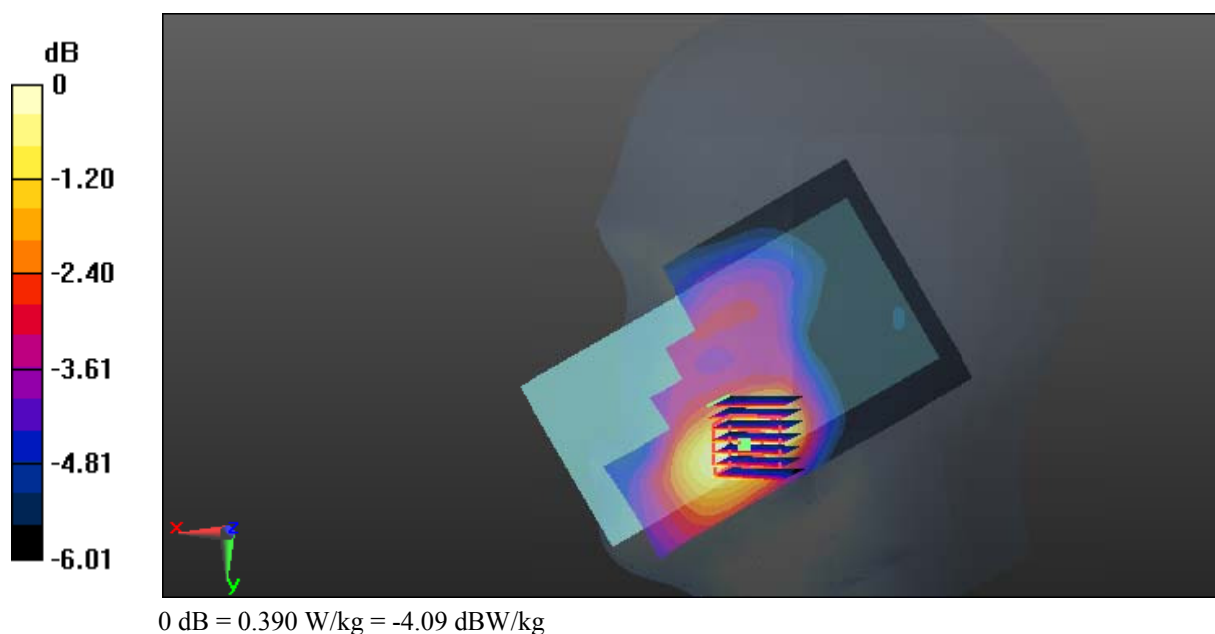

Test Plot 64#: LTE Band 4_Head Right Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.331 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.576 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

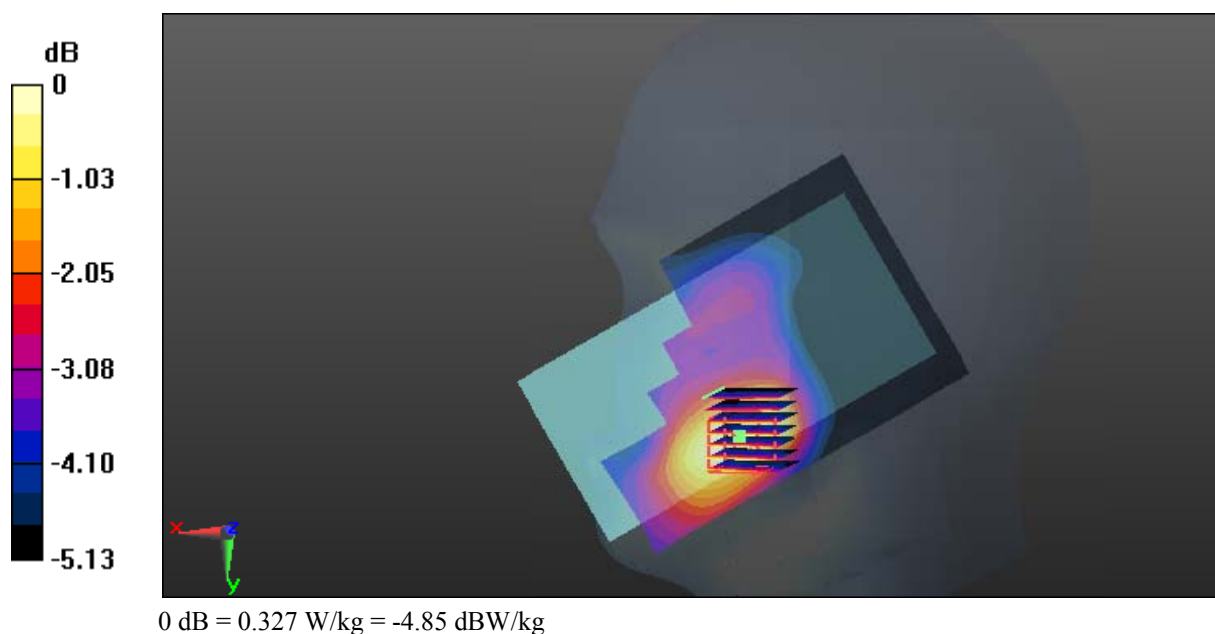

Test Plot 65#: LTE Band 4_Head Right Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.900 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

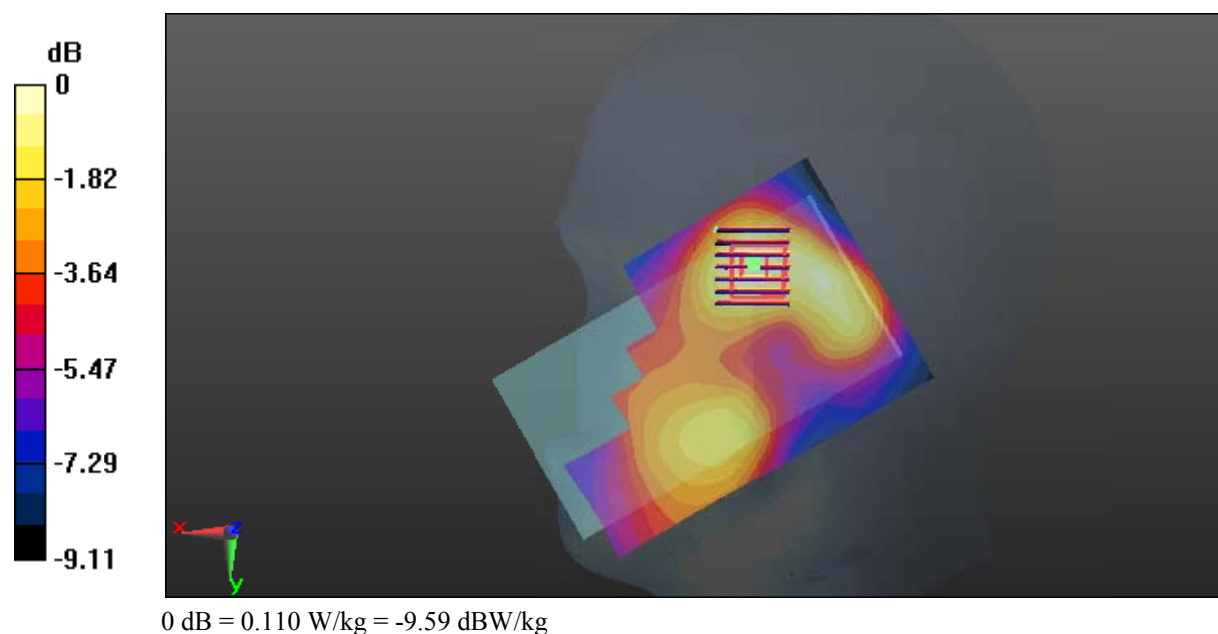

Test Plot 66#: LTE Band 4_Head Right Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0862 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.115 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0851 W/kg

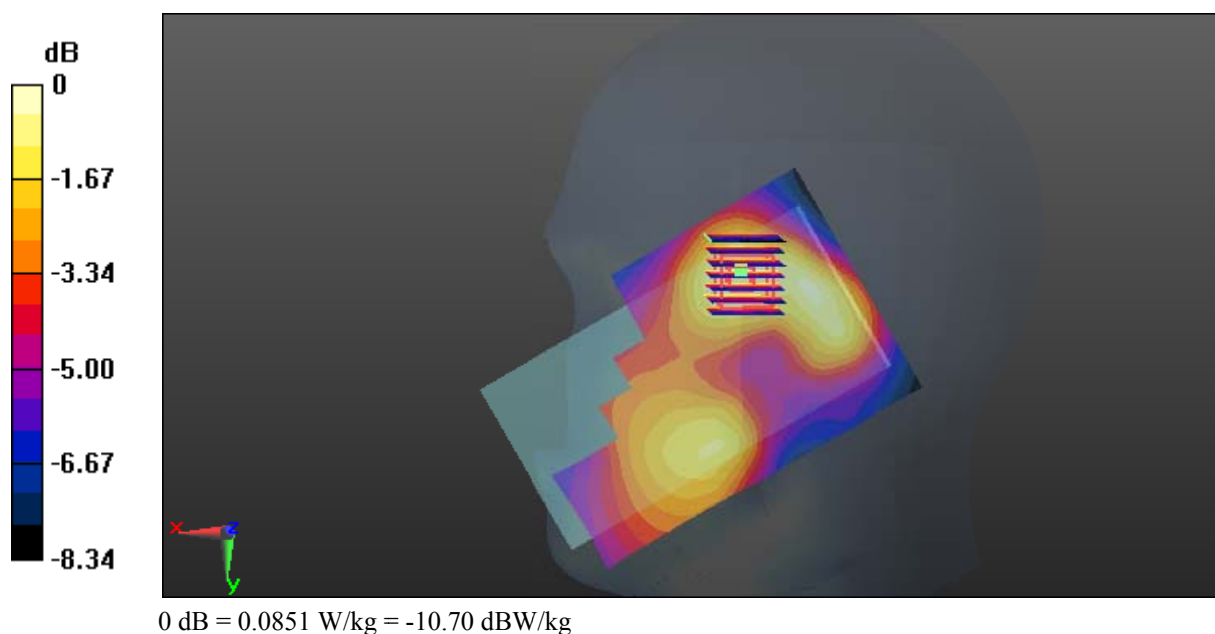

Test Plot 67#: LTE Band 4_Body Back_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.436 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.39 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.407 W/kg

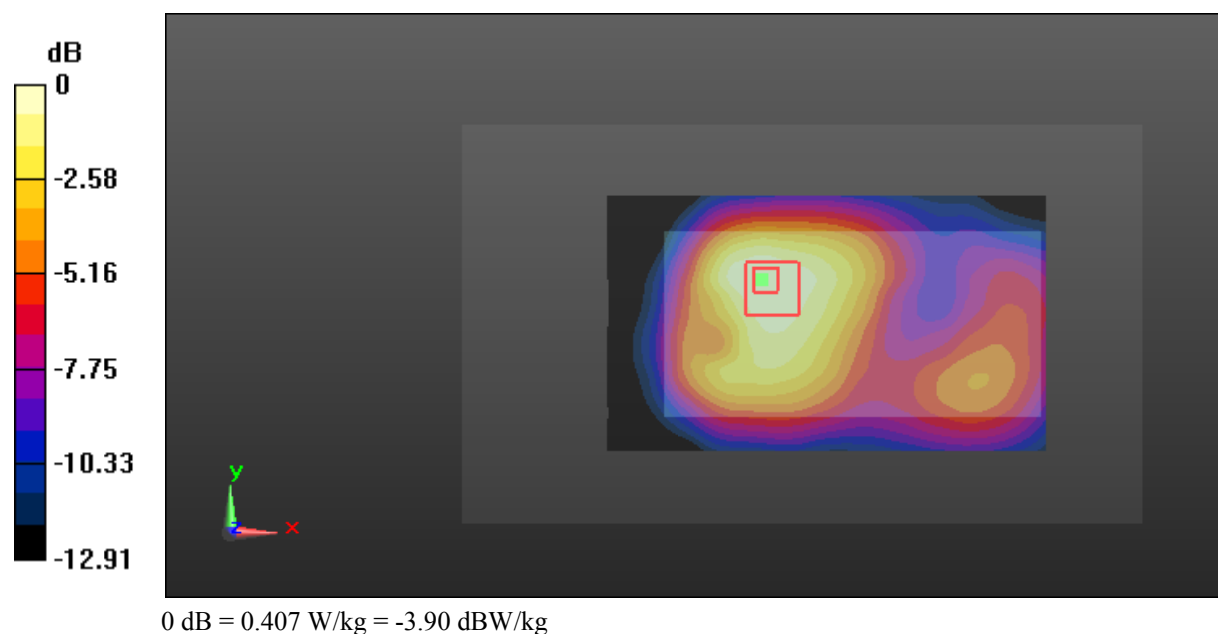

Test Plot 68#: LTE Band 4_Body Back_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.15 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.336 W/kg

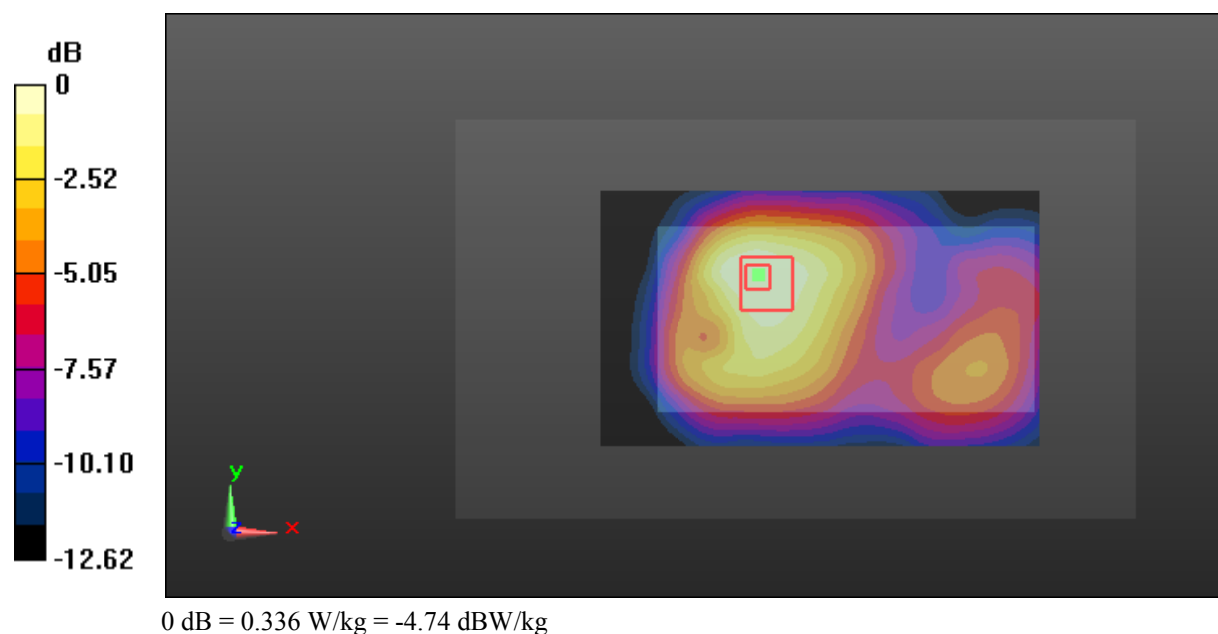

Test Plot 69#: LTE Band 4_Body Left_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.162 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.199 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.165 W/kg

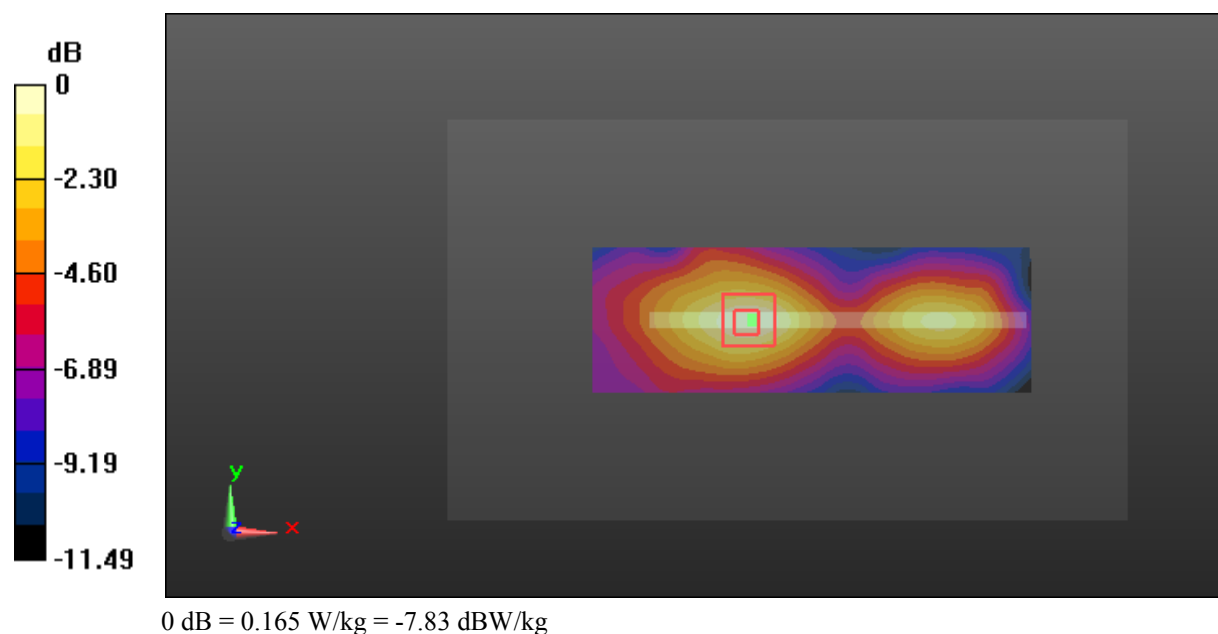

Test Plot 70#: LTE Band 4_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.128 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.288 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

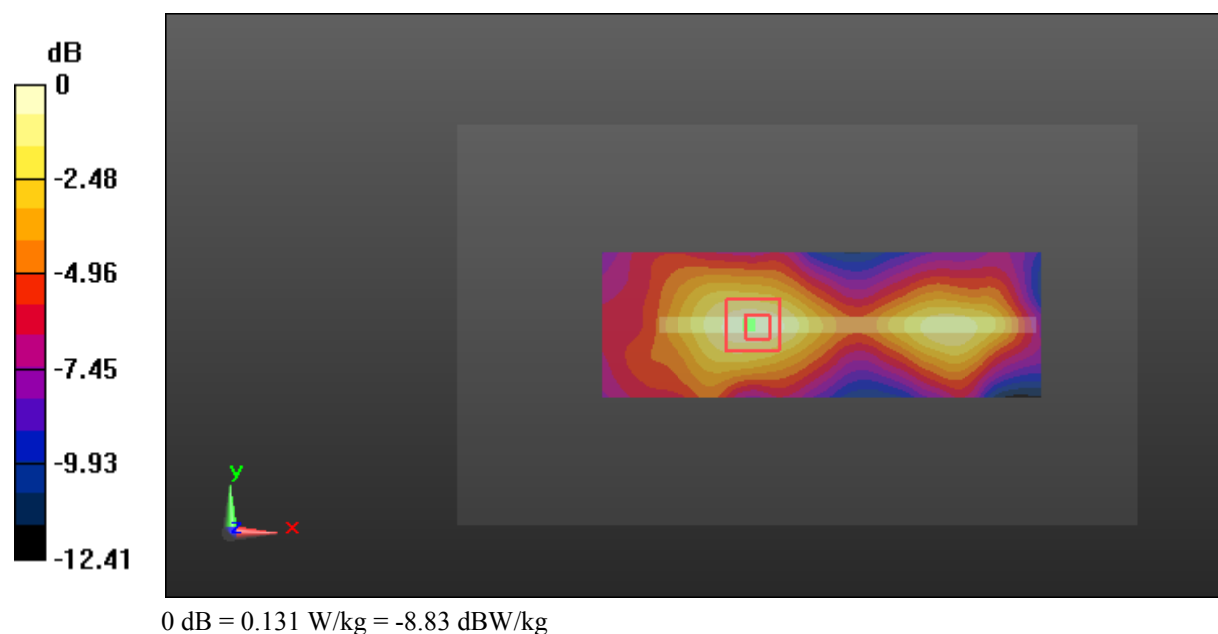

Test Plot 71#: LTE Band 4_Body Right_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.38 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

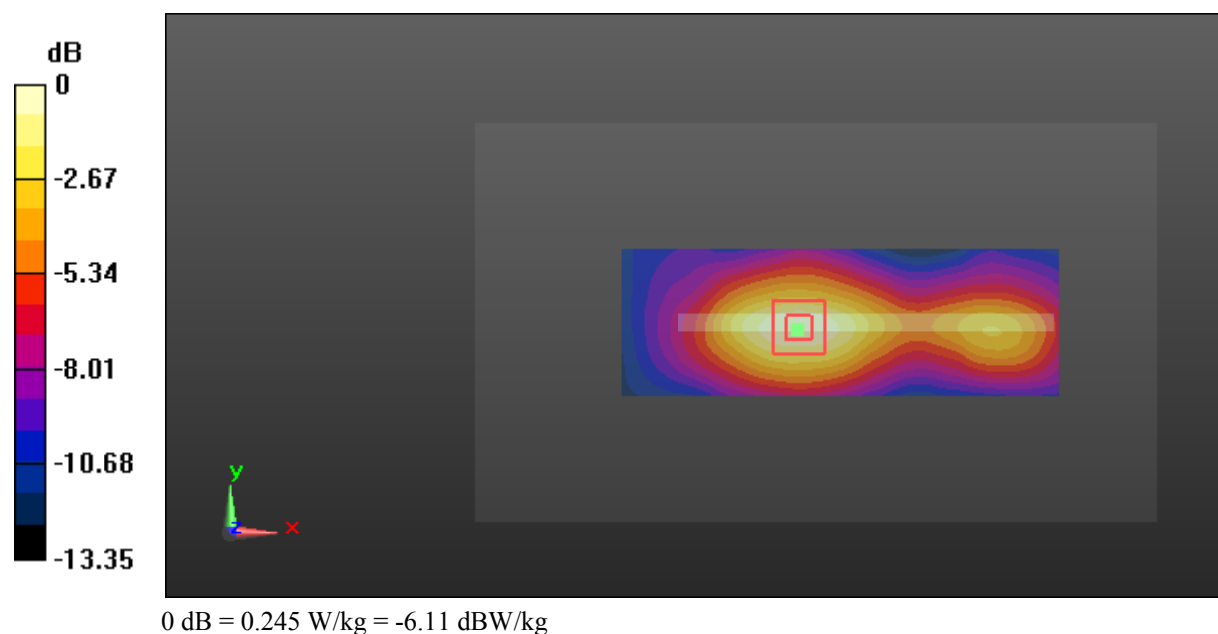

Test Plot 72#: LTE Band 4_Body Right_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.206 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.33 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

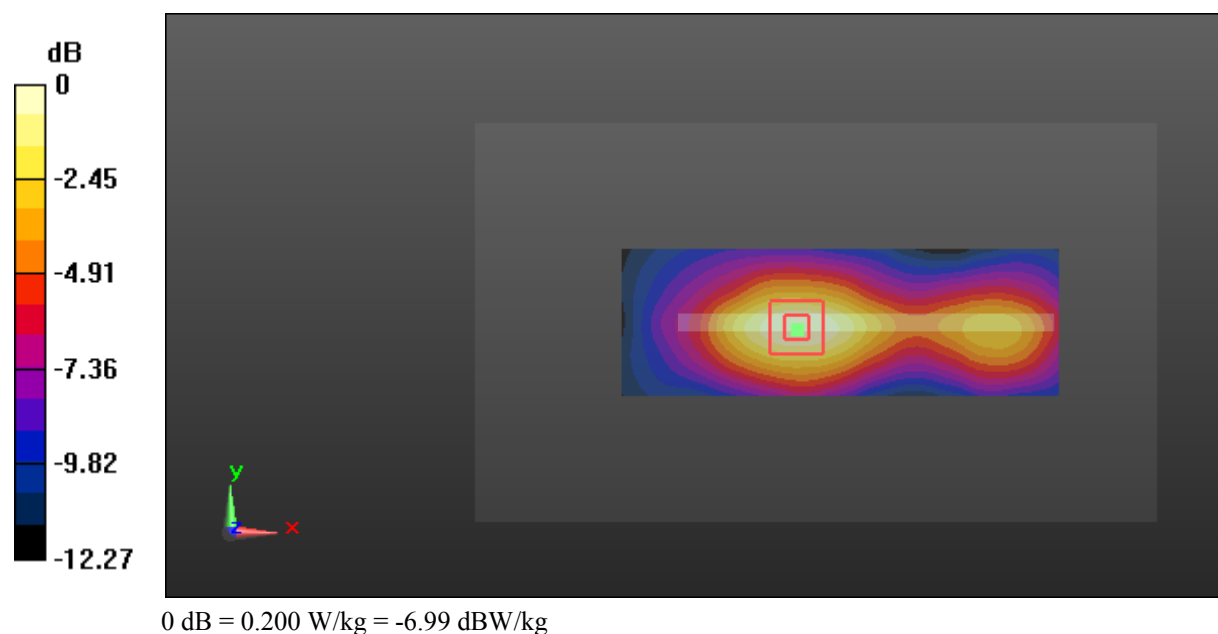

Test Plot 73#: LTE Band 4_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.336 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.45 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

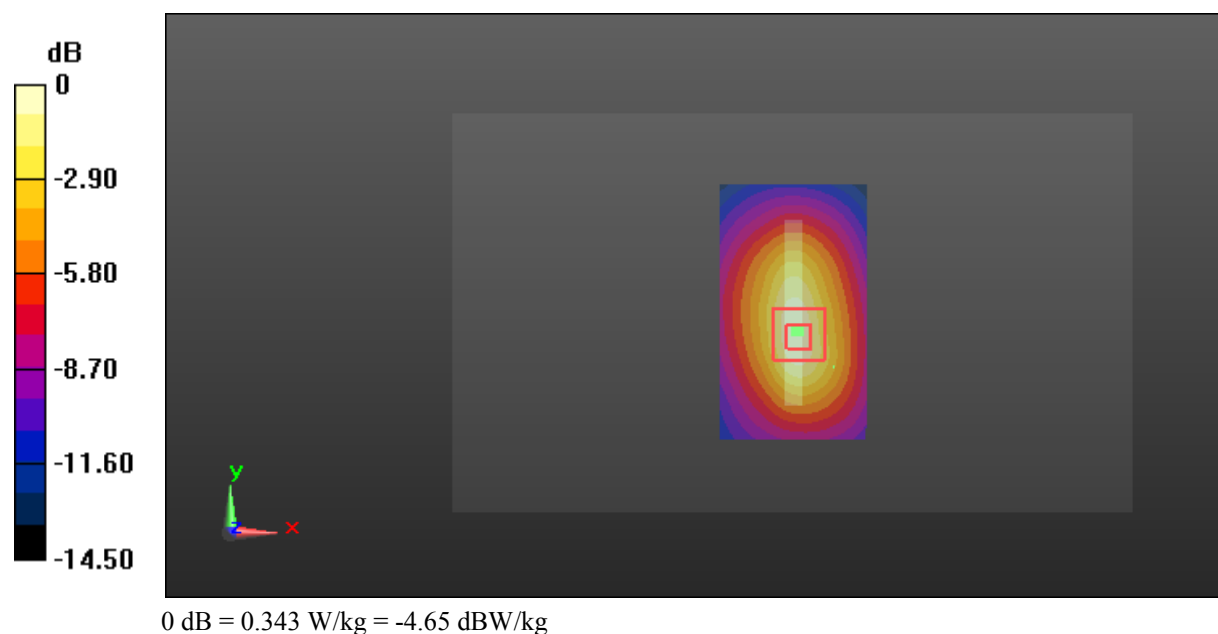

Test Plot 74#: LTE Band 4_Body Bottom_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.443$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.266 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.274 W/kg

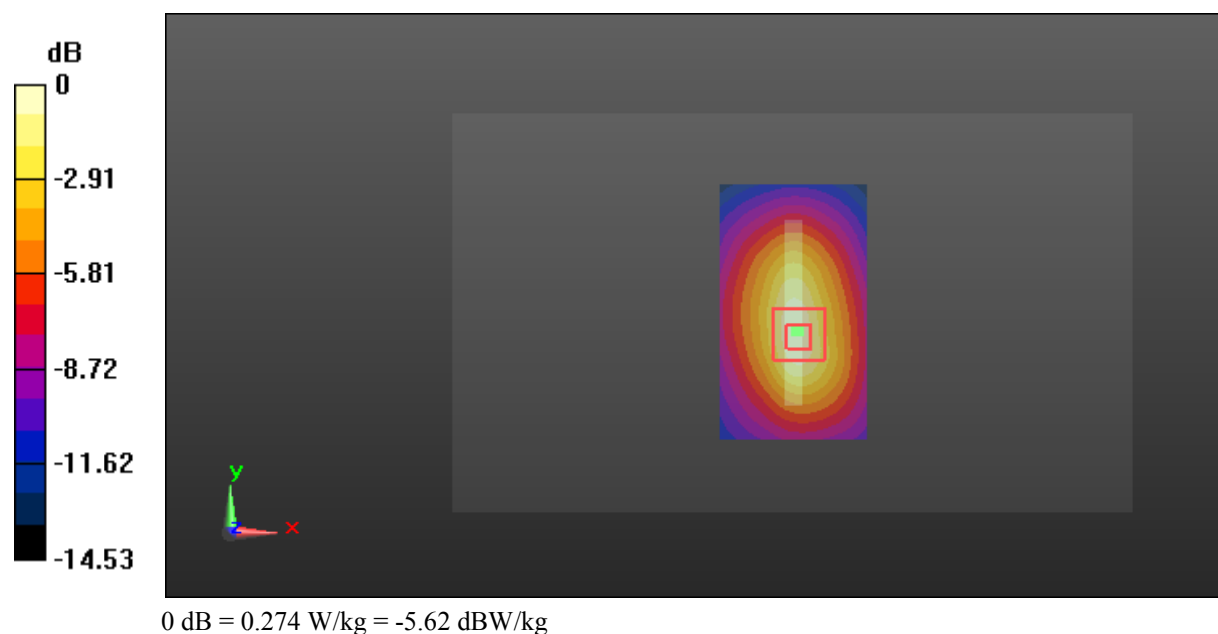

Test Plot 75#: LTE Band 5_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0933 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.686 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0871 W/kg

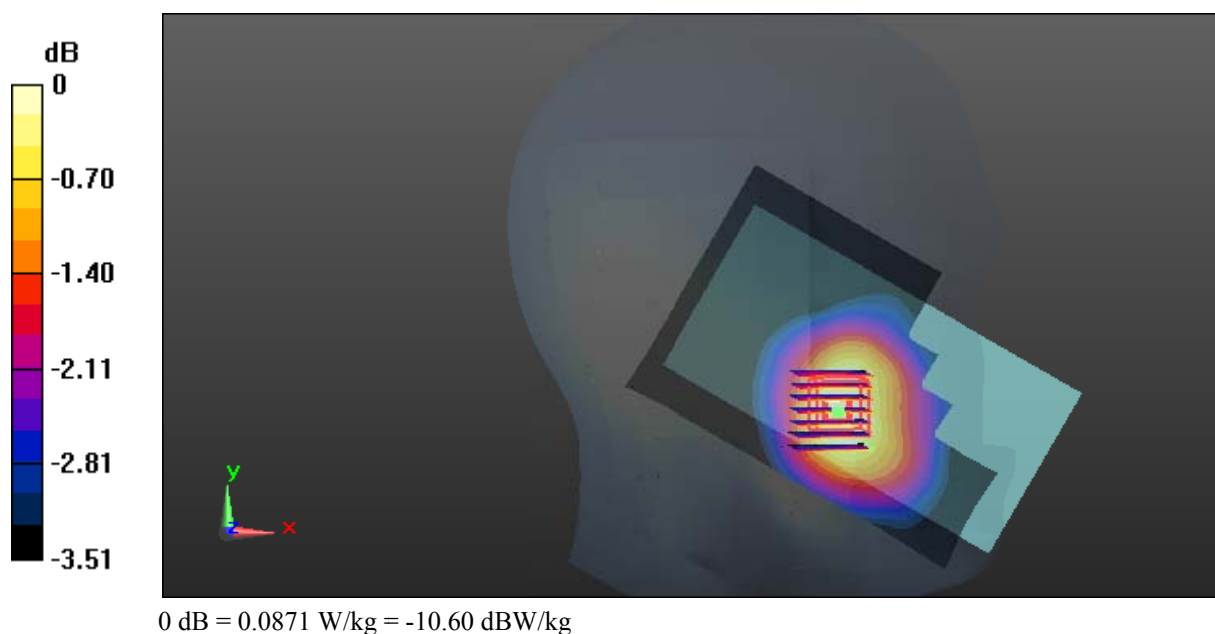

Test Plot 76#: LTE Band 5_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0736 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.079 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0696 W/kg

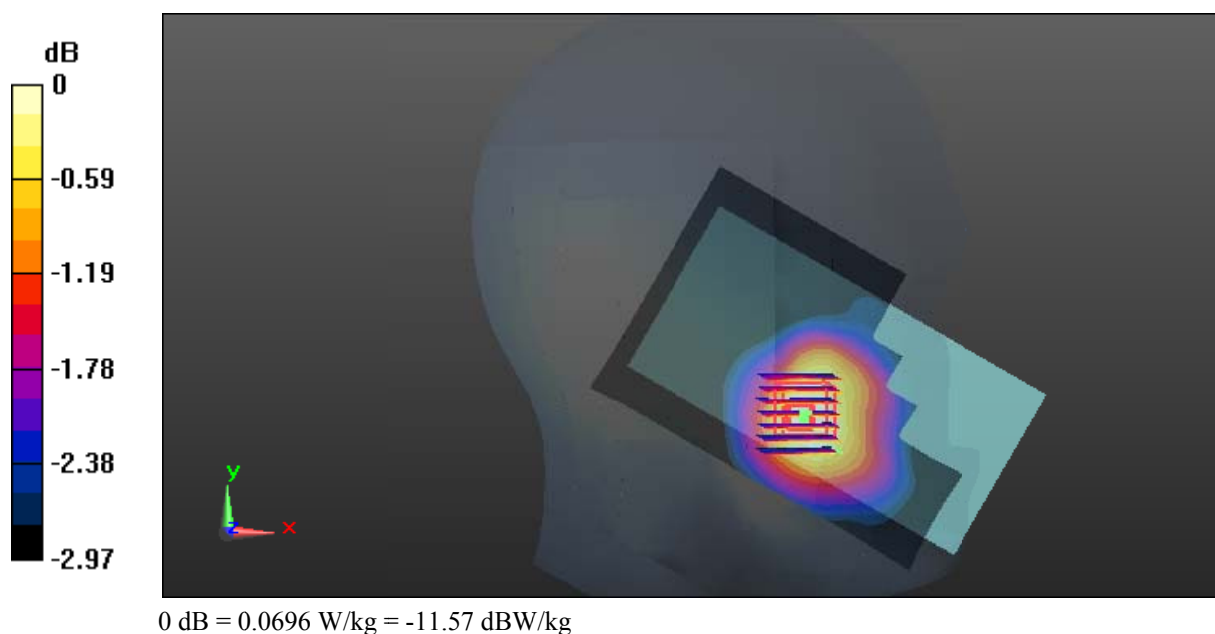

Test Plot 77#: LTE Band 5_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0377 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.478 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0337 W/kg

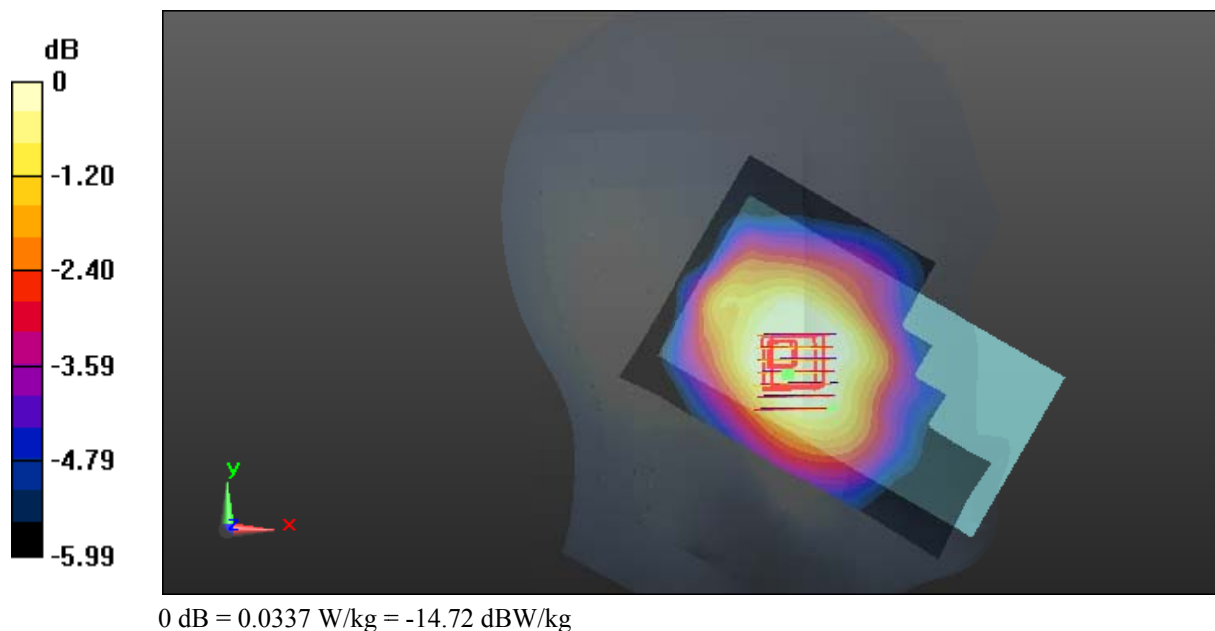

Test Plot 78#: LTE Band 5_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0290 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.704 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0248 W/kg

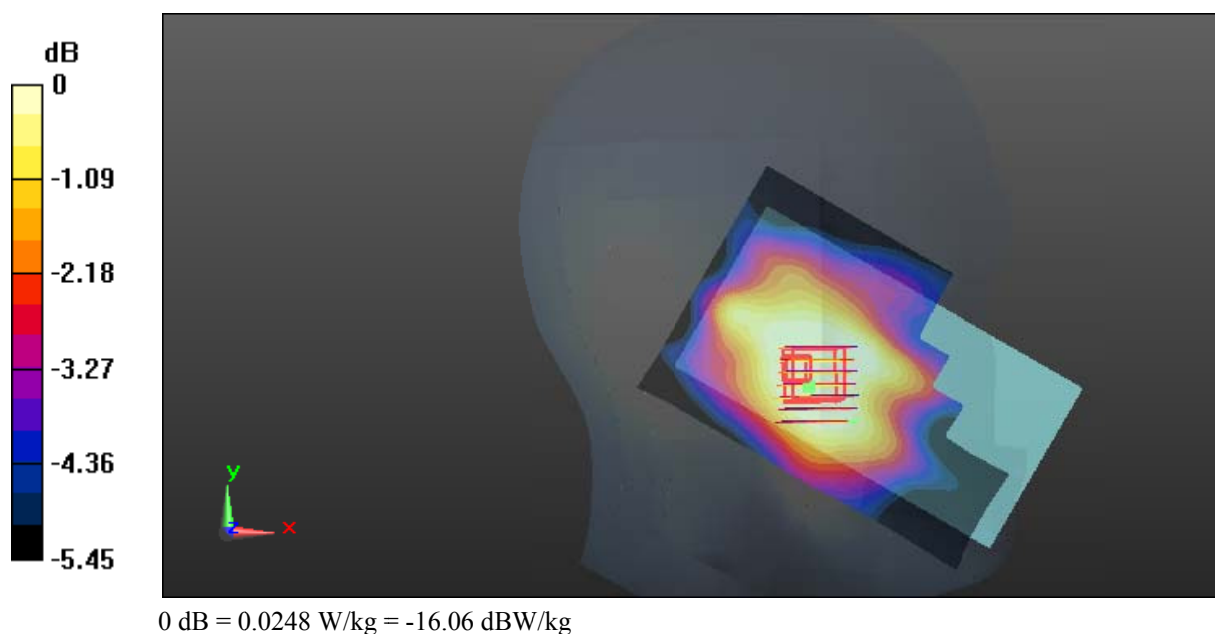

Test Plot 79#: LTE Band 5_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0740 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.721 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0683 W/kg

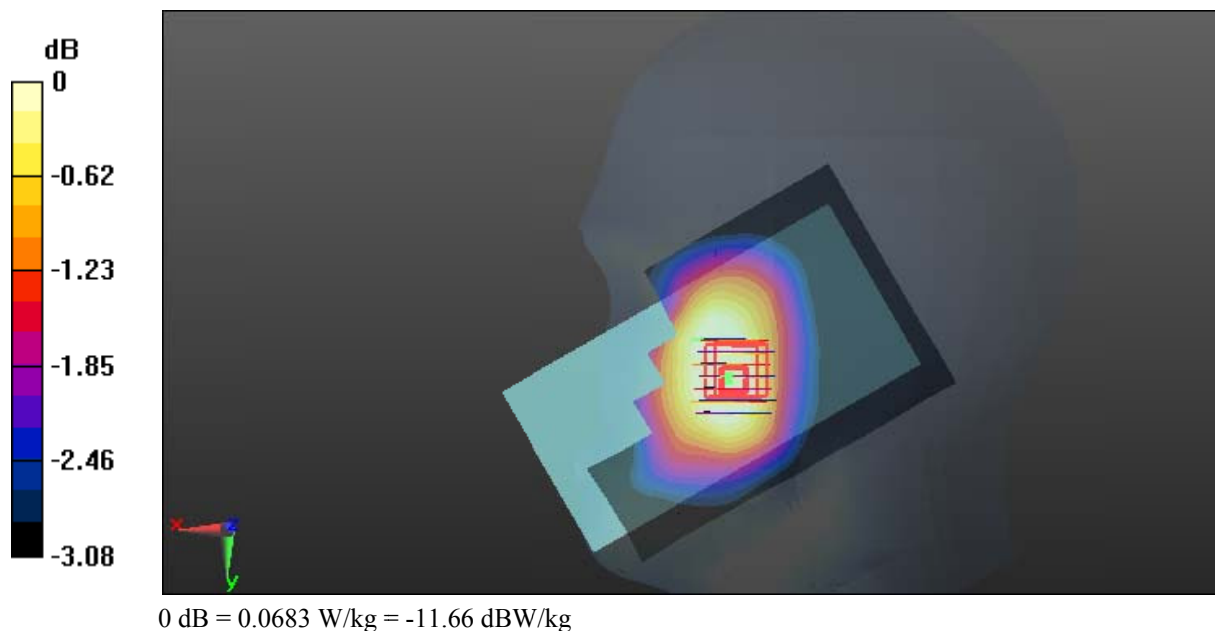

Test Plot 80#: LTE Band 5_Head Right Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0584 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.321 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0543 W/kg

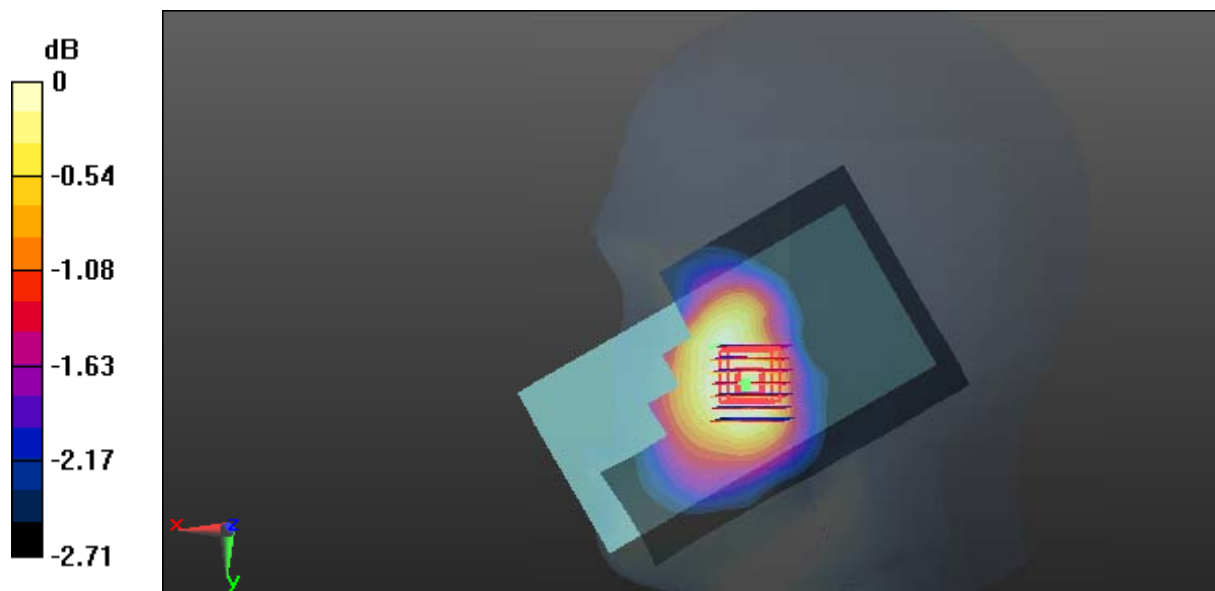

0 dB = 0.0543 W/kg = -12.65 dBW/kg

Test Plot 81#: LTE Band 5_Head Right Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0378 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.153 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0349 W/kg

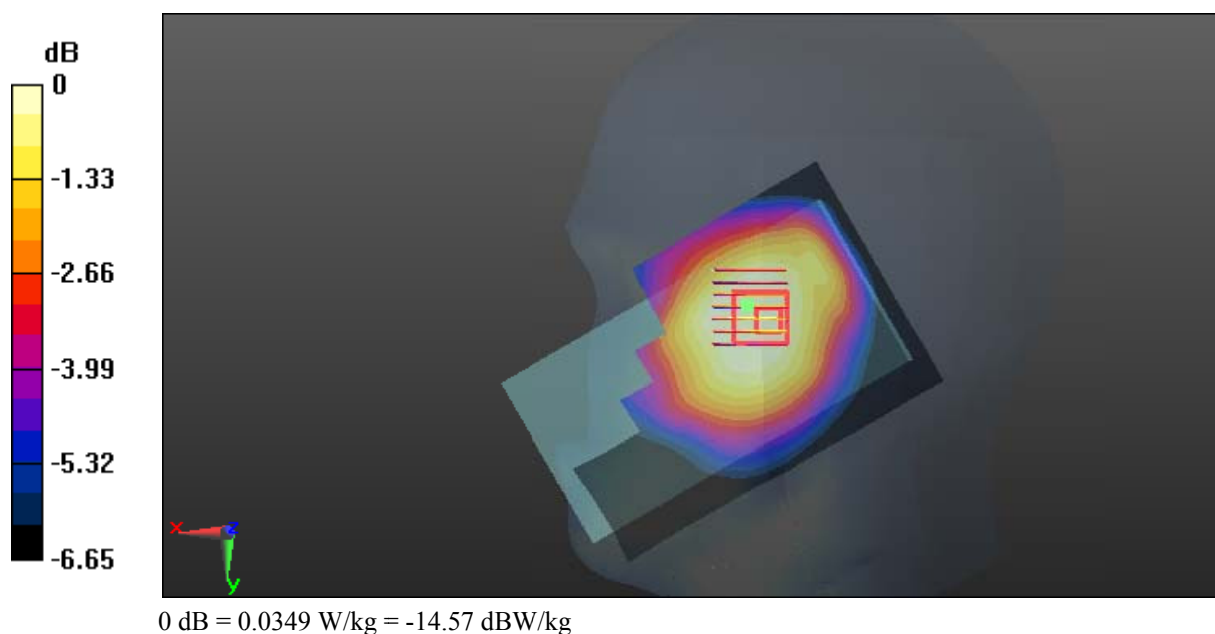

Test Plot 82#: LTE Band 5_Head Right Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0277 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.498 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0262 W/kg

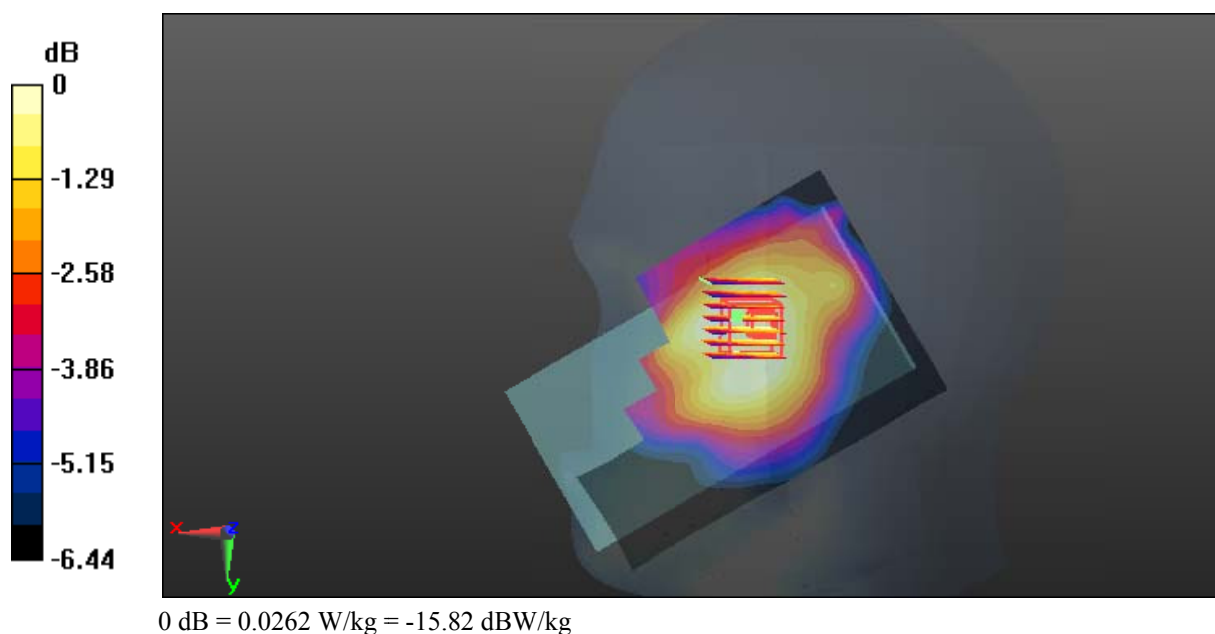

Test Plot 83#: LTE Band 5_Body Back_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.86 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

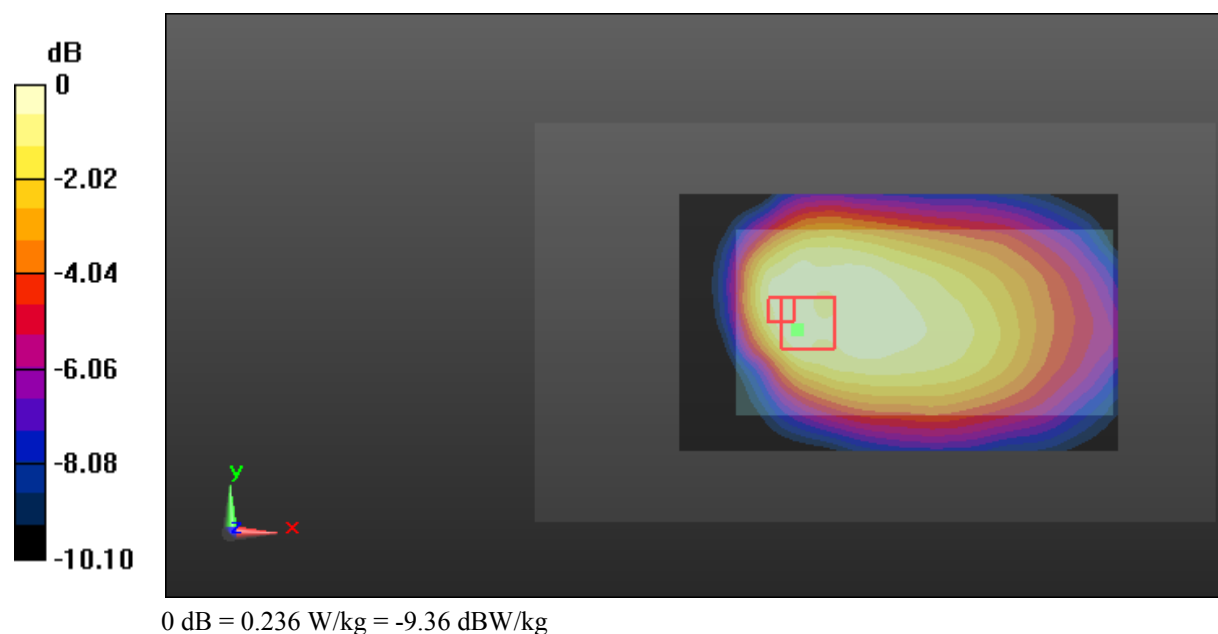

Test Plot 84#: LTE Band 5_Body Back_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.203 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.852 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

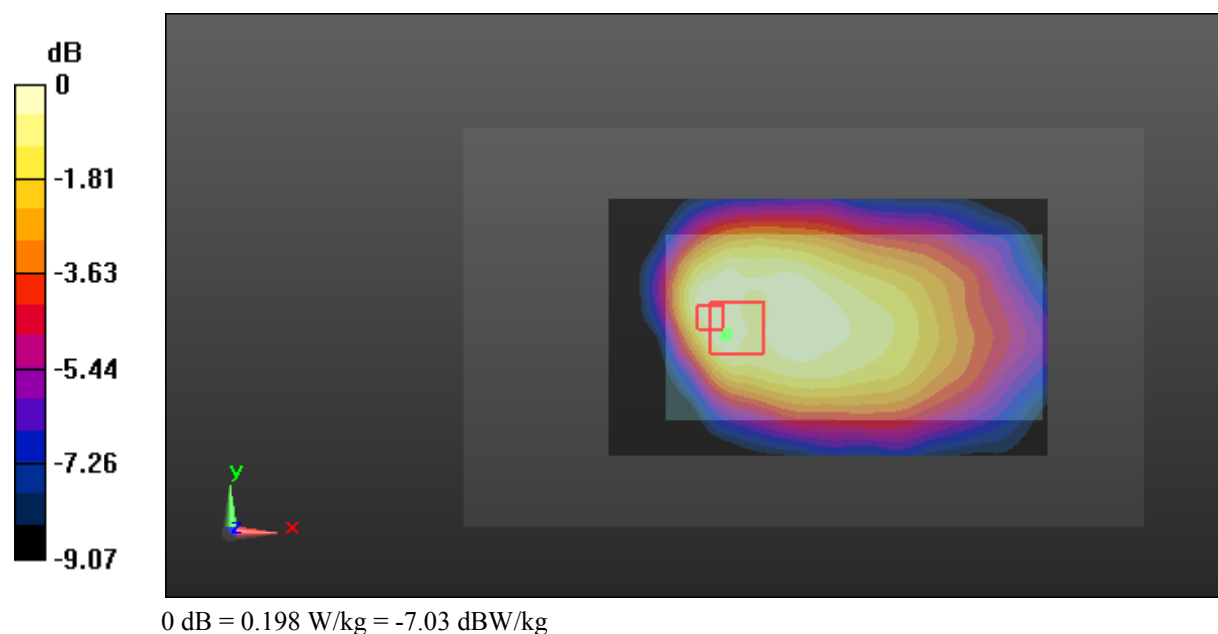

Test Plot 85#: LTE Band 5_Body Left_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0367 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.447 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0347 W/kg

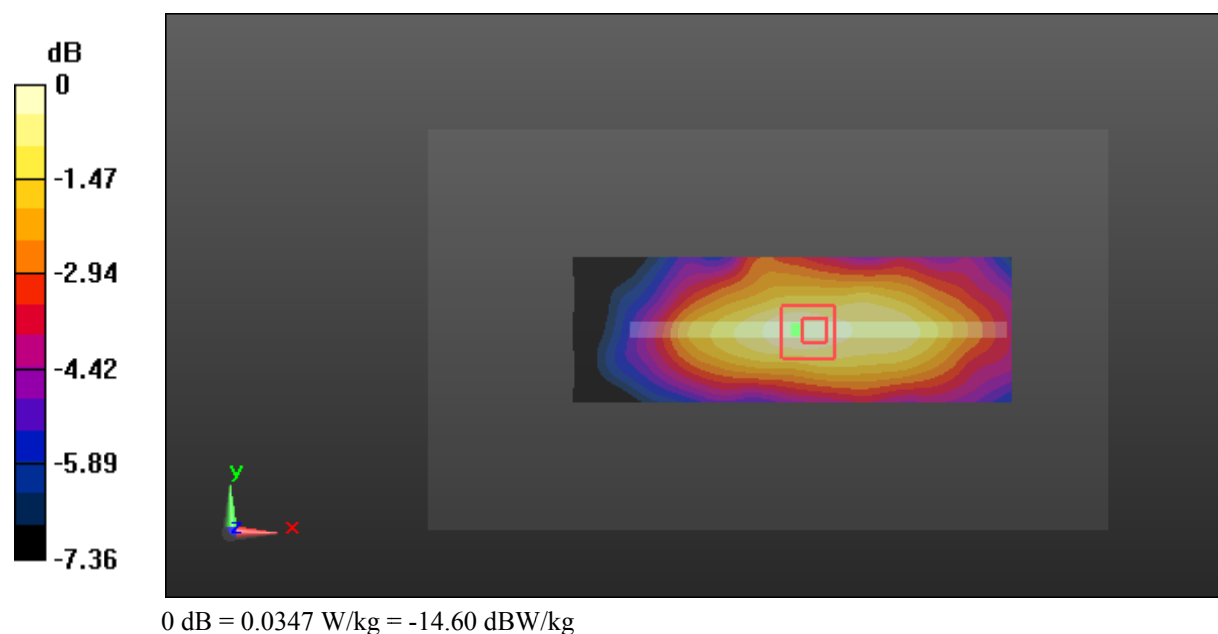

Test Plot 86#: LTE Band 5_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0233 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.711 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0268 W/kg

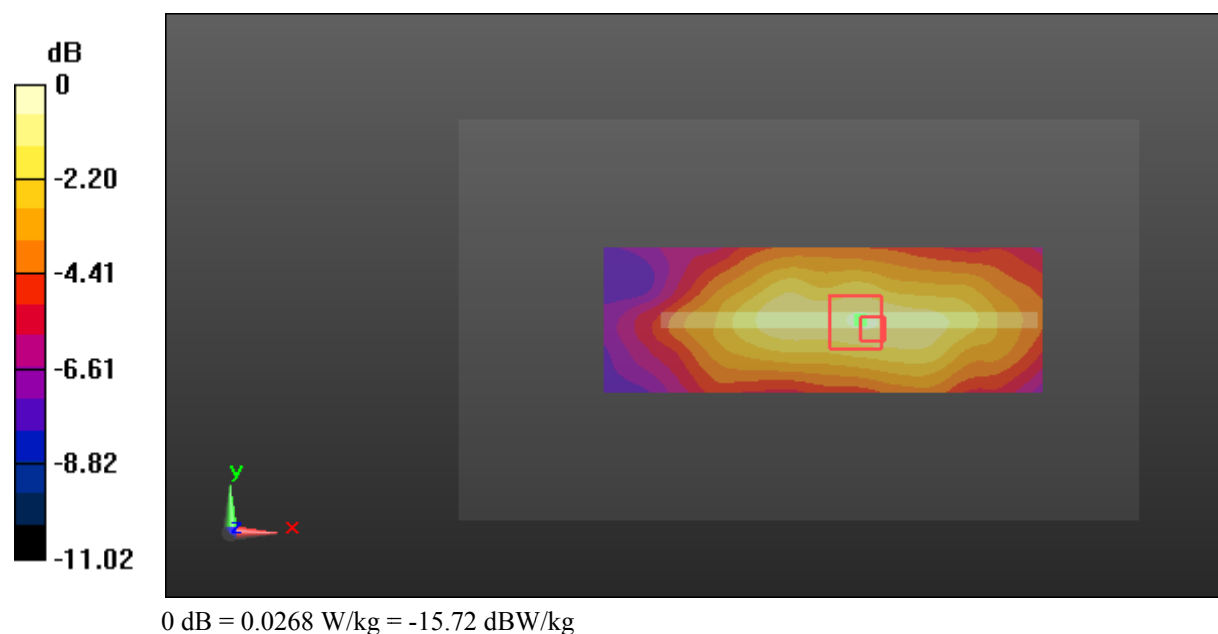

Test Plot 87#: LTE Band 5_Body Right_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0407 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.802 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0392 W/kg

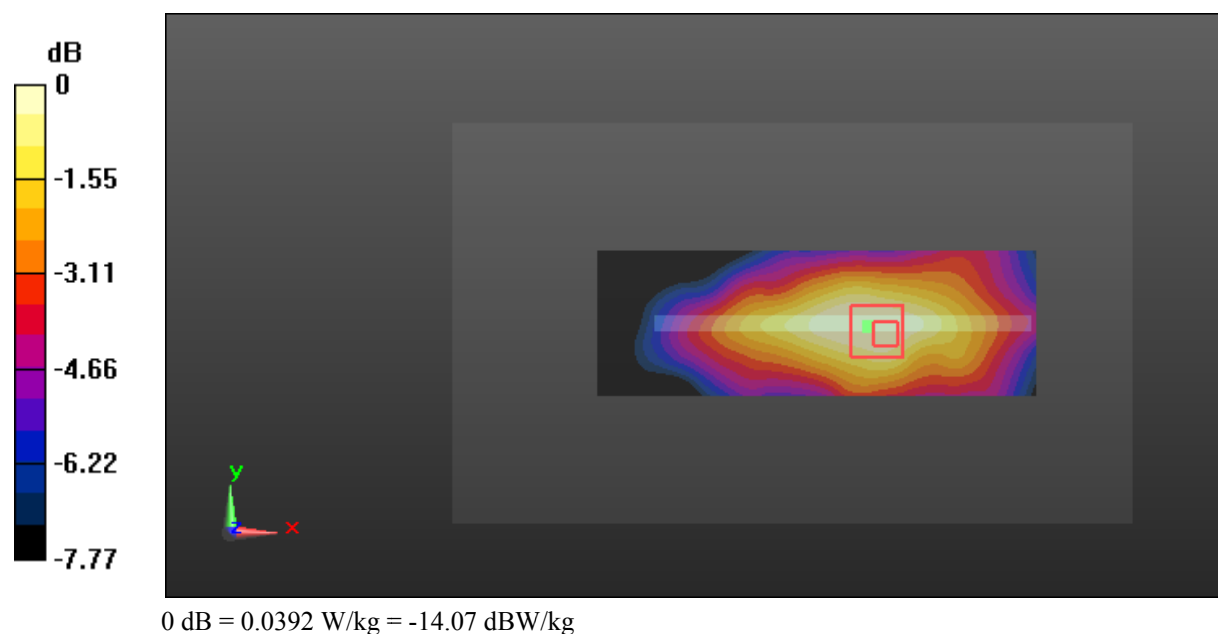

Test Plot 88#: LTE Band 5_Body Right_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0252 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.633 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0282 W/kg

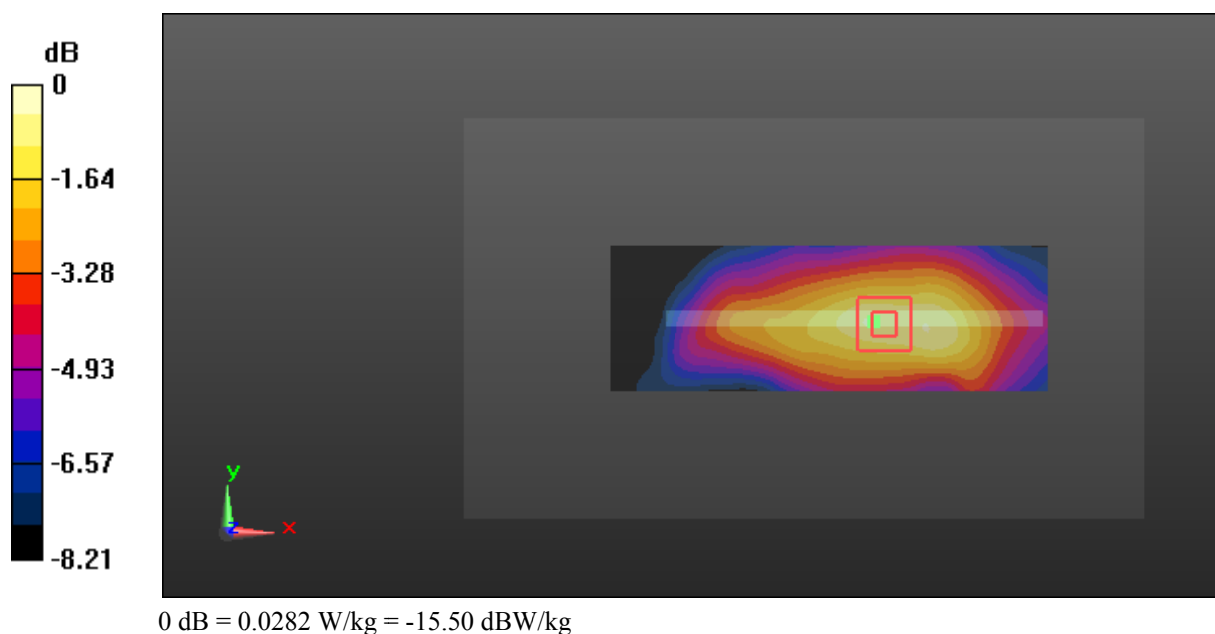

Test Plot 89#: LTE Band 5_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0185 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.099 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0181 W/kg

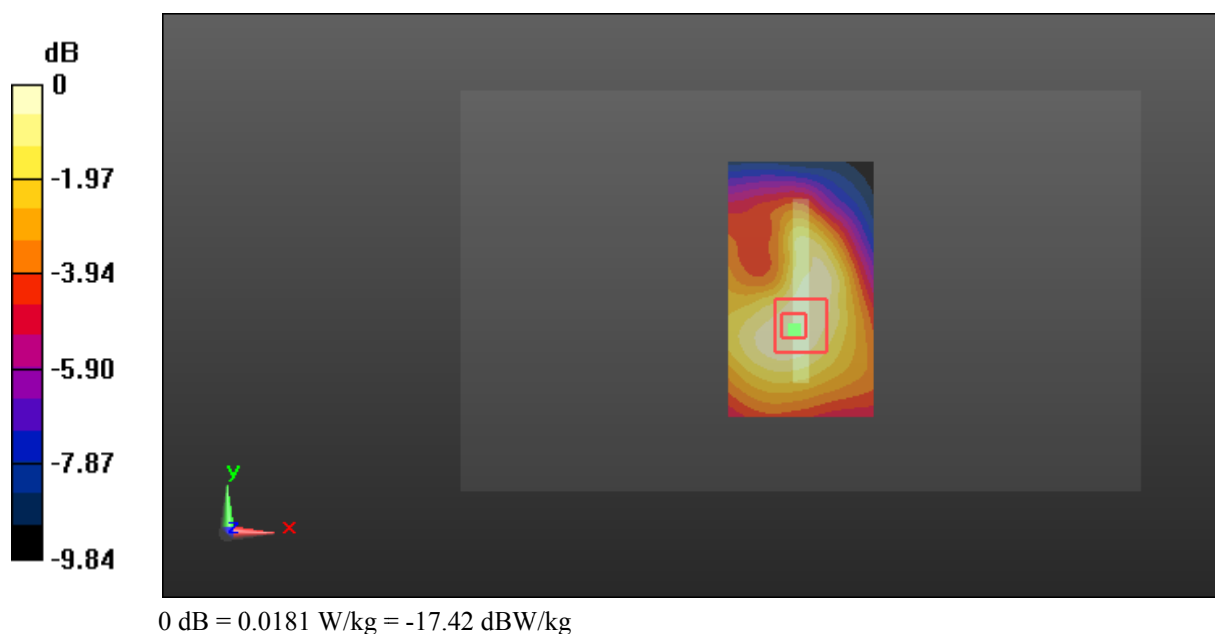

Test Plot 90#: LTE Band 5_Body Bottom_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.281 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.0079 W/kg

Maximum value of SAR (measured) = 0.0125 W/kg

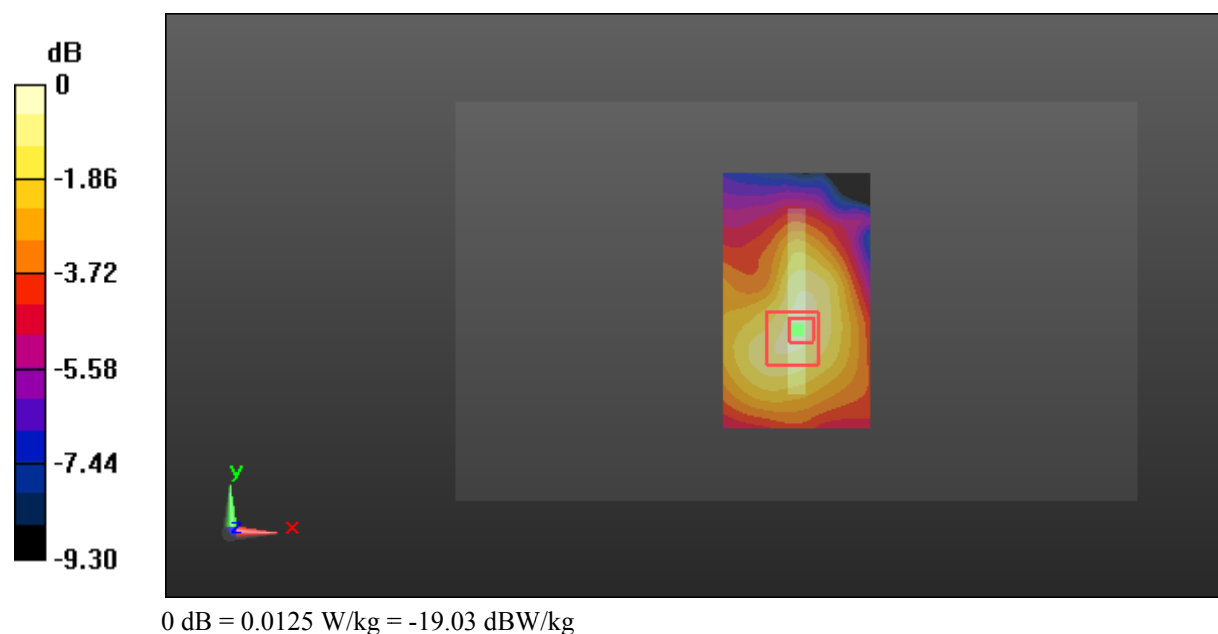

Test Plot 91#: LTE Band 7_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.136 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.745 V/m; Power Drift = 1.03 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

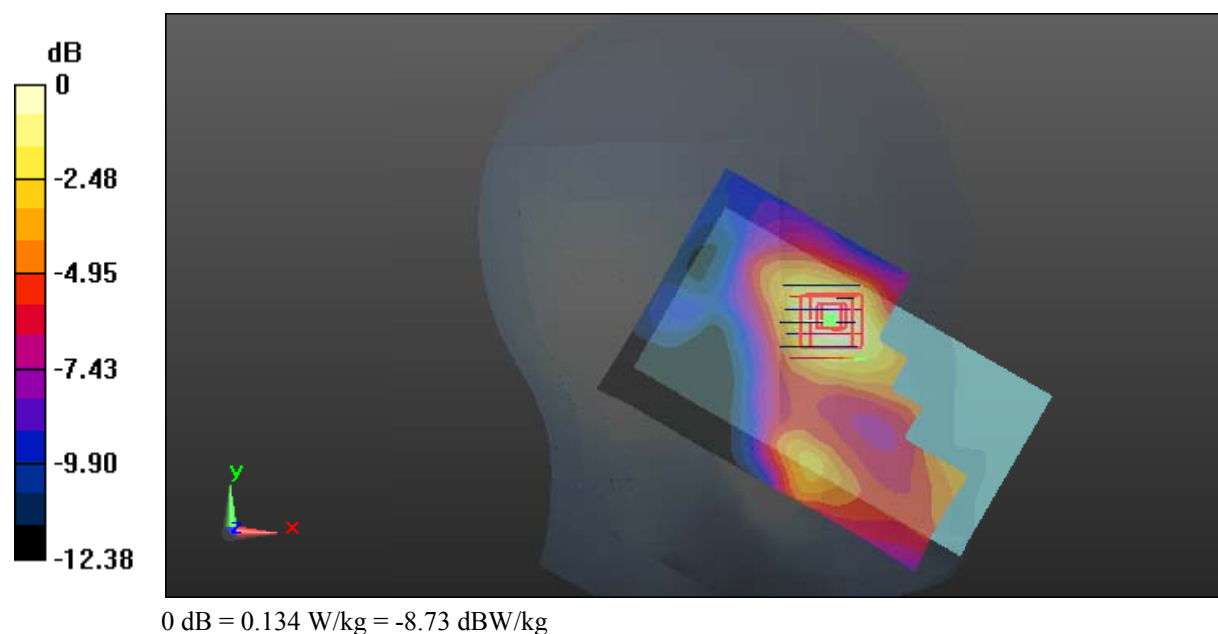

Test Plot 92#: LTE Band 7_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.115 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.642 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

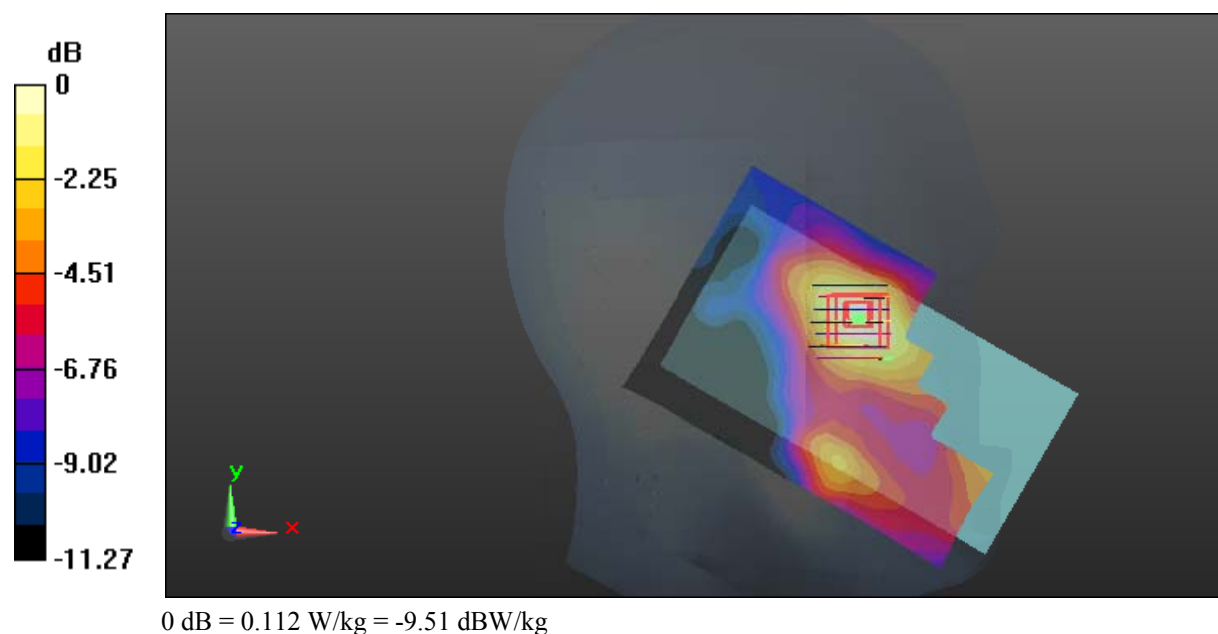

Test Plot 93#: LTE Band 7_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.508 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

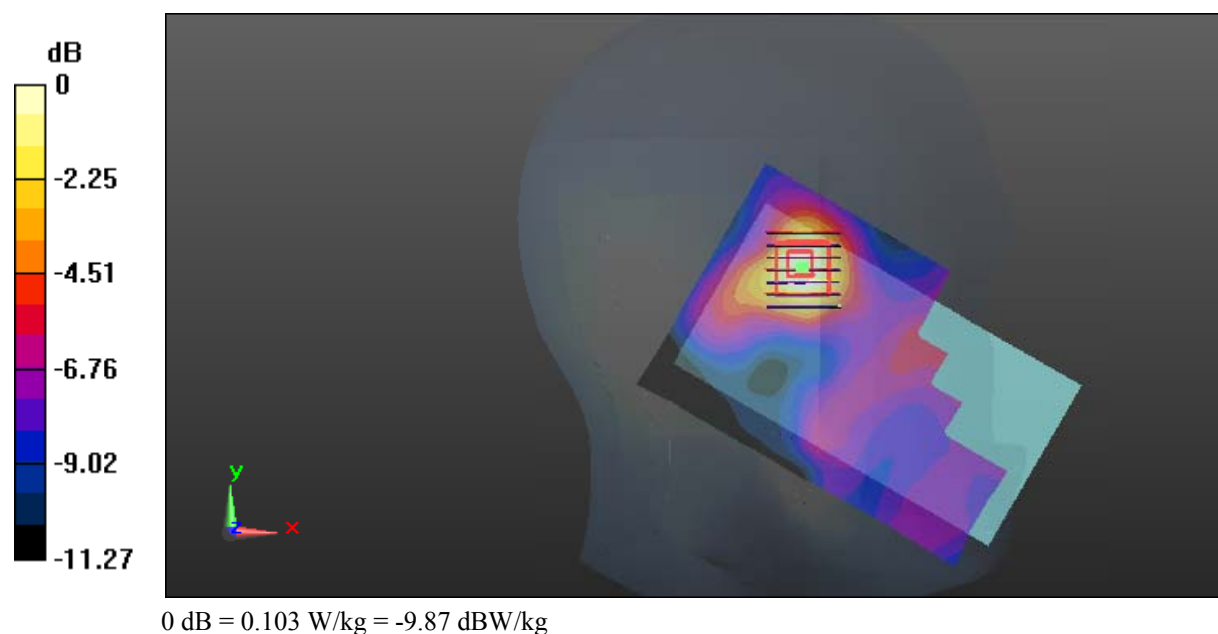

Test Plot 94#: LTE Band 7_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0954 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.104 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0854 W/kg

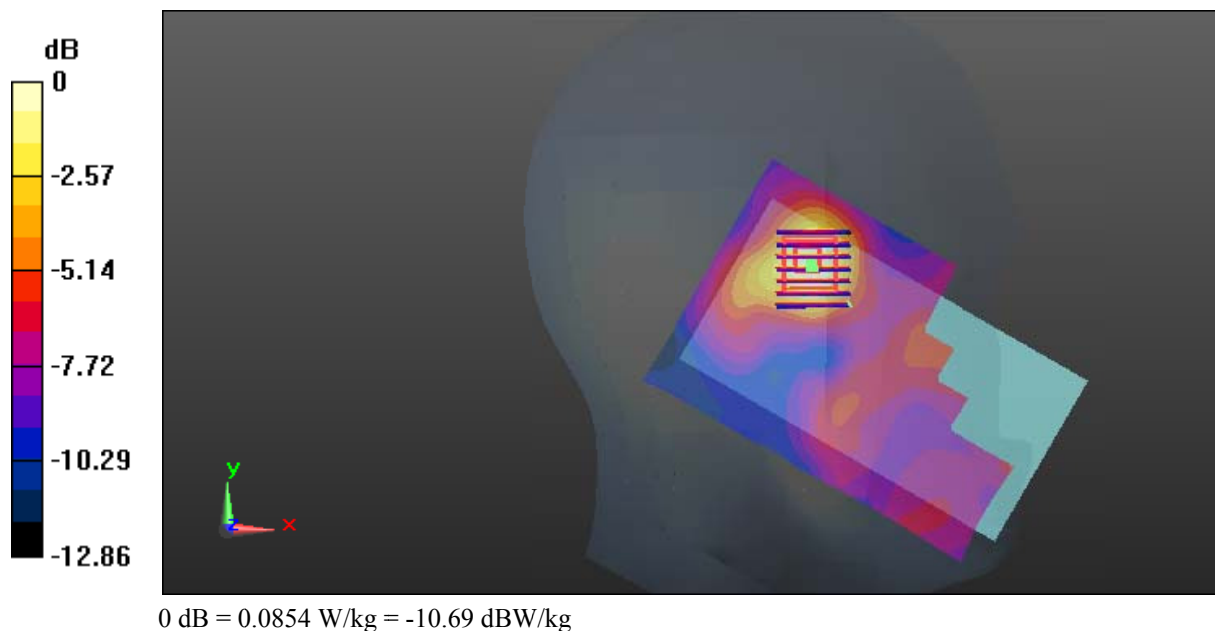

Test Plot 95#: LTE Band 7_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.255 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.966 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

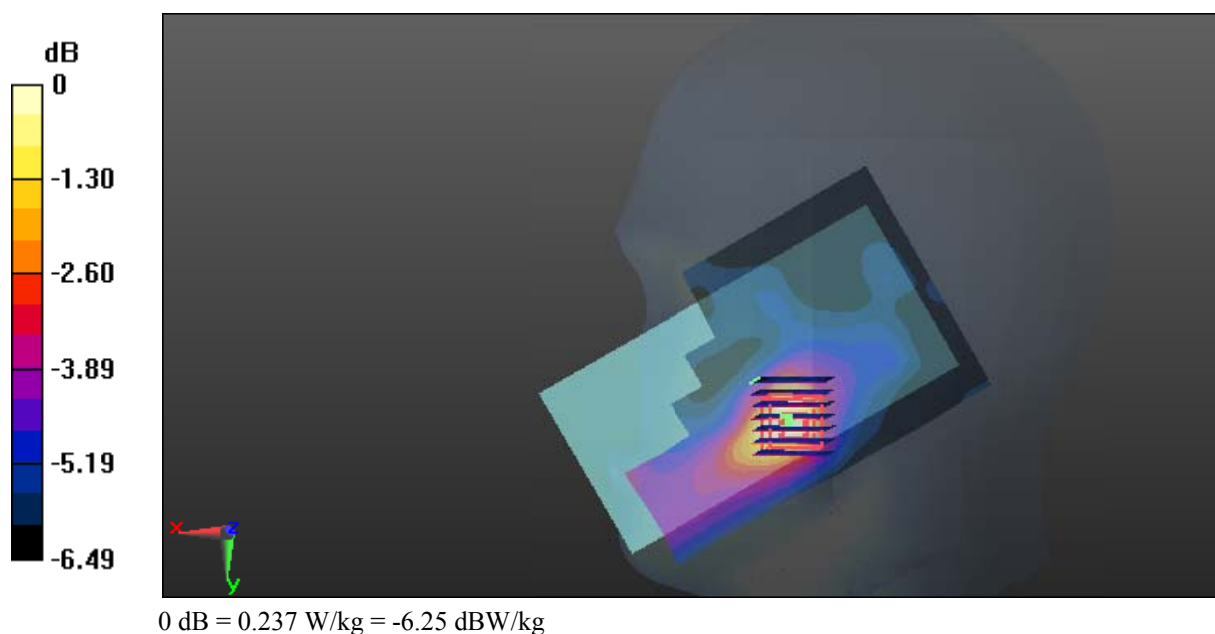

Test Plot 96#: LTE Band 7_Head Right Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.210 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.545 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

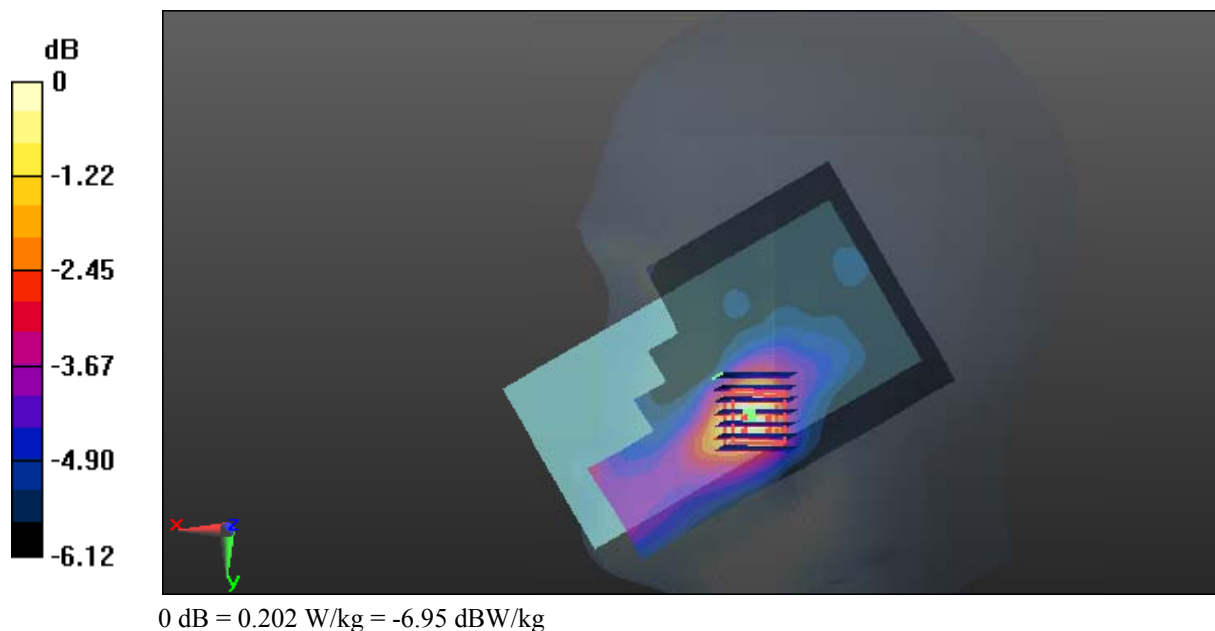

Test Plot 97#: LTE Band 7_Head Right Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0734 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.189 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0700 W/kg

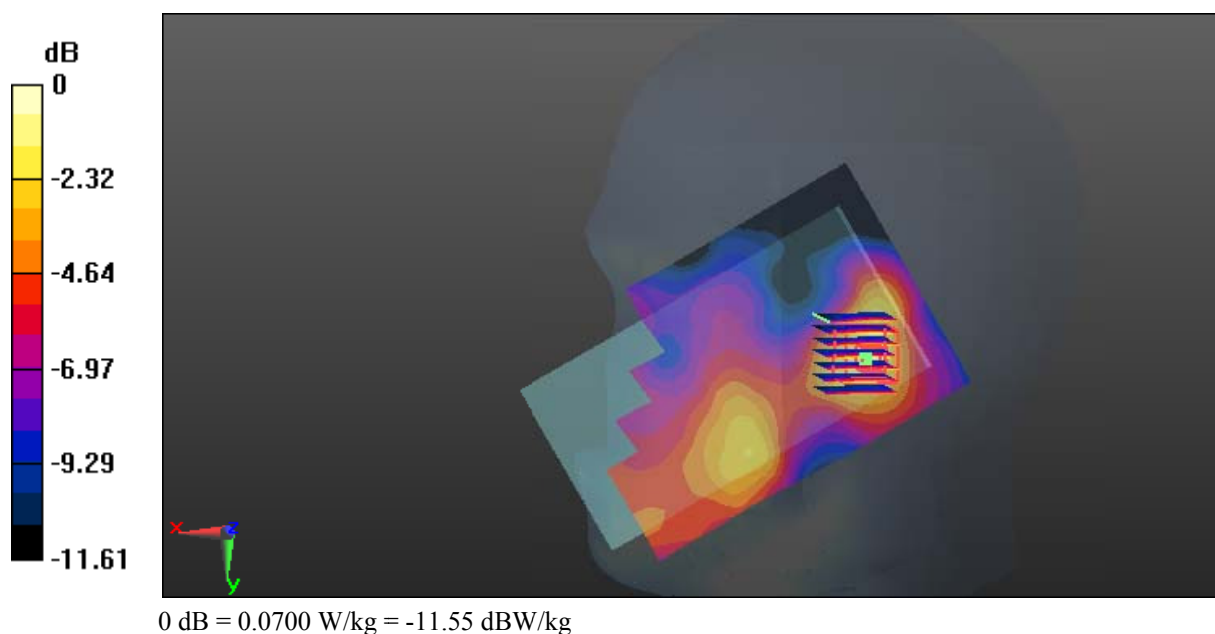

Test Plot 98#: LTE Band 7_Head Right Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0594 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.915 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0561 W/kg

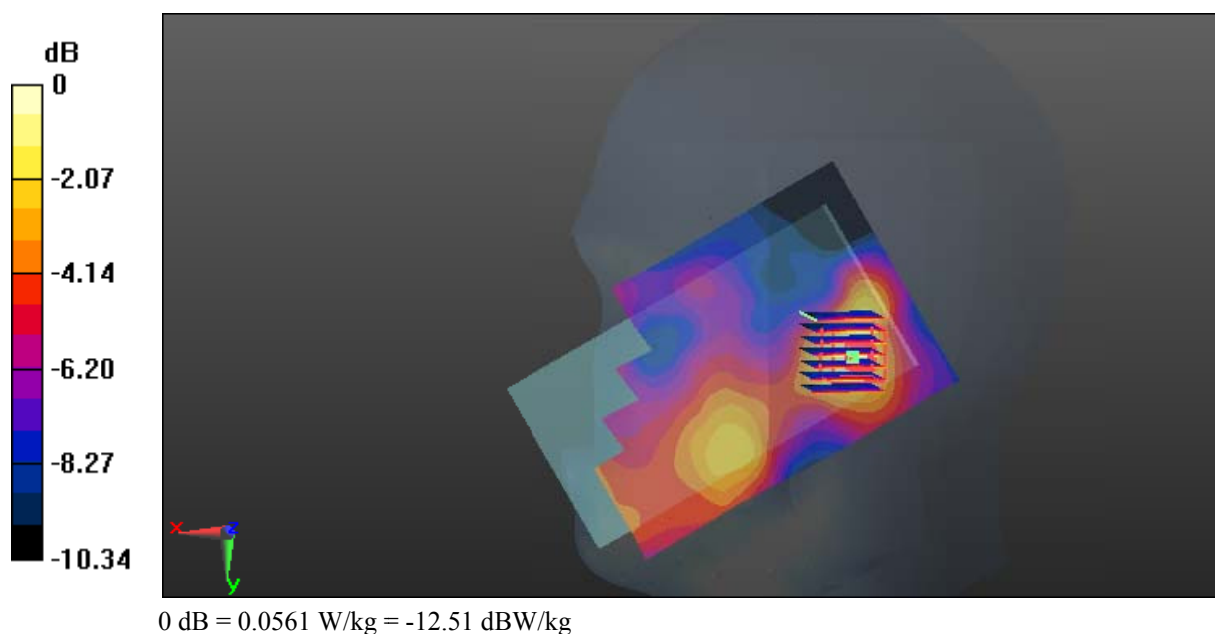

Test Plot 99#: LTE Band 7_Body Back_Low Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: 2510 MHz; $\sigma = 2.071$ S/m; $\epsilon_r = 51.82$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.048 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.620 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

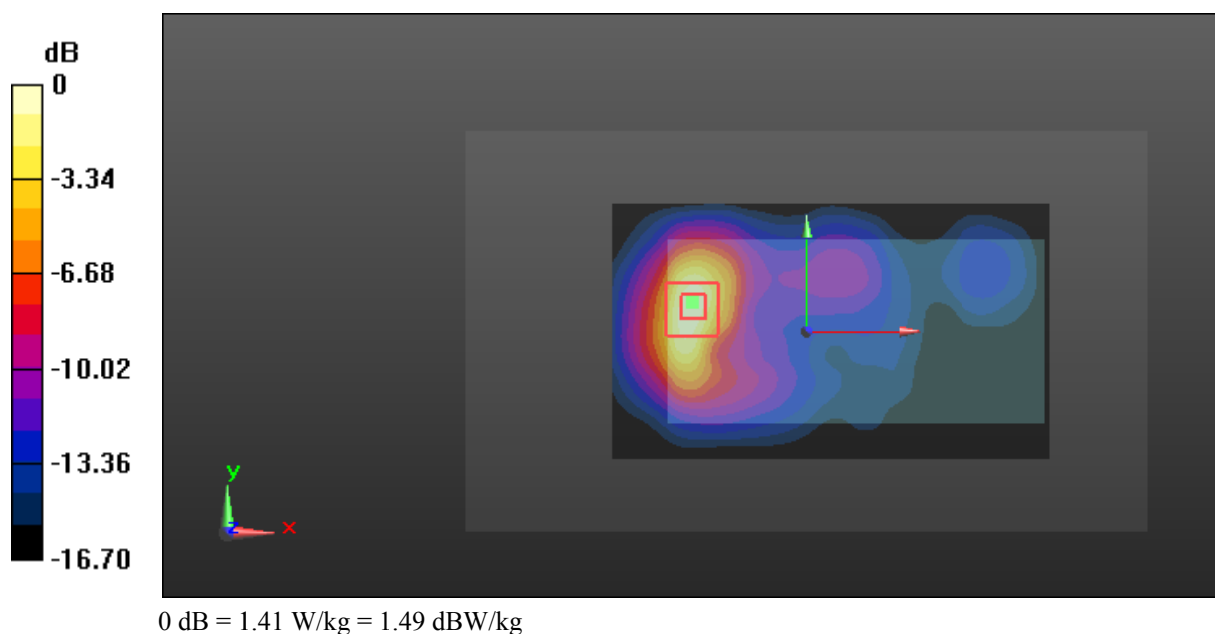

Test Plot 100#: LTE Band 7_Body Back_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147$ S/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.077 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.592 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

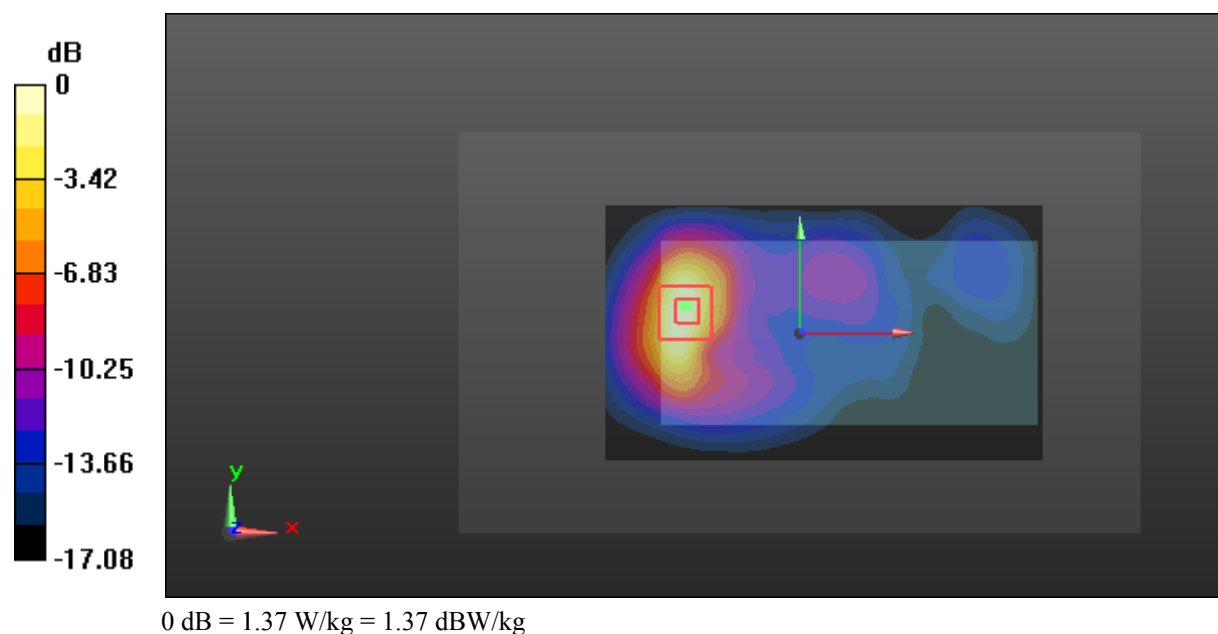

Test Plot 101#: LTE Band 7_Body Back_High Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: 2560 MHz; $\sigma = 2.156$ S/m; $\epsilon_r = 51.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.382 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.529 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

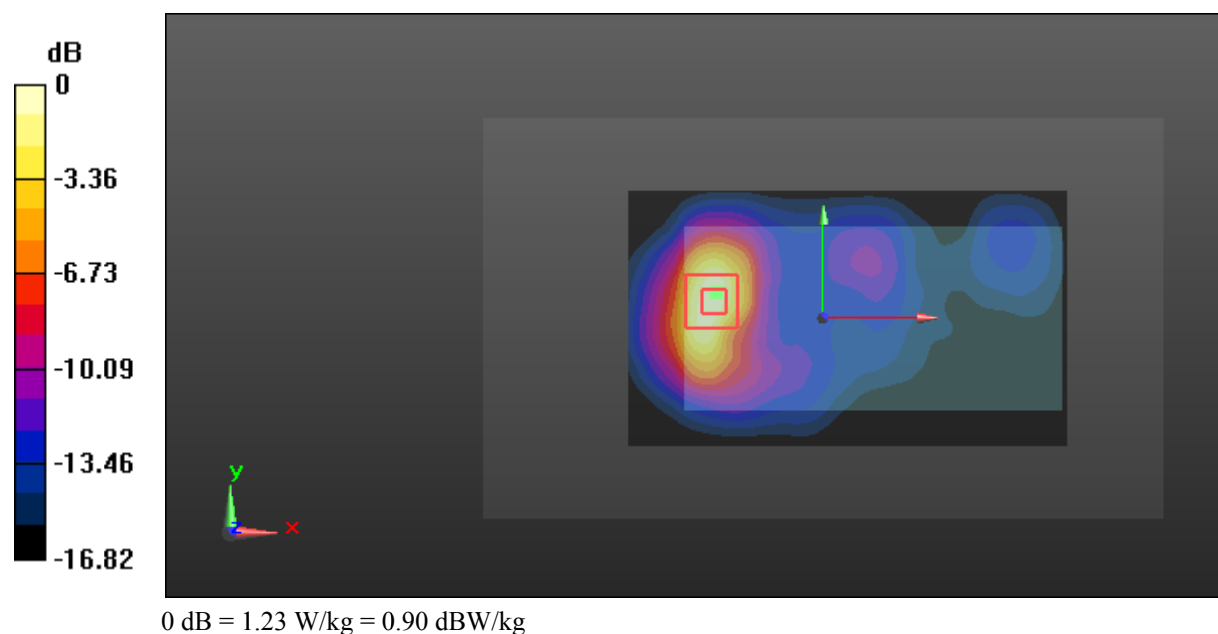

Test Plot 102#: LTE Band 7_Body Back_Low Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: 2510 MHz; $\sigma = 2.071$ S/m; $\epsilon_r = 51.82$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.775 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.375 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.363 W/kg

Maximum value of SAR (measured) = 0.760 W/kg

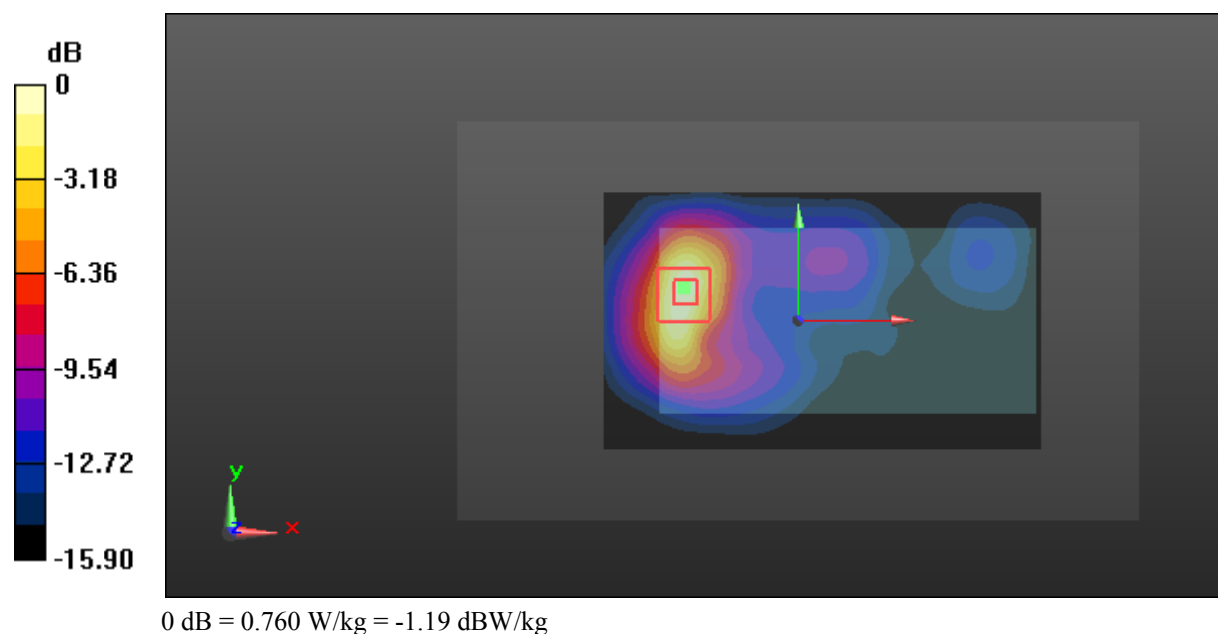

Test Plot 103#: LTE Band 7_Body Left_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147$ S/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0615 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.629 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0626 W/kg

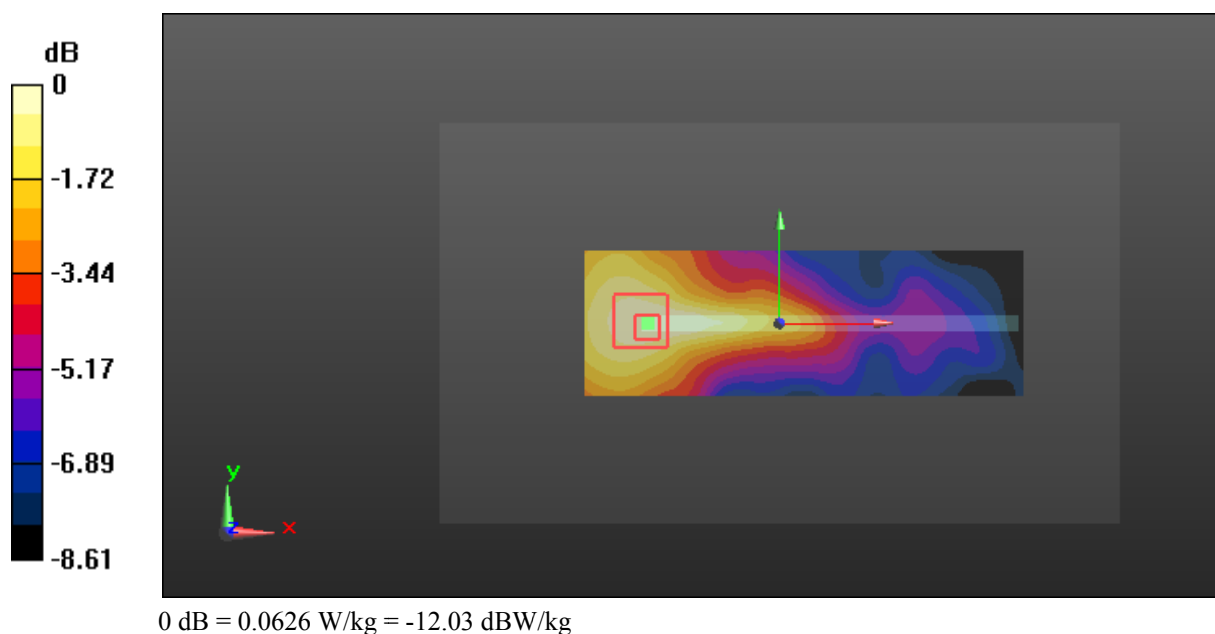

Test Plot 104#: LTE Band 7_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147$ S/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0550 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.192 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0535 W/kg

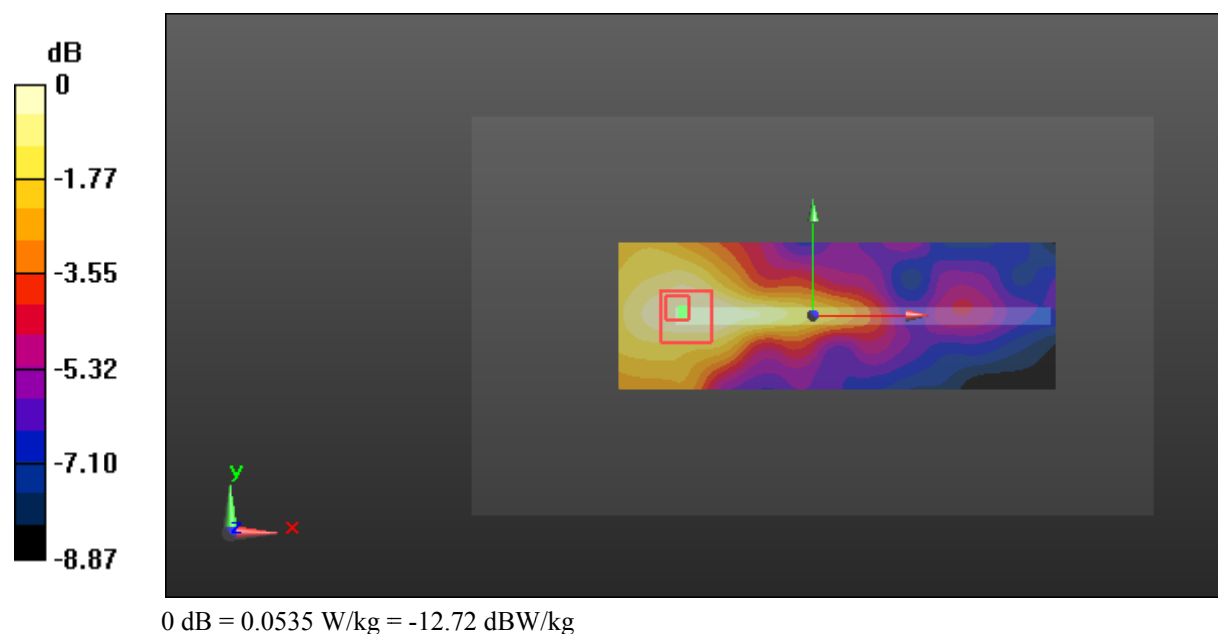

Test Plot 105#: LTE Band 7_Body Right_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147 \text{ S/m}$; $\epsilon_r = 51.69$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.102 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.979 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0965 W/kg

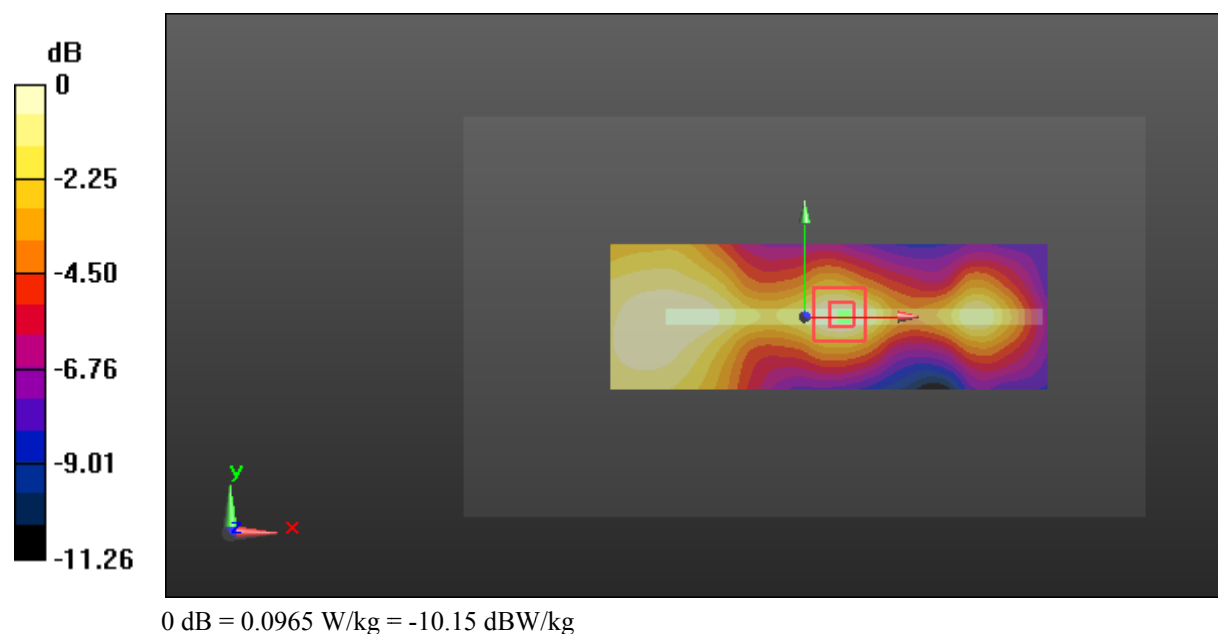

Test Plot 106#: LTE Band 7_Body Right_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147$ S/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0929 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.818 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0940 W/kg

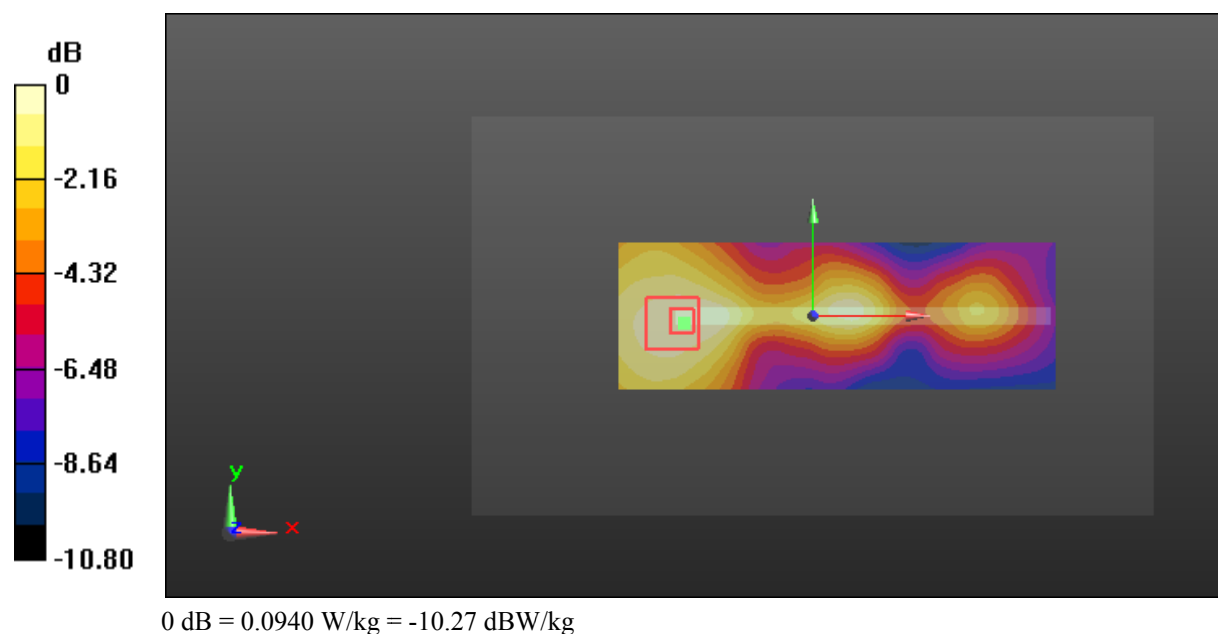

Test Plot 107#: LTE Band 7_Body Bottom_Low Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: 2510 MHz; $\sigma = 2.071$ S/m; $\epsilon_r = 51.82$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 0.994 W/kg

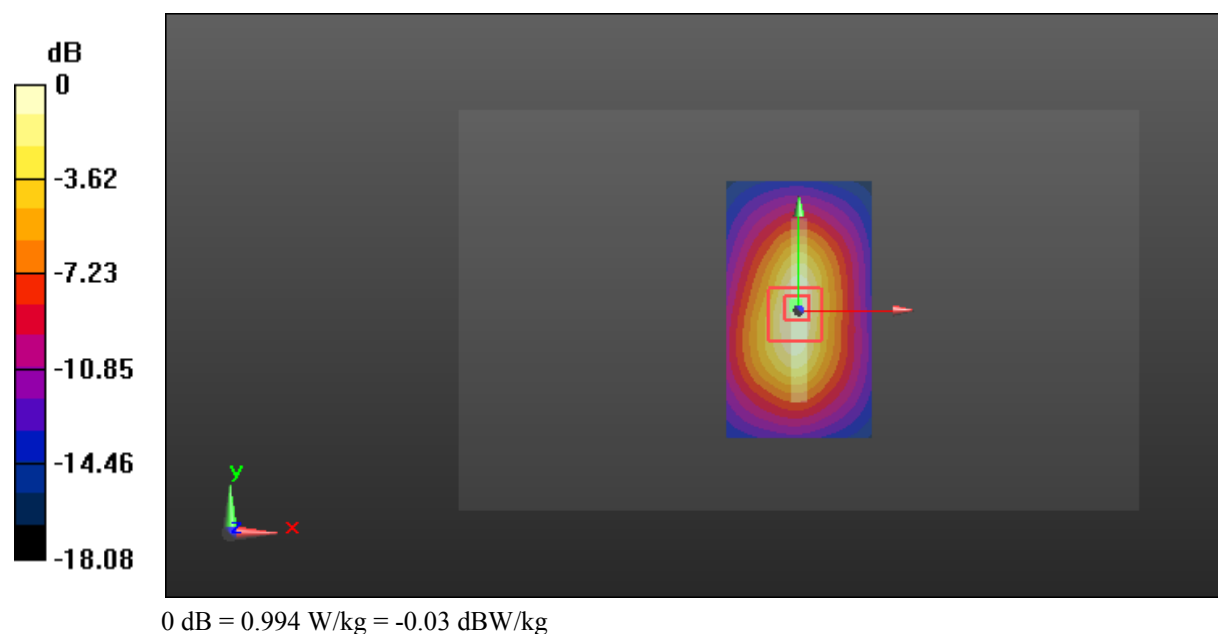

Test Plot 108#: LTE Band 7_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: 2535 MHz; $\sigma = 2.147$ S/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.67 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.450 W/kg

Maximum value of SAR (measured) = 0.987 W/kg

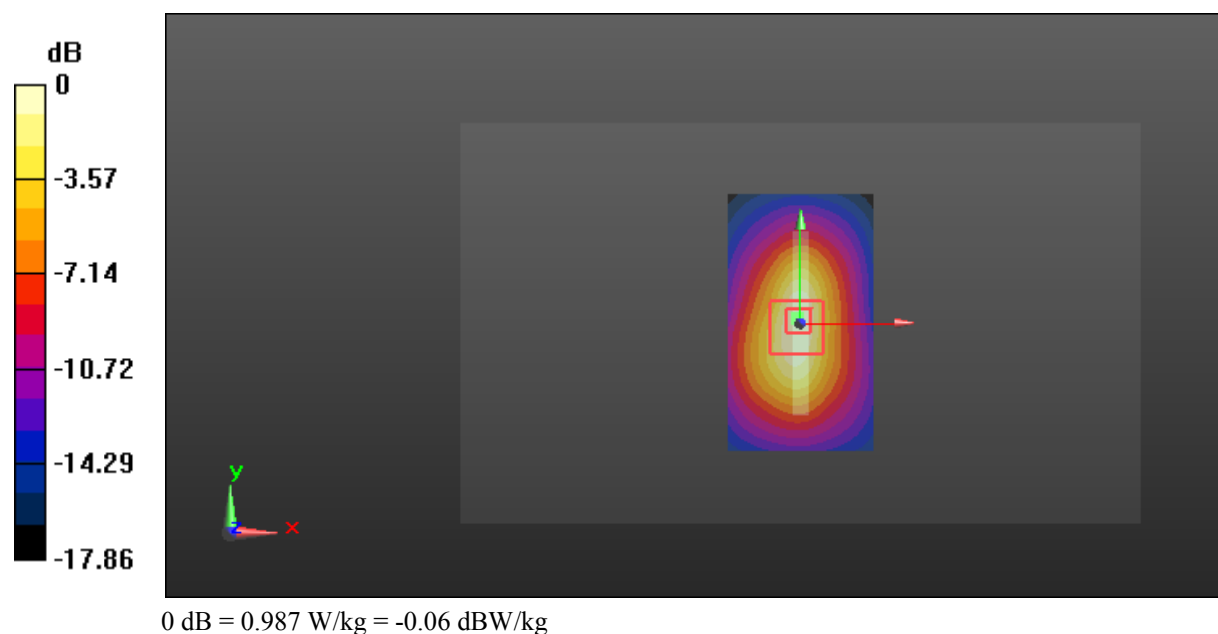

Test Plot 109#: LTE Band 7_Body Bottom_High Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: 2560 MHz; $\sigma = 2.156$ S/m; $\epsilon_r = 51.47$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.912 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.17 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.808 W/kg

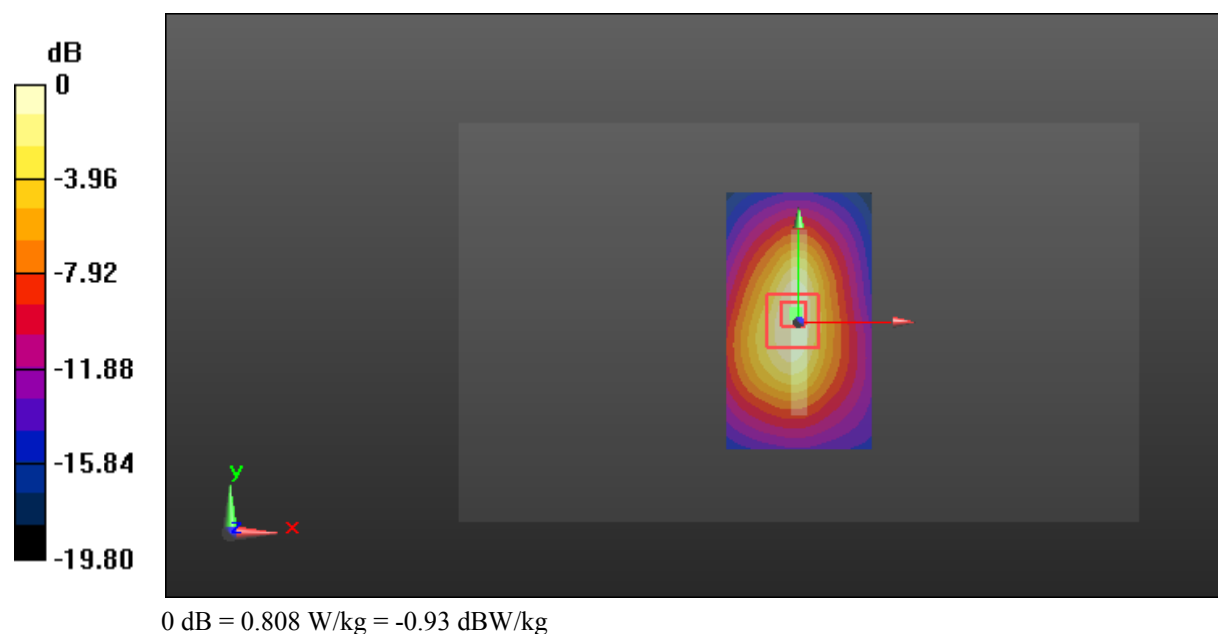

Test Plot 110#: LTE Band 7_Body Bottom_Low Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: 2510 MHz; $\sigma = 2.071$ S/m; $\epsilon_r = 51.82$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.687 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.21 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

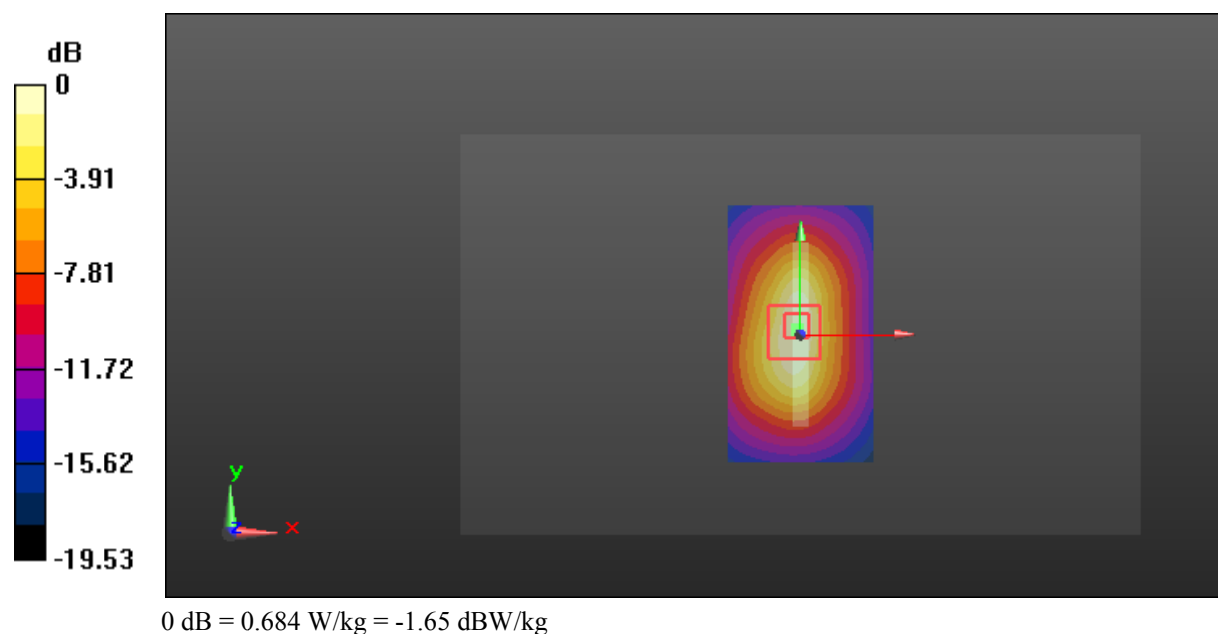

Test Plot 111#: LTE Band 17_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0449 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.839 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0450 W/kg

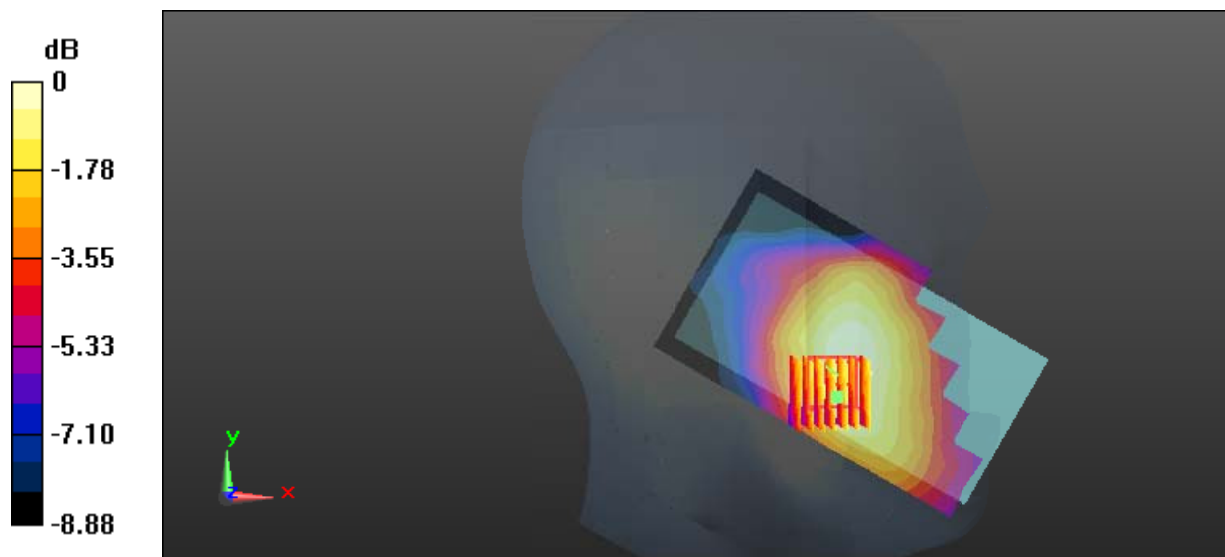

0 dB = 0.0450 W/kg = -13.47 dBW/kg

Test Plot 112#: LTE Band 17_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0365 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.474 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0381 W/kg

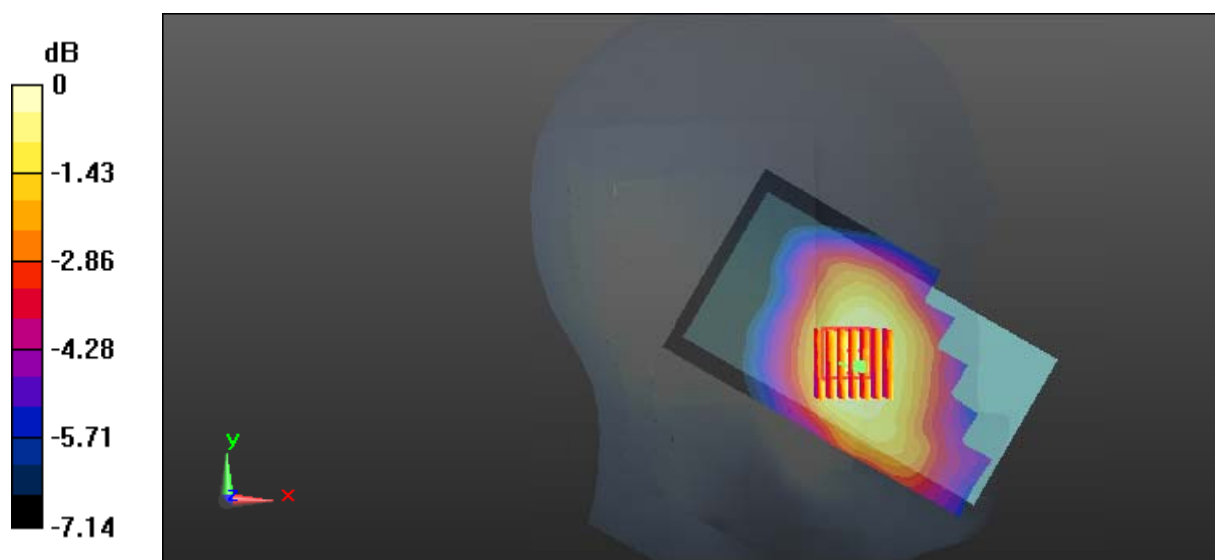

0 dB = 0.0381 W/kg = -14.19 dBW/kg

Test Plot 113#: LTE Band 17_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0234 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.277 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0230 W/kg

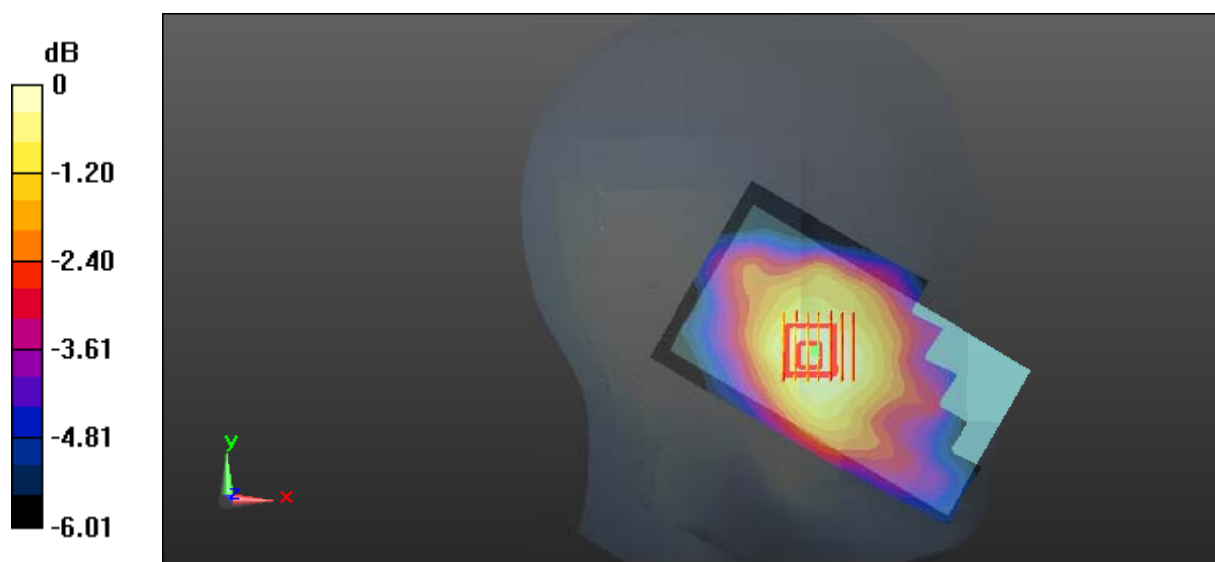

0 dB = 0.0230 W/kg = -16.38 dBW/kg

Test Plot 114#: LTE Band 17_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0194 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.631 V/m; Power Drift = 1.25 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0184 W/kg

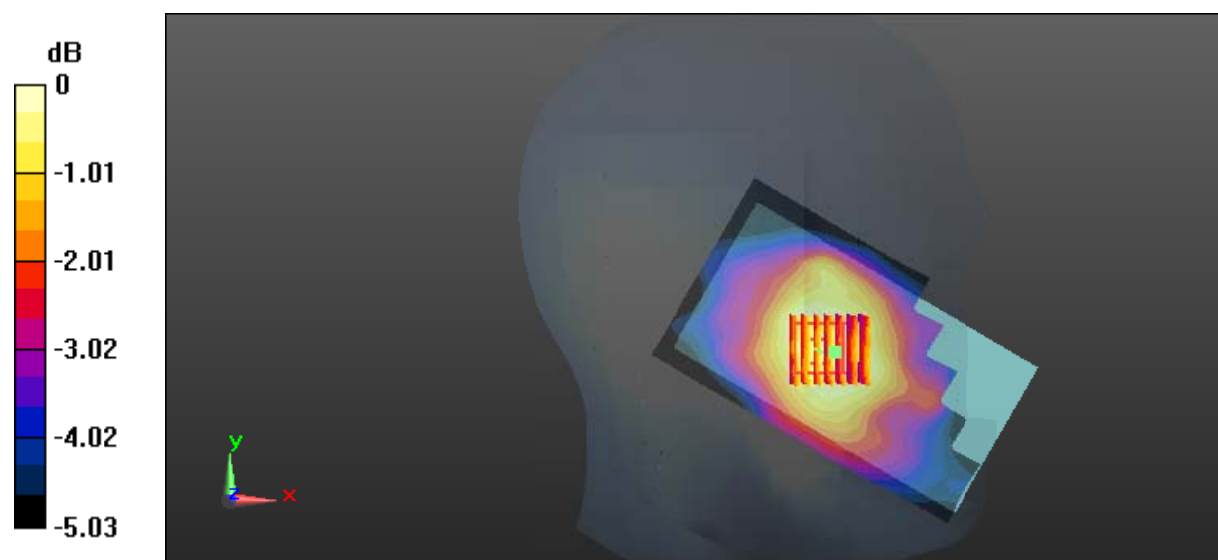

0 dB = 0.0184 W/kg = -17.35 dBW/kg

Test Plot 115#: LTE Band 17_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0601 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.382 V/m; Power Drift = 1.68 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0591 W/kg

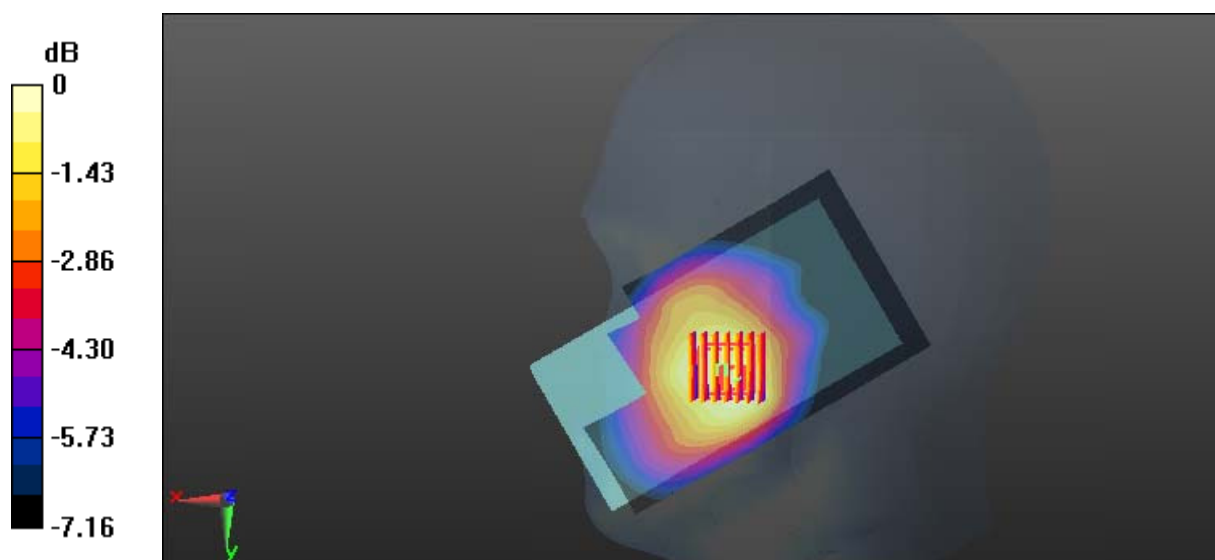

Test Plot 116#: LTE Band 17_Head Right Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0493 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.069 V/m; Power Drift = 1.68 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0453 W/kg

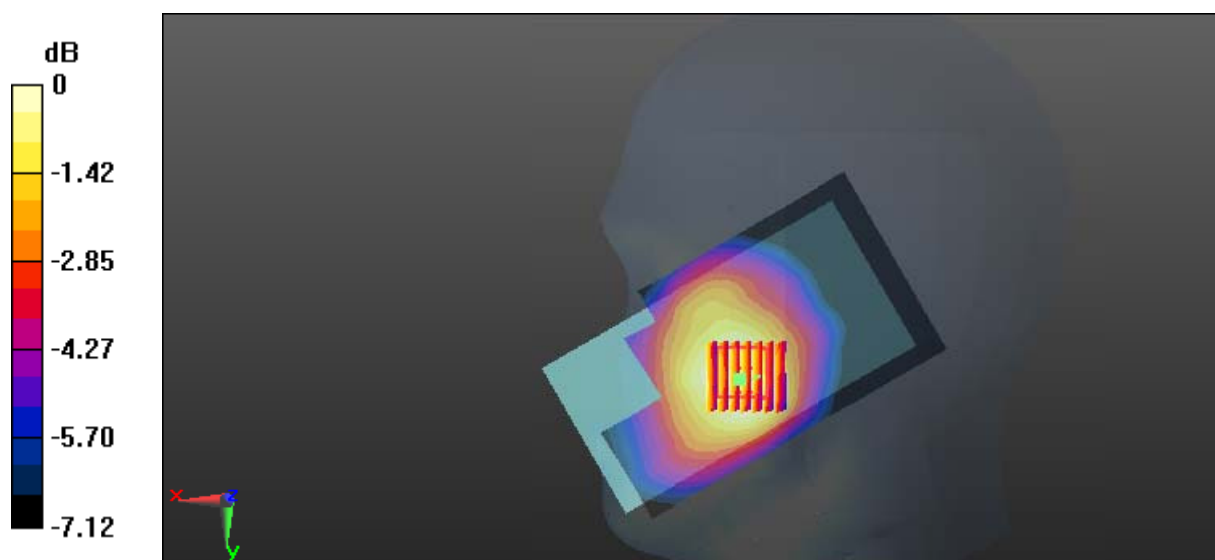

0 dB = 0.0453 W/kg = -13.44 dBW/kg

Test Plot 117#: LTE Band 17_Head Right Tilt_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0375 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.678 V/m; Power Drift = 0.96 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0365 W/kg

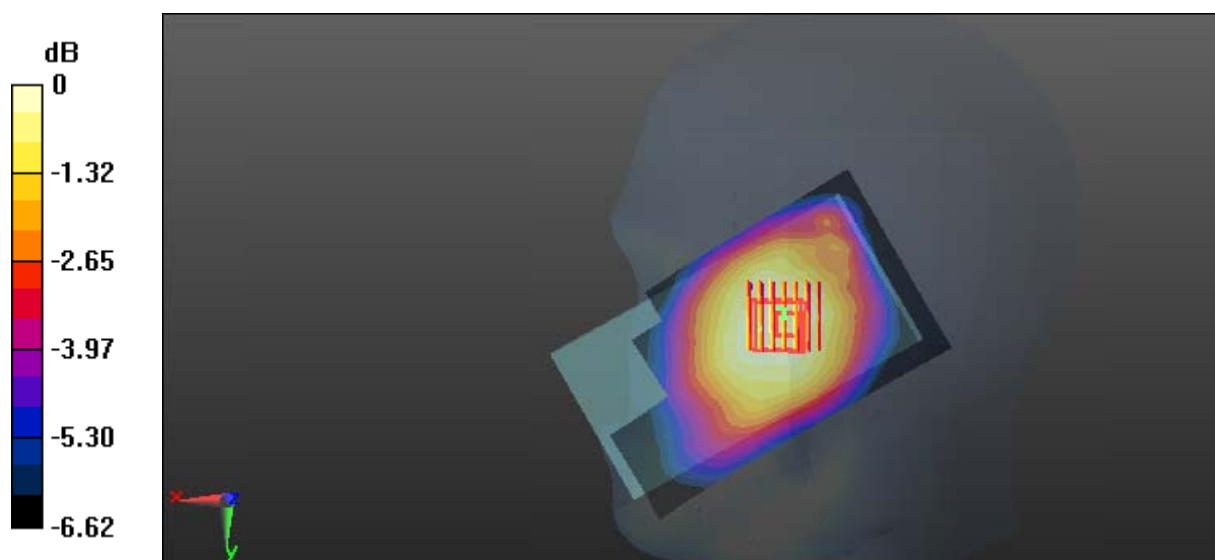

0 dB = 0.0365 W/kg = -14.38 dBW/kg

Test Plot 118#: LTE Band 17_Head Right Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.339$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0296 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.433 V/m; Power Drift = 0.81 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0281 W/kg

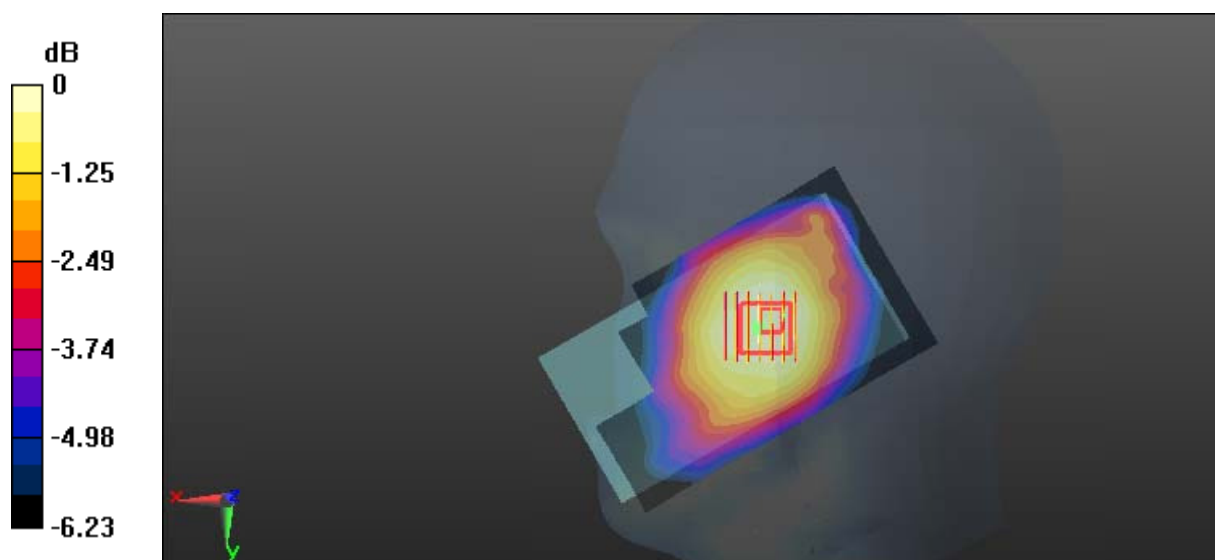

0 dB = 0.0281 W/kg = -15.51 dBW/kg

Test Plot 119#: LTE Band 17_Body Back_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.523 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.232 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.487 W/kg

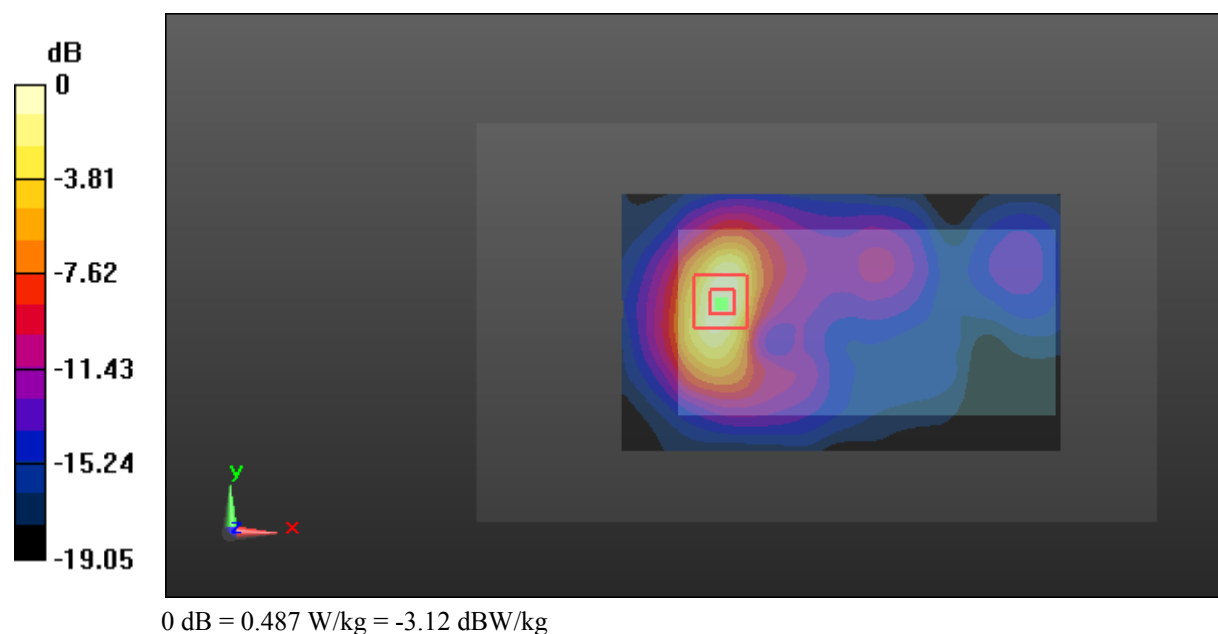

Test Plot 120#: LTE Band 17_Body Back_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.428 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.739 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.399 W/kg

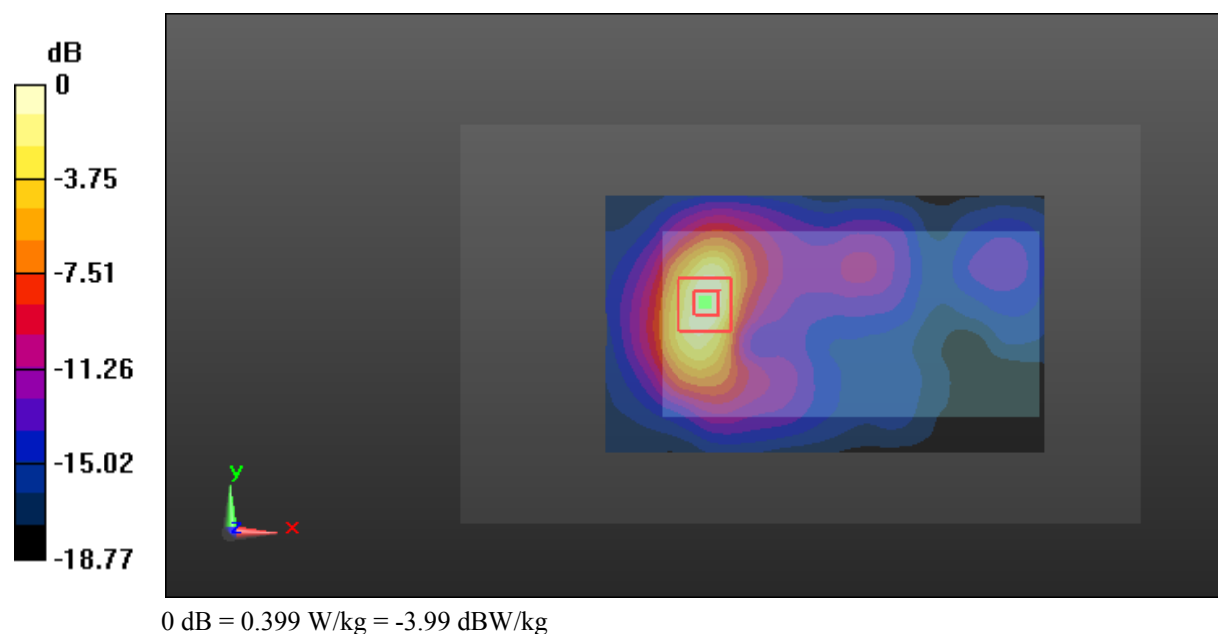

Test Plot 121#: LTE Band 17_Body Left_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0273 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.744 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0276 W/kg

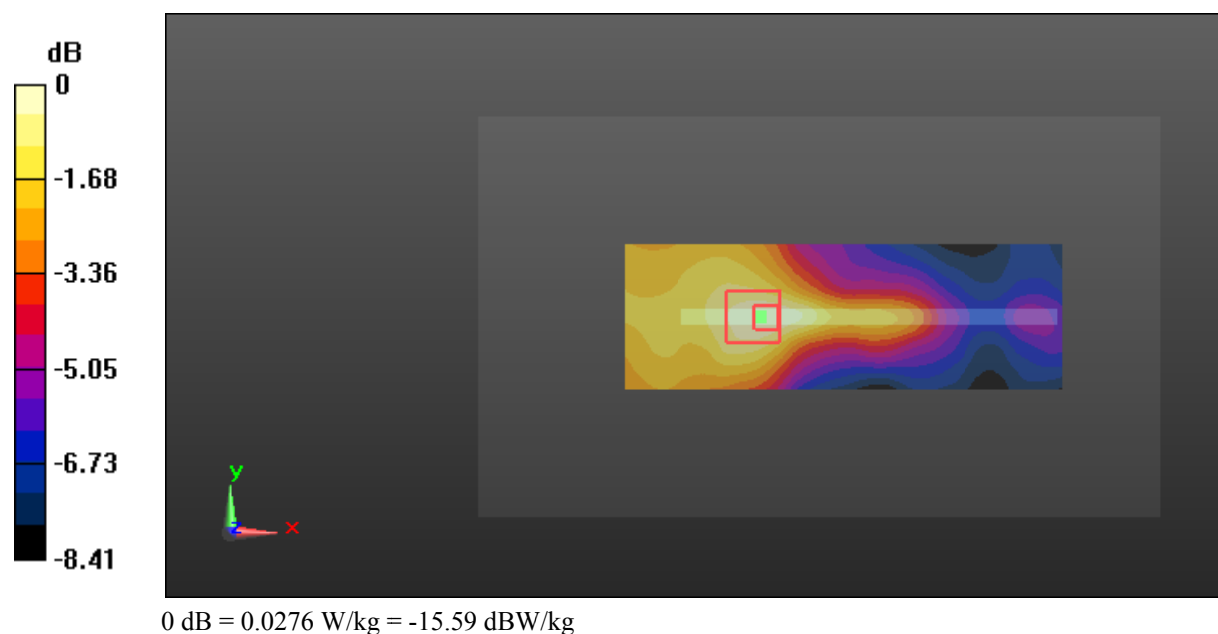

Test Plot 122#: LTE Band 17_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0228 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.450 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0232 W/kg

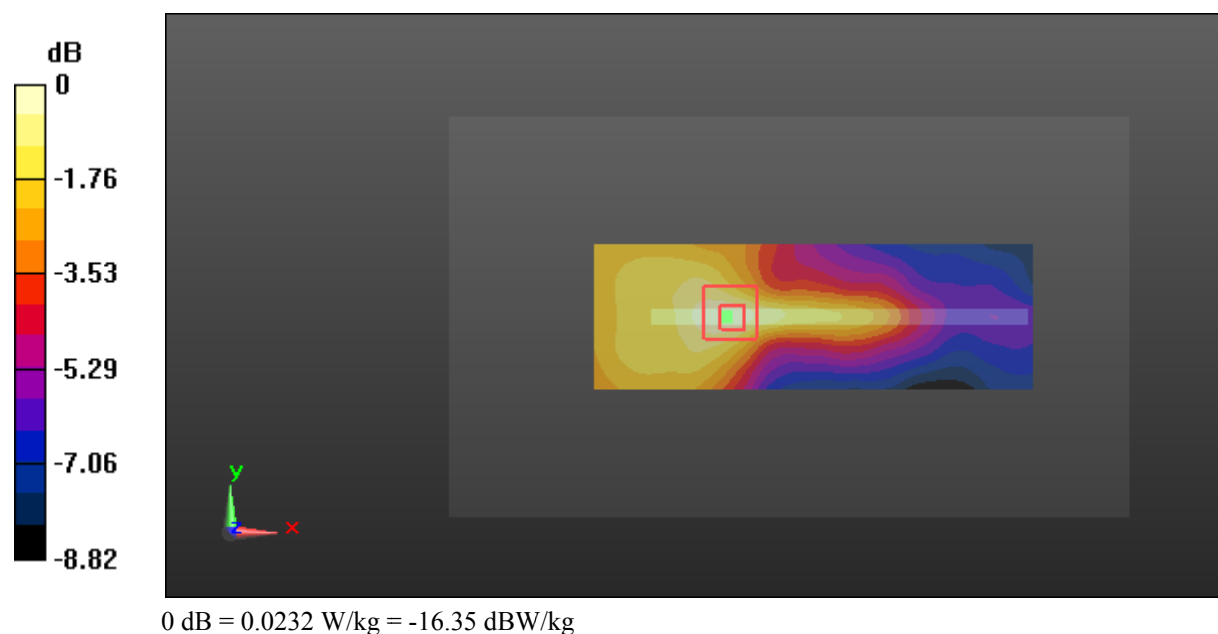

Test Plot 123#: LTE Band 17_Body Right_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0339 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.005 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0342 W/kg

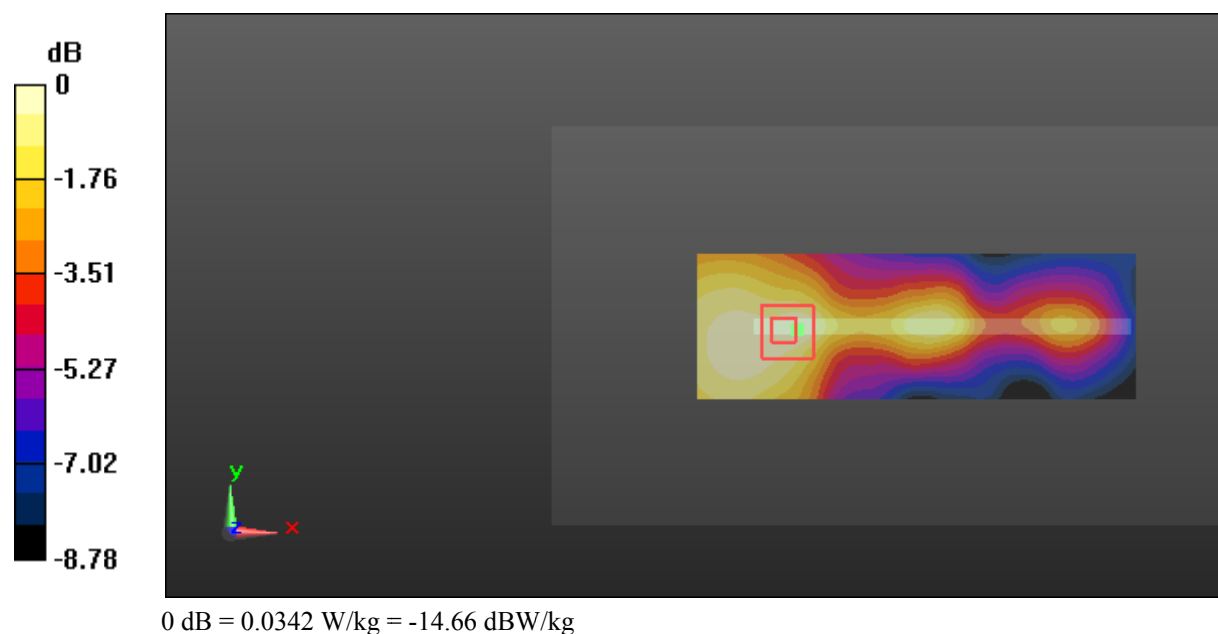

Test Plot 124#: LTE Band 17_Body Right_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0416 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.565 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0409 W/kg

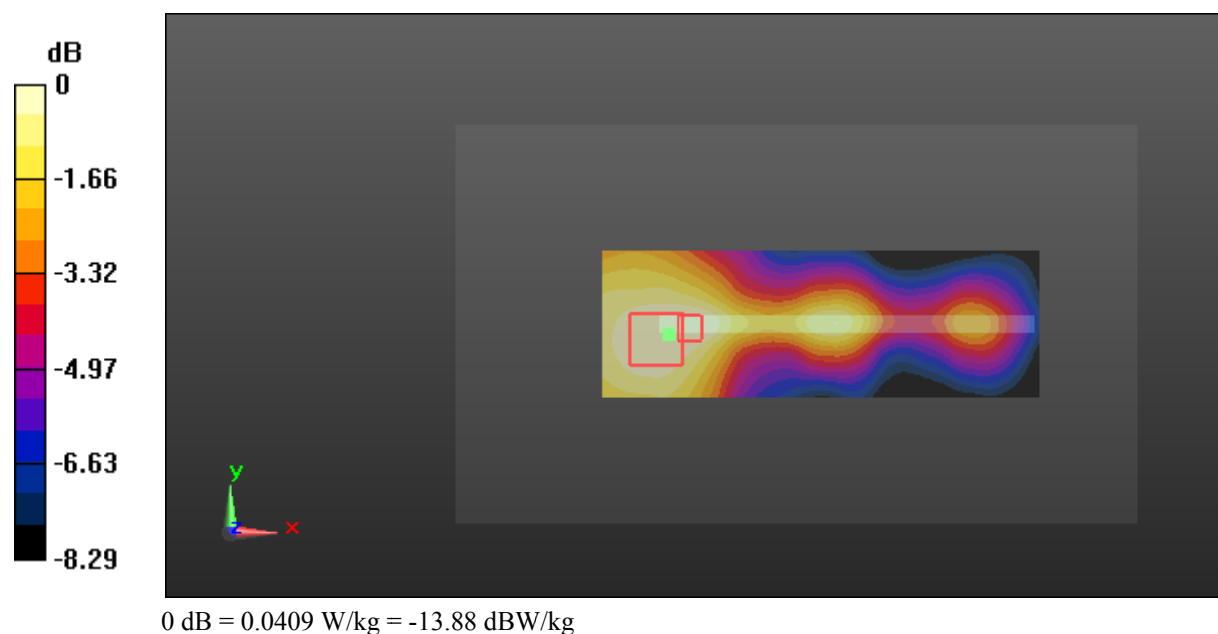

Test Plot 125#: LTE Band 17_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.375 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.23 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

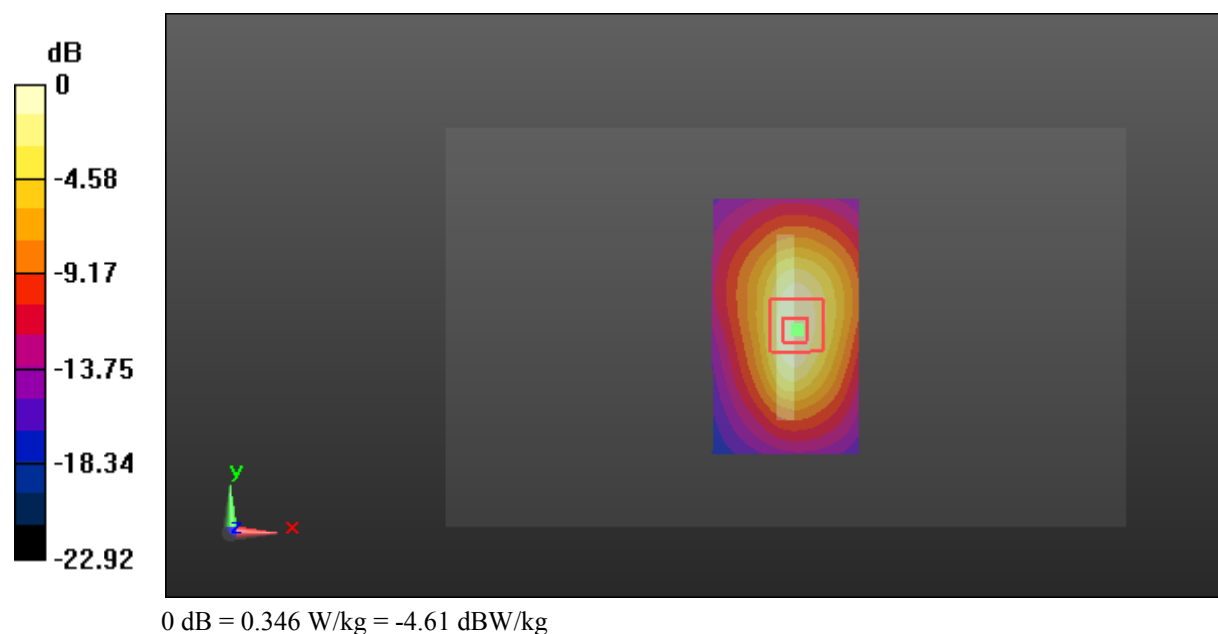

Test Plot 126#: LTE Band 17_Body Bottom_Middle Channel_50%RB**DUT: 4G Smart Phone: ELITE 5.5L+; Serial: 16112400321**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 54.485$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.305 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.41 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

