

Test Report

Report No.: MTi230801004-09E2

Date of issue: 2023-09-18

Applicant: GUANGDONG WANGJIA INTELLIGENT ROBOT CO., LTD.

Product: Robotic Vacuum Cleaners

Model(s): T200Pro, T100Pro, D60+

FCC ID: 2AVYJ-T200

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.




Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment.....	10
5	Evaluation Results (Evaluation).....	11
5.1	Antenna requirement	11
6	Radio Spectrum Matter Test Results (RF)	11
6.1	Conducted Emission at AC power line	11
6.2	Occupied Bandwidth	18
6.3	Maximum Conducted Output Power.....	19
6.4	Power Spectral Density	20
6.5	Emissions in frequency bands.....	21
6.6	Band edge emissions (Radiated)	22
6.7	Radiated emissions (below 1GHz)	35
6.8	Radiated emissions (above 1GHz).....	41
	Photographs of the test setup	48
	Photographs of the EUT.....	49
	Appendix A: DTS Bandwidth	51
	Appendix B: Maximum conducted output power.....	55
	Appendix C: Maximum power spectral density.....	56
	Appendix D: Band edge measurements	60
	Appendix E: Conducted Spurious Emission	62
	Appendix F: Duty Cycle	71

Test Result Certification	
Applicant:	GUANGDONG WANGJIA INTELLIGENT ROBOT CO., LTD.
Address:	Room 301, The Fifth Building No.1 Junma Road, Humen Town 523900 Dongguan, Guangdong PEOPLE'S REPUBLIC OF CHINA
Manufacturer:	GUANGDONG WANGJIA INTELLIGENT ROBOT CO., LTD.
Address:	Room 301, The Fifth Building No.1 Junma Road, Humen Town 523900 Dongguan, Guangdong PEOPLE'S REPUBLIC OF CHINA
Product description	
Product name:	Robotic Vacuum Cleane
Trade mark:	N/A
Model name:	T200Pro
Series Model:	T100Pro, D60+
Standards:	47 CFR Part 15.247
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-08-24 to 2023-09-05
Test result:	Pass

Test Engineer	:	
		(Maleah Deng)
Reviewed By	:	
		(Leon Chen)
Approved By	:	
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Robotic Vacuum Cleaner
Model name:	T200Pro
Series Model:	T100Pro, D60+
Model difference:	All the models are the same circuit and module, except the model name, battery manufacturer, battery rating and Charging base is different. (the difference between the T200Pro and the D60+ is the model name, the difference between the T200Pro and the T100Pro is the model name, the battery manufacturer, the battery rating and the charging base are different (T200Pro (with the base into the barrel), T100Pro(with the adapter)))
Electrical rating:	T200Pro: Input: DC 20V/0.9A Battery: DC 14.4V 3000mAh 43.2Wh T100Pro: Input: DC 19V 0.6A Battery: DC 14.8V 3000mAh 44.4Wh
Accessories:	T200pro: 1. Charging base (bucket with base) 2. AC cable T100Pro: 1. Adaptor: Model:NLB060190W1A5S58 Input: AC 100-240V 50/60Hz 0.35A Output: DC 19V 0.6A 2. Charging base x1
Hardware version:	V1.3
Software version:	1.1.0
Test sample(s) number:	MTi230801004-09S1001 MTi230801004-09S1002
RF specification	
Operating frequency range:	802.11b/g/n20:2412~2462 MHz
Modulation type:	IEEE 802.11b : DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna(s) type:	PCB Antenna
Antenna(s) gain:	2.24dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b
Mode2	TX-802.11g
Mode3	TX-802.11N(HT20)

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

Test Software:	Bluetooth RF Test Tool		
Mode	2412MHz	2437MHz	2462MHz
802.11b	84	84	84
802.11g	63	63	63
802.11n(HT 20)	60	60	60

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
3	Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	Emissions in frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2023-06-03	2024-06-02
Occupied Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-06-26	2024-06-25
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-06-26	2024-06-25
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03
5	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:


Operating Environment:			
Temperature:	26 °C	Humidity:	41 %
		Atmospheric Pressure:	101 kPa
Test mode:	Mode1, Mode2, Mode3		

6.1.2 Test Setup Diagram:

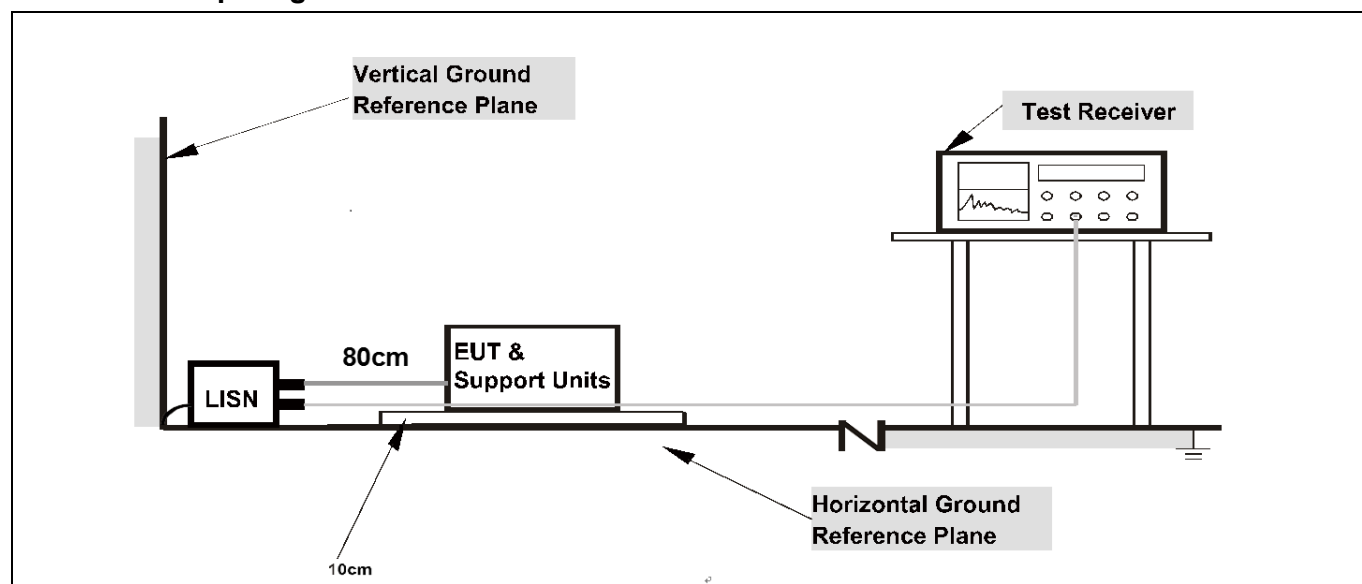


6.1.3 Test Data:

T200Pro:Mode1(AC 120/60Hz) / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

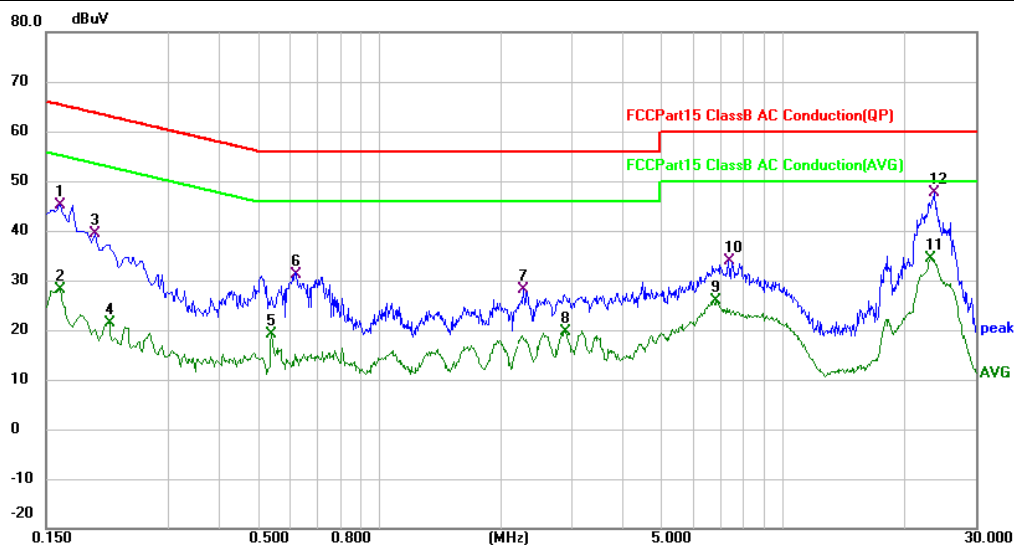


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	34.87	10.27	45.14	65.36	-20.22	QP	
2		0.1620	17.92	10.27	28.19	55.36	-27.17	AVG	
3		0.1980	28.80	10.60	39.40	63.69	-24.29	QP	
4		0.2140	10.77	10.62	21.39	53.05	-31.66	AVG	
5		0.5420	7.77	11.41	19.18	46.00	-26.82	AVG	
6		0.6260	19.43	11.62	31.05	56.00	-24.95	QP	
7		2.2940	17.82	10.42	28.24	56.00	-27.76	QP	
8		2.9020	9.44	10.31	19.75	46.00	-26.25	AVG	
9		6.8140	15.70	10.29	25.99	50.00	-24.01	AVG	
10		7.3540	23.51	10.29	33.80	60.00	-26.20	QP	
11		23.1580	23.54	10.75	34.29	50.00	-15.71	AVG	
12	*	23.6700	36.94	10.76	47.70	60.00	-12.30	QP	

T200Pro:Mode1(AC 120/60Hz) / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

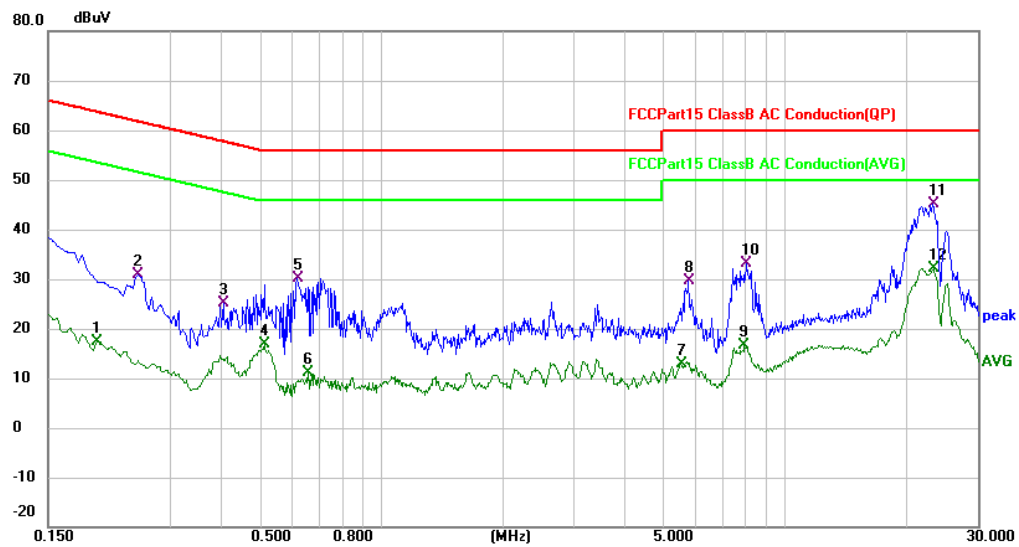


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1980	6.78	10.68	17.46	53.69	-36.23	AVG	
2		0.2500	20.07	10.77	30.84	61.76	-30.92	QP	
3		0.4060	13.94	11.12	25.06	57.73	-32.67	QP	
4		0.5140	5.57	11.34	16.91	46.00	-29.09	AVG	
5		0.6180	18.46	11.59	30.05	56.00	-25.95	QP	
6		0.6580	-0.64	11.67	11.03	46.00	-34.97	AVG	
7		5.5620	2.68	10.27	12.95	50.00	-37.05	AVG	
8		5.7980	19.33	10.27	29.60	60.00	-30.40	QP	
9		7.9500	6.24	10.33	16.57	50.00	-33.43	AVG	
10		8.0300	22.88	10.33	33.21	60.00	-26.79	QP	
11	*	23.1940	34.47	10.73	45.20	60.00	-14.80	QP	
12		23.2700	21.36	10.74	32.10	50.00	-17.90	AVG	

T100Pro:Mode1(AC 120/60Hz) / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

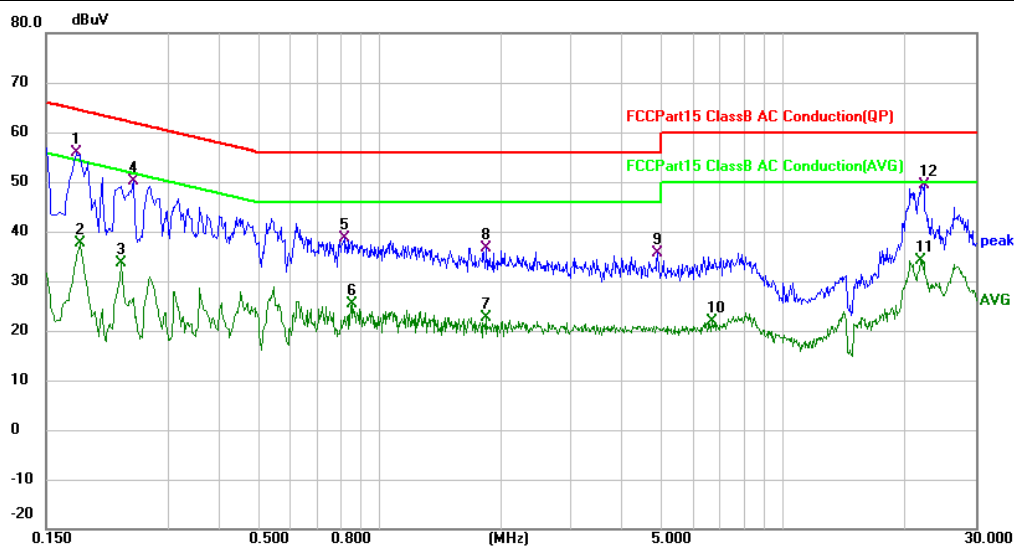


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1779	45.58	10.28	55.86	64.58	-8.72	QP	
2		0.1819	27.07	10.64	37.71	54.40	-16.69	AVG	
3		0.2300	22.92	10.73	33.65	52.45	-18.80	AVG	
4		0.2459	39.46	10.77	50.23	61.89	-11.66	QP	
5		0.8179	26.63	12.03	38.66	56.00	-17.34	QP	
6		0.8539	13.25	12.09	25.34	46.00	-20.66	AVG	
7		1.8380	12.57	10.07	22.64	46.00	-23.36	AVG	
8		1.8460	26.60	10.07	36.67	56.00	-19.33	QP	
9		4.9218	25.28	10.26	35.54	56.00	-20.46	QP	
10		6.6658	11.67	10.28	21.95	50.00	-28.05	AVG	
11		21.8500	23.36	10.70	34.06	50.00	-15.94	AVG	
12		22.3700	38.74	10.72	49.46	60.00	-10.54	QP	

T100Pro:Mode1(AC 120/60Hz) / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

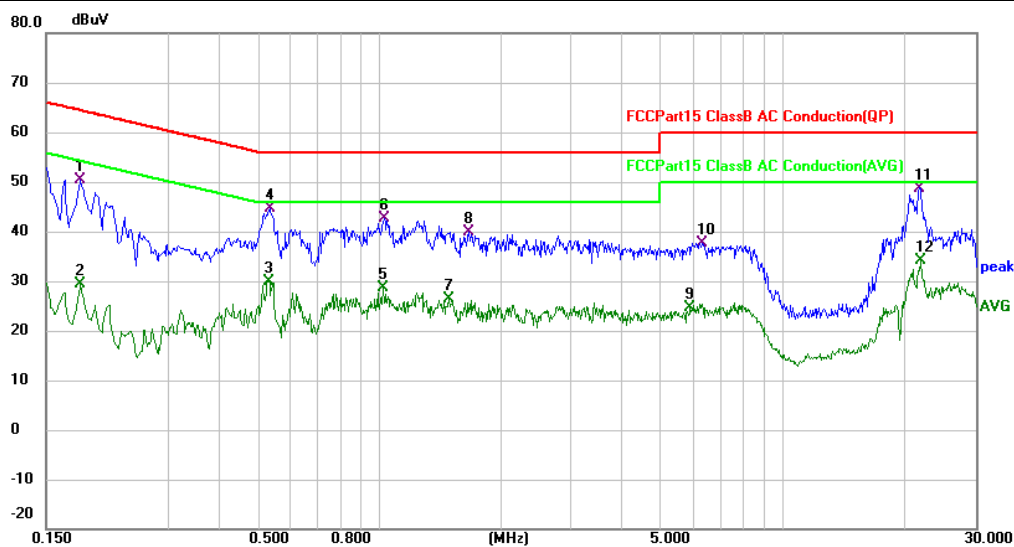


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1819	39.85	10.64	50.49	64.40	-13.91	QP	
2		0.1819	18.76	10.64	29.40	54.40	-25.00	AVG	
3		0.5321	18.57	11.38	29.95	46.00	-16.05	AVG	
4		0.5340	33.23	11.39	44.62	56.00	-11.38	QP	
5		1.0220	16.22	12.44	28.66	46.00	-17.34	AVG	
6		1.0300	30.26	12.46	42.72	56.00	-13.28	QP	
7		1.4858	13.19	13.19	26.38	46.00	-19.62	AVG	
8		1.6700	26.31	13.47	39.78	56.00	-16.22	QP	
9		5.9138	14.45	10.27	24.72	50.00	-25.28	AVG	
10		6.3459	27.32	10.28	37.60	60.00	-22.40	QP	
11	*	21.8260	38.05	10.70	48.75	60.00	-11.25	QP	
12		21.9780	23.39	10.71	34.10	50.00	-15.90	AVG	

T100Pro:Mode1(AC 240/60Hz) / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

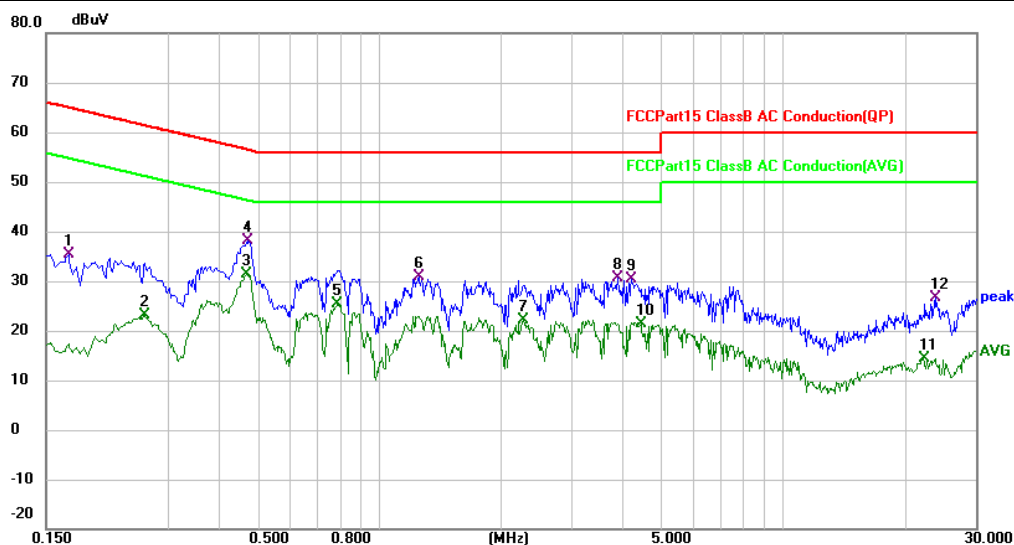

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.1700	25.05	10.28	35.33	64.96	-29.63	QP	
2		0.2620	12.42	10.79	23.21	51.37	-28.16	AVG	
3	*	0.4686	20.21	11.26	31.47	46.54	-15.07	AVG	
4		0.4737	26.87	11.26	38.13	56.45	-18.32	QP	
5		0.7900	13.34	11.96	25.30	46.00	-20.70	AVG	
6		1.2540	18.11	12.81	30.92	56.00	-25.08	QP	
7		2.2860	12.07	10.08	22.15	46.00	-23.85	AVG	
8		3.9100	20.46	10.27	30.73	56.00	-25.27	QP	
9		4.2300	20.05	10.26	30.31	56.00	-25.69	QP	
10		4.4618	11.02	10.26	21.28	46.00	-24.72	AVG	
11		22.2456	3.75	10.71	14.46	50.00	-35.54	AVG	
12		23.8658	15.99	10.75	26.74	60.00	-33.26	QP	

T100Pro:Mode1(AC 240/60Hz) / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

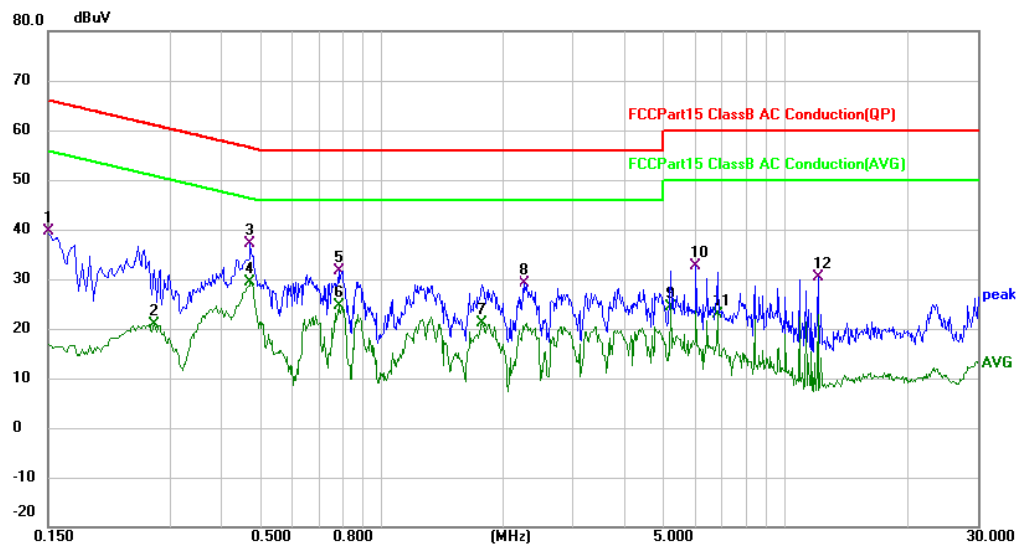

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	29.31	10.29	39.60	66.00	-26.40	QP	
2		0.2740	10.05	10.76	20.81	51.00	-30.19	AVG	
3		0.4737	25.77	11.24	37.01	56.45	-19.44	QP	
4	*	0.4737	18.14	11.24	29.38	46.45	-17.07	AVG	
5		0.7860	19.62	11.95	31.57	56.00	-24.43	QP	
6		0.7860	12.67	11.95	24.62	46.00	-21.38	AVG	
7		1.7740	7.13	13.98	21.11	46.00	-24.89	AVG	
8		2.2620	18.70	10.43	29.13	56.00	-26.87	QP	
9		5.2259	14.00	10.27	24.27	50.00	-25.73	AVG	
10		6.0339	22.38	10.28	32.66	60.00	-27.34	QP	
11		6.8379	12.63	10.29	22.92	50.00	-27.08	AVG	
12		12.0700	19.94	10.38	30.32	60.00	-29.68	QP	


6.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	47.7 %	Atmospheric Pressure:	101 kPa
Test mode:	Mode1, Mode2, Mode3				

6.2.2 Test Setup Diagram:

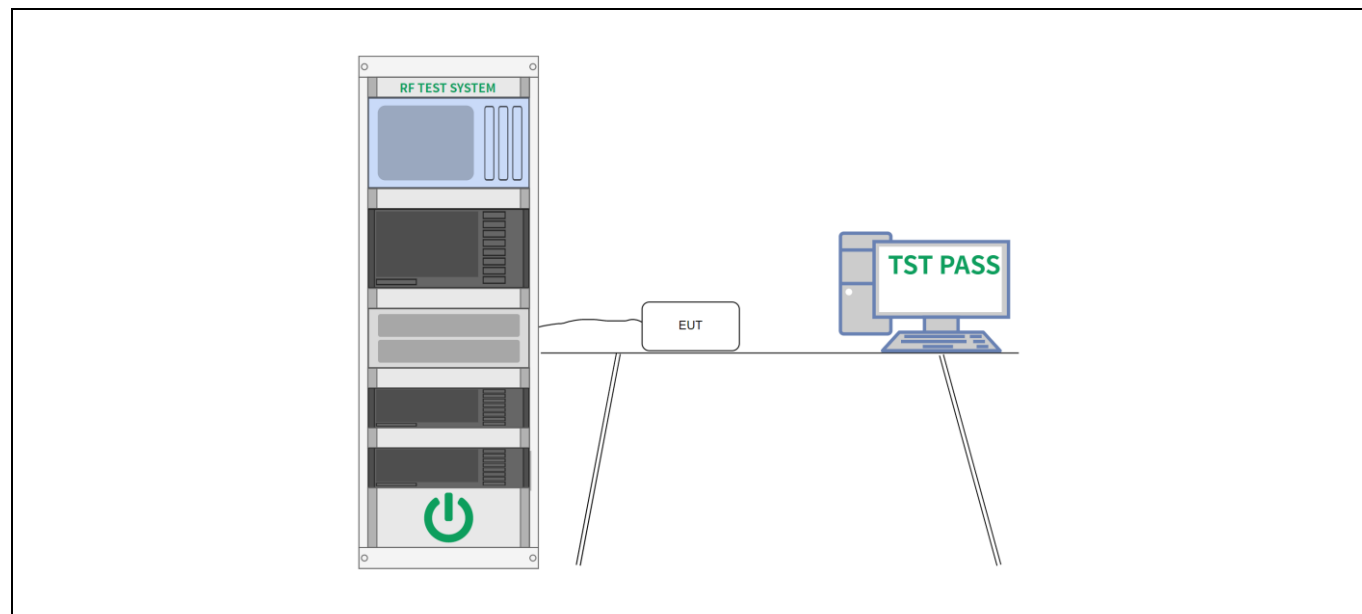

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	47.7 %	Atmospheric Pressure:	101 kPa
Test mode:	Mode1, Mode2, Mode3				

6.3.2 Test Setup Diagram:

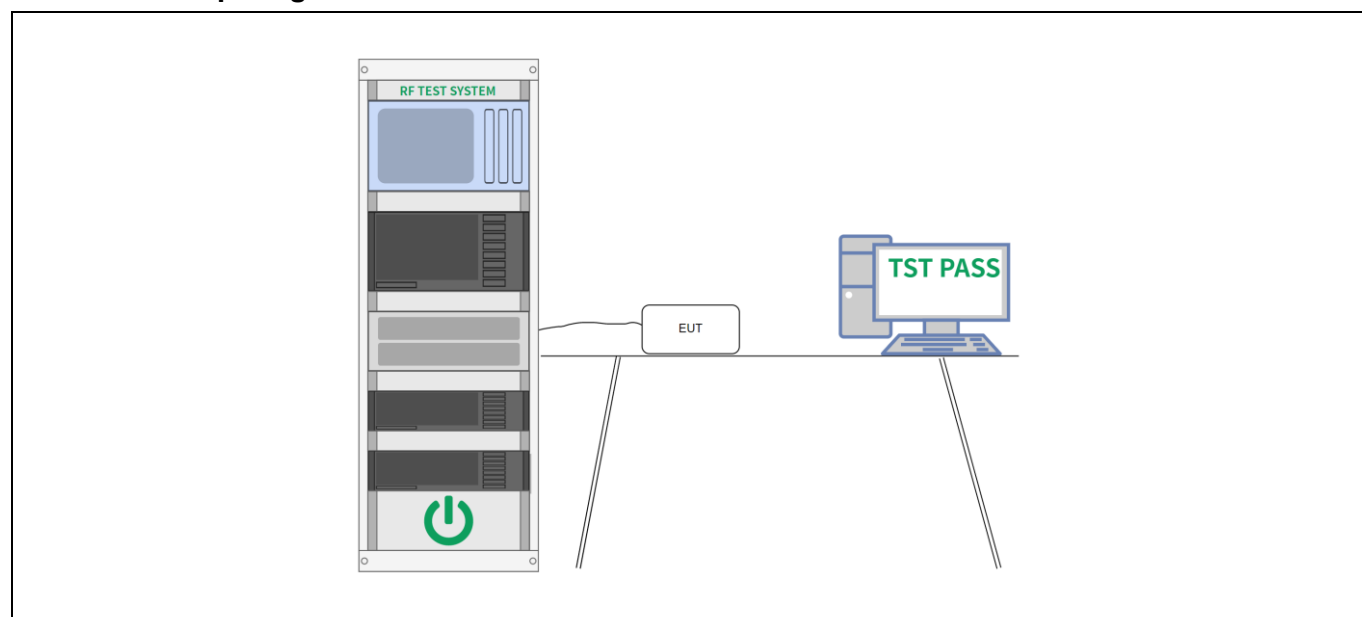

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	47.7 %	Atmospheric Pressure:	101 kPa
Test mode:	Mode1, Mode2, Mode3				

6.4.2 Test Setup Diagram:

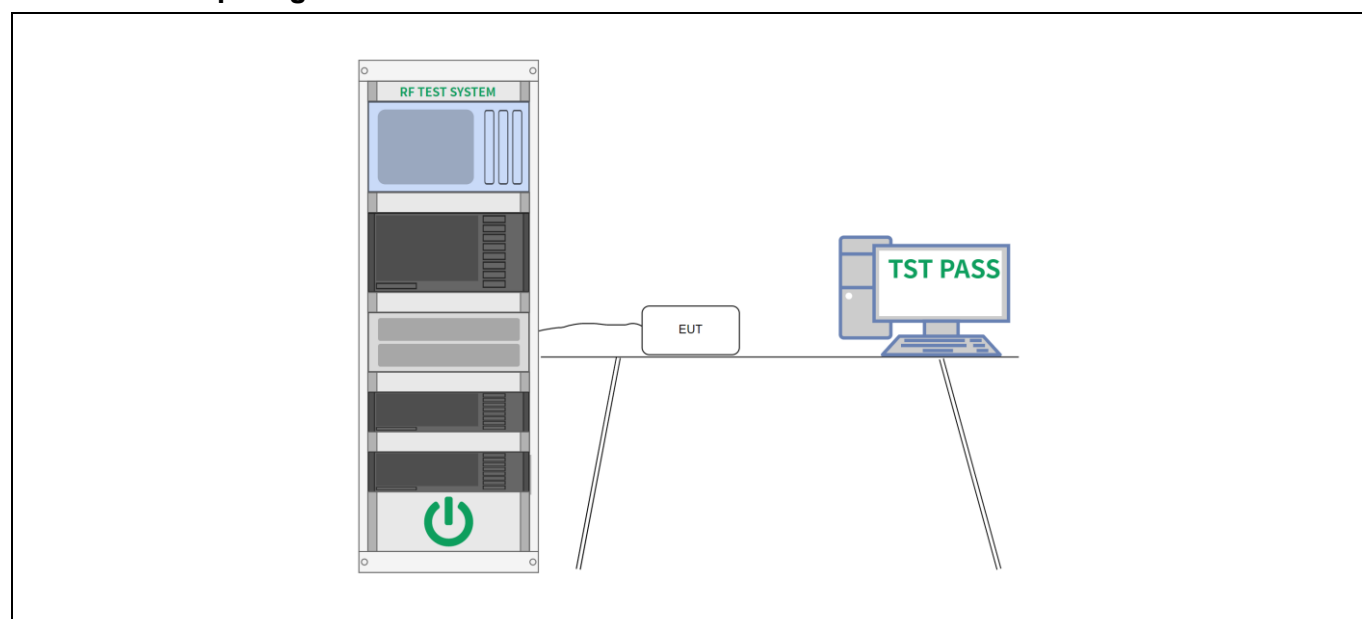

6.4.3 Test Data:

Please Refer to Appendix for Details.


6.5 Emissions in frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	47.7 %	Atmospheric Pressure:	101 kPa
Test mode:		Mode1, Mode2, Mode3			

6.5.2 Test Setup Diagram:

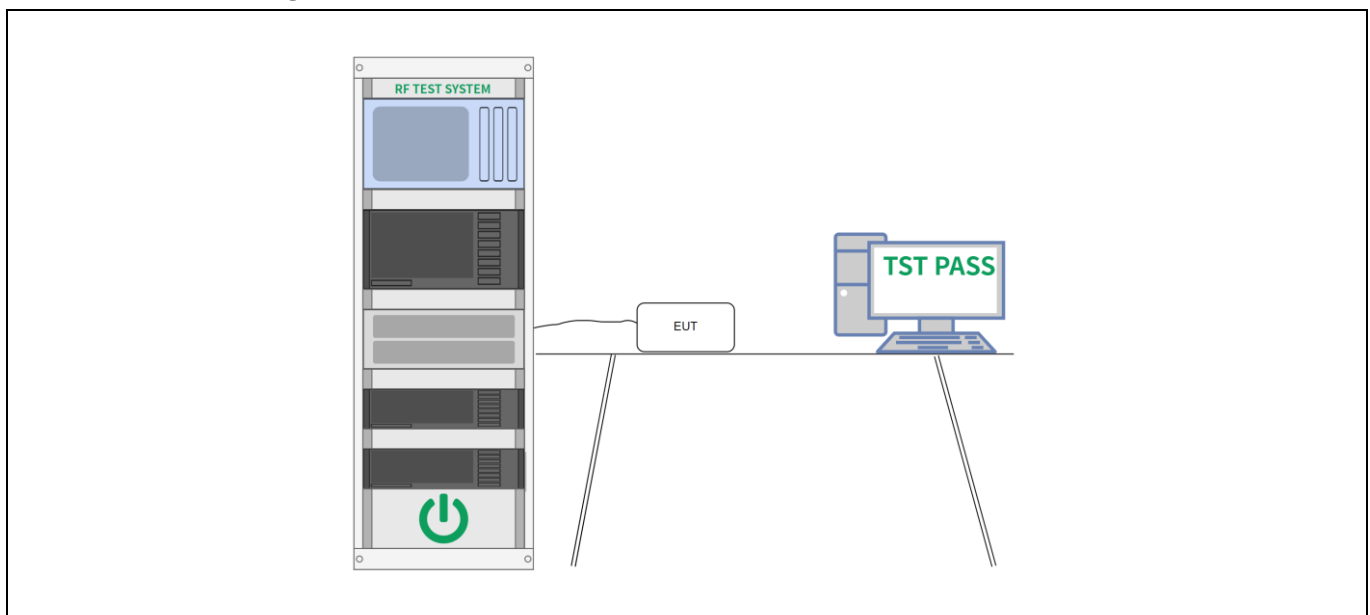

6.5.3 Test Data:

Please Refer to Appendix for Details.


6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	28.9 °C	Humidity:	53.3 %	Atmospheric Pressure:	100 kPa
Test mode:		Mode1, Mode2, Mode3			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

6.6.2 Test Setup Diagram:

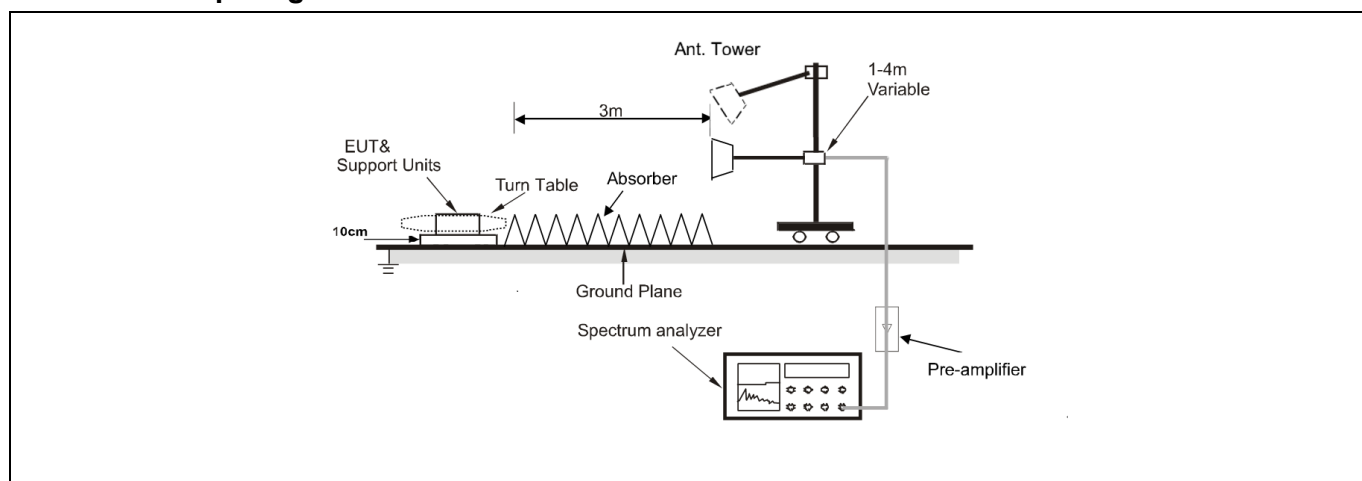

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	43.99	-2.66	41.33	74.00	-32.67	peak
2		2310.000	33.71	-2.66	31.05	54.00	-22.95	AVG
3		2390.000	44.31	-2.03	42.28	74.00	-31.72	peak
4	*	2390.000	33.87	-2.03	31.84	54.00	-22.16	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.66	-2.66	40.00	74.00	-34.00	peak
2		2310.000	33.61	-2.66	30.95	54.00	-23.05	AVG
3		2390.000	43.86	-2.03	41.83	74.00	-32.17	peak
4	*	2390.000	34.47	-2.03	32.44	54.00	-21.56	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.47	-1.91	45.56	74.00	-28.44	peak
2		2483.500	38.15	-1.91	36.24	54.00	-17.76	AVG
3		2500.000	48.01	-1.80	46.21	74.00	-27.79	peak
4	*	2500.000	38.10	-1.80	36.30	54.00	-17.70	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.08	-1.91	45.17	74.00	-28.83	peak
2	*	2483.500	38.26	-1.91	36.35	54.00	-17.65	AVG
3		2500.000	47.83	-1.80	46.03	74.00	-27.97	peak
4		2500.000	38.14	-1.80	36.34	54.00	-17.66	AVG

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.71	-2.66	40.05	74.00	-33.95	peak
2		2310.000	32.95	-2.66	30.29	54.00	-23.71	AVG
3		2390.000	47.68	-2.03	45.65	74.00	-28.35	peak
4	*	2390.000	35.10	-2.03	33.07	54.00	-20.93	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.69	-2.66	40.03	74.00	-33.97	peak
2		2310.000	33.07	-2.66	30.41	54.00	-23.59	AVG
3		2390.000	49.72	-2.03	47.69	74.00	-26.31	peak
4	*	2390.000	36.36	-2.03	34.33	54.00	-19.67	AVG

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	51.82	-1.91	49.91	74.00	-24.09	peak
2	*	2483.500	40.25	-1.91	38.34	54.00	-15.66	AVG
3		2500.000	46.90	-1.80	45.10	74.00	-28.90	peak
4		2500.000	38.03	-1.80	36.23	54.00	-17.77	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	52.39	-1.91	50.48	74.00	-23.52	peak
2	*	2483.500	40.38	-1.91	38.47	54.00	-15.53	AVG
3		2500.000	47.28	-1.80	45.48	74.00	-28.52	peak
4		2500.000	37.92	-1.80	36.12	54.00	-17.88	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.95	-2.66	40.29	74.00	-33.71	peak
2		2310.000	33.23	-2.66	30.57	54.00	-23.43	AVG
3		2390.000	65.04	-2.03	63.01	74.00	-10.99	peak
4	*	2390.000	45.17	-2.03	43.14	54.00	-10.86	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	43.56	-2.66	40.90	74.00	-33.10	peak
2		2310.000	33.56	-2.66	30.90	54.00	-23.10	AVG
3		2390.000	67.43	-2.03	65.40	74.00	-8.60	peak
4	*	2390.000	47.50	-2.03	45.47	54.00	-8.53	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	56.33	-1.91	54.42	74.00	-19.58	peak
2	*	2483.500	41.15	-1.91	39.24	54.00	-14.76	AVG
3		2500.000	47.75	-1.80	45.95	74.00	-28.05	peak
4		2500.000	38.12	-1.80	36.32	54.00	-17.68	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	55.49	-1.91	53.58	74.00	-20.42	peak
2	*	2483.500	41.28	-1.91	39.37	54.00	-14.63	AVG
3		2500.000	47.74	-1.80	45.94	74.00	-28.06	peak
4		2500.000	38.01	-1.80	36.21	54.00	-17.79	AVG


6.7 Radiated emissions (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	28.9 °C	Humidity:	53.3 %	Atmospheric Pressure:	100 kPa
Test mode:		Mode1, Mode2, Mode3			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					


6.7.2 Test Setup Diagram:

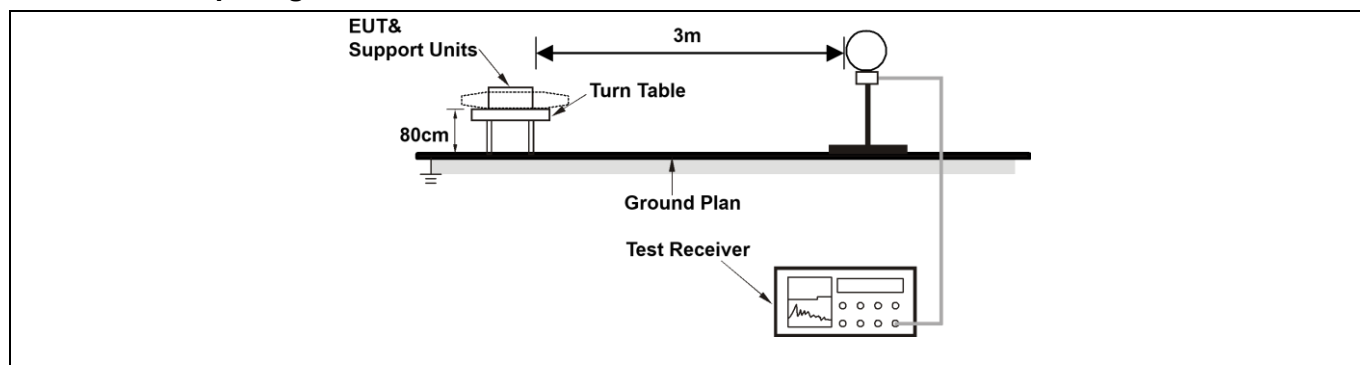

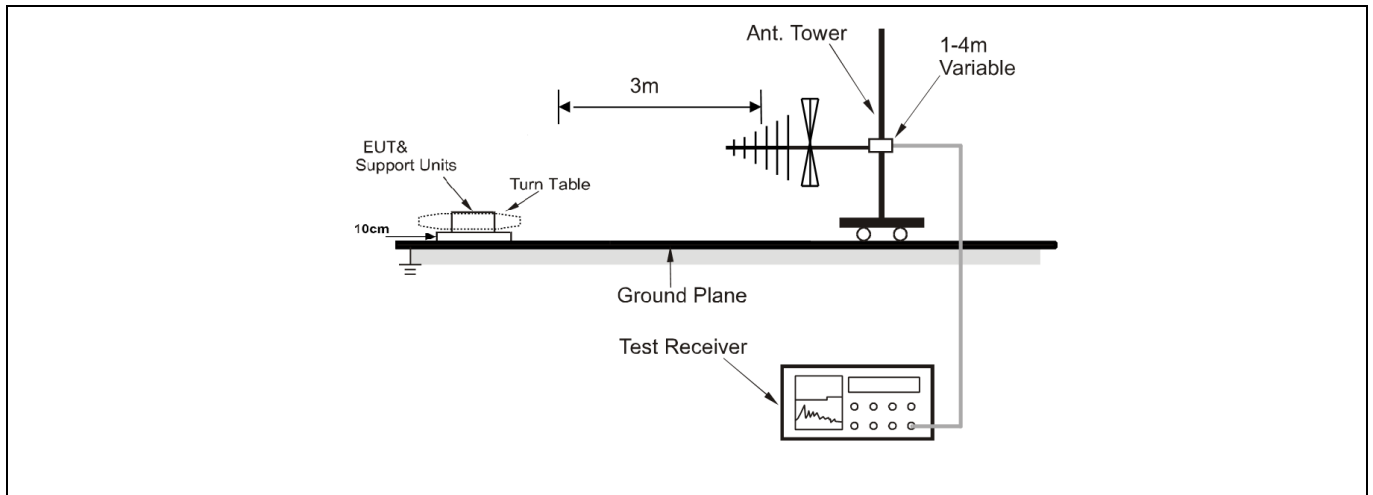


6.7.3 Test Data:

T200Pro: Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

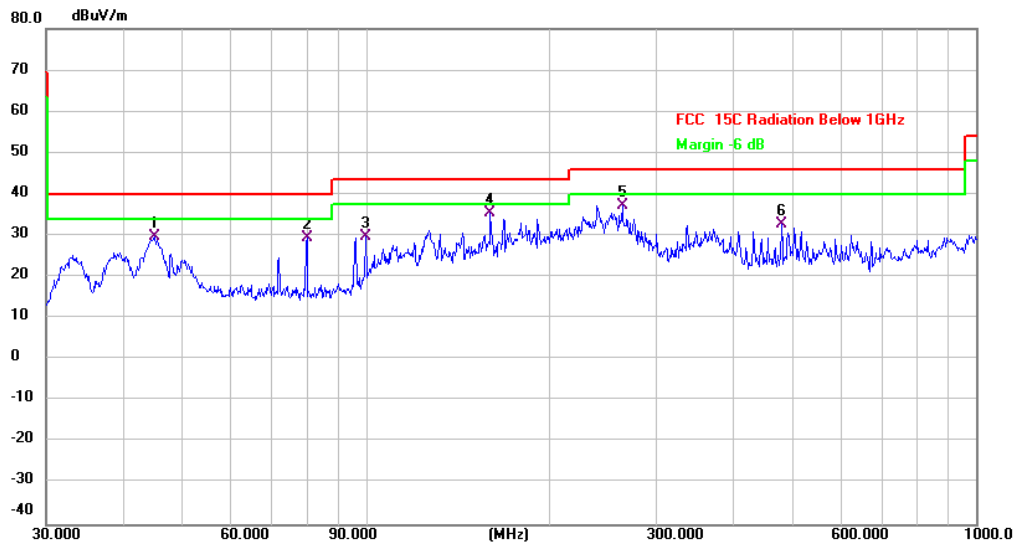


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		45.0583	37.24	-7.42	29.82	40.00	-10.18	QP	
2		80.0806	42.56	-13.00	29.56	40.00	-10.44	QP	
3		99.8777	38.46	-8.76	29.70	43.50	-13.80	QP	
4	*	159.7844	46.02	-10.71	35.31	43.50	-8.19	QP	
5		263.8190	44.76	-7.39	37.37	46.00	-8.63	QP	
6		480.5276	36.58	-3.71	32.87	46.00	-13.13	QP	

T200Pro: Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

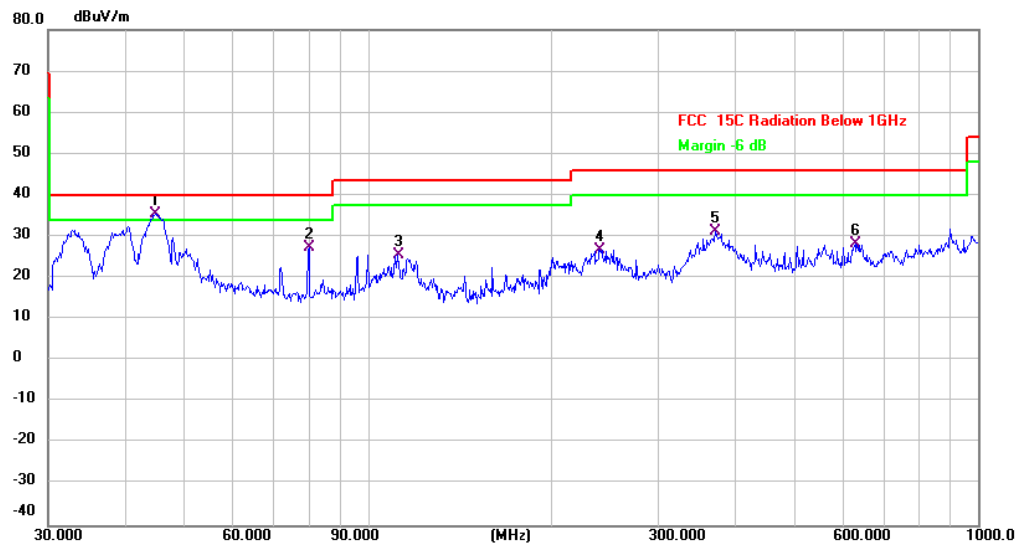

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	44.9006	42.93	-7.44	35.49	40.00	-4.51	QP	
2		80.0806	40.38	-13.00	27.38	40.00	-12.62	QP	
3		111.7380	33.33	-7.68	25.65	43.50	-17.85	QP	
4		239.9874	33.66	-6.89	26.77	46.00	-19.23	QP	
5		372.0045	35.87	-4.58	31.29	46.00	-14.71	QP	
6		629.4772	28.00	0.39	28.39	46.00	-17.61	QP	

T100Pro: Model1 / Polarization: Horizontal / CH: 11

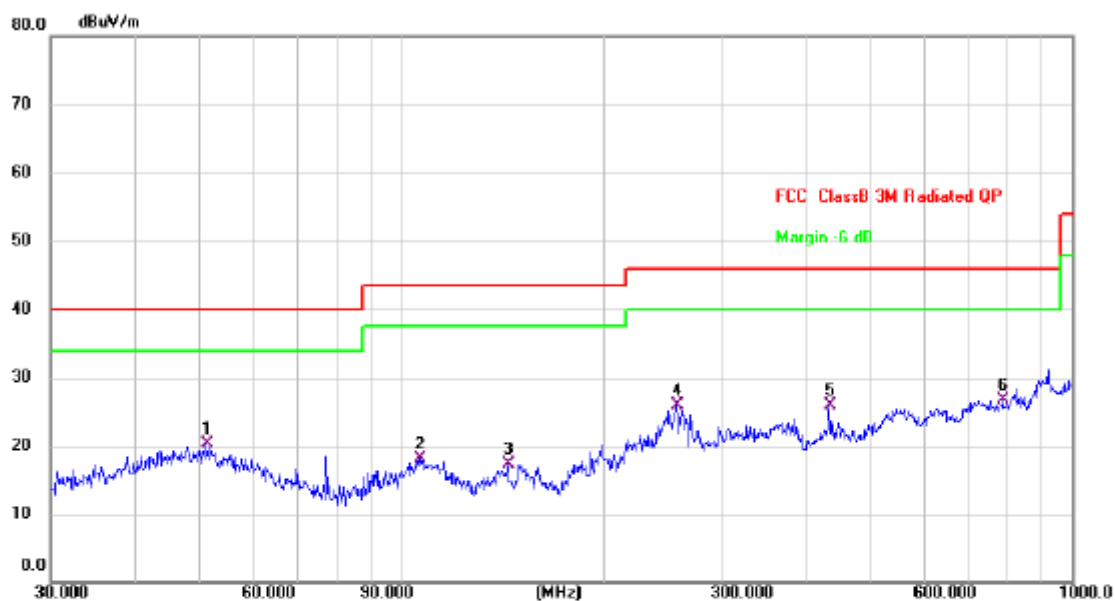

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		51.3005	27.10	-6.76	20.34	40.00	-19.66	QP	
2		106.7587	25.29	-7.25	18.04	43.50	-25.46	QP	
3		144.3348	27.48	-10.19	17.29	43.50	-26.21	QP	
4		257.4222	32.24	-6.38	25.86	46.00	-20.14	QP	
5		434.0651	29.26	-3.33	25.93	46.00	-20.07	QP	
6	*	787.8513	25.25	1.36	26.61	46.00	-19.39	QP	

T100Pro: Model1 / Polarization: Vertical / CH: 11



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		45.3755	28.07	-6.80	21.27	40.00	-18.73	QP	
2		129.9226	39.78	-11.31	28.47	43.50	-15.03	QP	
3	*	154.8204	43.79	-9.85	33.94	43.50	-9.56	QP	
4		232.5318	38.34	-7.39	30.95	46.00	-15.05	QP	
5		633.9073	32.60	-0.13	32.47	46.00	-13.53	QP	
6		747.4825	34.20	1.36	35.56	46.00	-10.44	QP	


6.8 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	28.9 °C	Humidity:	53.3 %	Atmospheric Pressure:	100 kPa
Test mode:		Mode1, Mode2, Mode3			
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					
All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

6.8.2 Test Setup Diagram:

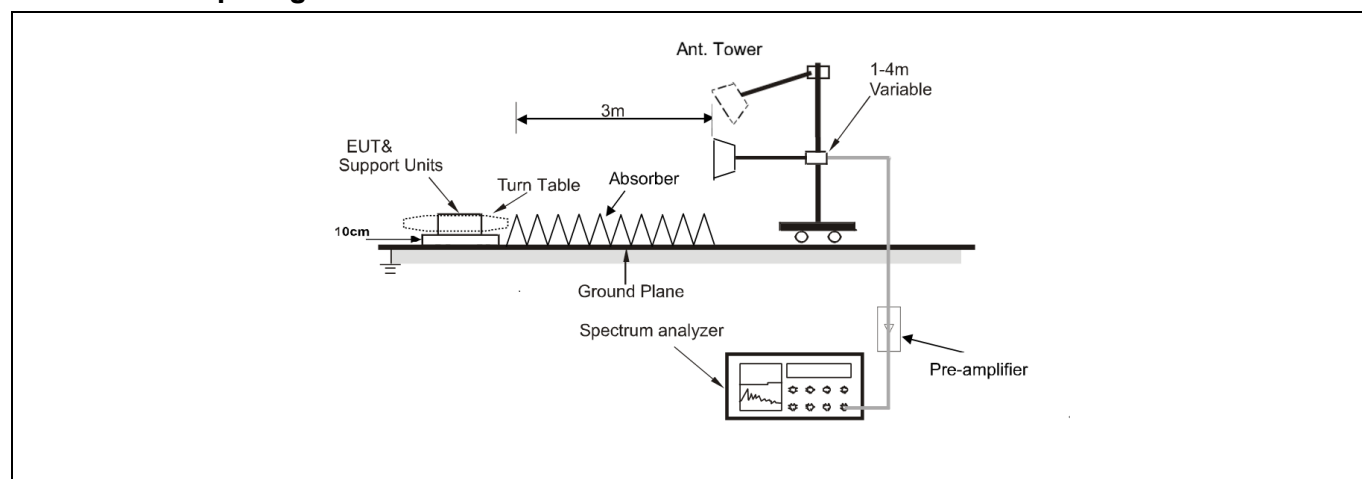

6.8.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.000	40.82	2.81	43.63	74.00	-30.37	peak
2		4824.000	33.71	2.81	36.52	54.00	-17.48	AVG
3		7236.000	40.28	9.10	49.38	74.00	-24.62	peak
4		7236.000	33.01	9.10	42.11	54.00	-11.89	AVG
5		9648.000	41.02	10.98	52.00	74.00	-22.00	peak
6	*	9648.000	34.61	10.98	45.59	54.00	-8.41	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	40.88	2.81	43.69	74.00	-30.31	peak
2		4824.000	34.73	2.81	37.54	54.00	-16.46	AVG
3		7236.000	40.05	9.10	49.15	74.00	-24.85	peak
4		7236.000	32.92	9.10	42.02	54.00	-11.98	AVG
5		9648.000	40.81	10.98	51.79	74.00	-22.21	peak
6	*	9648.000	34.73	10.98	45.71	54.00	-8.29	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 6

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4874.000	41.32	3.02	44.34	74.00	-29.66	peak
2		4874.000	35.42	3.02	38.44	54.00	-15.56	AVG
3		7311.000	40.62	8.97	49.59	74.00	-24.41	peak
4		7311.000	34.54	8.97	43.51	54.00	-10.49	AVG
5		9748.000	41.18	11.95	53.13	74.00	-20.87	peak
6	*	9748.000	35.05	11.95	47.00	54.00	-7.00	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 6

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	40.78	3.02	43.80	74.00	-30.20	peak
2		4874.000	33.75	3.02	36.77	54.00	-17.23	AVG
3		7311.000	40.55	8.97	49.52	74.00	-24.48	peak
4		7311.000	33.18	8.97	42.15	54.00	-11.85	AVG
5		9748.000	41.63	11.95	53.58	74.00	-20.42	peak
6	*	9748.000	34.90	11.95	46.85	54.00	-7.15	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.000	40.95	3.27	44.22	74.00	-29.78	peak
2		4924.000	34.75	3.27	38.02	54.00	-15.98	AVG
3		7386.000	39.27	9.16	48.43	74.00	-25.57	peak
4		7386.000	32.20	9.16	41.36	54.00	-12.64	AVG
5		9848.000	41.06	11.50	52.56	74.00	-21.44	peak
6	*	9848.000	34.38	11.50	45.88	54.00	-8.12	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: 11

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	41.58	3.27	44.85	74.00	-29.15	peak
2		4924.000	34.28	3.27	37.55	54.00	-16.45	AVG
3		7386.000	40.83	9.16	49.99	74.00	-24.01	peak
4		7386.000	33.03	9.16	42.19	54.00	-11.81	AVG
5		9848.000	41.49	11.50	52.99	74.00	-21.01	peak
6	*	9848.000	35.75	11.50	47.25	54.00	-6.75	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos


Appendix

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.080	0.5	PASS
		2437	9.040	0.5	PASS
		2462	9.040	0.5	PASS
11G	Ant1	2412	16.320	0.5	PASS
		2437	16.040	0.5	PASS
		2462	16.360	0.5	PASS
11N20SISO	Ant1	2412	17.560	0.5	PASS
		2437	17.560	0.5	PASS
		2462	17.320	0.5	PASS

Test Graphs

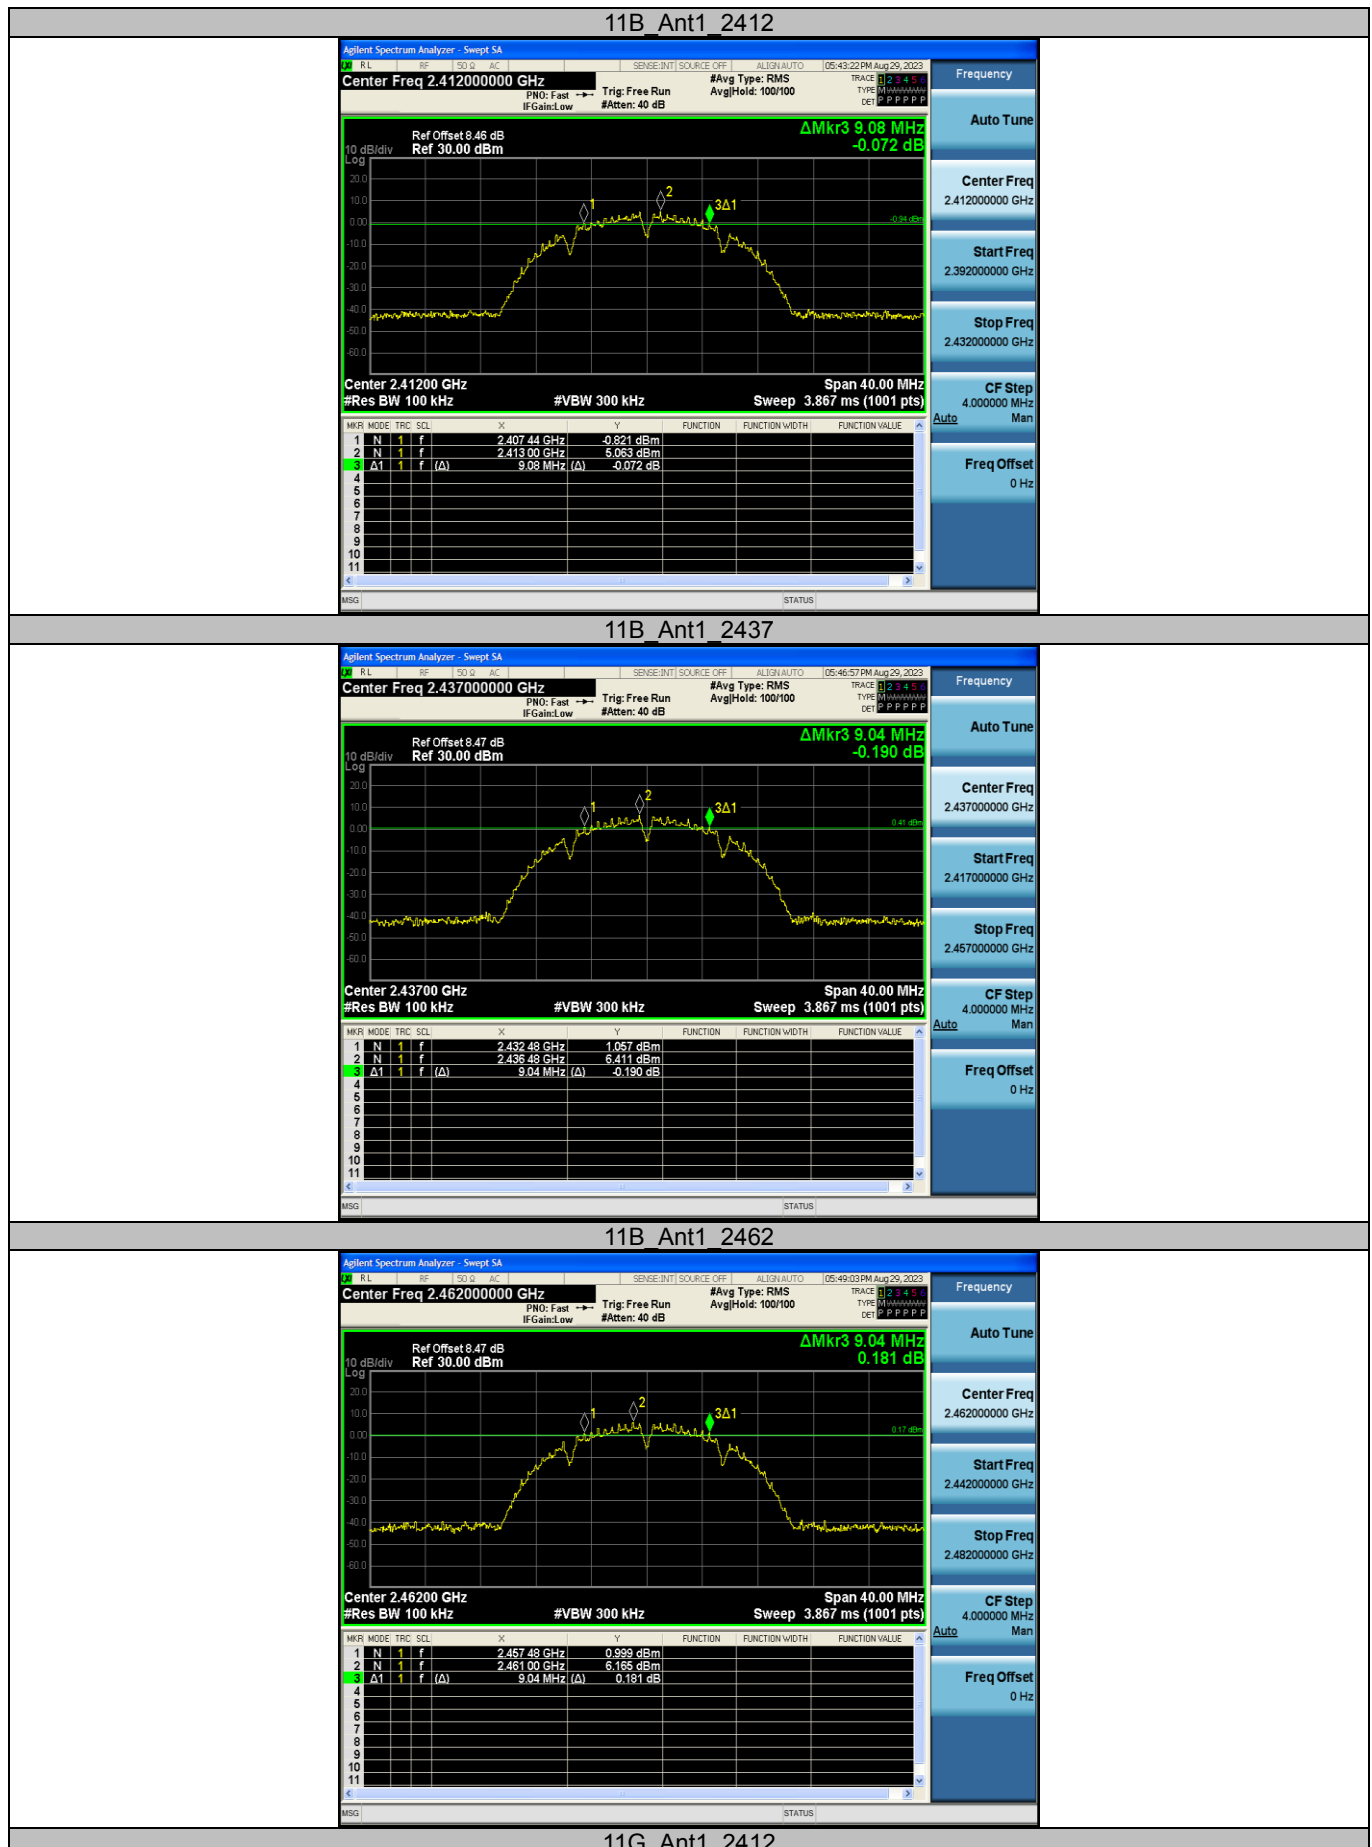





11G_Ant1_2437



11G_Ant1_2462

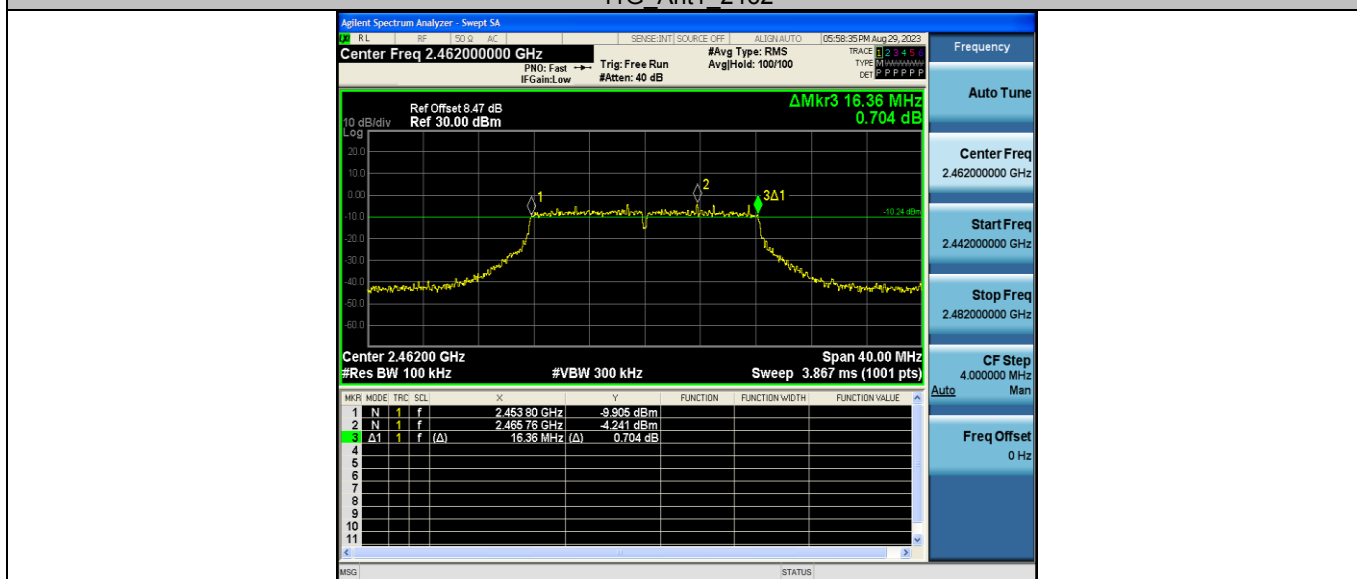

11N20SISO_Ant1_2412

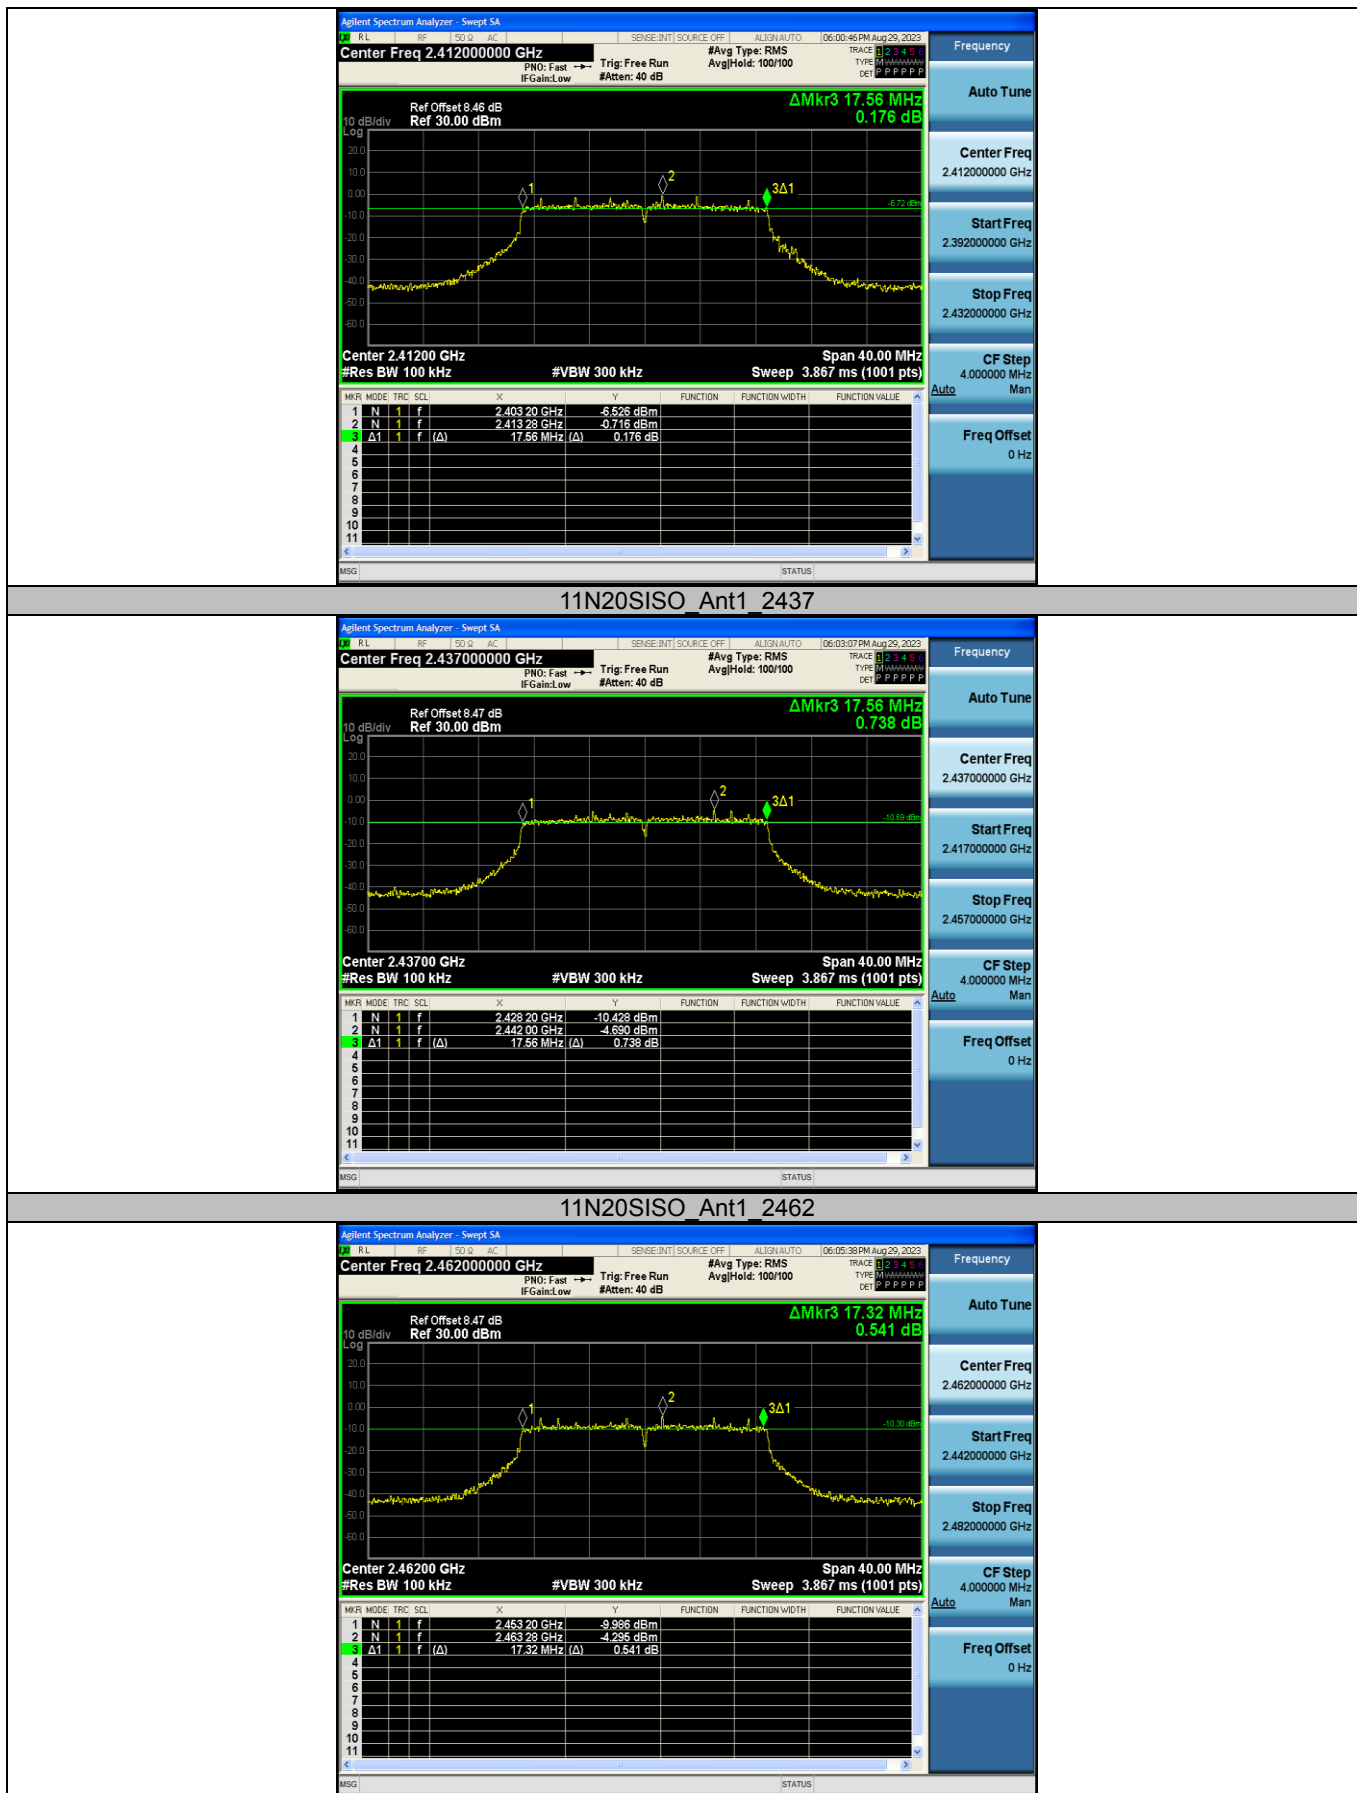

Appendix B: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	17.10	≤30.00	PASS
		2437	17.71	≤30.00	PASS
		2462	17.38	≤30.00	PASS
11G	Ant1	2412	14.35	≤30.00	PASS
		2437	14.86	≤30.00	PASS
		2462	14.60	≤30.00	PASS
11N20SISO	Ant1	2412	13.48	≤30.00	PASS
		2437	14.04	≤30.00	PASS
		2462	13.85	≤30.00	PASS


Appendix C: Maximum power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	1.4	≤8.00	PASS
		2437	3	≤8.00	PASS
		2462	2.19	≤8.00	PASS
11G	Ant1	2412	-8.2	≤8.00	PASS
		2437	-7.58	≤8.00	PASS
		2462	-8.92	≤8.00	PASS
11N20SISO	Ant1	2412	-9.71	≤8.00	PASS
		2437	-8.93	≤8.00	PASS
		2462	-9.91	≤8.00	PASS

Test Graphs

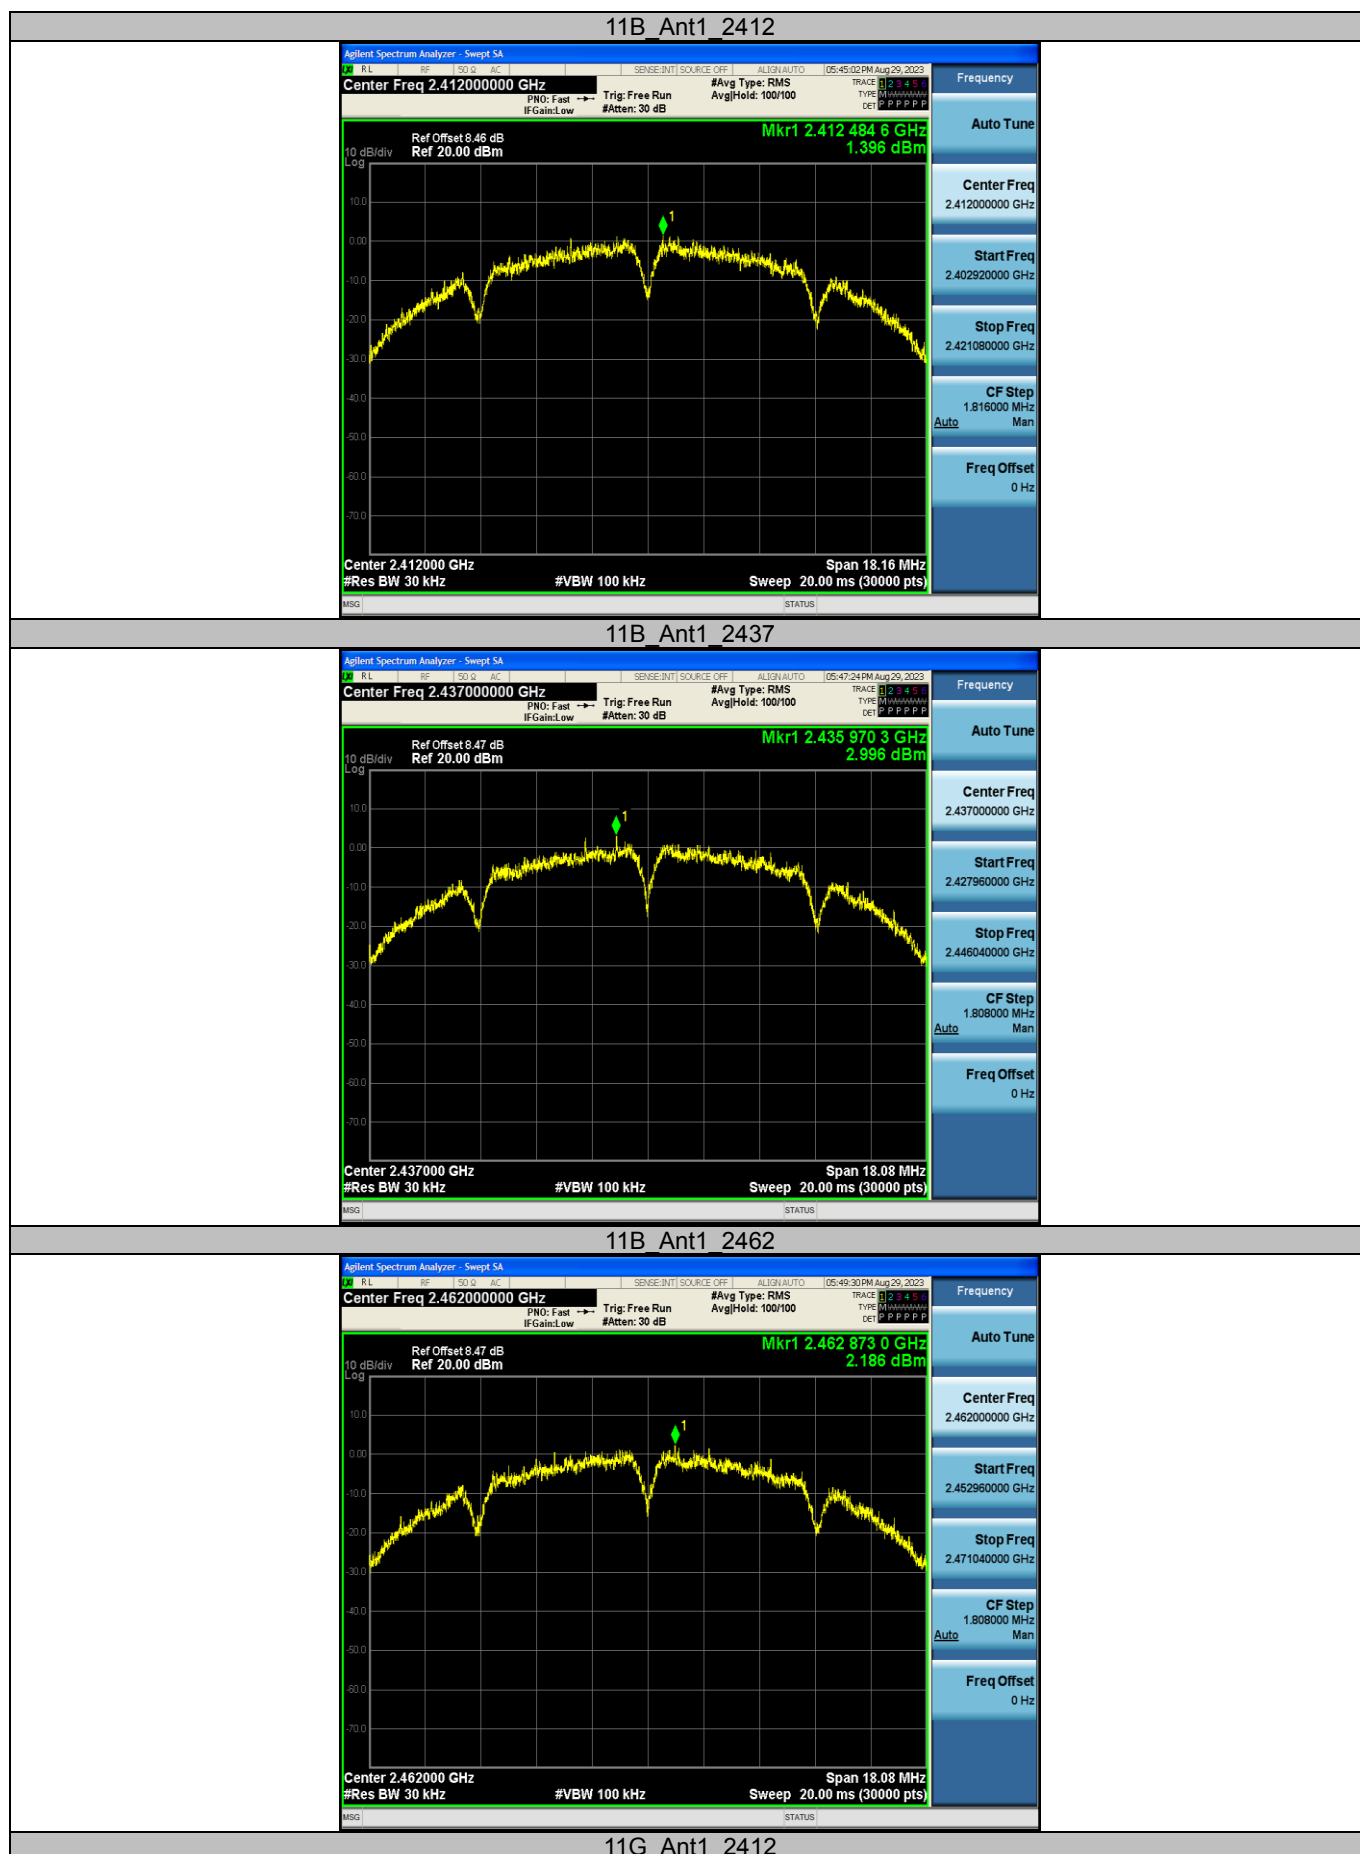


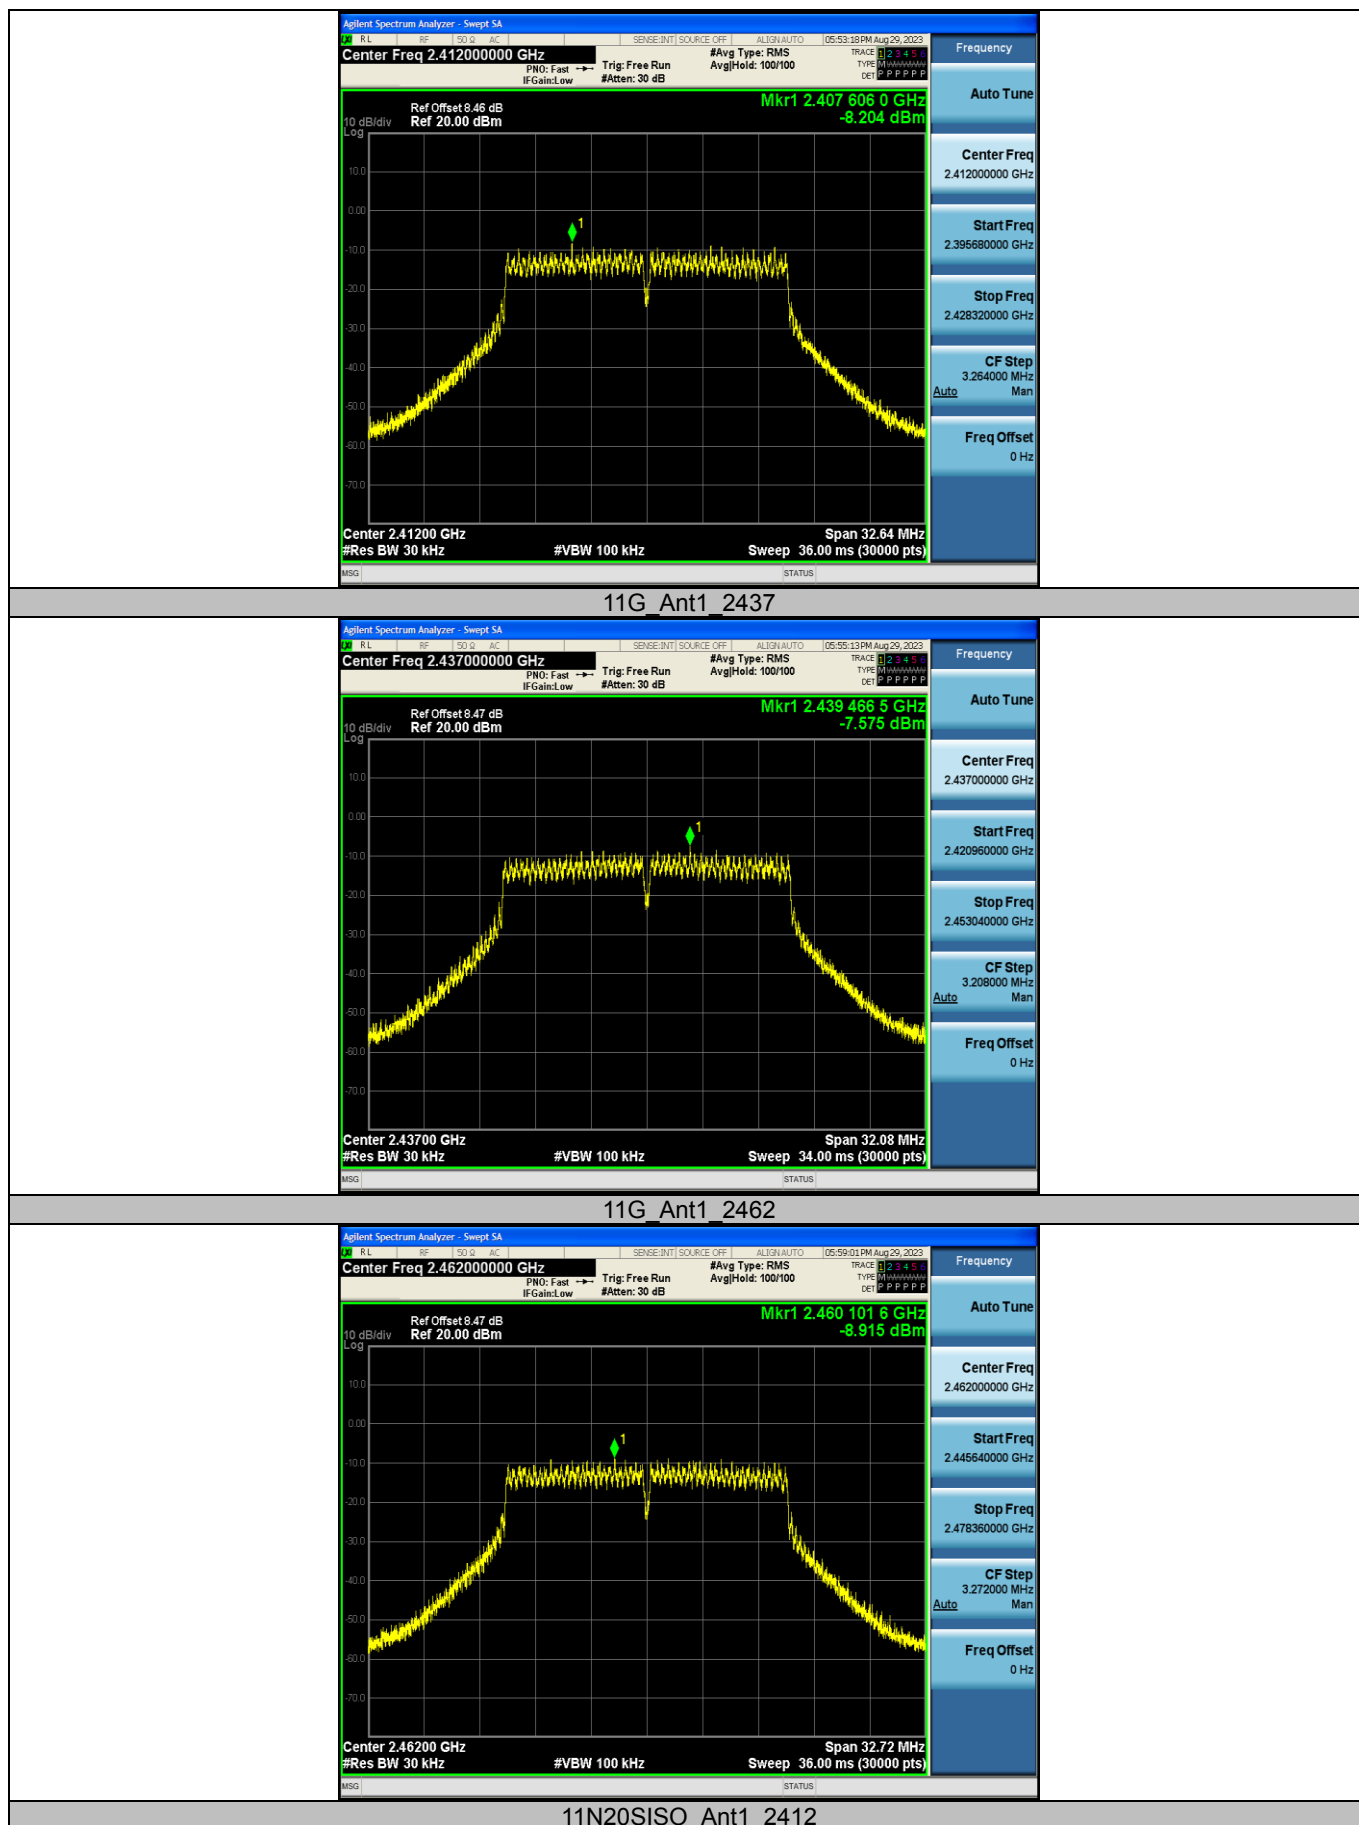

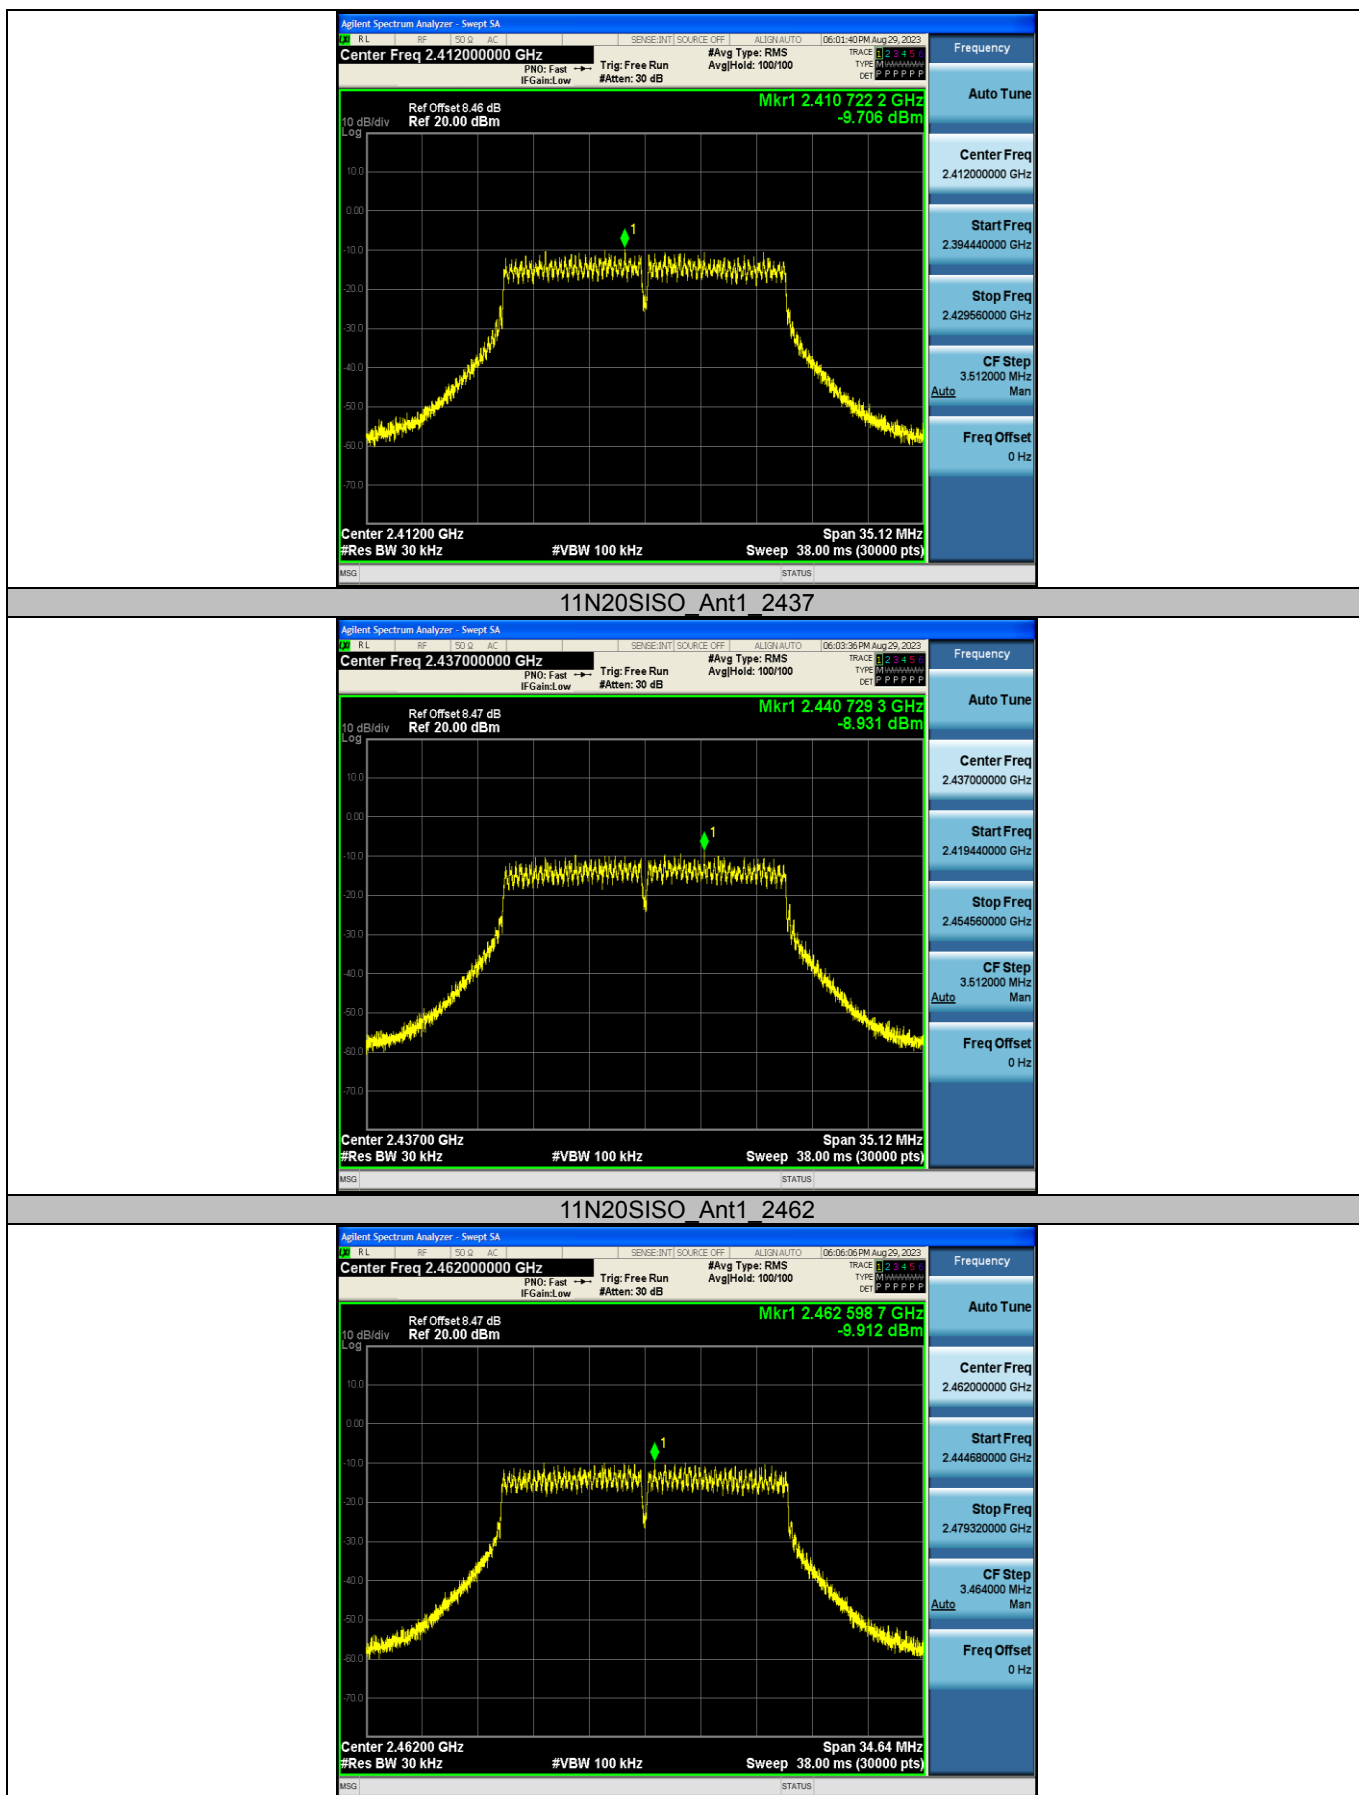


Appendix D: Band edge measurements


11B Ant1 Low 2412

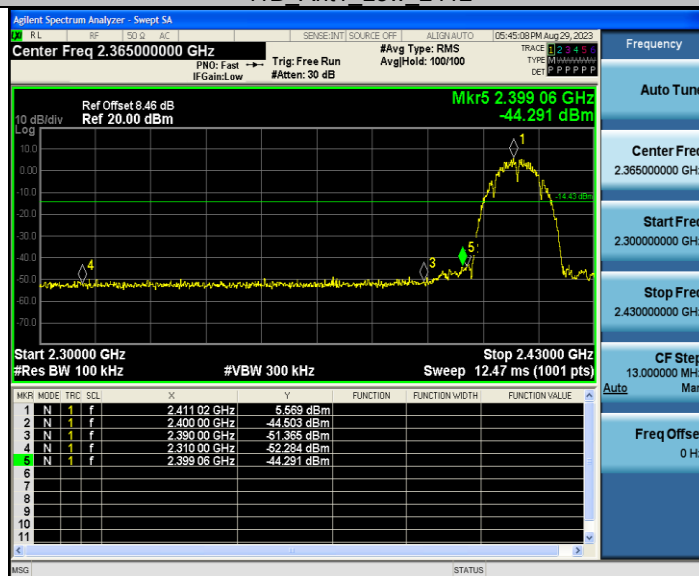

11B Ant1 High 2462

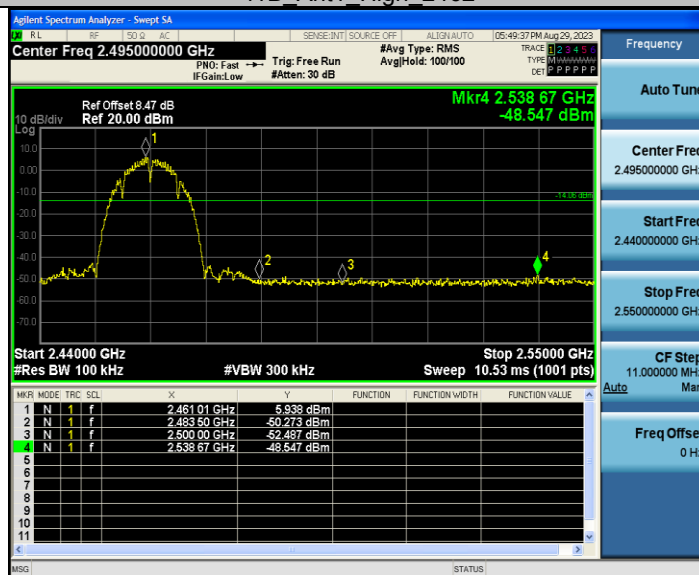


11G Ant1 Low 2412

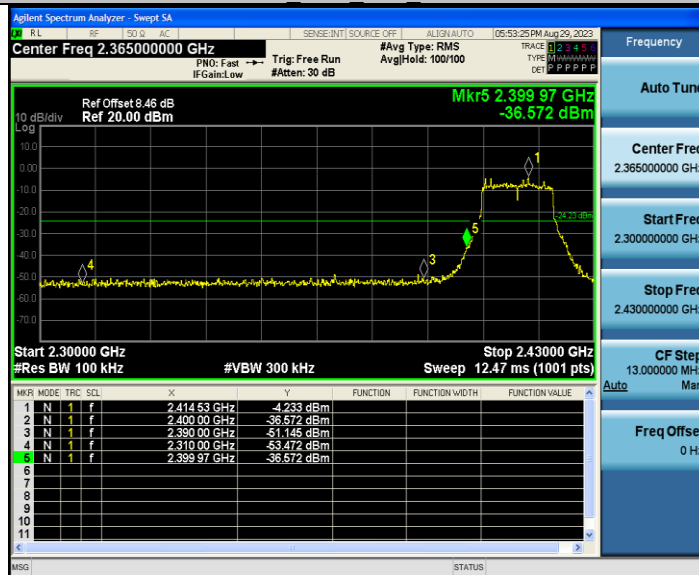



11G Ant1 High 2462





Appendix E: Conducted Spurious Emission

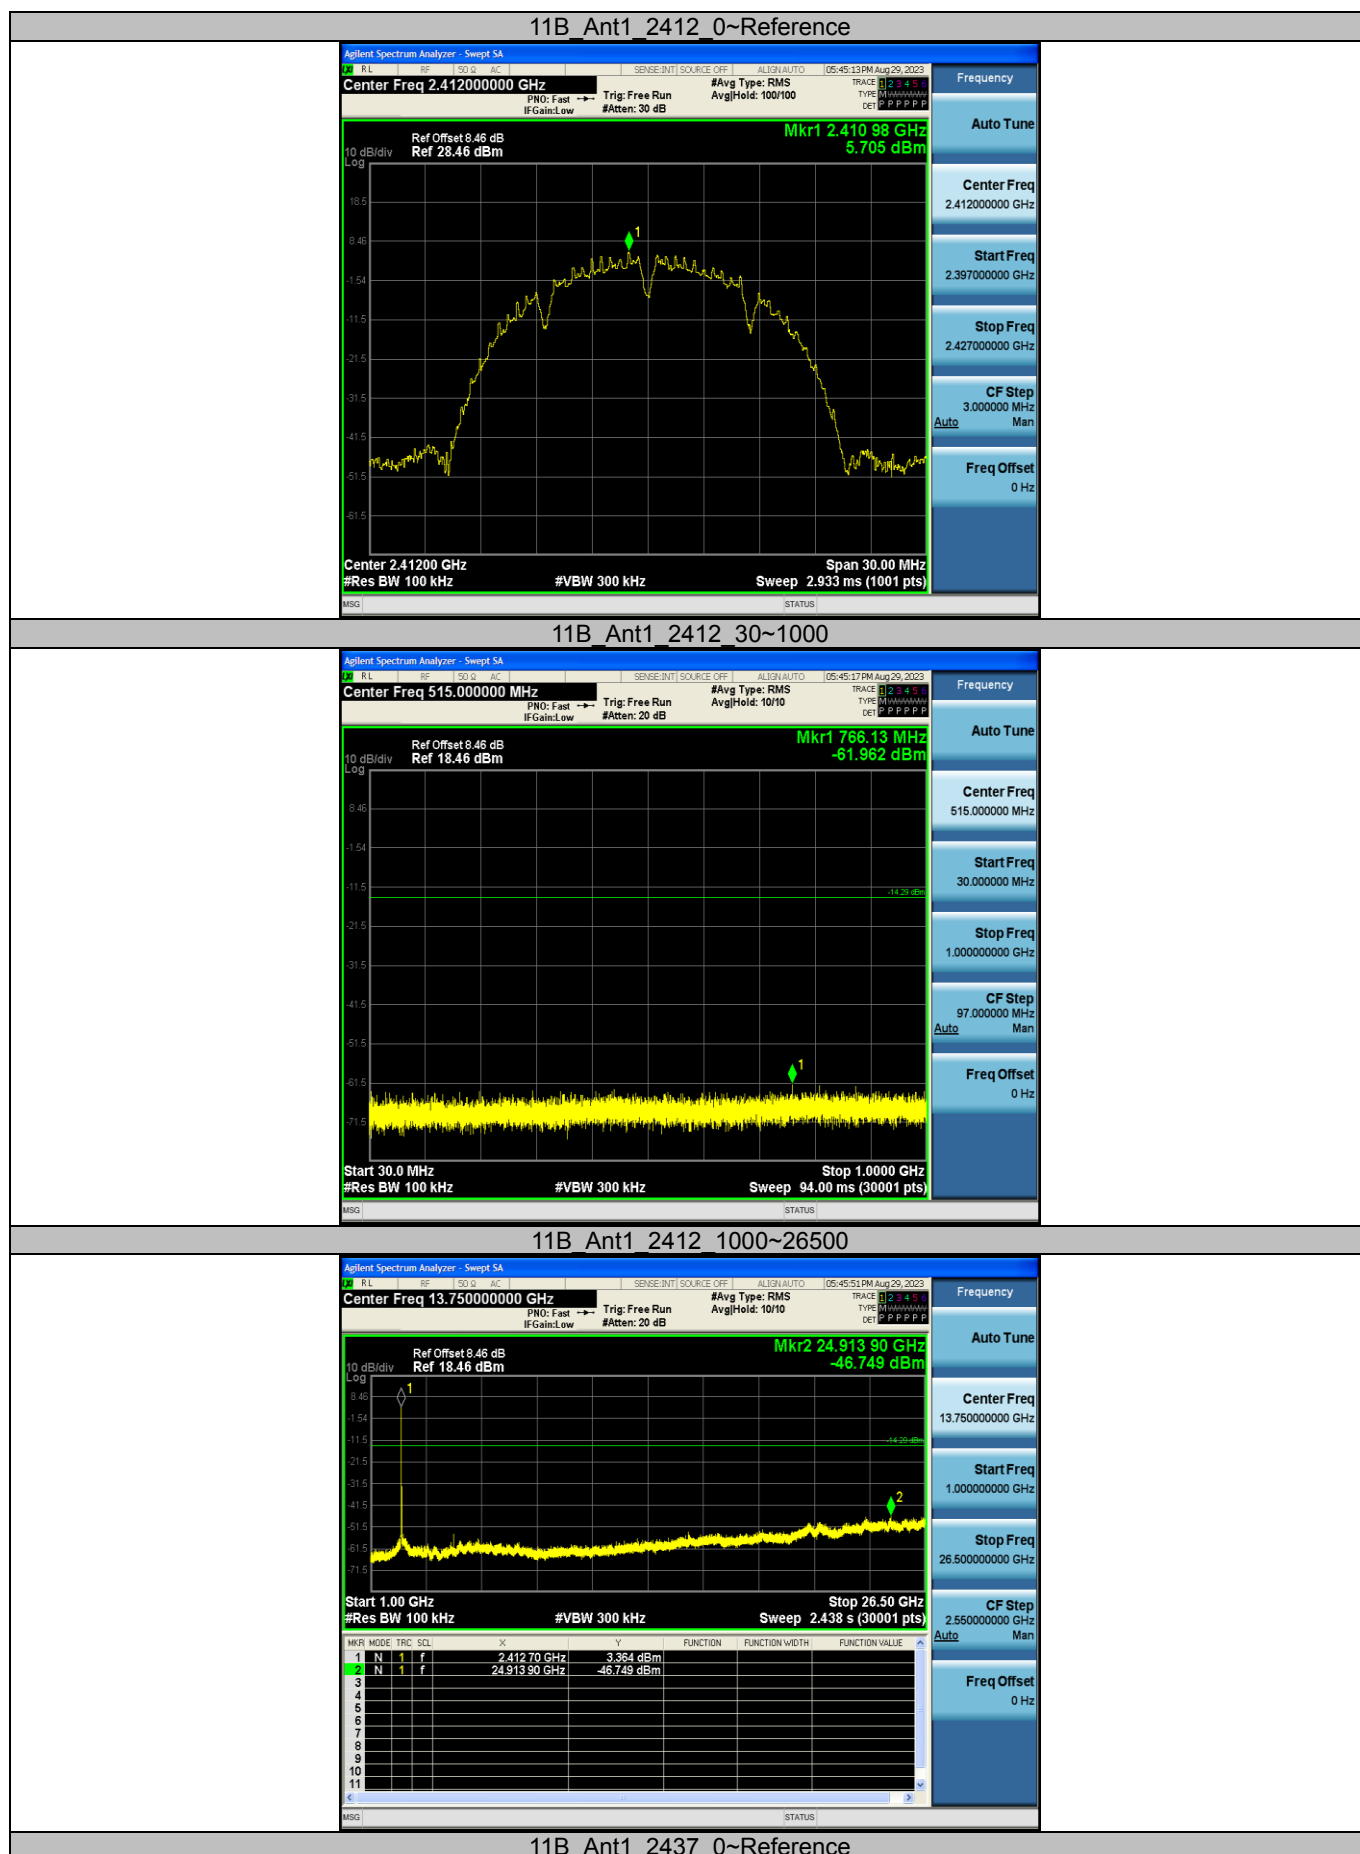


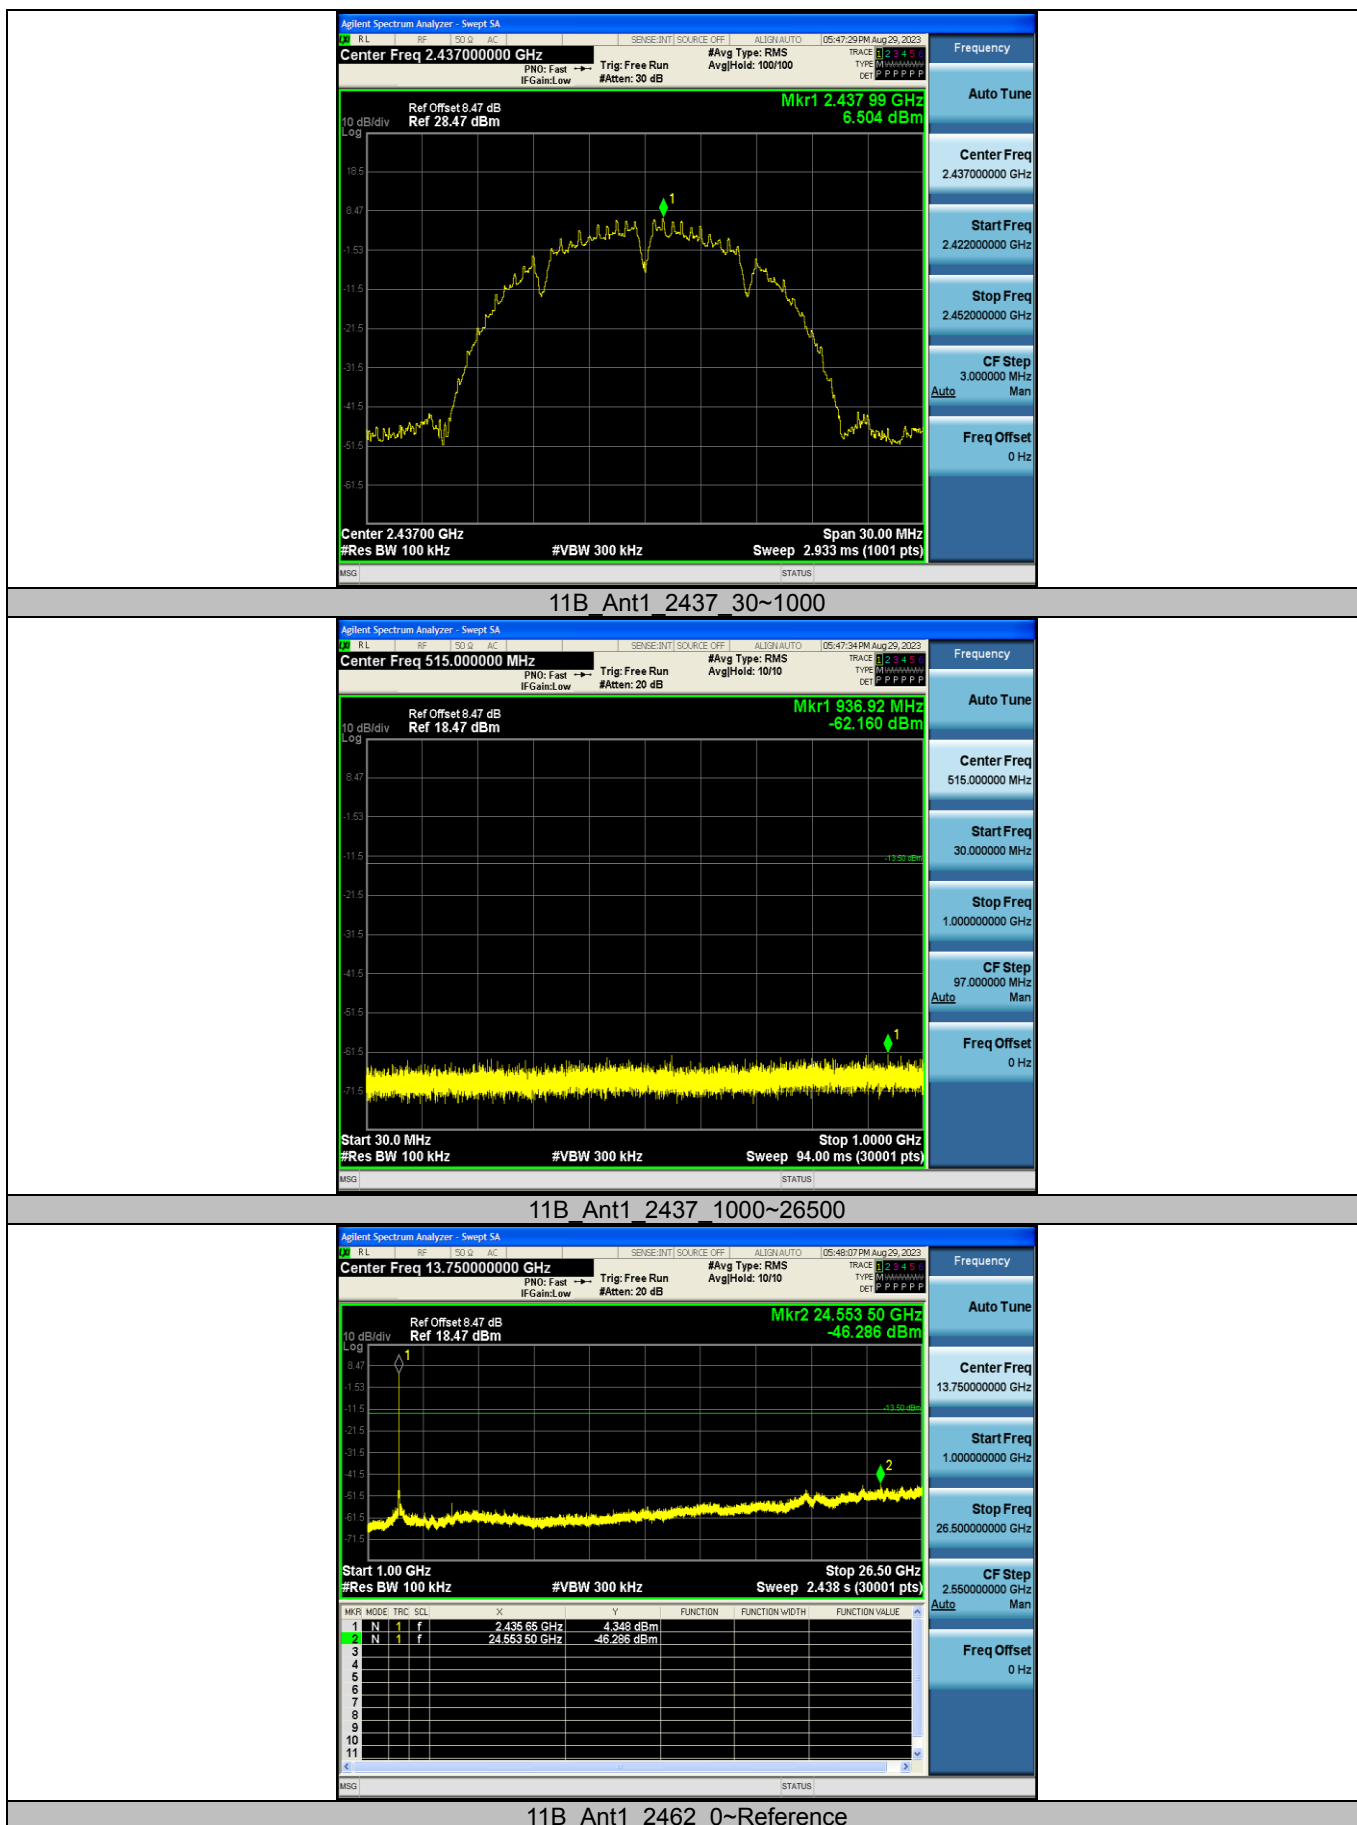


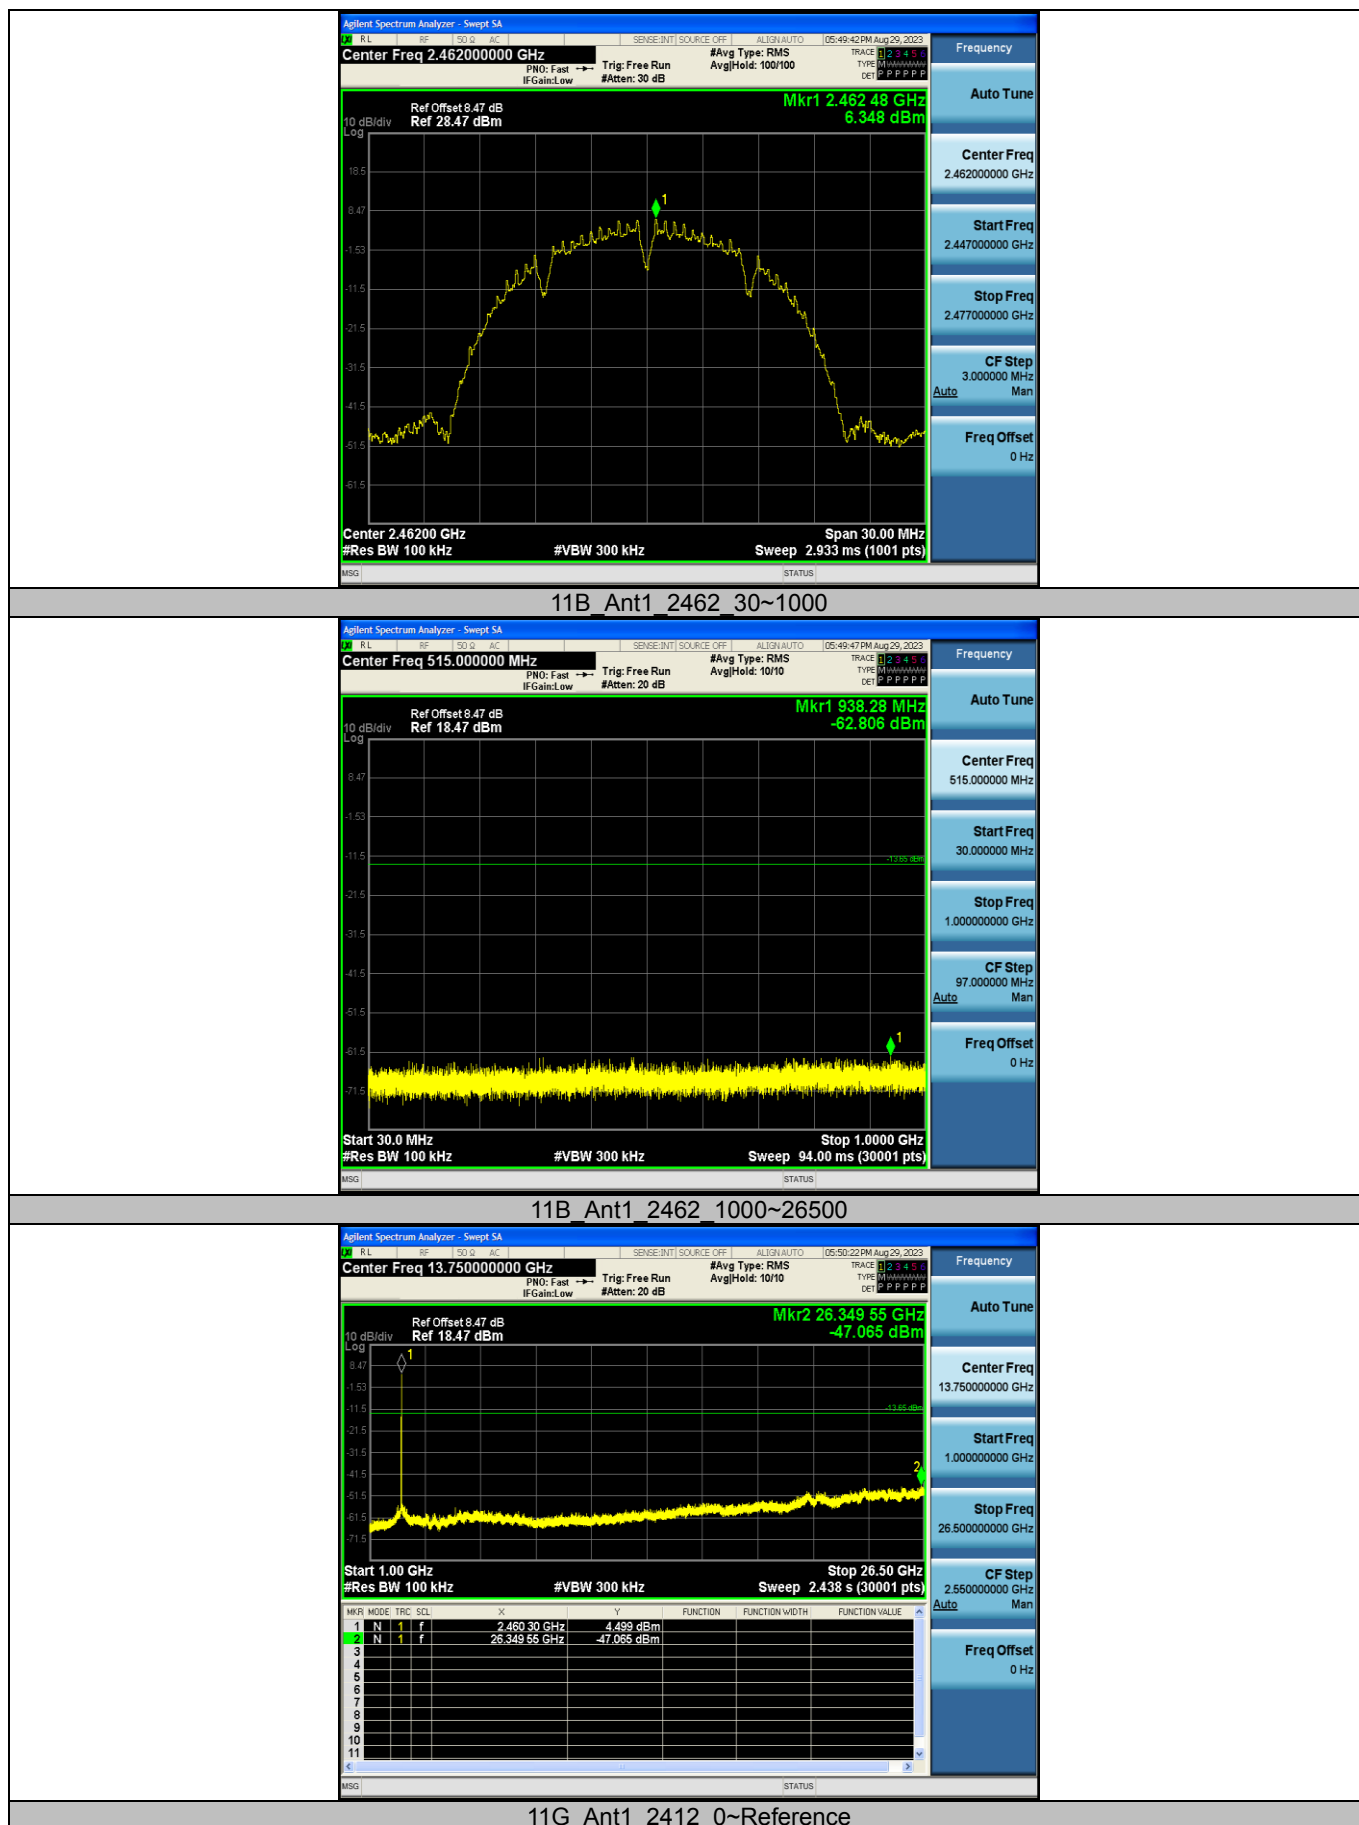


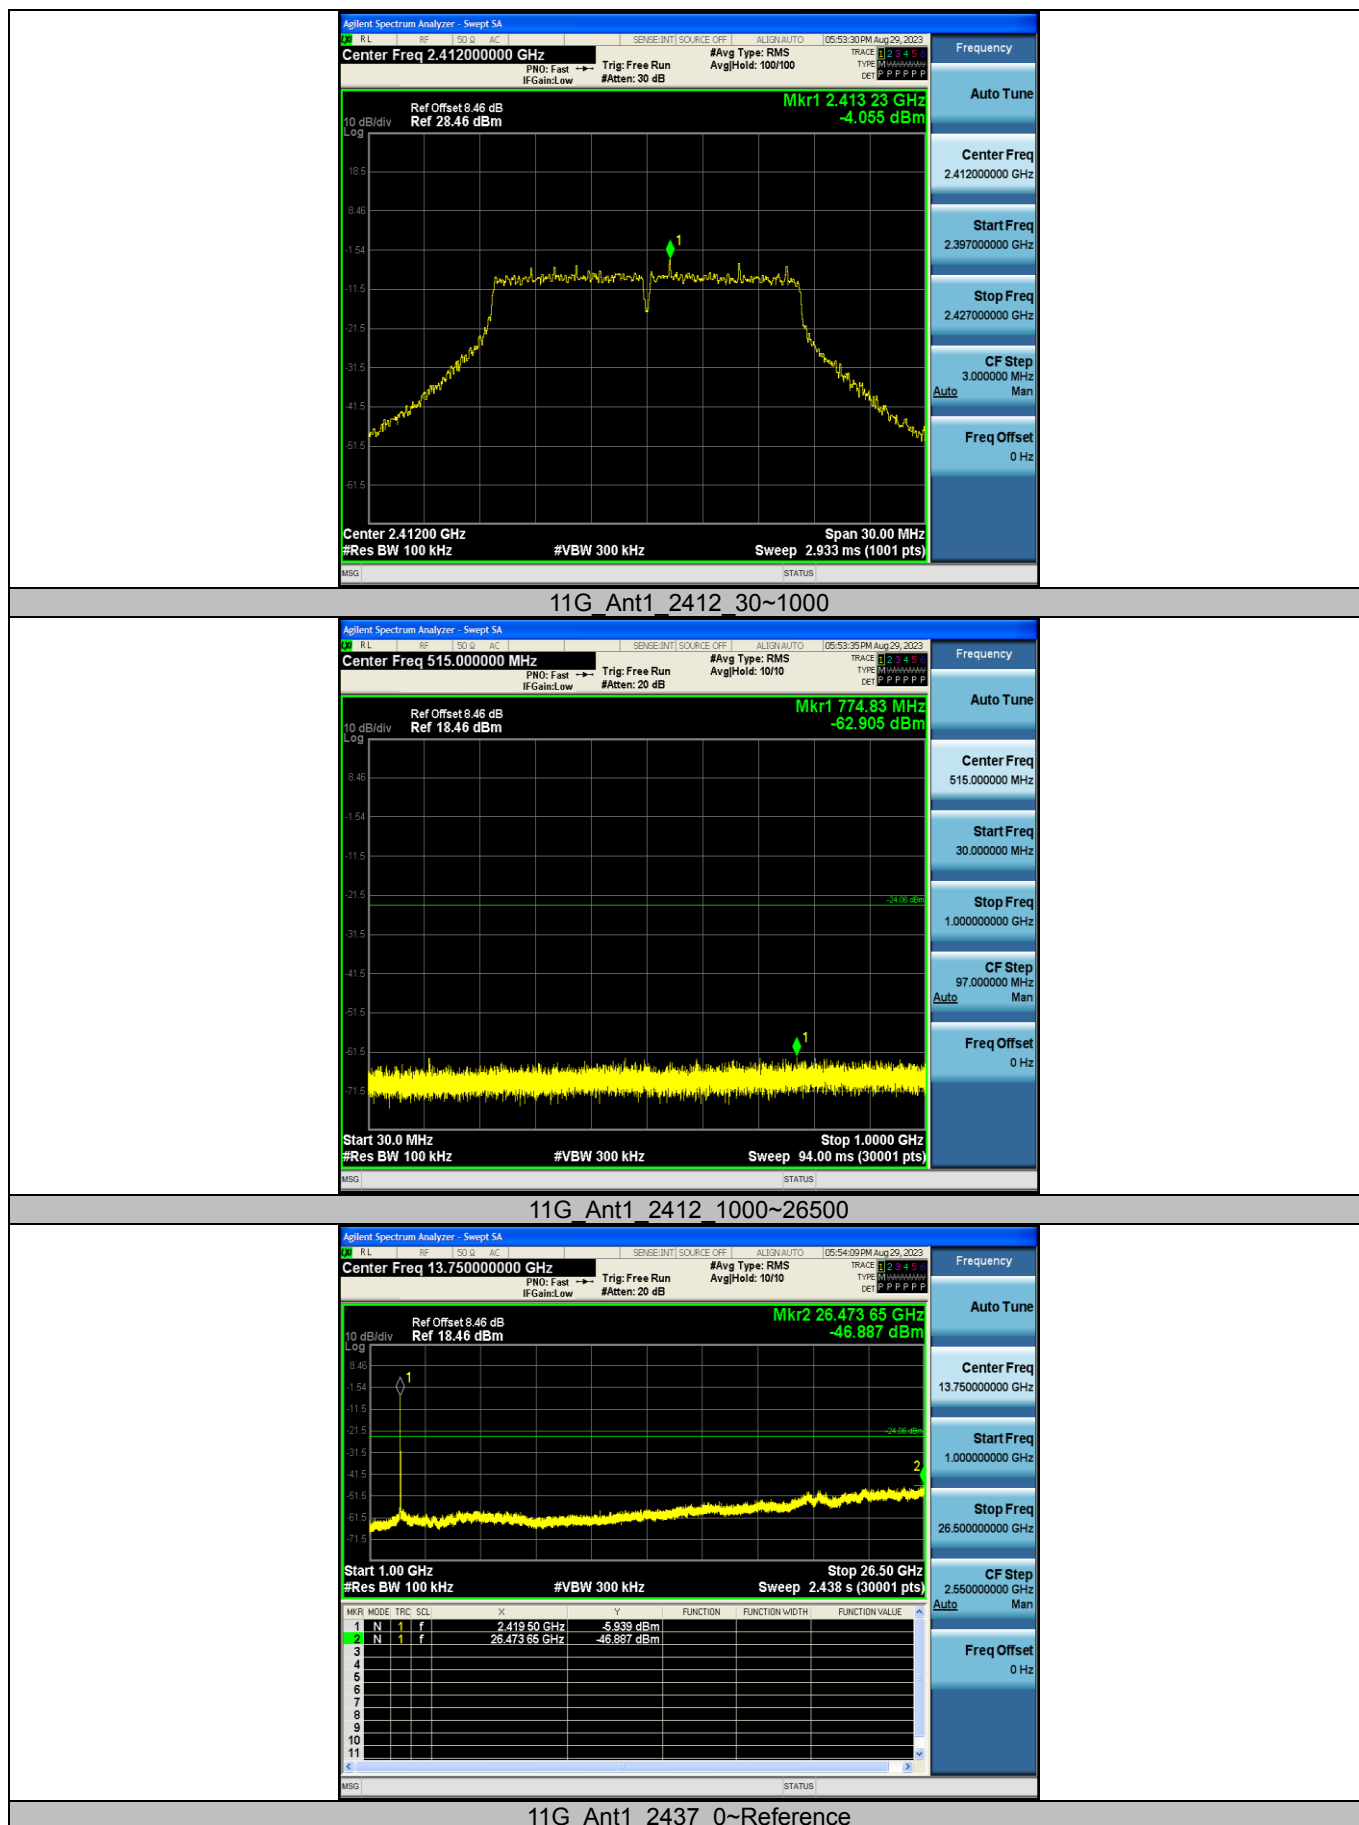


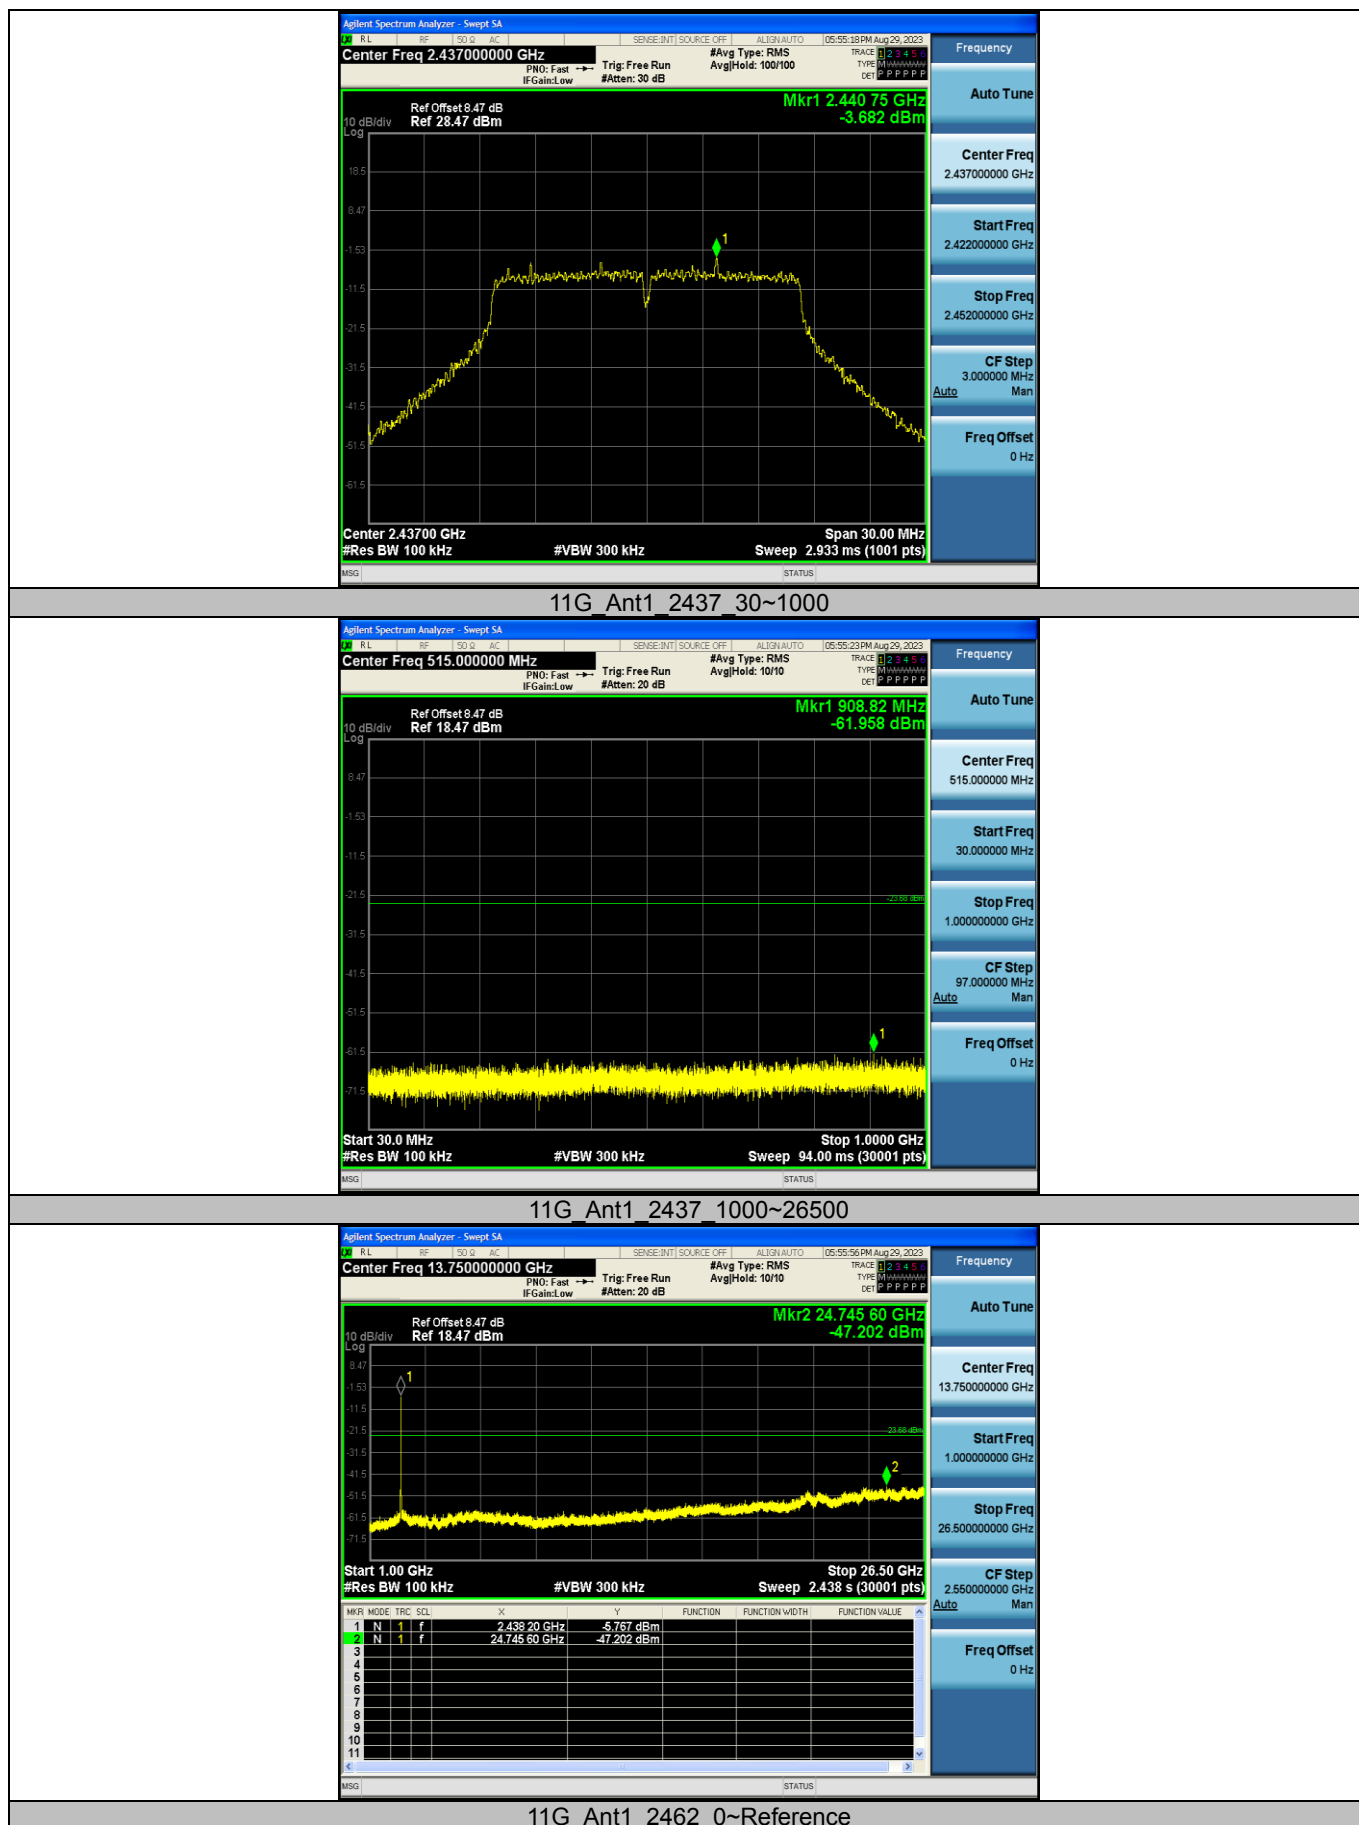

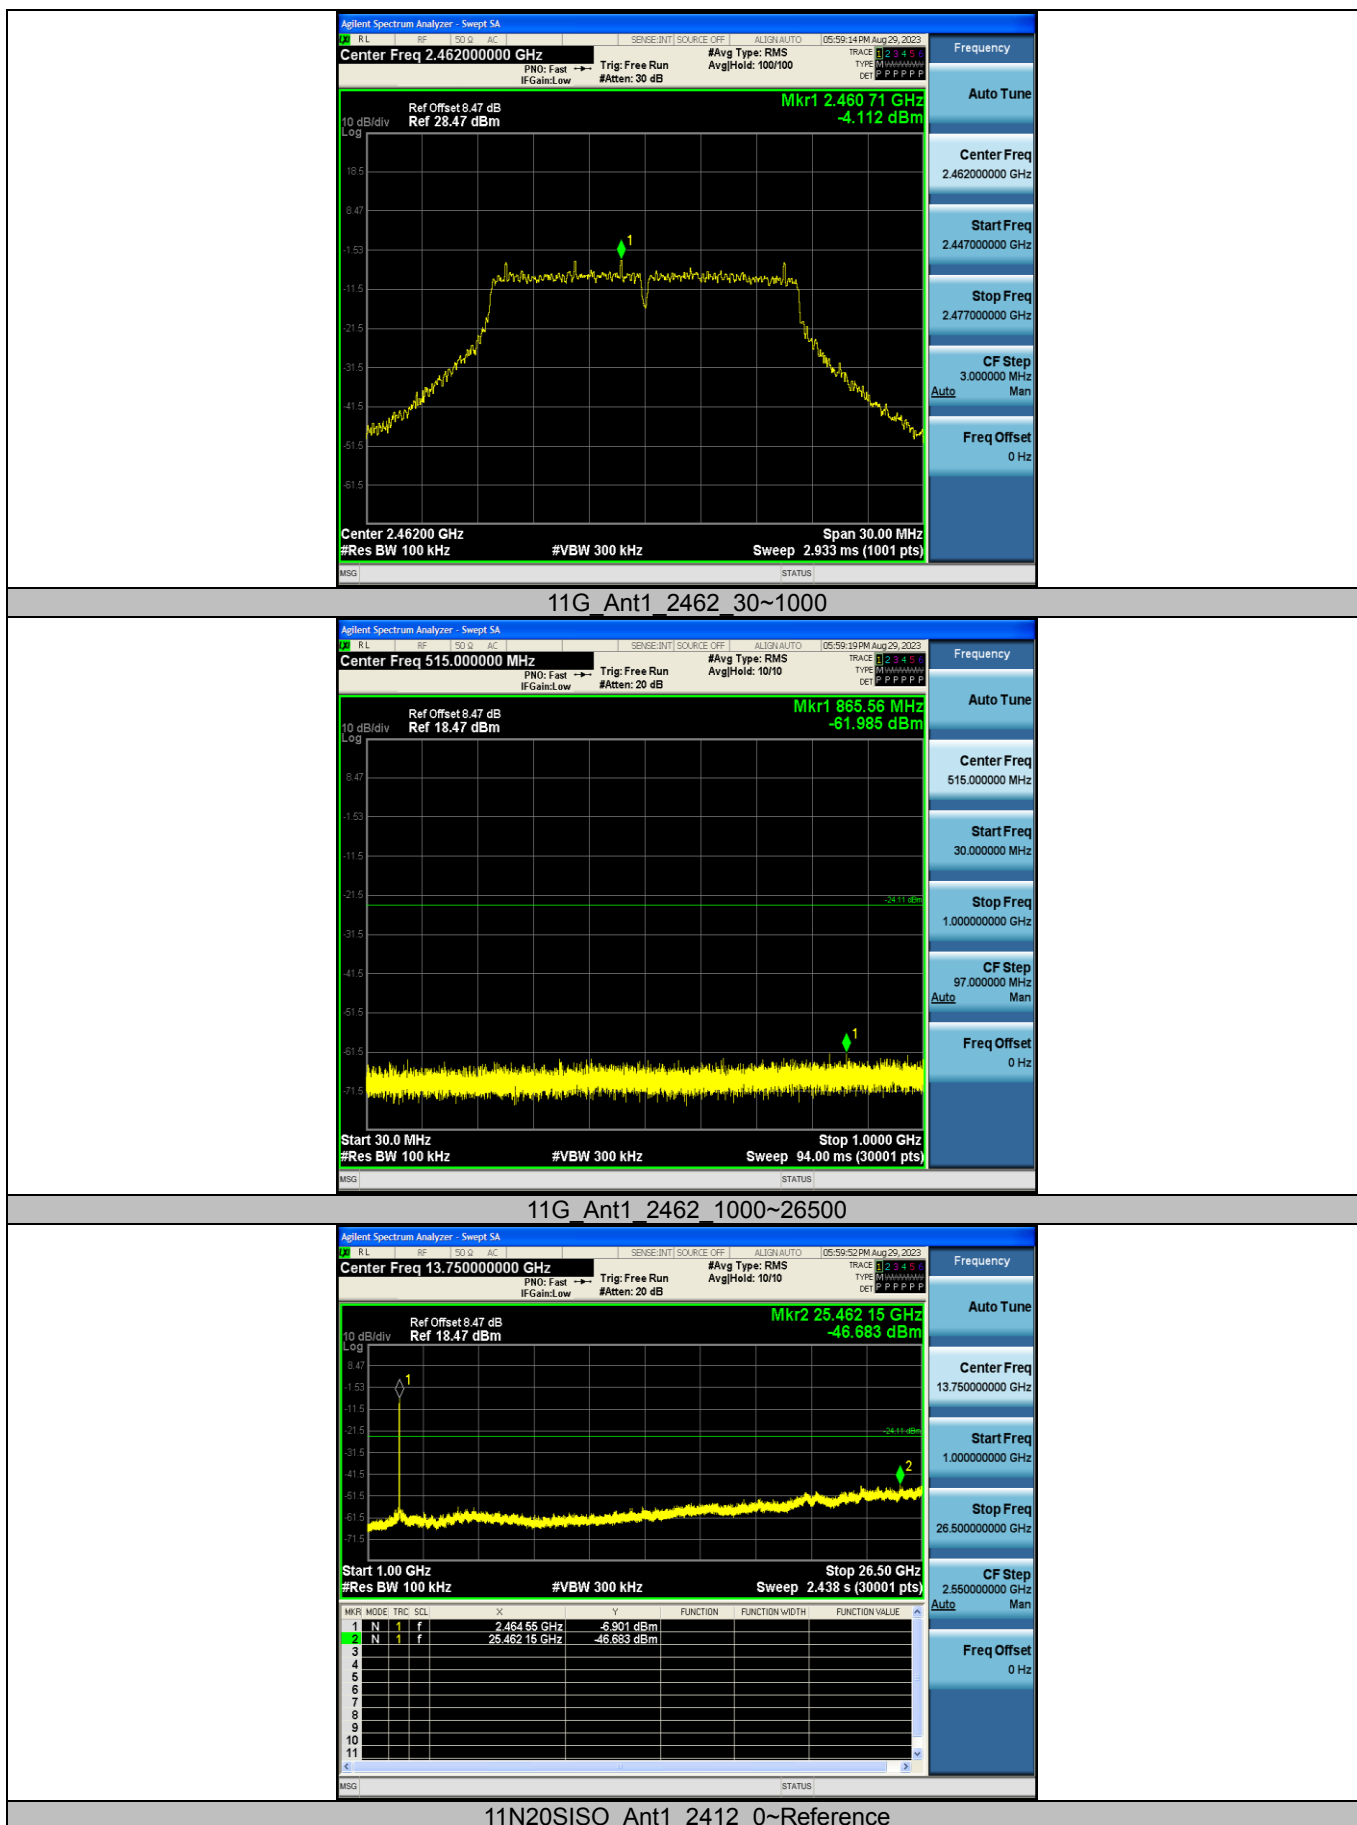

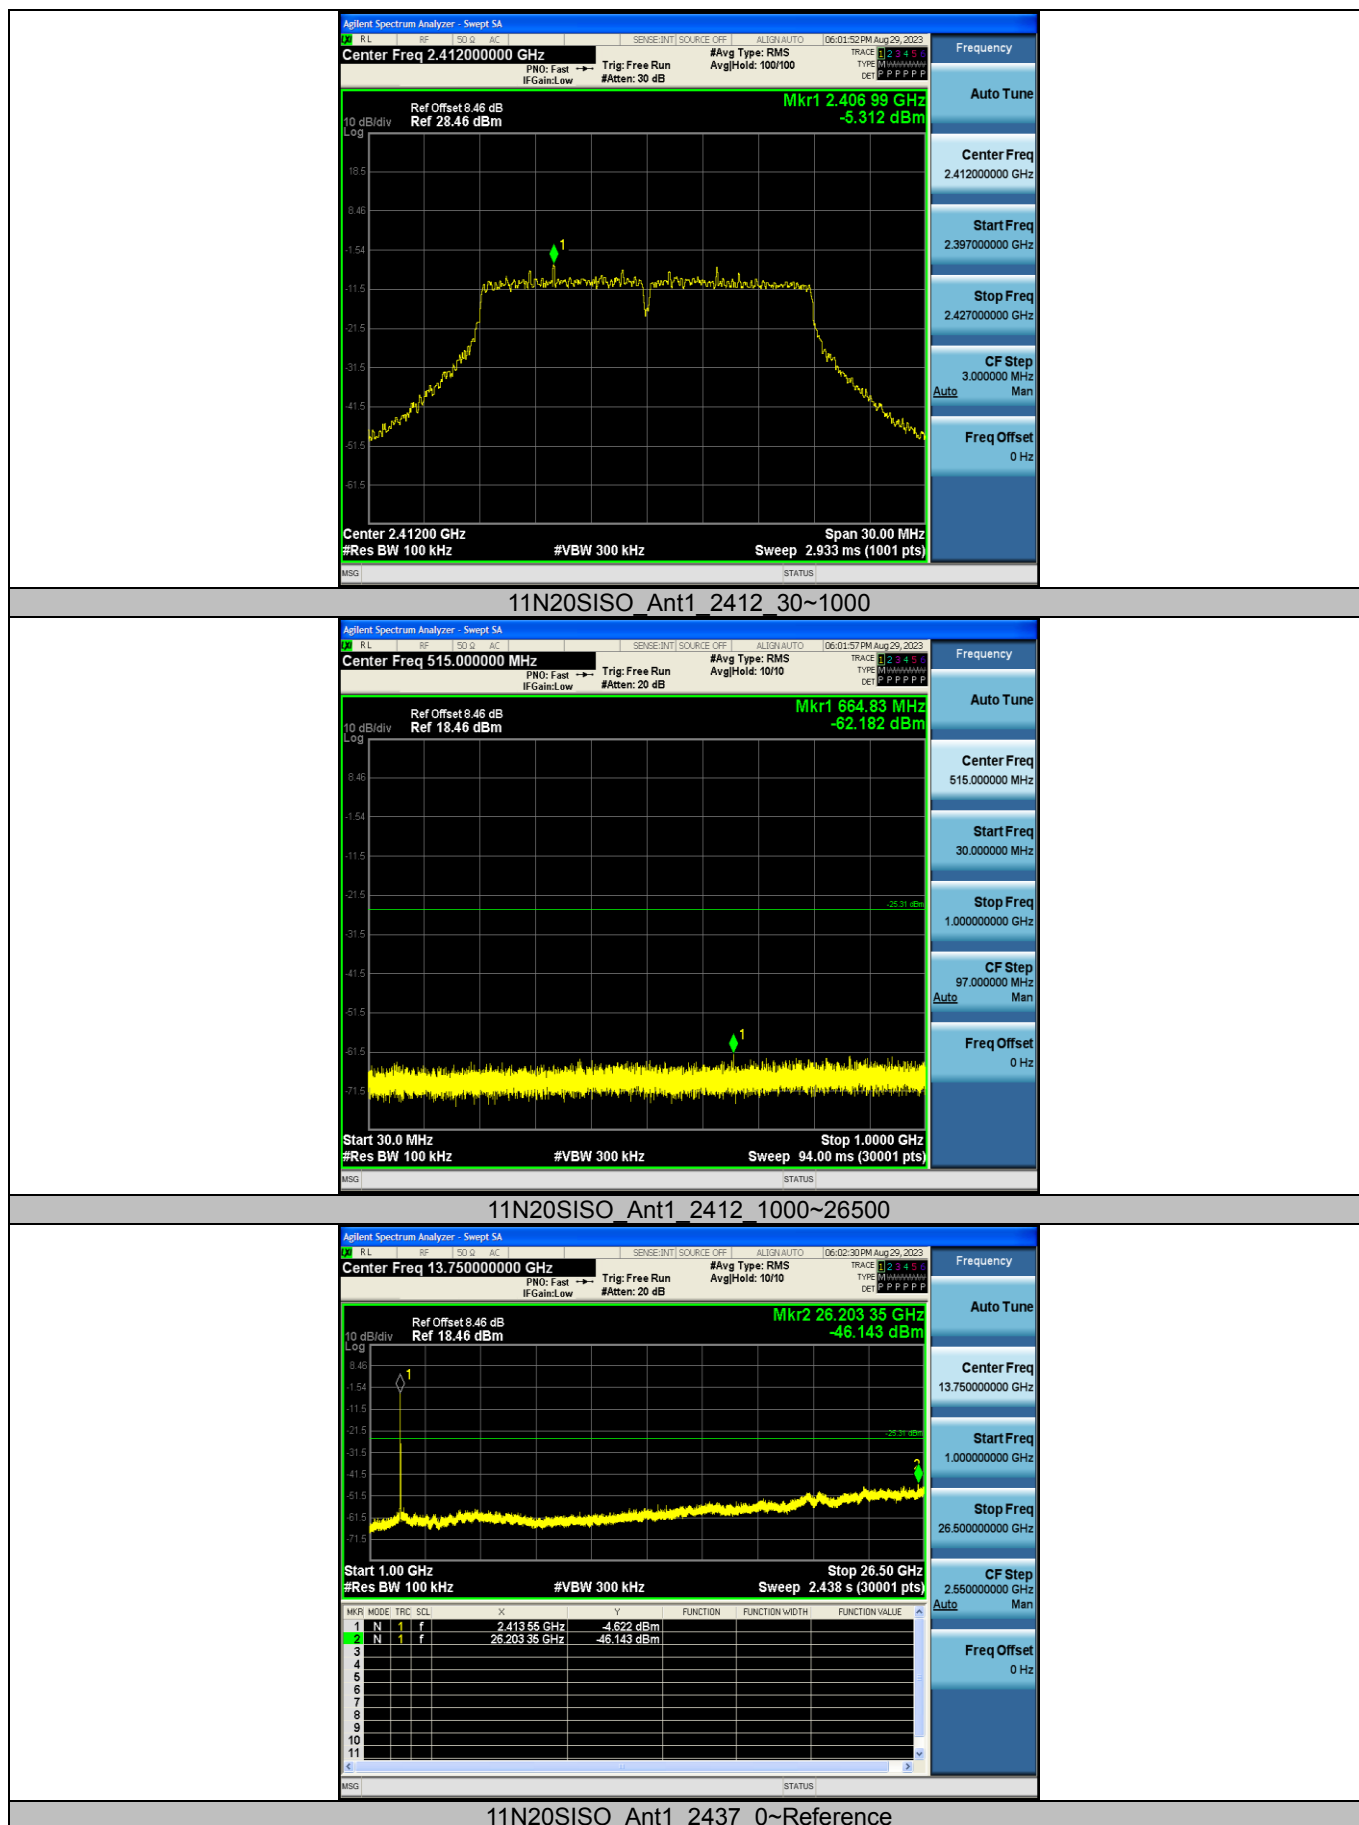

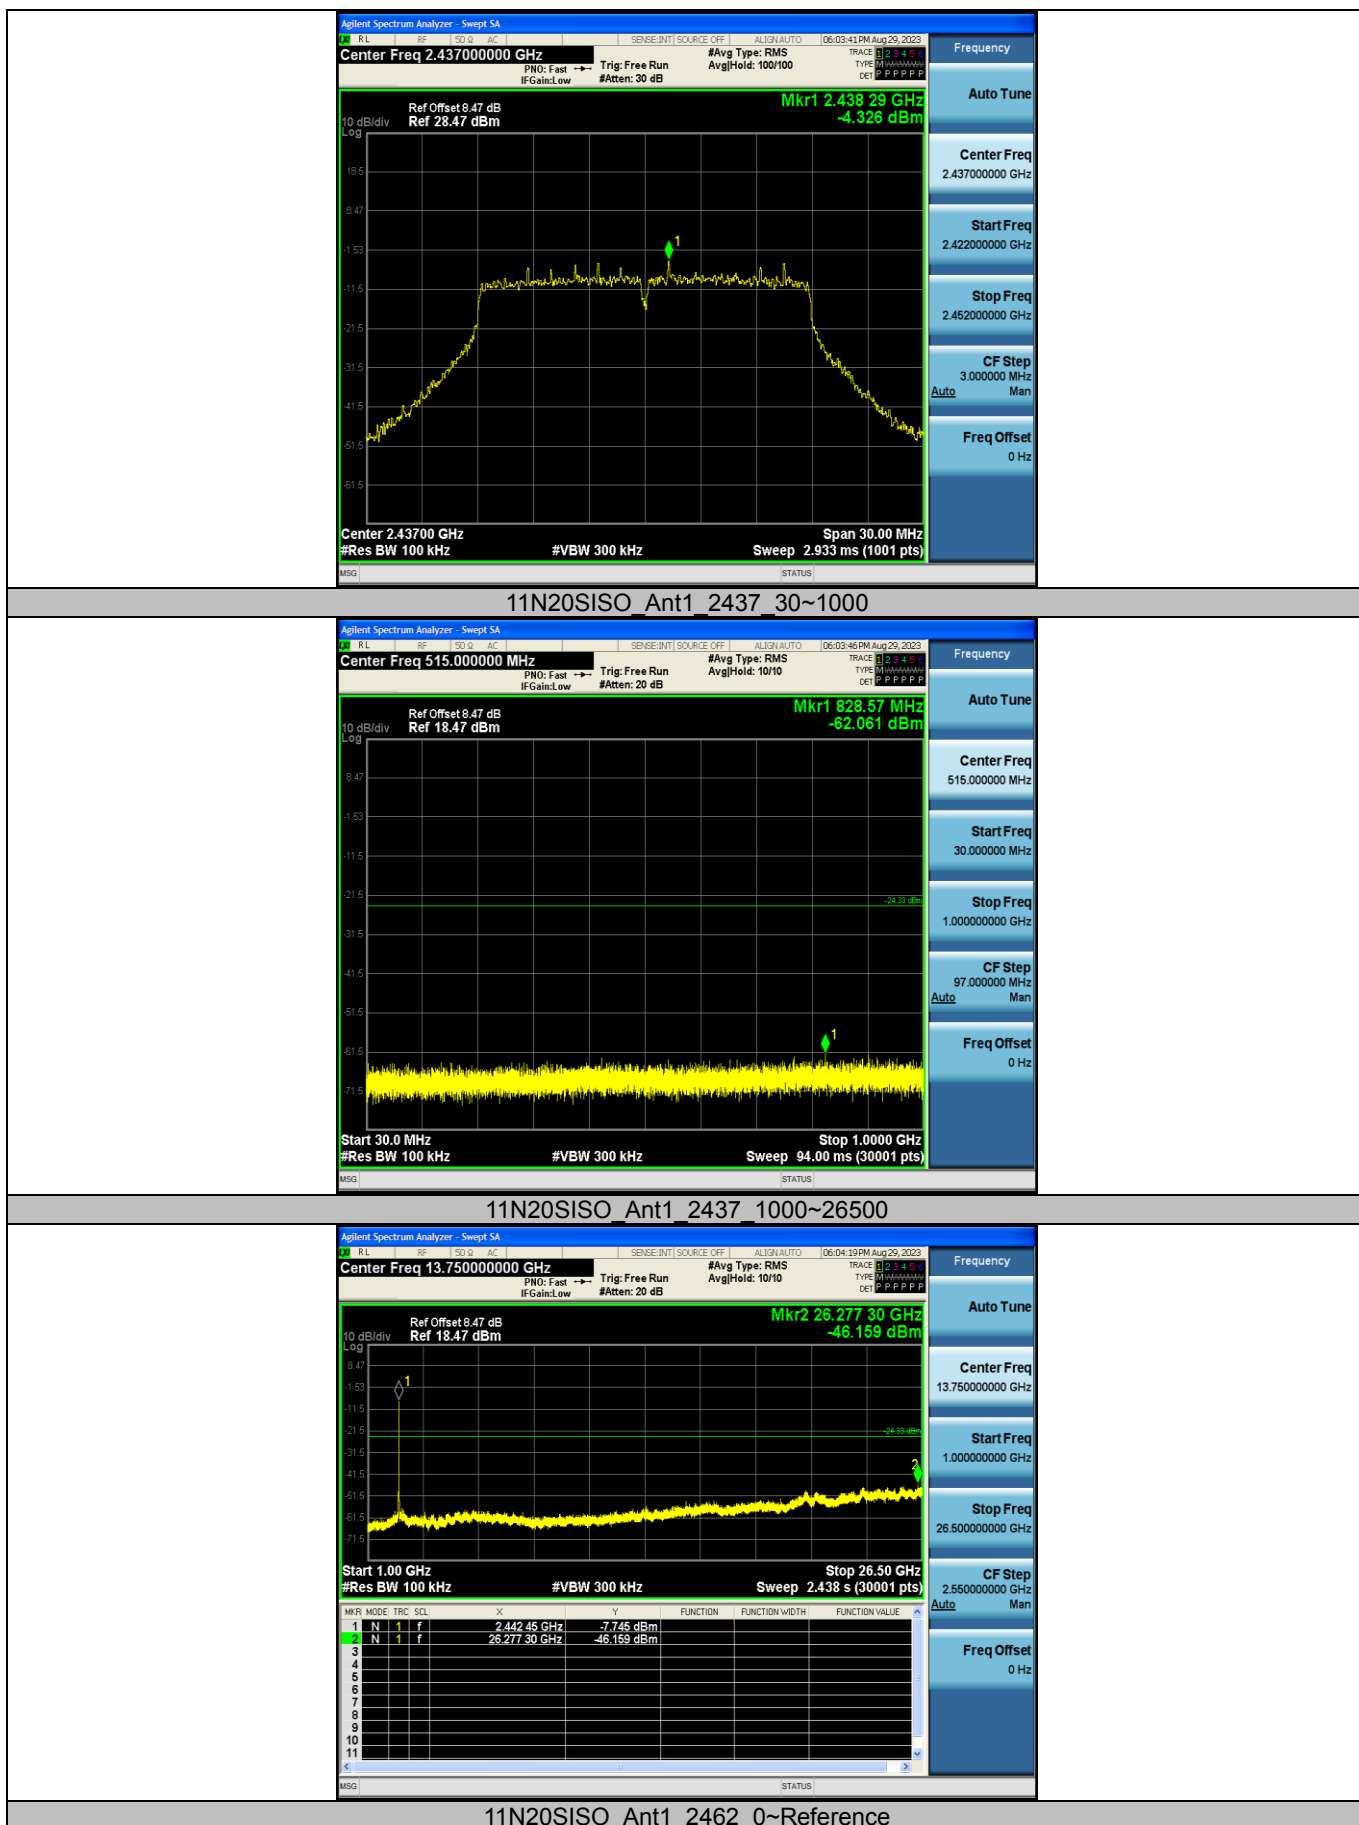

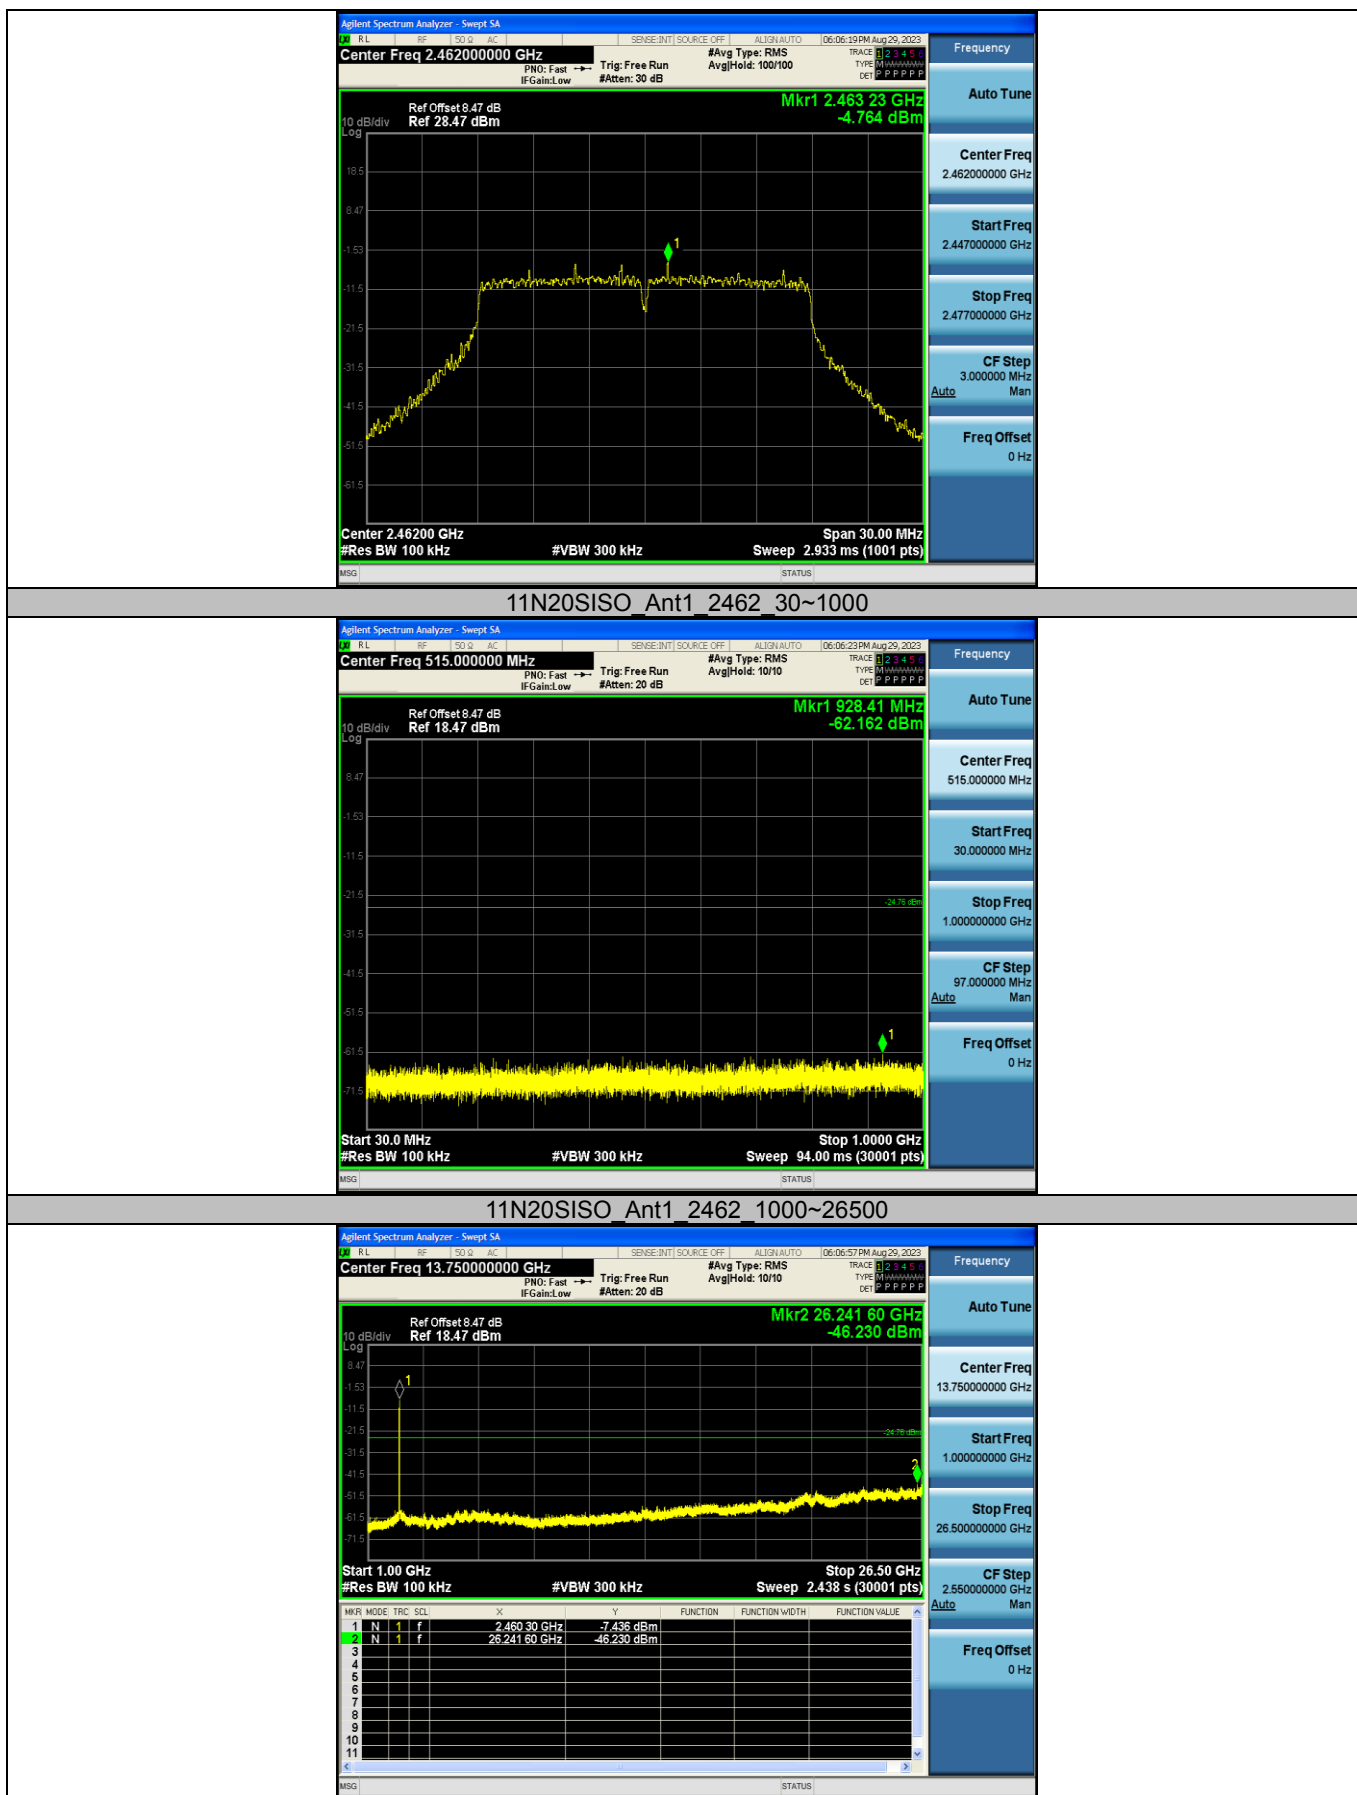

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2437	12.42	12.56	98.89	0.05
11G	Ant1	2437	2.06	2.19	94.06	0.27
11N20SISO	Ant1	2437	1.92	2.05	93.66	0.28

Notes:

Duty Cycle [%] = Transmission Duration [ms] / Transmission Period [ms] * 100

Factor = 10 * log (Duty Cycle)

Test Graphs



----End of Report----