



[Model Name]

Part No: GW.05.0153

Description

Dual-Band Wi-Fi 2.4~2.5GHz/5.15~5.85GHz Terminal Mount Monopole Antenna Also Covering Wi-Fi 6 Frequencies

Features:

Wi-Fi 2.4/5.8/7.1GHz

Covers Wi-Fi 6 Frequencies: 5.9-71GHz Extremely Compact - 62.3mm ± 1.5mm

Aesthetic look and fee

Unique can rotate 360 degrees and articulate through 180 degrees

Max Peak Gain compliant with most Wi-Fi modules

Connector: RP-SMA(M)
Dimensions: 62 3*Ø10mm

CE Certified

RoHS & Reach Compliant



| 1. | Introduction | 3 |
|----|-------------------------|----|
| | Specification | |
| | Test Setup | |
| | · | |
| | Antenna Characteristics | |
| | Radiation Patterns | |
| | Mechanical Drawing | |
| 7. | Packaging | 21 |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.















The GW.05 dual band Wi-Fi Hinged Rotatable Antenna is a high efficiency monopole antenna with the capacity to cover Wi-Fi 6 frequencies up to 7.125GHz. Compared to other much larger antennas on the market, it has superior wide-band high efficiency characteristics. The bright green colour of the antenna adds a unique quality look and feel to any modern Wi-Fi application point, device or router. It also provides differentiation if using Taoglas other similar looking antennas (such as the black color Taoglas TG.09 cellular antenna) on same device.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.



For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

This antenna's colour and connector and be customized subject to NRE, for further information please contact your regional Taoglas customer support team.

The GW.05 is also available in black - GW.05.0153B, and also available with FAKRA Code Z Connector - GW.05.0ZZ23 or with FAKRA Code I - GW.05.AE23. For further customizations please contact your regional Taoglas customer support team.



2. Specification

| GW.05.0153 | | | | | | | | | | |
|---------------------|-------------------|-----------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Frequency (MHz) | 2.4-2.4835 GHz | | 5.250- 5.350 GHz | 5.470- 5.725 GHz | 5.725- 5.850 GHz | 5.850- 5.895 GHz | 5.925- 6.425 GHz | 6.425- 6.525 GHz | 6.525- 6.875 GHz | 6.875- 7.125 GHz |
| | 2400-2483 | 5150-5250 | 5250-5350 | 5470-5725 | 5725-5850 | 5850-5895 | 5925-6425 | 6425-6525 | 6525-6875 | 6875-7125 |
| Efficiency (%) | | | | | | | | | | |
| Free space_Straight | 31.93 | 75.65 | 77.29 | 76.53 | 75.15 | 72.10 | 77.21 | 79.47 | 72.26 | 68.90 |
| Average Gain (dB) | | | | | | | | | | |
| Free space_Straight | -4.96 | -1.21 | -1.12 | -1.16 | -1.24 | -1.42 | -1.14 | -1.00 | -1.41 | -1.62 |
| Peak Gain (dBi) | | | | | | | | | | |
| Free space_Straight | 0.37 | 1.69 | 1.92 | 2.18 | 2.43 | 2.07 | 3.09 | 2.94 | 2.55 | 2.48 |
| Impedance | | | 50 Ω | | | | | | | |
| Polari | Linear | | | | | | | | | |
| Radiatio | Omni | | | | | | | | | |


| Mechanical | | | | | | |
|------------------------------------|----------------|--|--|--|--|--|
| Antenna length | 62.3mm | | | | | |
| Antenna Diameter | 10mm | | | | | |
| Casing | POM | | | | | |
| Connector | RP-SMA(M) | | | | | |
| Weight | 6g | | | | | |
| Recommended Torque for Mounting | 0.9N·m | | | | | |
| Max Torque for Mounting | 1.176N⋅m | | | | | |
| Environmental | | | | | | |
| Temperature Range | -40°C ∼ + 85°C | | | | | |

DRAFT SPECIFICATION




4. Antenna Characteristics

Return Loss

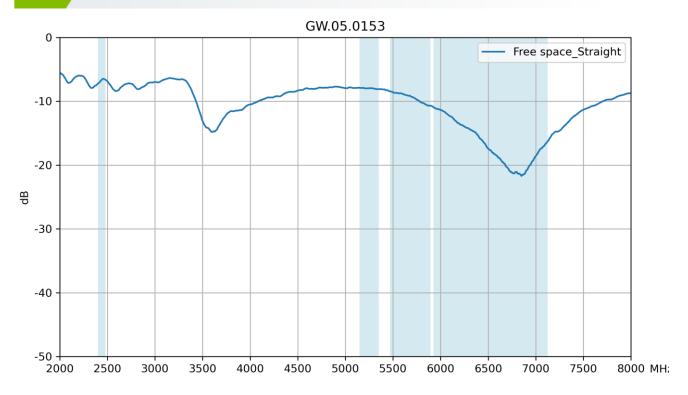


Efficiency

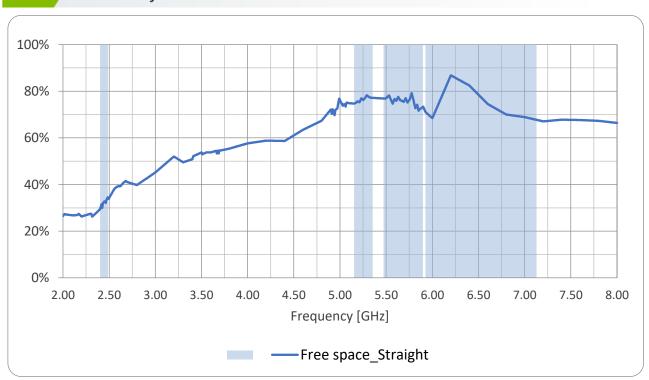




Average Gain

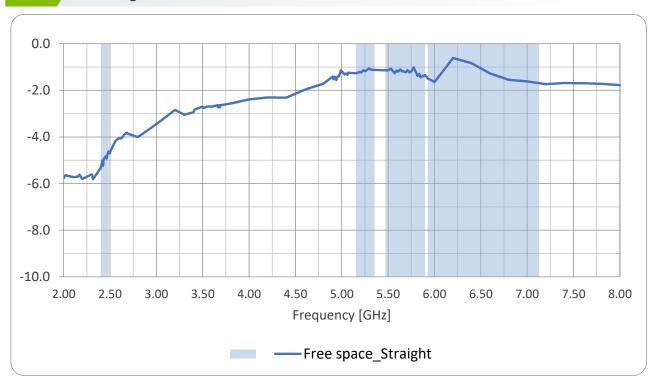

Peak Gain

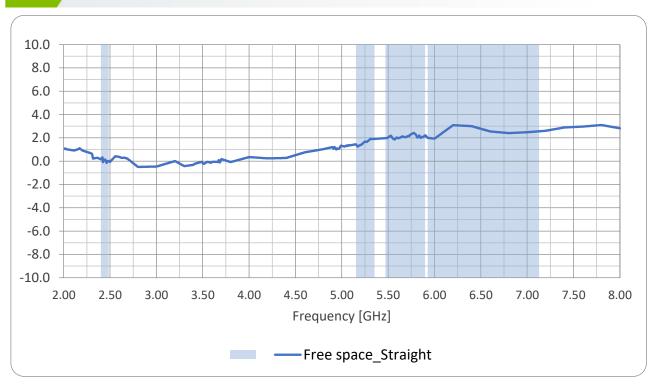




5. Radiation Patterns


GW.05.0153 Free space_Straight 3D and 2D Radiation Pattern

Gain total, 2442MHz

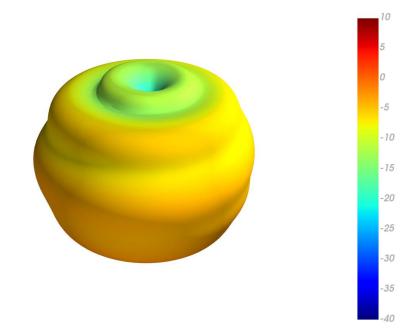

2442MHz

2484MHz

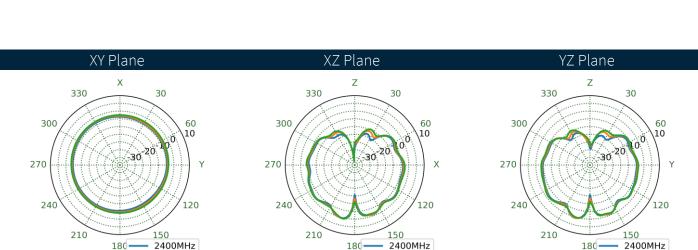

2442MHz


- 2484MHz


2442MHz

2484MHz




Gain total, 5190MHz

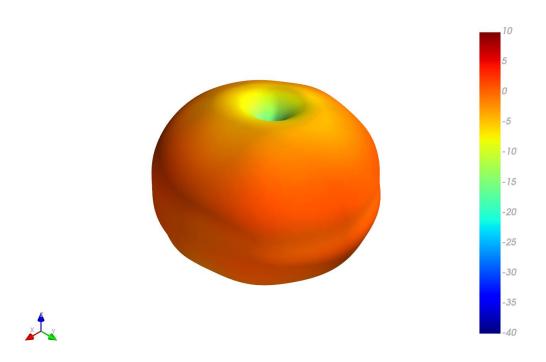


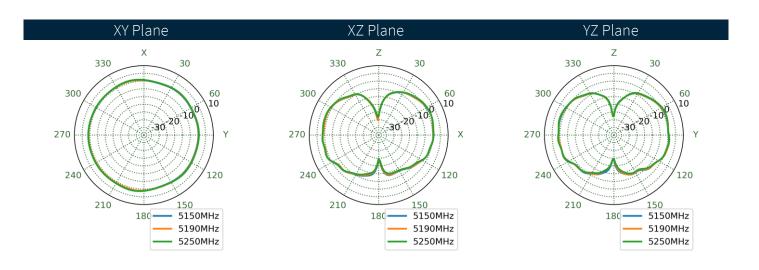




Gain total, 5290MHz

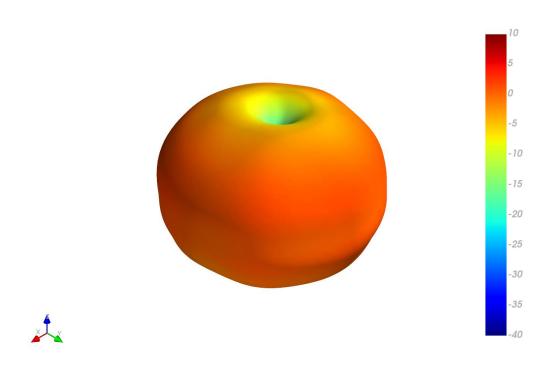


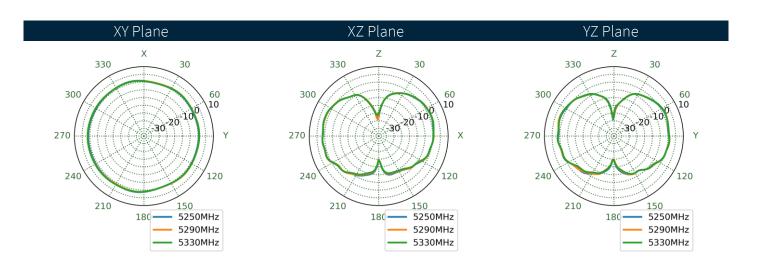




Gain total, 5590MHz

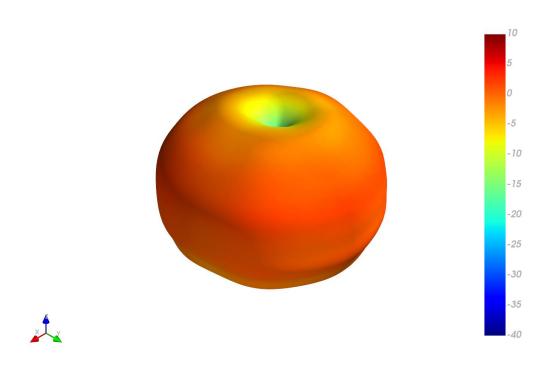


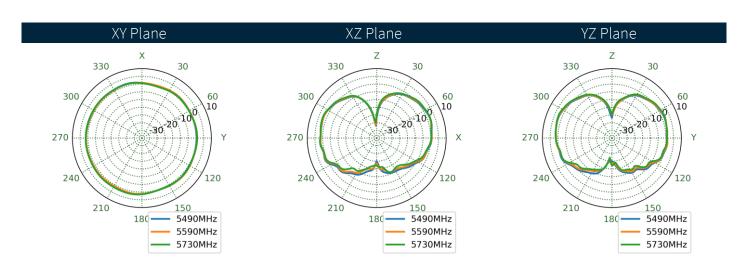




Gain total, 5795MHz

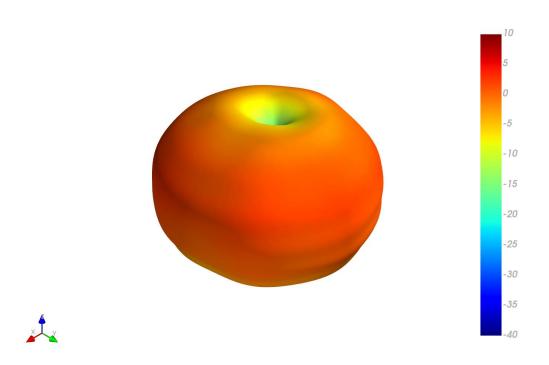


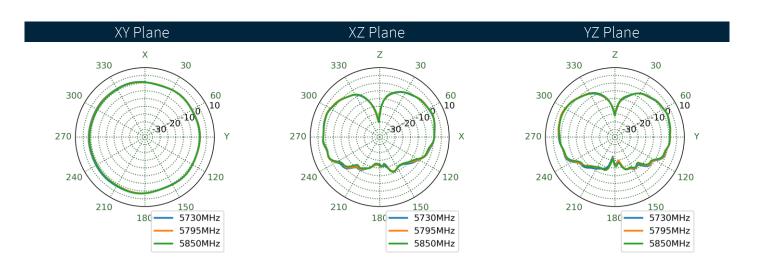




Gain total, 5875MHz

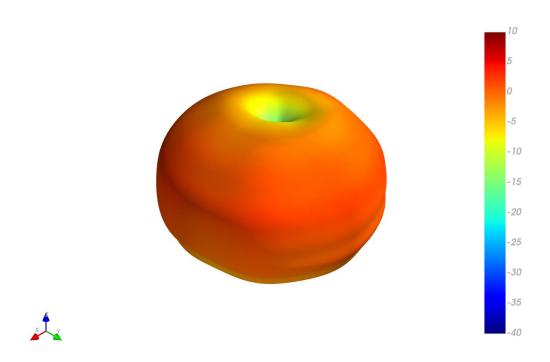


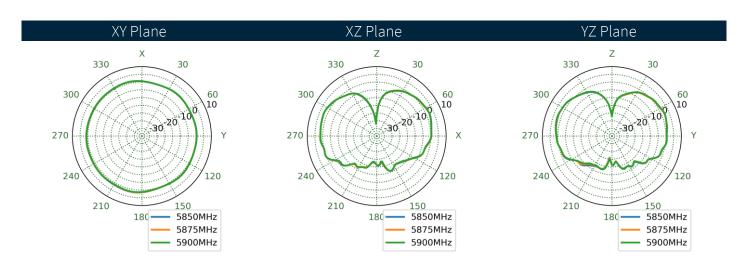




Gain total, 6175MHz

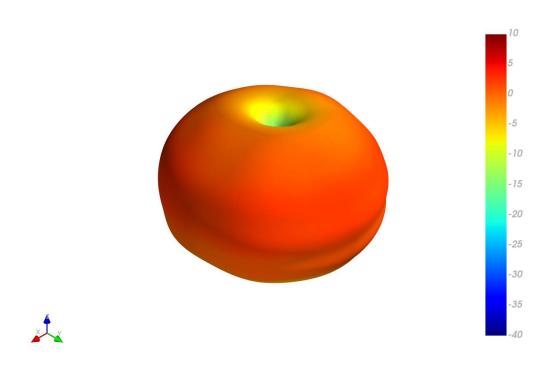


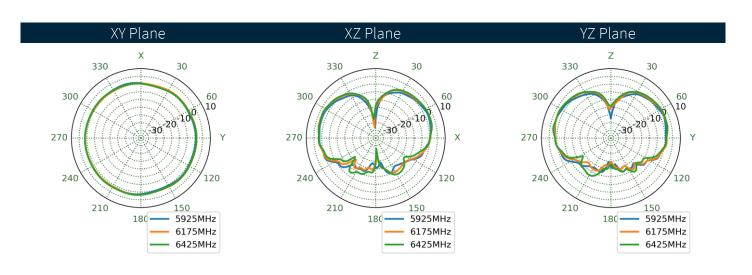




Gain total, 6475MHz

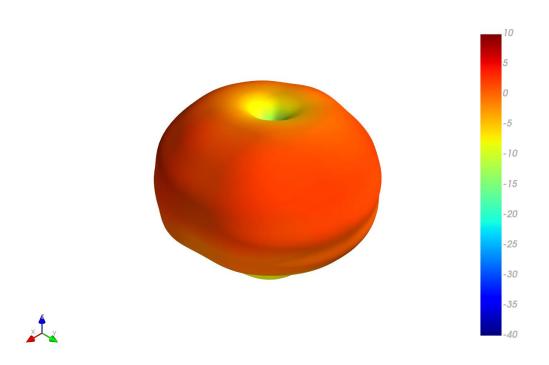


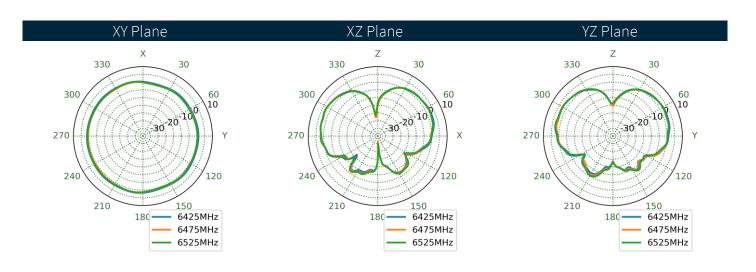




Gain total, 6700MHz

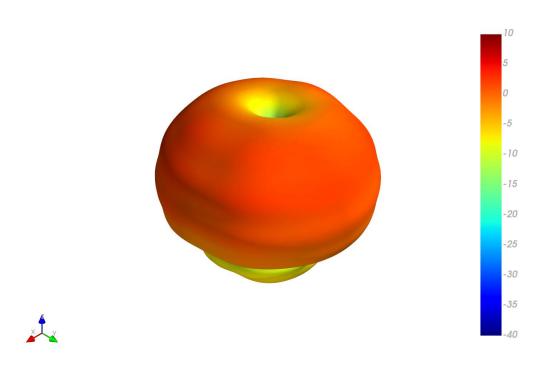


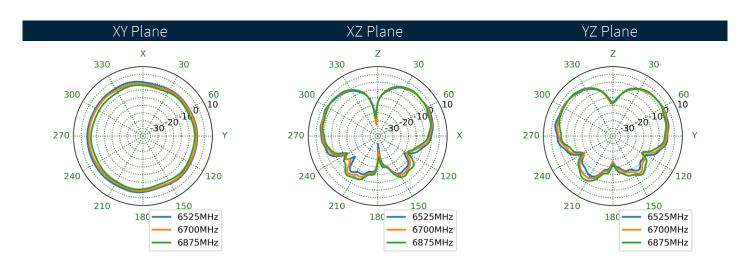




Gain total, 7000MHz

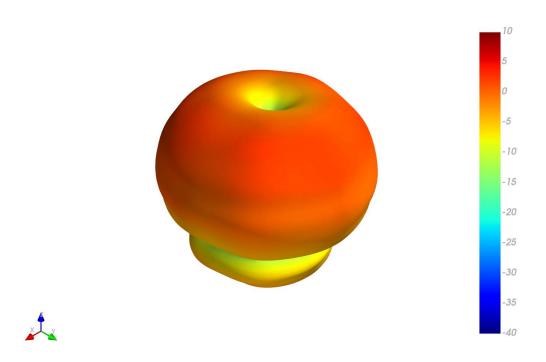

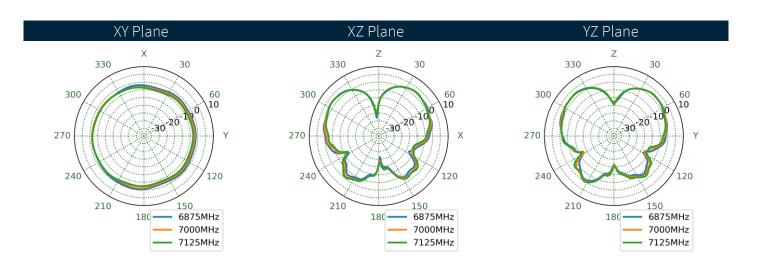



6. Mechanical Drawing

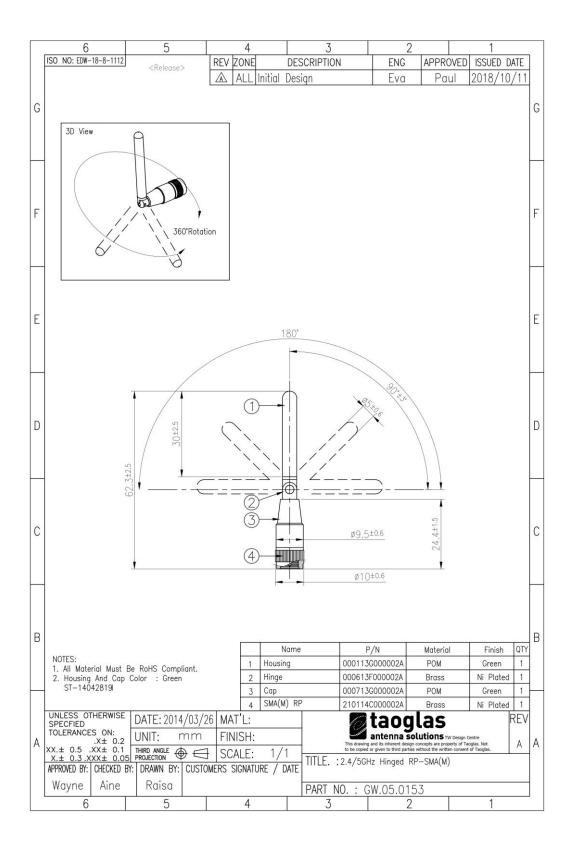

DRAFT SPECIFICATION



7. Packaging


1pc GW.05.0153 per PE Bag Bag Dimension: 74*42mm Weight: 8.5g



42mm

100pcs GW.05.0153 per Large PE Bag Bag Dimensions: 180*280mm


Weight: 100g

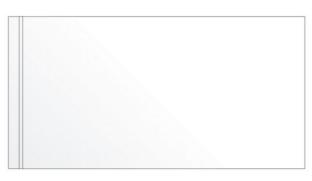

280mm

1500pcs GW.05.0153 per Carton Dimensions: 360*310*160mm

Weight: 2.5Kg

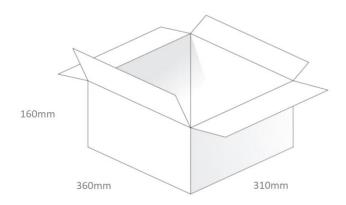





www.taoglas.com

