



<b>Test Report No.: 12121201.fcc01</b>		Page 1 of 263
<i>Client:</i>	<b>Intel Corporation</b> 100 Center Point Circle Suite 200 Columbia, SC 29210 USA	
<i>Test Item:</i>	<b>Digital Transmission System (DTS)</b> <b>Wireless Network Adapter Module</b>	
<i>Identification:</i>	<b>7260NGW</b>	<i>MAC address:</i> <b>001500B6698F</b>
<i>Project No.:</i>	<b>12121201</b>	<i>Date of Receipt:</i> <b>January 07, 2013</b>
<i>Testing Location:</i>	<b>TÜV Rheinland EPS B.V.</b> Eiberkamp 10 9351VT Leek	
<i>Test Specification:</i>	FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-12 Edition) RSS-Gen (issue 3, December 2010) an RSS-210 (Issue 8, December 2010) ANSI C63.10:2009 KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247 (10/4/12)	
<i>Test Result:</i>	The test item <b>passed</b> the test specification(s).	
<i>Testing Laboratory:</i>	<b>TÜV Rheinland EPS B.V.</b> Eiberkamp 10 9351 VT Leek	
<i>Tested by:</i>		<i>Reviewed by:</i>
2013-03-22	R. van der Meer / Inspector	2013-03-22
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
		
		2013-03-22
		O. Hoekstra / Reviewer
		<i>Signature</i>
<i>Other Aspects:-.</i>		
<i>Abbreviations:</i> P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V. The test results relate only to the item(s) tested.		

Test Report No.:

**12121201.fcc01**

Page 2 of 263

## TEST SUMMARY

### **5.1.1 VOLTAGE REQUIREMENTS**

*RESULT: PASS*

### **5.1.2 ANTENNA REQUIREMENTS**

*RESULT: PASS*

### **5.1.3 RESTRICTED BANDS OF OPERATION**

*RESULT: PASS*

### **5.2.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT**

*RESULT: PASS*

### **5.2.2 6dB AND 99% BANDWIDTH**

*RESULT: PASS*

### **5.2.3 PEAK POWER SPECTRAL DENSITY**

*RESULT: PASS*

### **5.2.4 BAND EDGE CONDUCTED EMISSIONS**

*RESULT: Pass*

### **5.2.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER**

*RESULT: PASS*

### **5.2.6 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER IN RESTRICTED BANDS**

*RESULT: PASS*

### **5.3.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER**

*RESULT: PASS*

Test Report No.:

**12121201.fcc01**

Page 3 of 263

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>6</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>6</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>6</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>6</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....</b>	<b>7</b>
<b>2.3</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>9</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>9</b>
<b>3.2</b>	<b>SYSTEM DETAILS .....</b>	<b>9</b>
<b>3.3</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE .....</b>	<b>10</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>12</b>
<b>4.1</b>	<b>TEST METHODOLOGY .....</b>	<b>12</b>
<b>4.2</b>	<b>OPERATION MODES .....</b>	<b>12</b>
<b>4.3</b>	<b>PHYSICAL CONFIGURATION FOR TESTING .....</b>	<b>13</b>
<b>4.4</b>	<b>TEST SOFTWARE .....</b>	<b>14</b>
<b>4.5</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>15</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>16</b>
<b>5.1</b>	<b>TECHNICAL REQUIREMENTS.....</b>	<b>16</b>
5.1.1	<i>Voltage Requirements .....</i>	<i>16</i>
5.1.2	<i>Antenna Requirements .....</i>	<i>16</i>
5.1.3	<i>Restricted Bands of Operation .....</i>	<i>17</i>
<b>5.2</b>	<b>CONDUCTED MEASUREMENTS AT ANTENNA PORT.....</b>	<b>18</b>
5.2.1	<i>Conducted Output Power.....</i>	<i>18</i>
5.2.2	<i>6dB and 99% Bandwidth.....</i>	<i>43</i>
5.2.3	<i>Peak Power Spectral Density .....</i>	<i>64</i>
5.2.4	<i>Band Edge Conducted Emissions .....</i>	<i>85</i>
5.2.5	<i>Radiated Spurious Emissions of Transmitter.....</i>	<i>96</i>
5.2.6	<i>Radiated Spurious Emissions of Transmitter in restricted bands .....</i>	<i>113</i>
<b>5.3</b>	<b>SPURIOUS EMISSIONS IN RECEIVE MODE.....</b>	<b>124</b>

Test Report No.:

**12121201.fcc01**

Page 4 of 263

<b>5.4</b>	<b>AC POWER LINE CONDUCTED MEASUREMENTS .....</b>	<b>126</b>
5.4.1	AC Power Line Conducted Emission of Transmitter.....	126
<b>6.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>128</b>
<b>6.1</b>	<b>TEST METHODOLOGY .....</b>	<b>128</b>
<b>6.2</b>	<b>OPERATION MODES .....</b>	<b>128</b>
<b>6.3</b>	<b>PHYSICAL CONFIGURATION FOR TESTING .....</b>	<b>130</b>
<b>6.4</b>	<b>TEST SOFTWARE .....</b>	<b>131</b>
<b>6.5</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>132</b>
<b>7.</b>	<b>TEST RESULTS .....</b>	<b>133</b>
<b>7.1</b>	<b>TECHNICAL REQUIREMENTS.....</b>	<b>133</b>
7.1.1	Voltage Requirements .....	133
7.1.2	Antenna Requirements .....	133
7.1.3	Restricted Bands of Operation .....	134
<b>7.2</b>	<b>CONDUCTED MEASUREMENTS AT ANTENNA PORT.....</b>	<b>135</b>
7.2.1	Conducted Output Power.....	135
7.2.2	6dB and 99% Bandwidth.....	159
7.2.3	Peak Power Spectral Density .....	184
7.2.4	Band Edge Conducted Emissions .....	207
7.2.5	Radiated Spurious Emissions of Transmitter.....	221
7.2.6	Radiated Spurious Emissions of Transmitter in restricted bands .....	234
<b>7.3</b>	<b>SPURIOUS EMISSIONS IN RECEIVE MODE.....</b>	<b>236</b>
<b>7.4</b>	<b>AC POWER LINE CONDUCTED MEASUREMENTS.....</b>	<b>238</b>
7.4.1	AC Power Line Conducted Emission of Transmitter.....	238
<b>8.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>240</b>
<b>8.1</b>	<b>TEST METHODOLOGY .....</b>	<b>240</b>
<b>8.2</b>	<b>OPERATION MODES .....</b>	<b>240</b>
<b>8.3</b>	<b>PHYSICAL CONFIGURATION FOR TESTING .....</b>	<b>241</b>
<b>8.4</b>	<b>TEST SOFTWARE .....</b>	<b>242</b>
<b>8.5</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>243</b>
<b>9.</b>	<b>TEST RESULTS .....</b>	<b>244</b>
<b>9.1</b>	<b>TECHNICAL REQUIREMENTS.....</b>	<b>244</b>
9.1.1	Voltage Requirements .....	244
9.1.2	Antenna Requirements .....	244
9.1.3	Restricted Bands of Operation .....	245

Test Report No.:	12121201.fcc01	Page 5 of 263
9.2	CONDUCTED MEASUREMENTS AT ANTENNA PORT.....	249
9.2.1	Conducted Output Power.....	249
9.2.2	6dB and 99% Bandwidth.....	252
9.2.3	Band Edge Conducted Emissions .....	258
9.2.4	Radiated Spurious Emissions of Transmitter.....	260
9.2.5	Radiated Spurious Emissions of Transmitter in restricted bands .....	262

Test Report No.:

**12121201.fcc01**

Page 6 of 263

## **1. General Remarks**

### **1.1 Complementary Materials**

There is no attachment to this test report.

## **2. Test Sites**

### **2.1 Test Facilities**

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (*)	: +15°C to +35°C
Relative humidity(*)	: 20 % to 75 %
Supply voltage	: 120VAC/60Hz
Air pressure	: 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

Test Report No.:

**12121201.fcc01**

Page 7 of 263

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
<b>For Antenna Port Conducted Emission</b>					
Spectrum Analyzer	Rohde & Schwarz	FSP40	99538	11/2012	11/2013
Temperature-Humiditymeter	Extech	SD500	99857	02/2012	02/2014
Spectrum Analyzer	Rohde & Schwarz	FSV	99733	05/2012	05/2013
<b>For Radiated Emission</b>					
Measurement Receiver	Rohde & Schwarz	ESCI	99699	03-26/2012	03-26/2013
RF Cable S-AR	Gigalink	APG0500	99858	02/2013	02/2014
Controller	Maturo	SCU/088/8090811	99861	N/A	N/A
Controller	EMCS	DOC202	99608	N/A	N/A
Controller	Heinrich Deisel	4630-100	99107	N/A	N/A
Test facility	Comtest	FCC listed: 90828	99580	12/2011	12/2014
Spectrum Analyzer	Rohde & Schwarz	FSP40	99538	11/2012	11/2013
Controller	EMCS	DOC202	99608	N/A	N/A
Antenna mast	EMCS	AP-4702C	99609	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	99855	02/2012	02/2014
Guidehorn 1-18 GHz	EMCO	3115	12484	04/2012	04/2013
Guidehorn 18-40 GHz	EMCO	RA42-K-F-4B-C	12488	04/2012	04/2013
Biconilog Testantenna	Chase	CBL 6111B	15633	01/2013	01/2014
2.4 GHz bandreject filter	BSC	XN-1783	14450	N/A	N/A
Bandpass filter 4-10 GHz	Reactel	7AS-7G-6G-511	99076	N/A	N/A
Bandpass filter 10-26 GHz	Reactel	9HS-10G/26.5G-S11	99136	N/A	N/A
Preamplifier 0.5 - 18 GHz	Miteq	AMF-5D-005180-28-13p	99596	N/A	N/A
Filterbox	EMCS	RFS06S	99606	10/2012	10/2013

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

Test Report No.:

**12121201.fcc01**

Page 8 of 263

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty**

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.5dB
	> 1GHz	±0.7dB
Radiated Emission	150kHz - 30MHz	±5.0dB
	30MHz - 1GHz	±5.0dB
	> 1GHz	±5.5dB



Test Report No.:

**12121201.fcc01**

Page 9 of 263

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The brand Intel model 7260NGW, hereafter referred to as EUT, is a PCIe small form factor IEEE 802.11a/b/g/n/ac + Bluetooth wireless network adapter module. The module will support MIMO (2x2) for 802.11n/ac modes and MISO (1x2) for 802.11a/b/g modes and utilizes DSSS and OFDM modulation techniques. Bluetooth operates with basic, EDR and BLE modes as SISO (1x1). When Bluetooth is operational WiFi operates as SISO (1x1).

The module is sold under two different FCC ID numbers under the same model number (see table below). The FCC ID ending in "U" is intended to allow user installation conditions and host systems must be provided with a BIOS locking feature to provide mutual authentication between module and host devices.

Brand	Model Number	Description	FCC/IC IDs
Intel	7260NGW	802.11a/b/g/n/ac + BT wireless network adapter module	PD97260NG PD97260NGU 1000M-7260NG

The content of this report and measurement results have not been changed other than the way of presenting the data.

#### 3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Wireless Network Adapter Module - Digital Transmission System (DTS)
Manufacturer	:	Intel Corporation
Brand	:	Intel
Model(s)	:	7260NGW
MAC address	:	001500B6698F
Voltage input rating	:	+3.3 V
Voltage output rating	:	--
Current input rating	:	--
Antenna	:	AUX3
Operating frequency	:	2412MHz-2462MHz, 5180MHz-5320MHz, 5500MHz-5700MHz, 5745MHz-5825MHz and 2402MHz-2480MHz.
Modulation	:	DSSS and OFDM
Remarks	:	n.a.

Test Report No.:

**12121201.fcc01**

Page 10 of 263

**Table 3: Interfaces present on the EUT**

No.	Port	From	To	Remarks
1.	Mains	Mains	Laptop (AUX1)	Through a AC/DC power supply
2.	Mains	Mains	Test jig (AUX2)	Through a AC/DC power supply
3.	Data com.	Laptop USB	Fixture USB	--
4.	Antenna port	EUT	Reference antennas (AUX3)	--

### **3.3 Countermeasures to achieve EMC Compliance**

No additional measures were employed to achieve compliance.

*Test Report No.:*

**12121201.fcc01**

*Page 11 of 263*

**WiFi 2.4 GHz (802.11b/g/n20/n40)**

Test Report No.:

**12121201.fcc01**

Page 12 of 263

## 4. Test Set-up and Operation Modes

### 4.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-210, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The test methods, which have been used, are based on ANSI C63.10-2009.

For details, see under each test item.

### 4.2 Operation Modes

Modulation	Duty cycle	Antenna	Test frequencies (MHz)					
			Lowest	Power setting	Middle	Power setting	Highest	Power setting
1 Mb DSSS	0.99	1	2412	15.0	2437	15.0	2462	15.5
1 Mb DSSS	0.98	2	2412	17.5	2437	17.0	2462	17.0
6 Mb OFDM	0.99	1	2412	12.0	2437	17.5	2462	14.0
6 Mb OFDM	0.92	2	2412	14.0	2437	19.0	2462	14.5
HT4 - 20 MHz	0.99	1	2412	12.0	2437	18.5	2462	13.5
HT4 - 20 MHz	0.99	2	2412	13.5	2437	19.0	2462	14.5
HT8 - 20 MHz	0.98	1+2	2412	10.5/10.5	2437	11.0/11.0	2462	9.5/9.5
HT4 - 40 MHz	0.85	1	2422	9.5	2437	18.5	2452	13.0
HT4 - 40 MHz	0.85	2	2422	12.0	2437	19.0	2452	14.5/10.0
HT8 - 40 MHz	0.80	1+2	2422	6.5/11.0	2437	19.0/11.0	2452	10.0

Testing was performed at the lowest operating frequency, at the operating frequency in the middle of the specified frequency band and at the highest operating frequency. These operation modes were selected after review of the capabilities and characteristics of the EUT.

Antenna ports are also referred to as Chain A and Chain B, where chain A refers to Antenna-port 2 and Chain B refers to Antenna-port 1.

The data rates of 1Mb/s for 802.11b, 6Mb/s for 802.11g, HT4 (SISO)/HT8 (MIMO) for 802.11n20 and n40 were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and band edge levels at restricted bands.

Test Report No.:

**12121201.fcc01**

Page 13 of 263

The test software (see section 4.4) was used to define the following two operational modes of the EUT:

- Operational mode 1: Continuous transmit a data pattern with a duty cycle less than 100%.
- Operational mode 2: Continuous receive.


### 4.3 Physical Configuration for Testing

The EUT was installed into a test-fixture that interfaced to a laptop computer and dc power supply. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel or continuously receive on the channel as specified in the testdata. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis (only attached to the test jig) and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2009.

**Figure 1: Test Setup Diagram**

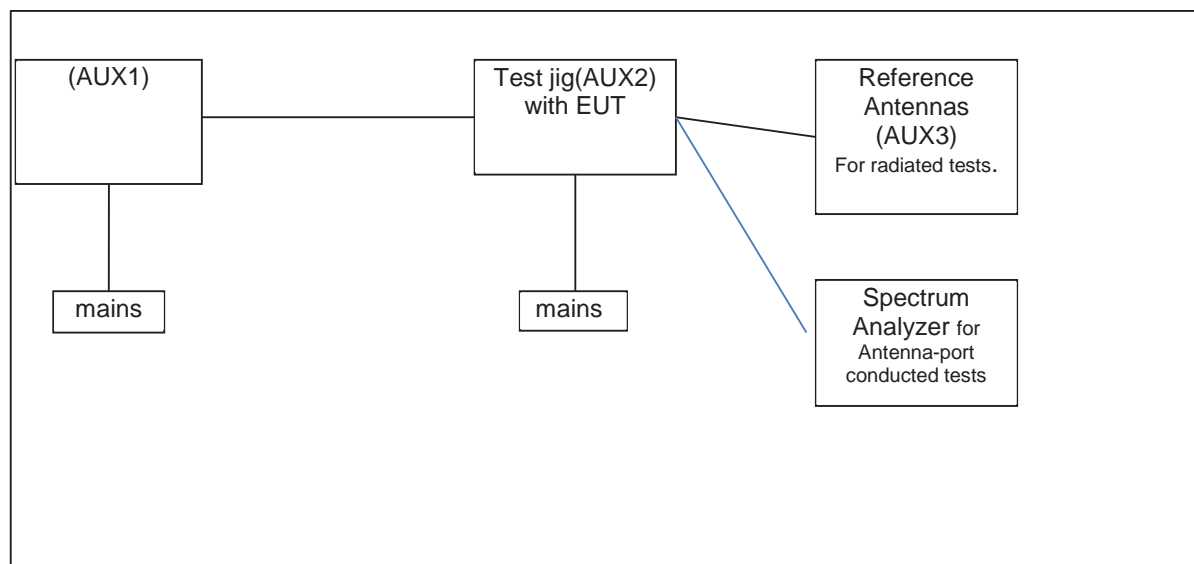

Notes:

For more details, refer to the document: Test Set-Up Photographs document.

Test Report No.:

**12121201.fcc01**

Page 14 of 263

#### **4.4 Test Software**

A continuous transmit or receive mode could be initiated by using test software as supplied by Intel Corporation. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by Intel Corporation and used during all tests is:

Test software : DRTU 1.6.0-0510  
Driver : 16.0.0.17

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

Test Report No.:

**12121201.fcc01**

Page 15 of 263

## 4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. AUX1

Product: Laptop Computer  
Brand: Lenovo  
Model: 9456-HTG  
Serial Number: L3-BF847 07/02  
Remark: property applicant, host for testsoftware and AUX2

2. AUX2

Product: Test Jig  
Brand: Intel  
Model: NGFF Extension Rev. 01  
Rated Voltage: 3.3 Vdc  
Antenna: Internal, integrated on the PCB  
Remarks: used for Antenna-port conducted tests

3. AUX3

Product: Reference antennas  
Manufacturer: SkyCross Electronics (Shenzen) Co.,Ltd  
Brand: SkyCross Electronics (Shenzen) Co.,Ltd  
Gain at 2G4: 3.0 dBi (declared by applicant)  
Remarks: used for radiated tests

Test Report No.:

**12121201.fcc01**

Page 16 of 263

## **5. Test Results**

### **5.1 Technical Requirements**

#### **5.1.1 Voltage Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the power supply requirements.

#### **5.1.2 Antenna Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.203 and IC RSS-Gen section 7.1.2

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has two non standard PIFA antenna connectors which complies with the requirements.



Test Report No.:

**12121201.fcc01**

Page 17 of 263

### **5.1.3 Restricted Bands of Operation**

#### **RESULT: Pass**

Requirements:

FCC 15.205 and IC RSS-Gen section 7.2.2

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The EUT operation frequency range is 2412 MHz - 2462 MHz. Therefore only spurious emissions may be found in the restricted bands of operation and the EUT complies with the restricted frequency band requirement.

Test Report No.:

**12121201.fcc01**

Page 18 of 263

## 5.2 Conducted Measurements at Antenna Port

### 5.2.1 Conducted Output Power

**RESULT: Pass**

Date of testing: 2013-01-14 & 2013-03-15

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

RSS-Gen: the e.i.r.p. shall not exceed 4 W (36 dBm).

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak Conducted Output Power was measured using the channel integration method according to option 2 in KDB 558074 D01.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the EUT. Summing is performed in linear power units (mW—not dBm).

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power. For MIMO mode, the Guidance on directional Gain calculations according to the *Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v01r02 dated 9/26/2012* was used. The number of transmit antennas (NANT) are 2 and the number of spatial streams (Nss) are 2 and therefore the Array Gain is 0 dB.

Notes:  $\text{mW} = 10^{(\text{dBm}/10)}$   
 $\text{dBm} = 10 \times \log(\text{mW})$

**plots : Peak power plots,**

Figures 1a, 1b and 1c, through 10a,10b,10c showing plots of the Peak Power outputs, correction factors included in the reading.

Test Report No.:


**12121201.fcc01**

Page 19 of 263

## Conducted Output Power

Operation mode: 1Mb DSSS, Antenna 1

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	17.7	58.9	+30	1000	3.0	20.7	117.5	1a
2437	17.7	58.9	+30	1000	3.0	20.7	117.5	1b
2462	17.6	57.5	+30	1000	3.0	20.6	114.8	1c

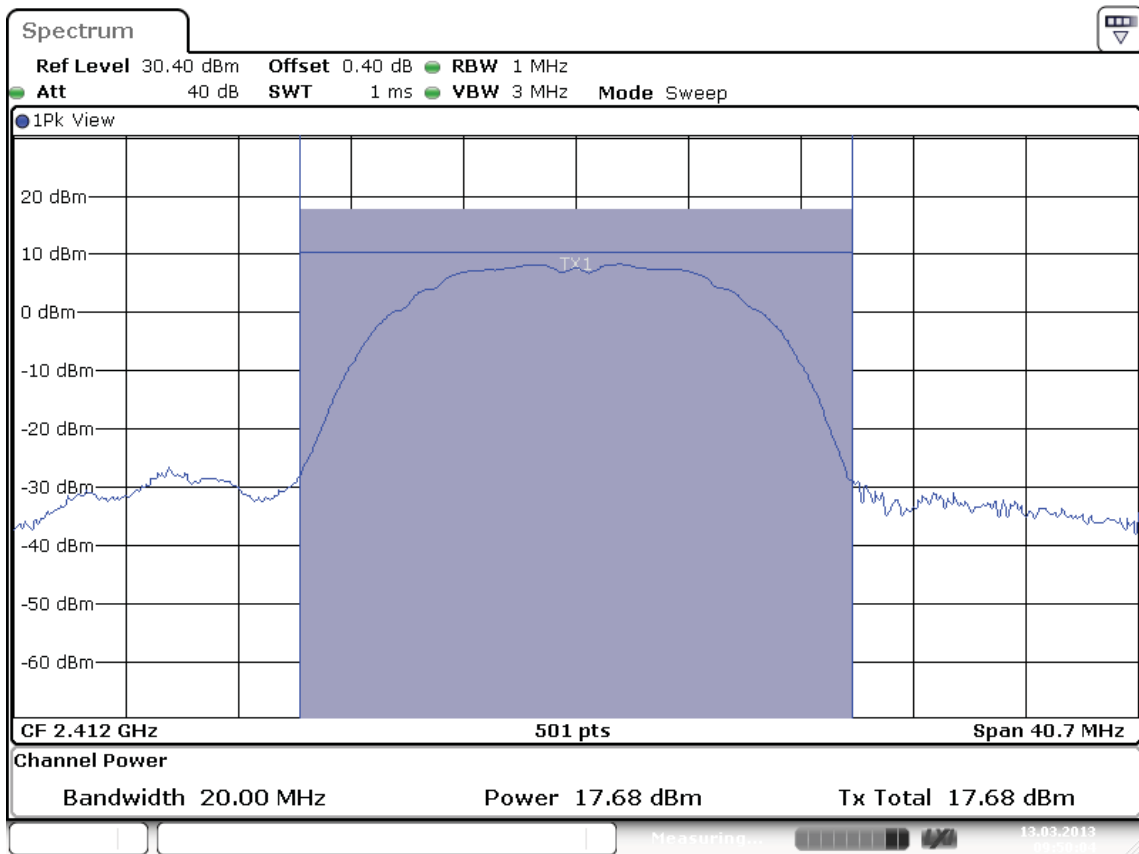


Date: 13.MAR.2013 09:50:04

Plot 1a

Test Report No.:


**12121201.fcc01**

Page 20 of 263

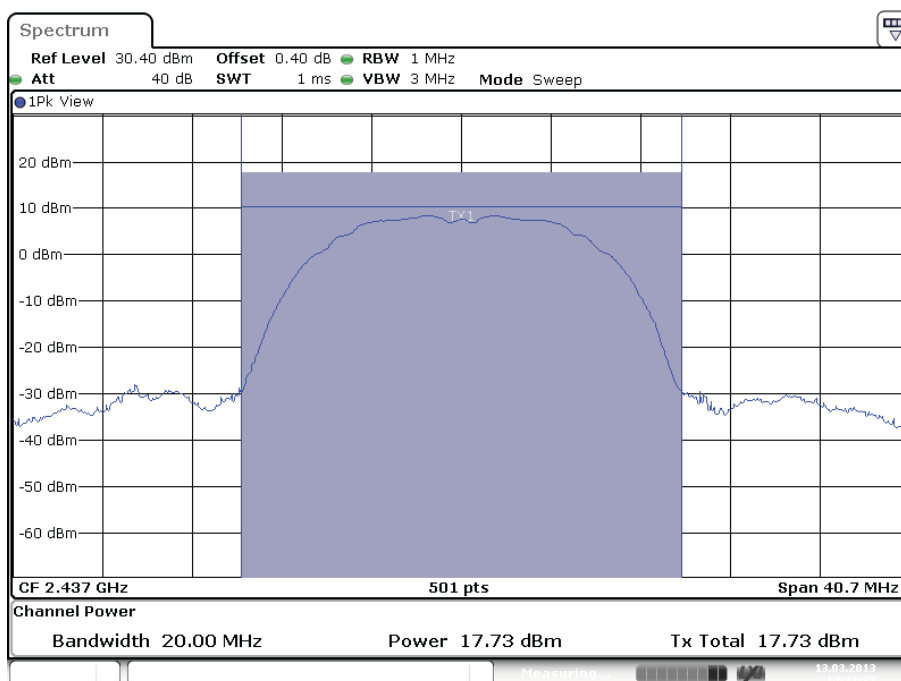

Date: 13.MAR.2013 14:21:36

Plot 1b

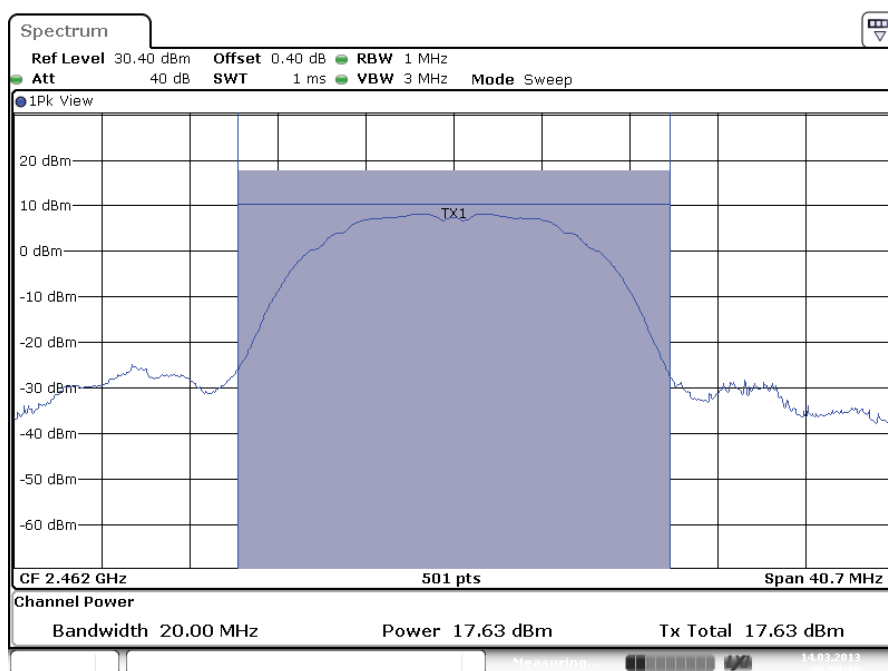

Date: 14.MAR.2013 08:58:10

Plot 1c


Test Report No.:

**12121201.fcc01**

Page 21 of 263

Operation mode: 1Mb DSSS, Antenna 2

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	19.8	95.5	+30	1000	3.0	22.8	190.5	2a
2437	19.6	91.2	+30	1000	3.0	22.6	182.0	2b
2462	19.2	8.32	+30	1000	3.0	22.2	166.0	2c

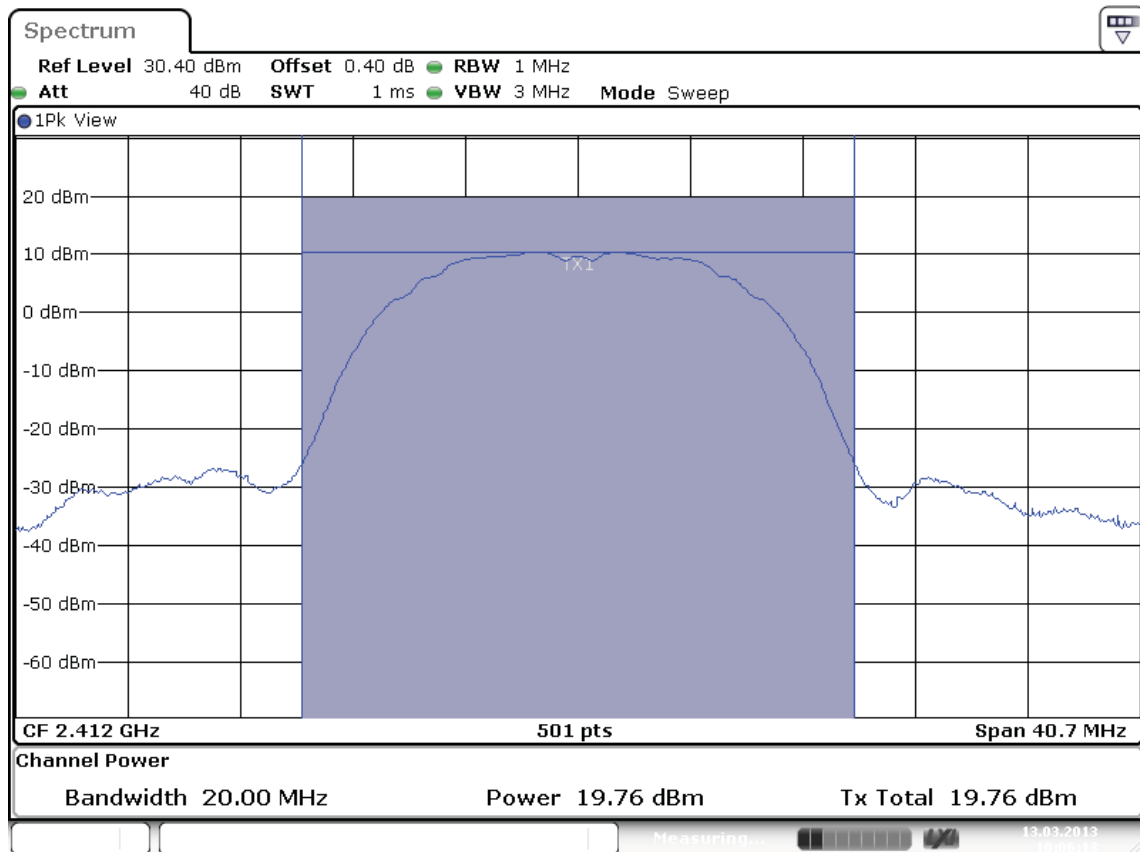


Date: 13.MAR.2013 10:06:13

Plot 2a

Test Report No.:


**12121201.fcc01**

Page 22 of 263

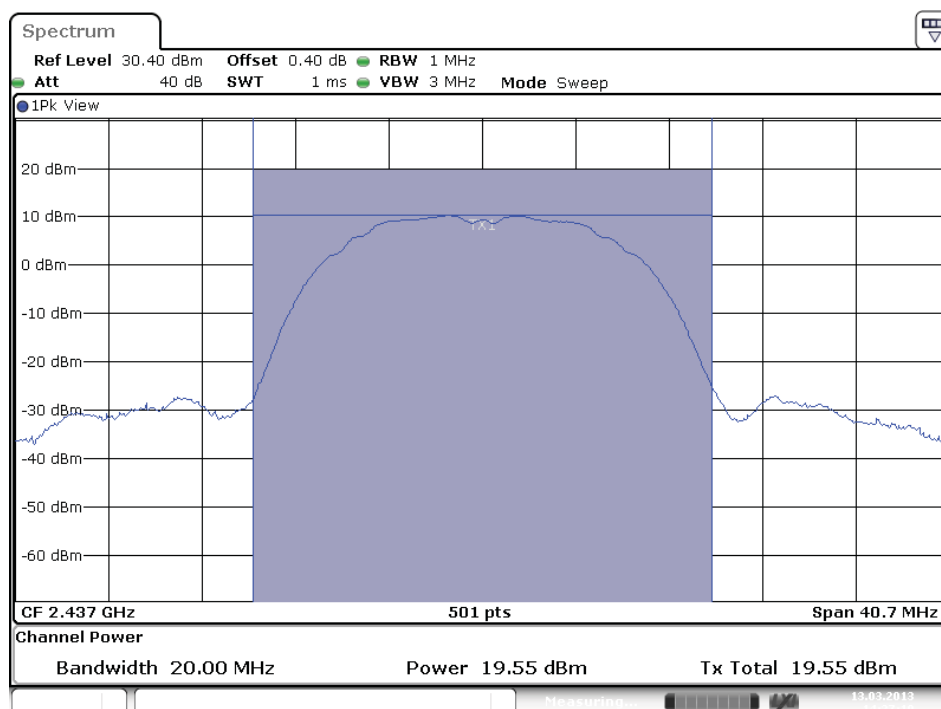

Date: 13.MAR.2013 14:27:10

Plot 2b

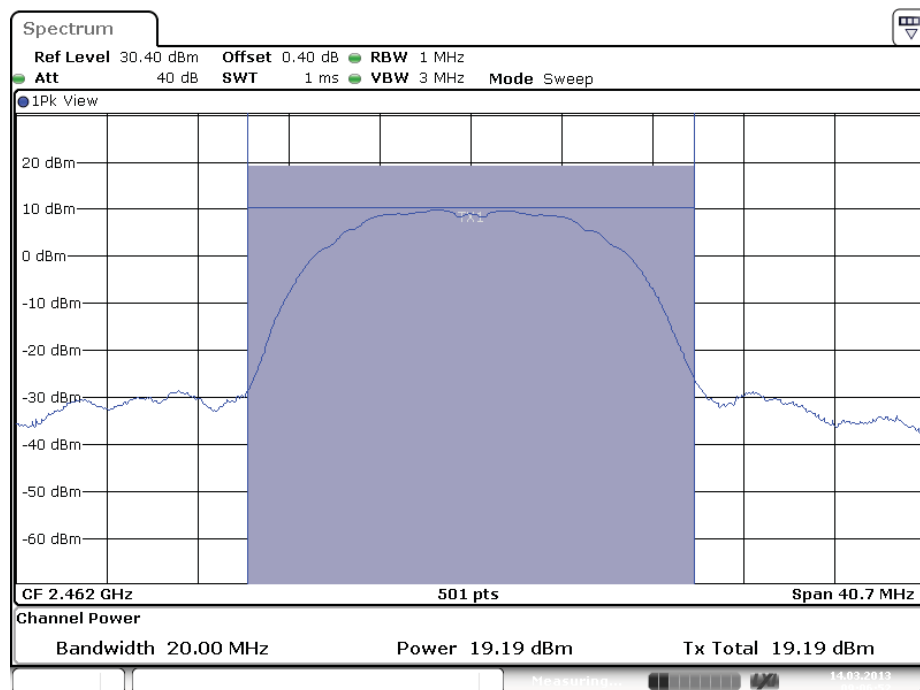

Date: 14.MAR.2013 09:06:52

Plot 2c


Test Report No.:

**12121201.fcc01**

Page 23 of 263

Operation mode: 6 Mb OFDM, Antenna 1

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	20.2	104.7	+30	1000	3.0	23.2	208.9	3a
2437	23.8	239.9	+30	1000	3.0	26.8	478.6	3b
2462	22.0	158.5	+30	1000	3.0	25.0	316.2	3c

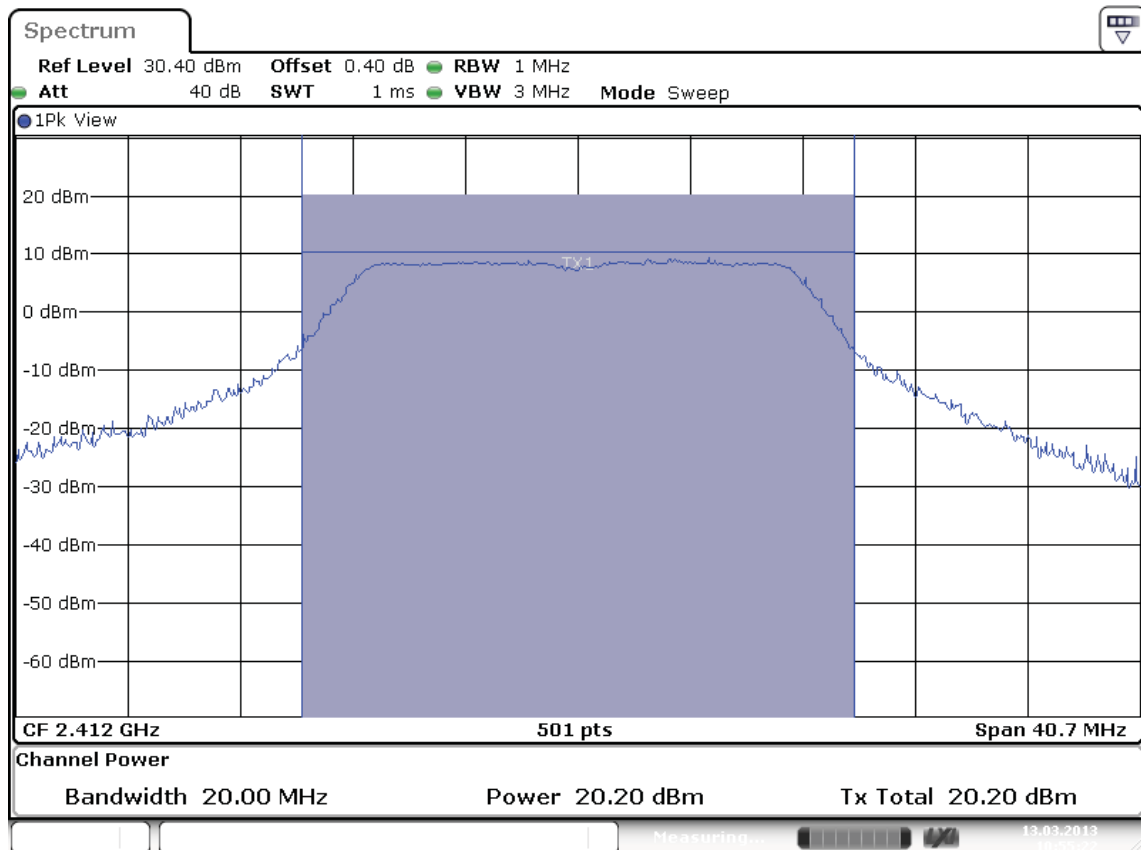


Date: 13.MAR.2013 10:55:21

Plot 3a

Test Report No.:


**12121201.fcc01**

Page 24 of 263

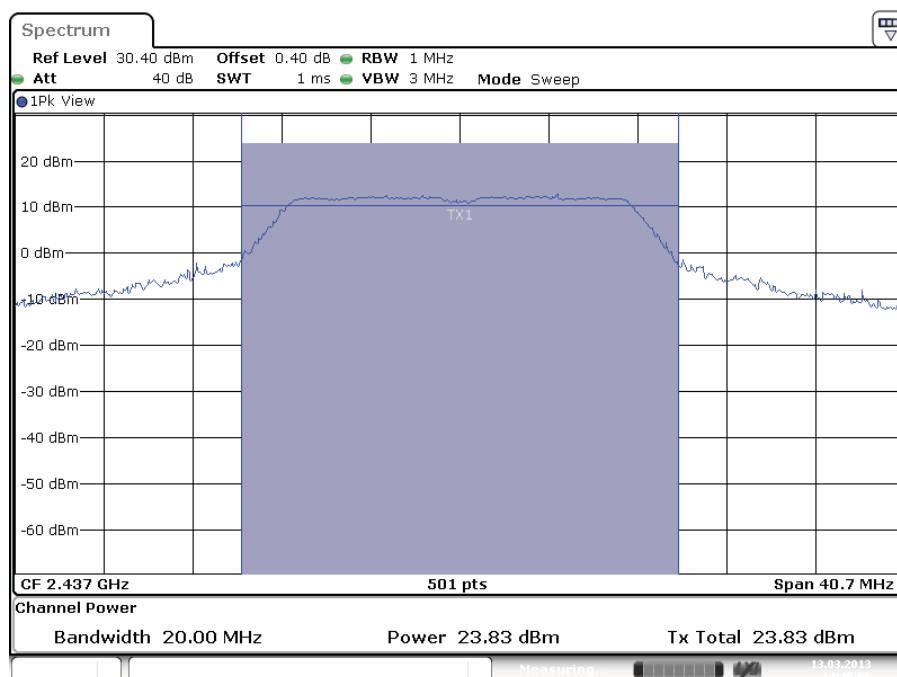

Date: 13.MAR.2013 14:46:55

Plot 3b

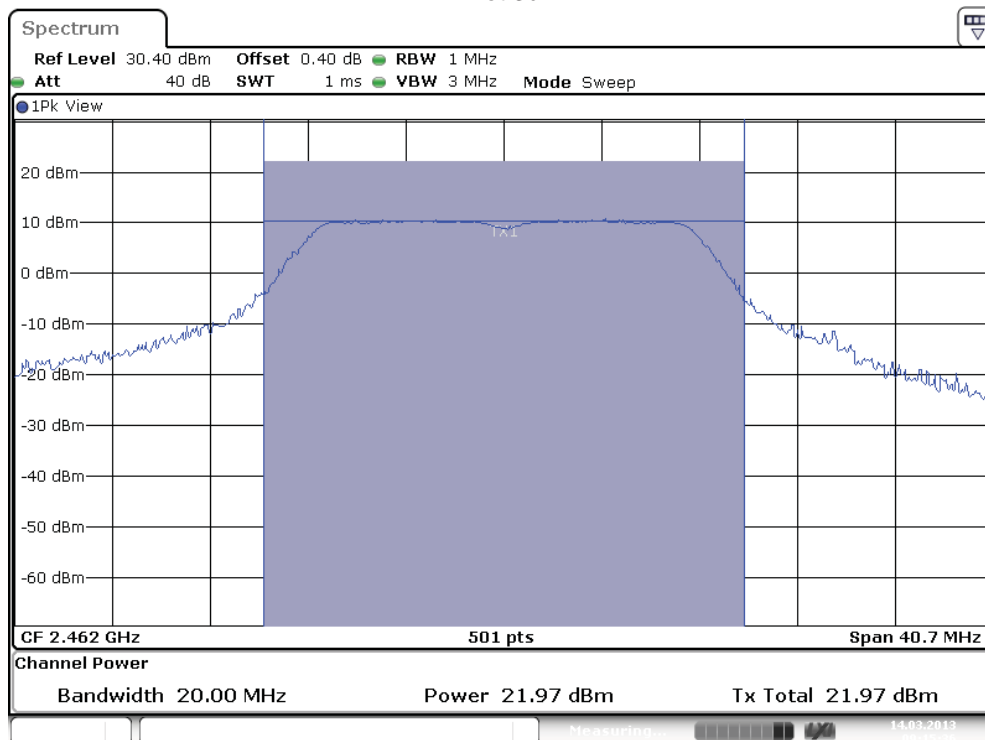

Date: 14.MAR.2013 09:15:36

Plot 3c




Test Report No.:

**12121201.fcc01**

Page 25 of 263

Operation mode: 6Mb OFDM, Antenna 2

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	21.8	151.4	+30	1000	3.0	24.8	302.0	4a
2437	25.0	316.2	+30	1000	3.0	28.0	631.0	4b
2462	22.7	186.2	+30	1000	3.0	25.7	371.5	4c

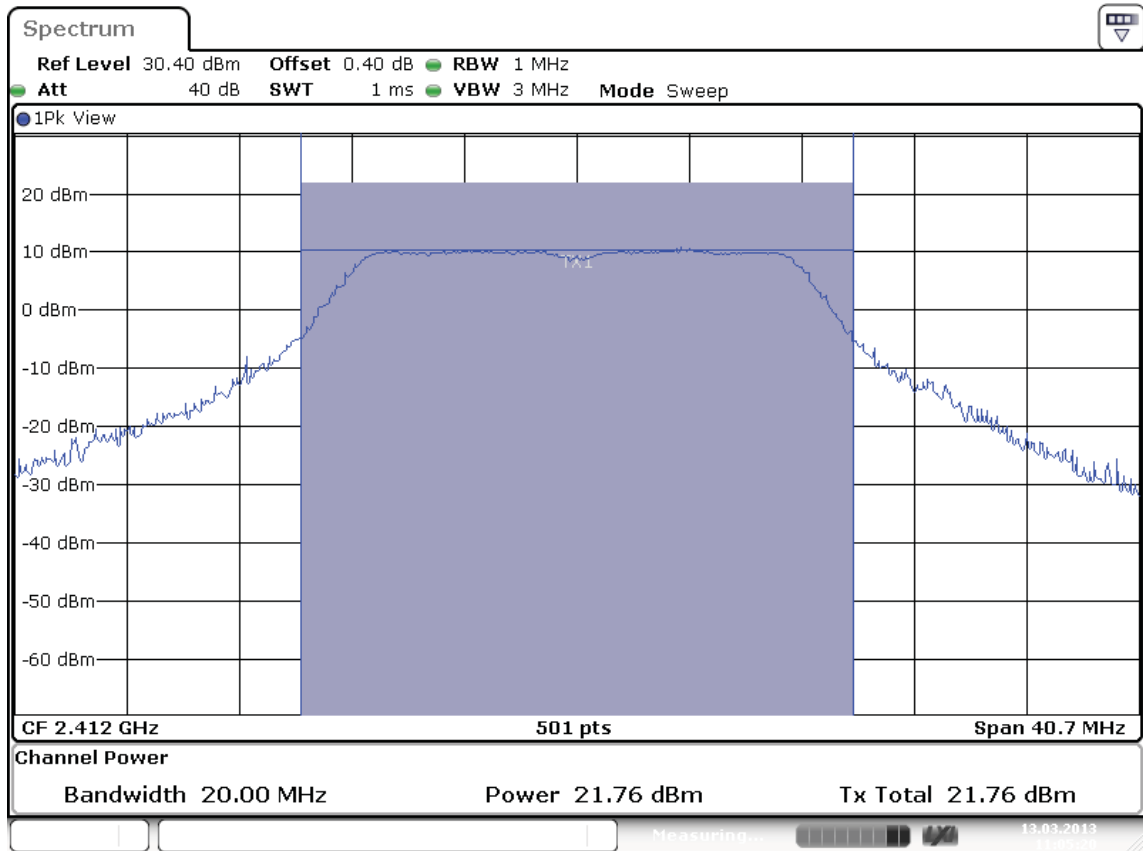


Date: 13.MAR.2013 11:05:20

Plot 4a

Test Report No.:


**12121201.fcc01**

Page 26 of 263

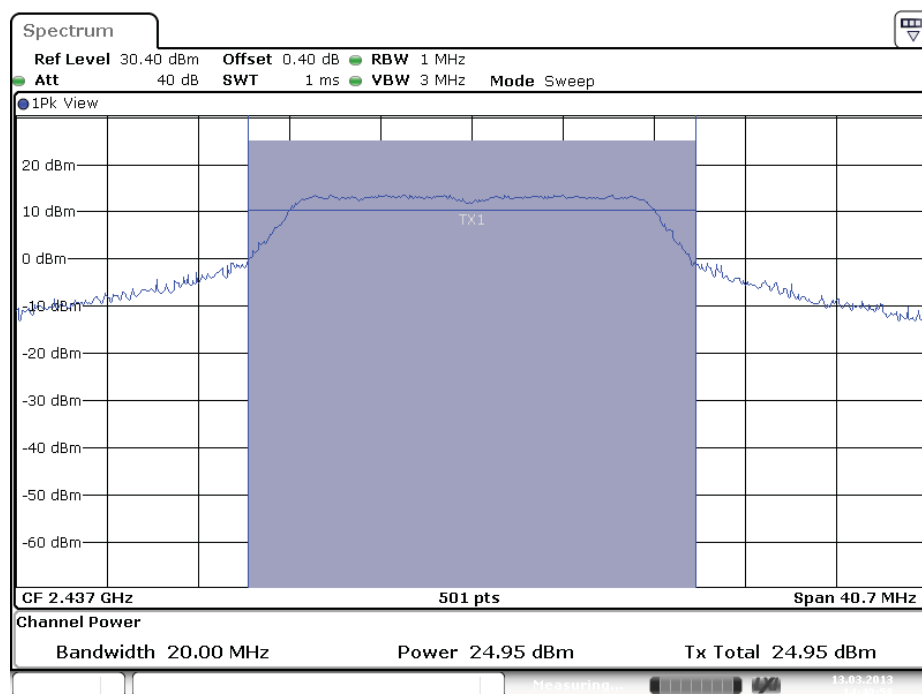

Date: 13.MAR.2013 14:49:58

Plot 4b

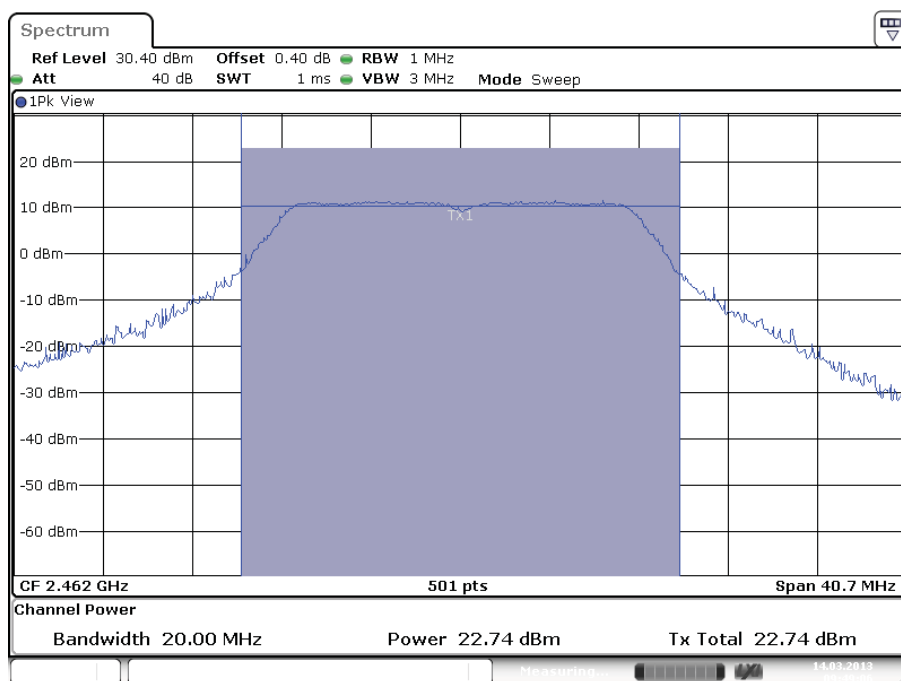

Date: 14.MAR.2013 09:49:06

Plot 4c


Test Report No.:

**12121201.fcc01**

Page 27 of 263

Operation mode: HT4-20 MHz, Antenna 1

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	20.5	112.2	+30	1000	3.0	23.5	223.9	5a
2437	23.8	239.9	+30	1000	3.0	26.8	478.6	5b
2462	22.2	166.0	+30	1000	3.0	25.2	331.1	5c

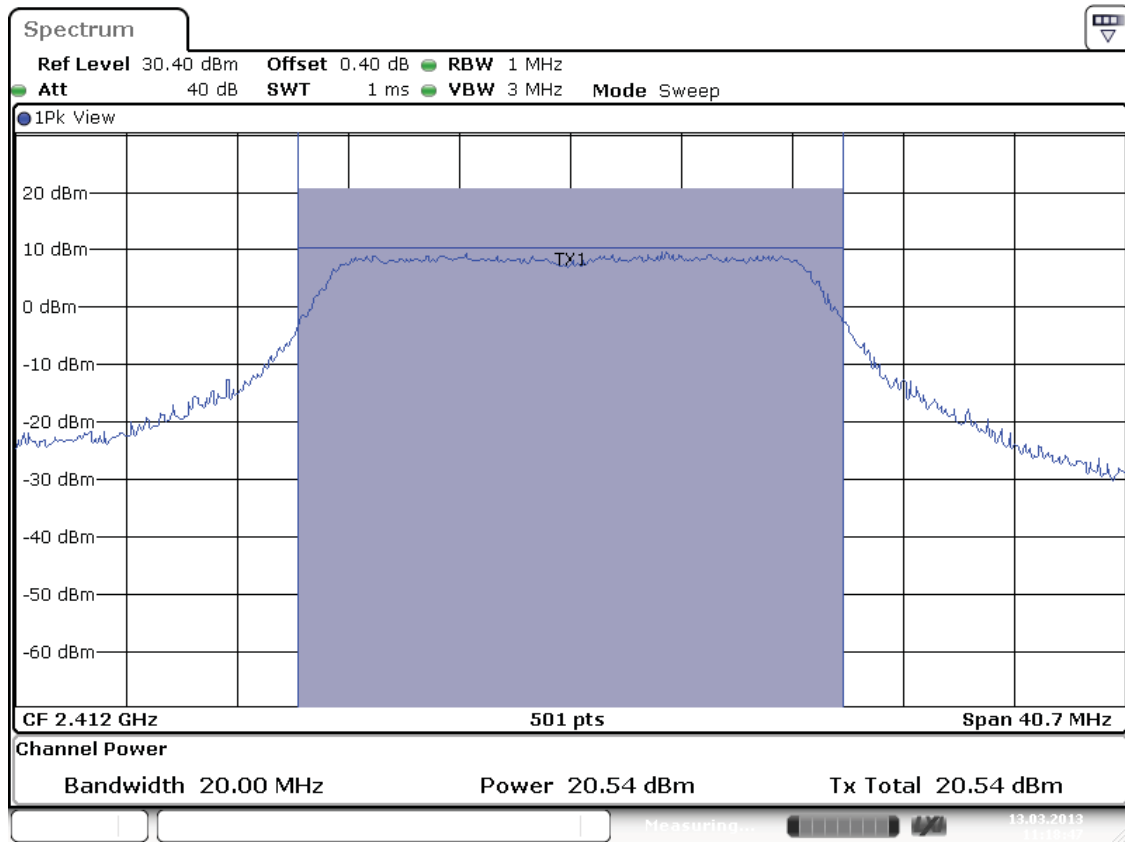


Date: 13.MAR.2013 11:18:48

Plot 5a

Test Report No.:


**12121201.fcc01**

Page 28 of 263

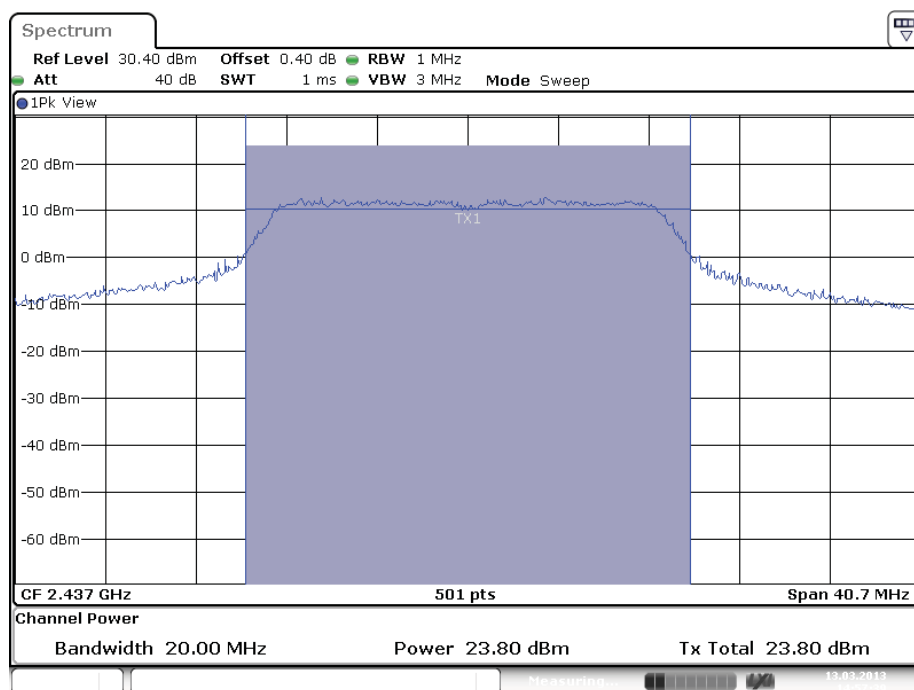

Date: 13.MAR.2013 14:57:39

Plot 5b

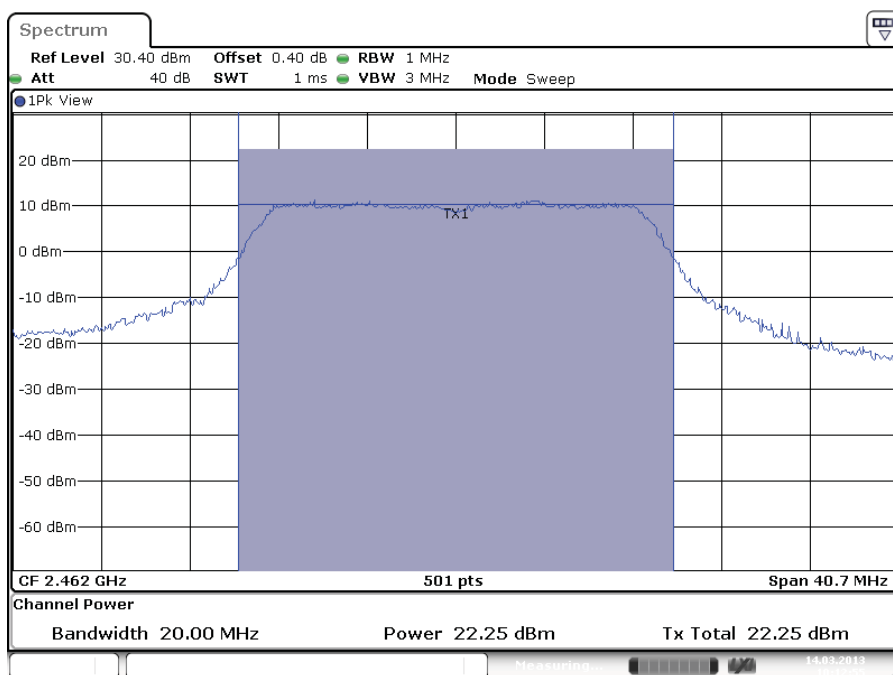

Date: 14.MAR.2013 10:12:55

Plot 5c


Test Report No.:

**12121201.fcc01**

Page 29 of 263

Operation mode: HT4-20 MHz, Antenna 2

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	22.2	166.0	+30	1000	3.0	25.2	331.1	6a
2437	25.2	331.1	+30	1000	3.0	28.2	660.7	6b
2462	23.1	204.2	+30	1000	3.0	26.1	407.4	6c

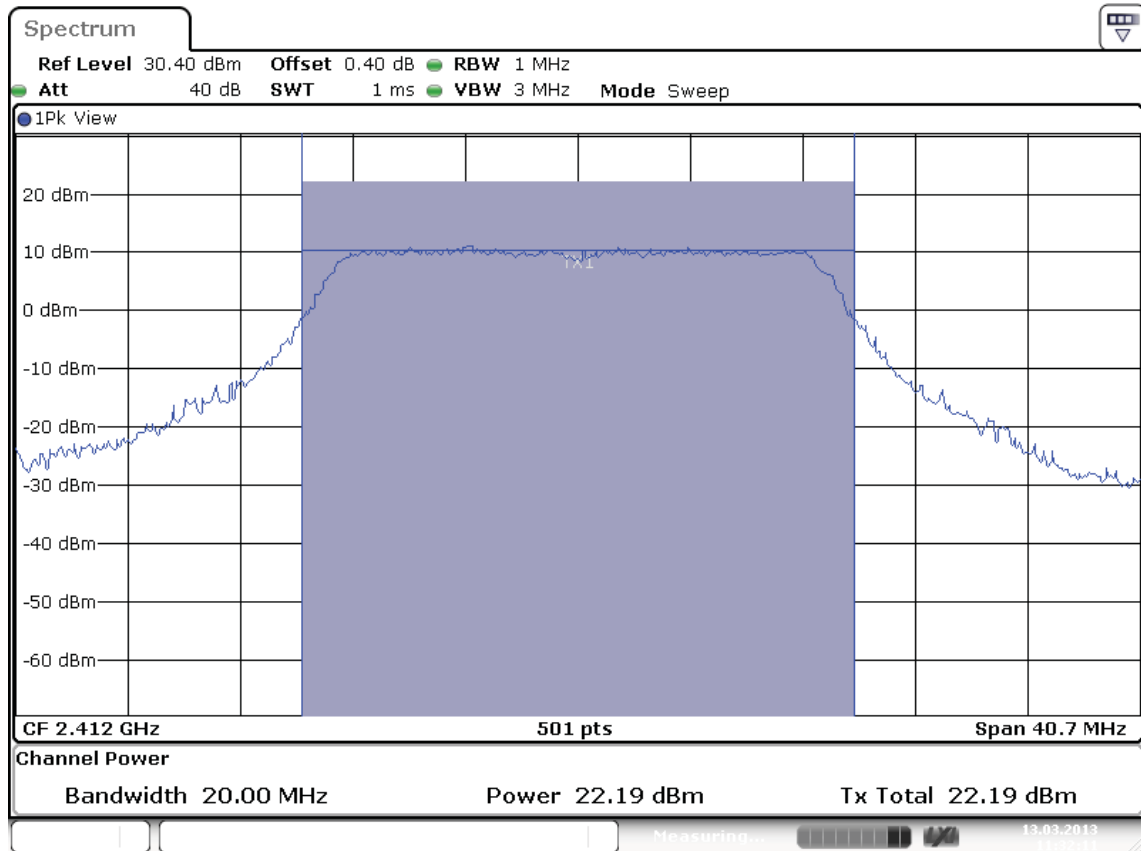


Date: 13.MAR.2013 11:32:11

Plot 6a


Test Report No.:

**12121201.fcc01**

Page 30 of 263

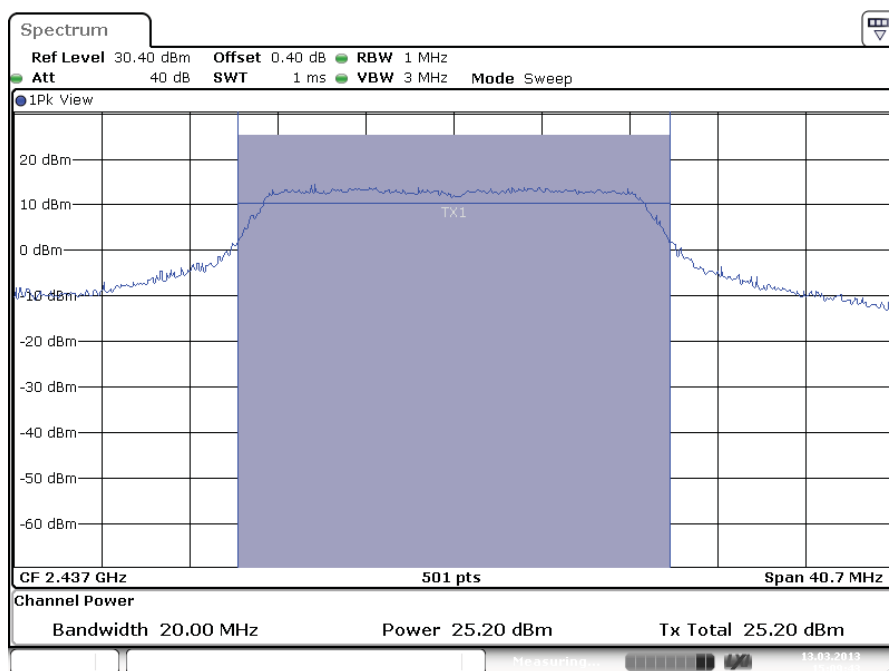

Plot 6b

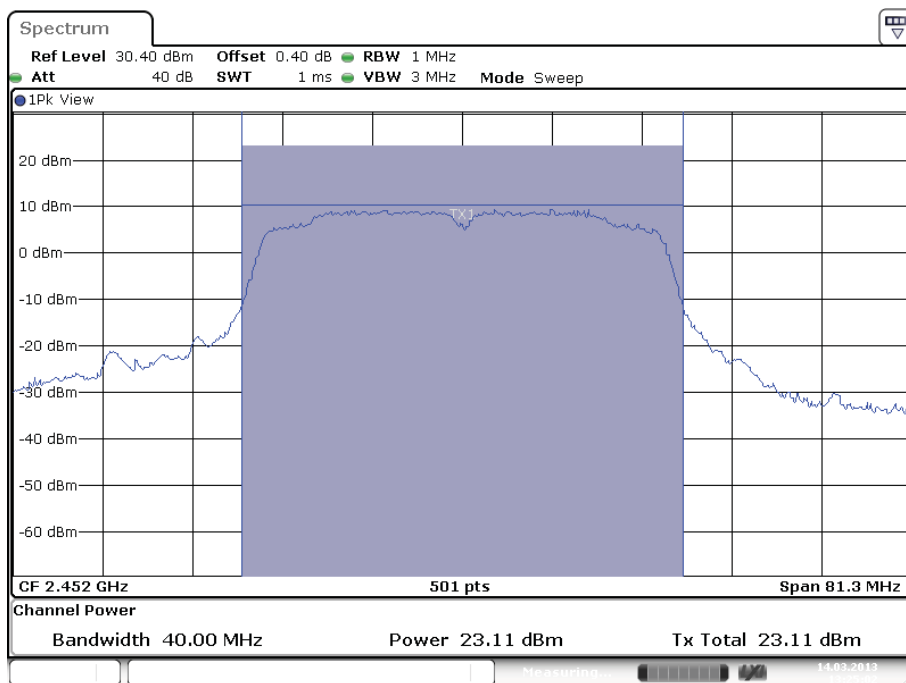

Plot 6c


Test Report No.:

**12121201.fcc01**

Page 31 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Frequency [MHz]	Output Power Antenna 1 [dBm]	Output Power Antenna 2 [dBm]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2412	17.4	16.2	+30	1000	3.0	22.9	192.8	7a
2437	19.4	18.3	+30	1000	3.0	24.9	308.7	7b
2462	18.4	17.0	+30	1000	3.0	23.8	238.0	7c

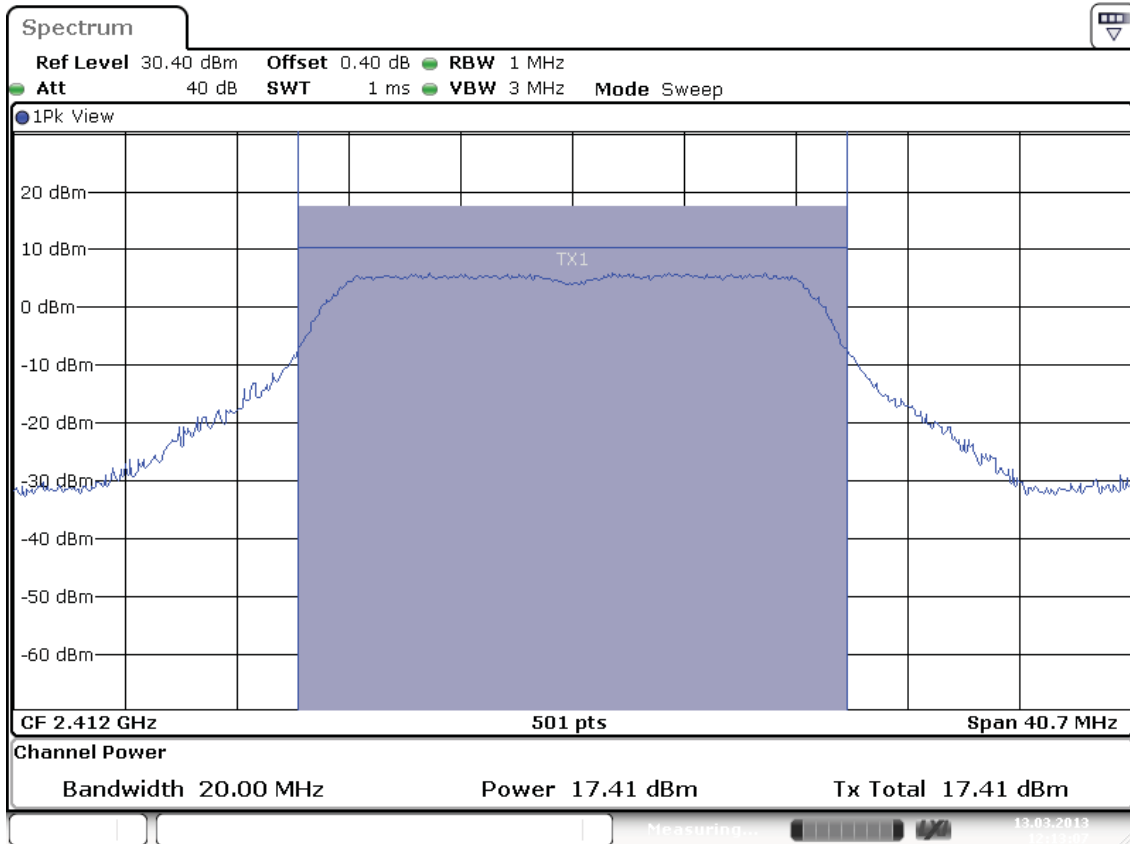


Date: 13.MAR.2013 12:13:07

Plot 7a-1 Antenna 1

Test Report No.:

**12121201.fcc01**

Page 32 of 263

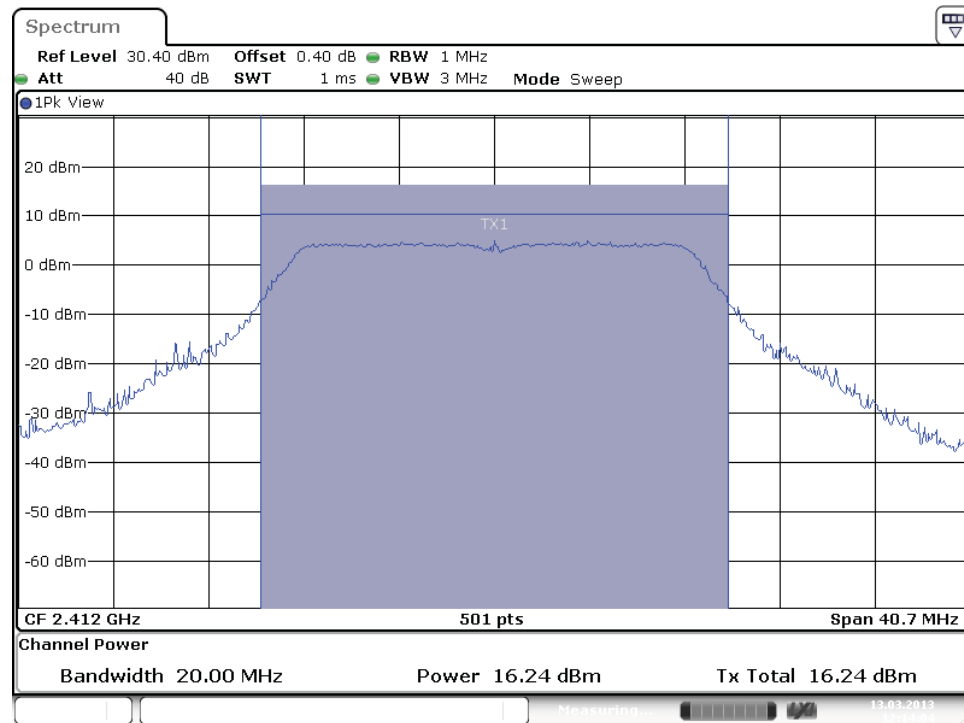

Date: 13.MAR.2013 12:14:04


Plot 7a-2 Antenna 2



Test Report No.:


**12121201.fcc01**

Page 33 of 263

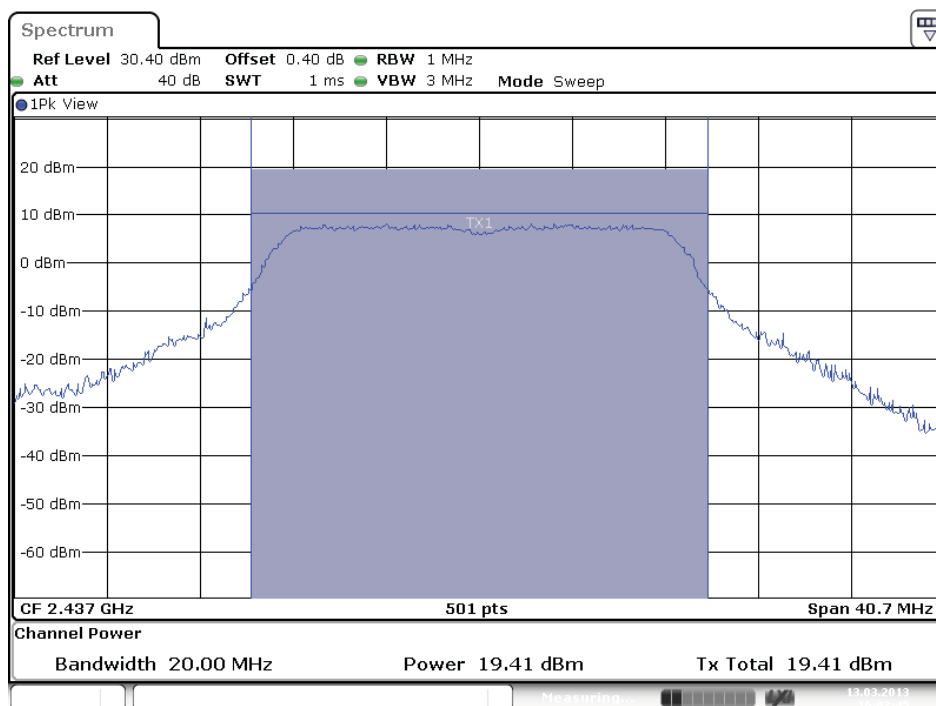

Date: 13.MAR.2013 16:02:45

Plot 7b-1 Antenna 1

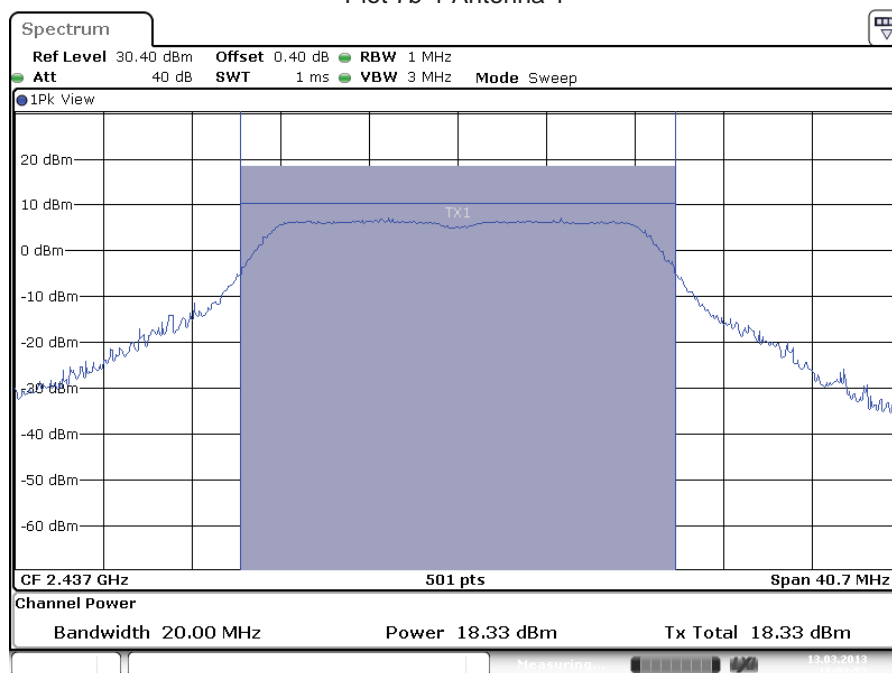


Date: 13.MAR.2013 16:03:52

Plot 7b-2 Antenna 2

Test Report No.:


**12121201.fcc01**

Page 34 of 263

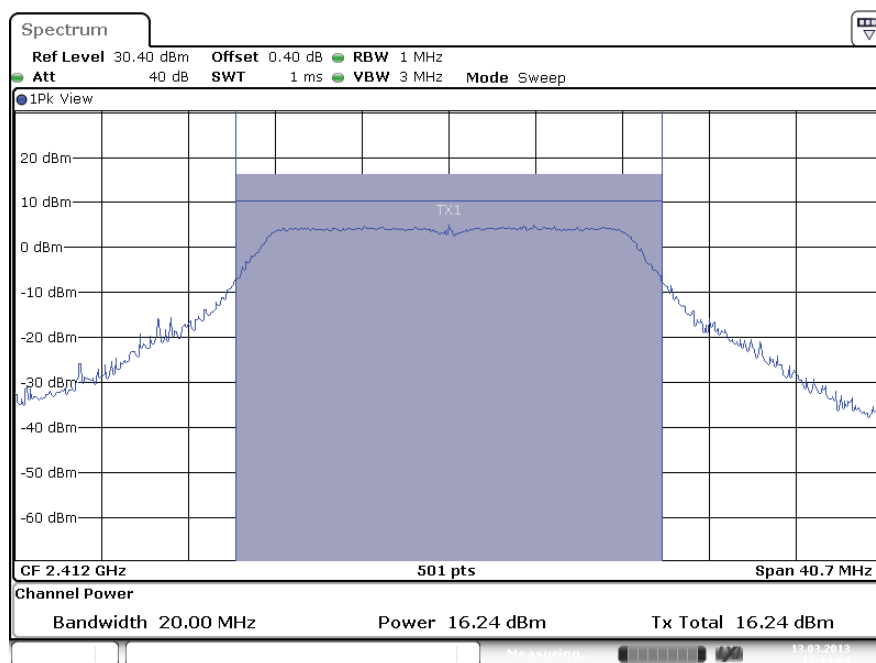

Date: 13.MAR.2013 12:14:04

Plot 7c-1 Antenna 1

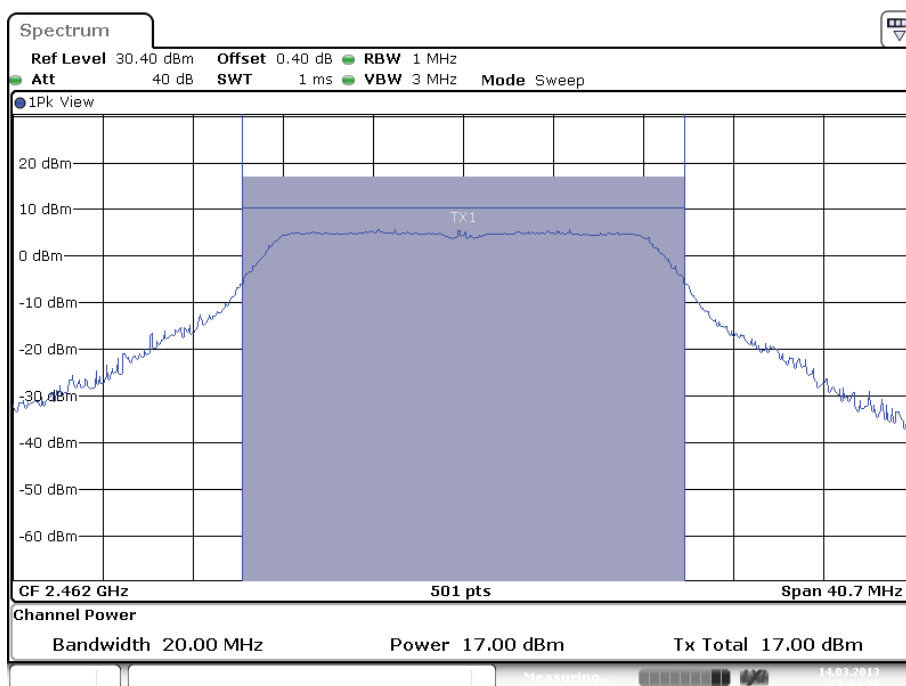

Date: 14.MAR.2013 12:44:38

Plot 7c-2 Antenna 2


Test Report No.:

**12121201.fcc01**

Page 35 of 263

Operation mode: HT4-40 MHz wide, Antenna 1

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2422	18.4	69.2	+30	1000	3.0	21.4	138.0	8a
2437	22.8	190.5	+30	1000	3.0	25.8	380.2	8b
2452	21.4	138.0	+30	1000	3.0	24.4	275.4	8c

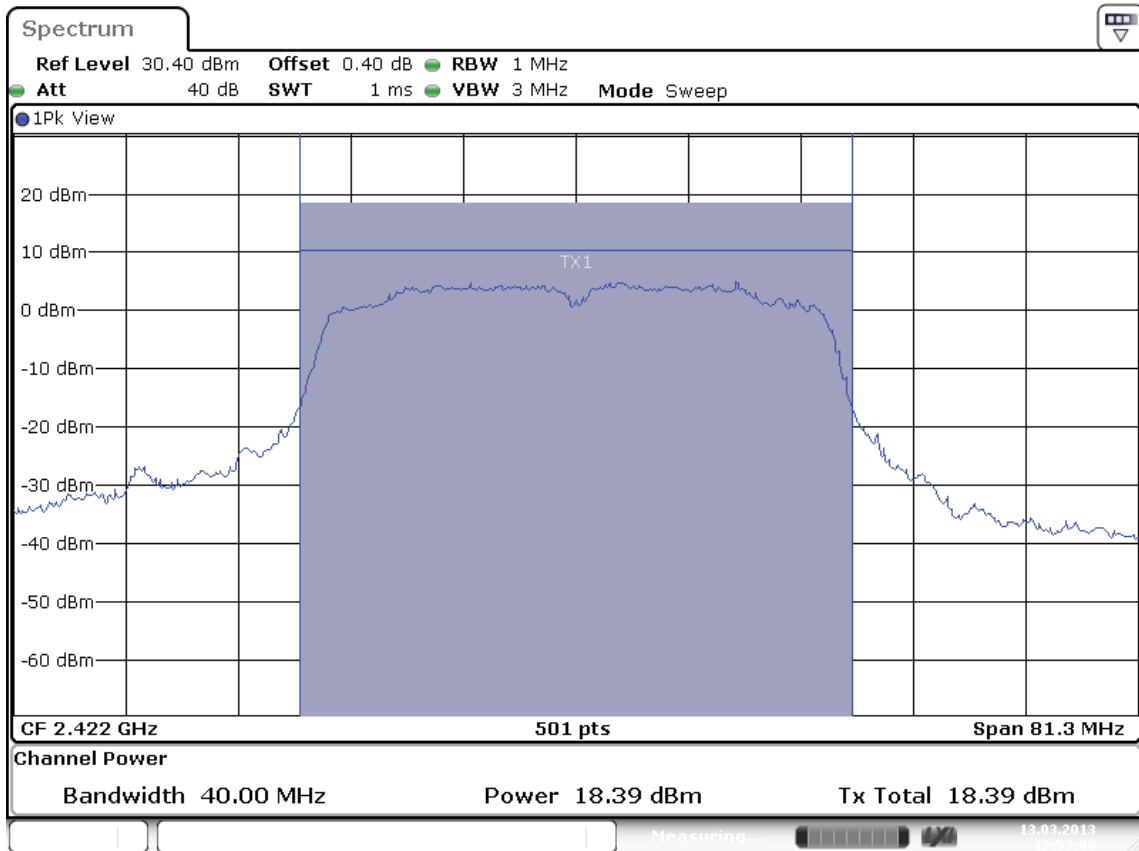


Date: 13.MAR.2013 12:53:00

Plot 8a

Test Report No.:


**12121201.fcc01**

Page 36 of 263

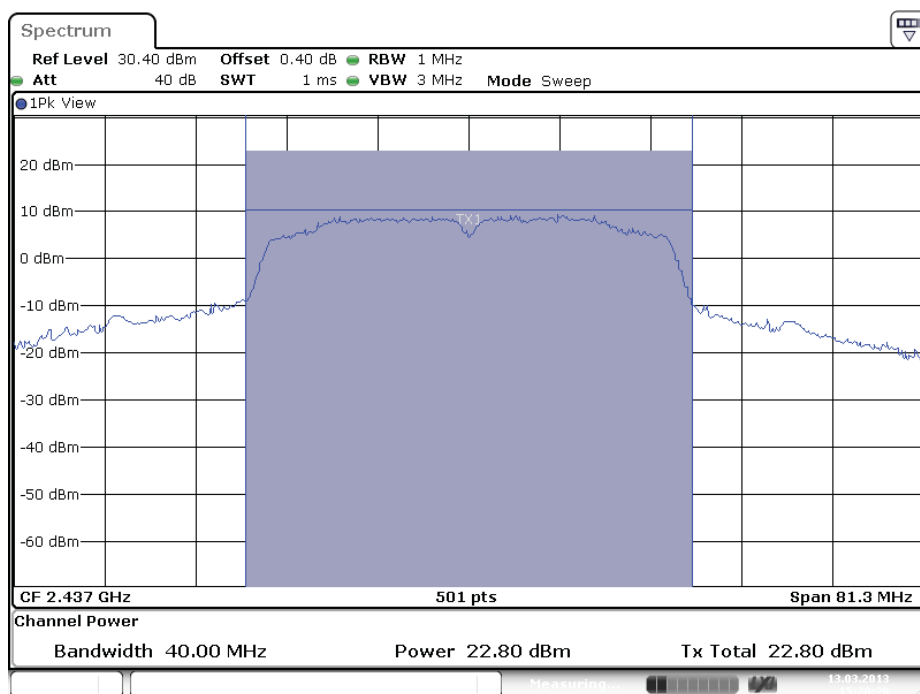

Date: 13.MAR.2013 15:20:20

Plot 8b

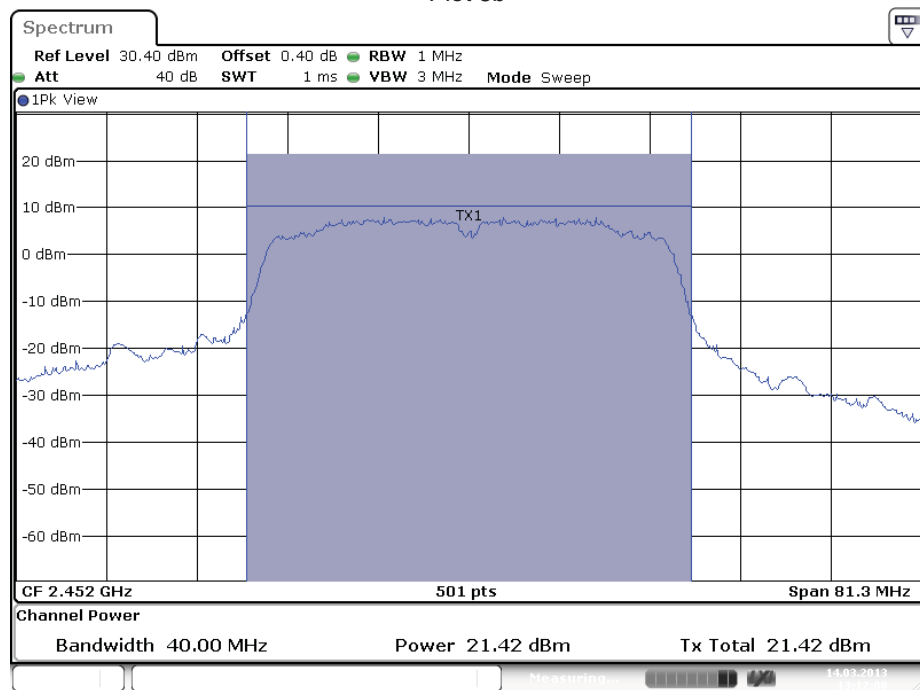

Date: 14.MAR.2013 13:12:09

Plot 8c


Test Report No.:

**12121201.fcc01**

Page 37 of 263

Operation mode: HT4-40 MHz wide, Antenna 2

Frequency [MHz]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2422	20.5	112.2	+30	1000	3.0	23.5	223.9	9a
2437	25.4	346.7	+30	1000	3.0	28.4	691.8	9b
2452	23.1	204.2	+30	1000	3.0	26.1	407.4	9c

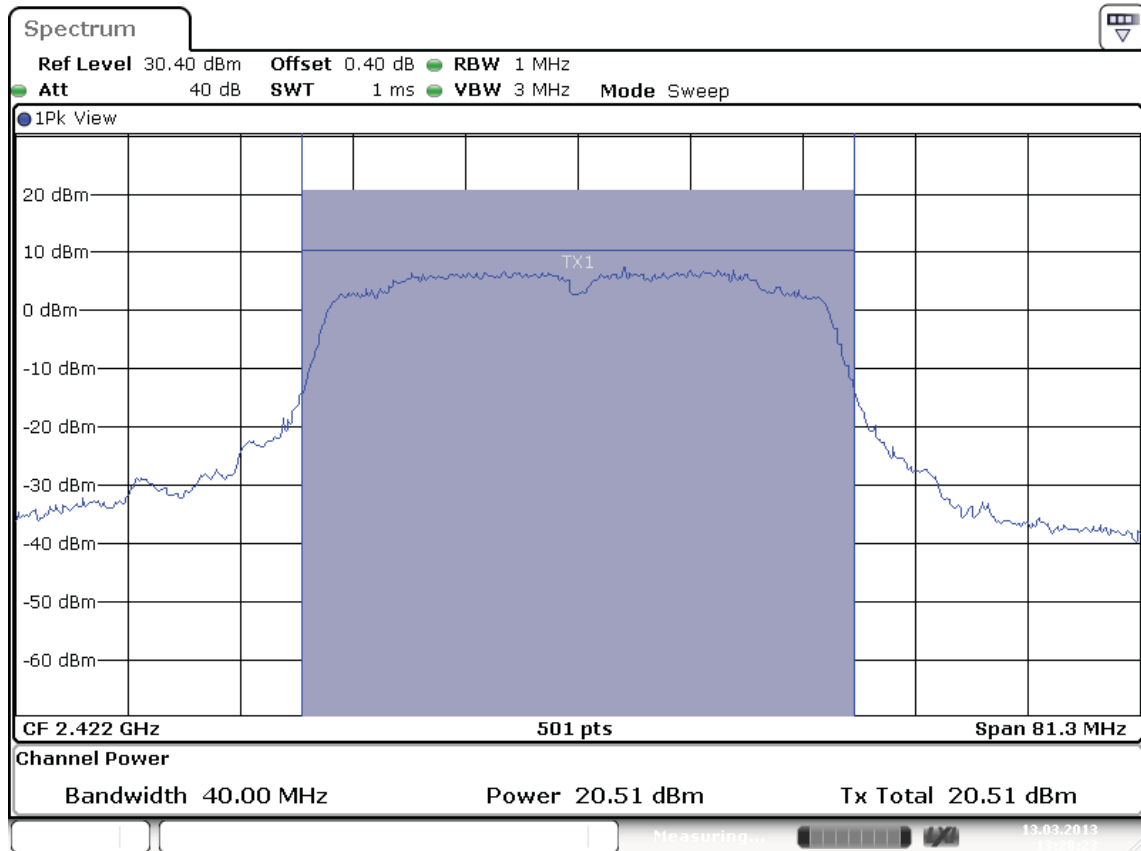


Date: 13.MAR.2013 13:28:24

Plot 9a

Test Report No.:


**12121201.fcc01**

Page 38 of 263

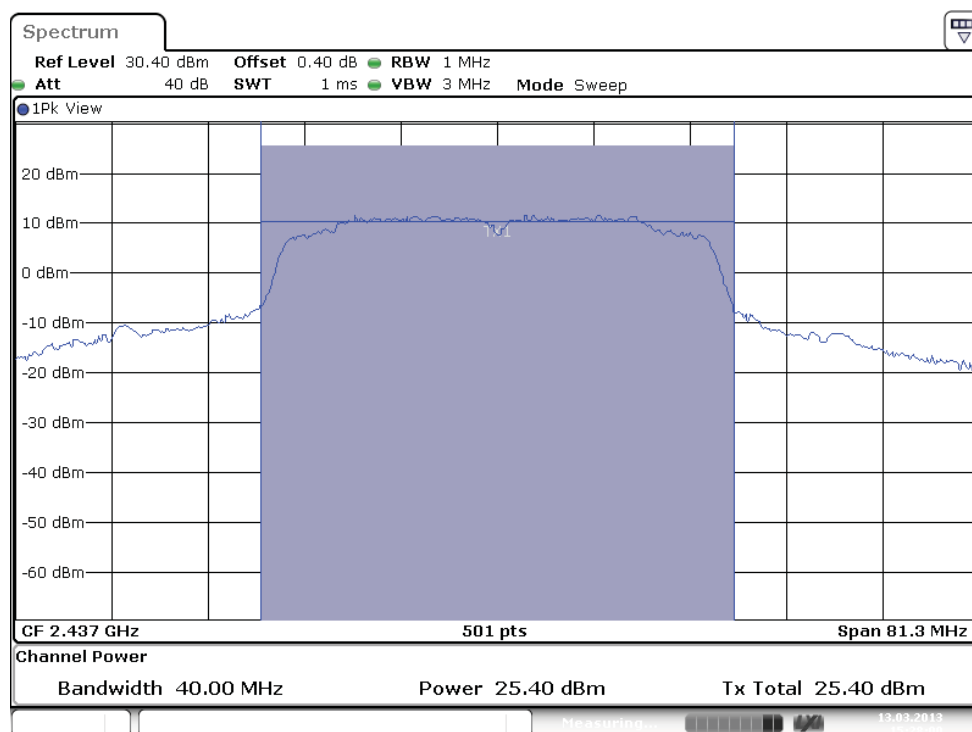

Date: 13.MAR.2013 15:28:00

Plot 9b

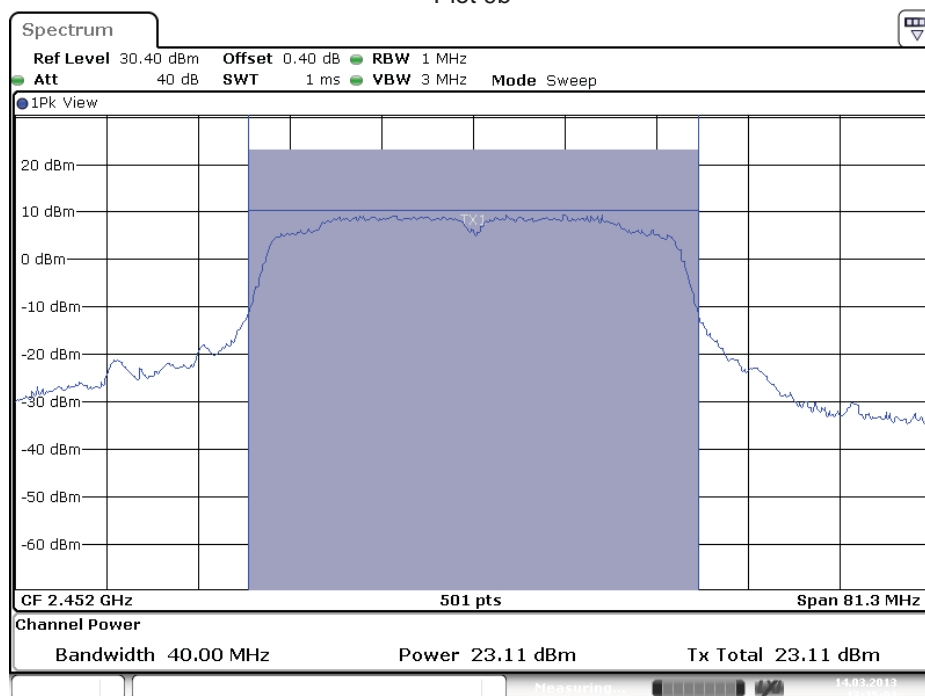

Date: 14.MAR.2013 13:25:02

Plot 9c


Test Report No.:

**12121201.fcc01**

Page 39 of 263

Operation mode: HT8-40 MHz wide, Antenna 1+2

Frequency [MHz]	Output Power Antenna 1 [dBm]	Output Power Antenna 2 [dBm]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2422	14.3	13.2	+30	1000	3.0	19.8	95.4	10a
2437	19.3	18.0	+30	1000	3.0	24.7	295.7	10b
2452	18.4	17.0	+30	1000	3.0	23.8	238.0	10c

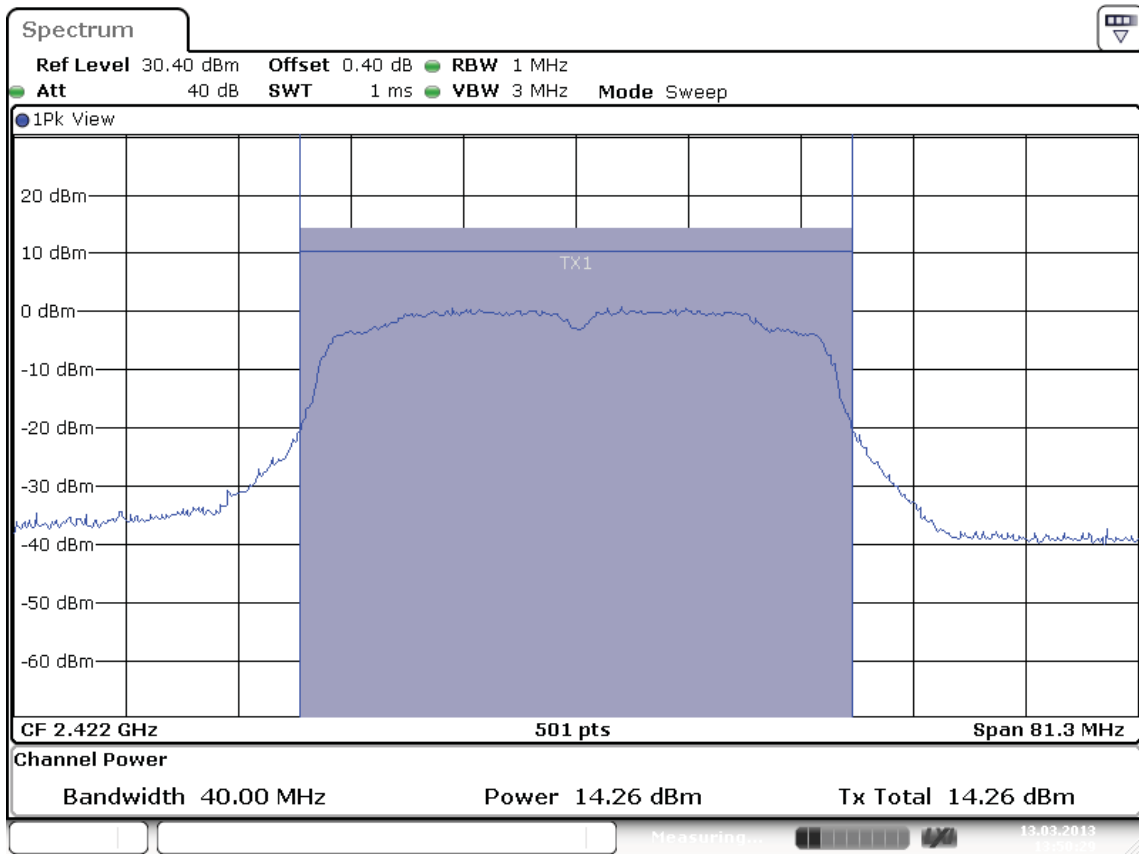


Date: 13.MAR.2013 13:50:29

Plot 10a-1

Test Report No.:

**12121201.fcc01**

Page 40 of 263

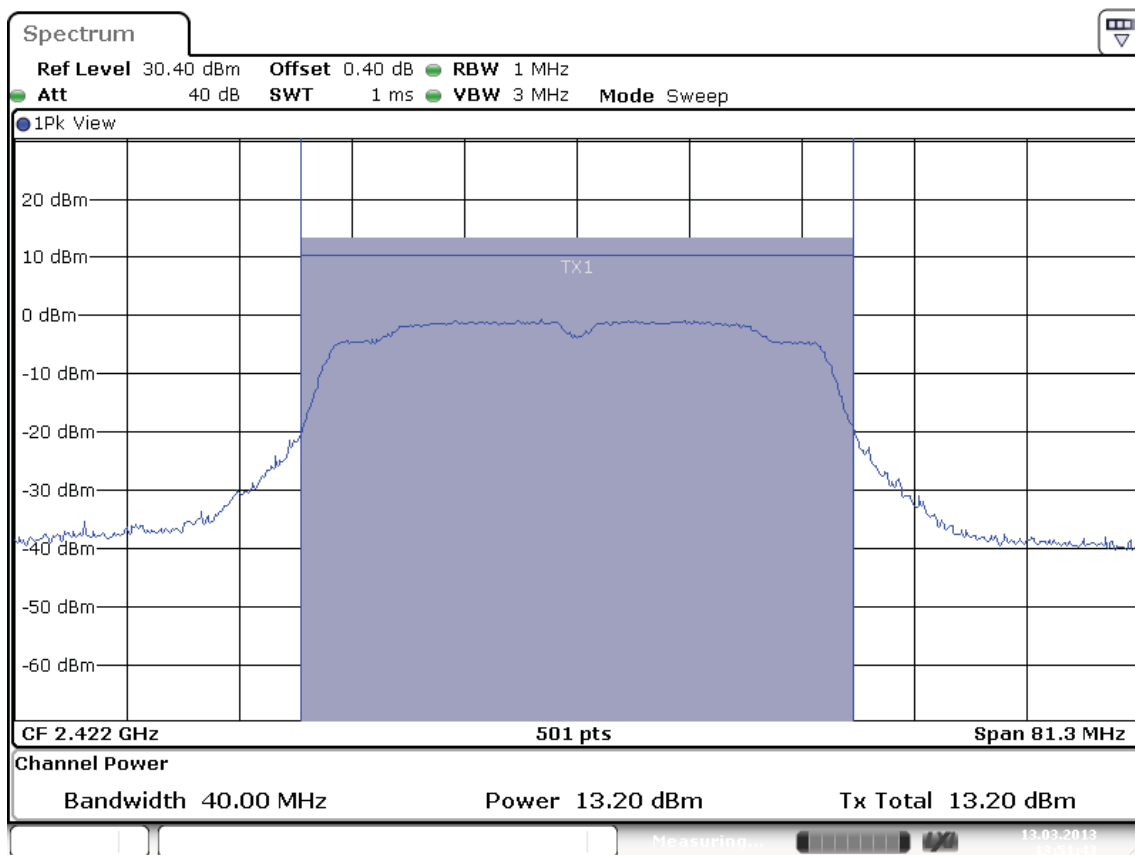

Date: 13.MAR.2013 13:51:43


Plot 10a-2



Test Report No.:


**12121201.fcc01**

Page 41 of 263

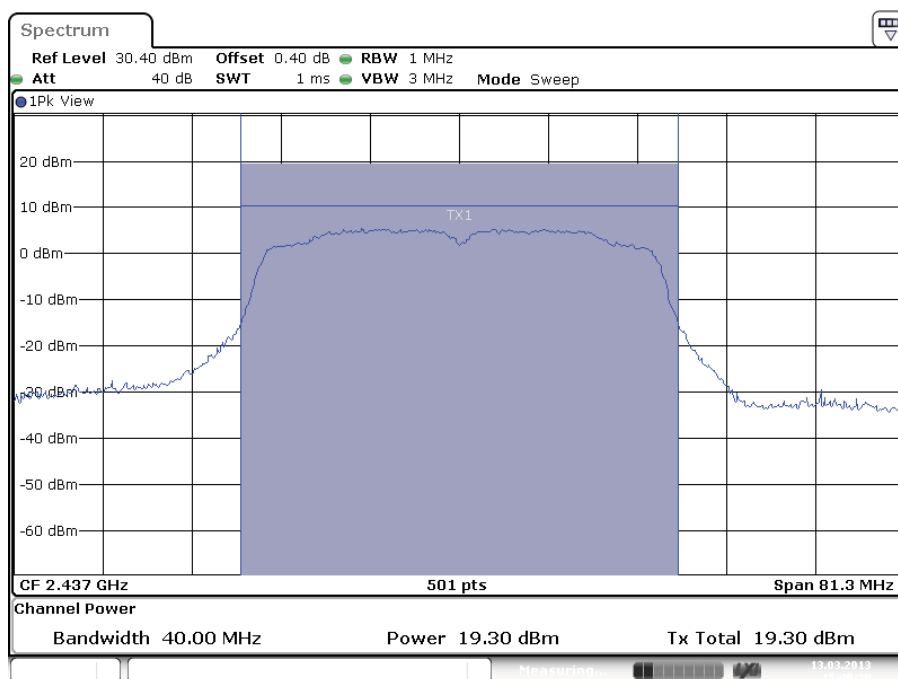

Date: 13.MAR.2013 15:49:30

Plot 10b-1

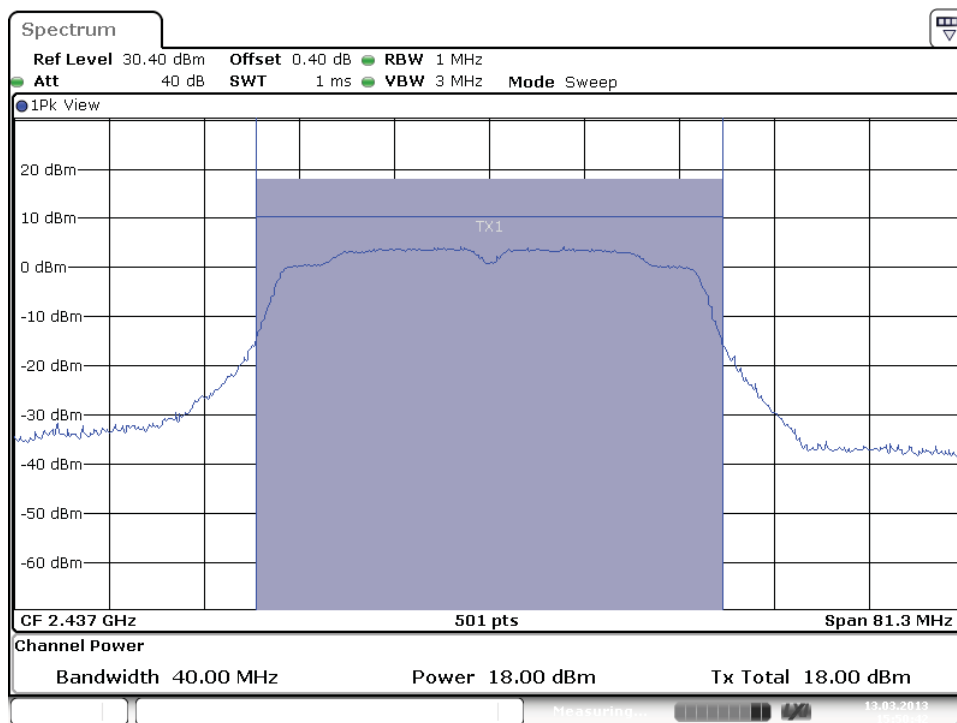


Date: 13.MAR.2013 15:50:42

Plot 10b-2


Test Report No.:

**12121201.fcc01**

Page 42 of 263

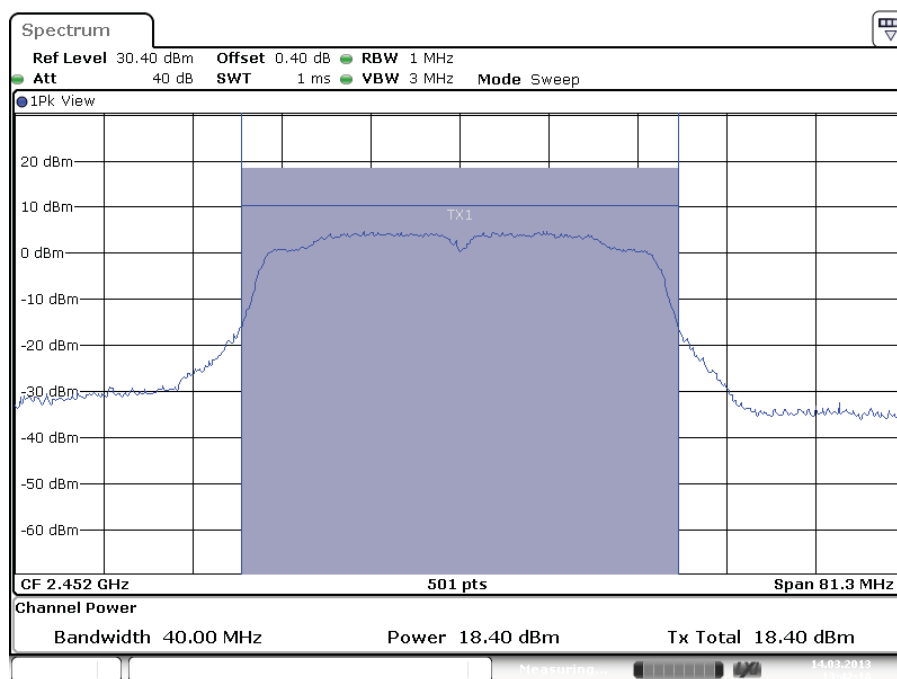

Plot 10c-1

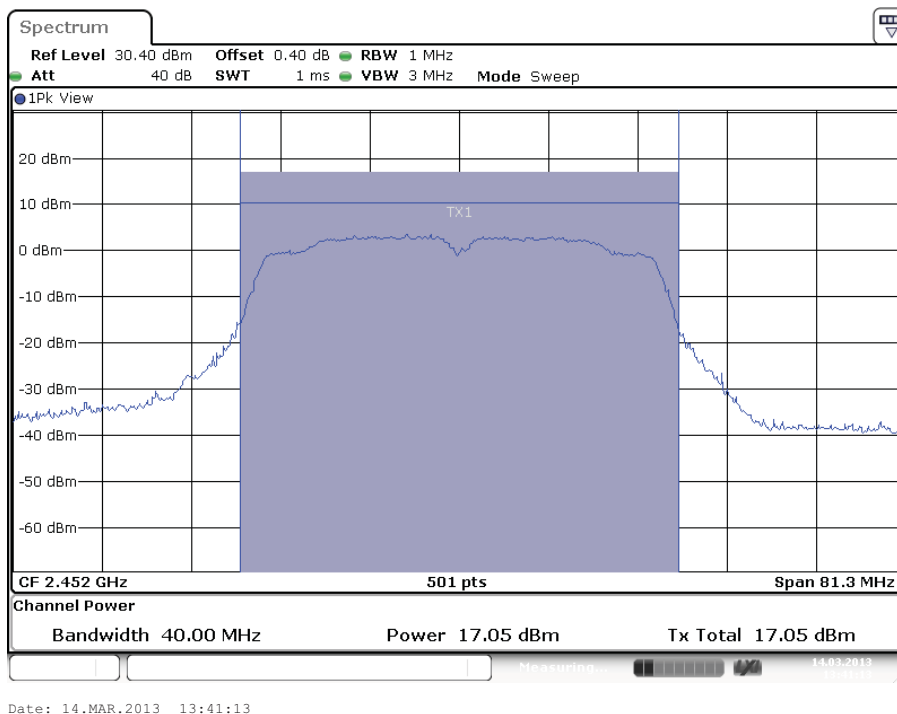

Plot 10c-2

Test Report No.:

**12121201.fcc01**

Page 43 of 263

## **5.2.2 6dB and 99% Bandwidth**

### **RESULT: Pass**

Date of testing:

2013-01-09 and 2013-03-13

Requirements:

FCC 15.247(a)(2) an RSS-210 Section A8.2(a)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 6dB bandwidth:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

ANSI C63.10-2009 and RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Plots shown on the next pages are of the 6 dB bandwidth.

Test Report No.:


**12121201.fcc01**

Page 44 of 263

## 6dB Bandwidth

Operation mode: 1Mb DSSS, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	14290	12098	500	A
2437	14084	12192	500	B
2462	14210	11162	500	C

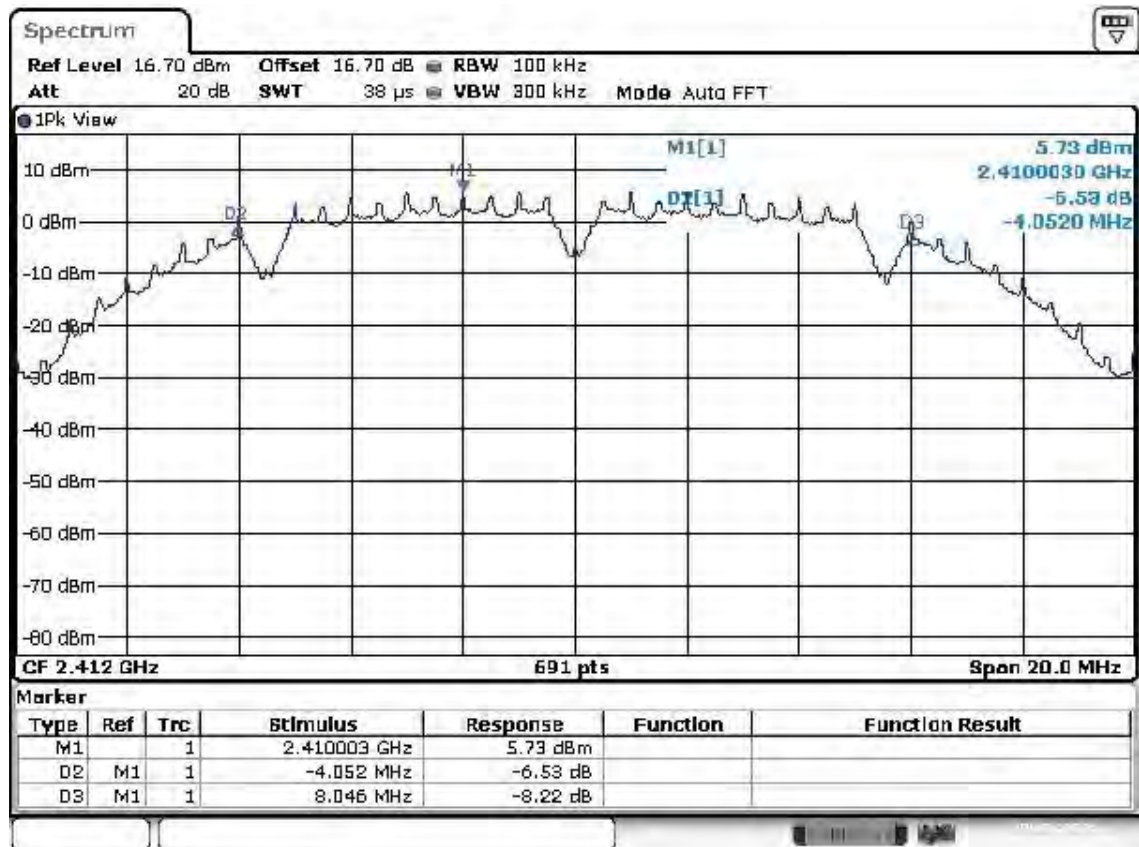


Date: 9.JAN.2013 09:23:12

Plot A


Test Report No.:

**12121201.fcc01**

Page 45 of 263

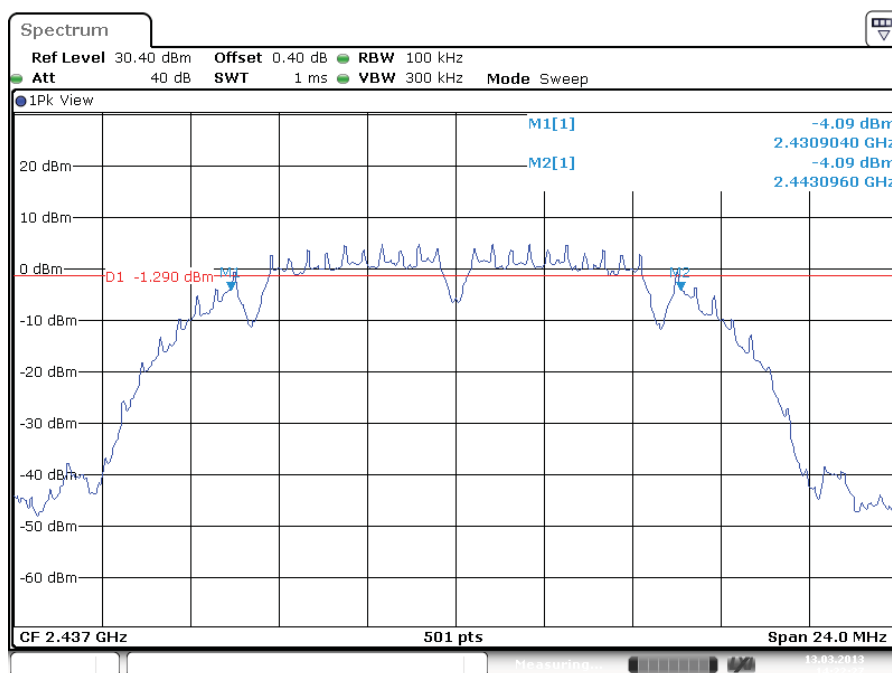

Plot B

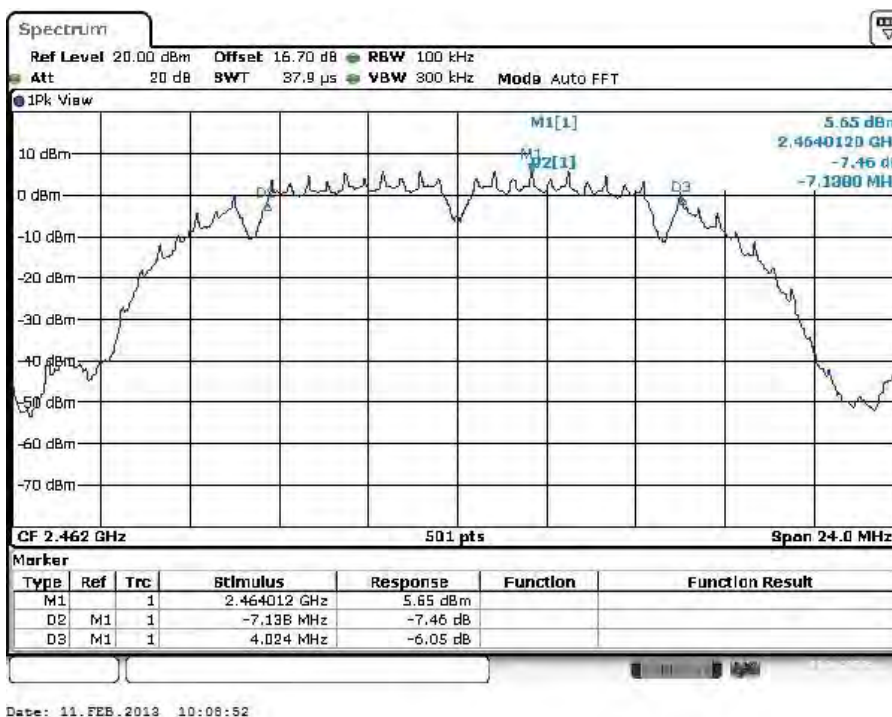

Plot C


Test Report No.:

**12121201.fcc01**

Page 46 of 263

Operation mode: 1Mb DSSS, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	14120	10651	500	A
2437	14179	12144	500	B
2462	14210	10970	500	C

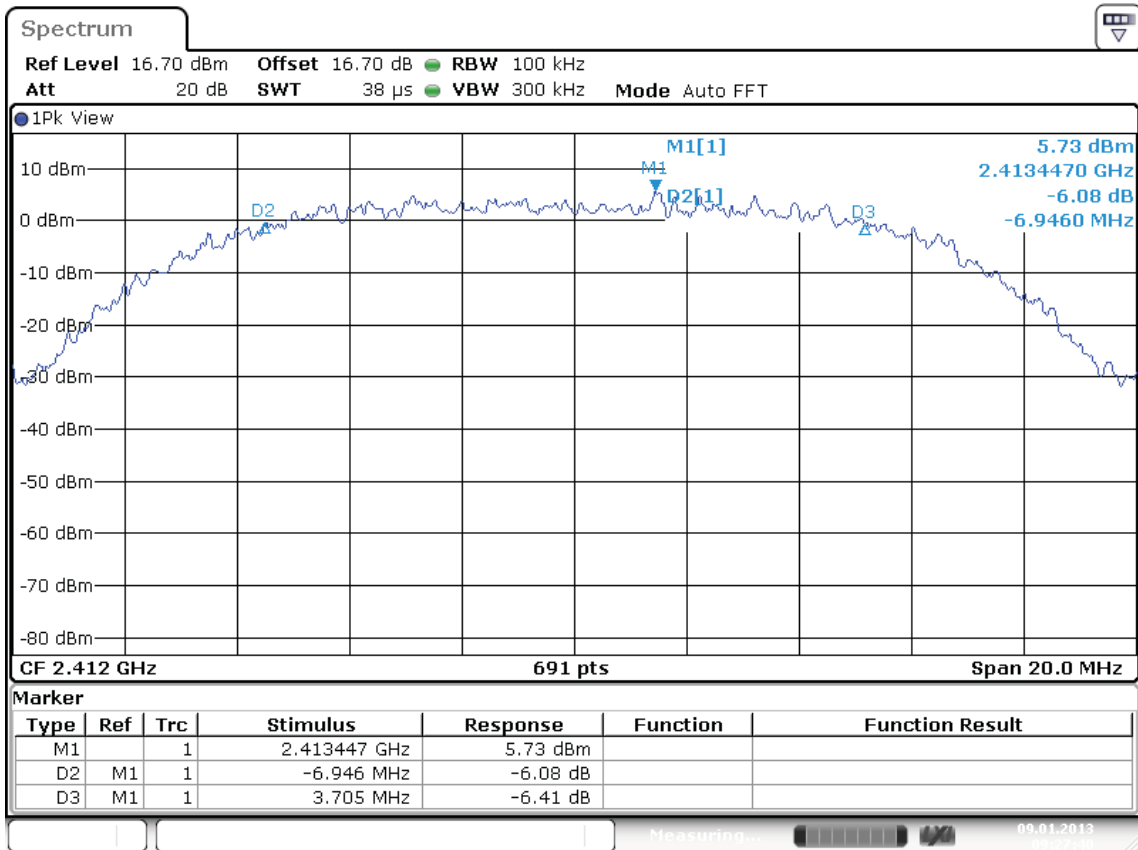


Date: 9.JAN.2013 09:27:40

Plot A


Test Report No.:

**12121201.fcc01**

Page 47 of 263

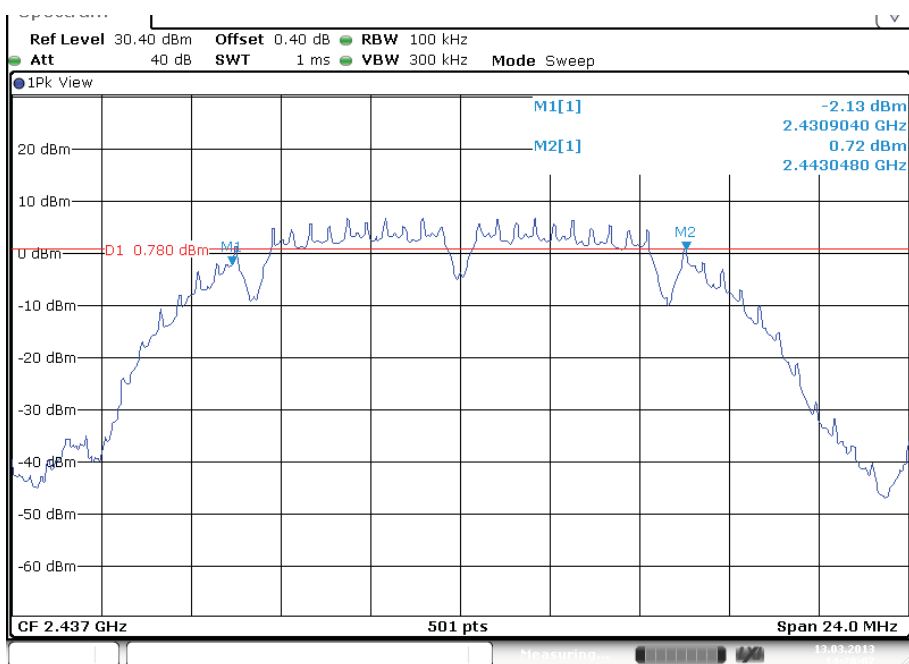

Plot B & C

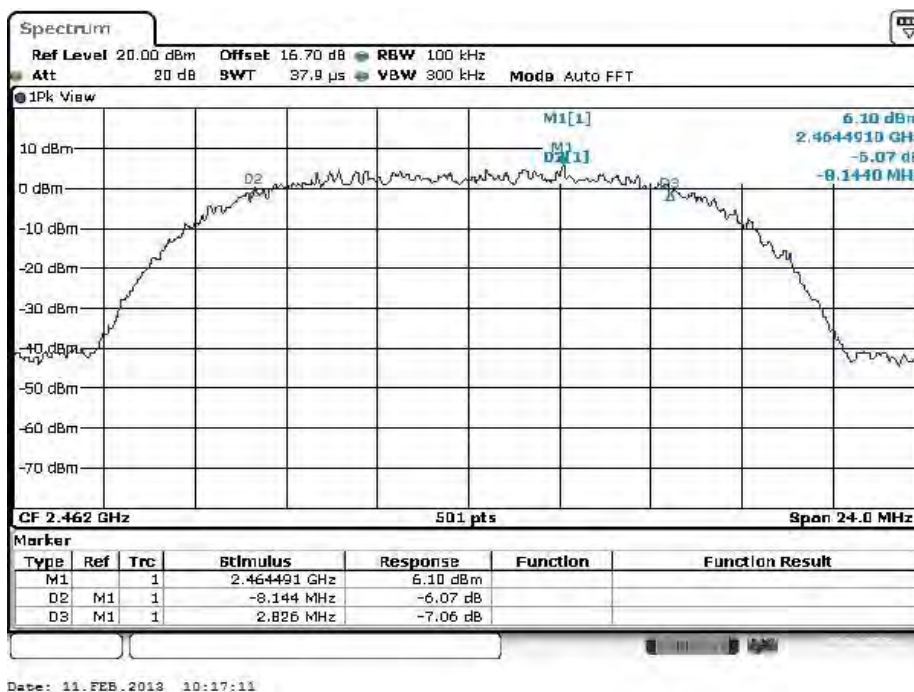


Test Report No.:

**12121201.fcc01**

Page 48 of 263

Operation mode: 6 Mb OFDM, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	17330	16555	500	A
2437	16623	16464	500	B
2462	17010	16806	500	C

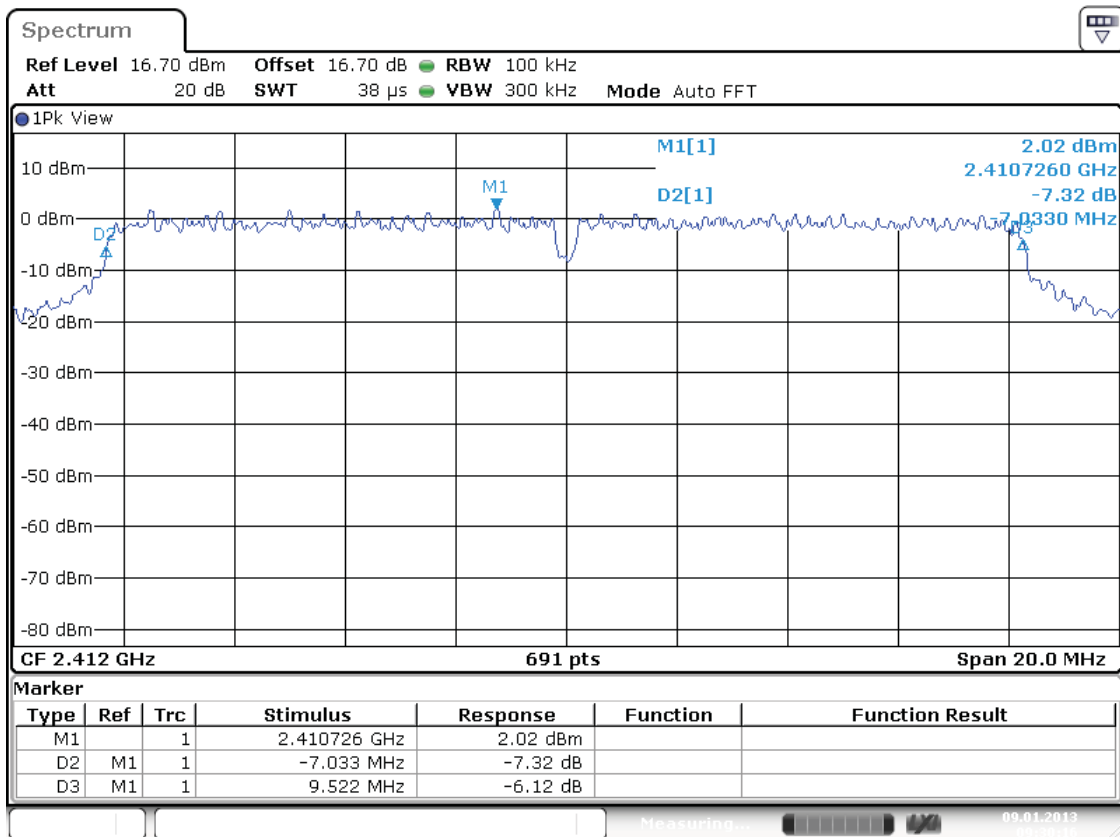

Date: 9.JAN.2013 09:30:16


Plot A




Test Report No.:

**12121201.fcc01**

Page 49 of 263

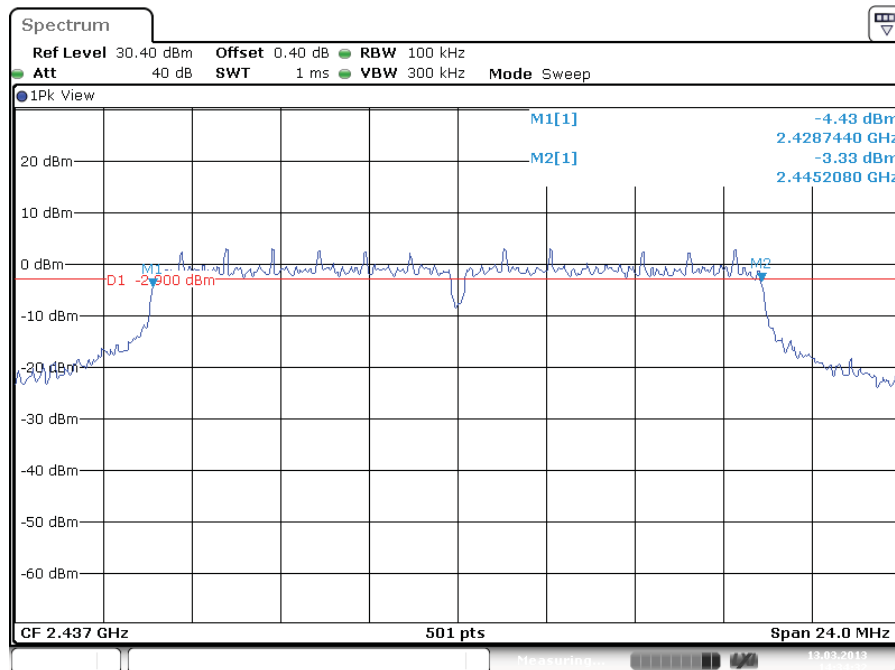

Plot B

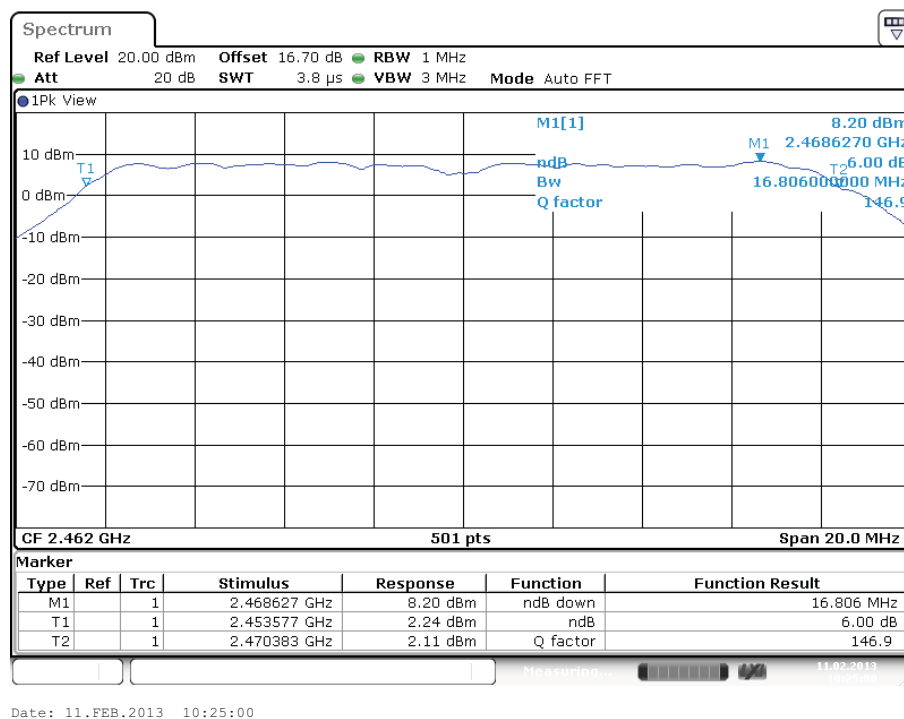

Plot C


Test Report No.:

**12121201.fcc01**

Page 50 of 263

Operation mode: 6 Mb OFDM, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	17410	16555	500	A
2437	17437	16464	500	B
2462	17010	16527	500	C

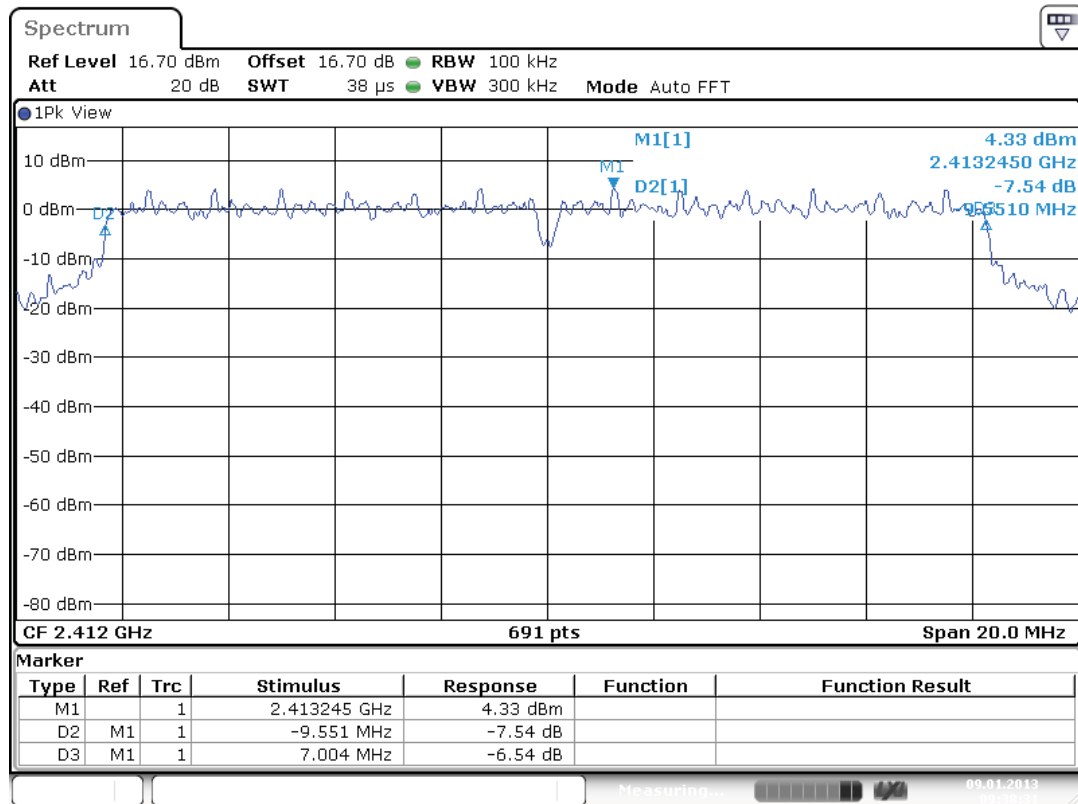


Date: 9.JAN.2013 09:38:31

Plot A


Test Report No.:

**12121201.fcc01**

Page 51 of 263

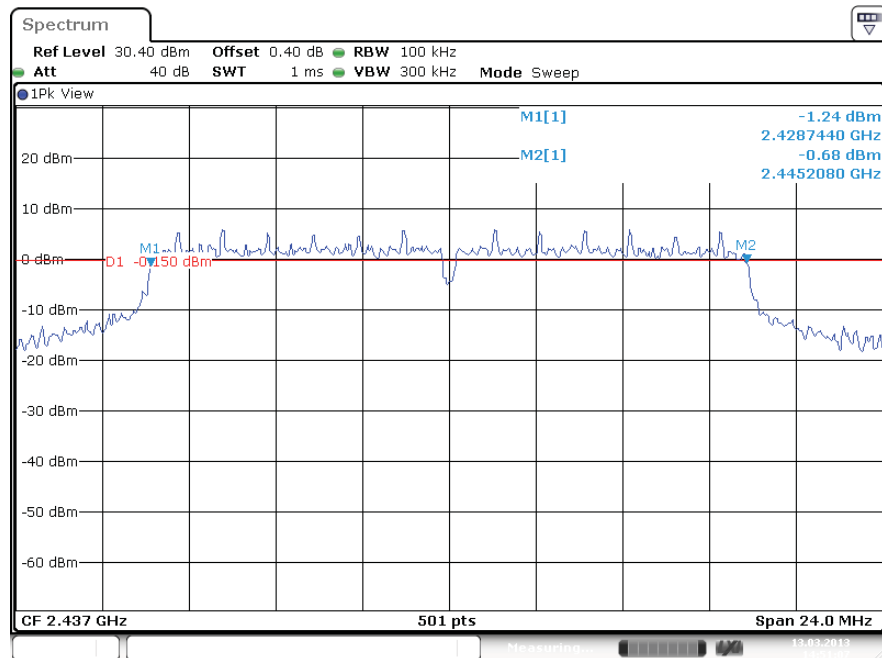

Plot B

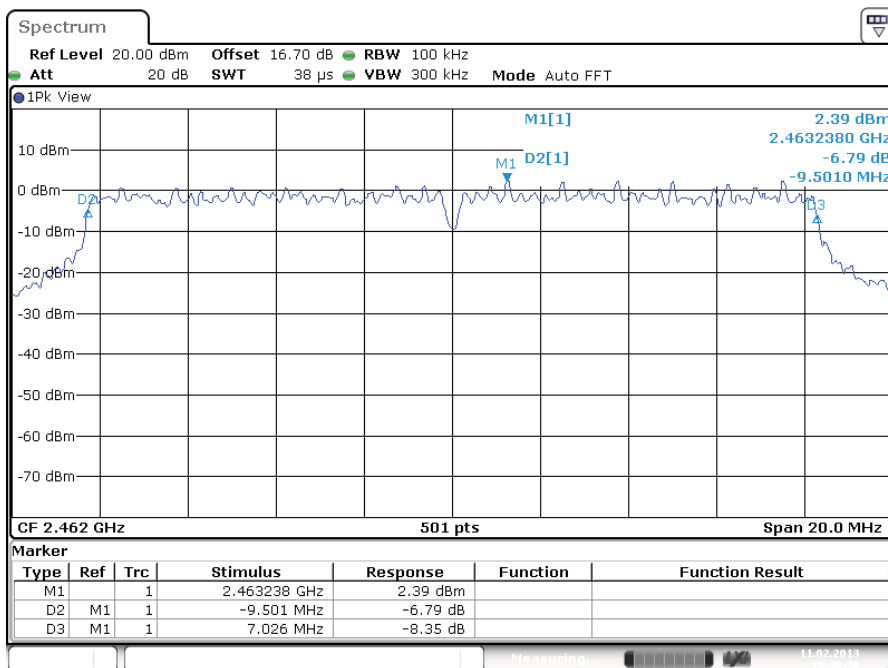

Plot C


Test Report No.:

**12121201.fcc01**

Page 52 of 263

Operation mode: HT4-20 MHz, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	18040	17684	500	A
2437	17964	17740	500	B
2462	20990	17725	500	C

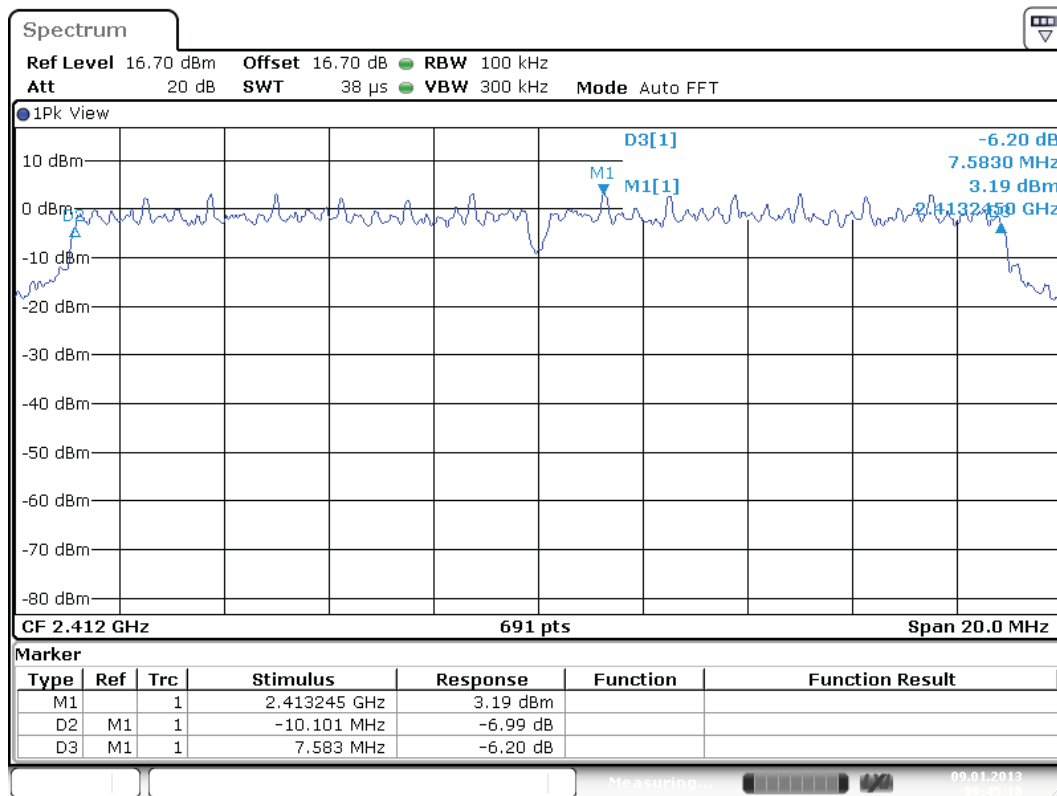


Date: 9.JAN.2013 09:45:10

Test Report No.:


**12121201.fcc01**

Page 53 of 263

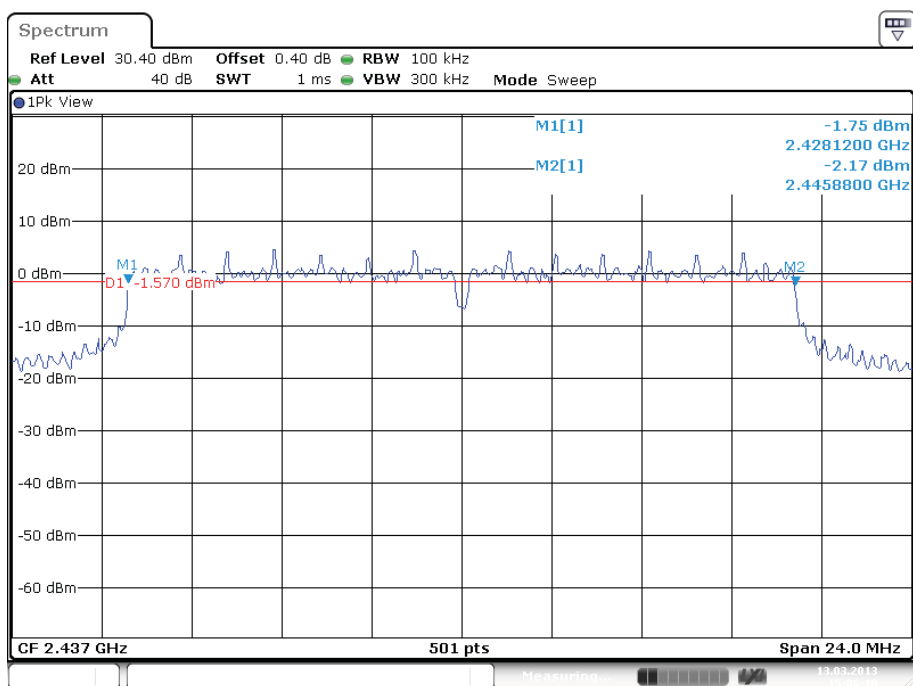

Date: 13.MAR.2013 15:06:10

Plot B & C

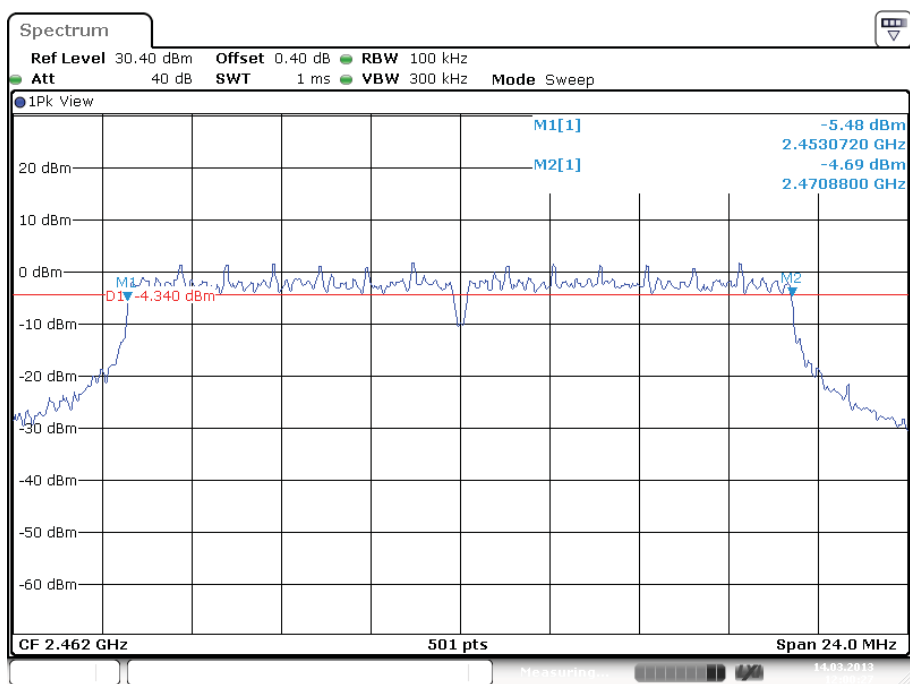

Date: 14.MAR.2013 12:00:27


Test Report No.:

**12121201.fcc01**

Page 54 of 263

Operation mode: HT4-20 MHz, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	18120	17742	500	A
2437	17820	17760	500	B
2462	17960	17805	500	C

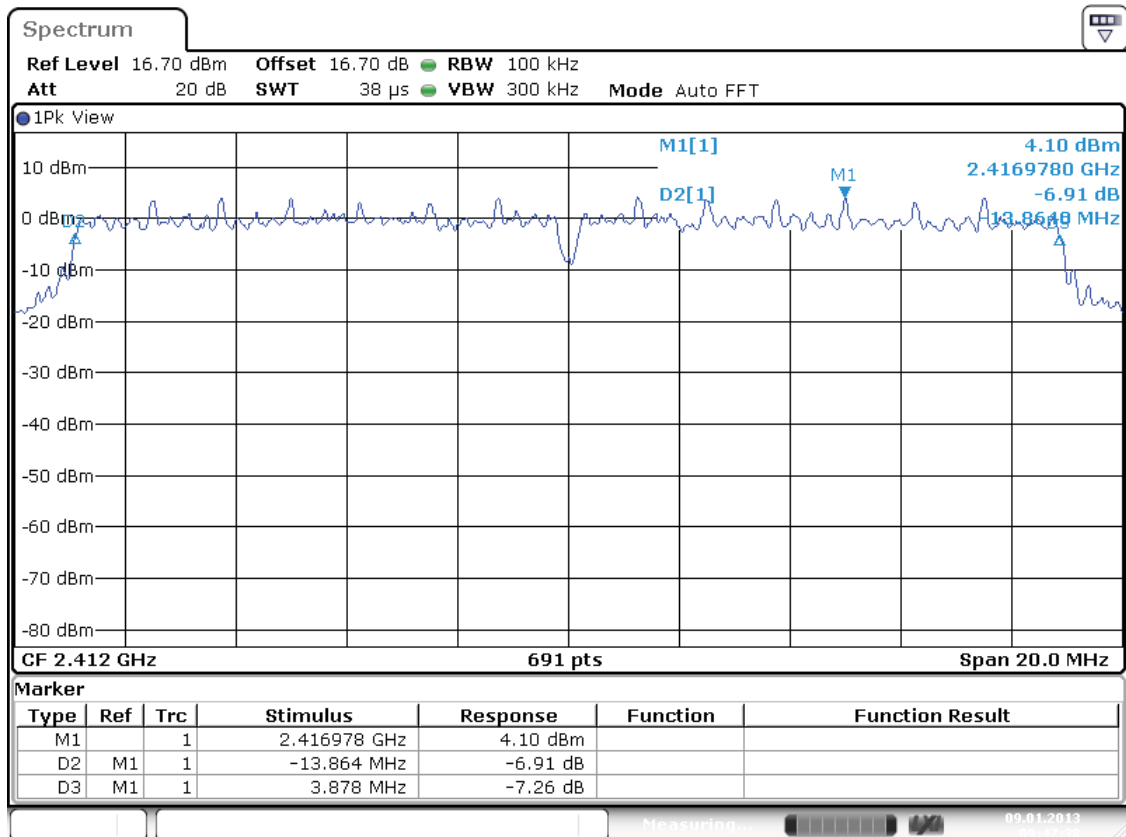


Date: 9.JAN.2013 09:47:38

Plot A

Test Report No.:


**12121201.fcc01**

Page 55 of 263

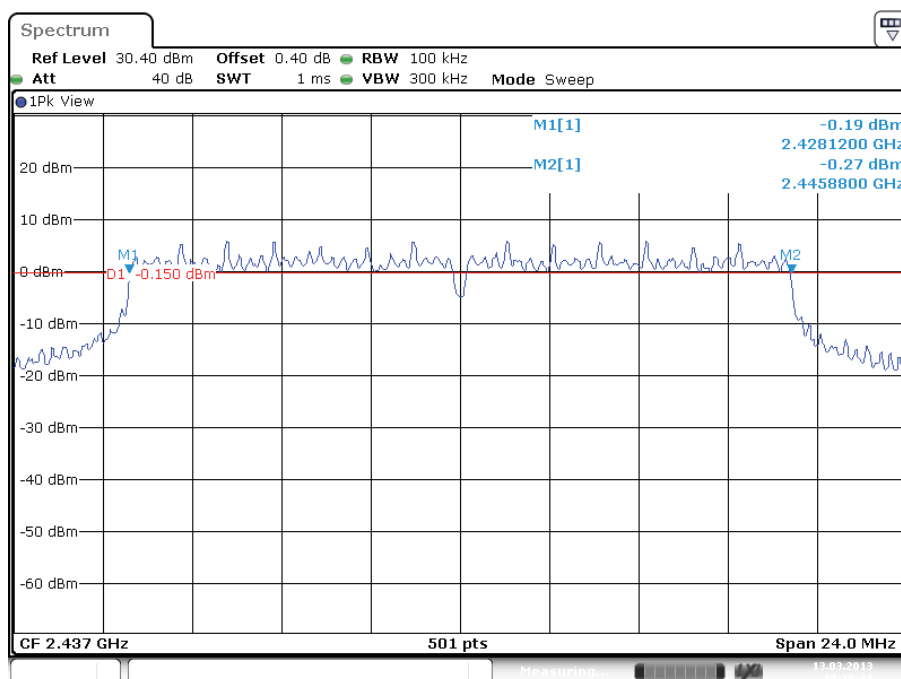

Date: 13.MAR.2013 15:10:32

Plot B

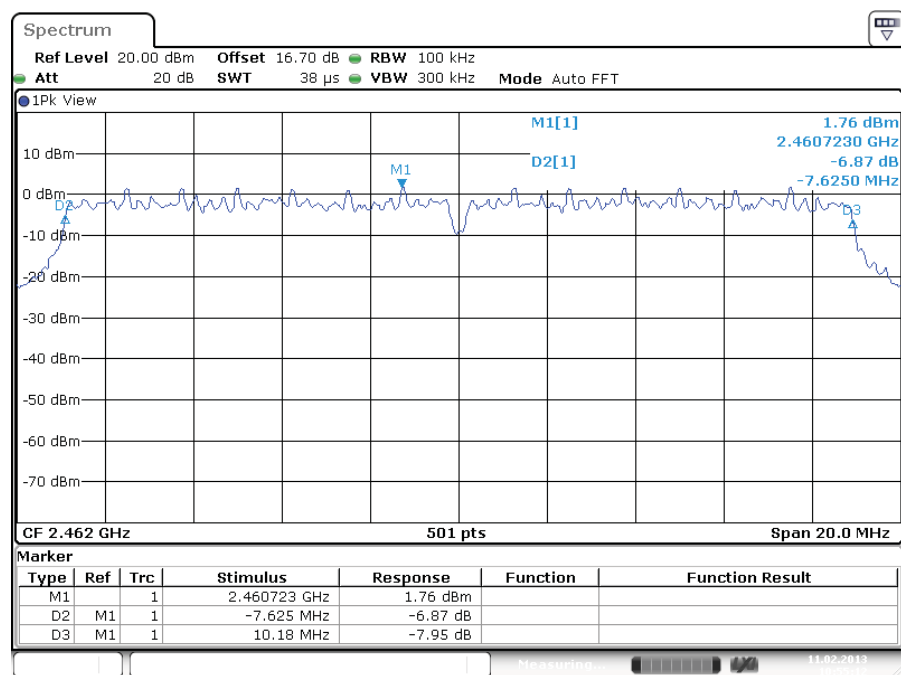

Date: 11.FEB.2013 10:55:12

Plot C


Test Report No.:

**12121201.fcc01**

Page 56 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2412	17960	16686	500	A
2437	17725	17712	500	B
2462	18040	17644	500	C

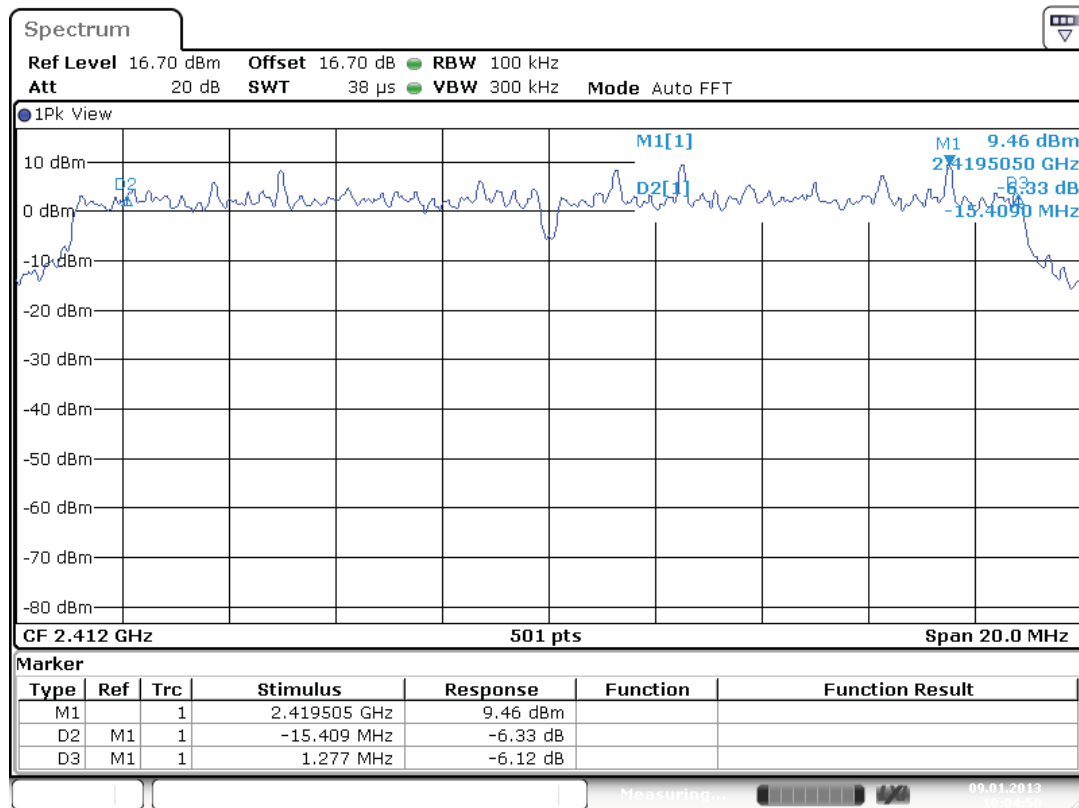

Date: 9.JAN.2013 10:04:50


Plot A



Test Report No.:


12121201.fcc01

Page 57 of 263

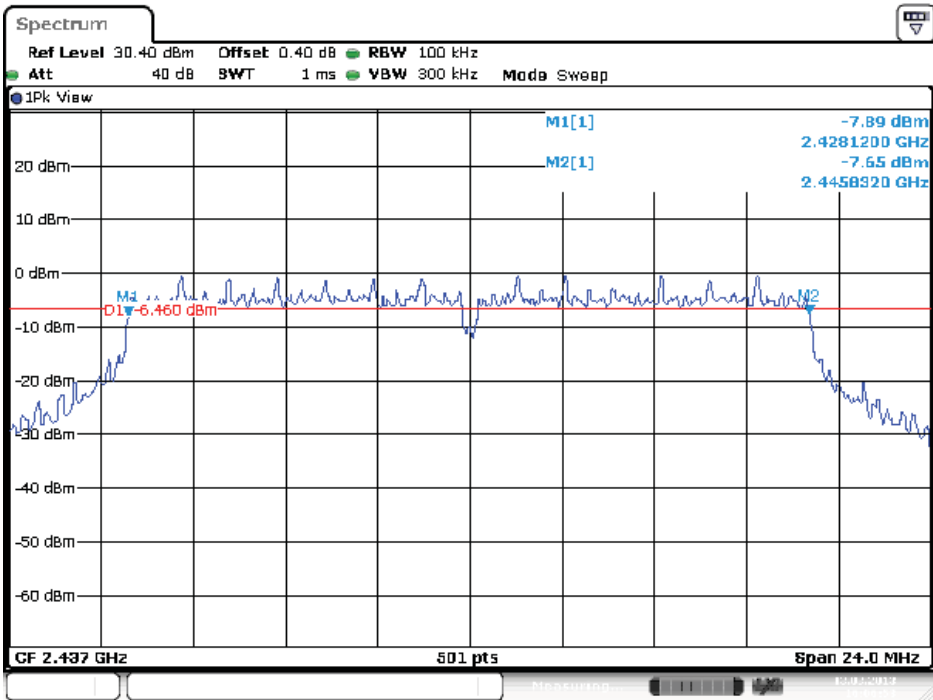

Date: 13.MAR.2013 16:06:53

Plot B

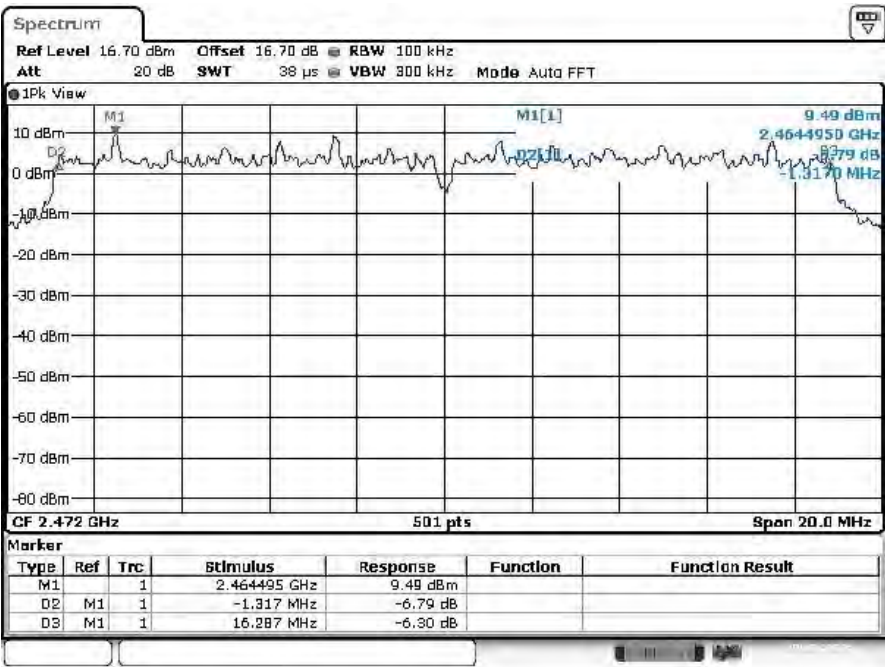

Date: 9.JAN.2013 12:13:26

Plot C


Test Report No.:

**12121201.fcc01**

Page 58 of 263

Operation mode: HT4-40 MHz wide, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2422	36090	35330	500	A
2437	36216	35328	500	B
2452	36410	35330	500	C

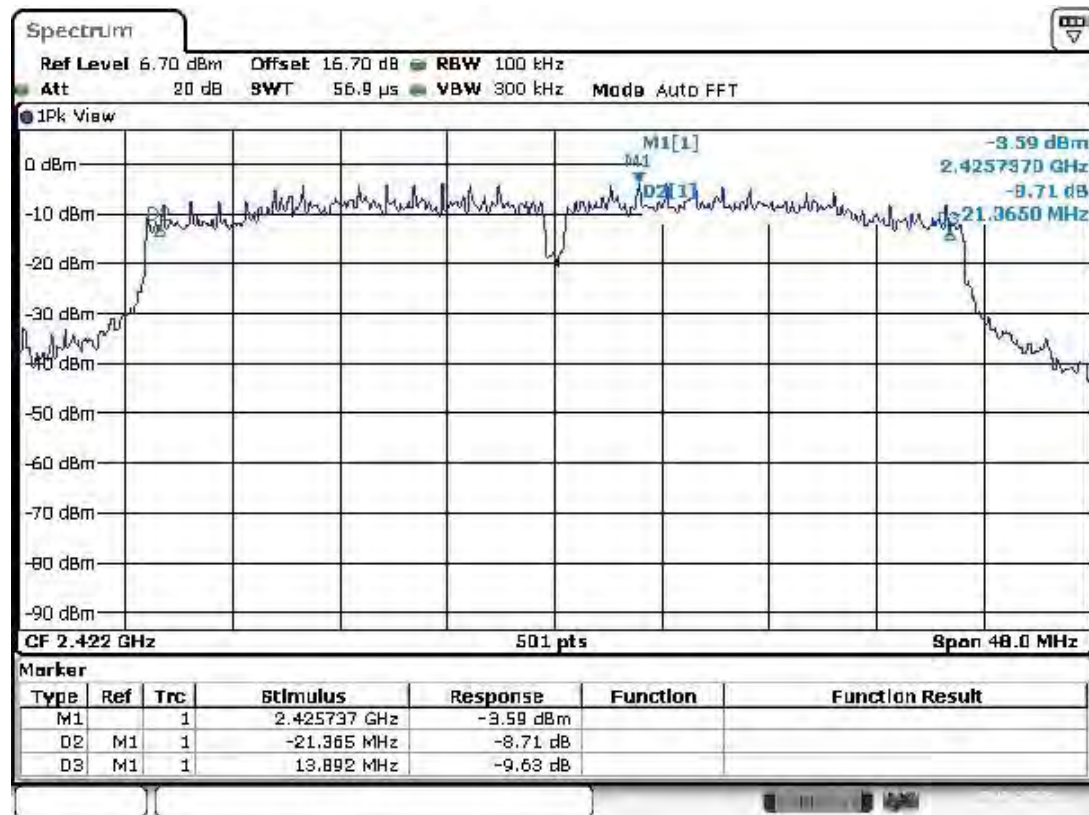


Date: 8.FEB.2013 15:22:07

Plot A


Test Report No.:

**12121201.fcc01**

Page 59 of 263

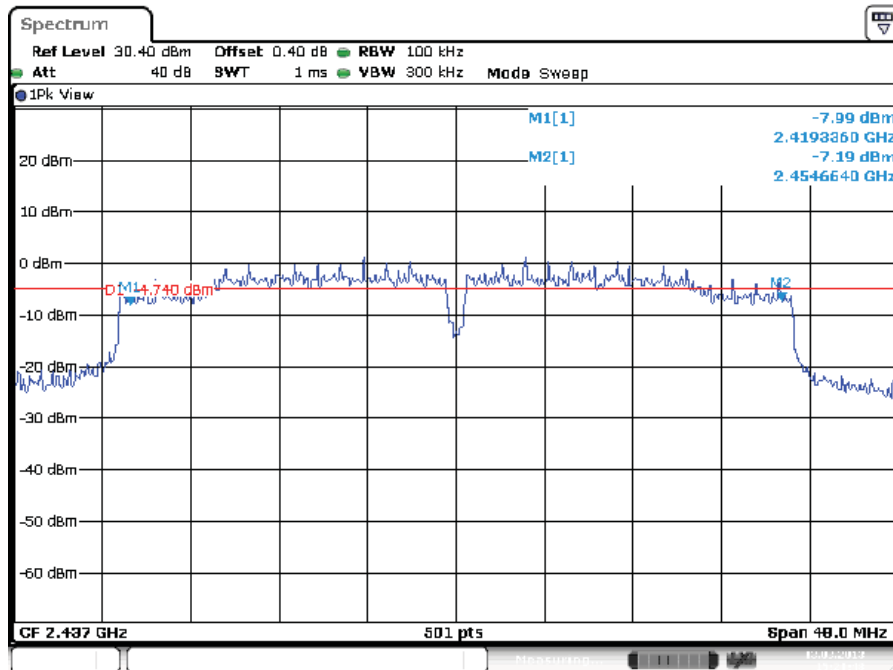

Plot B

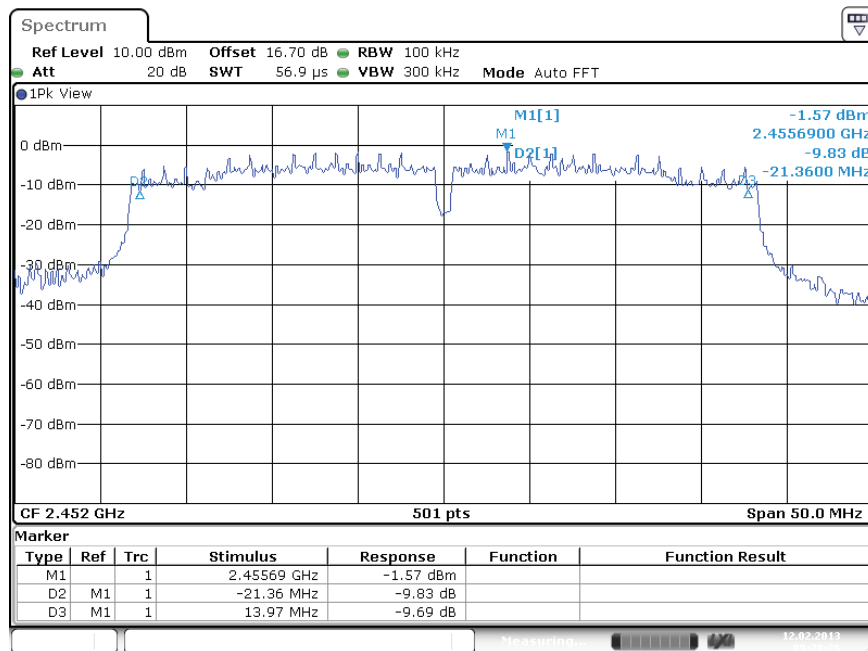

Plot C


Test Report No.:

**12121201.fcc01**

Page 60 of 263

Operation mode: HT4-40 MHz wide, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2422	35930	34030	500	A
2437	36024	35328	500	B
2452	35930	35230	500	C

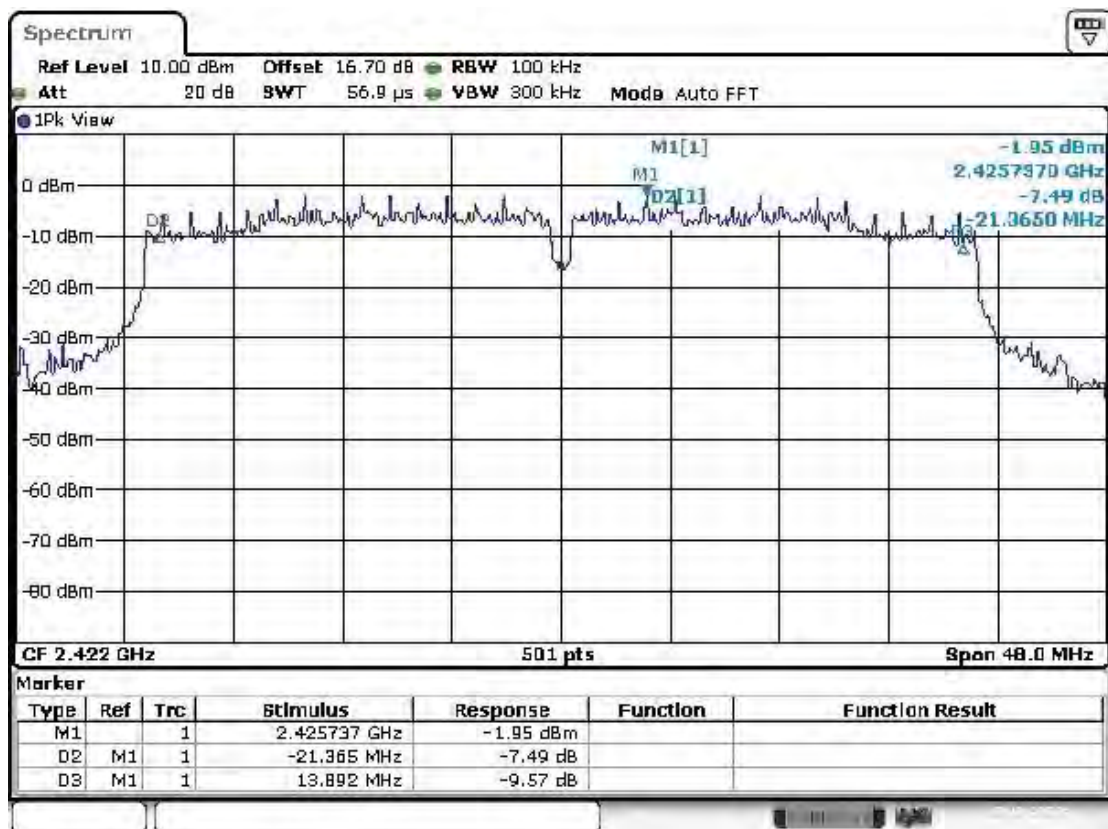


Date: 8.FEB.2013 15:32:47

Plot A

Test Report No.:


**12121201.fcc01**

Page 61 of 263

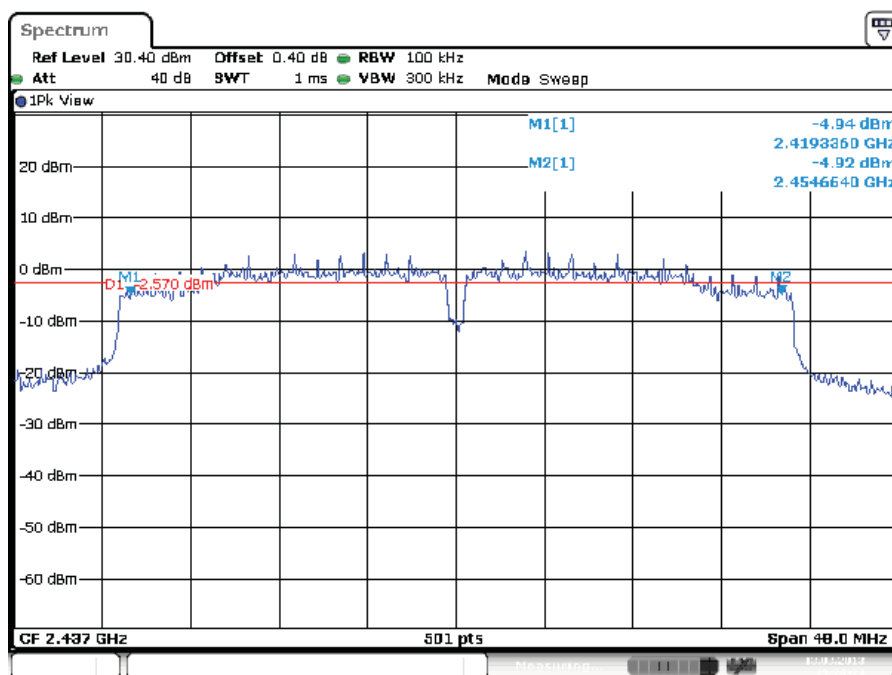

Date: 13.MAR.2013 15:29:23

Plot B

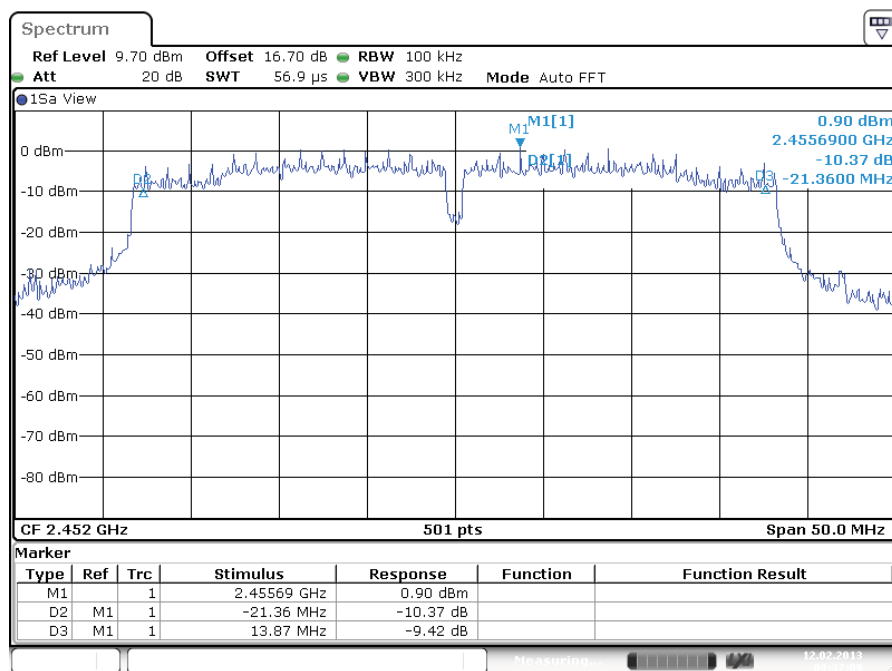

Date: 12.FEB.2013 09:37:10

Plot C


Test Report No.:

**12121201.fcc01**

Page 62 of 263

Operation mode: HT8-40 MHz wide, Antenna 1+2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2422	35930	35320	500	A
2437	35737	35328	500	B
2452	36090	35330	500	C

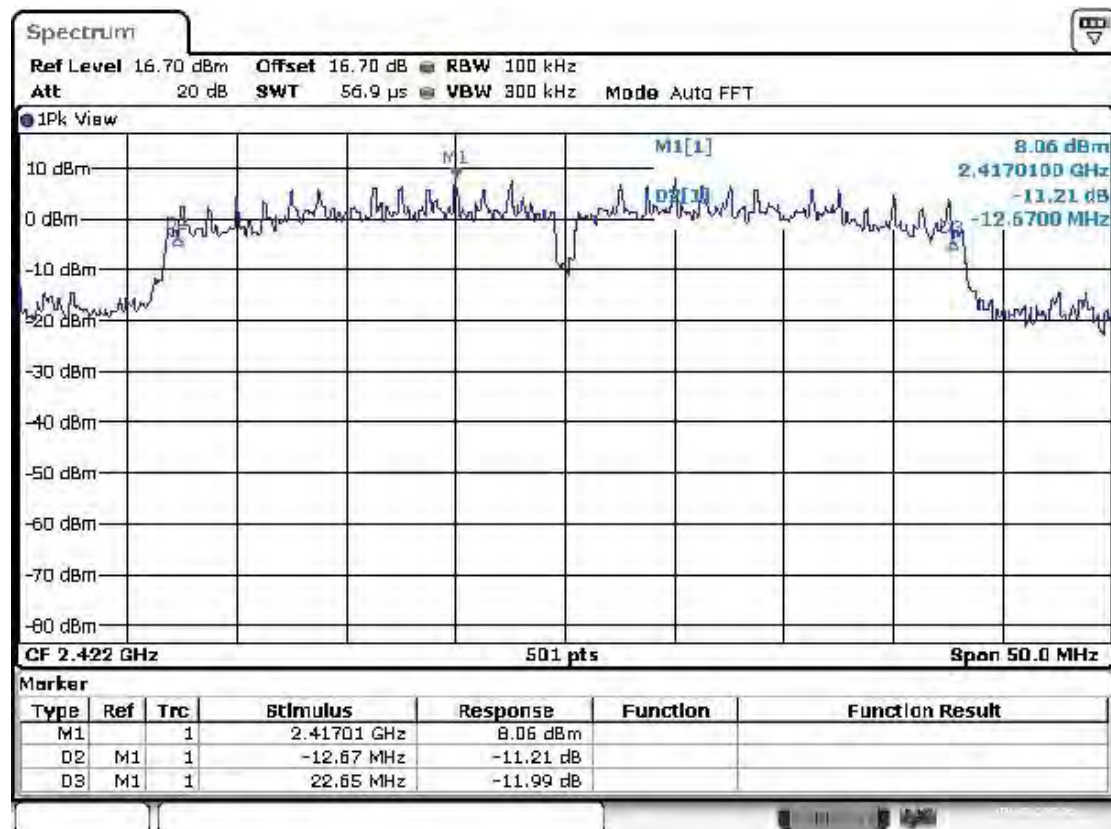


Date: 9.JAN.2013 10:14:33

Plot A


Test Report No.:

12121201.fcc01

Page 63 of 263

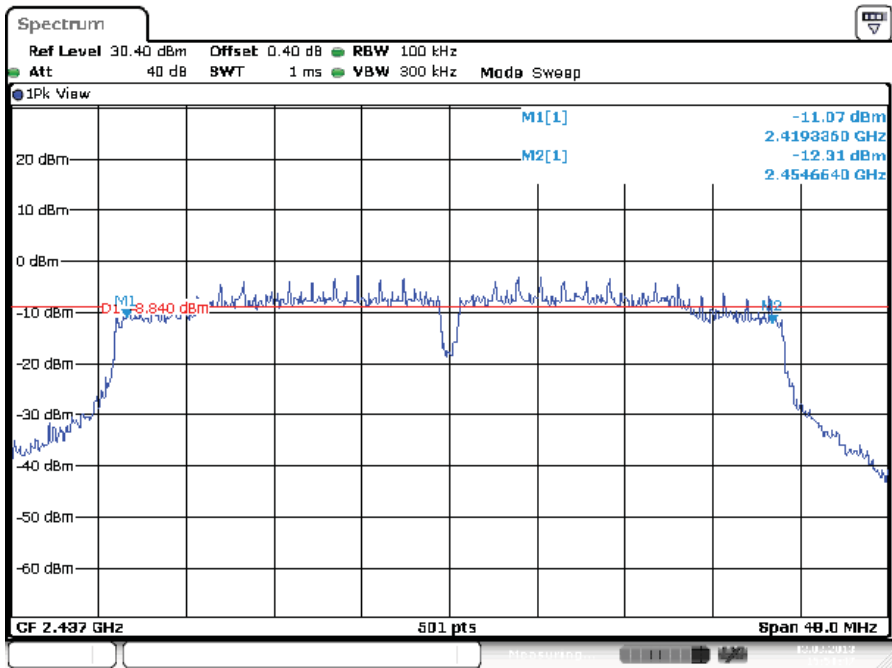

Plot B

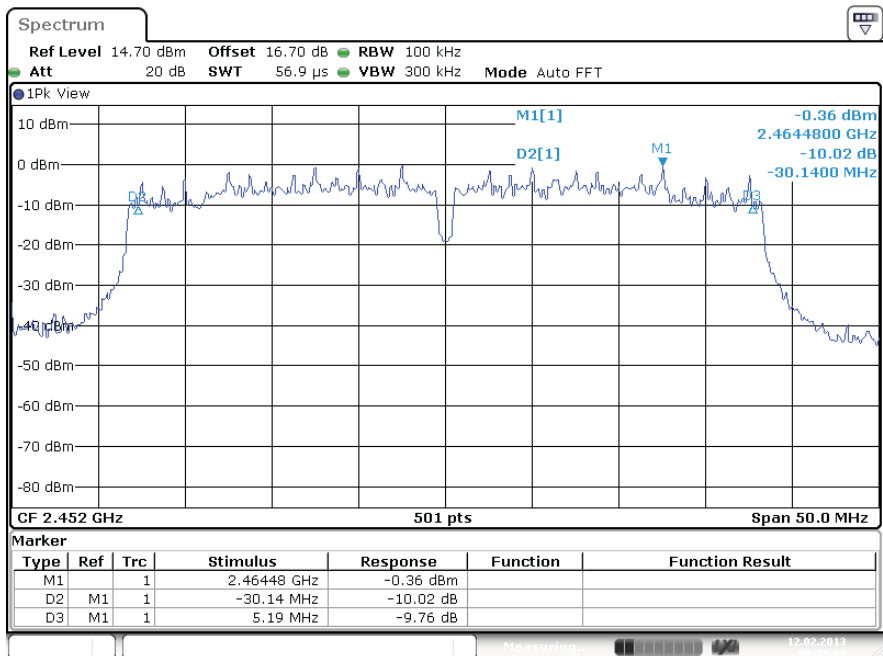

Plot C

Test Report No.:

**12121201.fcc01**

Page 64 of 263

### 5.2.3 Peak Power Spectral Density

#### RESULT: Pass

Date of testing:

2013-01-12 / 2013-03-14

Requirements:

FCC 15.247(e) and RSS-210 section A8.2(b)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak PSD Option 1 procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables.



Test Report No.:


**12121201.fcc01**

Page 65 of 263

## Peak Power Spectral Density

Operation mode: 1Mb DSSS, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-9.95	8	Pass	A
2437	-10.10	8	Pass	B
2462	-10.61	8	Pass	C

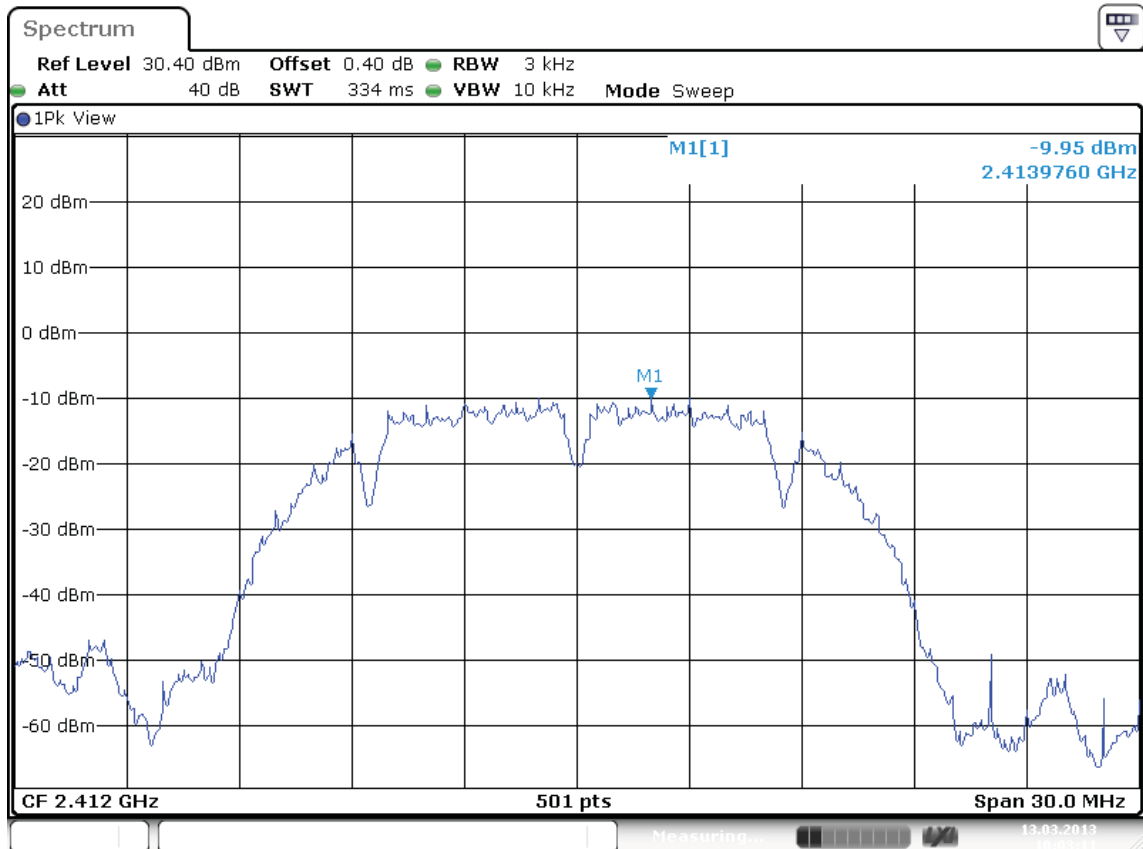


Date: 13.MAR.2013 10:03:11

Plot A:

Test Report No.:


**12121201.fcc01**

Page 66 of 263

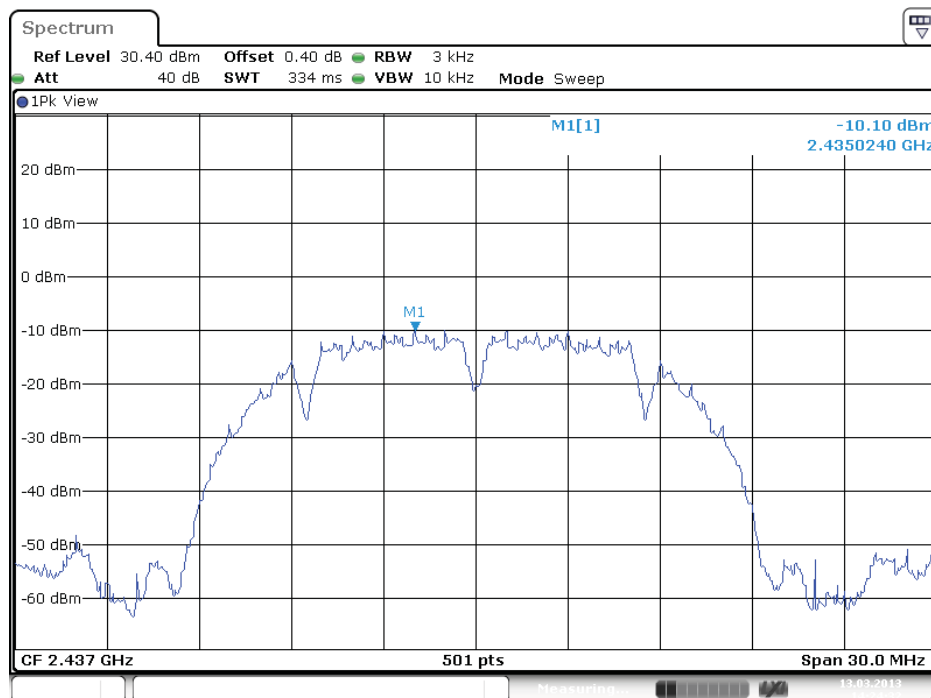

Date: 13.MAR.2013 14:24:32

B

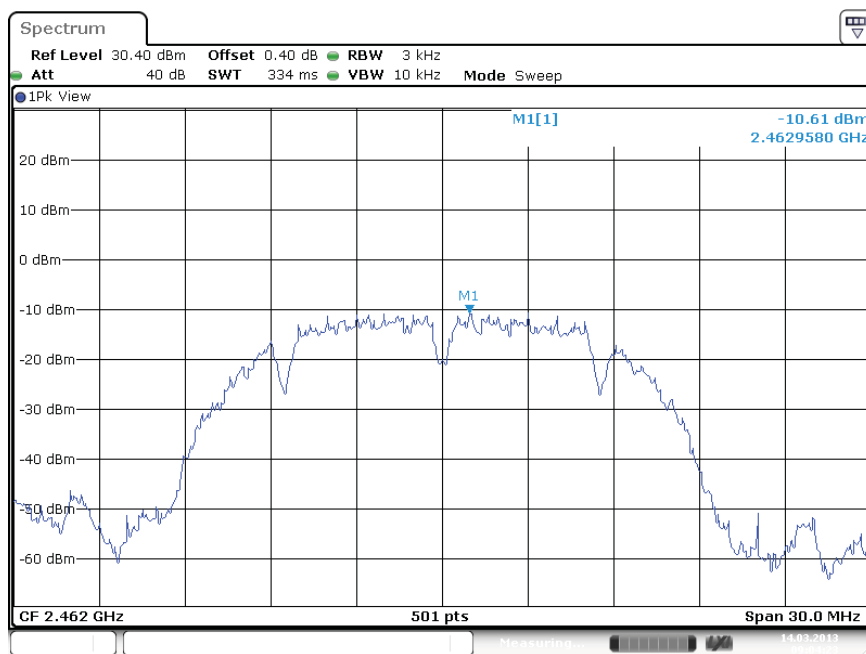

Date: 14.MAR.2013 09:04:23

C

Test Report No.:

**12121201.fcc01**

Page 67 of 263

Operation mode: 1Mb DSSS, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-10.85	8	Pass	A
2442	-9.67	8	Pass	B
2462	-10.21	8	Pass	C




Date: 9.JAN.2013 14:02:16

Plot A:


Test Report No.:

**12121201.fcc01**

Page 68 of 263

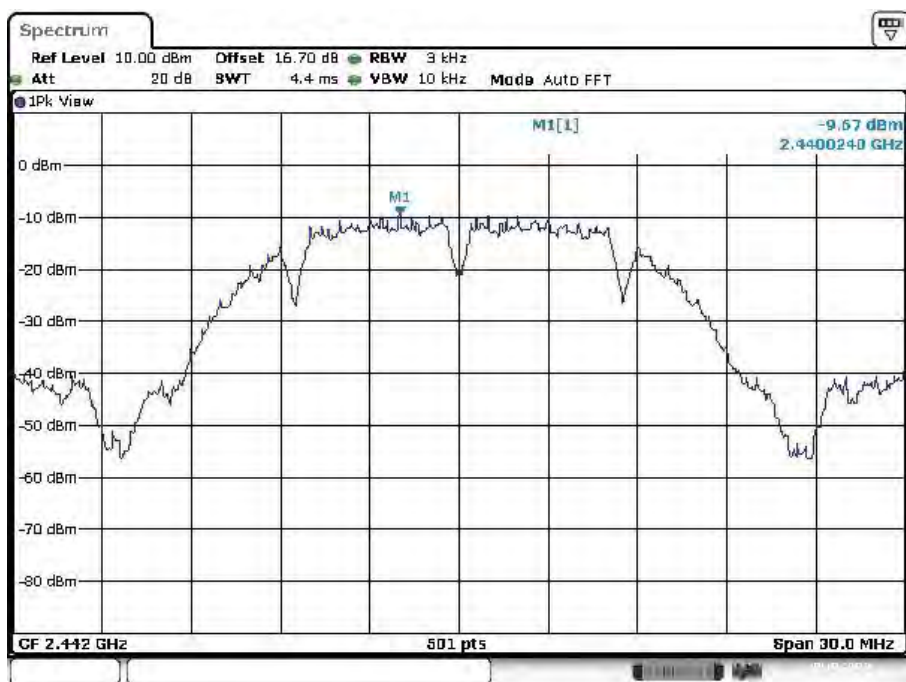

B

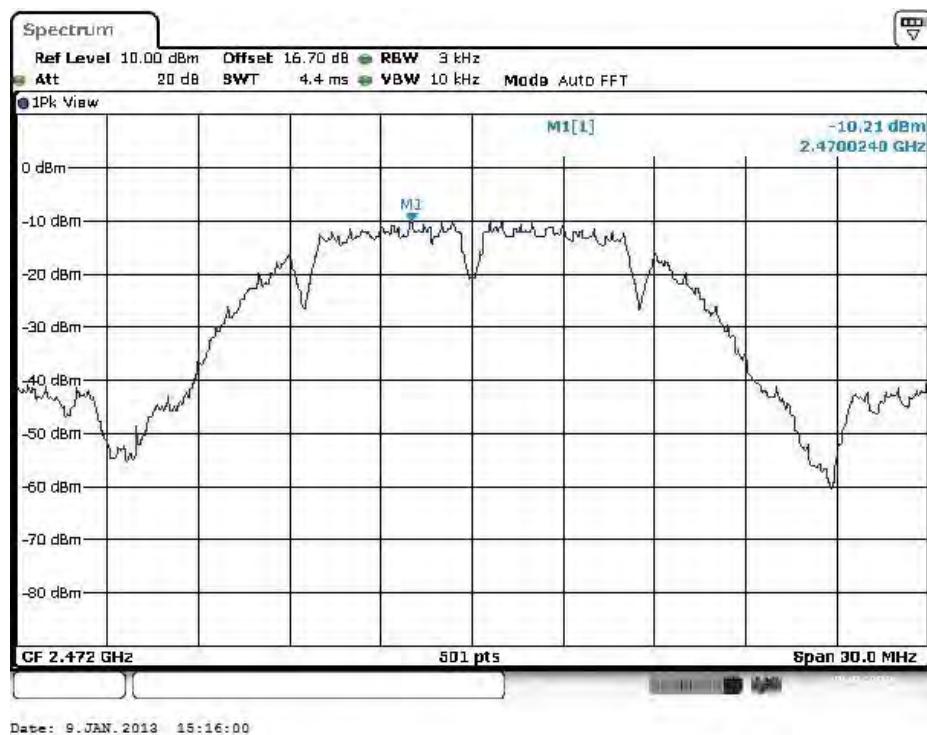

C


Test Report No.:

**12121201.fcc01**

Page 69 of 263

Operation mode: 6 Mb OFDM, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-14.21	8	Pass	A
2437	-10.76	8	Pass	B
2462	-11.39	8	Pass	C

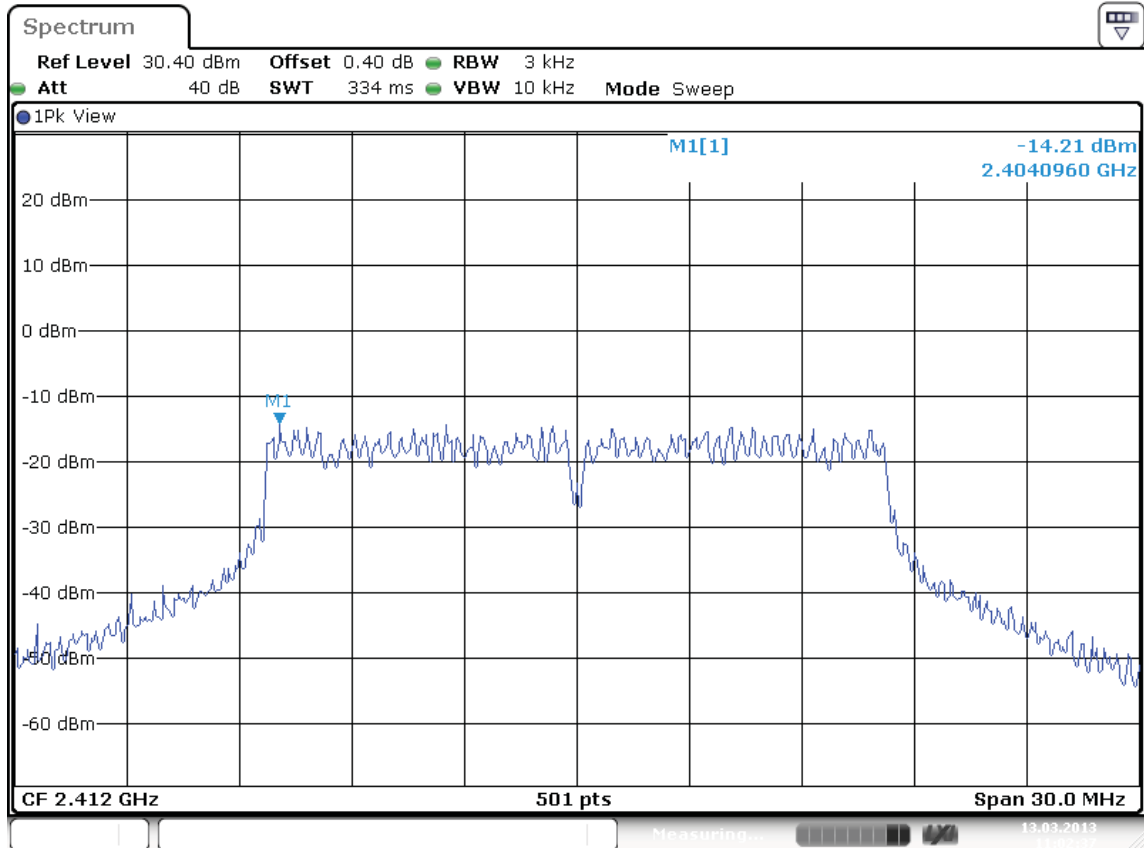


Date: 13.MAR.2013 11:02:38

Plot A

Test Report No.:


**12121201.fcc01**

Page 70 of 263

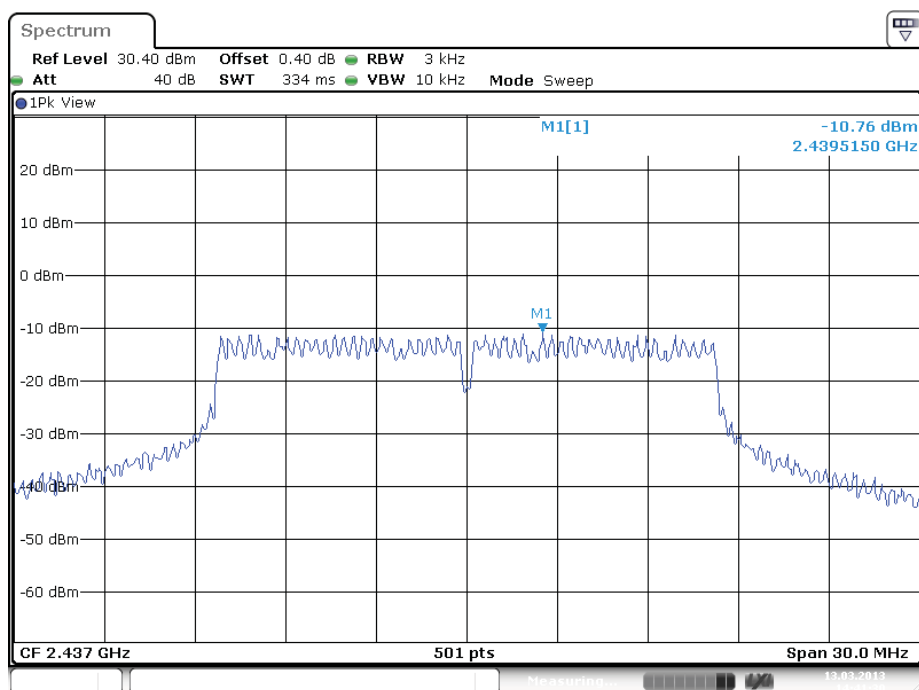

Date: 13.MAR.2013 14:41:30

Plot B

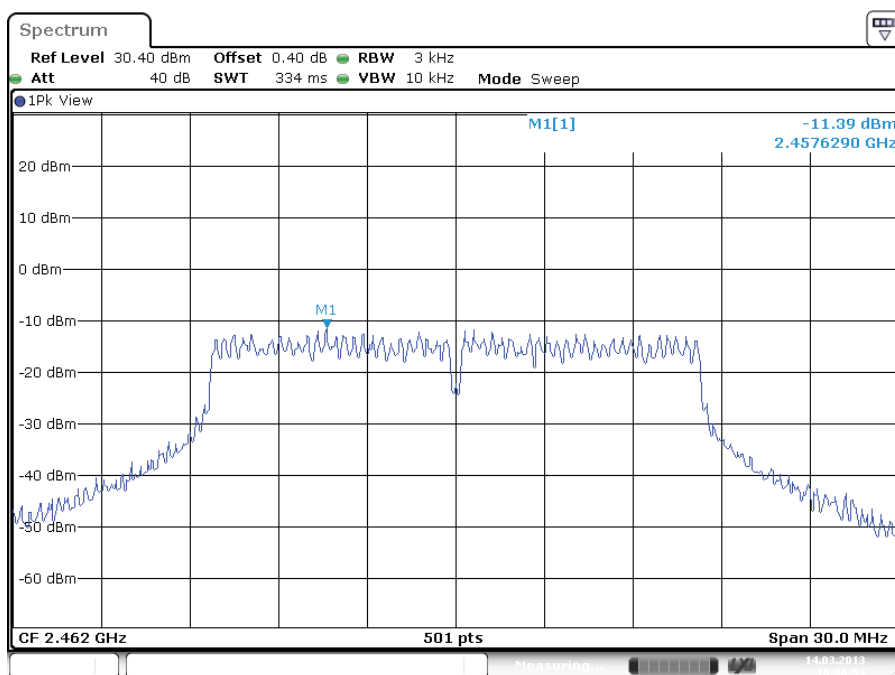

Date: 14.MAR.2013 10:06:55

Plot C

Test Report No.:


**12121201.fcc01**

Page 71 of 263

Operation mode: 6 Mb OFDM, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-10.32	8	Pass	A
2437	-9.95	8	Pass	B
2462	-9.53	8	Pass	C

Plot A:

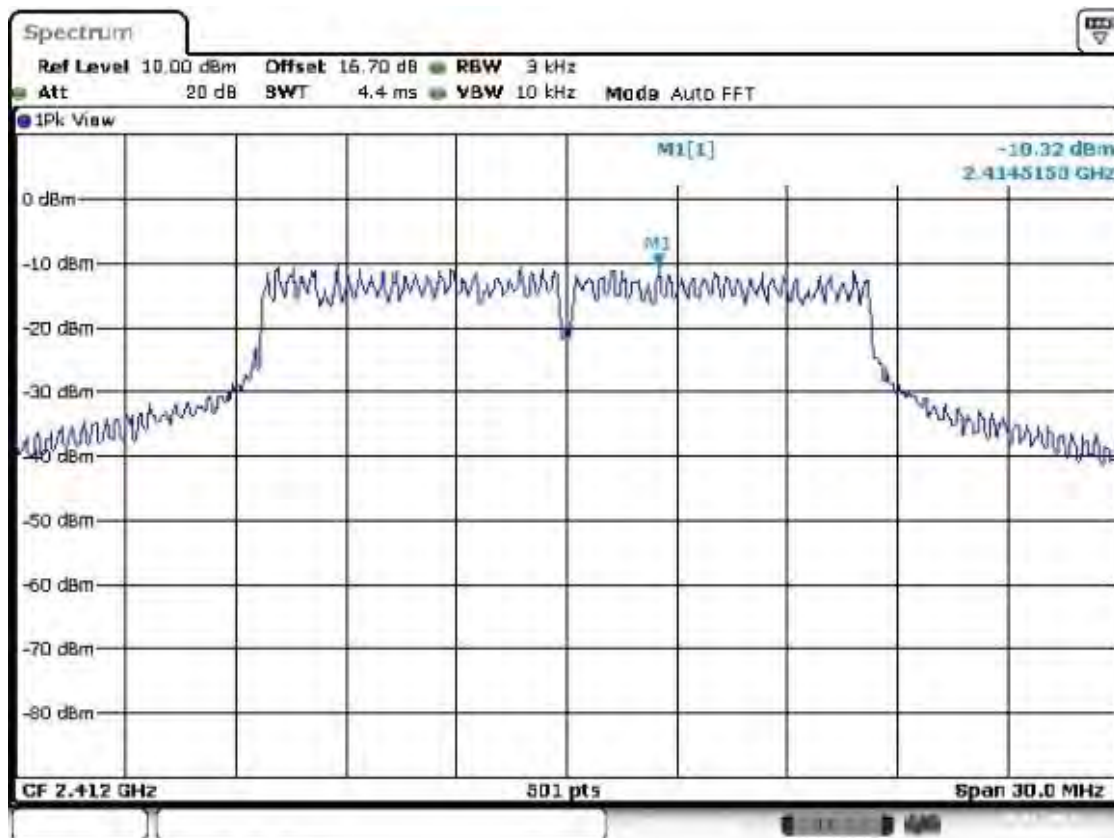


Date: 9. JAN. 2013 14:07:03


Test Report No.:

**12121201.fcc01**

Page 72 of 263

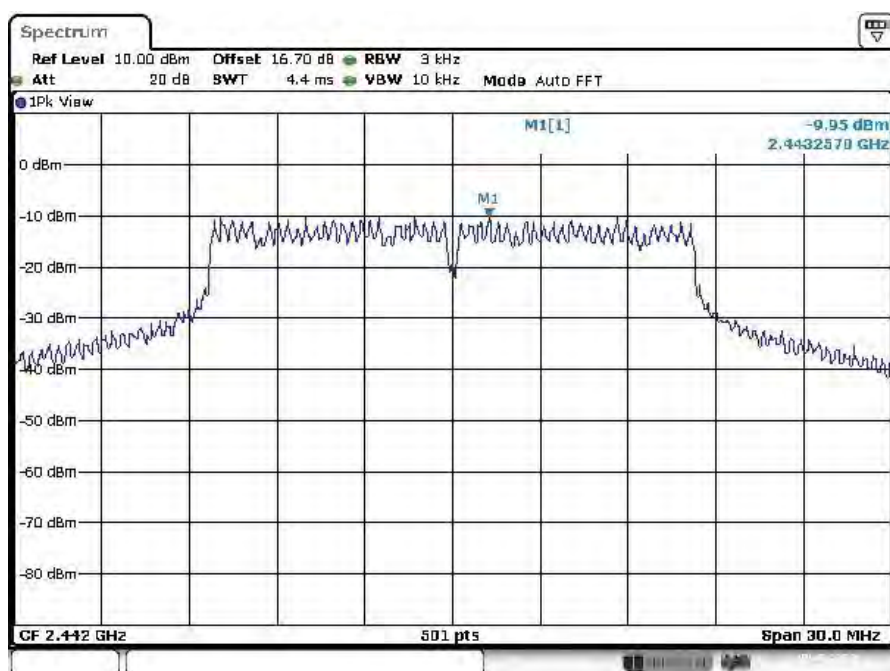

Plot B

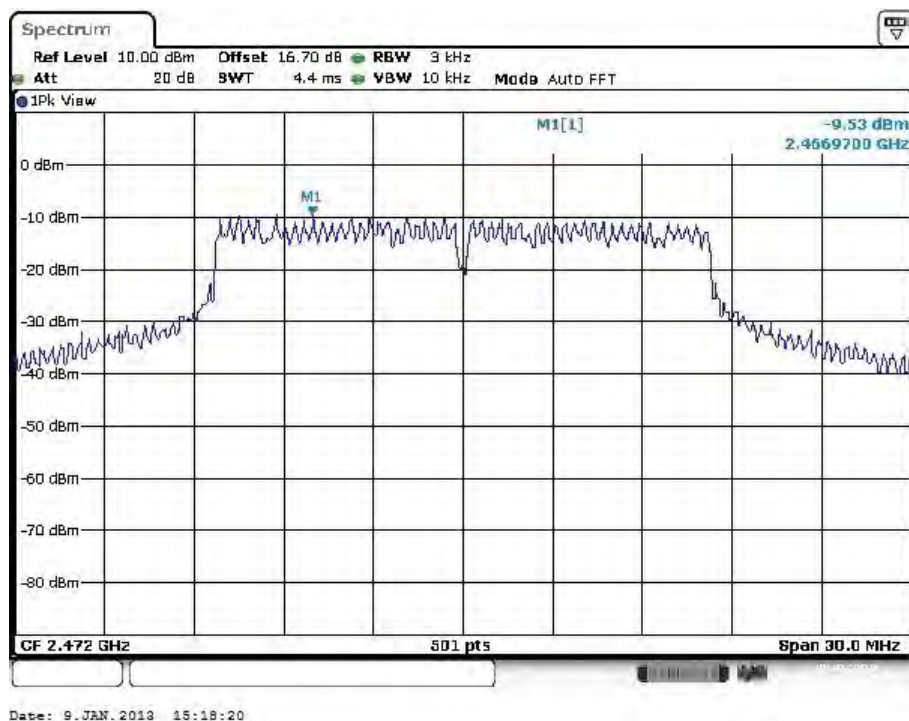

Plot C



Test Report No.:


**12121201.fcc01**

Page 73 of 263

Operation mode: HT4-20 MHz, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-10.87	8	Pass	A
2437	-9.50	8	Pass	B
2462	-10.87	8	Pass	C

Plot A

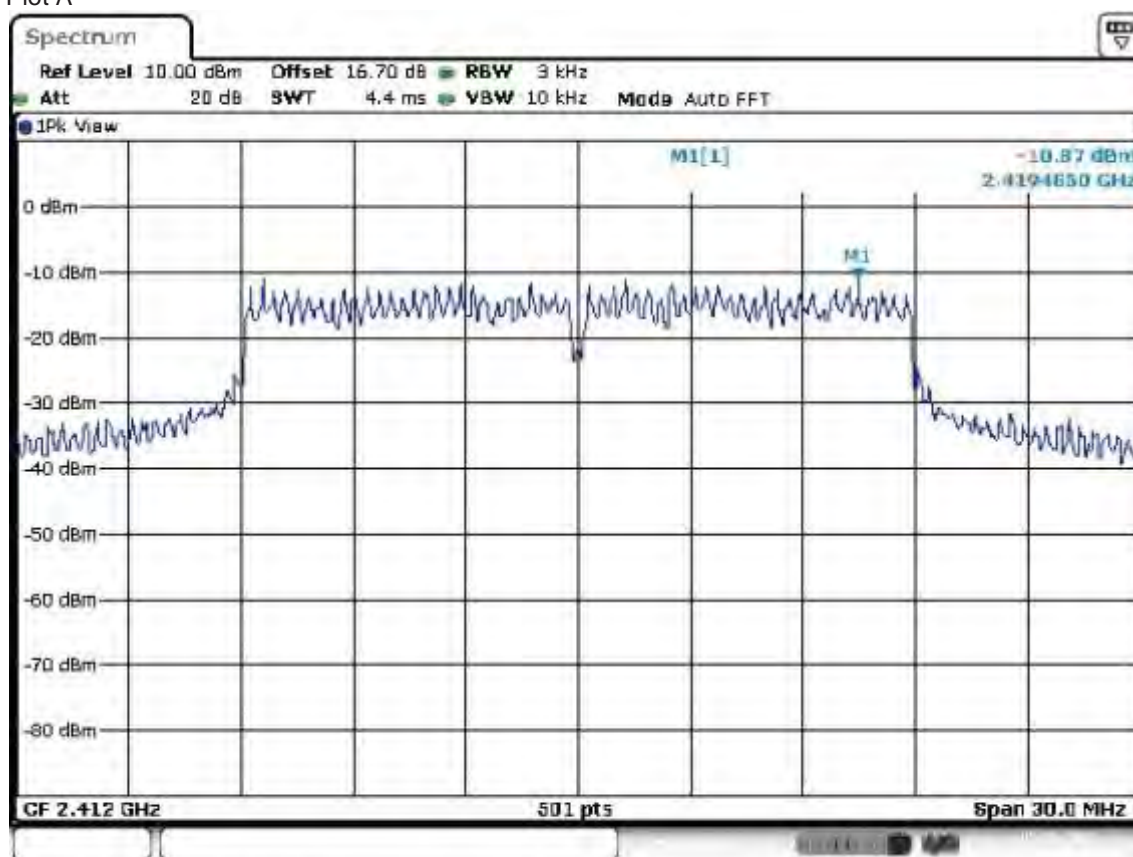


Date: 9.JAN.2013 14:09:22

Test Report No.:


**12121201.fcc01**

Page 74 of 263

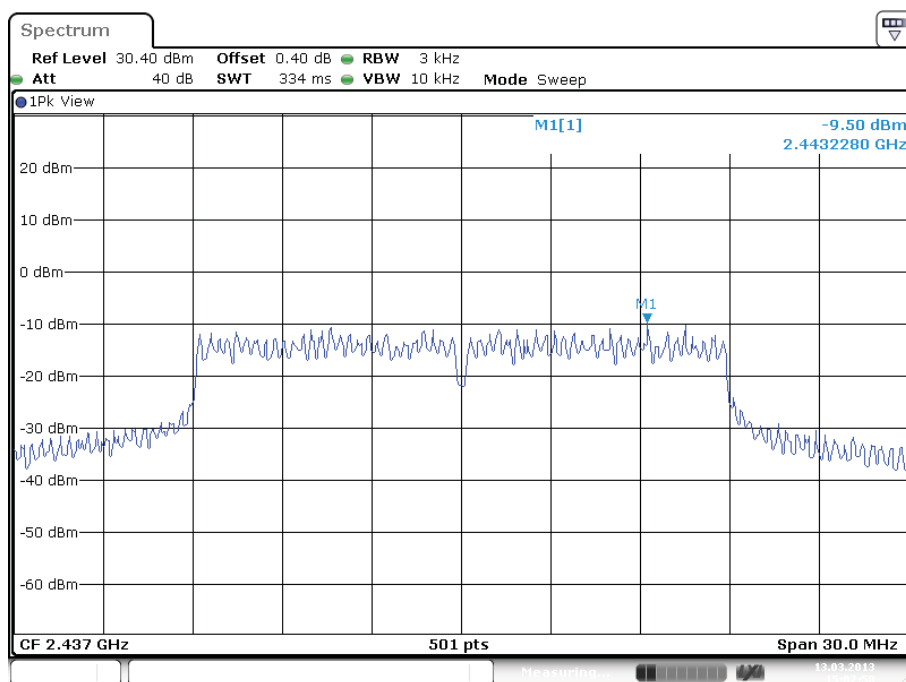

Date: 13.MAR.2013 15:07:51

Plot B

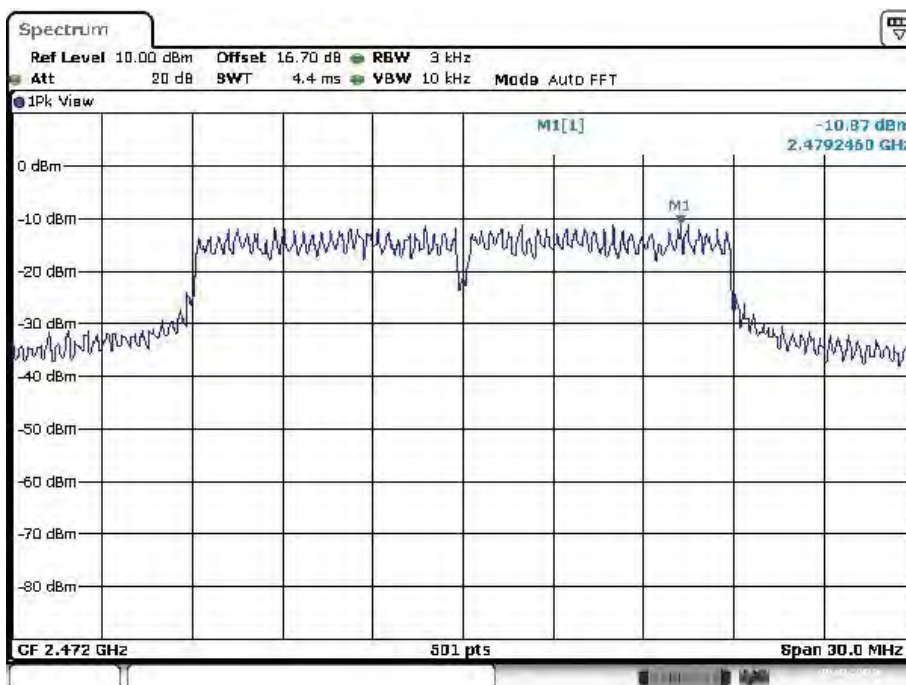

Date: 9.JAN.2013 15:20:59

Plot C

Test Report No.:


**12121201.fcc01**

Page 75 of 263

Operation mode: HT4-20 MHz, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-9.78	8	Pass	A
2437	-9.28	8	Pass	B
2462	-9.34	8	Pass	C

Plot A

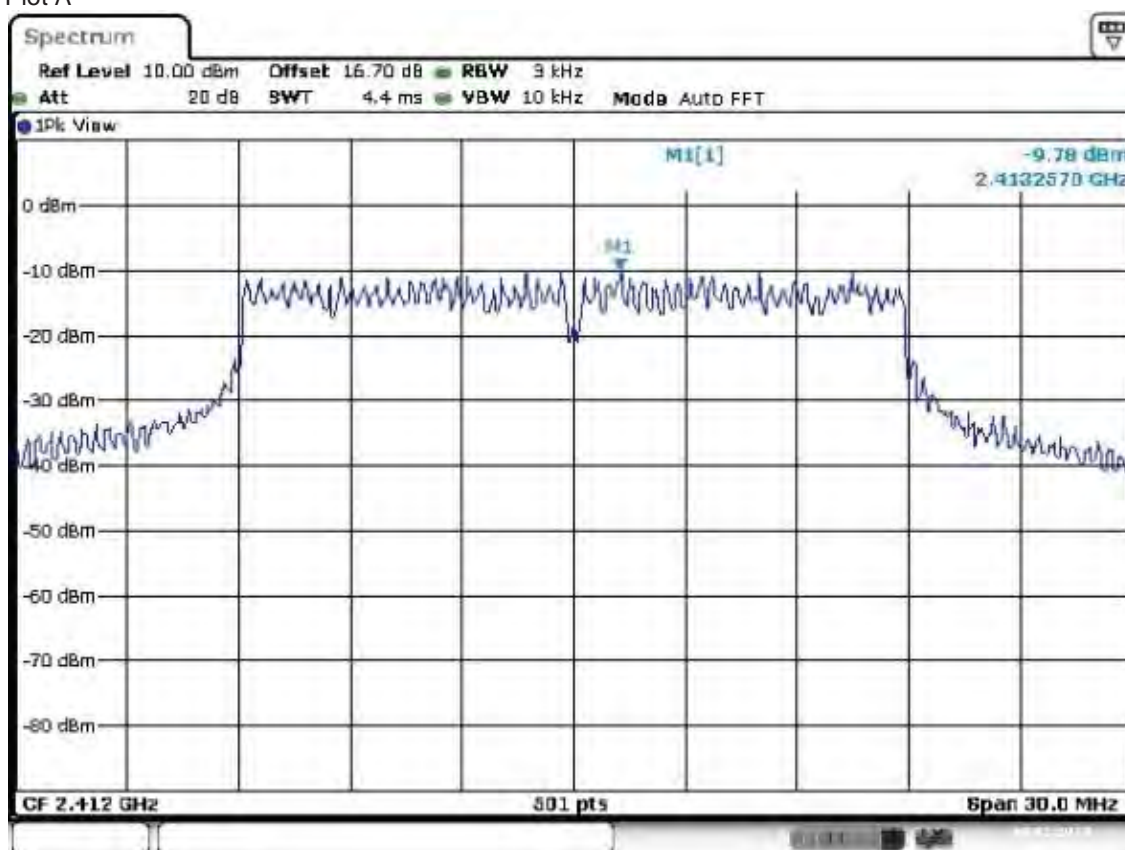


Date: 9. JAN. 2019 14:10:45

Test Report No.:


**12121201.fcc01**

Page 76 of 263

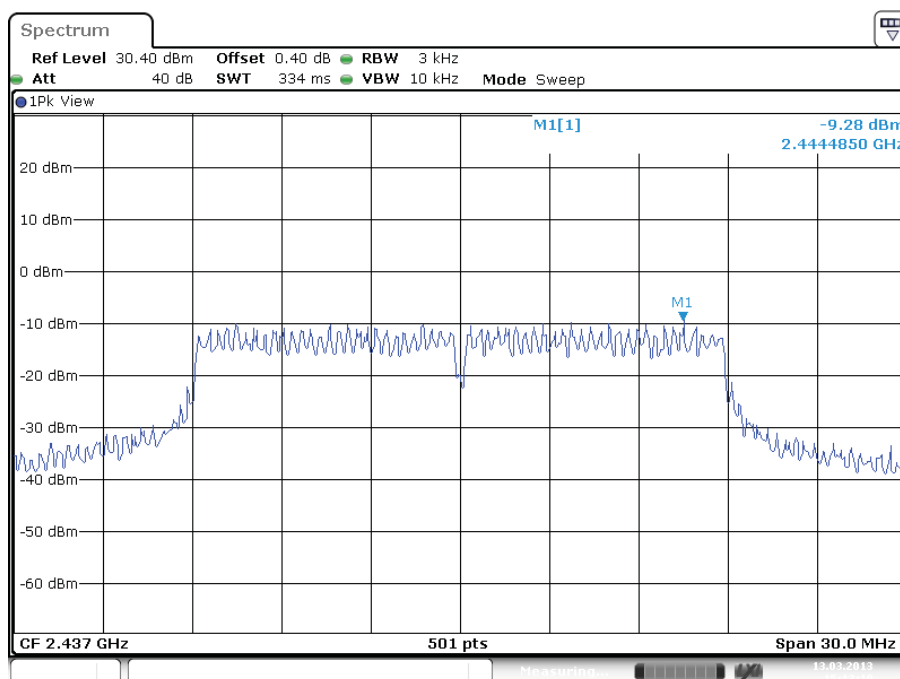

Date: 13.MAR.2013 15:13:10

Plot B

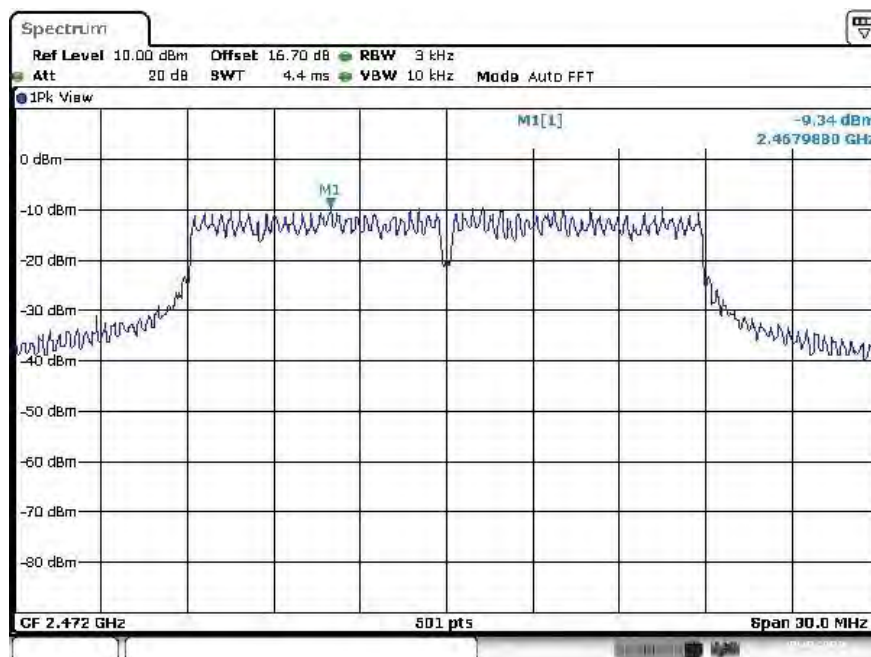

Date: 9.JAN.2013 15:23:02

Plot C


Test Report No.:

**12121201.fcc01**

Page 77 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2412	-15.96	8	Pass	A
2437	-14.99	8	Pass	B
2462	-16.53	8	Pass	C

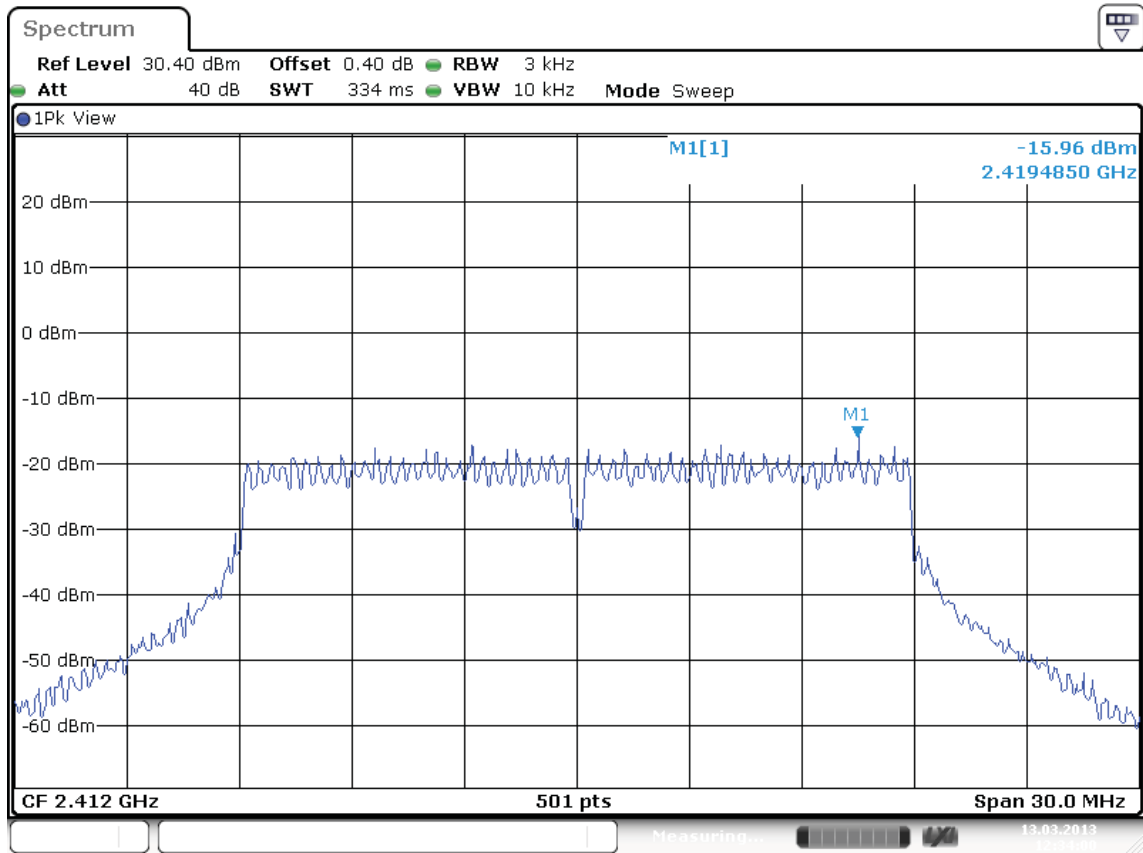


Date: 13.MAR.2013 12:34:00

Plot A


Test Report No.:

**12121201.fcc01**

Page 78 of 263

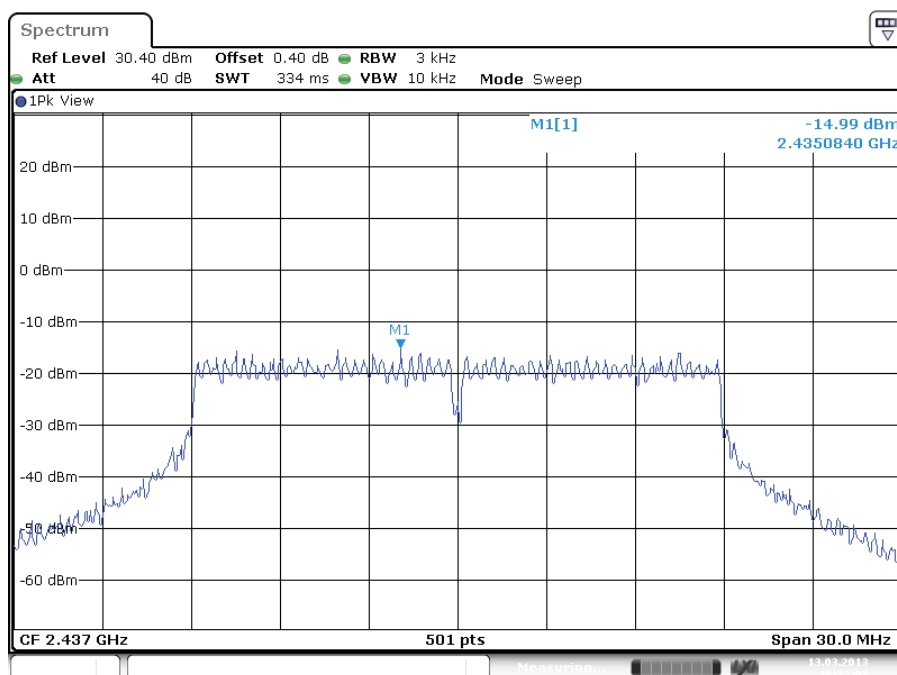

Plot B

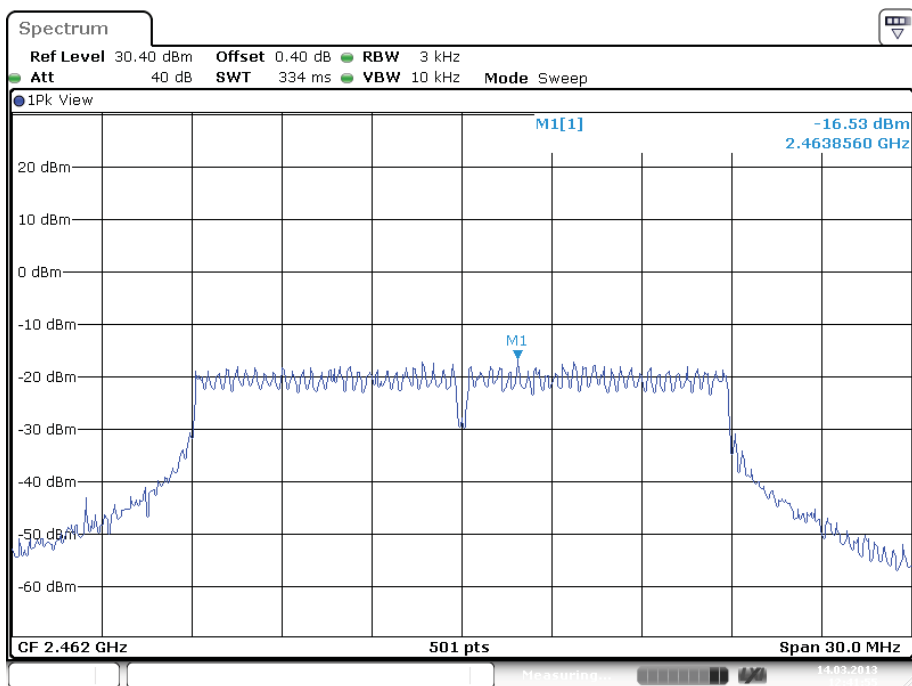

Plot C


Test Report No.:

**12121201.fcc01**

Page 79 of 263

Operation mode: HT4-40 MHz wide, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2422	-17.58	8	Pass	A
2437	-14.00	8	Pass	B
2452	-14.68	8	Pass	C

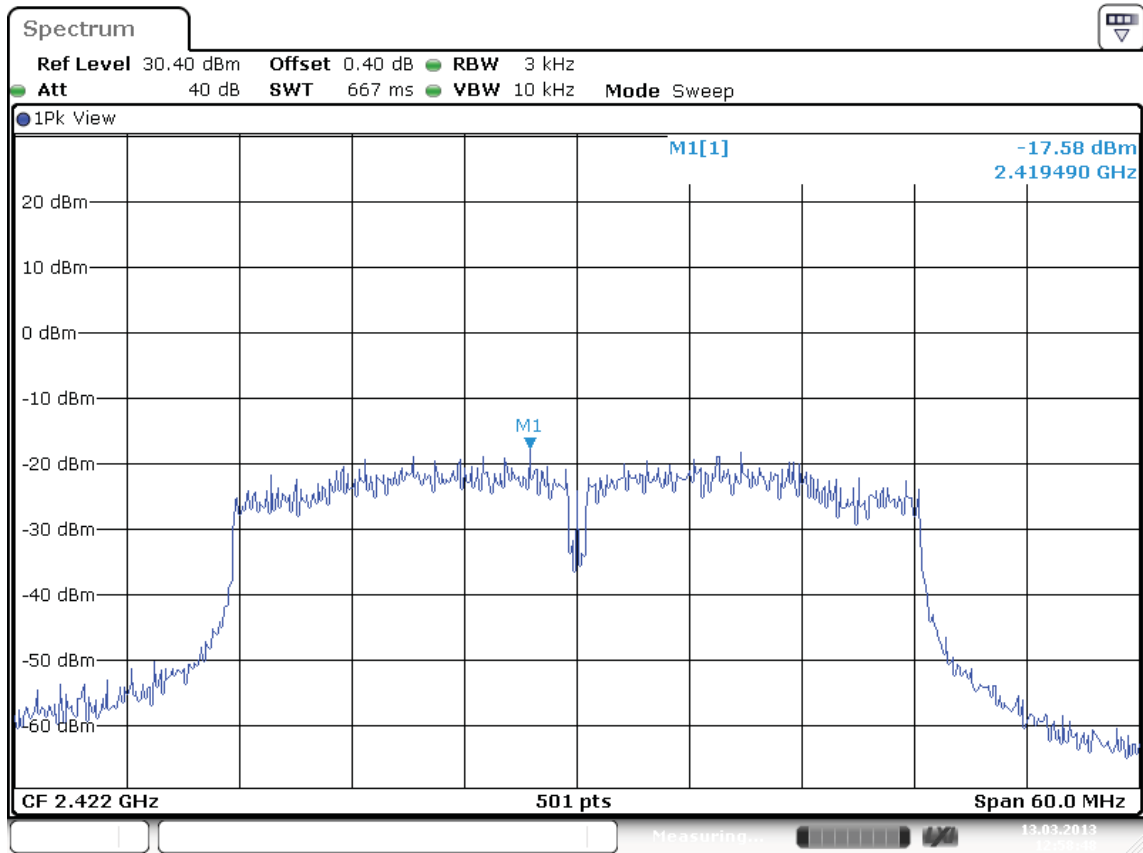


Date: 13.MAR.2013 12:58:49

Plot A

Test Report No.:


**12121201.fcc01**

Page 80 of 263

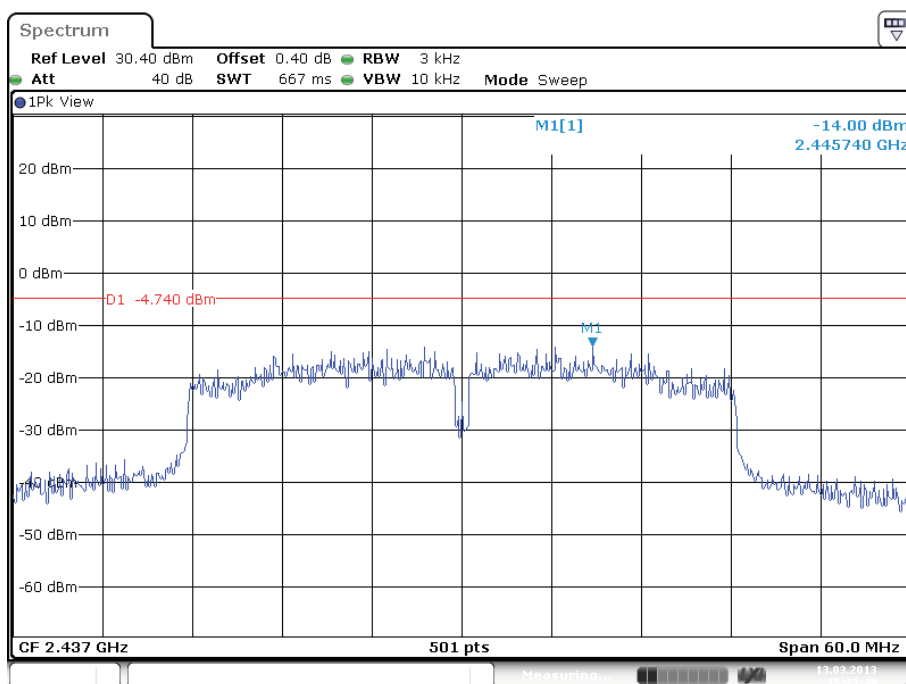

Date: 13.MAR.2013 15:23:49

Plot B

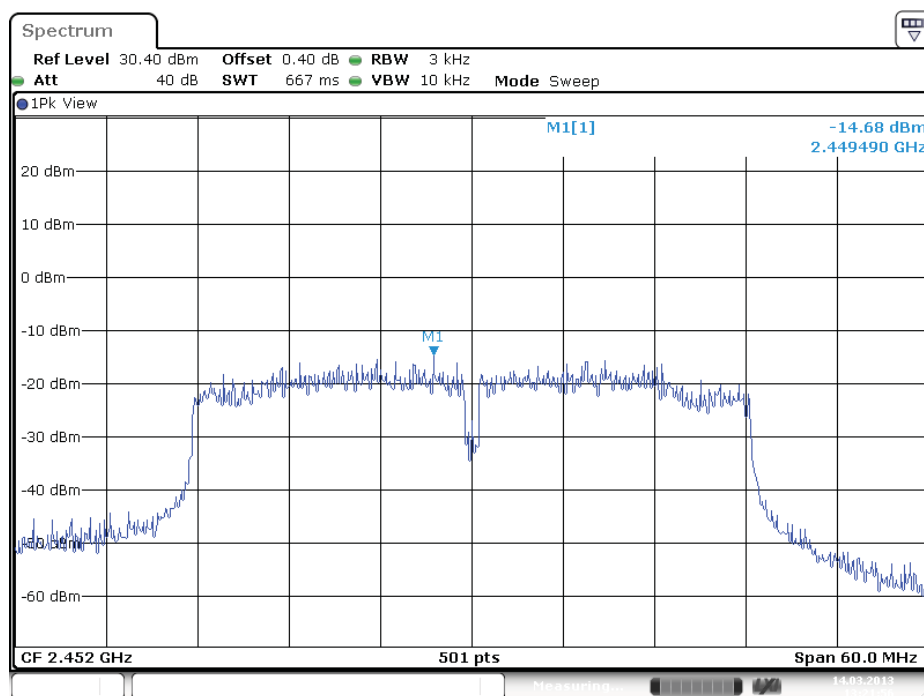

Date: 14.MAR.2013 13:21:56

Plot C




Test Report No.:

**12121201.fcc01**

Page 81 of 263

Operation mode: HT4-40 MHz wide, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2422	-16.10	8	Pass	A
2437	-10.91	8	Pass	B
2452	-13.95	8	Pass	C

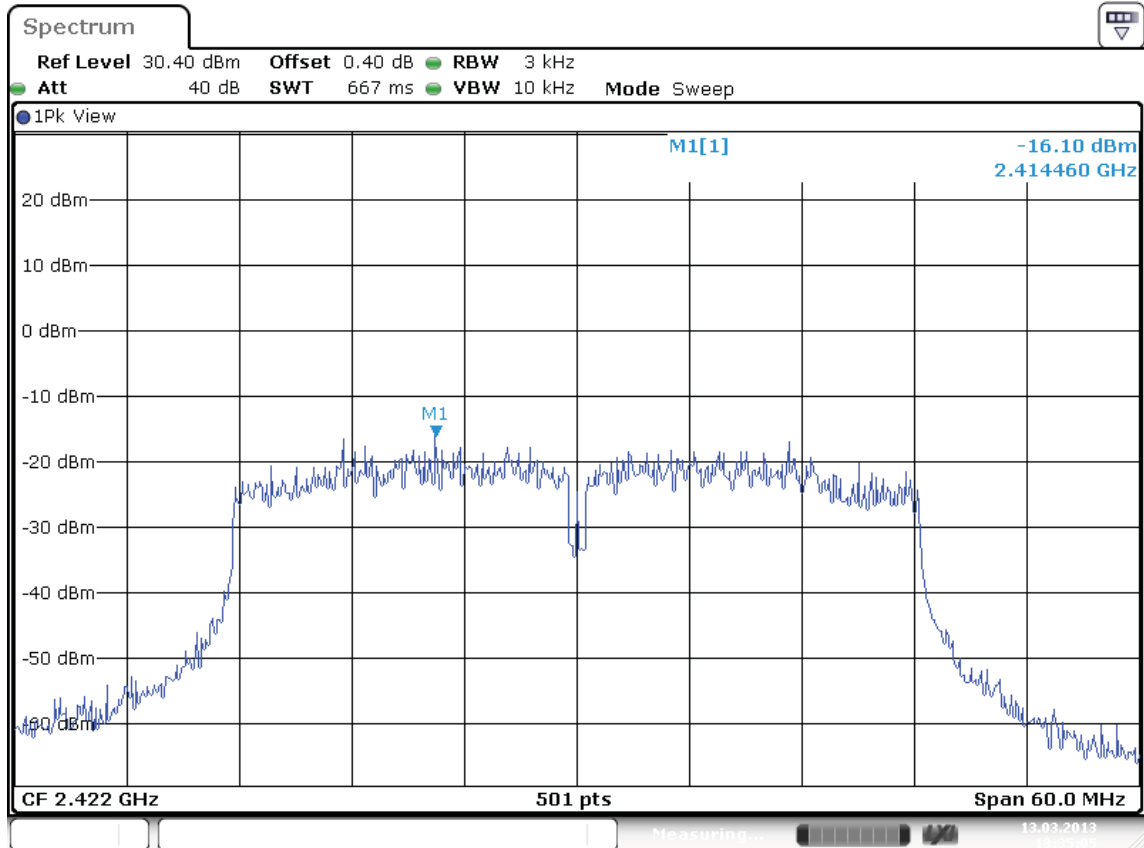


Date: 13.MAR.2013 13:35:05

Plot A


Test Report No.:

**12121201.fcc01**

Page 82 of 263

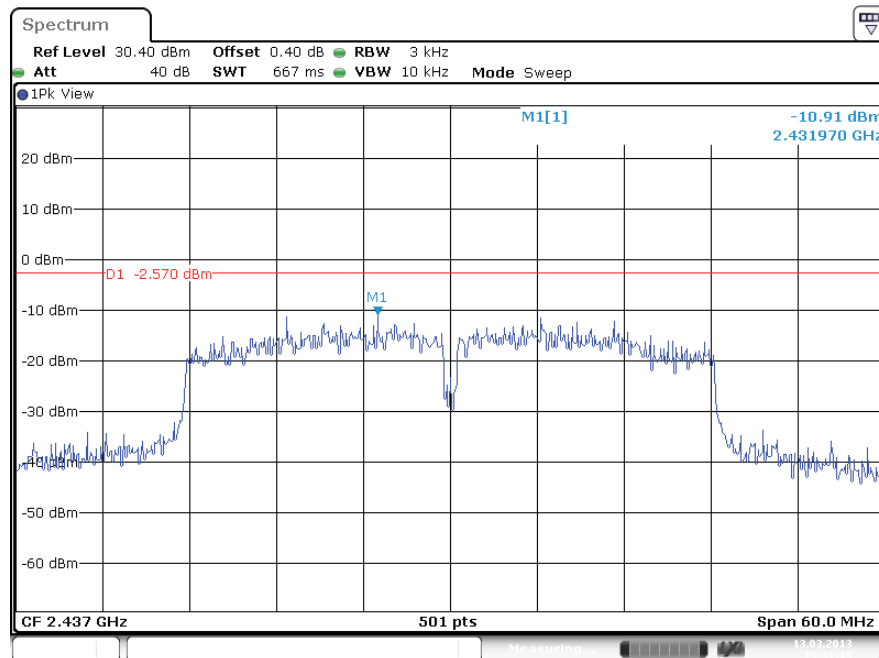

Plot B

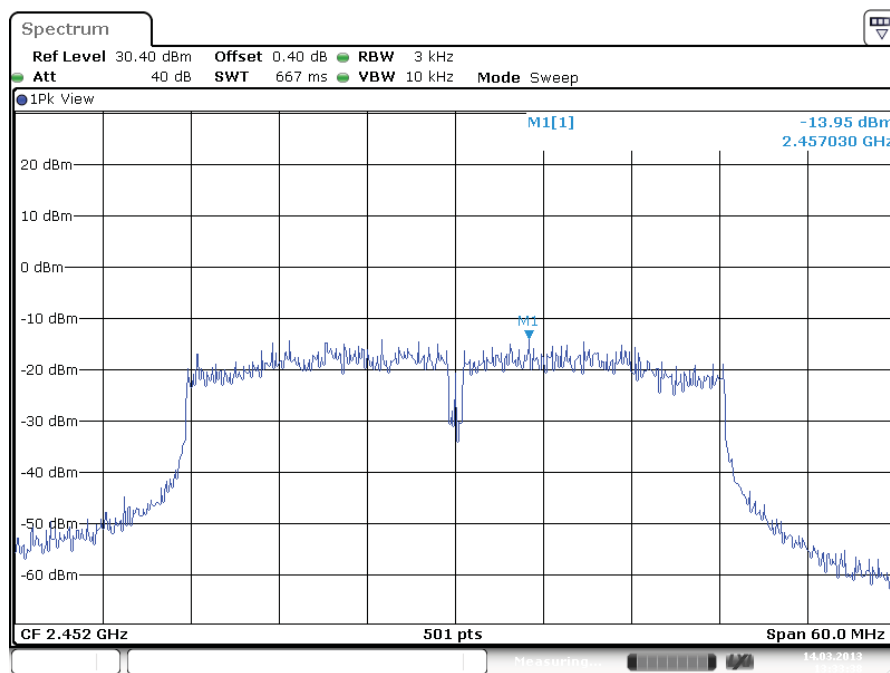

Plot C


Test Report No.:

**12121201.fcc01**

Page 83 of 263

Operation mode: HT8-40 MHz wide, Antenna 1+2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2422	-22.67	8	Pass	A
2437	-18.41	8	Pass	B
2452	-18.68	8	Pass	C

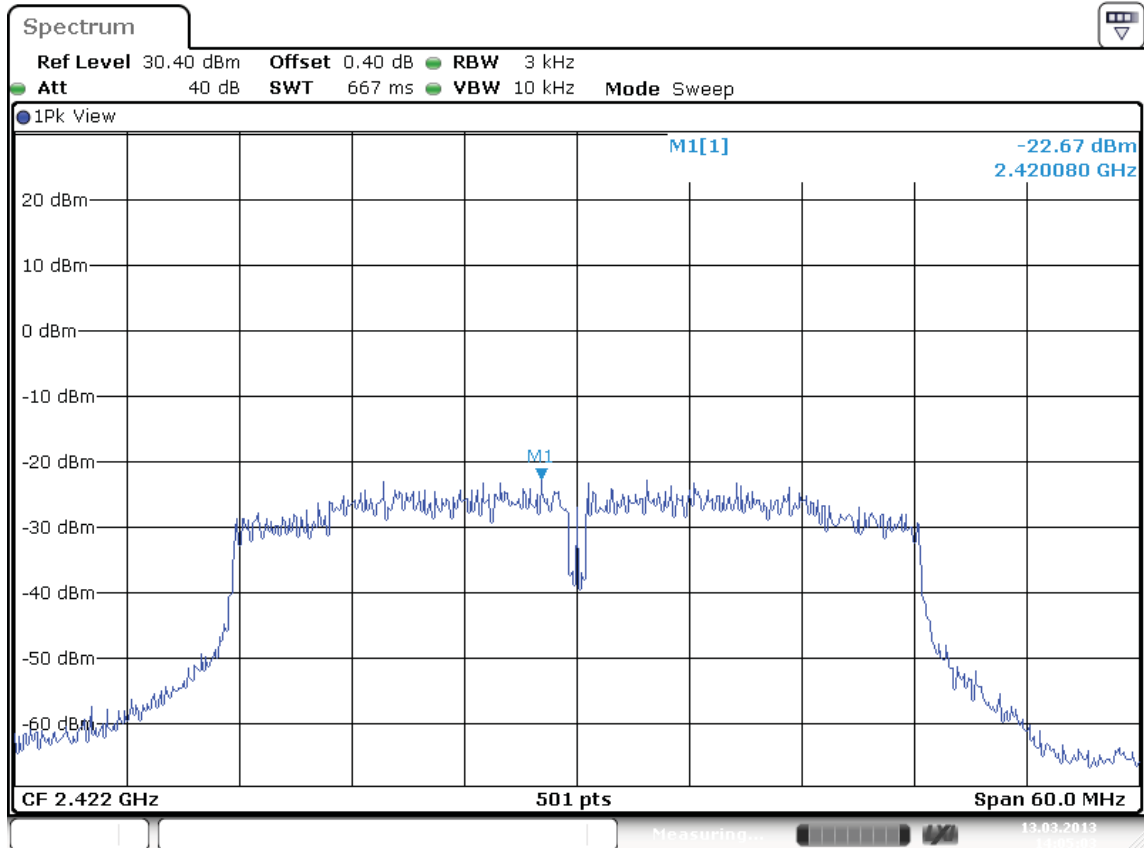


Date: 13.MAR.2013 14:05:03

Plot A


Test Report No.:

**12121201.fcc01**

Page 84 of 263

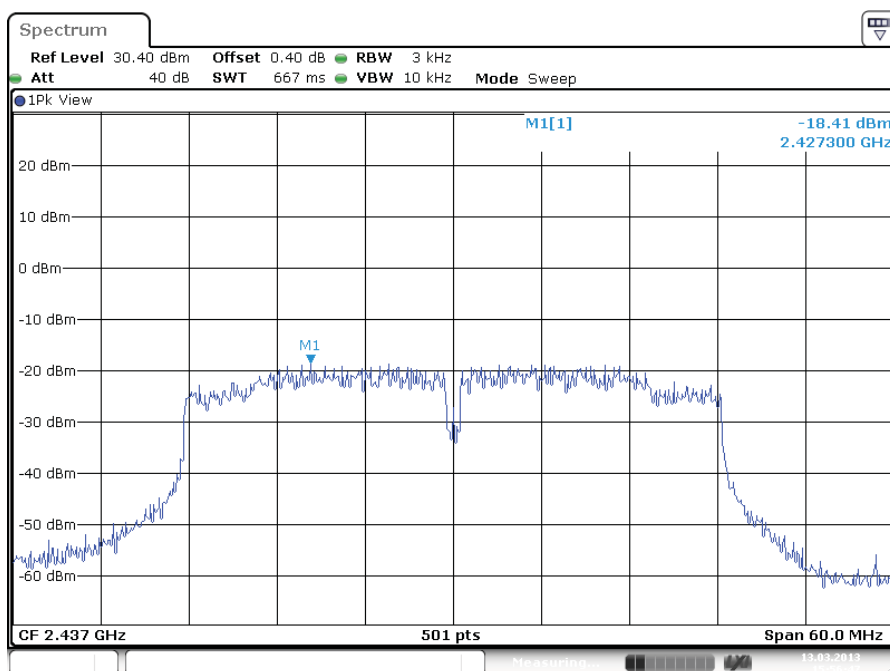

Plot B

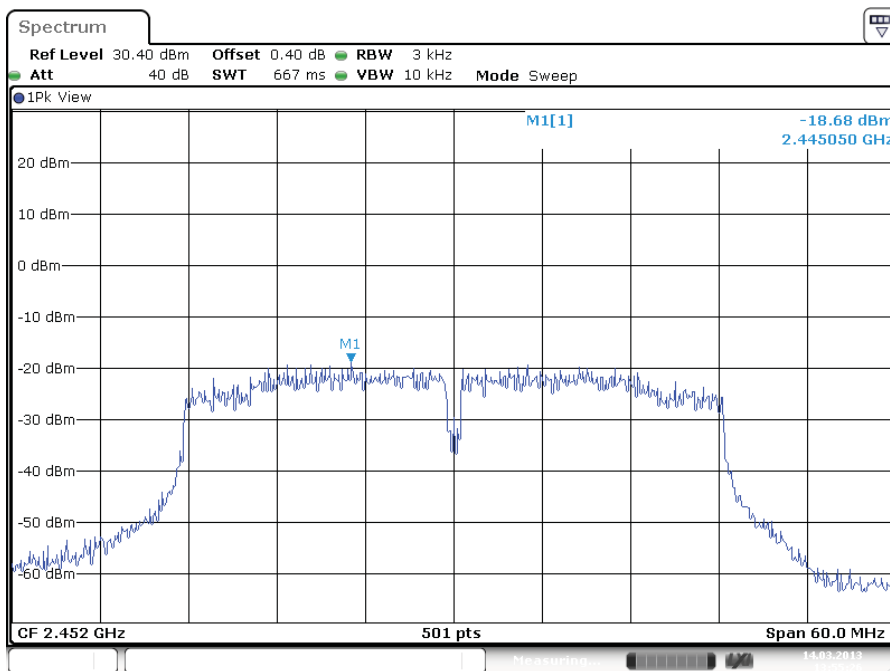

Plot C

Test Report No.:

**12121201.fcc01**

Page 85 of 263

## **5.2.4 Band Edge Conducted Emissions**

**RESULT: Pass**

Date of testing:

2013-01-12

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

Test Report No.:


**12121201.fcc01**

Page 86 of 263

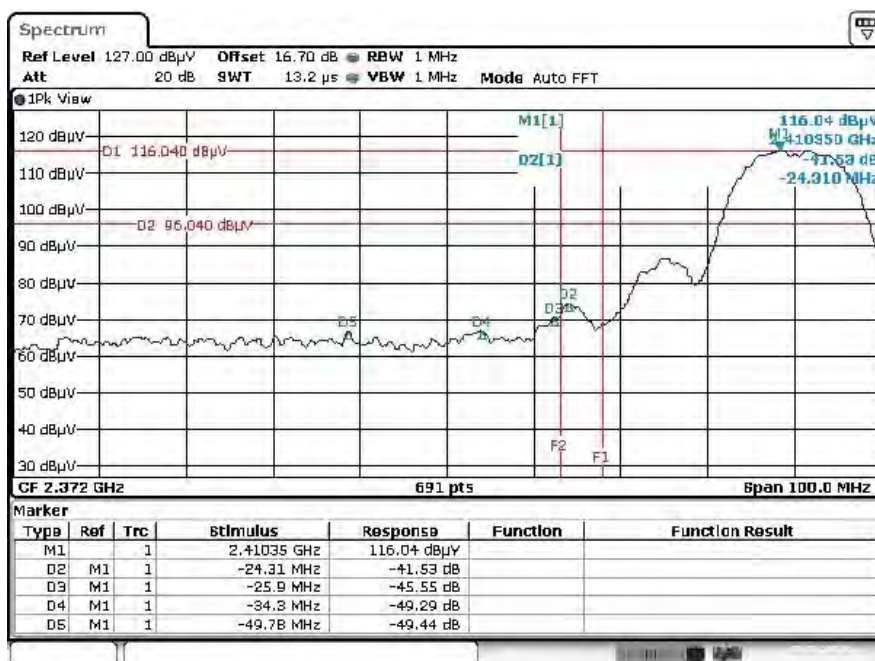

Date: 10.JAN.2013 11:17:33

Band Edge Conducted Emission, Spectral Diagram, 2412 MHz- 1Mb DSSS- Antenna 1

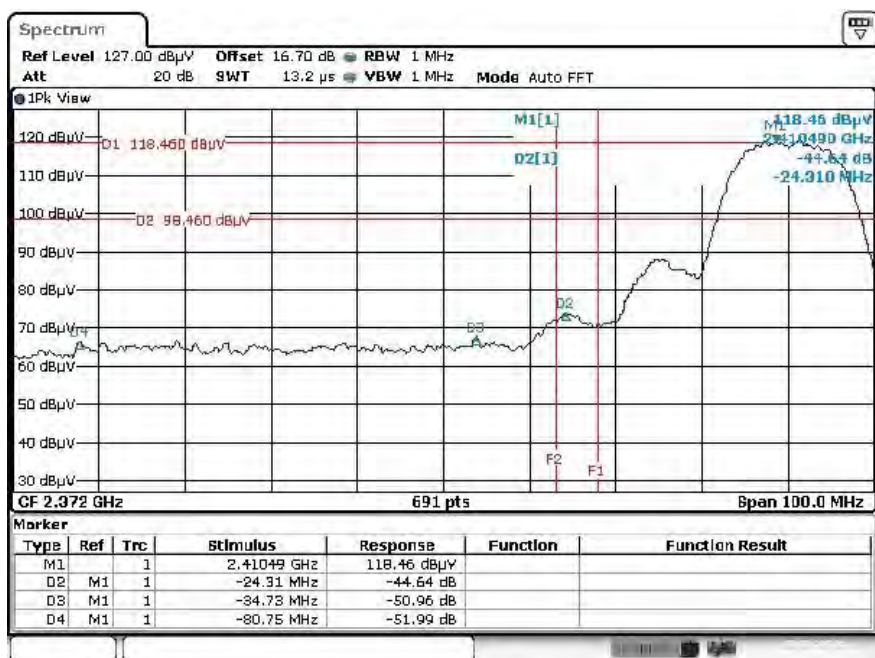


Date: 10.JAN.2013 10:01:33

Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-1Mb DSSS- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 87 of 263

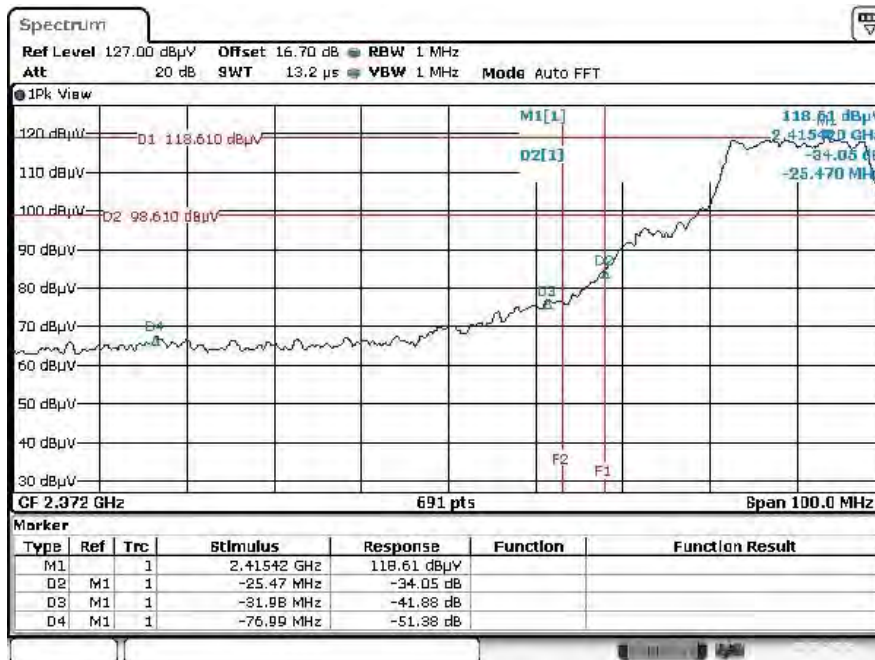

Date: 10.JAN.2013 10:03:42

Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-6Mb OFDM- Antenna 2

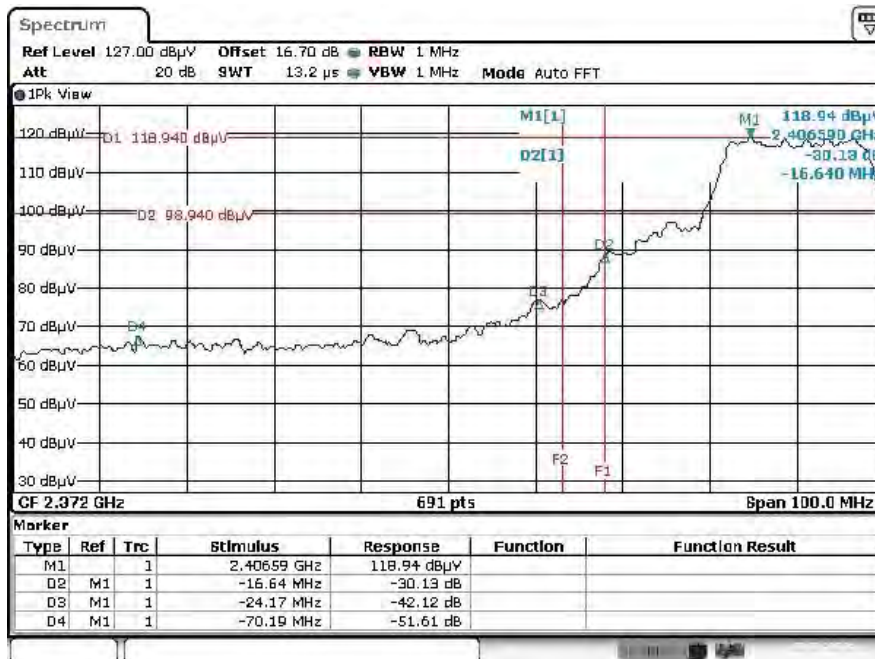

Date: 10.JAN.2013 10:09:44


Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-6Mb OFDM- Antenna 1



Test Report No.:


**12121201.fcc01**

Page 88 of 263

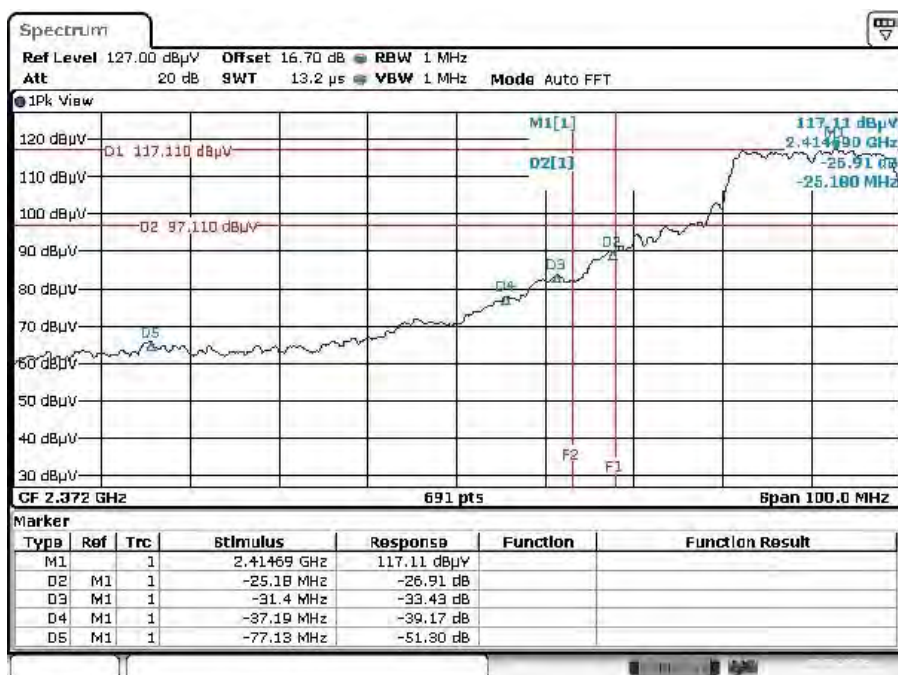

Date: 10.JAN.2013 10:16:28

Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-HT4-20MHz- Antenna 1

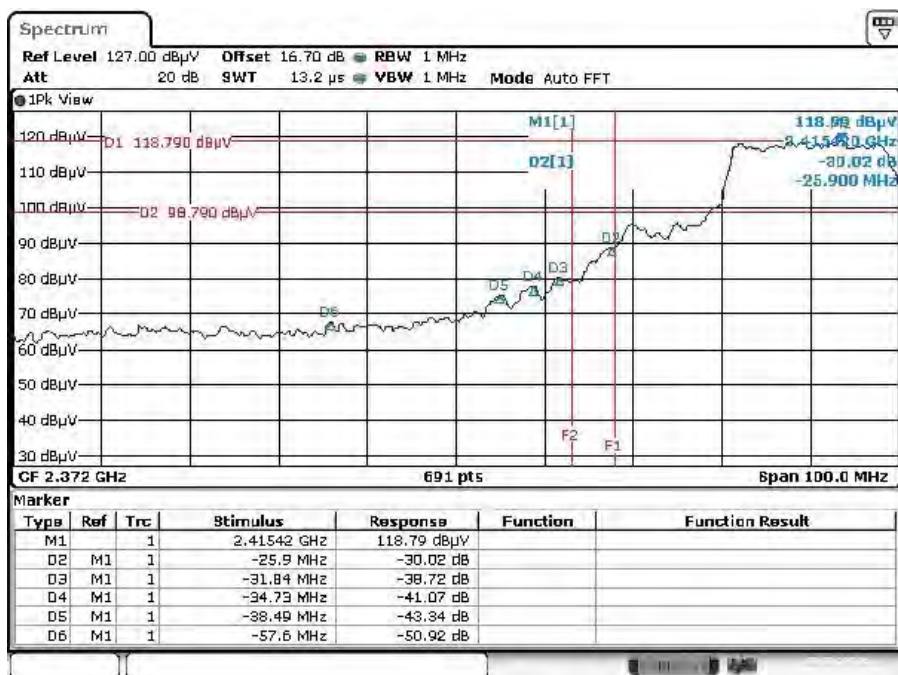

Date: 10.JAN.2013 10:12:19


Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-HT4-20MHz- Antenna 2



Test Report No.:


**12121201.fcc01**

Page 89 of 263

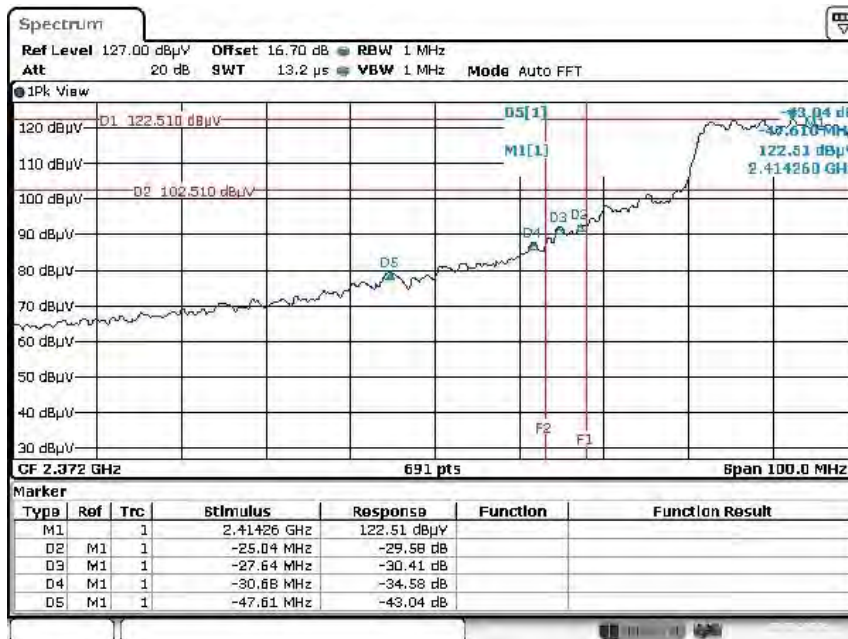

Date: 10.JAN.2013 11:21:44

Band Edge Conducted Emission, Spectral Diagram, 2412 MHz-HT8-20MHz- Antenna 1+2

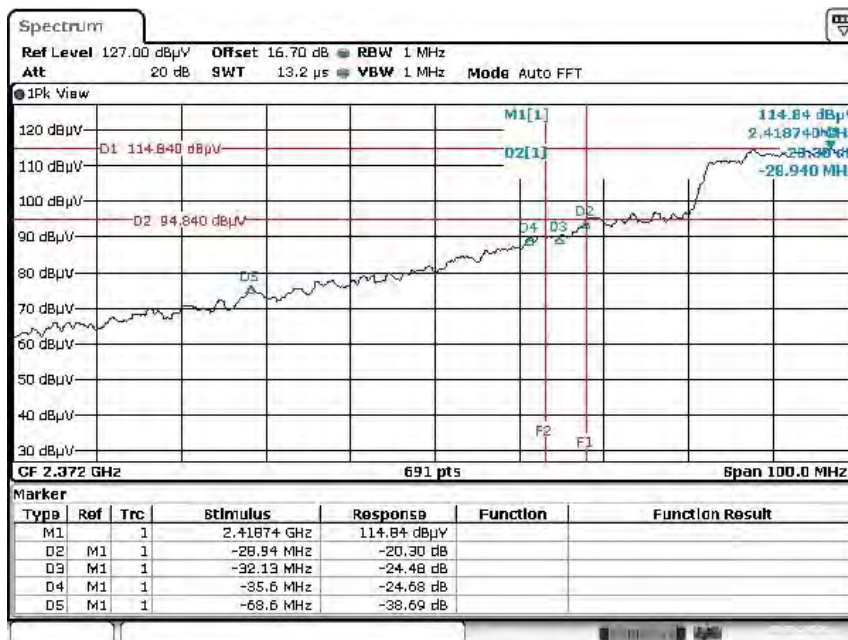


Date: 10.JAN.2013 11:25:59

Band Edge Conducted Emission, Spectral Diagram, 2422 MHz-HT4-40MHz- Antenna 1

Test Report No.:


**12121201.fcc01**

Page 90 of 263

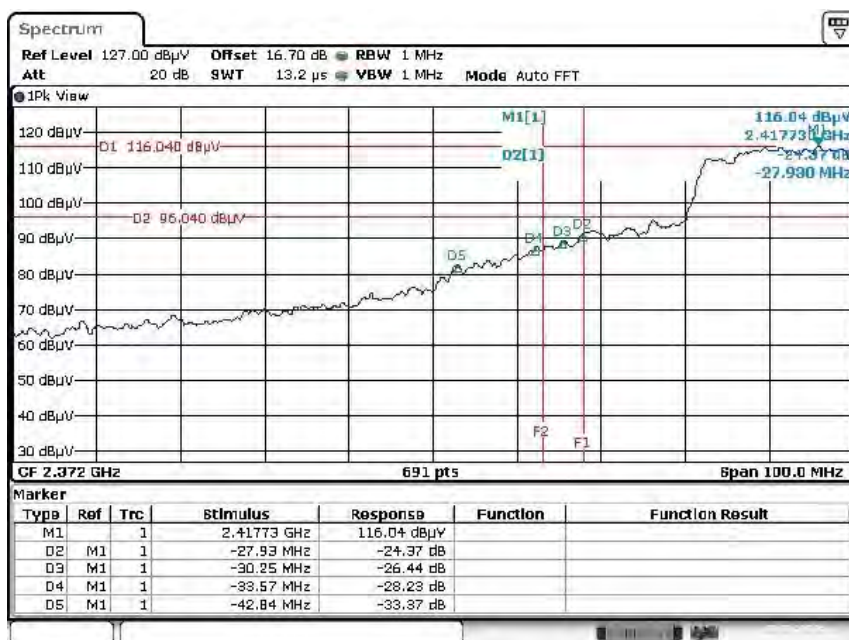

Date: 10. JAN. 2013 11:31:02

Band Edge Conducted Emission, Spectral Diagram, 2422 MHz HT4-40MHz, Antenna 2

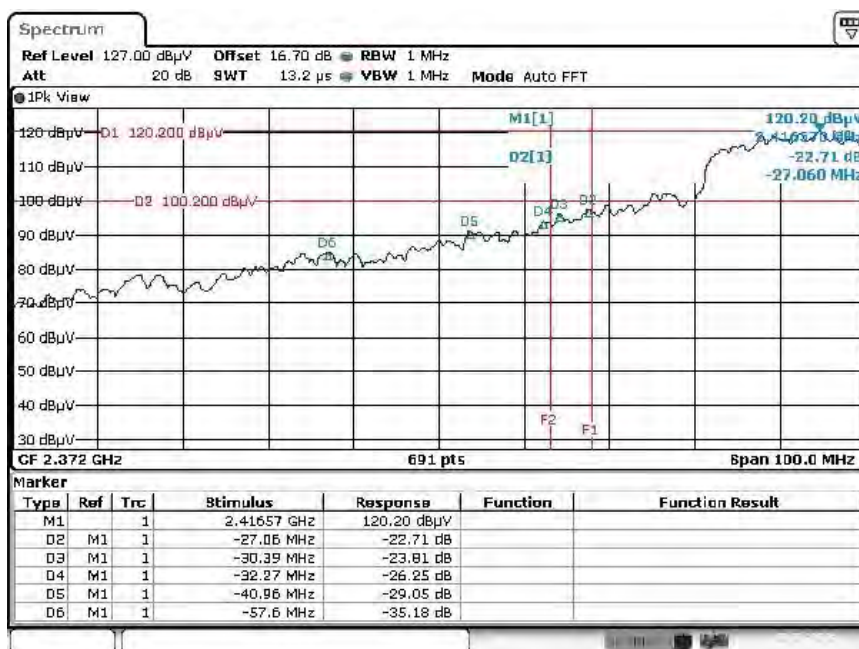


Date: 10. JAN. 2013 11:36:09

Band Edge Conducted Emission, Spectral Diagram, 2422 MHz HT8-40MHz, Antenna 1+2

Test Report No.:


**12121201.fcc01**

Page 91 of 263

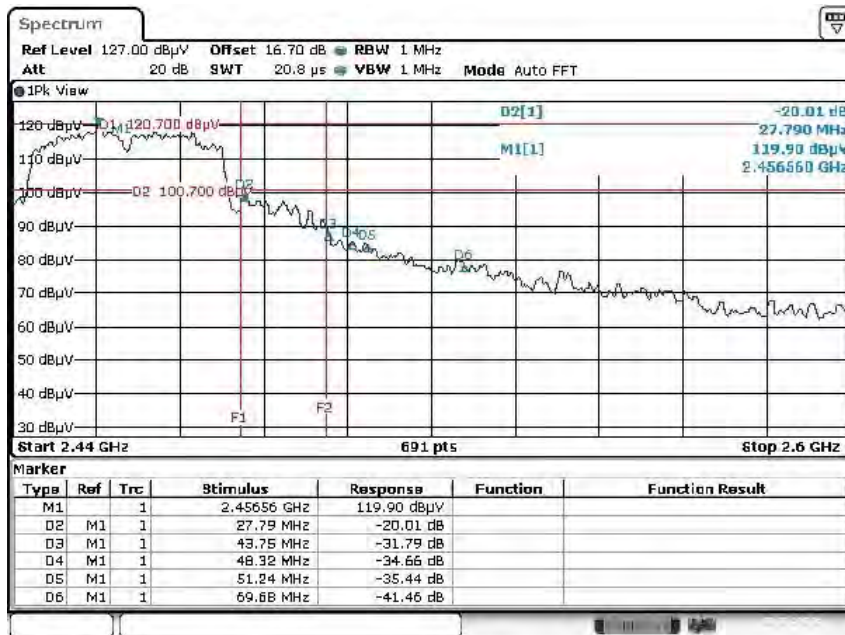

Date: 10. JAN. 2013 12:40:35

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- 1Mb DSSS- Antenna 1

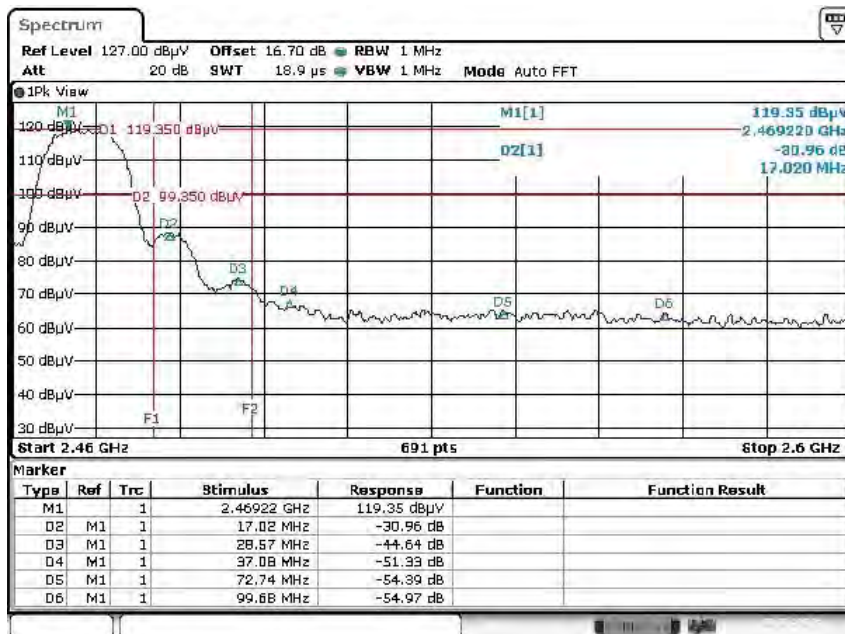

Date: 10. JAN. 2013 11:48:45


Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- 1Mb DSSS- Antenna 2



Test Report No.:


**12121201.fcc01**

Page 92 of 263

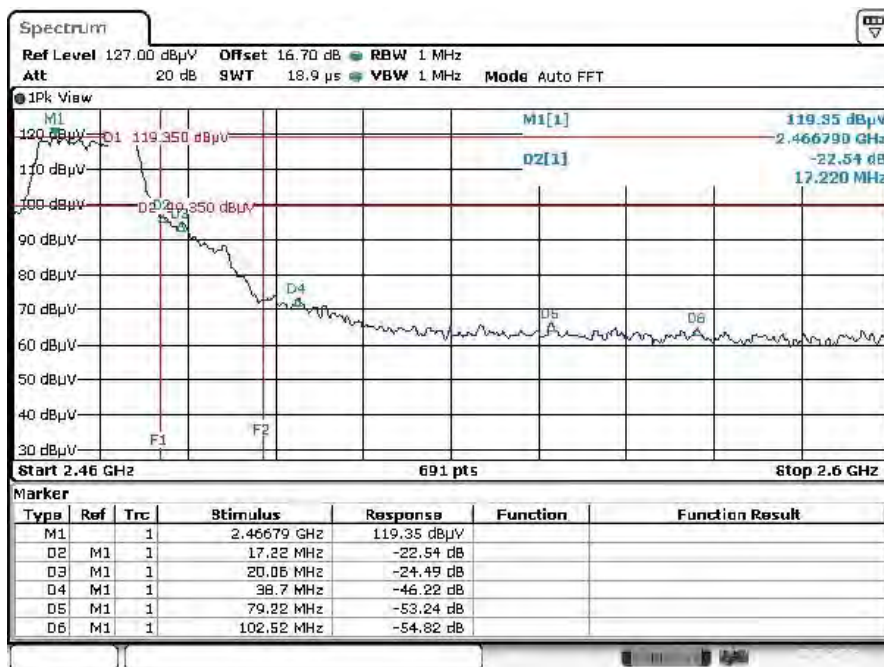

Date: 10.JAN.2013 11:51:07

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- 6Mb OFDM- Antenna 1

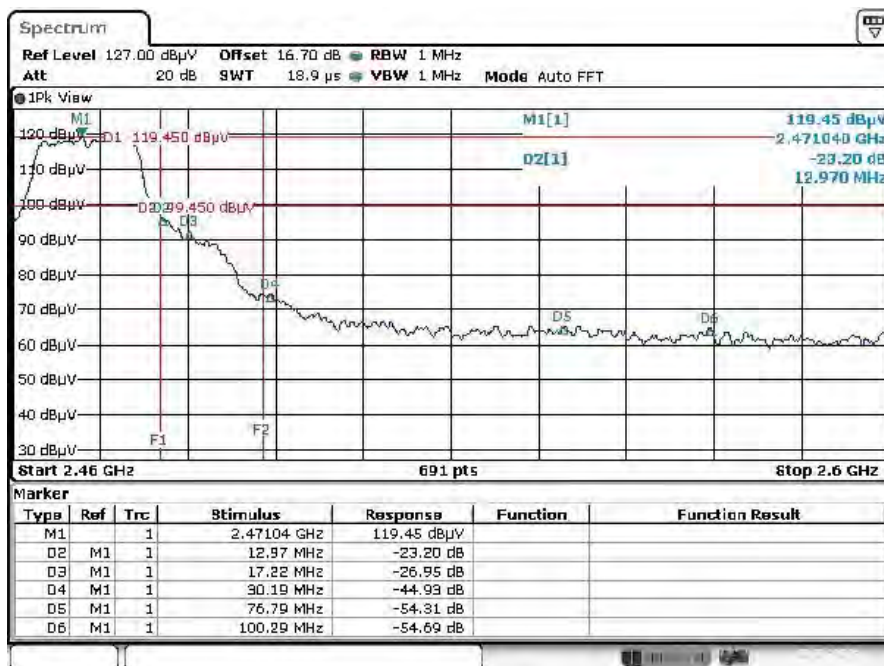


Date: 10.JAN.2013 11:52:55

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- 6Mb OFDM- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 93 of 263

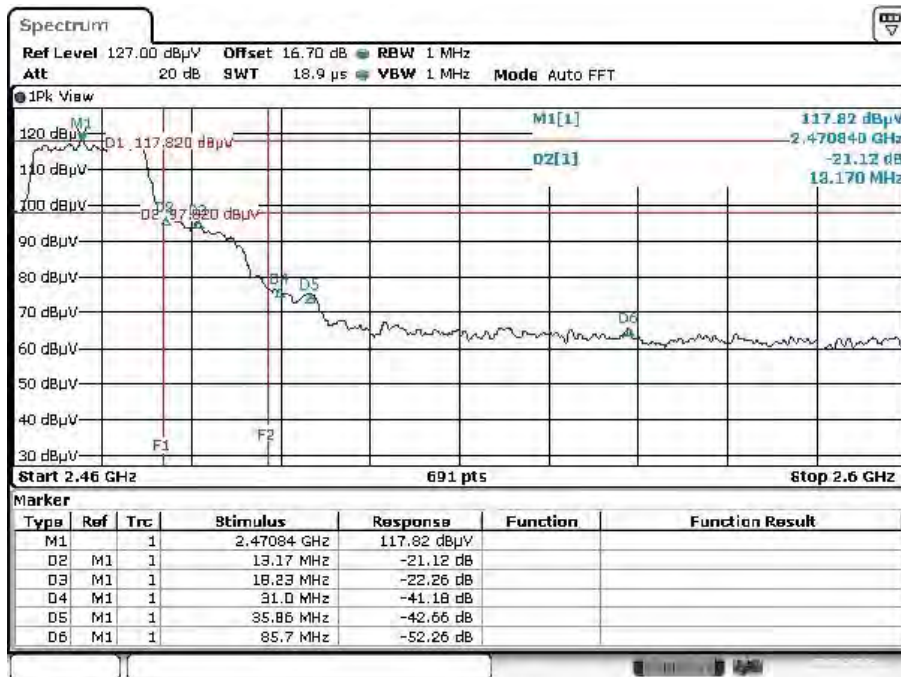

Date: 10.JAN.2013 12:24:45

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- HT4-20MHz- Antenna 1

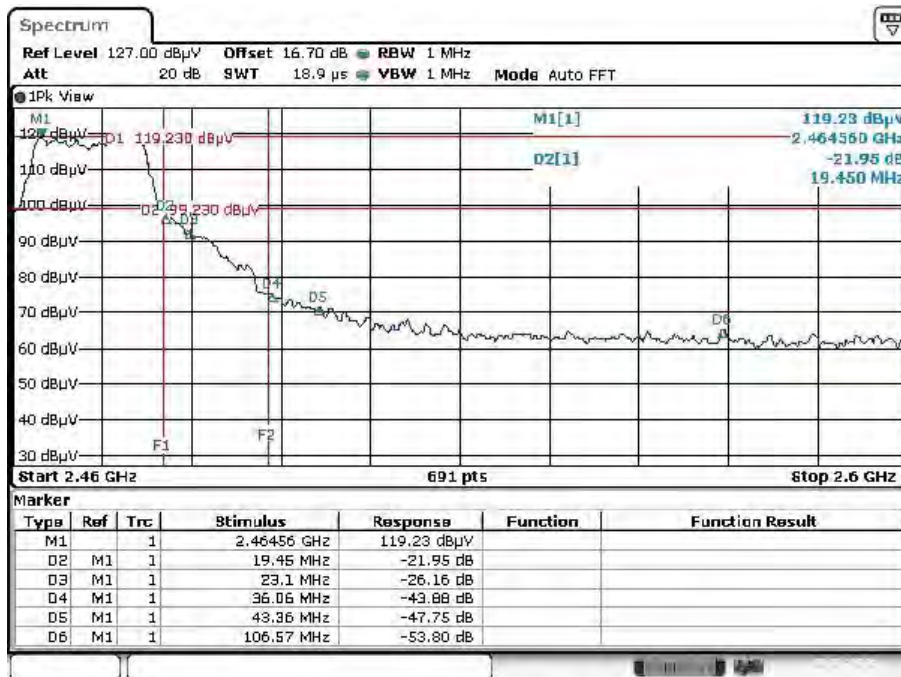


Date: 10.JAN.2013 12:26:41

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- HT4-20MHz- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 94 of 263

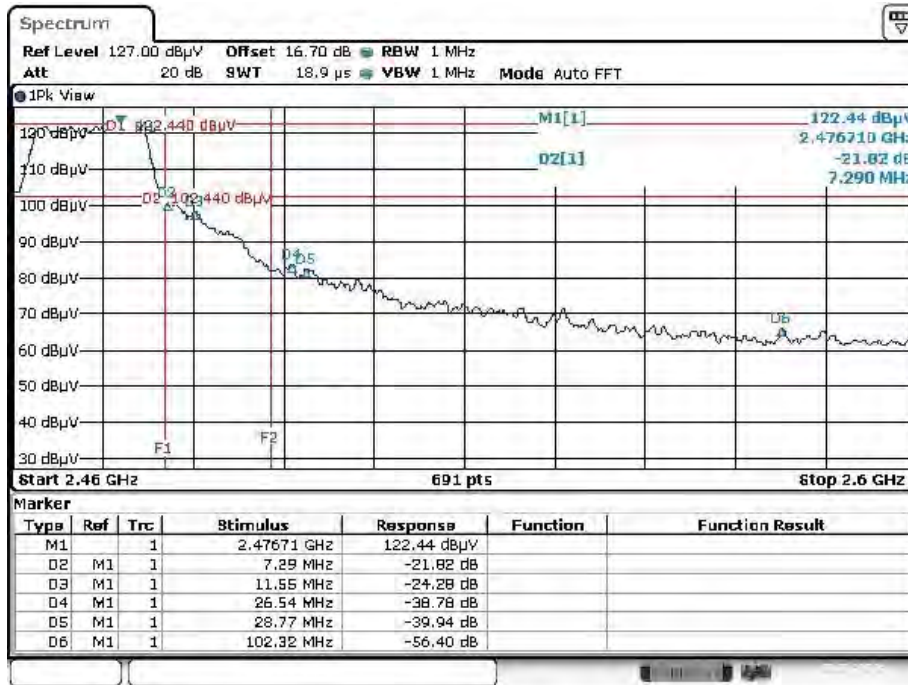

Date: 10. JAN. 2013 12:28:33

Band Edge Conducted Emission, Spectral Diagram, 2462 MHz- HT8-20MHz- Antenna 1+2

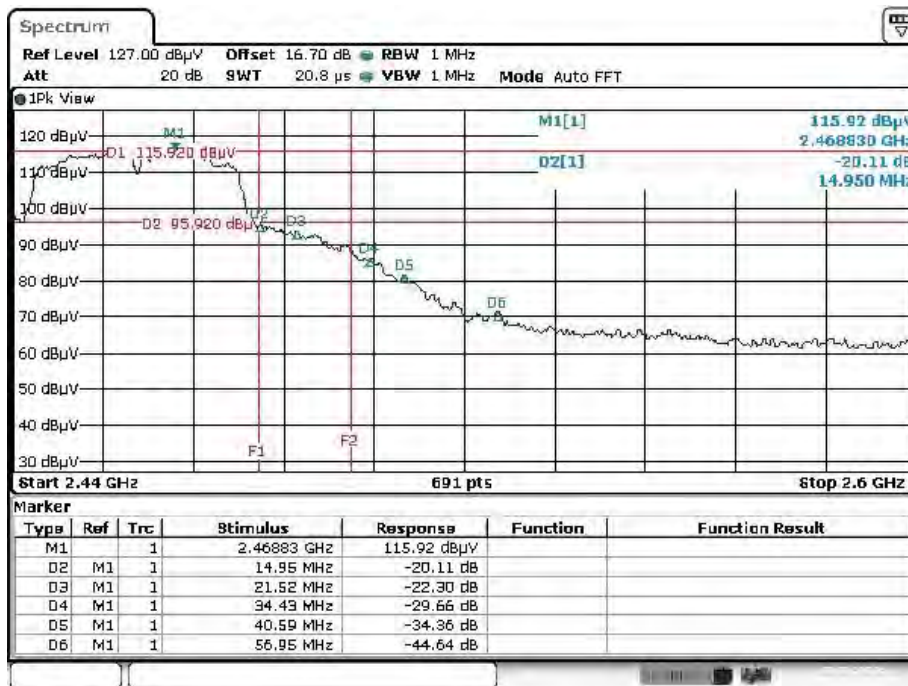

Date: 10. JAN. 2013 12:32:03


Band Edge Conducted Emission, Spectral Diagram, 2452 MHz- HT4-40MHz- Antenna 1




Test Report No.:

**12121201.fcc01**

Page 95 of 263

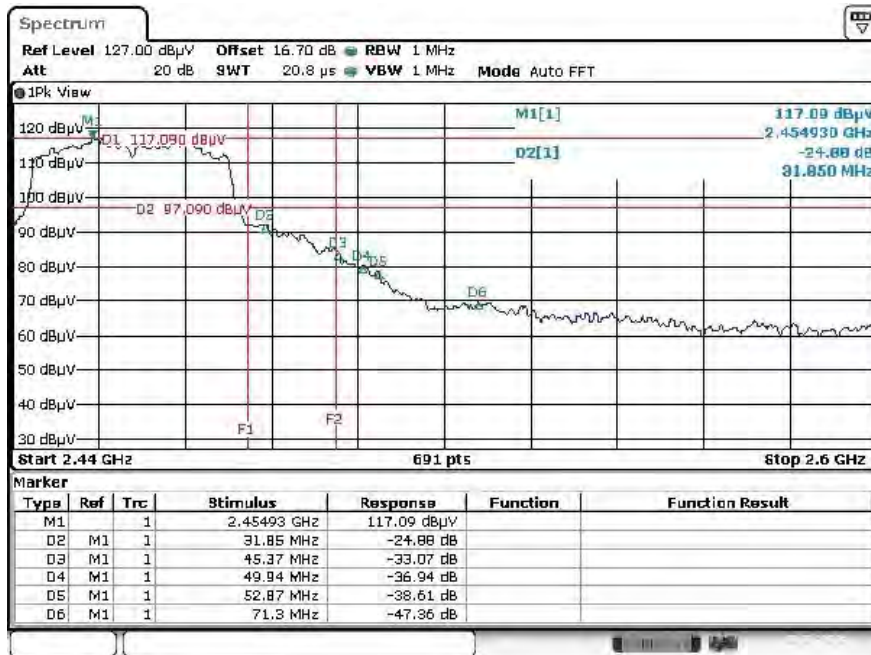

Band Edge Conducted Emission, Spectral Diagram, 2452 MHz- HT4-40MHz- Antenna 2

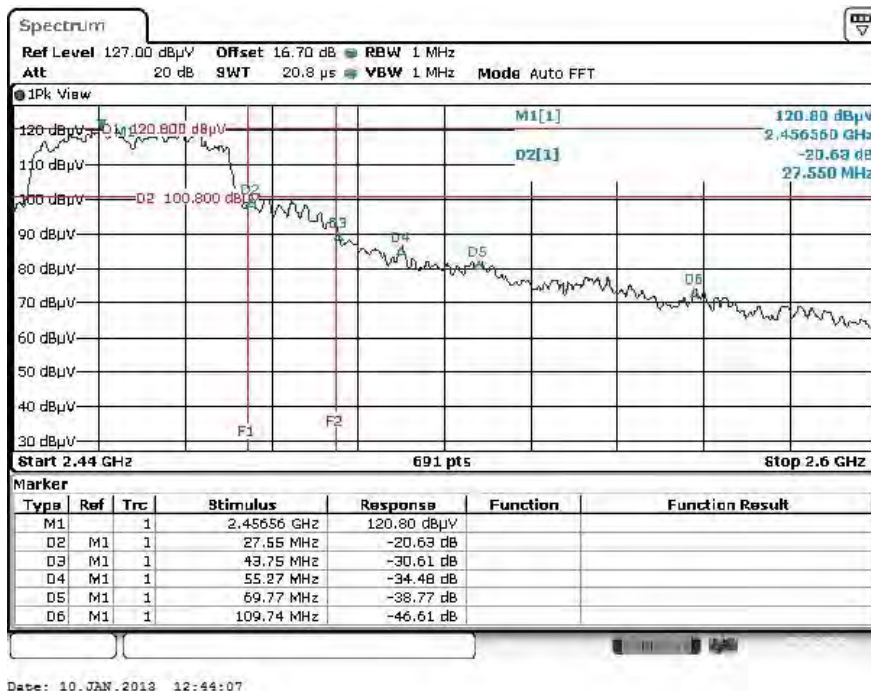

Band Edge Conducted Emission, Spectral Diagram, 2452 MHz- HT8-40MHz- Antenna 1+2

Test Report No.:

**12121201.fcc01**

Page 96 of 263

## 5.2.5 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2012-01-10

Frequency range: 30MHz - 25GHz

#### Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

#### Test procedure:

ANSI C63.10-2009. ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.



Test Report No.:

**12121201.fcc01**

Page 97 of 263

**Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations**

Freq. [MHz]	Antenna Orientation	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]
66.86	Vertical	15.1	5.4	20.5	40.0	19.5
111.48	Vertical	13.6	11.4	25.0	43.5	18.5
253.10	Vertical	13.7	14.2	27.9	46.0	18.1
774.96	Vertical	14.7	24.8	39.5	46.0	6.5
844.80	Vertical	15.3	26.1	41.4	46.0	4.6
922.40	Vertical	15.4	27.6	43.0	46.0	3.0

Note:

- Level QP = Reading QP + Factor
- Tested in modes as described in section 4.2, highest values noted.

Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating frequency or mode (transmit versus receive mode).

- Quasi Peak detector used with a bandwidth of 120 kHz

Test Report No.:

**12121201.fcc01**

Page 98 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz - 1 Mb DSSS – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6933	Vertical	Av	48.74	54	5.26
17649	Vertical	Av	49.89	54	4.11
18147	Vertical	Av	50.24	54	3.76
6933	Vertical	Pk	48.74	74	25.26
17649	Vertical	Pk	49.89	74	24.11
18147	Vertical	Pk	50.24	74	23.76

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz - 1 Mb DSSS – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13811	Vertical	Av	48.96	54	5.04
17250	Vertical	Av	50.13	54	3.87
18097	Vertical	Av	51.07	54	2.93
13811	Vertical	Pk	48.96	74	25.04
17250	Vertical	Pk	50.13	74	23.87
18097	Vertical	Pk	51.07	74	22.93

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 99 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz - 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	47.52	54	6.48
17250	Vertical	Av	50.70	54	3.30
18147	Vertical	Av	50.49	54	3.51
6983	Vertical	Pk	47.52	74	26.48
17250	Vertical	Pk	50.70	74	23.30
18147	Vertical	Pk	50.49	74	23.51

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz - 6 Mb OFDM – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48.11	54	5.89
17250	Horizontal	Av	50.38	54	3.62
18097	Vertical	Av	50.75	54	3.25
6983	Vertical	Pk	48.11	74	25.89
17250	Horizontal	Pk	50.38	74	23.62
18097	Vertical	Pk	50.75	74	23.25

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 100 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz – HT4-20 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48.11	54	5.89
17250	Vertical	Av	50.38	54	3.62
18097	Vertical	Av	50.75	54	3.25
6983	Vertical	Pk	48.11	74	25.89
17250	Vertical	Pk	50.38	74	23.62
18097	Vertical	Pk	50.75	74	23.25

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz – HT4-20 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48.27	54	5.73
17250	Vertical	Av	50.40	54	3.60
18097	Vertical	Av	50.40	54	3.60
6983	Vertical	Pk	48.27	74	25.73
17250	Vertical	Pk	50.40	74	23.30
18097	Vertical	Pk	50.40	74	23.60

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 101 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2412 MHz – HT8-20 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
14160	Vertical	Av	49.20	54	4.80
17250	Vertical	Av	50.70	54	3.30
18097	Vertical	Av	49.12	54	4.88
14160	Vertical	Pk	49.20	74	24.80
17250	Vertical	Pk	50.70	74	23.30
18097	Vertical	Pk	49.12	74	24.88

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2422 MHz – HT4-40 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
14160	Vertical	Av	49.01	54	4.99
17250	Vertical	Av	50.63	54	3.37
18097	Vertical	Av	51.45	54	2.55
14160	Vertical	Pk	49.01	74	24.99
17250	Vertical	Pk	50.63	74	23.37
18097	Vertical	Pk	51.45	74	22.55

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 102 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2422 MHz – HT4-40 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
14160	Vertical	Av	48.07	54	5.93
17250	Vertical	Av	49.56	54	4.44
18097	Vertical	Av	50.73	54	3.27
14160	Vertical	Pk	48.07	74	25.93
17250	Vertical	Pk	49.56	74	24.44
18097	Vertical	Pk	50.73	74	23.27

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2422 MHz – HT8-40 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
17250	Vertical	Av	49.79	54	4.21
18097	Vertical	Av	50.73	54	3.27
18745	Horizontal	Av	50.48	54	3.52
17250	Vertical	Pk	49.79	74	24.21
18097	Vertical	Pk	50.73	74	23.27
18745	Horizontal	Pk	50.48	74	23.52

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 103 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz - 1 Mb DSSS – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
16104	Vertical	Av	49.19	54	4.81
17250	Vertical	Av	49.67	54	4.33
18047	Vertical	Av	50.35	54	3.65
16104	Vertical	Pk	49.19	74	24.81
17250	Vertical	Pk	49.67	74	24.33
18047	Vertical	Pk	50.35	74	23.65

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz - 1 Mb DSSS – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6933	Vertical	Av	48.80	54	5.20
17250	Vertical	Av	49.84	54	4.16
18097	Vertical	Av	50.22	54	3.78
6933	Vertical	Pk	48.80	74	25.20
17250	Vertical	Pk	49.84	74	24.16
18097	Vertical	Pk	50.22	74	23.78

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 104 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz - 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	47.97	54	6.03
17250	Vertical	Av	49.79	54	4.21
18097	Vertical	Av	51.50	54	2.50
6983	Vertical	Pk	47.97	74	26.03
17250	Vertical	Pk	49.79	74	24.21
18097	Vertical	Pk	51.50	74	22.50

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz - 54 Mb OFDM – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	47.49	54	6.51
17250	Horizontal	Av	49.62	54	4.38
18097	Vertical	Av	50.61	54	3.39
6983	Vertical	Pk	47.49	74	26.51
17250	Horizontal	Pk	49.62	74	24.38
18097	Vertical	Pk	50.61	74	23.39

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.



Test Report No.:

**12121201.fcc01**

Page 105 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT4-20 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
6983	Vertical	Av	47.96	54	6.04
17250	Vertical	Av	50.75	54	3.25
18097	Vertical	Av	50.16	54	3.84
6983	Vertical	Pk	47.96	74	26.04
17250	Vertical	Pk	50.75	74	23.25
18097	Vertical	Pk	50.16	74	23.84

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT4-20 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
6983	Horizontal	Av	47.38	54	6.62
17250	Vertical	Av	50.78	54	3.22
18097	Vertical	Av	50.81	54	3.19
6983	Horizontal	Pk	47.38	74	26.62
17250	Vertical	Pk	50.78	74	23.22
18097	Vertical	Pk	50.81	74	23.19

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 106 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT8-20 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48.48	54	5,52
17250	Vertical	Av	50.39	54	3,61
18097	Vertical	Av	50.69	54	3,31
6983	Vertical	Pk	48.48	74	25,52
17250	Vertical	Pk	50.39	74	23,61
18097	Vertical	Pk	50.69	74	23,31

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT4-40 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	49,45	54	4,55
17250	Vertical	Av	51,04	54	2,96
18097	Vertical	Av	51,53	54	2,47
6983	Vertical	Pk	49,45	74	24,55
17250	Vertical	Pk	51,04	74	22,96
18097	Vertical	Pk	51,53	74	22,47

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 107 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT4-40 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
14160	Vertical	Av	48,73	54	5,27
17250	Vertical	Av	50,50	54	3,50
18097	Vertical	Av	51,03	54	2,97
14160	Vertical	Pk	48,73	74	25,27
17250	Vertical	Pk	50,50	74	23,50
18097	Vertical	Pk	51,03	74	22,97

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2437 MHz – HT8-40 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
18695	Vertical	Av	49,72	54	4,28
17250	Vertical	Av	50,22	54	3,78
18097	Horizontal	Av	50,20	54	3,80
18695	Vertical	Pk	49,72	74	24,28
17250	Vertical	Pk	50,22	74	23,78
18097	Horizontal	Pk	50,20	74	23,80

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 108 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz - 1 Mb DSSS – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
17250	Vertical	Av	49,25	54	4,75
18097	Vertical	Av	50,21	54	3,79
19642	Horizontal	Av	50,31	54	3,69
17250	Vertical	Pk	49,25	74	24,75
18097	Vertical	Pk	50,21	74	23,79
19642	Horizontal	Pk	50,31	74	23,69

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz - 1 Mb DSSS – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
16452	Vertical	Av	50,05	54	3,95
17250	Vertical	Av	50,82	54	3,18
18097	Vertical	Av	51,77	54	2,23
16452	Vertical	Pk	50,05	74	23,95
17250	Vertical	Pk	50,82	74	23,18
18097	Vertical	Pk	51,77	74	22,23

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 109 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz - 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
7033	Horizontal	Av	48,79	54	5,21
17250	Vertical	Av	49,51	54	4,49
18097	Vertical	Av	49,83	54	4,17
7033	Horizontal	Pk	48,79	74	25,21
17250	Vertical	Pk	49,51	74	24,49
18097	Vertical	Pk	49,83	74	24,17

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz - 6 Mb OFDM – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48,67	54	5,33
17250	Horizontal	Av	49,90	54	4,10
18097	Vertical	Av	49,90	54	4,10
6983	Vertical	Pk	48,67	74	25,33
17250	Horizontal	Pk	49,90	74	24,10
18097	Vertical	Pk	49,90	74	24,10

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 110 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz – HT4-20 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
16502	Vertical	Av	49,16	54	4,84
17250	Vertical	Av	50,19	54	3,81
18097	Vertical	Av	49,78	54	4,22
16502	Vertical	Pk	49,16	74	24,84
17250	Vertical	Pk	50,19	74	23,81
18097	Vertical	Pk	49,78	74	24,22

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz – HT4-20 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6983	Vertical	Av	48,96	54	5,04
17250	Vertical	Av	50,26	54	3,74
18097	Vertical	Av	51,25	54	2,75
6983	Vertical	Pk	48,96	74	25,04
17250	Vertical	Pk	50,26	74	23,74
18097	Vertical	Pk	51,25	74	22,75

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 111 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2462 MHz – HT8-20 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6933	Horizontal	Av	48,64	54	5,36
17250	Vertical	Av	49,64	54	4,36
18047	Vertical	Av	50,36	54	3,64
6933	Horizontal	Pk	48,64	74	25,36
17250	Vertical	Pk	49,64	74	24,36
18047	Vertical	Pk	50,36	74	23,64

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2452 MHz – HT4-40 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6933	Vertical	Av	47,79	54	6,21
17250	Vertical	Av	51,01	54	2,99
18097	Vertical	Av	50,90	54	3,10
6933	Vertical	Pk	47,79	74	26,21
17250	Vertical	Pk	51,01	74	22,99
18097	Vertical	Pk	50,90	74	23,10

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 112 of 263

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2452 MHz – HT4-40 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
6933	Vertical	Av	48,34	54	5,66
17250	Vertical	Av	49,87	54	4,13
18097	Vertical	Av	49,57	54	4,43
6933	Vertical	Pk	48,34	74	25,66
17250	Vertical	Pk	49,87	74	24,13
18097	Vertical	Pk	49,57	74	24,43

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations,  
2452 MHz – HT8-40 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
7381	Vertical	Av	48,04	54	5,96
17250	Vertical	Av	49,86	54	4,14
18097	Vertical	Av	51,19	54	2,81
7381	Vertical	Pk	48,04	74	25,96
17250	Vertical	Pk	49,86	74	24,14
18097	Vertical	Pk	51,19	74	22,81

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz



Test Report No.:

**12121201.fcc01**

Page 113 of 263

## **5.2.6 Radiated Spurious Emissions of Transmitter in restricted bands**

### **RESULT: Pass**

Date of testing: 2013-01-10 and 2013-02-04

Frequency range: 4.5-5.15 GHz and 5.35-5.46 GHz

Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure:

ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 4.5-5.15 GHz and 5.35-5.46 GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.


Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**


Page 114 of 263

Operation mode: 1Mb DSSS, Antenna 2

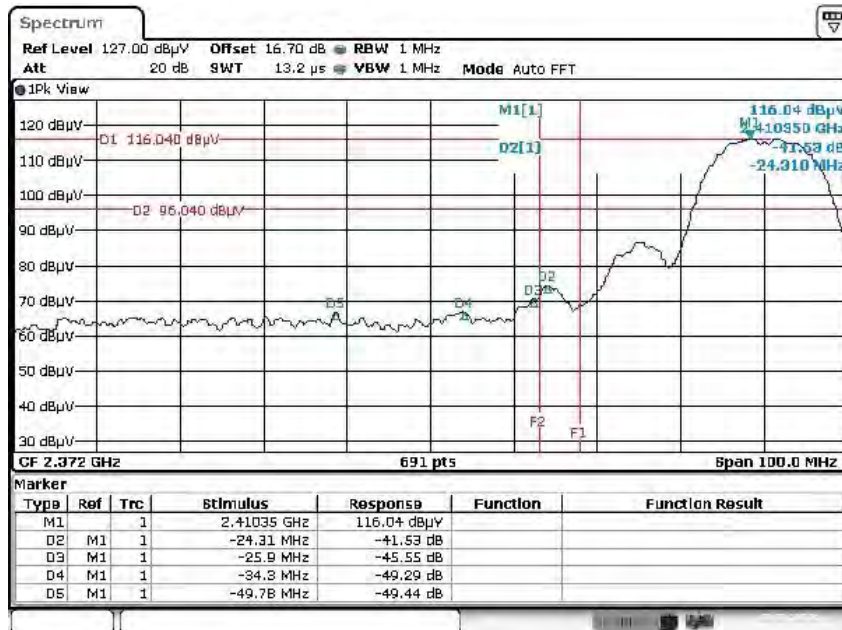

Date: 10.JAN.2013 11:17:33

Low Channel

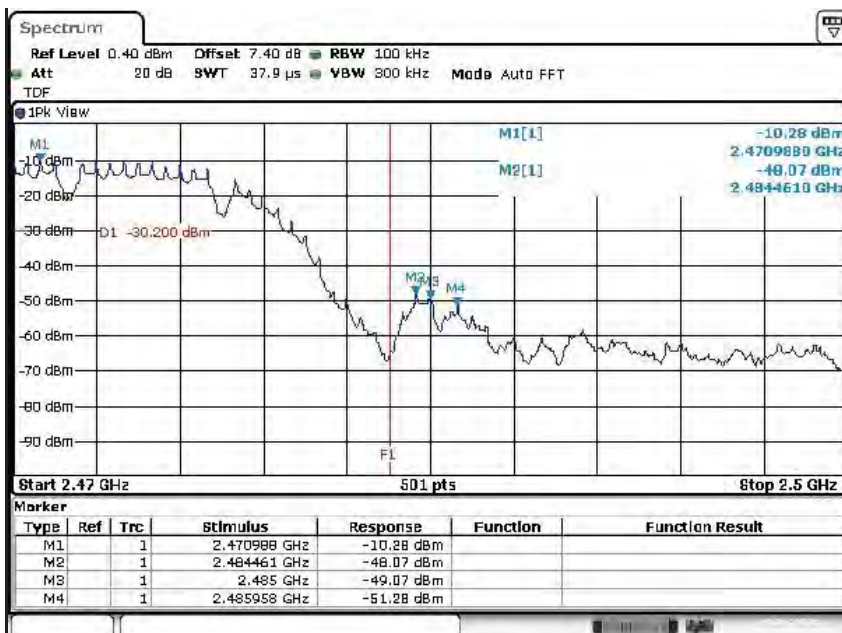

Date: 4.FEB.2013 09:35:50


High Channel

Test Report No.:


**12121201.fcc01**

Page 115 of 263

Operation mode: 1Mb DSSS, Antenna 1

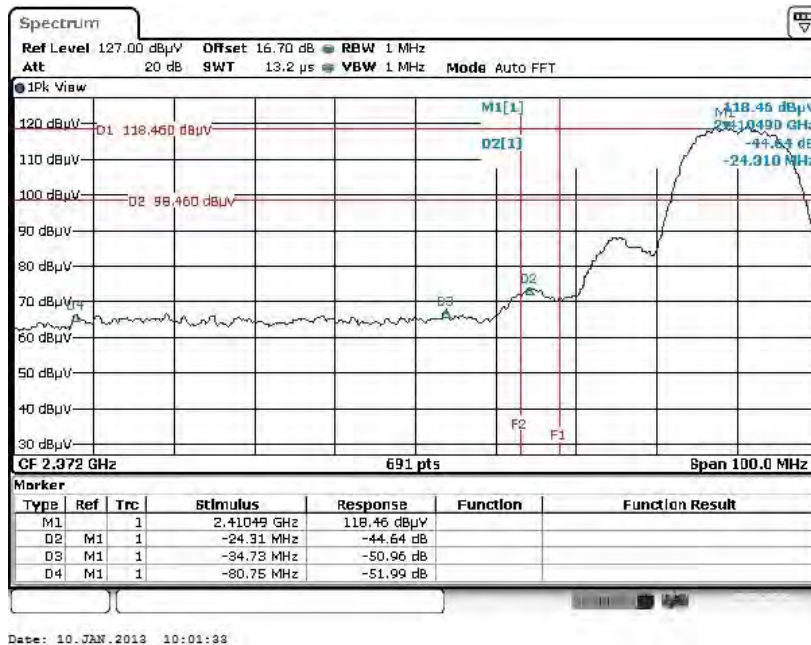

Low Channel

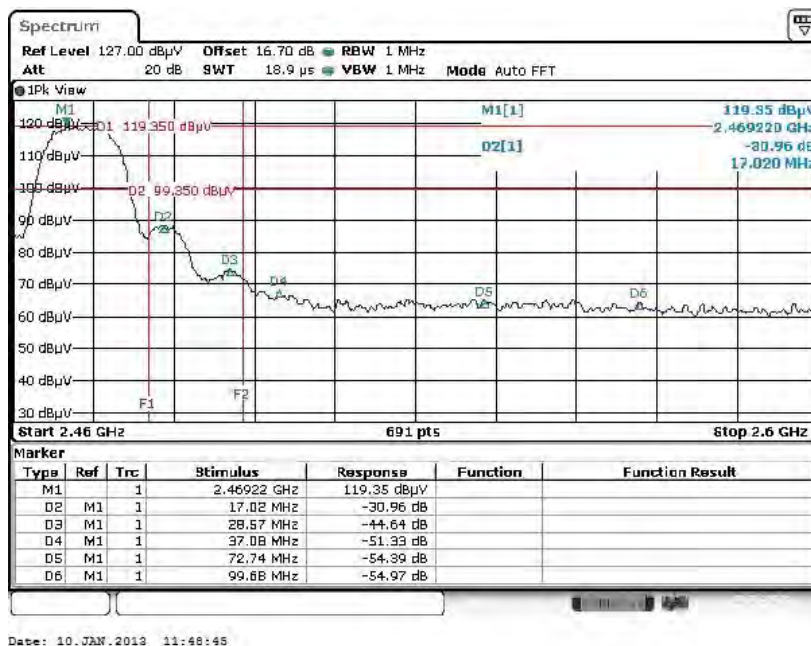


High Channel

Test Report No.:

**12121201.fcc01**


Page 116 of 263

Operation mode: 6 Mb OFDM, Antenna 2

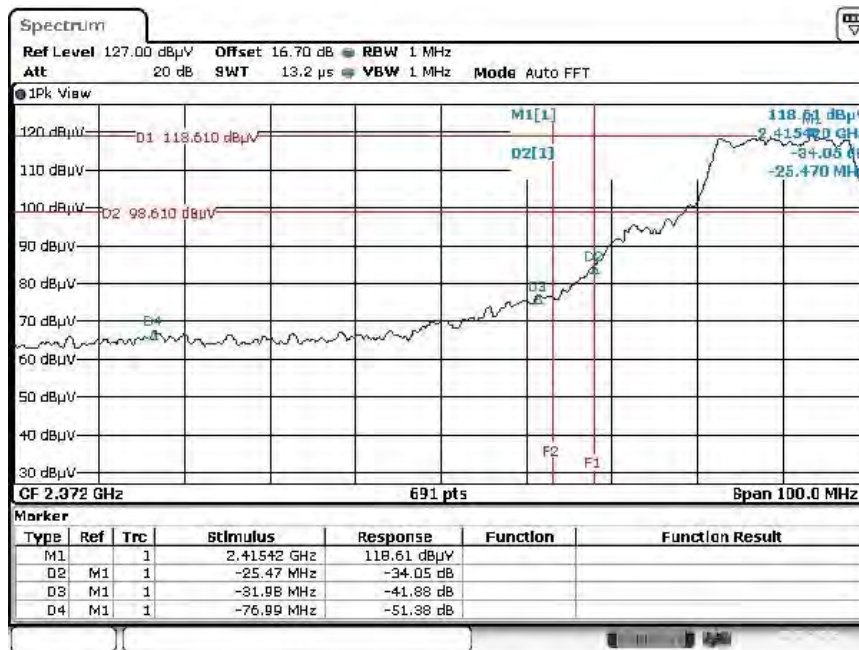

Date: 10.JAN.2013 10:03:42

Low Channel

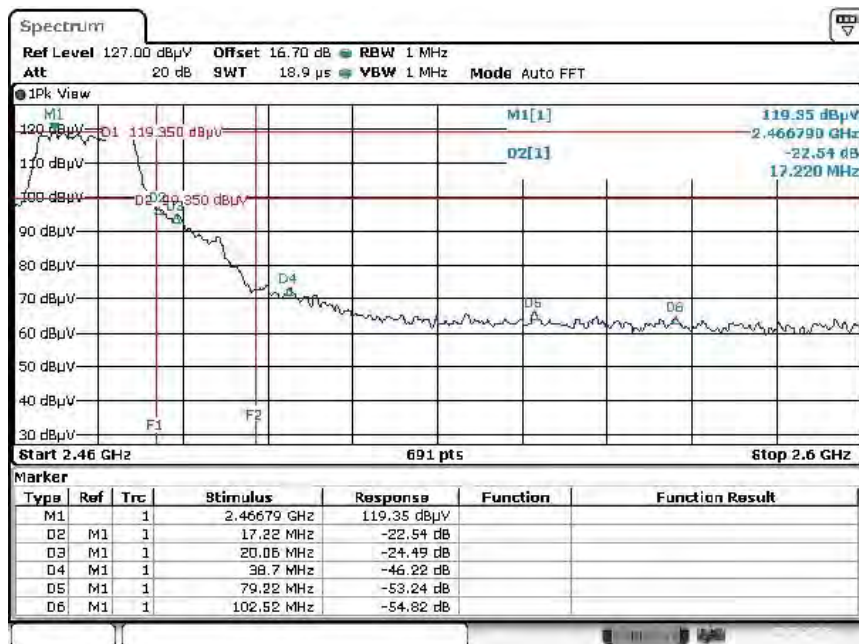

Date: 10.JAN.2013 11:51:07

High Channel




Test Report No.:

**12121201.fcc01**

Page 117 of 263

Operation mode: 6Mb OFDM, Antenna 1

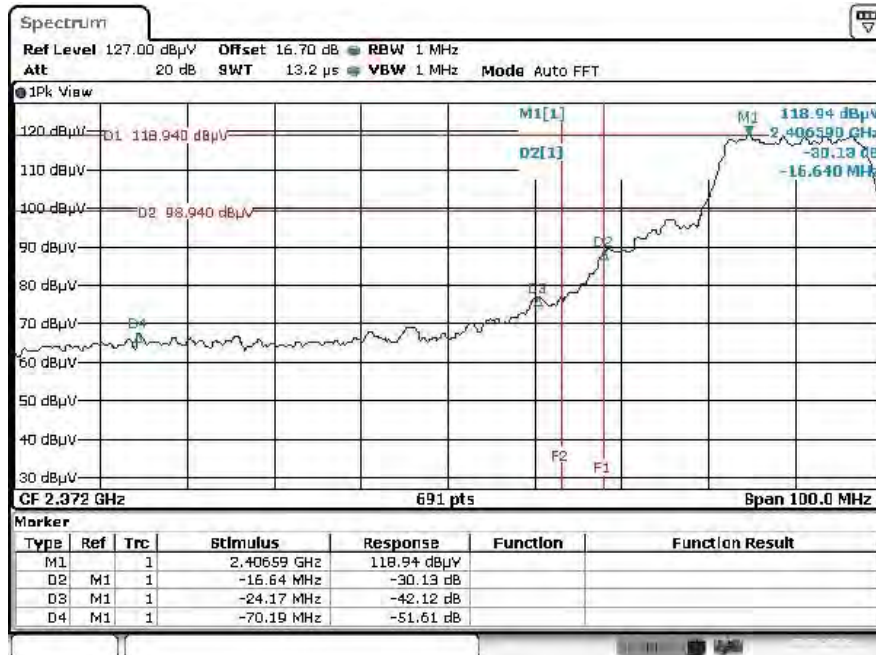

Date: 10. JAN. 2013 10:09:44

Low Channel



Date: 10. JAN. 2013 11:52:55


High Channel

Test Report No.:

**12121201.fcc01**


Page 118 of 263

Operation mode: HT4-20 MHz, Antenna 1

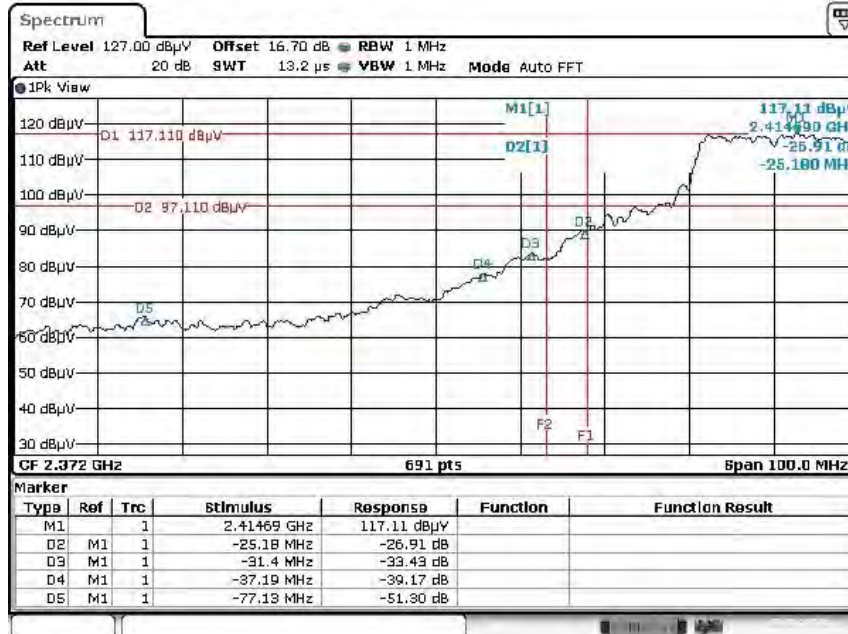

Date: 10.JAN.2013 10:16:28

Low Channel

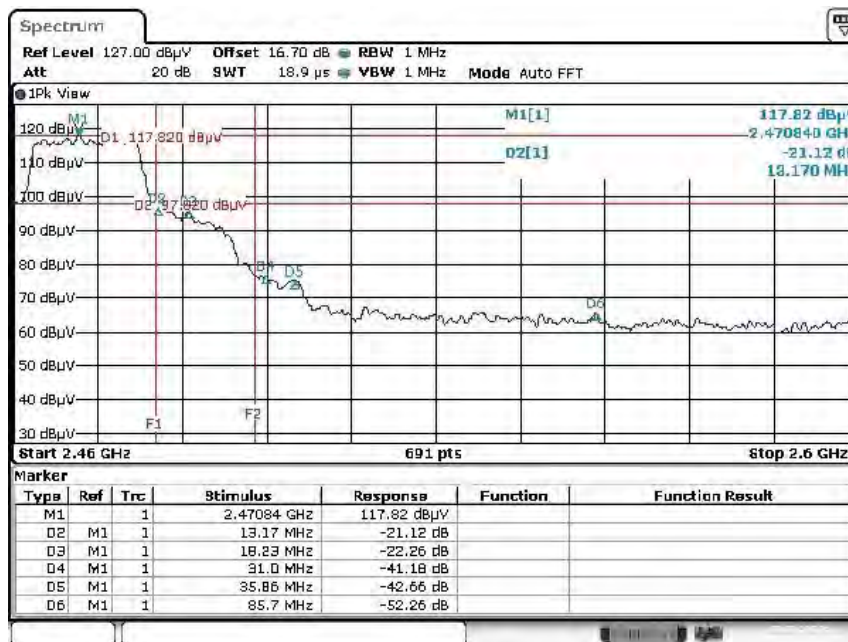

Date: 10.JAN.2013 12:24:45


High Channel

Test Report No.:

**12121201.fcc01**


Page 119 of 263

Operation mode: HT4-20 MHz, Antenna 2

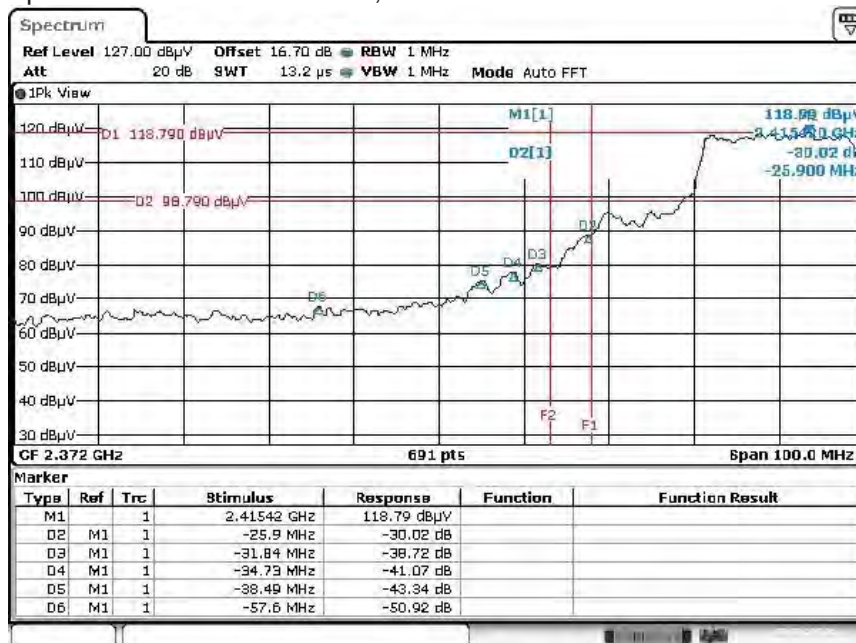

Date: 10.JAN.2013 10:12:19

Low Channel

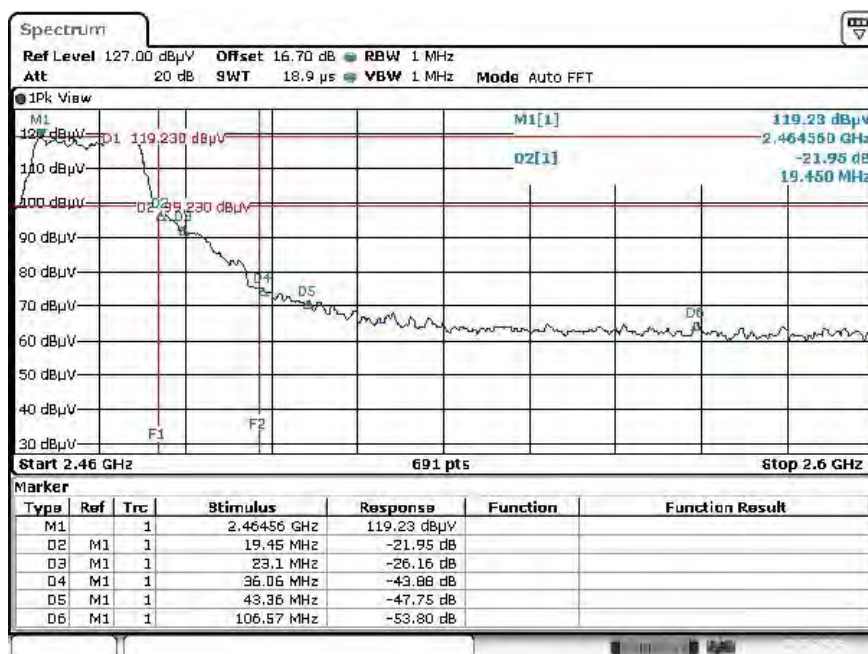

Date: 10.JAN.2013 12:26:41

High Channel




Test Report No.:

**12121201.fcc01**


Page 120 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

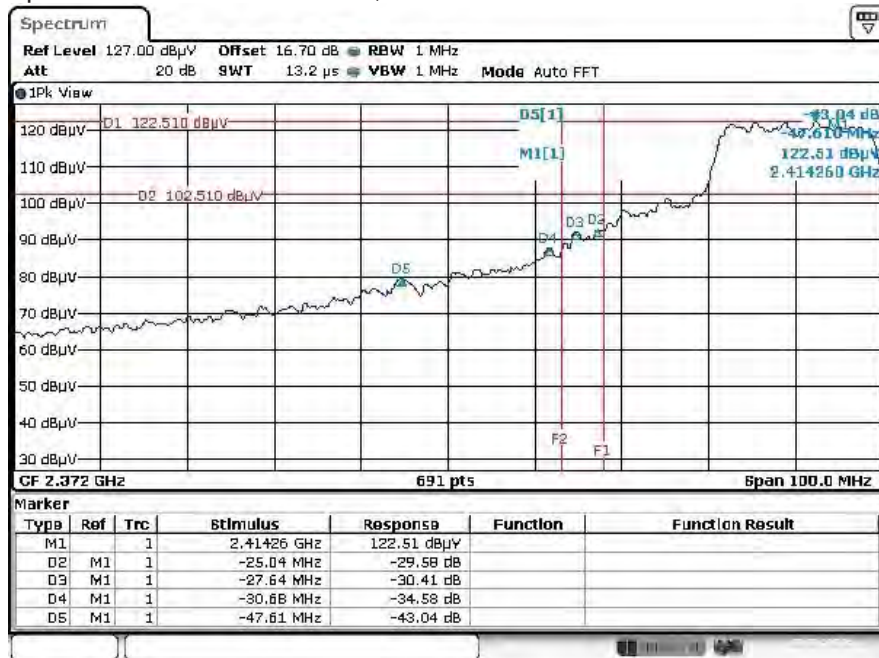

Date: 10 JAN 2013 11:21:44

Low Channel

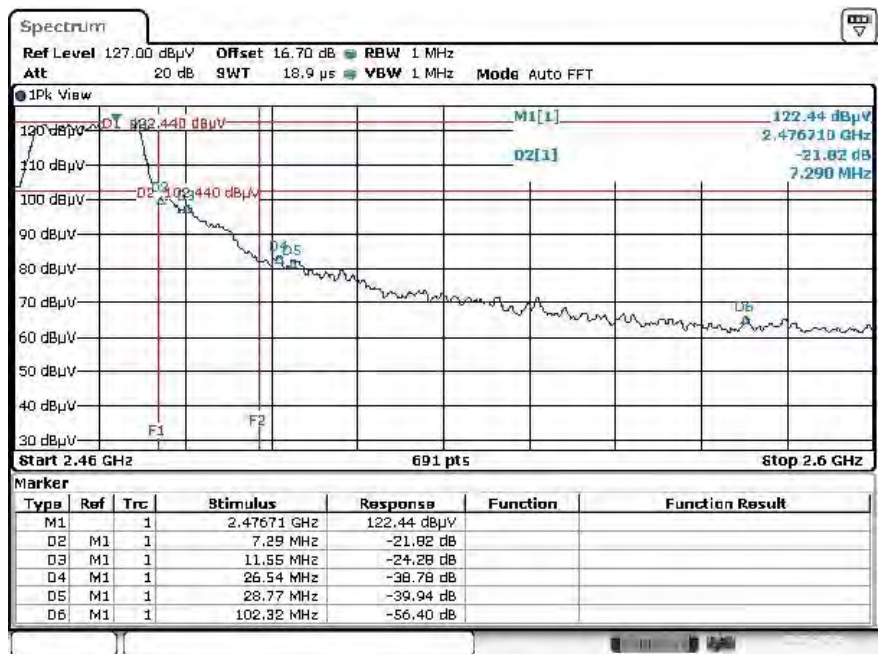

Date: 10 JAN 2013 12:28:33

High Channel




Test Report No.:

**12121201.fcc01**


Page 121 of 263

Operation mode: HT4-40 MHz wide, Antenna 1

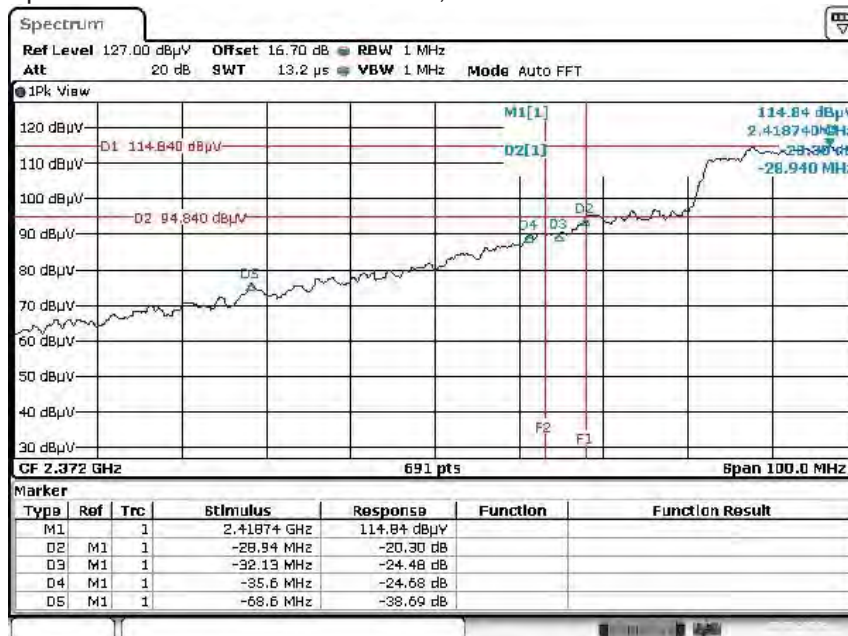

Date: 10.JAN.2013 11:25:59

Low Channel

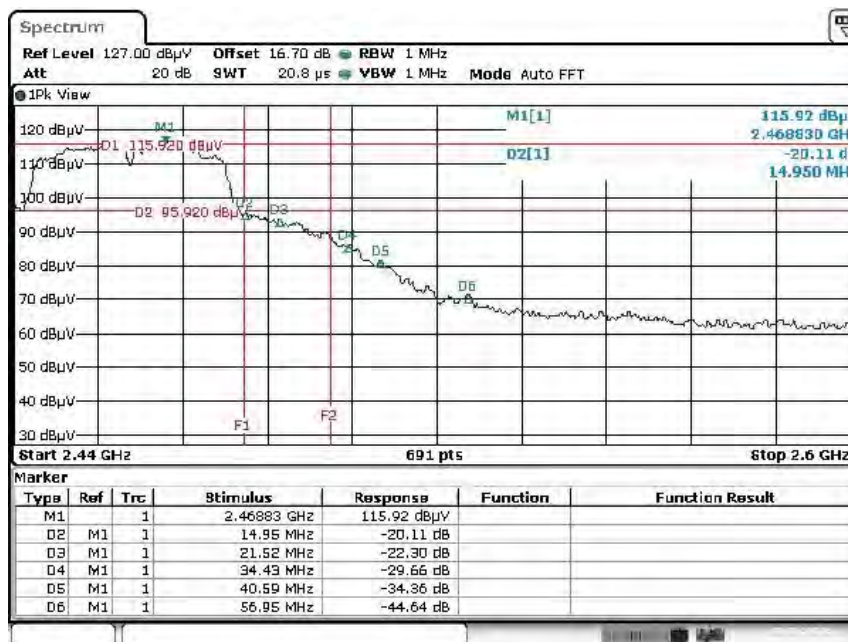

Date: 10.JAN.2013 12:32:08


High Channel

Test Report No.:

**12121201.fcc01**


Page 122 of 263

Operation mode: HT4-40 MHz wide, Antenna 2

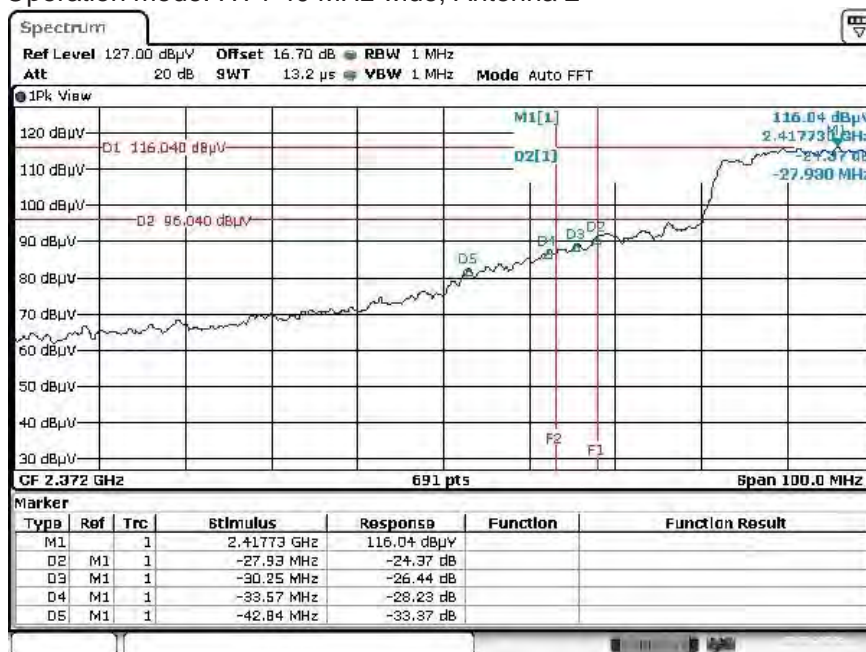

Date: 10.JAN.2013 11:31:02

Low Channel

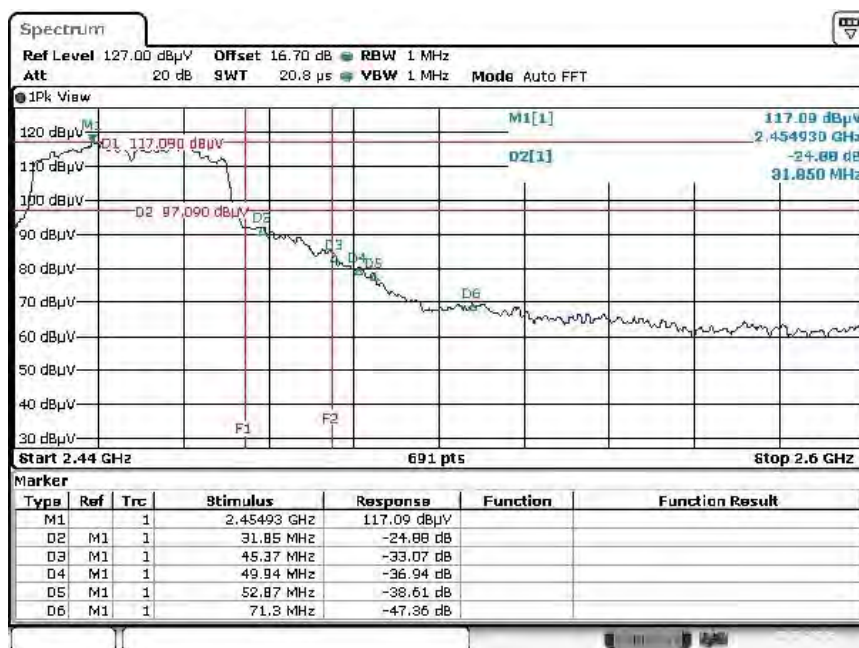

Date: 10.JAN.2013 12:34:31


High Channel

Test Report No.:

**12121201.fcc01**


Page 123 of 263

Operation mode: HT8-40 MHz wide, Antenna 1+2

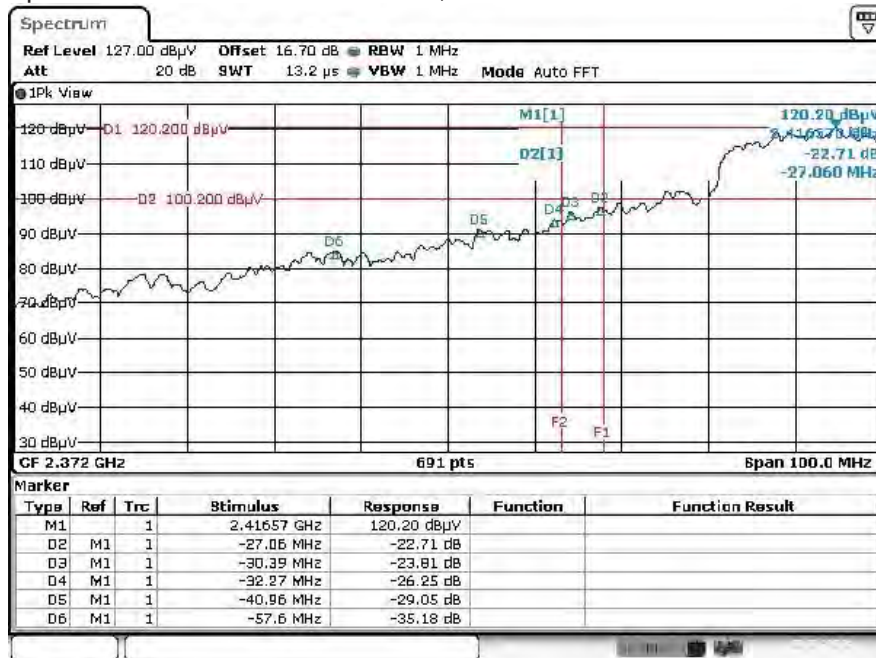

Date: 10. JAN. 2013 11:36:09

Low Channel

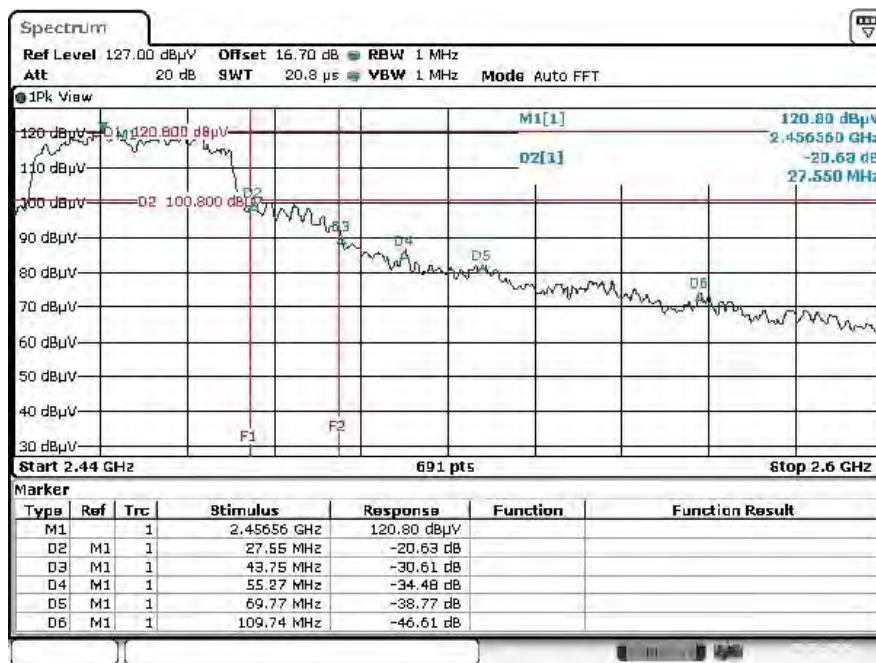

Date: 10. JAN. 2013 12:44:07

High Channel

Test Report No.:

**12121201.fcc01**

Page 124 of 263

## 5.3 Spurious emissions in receive mode

### RESULT: Pass

Date of testing: 2013-01-10

Requirements: RSS-Gen

Radiated emissions from receiver shall not exceed the radiated limits in the table below.

Freq. [MHz]	Detector	Measurement Bandwidth	Limit [dB $\mu$ V/m]
30 – 88	Qp	120 kHz	40.0
88 – 216	Qp	120 kHz	43.5
216 – 960	Qp	120 kHz	46.0
Above 916	Av	1 MHz	54.0

Test procedure: ANSI C63.10-2009 and RSS-Gen section 4.10

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30 MHz to 7500 MHz. Emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function. Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**

Page 125 of 263

Results:

Freq. [MHz]	Antenna Orientation	Detector/ Bandwidth	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
47.1	Vertical	Qp / 120 kHz	37.4	40.0	-2.6
64.9	Vertical	Qp / 120 kHz	36.7	43.5	-6.8
237.5	Vertical	Qp / 120 kHz	32.4	46.0	-13.6
466.0	Vertical	Qp / 120 kHz	35.2	46.0	-10.8
4824	Vertical	Av / 1 MHz	38.9	54.0	-15.1
6436	Vertical	Av / 1 MHz	36.4	54.0	-17.6

Note: - tested up to 3 times highest tunable frequency (which is 2462 MHz), up to 7.5 GHz.  
- the EUT was tested in receive mode, set at center frequency of 2437 MHz.  
- tested with DSSS, OFDM modes, worst case values noted

Test Report No.:

**12121201.fcc01**

Page 126 of 263

## **5.4 AC Power Line Conducted Measurements**

### **5.4.1 AC Power Line Conducted Emission of Transmitter**

AC power line conducted emissions are included in the Part 15B/ICES-003 testreport.  
Refer to documentnumber 13e\_PD97260NG\_Testreport\_FCC-15B-ICES003.

*Test Report No.:*

**12121201.fcc01**

*Page 127 of 263*

**WiFi 5.725 – 5.825 GHz (802.11a/n20/n40/ac80)**



Test Report No.:

**12121201.fcc01**

Page 128 of 263

## 6. Test Set-up and Operation Modes

### 6.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-210, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The test methods, which have been used, are based on ANSI C63.10: 2009. For details, see under each test item.

### 6.2 Operation Modes

Modulation	Duty cycle	Antenna	Test frequencies (MHz)					
			Lowest	Power/ Gain control setting	Middle	Power/ Gain control setting	Highest	Power/ Gain control setting
6 Mb OFDM	0.99	1	5745	18.0 dBm	5785	17.5 dBm	5825	18.0 dBm
6 Mb OFDM	0.99	2	5745	31.0	5785	32.5	5825	31.5
HT4 - 20 MHz	0.94	1	5745	11.0 dBm	5785	10.5 dBm	5825	11.0 dBm
HT4 - 20 MHz	0.94	2	5745	11.0 dBm	5785	10.5 dBm	5825	11.0 dBm
HT8 - 20 MHz	0.98	1+2	5745	27.0	5785	27.5 / 27.5	5825	27.5
HT4 - 40 MHz	0.89	1	5755	17.5 dBm	--	--	5795	11.0 dBm
HT4 - 40 MHz	0.89	2	5755	17.5 dBm	--	--	5795	11.0 dBm
HT8 - 40 MHz	0.96	1+2	5755	11.5/11.5 dBm	--	--	5795	28.0/ 28.0
VHT6 – 80 MHz	0.79	1	--	--	5775	14.0 dBm	--	--
VHT6 – 80 MHz	0.79	2	--	--	5775	14.0 dBm	--	--
VHT6 – 80 MHz	0.79	1+2	--	--	5775	27.0/27.0	--	--



Test Report No.:

**12121201.fcc01**

Page 129 of 263

Power setting was established by either 'Power Control' or 'Gain Control' in the software as defined in section 4.4.

Testing was performed at the lowest operating frequency, at the operating frequency in the middle of the specified frequency band and at the highest operating frequency. These operation modes were selected after review of the capabilities and characteristics of the EUT.

Antenna ports are also referred to as Chain A and Chain B, where chain A refers to Antenna-port 2 and Chain B refers to Antenna-port 1. Gain control setting is for both chains equal were applicable.

The data rates of 6Mb/s for 802.11a, HT4 (SISO)/HT8 (MIMO) for 802.11n20 and n40, and VHT6 (SISO)/(MIMO) for 802.11 ac80 were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and spurious levels at the band edges.


### 6.3 Physical Configuration for Testing

The EUT was installed into a test-fixture that interfaced to a laptop computer and dc power supply. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel or continuously receive on the channel as specified in the testdata. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis (only attached to the test jig) and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10: 2009.

**Figure 3: Test Setup Diagram**

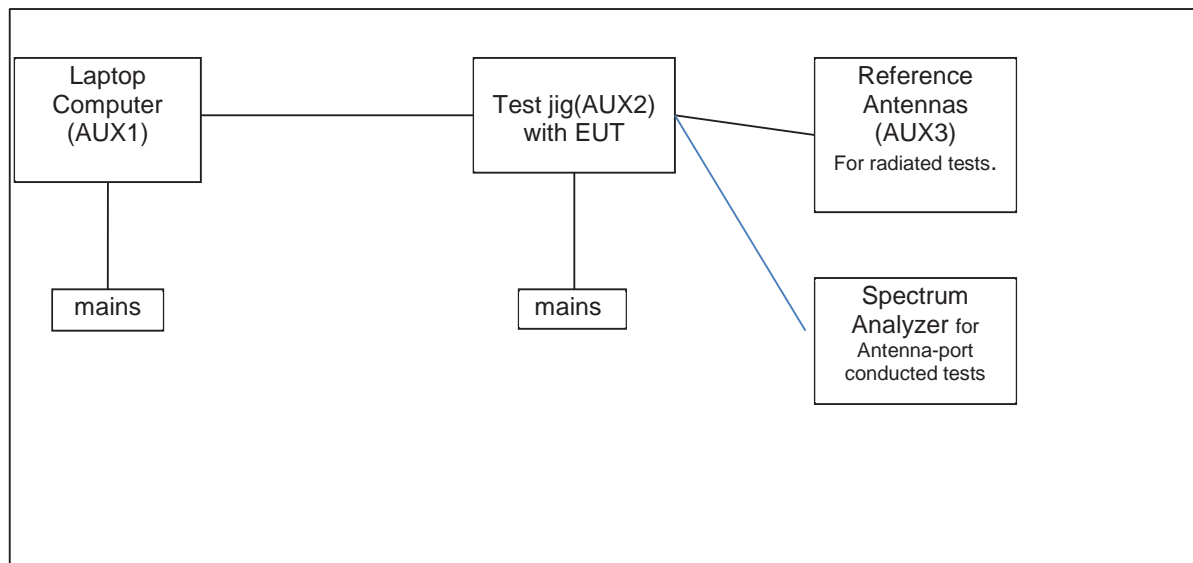

Notes:

For more details, refer to the document: Test Set-Up Photographs document.

Test Report No.:

**12121201.fcc01**

Page 131 of 263

## 6.4 Test Software

A continuous transmit or receive mode could be initiated by using test software as supplied by Intel Corporation. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by Intel Corporation and used during all tests is:

Test software : DRTU 1.6.0-0510  
Driver : 16.0.0.17

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

Test Report No.:

**12121201.fcc01**

Page 132 of 263

## 6.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

4. AUX1

Product: Laptop Computer  
Brand: Lenovo  
Model: 9456-HTG  
Serial Number: L3-BF847 07/02  
Remark: property applicant, host for testsoftware and AUX2

5. AUX2

Product: Test Jig  
Brand: Intel  
Model: NGFF Extension Rev. 01  
Rated Voltage: 3.3 Vdc  
Antenna: Internal, integrated on the PCB  
Remarks: used for Antenna-port conducted tests

6. AUX3

Product: Reference antennas  
Manufacturer: SkyCross Electronics (Shenzhen) Co.,Ltd  
Brand: SkyCross Electronics (Shenzhen) Co.,Ltd  
Gain at 5G: 5.0 dBi (declared by applicant)  
Remarks: used for radiated tests

Test Report No.:

**12121201.fcc01**

Page 133 of 263

## **7. Test Results**

### **7.1 Technical Requirements**

#### **7.1.1 Voltage Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the power supply requirements.

#### **7.1.2 Antenna Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.203 and IC RSS-Gen section 7.1.2

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has two non standard PIFA antenna connectors which complies with the requirements.

Test Report No.:

**12121201.fcc01**

Page 134 of 263

### **7.1.3 Restricted Bands of Operation**

#### **RESULT: Pass**

Requirements:

FCC 15.205 and IC RSS-Gen section 7.2.2

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The EUT operation frequency range is 5745 MHz to 5825 MHz range. Therefore only spurious emissions may be found in the restricted bands of operation and the EUT complies with the restricted frequency band requirement.

Test Report No.:

**12121201.fcc01**

Page 135 of 263

## 7.2 Conducted Measurements at Antenna Port

### 7.2.1 Conducted Output Power

#### RESULT: Pass

Date of testing: 2013-01-14 / 2013-03-15

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 5745 MHz to 5825 MHz band, the maximum peak output power is 1W (+30dBm).

RSS Gen : The e.i.r.p. shall not exceed 4 W (36 dBm).

Test procedure:

ANSI C63.10: 2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak Conducted Output Power was measured using the channel integration method according to option 2 in KDB 558074 D01.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the EUT. Summing is performed in linear power units (mW—not dBm).

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power. For MIMO mode, the Guidance on directional Gain calculations according to the *Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v01r02 dated 9/26/2012* was used.

The number of transmit antennas (NANT) are 2 and the number of spatial streams (Nss) are 2 and therefore the Array Gain is 0 dB.

Notes:  $\text{mW} = 10^{(\text{dBm}/10)}$   
 $\text{dBm} = 10 \times \log(\text{mW})$

**plots : Peak power plots,**

Figures 1a, 1b and 1c, through 10a,10b,10c showing plots of the Peak Power outputs, correction factors included in the reading.

Test Report No.:


**12121201.fcc01**

Page 136 of 263

**Table 4: Conducted Output Power**

Operation mode: 6Mb OFDM, Antenna 2

Freq- uency [MHz]	Gain control setting (dB)	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot nr.
5745	31.0	24.36	272.9	+30	1000	5.0	29.36	863.0	A
5785	32.5	24.15	260.0	+30	1000	5.0	29.15	822.2	B
5825	31.5	23.74	236.6	+30	1000	5.0	28.74	748.2	C

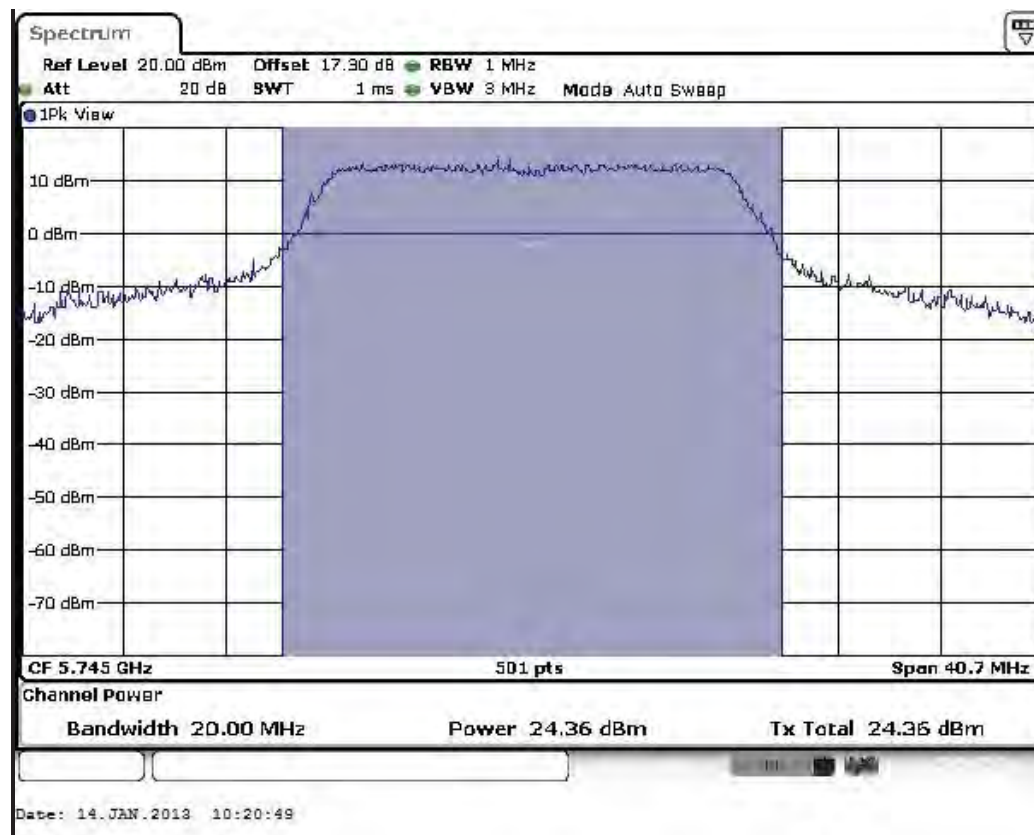


Plot A




Test Report No.:

**12121201.fcc01**

Page 137 of 263

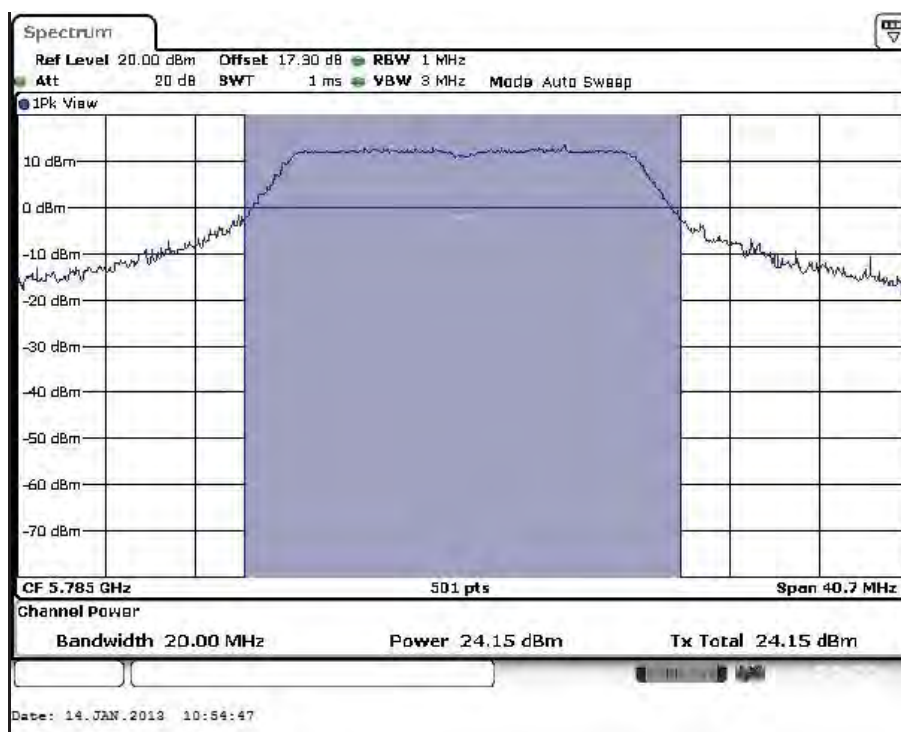

Plot B

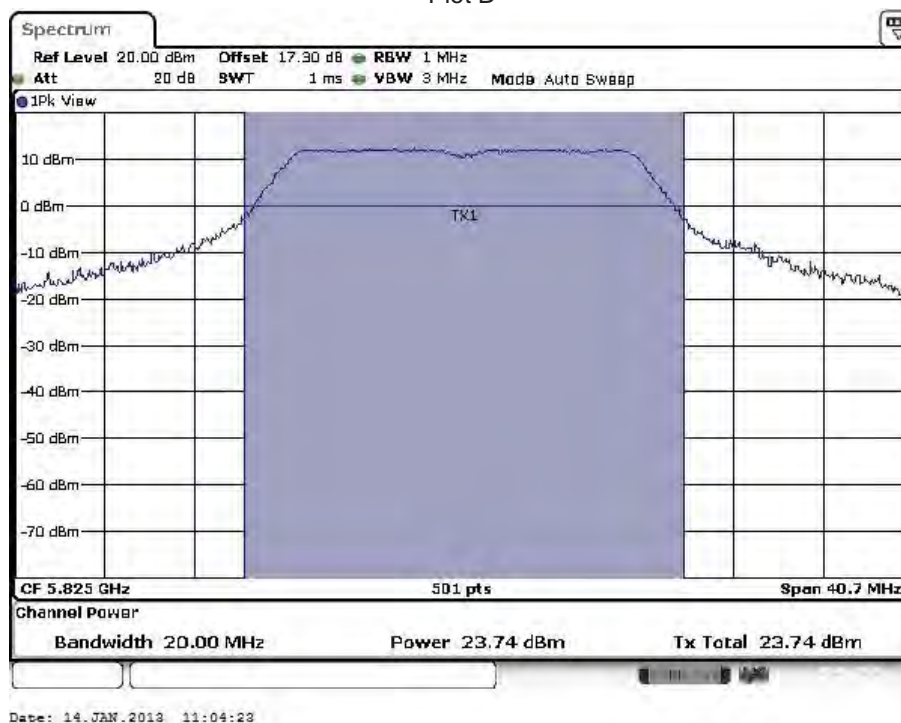

Plot C


Test Report No.:

**12121201.fcc01**

Page 138 of 263

Operation mode: 6Mb OFDM, Antenna 1

Frequency [MHz]	Power setting [dBm]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain [dBi]	EIRP [dBm]	EIRP [mW]	Plot number
5745	18.0	25.0	316.2	+30	1000	5.0	30.0	1000.0	A
5785	17.5	25.4	346.7	+30	1000	5.0	30.4	1096.5	B
5825	18.0	25.5	354.8	+30	1000	5.0	30.5	1122.0	C

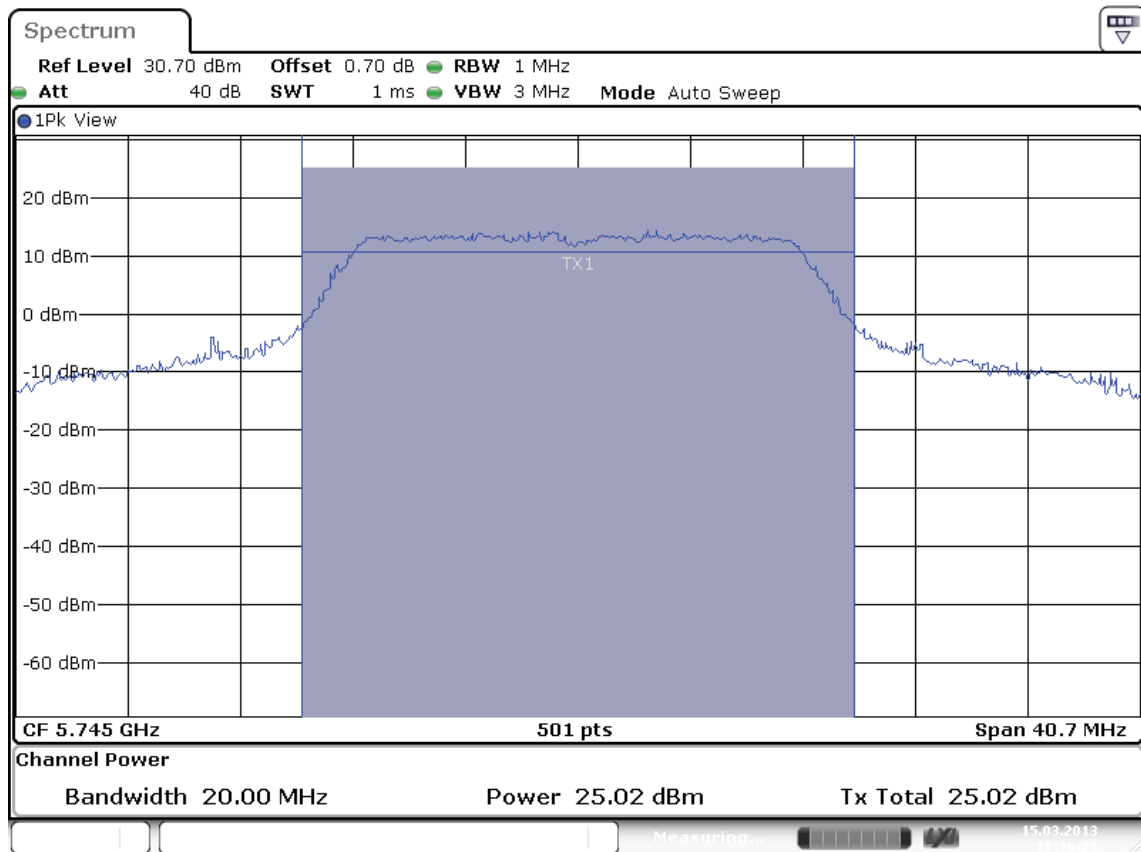


Date: 15.MAR.2013 11:36:23

Plot A

Test Report No.:


**12121201.fcc01**

Page 139 of 263

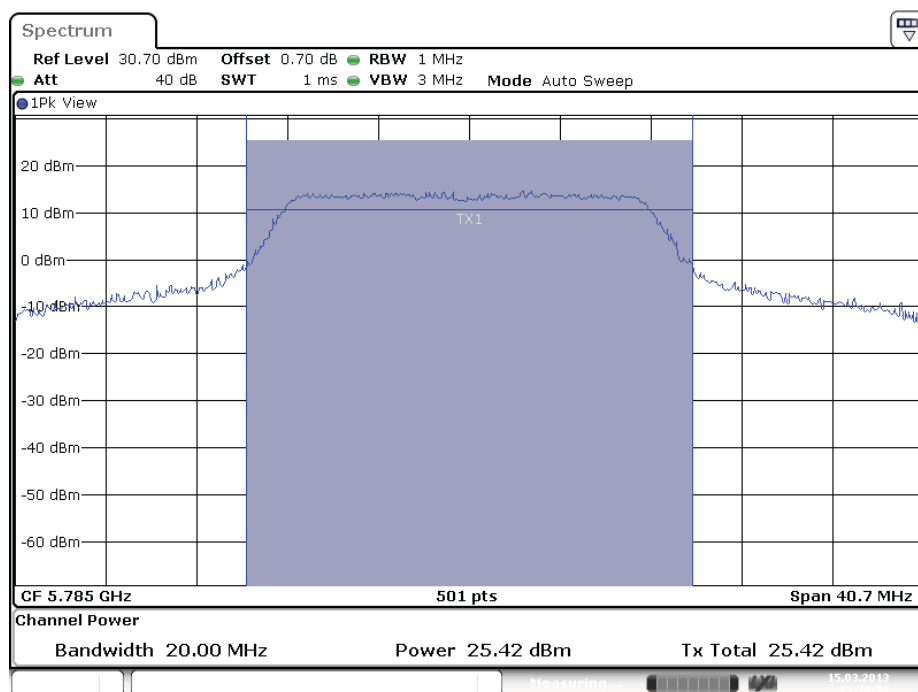

Date: 15.MAR.2013 12:39:52

Plot B

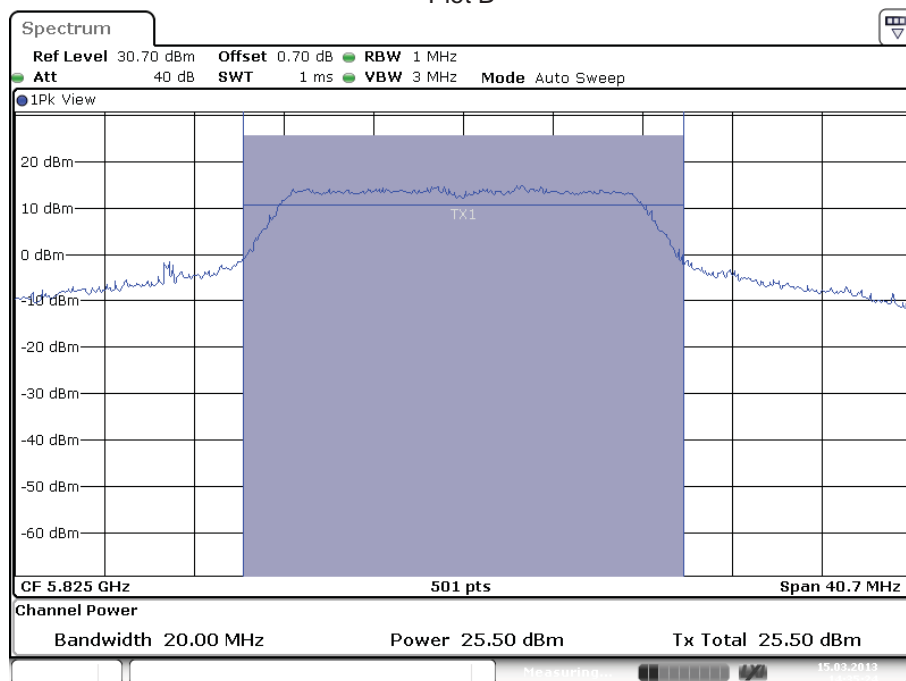

Date: 15.MAR.2013 14:35:25

Plot C


Test Report No.:

**12121201.fcc01**

Page 140 of 263

Operation mode: HT4-20MHz, Antenna 1

Frequency [MHz]	Gain Control setting (dB)	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
5745	32.5	21.66	146.6	+30	1000	5.0	26.66	463.4	A
5785	34.0	24.17	261.2	+30	1000	5.0	29.17	826.0	B
5825	32.0	24.01	251.8	+30	1000	5.0	29.01	796.2	C

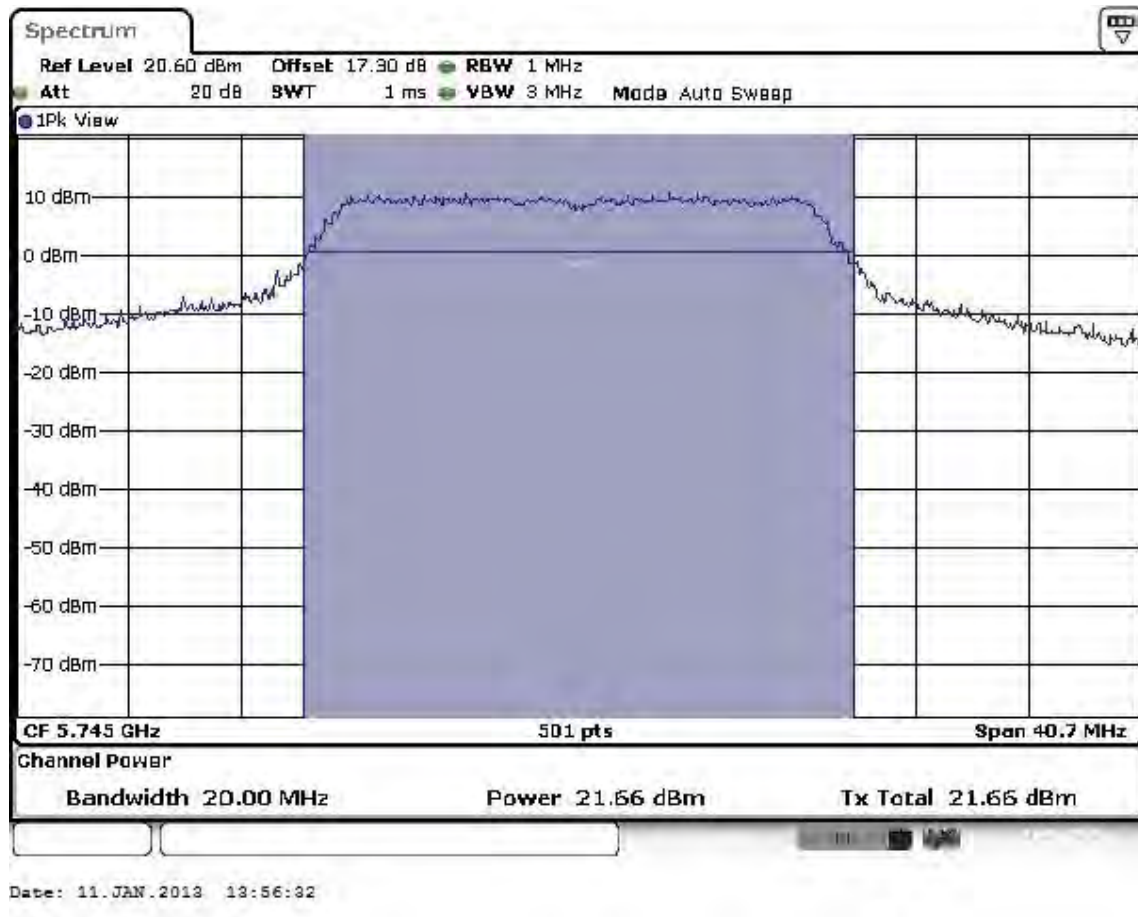


Plot A


Test Report No.:

**12121201.fcc01**

Page 141 of 263

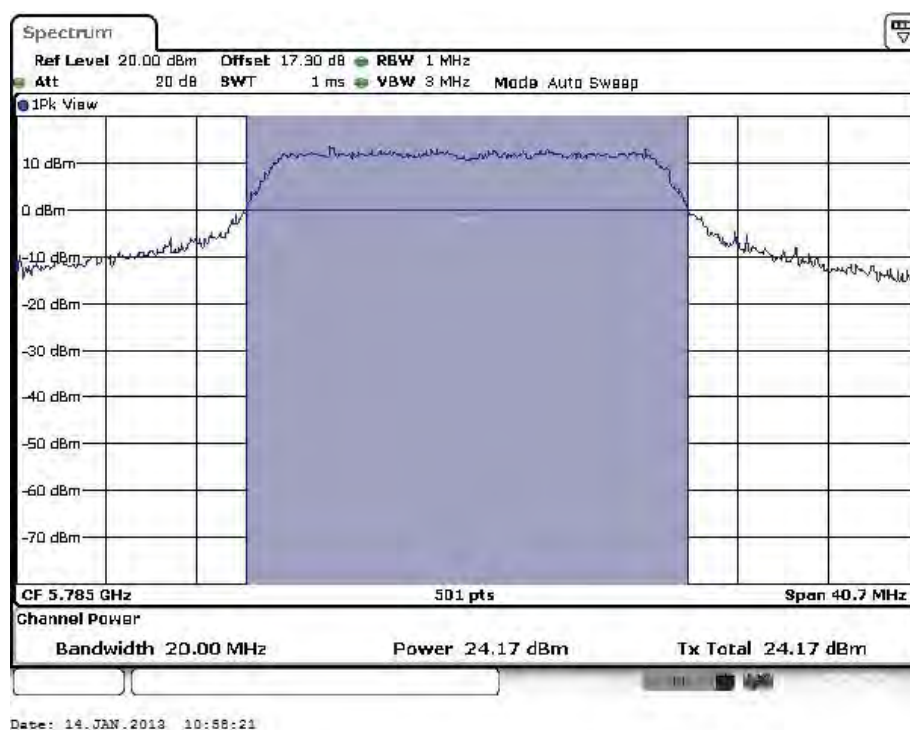

Plot B

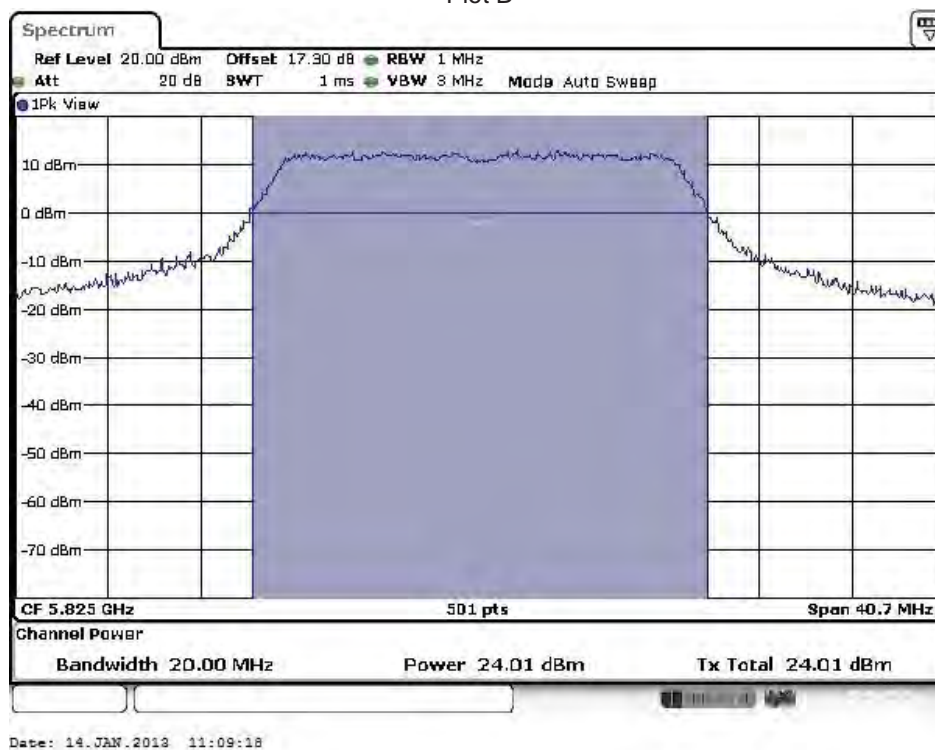

Plot C


Test Report No.:

**12121201.fcc01**

Page 142 of 263

Operation mode: HT4-20MHz, Antenna 2

Frequency [MHz]	Gain Control setting (dB)	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
5745	32.0	24.28	267.9	+30	1000	5.0	29.28	847.2	A
5785	32.5	24.45	278.6	+30	1000	5.0	29.45	881.0	B
5825	32.0	24.19	262.4	+30	1000	5.0	29.19	829.9	C

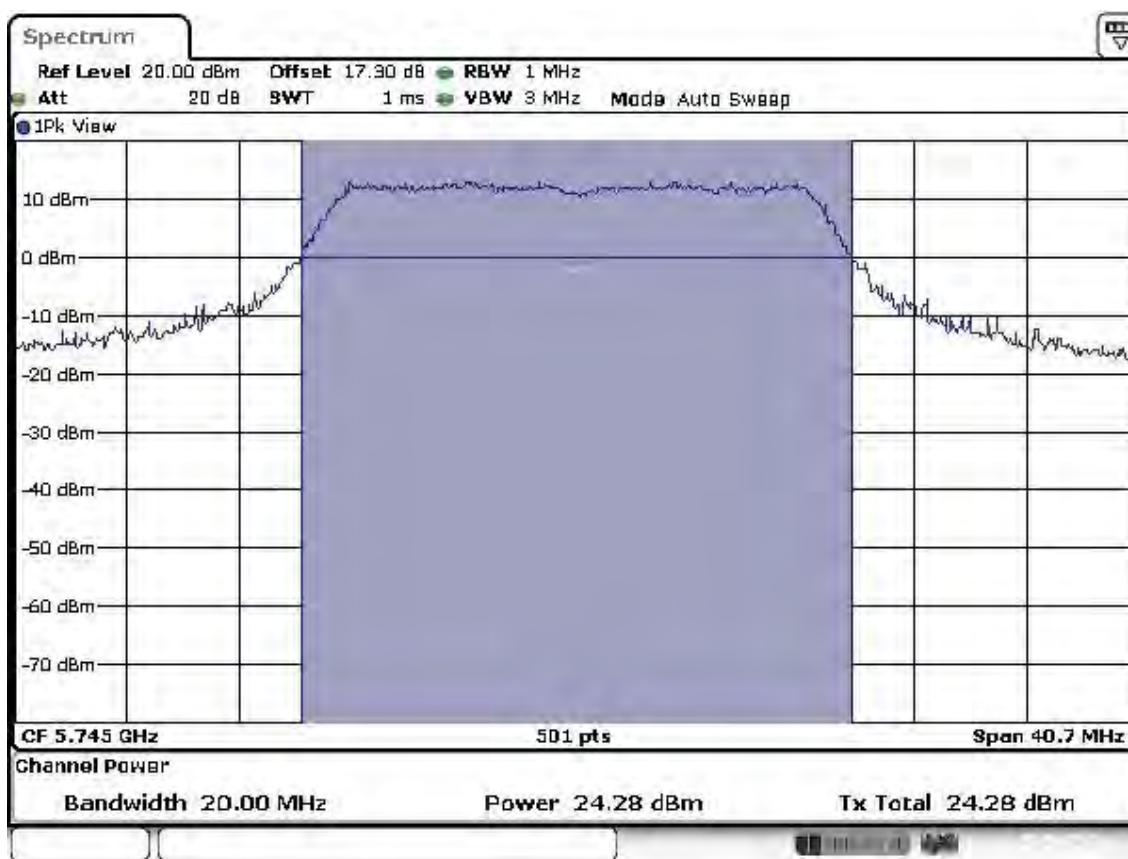

Date: 14.JAN.2013 10:22:21


Plot A



Test Report No.:


**12121201.fcc01**

Page 143 of 263

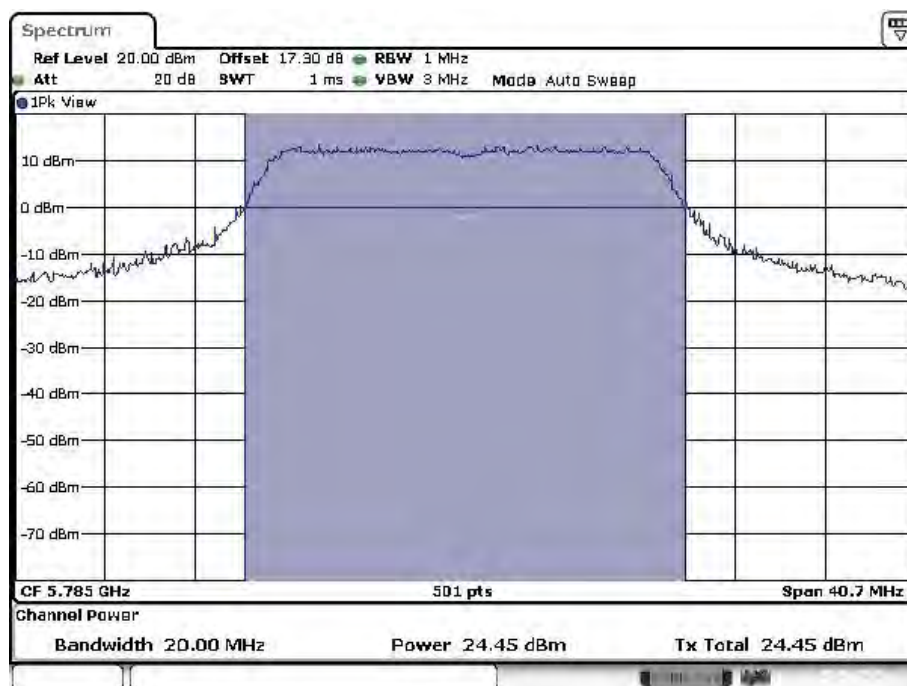

Date: 14.JAN.2013 10:56:07

Plot B

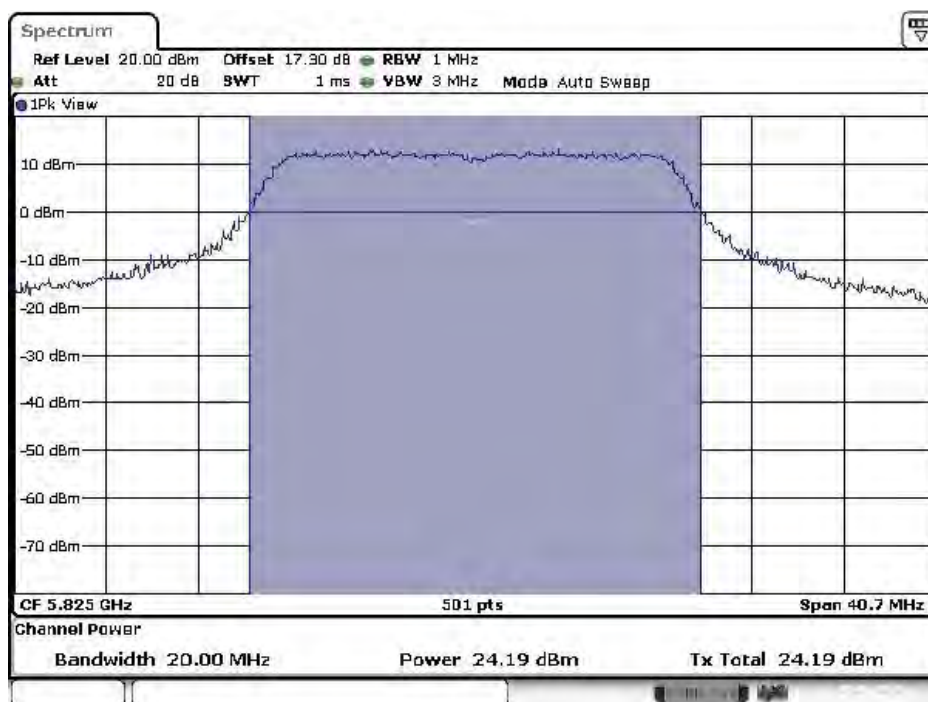

Date: 14.JAN.2013 11:07:02

Plot C


Test Report No.:

**12121201.fcc01**

Page 144 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Frequency [MHz]	Gain control setting (dB)	Output Power Antenna 1 [dBm]	Output Power Antenna 2 [dBm]	Output 1+2 [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
5745	27.0/27.0	19.20	19.20	166.0	+30	1000	5.0	27.20	524.8	A
5785	27.5/27.5	19.22	19.11	165.2	+30	1000	5.0	27.18	522.4	B
5825	27.5/27.5	18.93	18.60	150.6	+30	1000	5.0	26.77	475.3	C

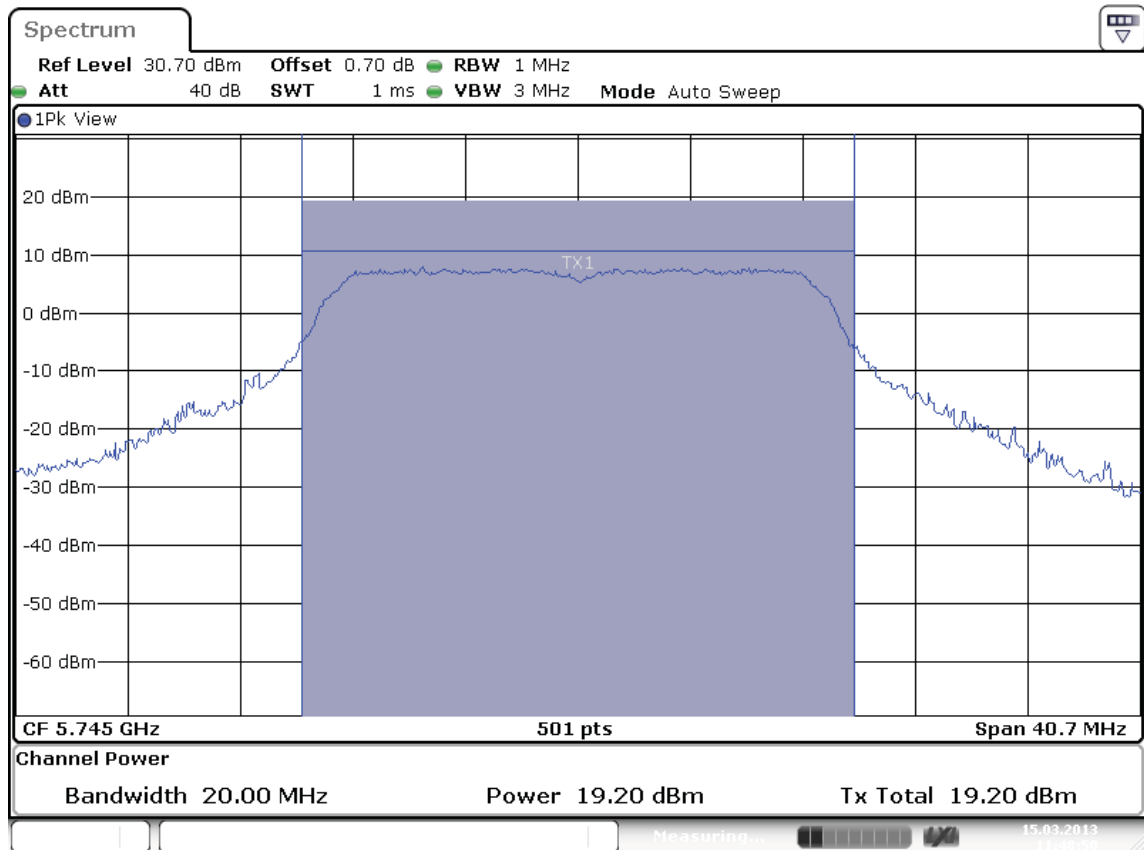

Date: 15.MAR.2013 11:48:50


Plot A Antenna 1



Test Report No.:


**12121201.fcc01**

Page 145 of 263

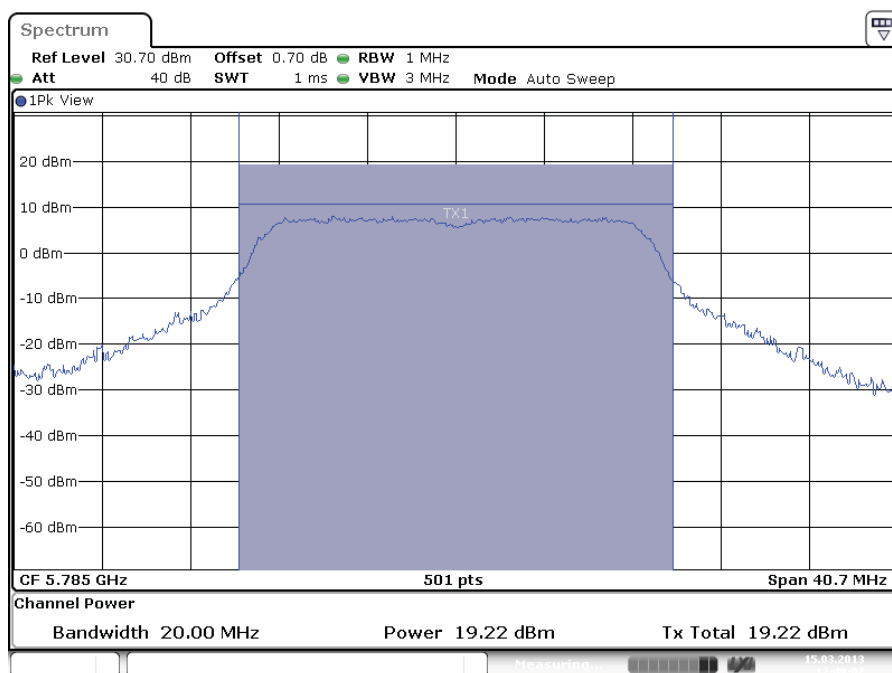

Date: 15.MAR.2013 12:49:08

Plot B Antenna 1

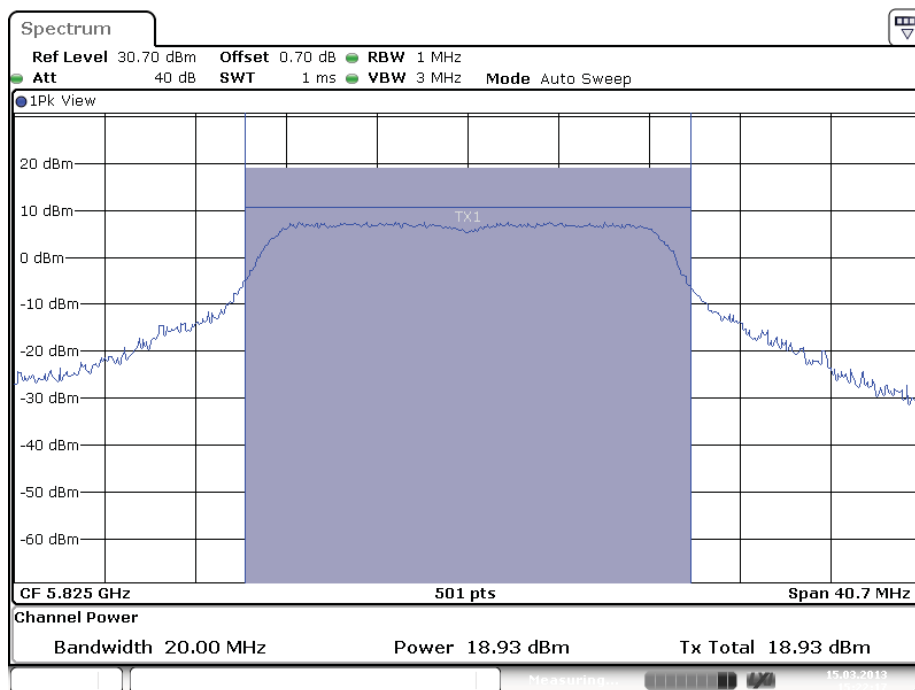


Date: 15.MAR.2013 15:22:17

Plot C Antenna 1

Test Report No.:


**12121201.fcc01**

Page 146 of 263

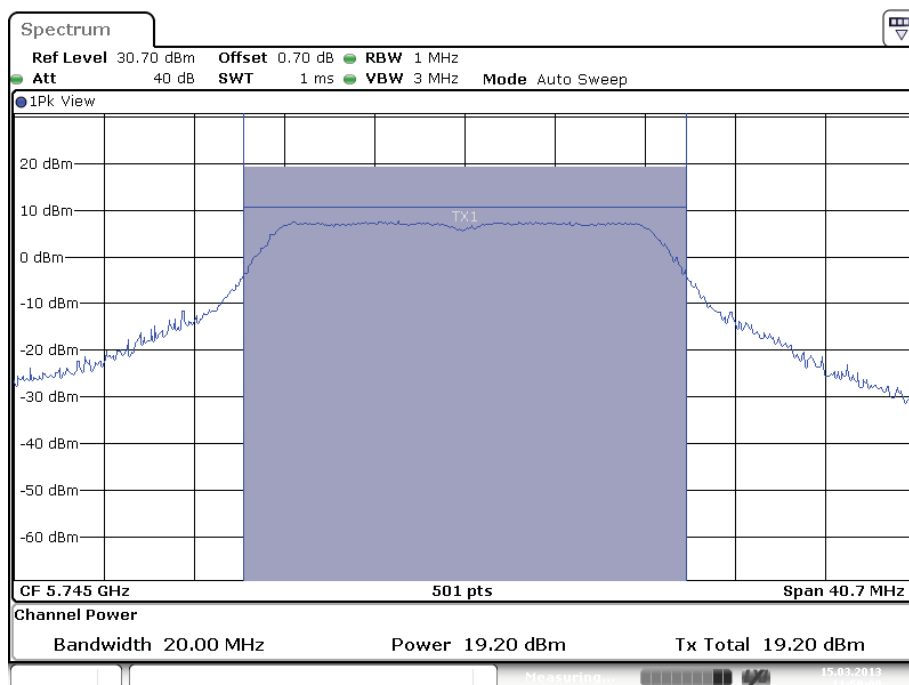

Date: 15.MAR.2013 11:50:09

Plot A2 Antenna 2

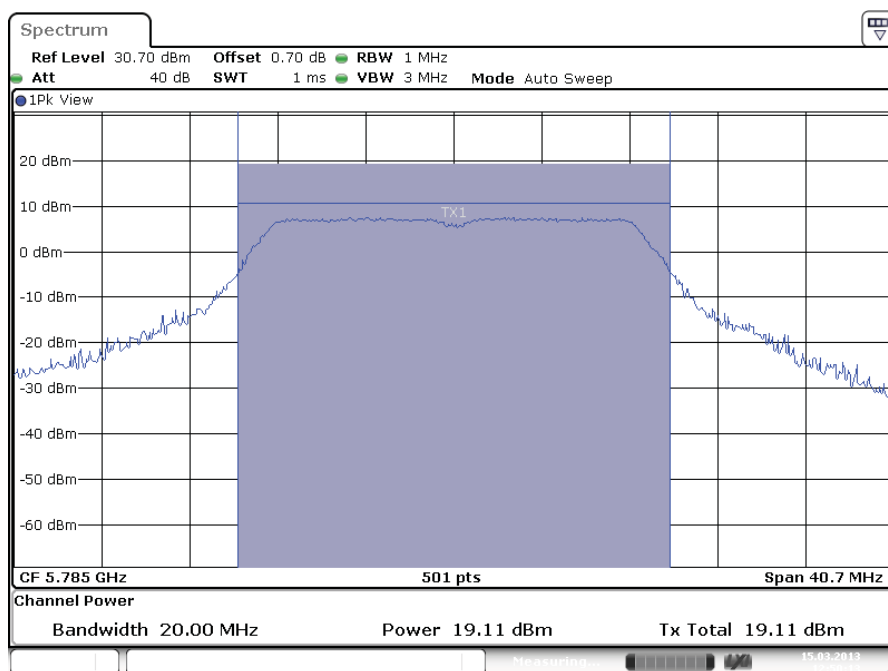


Date: 15.MAR.2013 12:50:13

Plot B2 Antenna 2

Test Report No.:

**12121201.fcc01**

Page 147 of 263

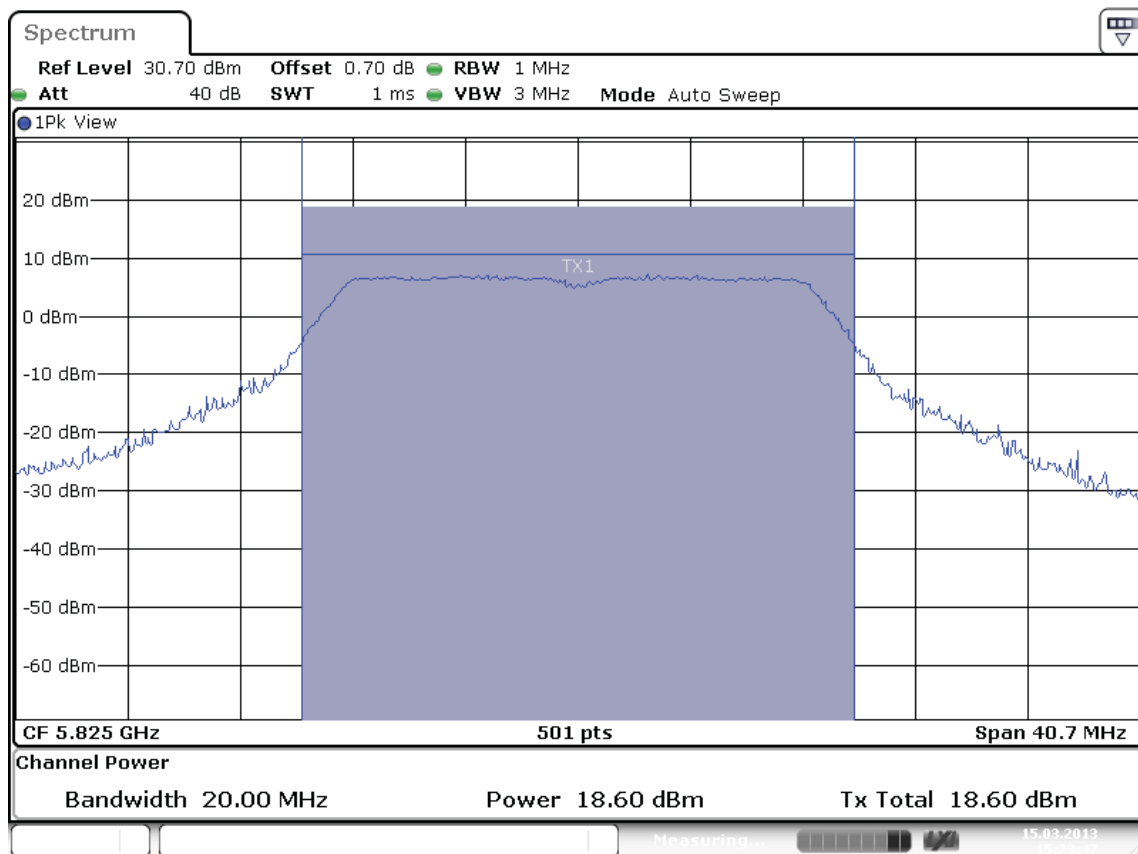

Date: 15.MAR.2013 15:23:47

Plot C2 Antenna 2


Test Report No.:

**12121201.fcc01**

Page 148 of 263

Operation mode: HT4-40 MHz wide, Antenna 1

Frequency [MHz]	Power setting [dBm]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain [dBi]	EIRP [dBm]	EIRP [mW]	Plot number
5755	11.5	19.6	91.2	+30	1000	5.0	24.6	288.4	A
5795	11.0	19.2	83.2	+30	1000	5.0	24.2	263.0	B

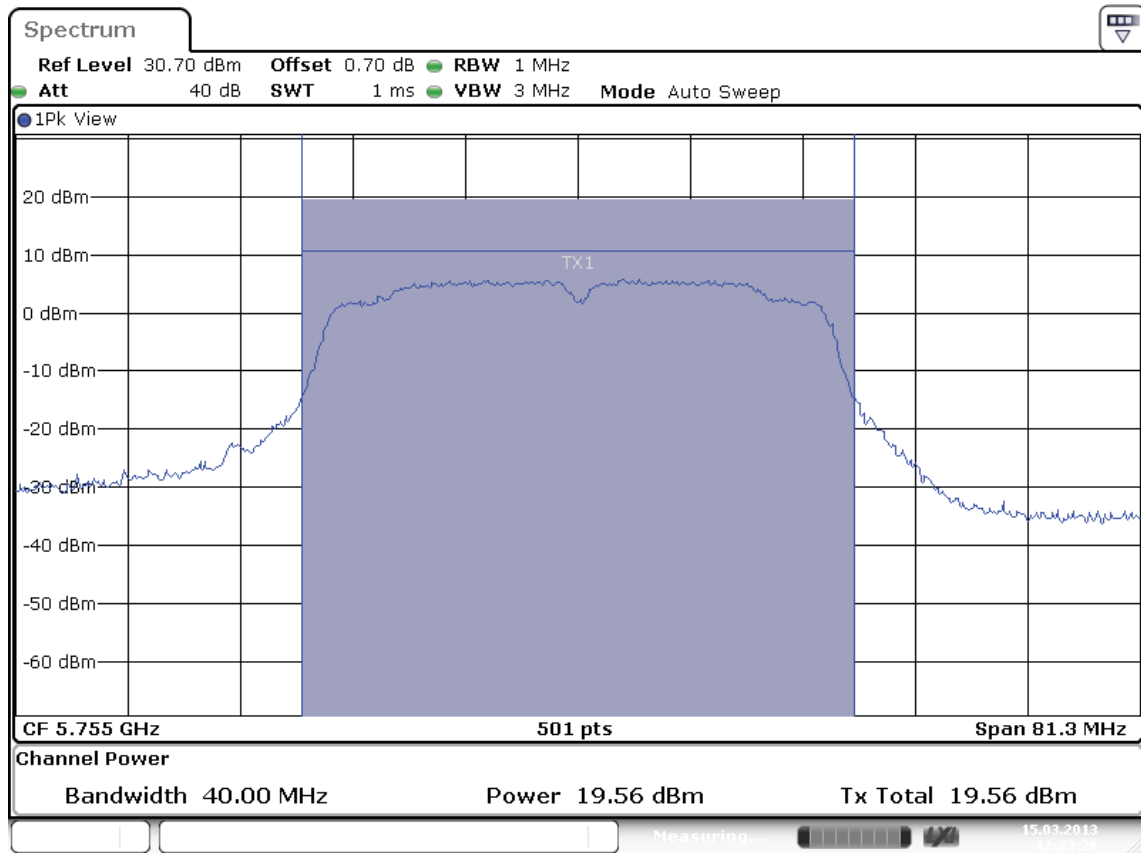


Date: 15.MAR.2013 12:23:27

Plot A

Test Report No.:

**12121201.fcc01**

Page 149 of 263

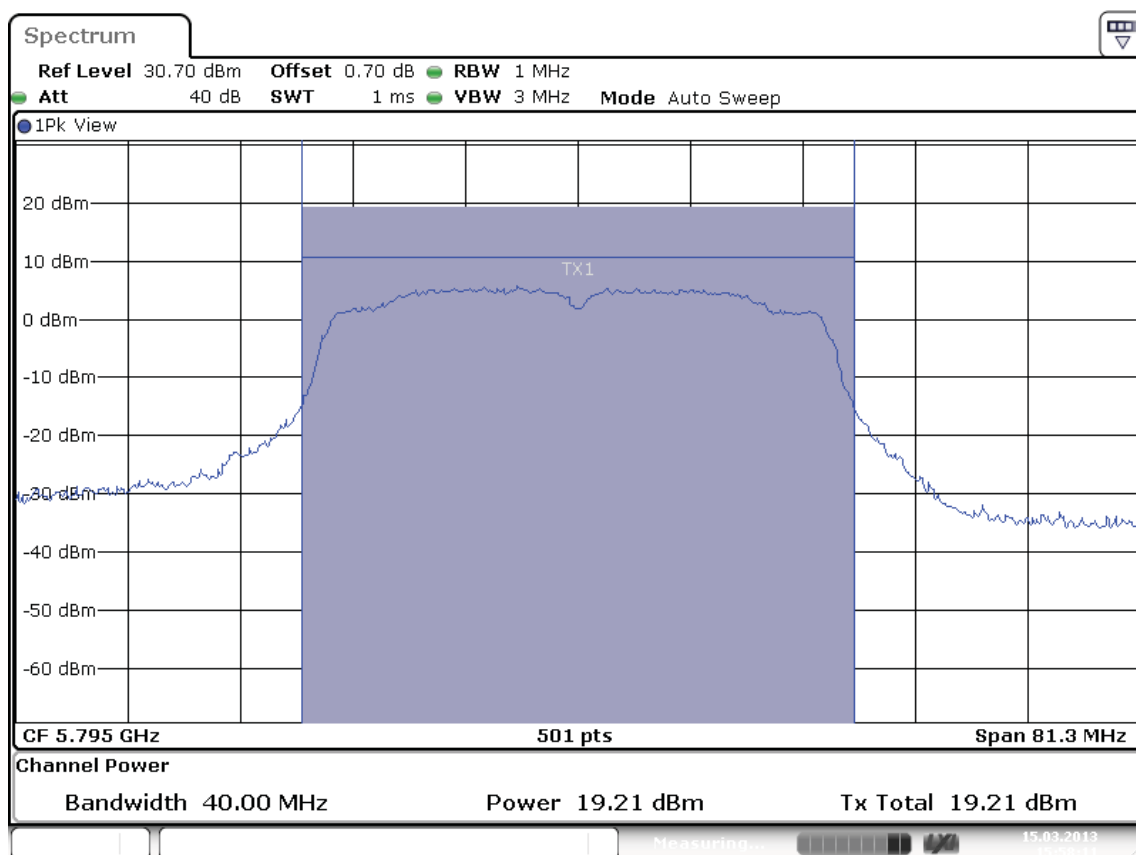

Date: 15.MAR.2013 15:58:11

Plot B


Test Report No.:

**12121201.fcc01**

Page 150 of 263

Operation mode: HT4-40 MHz wide, Antenna 2

Frequency [MHz]	Power setting [dBm]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain [dBi]	EIRP [dBm]	EIRP [mW]	Plot number
5755	11.5	19.2	83.2	+30	1000	5.0	24.2	263.0	A
5795	10.5	19.2	83.2	+30	1000	5.0	24.2	263.0	B

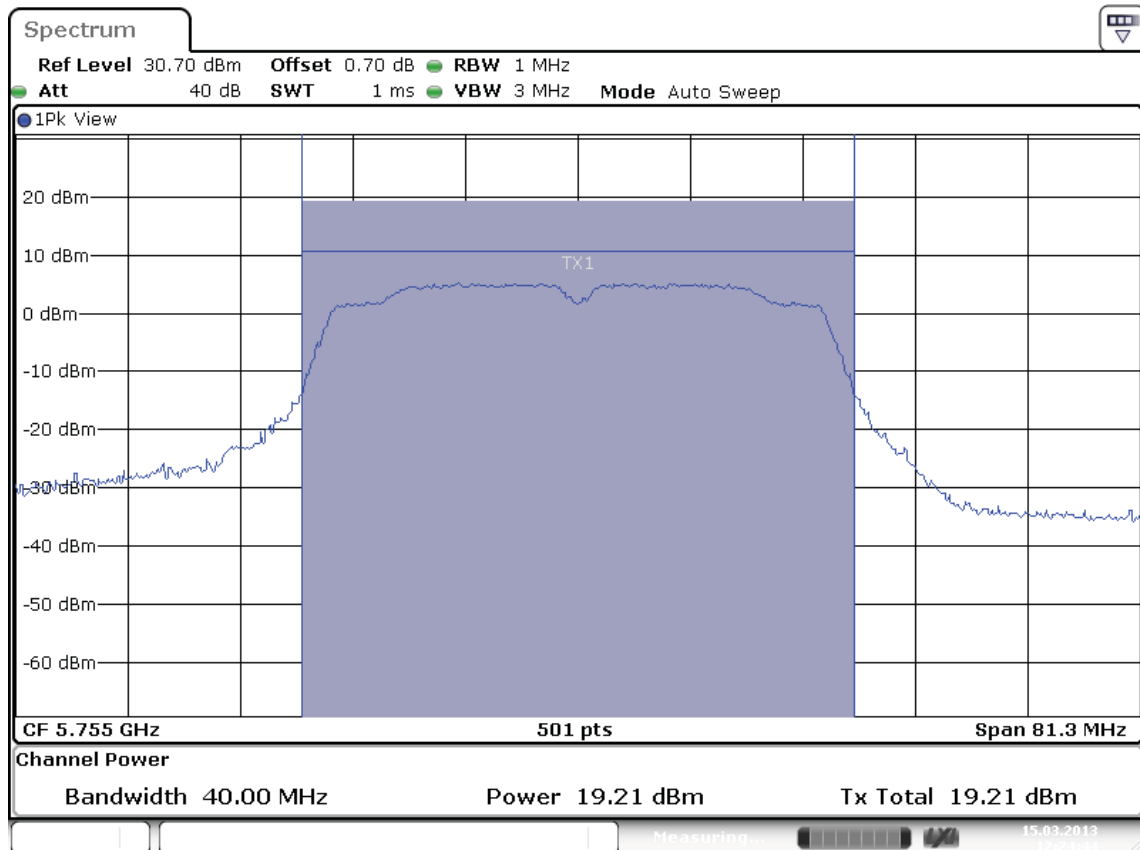


Date: 15.MAR.2013 12:24:44

Plot A

Test Report No.:

**12121201.fcc01**

Page 151 of 263

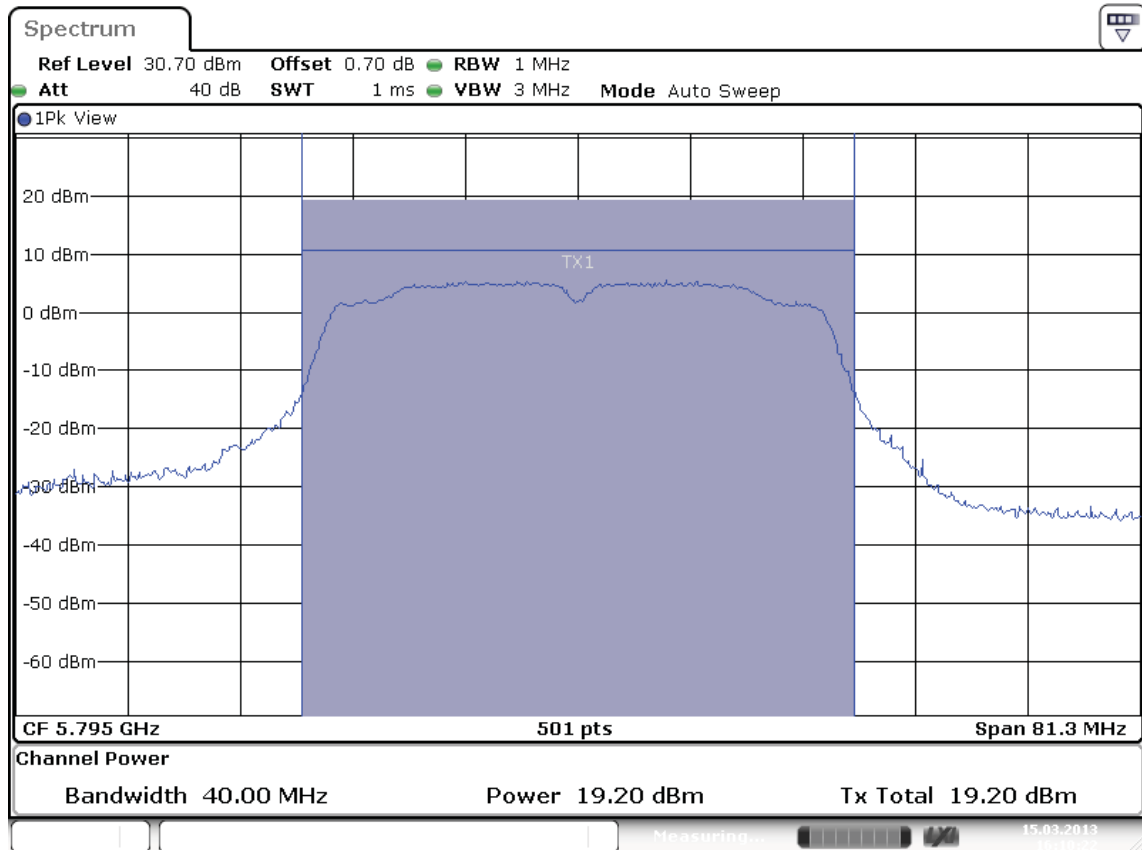

Date: 15.MAR.2013 16:10:22

Plot B


Test Report No.:

**12121201.fcc01**

Page 152 of 263

Operation mode: HT8-40 MHz, Antenna 1+2

Frequency [MHz]	Power setting (dBm)	Output Power Ant1/Ant2 [dBm]	Output Power Ant1/Ant2 [mW]	Limit [dBm]	Limit [mW]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
5755	11.5/11.5	19.6/19.2	91.2/83.2	+30	1000	5.0	27.4	551.4	A
5795	11.0/11.0	19.2/19.2	83.2/83.2	+30	1000	5.0	27.2	526.1	B

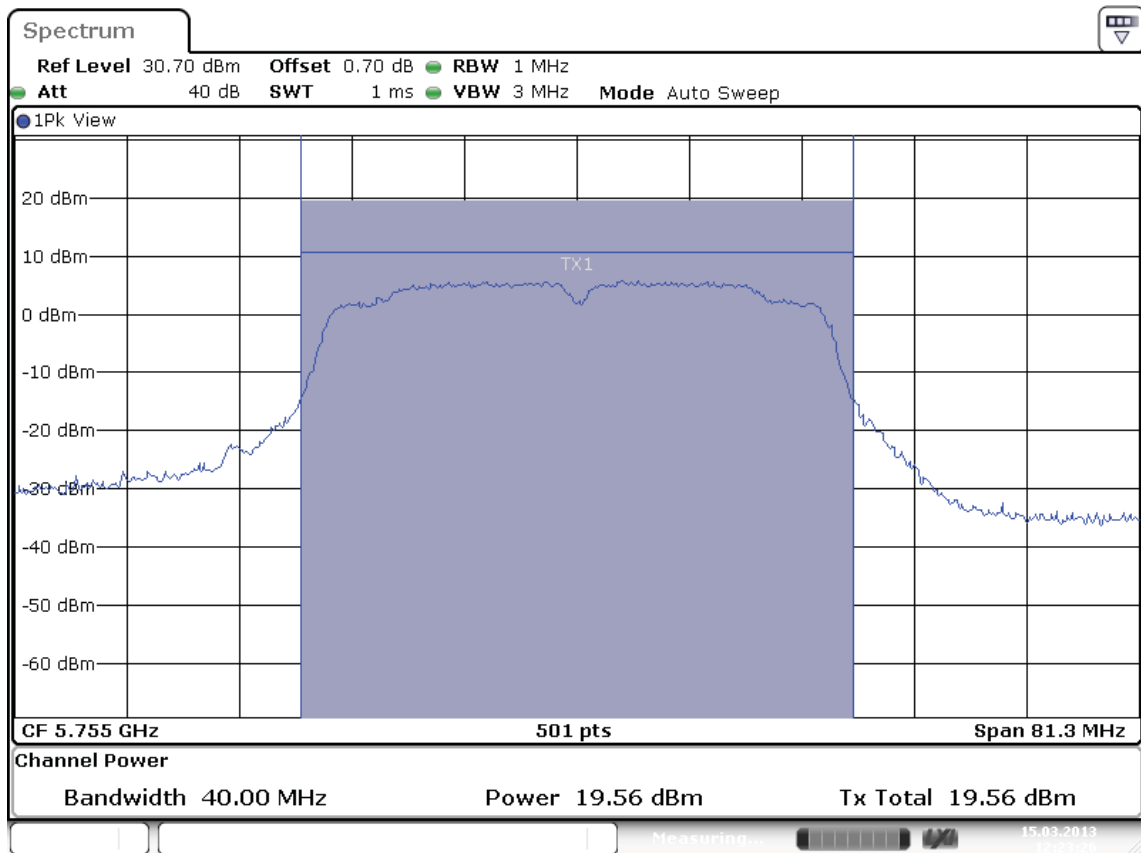

Date: 15.MAR.2013 12:23:27


Plot A1 Antenna1



Test Report No.:

**12121201.fcc01**

Page 153 of 263

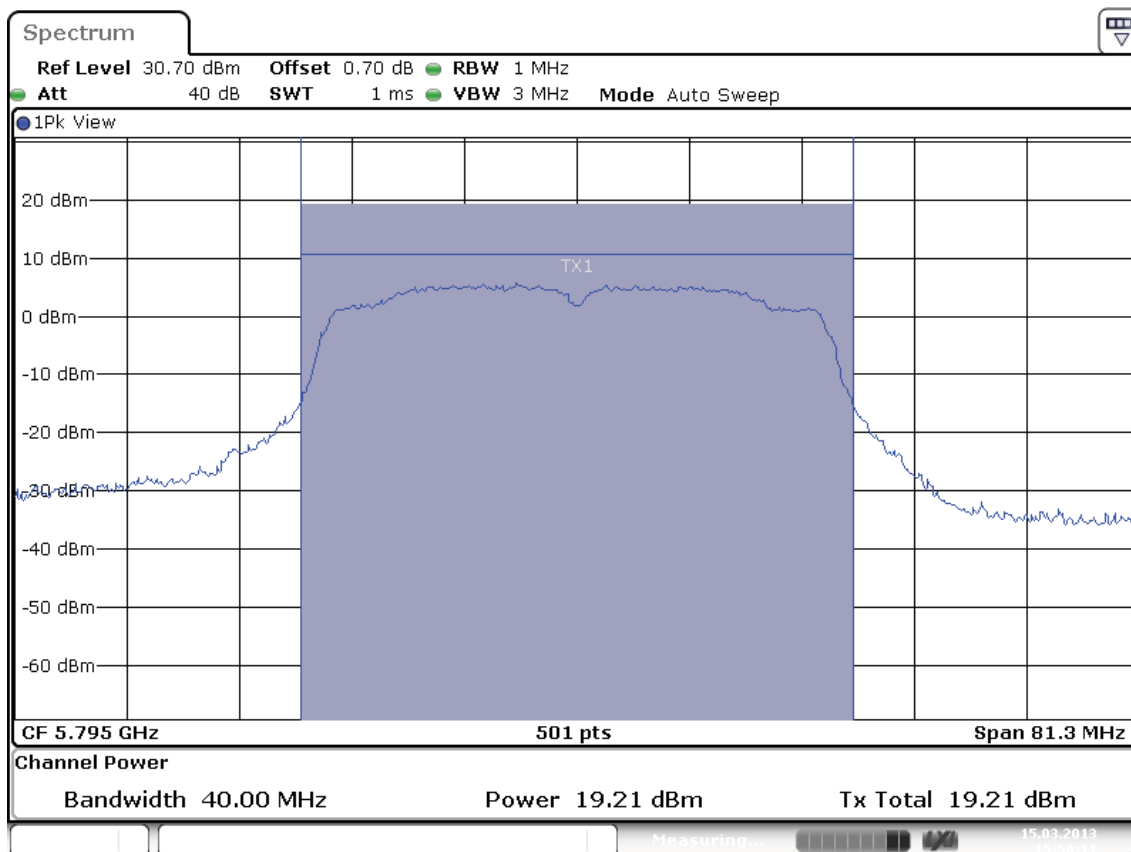


Date: 15.MAR.2013 15:58:11

Plot B1 Antenna1

Test Report No.:


**12121201.fcc01**

Page 154 of 263

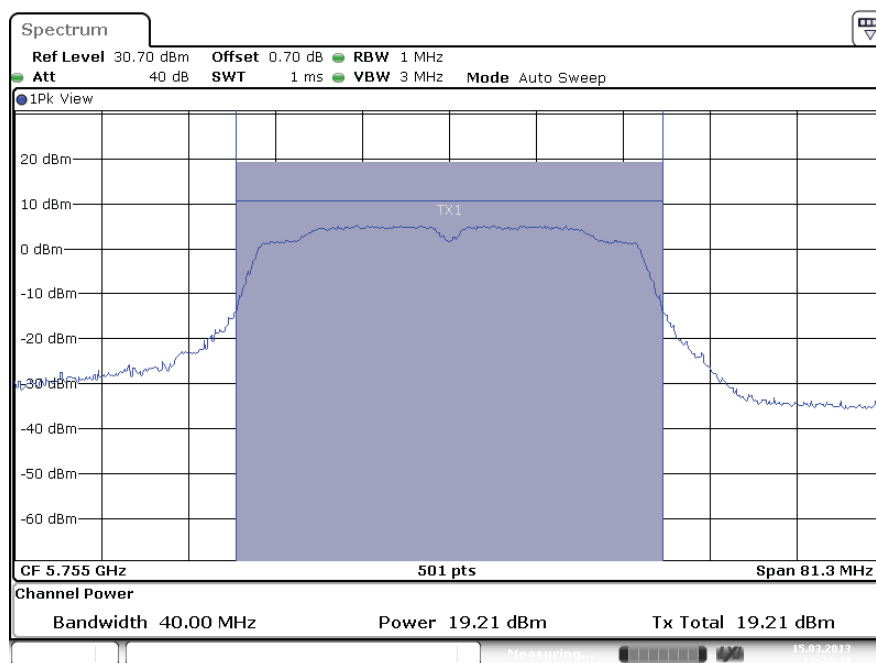

Date: 15.MAR.2013 12:24:44

Plot A2 Antenna2

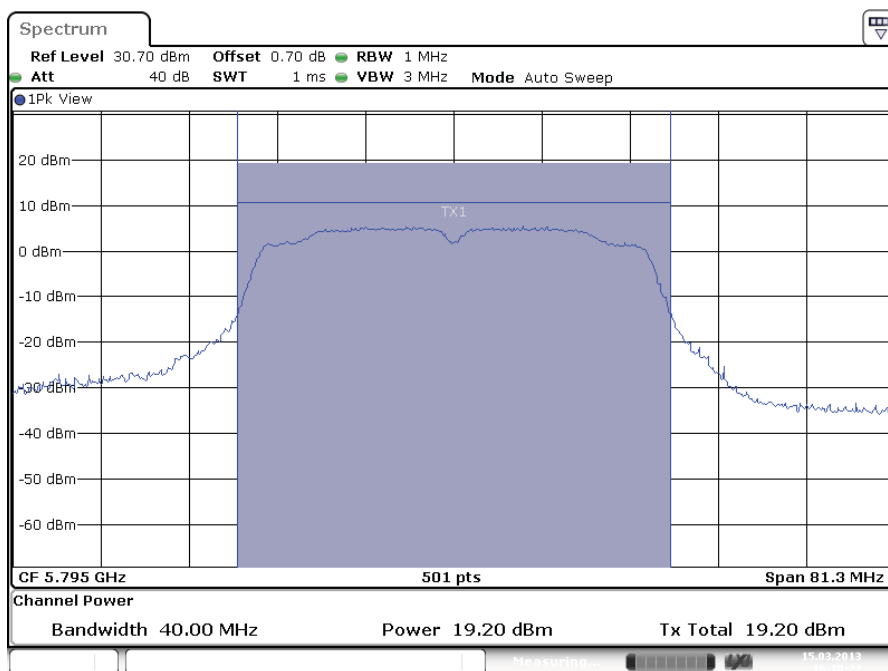

Date: 15.MAR.2013 16:10:22

Plot B2 Antenna2


Test Report No.:

**12121201.fcc01**

Page 155 of 263

Operation mode: VHT0-80 MHz wide, Antenna 1

Frequency [MHz]	Power setting [dBm]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain [dBi]	EIRP [dBm]	EIRP [mW]	Plot number
5775	14.0	23.56	227.0	+30	1000	5.0	28.56	717.8	A

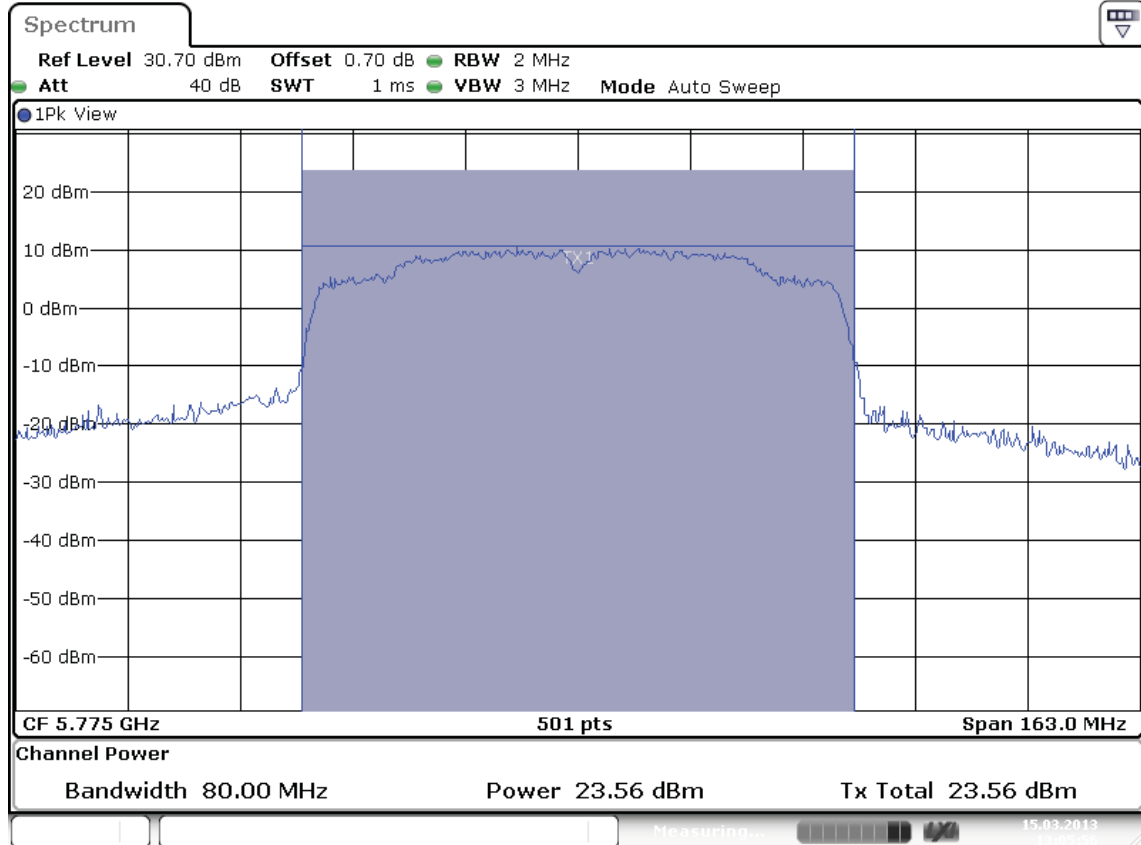

Date: 15.MAR.2013 13:05:55

Plot A


Test Report No.:

**12121201.fcc01**

Page 156 of 263

Operation mode: VHT0-80 MHz wide, Antenna 2

Frequency [MHz]	Power setting [dBm]	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Antenna Gain [dBi]	EIRP [dBm]	EIRP [mW]	Plot number
5775	14.0	23.84	242.1	+30	1000	5.0	28.84	765.6	A

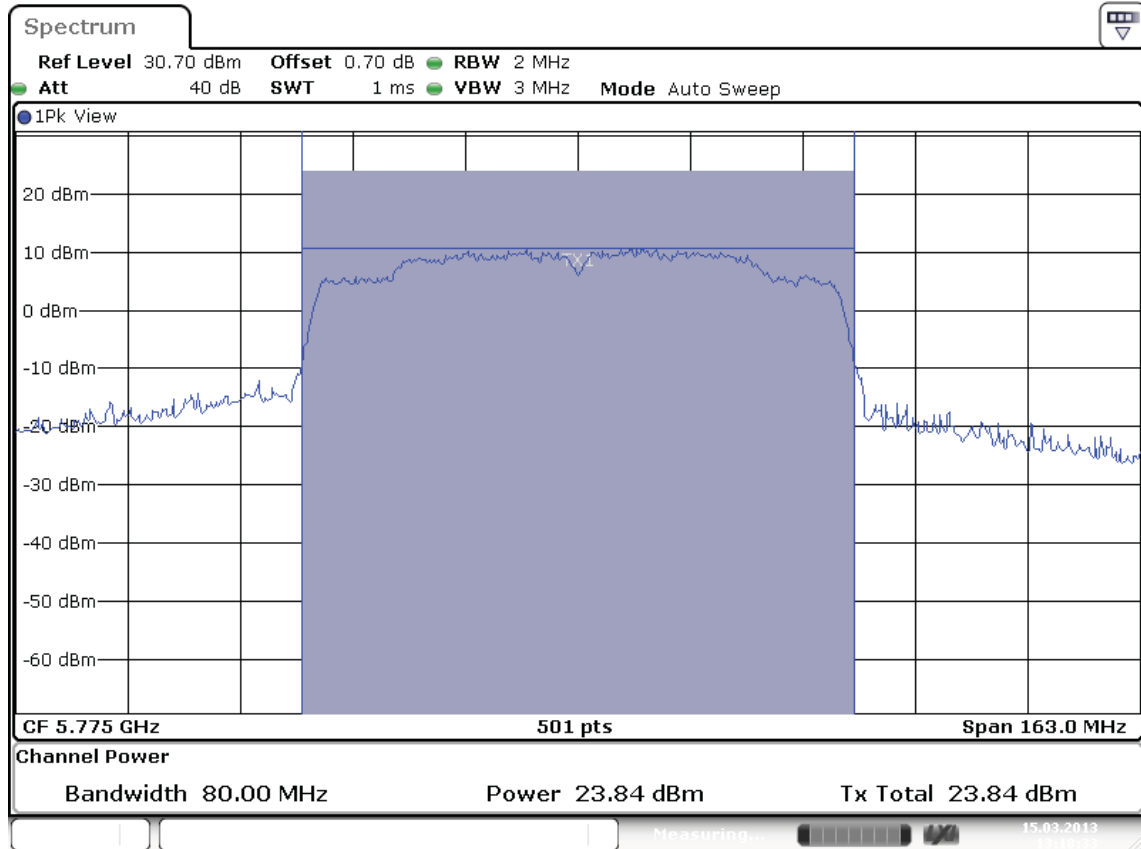

Date: 15.MAR.2013 13:18:34

Plot A


Test Report No.:

**12121201.fcc01**

Page 157 of 263

Operation mode: VHT0-80 MHz wide, Antenna 1+2

Freq- uency [MHz]	Gain control setting (dB)	Output Power Antenna1 [dBm]	Output Power Antenna2 [dBm]	Total Power Ant1+Ant2 [dBm]	Limit [dBm]	Limit [mW]	Ant- enna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
5775	27.0/27.0	19.69	19.92	22.82	+30	1000	5.0	27.82	605.3	A

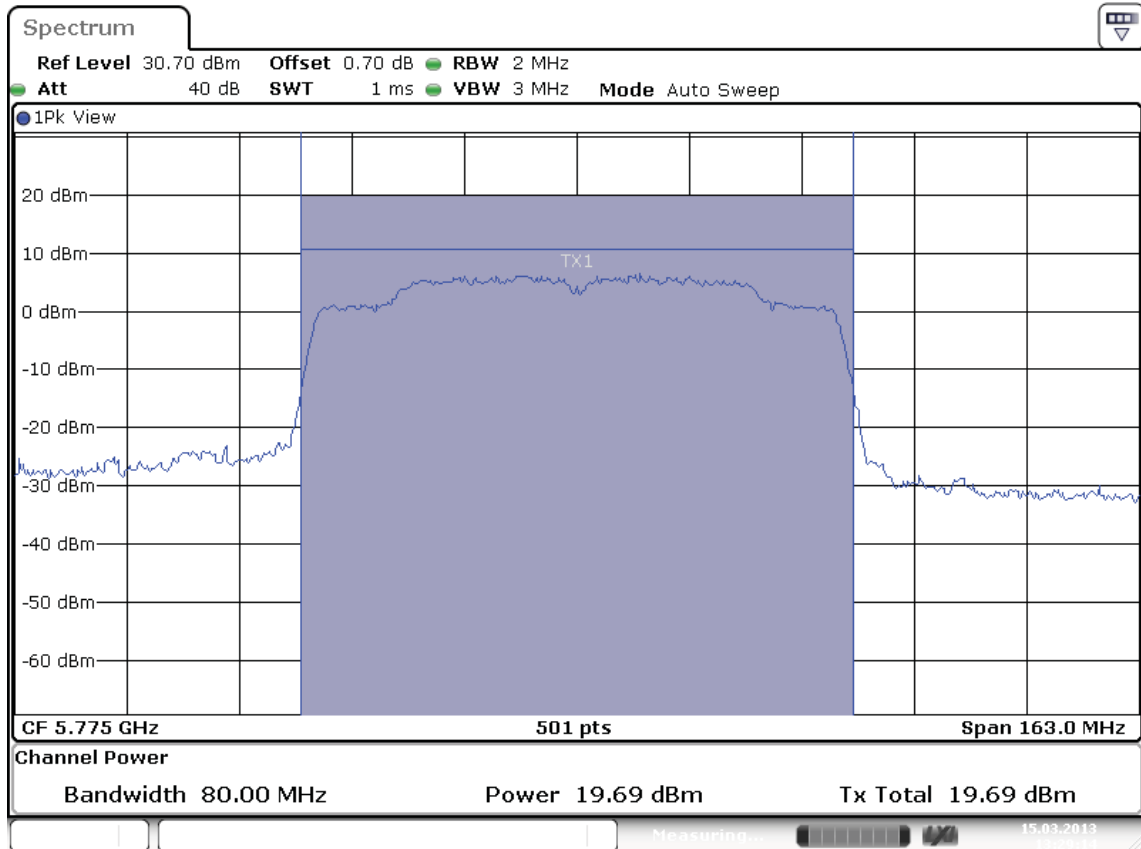


Date: 15.MAR.2013 13:29:14

Plot A

Test Report No.:

**12121201.fcc01**

Page 158 of 263

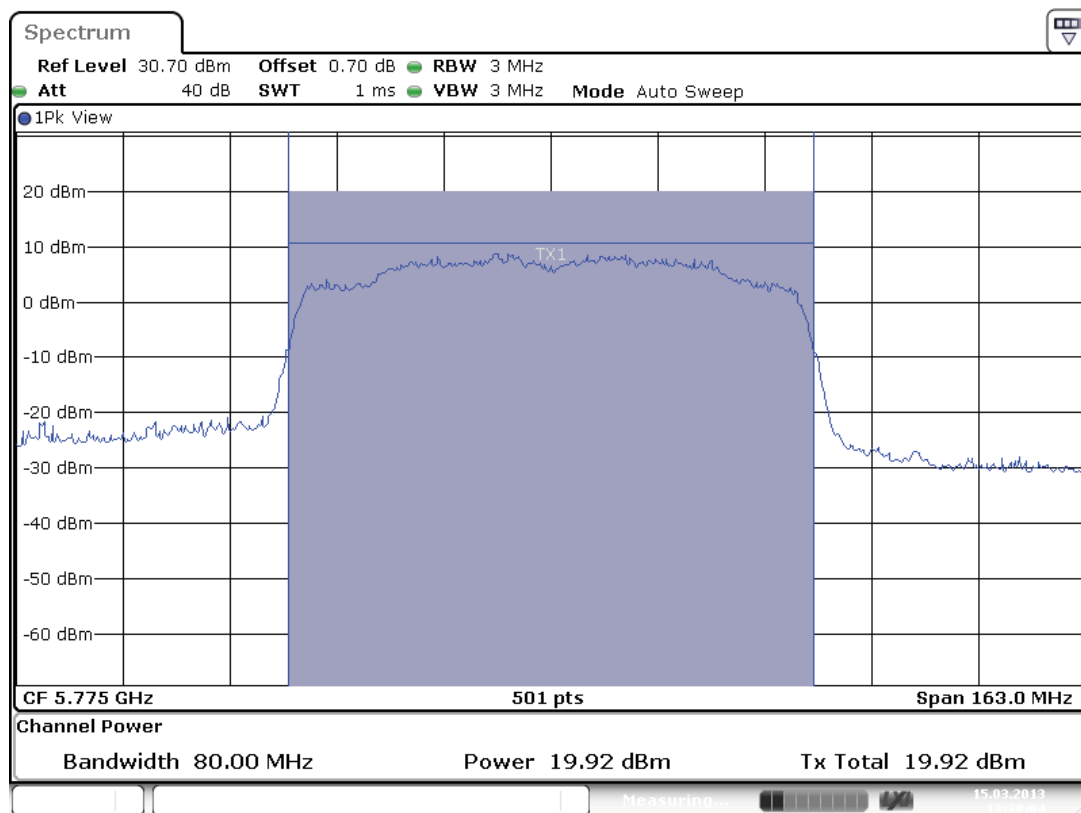

Date: 15.MAR.2013 13:38:05

Plot B

Test Report No.:

**12121201.fcc01**

Page 159 of 263

### **7.2.2 6dB and 99% Bandwidth**

**RESULT: Pass**

Date of testing:

2013-01-11 / 2013-03-15

Requirements:

FCC 15.247(a)(2) and RSS-210 Section A8.2(a)

For systems using digital modulation in the 5745 MHz to 5825 MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 6dB bandwidth:

ANSI C63.10: 2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

ANSI C63.10: 2009 and RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Test Report No.:


**12121201.fcc01**

Page 160 of 263

**Table 5: 6dB and 99% Bandwidth**

Operation mode: 6Mb OFDM, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5745	18683	16431	500	A
5785	18962	16447	500	B
5825	18044	16407	500	C

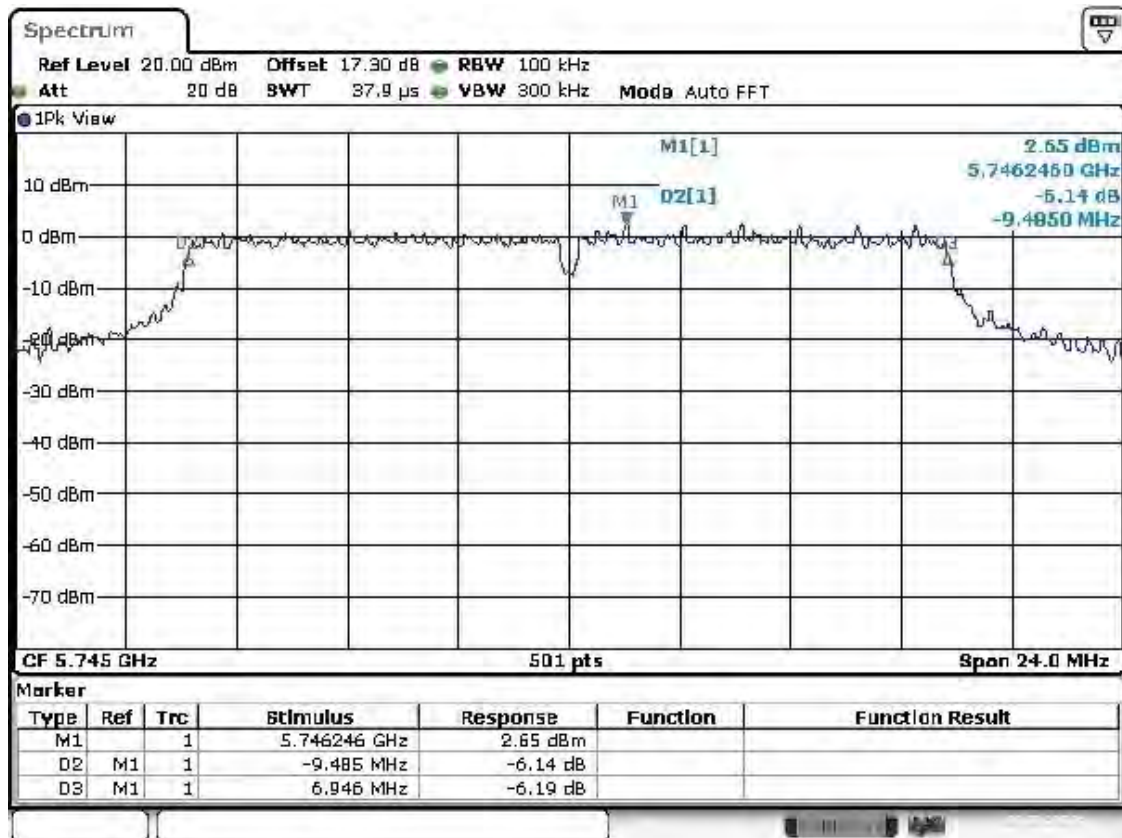

Date: 11. JAN. 2013 14:41:36


Plot A



Test Report No.:


**12121201.fcc01**

Page 161 of 263

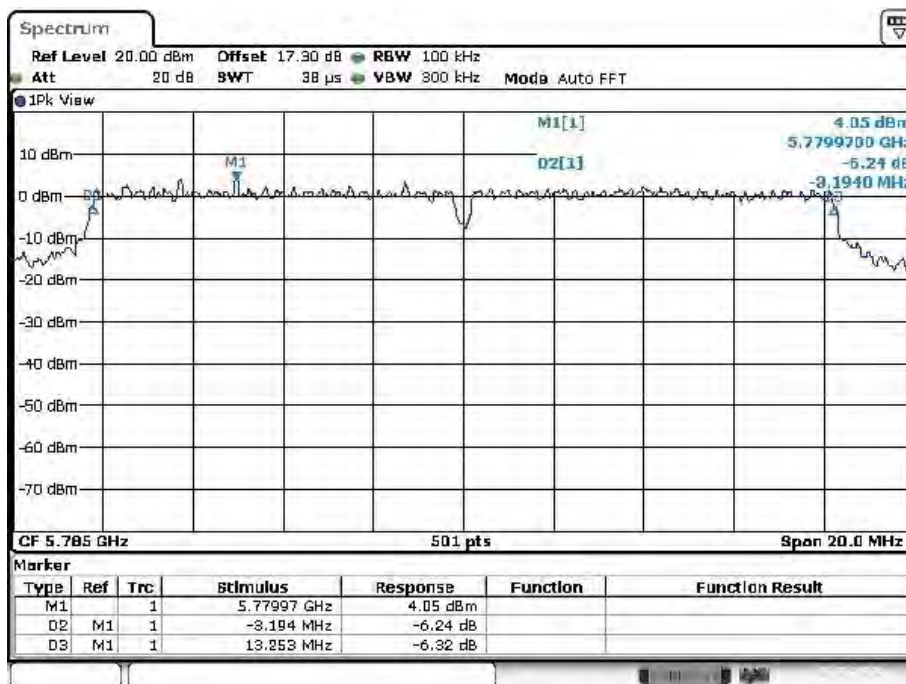

Date: 11.JAN.2013 15:23:22

Plot B

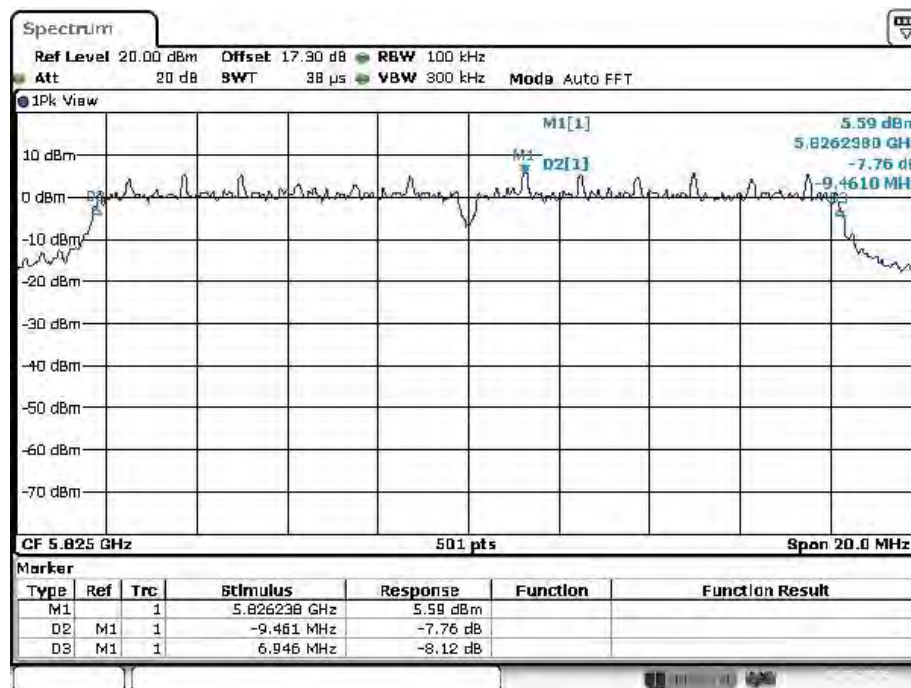

Date: 11.JAN.2013 15:33:14

Plot C

Test Report No.:

**12121201.fcc01**

Page 162 of 263


Operation mode: 6Mb OFDM, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5745	16526	16560	500	A
5785	16479	16560	500	B
5825	16575	16560	500	C

Test Report No.:

**12121201.fcc01**

Page 163 of 263

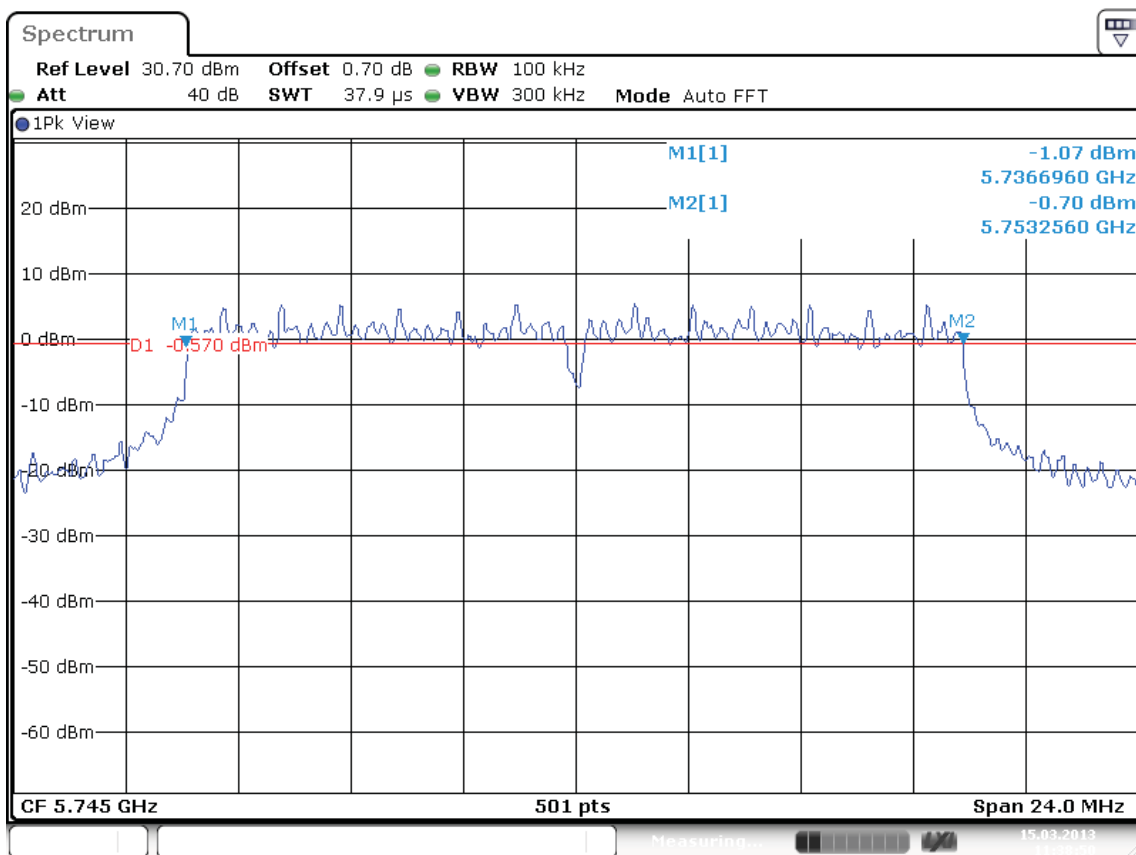


Date: 15.MAR.2013 11:38:50

Plot A


Test Report No.:

**12121201.fcc01**

Page 164 of 263

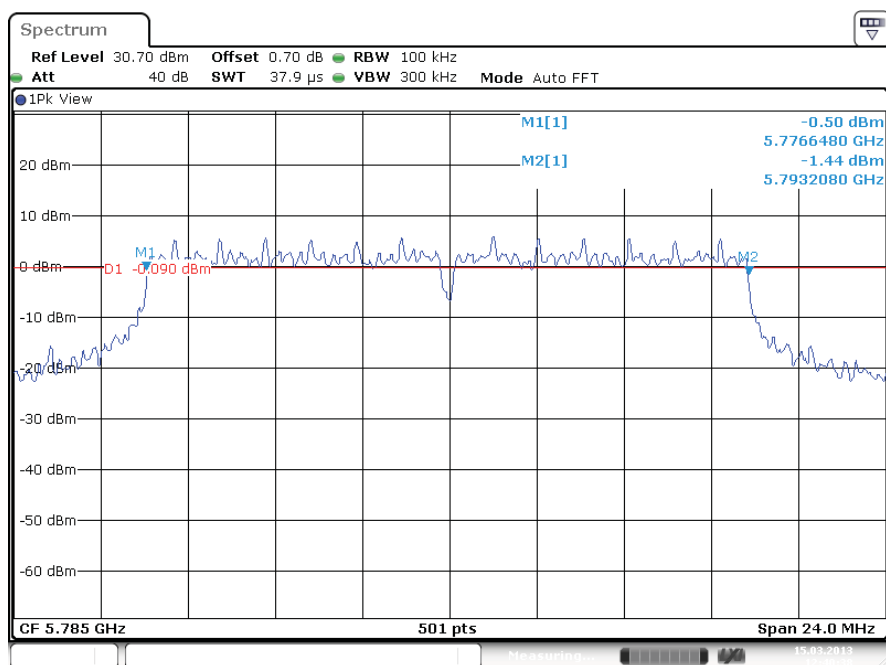

Plot B

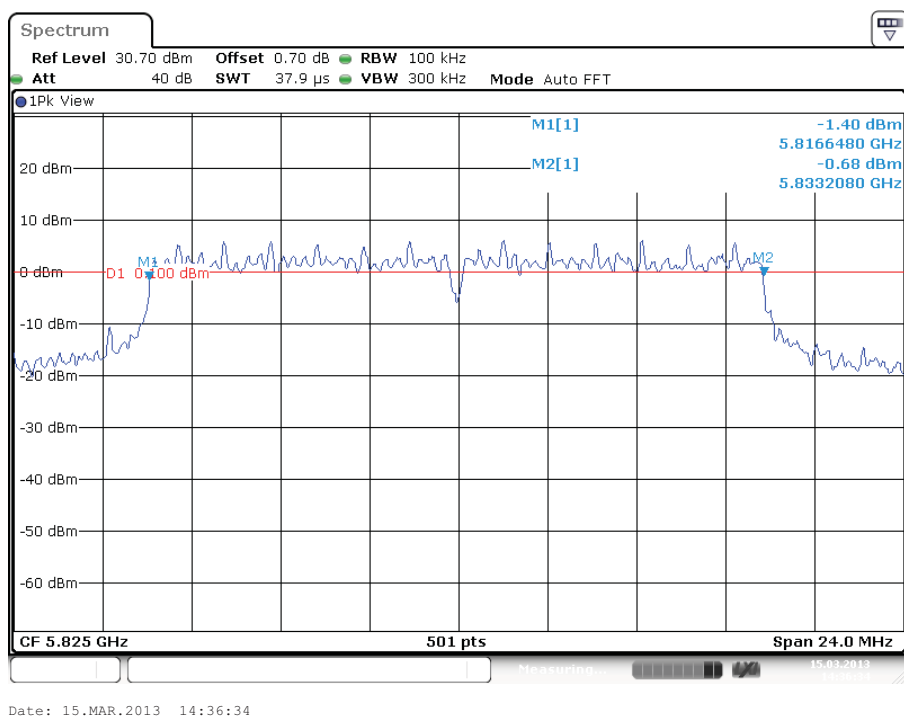

Plot C


Test Report No.:

**12121201.fcc01**

Page 165 of 263


Operation mode: HT4 – 20MHz, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5745	18762	17725	500	A
5785	20159	17765	500	B
5825	19082	17725	500	C

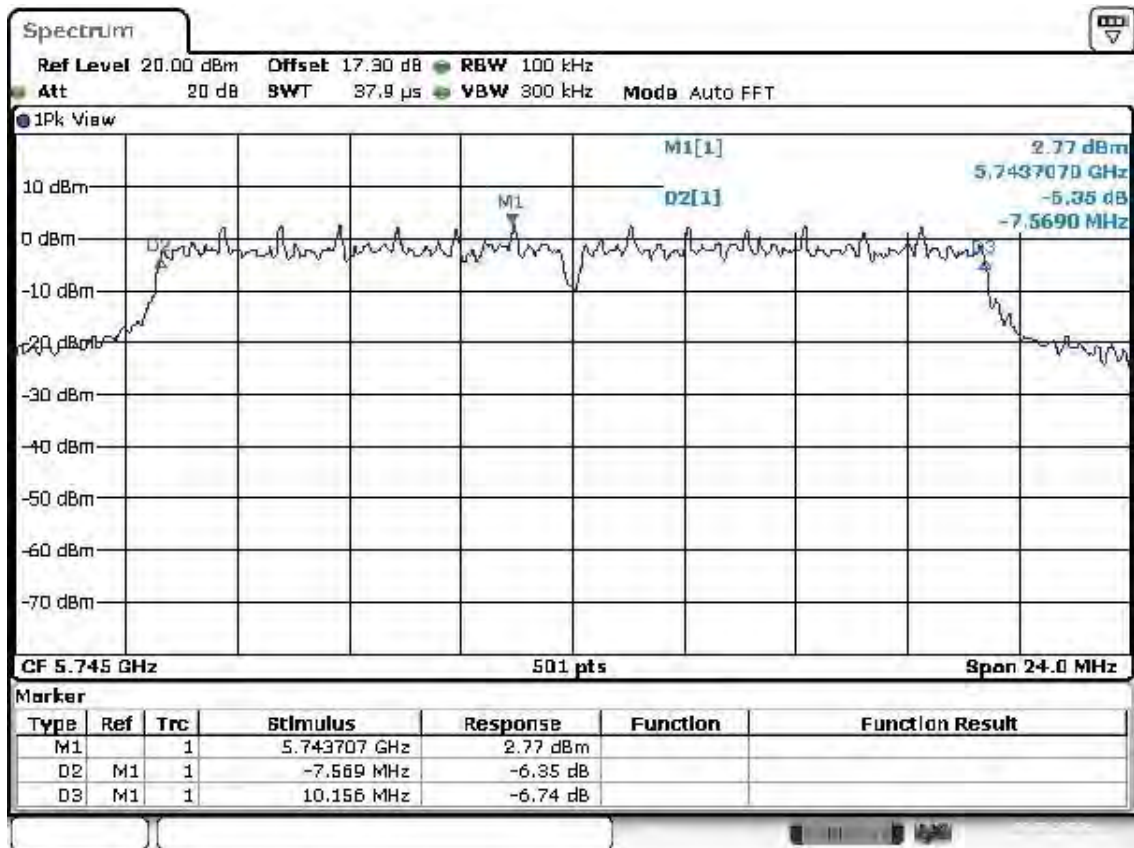


Date: 11.JAN.2013 14:47:07

Plot A

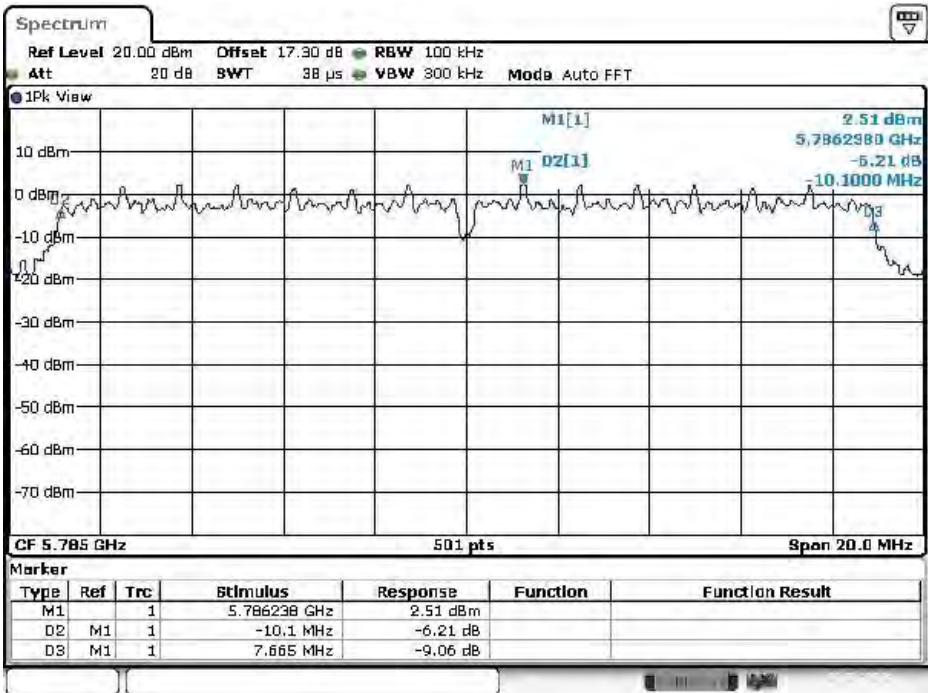

Plot B

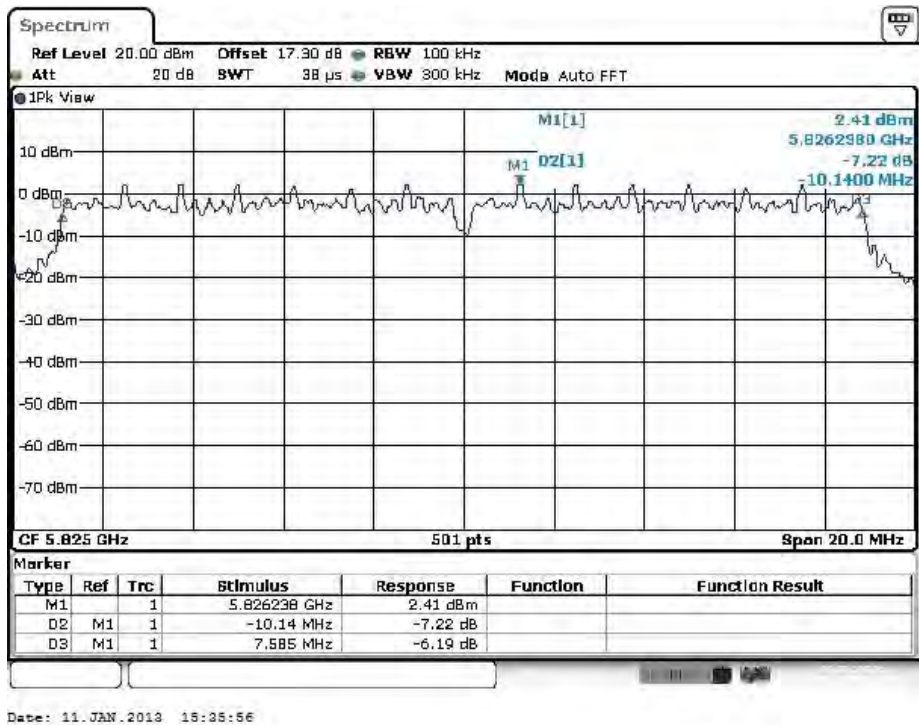

Plot C


Test Report No.:

**12121201.fcc01**

Page 167 of 263

Operation mode: HT4 – 20MHz, Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5745	19162	17725	500	A
5785	19062	17685	500	B
5825	19162	17724	500	C

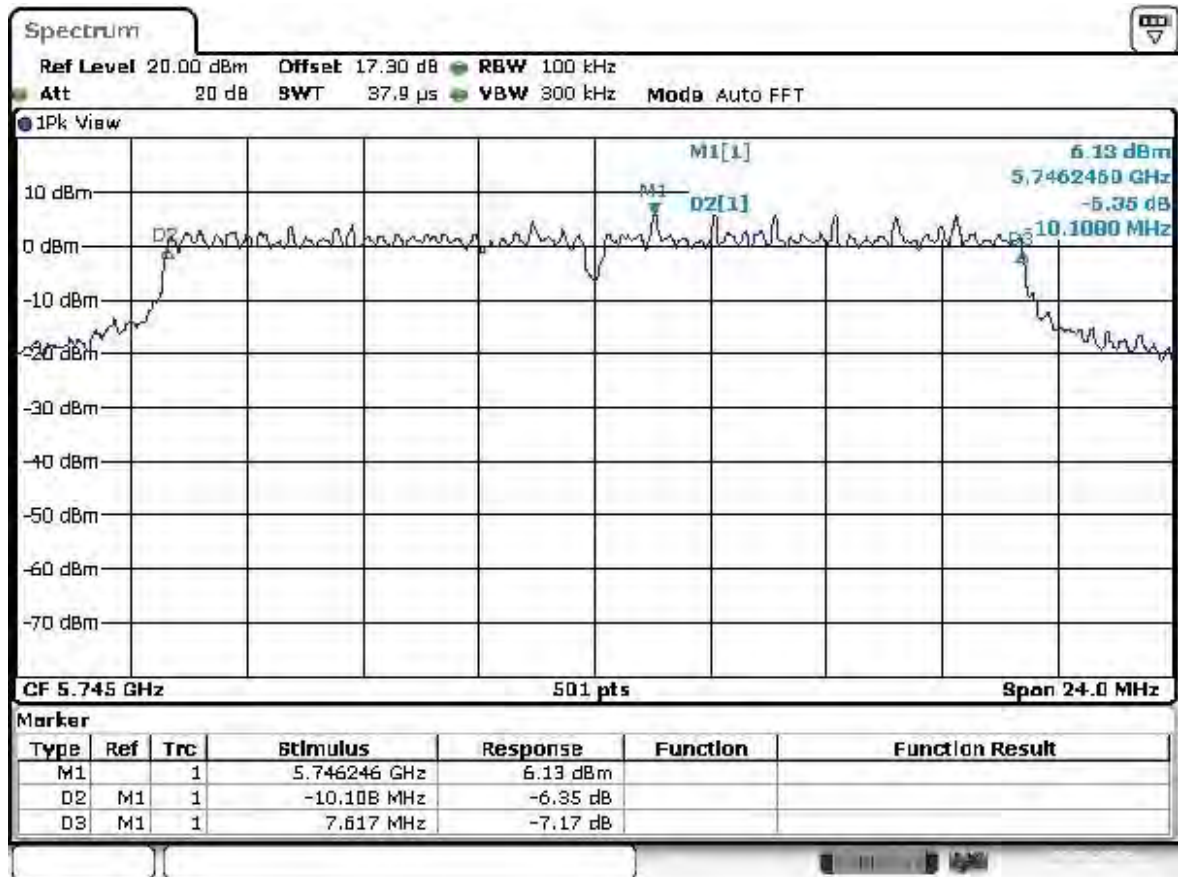

Date: 11. JAN. 2013 14:48:55


Plot A




Test Report No.:

12121201.fcc01

Page 168 of 263

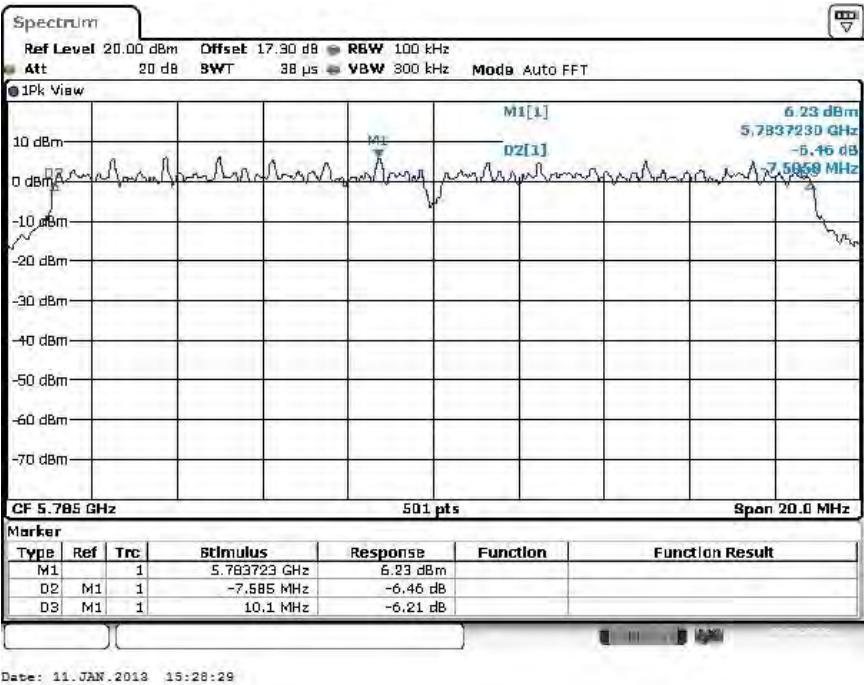

Plot B

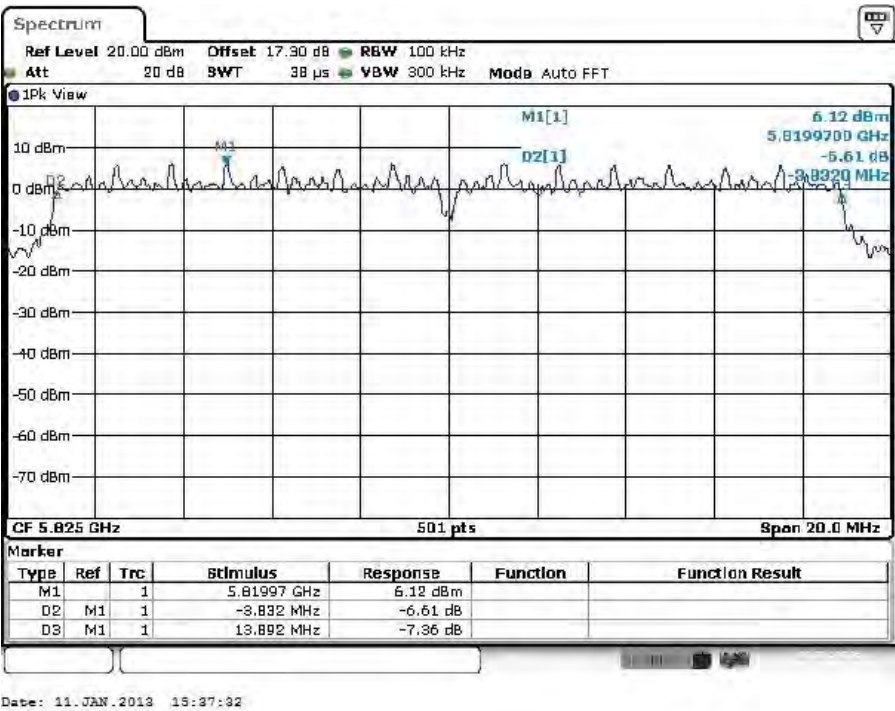

Plot C




Test Report No.:

**12121201.fcc01**

Page 169 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Operating Frequency [MHz]	99% Bandwidth Antenna1/Antenna2 [kHz]	6dB Bandwidth Antenna1/Antenna2 [kHz]	Limit [kHz]	Plot number
5745	17676 / 17725	17664 / 17664	500	A
5785	17724 / 17724	17664 / 17664	500	B
5825	17724 / 17726	17664 / 17664	500	C

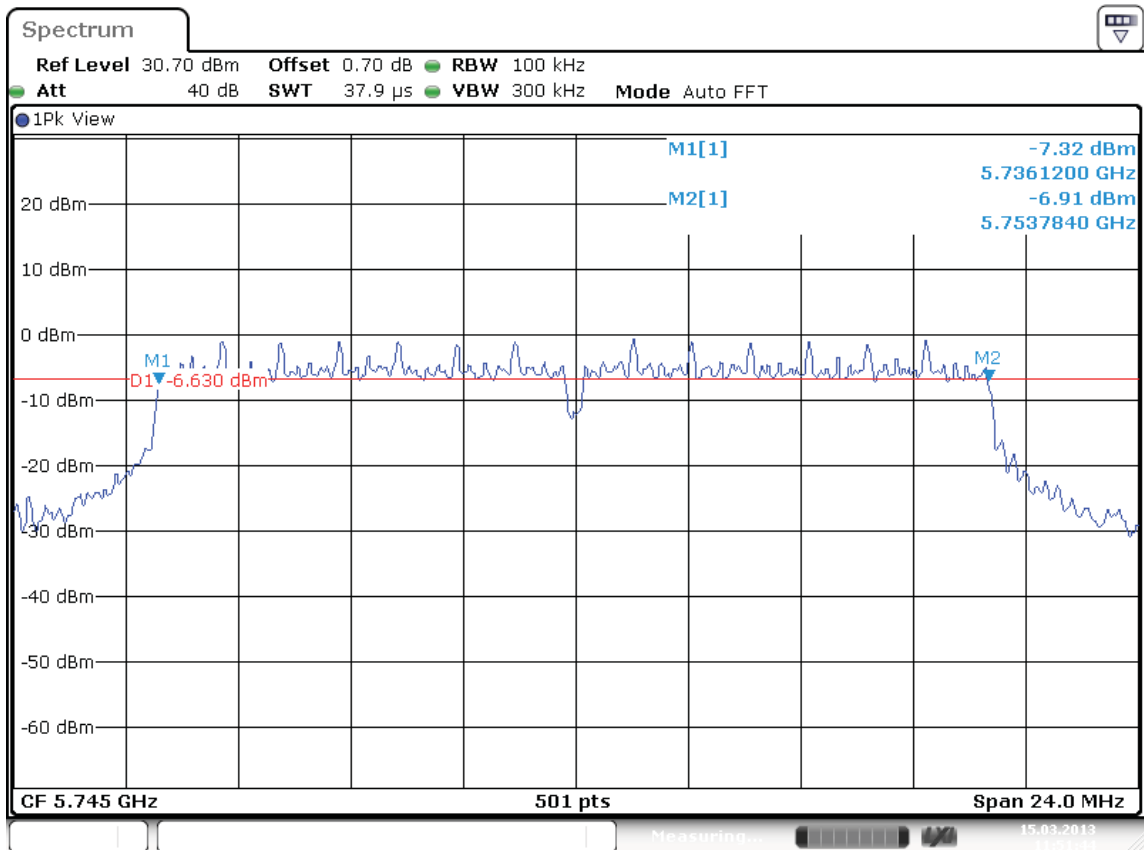


Date: 15.MAR.2013 11:51:44

Plot A Antenna 1


Test Report No.:

**12121201.fcc01**

Page 170 of 263

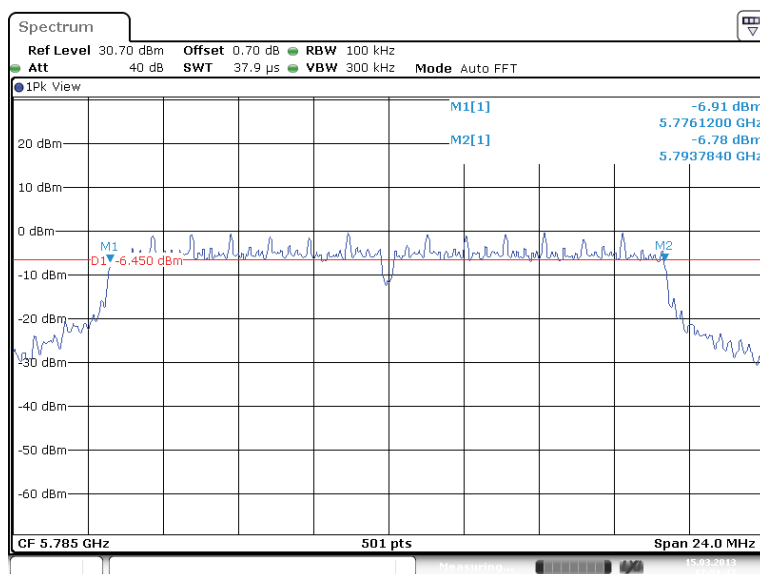

Plot B Antenna 1

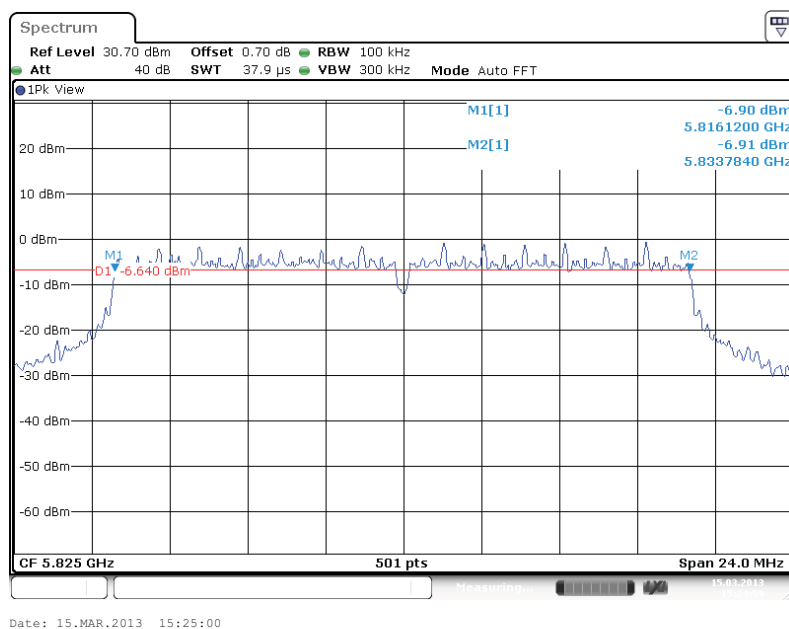


Plot C Antenna 1

Test Report No.:

**12121201.fcc01**

Page 171 of 263

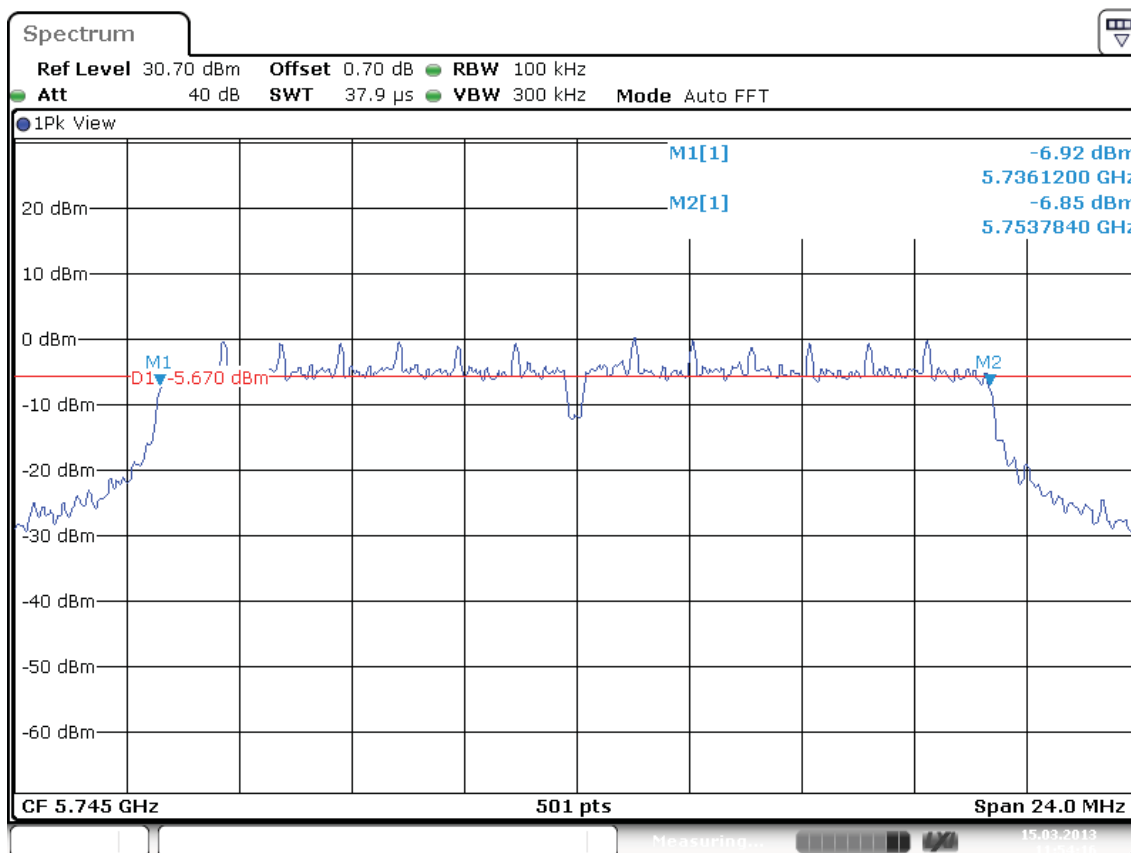


Date: 15.MAR.2013 11:54:17

Plot A Antenna 2


Test Report No.:

**12121201.fcc01**

Page 172 of 263

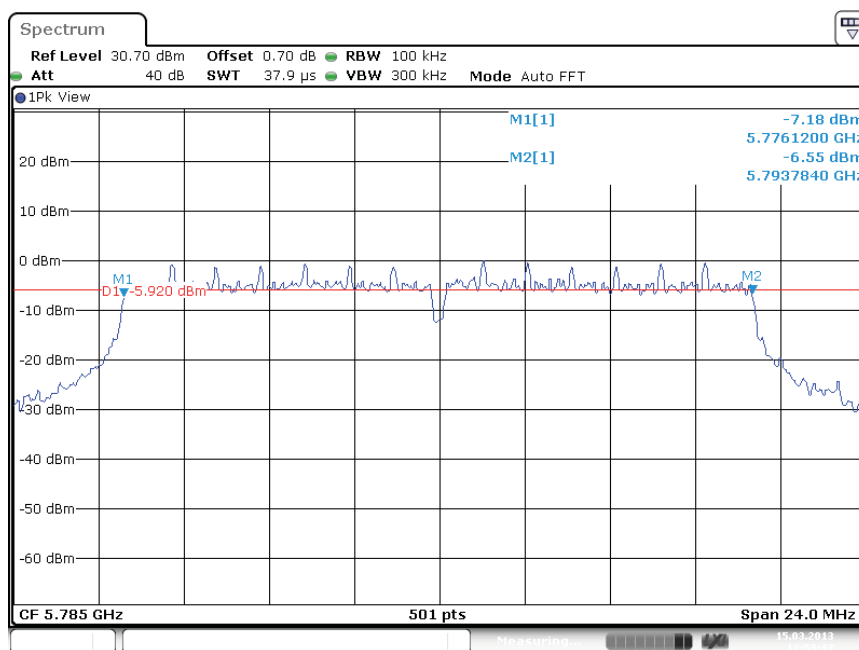

Plot B Antenna 2

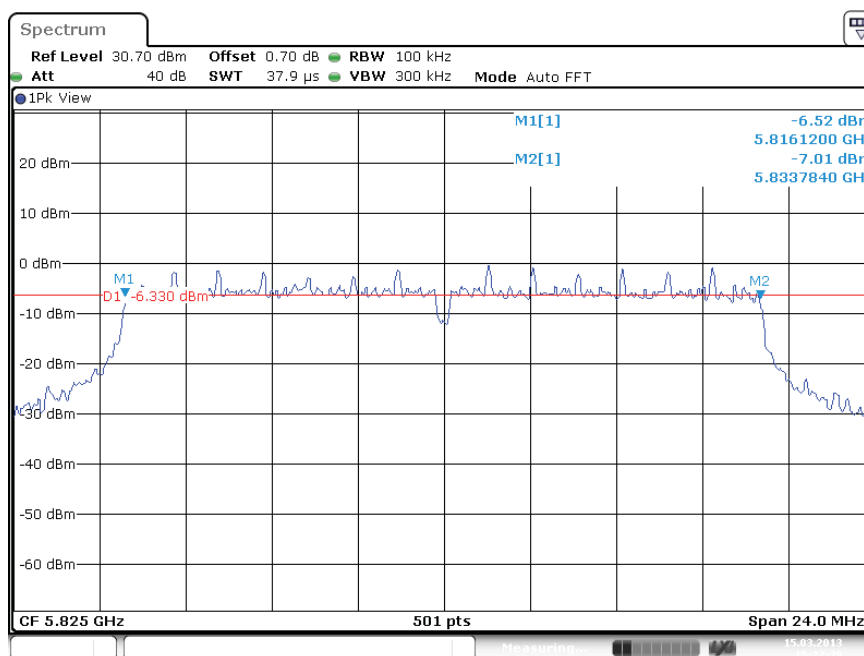

Plot C Antenna 2


Test Report No.:

**12121201.fcc01**

Page 173 of 263

Operation mode: HT4-40 MHz wide , Antenna 2

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5775	36119	35232	500	A
5795	36024	35328	500	B

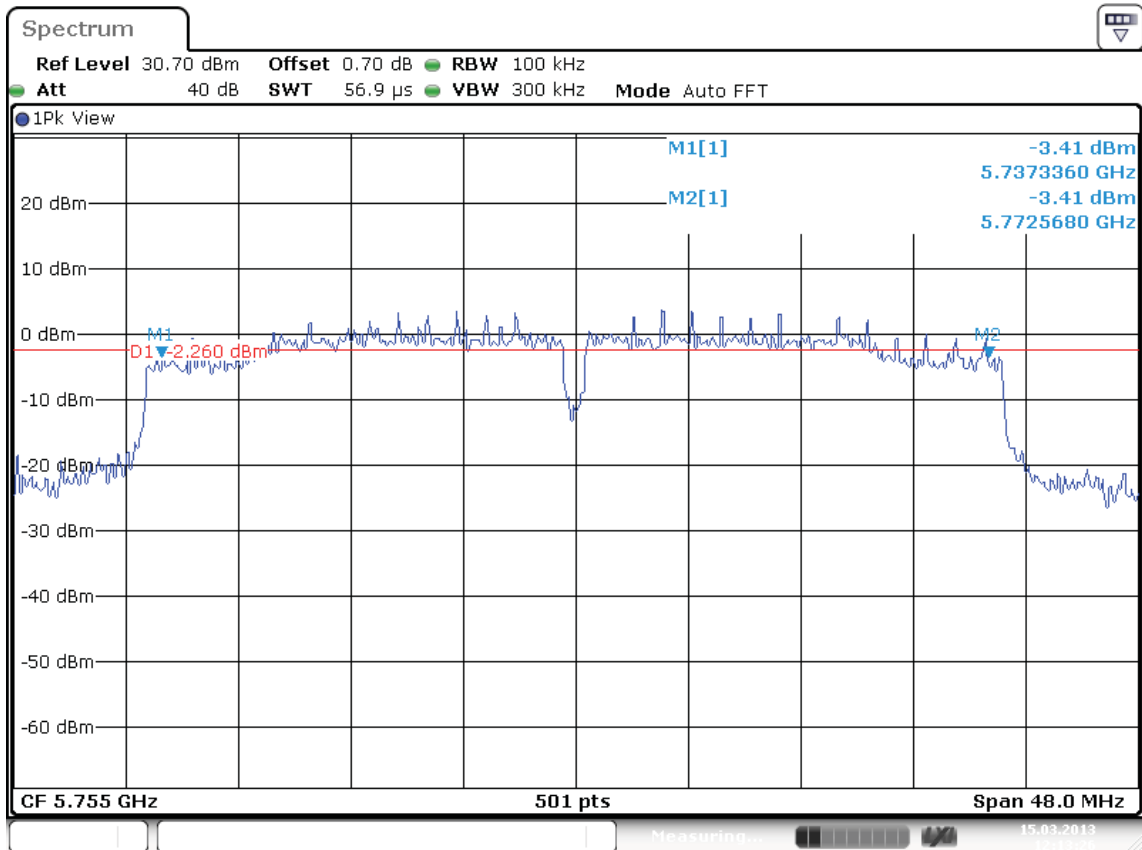


Date: 15.MAR.2013 12:13:26

Plot A

Test Report No.:

**12121201.fcc01**

Page 174 of 263

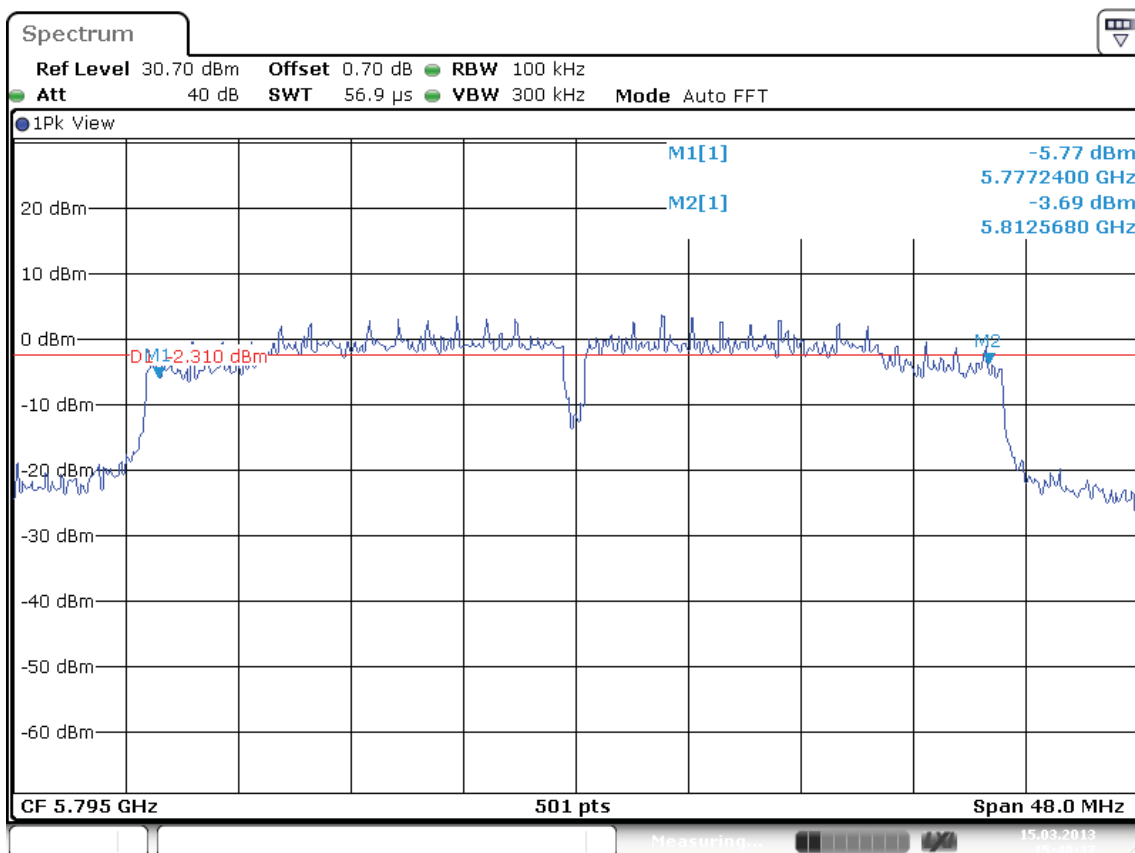

Date: 15.MAR.2013 15:48:38

Plot B


Test Report No.:

**12121201.fcc01**

Page 175 of 263

Operation mode: HT4-40 MHz, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
5775	36024	35328	500	A
5795	36024	35328	500	B

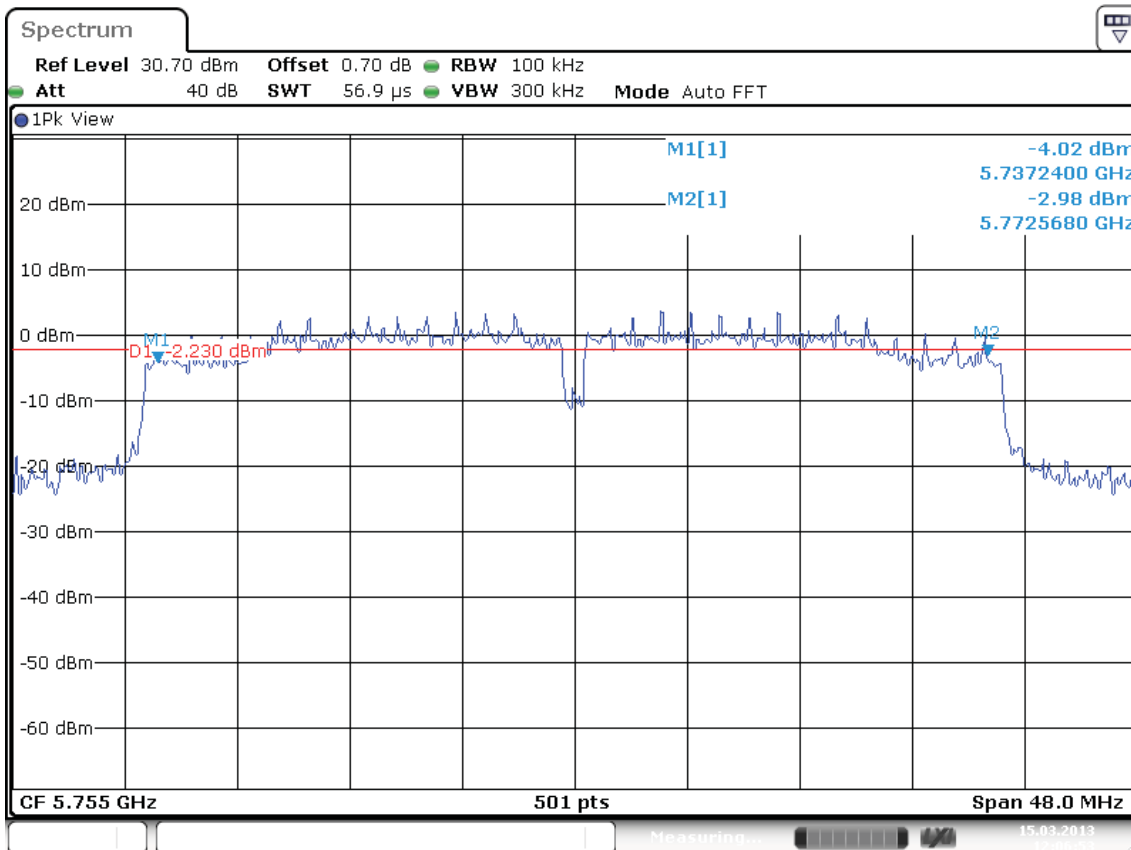


Date: 15.MAR.2013 12:06:54

Plot A

Test Report No.:

**12121201.fcc01**

Page 176 of 263

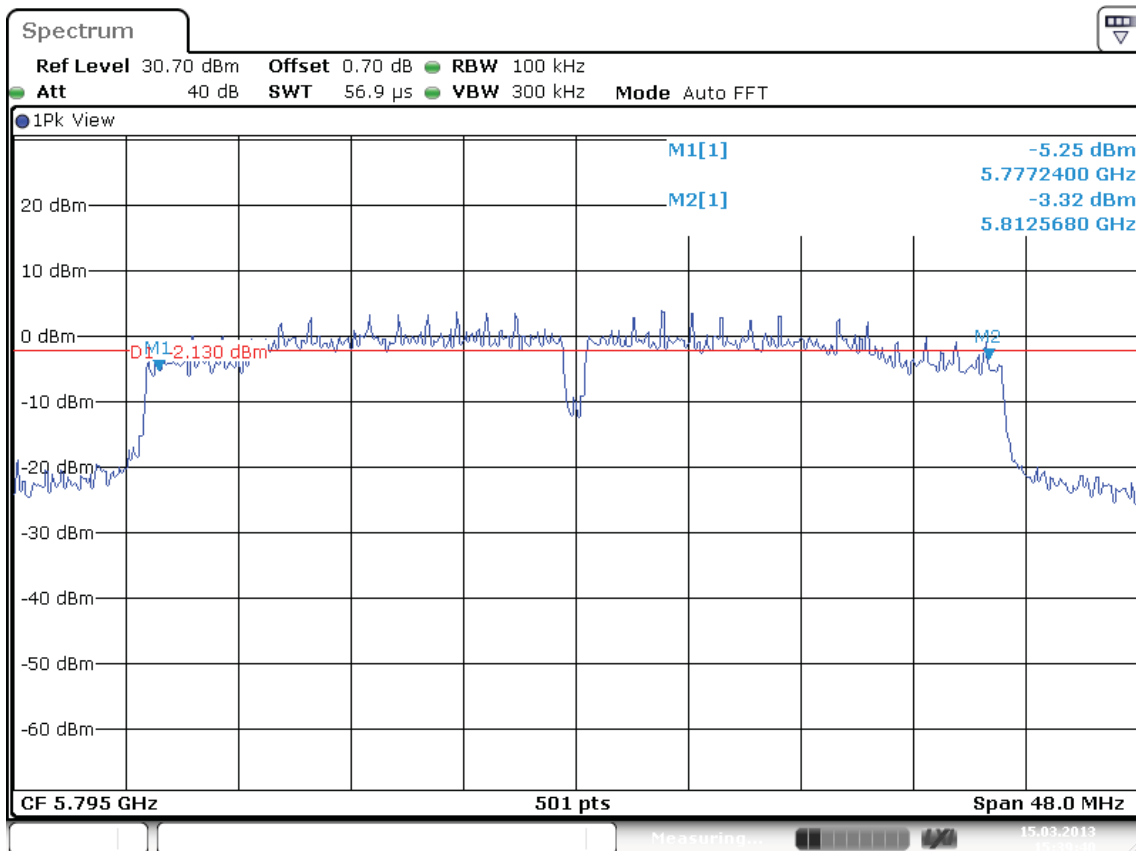

Date: 15.MAR.2013 15:39:40

Plot B




Test Report No.:

**12121201.fcc01**

Page 177 of 263

Operation mode: HT8-40 MHz wide, Antenna 1+2

Operating Frequency [MHz]	99% Bandwidth Antenna1/Antenna2 [kHz]	6dB Bandwidth Antenna1/Antenna2 [kHz]	Limit [kHz]	Plot number
5775	35928 / 35928	35832 / 35832	500	A
5795	35832 / 35832	35832 / 35832	500	B

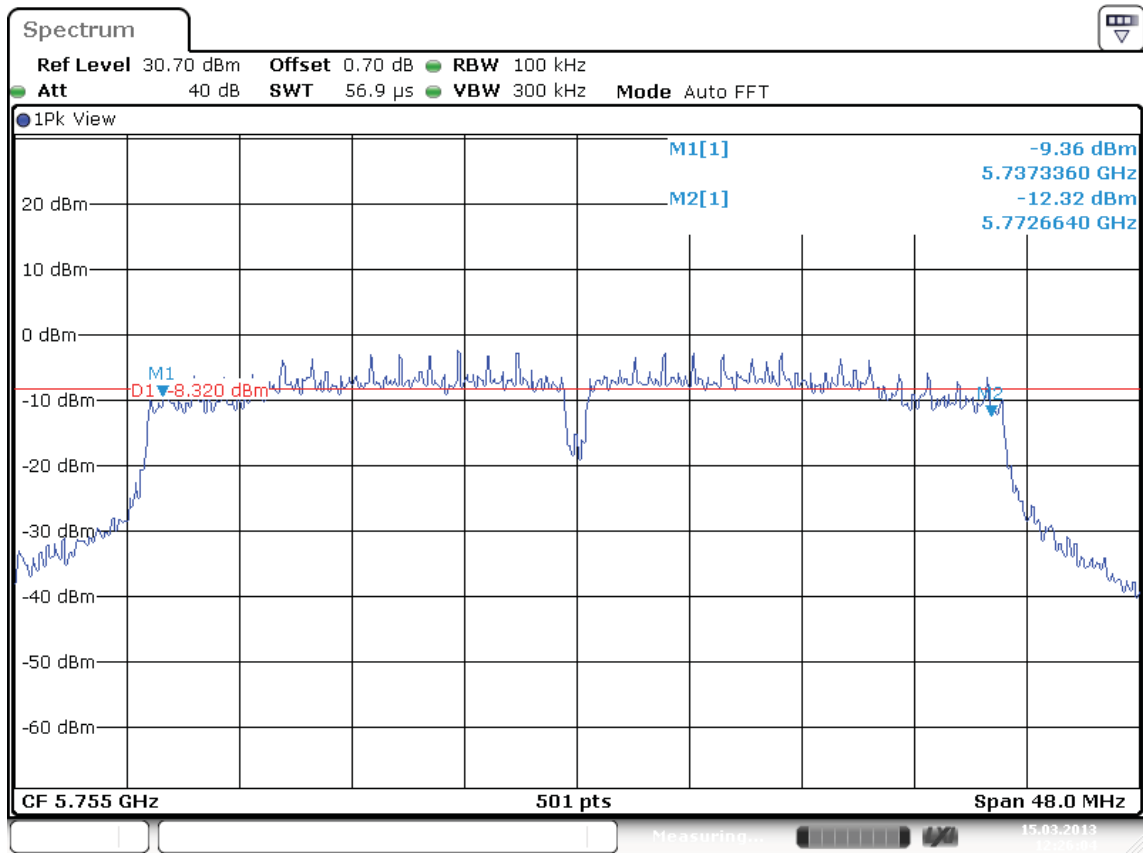


Date: 15.MAR.2013 12:26:04

Plot A Antenna 1

Test Report No.:

**12121201.fcc01**

Page 178 of 263

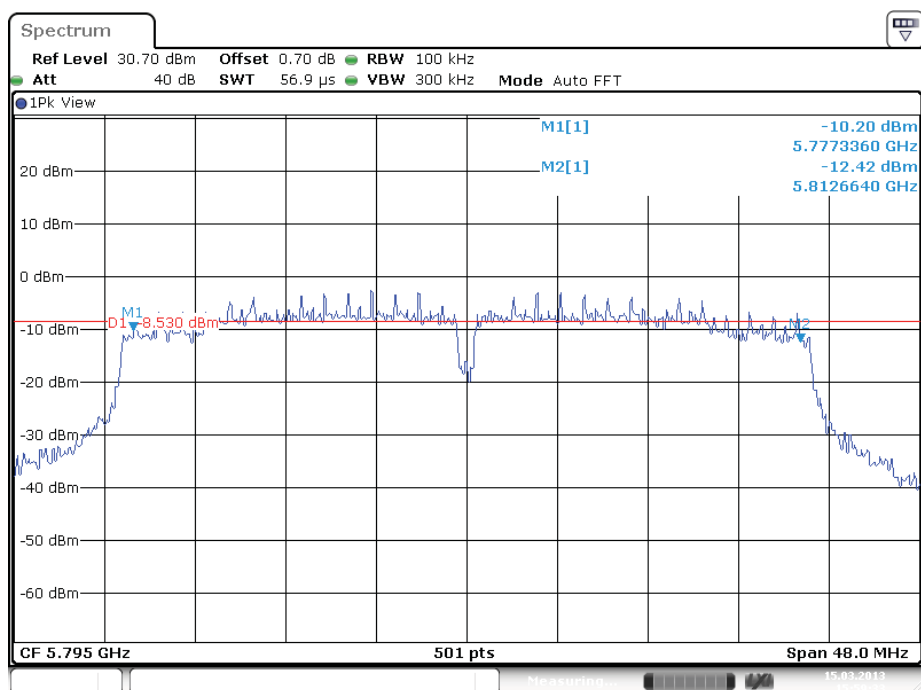


Date: 15.MAR.2013 15:59:33

Plot B Antenna 1

Test Report No.:


**12121201.fcc01**

Page 179 of 263

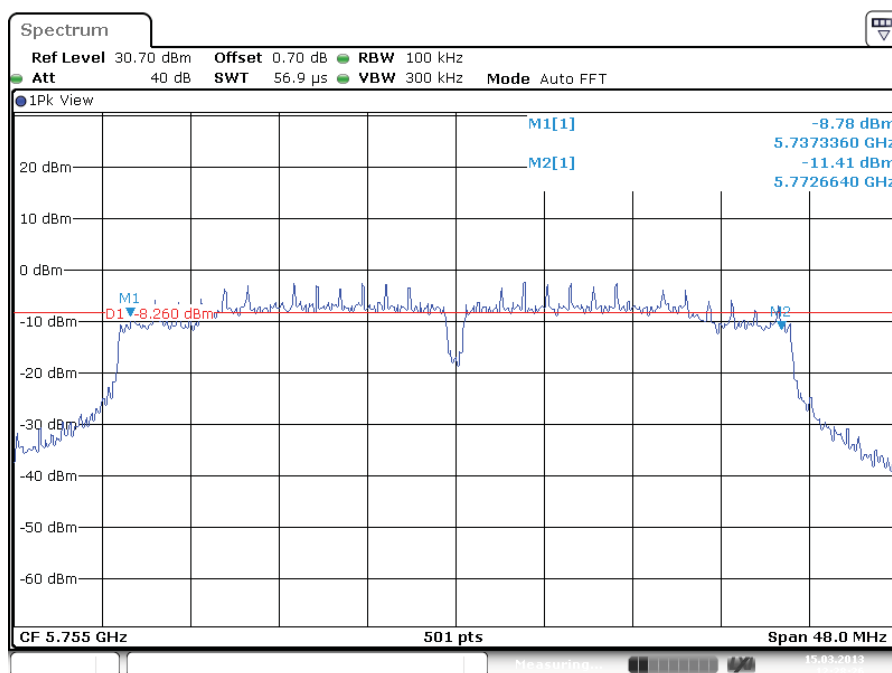

Date: 15.MAR.2013 12:28:26

Plot A Antenna 2

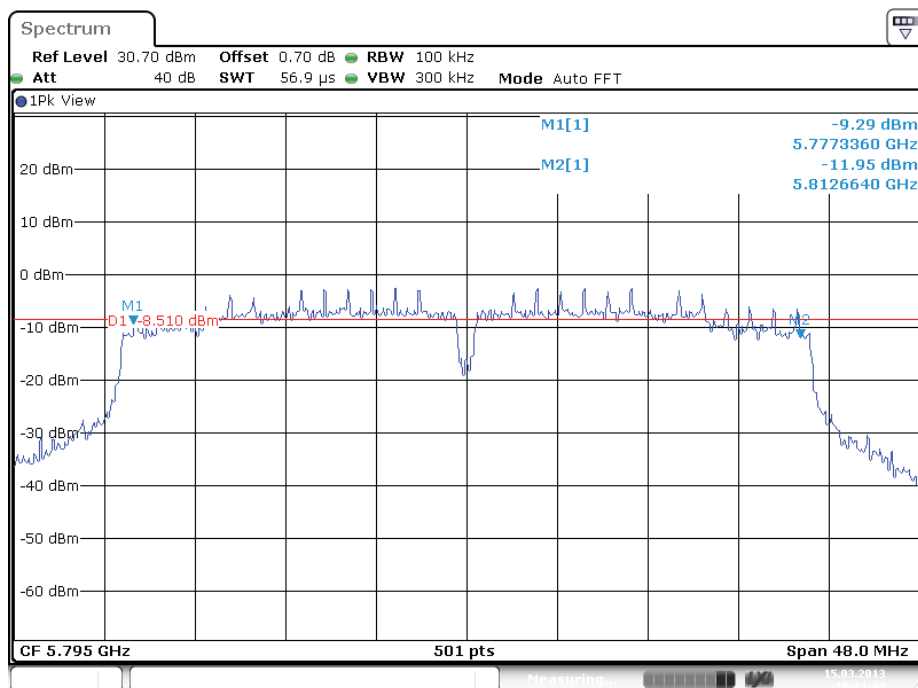

Date: 15.MAR.2013 16:11:43

Plot B Antenna 2


Test Report No.:

**12121201.fcc01**

Page 180 of 263

Operation mode:VHT6-80 MHz wide, Antenna 1

Operating Frequency [MHz]	99% Bandwidth Antenna1/Antenna2 [kHz]	6dB Bandwidth Antenna1/Antenna2 [kHz]	Limit [kHz]	Plot number
5775	75113	75648	500	A

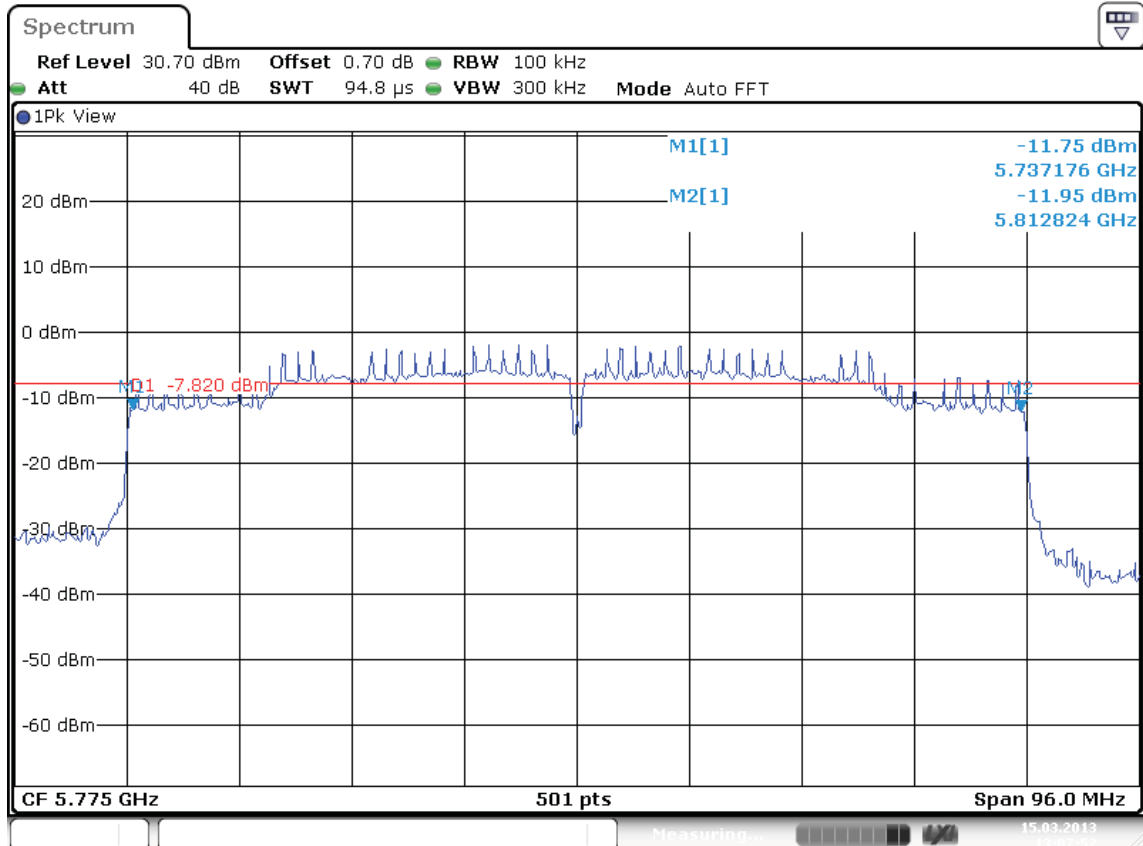

Date: 15.MAR.2013 13:07:52


Test Report No.:

**12121201.fcc01**

Page 181 of 263

Operation mode:VHT6-80 MHz wide, Antenna 2

Operating Frequency [MHz]	99% Bandwidth Antenna1/Antenna2 [kHz]	6dB Bandwidth Antenna1/Antenna2 [kHz]	Limit [kHz]	Plot number
5775	74922	75648	500	A

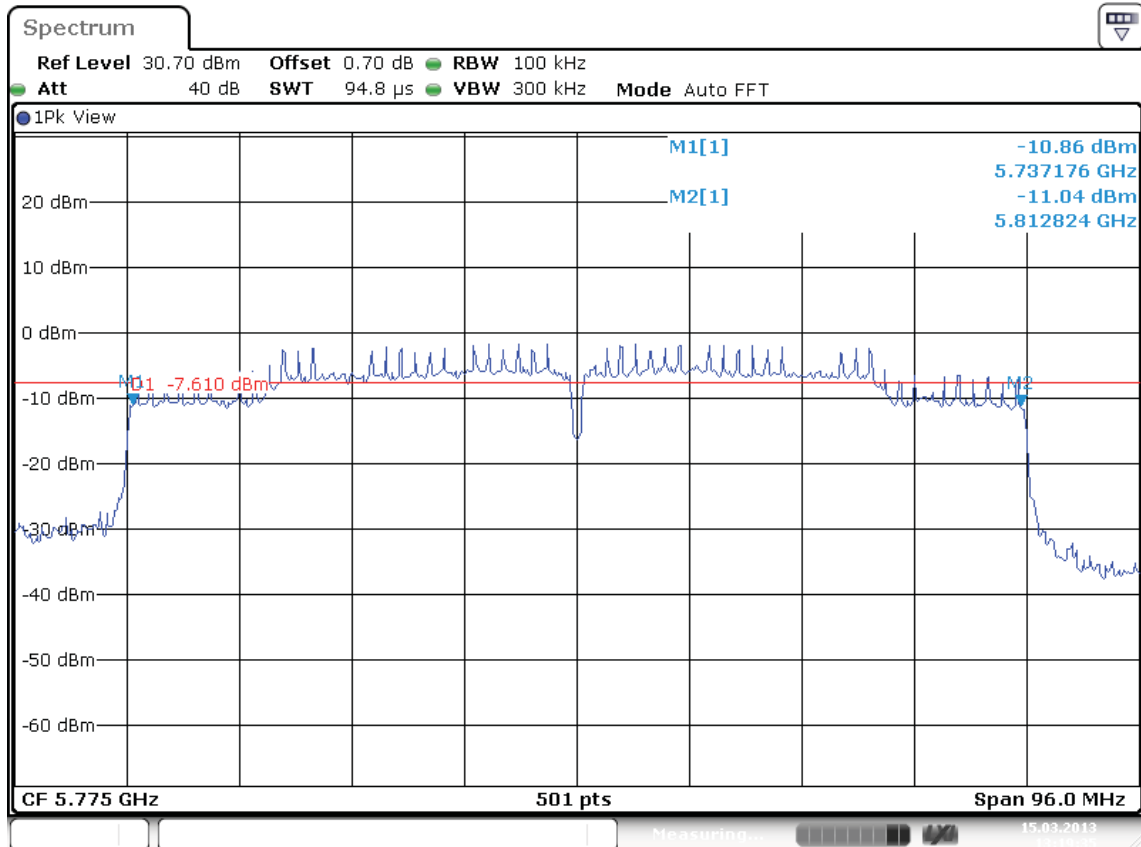

Date: 15.MAR.2013 13:19:35


Test Report No.:

**12121201.fcc01**

Page 182 of 263

Operation mode: VHT6-80 MHz wide, Antenna 1+2

Operating Frequency [MHz]	99% Bandwidth Antenna1/Antenna2 [kHz]	6dB Bandwidth Antenna1/Antenna2 [kHz]	Limit [kHz]	Plot number
5775	75113	75648	500	A

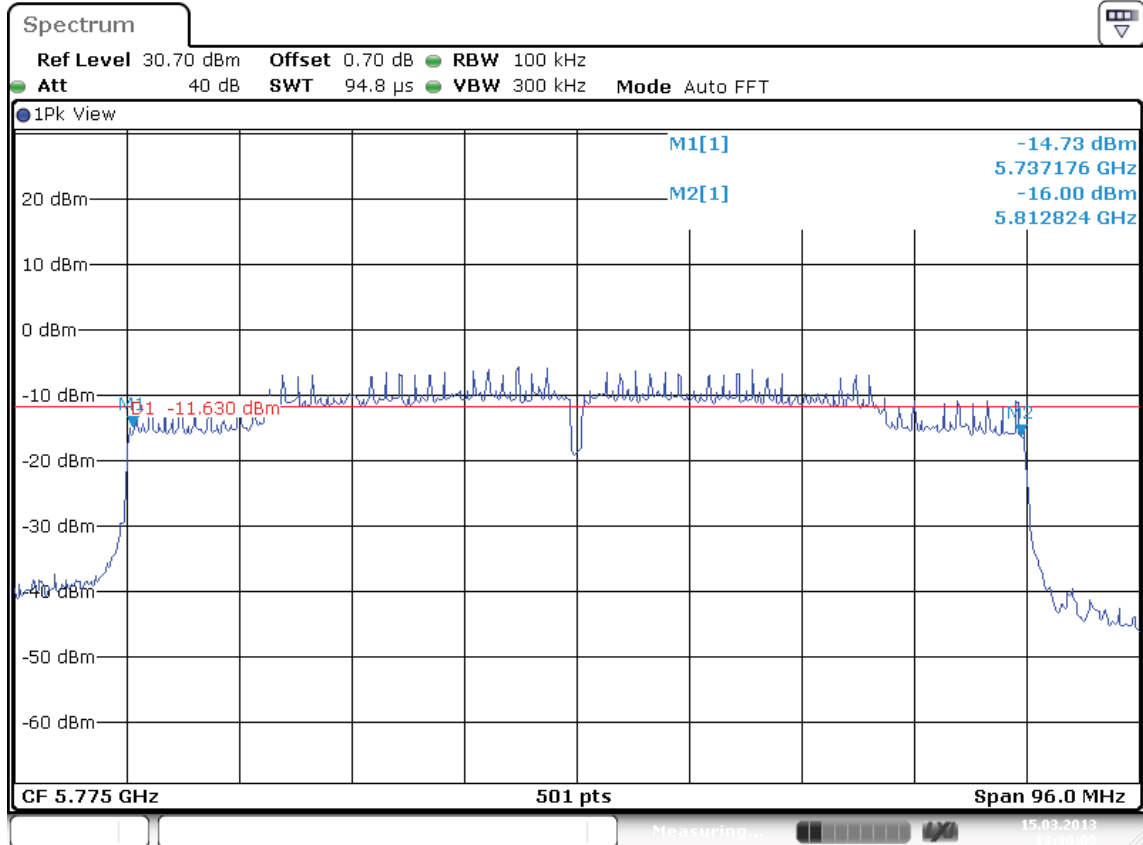


Date: 15.MAR.2013 13:30:09

Plot A-1: Antenna 1

Test Report No.:

**12121201.fcc01**

Page 183 of 263

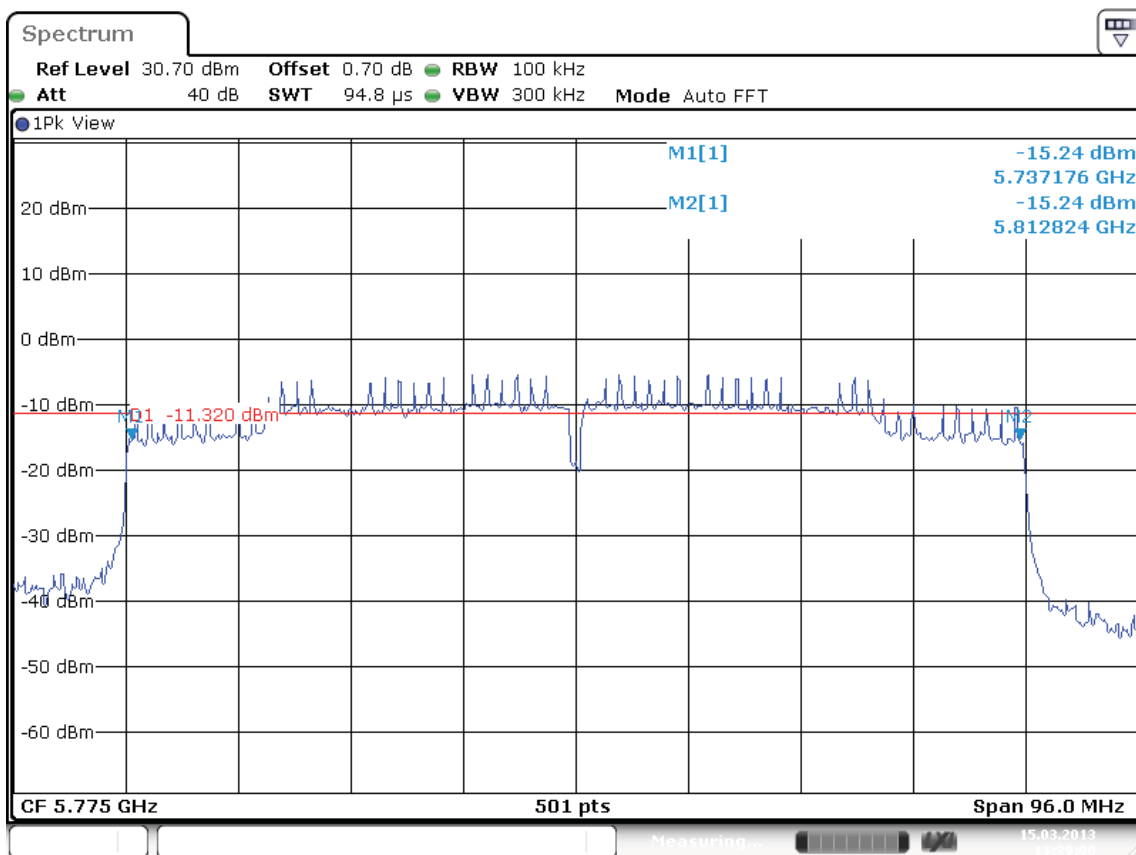

Date: 15.MAR.2013 13:39:01

Plot A-2: Antenna 2

Test Report No.:

**12121201.fcc01**

Page 184 of 263

### 7.2.3 Peak Power Spectral Density

#### RESULT: PASS

Date of testing: 2013-01-14

#### Requirements:

FCC 15.247(e) and RSS-210 section A8.2(b)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

#### Test procedure:

ANSI C63.10: 2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak PSD Option 1 procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables.

For MIMO mode, the *Measure and add 10 log(NANT) dB*, (where *NANT* is the number of outputs) technique was used according to the *Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v01r02 dated 9/26/2012*. With this technique, spectrum measurements are performed at each output of the EUT, and the quantity *10 log(NANT) dB* is added to each spectrum value before comparing to the emission limit. Number of outputs = 2. In these MIMO cases 3 dB has to be added to the number shown in the plots. Figures in the tables for MIMO mode are already corrected with this 3 dB value.



Test Report No.:


**12121201.fcc01**

Page 185 of 263

### Peak Power Spectral Density

Operation mode: 6Mb OFDM, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]	Plot
5745	-10.88	8	Pass	A
5785	-8.56	8	Pass	B
5825	-9.19	8	Pass	C

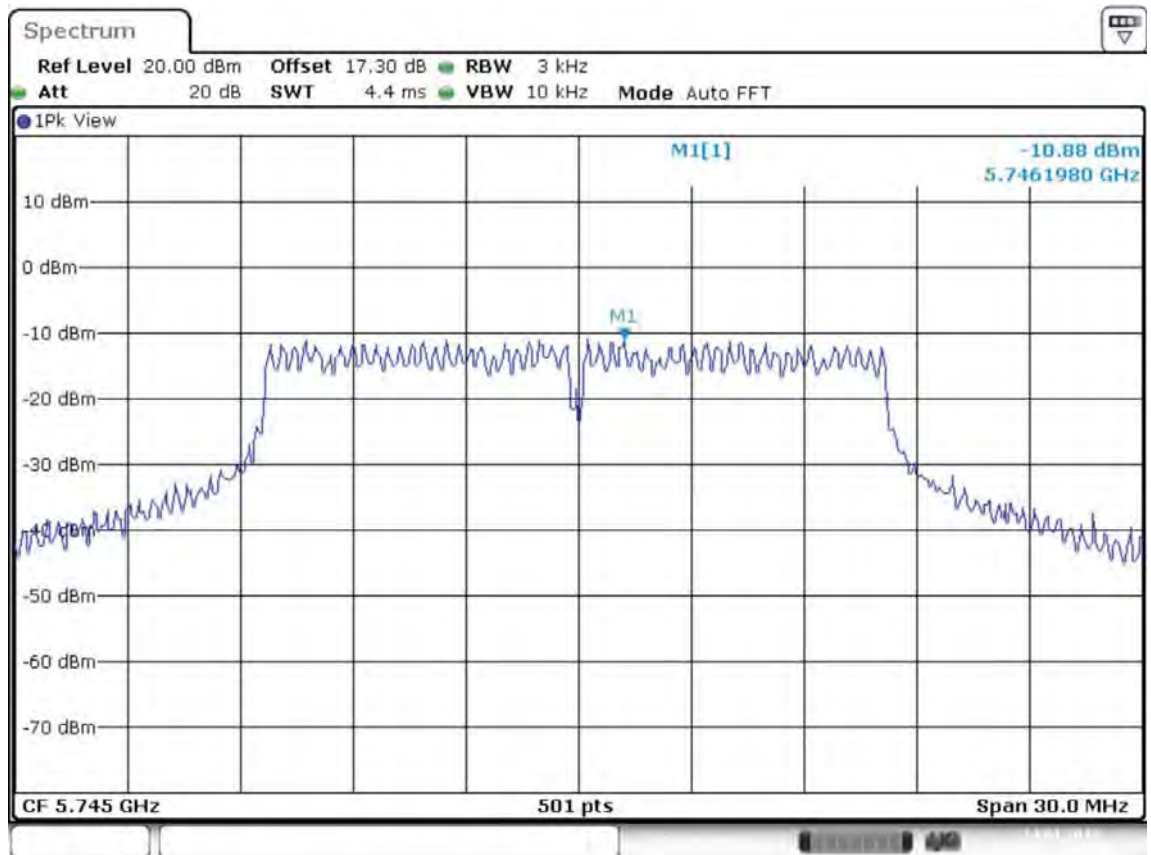


Date: 14.JAN.2013 13:44:20

Plot A

Test Report No.:


**12121201.fcc01**

Page 186 of 263

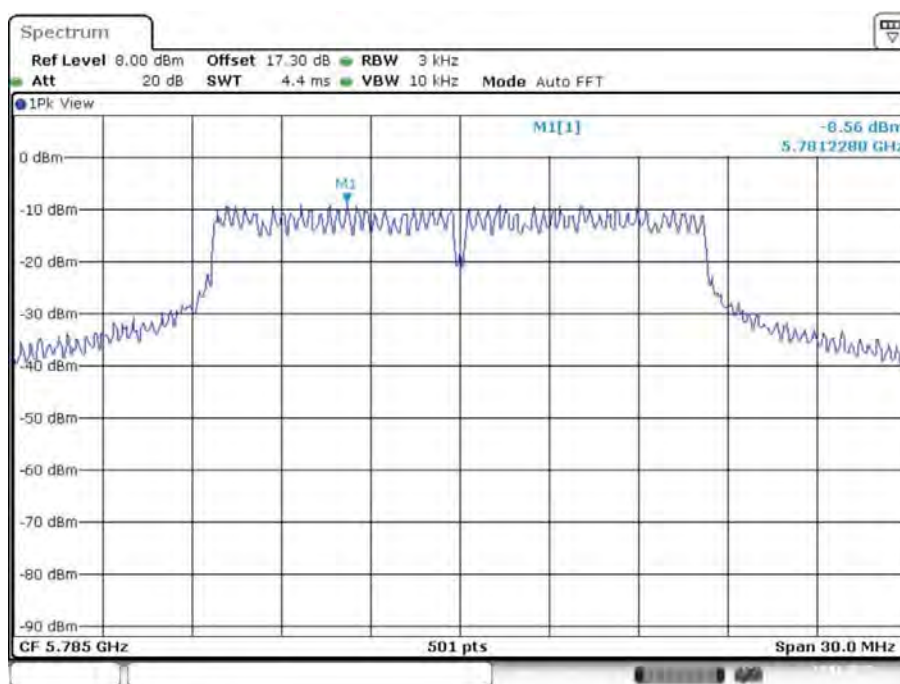

Date: 14.JAN.2013 14:02:15

Plot B

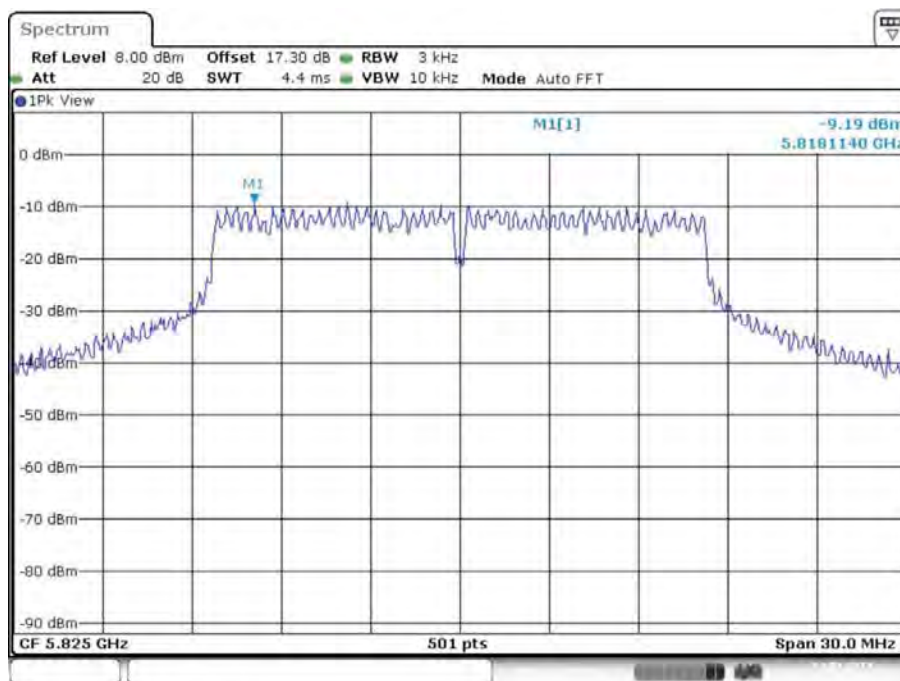

Date: 14.JAN.2013 14:41:05

Plot C


Test Report No.:

**12121201.fcc01**

Page 187 of 263

Operation mode: 6Mb OFDM, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]	Plot
5745	-8.94	8	Pass	A
5785	-8.26	8	Pass	B
5825	-7.99	8	Pass	C

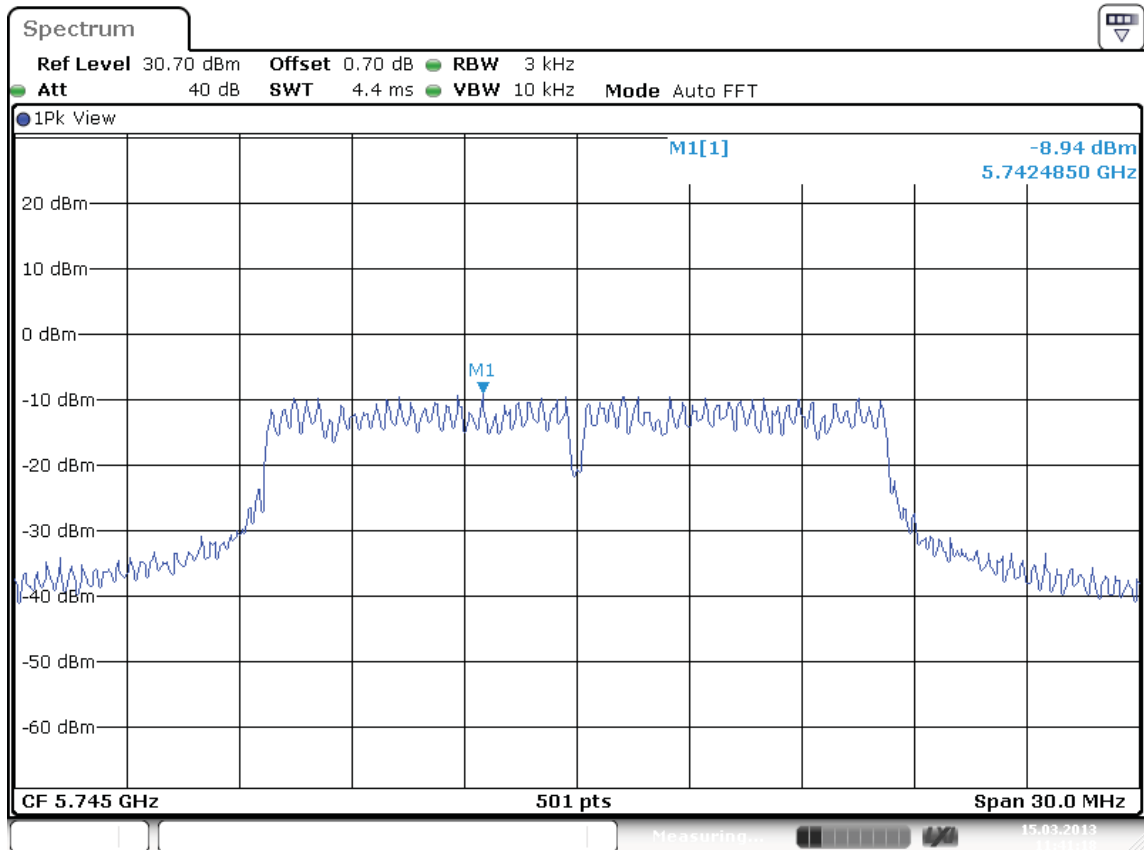


Date: 15.MAR.2013 11:41:18

Plot A

Test Report No.:


**12121201.fcc01**

Page 188 of 263

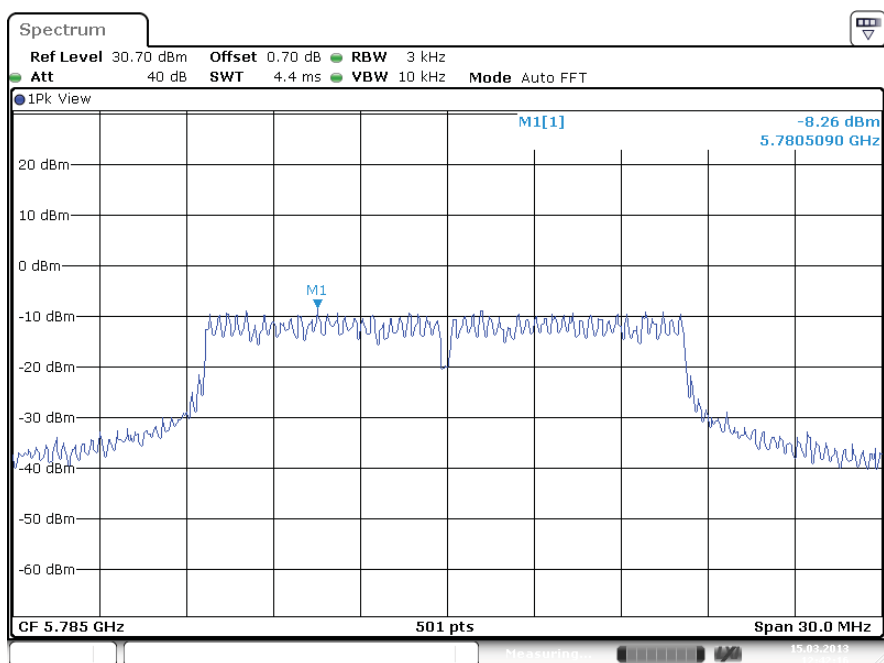

Date: 15.MAR.2013 12:42:16

Plot B

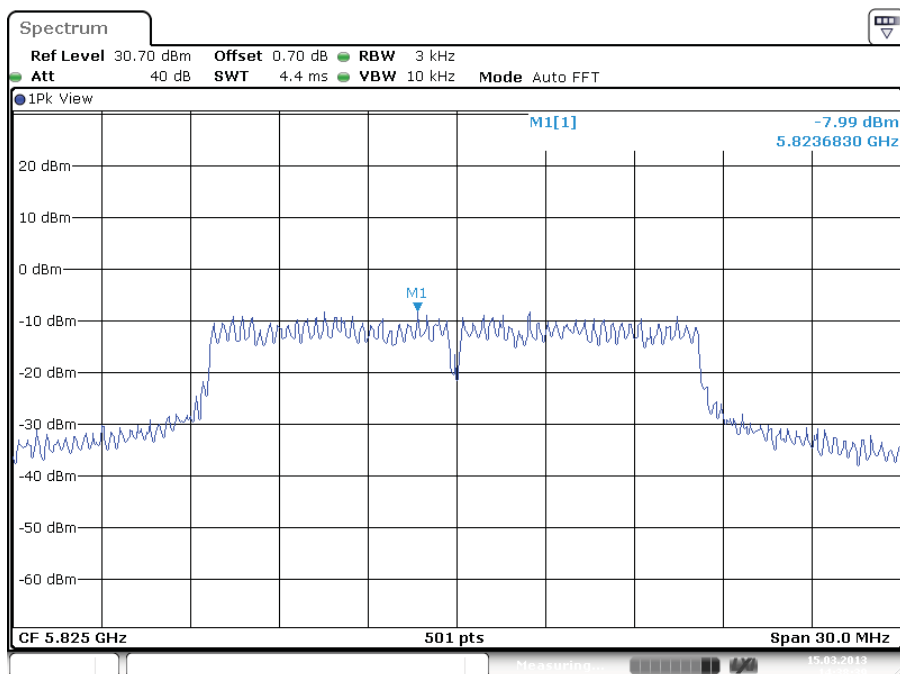

Date: 15.MAR.2013 14:38:39

Plot C


Test Report No.:

**12121201.fcc01**

Page 189 of 263

Operation mode: HT4-20MHz, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]	Plot
5745	-8.83	8	Pass	A
5785	-7.96	8	Pass	B
5825	-8.70	8	Pass	C

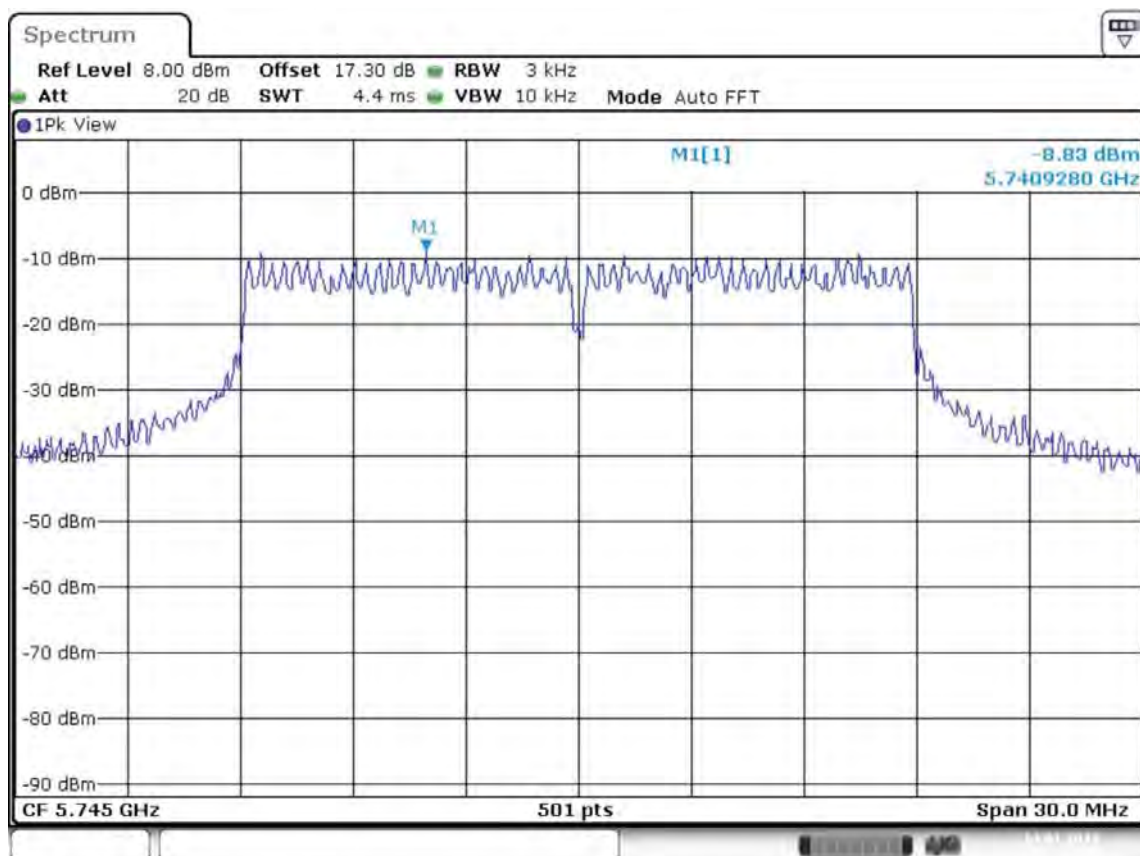


Date: 14.JAN.2013 13:49:47

Plot A

Test Report No.:


**12121201.fcc01**

Page 190 of 263

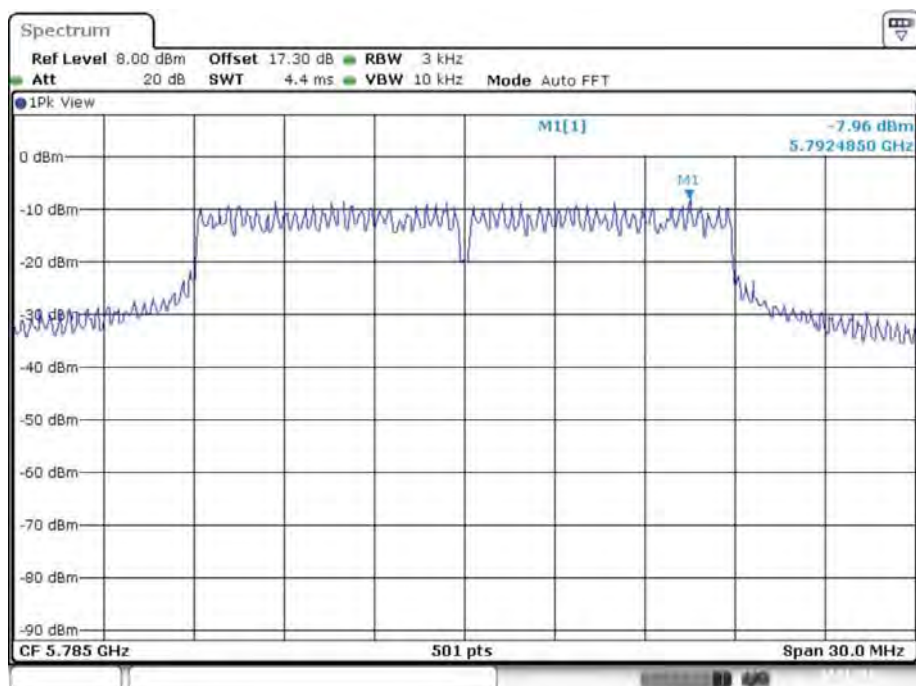

Date: 14.JAN.2013 14:04:24

Plot B

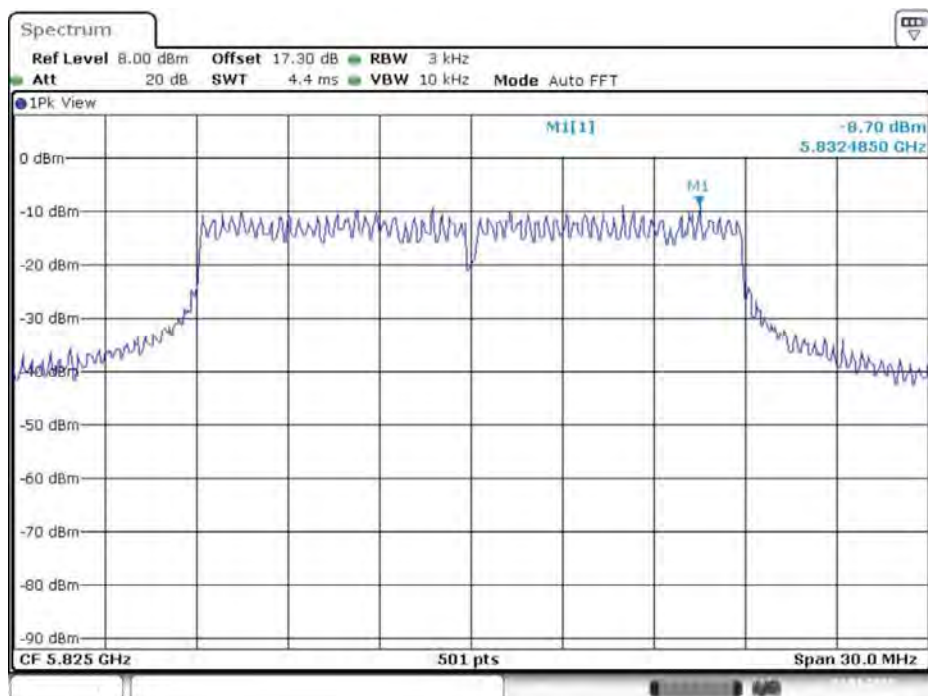

Date: 14.JAN.2013 14:44:08

Plot C


Test Report No.:

**12121201.fcc01**

Page 191 of 263

Operation mode: HT4-20MHz, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]	Plot
5745	-8.49	8	Pass	A
5785	-8.36	8	Pass	B
5825	-9.04	8	Pass	C

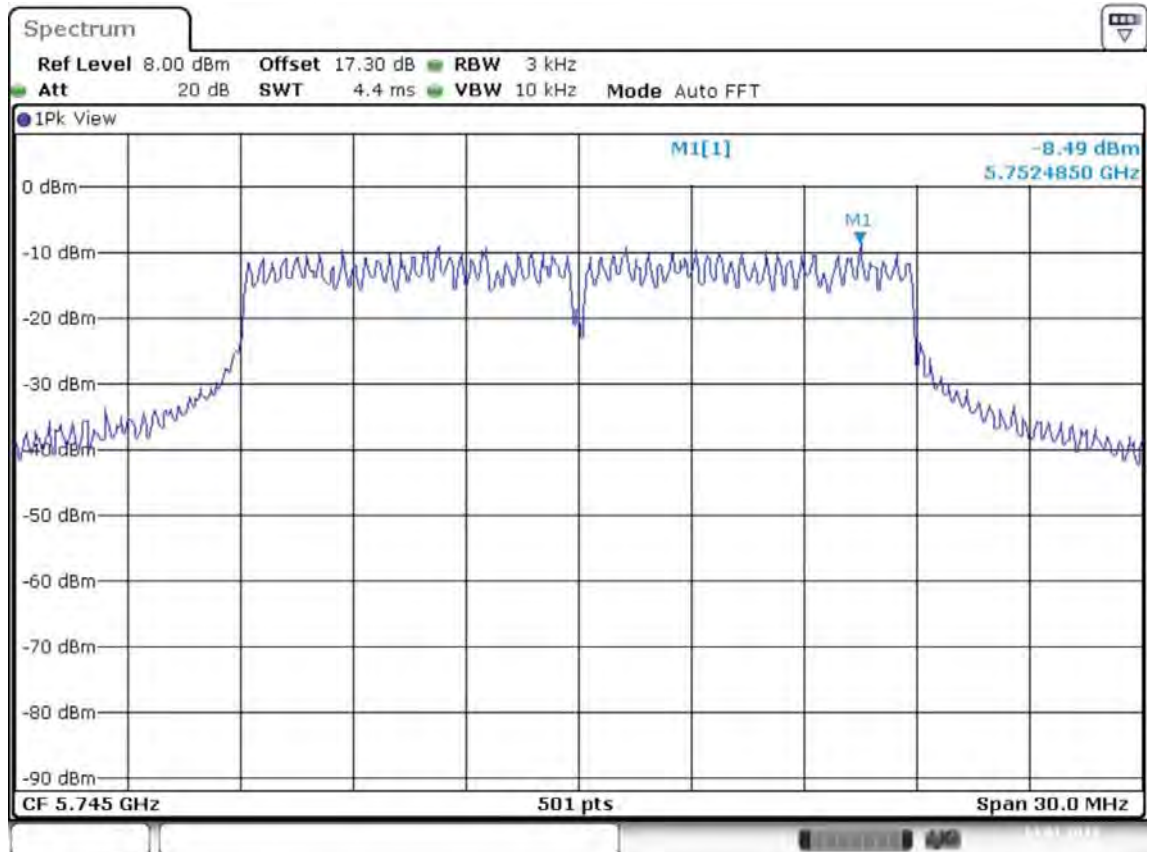

Date: 14.JAN.2013 13:48:10


Plot A



Test Report No.:


**12121201.fcc01**

Page 192 of 263

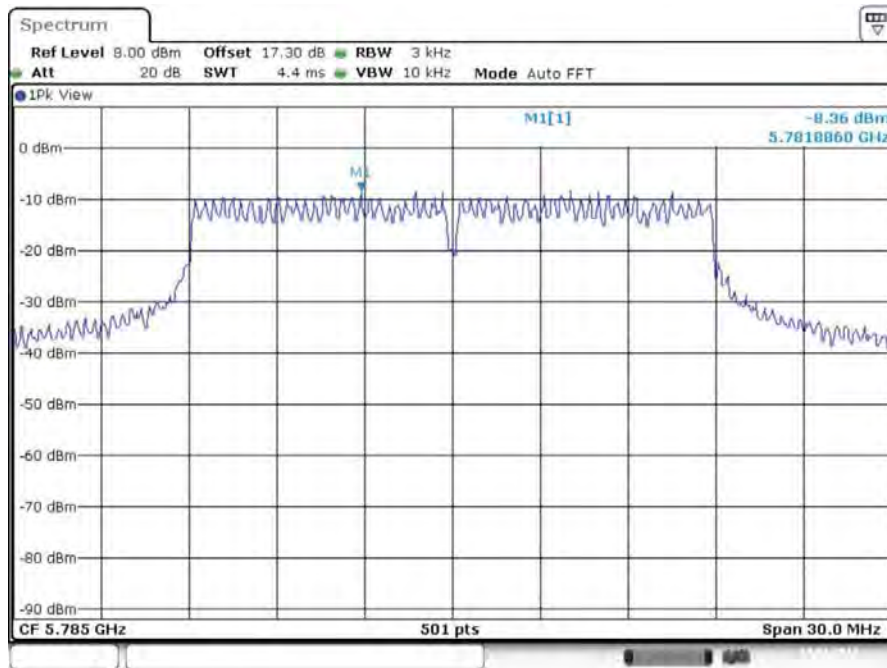

Date: 14.JAN.2013 14:09:44

Plot B

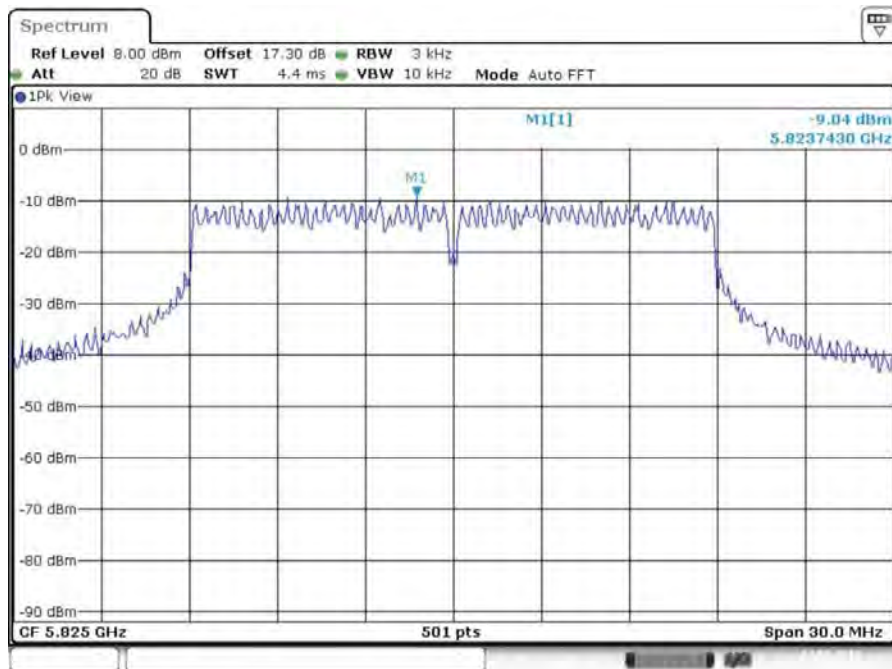

Date: 14.JAN.2013 14:42:47

Plot C




Test Report No.:

**12121201.fcc01**

Page 193 of 263

Operation mode: HT8-20 MHz, Antenna 1+2

Operating Frequency [MHz]	Max PSD Antenna 1 [dBm]	Max PSD Antenna 2 [dBm]	Limit [dBm]	Result [Pass/Fail]	Plot
5745	-11.67	-11.97	8	Pass	A
5785	-11.36	-11.25	8	Pass	B
5825	-11.85	-12.37	8	Pass	C

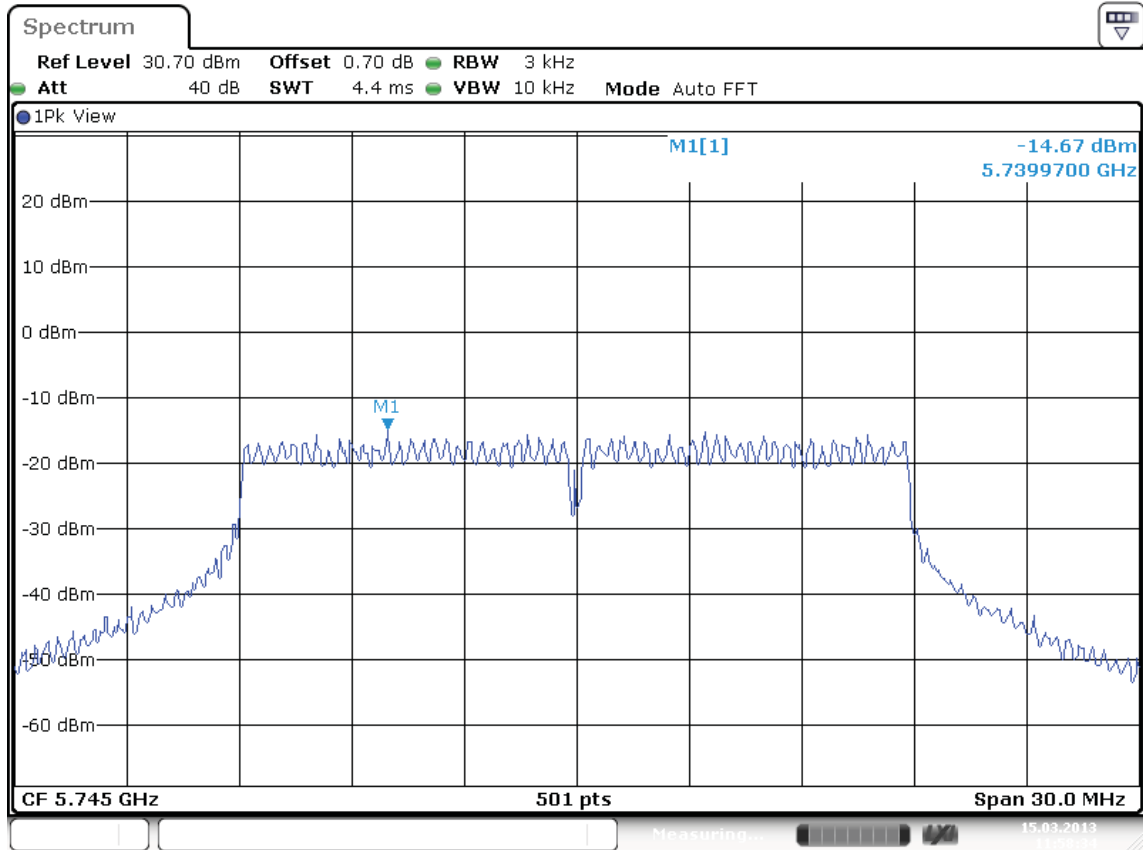


Date: 15.MAR.2013 11:58:34

Plot A Antenna 1

Test Report No.:


**12121201.fcc01**

Page 194 of 263

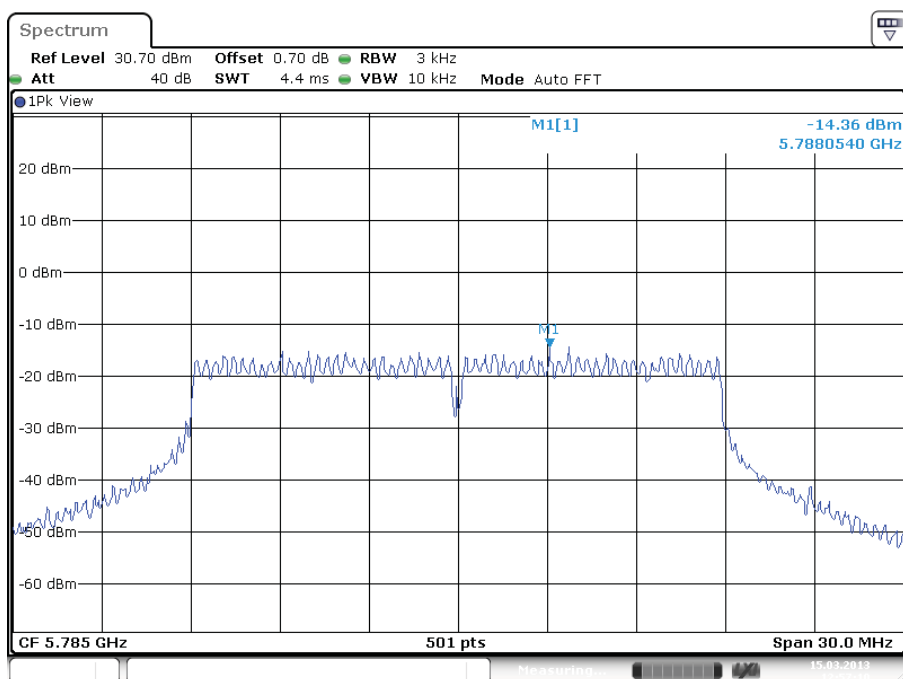

Date: 15.MAR.2013 12:57:10

Plot B Antenna 1

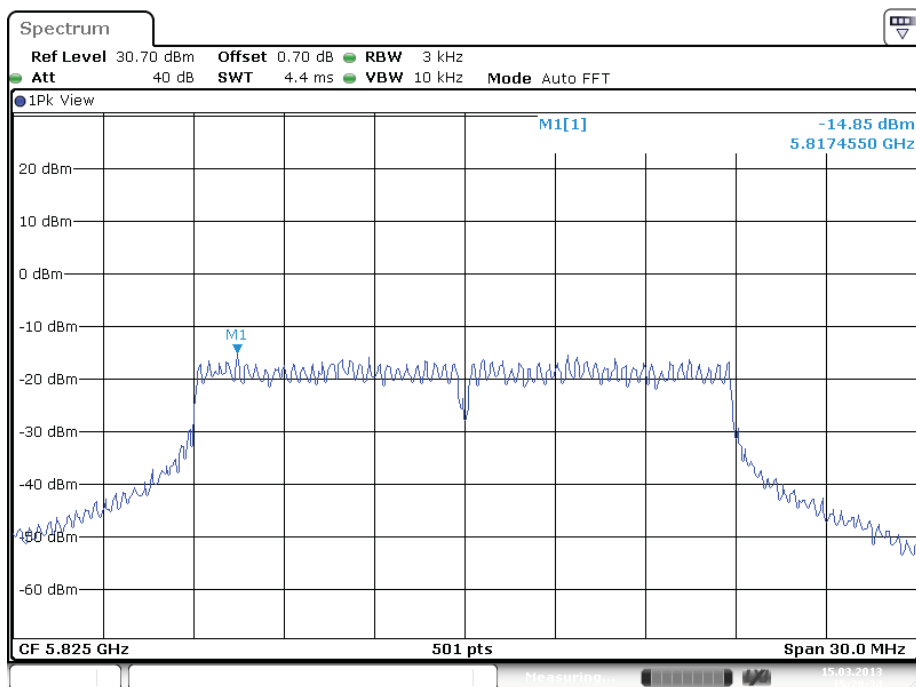


Date: 15.MAR.2013 15:29:34

Plot C Antenna 1

Test Report No.:


**12121201.fcc01**

Page 195 of 263

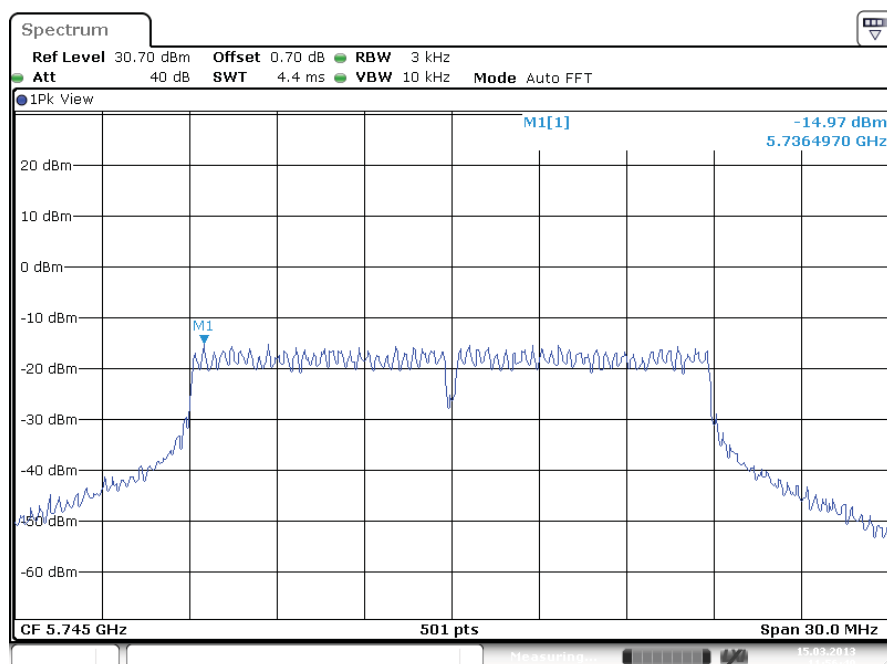

Date: 15.MAR.2013 11:56:49

Plot A Antenna 2

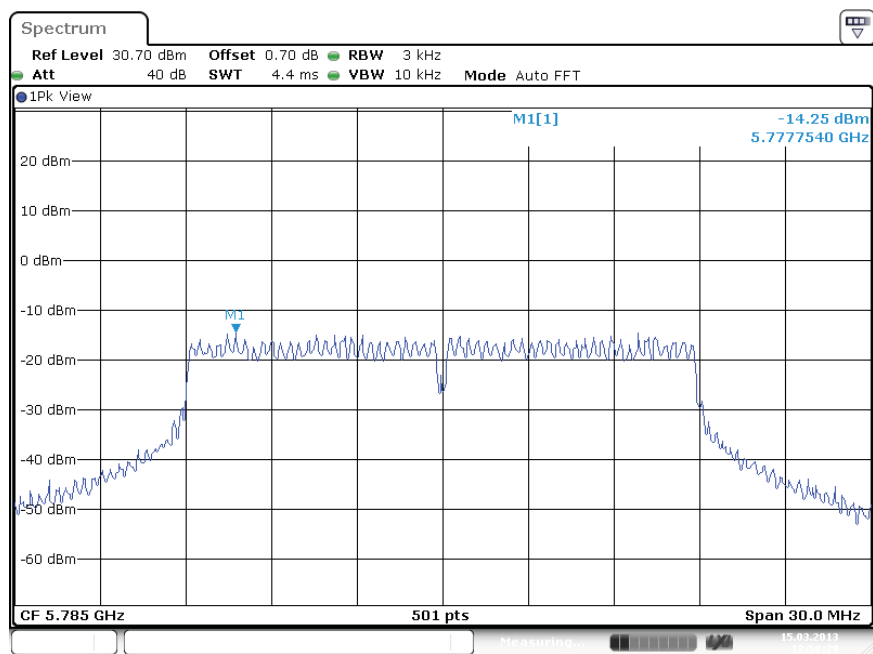


Date: 15.MAR.2013 12:58:29

Plot B Antenna 2

Test Report No.:

**12121201.fcc01**

Page 196 of 263

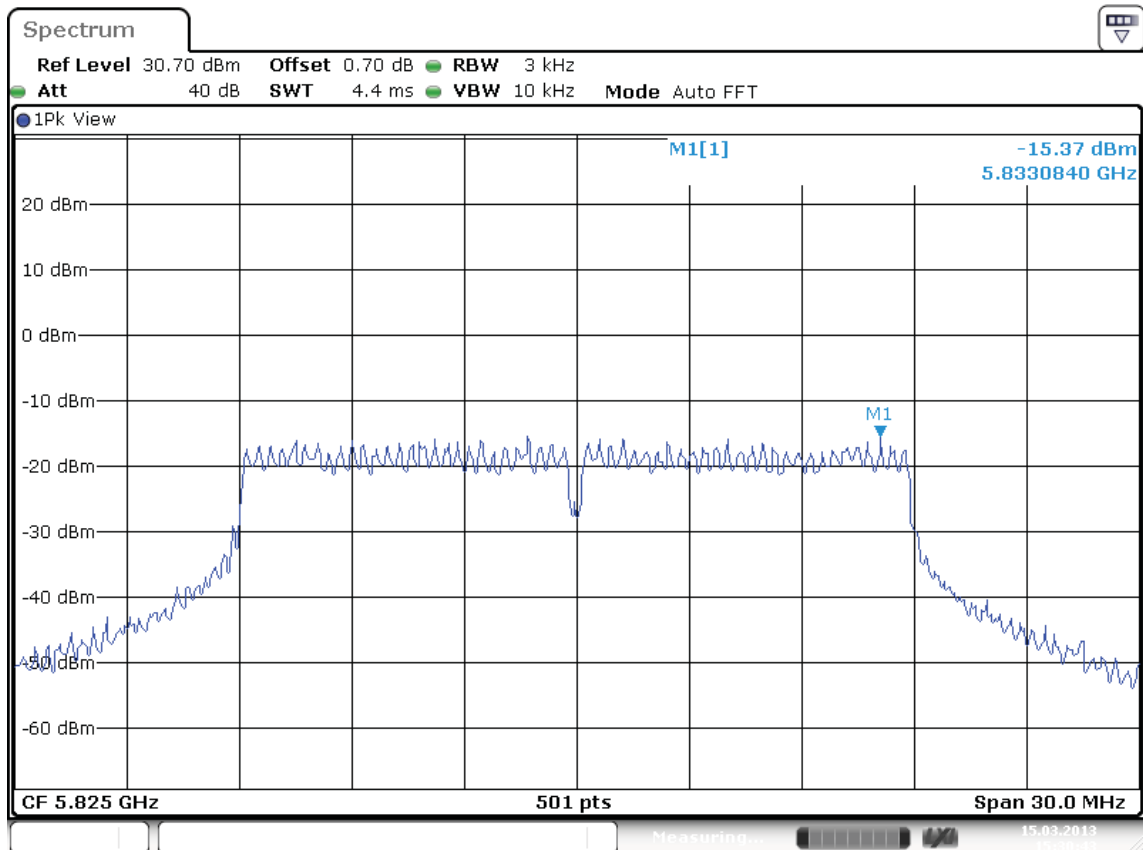

Date: 15.MAR.2013 15:30:43

Plot C Antenna 2


Test Report No.:

**12121201.fcc01**

Page 197 of 263

Operation mode: HT4-40 MHz, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-10.54	8	Pass
5795	-9.75	8	Pass

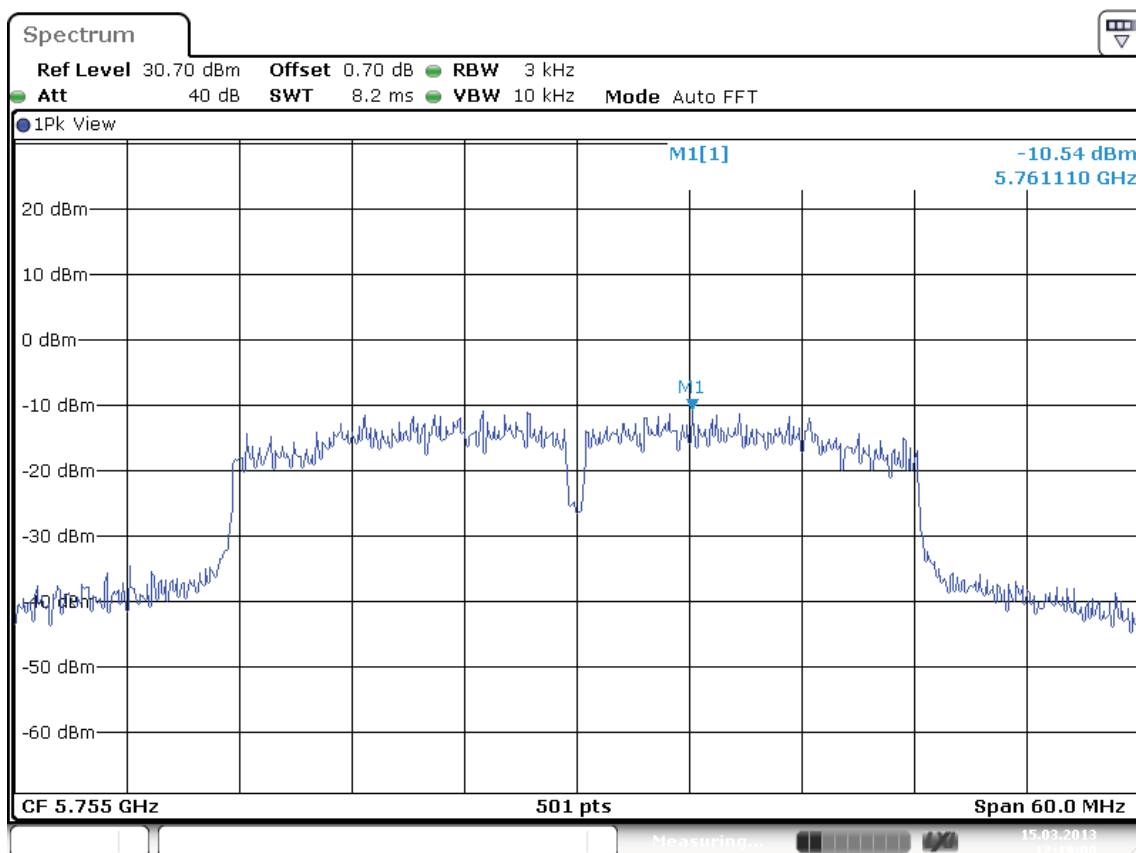


Date: 15.MAR.2013 12:19:00

Plot A

Test Report No.:

**12121201.fcc01**

Page 198 of 263

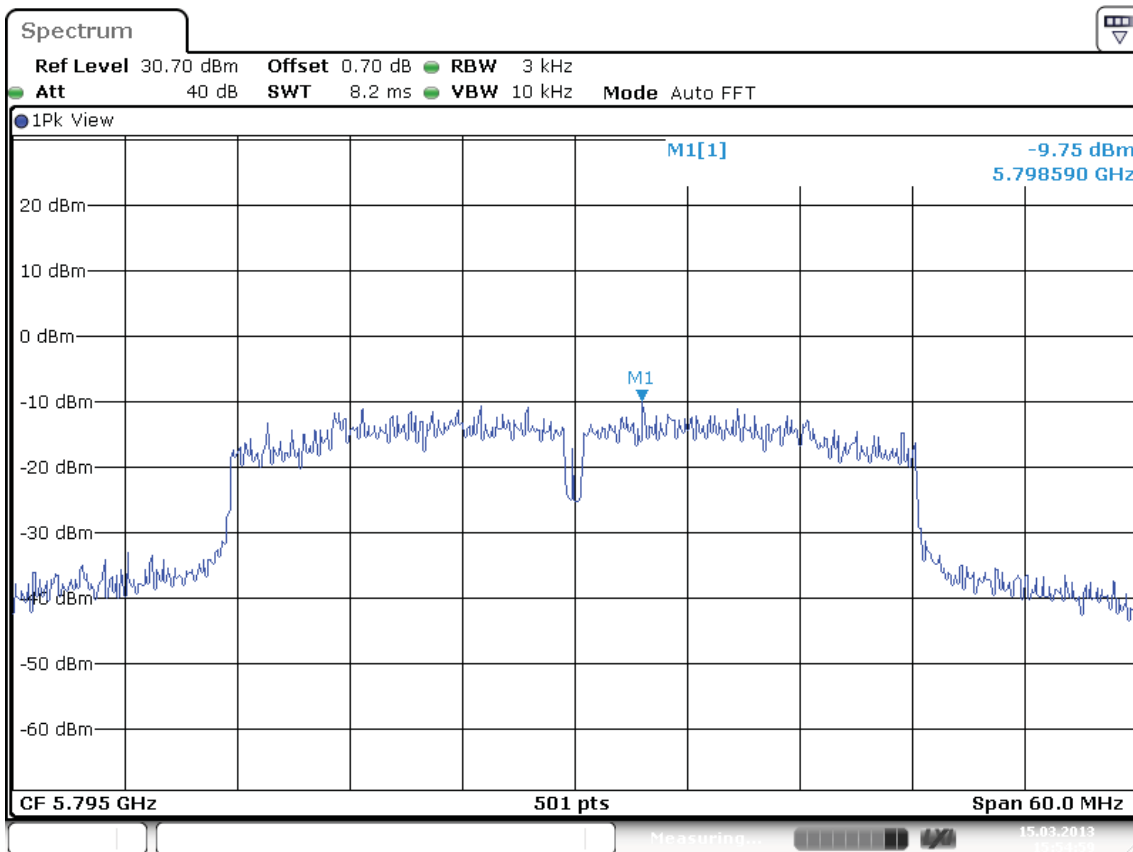

Date: 15.MAR.2013 15:54:59

Plot B


Test Report No.:

**12121201.fcc01**

Page 199 of 263

Operation mode: HT4-40 MHz, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-9.62	8	Pass
5795	-9.82	8	Pass

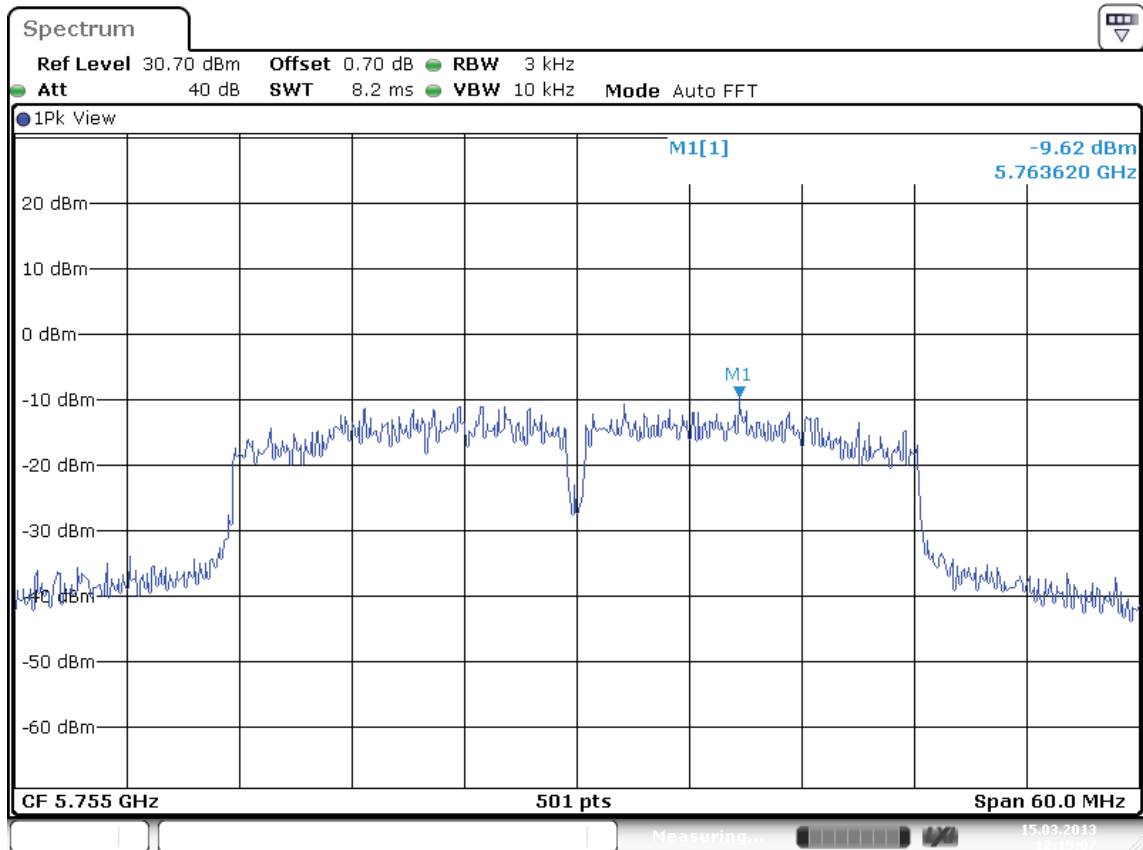


Date: 15.MAR.2013 12:15:07

Plot A

Test Report No.:

**12121201.fcc01**

Page 200 of 263

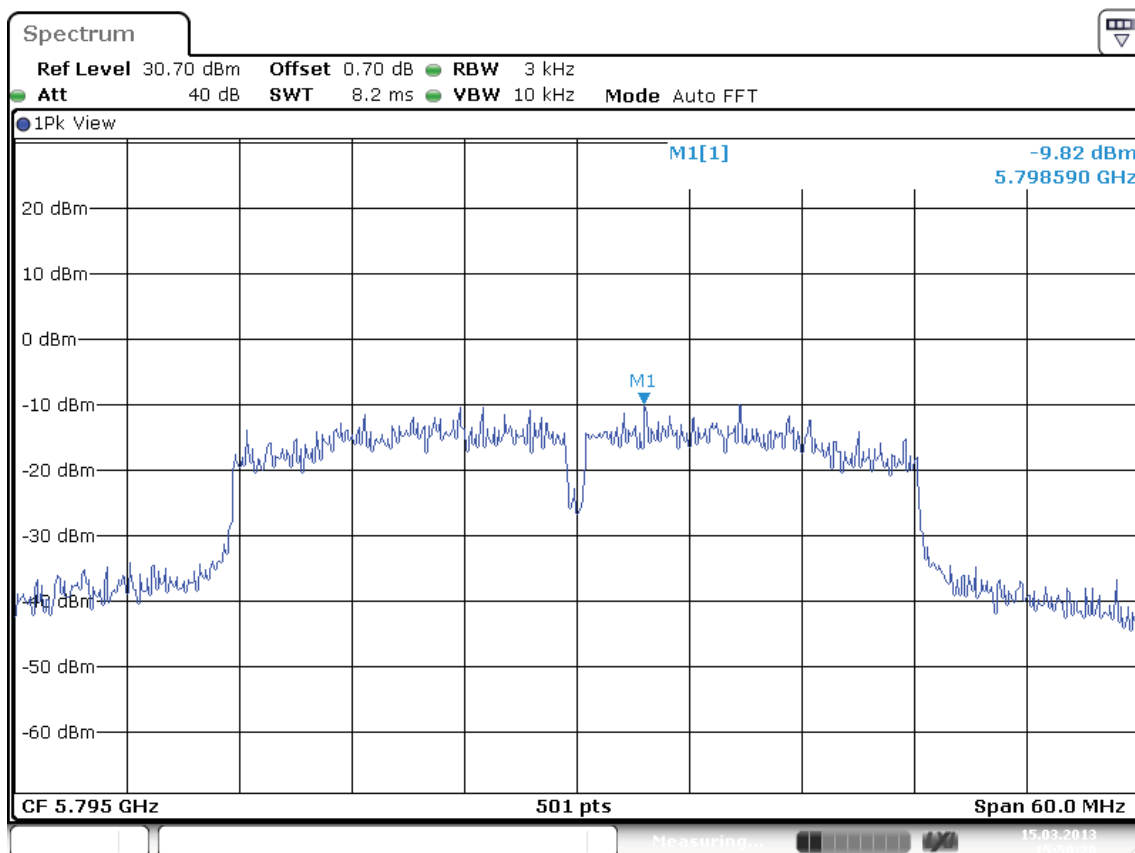

Date: 15.MAR.2013 15:50:20

Plot B




Test Report No.:

**12121201.fcc01**

Page 201 of 263

Operation mode: HT8-40 MHz, Antenna 1+2

Operating Frequency [MHz]	Max PSD Antenna 1 [dBm]	Max PSD Antenna 2 [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-13.97	-14.70	8	Pass
5795	-14.24	-14.22	8	Pass

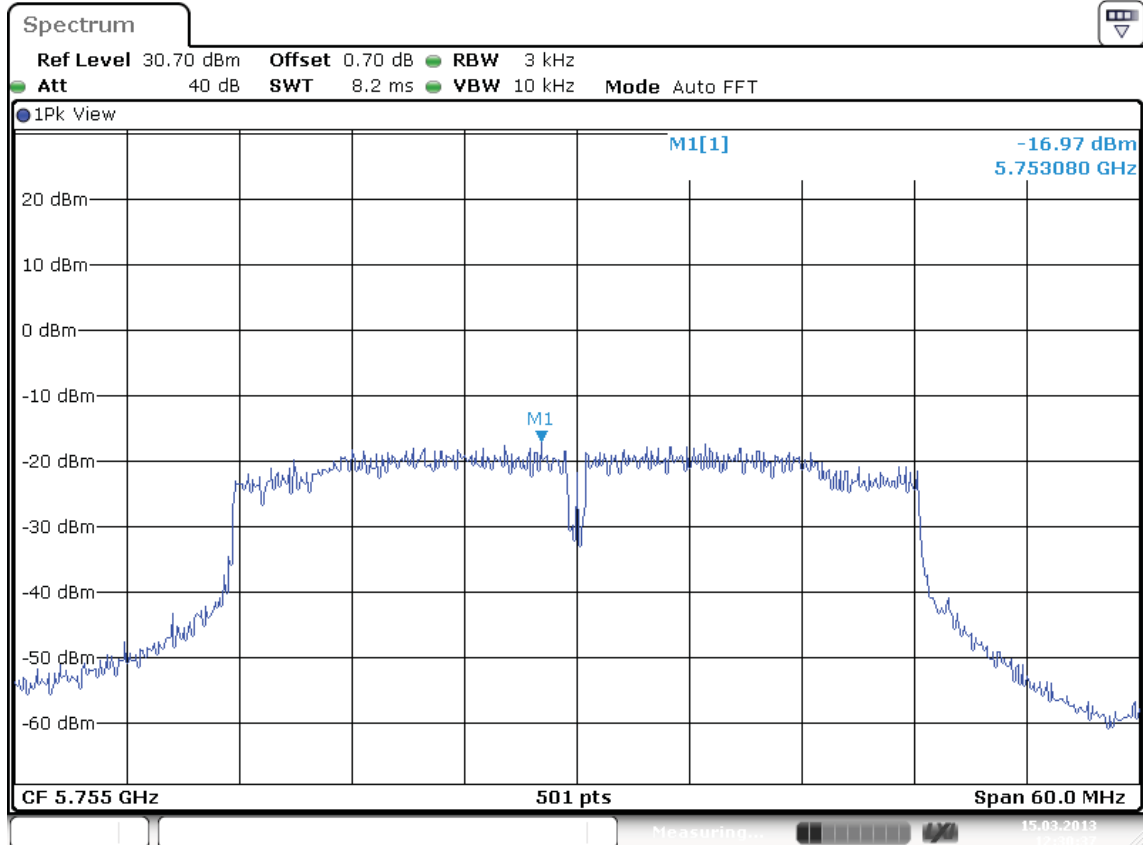


Date: 15.MAR.2013 12:30:37

Plot A Antenna 1

Test Report No.:

**12121201.fcc01**

Page 202 of 263

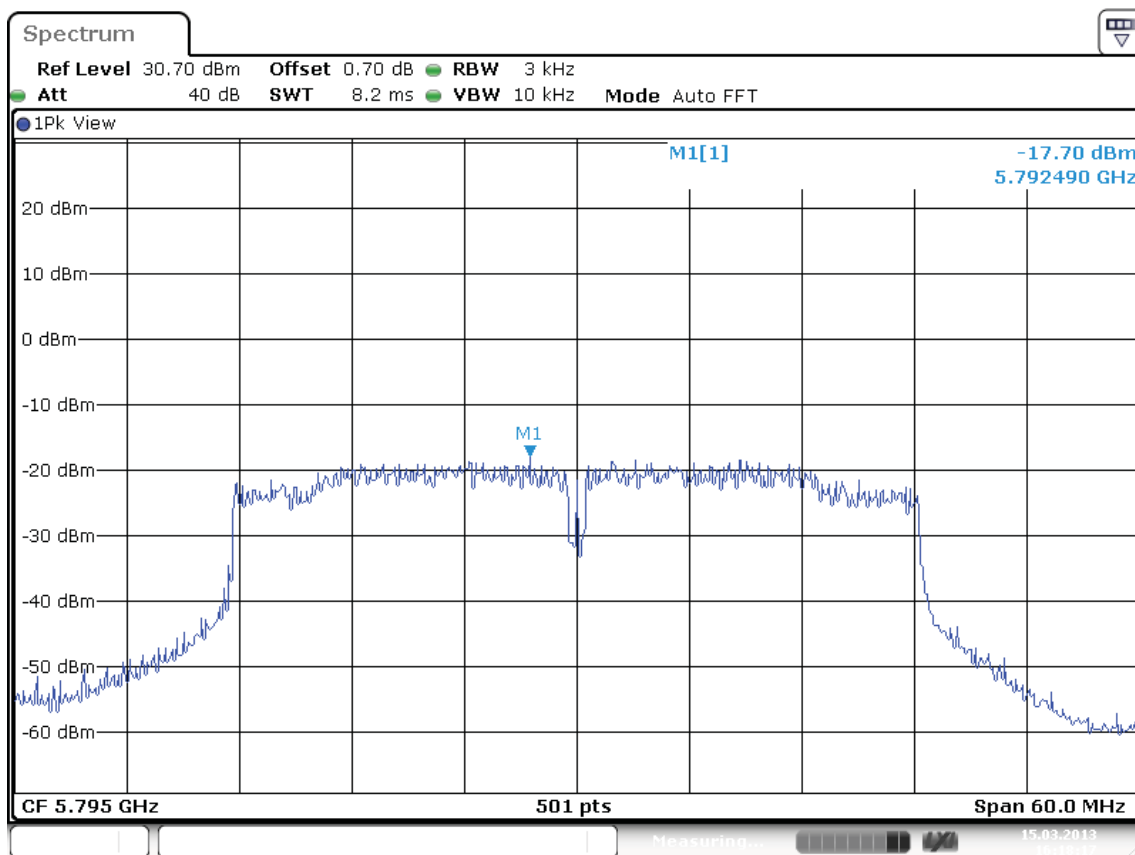


Date: 15.MAR.2013 16:18:16

Plot B Antenna 1

Test Report No.:


**12121201.fcc01**

Page 203 of 263

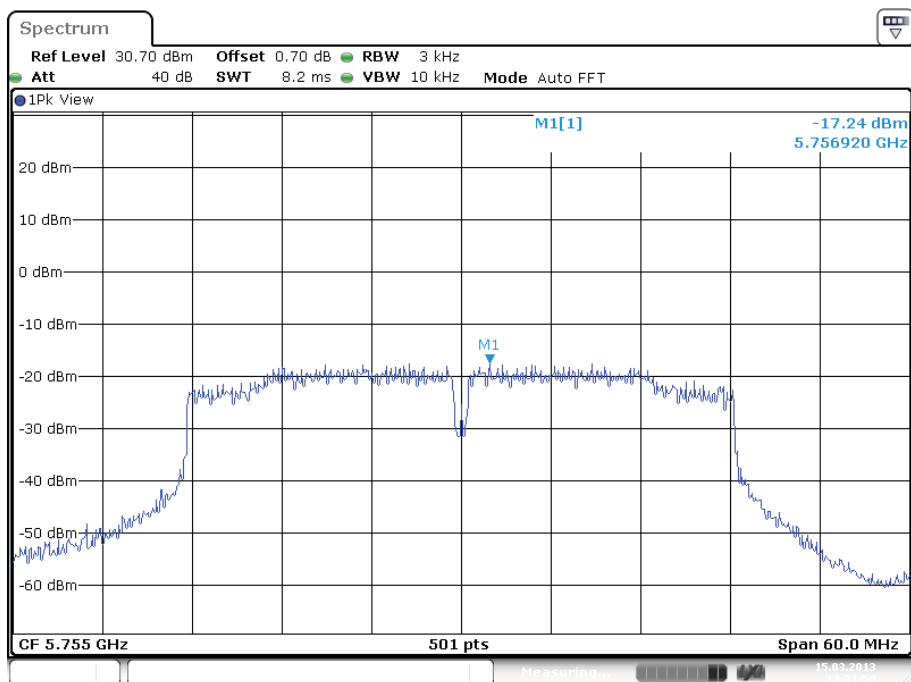

Date: 15.MAR.2013 12:31:51

Plot A Antenna 2

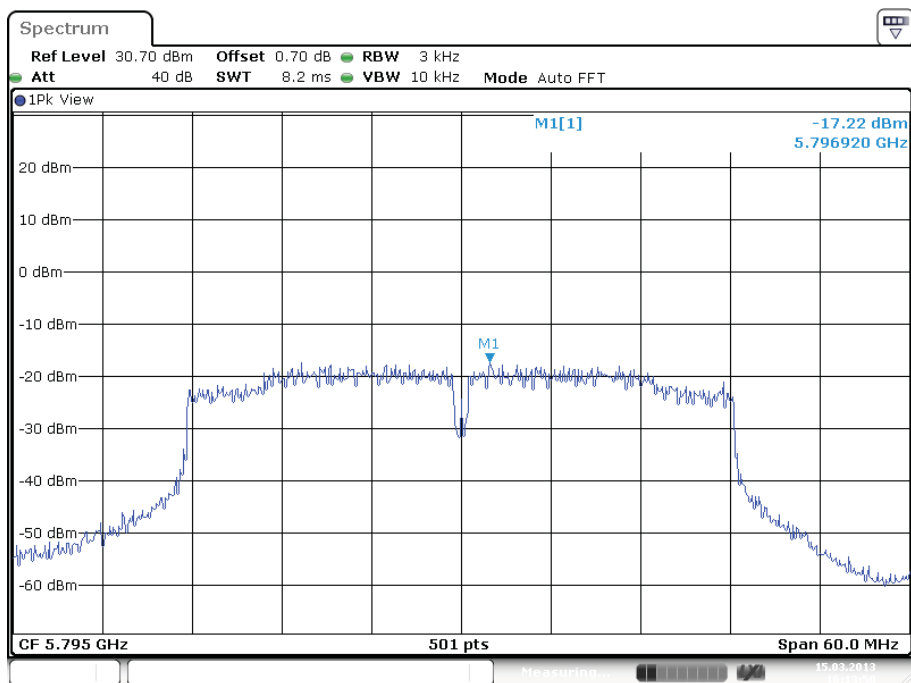

Date: 15.MAR.2013 16:13:50

Plot B Antenna 2


Test Report No.:

**12121201.fcc01**

Page 204 of 263

Operation mode: VHT6 -80 MHz, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-16.54	8	Pass

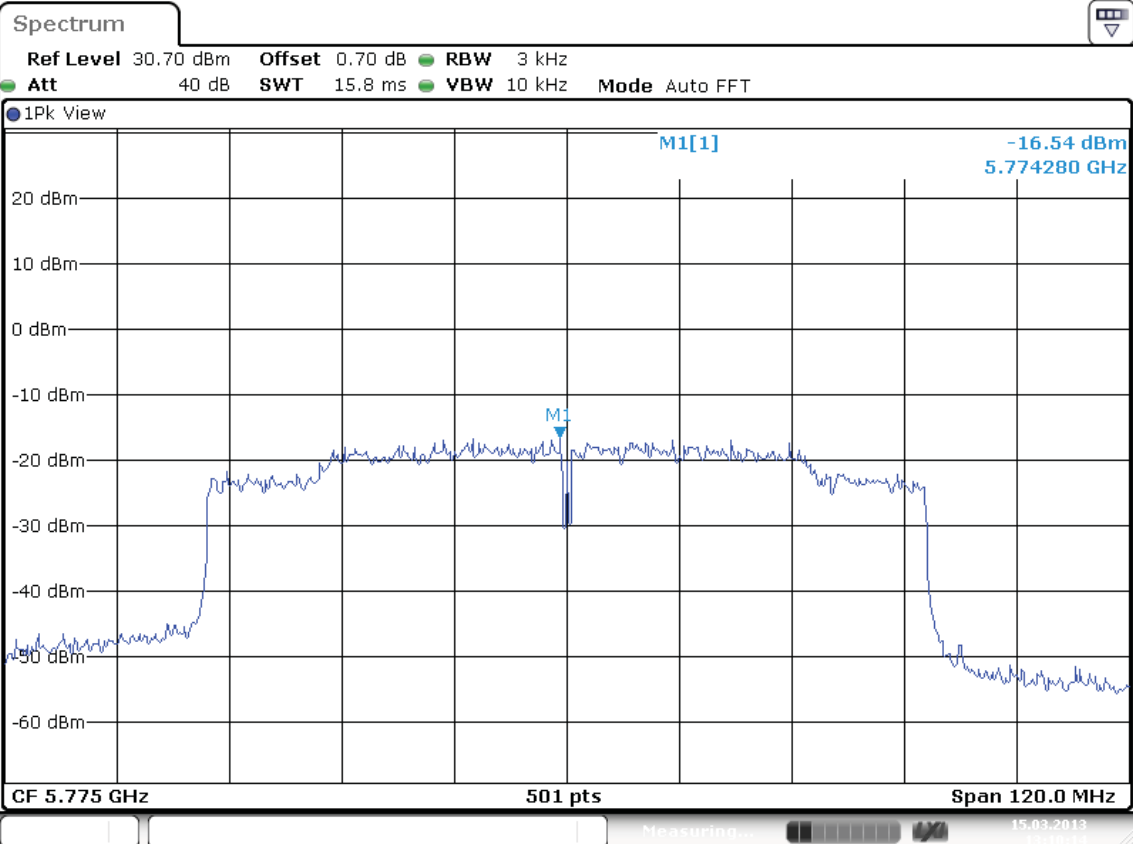

Date: 15.MAR.2013 13:10:14


Test Report No.:

**12121201.fcc01**

Page 205 of 263

Operation mode: VHT6 -80 MHz, Antenna 2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-15.70	8	Pass

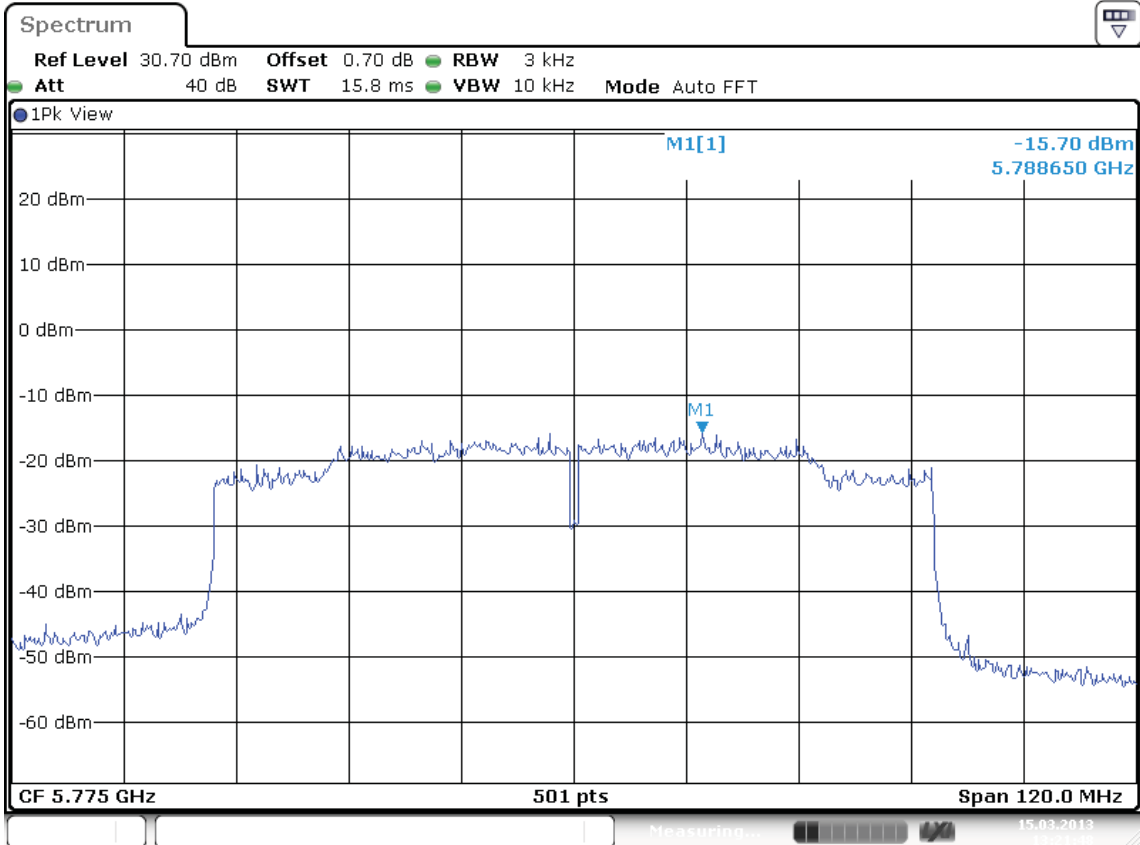

Date: 15.MAR.2013 13:21:48


Test Report No.:

**12121201.fcc01**

Page 206 of 263

Operation mode: VHT6-80 MHz wide, Antenna 1+2

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Result [Pass/Fail]
5775	-13.08	8	Pass

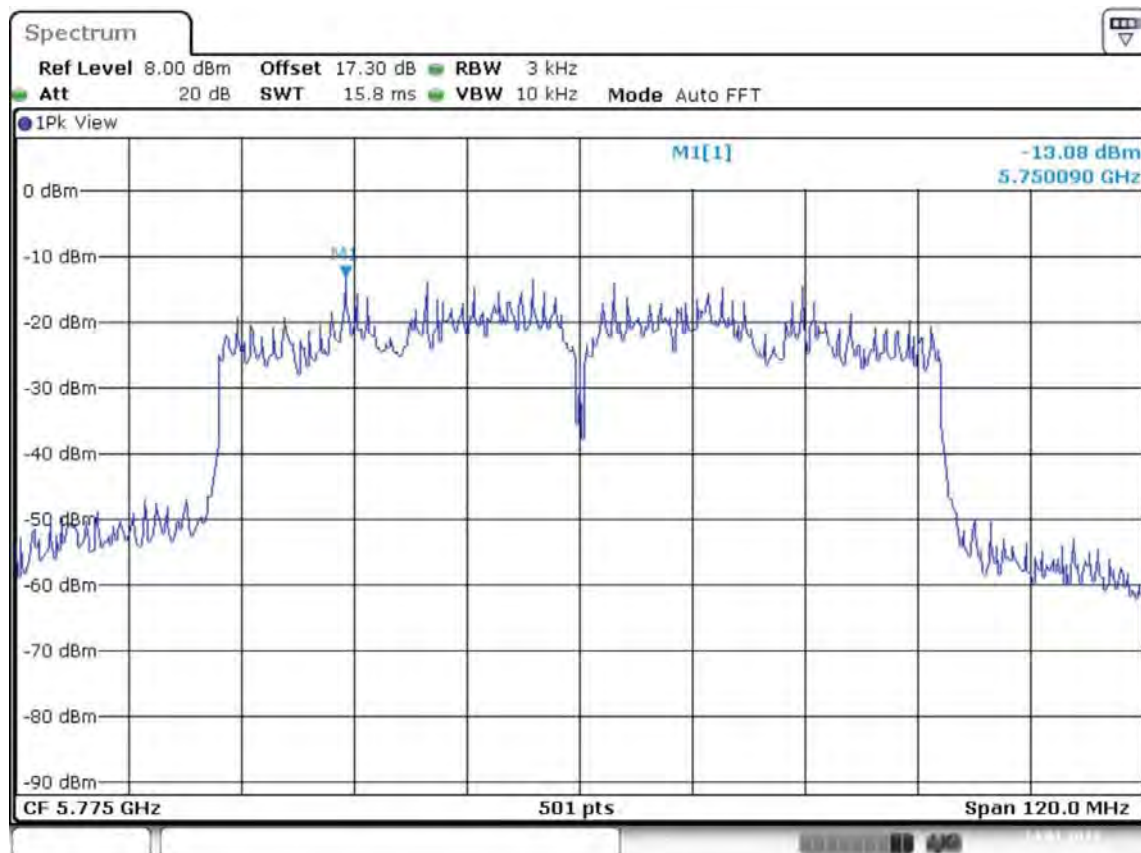

Date: 14.JAN.2013 13:57:32

Test Report No.:

**12121201.fcc01**

Page 207 of 263

## 7.2.4 Band Edge Conducted Emissions

**RESULT: Pass**

Date of testing:

2013-01-16 / 2013-03-15

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10: 2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental.  
See the figures on the following pages.


Test Report No.:

**12121201.fcc01**

Page 208 of 263

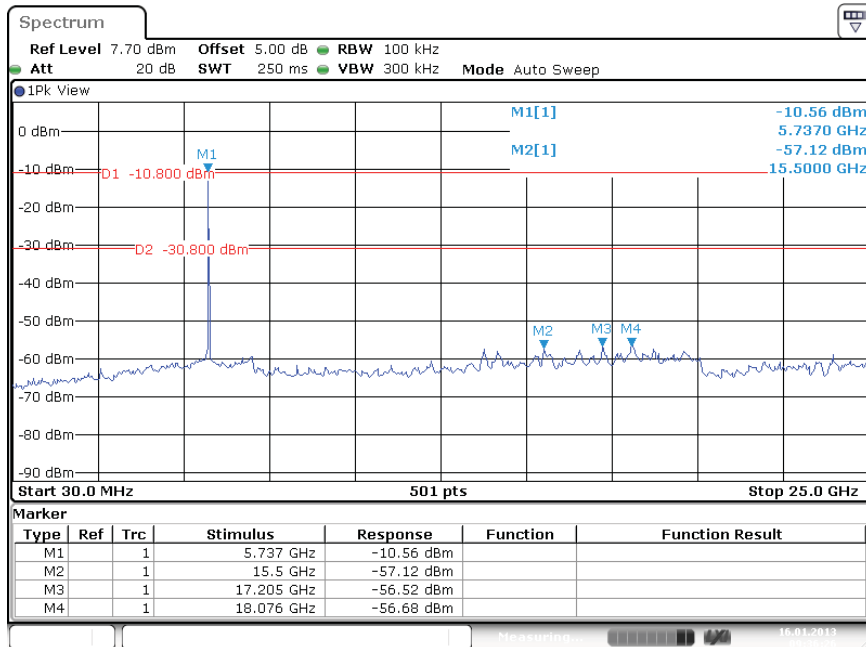

Band Edge Conducted Emission, Spectral Diagram, 5745 MHz- 6Mb OFDM- Antenna 2

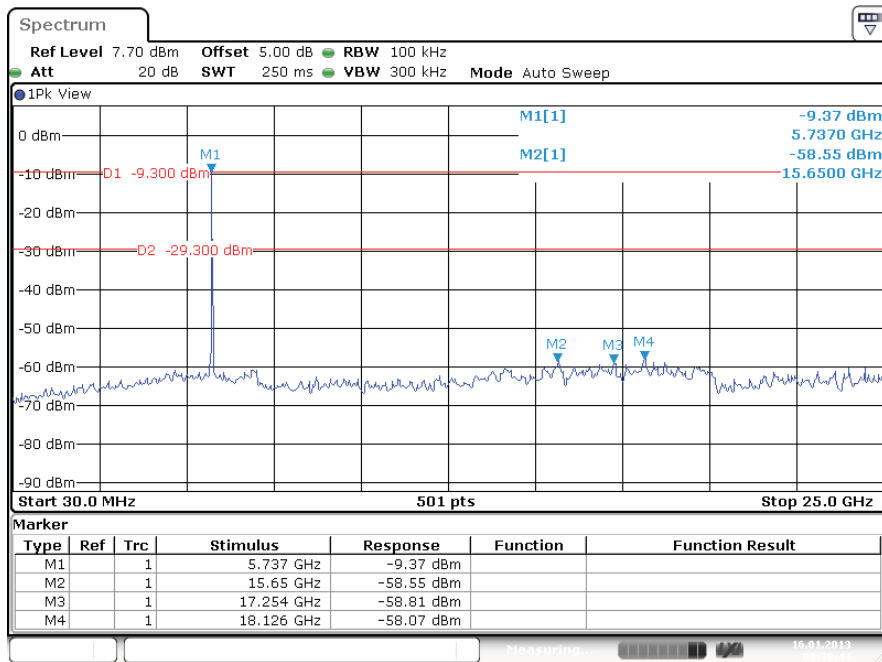


Band Edge Conducted Emission, Spectral Diagram, 5745 MHz- 6Mb OFDM- Antenna 1



Test Report No.:


**12121201.fcc01**

Page 209 of 263

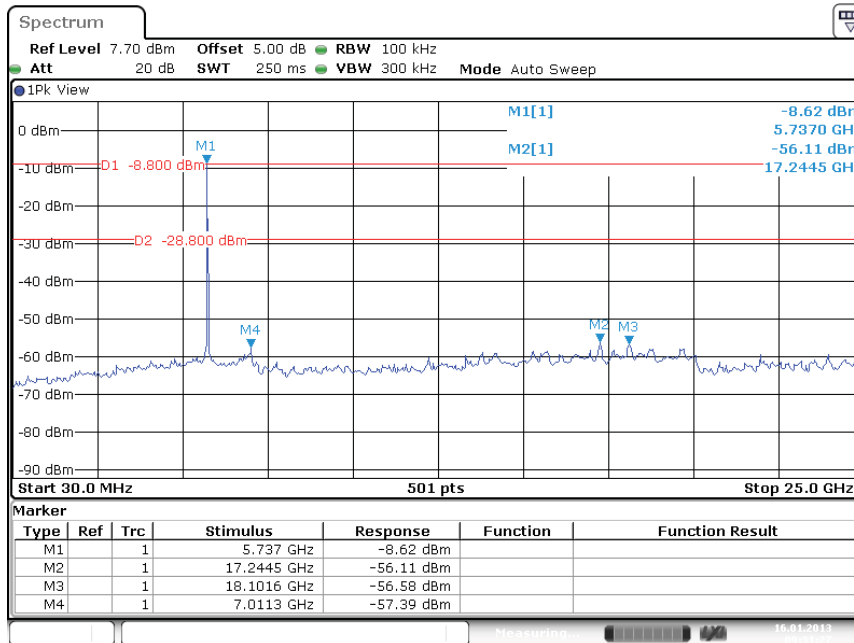

Date: 16.JAN.2013 09:31:27

Band Edge Conducted Emission, Spectral Diagram, 5745 MHz- HT4-20MHz- Antenna 1

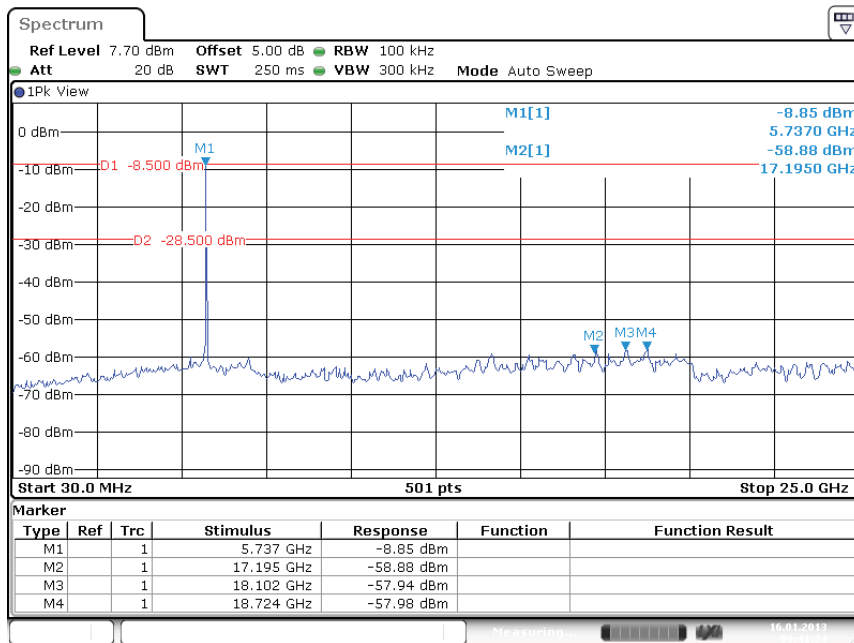


Date: 16.JAN.2013 09:41:35

Band Edge Conducted Emission, Spectral Diagram, 5745 MHz- HT4-20MHz- Antenna 2


Test Report No.:

**12121201.fcc01**

Page 210 of 263

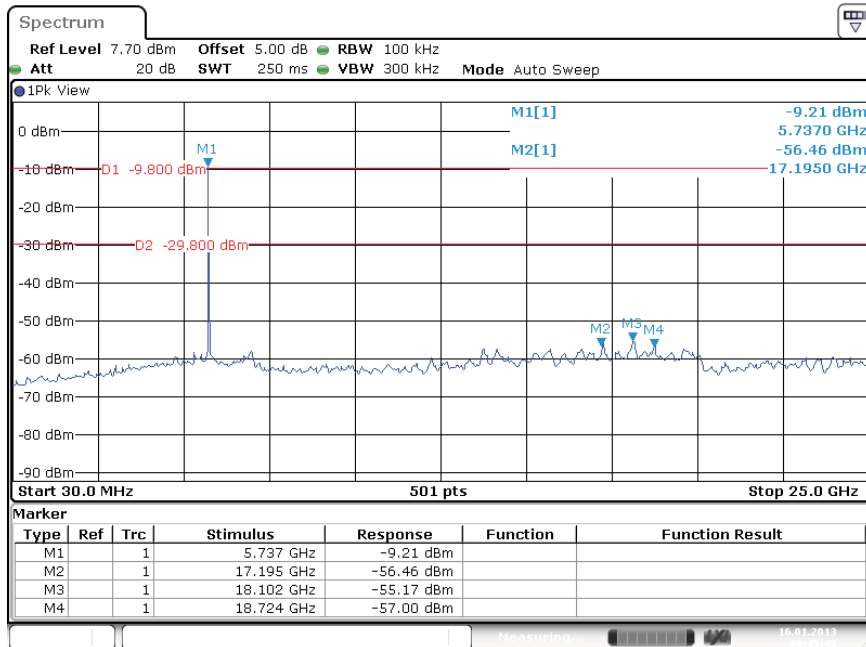

Band Edge Conducted Emission, Spectral Diagram, 5745 MHz HT8-20MHz- Antenna 1+2

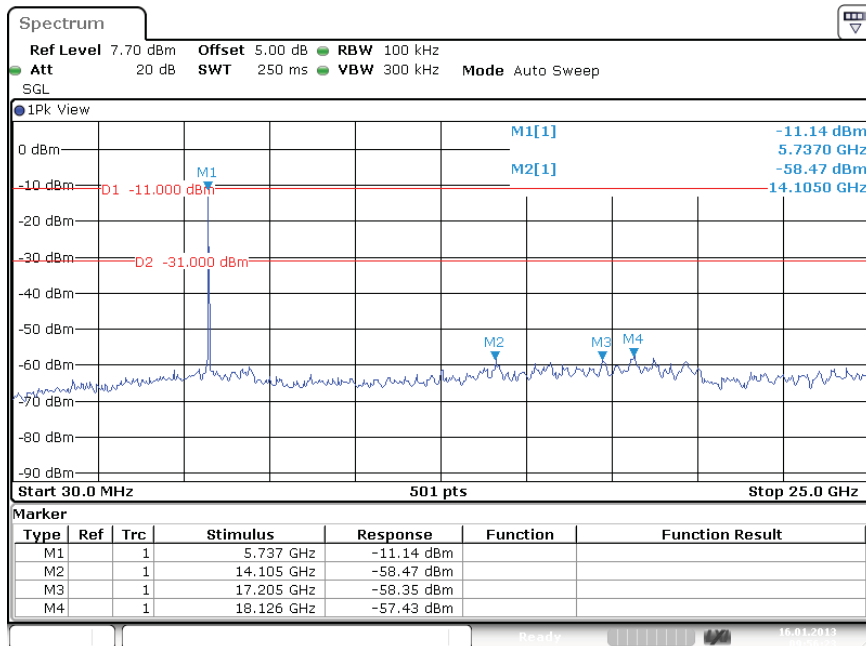


Band Edge Conducted Emission, Spectral Diagram, 5745 MHz- HT4-40MHz- Antenna 2


Test Report No.:

**12121201.fcc01**

Page 211 of 263

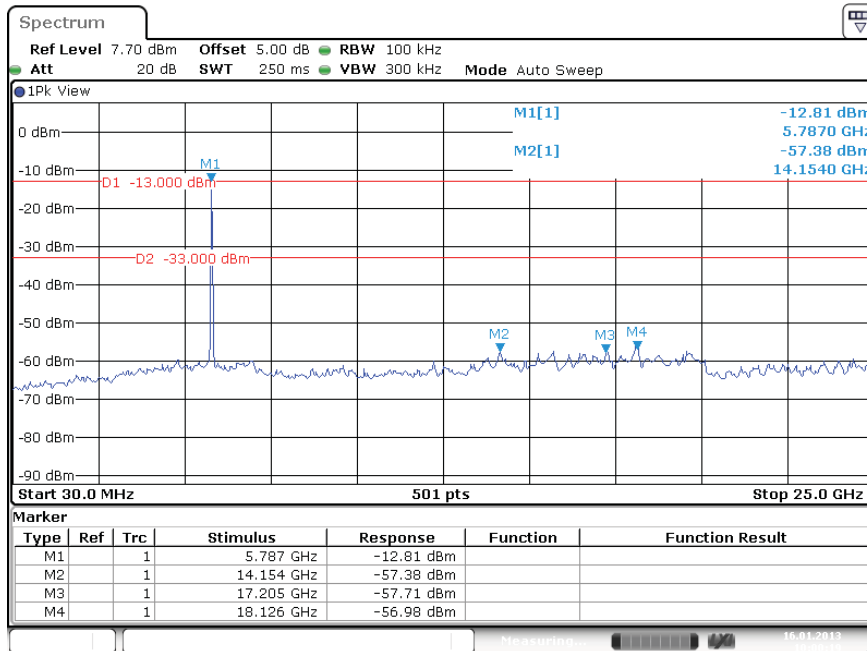

Band Edge Conducted Emission, Spectral Diagram, 5755 MHz- HT4-40MHz- Antenna 1

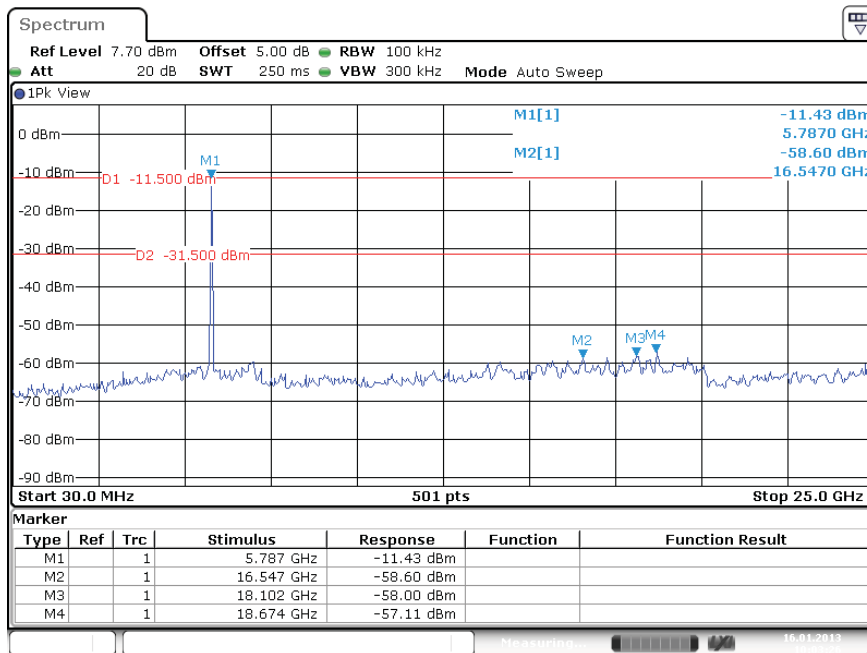


Band Edge Conducted Emission, Spectral Diagram, 5755 MHz- HT8-40MHz- Antenna 1+2

Test Report No.:


**12121201.fcc01**

Page 212 of 263

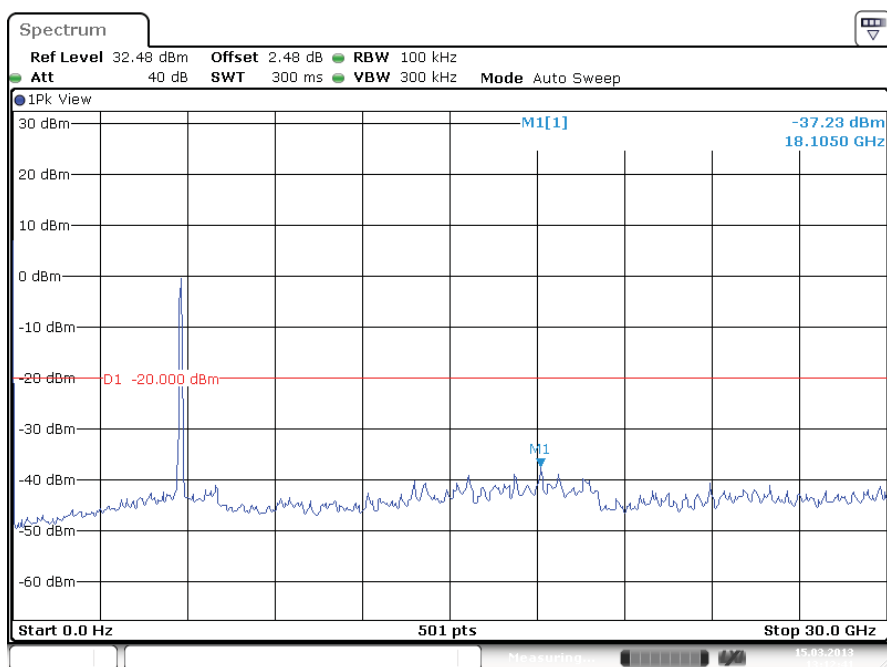

Date: 15.MAR.2013 13:12:41

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz VHT6-80MHz, Antenna 1

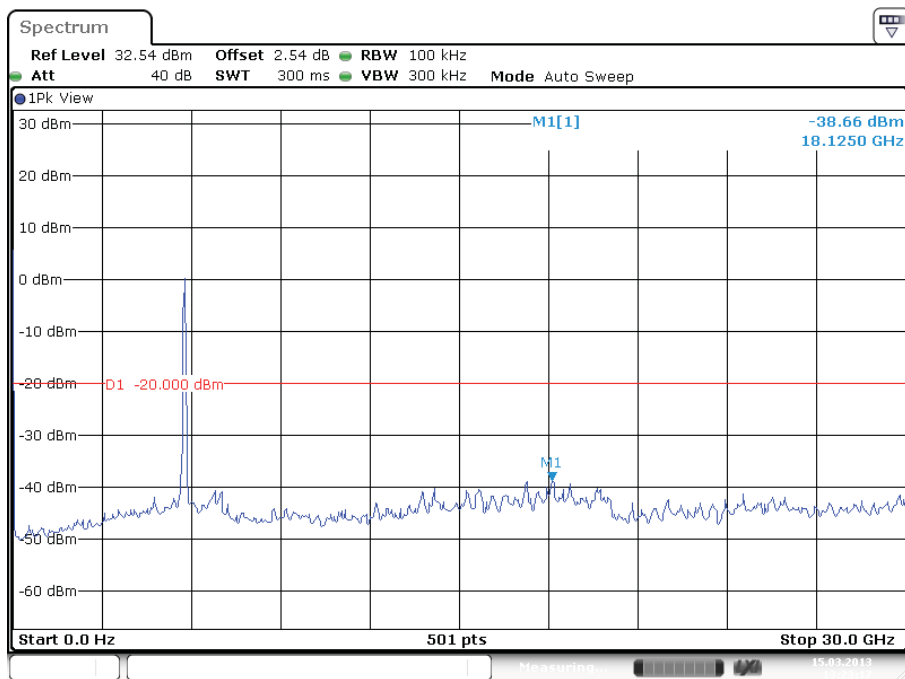


Date: 15.MAR.2013 13:23:17

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz VHT6-80MHz, Antenna 2

Test Report No.:

**12121201.fcc01**

Page 213 of 263

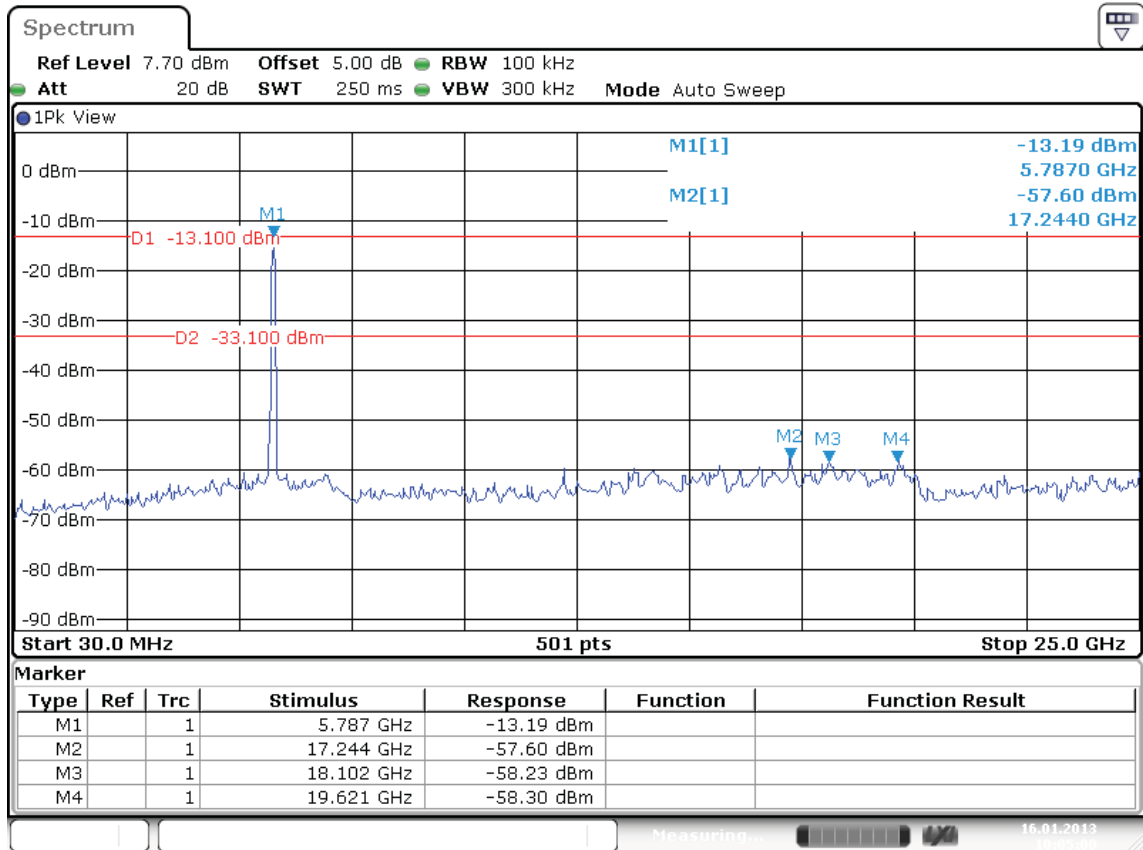


Date: 16.JAN.2013 10:05:00

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz VHT6-80MHz, Antenna 1+2

Test Report No.:


**12121201.fcc01**

Page 214 of 263

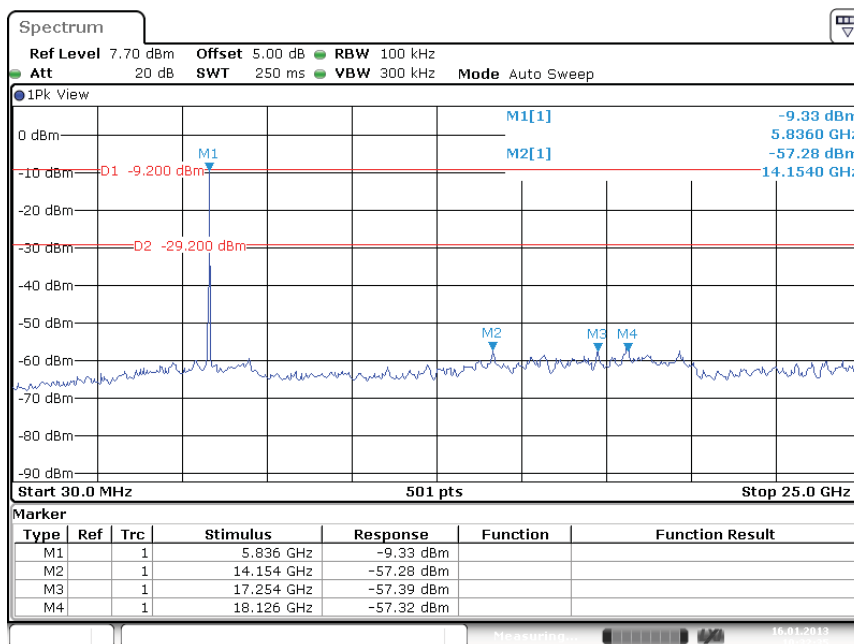

Date: 16.JAN.2013 10:32:35

Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- 6Mb OFDM- Antenna 2

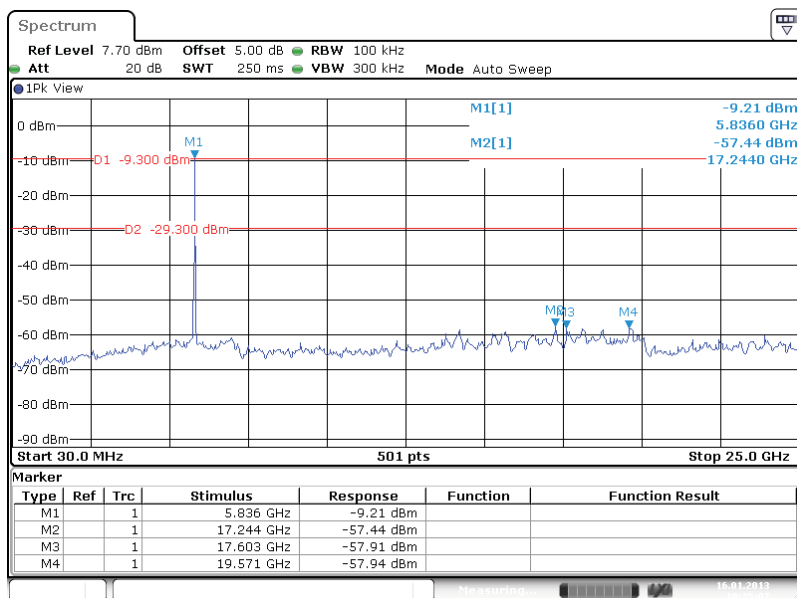


Date: 16.JAN.2013 10:35:08

Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- 6Mb DSSS- Antenna 1

Test Report No.:


**12121201.fcc01**

Page 215 of 263

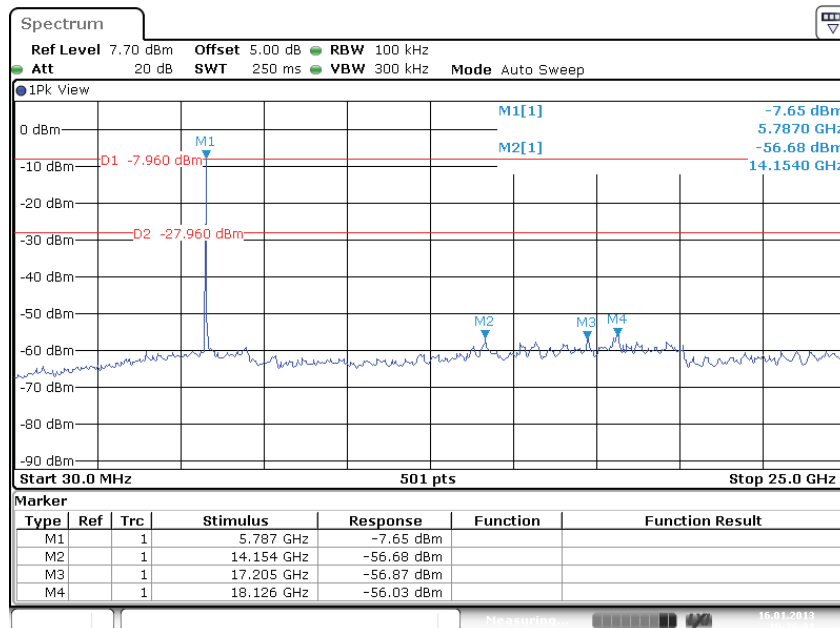

Date: 16.JAN.2013 10:20:02

Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- HT4-20MHz- Antenna 1

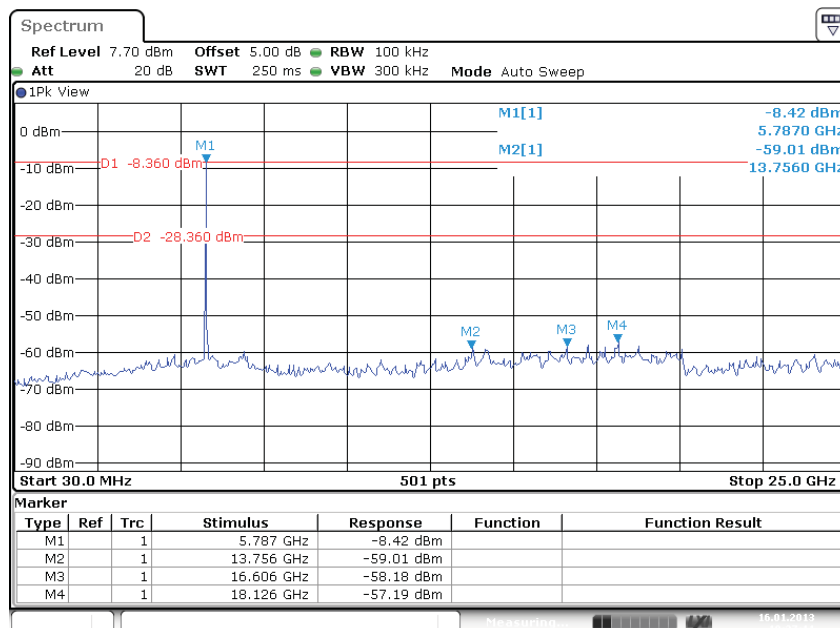


Date: 16.JAN.2013 10:27:11

Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- HT4-20MHz- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 216 of 263

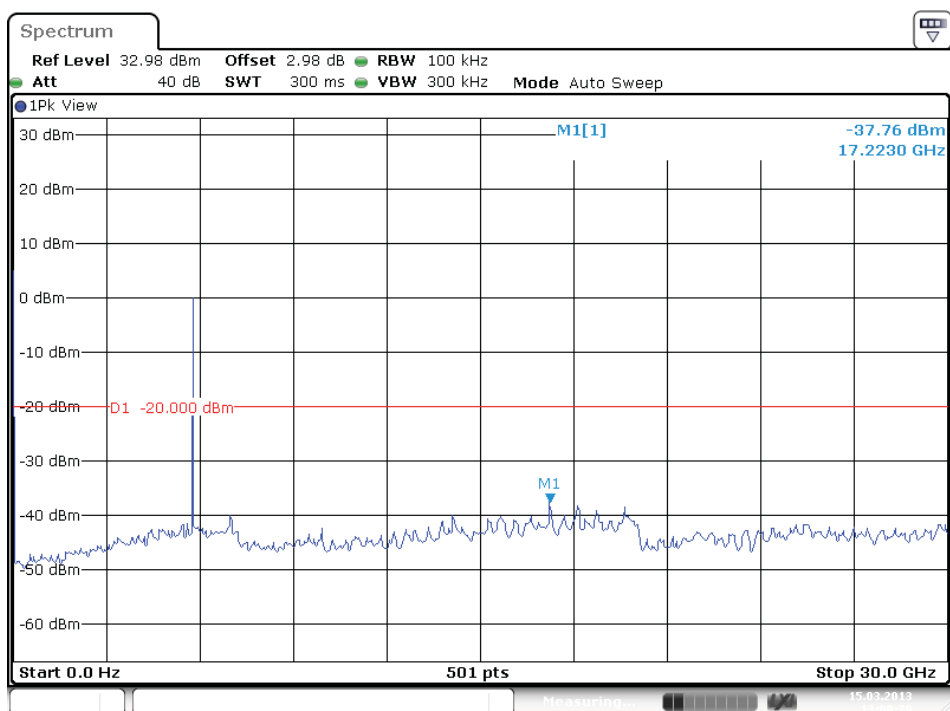

Date: 15.MAR.2013 13:00:29

Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- MIMO HT8-20MHz- Antenna 1

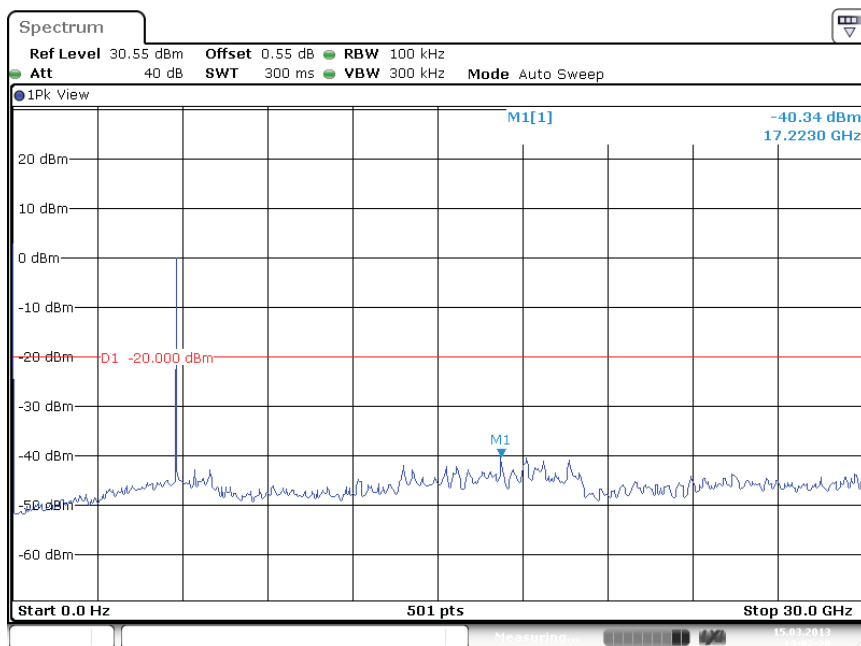

Date: 15.MAR.2013 13:02:20


Band Edge Conducted Emission, Spectral Diagram, 5825 MHz- MIMO HT8-20MHz- Antenna 2




Test Report No.:

**12121201.fcc01**

Page 217 of 263

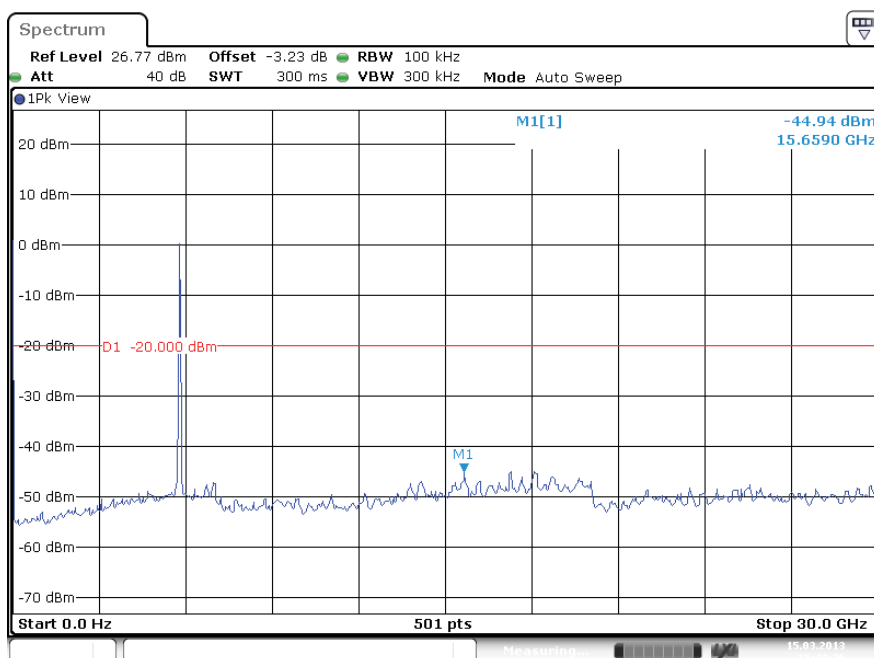

Band Edge Conducted Emission, Spectral Diagram, 5795 MHz- HT4-40MHz- Antenna 1

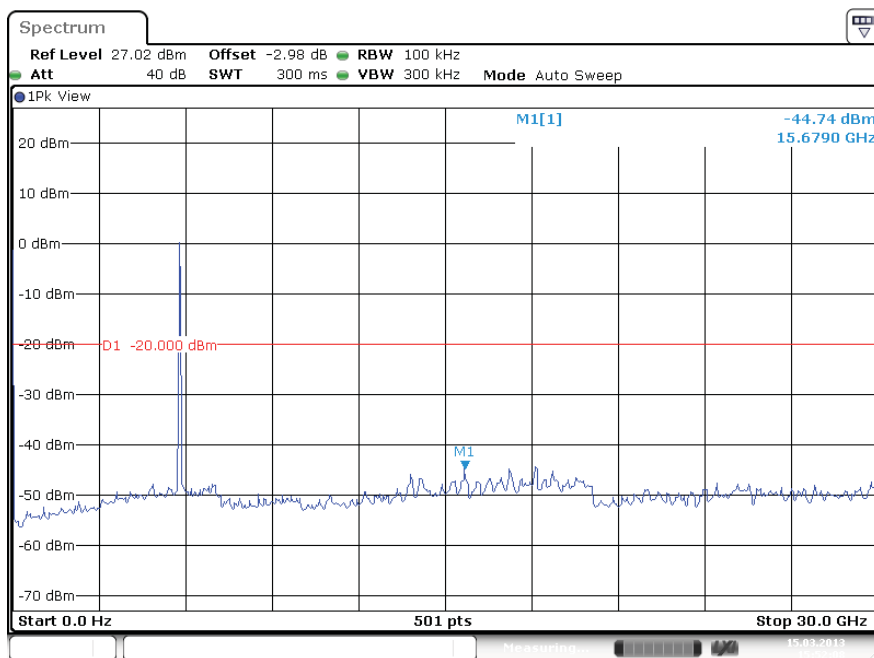


Band Edge Conducted Emission, Spectral Diagram, 5795 MHz- HT4-40MHz- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 218 of 263

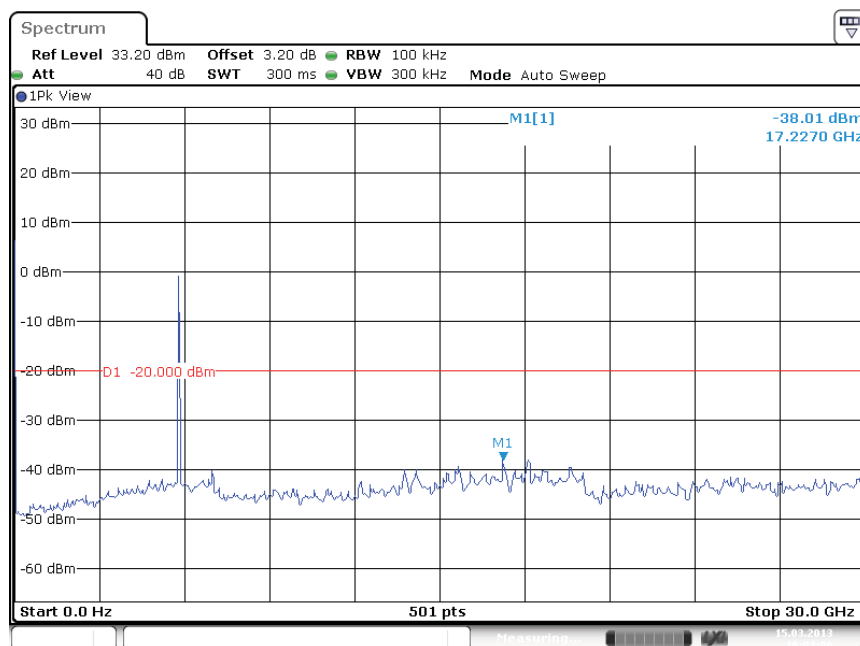

Date: 15.MAR.2013 16:03:07

Band Edge Conducted Emission, Spectral Diagram, 5795 MHz- MIMO HT8-40MHz- Antenna 1

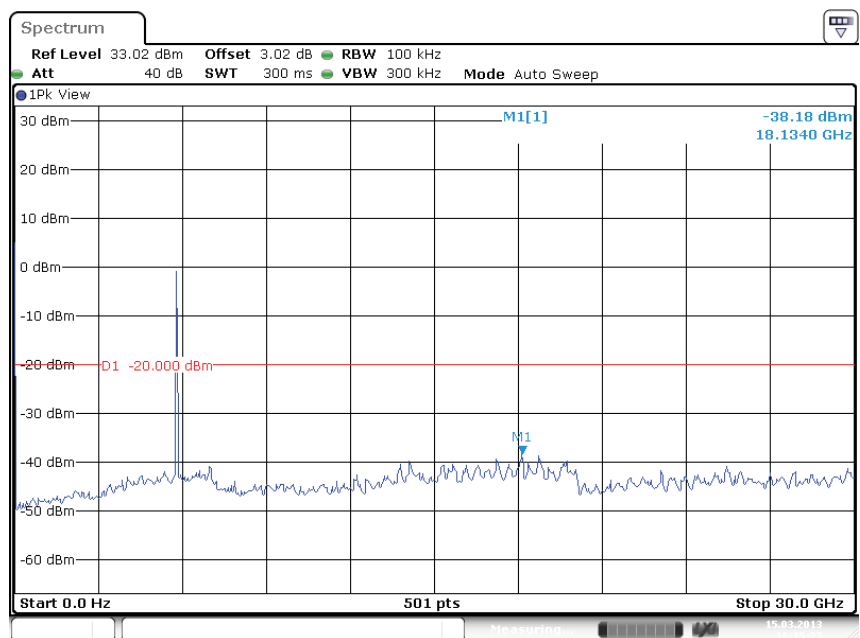


Date: 15.MAR.2013 16:15:28

Band Edge Conducted Emission, Spectral Diagram, 5795 MHz- MIMO HT8-40MHz- Antenna 2

Test Report No.:


**12121201.fcc01**

Page 219 of 263

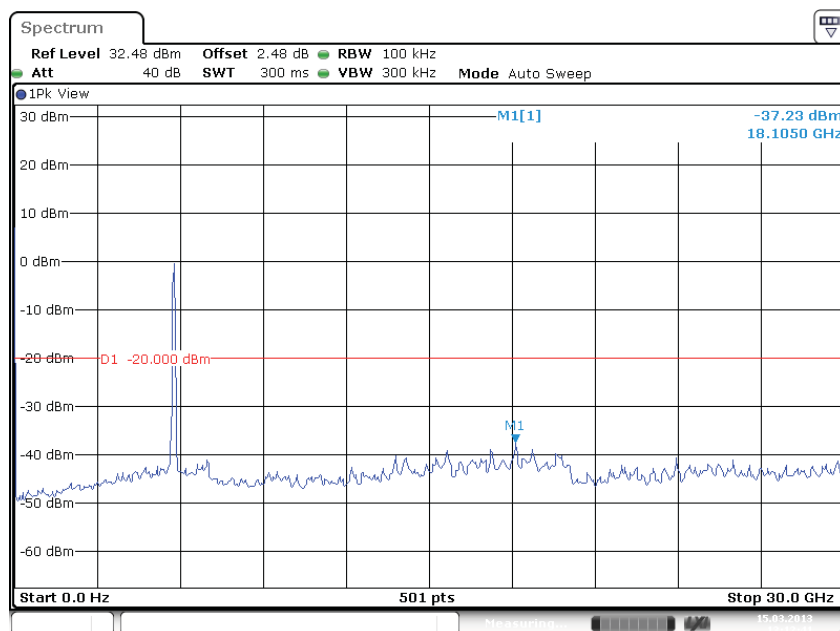

Date: 15.MAR.2013 13:12:41

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz- VHT6-80MHz- Antenna 1

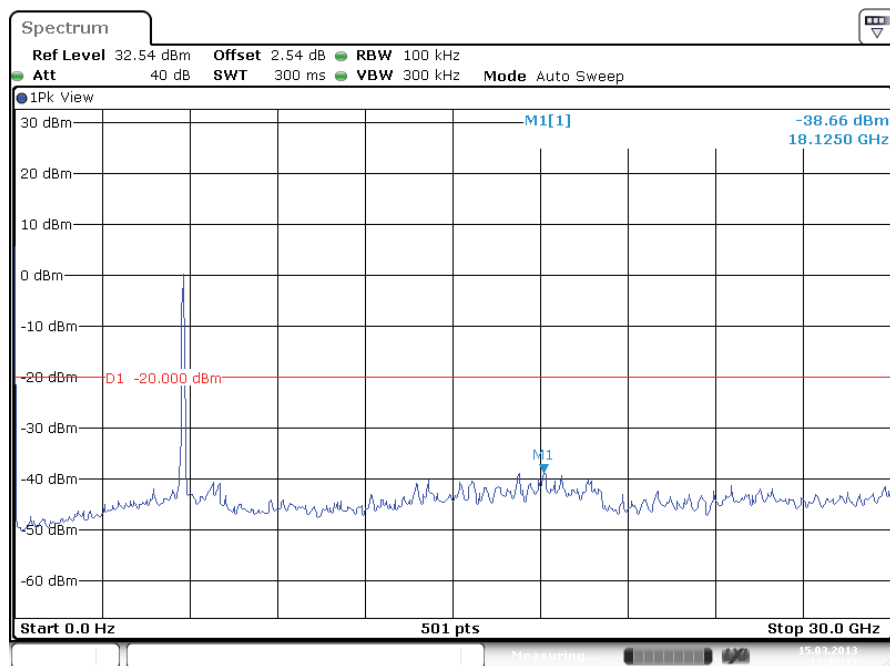


Date: 15.MAR.2013 13:23:17

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz- VHT6-80MHz- Antenna 2

Test Report No.:

**12121201.fcc01**

Page 220 of 263

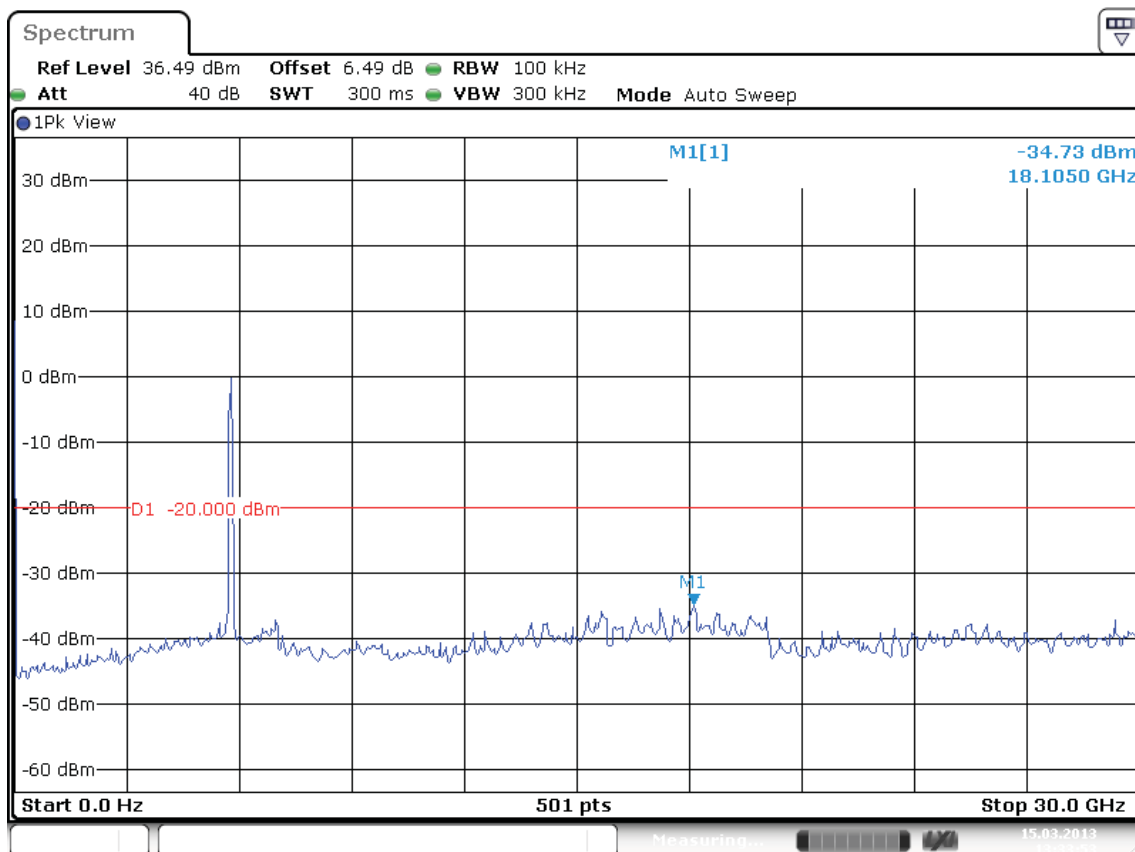

Date: 15.MAR.2013 13:33:53

Band Edge Conducted Emission, Spectral Diagram, 5775 MHz- VHT6-80MHz- Antenna 1+2

Test Report No.:

**12121201.fcc01**

Page 221 of 263

## 7.2.5 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2012-01-10

Frequency range: 30MHz - 40GHz

#### Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

#### Test procedure:

ANSI C63.10-2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency with a maximum frequency of 40GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**

Page 222 of 263

**Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations**

Freq. [MHz]	Antenna Orientation	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Result
66.86	Vertical	15.1	5.4	20.5	40.0	Pass
111.48	Vertical	13.6	11.4	25.0	43.5	Pass
253.10	Vertical	13.7	14.2	27.9	46.0	Pass
774.96	Vertical	14.7	24.8	39.5	46.0	Pass
844.80	Vertical	15.3	26.1	41.4	46.0	Pass
922.40	Vertical	15.4	27.6	43.0	46.0	Pass

Note: - Level QP = Reading QP + Factor  
- Tested in modes as described in section 4.2, highest values noted.  
Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating frequency or mode (transmit versus receive mode).  
- Quasi Peak detector used with a bandwidth of 120 kHz

Test Report No.:

**12121201.fcc01**

Page 223 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5745 MHz - 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11490	Horizontal	Av	35.2	54	Pass
15500	Vertical	Av	38.1	54	Pass
17205	Vertical	Av	38.7	54	Pass
18076	Vertical	Av	38.5	54	Pass
11490	Horizontal	Pk	35.2	74	Pass
15500	Vertical	Pk	38.1	74	Pass
17205	Vertical	Pk	38.7	74	Pass
18076	Vertical	Pk	38.5	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5745 MHz – 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11490	Horizontal	Av	35.2	54	Pass
15650	Vertical	Av	36.7	54	Pass
17254	Vertical	Av	36.4	54	Pass
18126	Vertical	Av	37.1	54	Pass
11490	Horizontal	Pk	35.2	74	Pass
15650	Vertical	Pk	36.7	74	Pass
17254	Vertical	Pk	36.4	74	Pass
18126	Vertical	Pk	37.1	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 224 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5745 MHz – HT4 20MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
7011	Vertical	Av	39.1	54	Pass
11490	Vertical	Av	38.6	54	Pass
18102	Vertical	Av	37.8	54	Pass
7011	Vertical	Pk	39.1	74	Pass
11490	Vertical	Pk	38.6	74	Pass
18102	Vertical	Pk	37.8	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5745 MHz – HT4 20 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11490	Vertical	Av	38.7	54	Pass
18102	Horizontal	Av	40.0	54	Pass
18724	Vertical	Av	38.2	54	Pass
11490	Vertical	Pk	38.7	74	Pass
18102	Horizontal	Pk	40.0	74	Pass
18724	Vertical	Pk	38.2	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.



Test Report No.:

**12121201.fcc01**

Page 225 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5755 MHz – HT4 40 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	35.0	54	Pass
17265	Vertical	Av	32.9	54	Pass
18126	Vertical	Av	38.2	54	Pass
11510	Vertical	Pk	35.0	74	Pass
17265	Vertical	Pk	32.9	74	Pass
18126	Vertical	Pk	38.2	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5755 MHz – HT4 40 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	35.0	54	Pass
17265	Vertical	Av	33.0	54	Pass
18126	Vertical	Av	37.8	54	Pass
11510	Vertical	Pk	35.0	74	Pass
17265	Vertical	Pk	33.0	74	Pass
18126	Vertical	Pk	37.8	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 226 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5755 MHz – HT8 40 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
14160	Vertical	Av	49.20	54	Pass
17250	Vertical	Av	50.70	54	Pass
18097	Vertical	Av	49.12	54	Pass
14160	Vertical	Pk	49.20	74	Pass
17250	Vertical	Pk	50.70	74	Pass
18097	Vertical	Pk	49.12	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5755 MHz – HT4 40 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	36.6	54	Pass
18102	Vertical	Av	37.2	54	Pass
18674	Vertical	Av	38.1	54	Pass
11510	Vertical	Pk	36.6	74	Pass
18102	Vertical	Pk	37.2	74	Pass
18674	Vertical	Pk	38.1	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5755 MHz – HT4 40 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	38.8	54	Pass
18102	Vertical	Av	39.5	54	Pass
18674	Vertical	Av	40.2	54	Pass
11510	Vertical	Pk	38.8	74	Pass
18102	Vertical	Pk	39.5	74	Pass
18674	Vertical	Pk	40.2	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 227 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5775 MHz – VHT6 80 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	38.1	54	Pass
17265	Vertical	Av	37.5	54	Pass
27000	Vertical	Av	39.3	54	Pass
11510	Vertical	Pk	38.1	74	Pass
17265	Vertical	Pk	37.5	74	Pass
27000	Vertical	Pk	39.3	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5775 MHz – VHT6 80 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	40.2	54	Pass
17265	Vertical	Av	39.8	54	Pass
27000	Vertical	Av	39.6	54	Pass
11510	Vertical	Pk	40.2	74	Pass
17265	Vertical	Pk	39.8	74	Pass
27000	Vertical	Pk	39.6	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5775 MHz – VHT6 80 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
11510	Vertical	Av	37.6	54	Pass
18102	Vertical	Av	37.0	54	Pass
19621	Vertical	Av	36.9	54	Pass
11510	Vertical	Pk	37.6	74	Pass
18102	Vertical	Pk	37.0	74	Pass
19621	Vertical	Pk	36.9	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz

Test Report No.:

**12121201.fcc01**

Page 228 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5785 MHz - 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
6.928	Vertical	Av	38.0	54	Pass
17254	Vertical	Av	38.2	54	Pass
18076	Vertical	Av	39.9	54	Pass
6.928	Vertical	Pk	38.0	74	Pass
17254	Vertical	Pk	38.2	74	Pass
18076	Vertical	Pk	39.9	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5785 MHz - 6 Mb OFDM – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
14154	Vertical	Av	36.3	54	Pass
16557	Vertical	Av	36.7	54	Pass
18076	Vertical	Av	38.5	54	Pass
14154	Vertical	Pk	36.3	74	Pass
16557	Vertical	Pk	36.7	74	Pass
18076	Vertical	Pk	38.5	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 229 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5785 MHz – HT4 20 MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
14154	Vertical	Av	38.5	54	Pass
17205	Vertical	Av	38.3	54	Pass
18126	Vertical	Av	39.2	54	Pass
14154	Vertical	Pk	38.5	74	Pass
17205	Vertical	Pk	38.3	74	Pass
18126	Vertical	Pk	39.2	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5785 MHz – HT4 20 MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
13756	Horizontal	Av	36.2	54	Pass
16606	Horizontal	Av	37.0	54	Pass
18126	Vertical	Av	38.0	54	Pass
13756	Horizontal	Pk	36.2	74	Pass
16606	Horizontal	Pk	37.0	74	Pass
18126	Vertical	Pk	38.0	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 230 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5785 MHz – HT8 40 MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Result
15699	Horizontal	Av	37.6	54	Pass
17254	Vertical	Av	39.6	54	Pass
18126	Vertical	Av	38.7	54	Pass
15699	Horizontal	Pk	37.6	74	Pass
17254	Vertical	Pk	39.6	74	Pass
18126	Vertical	Pk	38.7	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 231 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5825 MHz – 6 Mb OFDM – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
14154	Horizontal	Av	37.9	54	Pass
17254	Vertical	Av	37.8	54	Pass
18126	Vertical	Av	37.9	54	Pass
14154	Horizontal	Pk	37.9	74	Pass
17254	Vertical	Pk	37.8	74	Pass
18126	Vertical	Pk	37.9	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5825 MHz – 6 Mb OFDM – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Result
17244	Vertical	Av	37.8	54	Pass
17603	Vertical	Av	37.3	54	Pass
19571	Vertical	Av	37.3	54	Pass
17244	Vertical	Pk	37.8	74	Pass
17603	Vertical	Pk	37.3	74	Pass
19571	Vertical	Pk	37.3	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 232 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5825 MHz – HT4 20MHz – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Result
17244	Horizontal	Av	38.0	54	Pass
18102	Vertical	Av	37.1	54	Pass
19571	Vertical	Av	37.3	54	Pass
17244	Horizontal	Pk	38.0	74	Pass
18102	Vertical	Pk	37.1	74	Pass
19571	Vertical	Pk	37.3	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5825 MHz – HT4 20MHz – Antenna 2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Result
17244	Horizontal	Av	37.2	54	Pass
18052	Vertical	Av	38.0	54	Pass
18674	Vertical	Av	36.7	54	Pass
17244	Horizontal	Pk	37.2	74	Pass
18052	Vertical	Pk	38.0	74	Pass
18674	Vertical	Pk	36.7	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.



Test Report No.:

**12121201.fcc01**

Page 233 of 263

**Radiated Emission, 1 - 40GHz, Horizontal and Vertical Antenna Orientations,  
5825 MHz – HT8 40MHz – Antenna 1+2**

Freq. [MHz]	Antenna Orientation	Detector	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Result
15301	Horizontal	Av	39.5	54	Pass
17254	Vertical	Av	39.9	54	Pass
18076	Vertical	Av	39.6	54	Pass
15301	Horizontal	Pk	39.5	74	Pass
17254	Vertical	Pk	39.9	74	Pass
18076	Vertical	Pk	39.6	74	Pass

Note: - Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
Peak values also noted as Av value to show compliance with Av limit.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 234 of 263

## **7.2.6 Radiated Spurious Emissions of Transmitter in restricted bands**

### **RESULT: Pass**

Date of testing: 2013-01-13 / 2013-03-15

Frequency range: 4.5 – 5.15 GHz and 5.35 – 5.46 GHz

Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure:

ANSI C63.10: 2009 and ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 4.5 – 5.15 GHz and from 5.35 – 5.46 GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**

Page 235 of 263

Modulation	Frequency (MHz)	Antenna	Highest value in section (Peak)	Highest value in section (Peak)	Limit 15.209	Result
			4.5-5.15 GHz	5.35-5.45 GHz	Average/ Peak	Pass or Fail
6 Mb OFDM	5745	2	48.9	48.7	54 / 74	Pass
6 Mb OFDM	5745	1	52.3	50.0	54 / 74	Pass
HT4 - 20 MHz	5745	1	49.4	52.7	54 / 74	Pass
HT4 - 20 MHz	5745	2	53.9	52.7	54 / 74	Pass
HT8 - 20 MHz	5745	1+2	51.0	49.1	54 / 74	Pass
HT4 - 40 MHz	5755	2	53.3	53.3	54 / 74	Pass
HT4 - 40 MHz	5755	1	53.6	53.6	54 / 74	Pass
HT8 - 40 MHz	5755	1+2	52.9	53.2	54 / 74	Pass
VHT6 - 80 MHz	5775	1	52.7	53.3	54 / 74	Pass
VHT6 - 80 MHz	5775	2	52.8	53.2	54 / 74	Pass
VHT6 - 80 MHz	5775	1+2	53.3	53.3	54 / 74	Pass

Note:

were Peak values were already within Average limits, these were not re-tested with Average detector.

Test Report No.:

**12121201.fcc01**

Page 236 of 263

### 7.3 Spurious emissions in receive mode

**RESULT: Pass**

Date of testing: 2013-01-10

Requirements: RSS-Gen

Radiated emissions from receiver shall not exceed the radiated limits in the table below.

Freq. [MHz]	Detector	Measurement Bandwidth	Limit [dB $\mu$ V/m]
30 – 88	Qp	120 kHz	40.0
88 – 216	Qp	120 kHz	43.5
216 – 960	Qp	120 kHz	46.0
Above 916	Av	1 MHz	54.0

Test procedure: ANSI C63.10: 2009, RSS-Gen section 4.10

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30 MHz to 17500 MHz. Emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function. Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**

Page 237 of 263

Results:

Freq. [MHz]	Antenna Orientation	Detector/ Bandwidth	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
47.1	Vertical	Qp / 120 kHz	27.9	40.0	-12.1
64.9	Vertical	Qp / 120 kHz	26.7	40.0	-13.3
237.5	Vertical	Qp / 120 kHz	21.7	46.0	-24.3
466.0	Vertical	Qp / 120 kHz	26.7	46.0	-19.3
5755	Vertical	Av / 1 MHz	29.5	54.0	-24.5
7673	Vertical	Av / 1 MHz	29.0	54.0	-25.0

Note: - tested up to 3 times highest tunable frequency (which is 5825 MHz), up to 17.5 GHz.  
- the EUT was tested in receive mode, set at center frequency of 5785 MHz.  
- tested with DSSS, OFDM modes, worst case values noted

Test Report No.:

**12121201.fcc01**

Page 238 of 263

## **7.4 AC Power Line Conducted Measurements**

### **7.4.1 AC Power Line Conducted Emission of Transmitter**

AC power line conducted emissions are included in the Part 15B/ICES-003 testreport.  
Refer to document number 13e\_PD97260NG\_Testreport\_FCC-15B-ICES003.pdf

*Test Report No.:*

**12121201.fcc01**

*Page 239 of 263*

## **Bluetooth Low Energy (BLE)**

Test Report No.:

**12121201.fcc01**

Page 240 of 263

## 8. Test Set-up and Operation Modes

### 8.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-210, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 (DSS).

The test methods, which have been used, are based on ANSI C63.10-2009.

For details, see under each test item.

### 8.2 Operation Modes

Modulation	Duty cycle	Antenna	Test frequencies (MHz)					
			Lowest	Gain control setting	Middle	Gain control setting	Highest	Gain control setting
BLE payload 37 bytes	0.64	1	2402	--	2440	--	2480	--

Testing was performed at the lowest operating frequency, at the operating frequency in the middle of the specified frequency band and at the highest operating frequency. These operation modes were selected after review of the capabilities and characteristics of the EUT. Bluetooth operation was evaluated in BLE mode.

Antenna ports are also referred to as Chain A and Chain B, where chain A refers to Antenna-port 2 and Chain B refers to Antenna-port 1. Bluetooth is only available on Antenna 1 (Chain B).




### 8.3 Physical Configuration for Testing

The EUT was installed into a test-fixture that interfaced to a laptop computer and dc power supply. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel or continuously receive on the channel as specified in the testdata. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis (only attached to the test jig) and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10:2009.

**Figure 5: Test Setup Diagram**

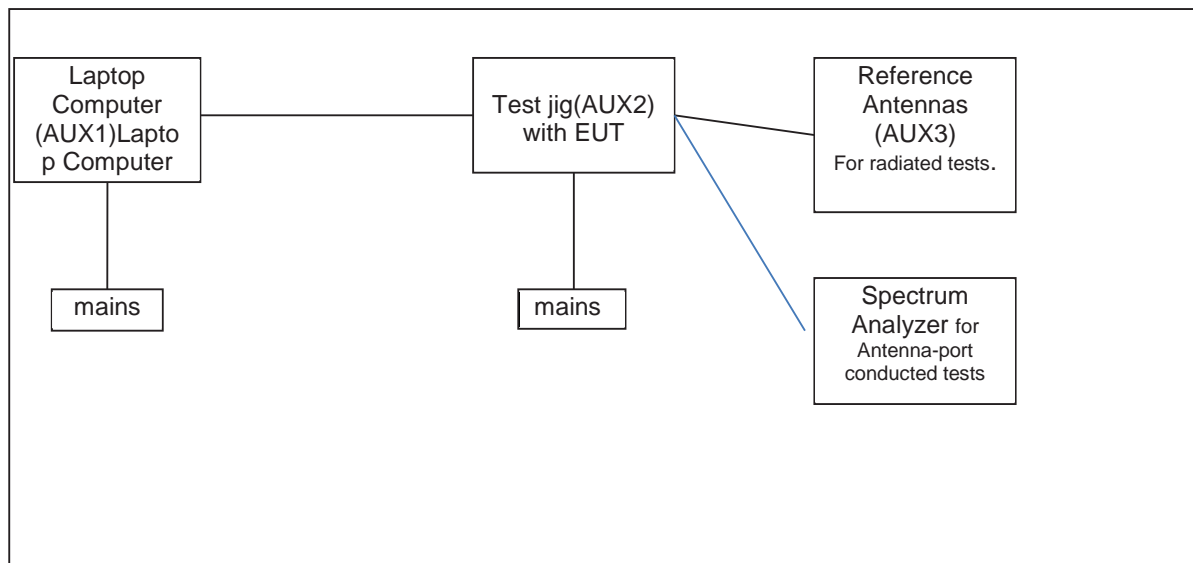

Notes:

For more details, refer to the document: Test Set-Up Photographs document.

Test Report No.:

**12121201.fcc01**

Page 242 of 263

## **8.4 Test Software**

The operation modes could be initiated by using test software as supplied by Intel Corporation. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by Intel Corporation and used during all tests is:

Test software : DRTU 1.6.0-0510  
Driver : 16.0.0.17

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

Test Report No.:

**12121201.fcc01**

Page 243 of 263

## 8.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

### 7. AUX1

Product: Laptop Computer  
Brand: Lenovo  
Model: 9456-HTG  
Serial Number: L3-BF847 07/02  
Remark: property applicant, host for testsoftware and AUX2

### 8. AUX2

Product: Test Jig  
Brand: Intel  
Model: NGFF Extension Rev. 01  
Rated Voltage: 3.3 Vdc  
Antenna: Internal, integrated on the PCB  
Remarks: used for Antenna-port conducted tests

### 9. AUX3

Product: Reference antennas  
Manufacturer: SkyCross Electronics (Shenzhen) Co.,Ltd  
Brand: SkyCross Electronics (Shenzhen) Co.,Ltd  
Gain at 2G4: 3.0 dBi (declared by applicant)  
Remarks: used for radiated tests

Test Report No.:

**12121201.fcc01**

Page 244 of 263

## **9. Test Results**

### **9.1 Technical Requirements**

#### **9.1.1 Voltage Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the power supply requirements.

#### **9.1.2 Antenna Requirements**

##### **RESULT: Pass**

Requirements:

FCC 15.203 and IC RSS-Gen section 7.1.2

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has two non standard PIFA antenna connectors which complies with the requirements.

Test Report No.:

**12121201.fcc01**

Page 245 of 263

### **9.1.3 Restricted Bands of Operation**

#### **RESULT: Pass**

Requirements:

FCC 15.205 and IC RSS-Gen section 7.2.2

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict: PASS


The EUT operation frequency range is 2402 MHz - 2480 MHz range. Therefore only spurious emissions may be found in the restricted bands of operation and the EUT complies with the restricted frequency band requirement.

Plots on the next pages show the peak values as a blue line, corresponding limit line is D2. Average values are shown as a black line with corresponding limit line D1.

Test Report No.:


**12121201.fcc01**

Page 246 of 263

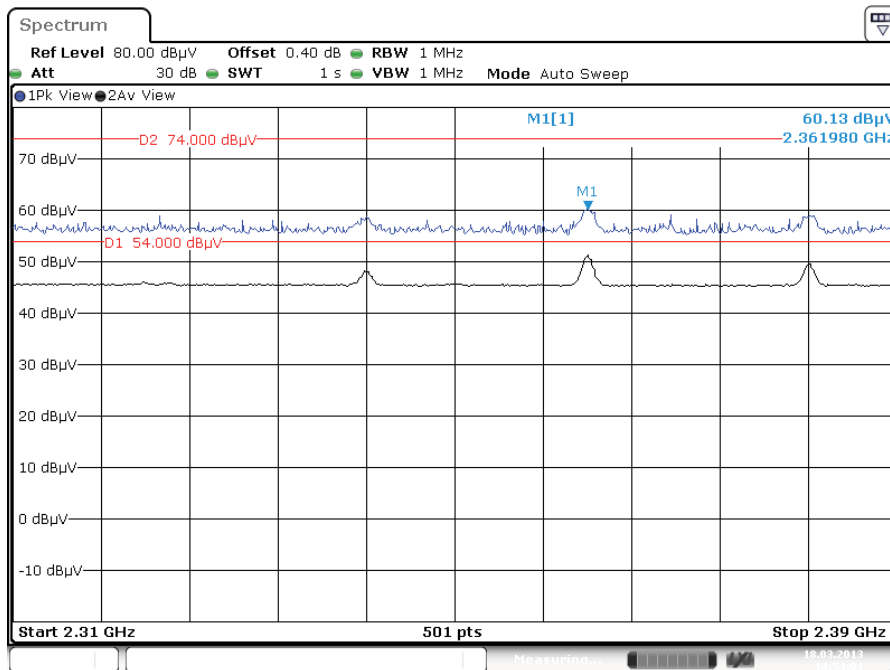

Date: 18.MAR.2013 14:54:01

Emissions in restricted band 2.31 – 2.39 GHz - 2402 MHz- BLE- Antenna 1

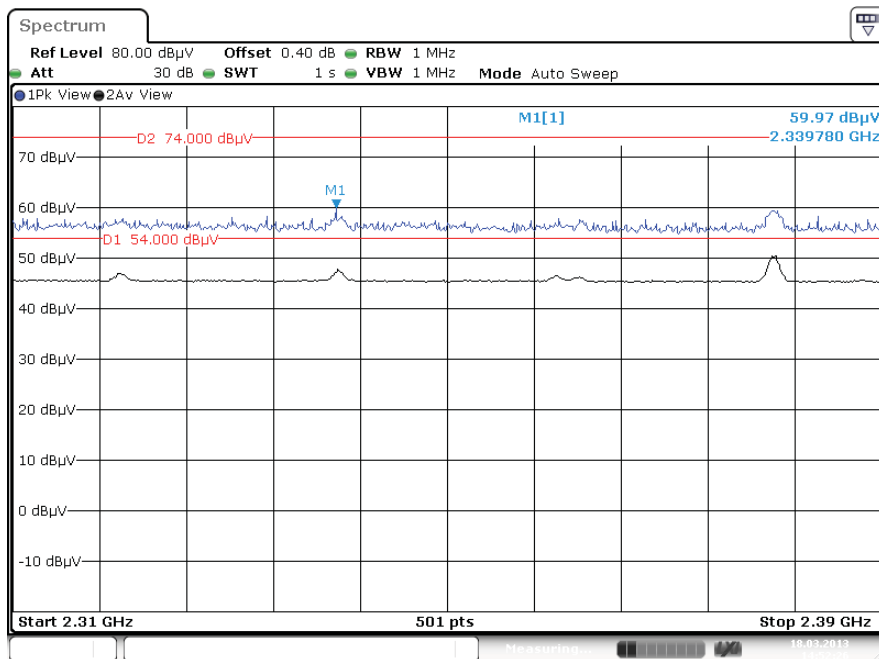


Date: 18.MAR.2013 14:52:26

Emissions in restricted band 2.31 – 2.39 GHz - 2440 MHz- BLE- Antenna 1

Test Report No.:


**12121201.fcc01**

Page 247 of 263

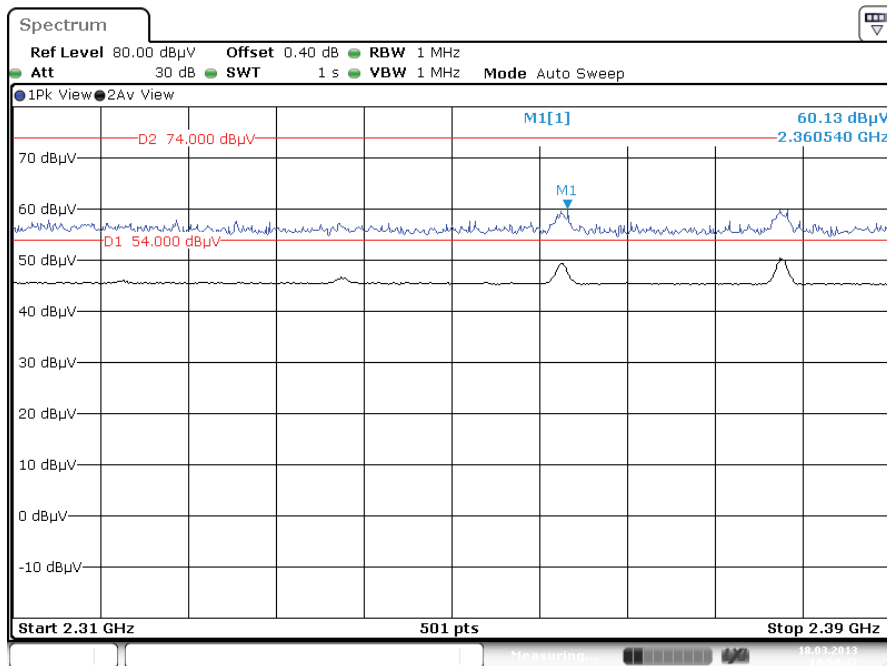

Date: 18.MAR.2013 14:54:47

Emissions in restricted band 2.31 – 2.39 GHz - 2480 MHz- BLE- Antenna 1

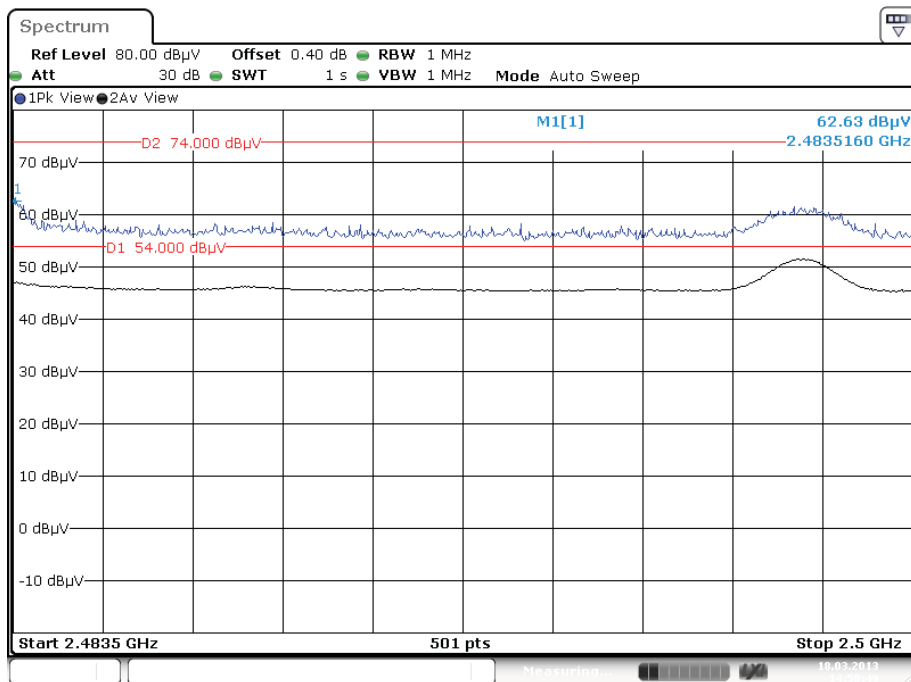


Date: 18.MAR.2013 14:58:49

Emissions in restricted band 2.4835 – 2.5 GHz - 2480 MHz- BLE- Antenna 1

Test Report No.:


**12121201.fcc01**

Page 248 of 263

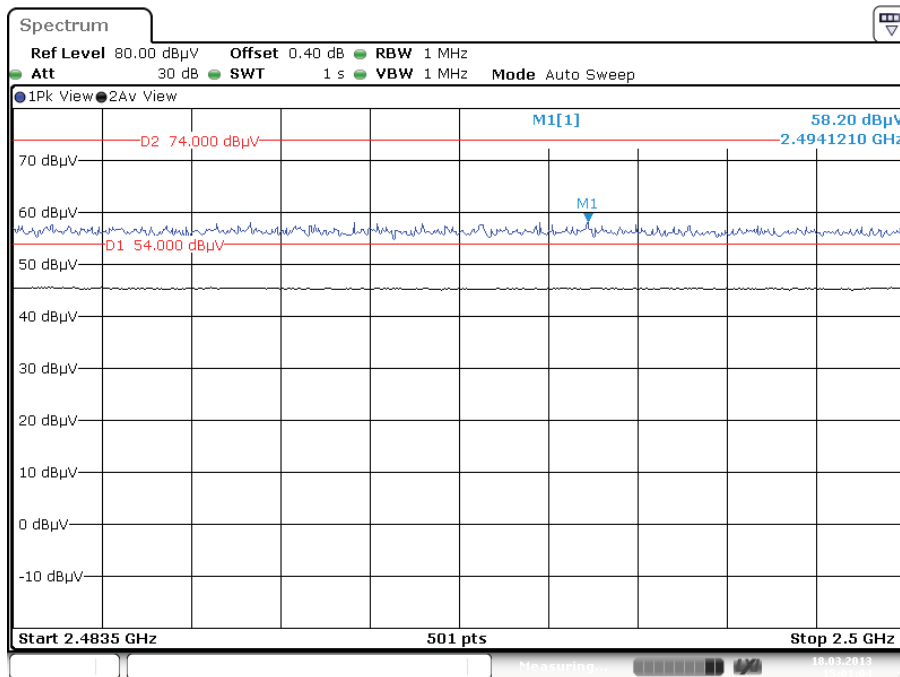

Date: 18.MAR.2013 15:01:05

Emissions in restricted band 2.4835 – 2.5 GHz - 2402 MHz- BLE- Antenna 1

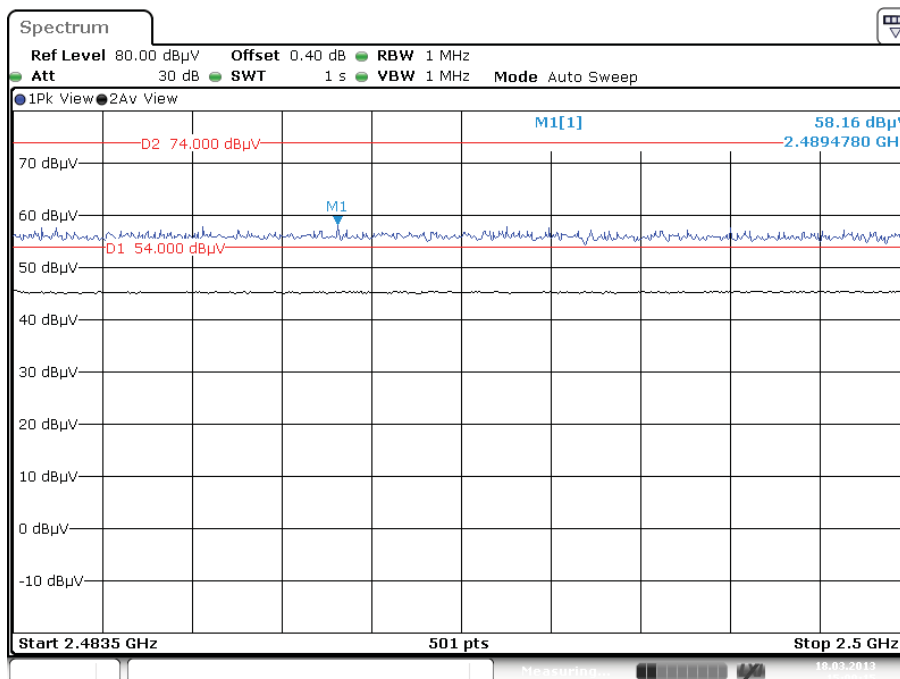

Date: 18.MAR.2013 15:00:15

Emissions in restricted band 2.4835 – 2.5 GHz - 2440 MHz- BLE- Antenna 1



Test Report No.:

**12121201.fcc01**

Page 249 of 263

## **9.2 Conducted Measurements at Antenna Port**

### **9.2.1 Conducted Output Power**

#### **RESULT: Pass**

Date of testing: 2013-01-14 & 2013-02-14

Requirements:

FCC 15.247(b)(3)

For systems using frequency hopping using at least 15 channels in the 2400-2483.5MHz band, the maximum peak output power is 1W (+30dBm).

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak Conducted Output Power was measured using the channel integration method according to option 2 in KDB 558074 D01.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Notes:  $\text{mW} = 10^{(\text{dBm}/10)}$   
 $\text{dBm} = 10 \times \log(\text{mW})$

**plots : Peak power plots,**

Plots of the Peak Power outputs are given on the next pages, correction factors included in the reading.

Test Report No.:

**12121201.fcc01**


Page 250 of 263

Operation mode: BLE, Antenna 1

Frequency [MHz]	Gain control setting (dB)	Output Power [dBm]	Output Power [mW]	Limit [dBm]	Limit [mW]	Margin [dB]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2402	--	+5.16	33	+30	1000	-24.84	3.0	+8.16	65	A
2440	--	+7.36	54	+30	1000	-22.64	3.0	+10.36	109	B
2480	--	+7.80	60	+30	1000	-22.20	3.0	+10.80	120	C

Note: there is no gain control for BLE mode.

The maximum directional antenna gain is less than 6 dBi and therefor the maximum output power is not required to be reduced from the stated value.

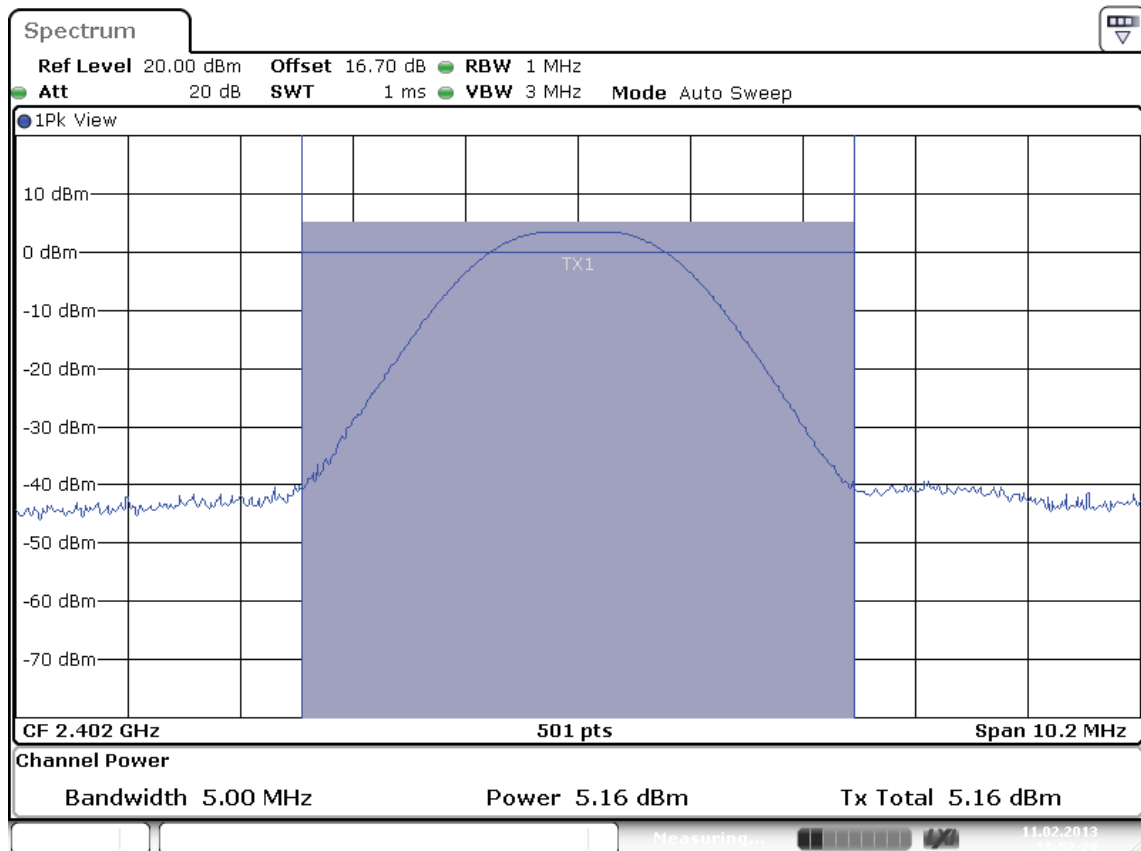


Date: 11.FEB.2013 13:52:29

Plot A

Test Report No.:


**12121201.fcc01**

Page 251 of 263

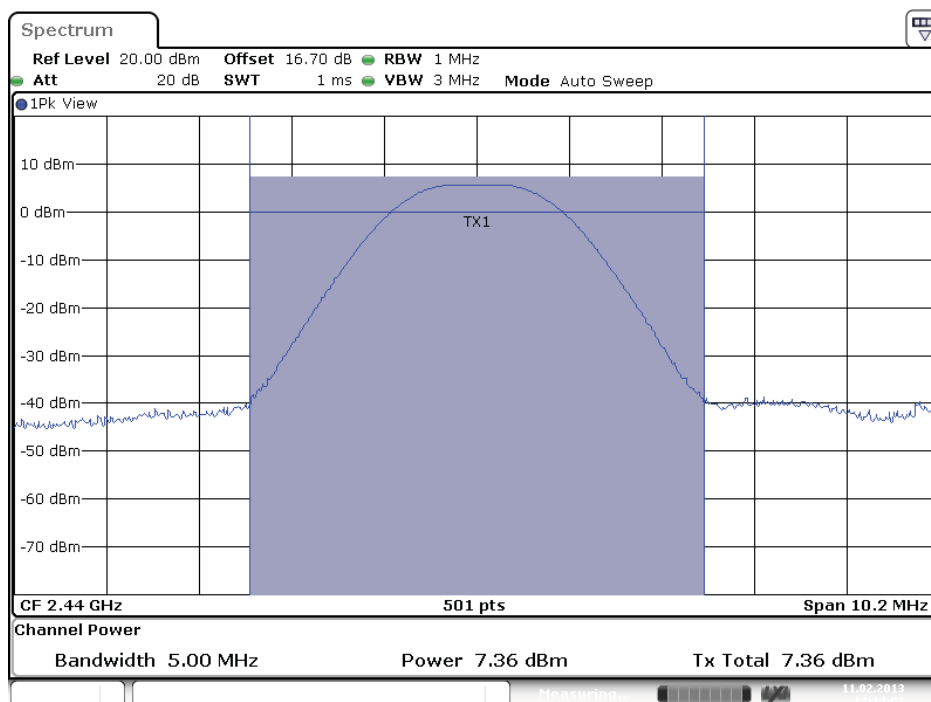

Date: 11.FEB.2013 14:24:53

Plot B

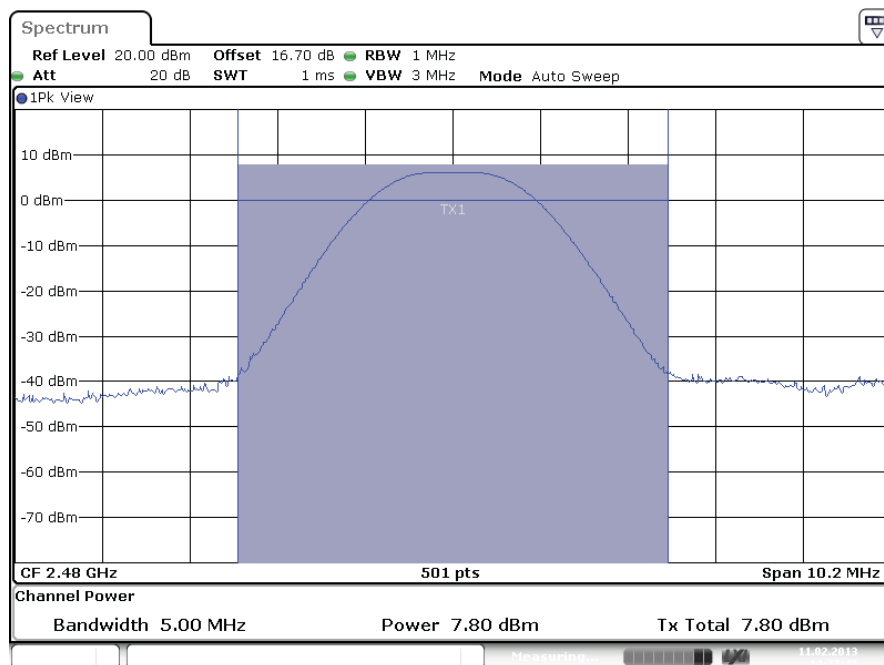

Date: 11.FEB.2013 14:27:45

Plot C

Test Report No.:

**12121201.fcc01**

Page 252 of 263

### **9.2.2 6dB and 99% Bandwidth**

#### **RESULT: Pass**

Date of testing:

2013-02-11 and 2013-03-18

Requirements:

FCC 15.247(a)(2) and RSS-210 Section A8.2(a)

For systems using hopping technology in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 6dB bandwidth:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

ANSI C63.10:2009 and RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Test Report No.:


**12121201.fcc01**

Page 253 of 263

## 6dB and 99% Bandwidth

Operation mode: BLE, Antenna 1

Operating Frequency [MHz]	99% Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Plot number
2402	1054	646.7	500	A
2440	1054	658.7	500	B
2480	1054	670.7	500	C

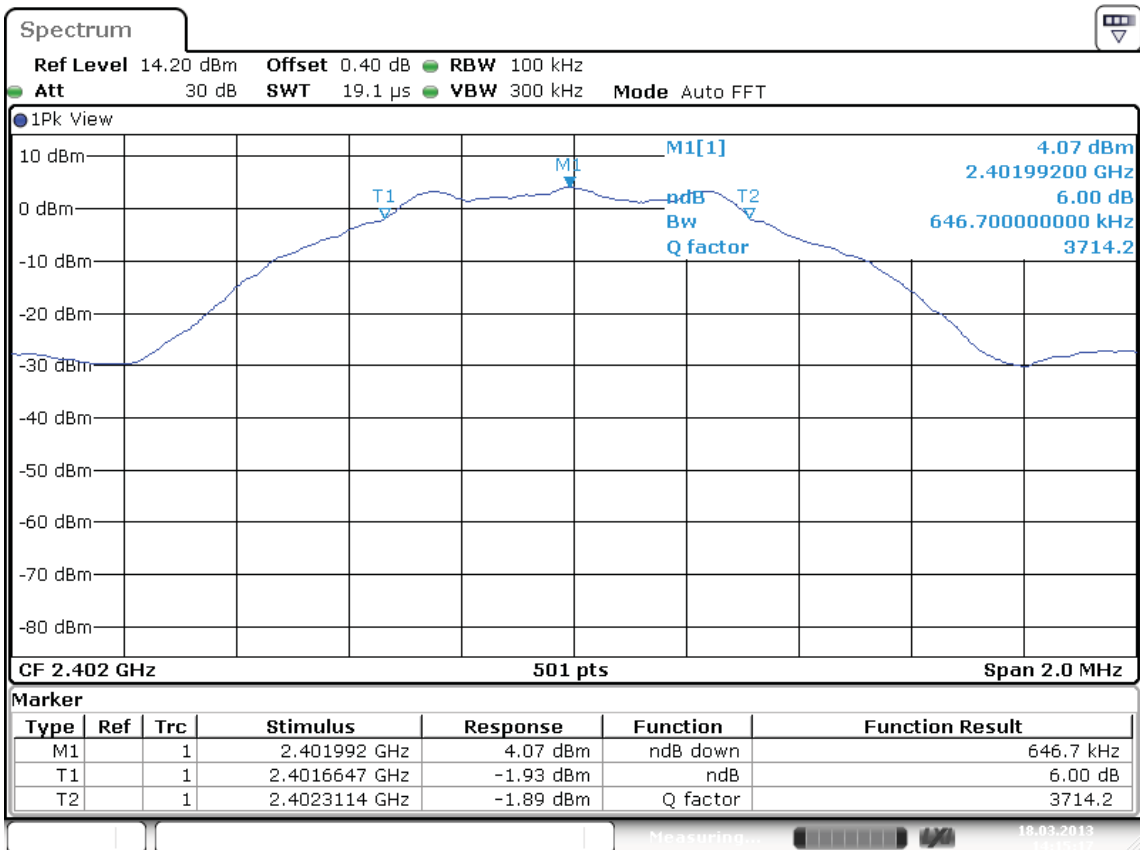


Date: 18.MAR.2013 14:15:17

Plot A


Test Report No.:

**12121201.fcc01**

Page 254 of 263

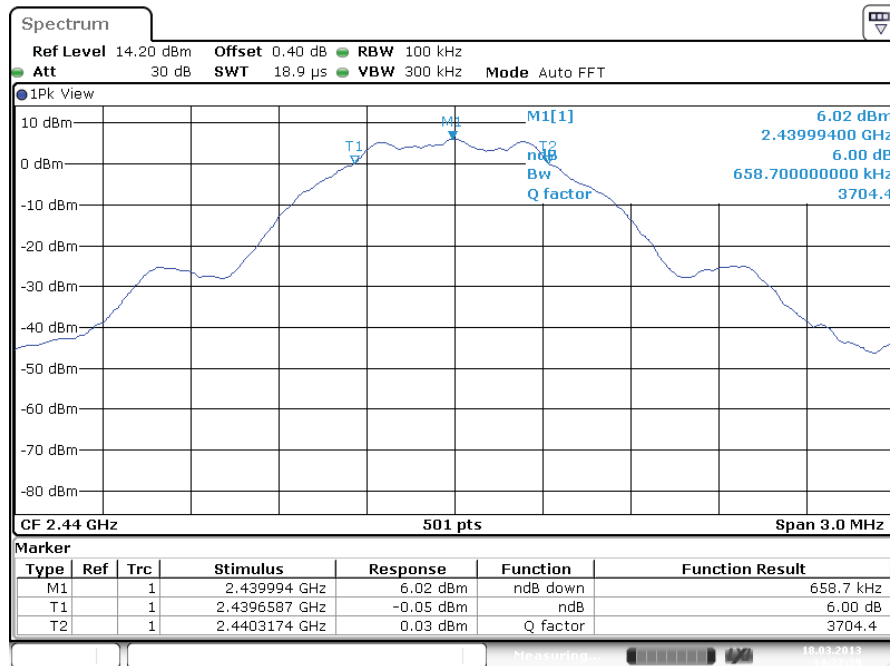

Plot B

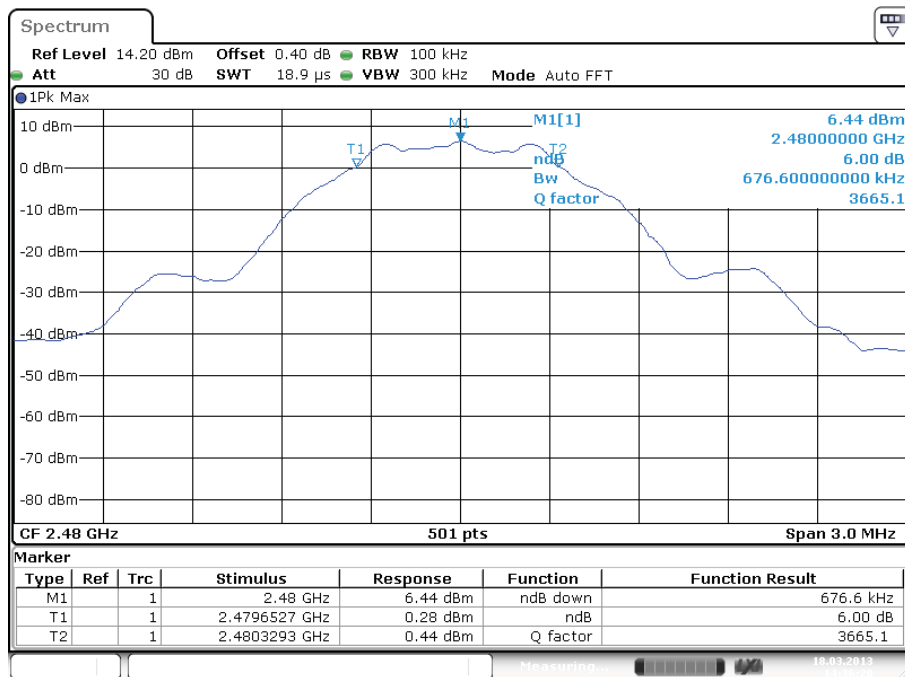

Plot C

Test Report No.:

**12121201.fcc01**

Page 255 of 263

### **Peak Power Spectral Density**

RESULT: PASS

Date of testing:

2013-03-18&19

Requirements:

FCC 15.247(e) and RSS-210 section A8.2(b)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The Peak PSD Option 1 procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables.

Test Report No.:


**12121201.fcc01**

Page 256 of 263

## Peak Power Spectral Density

Operation mode: BLE, Antenna 1

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Plot
2402	-10.6	8	Pass	A
2440	-9.37	8	Pass	B
2480	-9.05	8	Pass	C

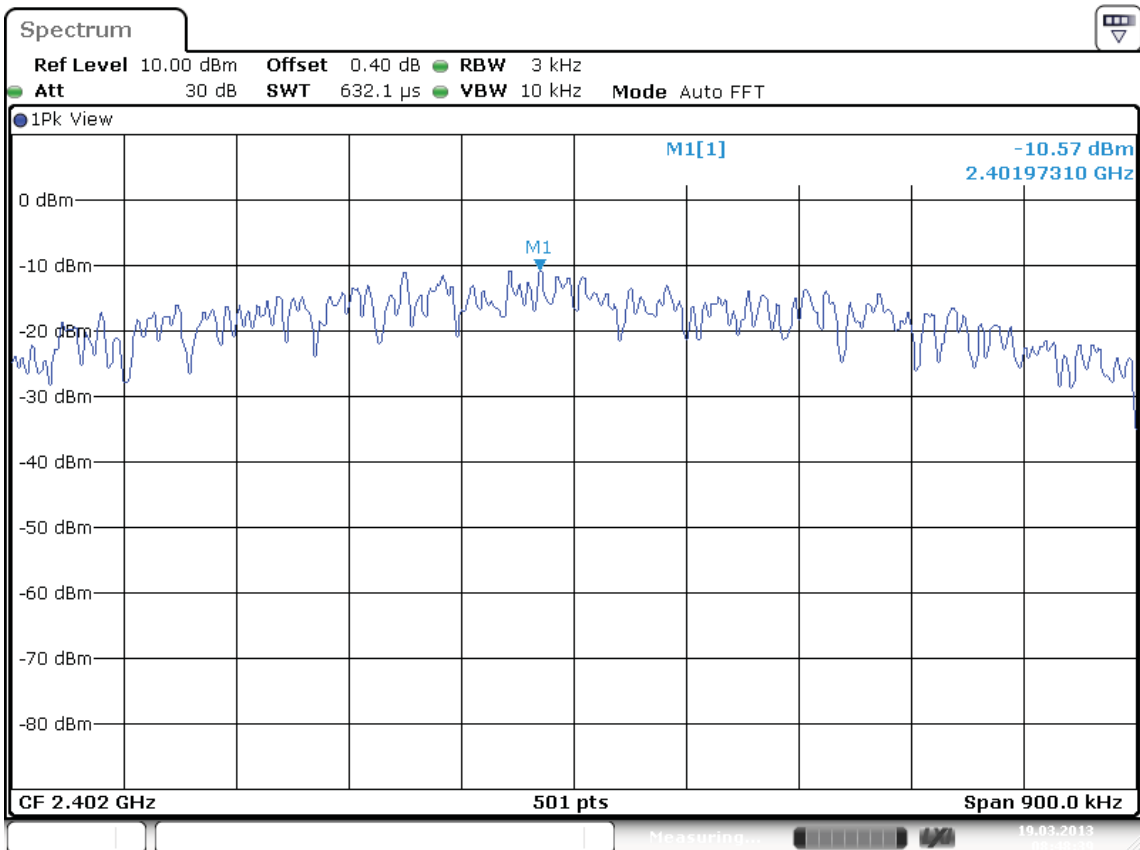

Date: 19.MAR.2013 08:48:40


Plot A



Test Report No.:


**12121201.fcc01**

Page 257 of 263

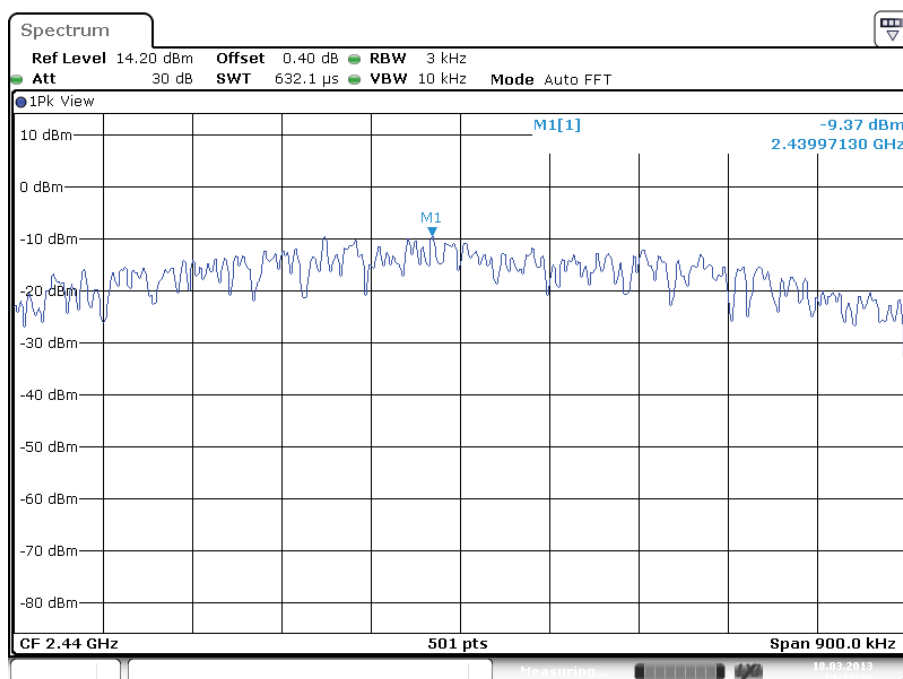

Date: 18.MAR.2013 14:27:27

Plot B

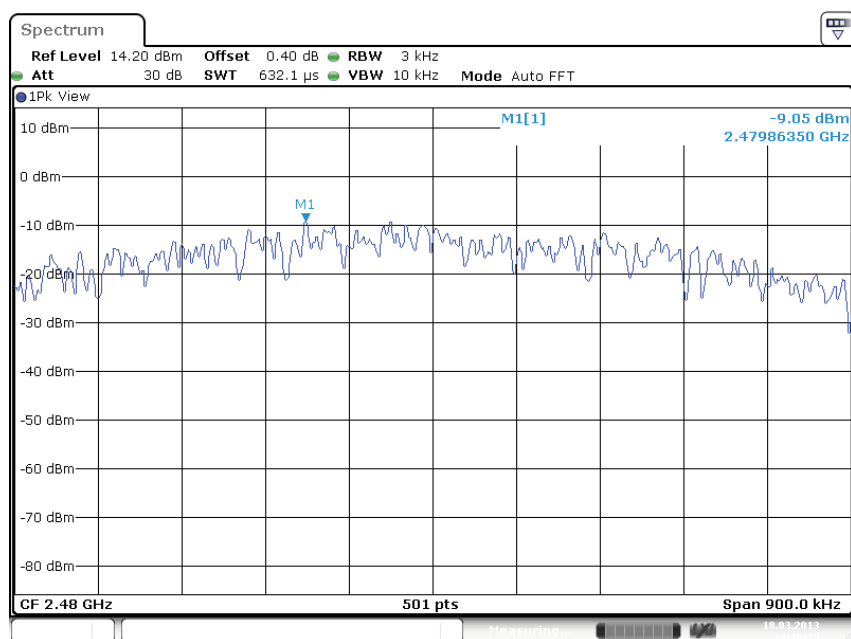

Date: 18.MAR.2013 14:28:26

Plot C

Test Report No.:

**12121201.fcc01**

Page 258 of 263

### **9.2.3 Band Edge Conducted Emissions**

**RESULT: Pass**

Date of testing:

2013-02-11

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

Test Report No.:


**12121201.fcc01**

Page 259 of 263

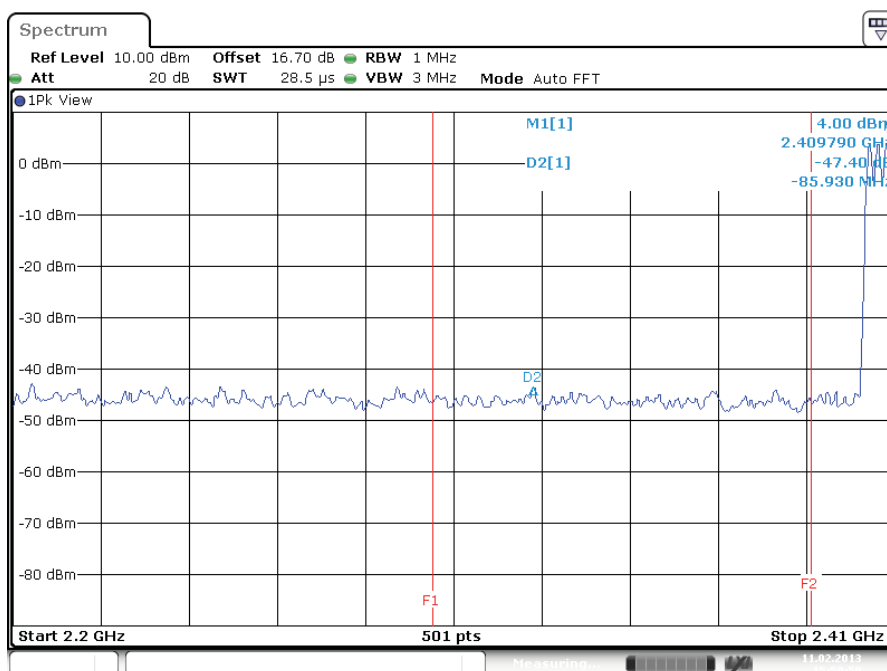

Date: 11.FEB.2013 15:50:59

Band Edge Conducted Emission- Lower band edge, Spectral Diagram, 2402 MHz- BLE- Antenna 1

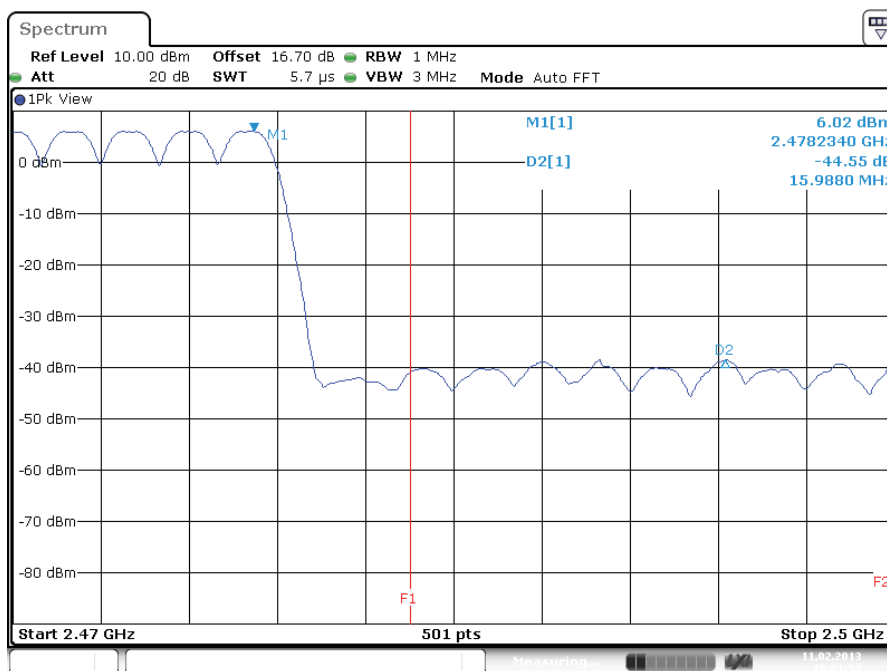

Date: 11.FEB.2013 16:01:54

Band Edge Conducted Emission- Higher band edge, Spectral Diagram, 2480 MHz-BLE-Antenna 1

Test Report No.:

**12121201.fcc01**

Page 260 of 263

## 9.2.4 Radiated Spurious Emissions of Transmitter

### RESULT: Pass

Date of testing: 2012-01-10

Frequency range: 30MHz - 25GHz

#### Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

#### Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

**12121201.fcc01**

Page 261 of 263

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations, 2402 MHz BLE – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
47.1	Vertical	Qp	23.4	40	-16.6
237.5	Horizontal	Qp	21.3	46	-24.7
371.0	Vertical	Qp	19.3	46	-26.7
952.6	Vertical	Qp	37.1	46	-8.9
4804	Vertical	Pk	28.1	54	-25.9
12750	Horizontal	Pk	25.2	54	-28.8

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations, 2440 MHz BLE – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
47.1	Vertical	Qp	23.5	40	-16.5
237.5	Horizontal	Qp	21.3	46	-24.7
371.0	Vertical	Qp	19.5	46	-26.5
848.0	Vertical	Qp	36.2	46	-9.8
4884	Vertical	Pk	30.3	54	-23.7
12750	Horizontal	Pk	25.2	54	-28.8

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
- Peak detector used with a bandwidth of 1 MHz.

**Radiated Emission, 30 MHz - 25GHz, Horizontal and Vertical Antenna Orientations, 2480 MHz BLE – Antenna 1**

Freq. [MHz]	Antenna Orientation	Detector	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
47.1	Vertical	Qp	23.4	40	-16.6
237.5	Horizontal	Qp	21.5	46	-24.5
371.0	Vertical	Qp	19.4	46	-26.6
954.5	Vertical	Qp	35.5	46	-10.5
4960	Vertical	Pk	25.1	54	-28.9
12750	Horizontal	Pk	25.2	54	-28.8

Note: - Quasi Peak detector used with a bandwidth of 120 kHz for frequencies below 1 GHz  
- Peak (Pk) value already within Average (Av) limits, therefor Av not retested.  
- Peak detector used with a bandwidth of 1 MHz.

Test Report No.:

**12121201.fcc01**

Page 262 of 263

## 9.2.5 Radiated Spurious Emissions of Transmitter in restricted bands

**RESULT: PASS**

Date of testing:

2013-02-12

Requirements:

FCC 15.205, FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Detector	Measurement distance (m)
0.009-0.490	2400/F(kHz)	43.5 > 13.8	Average	300
0.490-1.705	24000/F(kHz)	33.8 > 22.9	Average	300
1.705 - 30.0	30	29.5	Quasi peak	30
30 - 88	100	40.0	Quasi peak	3
88 - 216	150	43.5	Quasi peak	3
216 - 960	200	46.0	Quasi peak	3
960 - 25000	500	54.0	Average	3

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Test procedure:

ANSI C63.10:2009

KDB Publication No. 558074 D01: Measurement of Digital Transmission Systems Operating under Section 15.247.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 2.31GHz-2.39GHz and from 2.4835GHz-2.5GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

Test Report No.:

**12121201.fcc01**

Page 263 of 263

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Operating frequency [GHz]	Restricted frequency band [GHz]	Antenna Orientation	Frequency of the highest peak in the restricted band [GHz]	Level Pk of the highest peak in the restricted band [dBμV/m]	Limit [dBμV/m]	Margin [dB]
2.402	2.31 – 2.39	Vertical	2.3740	43.4	54	-10.6
2.440	2.31 – 2.39	Vertical	2.3878	46.5	54	-7.5
2.480	2.31 – 2.39	Vertical	2.3880	46.6	54	-7.4
2.402	2.4835-2.5	Vertical	2.4912	45.3	54	-8.7
2.440	2.4835-2.5	Vertical	2.4917	48.4	54	-5.6
2.480	2.4835-2.5	Vertical	2.4920	48.4	54	-5.6

The highest peak in the restricted band is noted for each operating frequency.

End of report