


目录 (Content)

1、封面(Cover).....	1
2、目录(Content).....	2
3、产品图面(Product Picture).....	3
4、产品规格描述 (Product specification describes)	4
5、电气性测试报告(Radiation Report).....	5-7
6、尺寸报告(Reliability Report).....	8
7、可靠性测试报告(Reliability Report).....	9


3、产品图面(Product Picture)

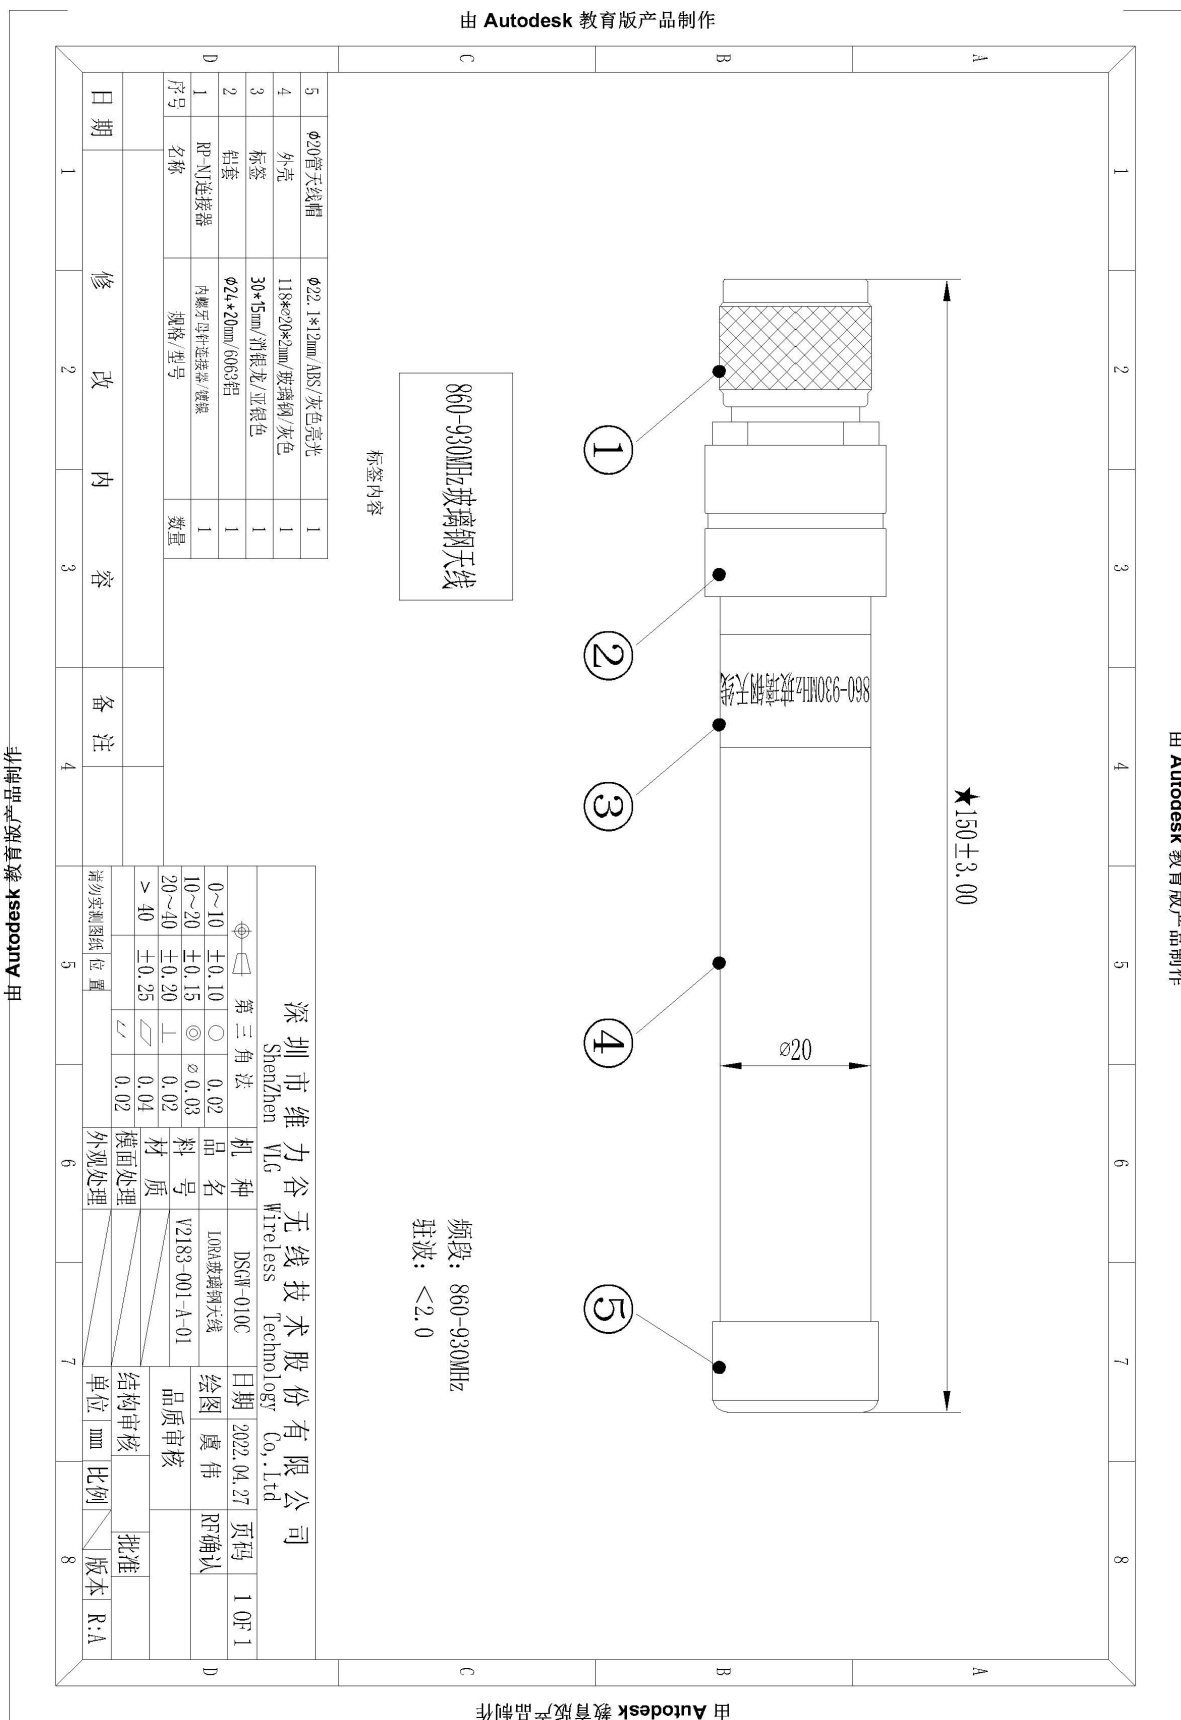

4、产品规格描述 (Product specification describes)

电气参数 (Parameter)	
频率范围 (Frequency)	860-930MHz
带宽 (Bandwidth)	/
输入阻抗 (Impedance)	50 Ω
驻波比 (VSWR)	<2.0
增益 (Gain)	$\leq 1.0\text{dBi}$
最大效率 (Max. Efficiency)	$\leq 70\%$
极化方式 (Polarization)	Linear polarization/Vertical
辐射方向图 (Radiation pattern)	Omni-directional
接口类型 (Connector)	RP-NJ
机械参数 (Mechanical Parameter)	
总长 (Length)	150 $\pm$ 3.0mm
盐雾测试 (Salt Spray Test)	48H
环境参数 (Environment Parameter)	
工作温度 (Operation Temperature)	-30 $^{\circ}\text{C}$ ~65 $^{\circ}\text{C}$
储藏温度 (Storage Temperature)	-30 $^{\circ}\text{C}$ ~75 $^{\circ}\text{C}$

5、电气性能测试报告(Radiation Report)

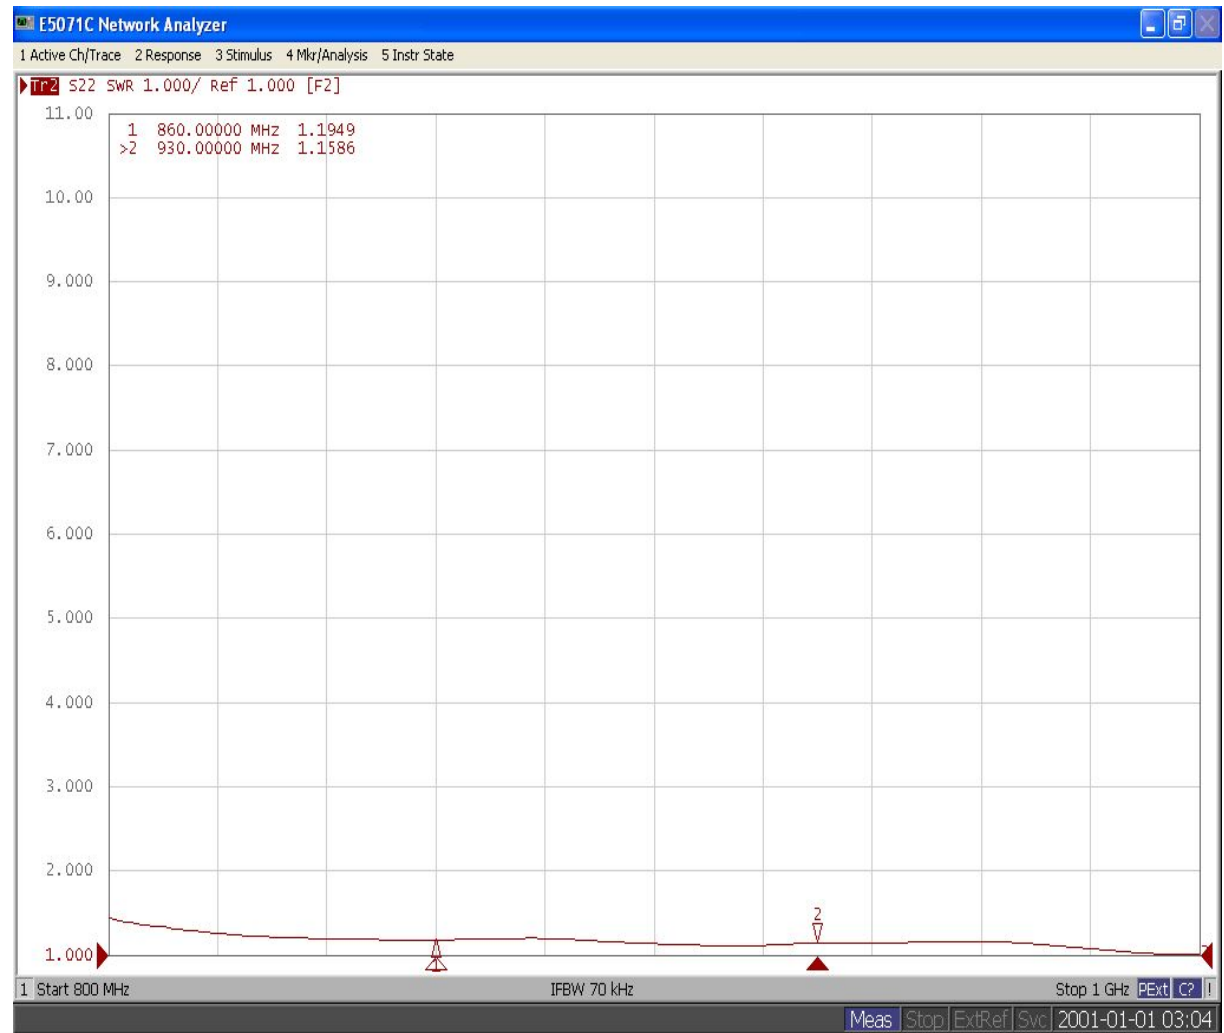

效率及增益(Efficiency And Gain)

Frequency	Efficiency	E Total. dB
860	70%	0.8
862	70%	0.9
864	70%	0.9
866	70%	1.0
868	70%	1.0
870	70%	1.0

深圳市维力谷无线技术股份有限公司
ShenZhen VLG Wireless Technology Co.,Ltd

872	70%	1. 1
874	70%	1. 1
876	70%	1. 1
878	71%	1. 1
880	70%	1. 1
882	70%	1. 1
884	70%	1. 1
886	70%	1. 1
888	69%	1. 1
890	69%	1. 2
892	69%	1. 2
894	68%	1. 1
896	68%	1. 1
898	68%	1. 1
900	67%	1. 1
902	67%	1. 1
904	67%	1. 1
906	67%	1. 1
908	67%	1. 1
910	66%	1. 1
912	66%	1. 1
914	66%	1. 1
916	66%	1. 1
918	65%	1. 0
920	66%	1. 1
922	65%	1. 1
924	65%	1. 1
926	65%	1. 1
928	65%	1. 1
930	65%	1. 1

860-930MHz

方向图

