







## ISO/IEC17025Accredited Lab.

Report No: FCC 1501131 File reference No: 2015-08-06

Applicant: Fujian Nan'an Baofeng Electronic Co., Ltd.

Product: walkie talkie

Model No: BF-888s, GT-1, BF-U1

Trademark: N/A

Test Standards: FCC Part 90

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 and FCC Part 90,

regulations for the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: August 06, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1501131 Page 2 of 61

Date: 2015-08-06



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

## IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 61

Report No: FCC1501131

Date: 2015-08-06



# **Test Report Conclusion**

#### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
6.0	Frequency Tolerance	12
7.0	Emission Bandwidth and Mask	18
8.0	Unwanted Radiation.	26
9.0	Modulation Characteristics.	32
10.0	Maximum transmitter Power (Conducted Output Power)	38
11.0	Transmitter Frequency Behaviour.	40
12.0	Radiated Emission on Receiving Mode.	46
13.0	FCC ID Label.	52
14.0	Photo of Test	53



Date: 2015-08-06



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

#### 1.2 Applicant Details

Applicant: Fujian Nan'an Baofeng Electronic Co., Ltd.

Address: Changfu Industrial Area, Xiamei, Nan'an, Quanzhou, Fujian, Chian

Telephone: 15959959929 Fax: 0595-86753889

#### 1.3 Description of EUT

Product: walkie talkie

Manufacturer: Fujian Nan'an Baofeng Electronic Co., Ltd.

Brand Name: N/A

Model Number: BF-888s, GT-1, BF-U1

Type of Modulation FM

Frequency range UHF:400MHz-470MHz Channel Spacing 12.5 kHz and 6.25kHz

Frequency Selection By operation

Antenna: Whip antenna with gain 1.0dBi

Emission Designer 3K81F3E for 12.5kHz channel spacing;

2K51F3E for 6.25 kHz channels spacing

## 1.4 Submitted Sample: 3Sample

#### 1.5 Test Duration

2015-01-16-2015-08-06

#### 1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1501131 Page 5 of 61

Date: 2015-08-06



Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 61

Report No: FCC1501131

Date: 2015-08-06



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20
Oscillator	KENWOOD	AG-203D	3070002	2015-03-17	2016-03-16
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21
3m OATS			N/A	2014-08-21	2015-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21
Modulation Analyzer	HP	8901B	3104A03367	2015-05-06	2016-05-05

Report No: FCC1501131 Page 7 of 61

Date: 2015-08-06



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT	The EUT has been tested according to the following specifications:								
	Standard	Test Type	Result						
	FCC Part 15.207	Conducted Emission	Compliant						
	FCC Part 90.205	Maximum Transmitter Power	Compliant						
	FCC Part 90.207	Modulation Characteristic	Compliant						
	FCC Part 90.209	Occupied Bandwidth	Compliant						
	FCC Part 90.210	Emission Mask	Compliant						
	FCC Part 90.213	Frequency Tolerance	Compliant						
	FCC Part 90.214	Transient Frequency Behaviour	Compliant						

#### 3.2 The tests were performed according to following standards:

FCC Part 90 TIA-603-D-2010 ANSI C63.10-2013


#### 4.0 **EUT Modification**

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: FCC1501131 Date: 2015-08-06 TIMEWAY HIS MINE THE PROPERTY HIS MINE THE

#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

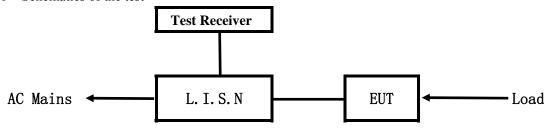


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

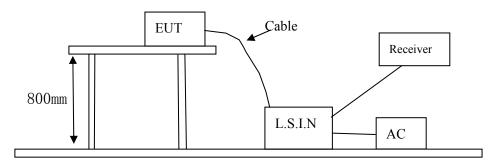

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

## A. EUT

Device	Manufacturer	Model	FCC ID
walkie talkie	Fujian Nan'an Baofeng Electronic Co., Ltd.	BF-888s/GT-1/BF-U1	ZP5BF-888S

### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1501131 Page 9 of 61

Date: 2015-08-06



## C. Peripherals

De	vice	Manufacturer	Model	FCC ID/DOC	Cable
N	I/A				

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	$0.50 \sim 5.00$ 73.0		56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2015-08-06




## Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

**EUT set Condition:** Charging Mode

**Results: Pass** 

Please refer to following diagram for individual

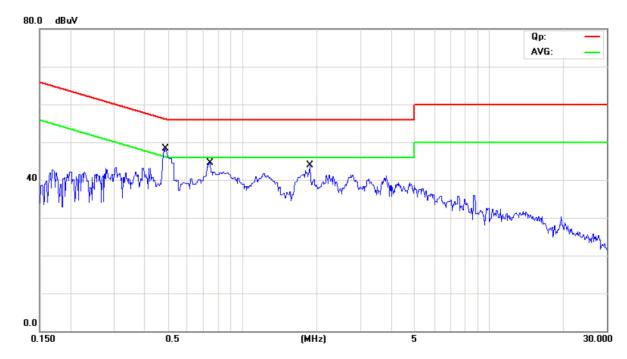

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBu∀	dBuV	dB	Detector	Comment
1 *	0.4876	34.70	11.36	46.06	56.21	-10.15	QP	
2	0.4876	7.10	11.36	18.46	46.21	-27.75	AVG	
3	0.7394	29.40	11.62	41.02	56.00	-14.98	QP	
4	0.7394	5.60	11.62	17.22	46.00	-28.78	AVG	
5	1.8627	25.20	12.25	37.45	56.00	-18.55	QP	
6	1.8627	-0.70	12.25	11.55	46.00	-34.45	AVG	

Page 11 of 61

Report No: FCC1501131

Date: 2015-08-06




## Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

**EUT set Condition:** Charging Mode

**Results: Pass** 

Please refer to following diagram for individual

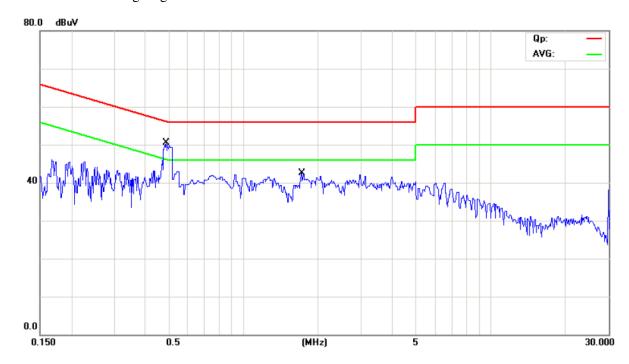

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.4852	37.20	11.35	48.55	56.25	-7.70	QP	
2	0.4852	10.40	11.35	21.75	46.25	-24.50	AVG	
3	1.7128	26.50	12.19	38.69	56.00	-17.31	QP	
4	1.7128	1.30	12.19	13.49	46.00	-32.51	AVG	

Report No: FCC1501131 Page 12 of 61

Date: 2015-08-06



# **6. Frequency Tolerance**

## 6.1 Applicable standard

According to FCC Part 90 Section 90.213,

In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

#### **6.2 Measurement Procedure**

## 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}$ C to  $25^{\circ}$ C. Otherwise, an environment chamber set for a temperature of  $20^{\circ}$ C shall be used. The EUT shall be powered by DC 3.3-3.7V
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Date: 2015-08-06



#### 6.3 TEST SETUP BLOCK DIAGRAM

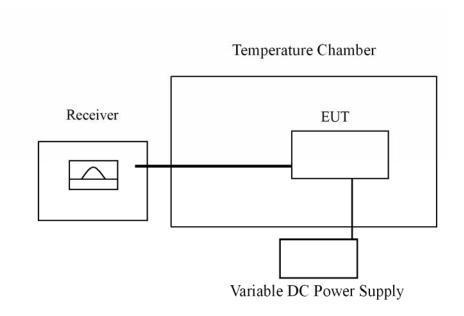


Figure 1

#### **6.5 TEST RESULT**

(1) Frequency stability versus input voltage (battery operation end point voltage is 3.3V)

UHF Band: (12.5 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	3.3V	469.97531	0.66	469.975MHz	1.0
Middle channel	3.3V	439.97537	0.84	439.975MHz	1.0
Bottom channel	3.3V	400.02525	0.62	400.025MHz	1.0

(2)Frequency stability versus ambient temperature

**Test Results** 

**UHF Band: (12.5 kHz Channel Spacing)** 

#### Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	469.97523	0.49	469.975MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 14 of 61

Report No: FCC1501131

Date: 2015-08-06



40	3.7	469.97543	0.91	469.975MHz	1.0
30	3.7	469.97529	0.62	469.975MHz	1.0
20	3.7	469.97536	0.77	469.975MHz	1.0
10	3.7	469.97532	0.68	469.975MHz	1.0
0	3.7	469.97524	0.51	469.975MHz	1.0
-10	3.7	469.97530	0.64	469.975MHz	1.0
-20	3.7	469.97541	0.87	469.975MHz	1.0
-30	3.7	469.97533	0.70	469.975MHz	1.0

## Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	439.97529	0.66	439.975MHz	1.0
40	3.7	439.97522	0.50	439.975MHz	1.0
30	3.7	439.97532	0.73	439.975MHz	1.0
20	3.7	439.97527	0.61	439.975MHz	1.0
10	3.7	439.97530	0.68	439.975MHz	1.0
0	3.7	439.97525	0.57	439.975MHz	1.0
-10	3.7	439.97536	0.82	439.975MHz	1.0
-20	3.7	439.97531	0.70	439.975MHz	1.0
-30	3.7	439.97534	0.77	439.975MHz	1.0

#### **Bottom channel**

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	400.02526	0.65	400.025MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-06



40	3.7	400.02521	0.52	400.025MHz	1.0
30	3.7	400.02524	0.60	400.025MHz	1.0
20	3.7	400.02520	0.50	400.025MHz	1.0
10	3.7	400.02518	0.45	400.025MHz	1.0
0	3.7	400.02527	0.67	400.025MHz	1.0
-10	3.7	400.02529	0.72	400.025MHz	1.0
-20	3.7	400.02517	0.42	400.025MHz	1.0
-30	3.7	400.02522	0.55	400.025MHz	1.0

## (1) Frequency stability versus input voltage (battery operation end point voltage is 3.3V)

## UHF Band: (6.25 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	3.3V	469.97523	0.49	469.975MHz	1.0
Middle channel	3.3V	439.97530	0.68	439.975MHz	1.0
Bottom channel	3.3V	400.02527	0.67	400.025MHz	1.0

## (2)Frequency stability versus ambient temperature

## **Test Results**

## **UHF Band: (6.25 kHz Channel Spacing)**

#### Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	469.97528	0.60	469.975MHz	1.0
40	3.7	469.97531	0.66	469.975MHz	1.0
30	3.7	469.97522	0.47	469.975MHz	1.0
20	3.7	469.97525	0.53	469.975MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 16 of 61

Report No: FCC1501131 Date: 2015-08-06



10	3.7	469.97526	0.55	469.975MHz	1.0
0	3.7	469.97533	0.70	469.975MHz	1.0
-10	3.7	469.97520	0.43	469.975MHz	1.0
-20	3.7	469.97524	0.51	469.975MHz	1.0
-30	3.7	469.97529	0.62	469.975MHz	1.0

#### Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	439.97525	0.57	439.975MHz	1.0
40	3.7	439.97527	0.61	439.975MHz	1.0
30	3.7	439.97532	0.73	439.975MHz	1.0
20	3.7	439.97530	0.68	439.975MHz	1.0
10	3.7	439.97528	0.64	439.975MHz	1.0
0	3.7	439.97526	0.59	439.975MHz	1.0
-10	3.7	439.97534	0.77	439.975MHz	1.0
-20	3.7	439.97529	0.66	439.975MHz	1.0
-30	3.7	439.97536	0.82	439.975MHz	1.0

#### **Bottom channel**

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	400.02523	0.57	400.025MHz	1.0
40	3.7	400.02531	0.77	400.025MHz	1.0
30	3.7	400.02525	0.62	400.025MHz	1.0
20	3.7	400.02528	0.70	400.025MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No: FCC1501131 Page 17 of 61

Date: 2015-08-06



10	3.7	400.02529	0.72	400.025MHz	1.0
0	3.7	400.02532	0.80	400.025MHz	1.0
-10	3.7	400.02526	0.65	400.025MHz	1.0
-20	3.7	400.02521	0.52	400.025MHz	1.0
-30	3.7	400.02520	0.50	400.025MHz	1.0

Date: 2015-08-06



Page 18 of 61

## 7. EMISSION BANDWIDTH and Mask

#### 7.1 PROVISIONS APPLICABLE

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two to three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (m) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, then an alternate procedure may be used provided prior Commission approval is obtained.

#### **Emission Mask-E:**

- 6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least 30 + 16.67(fd-3 kHz) or 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument

Date: 2015-08-06




resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

### 7.2 MEASUREMENT PROCEDURE

- 1). The EUT was modulated by 2.5 kHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz
- 2). Set SPA Center Frequency = fundamental frequency, RBW=100Hz or 300Hz (300Hz for 12.5 kHz Channel Spacing, 100Hz for 6.25 kHz Channel Spacing), VBW= 300 Hz, Span = 50 kHz
  - 3). Set SPA Max hold. Mark peak, -26 dB.

#### 7.3 Test Setup Block Diagram

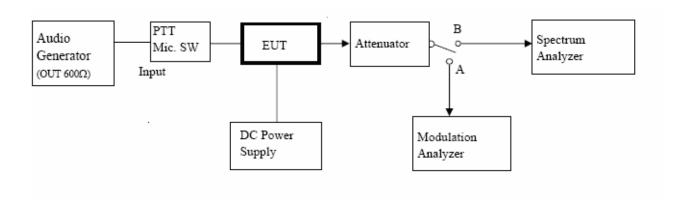

#### 7.4 Measurement Result:

For 12.5 kHz Channel Spacing

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
439.975MHz (Middle)	5.81kHz	3.81kHz	11.25 kHz	Pass		

Page 20 of 61

Report No: FCC1501131


Date: 2015-08-06



#### 7.5 Test Plots:

#### **UHF Band-Middle Channel**

#### 26dB Bandwidth

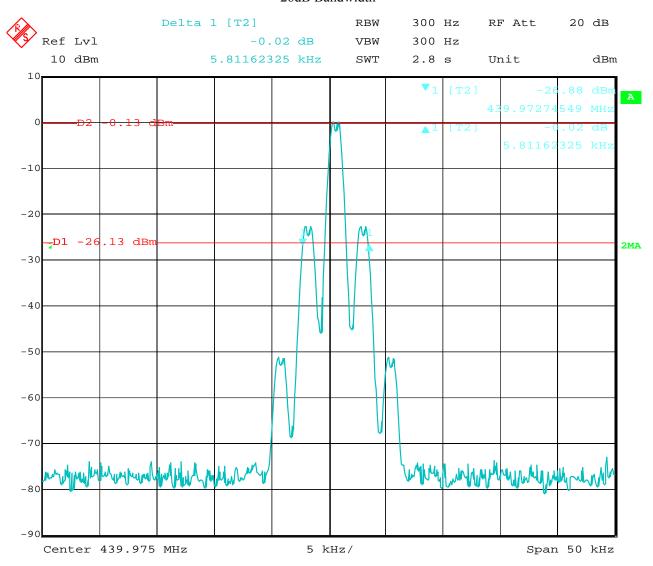

10.JUL.2015 15:52:37 Date:

Page 21 of 61


Report No: FCC1501131

Date: 2015-08-06



#### **UHF Band-Middle Channel**

#### 99% Bandwidth

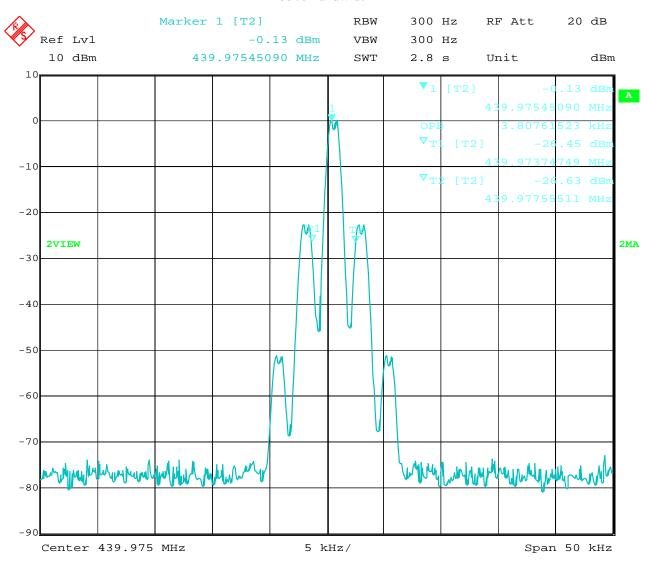

10.JUL.2015 15:51:36 Date:

Page 22 of 61


Report No: FCC1501131

Date: 2015-08-06



#### **UHF Band-Middle Channel**

#### Emission Mask D

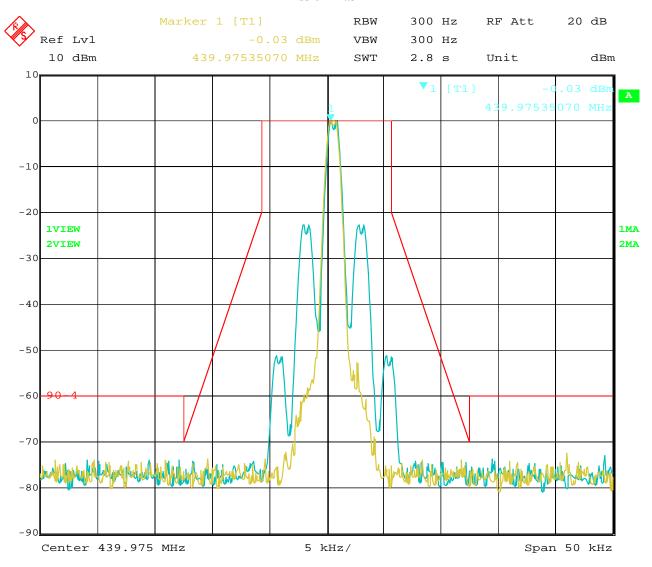

10.JUL.2015 15:51:04 Date:

Report No: FCC1501131 Page 23 of 61

Date: 2015-08-06




## For 6.25 kHz Channel Spacing

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
439.975MHz (Middle)	2.91kHz	2.51kHz	6 kHz	Pass		

#### **UHF Band-Middle Channel**

#### 26dB Bandwidth

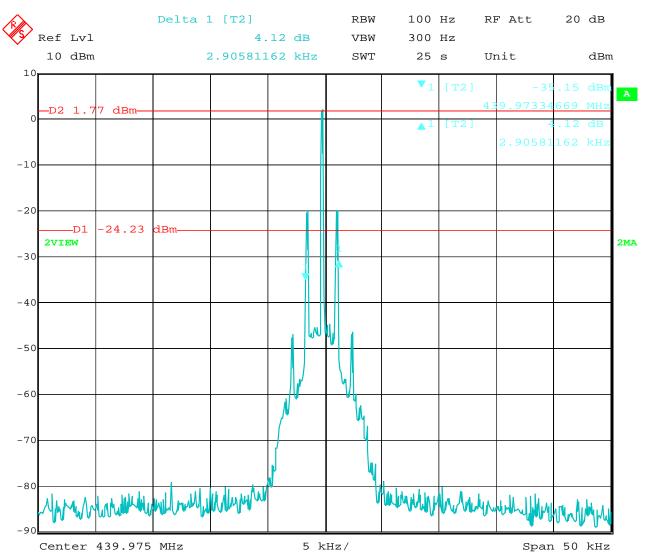

Date: 30.JUL.2015 15:36:51

Page 24 of 61


Report No: FCC1501131

Date: 2015-08-06



#### **UHF Band-Middle Channel**

#### 99% Bandwidth

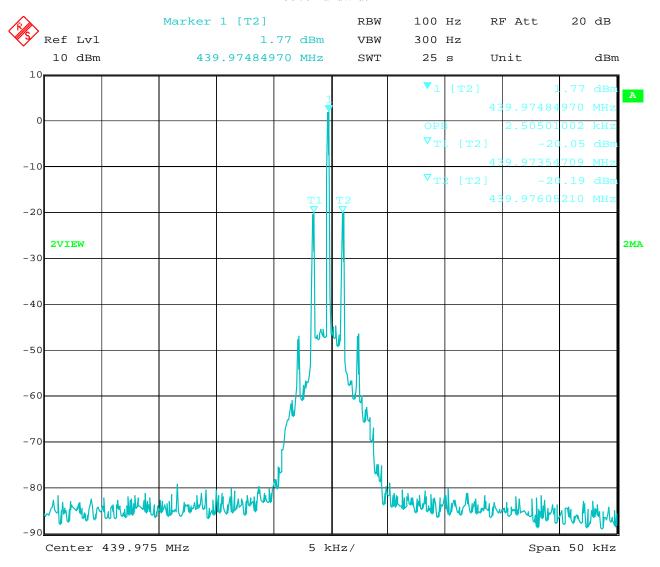

30.JUL.2015 15:35:50 Date:

Page 25 of 61


Report No: FCC1501131

Date: 2015-08-06



#### **UHF Band-Middle Channel**

#### Emission Mask E

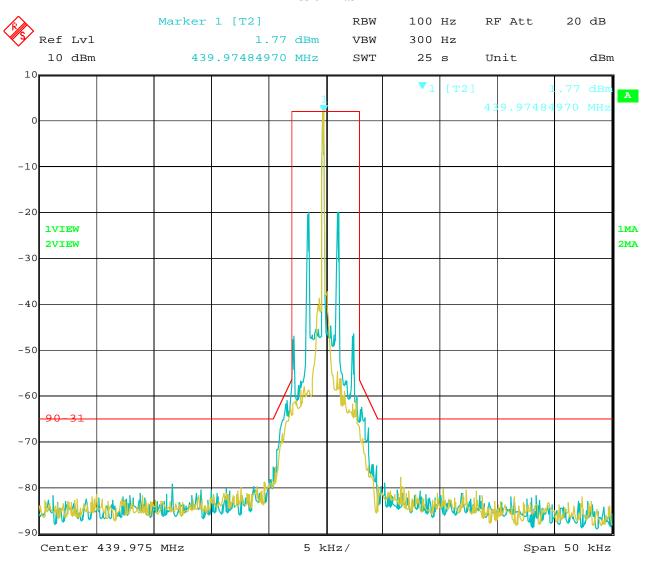

30.JUL.2015 15:33:33 Date:

Date: 2015-08-06



Page 26 of 61

## 8. UNWANTED RADIATION

#### 8.1 PROVISIONS APPLICABLE

- 8.1.1 **Emission Mask D**-According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:
- (1) On any frequency from the centre of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is the lesser attenuation.

#### **Emission Mask-E:**

- 6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least 30 + 16.67(fd-3 kHz) or 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

## **8.2 MEASUREMENT PROCEDURE (Radiated Emissions)**

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2015-08-06



close the emission level was approaching the limit.

- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver and Gain of Substitution antenna.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver and Gain of Substitution antenna. So the EIRP is obtained.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

### 8.3 Test setup Block Diagram

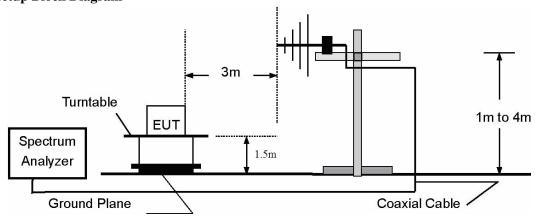

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: FCC1501131 Date: 2015-08-06



### **8.4 Substitution Method: (Radiated Emissions)**


#### **Radiated Below 1GHz**

#### Ground Plane

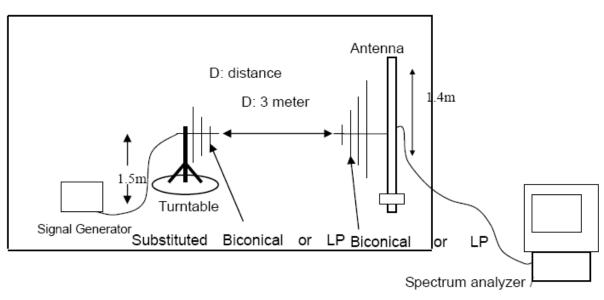

#### **Radiated Above 1 GHz**

## Ground plane

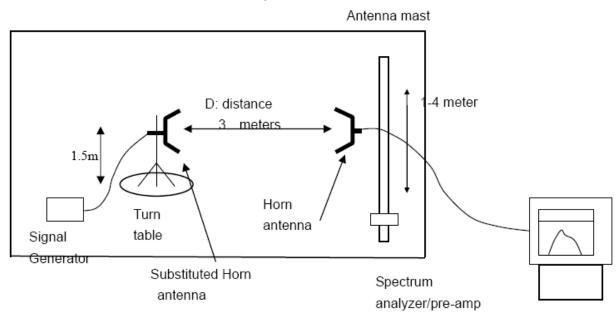

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2015-08-06



#### **8.5 MEASUREMENT RESULTS:**

Limit:  $43 + 10 \log (P) dB$ , (-13 dBm)

Note: The results were peak values and worse case was recorded

**UHF** Band

## Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
800.05	Vertical	-37.3	-13
1200.13	Vertical	-43.6	-13
1600.25	Vertical	-47.2	-13
800.05	Horizontal	-45.1	-13
1200.12	Horizontal	-52.3	-13

## Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
879.95	Vertical	-38.9	-13
1319.93	Vertical	-44.1	-13
1759.90	Vertical	-49.6	-13
879.95	Horizontal	-46.1	-13
1319.93	Horizontal	-49.6	-13

# Top channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
939.95	Vertical	-38.3	-13
1409.93	Vertical	-45.2	-13

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-06



1979.90	Vertical	-50.6	-13
939.95	Horizontal	-46.2	-13
1409.93	Horizontal	-50.7	-13

## **8.6 Conducted Emissions**

#### 8.6.1. Measurement Procedure

- 1). The eut antenna port connect to the spectrum analyzer through a attenuator.
- 2). Let the eut working in transmitter and used the spectrum to measure the conducted emission. 3). The output of the antenna shall be connected to the spectrum.

The setup of test receiver: Detector: Peak RBW: 120 kHz for 30-1000MHz, 1MHz for above1GHz

VBW: 300 kHz for 30-1000MHz 3MHz for above1GHz

#### 8.6.2.Test Setup Block Diagram (block diagram of configuration)



#### 8.6.3 Test Result

**UHF** Band

## Bottom channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
800.05	-32.6	-13
1200.08	-39.6	-13

### Middle channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
879.95	-33.1	-13
1319.93	-39.6	-13

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No: FCC1501131 Page 31 of 61



Date: 2015-08-06

## Top Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
939.95	-33.2	-13
1409.93	-39.5	-13

Date: 2015-08-06



Page 32 of 61

## 9. Modulation Characteristics

#### 9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

#### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

### 9.2.2 Audio Frequency Response

- (1). The EUT and test equipment were set up as shown in figure 2.
- (2). Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter: off
  - b) Low-pass filter: 15 kHz
  - c) Detector: positive peak
  - d) Function: FM
- (3). The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- (4). With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- (5). The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.

Report No: FCC1501131 Page 33 of 61

Date: 2015-08-06



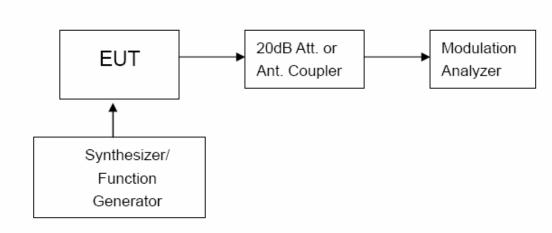


Figure 1: Modulation characteristic measurement configuration

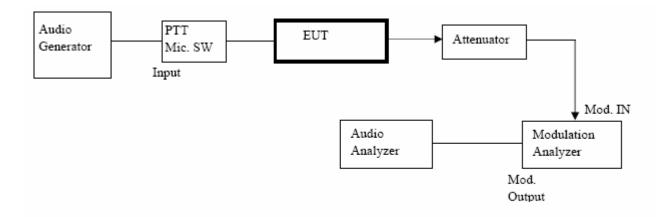


Figure 2: Audio Frequency Response Measurement Configure

Date: 2015-08-06




#### 9.4 MEASUREMENT RESULT

## (a). Modulation Limit:

## Middle channel (For UHF Band, 12.5 kHz Channel Spacing)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.09	0.27	0.31	0.39
-15	0.14	0.36	0.34	0.61
-10	0.18	0.55	0.6	0.79
-5	0.28	0.77	0.9	1.12
0	0.41	1.14	1.22	1.31
5	0.5	1.28	1.44	1.6
10	0.56	1.39	1.55	1.82
15	0.64	1.49	1.7	1.95
20	0.75	1.64	1.88	2.14

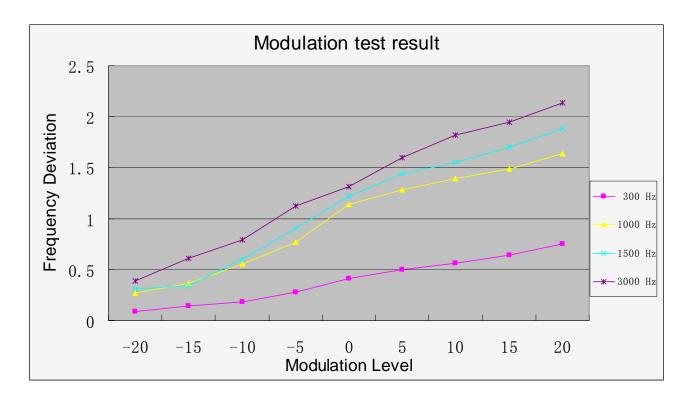


Report No: FCC1501131 Page 35 of 61

Date: 2015-08-06



# (b). Audio Frequency Response:

## For UHF Band, 12.5 kHz Channel Spacing

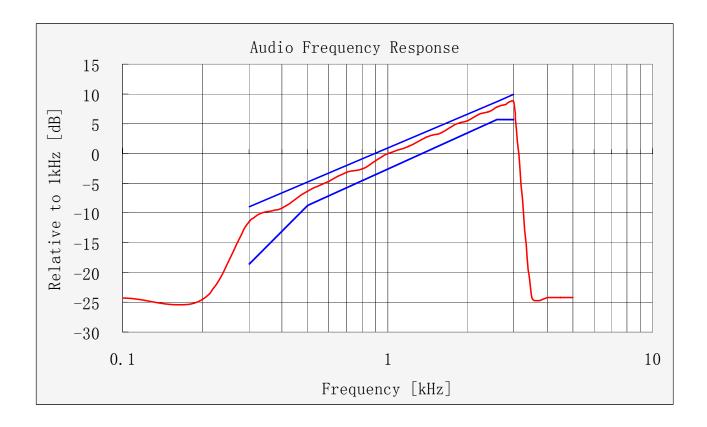


Date: 2015-08-06



### (a). Modulation Limit:

Middle channel (For UHF Band, 6.25 kHz Channel Spacing)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.07	0.31	0.37	0.43
-15	0.12	0.42	0.43	0.62
-10	0.18	0.6	0.66	0.85
-5	0.23	0.69	0.78	0.94
0	0.32	0.91	1.09	1.36
5	0.44	1.19	1.28	1.52
10	0.58	1.28	1.48	1.7
15	0.69	1.46	1.69	1.89
20	0.83	1.65	1.88	2.11

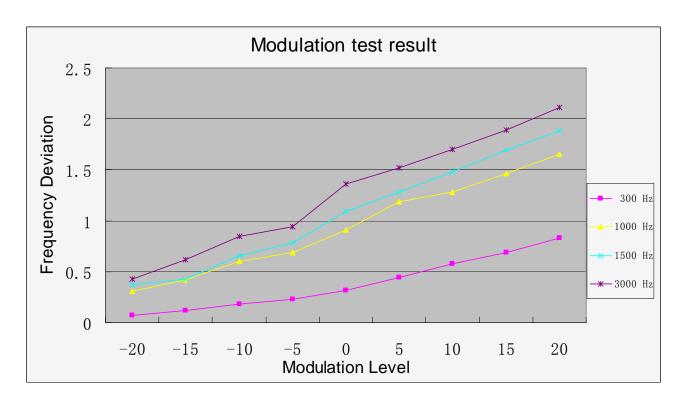


Report No: FCC1501131 Page 37 of 61

Date: 2015-08-06



# (b). Audio Frequency Response:

# For UHF Band, 6.25 kHz Channel Spacing

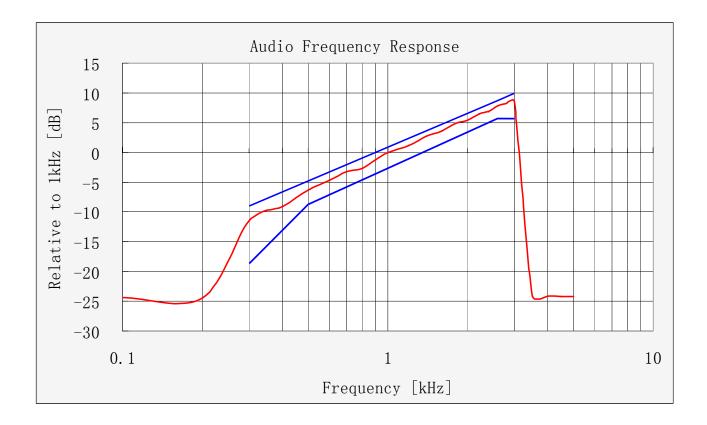

Report No: FCC1501131 Page 38 of 61

Date: 2015-08-06



# 10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

#### 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum EIRP is dependent upon the station's antenna HAAT and required service area.

#### 10.2 TEST PROCEDURE

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.

Spectrum analyzer setting: RBW=10 kHz, VBW=30 kHz, PK detector

#### 10.3 TEST RESULT

Calculation Formula: CP = R + A + L

\* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

#### For 12.5 kHz Channel Spacing

Conducted Power Measurement Results				
Channel Separation	Channel Measurement Result (dBm)			
UHF Band	Bottom channel	33.14		
	Middle Channel	32.10		
	Top channel	32.17		

Maximum EIRP=33.14+antenna Gain=33.14+1.0dBi=34.14dBm (UHF Band)

Report No: FCC1501131 Page 39 of 61

Date: 2015-08-06



## For 6.25 kHz Channel Spacing

Conducted Power Measurement Results				
Channel Separation	Channel Measurement Result (dBm)			
UHF Band	Bottom channel	33.07		
	Middle Channel	32.12		
	Top channel	32.18		

Maximum EIRP=33.07+antenna Gain=33.07+1.0dBi=34.07dBm (UHF Band)

Date: 2015-08-06



# 11. RANSMITTER FREQUENCY BEHAVIOR

#### 11.1 PROVISIONS APPLICABLE

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

> t<sub>3</sub> is the time period from the instant when the transmitter is turned off until toff.

 $t_{\rm off}$  is the instant when the 1 kHz test signal starts to rise. <sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.

	Maximum	All equipment		
Time intervals 1,2	frequency difference <sup>3</sup>	150 to 174 MHz	421 to 512 MHz	
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels				
t <sub>1</sub> <sup>4</sup> t <sub>2</sub> t <sub>3</sub> <sup>4</sup>	±25.0 kHz ±12.5 kHz ±25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms	
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels				
t <sub>1</sub> <sup>4</sup> t <sub>2</sub> t <sub>3</sub> <sup>4</sup>	±12.5 kHz ±6.25 kHz ±12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms	
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels				

t <sub>1</sub> <sup>4</sup> t <sub>2</sub> t <sub>3</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> 4	±6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup> on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

Date: 2015-08-06




t<sub>3</sub> is the time period from the instant when the transmitter is turned off until toff.

- $t_{\rm off}$  is the instant when the 1 kHz test signal starts to rise.  $^2$  During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.
- <sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.
- 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

#### 11.2 Test Method

TIA-603-D-2010

## 11.3 Test setup Block Diagram

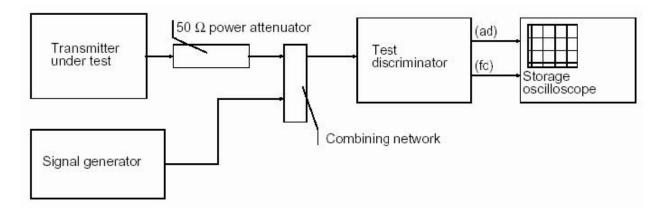


#### 11.4 MEASURE RESULT

Date: 2015-08-06





## Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation--Off to On at UHF Band

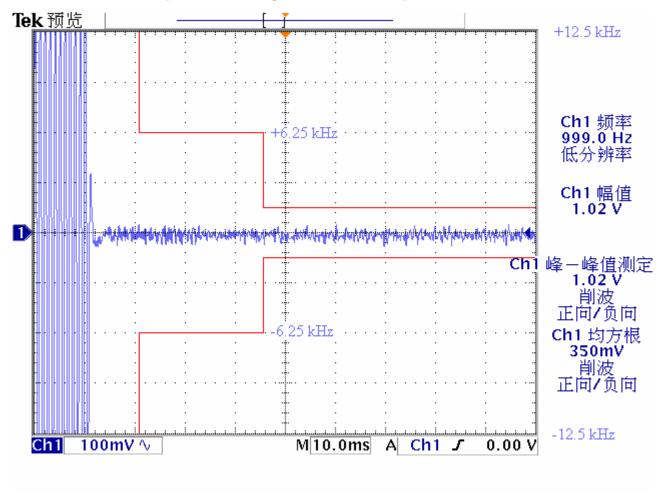

Date: 2015-08-06






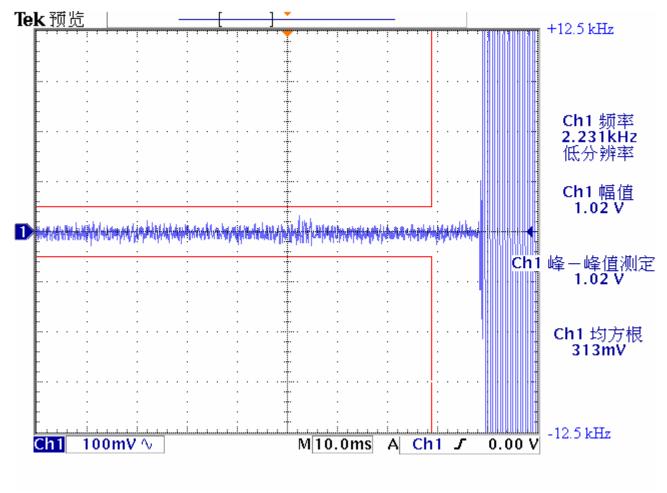

Date: 2015-08-06




## Transmitter Frequency Behaviour @ 6.25 kHz Channel Separation--Off to On at UHF Band

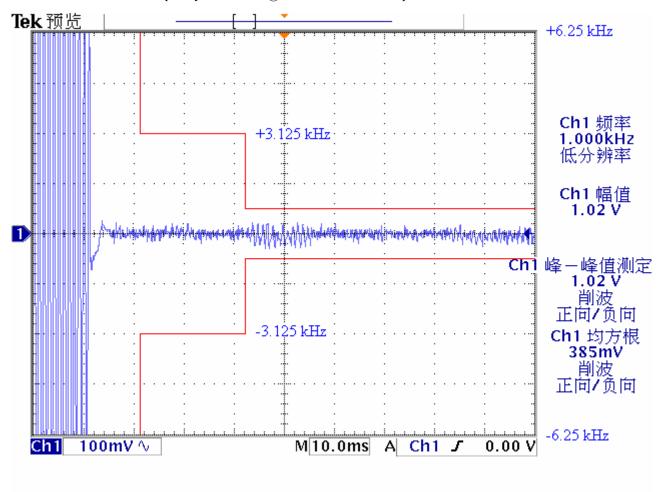

Date: 2015-08-06



## Transmitter Frequency Behaviour @ 6.25 kHz Channel Separation—On to Off at UHF Band

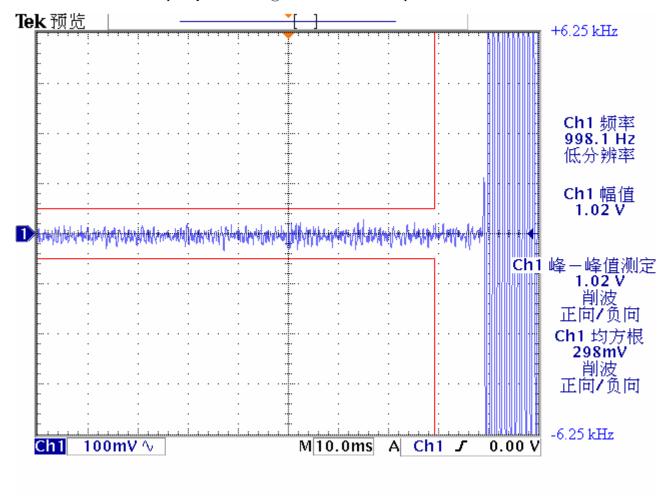

Report No: FCC1501131 Page 46 of 61

Date: 2015-08-06



# 12. Radiated Emission on Receiving Mode

## 12.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

#### 12.2 TEST METHOD

ANSI C 63.4: 2014

#### 12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

Note: 1. for radiated emissions above 1GHz, please see page 50 and 51.

2. for radiated emissions below 30MHz, please see page 49

3. Measurement distance: 3m

Date: 2015-08-06




## Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition:** Charging and Receiving

**Results: Pass** 

Please refer to following diagram for individual

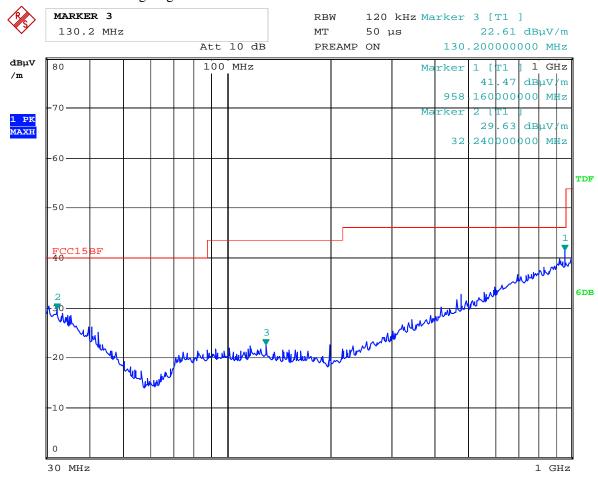

Date: 14.JUL.2015 14:51:18

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
130.200	22.61	Н	43.50
958.160	41.47	Н	46.00
32.240	29.63	Н	40.00

Date: 2015-08-06




## Radiated Emission In Vertical (30MHz----1000MHz)

**EUT set Condition:** Charging and Receiving

**Results: Pass** 

Please refer to following diagram for individual

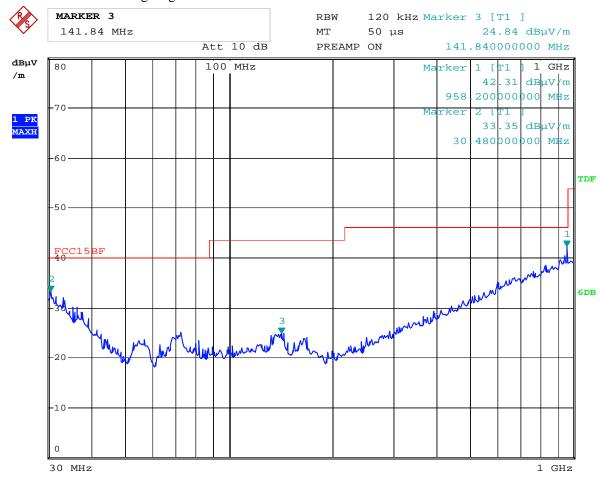

Date: 14.JUL.2015 14:54:08

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
141.840	24.84	V	43.50
958.200	42.31	V	46.00
30.480	33.35	V	40.00

Report No: FCC1501131 Page 49 of 61

Date: 2015-08-06




## Radiated Emission (0.009MHz----30MHz)

**EUT set Condition:** Charging and Receiving

**Results: Pass** 

Please refer to following diagram for individual

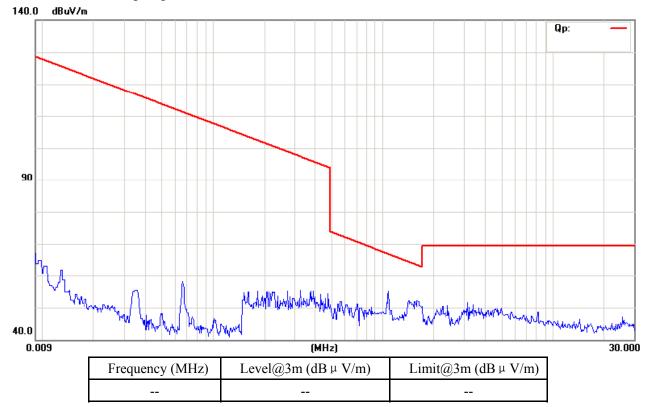

Report No: FCC1501131 Page 50 of 61

Date: 2015-08-06




## Radiated Emission In Horizontal (1000MHz----5000MHz)

**EUT set Condition:** Charging and Receiving

**Results: Pass** 

Please refer to following diagram for individual

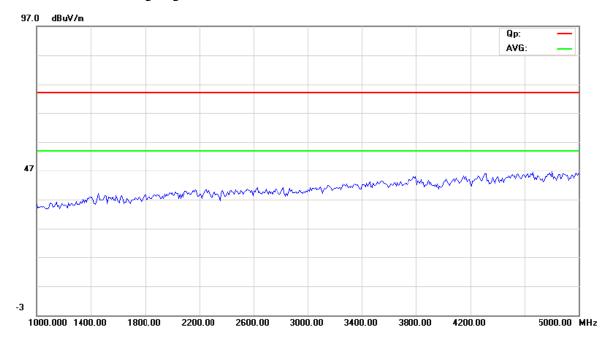

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
		Н	

Report No: FCC1501131 Page 51 of 61

Date: 2015-08-06




## Radiated Emission In Vertical (1000MHz----5000MHz)

**EUT set Condition:** Charging and Receiving

**Results: Pass** 

Please refer to following diagram for individual

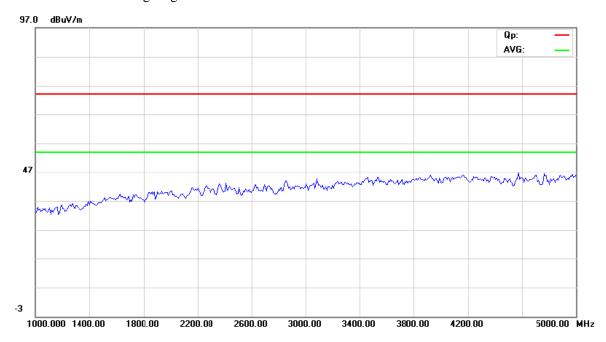

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
		V	

**Note: Scanning with PK Detector** 

Page 52 of 61

Report No: FCC1501131

Date: 2015-08-06




#### 13.0 FCC ID Label

#### **FCC ID: ZP5BF-888S**

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

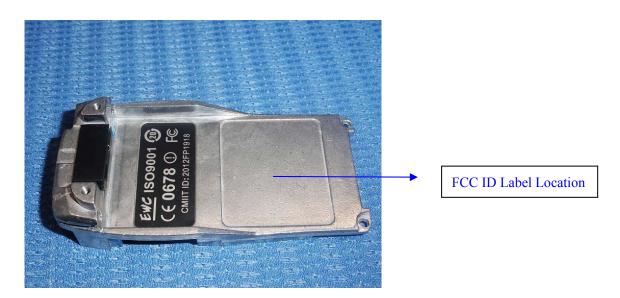

Report No: FCC1501131 Page 53 of 61

Date: 2015-08-06



#### 14.0 Photo of testing

#### 14.1 Conducted test View--



Date: 2015-08-06



#### 14.2 Radiated emission test view





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-08-06



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Outside View



Body-worn accessory



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-08-06



Interior View



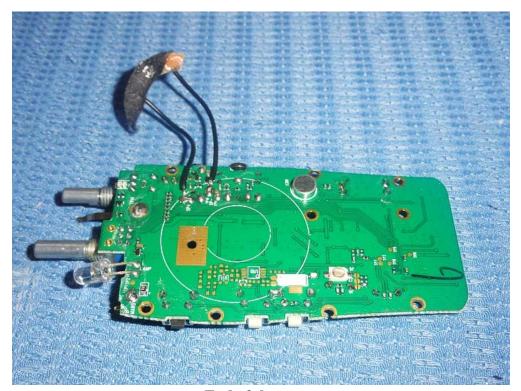

-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.