


FCC Test Report

FCC ID : I8811ACAP22
Equipment : 802.11ac Wave 2 Dual-Radio Ceiling Mount
PoE Access Point
(Refer to item 1.1.1 for more details)
Model No. : NWA1123ACv3
(Refer to item 1.1.1 for more details)
Brand Name : ZYXEL
Applicant : Zyxel Communications Corporation
Address : No.2 Industry East RD. IX, Hsinchu Science
Park, Hsinchu 30075, Taiwan, R.O.C
Standard : 47 CFR FCC Part 15.247
Received Date : Jul. 07, 2020
Tested Date : Jul. 07 ~ Sep. 02, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	10
1.4	The Equipment List	13
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	14
2	TEST CONFIGURATION.....	15
2.1	Testing Facility	15
2.2	The Worst Test Modes and Channel Details	15
3	TRANSMITTER TEST RESULTS	16
3.1	Conducted Emissions.....	16
3.2	6dB and Occupied Bandwidth.....	21
3.3	RF Output Power.....	27
3.4	Power Spectral Density	32
3.5	Unwanted Emissions into Restricted Frequency Bands	38
3.6	Emissions in Non-Restricted Frequency Bands.....	68
4	TEST LABORATORY INFORMATION	73

Release Record

Report No.	Version	Description	Issued Date
FR070801AC	Rev. 01	Initial issue	Sep. 24, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 16.839MHz 42.70 (Margin -7.30dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 73.76 (Margin -0.24dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: <i>Non-beamforming mode</i> 29.20 <i>Beamforming mode</i> 26.12	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
ZYXEL	NWA1123ACv3	802.11ac Wave 2 Dual-Radio Ceiling Mount PoE Access Point	Software difference
ZYXEL	WAC500	802.11ac Wave 2 Dual-Radio Unified Access Point	
✦ The above models, model NWA1123ACv3 was selected as a representative one for the final test and only its data was recorded in this report.			

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15
2400-2483.5	ac (VHT20)	2412-2462	1-11 [11]	2	MCS 0-9
2400-2483.5	ac (VHT40)	2422-2452	3-9 [7]	2	MCS 0-9
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.. Note 4: 802.11ac supports beamforming function.					

1.1.3 Antenna Details

Ant. No.	Brand	Model	Type	Gain (dBi)	Connector
1	ARISTOTLE	RFA-25-G528	PIFA	0	N/A
2	ARISTOTLE	RFA-25-G526	PIFA	0	N/A

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter 30~57Vdc from PoE
-------------------	---

Note: The PoE power supply is not bundled in market.

1.1.5 Accessories


Accessories		
No.	Equipment	Description
1	AC adapter (Only for NWA1123ACv3)	Brand: DEE VAN ENTERPRISE CO. LTD. Model: DSA-12PFU-12 FCA 120100 I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 12Vdc, 1.0A, 12W Power Line: 1.5m non-shielded without core

1.1.6 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20 / ac VHT20		802.11n HT40 / ac VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

1.1.7 Test Tool and Duty Cycle

Test Tool	QSPR, Version:5.0-00188		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	98.33%	0.07
	VHT20	90.56%	0.43
	VHT40	81.97%	0.86

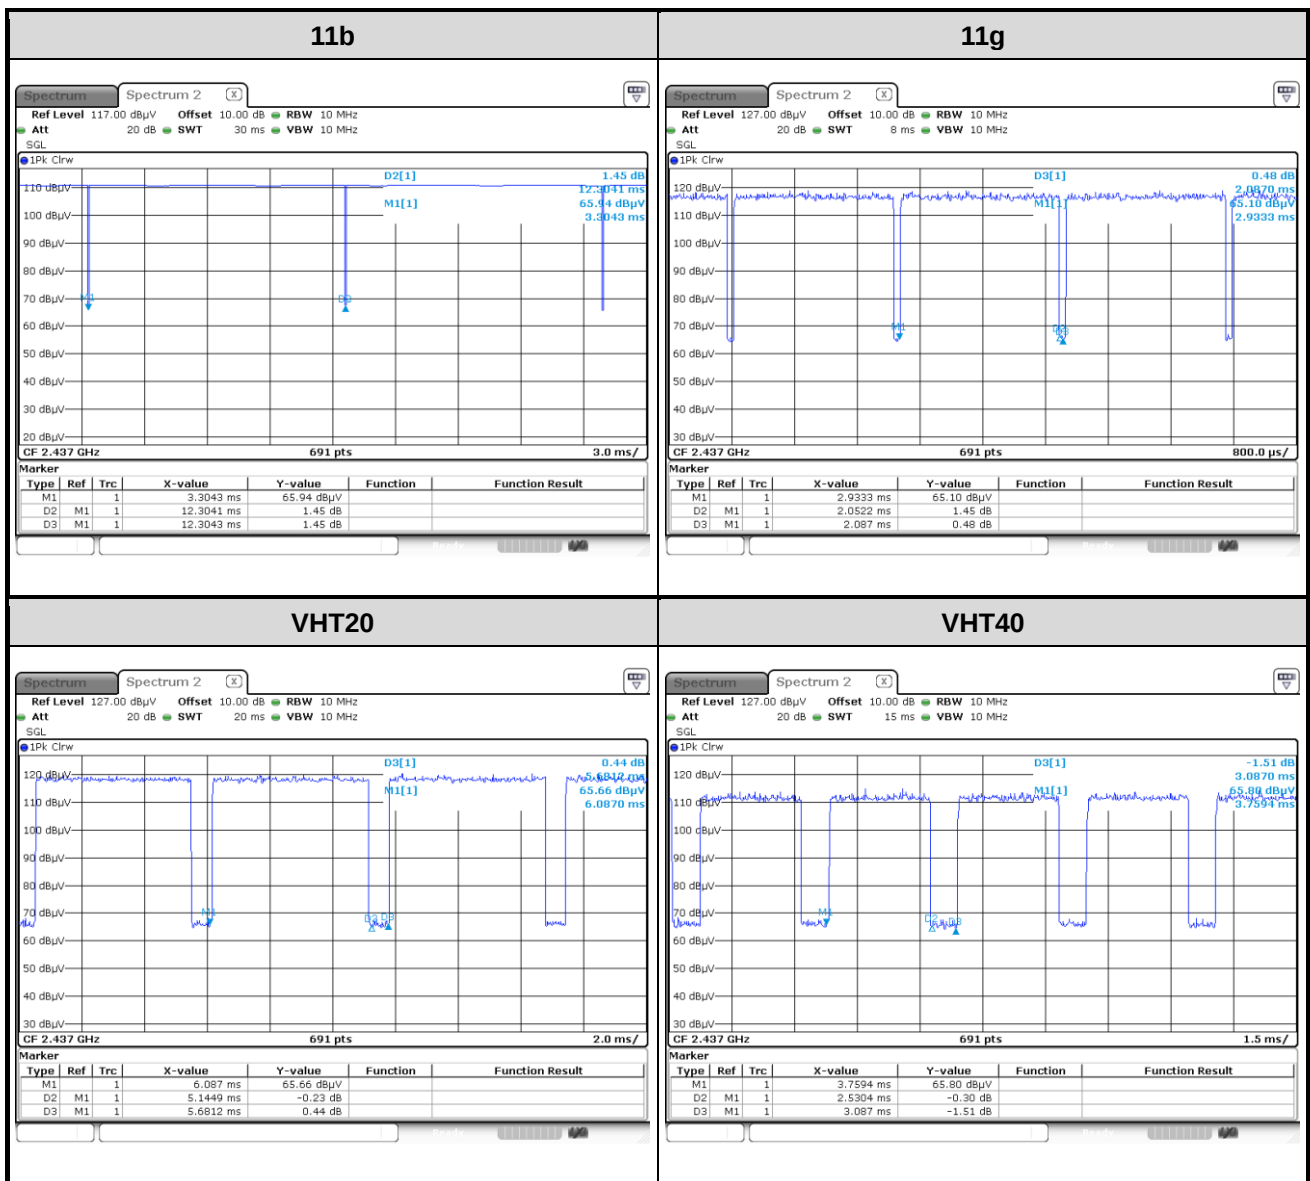

1.1.8 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	21
11b	2437	21
11b	2462	21
11g	2412	18.5
11g	2437	21
11g	2462	19
VHT20	2412	18
VHT20	2437	21
VHT20	2462	18
VHT40	2422	16
VHT40	2437	18.5
VHT40	2452	16.5

1.2 Local Support Equipment List

Adapter Mode


Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E6440	DoC	---
2	Notebook	DELL	Latitude E6440	DoC	(only for BF mode)
3	RJ45	ICC	RJ45-10m	---	---
4	RJ45	ICC	RJ45-1.3m	---	(only for BF mode)
5	802.11ac Wave 2 Dual-Radio Ceiling Mount PoE Access Point	ZYXEL	NWA1123ACv3	---	Provided by applicant. (only for BF mode)

PoE mode


Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E6440	DoC	---
2	Notebook	DELL	Latitude E6440	DoC	(only for BF mode)
3	RJ45	ICC	RJ45-10m	---	---
4	RJ45	ICC	RJ45-1.3m	---	---
5	RJ45	ICC	RJ45-1.3m	---	(only for BF mode)
6	POE	ZYXEL	XS1930-12HP	---	Provided by applicant. (only for BF mode)
7	802.11ac Wave 2 Dual-Radio Ceiling Mount PoE Access Point	ZYXEL	NWA1123ACv3	---	Provided by applicant. (only for BF mode)

1.3 Test Setup Chart


Adapter mode, Non-beamforming mode

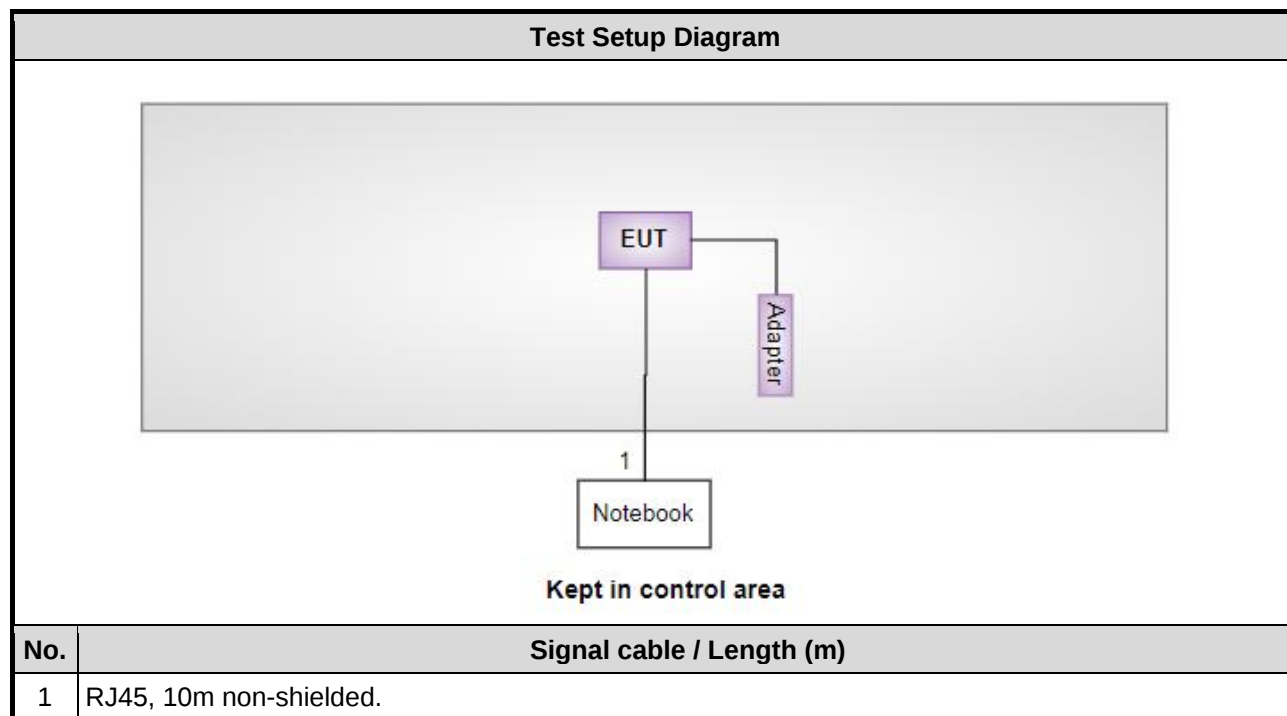


Adapter mode, Beamforming mode

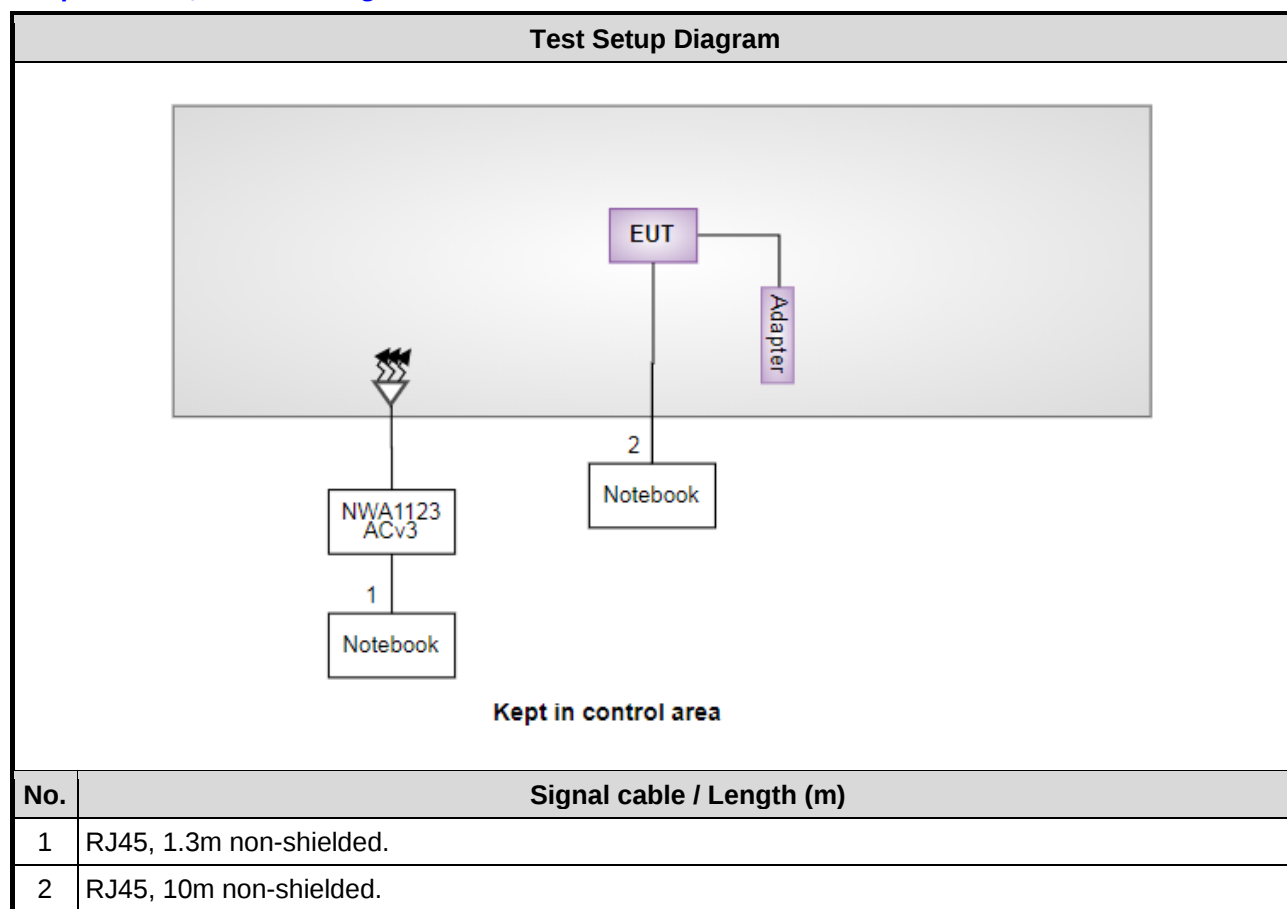

PoE mode, Non-beamforming mode

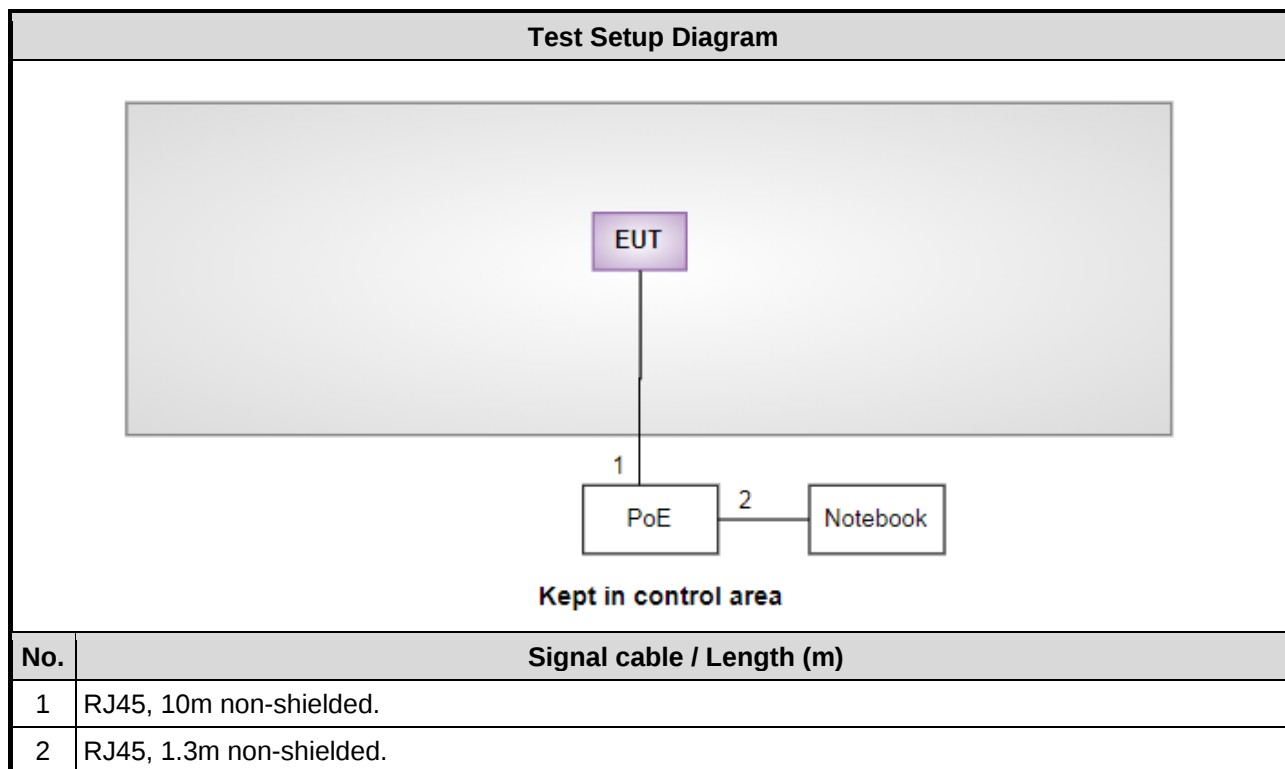

PoE mode, Beamforming mode

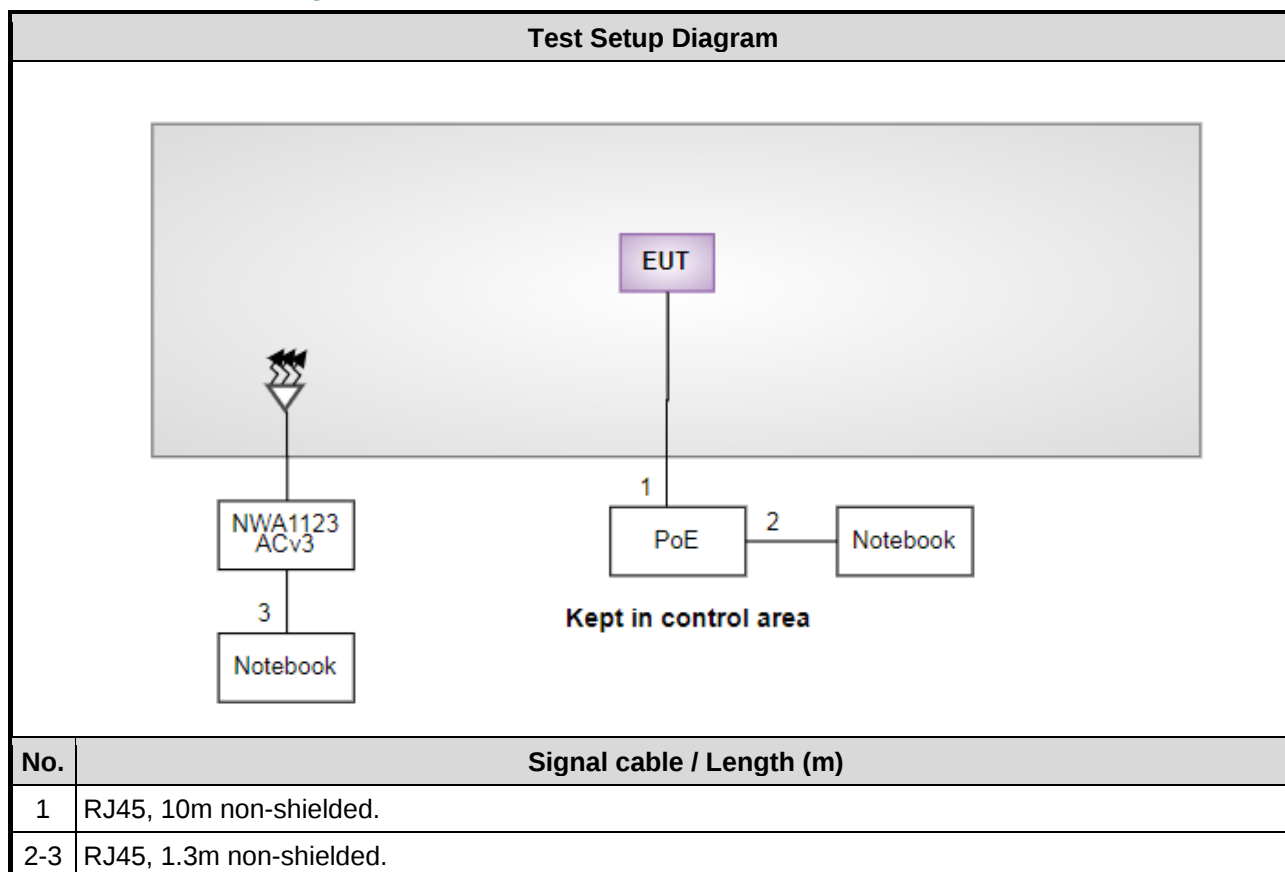

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Aug. 27, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 20, 2019	Dec. 19, 2020
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
50 ohm terminal (Support Unit)	NA	50	04	Jun. 05, 2020	Jun. 04, 2021
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Tested Date	Jul. 07 ~ Jul. 10, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 29, 2020	Apr. 28, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 27, 2019	Dec. 26, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980187	Aug. 14, 2019	Aug. 13, 2020
Preamplifier	Agilent	83017A	MY39501309	Sep. 24, 2019	Sep. 23, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 27, 2019	Sep. 26, 2020
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 27, 2019	Sep. 26, 2020
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 27, 2019	Sep. 26, 2020
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 27, 2019	Sep. 26, 2020
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 27, 2019	Sep. 26, 2020
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 27, 2019	Sep. 26, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Sep. 02, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.96 dB
Radiated emission > 1GHz	±4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.
Test Site	03CH03-WS
Address of Test Site	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISSED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	1, 2
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	1, 2
Maximum Output Power	11b 11g VHT20 VHT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 Mbps 6 Mbps MCS 0 MCS 0	1
Maximum Output Power	VHT20 VHT40	2412 / 2437 / 2462 2422 / 2437 / 2452	MCS 0 MCS 0	3
Radiated Emissions >1GHz 6dB bandwidth Power spectral density	11b 11g VHT20 VHT40	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462 2422 / 2437 / 2452	1 Mbps 6 Mbps MCS 0 MCS 0	1

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** result was found as the worst case and was shown in this report.
- The EUT had been tested by following test configurations.
Configuration 1: Non-beamforming mode / Adapter mode
Configuration 2: Non-beamforming mode / PoE mode
Configuration 3: Beamforming mode / Adapter mode

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

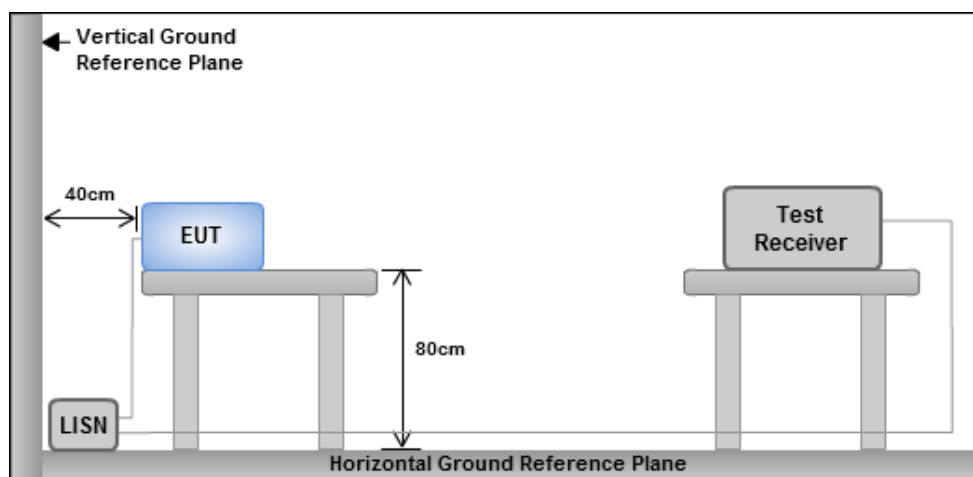

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions


Configuration 1

Modulation	11g	Test Freq. (MHz)	2437																																																																																																																					
Power Phase	Line																																																																																																																							
Test by : Alex Tsai Temperature: 24°C Humidity: 60%																																																																																																																								
Level (dBuV) Frequency (MHz) <table><thead><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>LISN factor dB</th><th>cable loss dB</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>0.213</td><td>20.31</td><td>53.10</td><td>-32.79</td><td>10.43</td><td>9.63</td><td>0.06</td><td>Average</td></tr><tr><td>2</td><td>0.213</td><td>35.09</td><td>63.10</td><td>-28.01</td><td>25.21</td><td>9.63</td><td>0.06</td><td>QP</td></tr><tr><td>3</td><td>0.393</td><td>23.98</td><td>47.99</td><td>-24.01</td><td>14.02</td><td>9.63</td><td>0.08</td><td>Average</td></tr><tr><td>4</td><td>0.393</td><td>32.28</td><td>57.99</td><td>-25.71</td><td>22.32</td><td>9.63</td><td>0.08</td><td>QP</td></tr><tr><td>5</td><td>0.456</td><td>22.29</td><td>46.76</td><td>-24.47</td><td>12.31</td><td>9.63</td><td>0.09</td><td>Average</td></tr><tr><td>6</td><td>0.456</td><td>28.33</td><td>56.76</td><td>-28.43</td><td>18.35</td><td>9.63</td><td>0.09</td><td>QP</td></tr><tr><td>7</td><td>1.043</td><td>17.54</td><td>46.00</td><td>-28.46</td><td>7.47</td><td>9.63</td><td>0.12</td><td>Average</td></tr><tr><td>8</td><td>1.043</td><td>28.11</td><td>56.00</td><td>-27.89</td><td>18.04</td><td>9.63</td><td>0.12</td><td>QP</td></tr><tr><td>9*</td><td>10.239</td><td>28.58</td><td>50.00</td><td>-21.42</td><td>18.08</td><td>9.69</td><td>0.40</td><td>Average</td></tr><tr><td>10</td><td>10.239</td><td>30.56</td><td>60.00</td><td>-29.44</td><td>20.06</td><td>9.69</td><td>0.40</td><td>QP</td></tr><tr><td>11</td><td>19.326</td><td>25.44</td><td>50.00</td><td>-24.56</td><td>14.48</td><td>9.72</td><td>0.65</td><td>Average</td></tr><tr><td>12</td><td>19.326</td><td>33.32</td><td>60.00</td><td>-26.68</td><td>22.36</td><td>9.72</td><td>0.65</td><td>QP</td></tr></tbody></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark	1	0.213	20.31	53.10	-32.79	10.43	9.63	0.06	Average	2	0.213	35.09	63.10	-28.01	25.21	9.63	0.06	QP	3	0.393	23.98	47.99	-24.01	14.02	9.63	0.08	Average	4	0.393	32.28	57.99	-25.71	22.32	9.63	0.08	QP	5	0.456	22.29	46.76	-24.47	12.31	9.63	0.09	Average	6	0.456	28.33	56.76	-28.43	18.35	9.63	0.09	QP	7	1.043	17.54	46.00	-28.46	7.47	9.63	0.12	Average	8	1.043	28.11	56.00	-27.89	18.04	9.63	0.12	QP	9*	10.239	28.58	50.00	-21.42	18.08	9.69	0.40	Average	10	10.239	30.56	60.00	-29.44	20.06	9.69	0.40	QP	11	19.326	25.44	50.00	-24.56	14.48	9.72	0.65	Average	12	19.326	33.32	60.00	-26.68	22.36	9.72	0.65	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	0.213	20.31	53.10	-32.79	10.43	9.63	0.06	Average																																																																																																																
2	0.213	35.09	63.10	-28.01	25.21	9.63	0.06	QP																																																																																																																
3	0.393	23.98	47.99	-24.01	14.02	9.63	0.08	Average																																																																																																																
4	0.393	32.28	57.99	-25.71	22.32	9.63	0.08	QP																																																																																																																
5	0.456	22.29	46.76	-24.47	12.31	9.63	0.09	Average																																																																																																																
6	0.456	28.33	56.76	-28.43	18.35	9.63	0.09	QP																																																																																																																
7	1.043	17.54	46.00	-28.46	7.47	9.63	0.12	Average																																																																																																																
8	1.043	28.11	56.00	-27.89	18.04	9.63	0.12	QP																																																																																																																
9*	10.239	28.58	50.00	-21.42	18.08	9.69	0.40	Average																																																																																																																
10	10.239	30.56	60.00	-29.44	20.06	9.69	0.40	QP																																																																																																																
11	19.326	25.44	50.00	-24.56	14.48	9.72	0.65	Average																																																																																																																
12	19.326	33.32	60.00	-26.68	22.36	9.72	0.65	QP																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																								

Modulation	11g	Test Freq. (MHz)	2437																																																																																																																					
Power Phase	Neutral																																																																																																																							
Test by : Alex Tsai Temperature: 24°C Humidity: 60%																																																																																																																								
Level (dBuV) <table><thead><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>LISN factor dB</th><th>cable loss dB</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>0.177</td><td>28.39</td><td>54.64</td><td>-26.25</td><td>18.54</td><td>9.65</td><td>0.06</td><td>Average</td></tr><tr><td>2</td><td>0.177</td><td>43.07</td><td>64.64</td><td>-21.57</td><td>33.22</td><td>9.65</td><td>0.06</td><td>QP</td></tr><tr><td>3</td><td>0.383</td><td>26.69</td><td>48.21</td><td>-21.52</td><td>16.79</td><td>9.65</td><td>0.08</td><td>Average</td></tr><tr><td>4</td><td>0.383</td><td>36.32</td><td>58.21</td><td>-21.89</td><td>26.42</td><td>9.65</td><td>0.08</td><td>QP</td></tr><tr><td>5*</td><td>0.419</td><td>27.74</td><td>47.46</td><td>-19.72</td><td>17.84</td><td>9.65</td><td>0.08</td><td>Average</td></tr><tr><td>6</td><td>0.419</td><td>33.79</td><td>57.46</td><td>-23.67</td><td>23.89</td><td>9.65</td><td>0.08</td><td>QP</td></tr><tr><td>7</td><td>0.456</td><td>22.19</td><td>46.76</td><td>-24.57</td><td>12.28</td><td>9.65</td><td>0.09</td><td>Average</td></tr><tr><td>8</td><td>0.456</td><td>31.19</td><td>56.76</td><td>-25.57</td><td>21.28</td><td>9.65</td><td>0.09</td><td>QP</td></tr><tr><td>9</td><td>1.049</td><td>17.18</td><td>46.00</td><td>-28.82</td><td>7.21</td><td>9.65</td><td>0.12</td><td>Average</td></tr><tr><td>10</td><td>1.049</td><td>23.97</td><td>56.00</td><td>-32.03</td><td>14.00</td><td>9.65</td><td>0.12</td><td>QP</td></tr><tr><td>11</td><td>24.015</td><td>19.90</td><td>50.00</td><td>-30.10</td><td>8.74</td><td>9.81</td><td>0.70</td><td>Average</td></tr><tr><td>12</td><td>24.015</td><td>26.56</td><td>60.00</td><td>-33.44</td><td>15.40</td><td>9.81</td><td>0.70</td><td>QP</td></tr></tbody></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark	1	0.177	28.39	54.64	-26.25	18.54	9.65	0.06	Average	2	0.177	43.07	64.64	-21.57	33.22	9.65	0.06	QP	3	0.383	26.69	48.21	-21.52	16.79	9.65	0.08	Average	4	0.383	36.32	58.21	-21.89	26.42	9.65	0.08	QP	5*	0.419	27.74	47.46	-19.72	17.84	9.65	0.08	Average	6	0.419	33.79	57.46	-23.67	23.89	9.65	0.08	QP	7	0.456	22.19	46.76	-24.57	12.28	9.65	0.09	Average	8	0.456	31.19	56.76	-25.57	21.28	9.65	0.09	QP	9	1.049	17.18	46.00	-28.82	7.21	9.65	0.12	Average	10	1.049	23.97	56.00	-32.03	14.00	9.65	0.12	QP	11	24.015	19.90	50.00	-30.10	8.74	9.81	0.70	Average	12	24.015	26.56	60.00	-33.44	15.40	9.81	0.70	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	0.177	28.39	54.64	-26.25	18.54	9.65	0.06	Average																																																																																																																
2	0.177	43.07	64.64	-21.57	33.22	9.65	0.06	QP																																																																																																																
3	0.383	26.69	48.21	-21.52	16.79	9.65	0.08	Average																																																																																																																
4	0.383	36.32	58.21	-21.89	26.42	9.65	0.08	QP																																																																																																																
5*	0.419	27.74	47.46	-19.72	17.84	9.65	0.08	Average																																																																																																																
6	0.419	33.79	57.46	-23.67	23.89	9.65	0.08	QP																																																																																																																
7	0.456	22.19	46.76	-24.57	12.28	9.65	0.09	Average																																																																																																																
8	0.456	31.19	56.76	-25.57	21.28	9.65	0.09	QP																																																																																																																
9	1.049	17.18	46.00	-28.82	7.21	9.65	0.12	Average																																																																																																																
10	1.049	23.97	56.00	-32.03	14.00	9.65	0.12	QP																																																																																																																
11	24.015	19.90	50.00	-30.10	8.74	9.81	0.70	Average																																																																																																																
12	24.015	26.56	60.00	-33.44	15.40	9.81	0.70	QP																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																								

Configuration 2

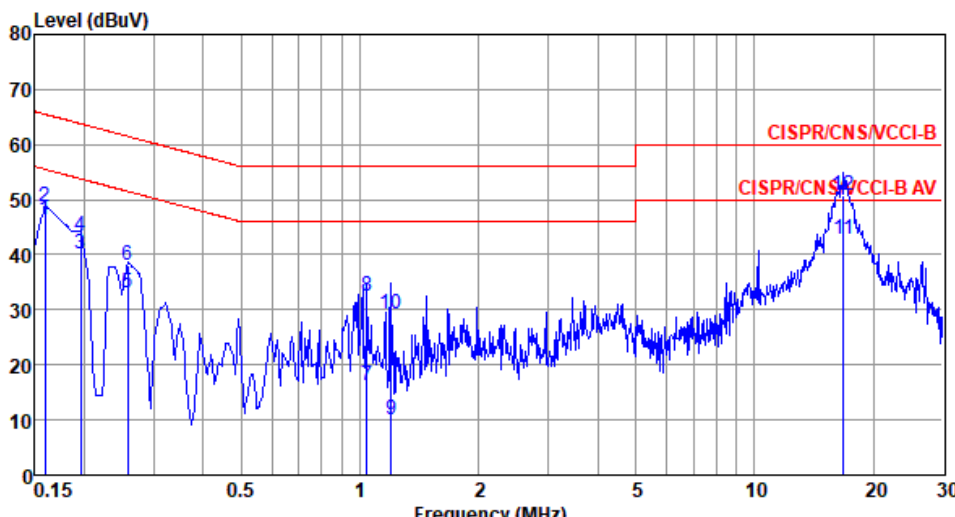Modulation	11g	Test Freq. (MHz)	2437																																																																																																																					
Power Phase	Line																																																																																																																							
Test by : Alex Tsai Temperature: 24°C Humidity: 60%																																																																																																																								
Level (dBUV)  Frequency (MHz) <table><thead><tr><th></th><th>Freq MHz</th><th>Level dBUV</th><th>Limit Line dBUV</th><th>Over Limit dB</th><th>Read Level dBUV</th><th>LISN factor dB</th><th>cable loss dB</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>0.159</td><td>46.41</td><td>55.52</td><td>-9.11</td><td>36.72</td><td>9.64</td><td>0.05</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>48.85</td><td>65.52</td><td>-16.67</td><td>39.16</td><td>9.64</td><td>0.05</td><td>QP</td></tr><tr><td>3</td><td>0.195</td><td>40.29</td><td>53.80</td><td>-13.51</td><td>30.60</td><td>9.63</td><td>0.06</td><td>Average</td></tr><tr><td>4</td><td>0.195</td><td>43.30</td><td>63.80</td><td>-20.50</td><td>33.61</td><td>9.63</td><td>0.06</td><td>QP</td></tr><tr><td>5</td><td>0.258</td><td>33.11</td><td>51.51</td><td>-18.40</td><td>23.41</td><td>9.63</td><td>0.07</td><td>Average</td></tr><tr><td>6</td><td>0.258</td><td>38.06</td><td>61.51</td><td>-23.45</td><td>28.36</td><td>9.63</td><td>0.07</td><td>QP</td></tr><tr><td>7</td><td>1.043</td><td>16.22</td><td>46.00</td><td>-29.78</td><td>6.47</td><td>9.63</td><td>0.12</td><td>Average</td></tr><tr><td>8</td><td>1.043</td><td>32.42</td><td>56.00</td><td>-23.58</td><td>22.67</td><td>9.63</td><td>0.12</td><td>QP</td></tr><tr><td>9</td><td>1.197</td><td>10.07</td><td>46.00</td><td>-35.93</td><td>0.30</td><td>9.63</td><td>0.14</td><td>Average</td></tr><tr><td>10</td><td>1.197</td><td>29.37</td><td>56.00</td><td>-26.63</td><td>19.60</td><td>9.63</td><td>0.14</td><td>QP</td></tr><tr><td>11*</td><td>16.839</td><td>42.70</td><td>50.00</td><td>-7.30</td><td>32.37</td><td>9.71</td><td>0.62</td><td>Average</td></tr><tr><td>12</td><td>16.839</td><td>50.64</td><td>60.00</td><td>-9.36</td><td>40.31</td><td>9.71</td><td>0.62</td><td>QP</td></tr></tbody></table>					Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark	1	0.159	46.41	55.52	-9.11	36.72	9.64	0.05	Average	2	0.159	48.85	65.52	-16.67	39.16	9.64	0.05	QP	3	0.195	40.29	53.80	-13.51	30.60	9.63	0.06	Average	4	0.195	43.30	63.80	-20.50	33.61	9.63	0.06	QP	5	0.258	33.11	51.51	-18.40	23.41	9.63	0.07	Average	6	0.258	38.06	61.51	-23.45	28.36	9.63	0.07	QP	7	1.043	16.22	46.00	-29.78	6.47	9.63	0.12	Average	8	1.043	32.42	56.00	-23.58	22.67	9.63	0.12	QP	9	1.197	10.07	46.00	-35.93	0.30	9.63	0.14	Average	10	1.197	29.37	56.00	-26.63	19.60	9.63	0.14	QP	11*	16.839	42.70	50.00	-7.30	32.37	9.71	0.62	Average	12	16.839	50.64	60.00	-9.36	40.31	9.71	0.62	QP
	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	0.159	46.41	55.52	-9.11	36.72	9.64	0.05	Average																																																																																																																
2	0.159	48.85	65.52	-16.67	39.16	9.64	0.05	QP																																																																																																																
3	0.195	40.29	53.80	-13.51	30.60	9.63	0.06	Average																																																																																																																
4	0.195	43.30	63.80	-20.50	33.61	9.63	0.06	QP																																																																																																																
5	0.258	33.11	51.51	-18.40	23.41	9.63	0.07	Average																																																																																																																
6	0.258	38.06	61.51	-23.45	28.36	9.63	0.07	QP																																																																																																																
7	1.043	16.22	46.00	-29.78	6.47	9.63	0.12	Average																																																																																																																
8	1.043	32.42	56.00	-23.58	22.67	9.63	0.12	QP																																																																																																																
9	1.197	10.07	46.00	-35.93	0.30	9.63	0.14	Average																																																																																																																
10	1.197	29.37	56.00	-26.63	19.60	9.63	0.14	QP																																																																																																																
11*	16.839	42.70	50.00	-7.30	32.37	9.71	0.62	Average																																																																																																																
12	16.839	50.64	60.00	-9.36	40.31	9.71	0.62	QP																																																																																																																
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																								

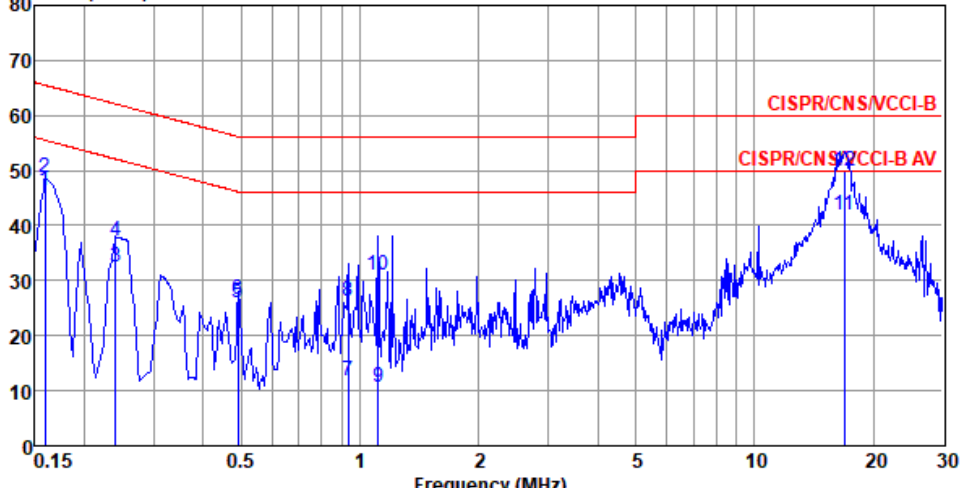Modulation	11g	Test Freq. (MHz)	2437																																																																																																																					
Power Phase	Neutral																																																																																																																							
Test by : Alex Tsai Temperature: 24°C Humidity: 60%																																																																																																																								
Level (dBuV)  Frequency (MHz) <table><thead><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>LISN factor dB</th><th>cable loss dB</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>0.159</td><td>46.22</td><td>55.52</td><td>-9.30</td><td>36.51</td><td>9.66</td><td>0.05</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>48.63</td><td>65.52</td><td>-16.89</td><td>38.92</td><td>9.66</td><td>0.05</td><td>QP</td></tr><tr><td>3</td><td>0.240</td><td>32.59</td><td>52.08</td><td>-19.49</td><td>22.87</td><td>9.65</td><td>0.07</td><td>Average</td></tr><tr><td>4</td><td>0.240</td><td>37.16</td><td>62.08</td><td>-24.92</td><td>27.44</td><td>9.65</td><td>0.07</td><td>QP</td></tr><tr><td>5</td><td>0.491</td><td>26.07</td><td>46.14</td><td>-20.07</td><td>16.33</td><td>9.65</td><td>0.09</td><td>Average</td></tr><tr><td>6</td><td>0.491</td><td>26.47</td><td>56.14</td><td>-29.67</td><td>16.73</td><td>9.65</td><td>0.09</td><td>QP</td></tr><tr><td>7</td><td>0.933</td><td>11.79</td><td>46.00</td><td>-34.21</td><td>2.02</td><td>9.65</td><td>0.12</td><td>Average</td></tr><tr><td>8</td><td>0.933</td><td>26.18</td><td>56.00</td><td>-29.82</td><td>16.41</td><td>9.65</td><td>0.12</td><td>QP</td></tr><tr><td>9</td><td>1.111</td><td>10.59</td><td>46.00</td><td>-35.41</td><td>0.81</td><td>9.65</td><td>0.13</td><td>Average</td></tr><tr><td>10</td><td>1.111</td><td>30.85</td><td>56.00</td><td>-25.15</td><td>21.07</td><td>9.65</td><td>0.13</td><td>QP</td></tr><tr><td>11*</td><td>16.928</td><td>41.84</td><td>50.00</td><td>-8.16</td><td>31.41</td><td>9.81</td><td>0.62</td><td>Average</td></tr><tr><td>12</td><td>16.928</td><td>49.86</td><td>60.00</td><td>-10.14</td><td>39.43</td><td>9.81</td><td>0.62</td><td>QP</td></tr></tbody></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark	1	0.159	46.22	55.52	-9.30	36.51	9.66	0.05	Average	2	0.159	48.63	65.52	-16.89	38.92	9.66	0.05	QP	3	0.240	32.59	52.08	-19.49	22.87	9.65	0.07	Average	4	0.240	37.16	62.08	-24.92	27.44	9.65	0.07	QP	5	0.491	26.07	46.14	-20.07	16.33	9.65	0.09	Average	6	0.491	26.47	56.14	-29.67	16.73	9.65	0.09	QP	7	0.933	11.79	46.00	-34.21	2.02	9.65	0.12	Average	8	0.933	26.18	56.00	-29.82	16.41	9.65	0.12	QP	9	1.111	10.59	46.00	-35.41	0.81	9.65	0.13	Average	10	1.111	30.85	56.00	-25.15	21.07	9.65	0.13	QP	11*	16.928	41.84	50.00	-8.16	31.41	9.81	0.62	Average	12	16.928	49.86	60.00	-10.14	39.43	9.81	0.62	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	0.159	46.22	55.52	-9.30	36.51	9.66	0.05	Average																																																																																																																
2	0.159	48.63	65.52	-16.89	38.92	9.66	0.05	QP																																																																																																																
3	0.240	32.59	52.08	-19.49	22.87	9.65	0.07	Average																																																																																																																
4	0.240	37.16	62.08	-24.92	27.44	9.65	0.07	QP																																																																																																																
5	0.491	26.07	46.14	-20.07	16.33	9.65	0.09	Average																																																																																																																
6	0.491	26.47	56.14	-29.67	16.73	9.65	0.09	QP																																																																																																																
7	0.933	11.79	46.00	-34.21	2.02	9.65	0.12	Average																																																																																																																
8	0.933	26.18	56.00	-29.82	16.41	9.65	0.12	QP																																																																																																																
9	1.111	10.59	46.00	-35.41	0.81	9.65	0.13	Average																																																																																																																
10	1.111	30.85	56.00	-25.15	21.07	9.65	0.13	QP																																																																																																																
11*	16.928	41.84	50.00	-8.16	31.41	9.81	0.62	Average																																																																																																																
12	16.928	49.86	60.00	-10.14	39.43	9.81	0.62	QP																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																								

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	23°C / 65%	Tested By	Alex Huang
-------------------	------------	-----------	------------

Configuration 1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.551M	13.025M	13M0G1D	7.536M	12.88M
802.11g_Nss1,(6Mbps)_2TX	16.377M	16.787M	16M8D1D	16.304M	16.643M
802.11ac VHT20_Nss1,(MCS0)_2TX	17.681M	17.945M	17M9D1D	17.536M	17.8M
802.11ac VHT40_Nss1,(MCS0)_2TX	36.377M	36.614M	36M6D1D	35.652M	36.324M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.043M	12.88M	7.536M	13.025M
2437MHz	Pass	500k	8.043M	12.88M	7.609M	12.952M
2462MHz	Pass	500k	8.551M	12.952M	7.536M	12.952M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.377M	16.643M	16.377M	16.643M
2437MHz	Pass	500k	16.377M	16.787M	16.304M	16.787M
2462MHz	Pass	500k	16.304M	16.643M	16.377M	16.643M
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.609M	17.8M	17.609M	17.8M
2437MHz	Pass	500k	17.536M	17.873M	17.536M	17.945M
2462MHz	Pass	500k	17.681M	17.8M	17.536M	17.8M
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	36.377M	36.324M	36.377M	36.469M
2437MHz	Pass	500k	36.377M	36.469M	36.087M	36.614M
2452MHz	Pass	500k	36.087M	36.324M	35.652M	36.469M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_2TX

EBW


2412MHz

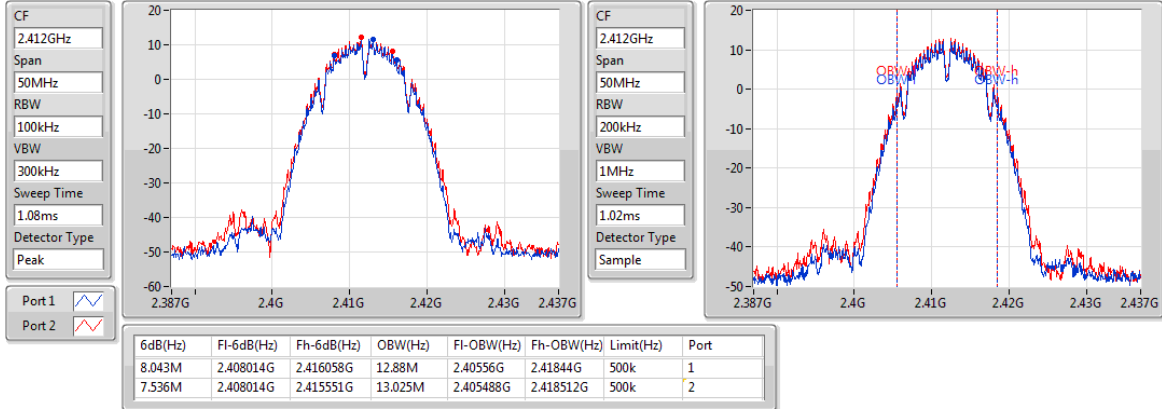

802.11b_Nss1,(1Mbps)_2TX

EBW


2437MHz

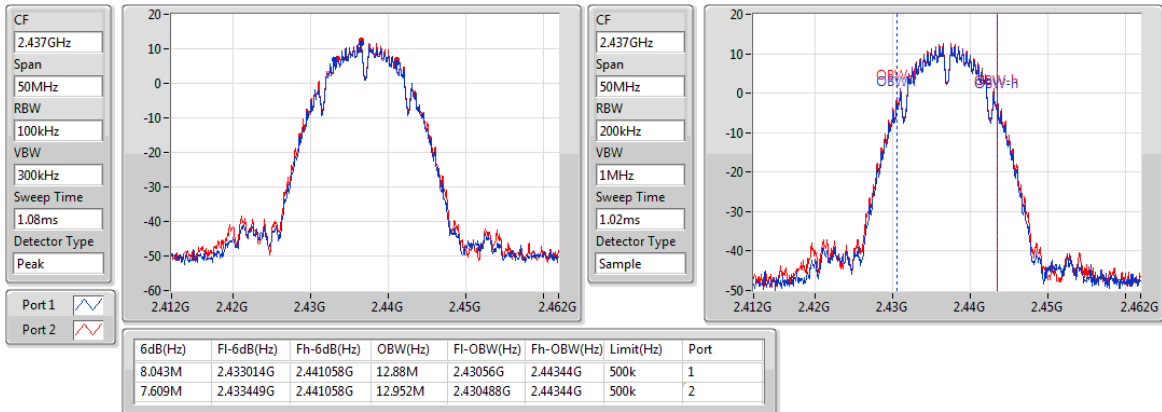

802.11b_Nss1,(1Mbps)_2TX

EBW


2462MHz

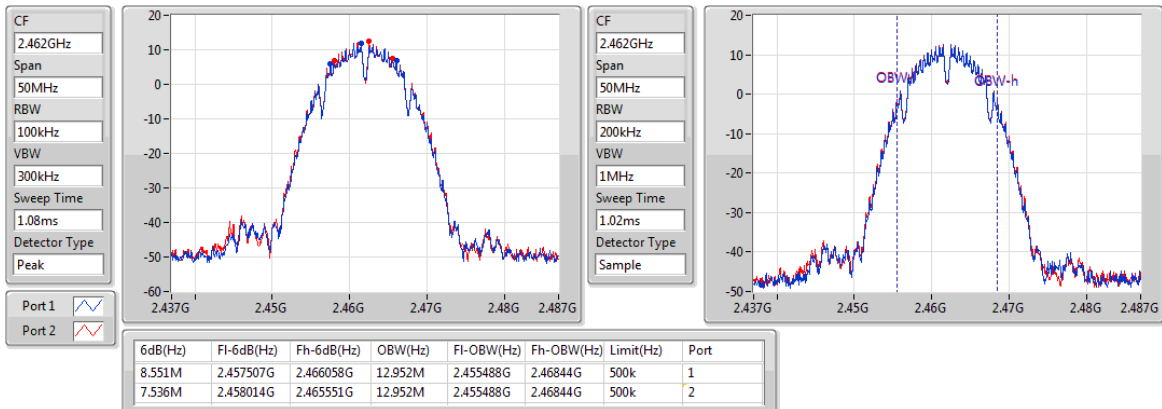

802.11g_Nss1,(6Mbps)_2TX

EBW


2412MHz

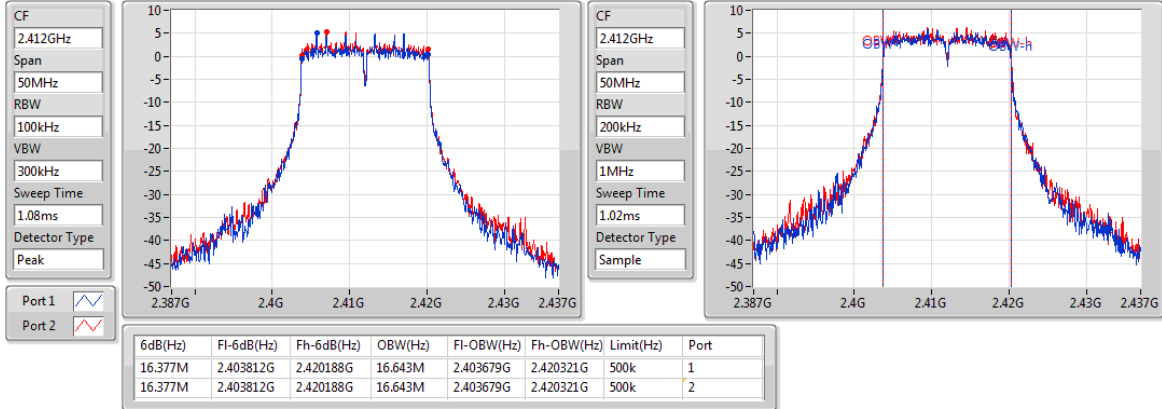

802.11g_Nss1,(6Mbps)_2TX

EBW


2437MHz

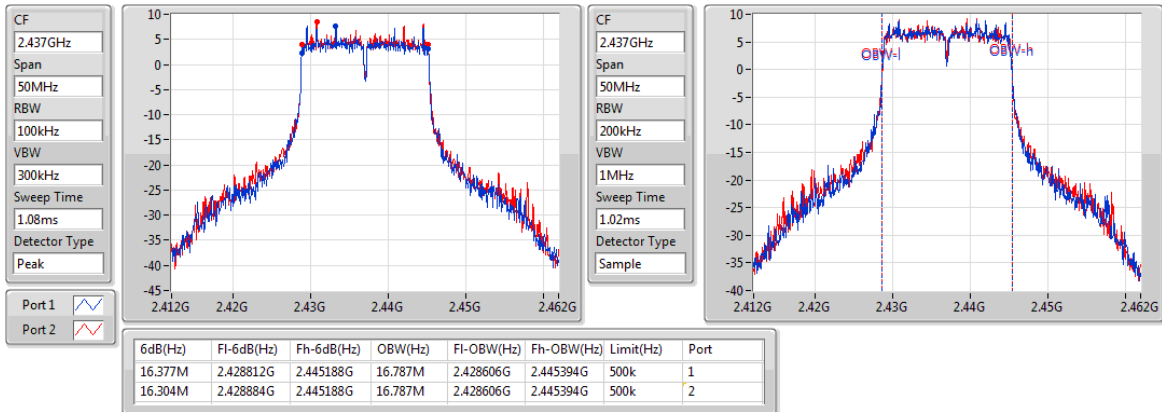

802.11g_Nss1,(6Mbps)_2TX

EBW


2462MHz

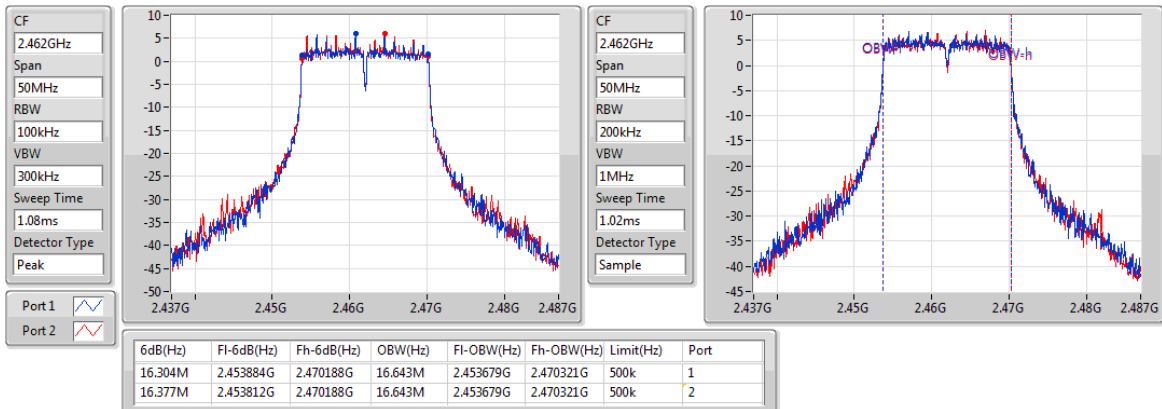

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


2412MHz

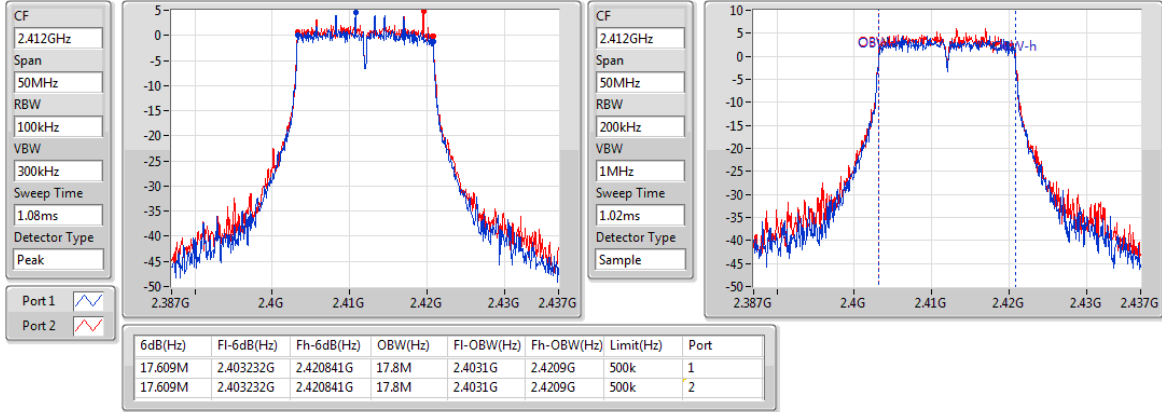

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


2437MHz

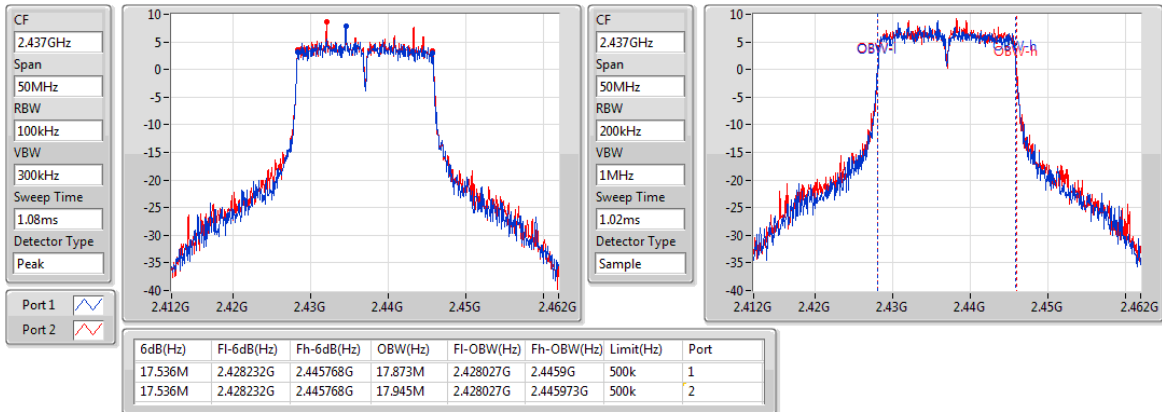

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


2462MHz

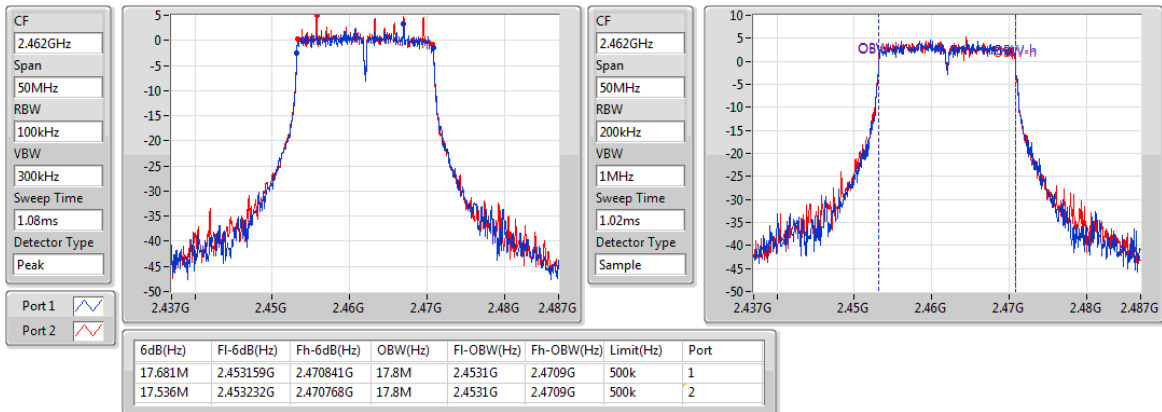

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


2422MHz

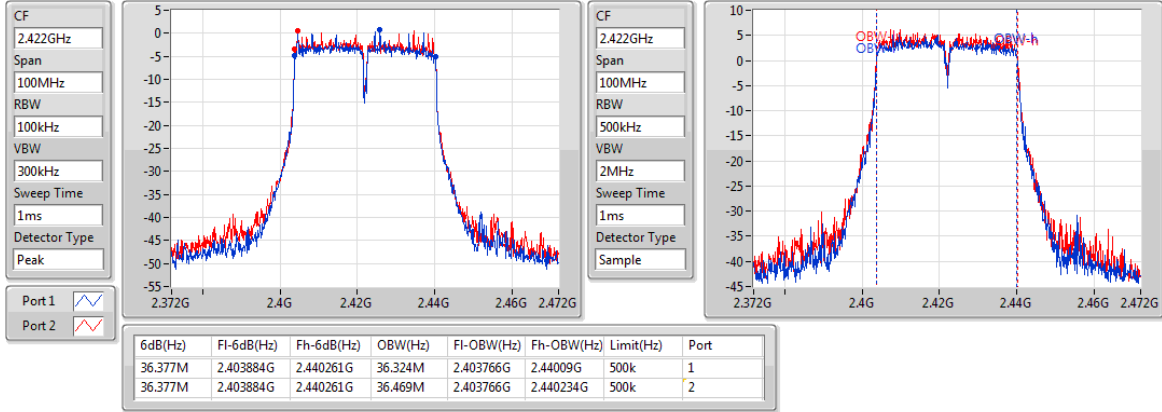

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


2437MHz

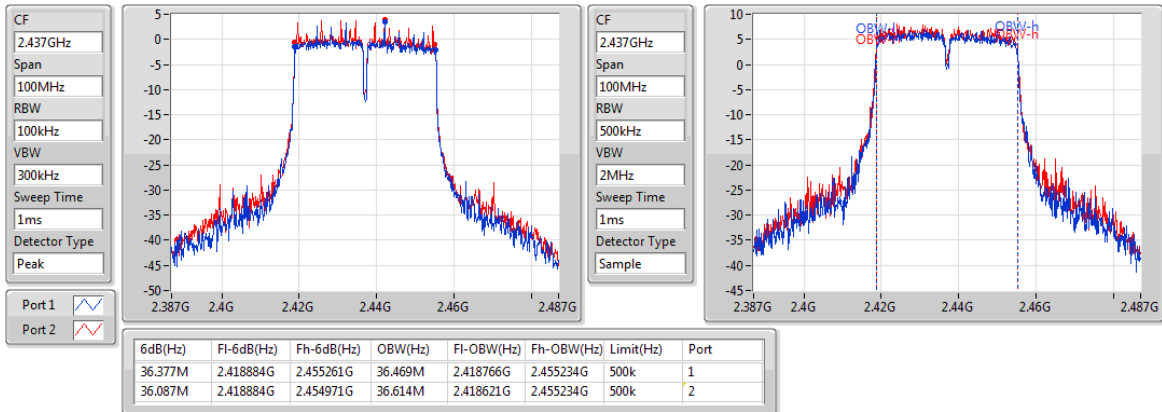

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW

2452MHz

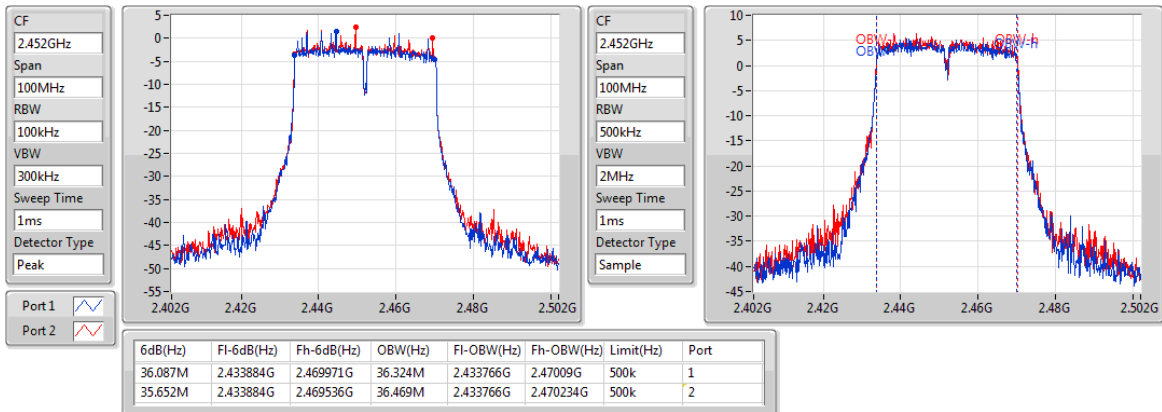

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Ambient Condition	23°C / 65%	Tested By	Alex Huang
-------------------	------------	-----------	------------

Configuration 1

Summary of Peak Conducted Output Power

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	26.30	0.42658
802.11g_Nss1,(6Mbps)_2TX	29.20	0.83176
802.11ac VHT20_Nss1,(MCS0)_2TX	29.13	0.81846
802.11ac VHT40_Nss1,(MCS0)_2TX	28.32	0.67920

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	22.92	23.28	26.11	30.00	26.11	36.00
2437MHz	Pass	0.00	23.02	23.15	26.10	30.00	26.10	36.00
2462MHz	Pass	0.00	23.46	23.12	26.30	30.00	26.30	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	24.76	24.84	27.81	30.00	27.81	36.00
2437MHz	Pass	0.00	26.21	26.17	29.20	30.00	29.20	36.00
2462MHz	Pass	0.00	25.29	25.32	28.32	30.00	28.32	36.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	24.41	24.62	27.53	30.00	27.53	36.00
2437MHz	Pass	0.00	26.18	26.06	29.13	30.00	29.13	36.00
2462MHz	Pass	0.00	24.66	24.59	27.64	30.00	27.64	36.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	0.00	23.58	23.69	26.65	30.00	26.65	36.00
2437MHz	Pass	0.00	25.38	25.23	28.32	30.00	28.32	36.00
2452MHz	Pass	0.00	24.35	24.04	27.21	30.00	27.21	36.00

DG = Directional Gain; Port X = Port X output power

Summary of Conducted (Average) Output Power

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	24.01	0.25177
802.11g_Nss1,(6Mbps)_2TX	22.99	0.19907
802.11ac VHT20_Nss1,(MCS0)_2TX	22.97	0.19815
802.11ac VHT40_Nss1,(MCS0)_2TX	21.04	0.12706

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	20.58	20.96	23.78	-	23.78	-
2437MHz	Pass	0.00	20.68	20.81	23.76	-	23.76	-
2462MHz	Pass	0.00	21.16	20.84	24.01	-	24.01	-
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	17.15	17.21	20.19	-	20.19	-
2437MHz	Pass	0.00	20.08	19.88	22.99	-	22.99	-
2462MHz	Pass	0.00	18.03	17.68	20.87	-	20.87	-
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	0.00	16.52	16.81	19.68	-	19.68	-
2437MHz	Pass	0.00	20.06	19.86	22.97	-	22.97	-
2462MHz	Pass	0.00	16.84	16.63	19.75	-	19.75	-
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	0.00	15.19	15.46	18.34	-	18.34	-
2437MHz	Pass	0.00	18.02	18.04	21.04	-	21.04	-
2452MHz	Pass	0.00	15.81	15.69	18.76	-	18.76	-

DG = Directional Gain; **Port X** = Port X output power

Note : Conducted average output power is for reference only

Configuration 3

Summary of Peak Conducted Output Power

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	26.12	0.40926
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	25.31	0.33963

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.01	21.40	21.61	24.52	30.00	27.53	36.00
2437MHz	Pass	3.01	23.17	23.05	26.12	30.00	29.13	36.00
2462MHz	Pass	3.01	21.65	21.58	24.63	30.00	27.64	36.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	3.01	20.57	20.68	23.64	30.00	26.65	36.00
2437MHz	Pass	3.01	22.37	22.22	25.31	30.00	28.32	36.00
2452MHz	Pass	3.01	21.34	21.03	24.20	30.00	27.21	36.00

DG = Directional Gain = $0 + 10 \cdot \log(2/1) = 3.01$ dBi

Port X = Port X output power

Summary of Conducted (Average) Output Power

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	19.96	0.09908
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	18.03	0.06353

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.01	13.51	13.80	16.67	-	19.68	-
2437MHz	Pass	3.01	17.05	16.85	19.96	-	22.97	-
2462MHz	Pass	3.01	13.83	13.62	16.74	-	19.75	-
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	3.01	12.18	12.45	15.33	-	18.34	-
2437MHz	Pass	3.01	15.01	15.03	18.03	-	21.04	-
2452MHz	Pass	3.01	12.8	12.68	15.75	-	18.76	-

DG = Directional Gain = $0 + 10 \cdot \log(2/1) = 3.01$ dBi

Port X = Port X output power

Note : Conducted average output power is for reference only

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Ambient Condition	23°C / 65%	Tested By	Alex Huang
-------------------	------------	-----------	------------

Configuration 1

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	0.53
802.11g_Nss1,(6Mbps)_2TX	-2.70
802.11ac VHT20_Nss1,(MCS0)_2TX	-4.12
802.11ac VHT40_Nss1,(MCS0)_2TX	-7.73

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.01	-2.84	-1.86	0.12	8.00
2437MHz	Pass	3.01	-2.88	-1.64	0.39	8.00
2462MHz	Pass	3.01	-1.91	-2.33	0.53	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.01	-8.74	-8.30	-6.33	8.00
2437MHz	Pass	3.01	-6.11	-3.71	-2.70	8.00
2462MHz	Pass	3.01	-8.08	-7.64	-5.33	8.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.01	-9.97	-8.39	-6.75	8.00
2437MHz	Pass	3.01	-6.39	-6.29	-4.12	8.00
2462MHz	Pass	3.01	-8.96	-8.51	-6.75	8.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	3.01	-13.53	-12.03	-10.31	8.00
2437MHz	Pass	3.01	-11.43	-9.72	-7.73	8.00
2452MHz	Pass	3.01	-12.82	-12.43	-9.79	8.00


DG = Directional Gain = $0 + 10 \cdot \log(2/1) = 3.01$ dBi

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11b_Nss1,(1Mbps)_2TX

PSD


2412MHz

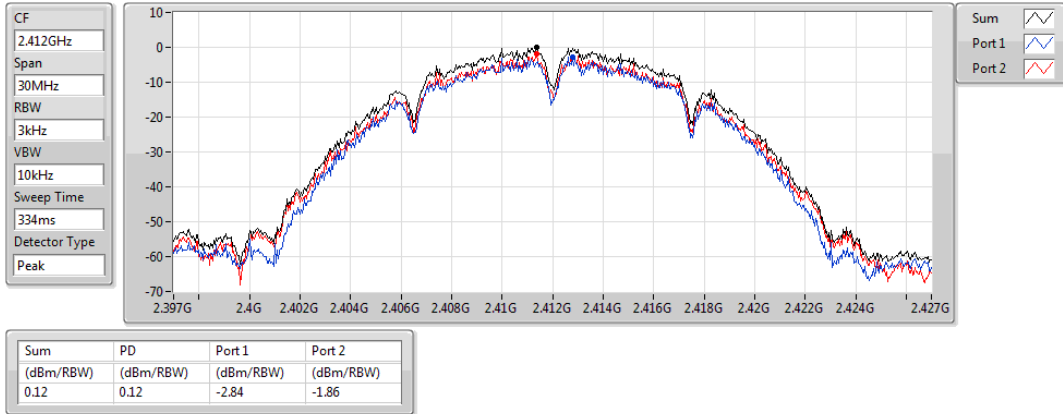

802.11b_Nss1,(1Mbps)_2TX

PSD


2437MHz

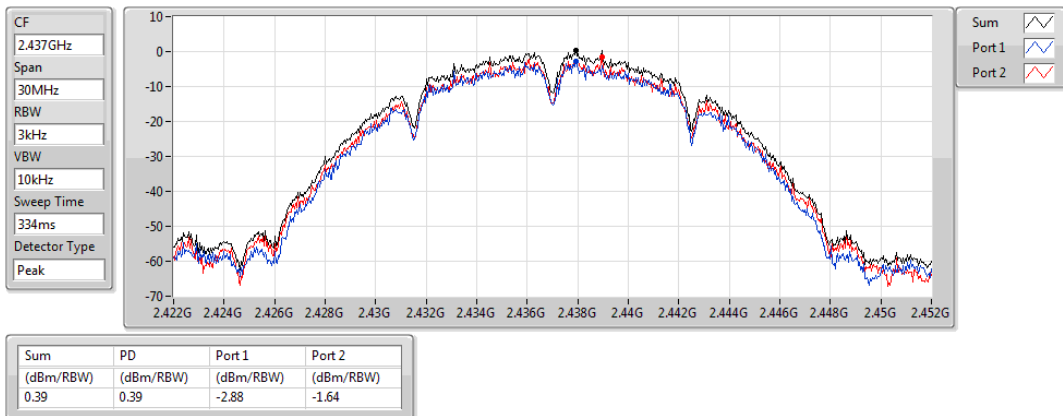

802.11b_Nss1,(1Mbps)_2TX

PSD


2462MHz

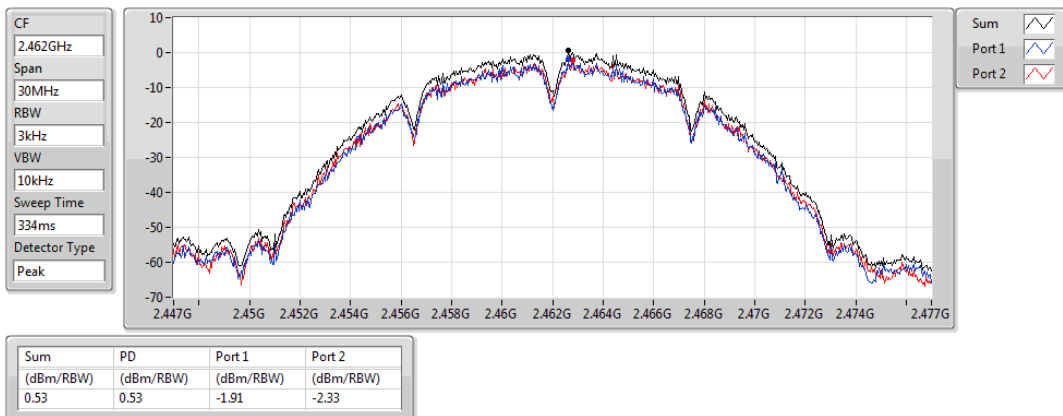

802.11g_Nss1,(6Mbps)_2TX

PSD


2412MHz

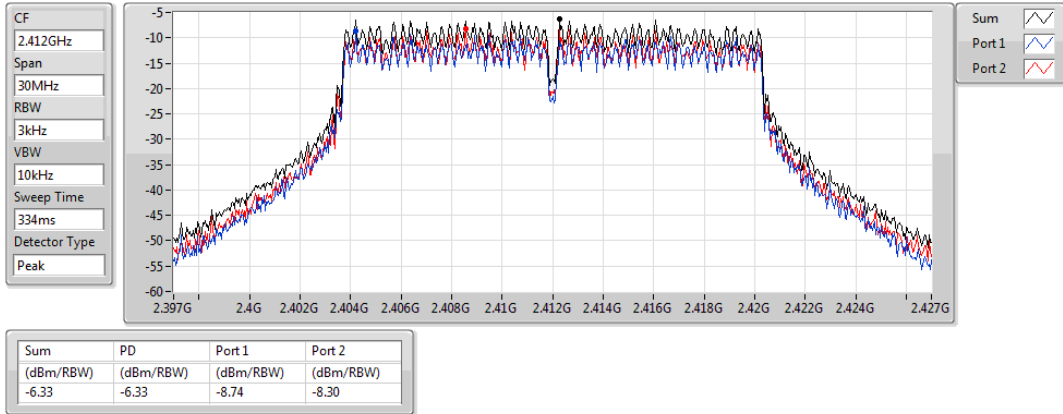

802.11g_Nss1,(6Mbps)_2TX

PSD


2437MHz

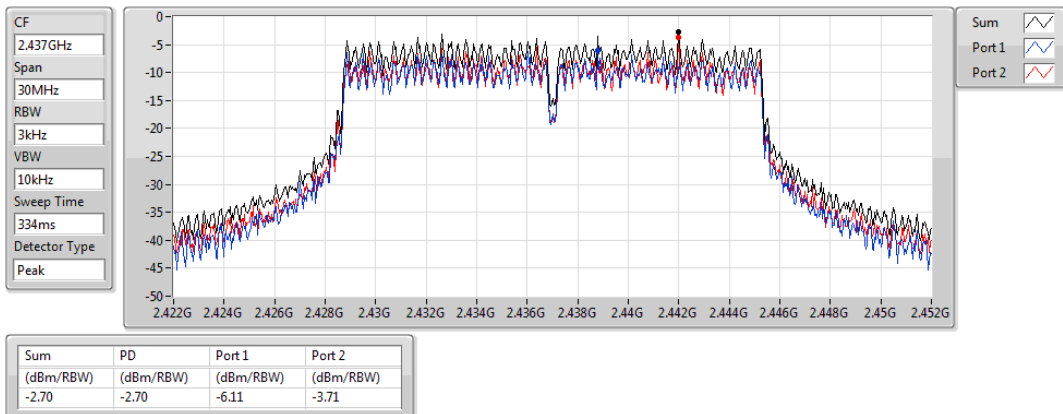

802.11g_Nss1,(6Mbps)_2TX

PSD


2462MHz

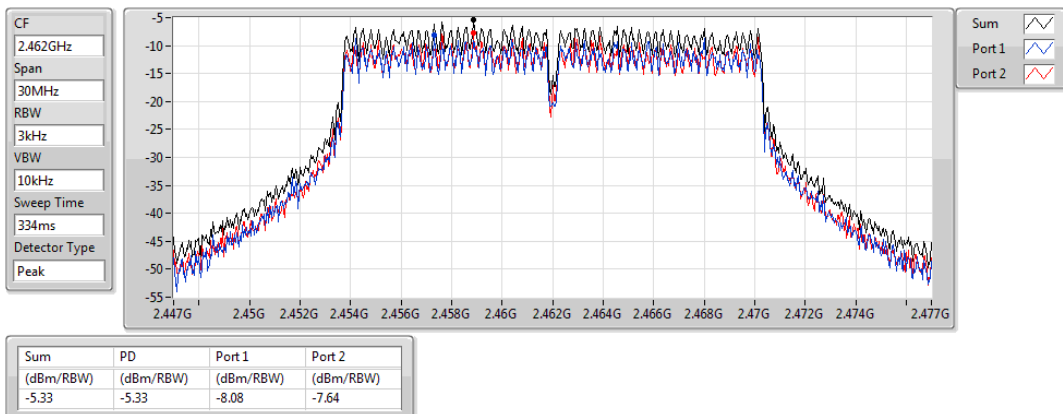

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


2412MHz

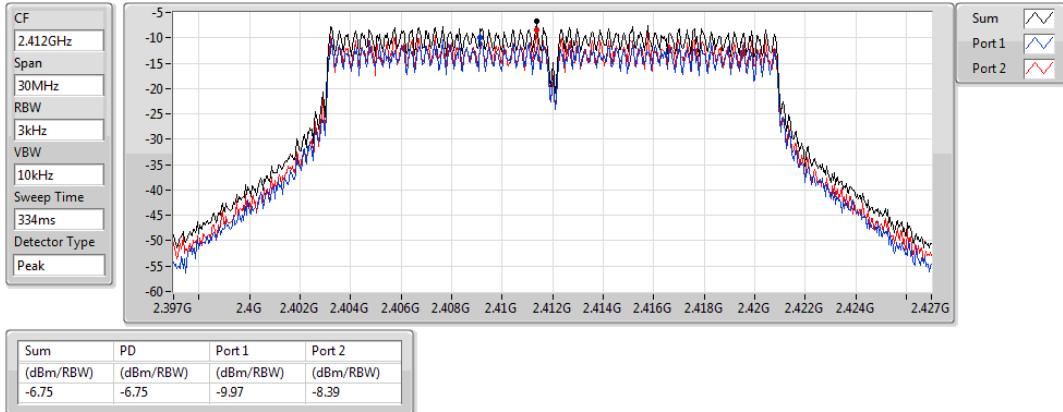

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


2437MHz

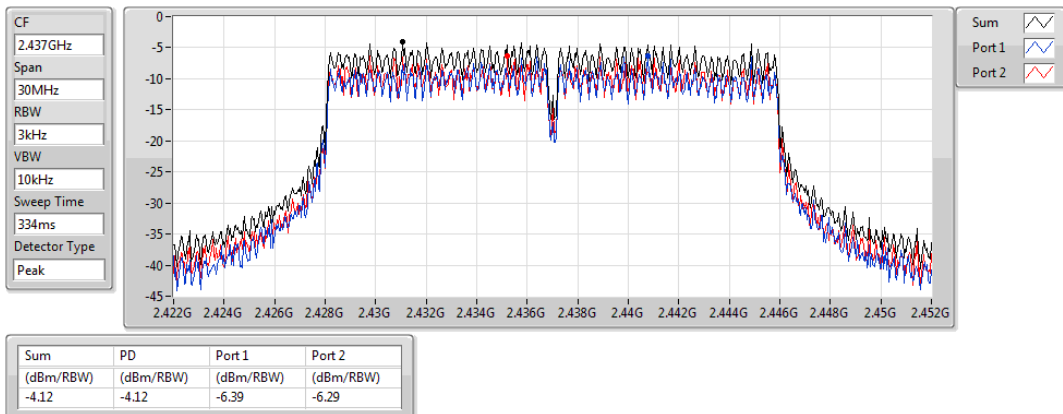

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


2462MHz

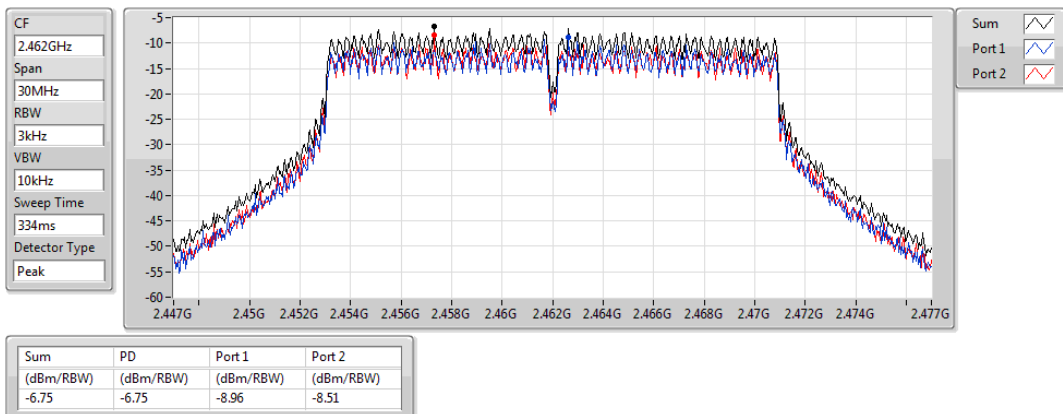

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


2422MHz

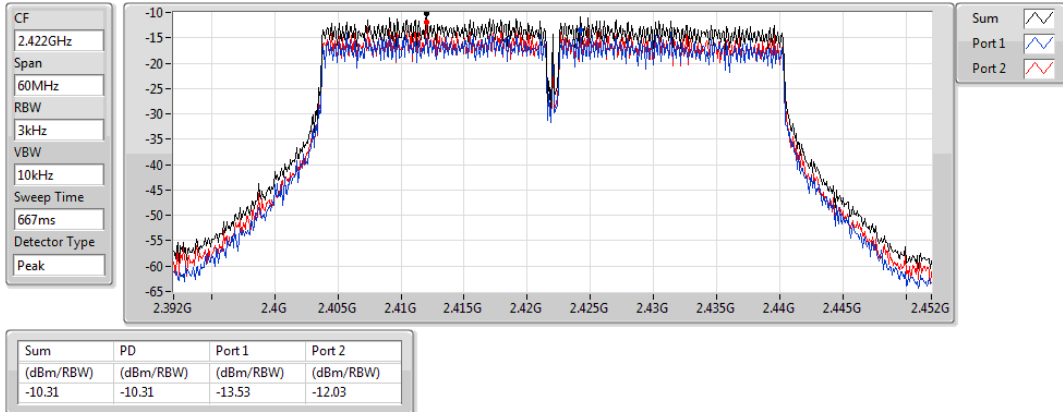

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


2437MHz

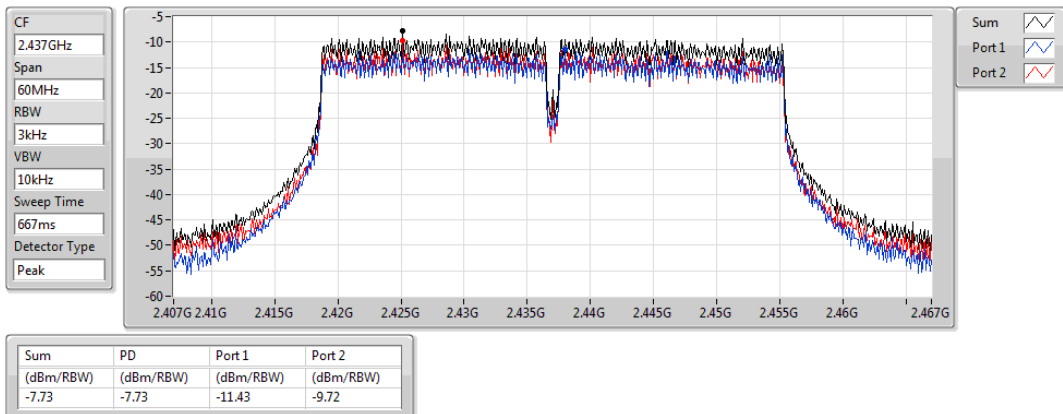

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

2452MHz

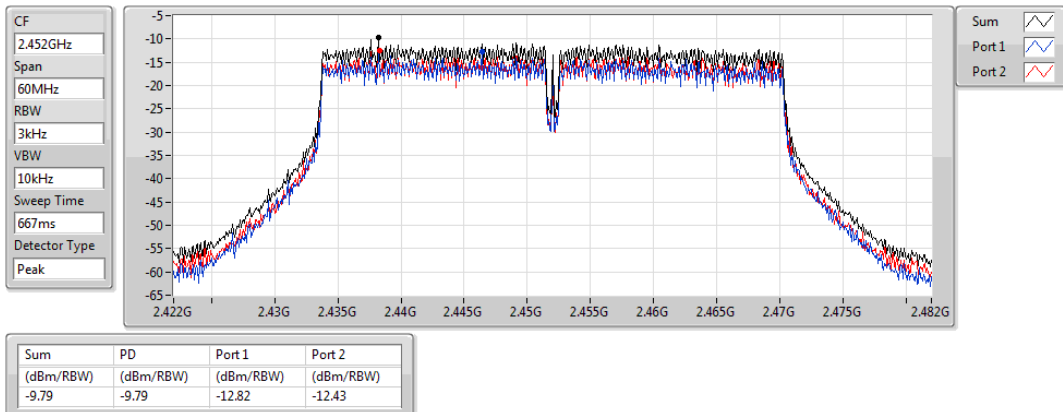

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

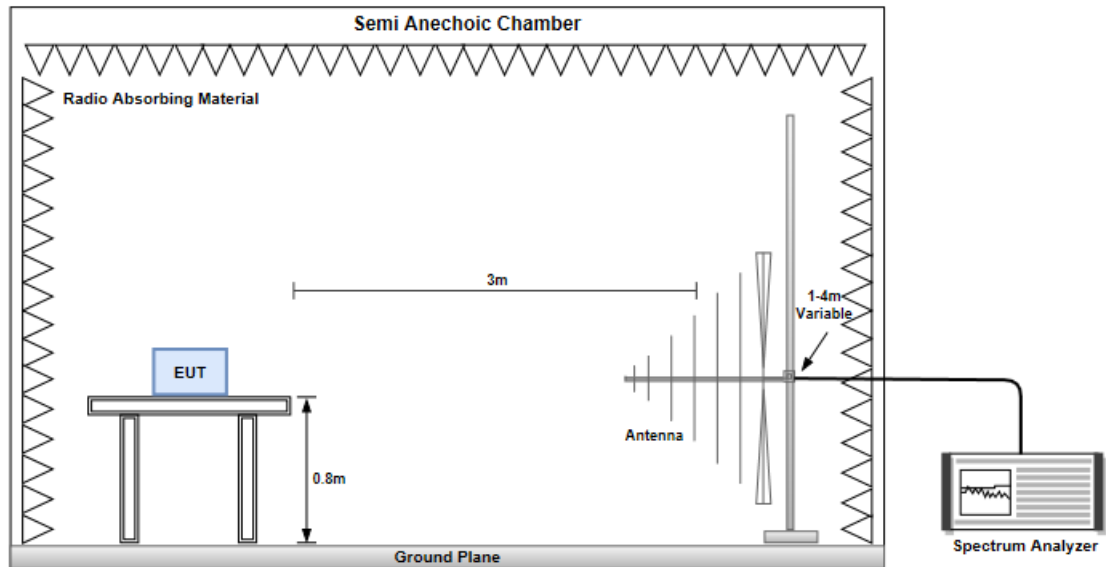



Radiated Emissions above 1 GHz

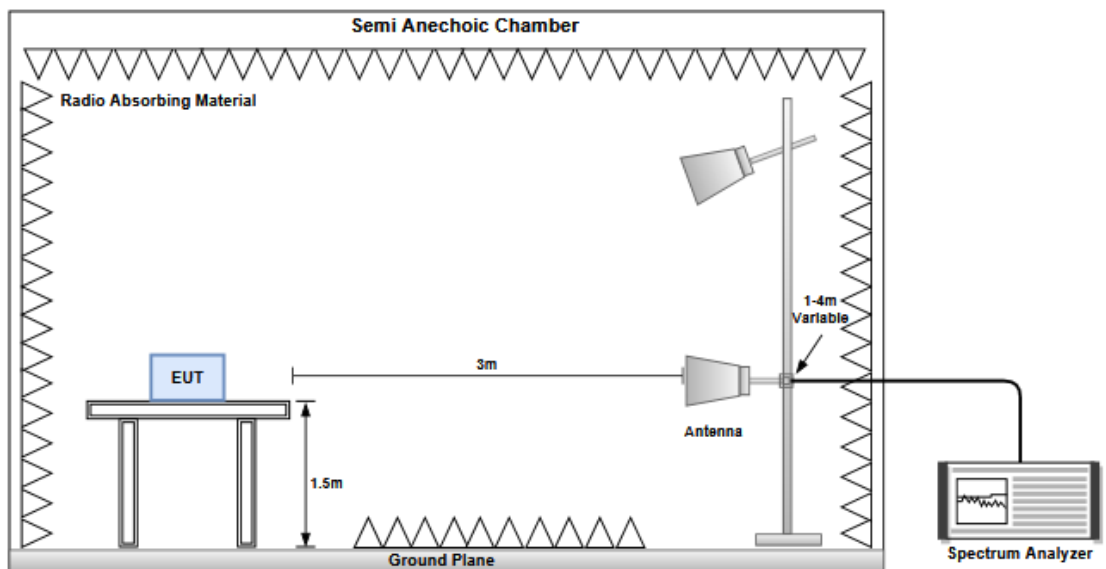

Configuration 1

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

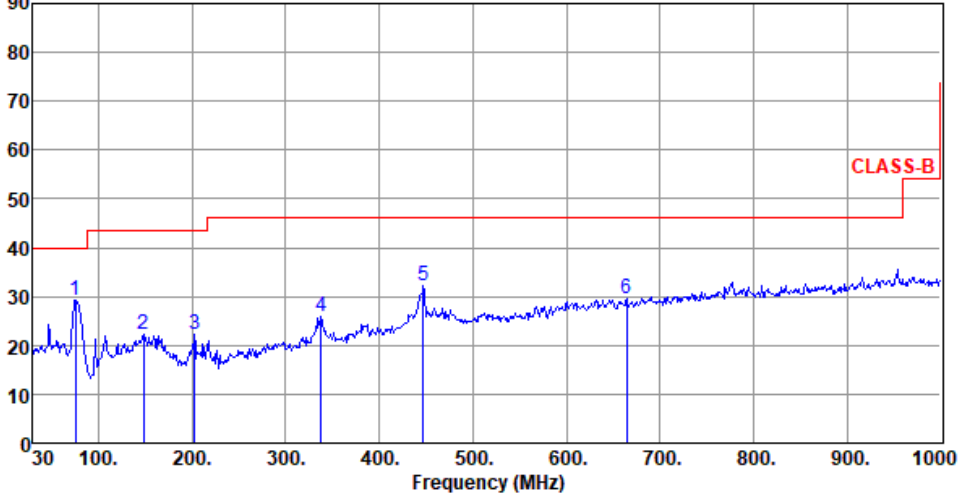Modulation	11g	Test Freq. (MHz)	2437																																																																						
Polarization	Horizontal																																																																								
Test By :BRAD WU Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>75.59</td><td>29.31</td><td>40.00</td><td>-10.69</td><td>41.58</td><td>-12.27</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>148.34</td><td>22.35</td><td>43.50</td><td>-21.15</td><td>31.37</td><td>-9.02</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>202.66</td><td>22.19</td><td>43.50</td><td>-21.31</td><td>34.42</td><td>-12.23</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>337.49</td><td>25.95</td><td>46.00</td><td>-20.05</td><td>33.17</td><td>-7.22</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>447.10</td><td>32.07</td><td>46.00</td><td>-13.93</td><td>36.02</td><td>-3.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>664.38</td><td>29.40</td><td>46.00</td><td>-16.60</td><td>28.74</td><td>0.66</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	75.59	29.31	40.00	-10.69	41.58	-12.27	Peak	---	---	2	148.34	22.35	43.50	-21.15	31.37	-9.02	Peak	---	---	3	202.66	22.19	43.50	-21.31	34.42	-12.23	Peak	---	---	4	337.49	25.95	46.00	-20.05	33.17	-7.22	Peak	---	---	5	447.10	32.07	46.00	-13.93	36.02	-3.95	Peak	---	---	6	664.38	29.40	46.00	-16.60	28.74	0.66	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	75.59	29.31	40.00	-10.69	41.58	-12.27	Peak	---	---																																																																
2	148.34	22.35	43.50	-21.15	31.37	-9.02	Peak	---	---																																																																
3	202.66	22.19	43.50	-21.31	34.42	-12.23	Peak	---	---																																																																
4	337.49	25.95	46.00	-20.05	33.17	-7.22	Peak	---	---																																																																
5	447.10	32.07	46.00	-13.93	36.02	-3.95	Peak	---	---																																																																
6	664.38	29.40	46.00	-16.60	28.74	0.66	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

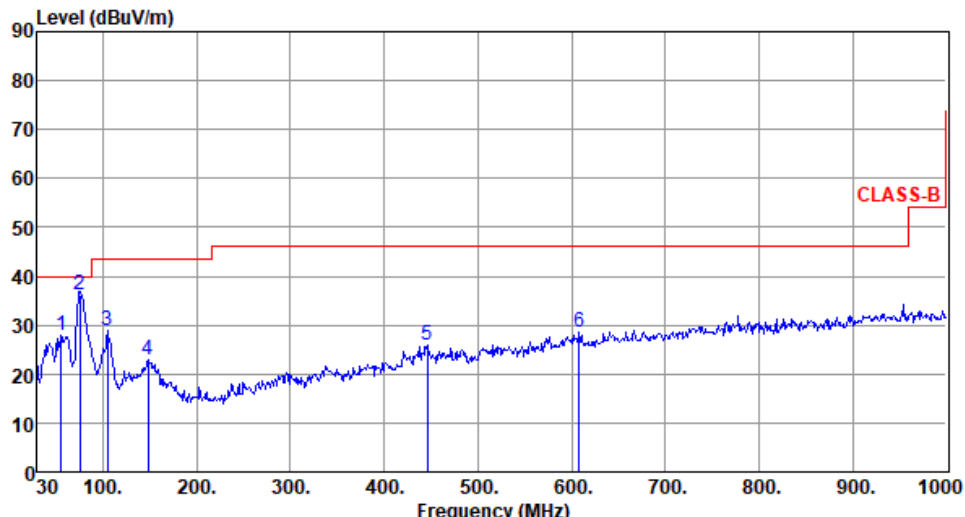Modulation	11g	Test Freq. (MHz)	2437																																																																						
Polarization	Vertical																																																																								
Test By :BRAD WU Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>55.22</td><td>27.98</td><td>40.00</td><td>-12.02</td><td>37.09</td><td>-9.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>75.59</td><td>36.25</td><td>40.00</td><td>-3.75</td><td>48.52</td><td>-12.27</td><td>QP</td><td>100</td><td>261</td></tr><tr><td>3</td><td>104.69</td><td>28.73</td><td>43.50</td><td>-14.77</td><td>41.60</td><td>-12.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>148.34</td><td>22.76</td><td>43.50</td><td>-20.74</td><td>31.78</td><td>-9.02</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>446.13</td><td>25.88</td><td>46.00</td><td>-20.12</td><td>29.81</td><td>-3.93</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>608.12</td><td>28.49</td><td>46.00</td><td>-17.51</td><td>28.64</td><td>-0.15</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	55.22	27.98	40.00	-12.02	37.09	-9.11	Peak	---	---	2	75.59	36.25	40.00	-3.75	48.52	-12.27	QP	100	261	3	104.69	28.73	43.50	-14.77	41.60	-12.87	Peak	---	---	4	148.34	22.76	43.50	-20.74	31.78	-9.02	Peak	---	---	5	446.13	25.88	46.00	-20.12	29.81	-3.93	Peak	---	---	6	608.12	28.49	46.00	-17.51	28.64	-0.15	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	55.22	27.98	40.00	-12.02	37.09	-9.11	Peak	---	---																																																																
2	75.59	36.25	40.00	-3.75	48.52	-12.27	QP	100	261																																																																
3	104.69	28.73	43.50	-14.77	41.60	-12.87	Peak	---	---																																																																
4	148.34	22.76	43.50	-20.74	31.78	-9.02	Peak	---	---																																																																
5	446.13	25.88	46.00	-20.12	29.81	-3.93	Peak	---	---																																																																
6	608.12	28.49	46.00	-17.51	28.64	-0.15	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
Test By :BRAD WU Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.38	54.00	-9.62	44.14	0.24	Average	293	40
2	2390.00	54.93	74.00	-19.07	54.69	0.24	Peak	293	40
3 *	2412.00	104.92	---	---	104.69	0.23	Average	293	40
4 *	2412.00	107.75	---	---	107.52	0.23	Peak	293	40
5	4824.00	48.51	54.00	-5.49	42.01	6.50	Average	100	186
6	4824.00	52.50	74.00	-21.50	46.00	6.50	Peak	100	186
7	12060.00	47.05	54.00	-6.95	30.81	16.24	Average	100	16
8	12060.00	59.88	74.00	-14.12	43.64	16.24	Peak	100	16

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Modulation		11b		Test Freq. (MHz)		2462			
Polarization		Horizontal							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBUV/m) <									

Modulation		11b		Test Freq. (MHz)		2462			
Polarization		Vertical							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBuV/m) </									

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			

Modulation		11g		Test Freq. (MHz)		2462			
Polarization		Vertical							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBuV/m)									

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

Modulation	VHT20	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation	VHT20	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			

Modulation	VHT20	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

Modulation		VHT20		Test Freq. (MHz)		2462			
Polarization		Horizontal							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBuV/m)									

Modulation		VHT20		Test Freq. (MHz)		2462			
Polarization		Vertical							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBuV/m)									

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	2422
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation	VHT40	Test Freq. (MHz)	2422
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation	VHT40	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			


Modulation	VHT40	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			


Modulation	VHT40	Test Freq. (MHz)	2452
Polarization	Horizontal		
Test By :BRAD WU Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

Modulation		VHT40		Test Freq. (MHz)		2452			
Polarization		Vertical							
Test By		:BRAD WU		Temperature(°C):24		Humidity(%):64			
Level (dBuV/m)									

Configuration 2

3.5.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

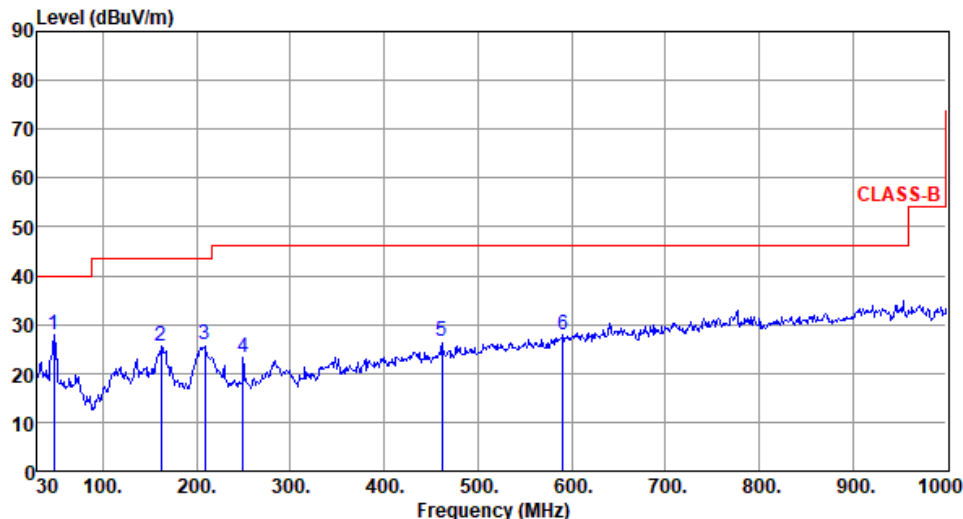Modulation	11g	Test Freq. (MHz)	2437																																																																						
Polarization	Horizontal																																																																								
Test By :BRAD WU Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>47.42</td><td>27.85</td><td>40.00</td><td>-12.15</td><td>36.74</td><td>-8.89</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>161.82</td><td>25.44</td><td>43.50</td><td>-18.06</td><td>34.47</td><td>-9.03</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>208.36</td><td>25.77</td><td>43.50</td><td>-17.73</td><td>38.02</td><td>-12.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>249.31</td><td>23.36</td><td>46.00</td><td>-22.64</td><td>33.54</td><td>-10.18</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>461.58</td><td>26.44</td><td>46.00</td><td>-19.56</td><td>30.22</td><td>-3.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>590.52</td><td>27.88</td><td>46.00</td><td>-18.12</td><td>28.80</td><td>-0.92</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	47.42	27.85	40.00	-12.15	36.74	-8.89	Peak	---	---	2	161.82	25.44	43.50	-18.06	34.47	-9.03	Peak	---	---	3	208.36	25.77	43.50	-17.73	38.02	-12.25	Peak	---	---	4	249.31	23.36	46.00	-22.64	33.54	-10.18	Peak	---	---	5	461.58	26.44	46.00	-19.56	30.22	-3.78	Peak	---	---	6	590.52	27.88	46.00	-18.12	28.80	-0.92	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	47.42	27.85	40.00	-12.15	36.74	-8.89	Peak	---	---																																																																
2	161.82	25.44	43.50	-18.06	34.47	-9.03	Peak	---	---																																																																
3	208.36	25.77	43.50	-17.73	38.02	-12.25	Peak	---	---																																																																
4	249.31	23.36	46.00	-22.64	33.54	-10.18	Peak	---	---																																																																
5	461.58	26.44	46.00	-19.56	30.22	-3.78	Peak	---	---																																																																
6	590.52	27.88	46.00	-18.12	28.80	-0.92	Peak	---	---																																																																

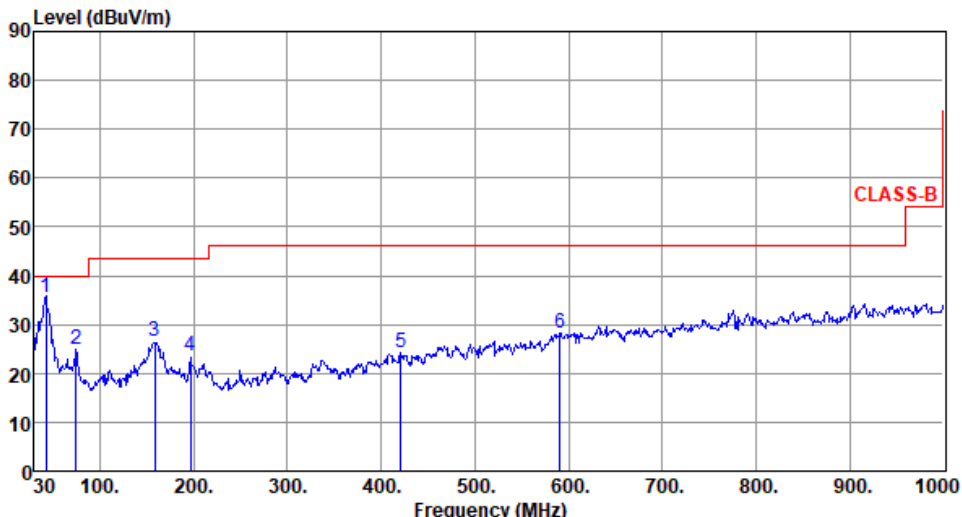Modulation	11g	Test Freq. (MHz)	2437																																																																						
Polarization	Vertical																																																																								
Test By :BRAD WU Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>42.54</td><td>35.68</td><td>40.00</td><td>-4.32</td><td>44.51</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>74.54</td><td>24.79</td><td>40.00</td><td>-15.21</td><td>36.87</td><td>-12.08</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>158.16</td><td>26.41</td><td>43.50</td><td>-17.09</td><td>35.41</td><td>-9.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>196.77</td><td>23.42</td><td>43.50</td><td>-20.08</td><td>35.53</td><td>-12.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>420.96</td><td>24.39</td><td>46.00</td><td>-21.61</td><td>29.49</td><td>-5.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>590.58</td><td>28.36</td><td>46.00</td><td>-17.64</td><td>29.28</td><td>-0.92</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg	1	42.54	35.68	40.00	-4.32	44.51	-8.83	Peak	---	---	2	74.54	24.79	40.00	-15.21	36.87	-12.08	Peak	---	---	3	158.16	26.41	43.50	-17.09	35.41	-9.00	Peak	---	---	4	196.77	23.42	43.50	-20.08	35.53	-12.11	Peak	---	---	5	420.96	24.39	46.00	-21.61	29.49	-5.10	Peak	---	---	6	590.58	28.36	46.00	-17.64	29.28	-0.92	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	42.54	35.68	40.00	-4.32	44.51	-8.83	Peak	---	---																																																																
2	74.54	24.79	40.00	-15.21	36.87	-12.08	Peak	---	---																																																																
3	158.16	26.41	43.50	-17.09	35.41	-9.00	Peak	---	---																																																																
4	196.77	23.42	43.50	-20.08	35.53	-12.11	Peak	---	---																																																																
5	420.96	24.39	46.00	-21.61	29.49	-5.10	Peak	---	---																																																																
6	590.58	28.36	46.00	-17.64	29.28	-0.92	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level


3.6.3 Test Setup



Configuration 1

3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands


Ambient Condition	23°C / 65%	Tested By	Alex Huang
-------------------	------------	-----------	------------

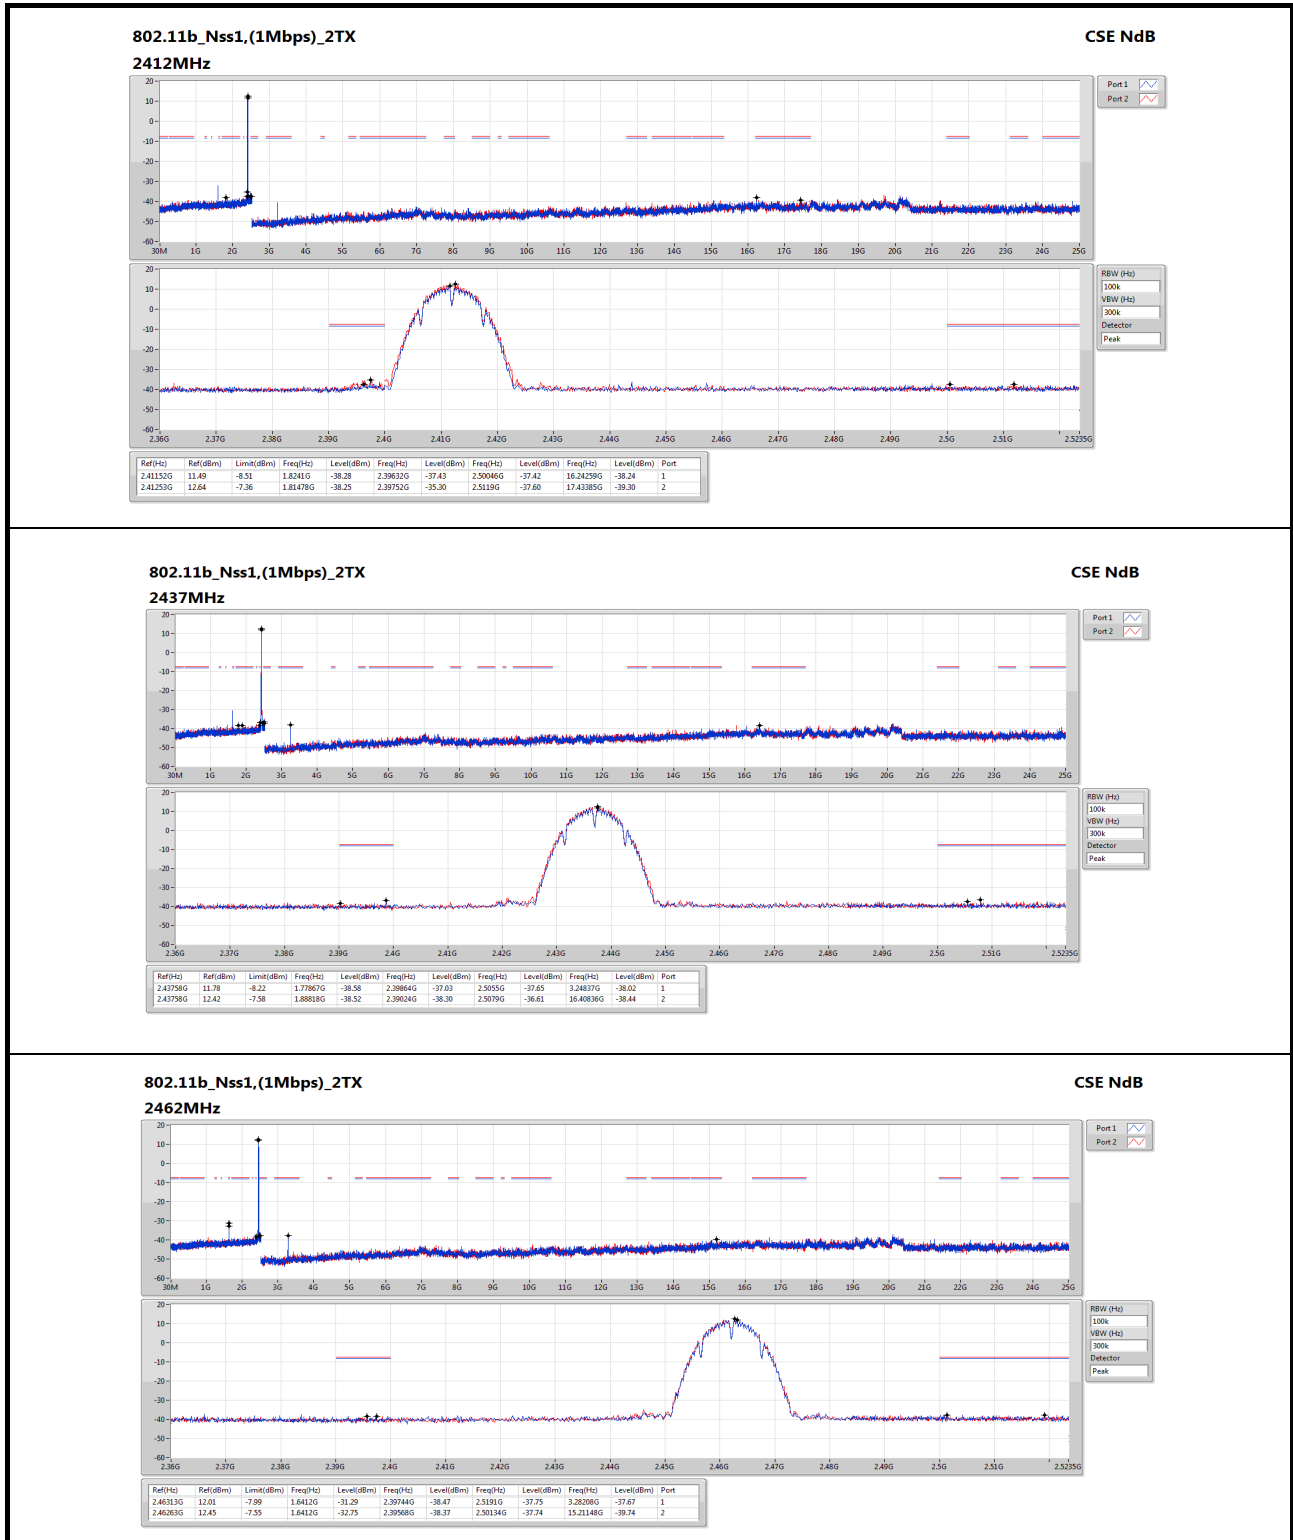

802.11g_Nss1,(6Mbps)_2TX

CSE NdB


2412MHz

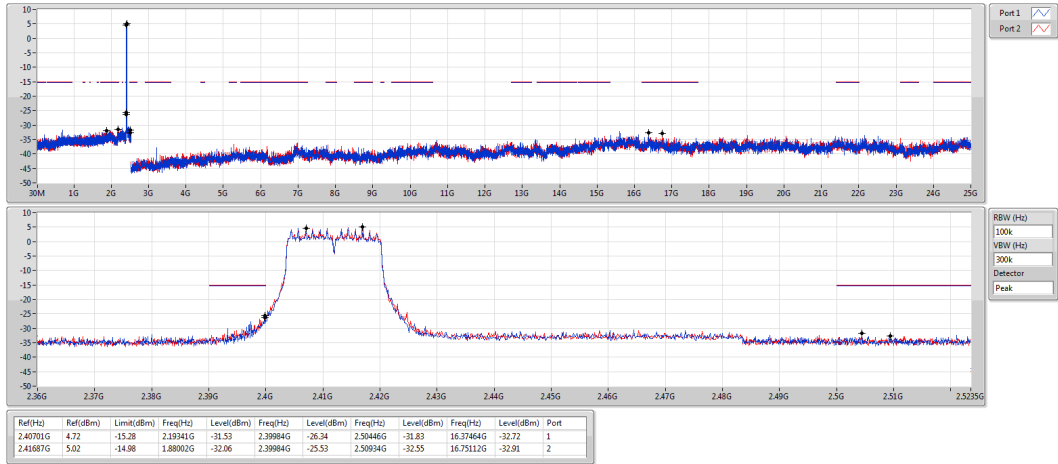

802.11g_Nss1,(6Mbps)_2TX

CSE NdB


2437MHz

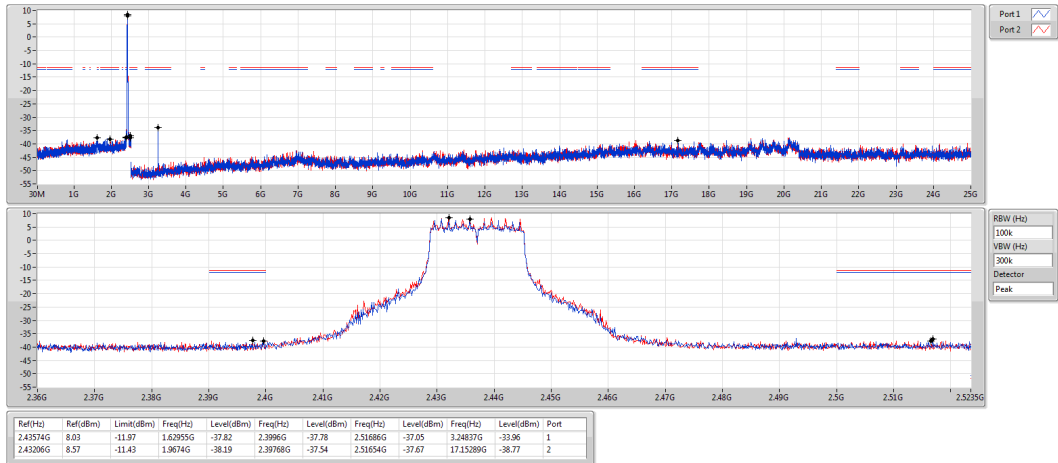

802.11g_Nss1,(6Mbps)_2TX


CSE NdB

2462MHz

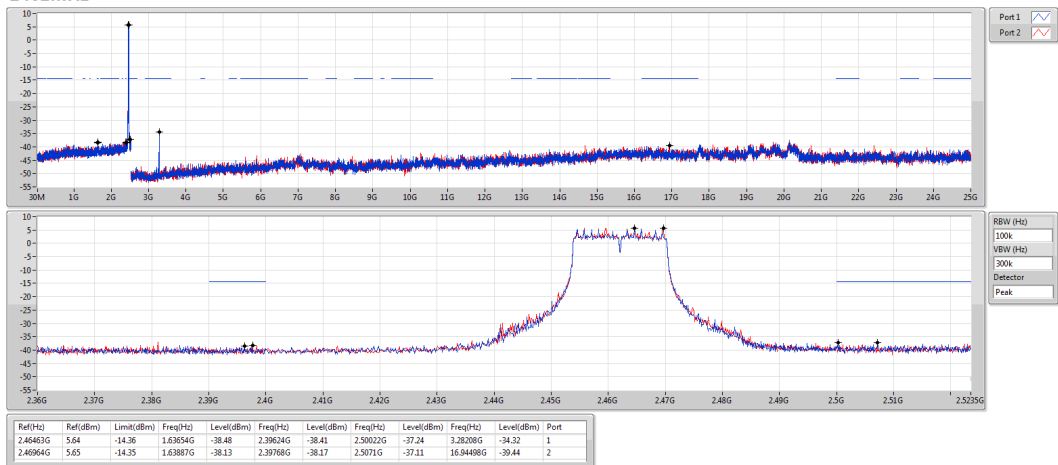


802.11ac VHT20_Nss1,(MCS0)_2TX
2412MHz

CSE NdB

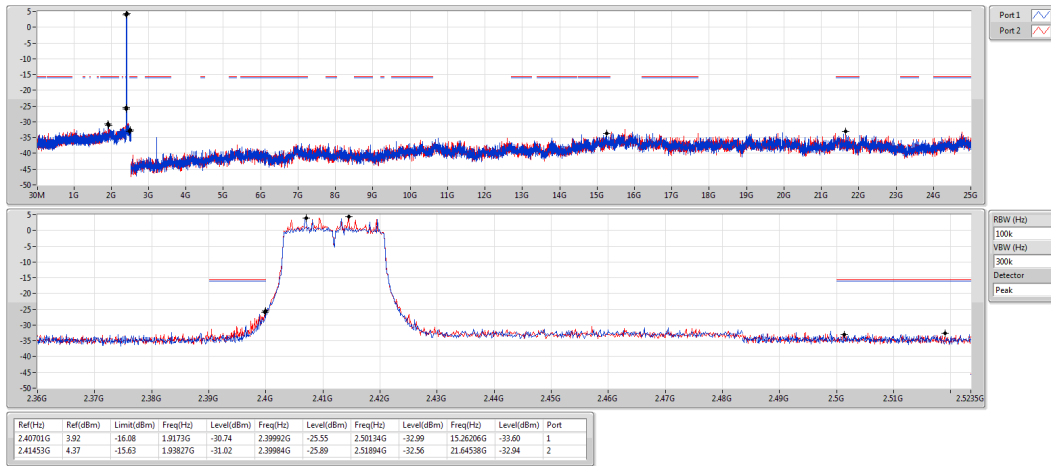


802.11ac VHT20_Nss1,(MCS0)_2TX
2437MHz

CSE NdB

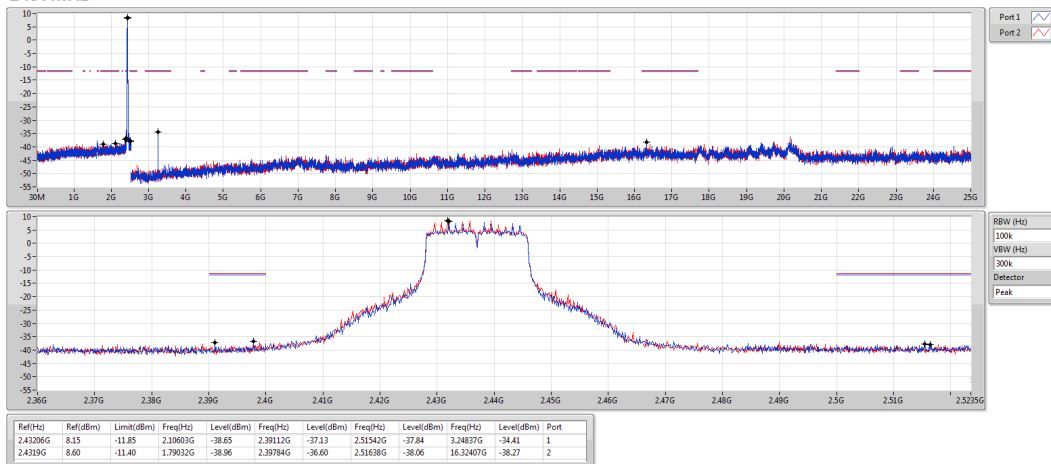


802.11ac VHT20_Nss1,(MCS0)_2TX
2462MHz

CSE NdB

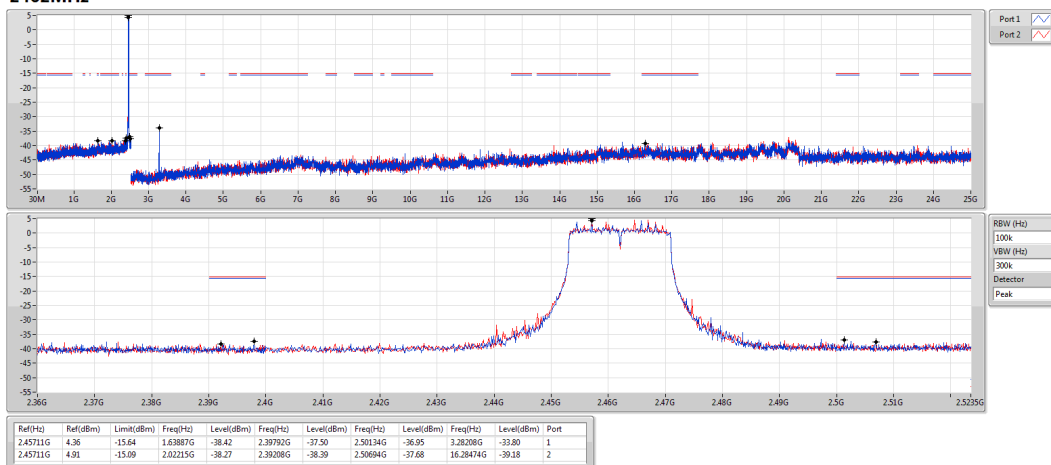


802.11ac VHT40_Nss1,(MCS0)_2TX
2422MHz

CSE NdB

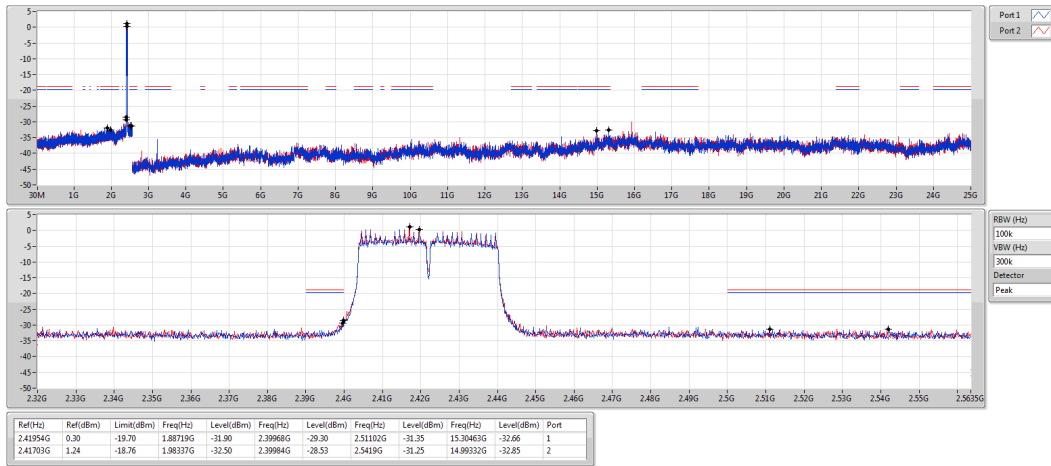


802.11ac VHT40_Nss1,(MCS0)_2TX
2437MHz

CSE NdB

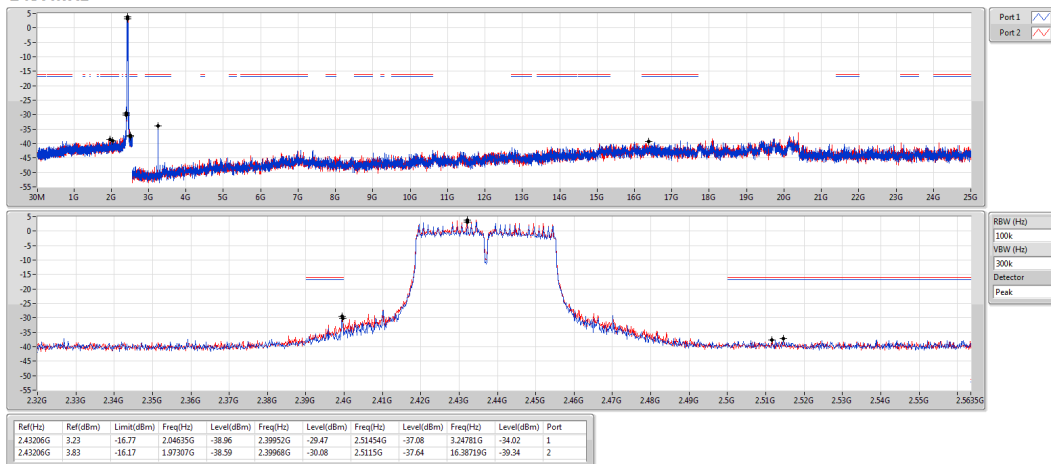

802.11ac VHT40_Nss1,(MCS0)_2TX
2452MHz

CSE NdB

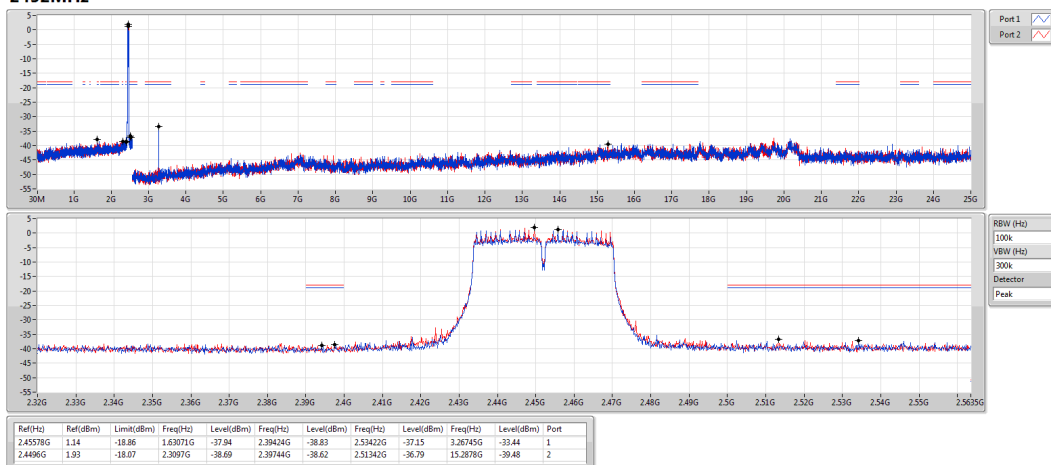

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==