

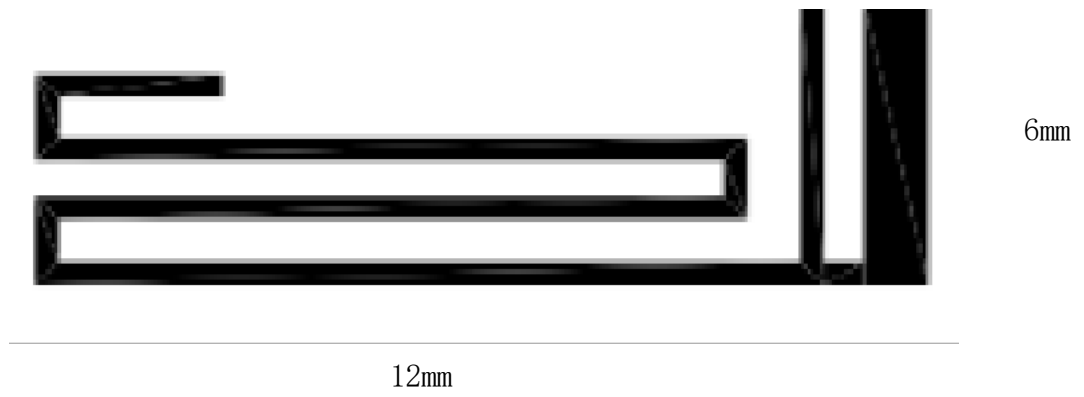
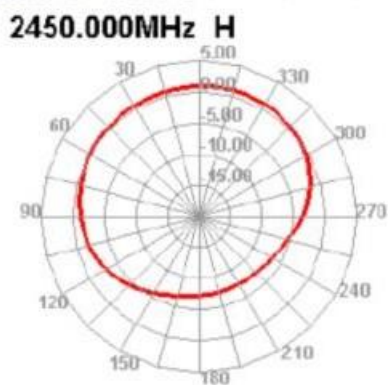
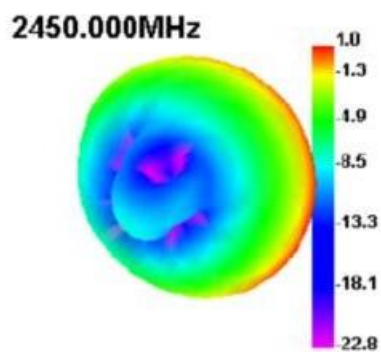
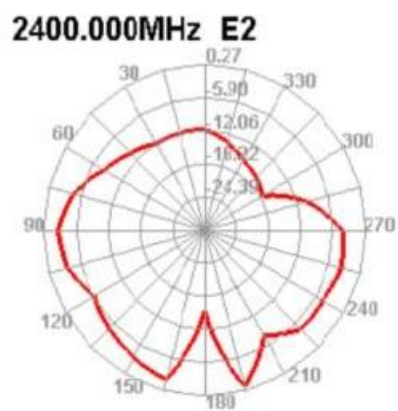
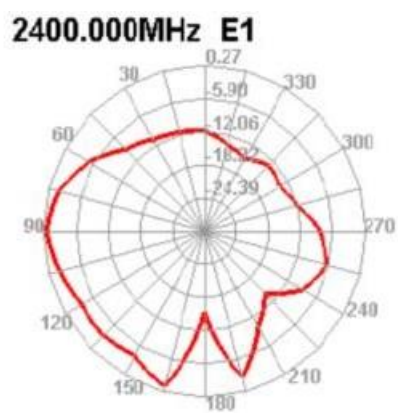



Antenna specification

Electrical Specifications	
Frequency Range	2400-2500HZ
VSWR	≤2.0
GAIN	1dBi
Radiation	OMNI
Polarizatin	LINEAR
Input Impedance	50 Q
Mechanical Specifications	
Input connector	pcg
Working Temperature	-30°C~+80°C
Working HUmidity	40~85%







2450.000MHz E1

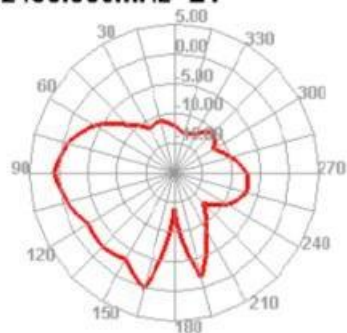


2450.000MHz E2

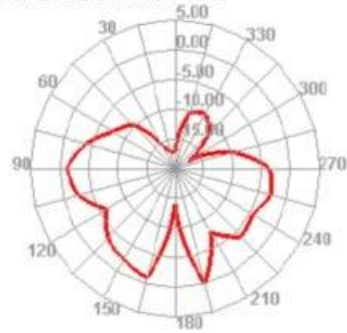


2500.000MHz




2500.000MHz H

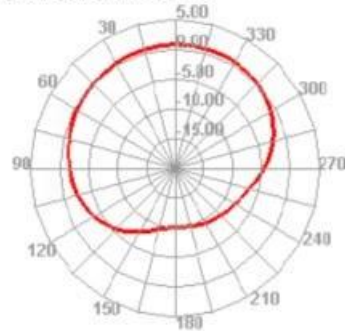

2500.000MHz E1

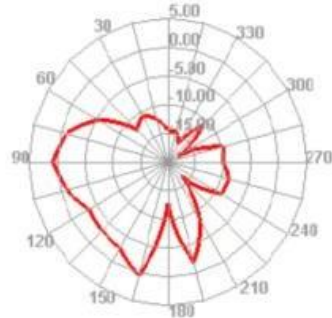

2500.000MHz E2

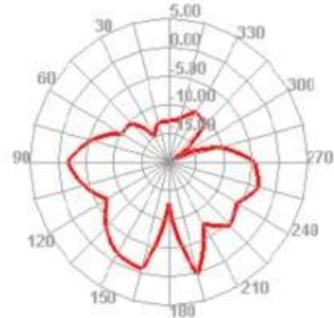

Supplier: Shenzhen Huapu Microelectronics Co., Ltd.

Address: Floor 30, Building 8, Zone C, Vanke Cloud City, Xili Street, Nanshan District, Shenzhen