



REPORT No. : SZ14070154W02

FCC /IC RF TEST REPORT

APPLICANT : ICON Health & Fitness Inc

PRODUCT NAME : Heart Rate Monitor

MODEL NAME : IFHRM214

TRADE NAME : iFit Heart Rate Monitor

BRAND NAME : IFIT SOLUTIONS

FCC ID : OMC-M14172ANTB

IC Number : 3673A-M14172ANTB

STANDARD(S) : 47 CFR Part 15 Subpart C
RSS-GEN
RSS-210

ISSUE DATE : 2014-11-07



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1. IDENTIFICATION OF ALL USED EUTS	5
1.3. TEST STANDARDS AND RESULTS	6
1.3.1. TEST ENVIRONMENT CONDITIONS	7
2. 47 CFR PART 15C & RSS-210 REQUIREMENTS	8
2.1. ANTENNA REQUIREMENT	8
2.1.1. APPLICABLE STANDARD	8
2.1.2. RESULT: COMPLIANT	8
2.2. PEAK OUTPUT POWER	8
2.2.1. REQUIREMENT	8
2.2.2. TEST DESCRIPTION	8
2.2.3. TEST RESULT	9
2.3. BANDWIDTH	12
2.3.1. REQUIREMENT	12
2.3.2. TEST DESCRIPTION	12
2.3.3. TEST RESULT	12
2.4. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	17
2.4.1. REQUIREMENT	17
2.4.2. TEST DESCRIPTION	17
2.4.3. TEST RESULT	17
2.5. POWER SPECTRAL DENSITY (PSD)	21
2.5.1. REQUIREMENT	21
2.5.2. TEST DESCRIPTION	21
2.5.3. TEST RESULT	21
2.6. RESTRICTED FREQUENCY BANDS	24
2.6.1. REQUIREMENT	24
2.6.2. TEST DESCRIPTION	24
2.6.3. TEST RESULT	25



2.7. CONDUCTED EMISSION	28
2.7.1. REQUIREMENT	28
2.7.2. TEST DESCRIPTION	28
2.7.3. TEST RESULT	29
2.8. RADIATED EMISSION	30
2.8.1. REQUIREMENT	30
2.8.2. TEST DESCRIPTION	30
2.8.3. TEST RESULT	33
2.9. RF EXPOSURE EVALUATION	37
2.9.1. REQUIREMENT	37

ANNEX A GENERAL INFORMATION**38**

1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY	38
1.2 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	38
1.3 FACILITIES AND ACCREDITATIONS	38
1.4 TEST EQUIPMENTS UTILIZED	39
1.4.1 CONDUCTED TEST EQUIPMENTS	39
1.4.2 CONDUCTED EMISSION TEST EQUIPMENTS	39
1.4.3 RADIATED TEST EQUIPMENTS	39
1.4.4 CLIMATE CHAMBER	40
1.4.5 VIBRATION TABLE	40
1.4.6 ANECHOIC CHAMBER	40

Change History		
Issue	Date	Reason for change
1.0	2014-11-07	First edition



REPORT No. : SZ14070154W02

Test Report Declaration

Applicant	ICON Health & Fitness Inc
Applicant Address	1500 South 1000 West, Logan, UT. 84321
Manufacturer	National Electronics & Watch Co. Ltd
Manufacturer Address	15/F, SHING DAO IND. BUILDING 232 ABERDEEN MAIN ROAD, ABERDEEN, HONG KONG
Product Name	Heart Rate Monitor
Model Name	IFHRM214
Brand Name	IFIT SOLUTIONS
HW Version	N/A
SW Version	N/A
Test Standards	47 CFR Part 15 Subpart C RSS-GEN RSS-210
Test Date	2014-08-28 to 2014-09-23
Test Result	PASS

Tested by : Nie Quan

Nie Quan

Reviewed by : Qiu Xiaojun

Qiu Xiaojun

Approved by : Zeng Dexin

Zeng Dexin



1. Technical Information

Note: Provide by applicant.

1.1. Applicant Information

Company:	ICON Health & Fitness Inc
Address:	1500 South 1000 West, Logan, UT. 84321

1.2. Equipment under Test (EUT) Description

Brand Name:	IFIT SOLUTIONS
Trade Name:	iFit Heart Rate Monitor
Model Name:	IFHRM214
Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz);
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	0.04dBi

NOTE:

The EUT is Heart Rate Monitor, it contain Bluetooth 4.0 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1. Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	N/A	N/A



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 for the EUT FCC ID/IC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices
2	RSS-GEN Issue 3, December 2010	General Requirements and Information for the Certification of Radio Apparatus
3	RSS-210 Issue 8, December 2010	Low-power Licence-exempt Apparatus Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Section in CFR 47	Section in RSS-GEN, RSS-210	Description	Result
1	15.203	N.A	Antenna Requirement	<u>PASS</u>
2	15.247(b)	RSS-210, A8.4 (4)	Peak Output Power	<u>PASS</u>
3	15.247(a)	RSS-210, A8.2 (a)	Bandwidth	<u>PASS</u>
4	15.247(d)	RSS-210, A8.5	Conducted Spurious Emission and Band Edge	<u>PASS</u>
5	15.247(d)	RSS-210, A8.5	Restricted Frequency Bands	<u>PASS</u>
6	15.207	RSS-GEN, 7.2.4	Conducted Emission	<u>N/A</u>
7	15.209 ,15.247(d)	RSS-210, A8.5 RSS-GEN, 7.2.5	Radiated Emission	<u>PASS</u>
8	15.247(e)	RSS-210, A8.2(b)	Power spectral density (PSD)	<u>PASS</u>
9	15.247(i), 1.1307 & 2.1093	RSS-102	RF exposure evaluation	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r02 (05/06/2014).



REPORT No. : SZ14070154W02

1.3.1. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C &RSS-210 REQUIREMENTS

2.1. Antenna requirement

2.1.1. Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

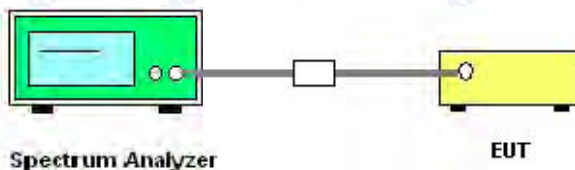

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please reference ANNEX A(1.4).

2.2.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
0	2402	1.593	0.001443	Plot A	30	1	PASS
19	2440	0.962	0.001248	Plot B			PASS
39	2480	-1.088	0.000780	Plot C			PASS


B. Test Plots:



REPORT No. : SZ14070154W02

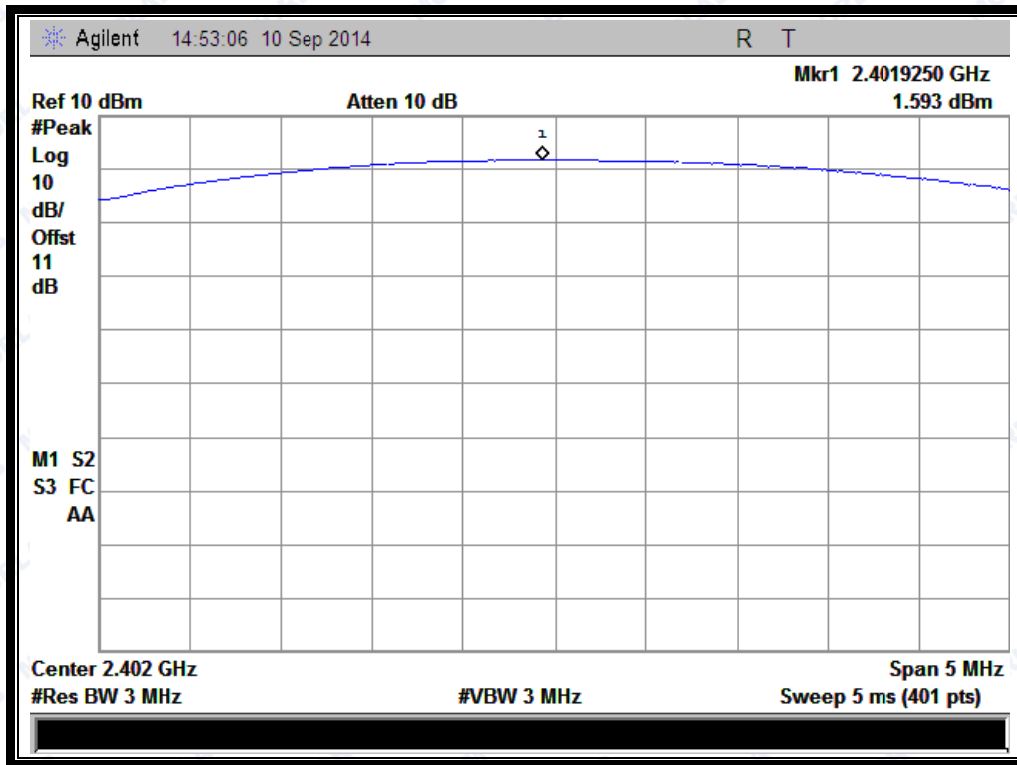


(Plot A: Channel 0: 2402MHz)

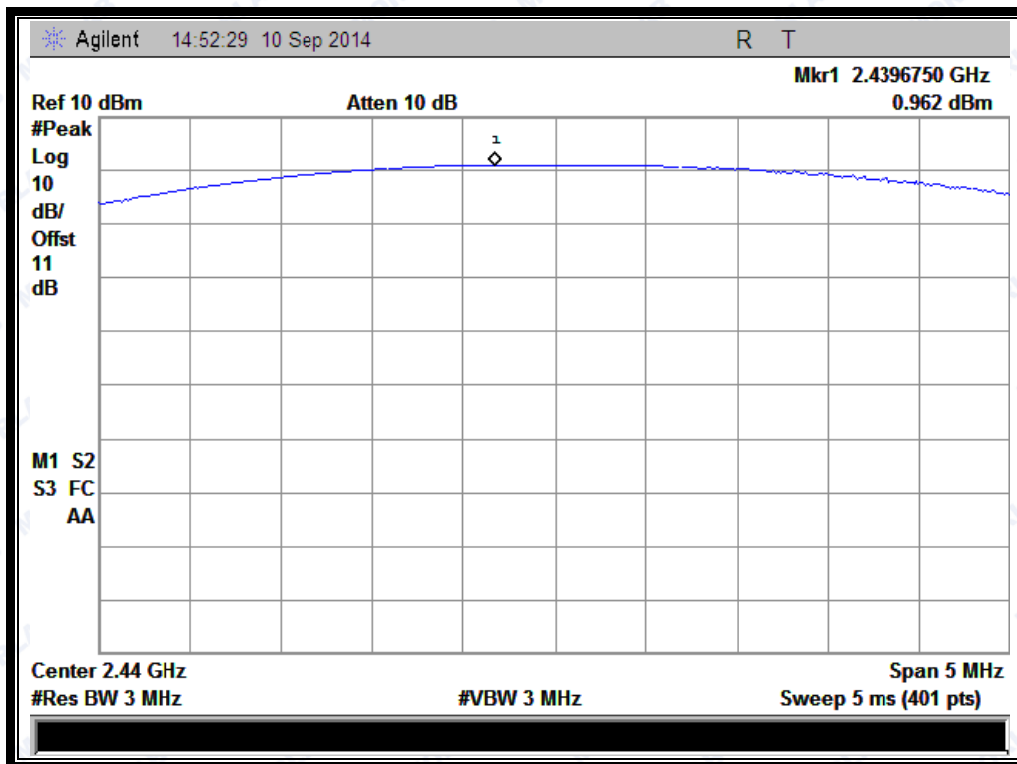

(Plot B: Channel 19: 2440MHz)



REPORT No. : SZ14070154W02

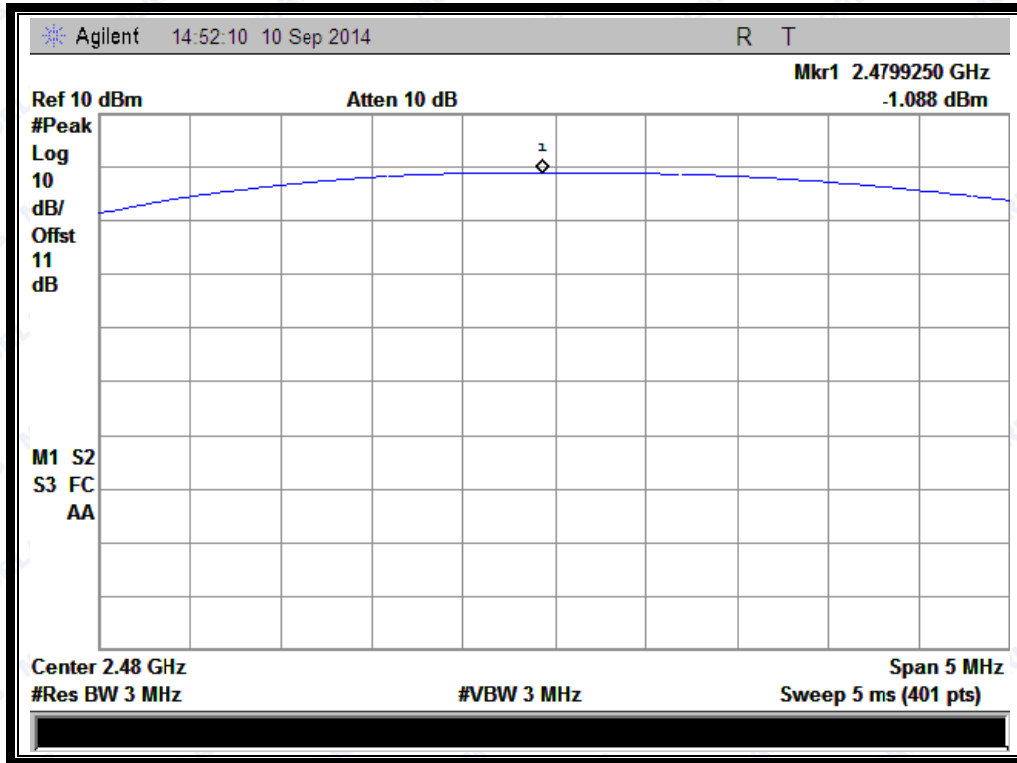

(Plot C: Channel 39: 2480MHz)


2.3. Bandwidth

2.3.1. Requirement

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:

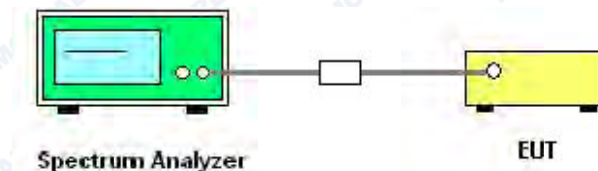

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.




REPORT No. : SZ14070154W02

A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2402	0.6626	0.9791	Plot A	≥500	PASS
19	2440	0.7370	1.0122	Plot B	≥500	PASS
39	2480	0.6658	1.1250	Plot C	≥500	PASS

B. Test Plots:

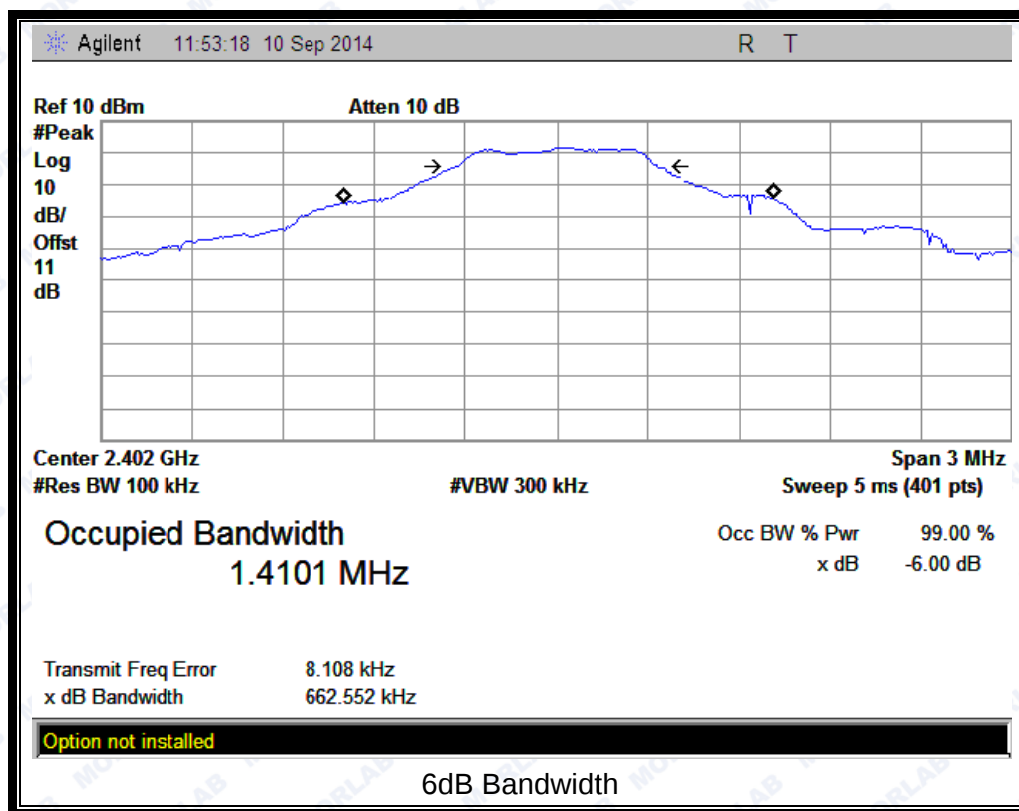




REPORT No. : SZ14070154W02

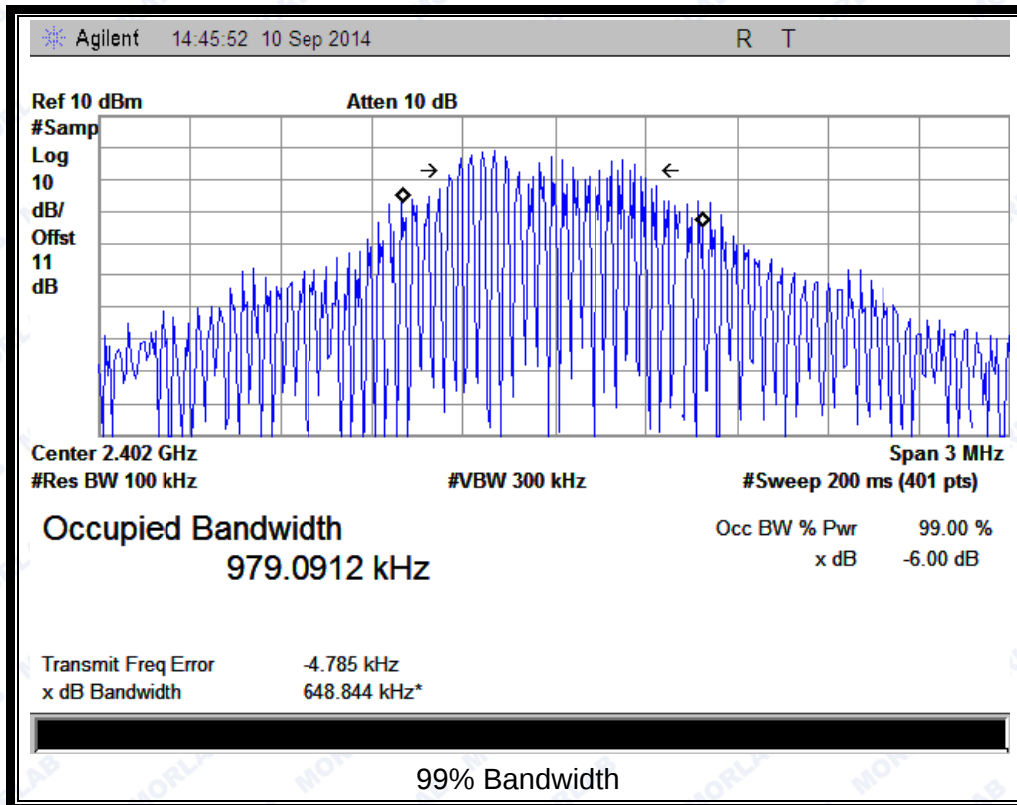


(Plot A: Channel 0: 2402MHz)

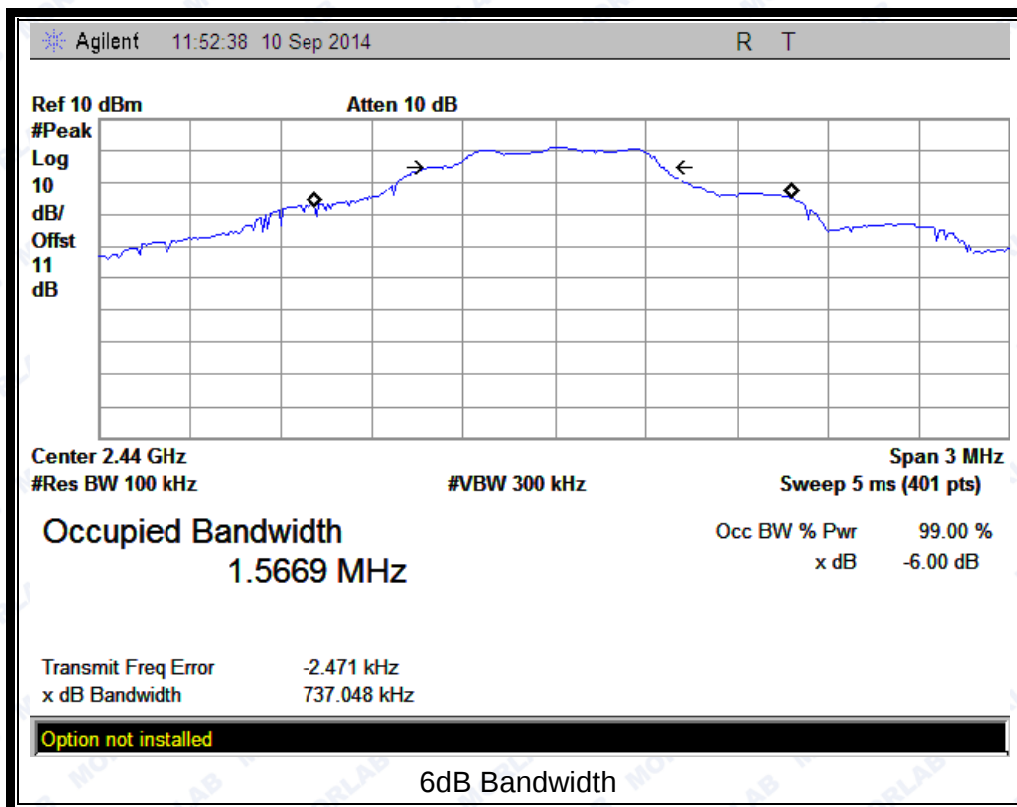




REPORT No. : SZ14070154W02

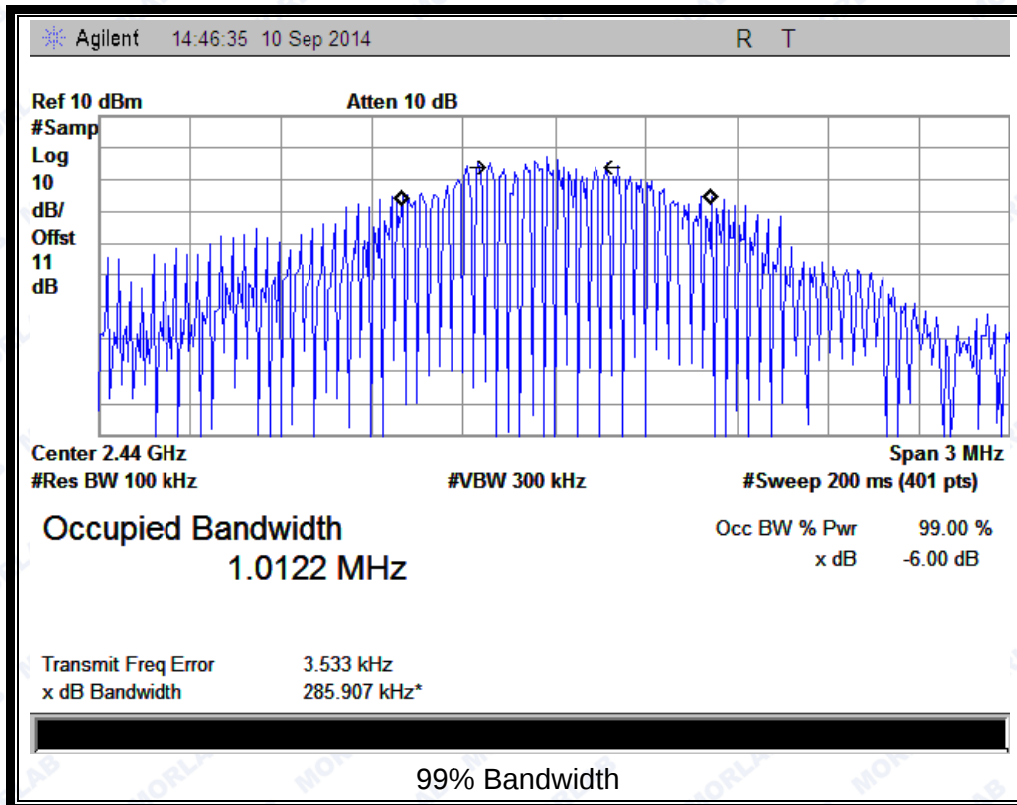


(Plot B: Channel 19: 2440 MHz)

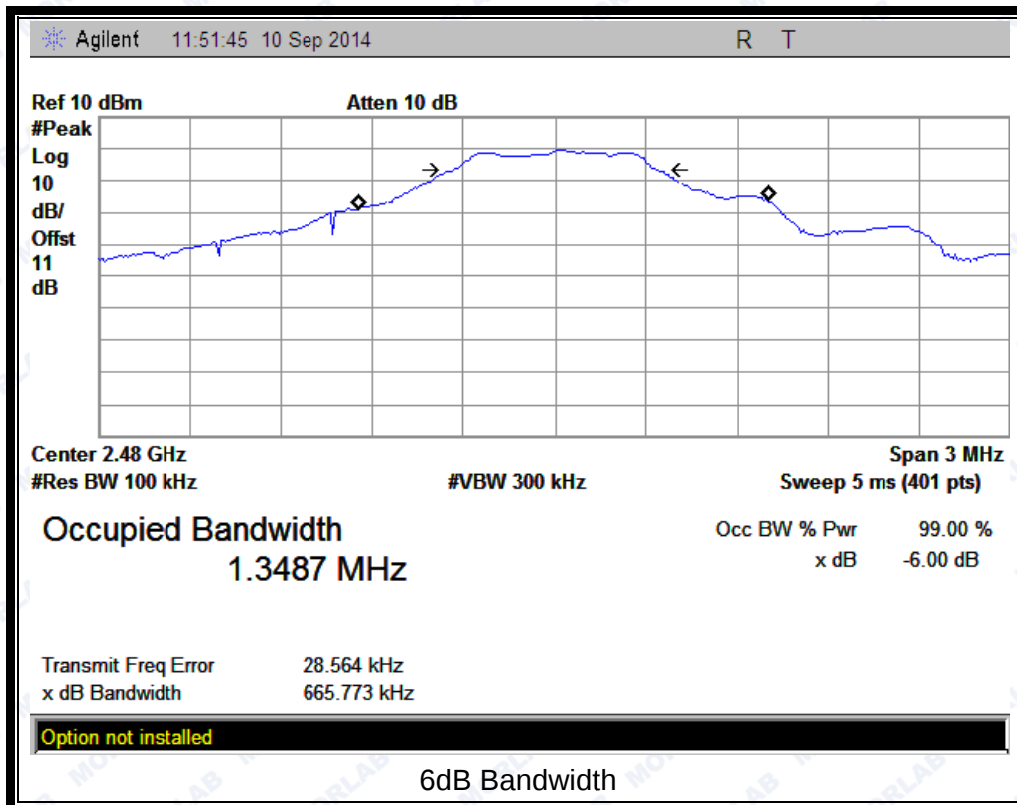



REPORT No. : SZ14070154W02

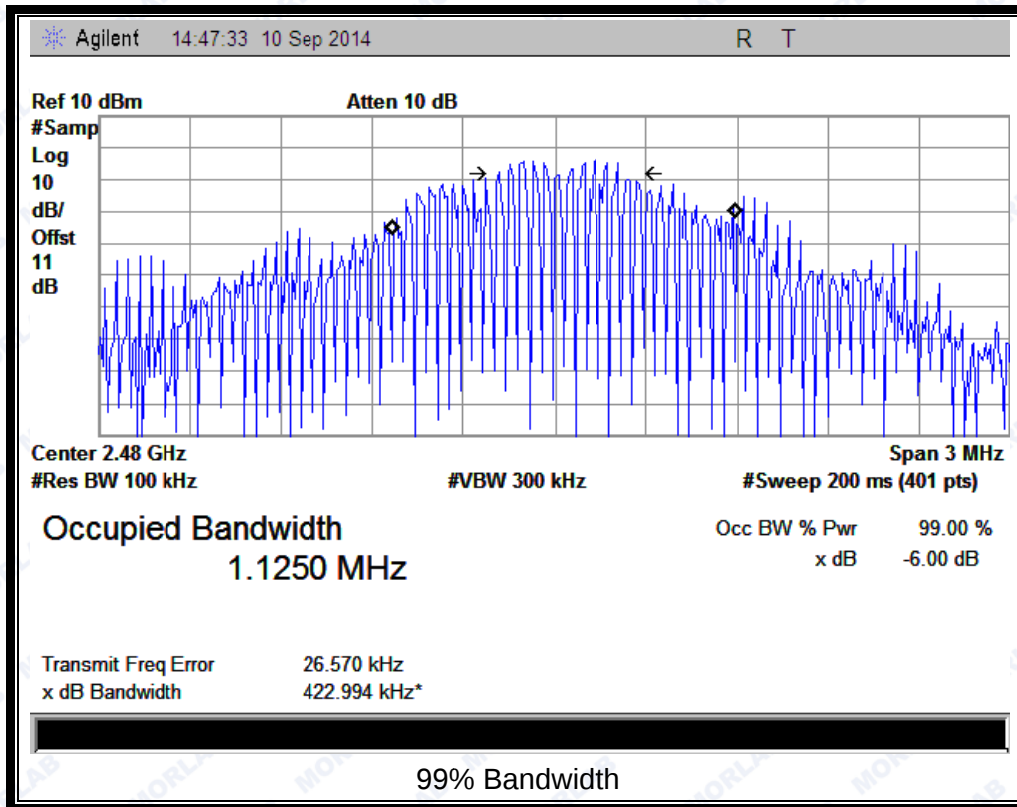

(Plot C: Channel 39: 2480MHz)


2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

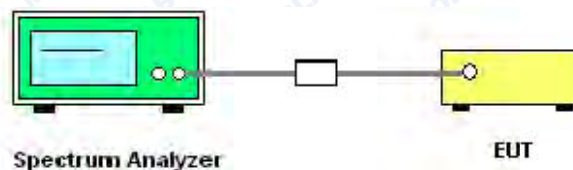

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-34.75	Plot A.1	0.587	-19.4	PASS
19	2440	-35.03	Plot B.1	-0.307	-20.3	PASS
39	2480	-46.36	Plot C.1	-1.881	-21.9	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

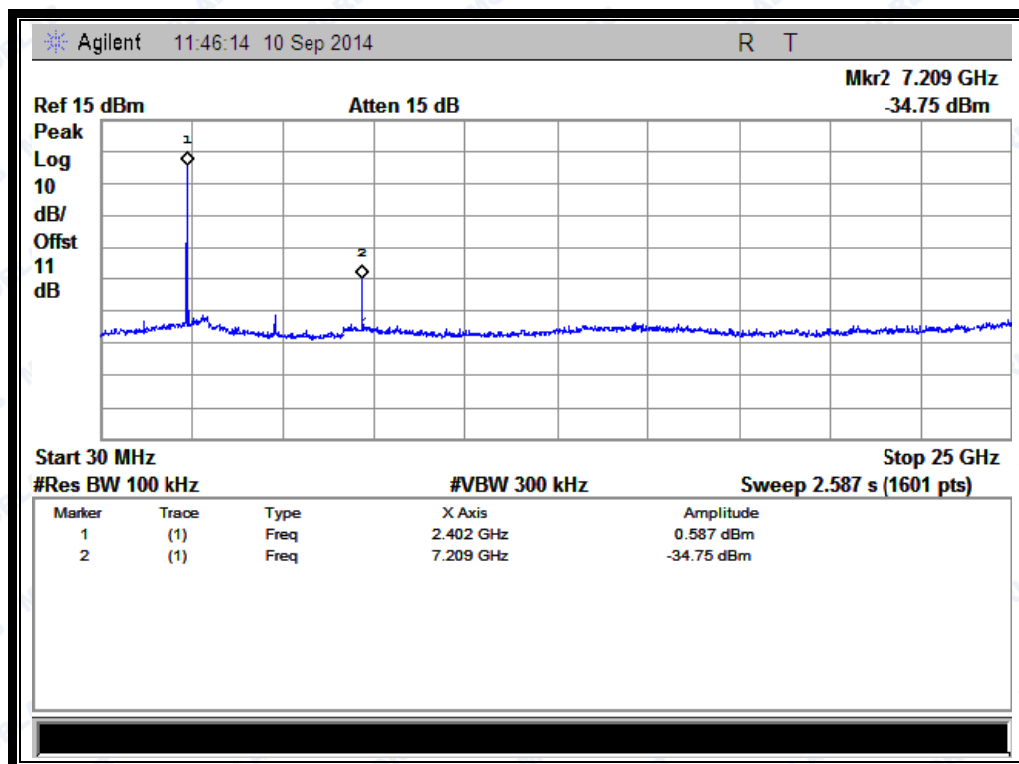


(Plot A.1: Channel = 0, 30MHz to 25GHz)



REPORT No. : SZ14070154W02

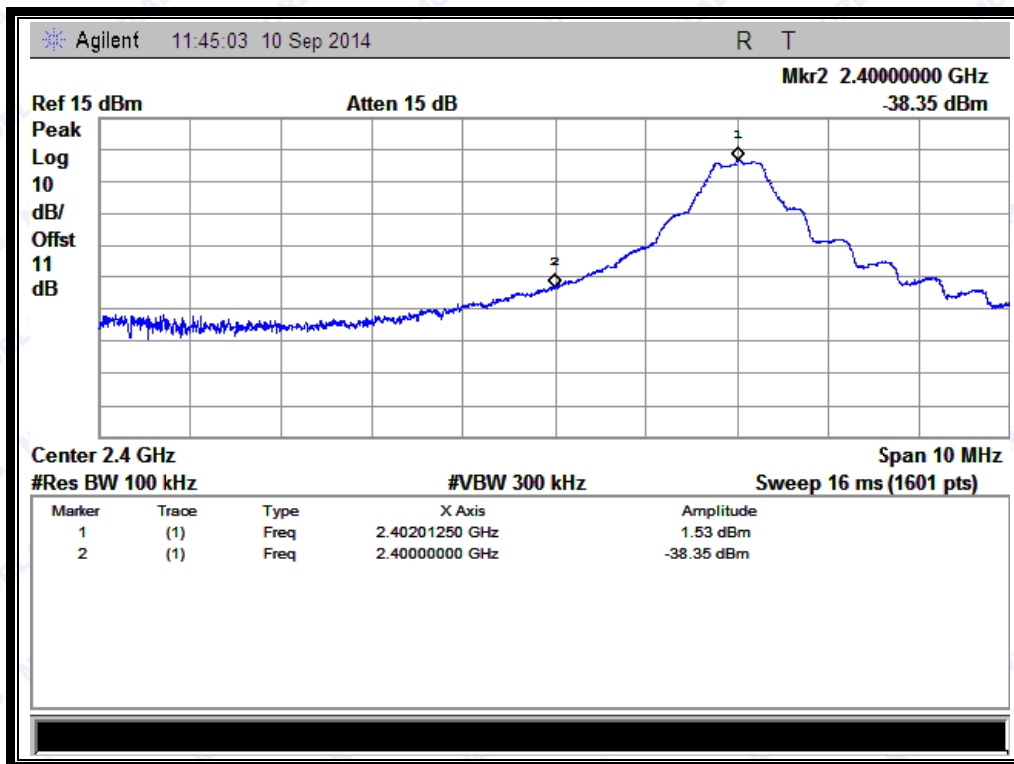


(Band Edge@ Channel = 0)

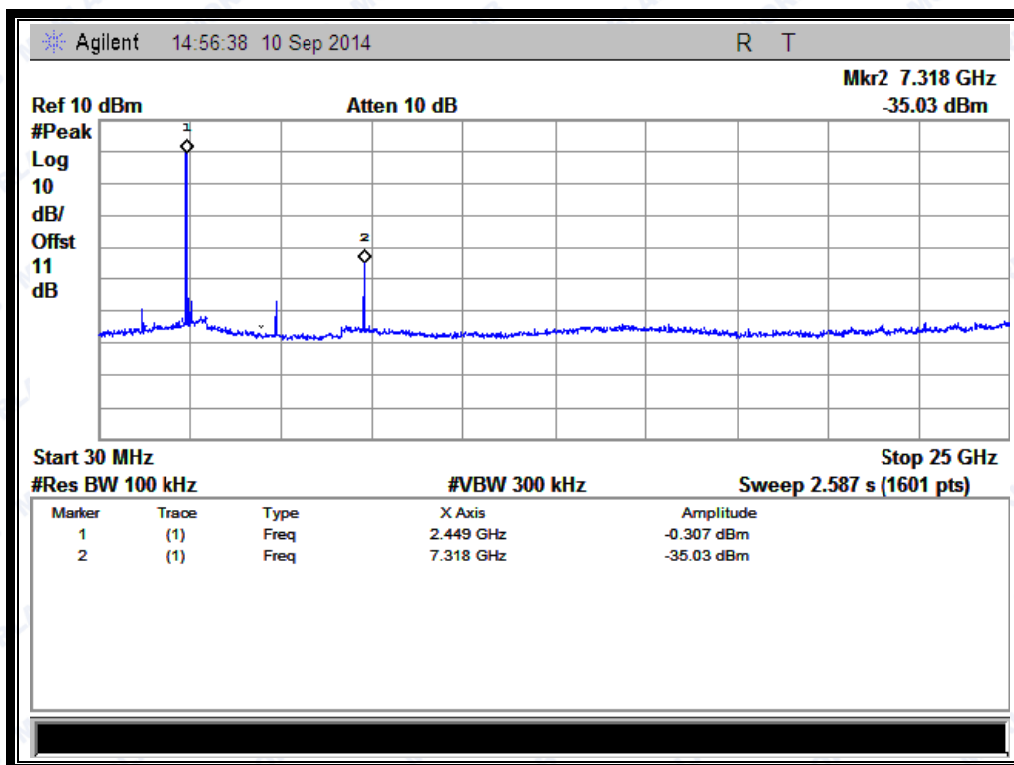


(Plot B.1: Channel = 19, 30MHz to 25GHz)



REPORT No. : SZ14070154W02

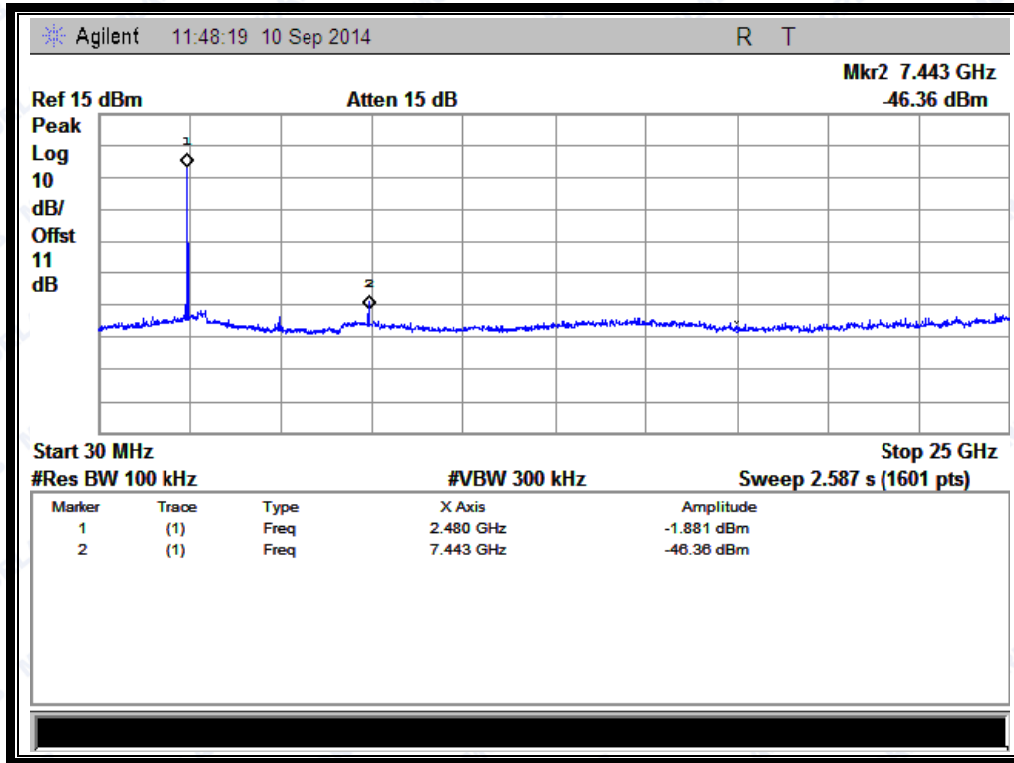

(Plot C.1: Channel = 39, 30MHz to 25GHz)

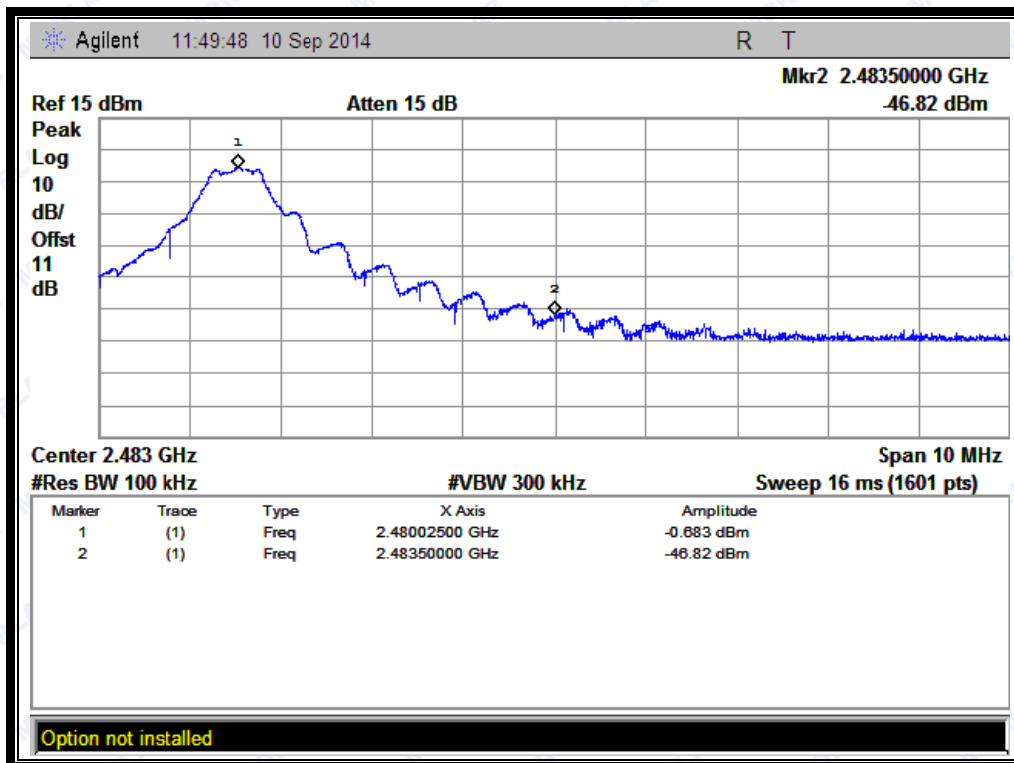

(Band Edge@ Channel = 39)


2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density

2.5.2. Test Description

A. Test Set:

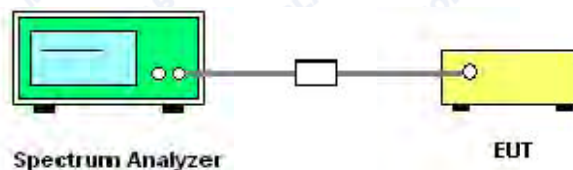

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A(1.4).

2.5.3. Test Result

The lowest, middle and highest channels are tested.

A. Test Verdict:


Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2402	-12.42	Plot A	8	PASS



REPORT No. : SZ14070154W02

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
19	2440	-12.38	Plot B	8	PASS
39	2480	-14.68	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

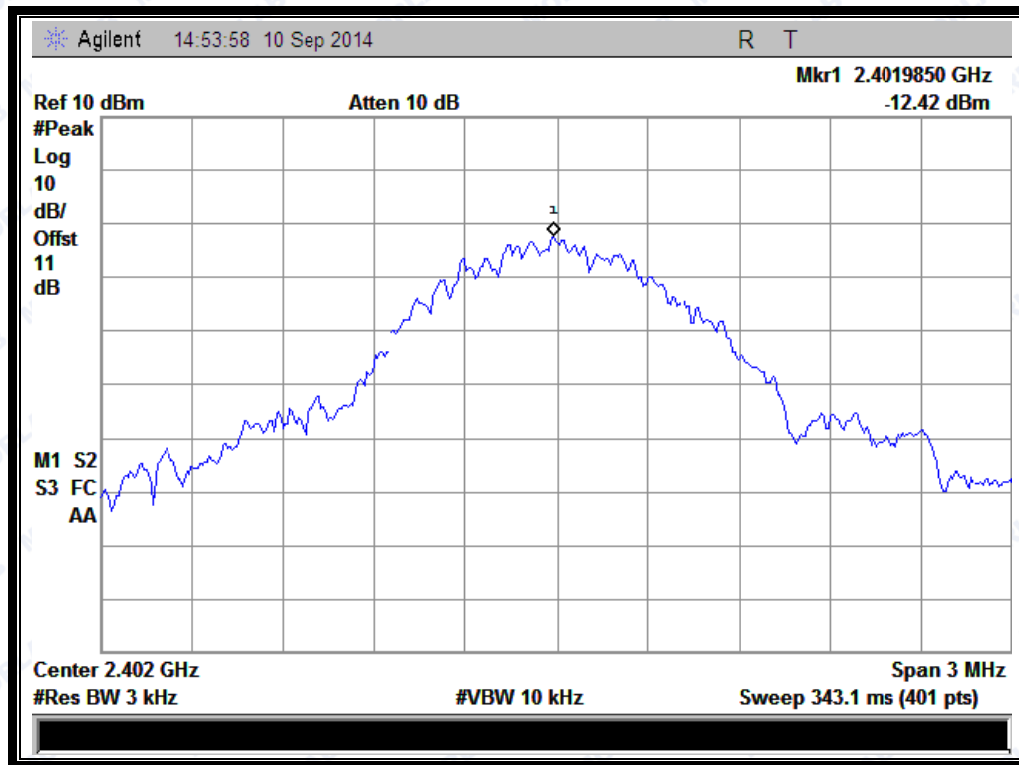


(Plot A: Channel = 0)



REPORT No. : SZ14070154W02

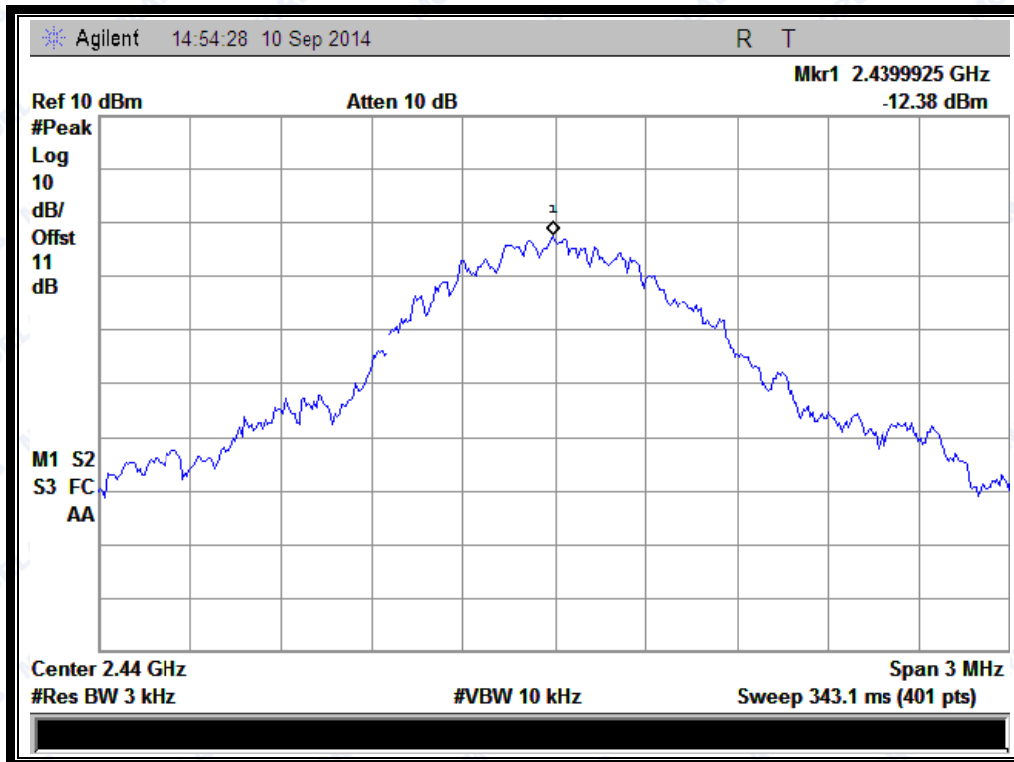

(Plot B: Channel = 19)

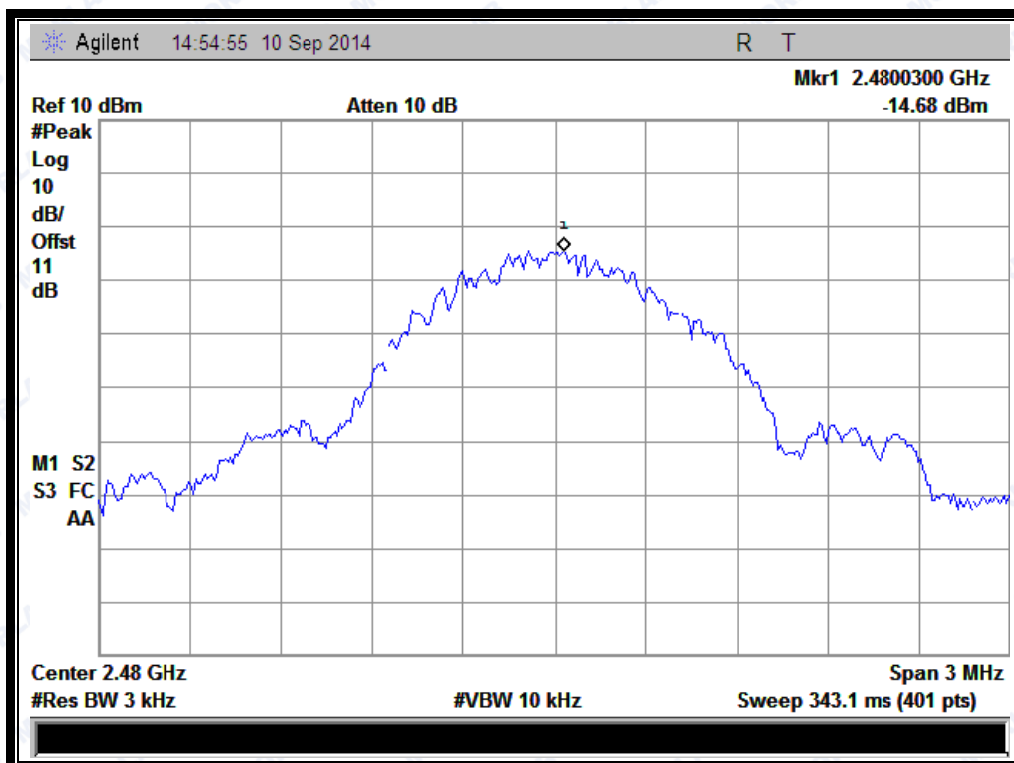

(Plot C: Channel = 39)


2.6. Restricted Frequency Bands

2.6.1. Requirement

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2. Test Description

A. Test Setup

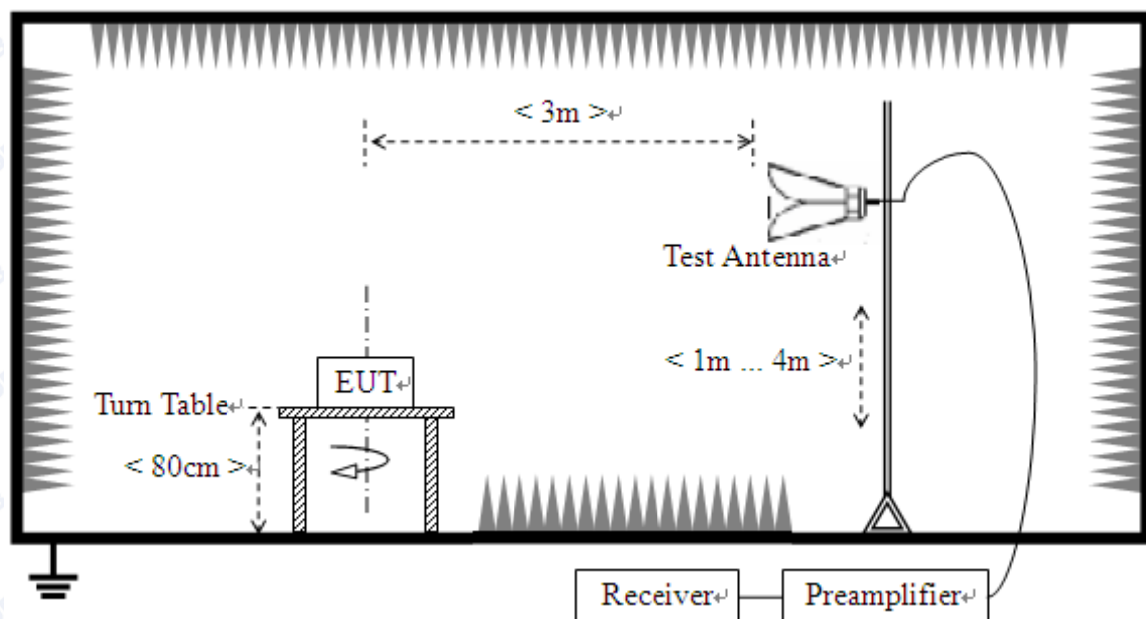

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the



ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).

2.6.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2359.80	PK	55.41	-33.63	32.56	54.34	74	Pass
0	2360.32	AV	34.36	-33.63	32.56	33.29	54	Pass
39	2483.56	PK	52.91	-33.18	32.50	52.23	74	Pass
39	2483.50	AV	36.22	-33.18	32.50	35.54	54	Pass


B. Test Plots:



REPORT No. : SZ14070154W02

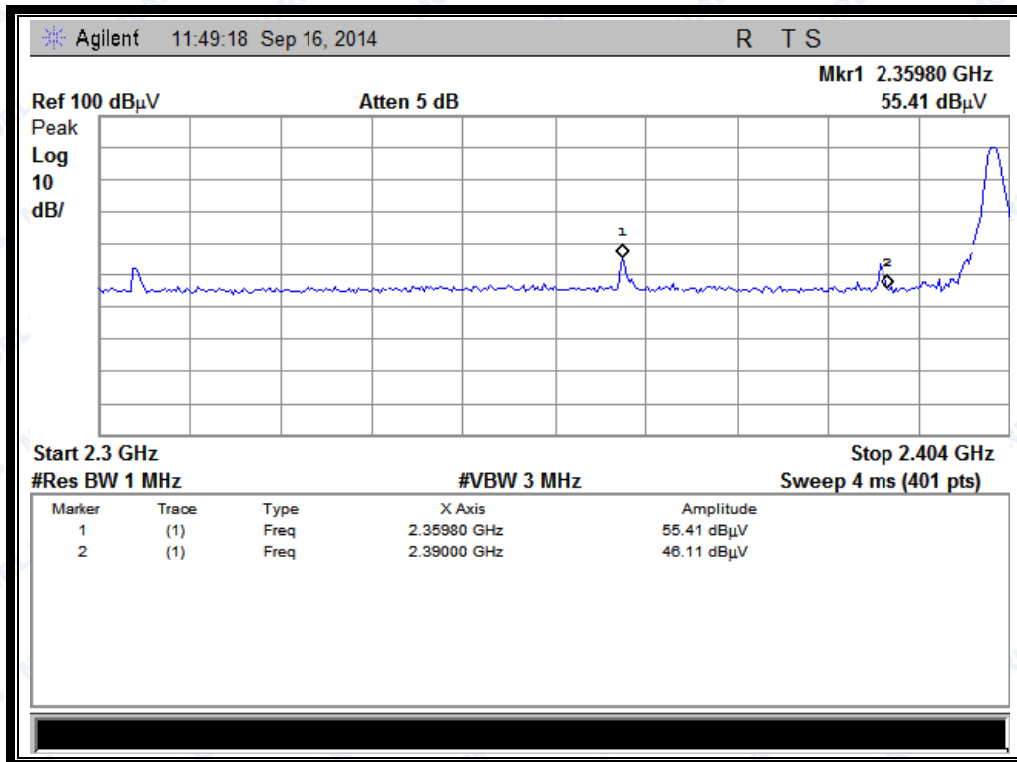


(Plot A1: Channel = 0 PEAK)

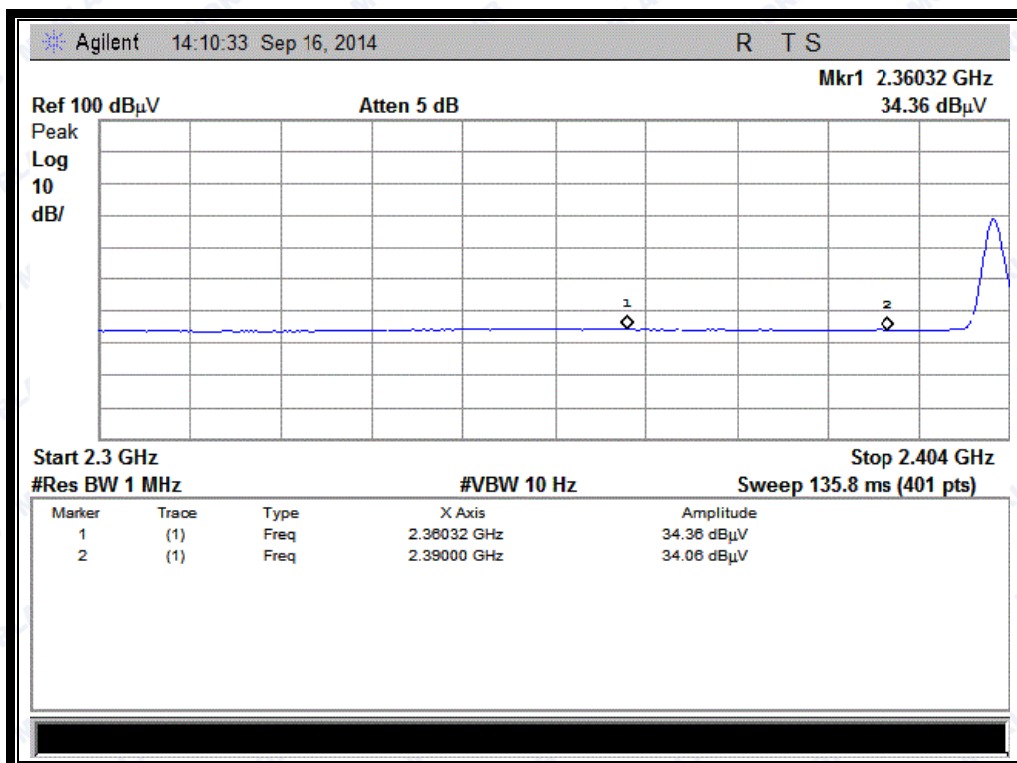


(Plot A2: Channel = 0 AVG)



REPORT No. : SZ14070154W02

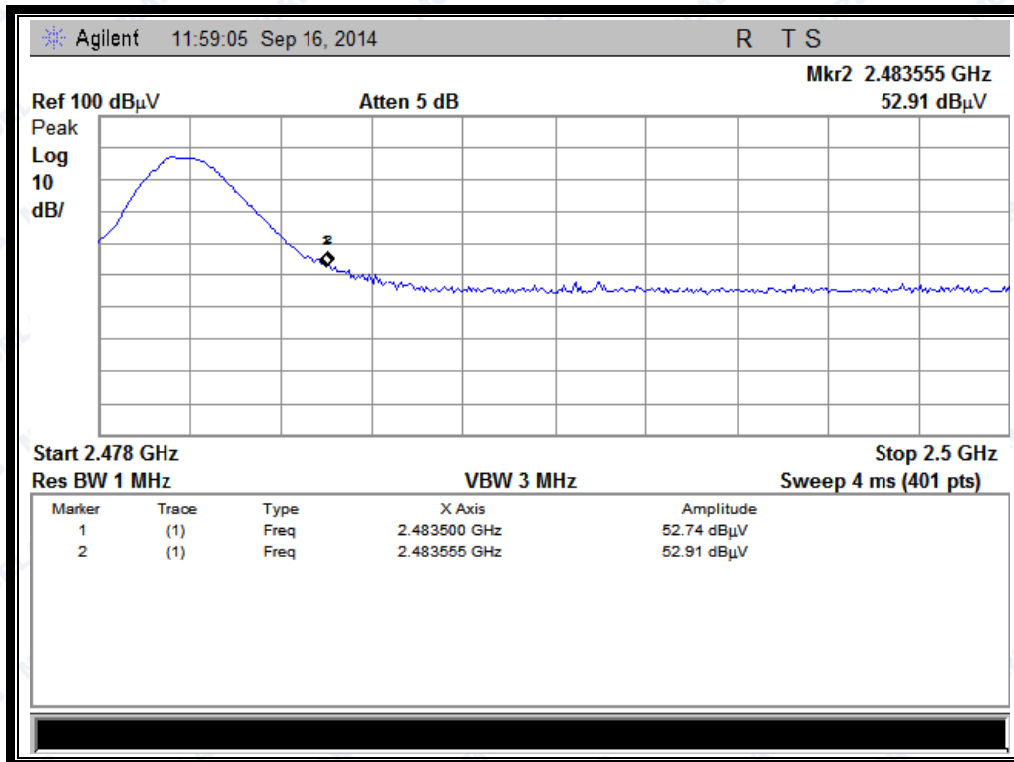

(Plot B1: Channel = 39 PEAK)

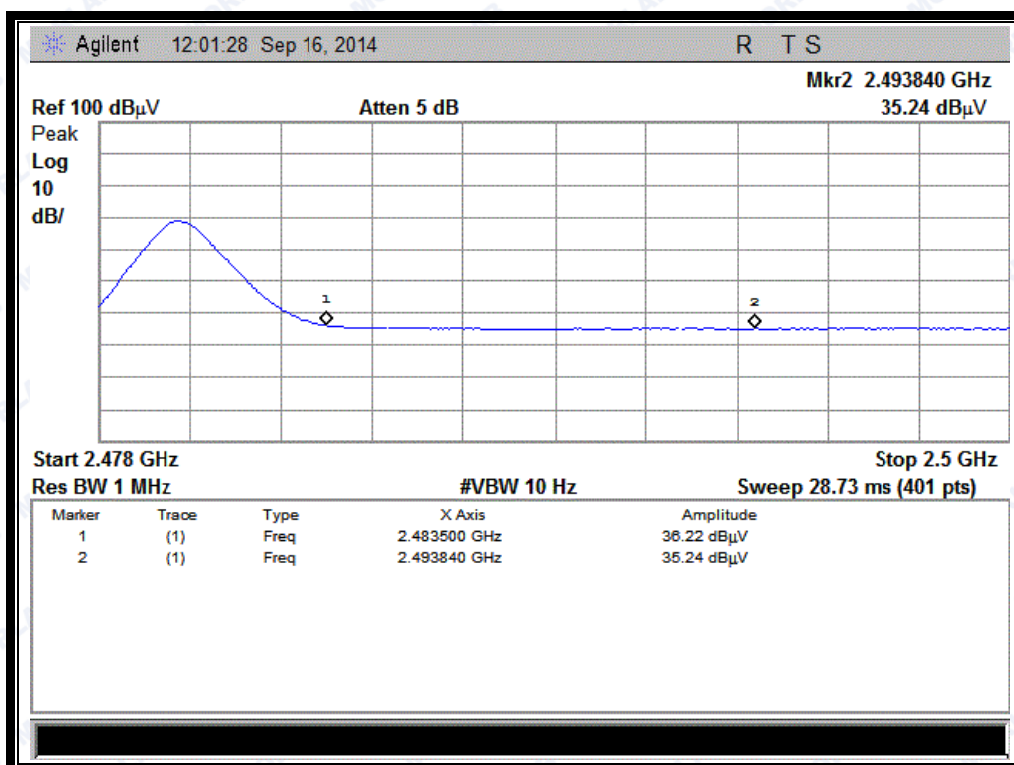

(Plot B2: Channel = 39 AVG)



2.7. Conducted Emission

2.7.1. Requirement

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5 - 30		60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

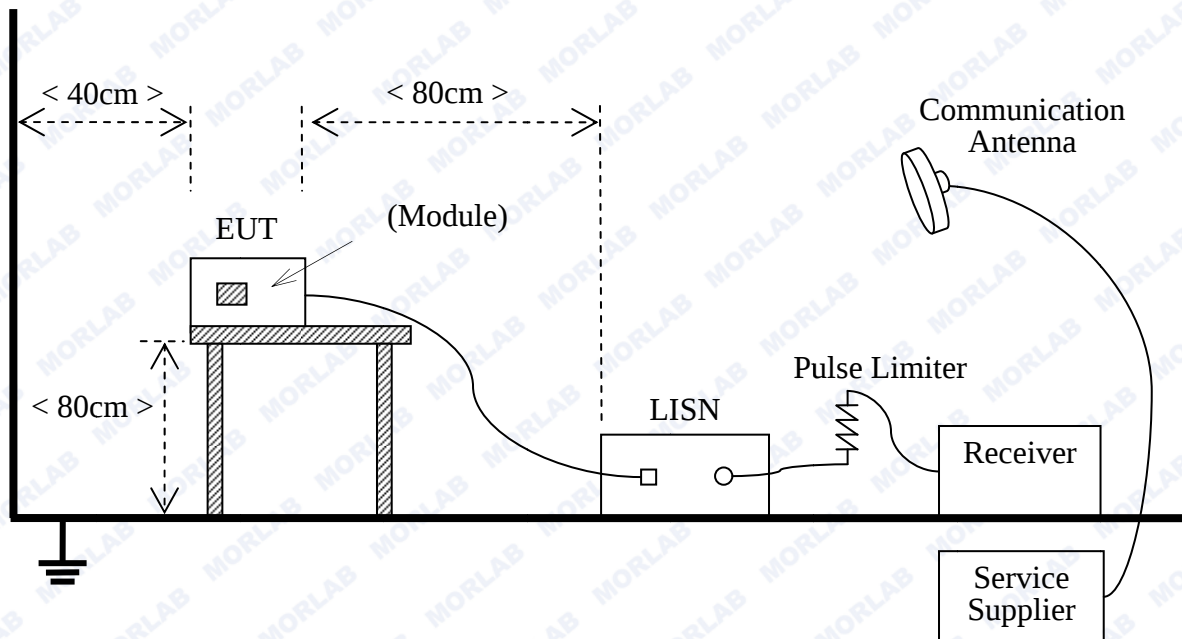

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3. Test Result

The EUT can not to be connected to the public utility (AC) power line, so conducted emission is unnecessary.



2.8. Radiated Emission

2.8.1. Requirement

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

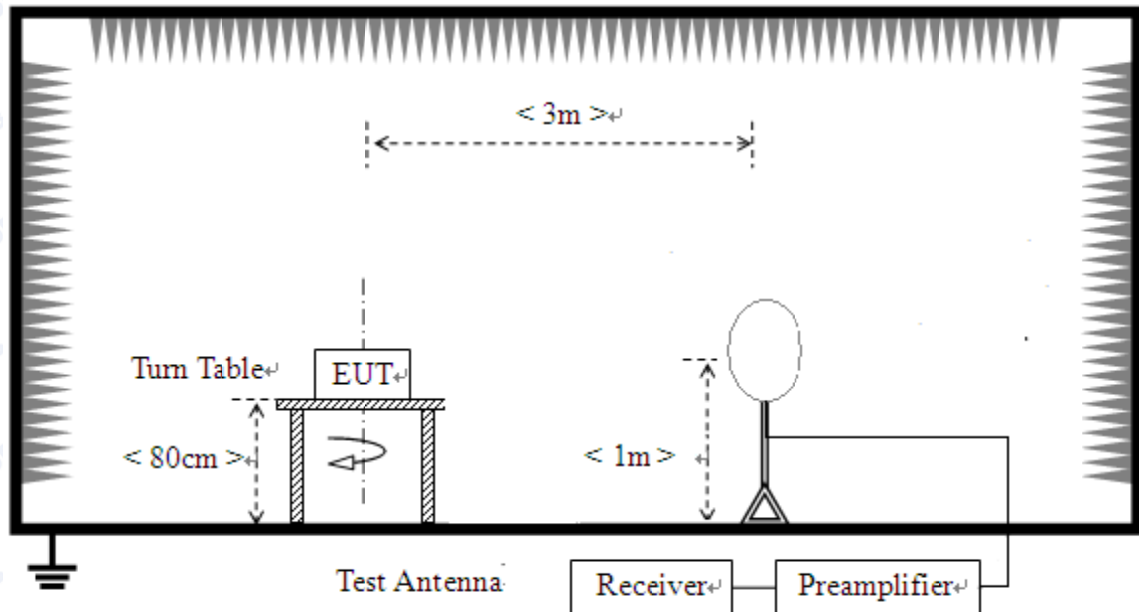

2) For radiated emissions from 30MHz to 1GHz

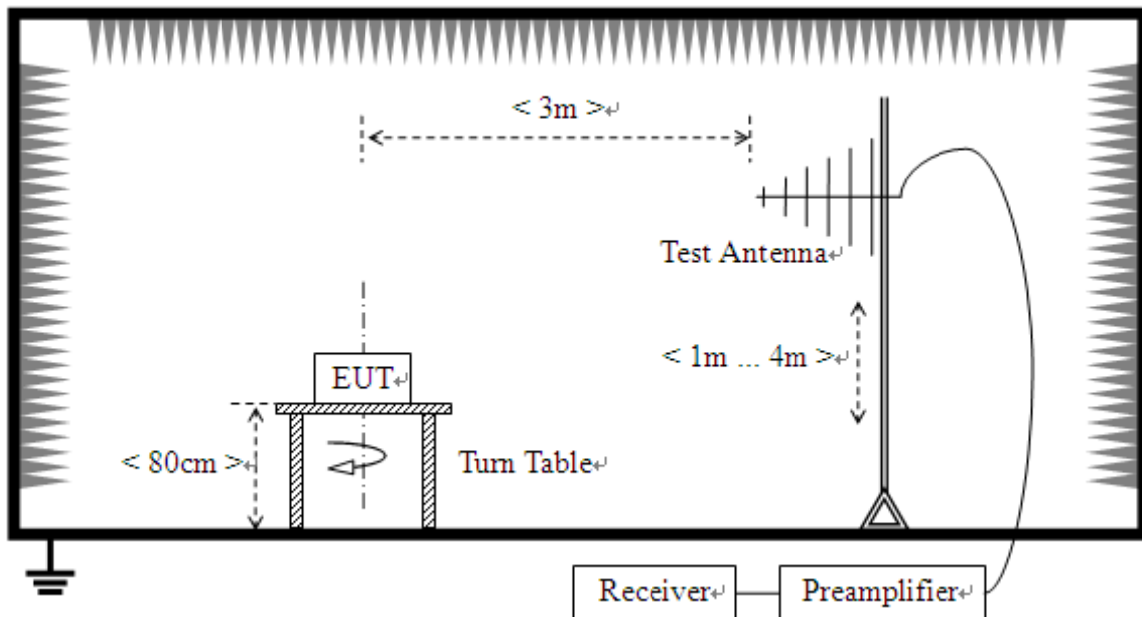

3) For radiated emissions above 1GHz

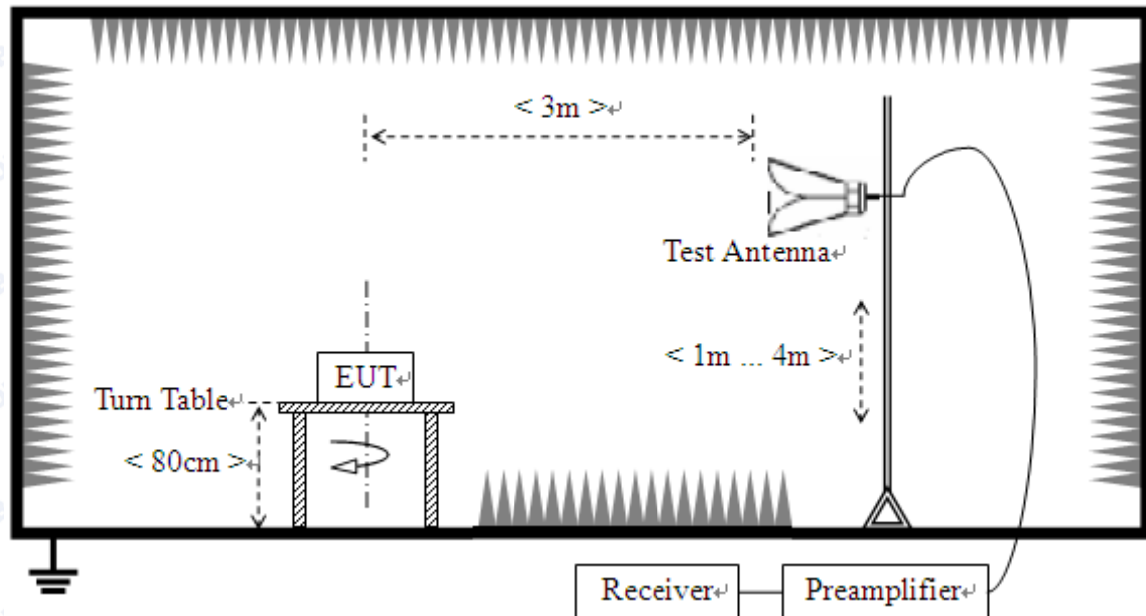

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.8.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0




REPORT No. : SZ14070154W02

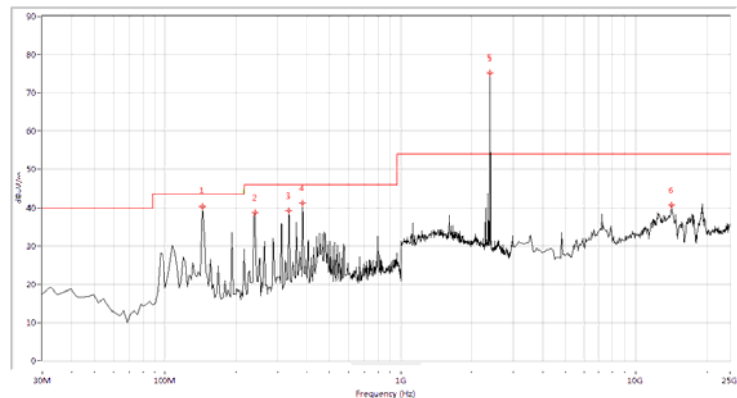

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
143.691	40.28	38.15	N.A	N.A	43.5	N.A	Horizontal	PASS
240.449	38.73	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
334.788	39.16	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
383.167	41.25	39.32	N.A	N.A	46.0	N.A	Horizontal	PASS
2402.000	75.29	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
14137.157	40.56	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

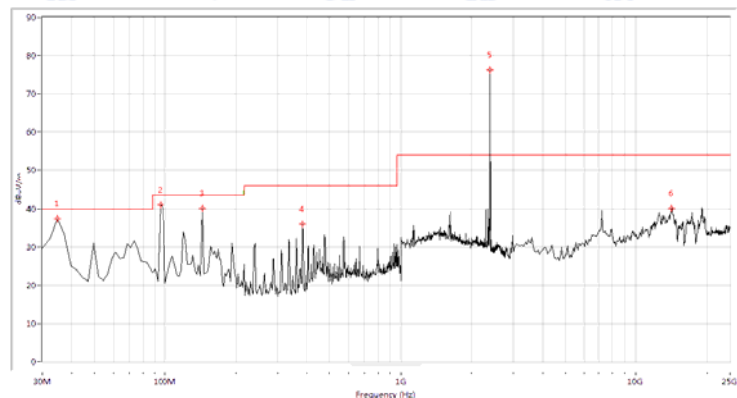


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	37.45	35.60	N.A	N.A	40.0	N.A	Vertical	PASS
95.312	40.94	38.42	N.A	N.A	43.5	N.A	Vertical	PASS
143.691	40.06	37.39	N.A	N.A	43.5	N.A	Vertical	PASS
383.167	35.98	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2402.0000	76.21	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
14192.020	40.01	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No. : SZ14070154W02

Plot for Channel = 19

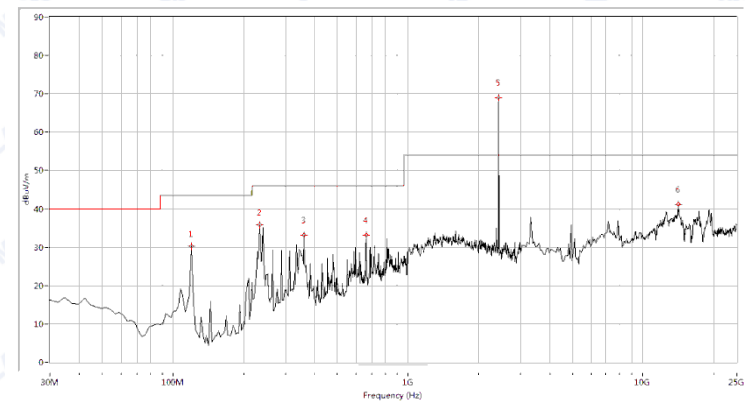

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
119.501	30.21	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
233.192	35.84	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
358.978	33.15	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
663.766	33.09	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2440.000	68.99	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
14137.157	41.18	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

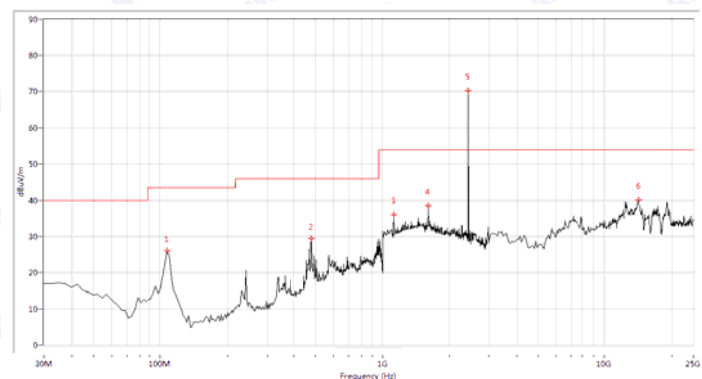


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
107.406	26.09	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
479.925	29.32	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1119.701	36.01	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
1598.504	38.46	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
2440.000	70.24	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
14246.883	40.03	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 39

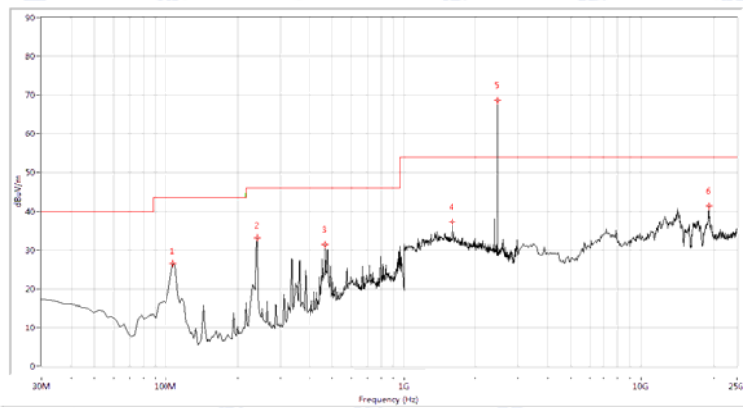

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
107.406	26.53	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
240.449	33.14	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
467.830	31.42	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
1598.504	37.29	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
2480.000	68.67	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
19129.676	41.27	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

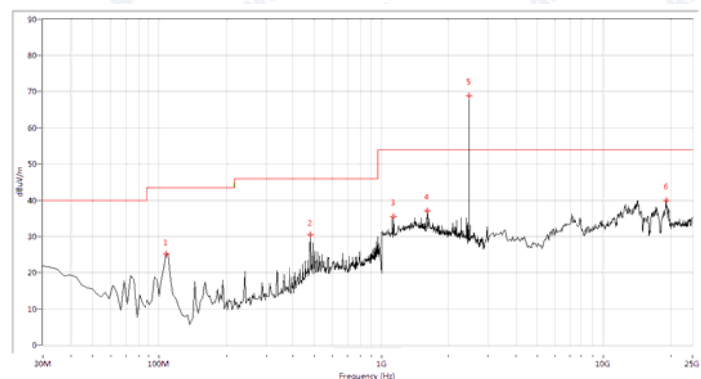

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
107.406	25.12	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
479.925	30.52	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1129.676	35.41	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
1593.516	37.15	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
2480.000	68.72	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
19129.676	39.86	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



2.9. RF exposure evaluation

2.9.1. Requirement

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by §2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is 1.593dBm(1.443mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.



Annex A General Information

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.



REPORT No. : SZ14070154W02

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2014.02.26	2015.02.25
2	Power Splitter	NW521	1506A	Weinschel	2014.02.26	2015.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2014.02.26	2015.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2014.02.26	2015.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2014.02.26	2015.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2014.02.26	2015.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2014.02.26	2015.02.25
3	Service Supplier	100448	CMU200	R&S	2014.02.26	2015.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2014.02.26	2015.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25



REPORT No. : SZ14070154W02

2	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2014.02.26	2015.02.25
3	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2014.02.26	2015.02.25
4	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2014.02.26	2015.02.25
5	Test Antenna - Loop	1519-022	HL050S7	R&S	2014.02.26	2015.02.25
6	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2014.02.26	2015.02.25
7	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2014.02.26	2015.02.25

1.4.5 Vibration Table

Vibration Table

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2014.02.26	2015.02.25

1.4.6 Anechoic Chamber

Anechoic Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2014.02.26	2015.02.25

***** END OF REPORT *****