



REPORT No.: SZ21020185W04

TEST REPORT

APPLICANT : Nubia Technology Co., Ltd.

PRODUCT NAME : 5G Mobile Phone

MODEL NAME : NX666J

BRAND NAME : REDMAGIC

FCC ID : 2AHJO-NX666J

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2021-03-15

TEST DATE : 2021-03-18 to 2021-04-28

ISSUE DATE : 2021-05-07

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Peng Huarui
Peng Huarui(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	5
1.4. The Channel Number and Frequency	6
1.5. Test Standards and Results	7
1.6. Environmental Conditions	8
2. 47 CFR Part 15E Requirements	9
2.1. Antenna Requirement	9
2.2. Duty Cycle of the Test Signal	10
2.3. Maximum Conducted Output Power	16
2.4. Emission Bandwidth	26
2.5. Peak Power Spectral Density	79
2.6. Frequency Stability	138
2.7. Conducted Emission	140
2.8. Restricted Frequency Bands	144
2.9. Radiated Emission	173
Annex A Test Uncertainty	231
Annex B Testing Laboratory Information	232

Change History		
Version	Date	Reason for change
1.0	2021-05-07	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Nubia Technology Co.,Ltd.
Applicant Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
Manufacturer:	Nubia Technology Co.,Ltd.
Manufacturer Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	5G Mobile Phone
Serial No.:	(N/A, marked #1 by test site)
Hardware Version:	NX666J_EUHW1.0
Software Version:	NX666J_ENCommon_V2.06
Modulation Technology:	OFDM
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40),802.11ac (VHT80) 802.11ax (HEW20), 802.11ax (HEW40),802.11ax (HEW80)
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5745MHz-5825MHz
Channel Number:	Refer to 1.3
Antenna Type:	PIFA Antenna
Antenna Gain:	ANT0: -7.5dBi; ANT1: -7.8dBi
Directional Gain:	-4.49dBi _{Note 2}

Accessory Information:	Battery	
	Brand Name:	nubia
	Model No.:	Li3941T44PGh836548
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4100mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	AC Adapter	
	Brand Name:	NUBIA
	Model No.:	STC-A5101230A-Z
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5.0V=3.0A, 10.0V=3.0A, 12.0V=2.5A, 20.0V=1.5A
	Rated Input:	100-240V~50/60Hz, 0.7A
	Manufacturer:	Shenzhen Ruijing Industrial Co., Ltd.

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n, 802.11ac and 802.11ax modulation mode.

Modulation Mode:	TX Function
802.11n	2TX
802.11ac	2TX
802.11ax	2TX

Note 2: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: For conducted test item Conducted Output Power and Peak Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT0) in this report.

Note 4: All radiation test items for 802.11n, 802.11ac and 802.11ax modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT0) in this report.

Note 5: WIFI hotspot only support U-NII-1 and U-NII-3 band.

Note 6: We use the dedicated software to control the EUT continuous transmission.

Note 7: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11a	20	OFDM	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		
802.11ac	20/40/80 (VHT20/40/80)	OFDM	BPSK	MCS0~MCS9	N/A
			QPSK		
			16QAM		
			64QAM		
			256QAM		
802.11ax	20/40/80 (HEW20/40/80)	OFDMA	BPSK	MCS0~MCS11	26/52/106/242/484/996
			QPSK		
			16QAM		
			64QAM		
			256QAM		
			1024QAM		

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Frequency Range: 5150MHz-5250MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
Frequency Range: 5250MHz-5350MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290		
Frequency Range: 5725MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Mar 26, 2021	Ouyang Feng	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Apr 26, 2021	Ouyang Feng	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Apr 01, 2021	Ouyang Feng	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Apr 01, 2021	Ouyang Feng	PASS	No deviation
6	15.407(g)	Frequency Stability	Apr 01, 2021	Ouyang Feng	PASS	No deviation
7	15.207	Conducted Emission	Mar 18, 2021	Wu Runfeng	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Apr 19&28, 2021	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Apr 19&28, 2021	Gao Jianrou	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ20120168W05).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01 and KDB662911 D01 v02r01.

Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

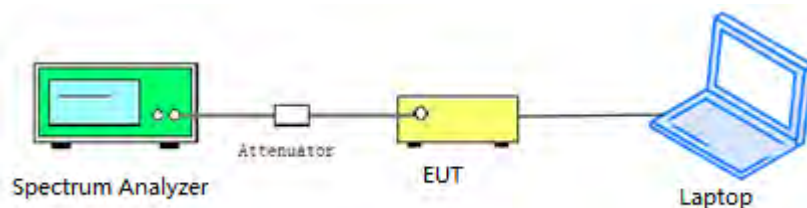

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	100.00	0.00
802.11n(HT20)	99.30	0.03
802.11n(HT40)	99.30	0.03
802.11ac(VHT20)	99.09	0.04
802.11ac(VHT40)	99.09	0.04
802.11ac(VHT80)	99.09	0.04
802.11ax(HEW20)	99.09	0.04
802.11ax(HEW40)	99.09	0.04
802.11ax(HEW80)	99.09	0.04


B. Test Plot:

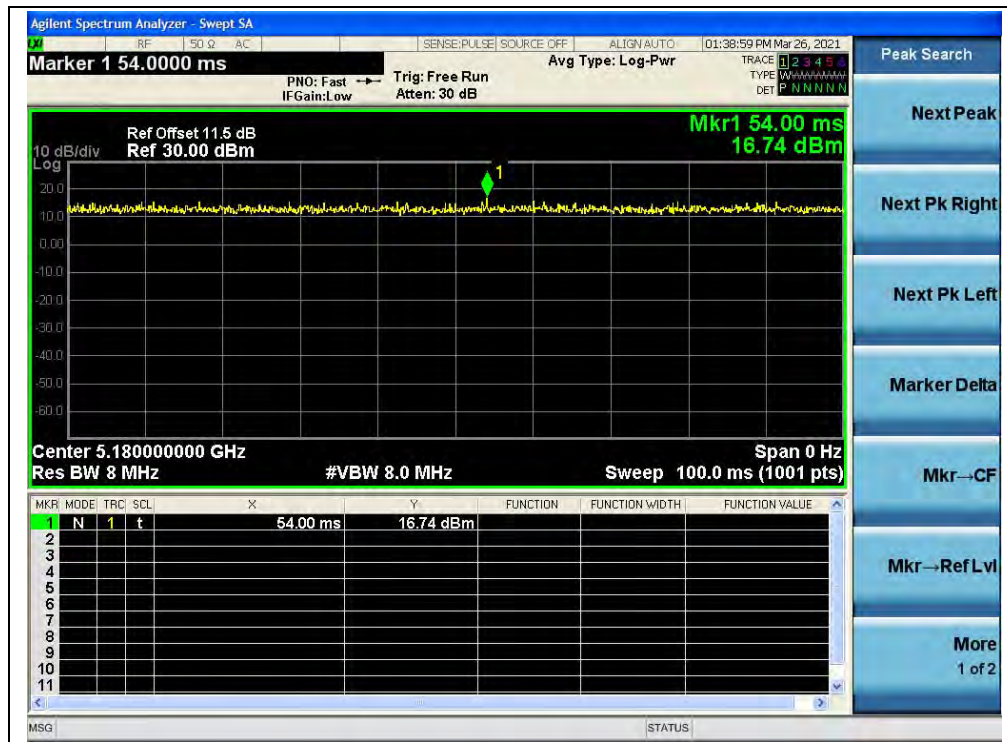


(Channel 36, 5180MHz, 802.11a)

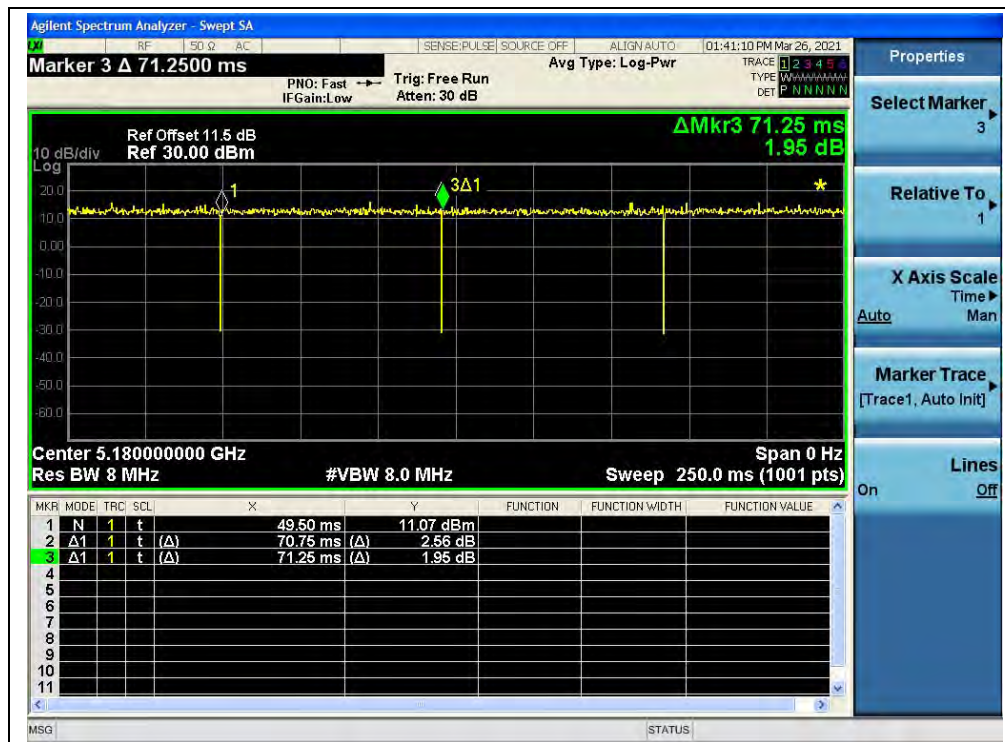


(Channel 36, 5180MHz, 802.11n (HT20))

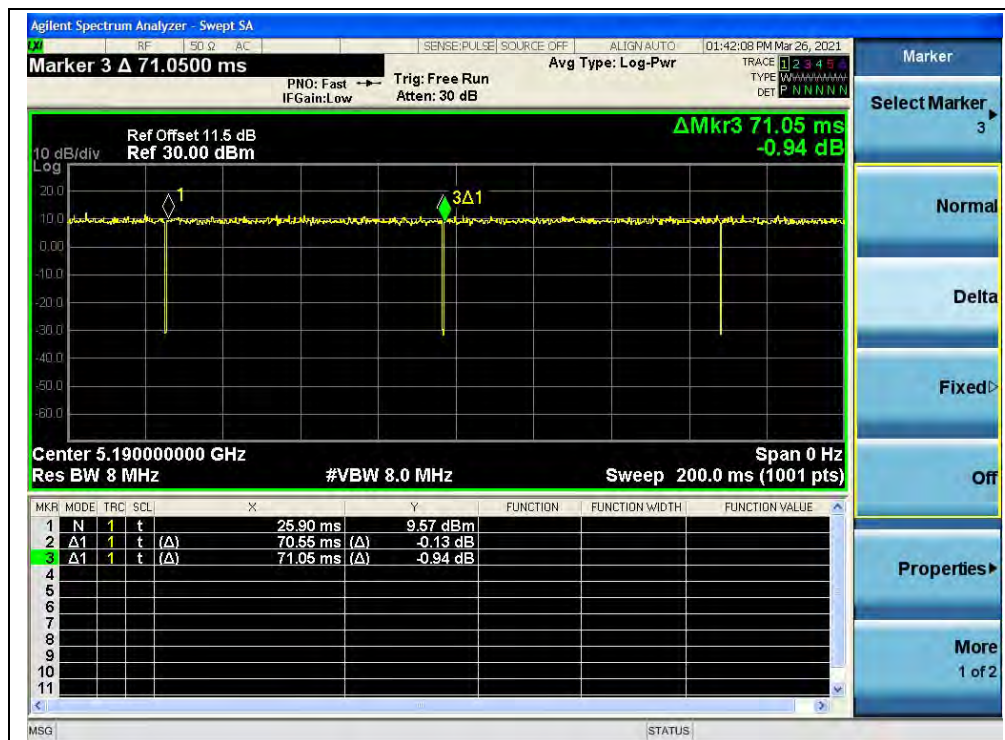


(Channel 38, 5190MHz, 802.11n (HT40))

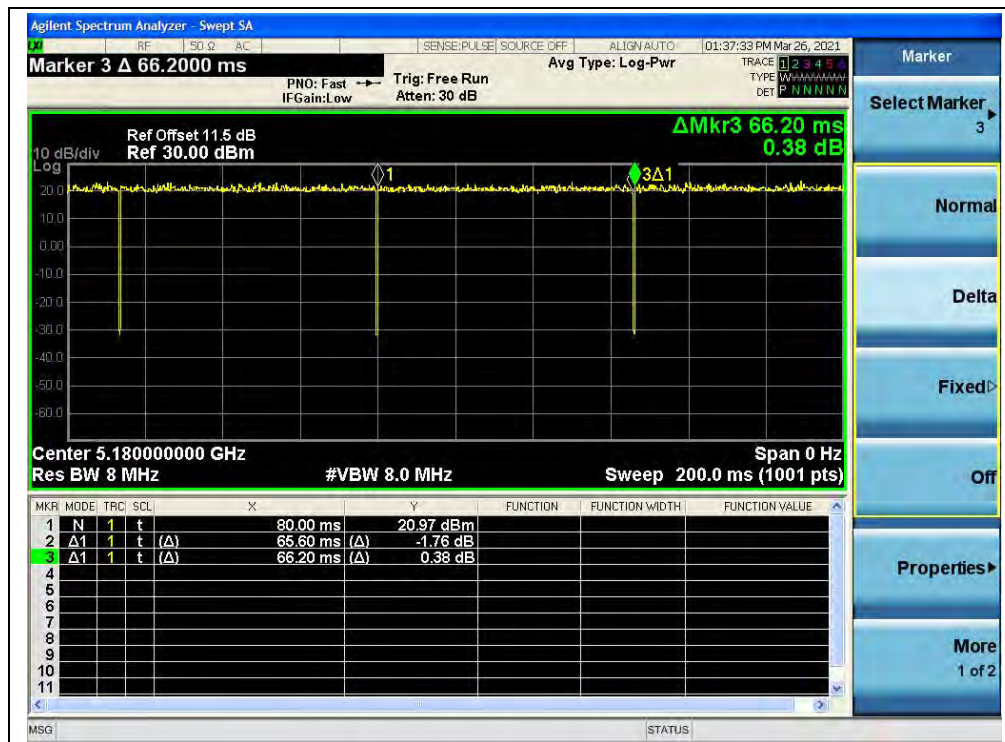


(Channel 36, 5180MHz, 802.11ac (VHT20))

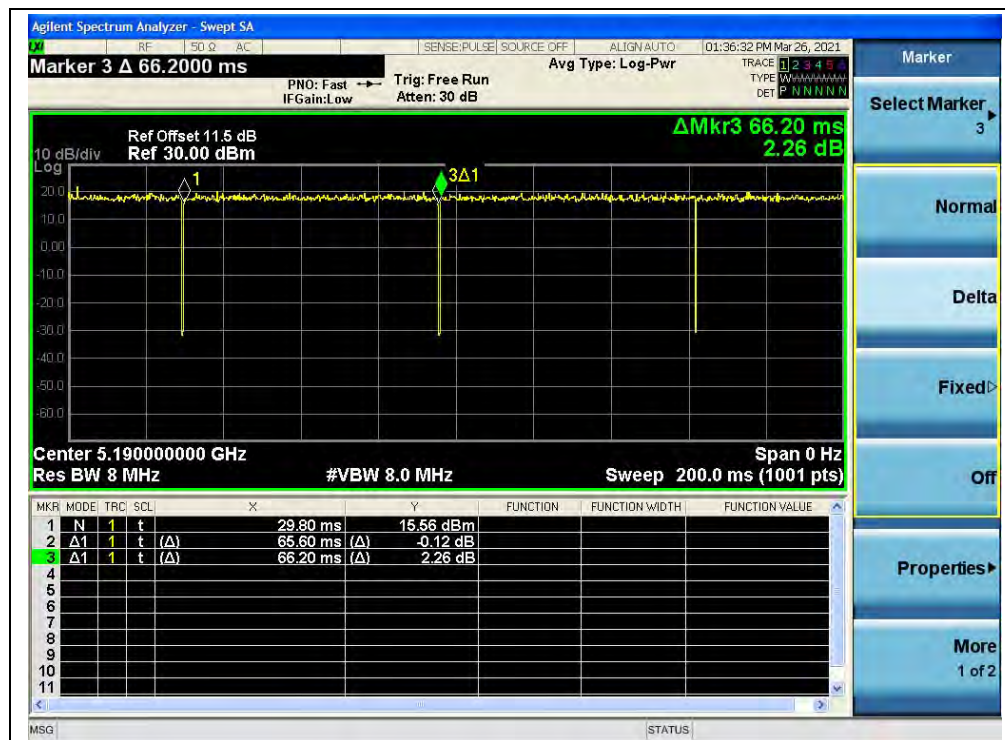


(Channel 38, 5190MHz, 802.11ac (VHT40))

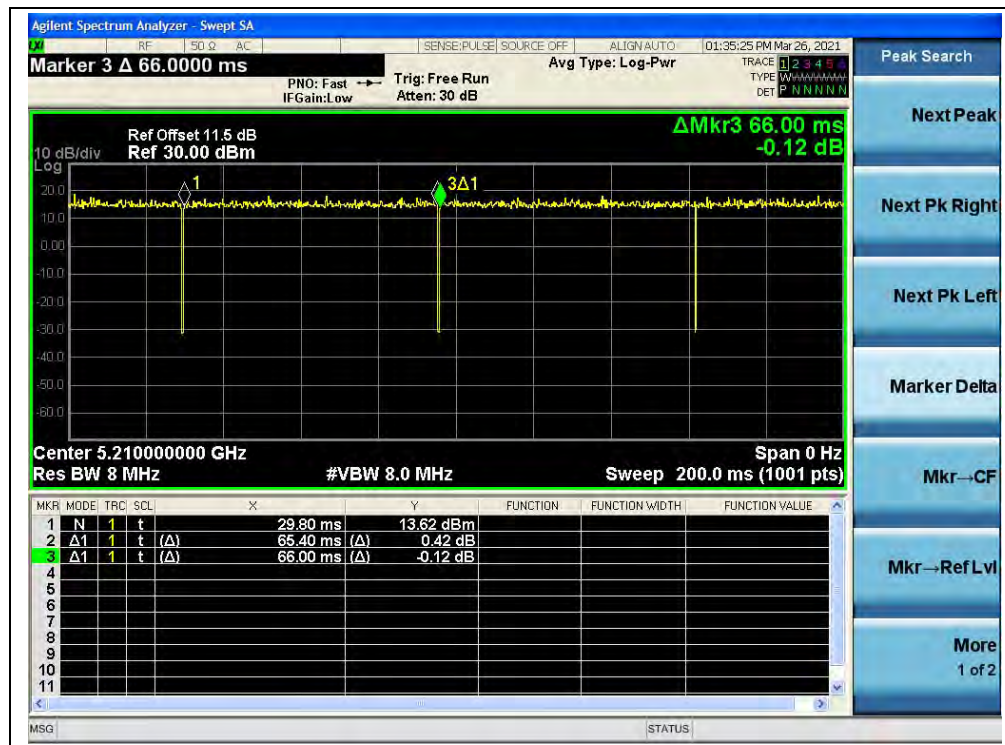


(Channel 42, 5210MHz, 802.11ac (VHT80))

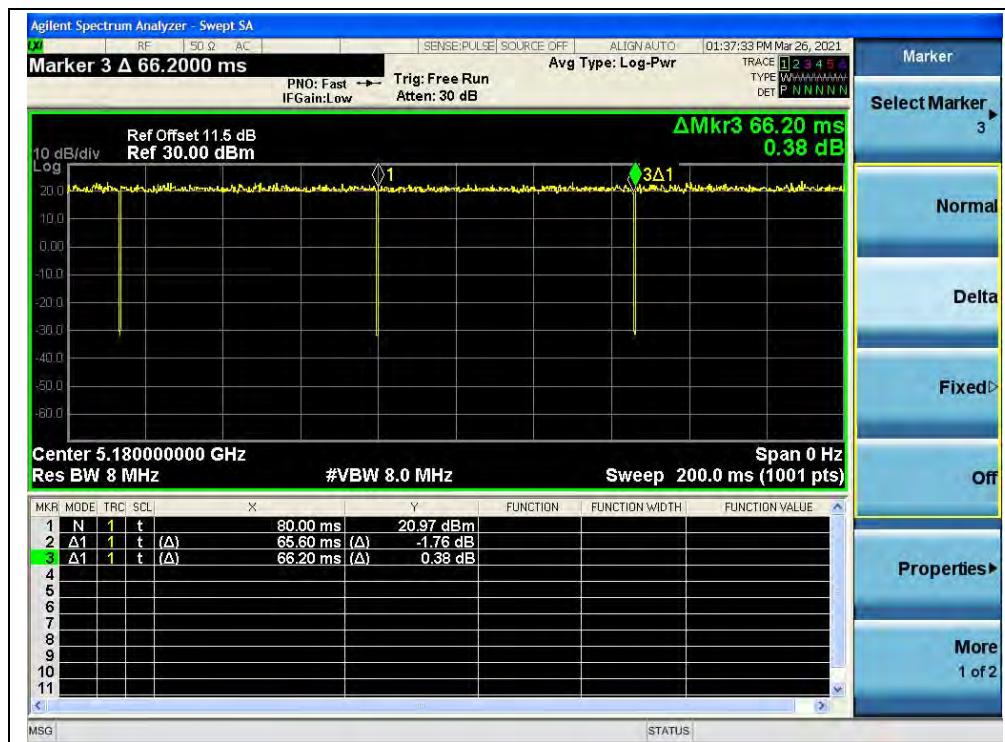

(CH36, 5180MHz, 802.11ax (HEW20))

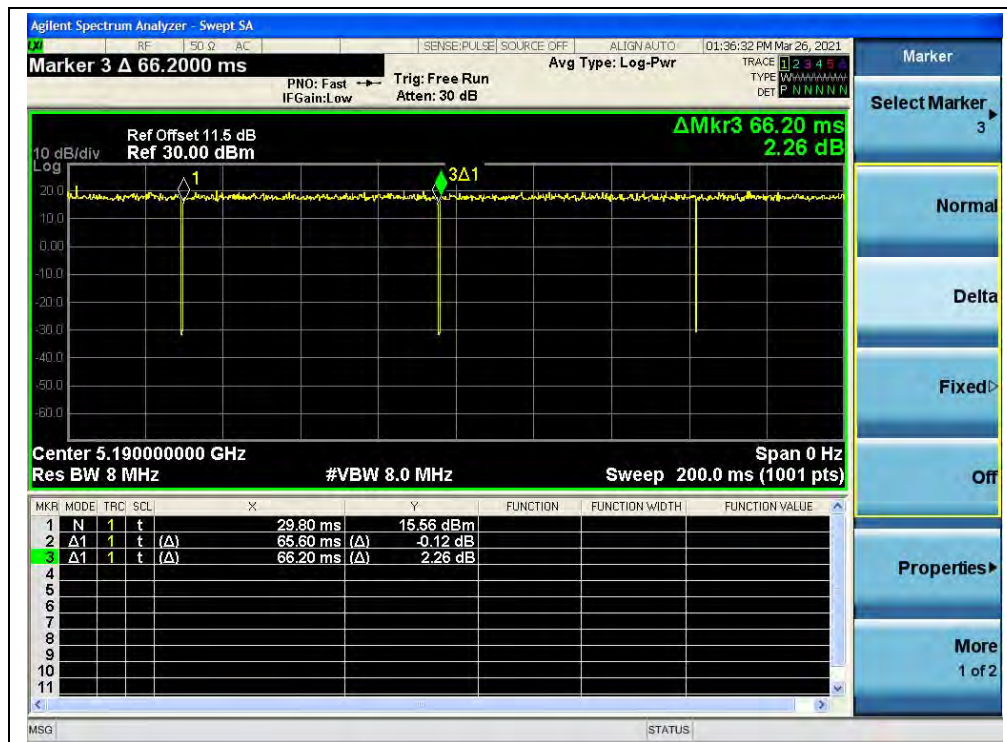

(CH38, 5190MHz, 802.11ax (HEW40))

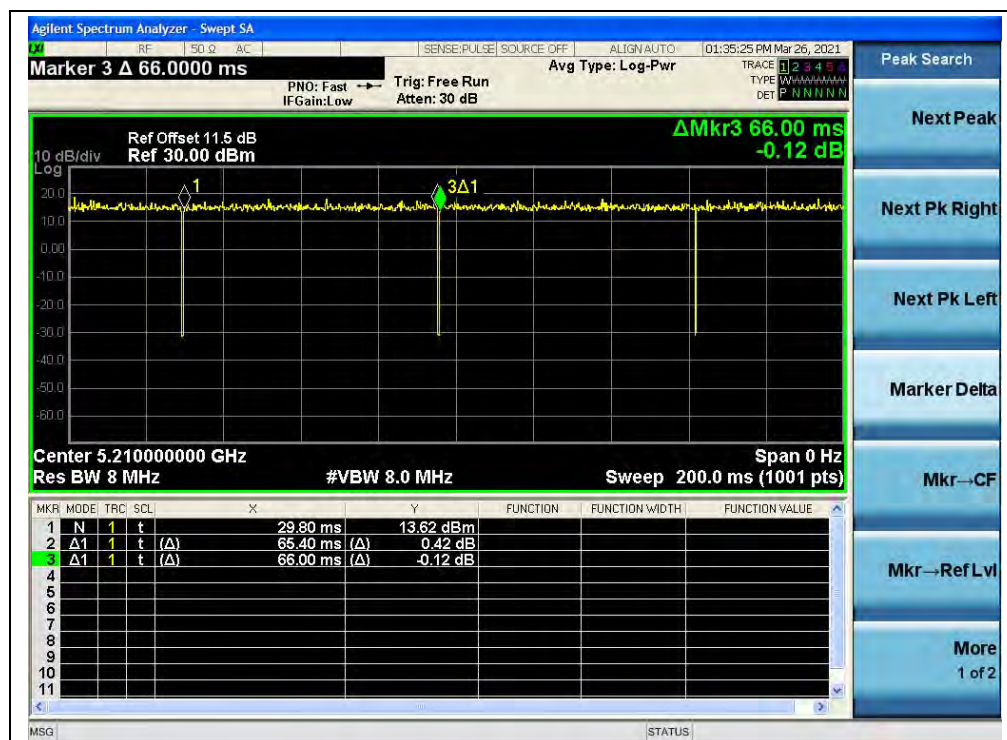

(CH42, 5210MHz, 802.11ax (HEW80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.


2.3.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

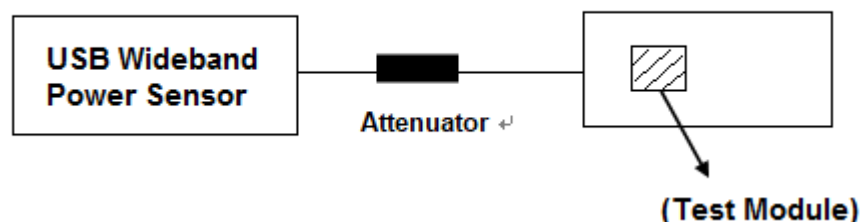

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

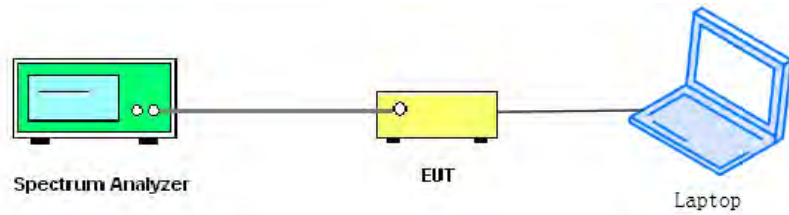For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



2.3.3. Limits

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	$10+10\log(26\text{dB BW})$	Limits (dBm)
a	UNII-2a	5260	19.00	23.79	23.79
		5300	19.08	23.81	23.81
		5320	19.14	23.82	23.82
n20	UNII-2a	5260	20.21	24.06	24.00
		5300	20.42	24.10	24.00
		5320	20.49	24.12	24.00
ac20	UNII-2a	5260	20.05	24.02	24.00
		5300	20.29	24.07	24.00
		5320	19.99	24.01	24.00
ax20	UNII-2a	5260	21.05	24.23	24.00
		5300	21.09	24.24	24.00
		5320	21.14	24.25	24.00
ax_RU26	UNII-2a	5260	20.46	24.11	24.00
		5300	20.37	24.09	24.00
		5320	20.36	24.09	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Frequency (MHz)	Average Power							Limit		Verdict
	Measured		Duty Factor	Duty Factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W			
5180	13.07	12.36	0.00	13.07	0.020	12.36	0.017	24	0.25	PASS
5220	12.82	11.93		12.82	0.019	11.93	0.016			
5240	12.90	12.18		12.90	0.019	12.18	0.017			
5260	12.75	12.54		12.75	0.019	12.54	0.018	23.79	0.24	PASS
5300	12.64	12.34		12.64	0.018	12.34	0.017	23.81	0.24	
5320	12.82	12.61		12.82	0.019	12.61	0.018	23.82	0.24	
5745	12.78	12.58		12.78	0.019	12.58	0.018	30	1	
5785	12.93	12.88		12.93	0.020	12.88	0.019			
5825	12.81	12.79		12.81	0.019	12.79	0.019			

**802.11n (HT20) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1				dBm	W	
5180	12.52	12.15	0.03	15.44	0.035	24	0.25	PASS
5220	12.68	12.34		15.56	0.036			
5240	12.81	12.72		15.80	0.038			
5260	12.60	12.41		15.56	0.036			
5300	12.61	12.55		15.56	0.036			
5320	12.79	12.66		15.80	0.038			
5745	12.18	12.11		15.19	0.033	30	1	
5785	12.35	12.21		15.31	0.034			
5825	12.80	12.67		15.80	0.038			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

802.11n (HT40) Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm	W	
5190	13.08	12.94	0.03	16.02	0.040	24	0.25	PASS
5230	13.10	12.88		16.02	0.040			
5270	13.02	12.92		16.02	0.040			
5310	13.21	13.01		16.13	0.041			
5755	12.54	12.12		15.31	0.034	30	1	
5795	12.70	12.21		15.44	0.035			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

**802.11ac (VHT20) Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5180	12.86	12.45	0.04	15.68	0.037	24	0.25	PASS
5220	12.95	12.45		15.80	0.038			
5240	13.01	12.72		15.91	0.039			
5260	12.91	12.34		15.68	0.037			
5300	12.74	12.11		15.44	0.035			
5320	12.85	12.32		15.68	0.037			
5745	12.20	12.00		15.19	0.033	30	1	
5785	12.33	12.12		15.31	0.034			
5825	12.71	12.32		15.56	0.036			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

802.11ac (VHT40) Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm	W	
5190	13.10	12.66	0.04	15.91	0.039	24	0.25	PASS
5230	13.01	12.59		15.91	0.039			
5270	13.03	12.65		15.91	0.039			
5310	13.23	12.88		16.13	0.041			
5755	12.55	12.01		15.31	0.034	30	1	
5795	12.78	12.22		15.56	0.036			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

**802.11ac (VHT80) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm	W	
	dBm	dBm						
5210	13.12	12.89	0.04	16.02	0.040	24	0.25	PASS
5290	13.07	12.99		16.13	0.041			
5775	12.79	12.56		15.68	0.037	30	1	
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

802.11ax (HEW20) Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm	W	
5180	12.84	12.45	0.04	15.68	0.037	24	0.25	PASS
5220	12.94	12.66		15.80	0.038			
5240	13.05	12.89		16.02	0.040			
5260	12.83	12.67		15.80	0.038			
5300	12.77	12.57		15.68	0.037			
5320	12.83	12.77		15.80	0.038			
5745	13.22	12.22		15.80	0.038	30	1	
5785	13.31	12.90		16.13	0.041			
5825	12.80	12.55		15.68	0.037			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

**802.11ax (HEW20) RU26 Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm	W	
5180	13.60	12.56	0.04	16.63	0.046	24	0.25	PASS
5220	13.31	12.16		16.02	0.040			
5240	13.19	13.93		16.13	0.041			
5260	13.15	12.78		16.13	0.041			
5300	13.21	12.88		16.63	0.046			
5320	13.30	12.74		16.02	0.040			
5745	13.01	12.86		16.02	0.040	30	1	
5785	13.22	12.72		16.02	0.040			
5825	13.29	12.26		15.91	0.039			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

802.11ax (HEW20) RU52 Mode

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm	W	
5180	13.11	12.85	0.04	16.02	0.040	24	0.25	PASS
5220	13.21	12.01		15.68	0.037			
5240	13.28	12.55		16.02	0.040			
5260	13.14	12.77		16.02	0.040			
5300	13.02	12.88		16.02	0.040			
5320	13.09	12.89		16.02	0.040			
5745	13.12	12.88		16.02	0.040	30	1	
5785	13.21	12.82		16.02	0.040			
5825	13.09	12.82		16.02	0.040			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

**802.11ax (HEW20) RU106 Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5180	13.04	12.79	0.04	16.02	0.040	24	0.25	PASS
5220	13.15	12.81		16.02	0.040			
5240	13.11	12.86		16.02	0.040			
5260	13.01	12.99		16.02	0.040			
5300	13.18	12.66		16.02	0.040			
5320	13.09	12.79		16.02	0.040			
5745	13.16	12.96		16.13	0.041	30	1	
5785	13.11	12.86		16.02	0.040			
5825	13.08	12.77		16.02	0.040			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

802.11ax (HEW40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5190	13.00	12.66	0.04	15.91	0.039	24	0.25	PASS
5230	12.62	12.33		15.56	0.036			
5270	12.68	12.31		15.56	0.036			
5310	12.89	12.34		15.68	0.037			
5755	12.34	12.12		15.31	0.034	30	1	
5795	12.67	12.31		15.56	0.036			
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								

**802.11ax (HEW80) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1						
	dBm	dBm		W	dBm	dBm	W	
5210	12.97	12.76	0.04	15.91	0.039	24	0.25	PASS
5290	13.01	12.76		15.91	0.039			
5775	12.81	12.11		15.56	0.036	30	1	
Note: Directional gain = -7.5dBi +10log(2) = -4.49dBi<6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.								


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

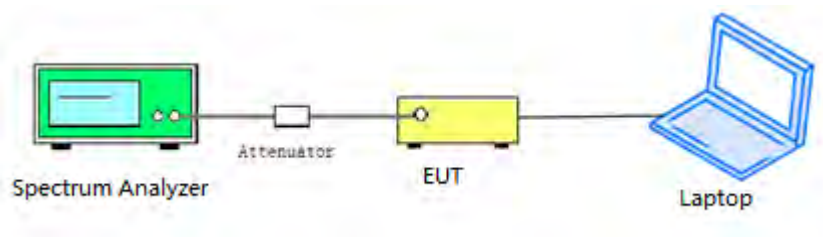

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
 2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
- Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	19.08
44	5220	19.05
48	5240	19.08
52	5260	19.00
60	5300	19.08
64	5320	19.14
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.39
157	5785	16.38
165	5825	16.37




B.Test Plot:




(Channel 36, 5180MHz, 802.11a)




(Channel 44, 5220 MHz, 802.11a)

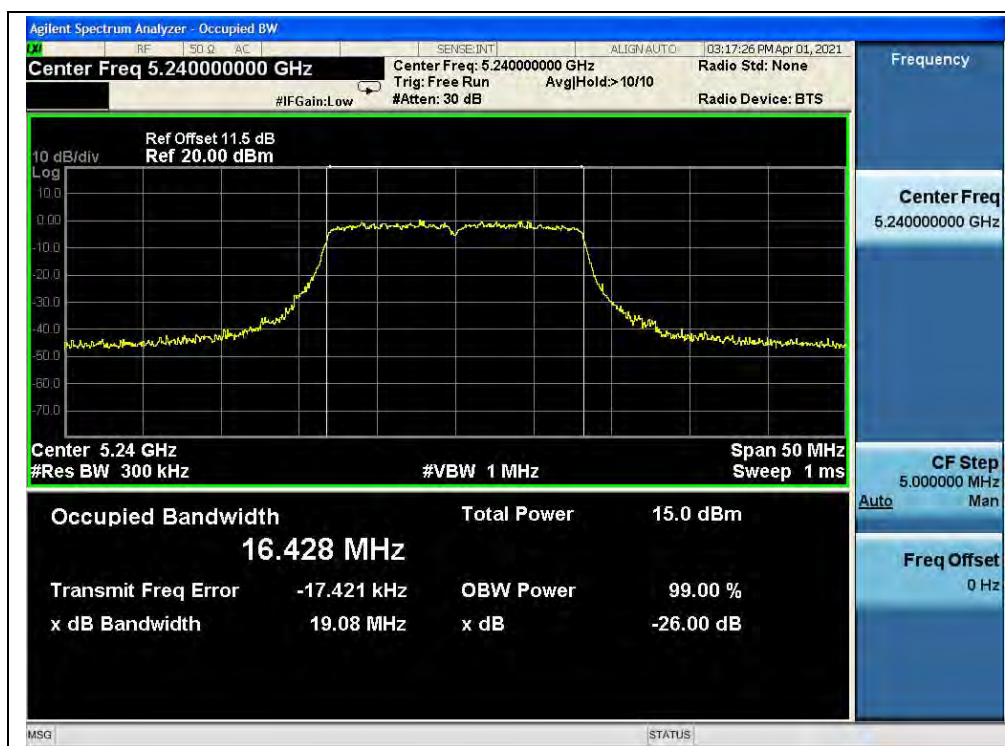


(Channel 48, 5240MHz, 802.11a)

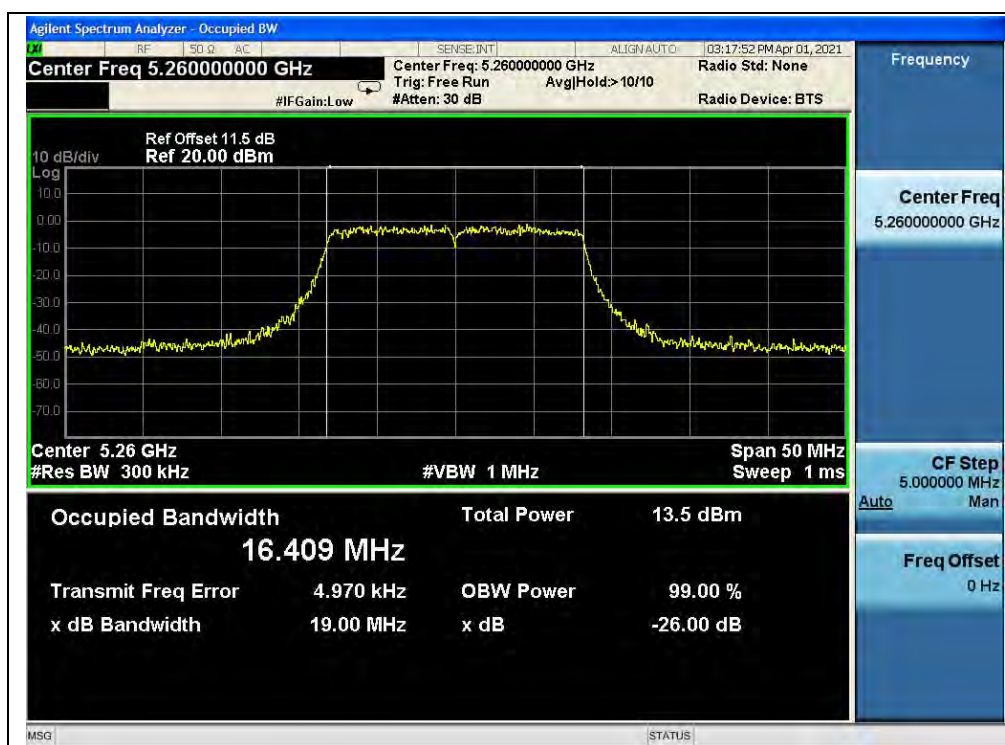


(Channel 52, 5260MHz, 802.11a)

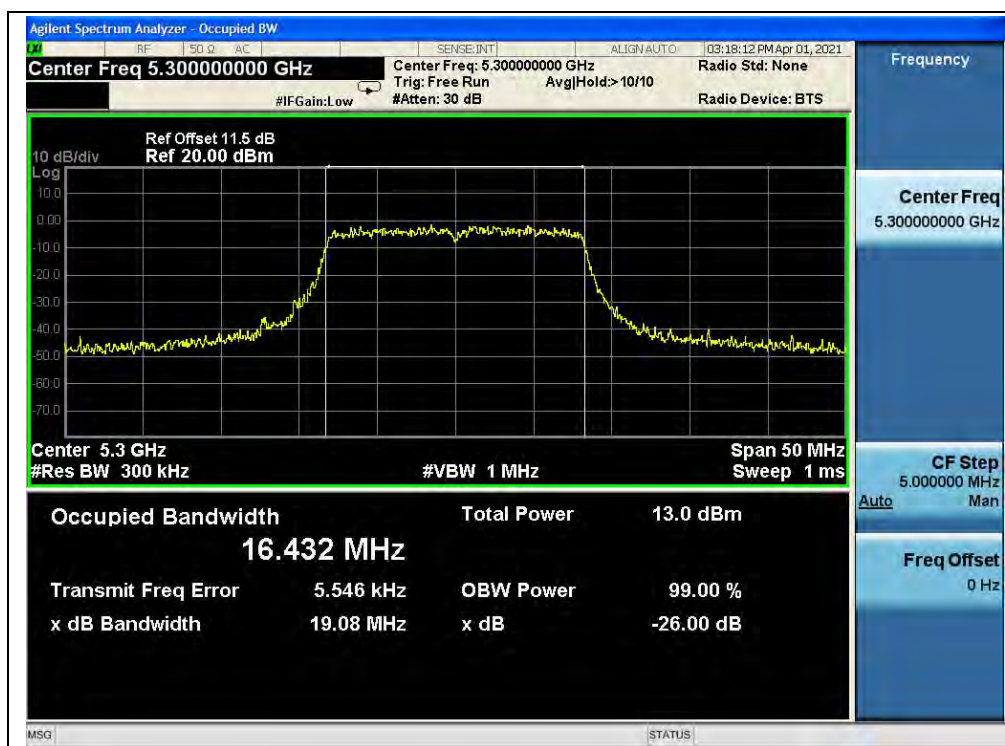


(Channel 60, 5300 MHz, 802.11a)

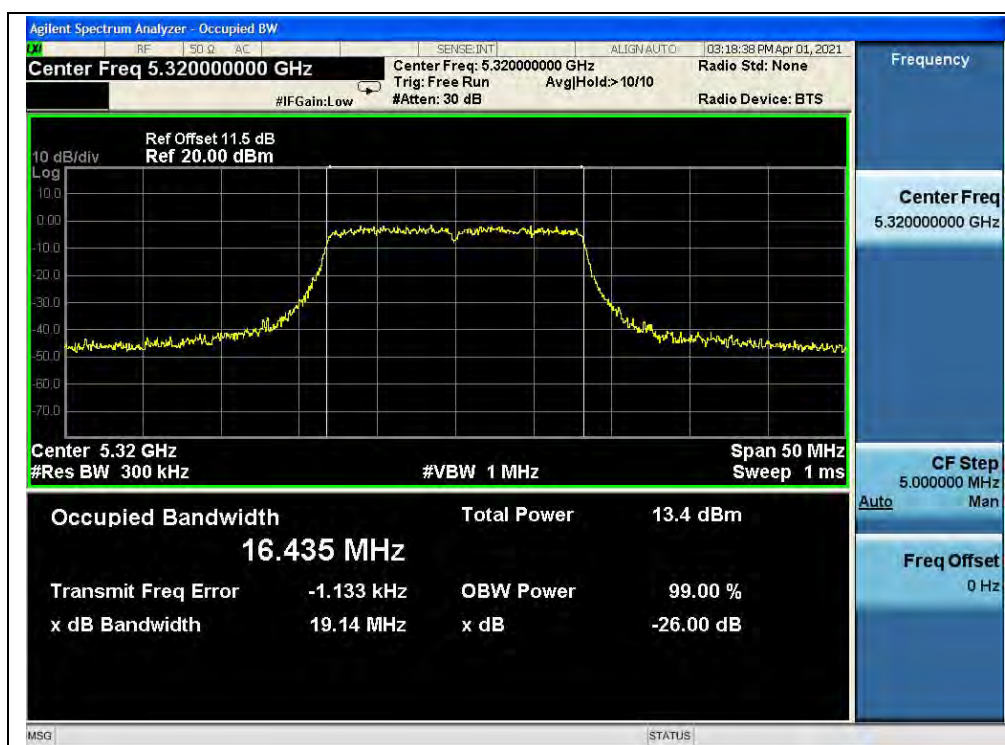


(Channel 64, 5320MHz, 802.11a)

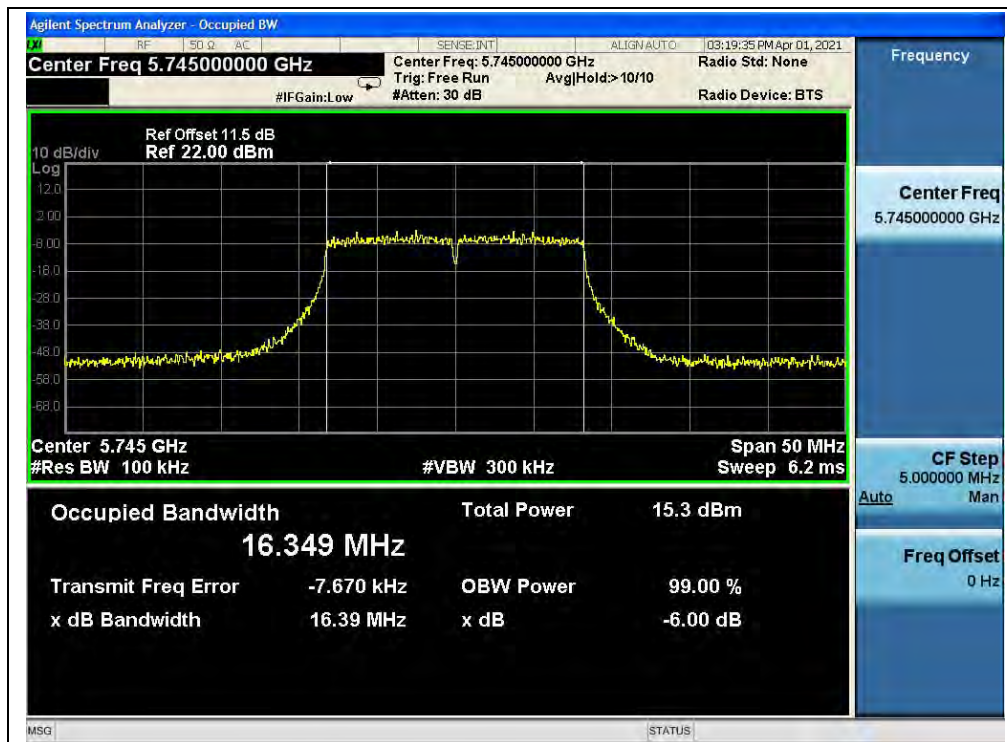

(Channel 149, 5745MHz, 802.11a)

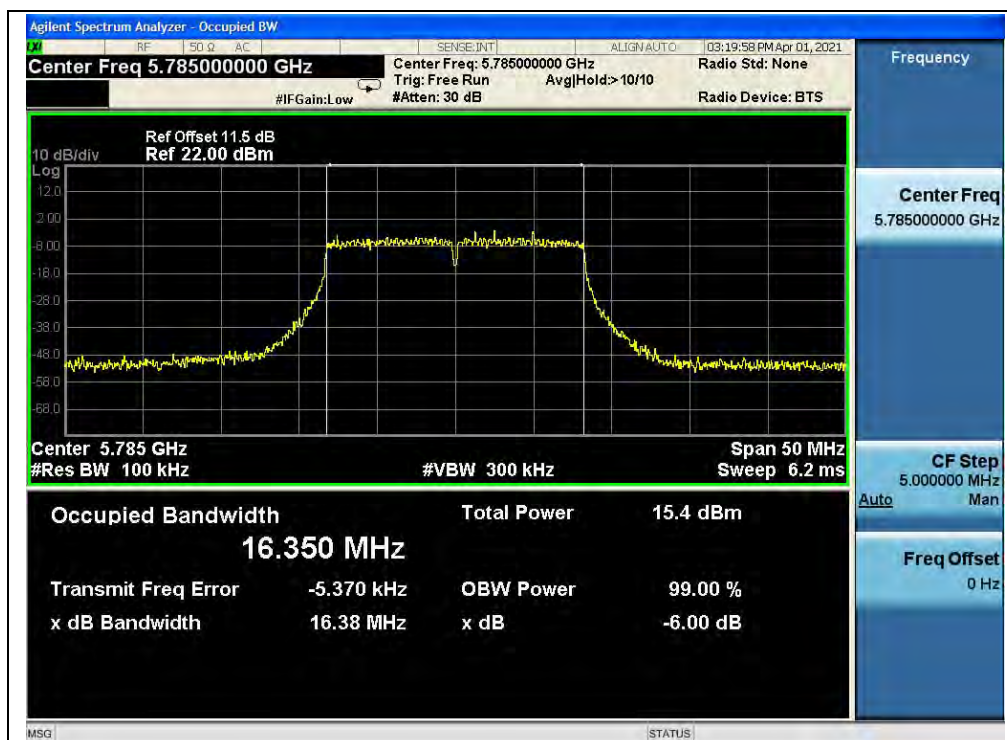

(Channel 157, 5785MHz, 802.11a)

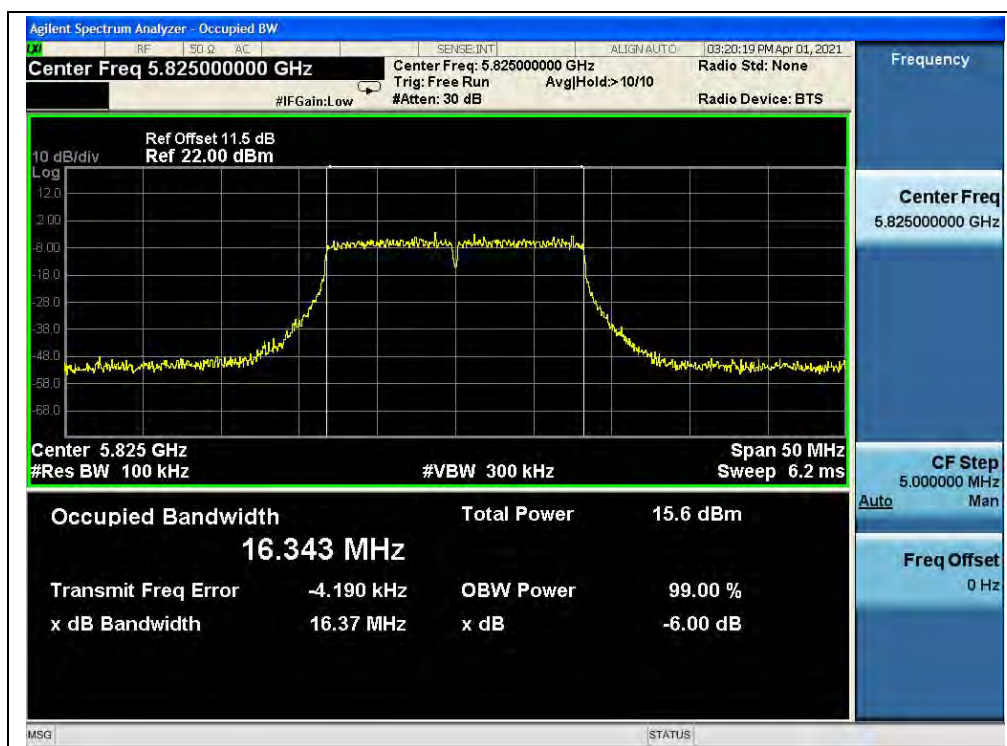

(Channel 165, 5825MHz, 802.11a)



A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.05
44	5220	20.41
48	5240	20.18
52	5260	20.21
60	5300	20.42
64	5320	20.49
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.64
157	5785	17.59
165	5825	17.66

Agilent Spectrum Analyzer - Occupied BW

RF SQ BW AC SENSE INT ALIGN AUTO 03:46:42 PM Apr 01, 2021

Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Radio Std: None
 Trig: Free Run Avg/Hold: >10/10
 #IFGain: Low #Atten: 30 dB Radio Device: BTS

Ref Offset 11.5 dB
 Ref 20.00 dBm

10 dB/div
 Log

Center 5.18 GHz Span 50 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms

Occupied Bandwidth		Total Power	
17.612 MHz		15.3 dBm	

Transmit Freq Error		OBW Power	
2.197 kHz		99.00 %	

x dB Bandwidth		x dB	
20.05 MHz		-26.00 dB	

Recall State

From File...

Register 1
 Last: 3/8/2019
 3:37:46 PM

Register 2
 (empty)


Register 3
 (empty)

Register 4
 (empty)


More
 1 of 3

MSG File <B1-5180.state> recalled STATUS


(Channel 36, 5180MHz, 802.11n (HT20))

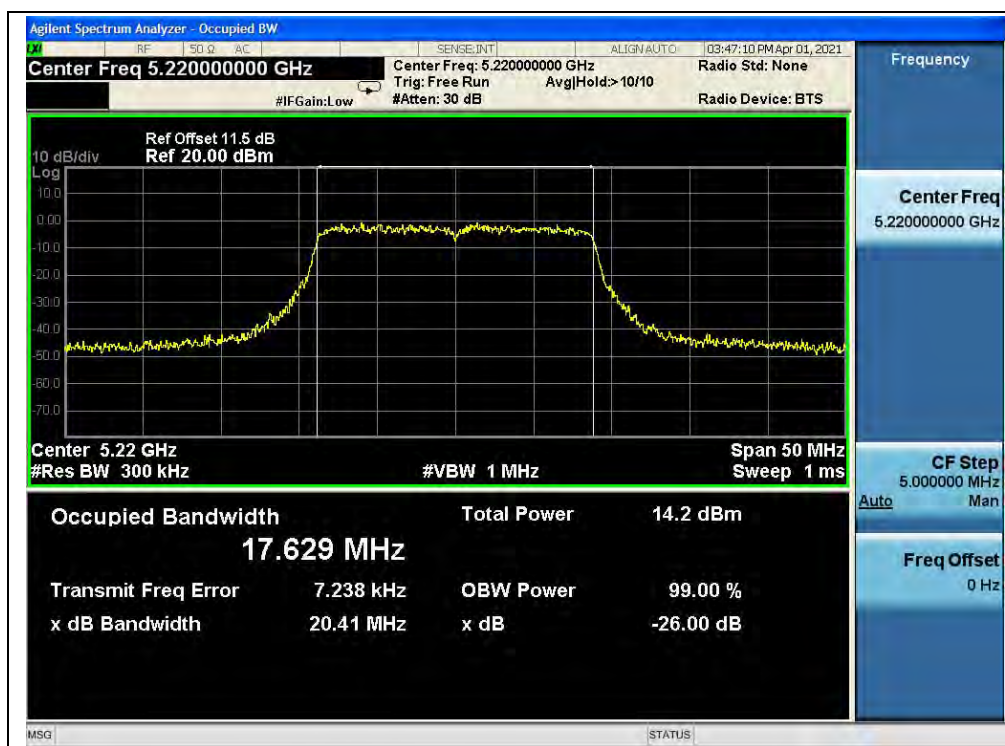


(Channel 44, 5220MHz, 802.11n (HT20))

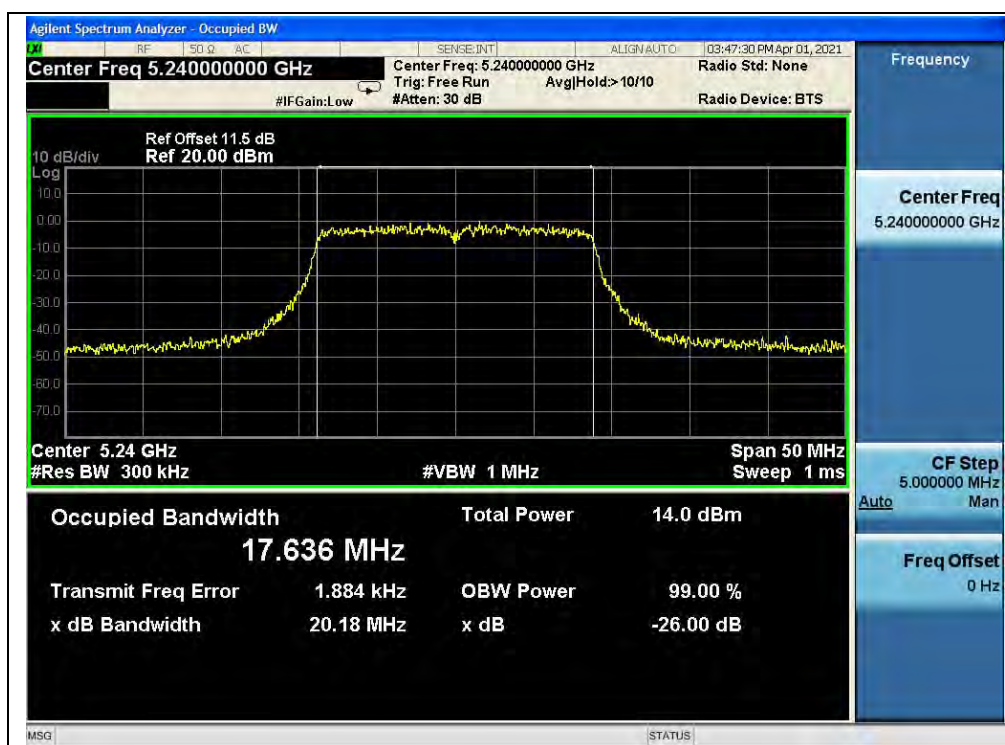


(Channel 48, 5240MHz, 802.11n (HT20))

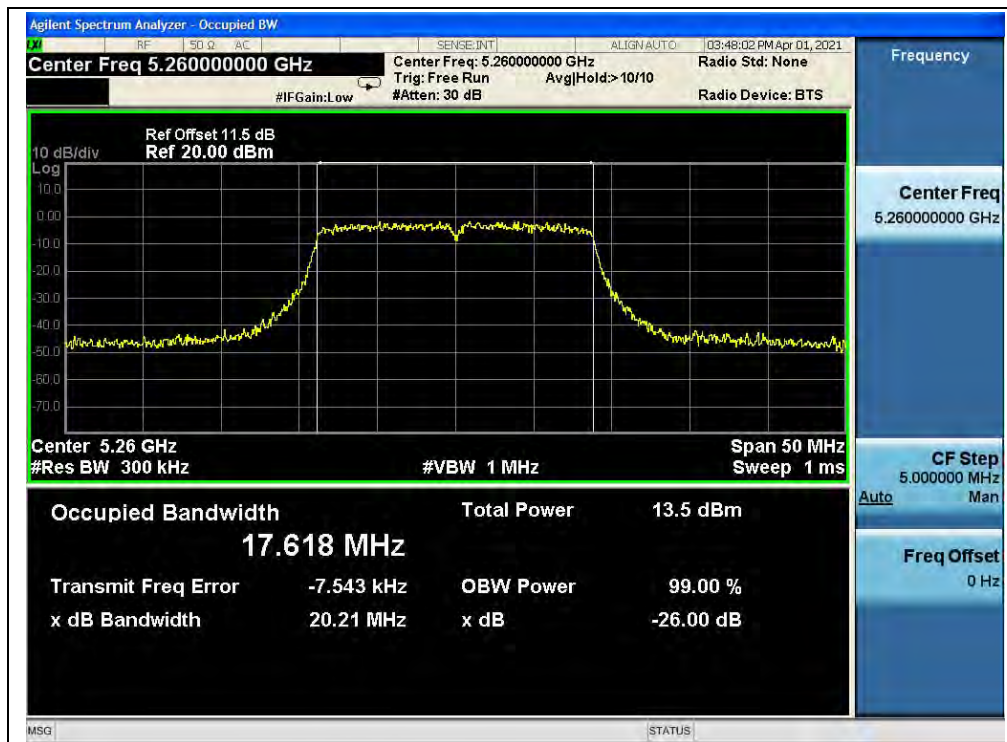


(Channel 52, 5260MHz, 802.11n (HT20))

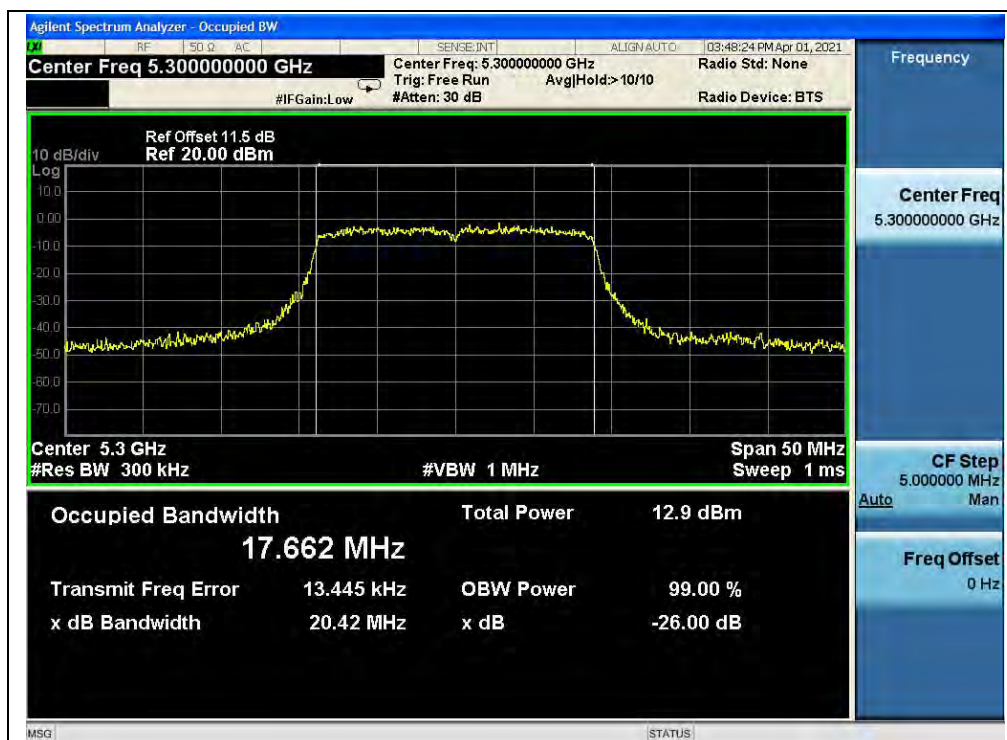


(Channel 60, 5300MHz, 802.11n (HT20))

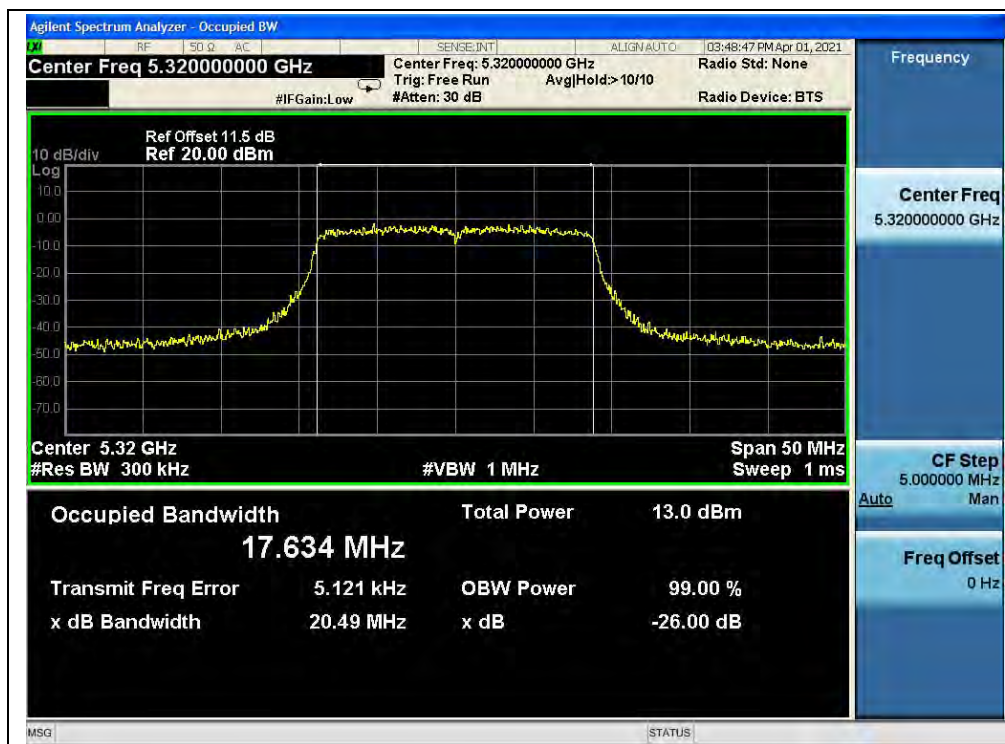


(Channel 64, 5320MHz, 802.11n (HT20))

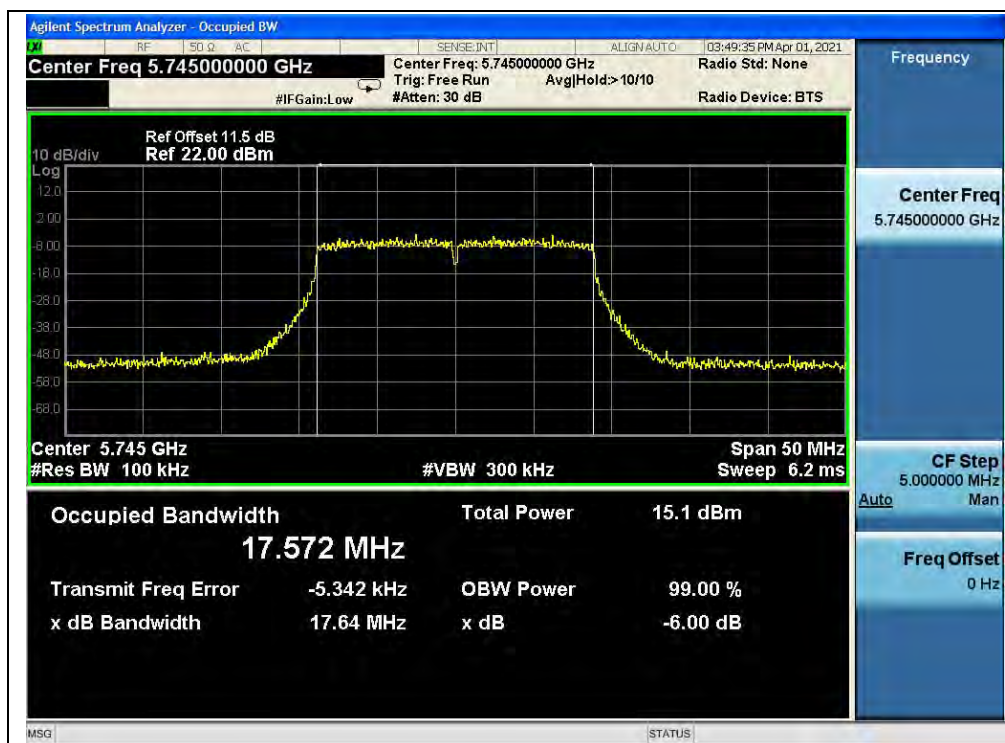

(Channel 149, 5745MHz, 802.11 n (HT20))

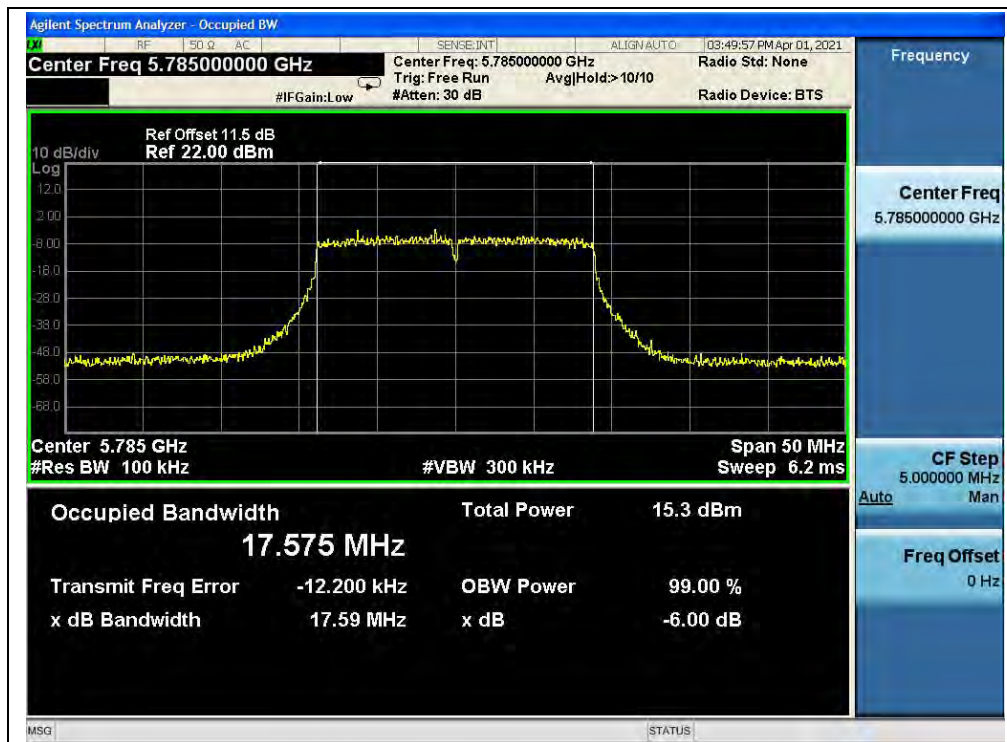

(Channel 157, 5785MHz, 802.11 n (HT20))

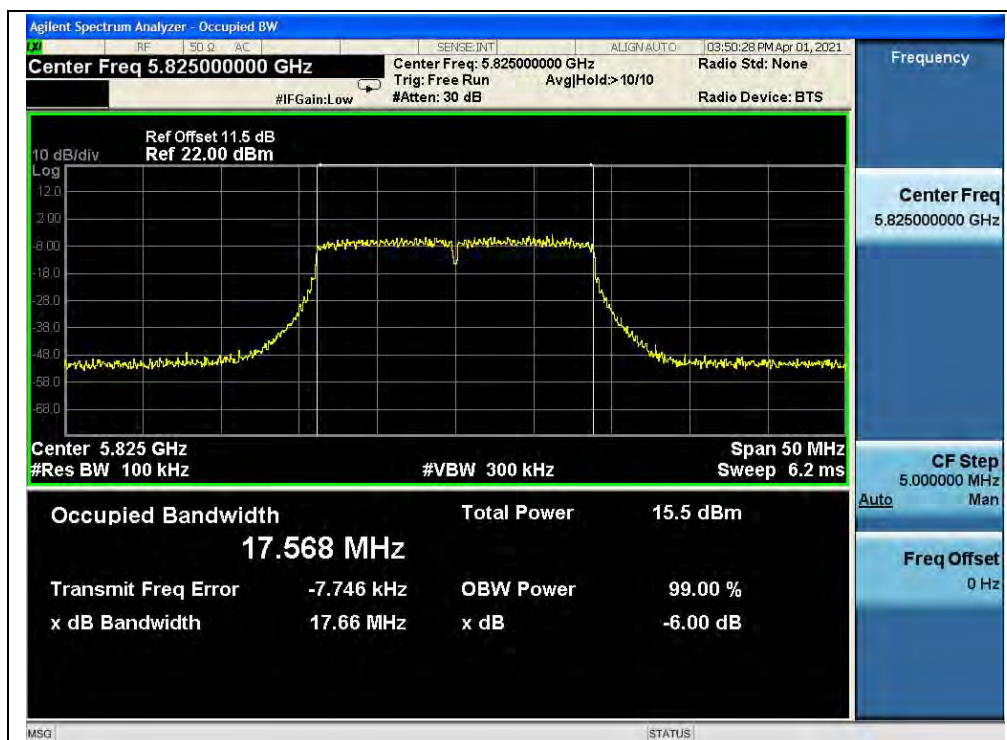

(Channel 165, 5825MHz, 802.11 n (HT20))




802.11n (HT40) Mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.29
46	5230	39.27
54	5270	39.47
62	5310	39.29
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	36.39
159	5795	36.42


B.Test Plot:

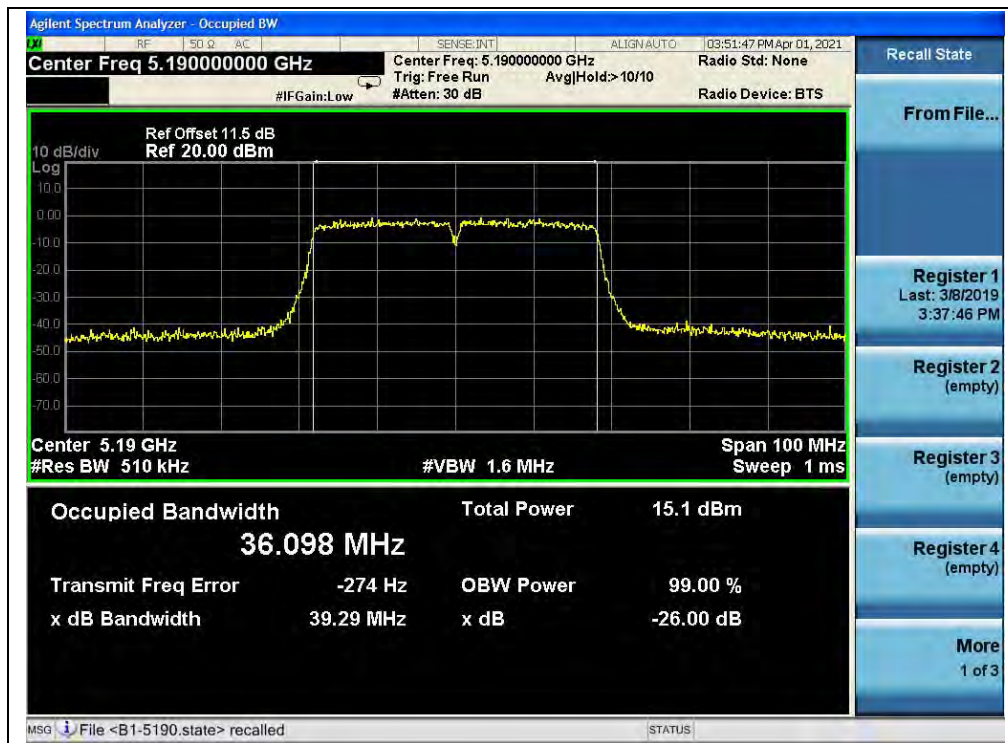


(Channel 38, 5190MHz, 802.11n (HT40))




(Channel 46, 5230MHz, 802.11n (HT40))

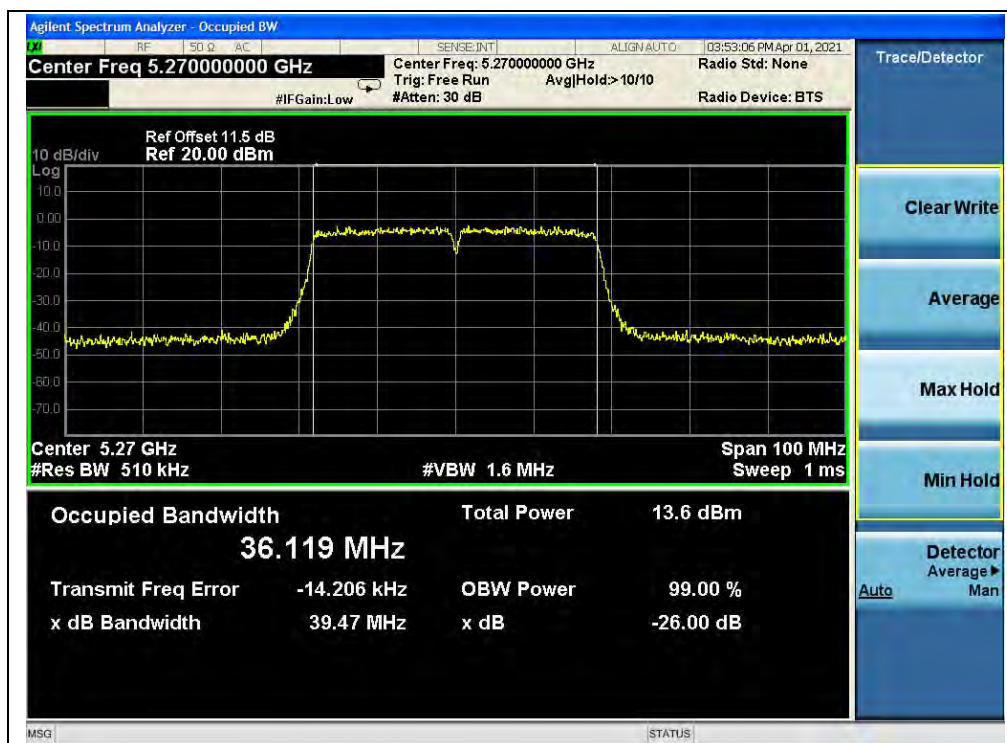


(Channel 54, 5270MHz, 802.11n (HT40))

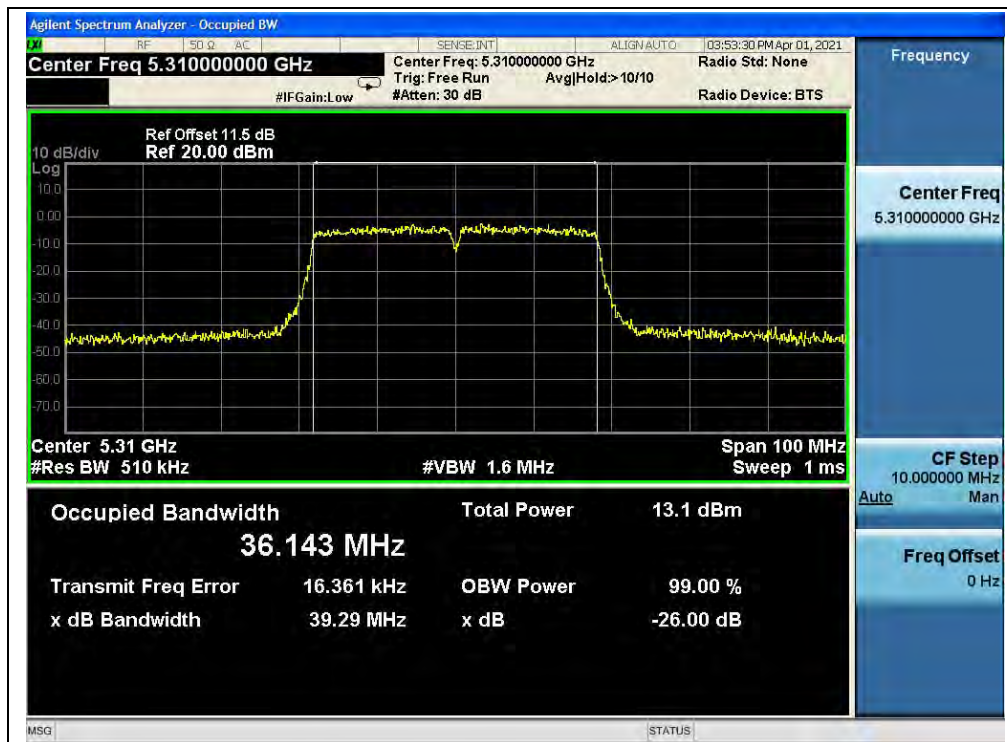

(Channel 62, 5310MHz, 802.11n (HT40))

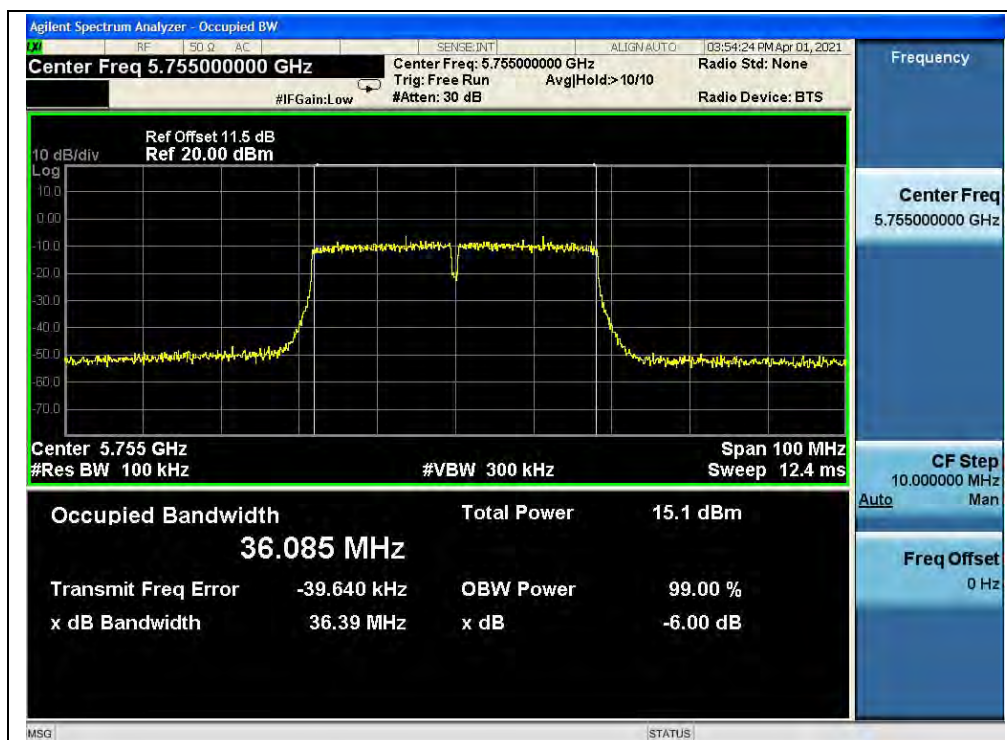

(Channel 151, 5755MHz, 802.11n (HT40))

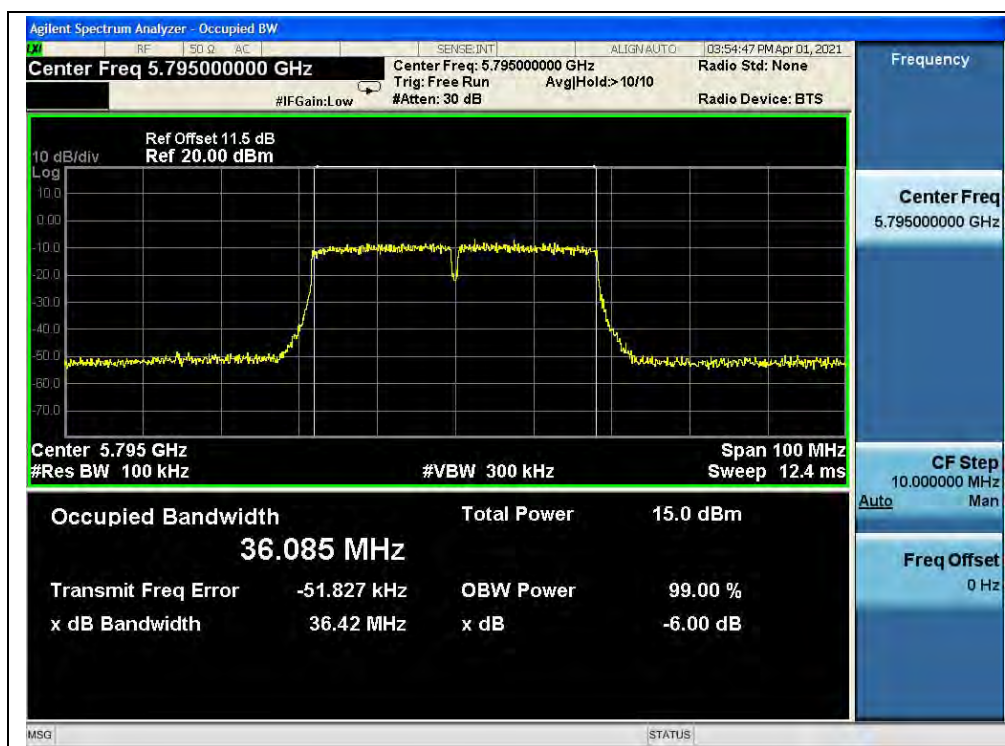

(Channel 159, 5795MHz, 802.11n (HT40))




A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.33
44	5220	20.00
48	5240	20.10
52	5260	20.05
60	5300	20.29
64	5320	19.99
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.60
157	5785	17.58
165	5825	17.61


B.Test Plot:



(Channel 36, 5180MHz, 802.11ac (VHT20))

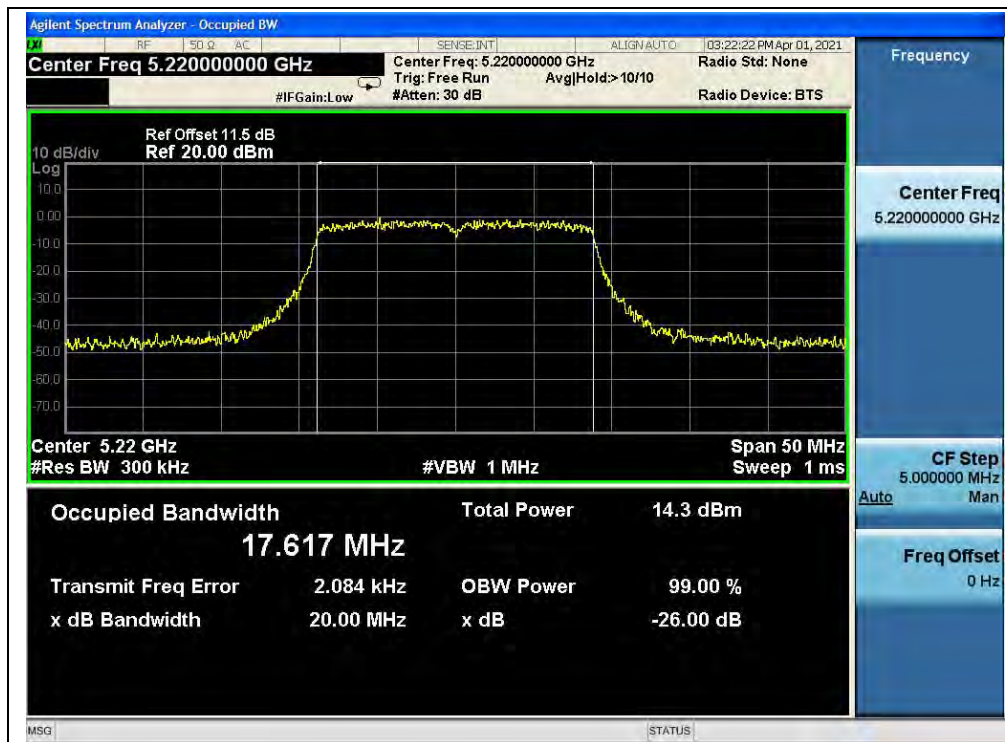


(Channel 44, 5220MHz, 802.11ac (VHT20))

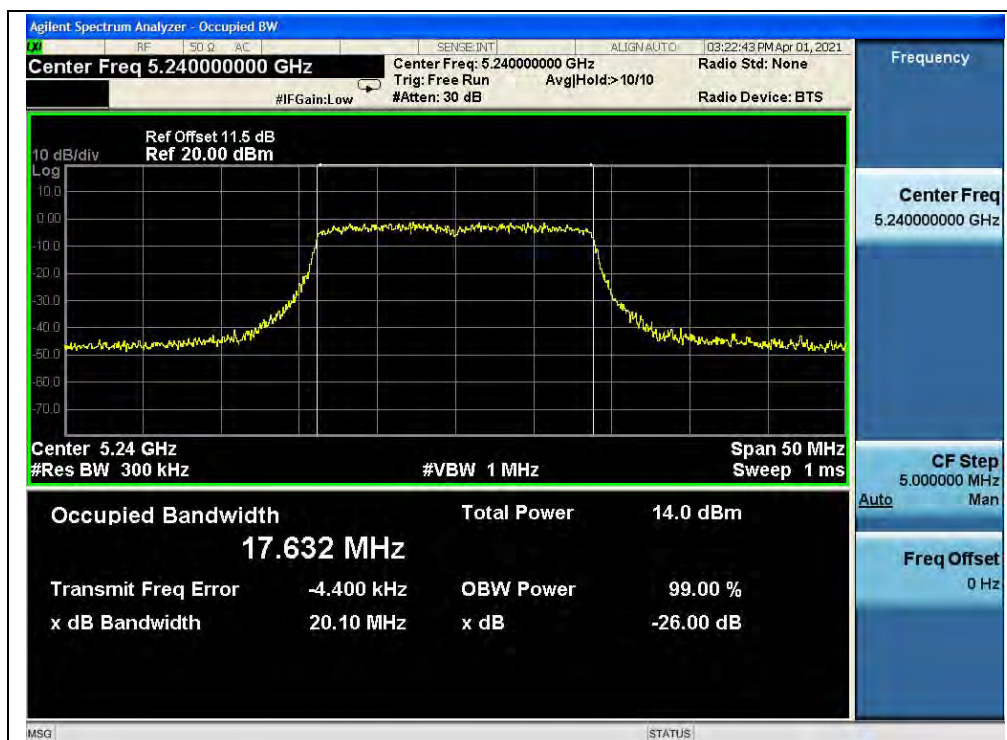


(Channel 48, 5240MHz, 802.11ac (VHT20))



(Channel 52, 5260MHz, 802.11ac (VHT20))

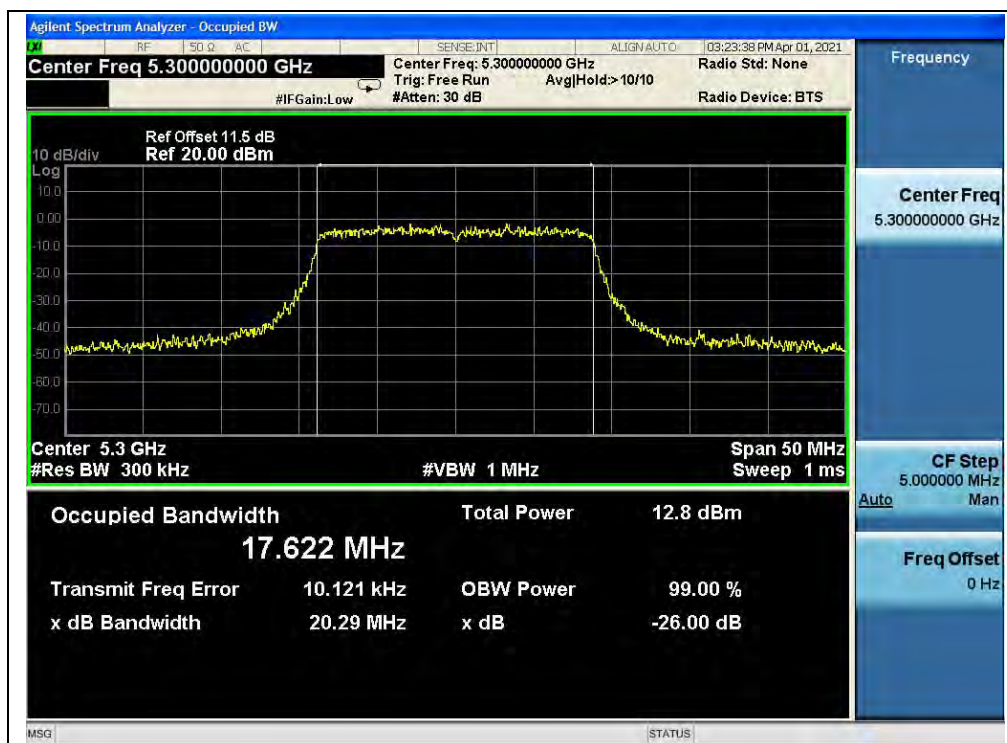

(Channel 60, 5300MHz, 802.11ac (VHT20))

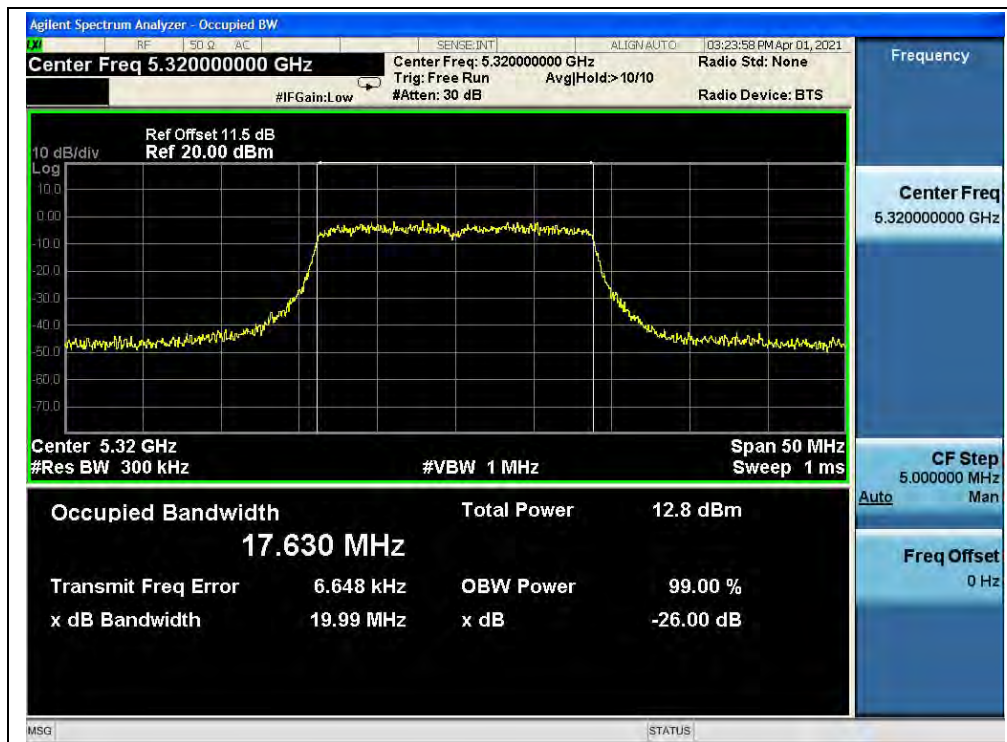


(Channel 64, 5320MHz, 802.11ac (VHT20))



(Channel 149, 5745MHz, 802.11 ac (VHT20))



(Channel 157, 5785MHz, 802.11 ac (VHT20))

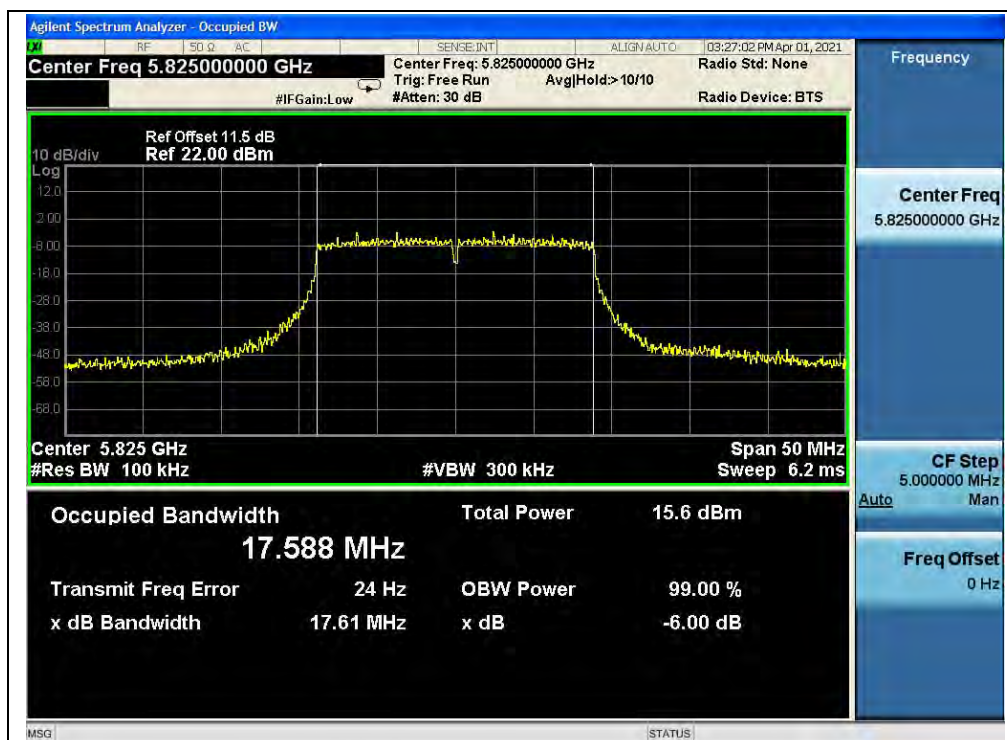

(Channel 165, 5825MHz, 802.11 ac (VHT20))




802.11ac (VHT40) Mode


A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.67
46	5230	39.74
54	5270	39.37
62	5310	39.83
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	36.40
159	5795	36.41


B.Test Plot:

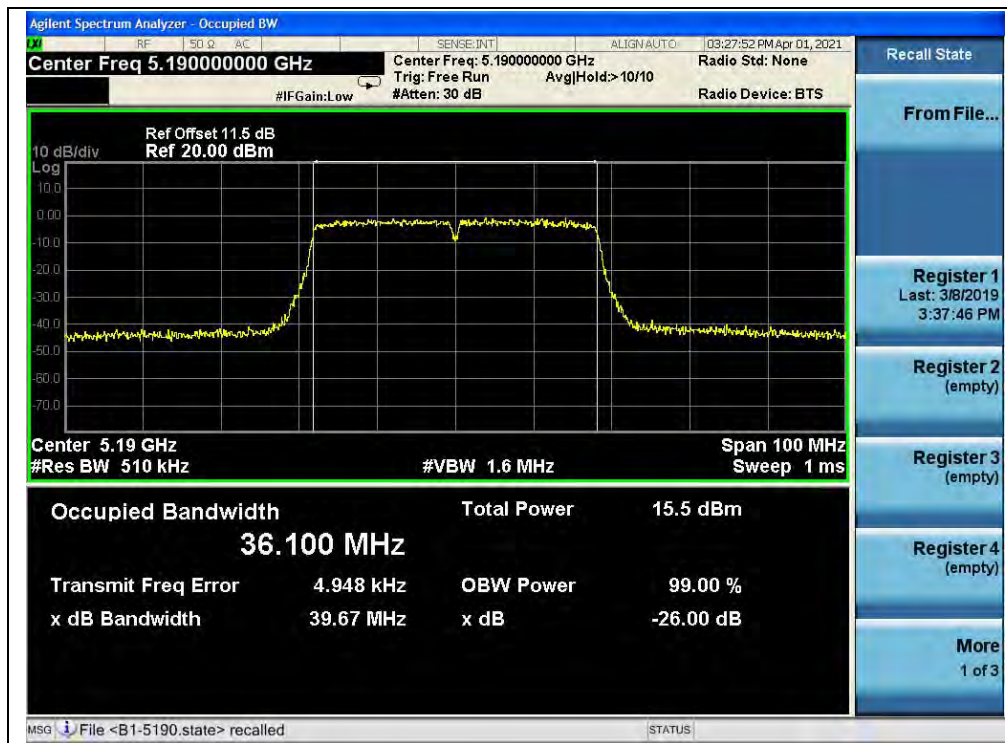


(Channel 38, 5190MHz, 802.11ac (VHT40))

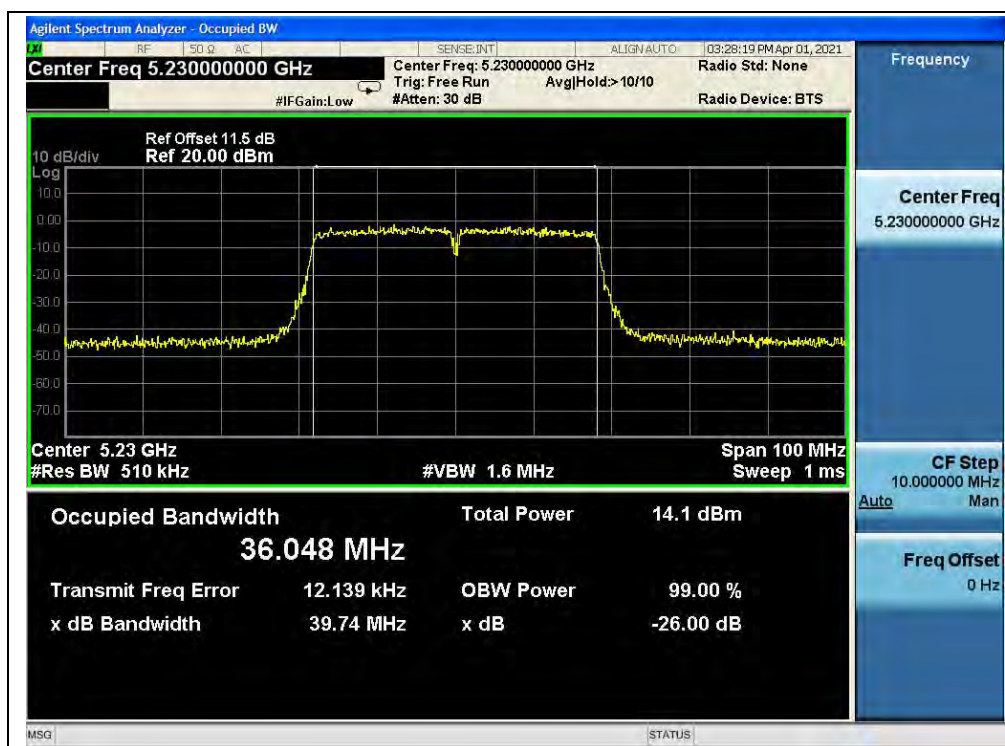


(Channel 46, 5230MHz, 802.11ac (VHT40))

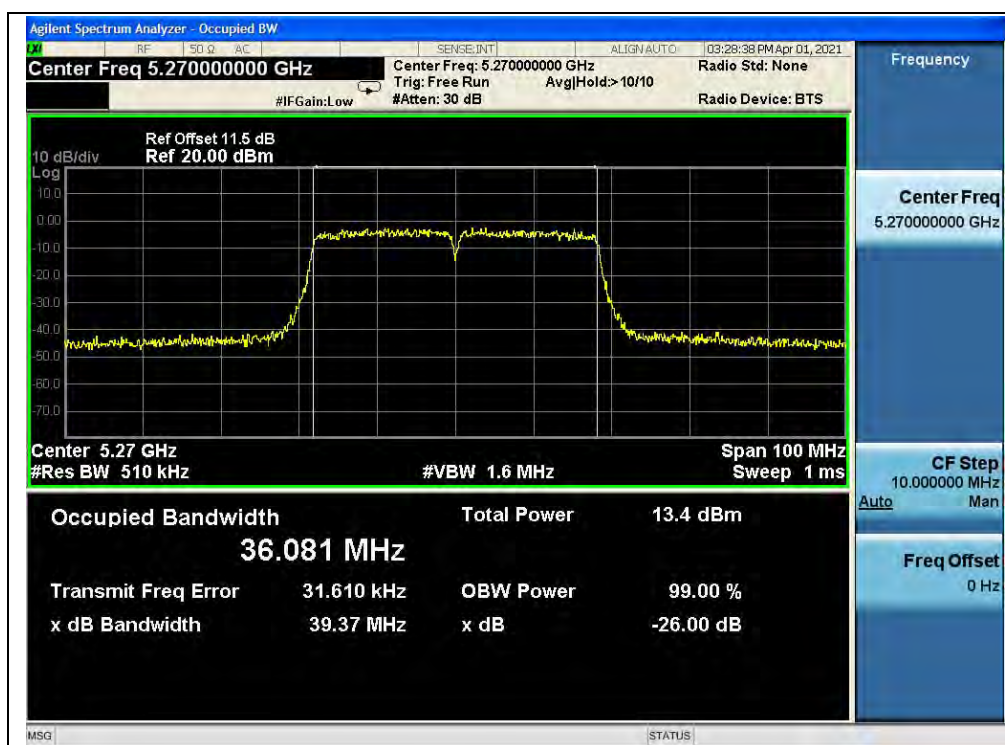


(Channel 54, 5270MHz, 802.11ac (VHT40))

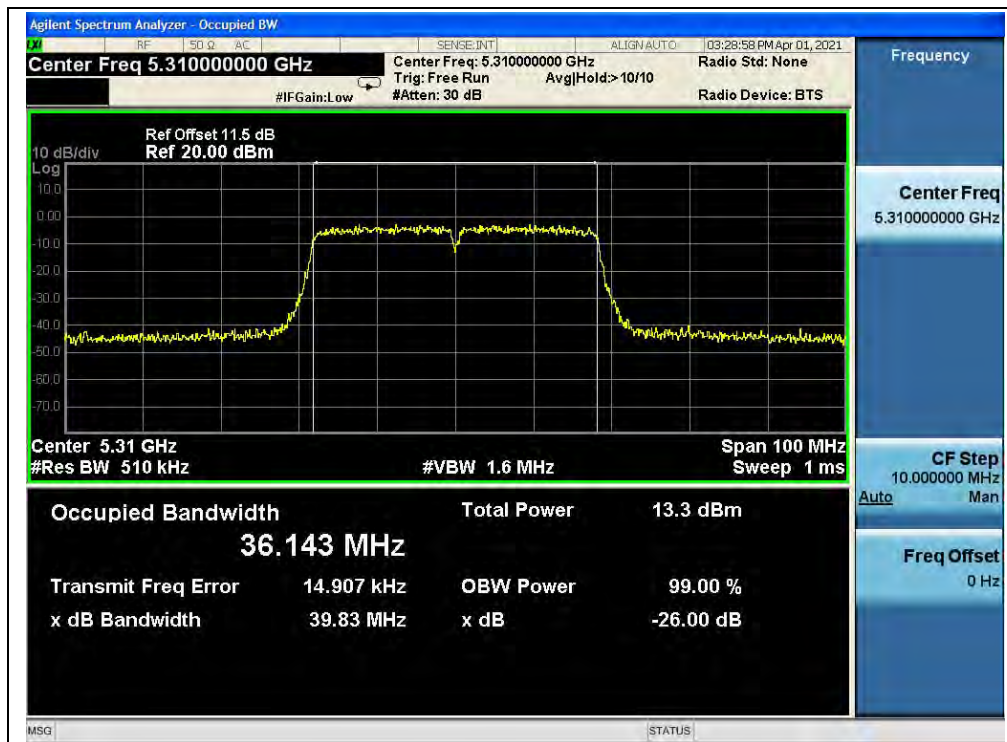

(Channel 62, 5310MHz, 802.11ac (VHT40))

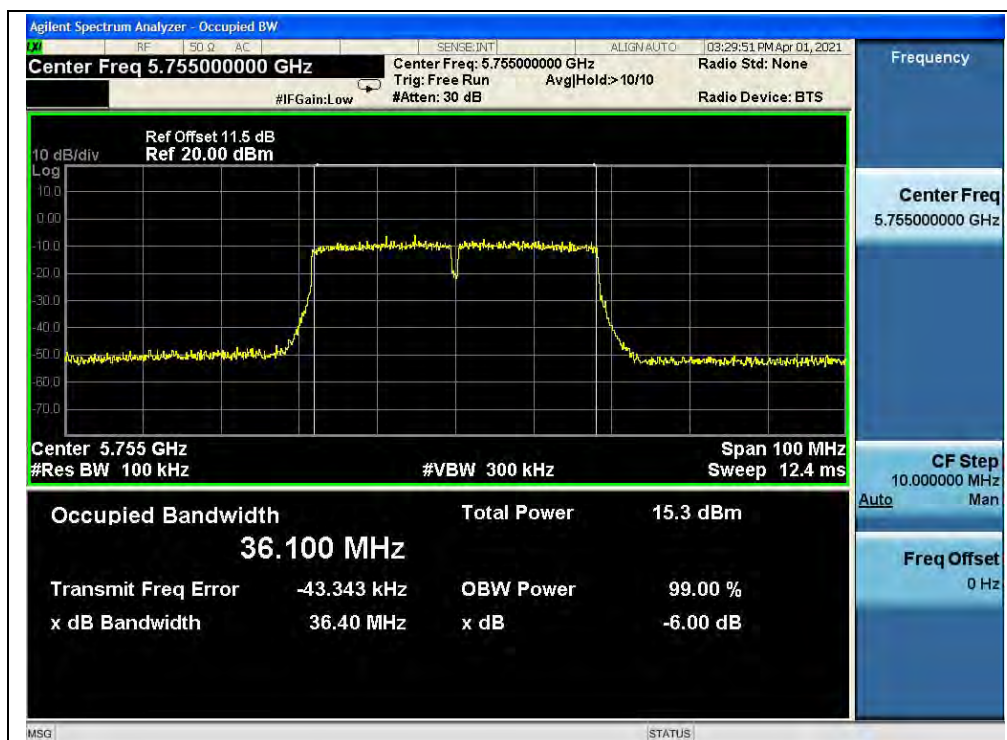

(Channel 151, 5755MHz, 802.11ac (VHT40))

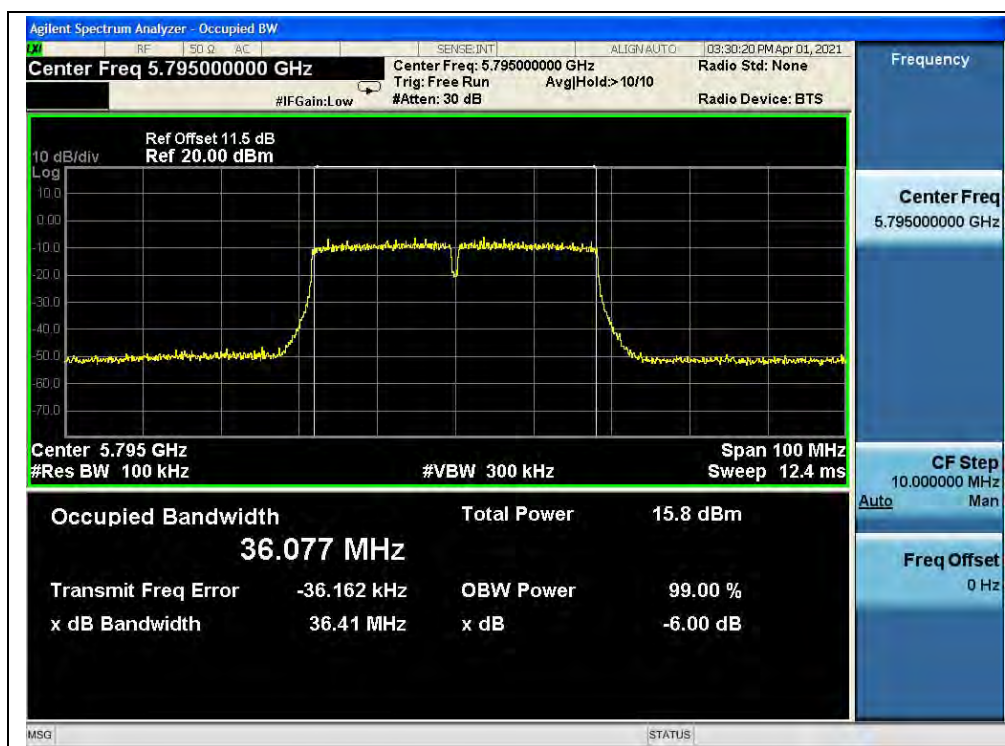

(Channel 159, 5795MHz, 802.11ac (VHT40))

**802.11ac (VHT80) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	80.90
58	5290	80.67
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
155	5775	76.23

B.Test Plot:

(Channel 42, 5210MHz, 802.11ac (VHT80))



(Channel 58, 5290MHz, 802.11ac (VHT80))

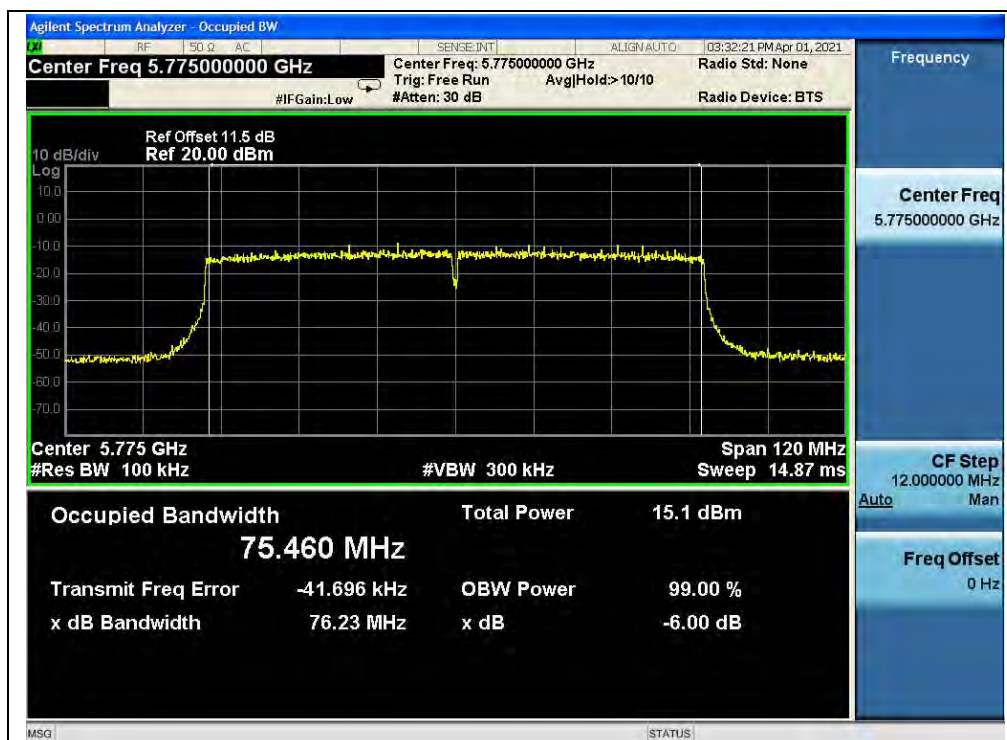

(Channel 155, 5775MHz, 802.11ac (VHT80))

**802.11ax (HEW20) Mode****A.Test Verdict:**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.45
44	5220	20.83
48	5240	20.88
52	5260	21.05
60	5300	21.09
64	5320	21.14
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	18.43
157	5785	19.00
165	5825	19.01

B.Test Plot:

(Channel 36, 5180MHz, 802.11ax (HEW20))



(Channel 44, 5220MHz, 802.11ax (HEW20))



(Channel 48, 5240MHz, 802.11ax (HEW20))




(Channel 52, 5260MHz, 802.11ax (HEW20))




(Channel 60, 5300MHz, 802.11ax (HEW20))



(Channel 64, 5320MHz, 802.11ax (HEW20))

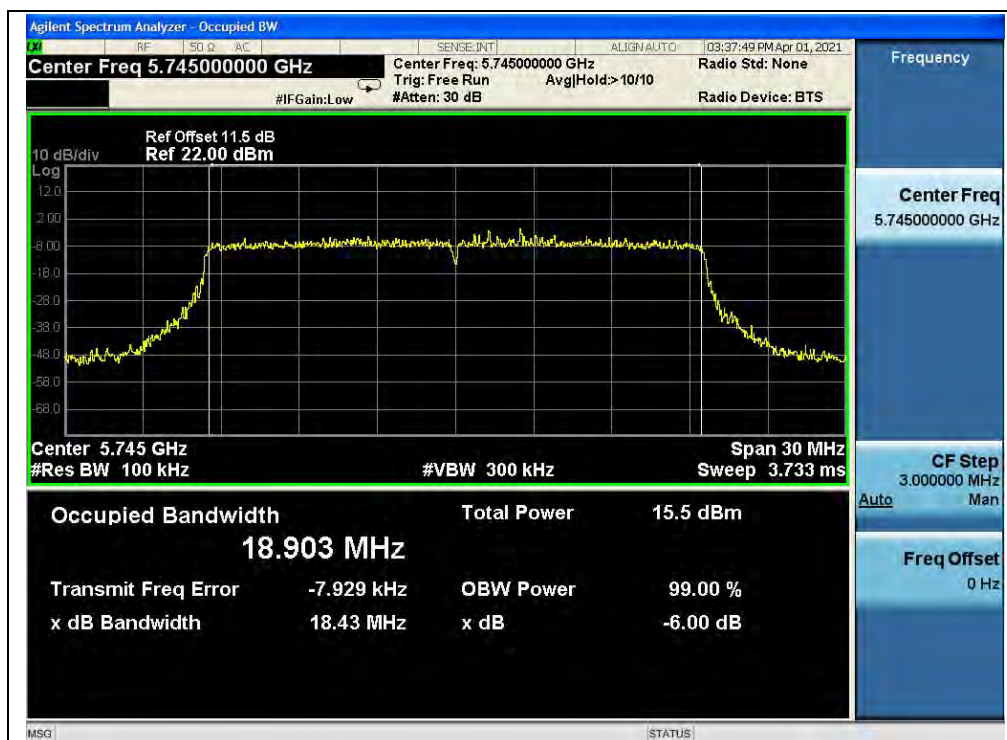

(Channel 149, 5745MHz, 802.11ax (HEW20))

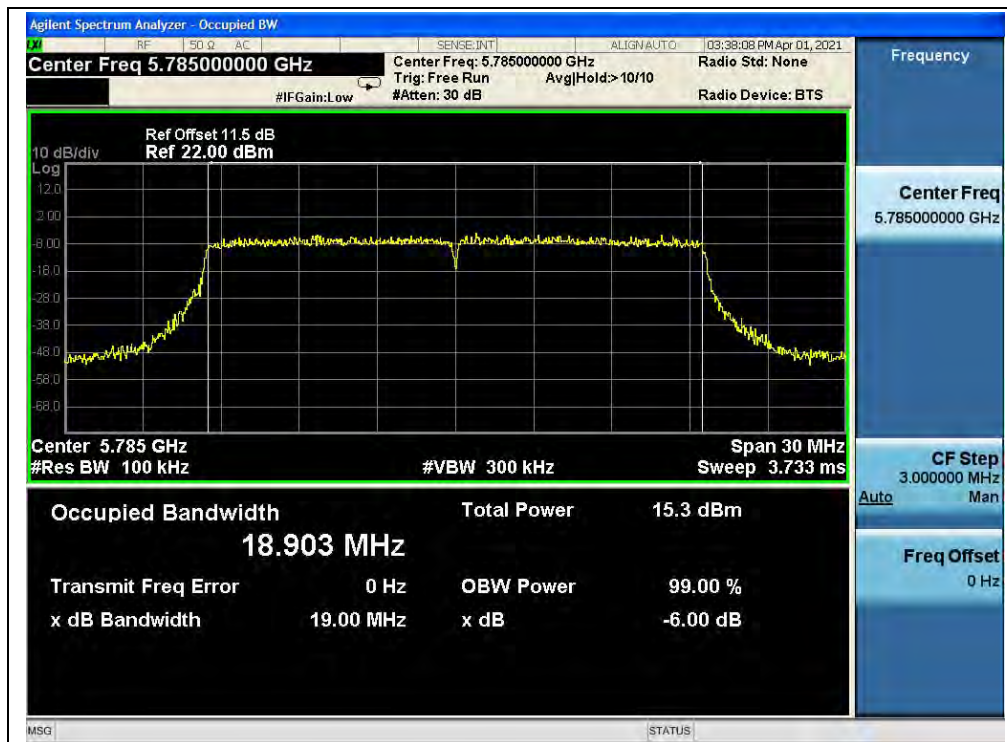

(Channel 157, 5785MHz, 802.11ax (HEW20))



(Channel 165, 5825MHz, 802.11ax (HEW20))



802.11ax (HEW20) RU26 Mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.33
44	5220	20.42
48	5240	20.50
52	5260	20.46
60	5300	20.37
64	5320	20.36
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	2.07
157	5785	2.05
165	5825	2.09

B.Test Plot:



(Channel 36, 5180MHz, 802.11ax (HEW20) RU26)



(Channel 44, 5220MHz, 802.11ax (HEW20) RU26)



(Channel 48, 5240MHz, 802.11ax (HEW20) RU26)



(Channel 52, 5260MHz, 802.11ax (HEW20) RU26)




(Channel 60, 5300MHz, 802.11ax (HEW20) RU26)



(Channel 64, 5320MHz, 802.11ax (HEW20) RU26)



(Channel 149, 5745MHz, 802.11ax (HEW20) RU26)

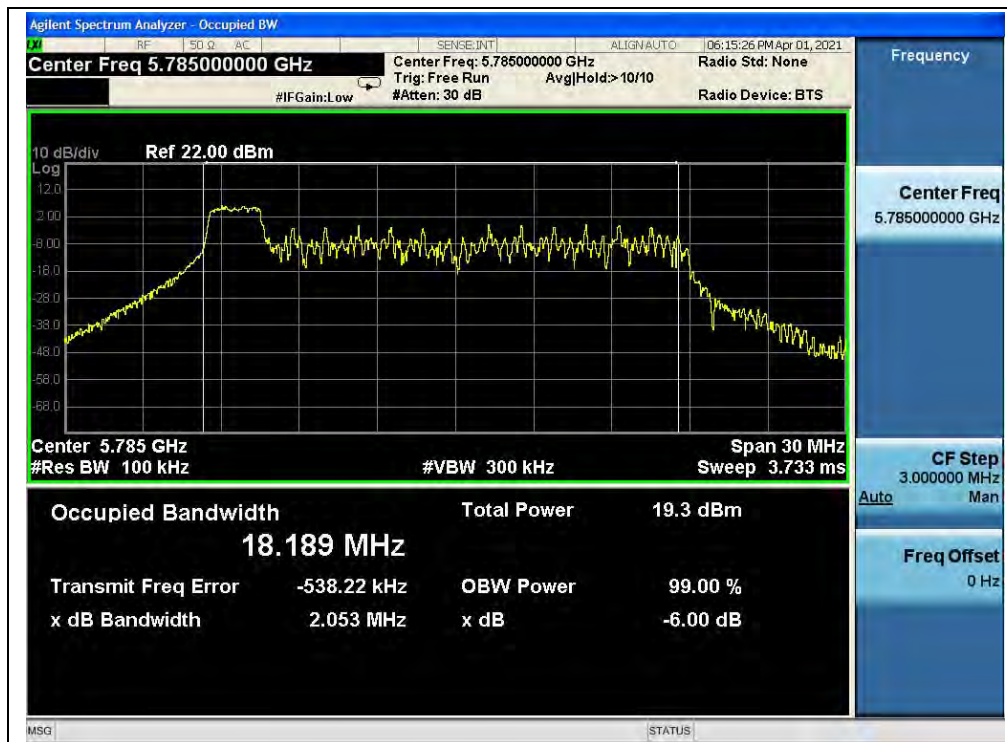


(Channel 157, 5785MHz, 802.11ax (HEW20) RU26)



(Channel 165, 5825MHz, 802.11ax (HEW20) RU26)

**802.11ax (HEW20) RU52 Mode****A.Test Verdict:**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.50
44	5220	21.23
48	5240	21.27
52	5260	21.27
60	5300	21.25
64	5320	21.11
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.09
157	5785	17.09
165	5825	17.07

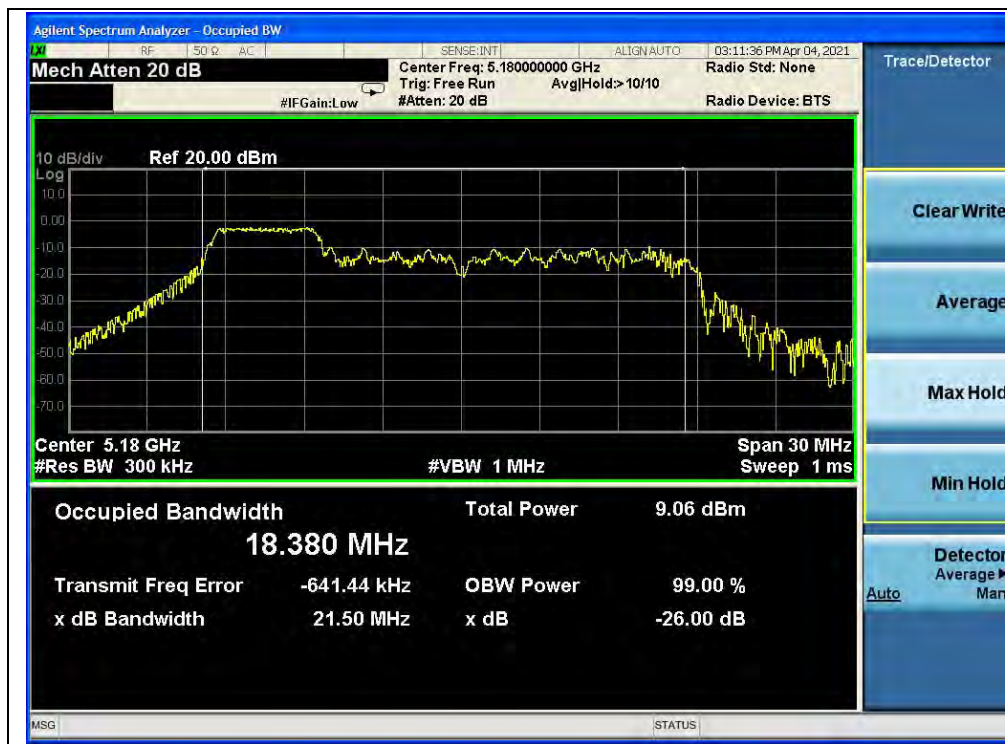B.Test Plot:

(Channel 36, 5180MHz, 802.11ax (HEW20) RU52)



(Channel 44, 5220MHz, 802.11ax (HEW20) RU52)

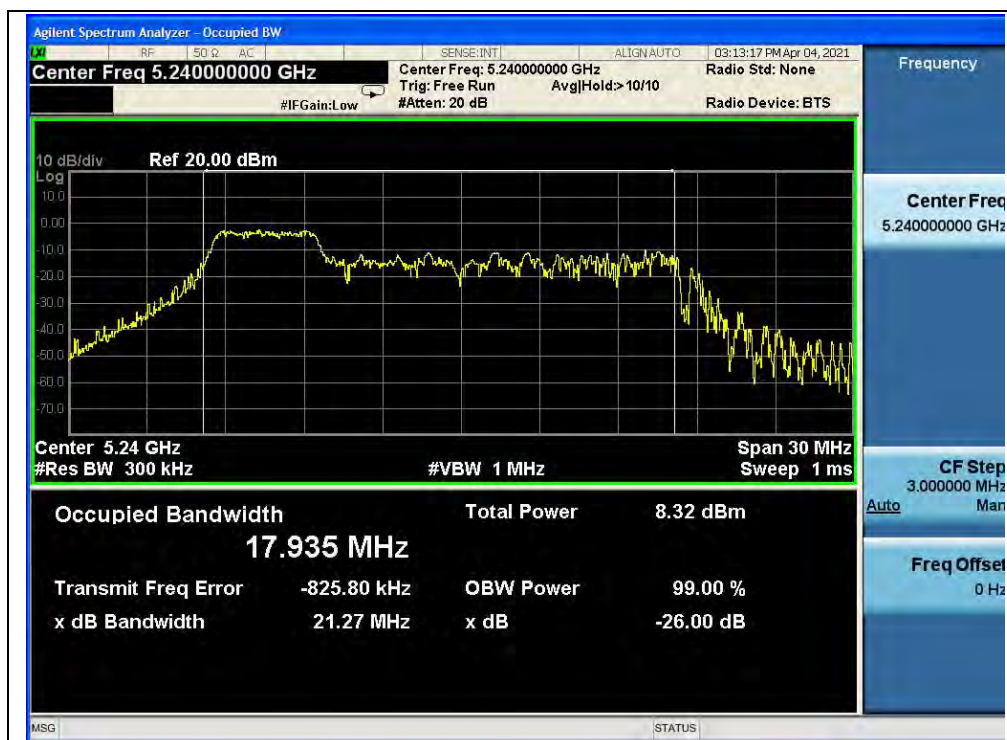

(Channel 48, 5240MHz, 802.11ax (HEW20) RU52)




(Channel 52, 5260MHz, 802.11ax (HEW20) RU52)




(Channel 60, 5300MHz, 802.11ax (HEW20) RU52)




(Channel 64, 5320MHz, 802.11ax (HEW20) RU52)

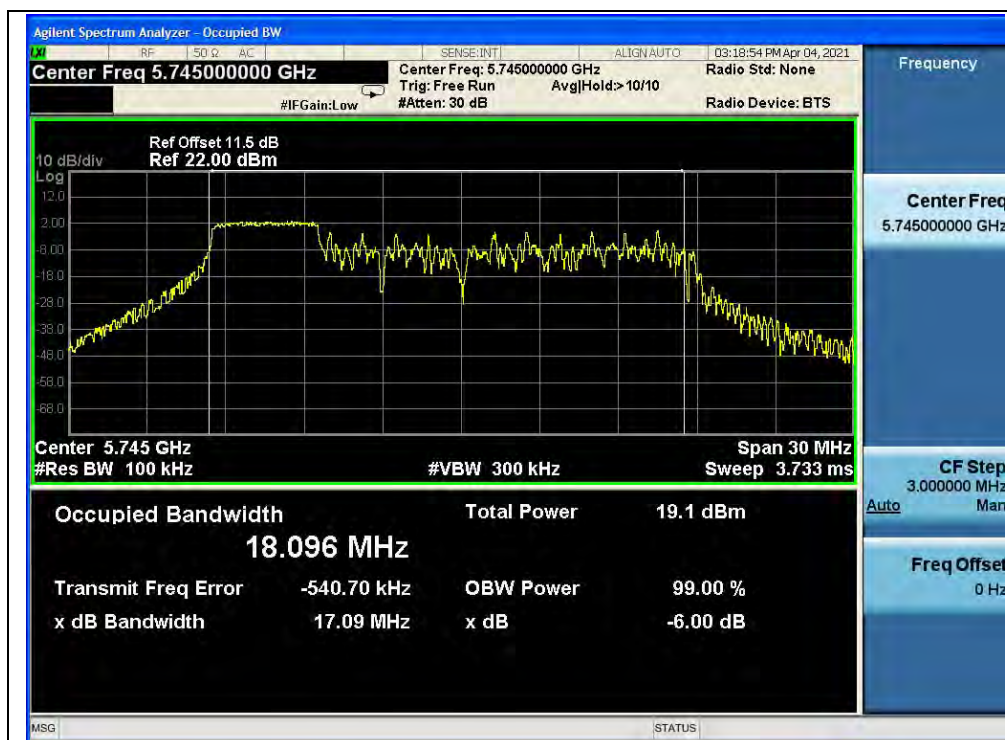

(Channel 149, 5745MHz, 802.11ax (HEW20) RU52)

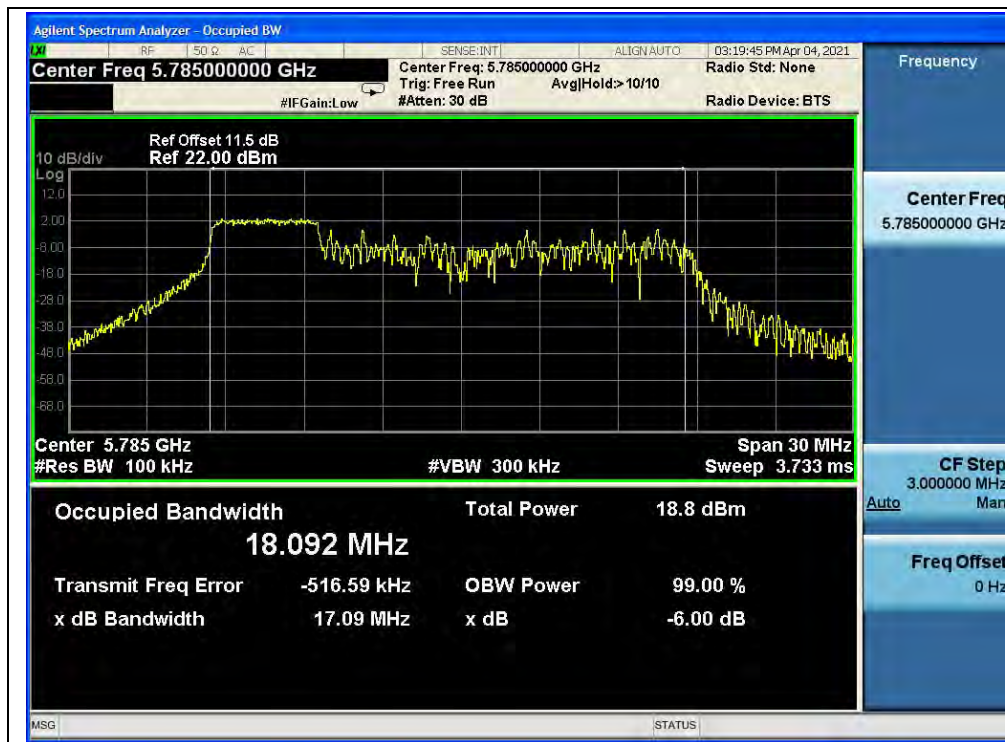

(Channel 157, 5785MHz, 802.11ax (HEW20) RU52)

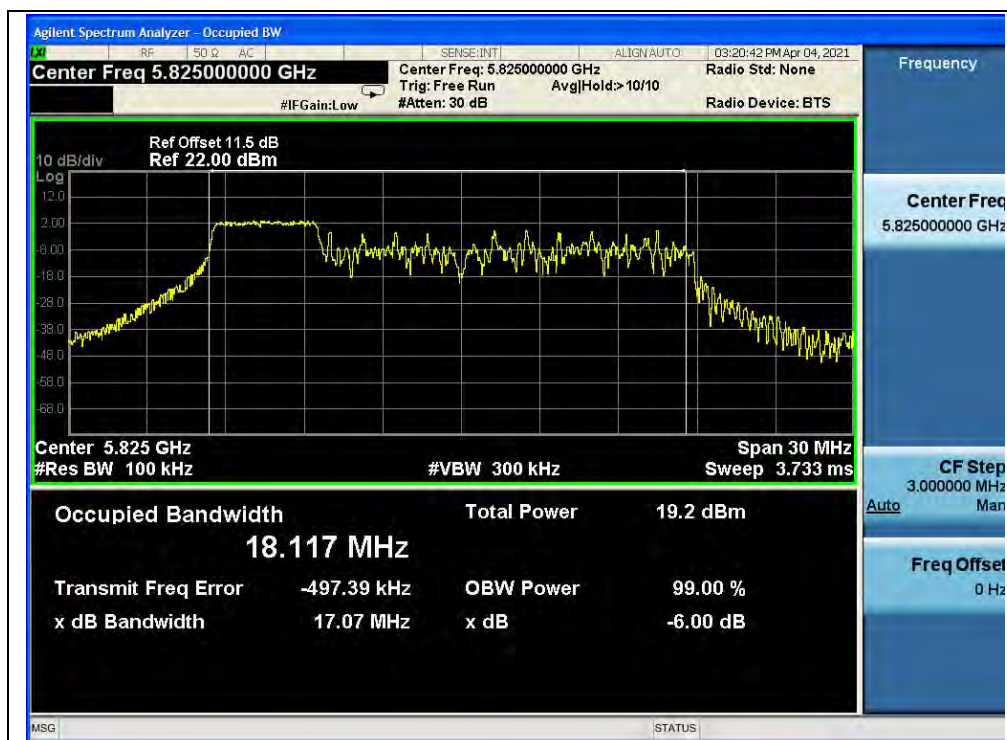

(Channel 165, 5825MHz, 802.11ax (HEW20) RU52)




802.11ax (HEW20) RU106 Mode

A.Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.21
44	5220	21.43
48	5240	21.43
52	5260	21.33
60	5300	20.89
64	5320	21.29
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	18.12
157	5785	17.12
165	5825	17.14


B.Test Plot:

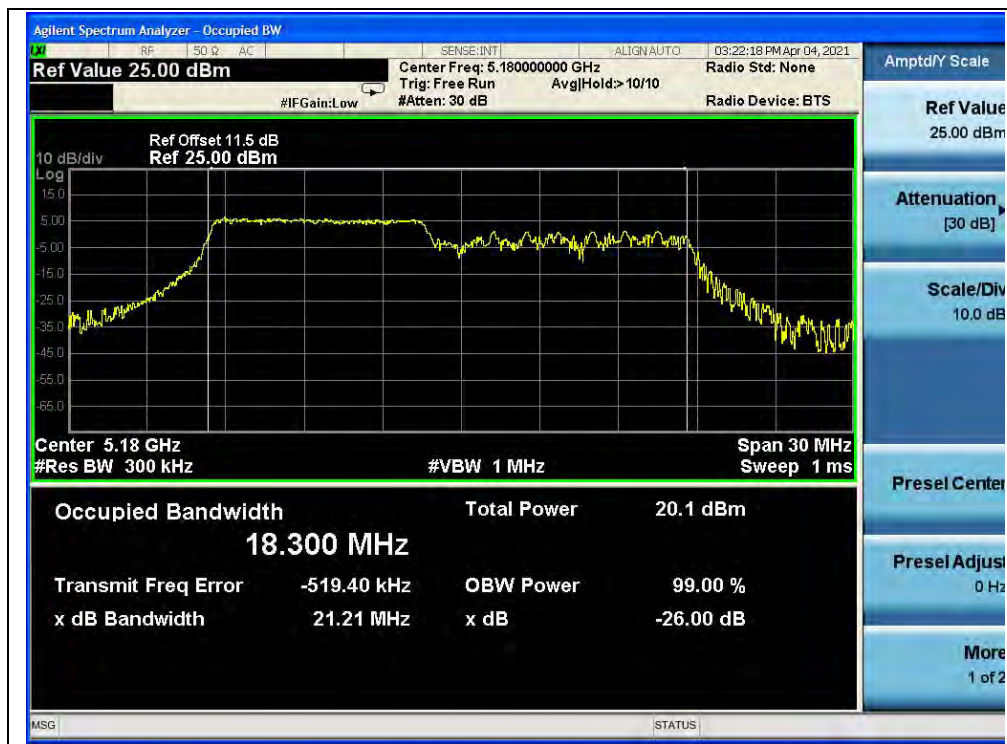


(Channel 36, 5180MHz, 802.11ax (HEW20) RU106)



(Channel 44, 5220MHz, 802.11ax (HEW20) RU106)

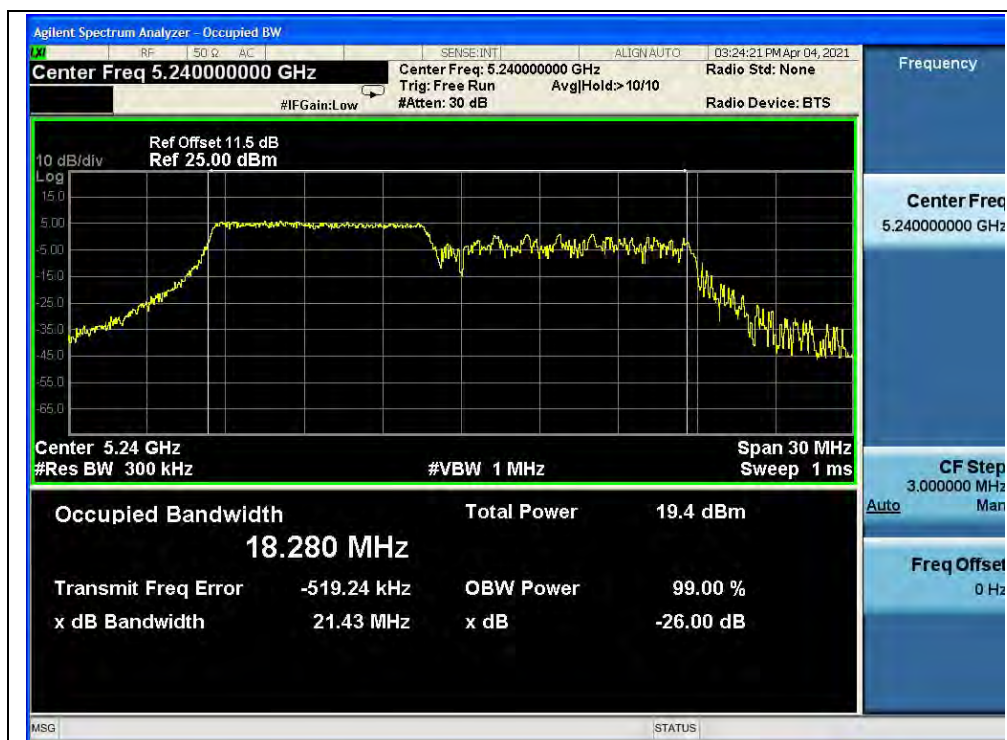

(Channel 48, 5240MHz, 802.11ax (HEW20) RU106)

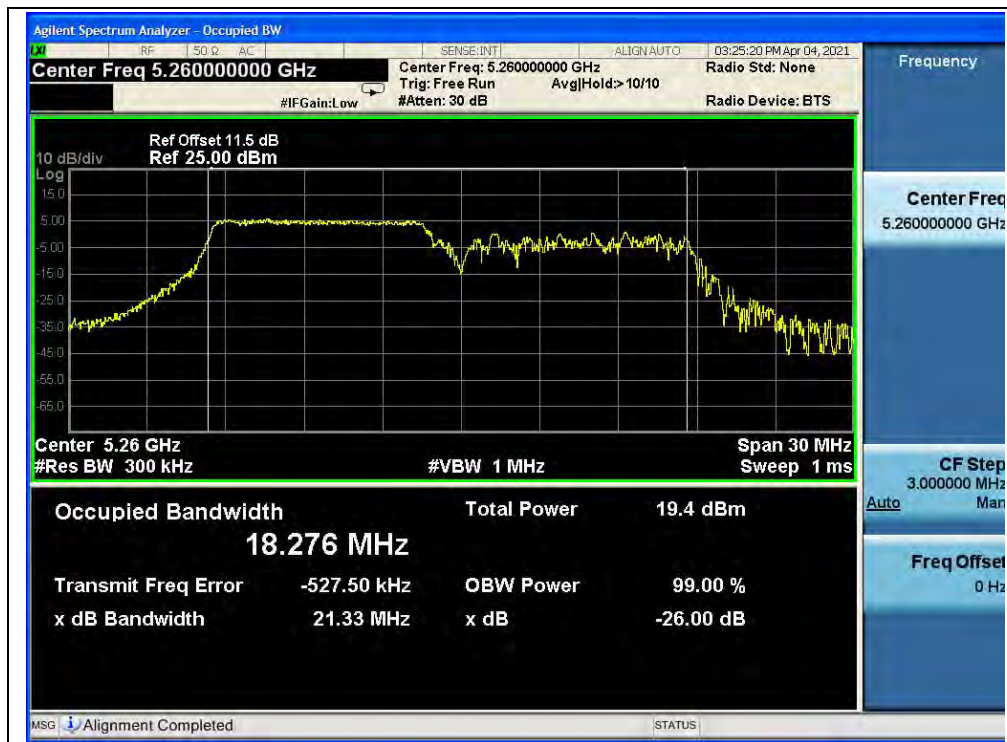

(Channel 52, 5260MHz, 802.11ax (HEW20) RU106)



(Channel 60, 5300MHz, 802.11ax (HEW20) RU106)



(Channel 64, 5320MHz, 802.11ax (HEW20) RU106)



(Channel 149, 5745MHz, 802.11ax (HEW20) RU106)




(Channel 157, 5785MHz, 802.11ax (HEW20) RU106)




(Channel 165, 5825MHz, 802.11ax (HEW20) RU106)

**802.11ax (HEW40) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	40.14
46	5230	39.95
54	5270	40.33
62	5310	40.02
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	37.49
159	5795	38.00

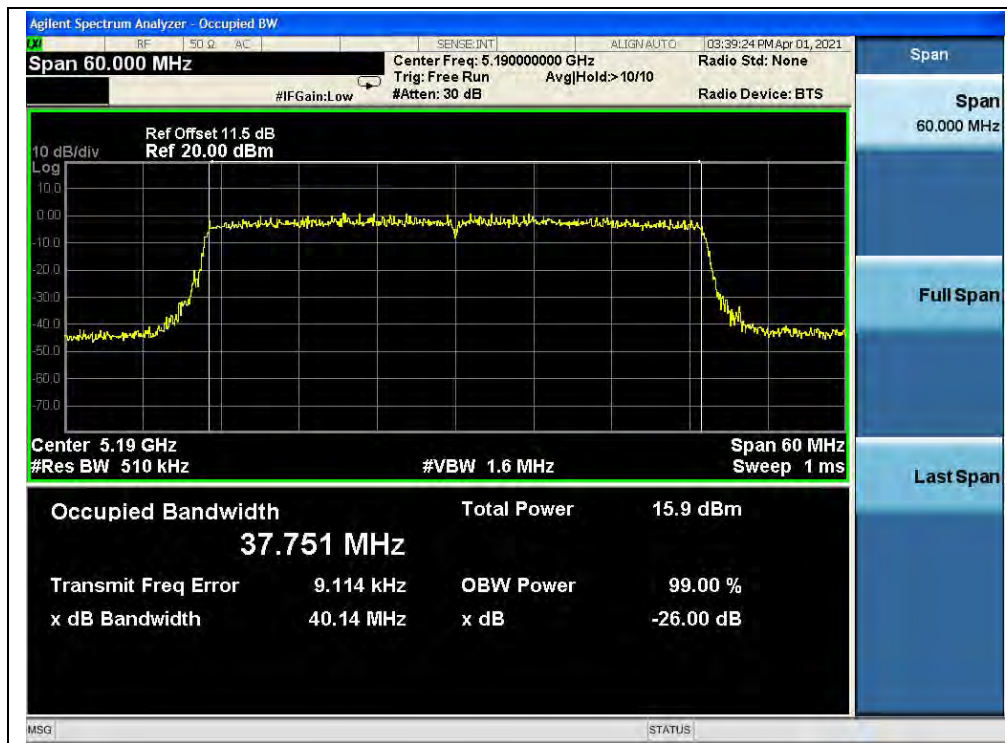B.Test Plot:


(Channel 38, 5190MHz, 802.11ax (HEW40))

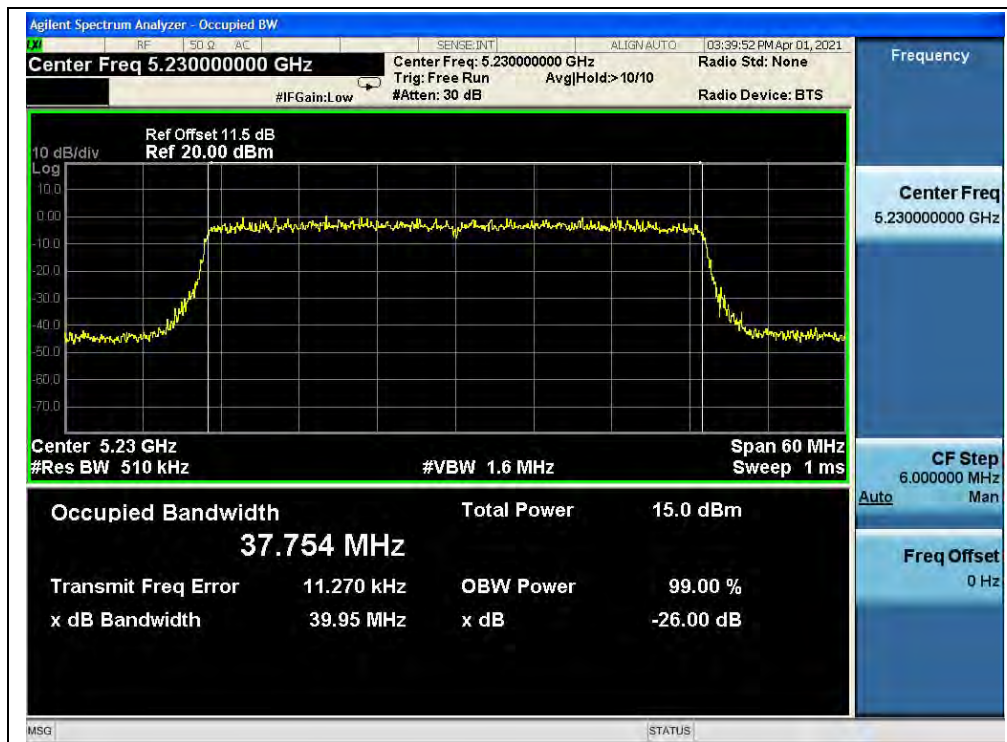


(Channel 46, 5230MHz, 802.11ax (HEW40))

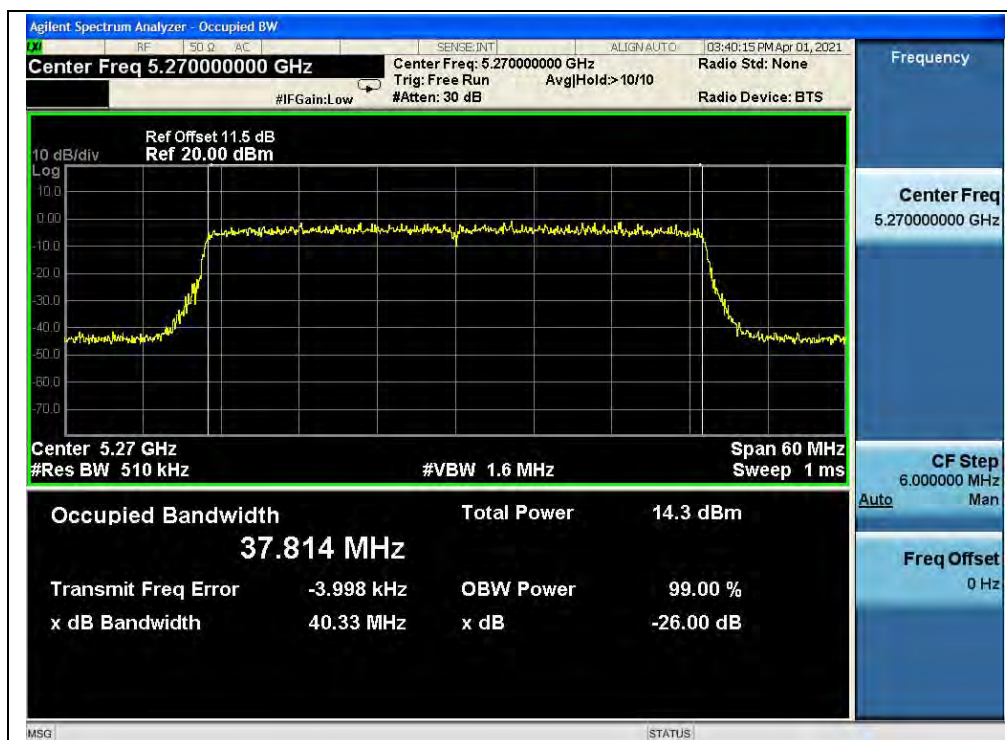


(Channel 54, 5270MHz, 802.11ax (HEW40))

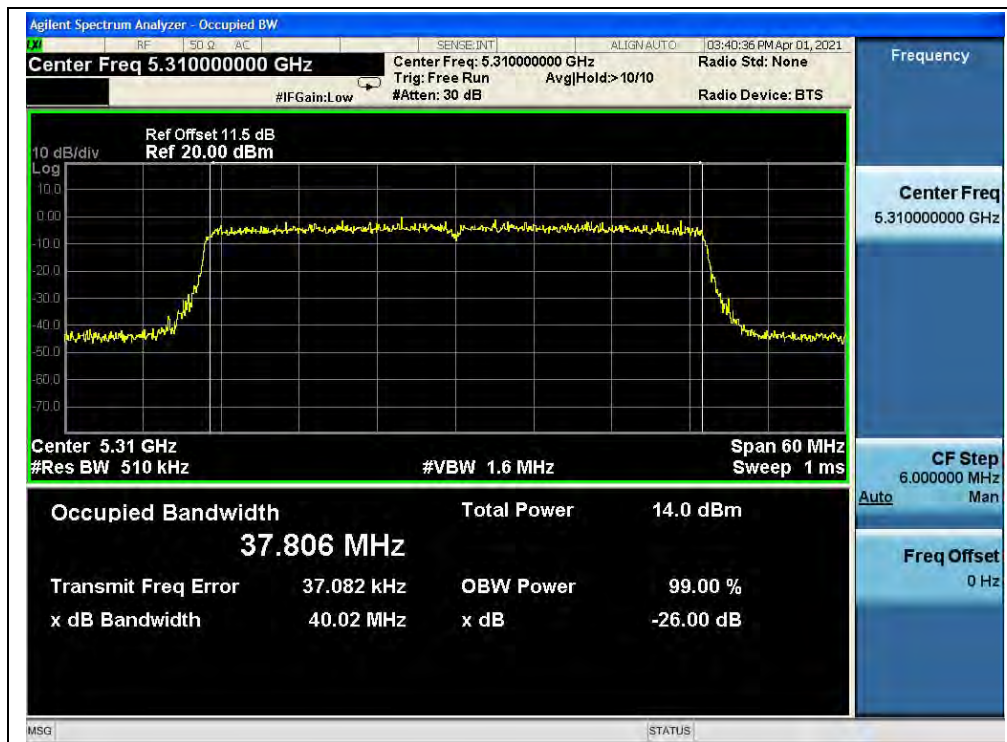

(Channel 62, 5310MHz, 802.11ax (HEW40))

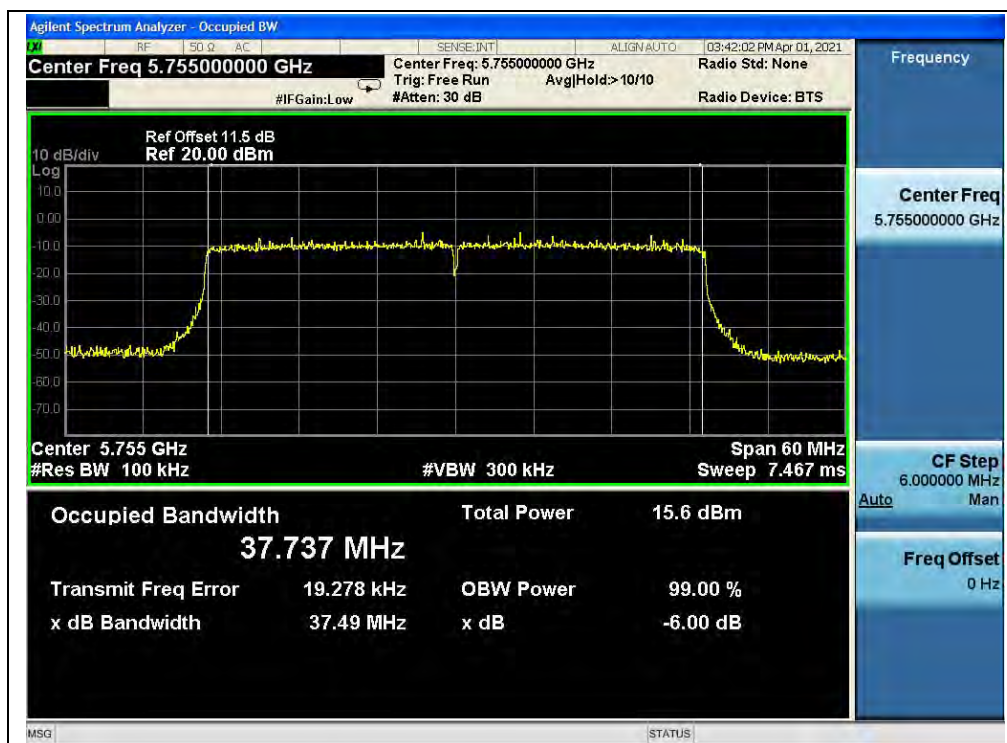


(Channel 151, 5755MHz, 802.11ax (HEW40))

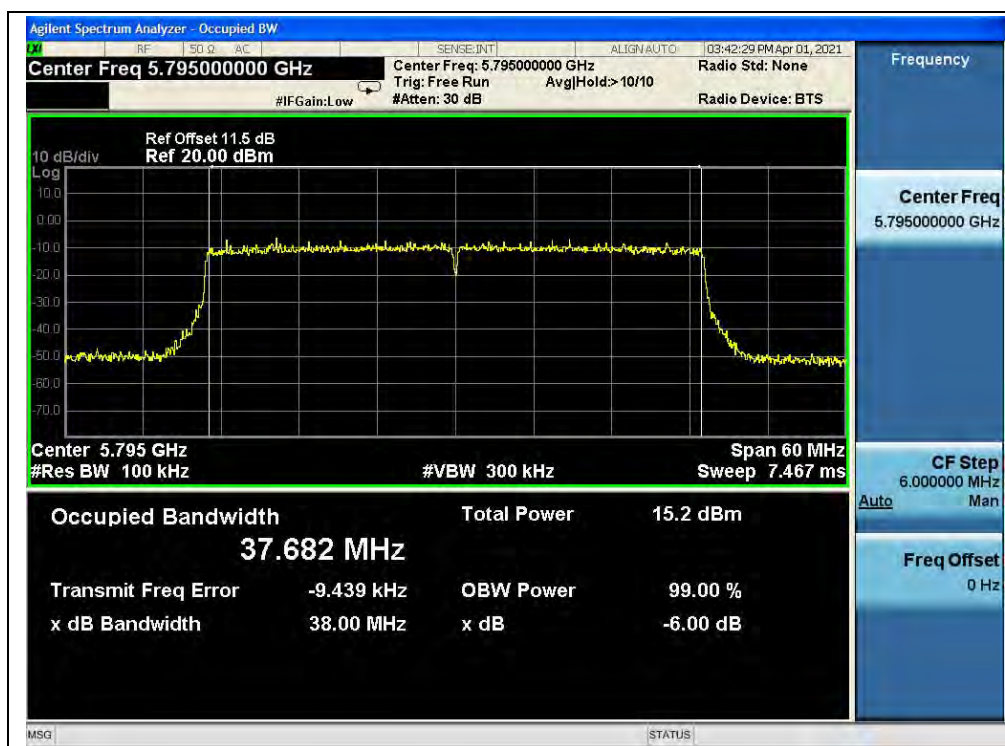


(Channel 159, 5795MHz, 802.11ax (HEW40))

**802.11ax (HEW80) Mode****A.Test Verdict:**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	81.30
58	5290	81.87
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
155	5775	76.45

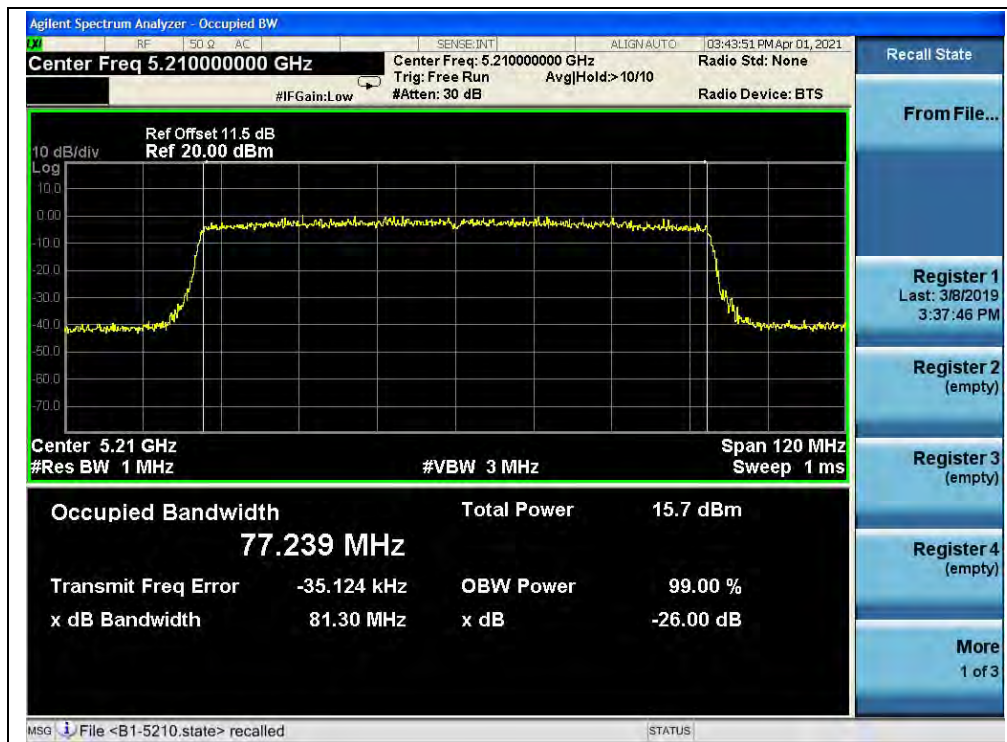B.Test Plot:

(Channel 42, 5210MHz, 802.11ax (HEW80))

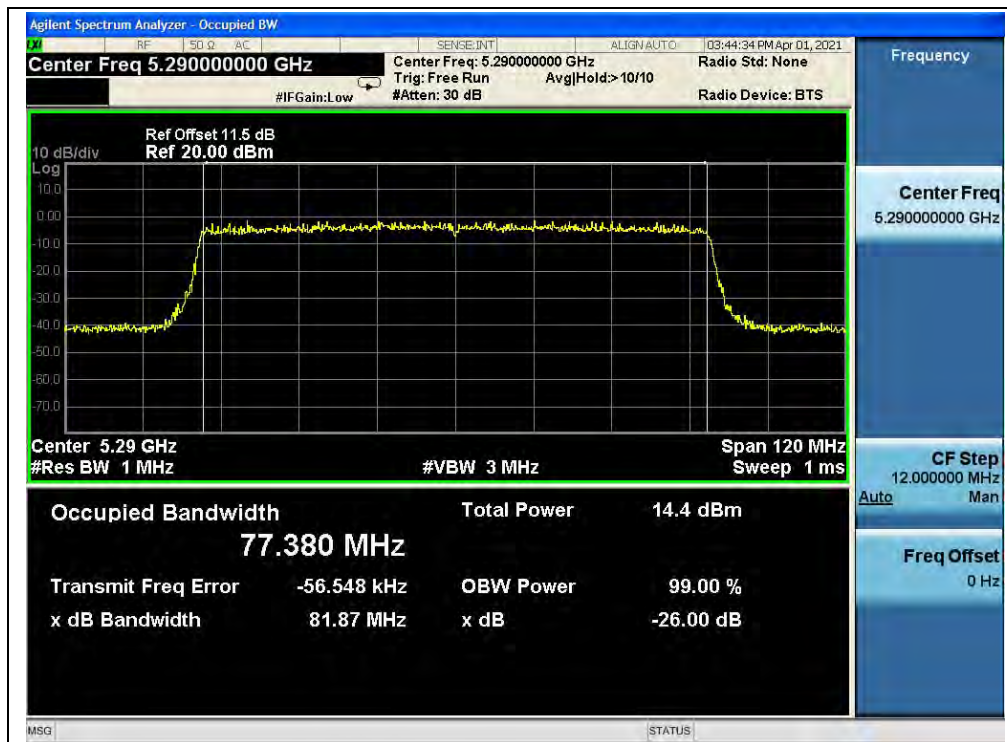

(Channel 58, 5290MHz, 802.11ax (HEW80))



(Channel 155, 5775MHz, 802.11ax (HEW80))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

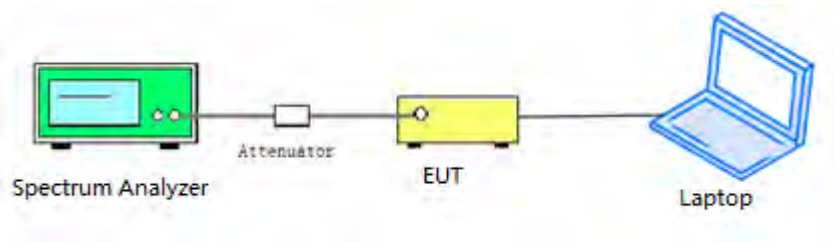

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.5.3. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW $\geq$ 3MHz
- 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result

802.11a Mode

A.Test Verdict:

Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Corrected PPSD (dBm/MHz)		Limit (dBm/MHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5180	1.37	0.69	0.00	1.37	0.69	11	PASS
5220	1.00	0.43		1.00	0.43		
5240	0.96	0.46		0.96	0.46		
5260	0.69	0.17		0.69	0.17		
5300	0.43	0.15		0.43	0.15		
5320	0.46	0.31		0.46	0.31		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)		Limit (dBm/500KHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5745	-1.88	-2.23	0.00	-1.88	-2.23	30	PASS
5785	-1.86	-2.12		-1.86	-2.12		
5825	-1.69	-1.72		-1.69	-1.72		

B.Test Plot:



(Channel 36, 5180MHz, 802.11a, ANT0)



(Channel 44, 5220MHz, 802.11a, ANT0)



(Channel 48, 5240MHz, 802.11a, ANT0)



(Channel 52, 5260MHz, 802.11a, ANT0)



(Channel 60, 5300MHz, 802.11a, ANT0)



(Channel 64, 5320MHz, 802.11a, ANT0)