

# FCC Part 15C Test Report

## FCC ID: 2BCCG-DELTA

Applicant: Shenzhen Algo Technologies Co., Ltd.

Address: 5th Floor, Building E5, Juyin Technology Industrial Park, Ganli Road, Longgang District, Shenzhen 518116, China

Manufacturer: Shenzhen Algo Technologies Co., Ltd.

Address: 5th Floor, Building E5, Juyin Technology Industrial Park, Ganli Road, Longgang District, Shenzhen 518116, China

EUT: Laser Engraver

Trade Mark: N/A

Model Number: Delta, Delta MK2, Alpha, Alpha MK2, Gamma, Epsilon, Zeta, DIY KIT, DIY KIT Plus, DIY KIT Pro, DIY KIT Plus Pro, DIY KIT MK2, DIY KIT Plus MK2, DIY KIT Pro MK2, DIY KIT Plus Pro MK2, Laser Master 1 MK2, Laser Master 2 MK2

Date of Receipt: Jul. 08, 2023

Test Date: Jul. 08, 2023 - Jul. 22, 2023

Date of Report: Jul. 22, 2023

Prepared By: BTF Testing Lab (Shenzhen) Co., Ltd.

Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: BTF230718R01701

Project Engineer: Elma.yang

EMC Manager: Ryan.CJ



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of BTF Testing Lab (Shenzhen) Co., Ltd.*

Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 MEASUREMENT UNCERTAINTY	4
<b>2 . GENERAL INFORMATION</b>	<b>5</b>
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
<b>3 . EMC EMISSION TEST</b>	<b>11</b>
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.2.8 TEST RESULTS (1GHZ~25GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	25
3.3.1 TEST REQUIREMENT:	25
3.3.2 TEST PROCEDURE	25
3.3.3 DEVIATION FROM TEST STANDARD	25
3.3.4 TEST SETUP	26
3.3.5 EUT OPERATING CONDITIONS	26
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS	
MEASUREMENT	31
3.4.1 APPLICABLE STANDARD	31
3.4.2 TEST PROCEDURE	31

Table of Contents	Page
3.4.3 DEVIATION FROM STANDARD	31
3.4.4 TEST SETUP	31
3.4.5 EUT OPERATION CONDITIONS	31
3.4.6 TEST RESULTS	31
4 . AVERAGE OUTPUT POWER	32
4.1 APPLIED PROCEDURES / LIMIT	32
4.1.1 TEST PROCEDURE	32
4.1.2 DEVIATION FROM STANDARD	32
4.1.3 TEST SETUP	32
4.1.4 EUT OPERATION CONDITIONS	32
4.1.5 TEST RESULTS	32
5 . POWER SPECTRAL DENSITY TEST	33
5.1 APPLIED PROCEDURES / LIMIT	33
5.1.1 TEST PROCEDURE	33
5.1.2 DEVIATION FROM STANDARD	33
5.1.3 TEST SETUP	33
5.1.4 EUT OPERATION CONDITIONS	33
5.1.5 TEST RESULTS	33
6 . 6DB BANDWIDTH TEST	34
6.1 APPLIED PROCEDURES / LIMIT	34
6.1.1 TEST PROCEDURE	34
6.1.2 DEVIATION FROM STANDARD	34
6.1.3 TEST SETUP	34
6.1.4 EUT OPERATION CONDITIONS	34
6.1.5 TEST RESULTS	34
7 . ANTENNA REQUIREMENT	35
7.1 STANDARD REQUIREMENT	35
7.2 EUT ANTENNA	35
8 . TEST SEUUP PHOTO	36
9 . EUT PHOTO	38

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.205, 15.247(d)	Band Edge Emission& Conducted Spurious Emissions	PASS	
15.247(b)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % °

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Laser Engraver
Trademark	N/A
Model No.:	Delta Delta MK2, Alpha, Alpha MK2, Gamma, Epsilon, Zeta, DIY KIT, DIY KIT Plus, DIY KIT Pro, DIY KIT Plus Pro, DIY KIT MK2, DIY KIT Plus MK2, DIY KIT Pro MK2, DIY KIT Plus Pro MK2, Laser Master 1 MK2, Laser Master 2 MK2
Model Difference	The product's different for model number and appearance color.
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20): OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	External Antenna
Antenna gain:	3.5dBi
Power supply:	DC 24V from adapter
Adapter:	K1211-2406000D Input: AC 100-240V 50/60Hz 2.5A Output: DC 24V 6A

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

## 2. Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

### Channel List(802.11nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		

## 2.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode
<b>For Conducted Emission</b>	
Final Test Mode	Description
Mode 5	Link Mode
<b>For Radiated Emission</b>	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode


Note: 1. The measurements are performed at the highest, middle, lowest available channels.  
2. During the test, duty cycle has been measured., the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

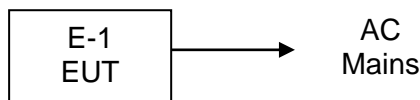

Conducted Spurious Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Laser Engraver	Delta	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: AXDN-0002.0			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	6Mbps	MSC0	MSC0
Power Setting of Softwave	60	60	60	66

## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23

Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

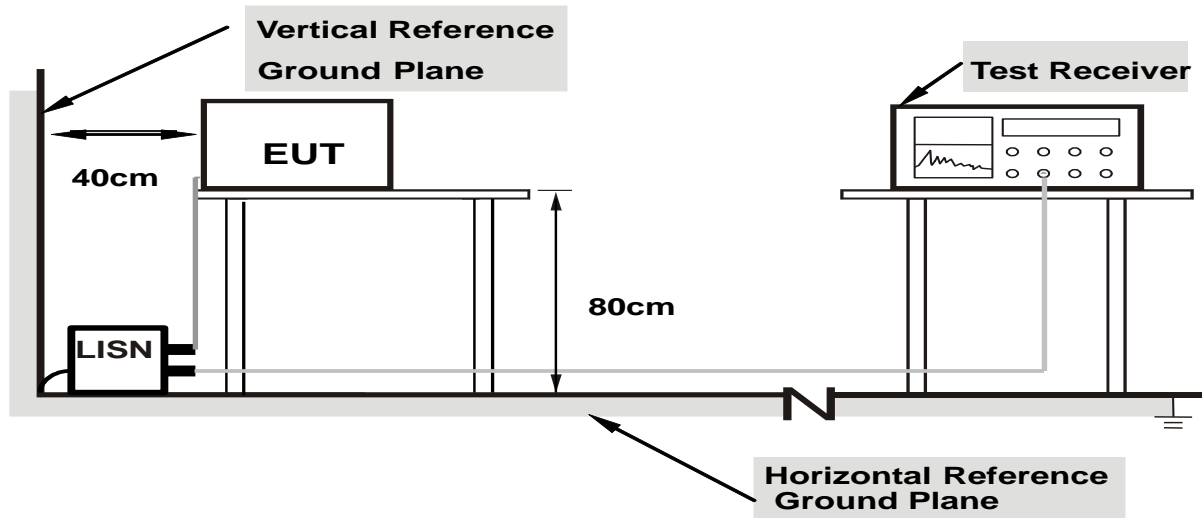

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**


### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

### 3.1.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

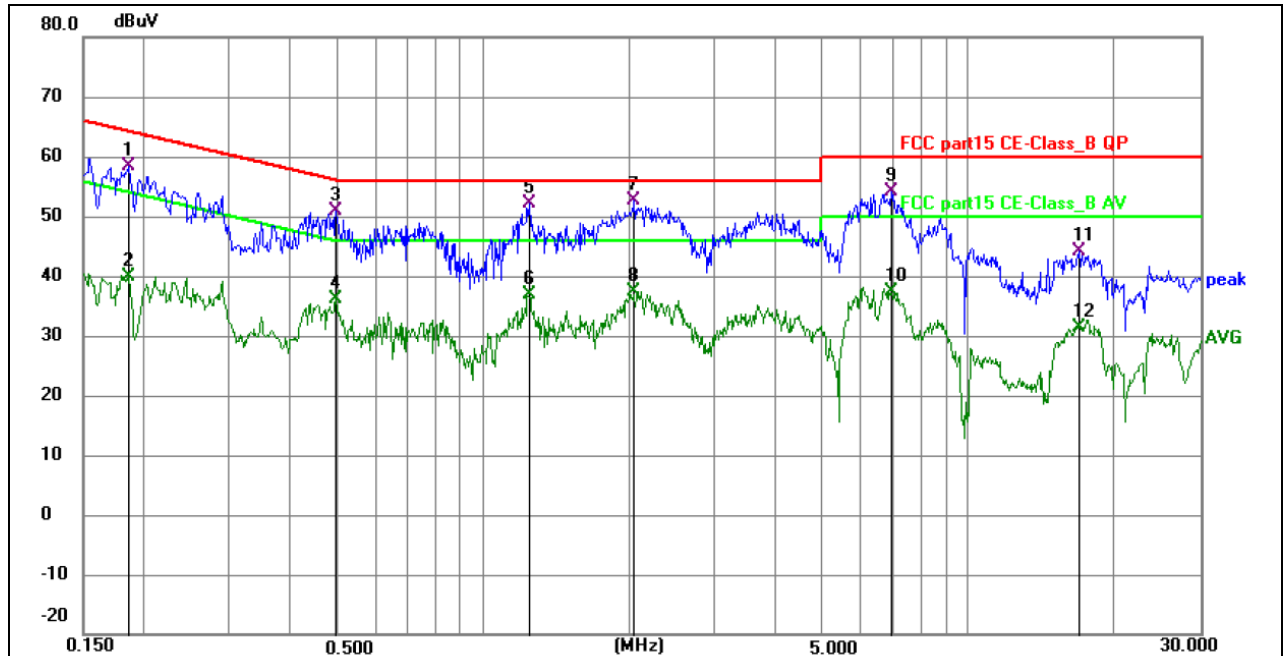


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.185900	48.65	9.76	58.41	64.22	-5.81	QP	P	
2	0.185900	30.20	9.76	39.96	54.22	-14.26	AVG	P	
3	0.496400	41.59	9.18	50.77	56.06	-5.29	QP	P	
4	0.496400	26.93	9.18	36.11	46.06	-9.95	AVG	P	
5	1.247900	42.76	9.42	52.18	56.00	-3.82	QP	P	
6	1.247900	27.50	9.42	36.92	46.00	-9.08	AVG	P	
7 *	2.044500	42.83	9.81	52.64	56.00	-3.36	QP	P	
8	2.044500	27.56	9.81	37.37	46.00	-8.63	AVG	P	
9	6.935900	44.27	9.74	54.01	60.00	-5.99	QP	P	
10	6.935900	27.55	9.74	37.29	50.00	-12.71	AVG	P	
11	16.885500	33.91	10.24	44.15	60.00	-15.85	QP	P	
12	16.885500	21.23	10.24	31.47	50.00	-18.53	AVG	P	

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

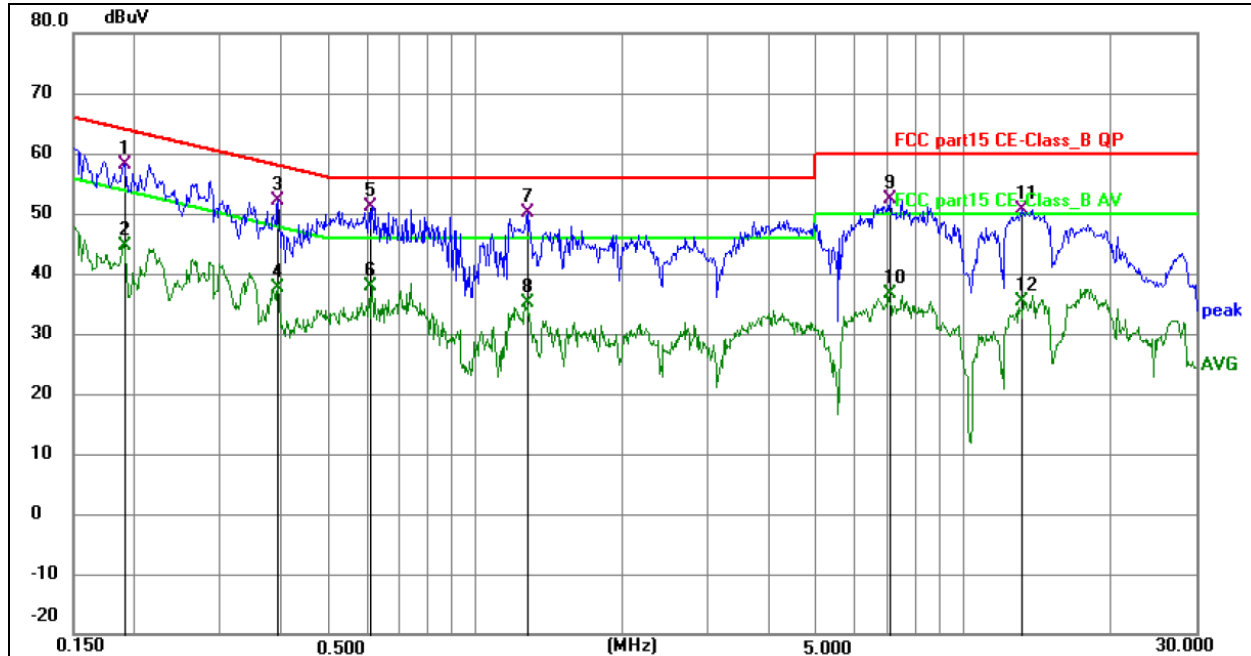

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.190500	48.92	9.13	58.05	64.01	-5.96	QP	P	
2	0.190500	35.40	9.13	44.53	54.01	-9.48	AVG	P	
3	0.393000	42.97	9.22	52.19	58.00	-5.81	QP	P	
4	0.393000	28.51	9.22	37.73	48.00	-10.27	AVG	P	
5 *	0.613400	41.97	9.24	51.21	56.00	-4.79	QP	P	
6	0.613400	28.60	9.24	37.84	46.00	-8.16	AVG	P	
7	1.279500	40.51	9.53	50.04	56.00	-5.96	QP	P	
8	1.279500	25.62	9.53	35.15	46.00	-10.85	AVG	P	
9	7.084500	42.59	9.87	52.46	60.00	-7.54	QP	P	
10	7.084500	26.81	9.87	36.68	50.00	-13.32	AVG	P	
11	13.258300	40.38	10.21	50.59	60.00	-9.41	QP	P	
12	13.258300	25.23	10.21	35.44	50.00	-14.56	AVG	P	

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 0.8 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

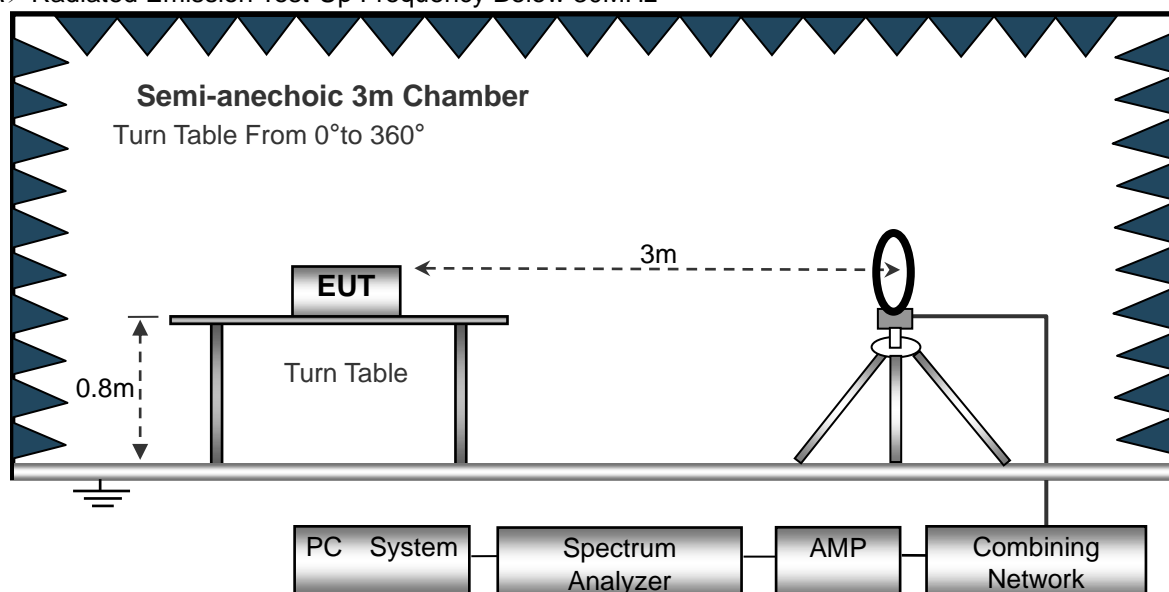

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

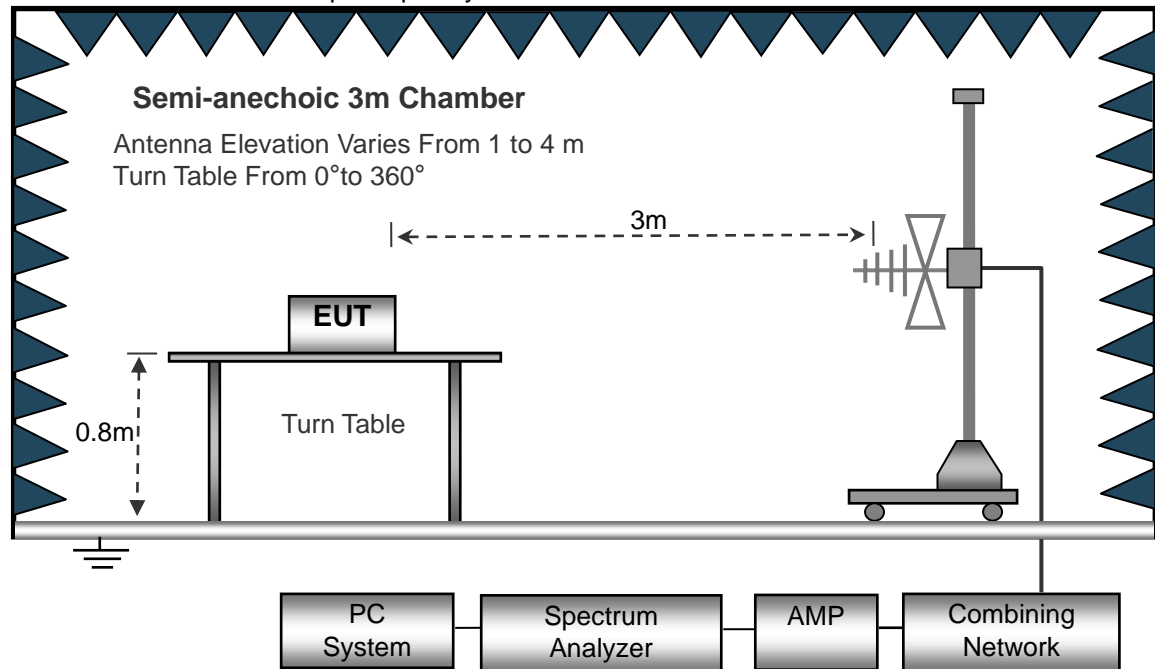

(C) Radiated Emission Test-Up Frequency Above 1GHz

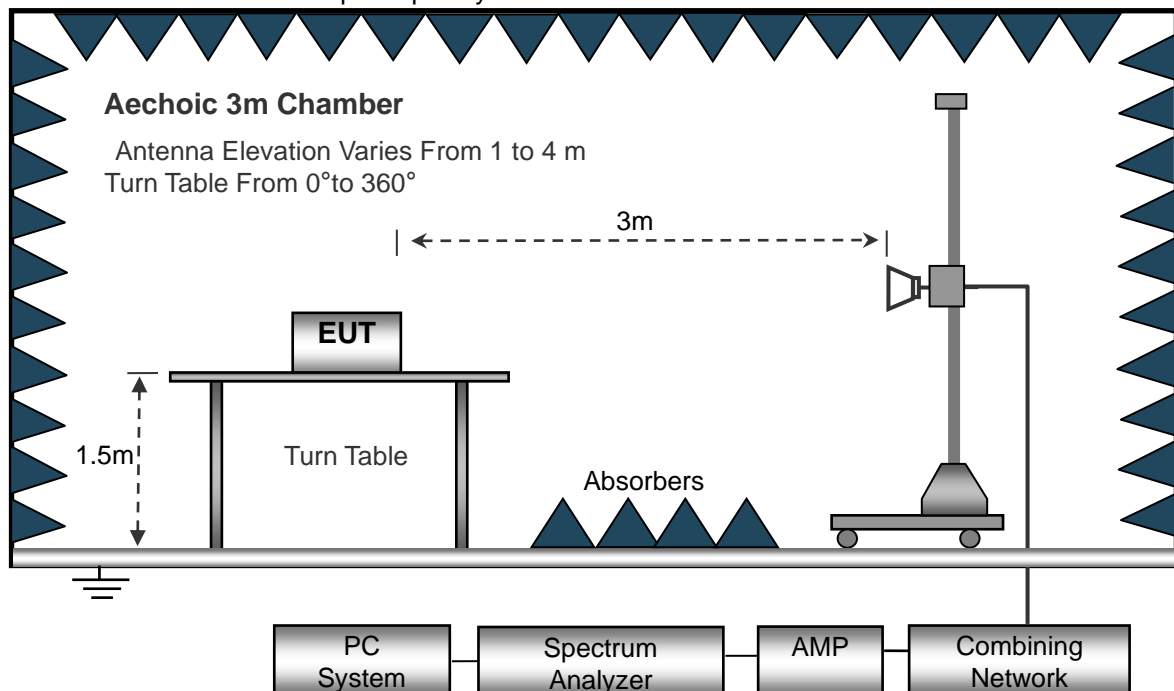

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

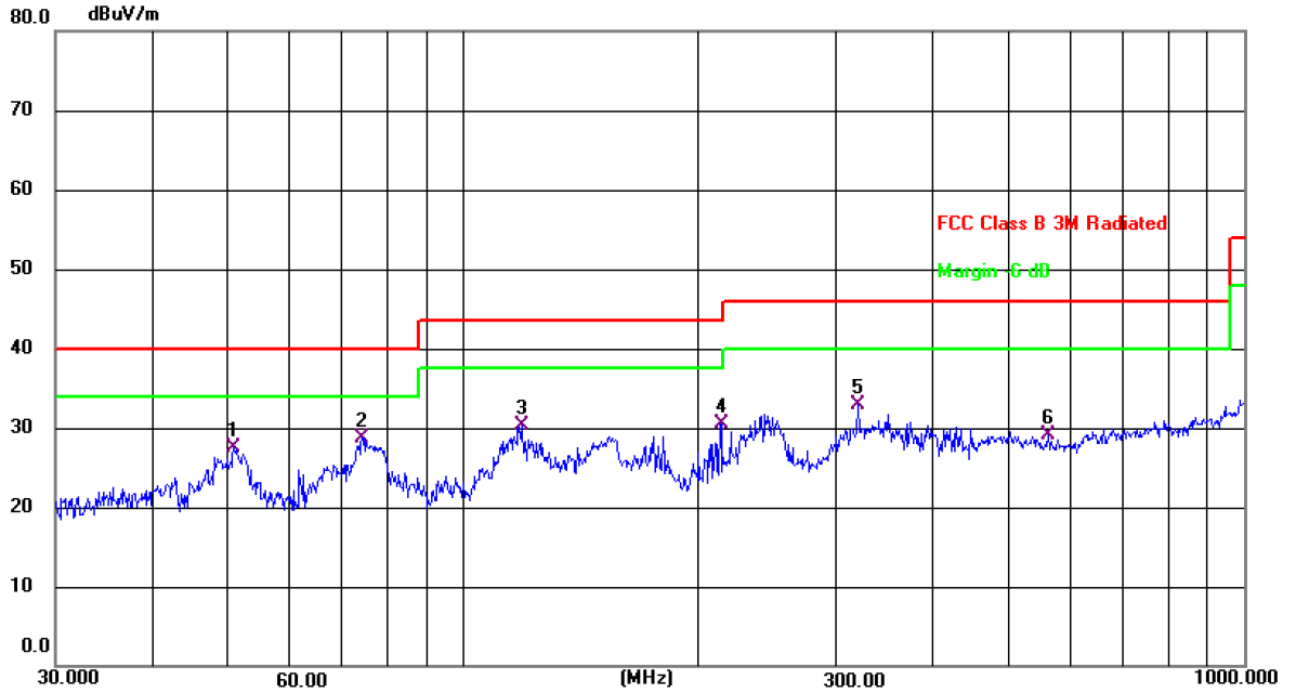


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		50.7635	40.87	-13.37	27.50	40.00	-12.50	QP
2	*	74.1350	46.85	-18.16	28.69	40.00	-11.31	QP
3		118.6012	48.16	-17.95	30.21	43.50	-13.29	QP
4		213.7632	45.96	-15.42	30.54	43.50	-12.96	QP
5		319.9368	45.13	-12.18	32.95	46.00	-13.05	QP
6		560.6928	36.43	-7.25	29.18	46.00	-16.82	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

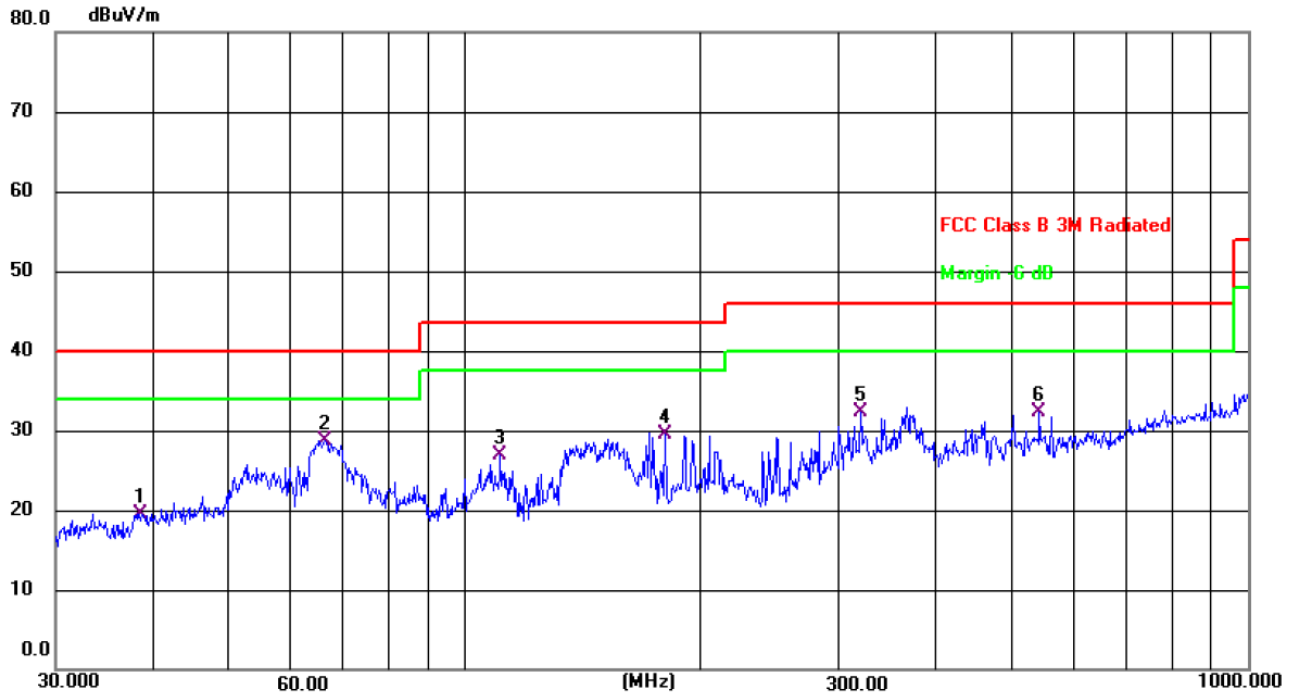

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		38.6160	34.12	-14.53	19.59	40.00	-20.41	QP
2	*	66.2660	44.89	-16.11	28.78	40.00	-11.22	QP
3		110.9569	44.75	-17.81	26.94	43.50	-16.56	QP
4		180.0164	46.73	-17.32	29.41	43.50	-14.09	QP
5		319.9368	44.41	-12.18	32.23	46.00	-13.77	QP
6		541.3721	39.76	-7.51	32.25	46.00	-13.75	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

### 3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	67.62	50.65	6.88	31.29	55.14	74	-18.86	PK
V	4824	55.46	50.65	6.88	31.29	42.98	54	-11.02	AV
V	7236	67.21	49.98	7.16	36.63	61.02	74	-12.98	PK
V	7236	46.48	49.98	7.16	36.63	40.29	54	-13.71	AV
V	16087	48.74	51.53	11.34	41.52	50.07	74	-23.93	PK
H	4824	67.01	50.65	6.88	31.29	54.53	74	-19.47	PK
H	4824	55.47	50.65	6.88	31.29	42.99	54	-11.01	AV
H	7236	69.72	49.98	7.16	36.63	63.53	74	-10.47	PK
H	7236	45.50	49.98	7.16	36.63	39.31	54	-14.69	AV
H	16087	48.63	51.53	11.34	41.52	49.96	74	-24.04	PK
operation frequency:2437									
V	4874	67.59	50.67	6.89	31.38	55.19	74	-18.81	PK
V	4874	55.64	50.67	6.89	31.38	43.24	54	-10.76	AV
V	7311	69.51	50.02	7.24	36.63	63.36	74	-10.64	PK
V	7311	46.40	50.02	7.24	36.63	40.25	54	-13.75	AV
V	16087	48.54	51.53	11.34	41.52	49.87	74	-24.13	PK
H	4874	67.01	50.67	6.89	31.38	54.61	74	-19.39	PK
H	4874	56.06	50.67	6.89	31.38	43.66	54	-10.34	AV
H	7311	69.68	50.02	7.24	36.63	63.53	74	-10.47	PK
H	7311	47.53	50.02	7.24	36.63	41.38	54	-12.62	AV
H	16087	48.59	51.53	11.34	41.52	49.92	74	-24.08	PK
operation frequency:2462									
V	4924	68.60	50.79	6.83	31.36	56.00	74	-18.00	PK
V	4924	55.65	50.79	6.83	31.36	43.05	54	-10.95	AV
V	7386	69.65	50.11	7.25	36.58	63.37	74	-10.63	PK
V	7386	46.88	50.11	7.25	36.58	40.60	54	-13.40	AV
V	16087	49.62	51.53	11.34	41.52	50.95	74	-23.05	PK
H	4924	68.03	50.79	6.83	31.36	55.43	74	-18.57	PK
H	4924	55.92	50.79	6.83	31.36	43.32	54	-10.68	AV
H	7386	67.61	50.11	7.25	36.58	61.33	74	-12.67	PK
H	7386	48.49	50.11	7.25	36.58	42.21	54	-11.79	AV
H	16087	49.93	51.53	11.34	41.52	51.26	74	-22.74	PK
<b>Remark:</b> 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	67.82	50.65	6.88	31.29	55.34	74	-18.66	PK
V	4824	55.98	50.65	6.88	31.29	43.50	54	-10.50	AV
V	7236	66.48	49.98	7.16	36.63	60.29	74	-13.71	PK
V	7236	46.39	49.98	7.16	36.63	40.20	54	-13.80	AV
V	16087	50.09	51.53	11.34	41.52	51.42	74	-22.58	PK
H	4824	69.74	50.65	6.88	31.29	57.26	74	-16.74	PK
H	4824	52.74	50.65	6.88	31.29	40.26	54	-13.74	AV
H	7236	66.53	49.98	7.16	36.63	60.34	74	-13.66	PK
H	7236	48.01	49.98	7.16	36.63	41.82	54	-12.18	AV
H	16087	48.12	51.53	11.34	41.52	49.45	74	-24.55	PK
operation frequency:2437									
V	4874	67.69	50.67	6.89	31.38	55.29	74	-18.71	PK
V	4874	55.86	50.67	6.89	31.38	43.46	54	-10.54	AV
V	7311	66.90	50.02	7.24	36.63	60.75	74	-13.25	PK
V	7311	46.51	50.02	7.24	36.63	40.36	54	-13.64	AV
V	16087	48.63	51.53	11.34	41.52	49.96	74	-24.04	PK
H	4874	66.48	50.67	6.89	31.38	54.08	74	-19.92	PK
H	4874	55.63	50.67	6.89	31.38	43.23	54	-10.77	AV
H	7311	65.98	50.02	7.24	36.63	59.83	74	-14.17	PK
H	7311	48.03	50.02	7.24	36.63	41.88	54	-12.12	AV
H	16087	48.41	51.53	11.34	41.52	49.74	74	-24.26	PK
operation frequency:2462									
V	4924	67.42	50.79	6.83	31.36	54.82	74	-19.18	PK
V	4924	56.08	50.79	6.83	31.36	43.48	54	-10.52	AV
V	7386	67.18	50.11	7.25	36.58	60.90	74	-13.10	PK
V	7386	47.83	50.11	7.25	36.58	41.55	54	-12.45	AV
V	16087	46.91	51.53	11.34	41.52	48.24	74	-25.76	PK
H	4924	66.62	50.79	6.83	31.36	54.02	74	-19.98	PK
H	4924	54.71	50.79	6.83	31.36	42.11	54	-11.89	AV
H	7386	65.48	50.11	7.25	36.58	59.20	74	-14.80	PK
H	7386	45.88	50.11	7.25	36.58	39.60	54	-14.40	AV
H	16087	47.40	51.53	11.34	41.52	48.73	74	-25.27	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	66.48	50.65	6.88	31.29	54.00	74	-20.00	PK
V	4824	55.57	50.65	6.88	31.29	43.09	54	-10.91	AV
V	7236	66.70	49.98	7.16	36.63	60.51	74	-13.49	PK
V	7236	46.61	49.98	7.16	36.63	40.42	54	-13.58	AV
V	16087	47.12	51.53	11.34	41.52	48.45	74	-25.55	PK
H	4824	67.18	50.65	6.88	31.29	54.70	74	-19.30	PK
H	4824	55.93	50.65	6.88	31.29	43.45	54	-10.55	AV
H	7236	64.66	49.98	7.16	36.63	58.47	74	-15.53	PK
H	7236	47.52	49.98	7.16	36.63	41.33	54	-12.67	AV
H	16087	47.38	51.53	11.34	41.52	48.71	74	-25.29	PK
operation frequency:2437									
V	4874	67.21	50.67	6.89	31.38	54.81	74	-19.19	PK
V	4874	55.26	50.67	6.89	31.38	42.86	54	-11.14	AV
V	7311	65.48	50.02	7.24	36.63	59.33	74	-14.67	PK
V	7311	47.50	50.02	7.24	36.63	41.35	54	-12.65	AV
V	16087	47.58	51.53	11.34	41.52	48.91	74	-25.09	PK
H	4874	65.90	50.67	6.89	31.38	53.50	74	-20.50	PK
H	4874	54.25	50.67	6.89	31.38	41.85	54	-12.15	AV
H	7311	65.62	50.02	7.24	36.63	59.47	74	-14.53	PK
H	7311	46.60	50.02	7.24	36.63	40.45	54	-13.55	AV
H	16087	46.91	51.53	11.34	41.52	48.24	74	-25.76	PK
operation frequency:2462									
V	4924	67.73	50.79	6.83	31.36	55.13	74	-18.87	PK
V	4924	55.15	50.79	6.83	31.36	42.55	54	-11.45	AV
V	7386	64.92	50.11	7.25	36.58	58.64	74	-15.36	PK
V	7386	46.88	50.11	7.25	36.58	40.60	54	-13.40	AV
V	16087	49.11	51.53	11.34	41.52	50.44	74	-23.56	PK
H	4924	67.74	50.79	6.83	31.36	55.14	74	-18.86	PK
H	4924	54.45	50.79	6.83	31.36	41.85	54	-12.15	AV
H	7386	65.99	50.11	7.25	36.58	59.71	74	-14.29	PK
H	7386	47.61	50.11	7.25	36.58	41.33	54	-12.67	AV
H	16087	47.50	51.53	11.34	41.52	48.83	74	-25.17	PK
<b>Remark:</b> 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2422									
V	4844	66.52	50.67	6.89	31.32	54.06	74	-19.94	PK
V	4844	55.55	50.67	6.89	31.32	43.09	54	-10.91	AV
V	7266	66.62	50.01	7.15	36.62	60.38	74	-13.62	PK
V	7266	47.11	50.01	7.15	36.62	40.87	54	-13.13	AV
V	16087	46.93	51.53	11.34	41.52	48.26	74	-25.74	PK
H	4844	66.81	50.67	6.89	31.32	54.35	74	-19.65	PK
H	4844	55.63	50.67	6.89	31.32	43.17	54	-10.83	AV
H	7266	64.49	50.01	7.15	36.62	58.25	74	-15.75	PK
H	7266	47.58	50.01	7.15	36.62	41.34	54	-12.66	AV
H	16087	47.82	51.53	11.34	41.52	49.15	74	-24.85	PK
operation frequency:2437									
V	4874	66.71	50.67	6.89	31.38	54.31	74	-19.69	PK
V	4874	54.57	50.67	6.89	31.38	42.17	54	-11.83	AV
V	7311	65.58	50.02	7.24	36.63	59.43	74	-14.57	PK
V	7311	46.62	50.02	7.24	36.63	40.47	54	-13.53	AV
V	16087	47.90	51.53	11.34	41.52	49.23	74	-24.77	PK
H	4874	65.71	50.67	6.89	31.38	53.31	74	-20.69	PK
H	4874	53.91	50.67	6.89	31.38	41.51	54	-12.49	AV
H	7311	65.72	50.02	7.24	36.63	59.57	74	-14.43	PK
H	7311	47.80	50.02	7.24	36.63	41.65	54	-12.35	AV
H	16087	46.81	51.53	11.34	41.52	48.14	74	-25.86	PK
operation frequency:2452									
V	4904	67.89	50.76	6.81	31.31	55.25	74	-18.75	PK
V	4904	54.46	50.76	6.81	31.31	41.82	54	-12.18	AV
V	7356	65.07	50.08	7.21	36.52	58.72	74	-15.28	PK
V	7356	47.66	50.08	7.21	36.52	41.31	54	-12.69	AV
V	16087	49.09	51.53	11.34	41.52	50.42	74	-23.58	PK
H	4904	67.61	50.76	6.81	31.31	54.97	74	-19.03	PK
H	4904	54.86	50.76	6.81	31.31	42.22	54	-11.78	AV
H	7356	65.98	50.08	7.21	36.52	59.63	74	-14.37	PK
H	7356	46.60	50.08	7.21	36.52	40.25	54	-13.75	AV
H	16087	47.92	51.53	11.34	41.52	49.25	74	-24.75	PK
<b>Remark:</b> 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested  
and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

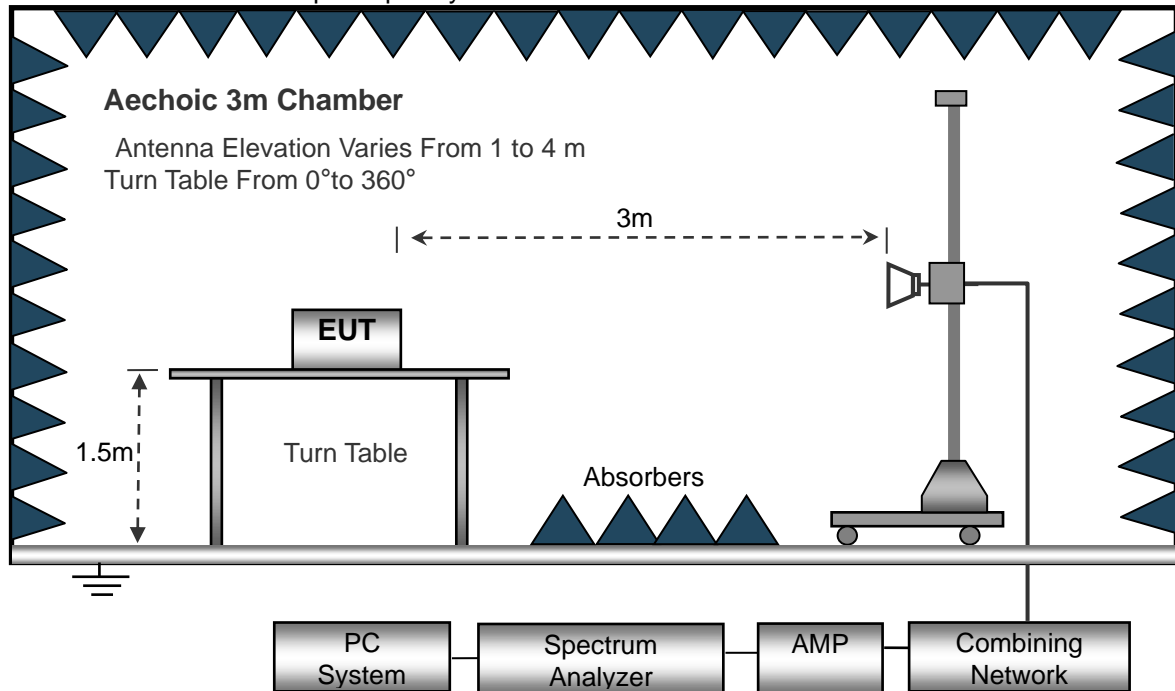

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.3.6 TEST RESULT

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	76.66	52.12	2.73	27.38	54.65	74	-19.35	PK
V	2390	65.93	52.12	2.73	27.38	43.92	54	-10.08	AV
V	2400	76.73	52.16	2.78	27.41	54.76	74	-19.24	PK
V	2400	64.78	52.16	2.78	27.41	42.81	54	-11.19	AV
H	2390	77.24	52.12	2.73	27.38	55.23	74	-18.77	PK
H	2390	66.19	52.12	2.73	27.38	44.18	54	-9.82	AV
H	2400	77.07	52.16	2.78	27.41	55.10	74	-18.90	PK
H	2400	66.03	52.16	2.78	27.41	44.06	54	-9.94	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	76.63	52.23	2.86	27.44	54.70	74	-19.30	PK
V	2483.5	65.99	52.23	2.86	27.44	44.06	54	-9.94	AV
V	2500	76.67	52.26	2.88	27.49	54.78	74	-19.22	PK
V	2500	64.50	52.26	2.88	27.49	42.61	54	-11.39	AV
H	2483.5	77.16	52.23	2.86	27.44	55.23	74	-18.77	PK
H	2483.5	65.88	52.23	2.86	27.44	43.95	54	-10.05	AV
H	2500	76.78	52.26	2.88	27.49	54.89	74	-19.11	PK
H	2500	65.61	52.26	2.88	27.49	43.72	54	-10.28	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	76.89	52.12	2.73	27.38	54.88	74	-19.12	PK
V	2390	65.71	52.12	2.73	27.38	43.70	54	-10.30	AV
V	2400	76.57	52.16	2.78	27.41	54.60	74	-19.40	PK
V	2400	64.96	52.16	2.78	27.41	42.99	54	-11.01	AV
H	2390	77.37	52.12	2.73	27.38	55.36	74	-18.64	PK
H	2390	65.68	52.12	2.73	27.38	43.67	54	-10.33	AV
H	2400	76.78	52.16	2.78	27.41	54.81	74	-19.19	PK
H	2400	65.59	52.16	2.78	27.41	43.62	54	-10.38	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.14	52.23	2.86	27.44	55.21	74	-18.79	PK
V	2483.5	66.22	52.23	2.86	27.44	44.29	54	-9.71	AV
V	2500	76.86	52.26	2.88	27.49	54.97	74	-19.03	PK
V	2500	65.61	52.26	2.88	27.49	43.72	54	-10.28	AV
H	2483.5	77.18	52.23	2.86	27.44	55.25	74	-18.75	PK
H	2483.5	65.60	52.23	2.86	27.44	43.67	54	-10.33	AV
H	2500	76.76	52.26	2.88	27.49	54.87	74	-19.13	PK
H	2500	66.22	52.26	2.88	27.49	44.33	54	-9.67	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	77.04	52.12	2.73	27.38	55.03	74	-18.97	PK
V	2390	65.60	52.12	2.73	27.38	43.59	54	-10.41	AV
V	2400	77.77	52.16	2.78	27.41	55.80	74	-18.20	PK
V	2400	65.62	52.16	2.78	27.41	43.65	54	-10.35	AV
H	2390	77.60	52.12	2.73	27.38	55.59	74	-18.41	PK
H	2390	65.51	52.12	2.73	27.38	43.50	54	-10.50	AV
H	2400	77.28	52.16	2.78	27.41	55.31	74	-18.69	PK
H	2400	65.57	52.16	2.78	27.41	43.60	54	-10.40	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.57	52.23	2.86	27.44	55.64	74	-18.36	PK
V	2483.5	66.02	52.23	2.86	27.44	44.09	54	-9.91	AV
V	2500	76.53	52.26	2.88	27.49	54.64	74	-19.36	PK
V	2500	65.83	52.26	2.88	27.49	43.94	54	-10.06	AV
H	2483.5	77.76	52.23	2.86	27.44	55.83	74	-18.17	PK
H	2483.5	65.81	52.23	2.86	27.44	43.88	54	-10.12	AV
H	2500	77.08	52.26	2.88	27.49	55.19	74	-18.81	PK
H	2500	66.50	52.26	2.88	27.49	44.61	54	-9.39	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2422									
V	2390	77.04	52.12	2.73	27.38	55.03	74	-18.97	PK
V	2390	65.63	52.12	2.73	27.38	43.62	54	-10.38	AV
V	2400	78.05	52.16	2.78	27.41	56.08	74	-17.92	PK
V	2400	65.98	52.16	2.78	27.41	44.01	54	-9.99	AV
H	2390	77.77	52.12	2.73	27.38	55.76	74	-18.24	PK
H	2390	65.73	52.12	2.73	27.38	43.72	54	-10.28	AV
H	2400	77.32	52.16	2.78	27.41	55.35	74	-18.65	PK
H	2400	66.18	52.16	2.78	27.41	44.21	54	-9.79	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2452									
V	2483.5	77.69	52.23	2.86	27.44	55.76	74	-18.24	PK
V	2483.5	65.71	52.23	2.86	27.44	43.78	54	-10.22	AV
V	2500	77.05	52.26	2.88	27.49	55.16	74	-18.84	PK
V	2500	65.68	52.26	2.88	27.49	43.79	54	-10.21	AV
H	2483.5	77.79	52.23	2.86	27.44	55.86	74	-18.14	PK
H	2483.5	66.01	52.23	2.86	27.44	44.08	54	-9.92	AV
H	2500	76.98	52.26	2.88	27.49	55.09	74	-18.91	PK
H	2500	66.87	52.26	2.88	27.49	44.98	54	-9.02	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

#### 3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.


Trace mode = max hold.

Allow trace to fully stabilize.

#### 3.4.3 DEVIATION FROM STANDARD

No deviation.

#### 3.4.4 TEST SETUP

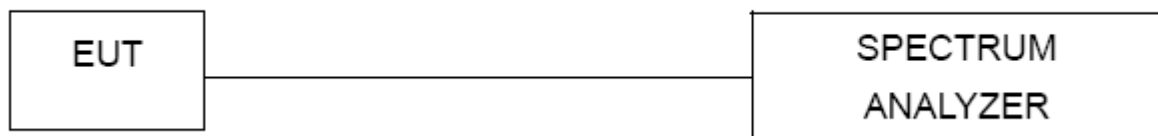

#### 3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 3.4.6 TEST RESULTS

Please see annex1.

#### 4. AVERAGE OUTPUT POWER

##### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS


##### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d. Set VBW  $\geq [3 \times \text{RBW}]$ .
- e. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- f. Sweep time = auto.
- g. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h. If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle  $\geq 98\%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- i. Trace average at least 100 traces in power averaging (rms) mode.
- j. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP

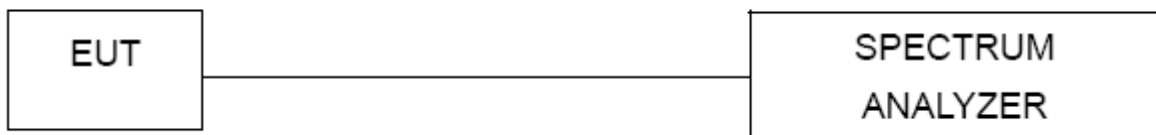

##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

##### 4.1.5 TEST RESULTS

Please see annex1.

**5. POWER SPECTRAL DENSITY TEST****5.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3kHz$
VB	$VBW \geq 3RBW$
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	Max Hold
Sweep Time	Auto

**5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

**5.1.2 DEVIATION FROM STANDARD**

No deviation.

**5.1.3 TEST SETUP****5.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**

Please see annex1.

## 6. 6DB BANDWIDTH TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


#### 6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

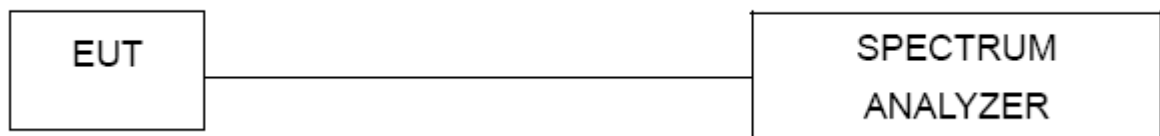

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 6.1.5 TEST RESULTS

Please see annex1

## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA


EUT antenna is equipped with a unique antenna connector (connected with reverse spiral pattern), and the antenna gain is less than 6dBi, which meets the standard requirements.

## 8. TEST SETUP PHOTO


Radiated Measurement Photos

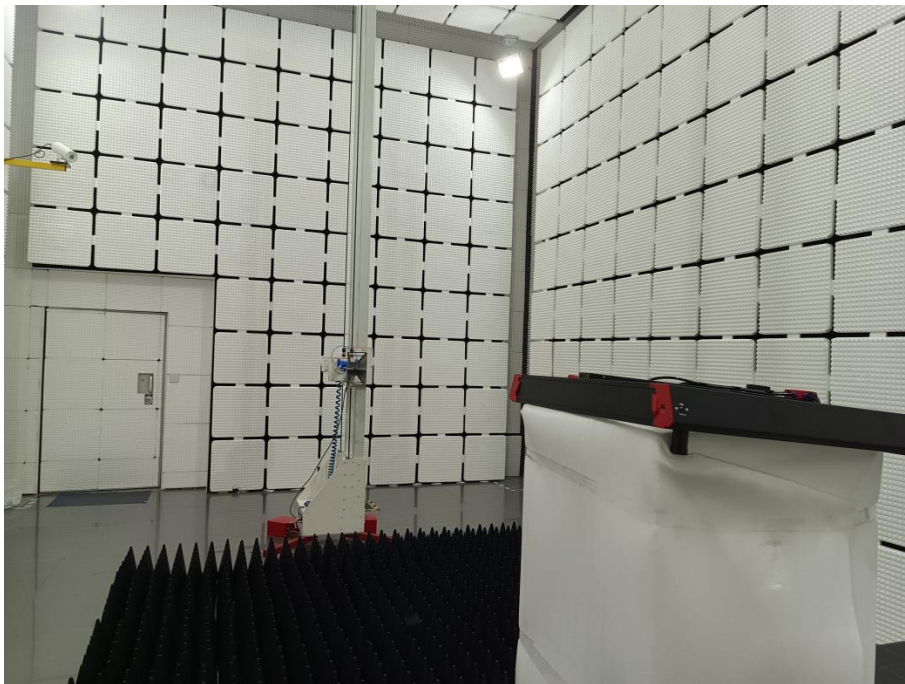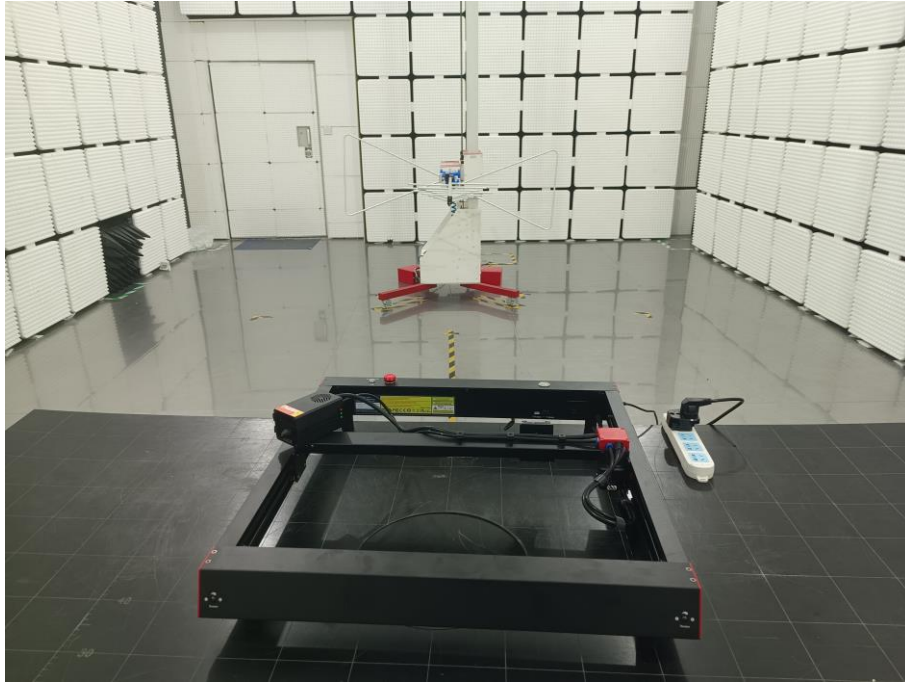


### Conducted Measurement Photos

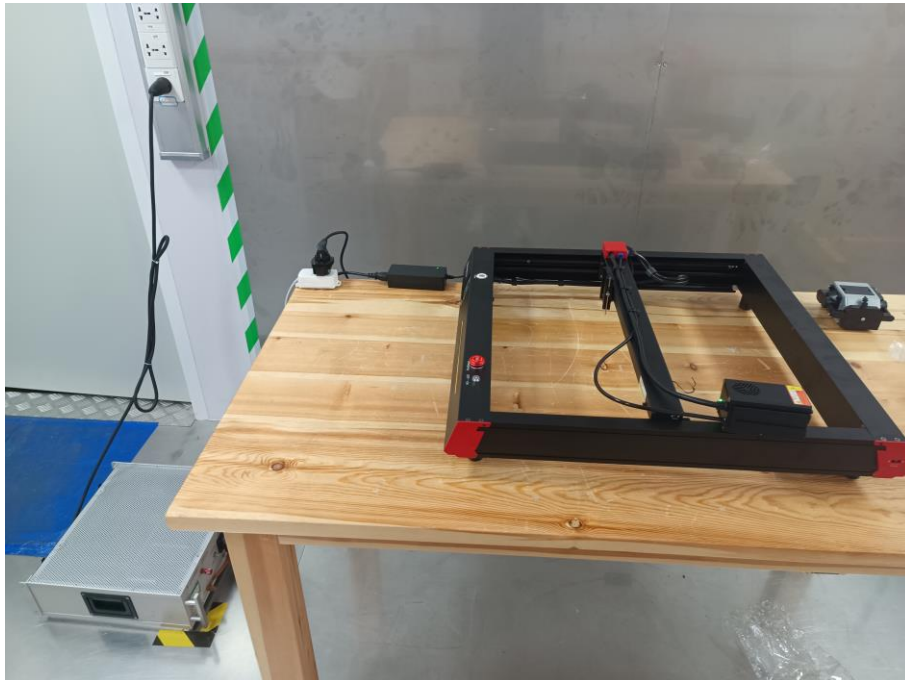

## 9. EUT PHOTO

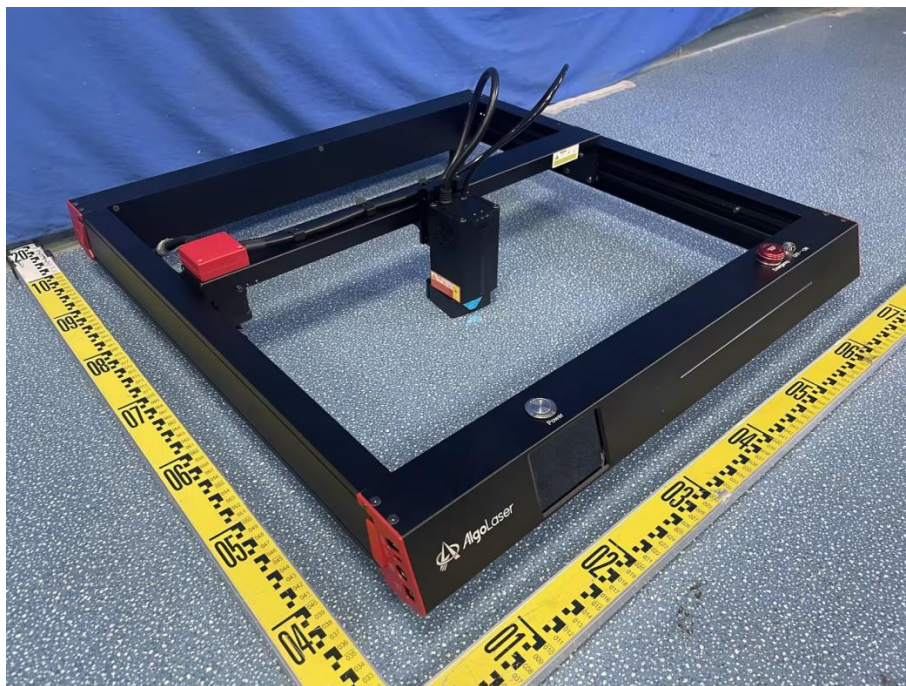



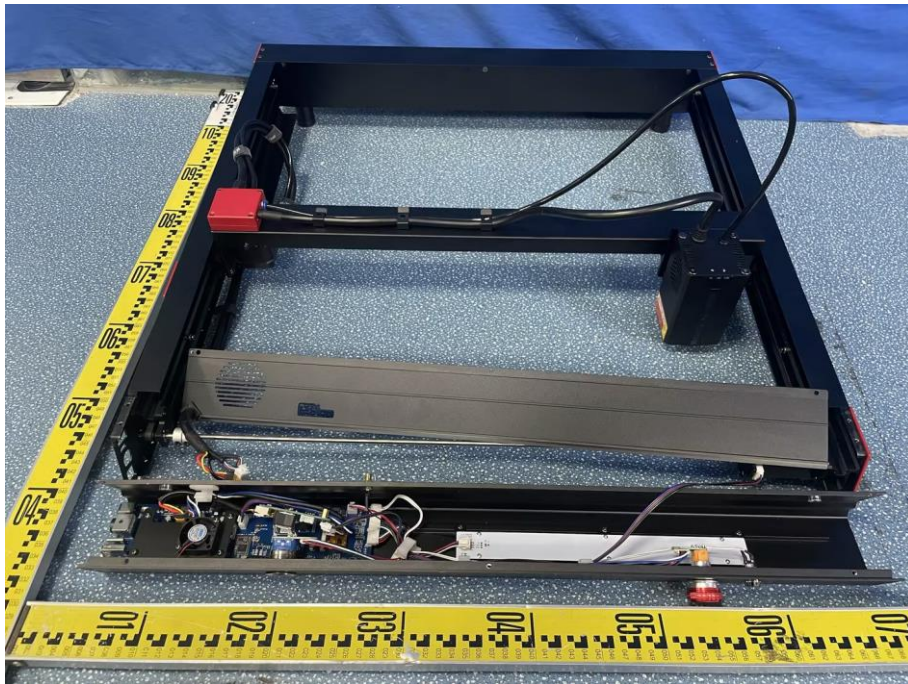

\*\*\*\*\* END OF REPORT \*\*\*\*\*