

Test Plot*#: WCDMA Band 5_Head Right Tilt_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0318 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.774 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0235 W/kg

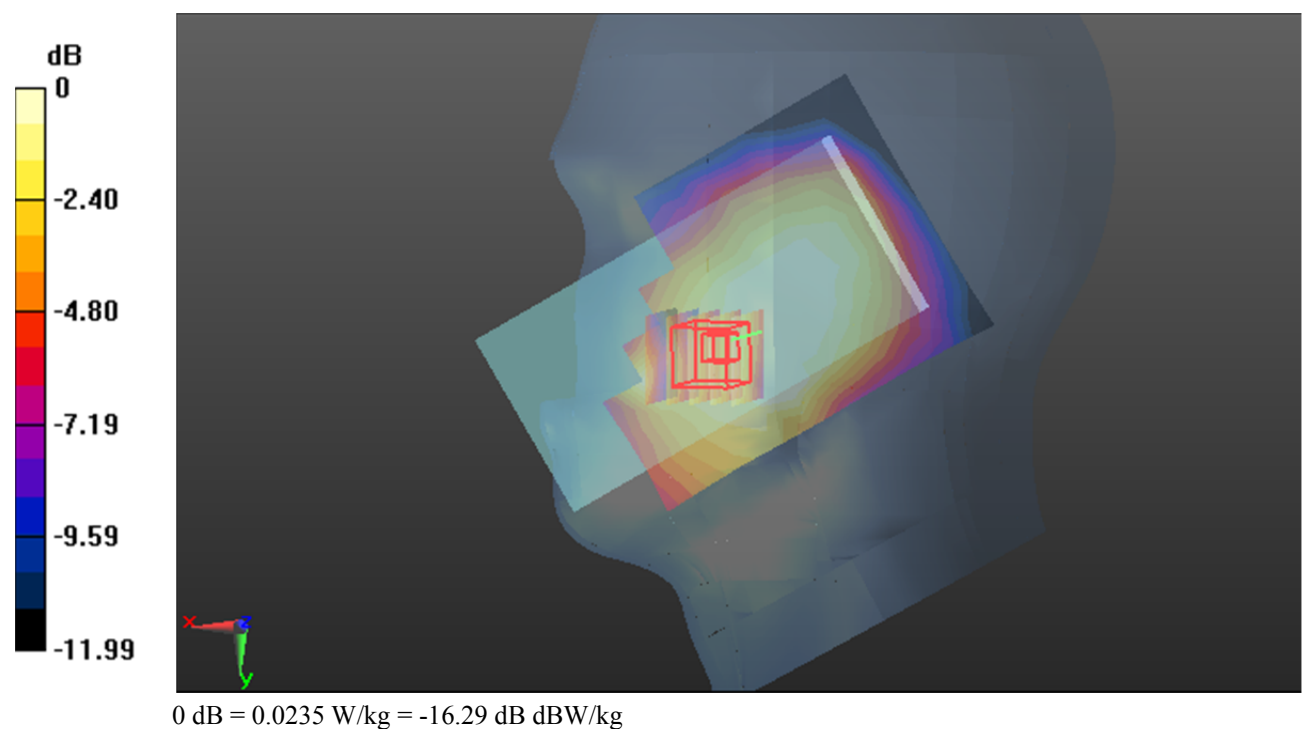

Test Plot*#: WCDMA Band 5_Body Front_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0745 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.281 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0886 W/kg

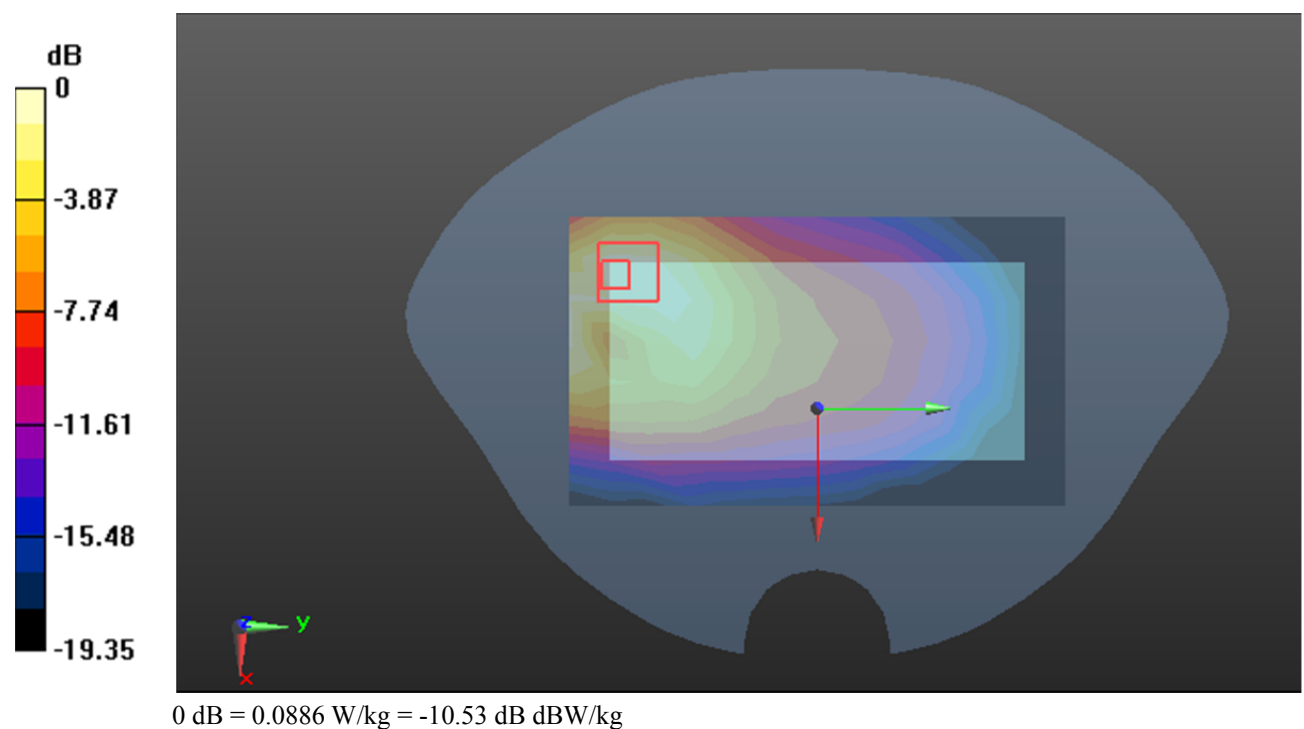

Test Plot*#: WCDMA Band 5_Body Back_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0645 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.673 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0640 W/kg

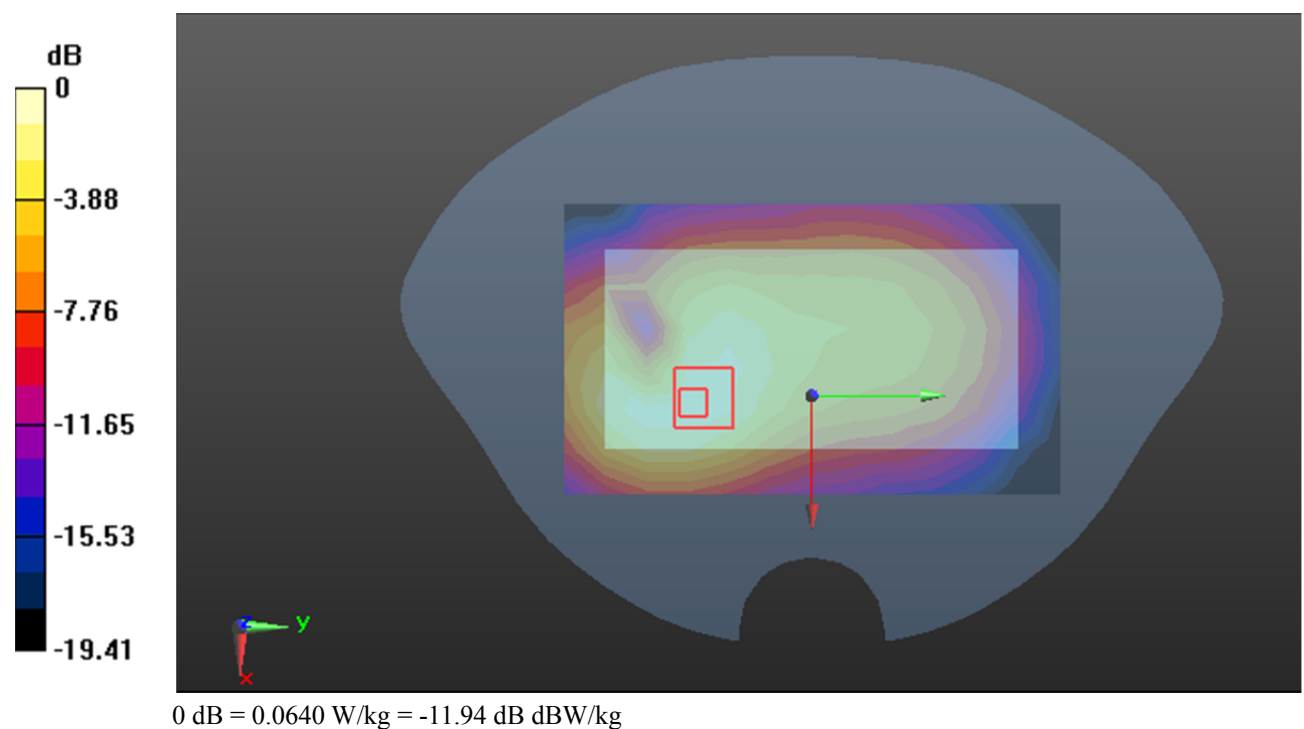

Test Plot*#: WCDMA Band 5_Body Left_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0310 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.560 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0334 W/kg

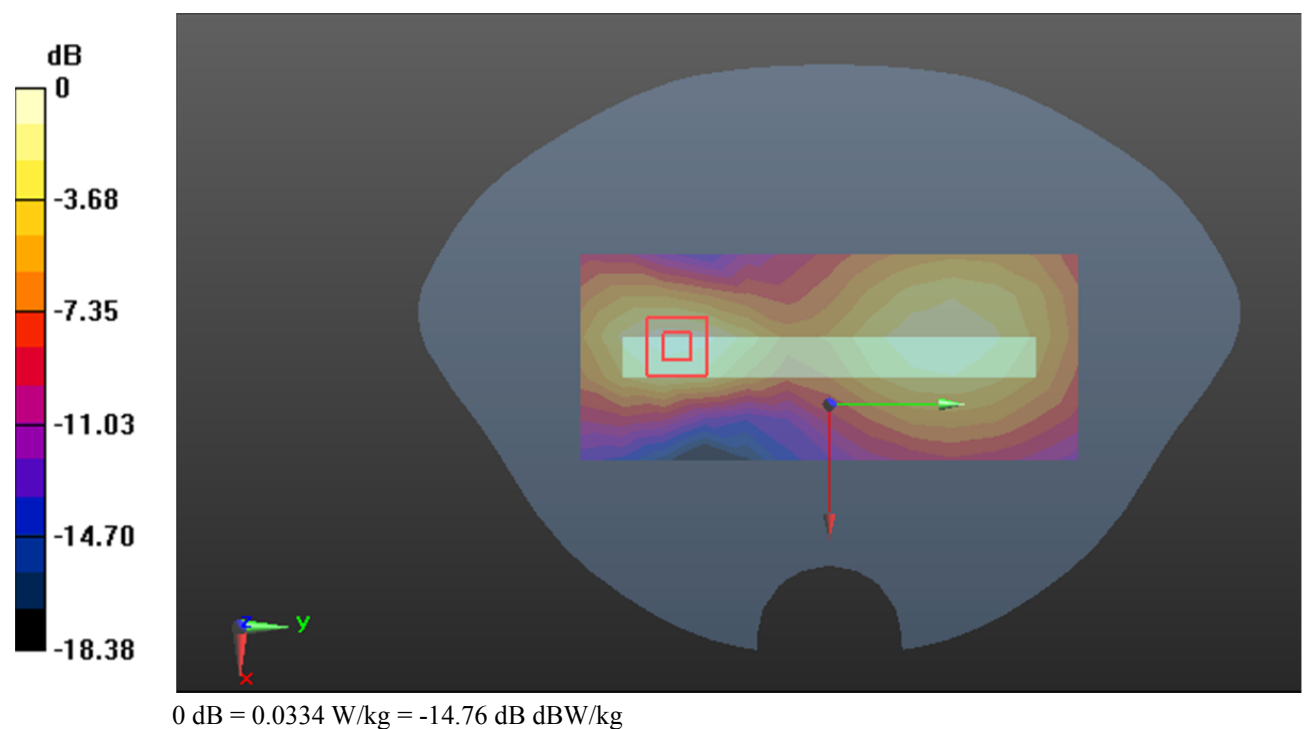

Test Plot*#: WCDMA Band 5_Body Right_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.934 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00764 W/kg

Maximum value of SAR (measured) = 0.0124 W/kg

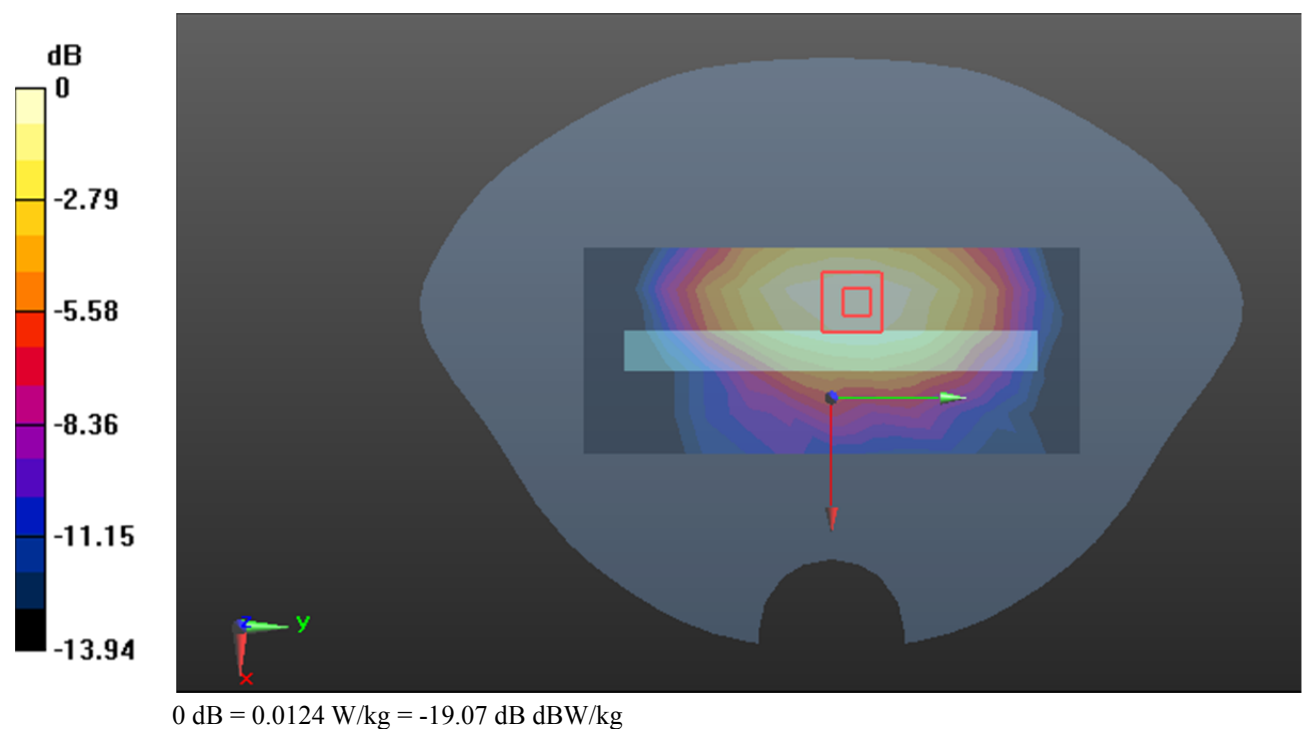

Test Plot*#: WCDMA Band 5_Body Bottom_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.940$ S/m; $\epsilon_r=41.428$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0967 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.85 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

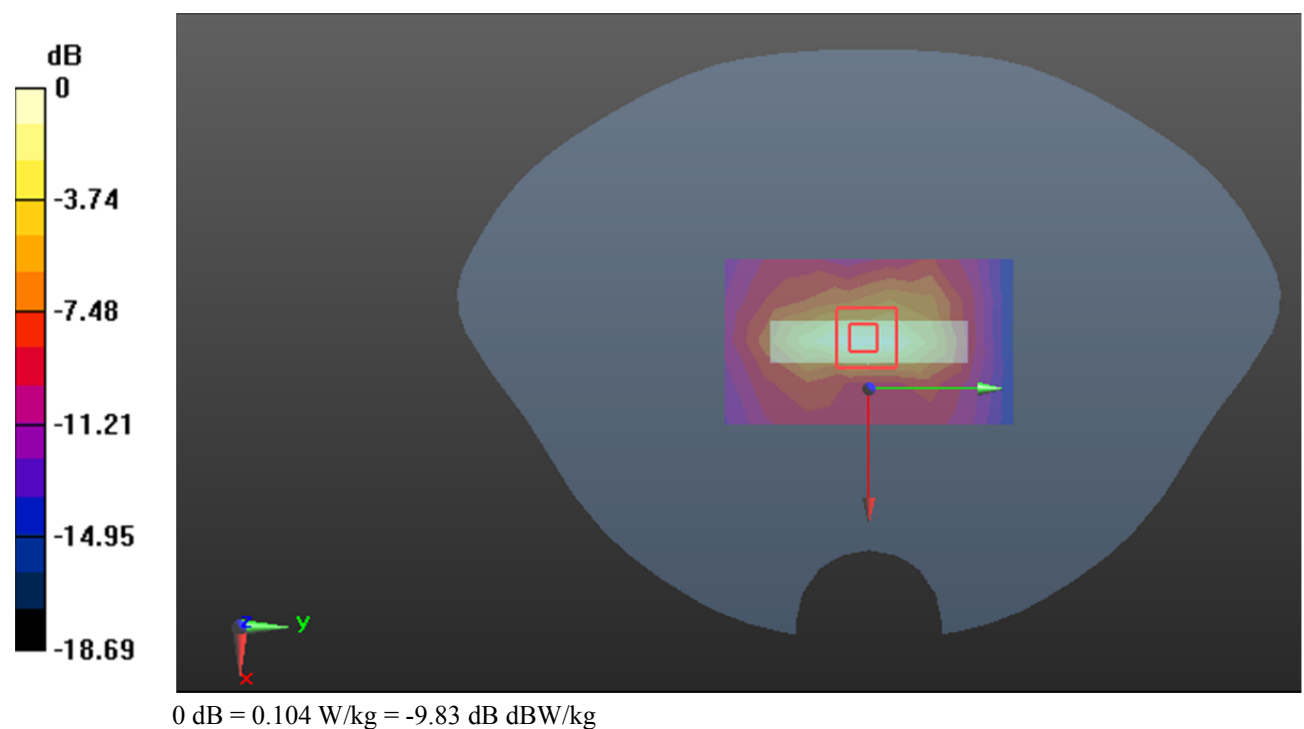

Test Plot*#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.269 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.022 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.272 W/kg

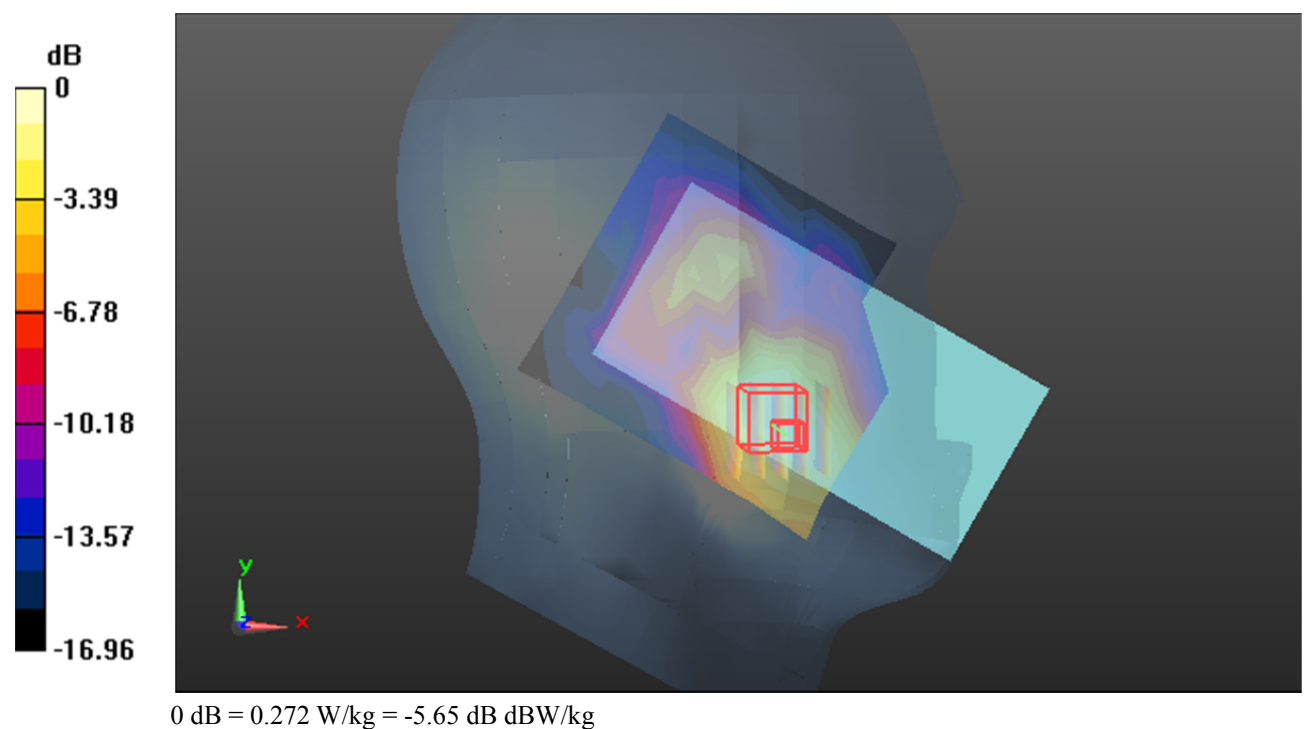

Test Plot*#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.222 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.372 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

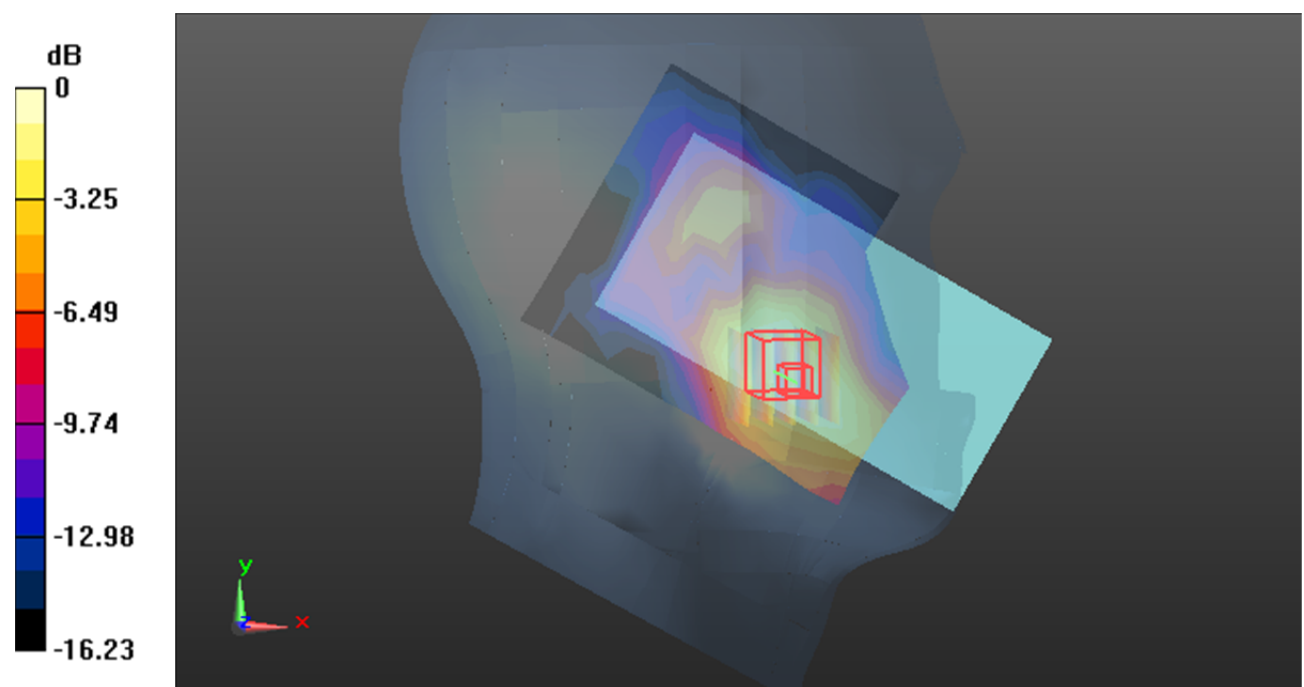

0 dB = 0.243 W/kg = -6.14 dB dBW/kg

Test Plot*#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.239 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

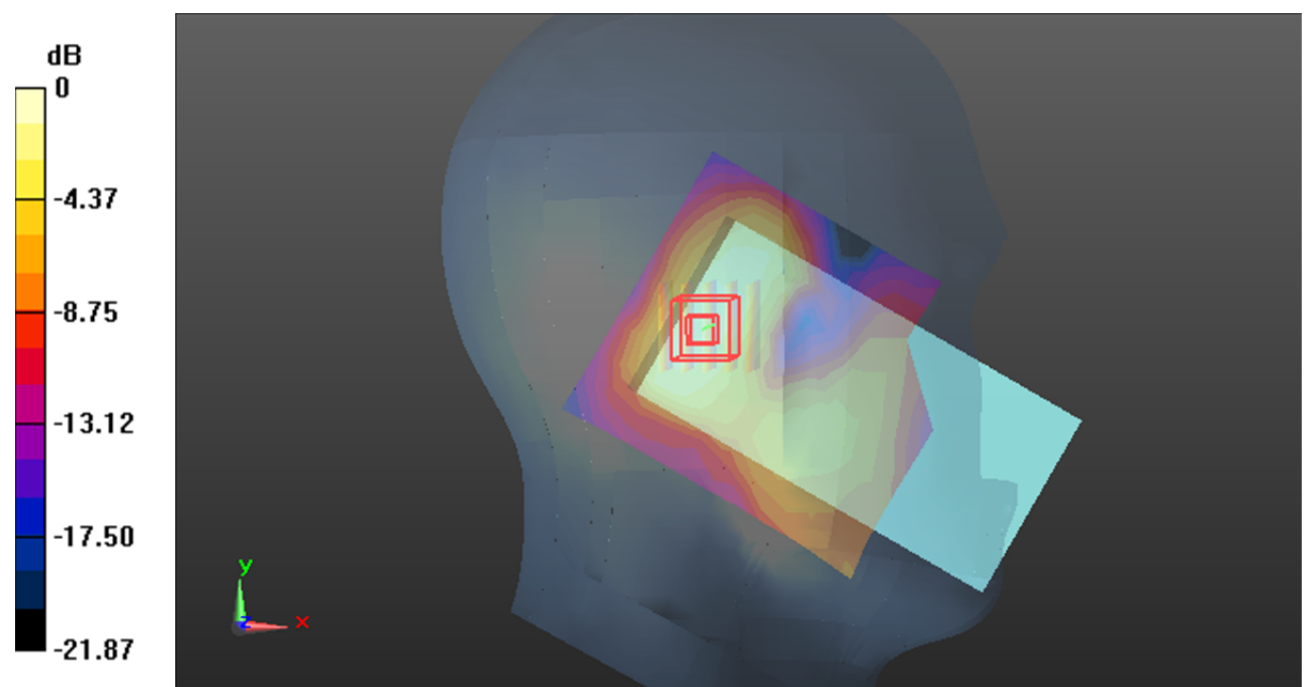

0 dB = 0.134 W/kg = -8.73 dB dBW/kg

Test Plot*#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0978 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.289 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

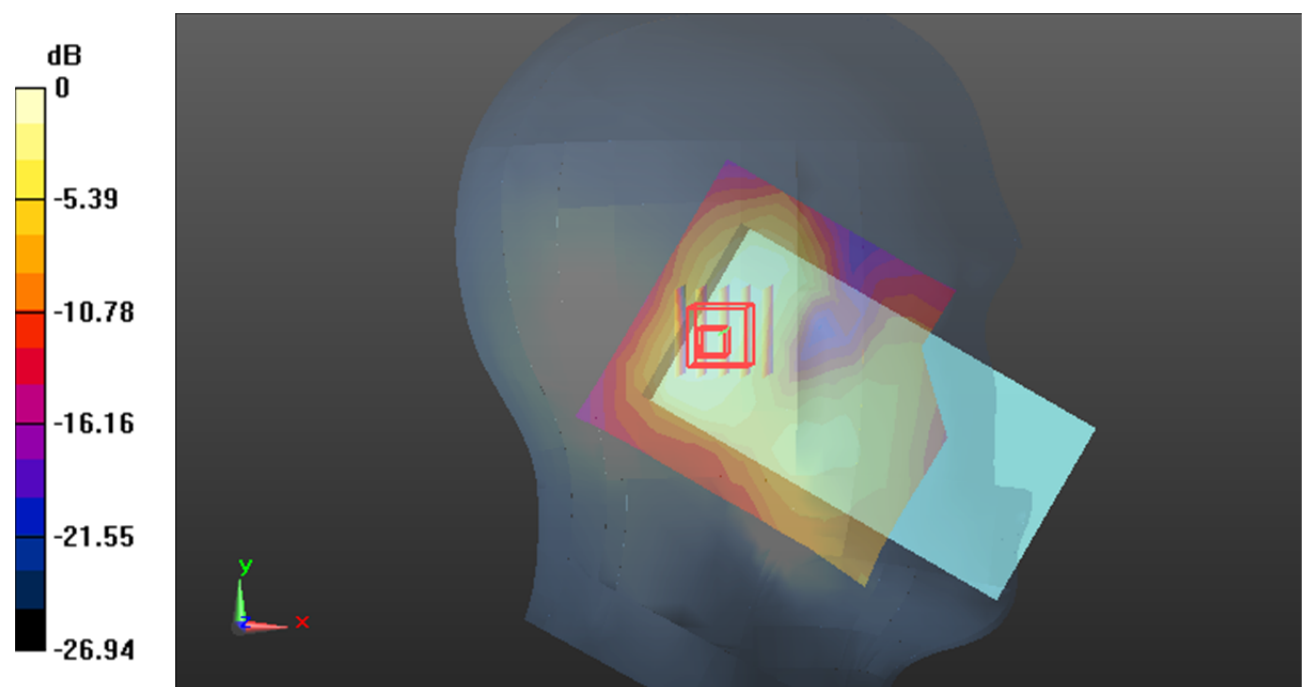

0 dB = 0.108 W/kg = -9.67 dB dBW/kg

Test Plot*#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.403 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

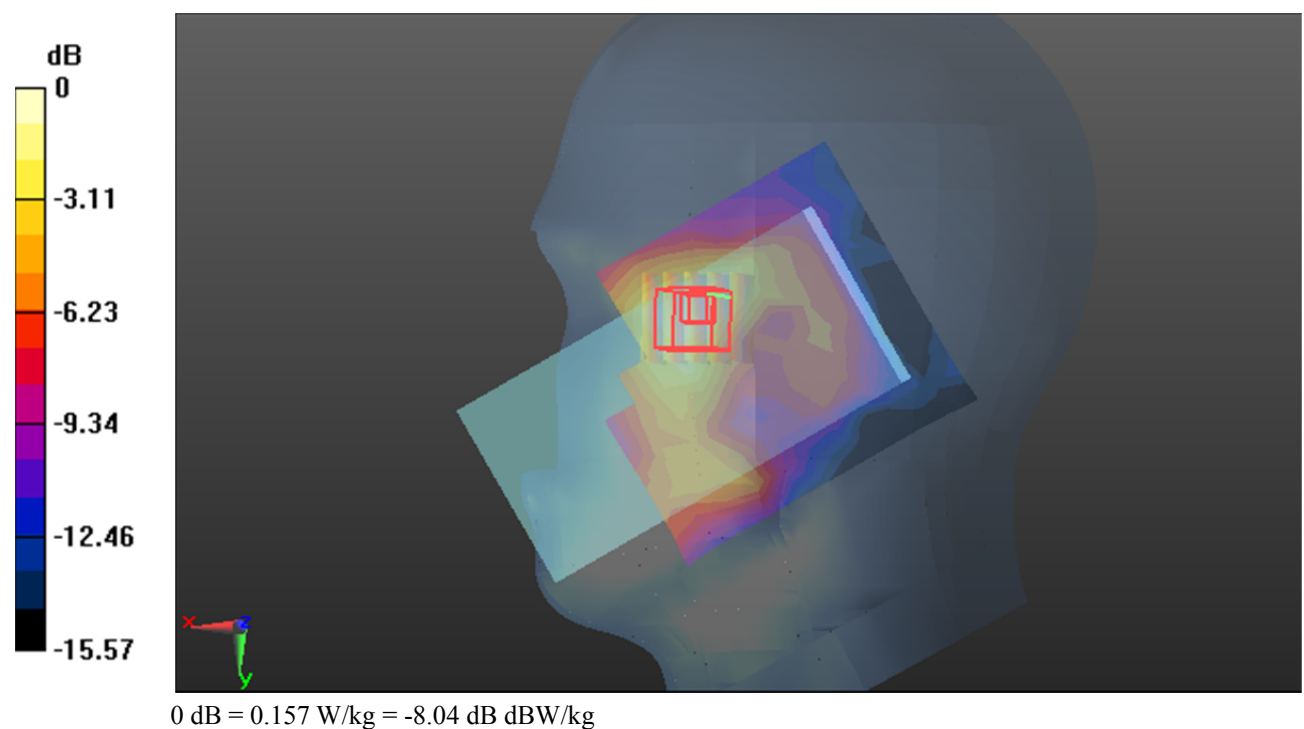

Test Plot*#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.109 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

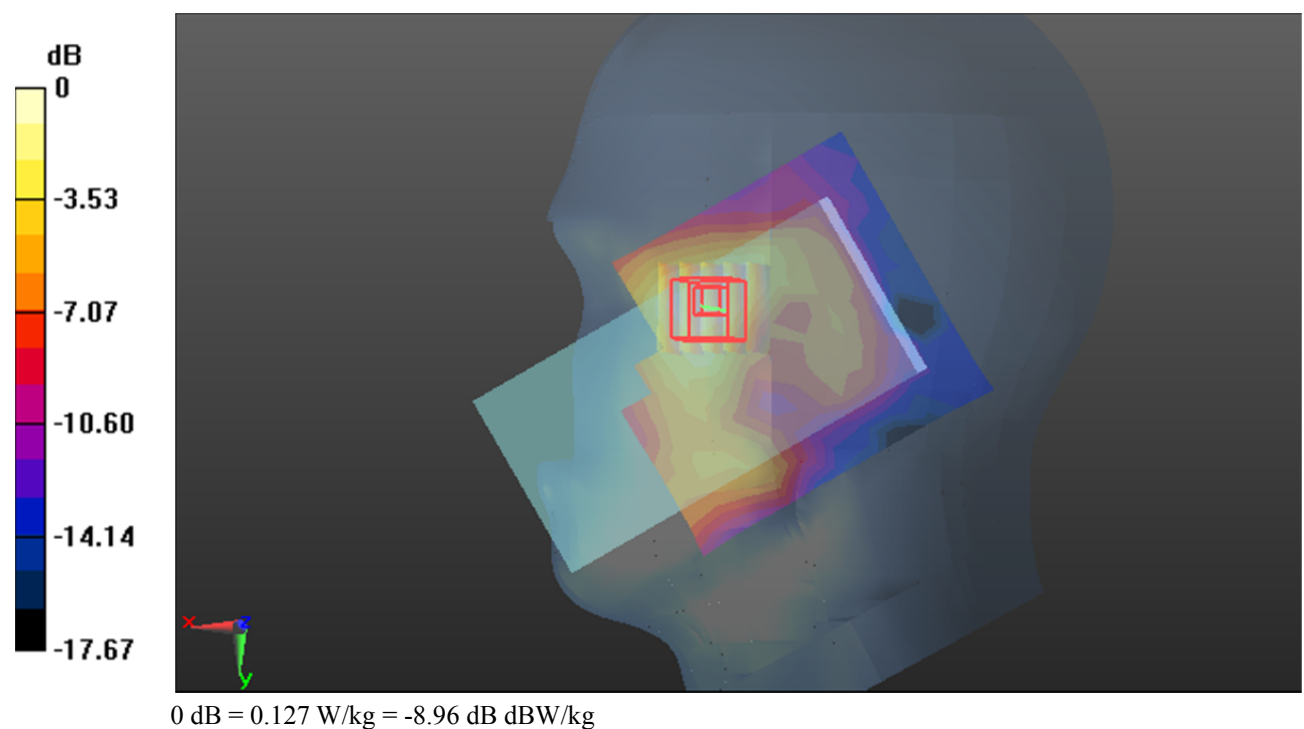

Test Plot*#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.045 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

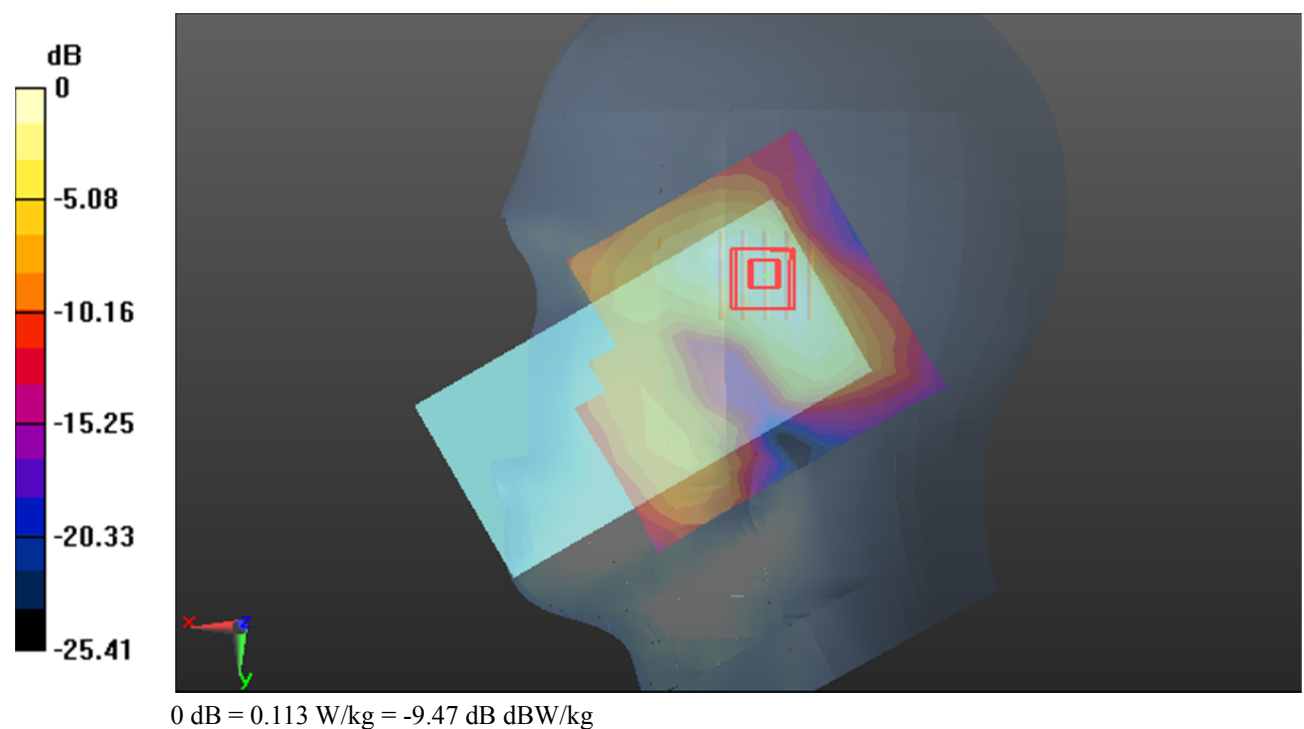

Test Plot*#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0923 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.532 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0940 W/kg

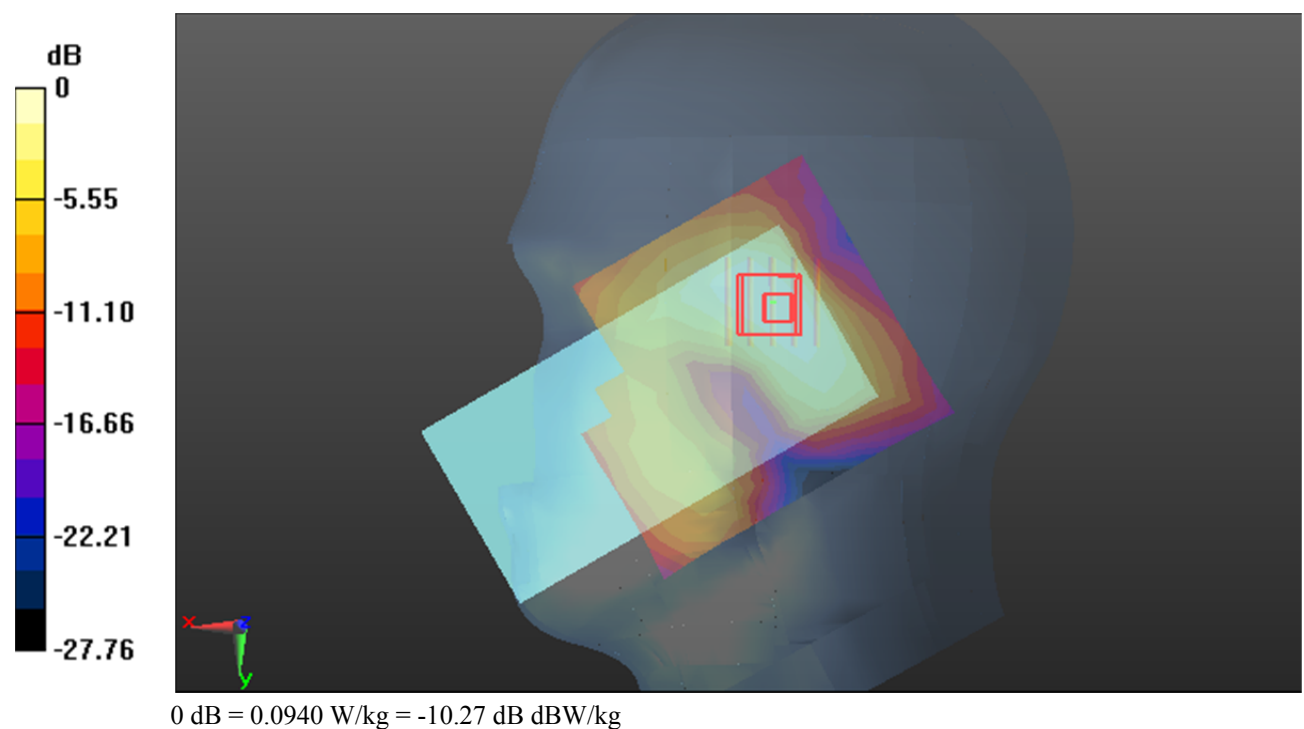

Test Plot*#: LTE Band 7_Body Front_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.355 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.325 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

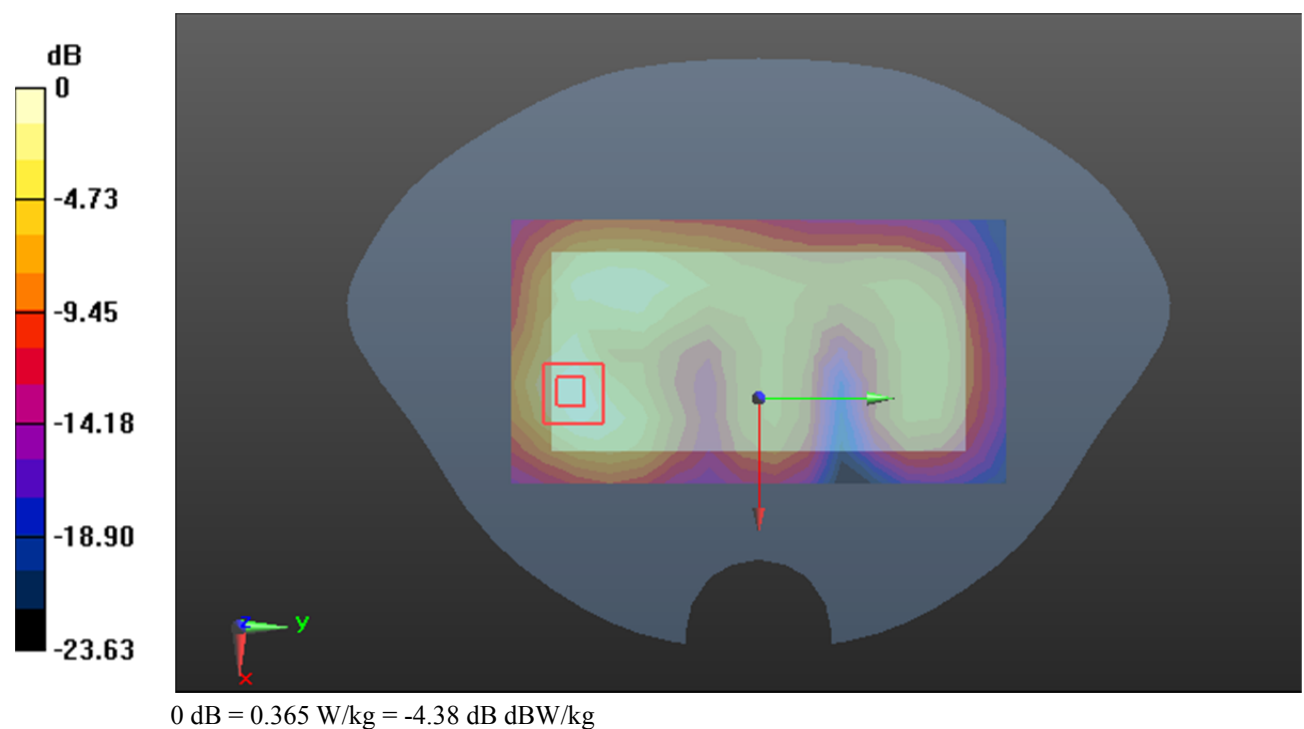

Test Plot*#: LTE Band 7_Body Front_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.433 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

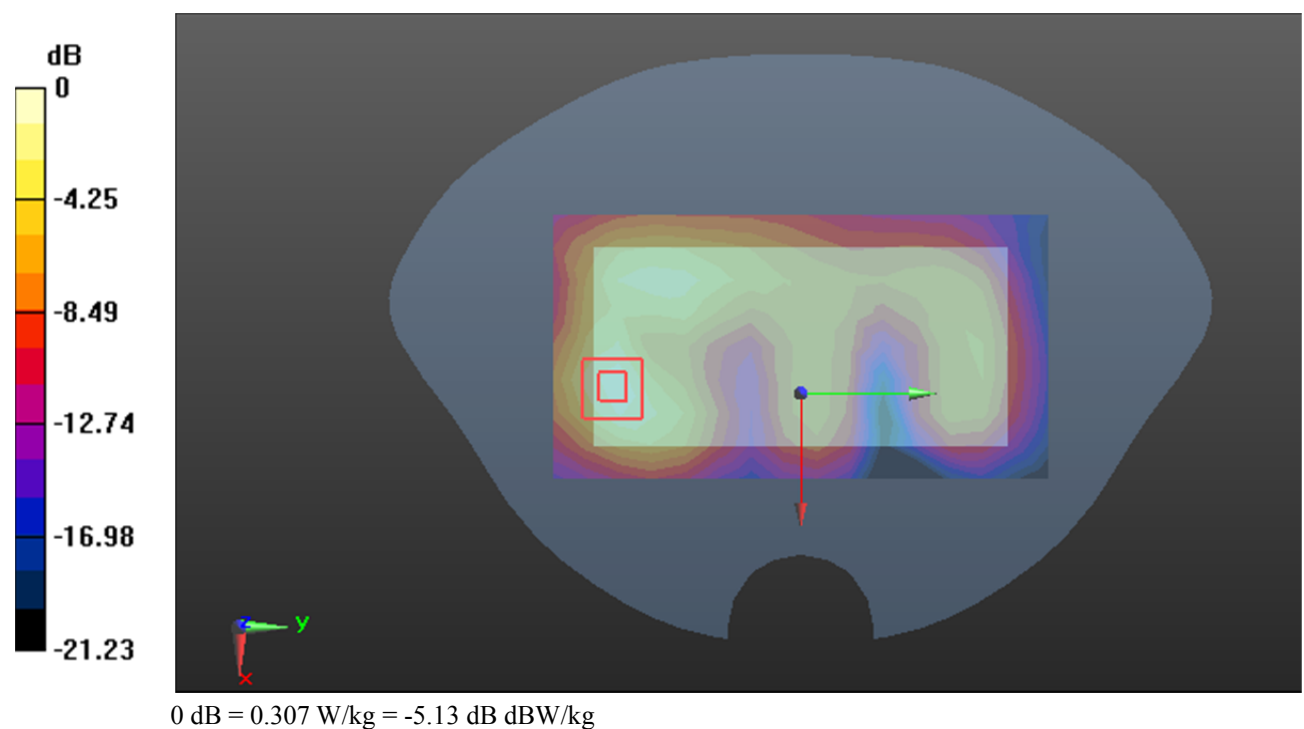

Test Plot*#: LTE Band 7_Body Back_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.309 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.408 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

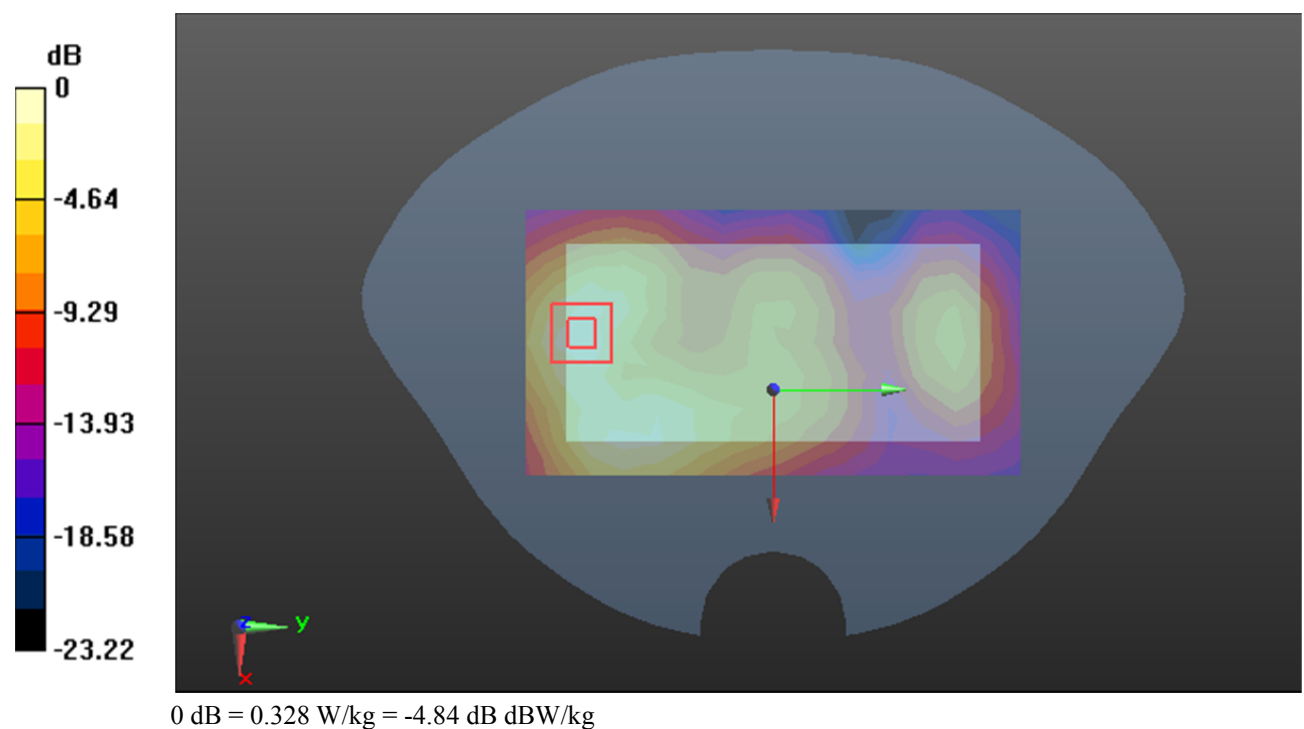

Test Plot*#: LTE Band 7_Body Back_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.255 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.749 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

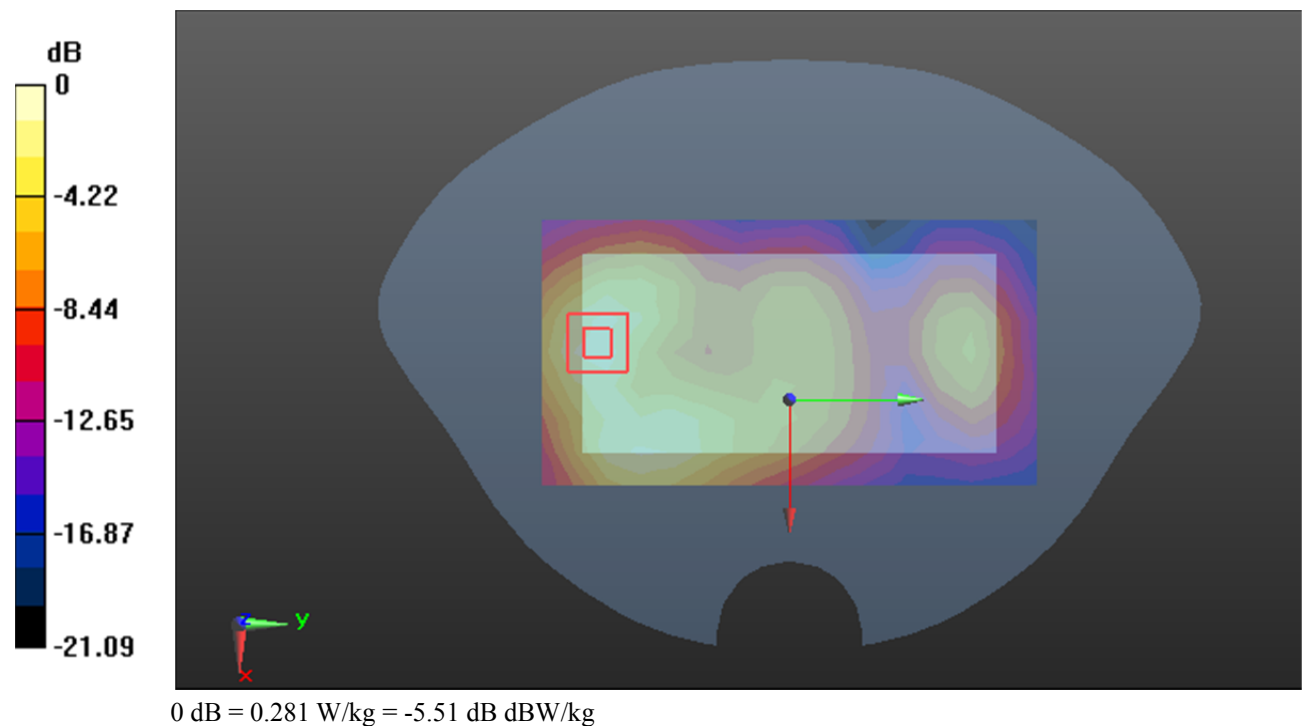

Test Plot*#: LTE Band 7_Body Left_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.24 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

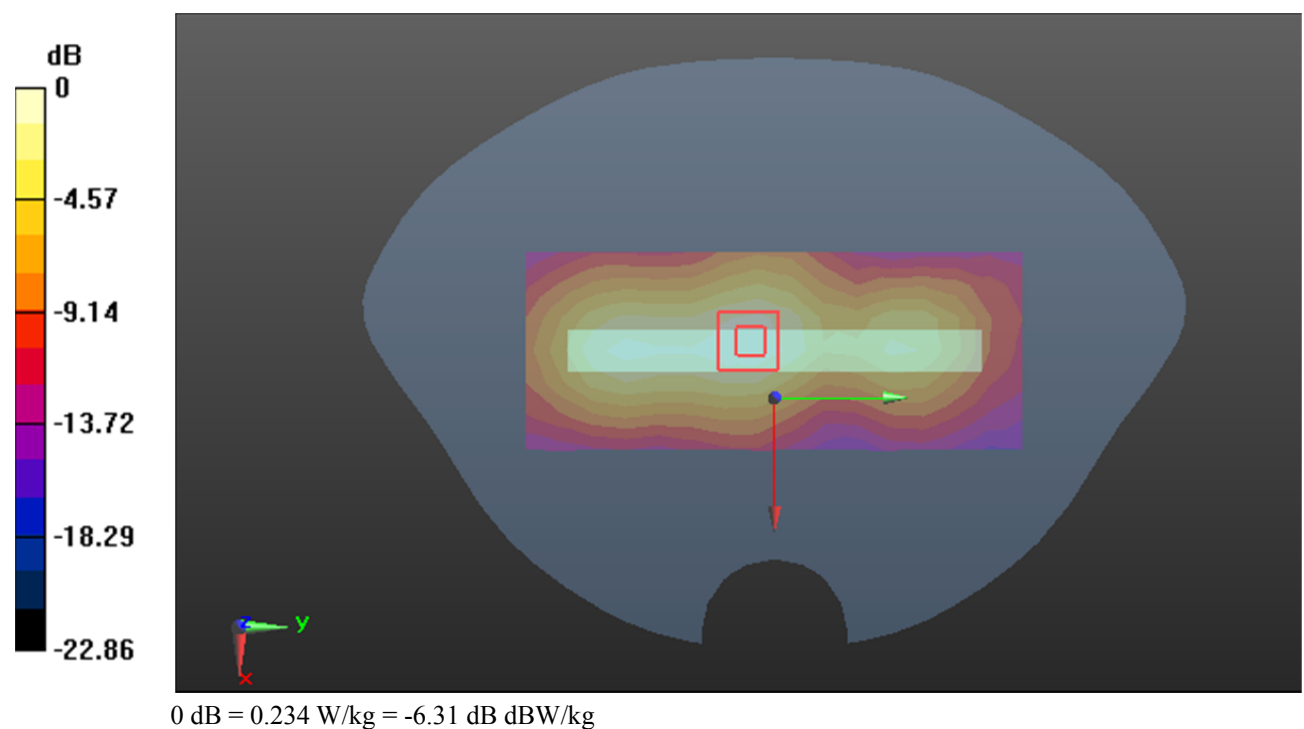

Test Plot*#: LTE Band 7_Body Left_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.181 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.499 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

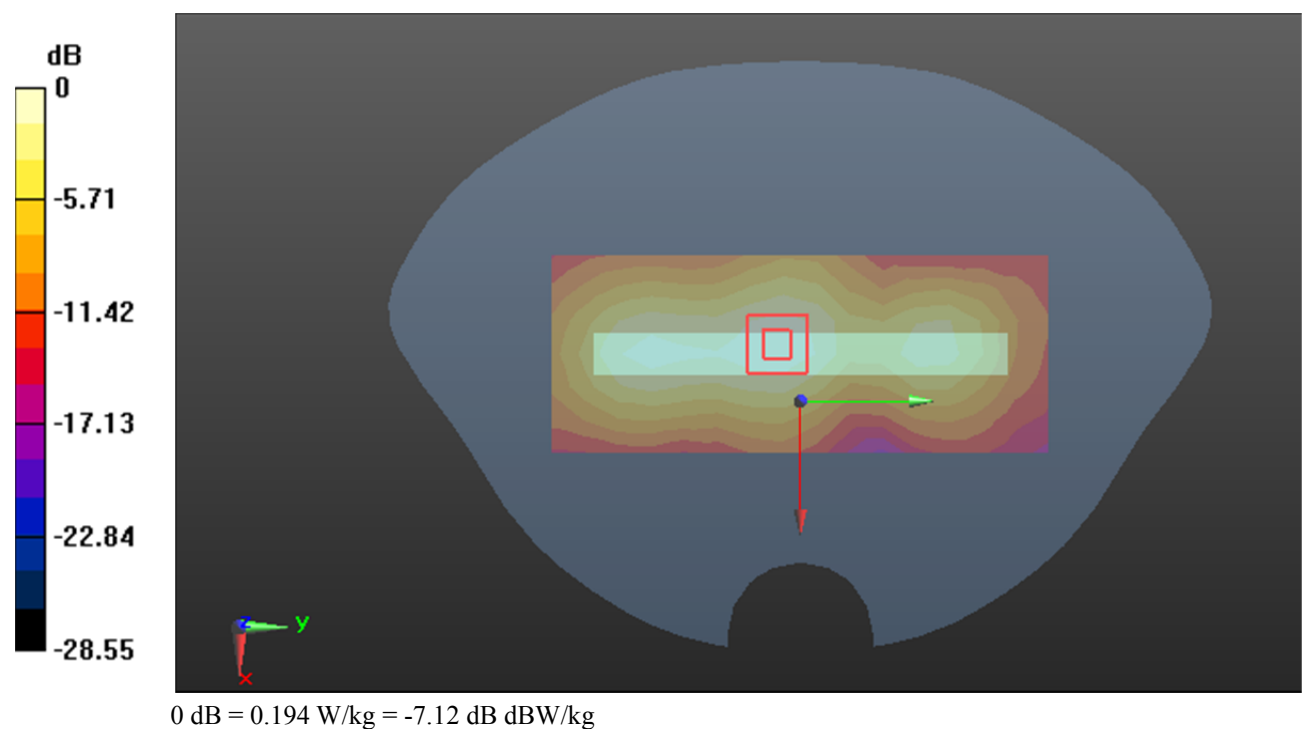

Test Plot*#: LTE Band 7_Body Right_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0291 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.854 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0312 W/kg

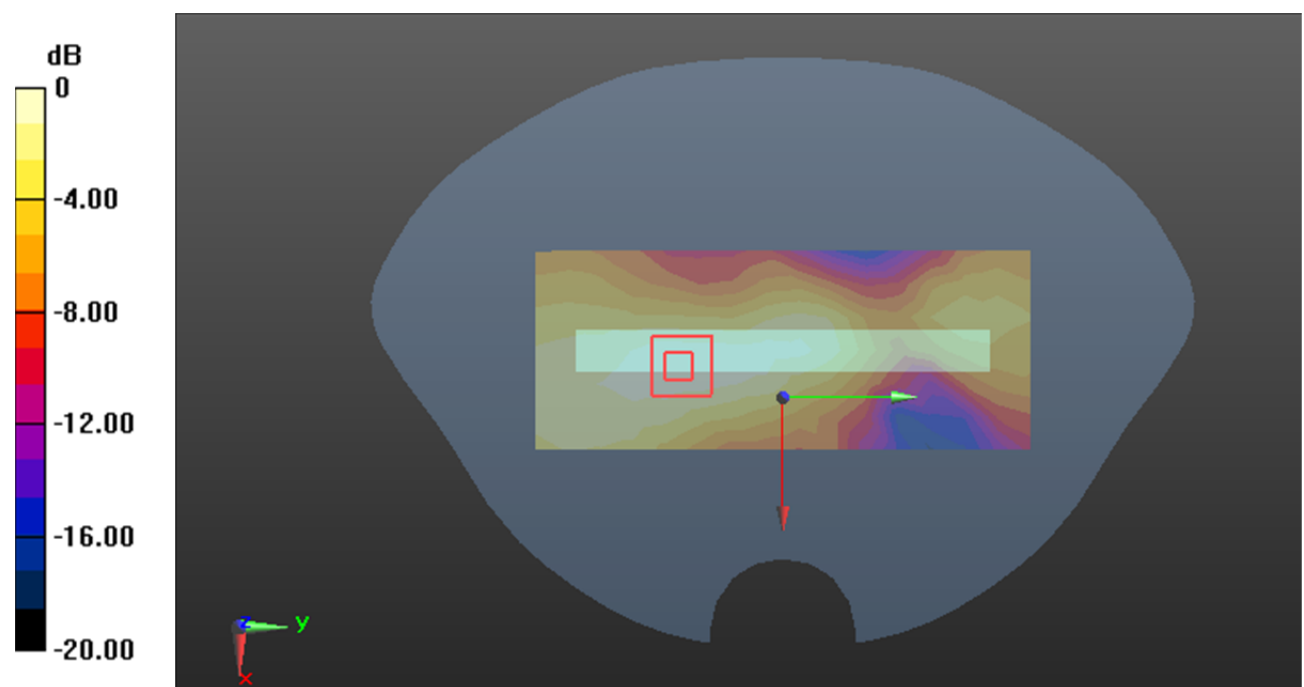

0 dB = 0.0312 W/kg = -15.06 dB dBW/kg

Test Plot*#: LTE Band 7_Body Right_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.609 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0355 W/kg

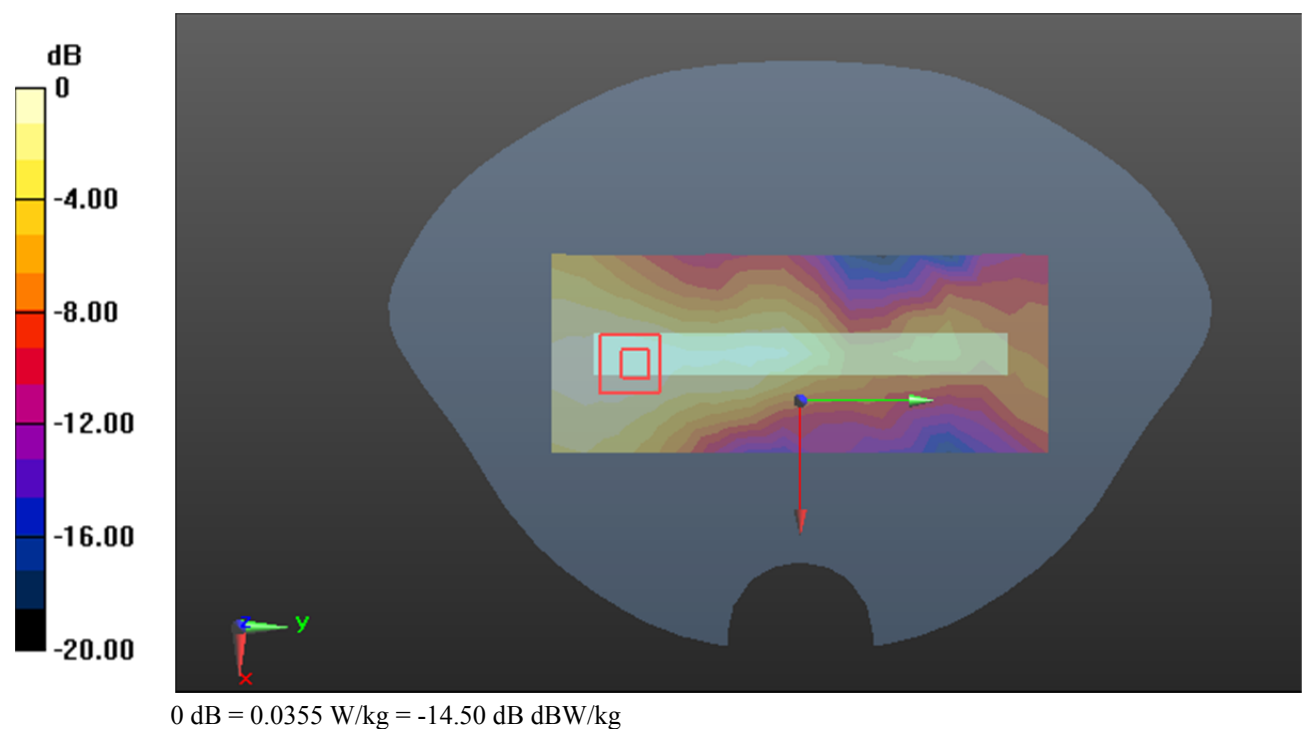

Test Plot*#: LTE Band 7_Body Bottom_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.860 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.52 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.818 W/kg

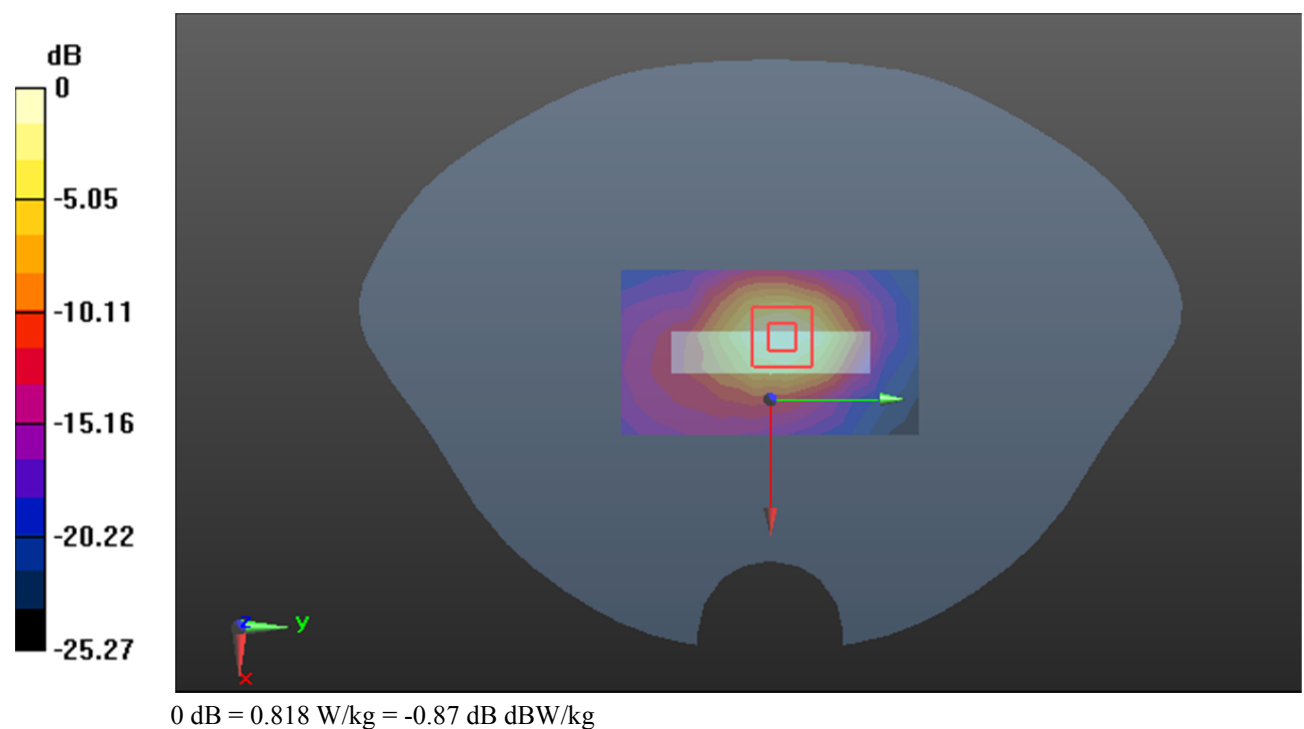

Test Plot*#: LTE Band 7_Body Bottom_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 39.303$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.607 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.77 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

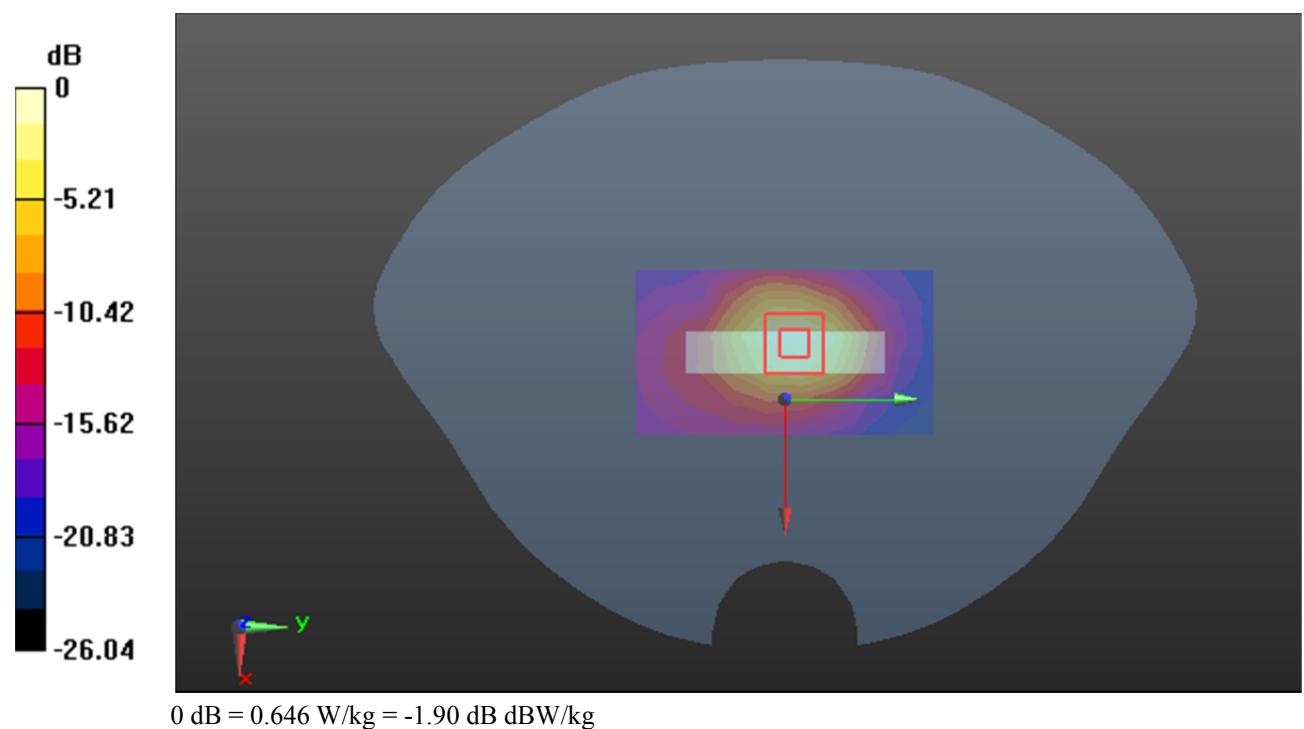

Test Plot*#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0588 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.651 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0600 W/kg

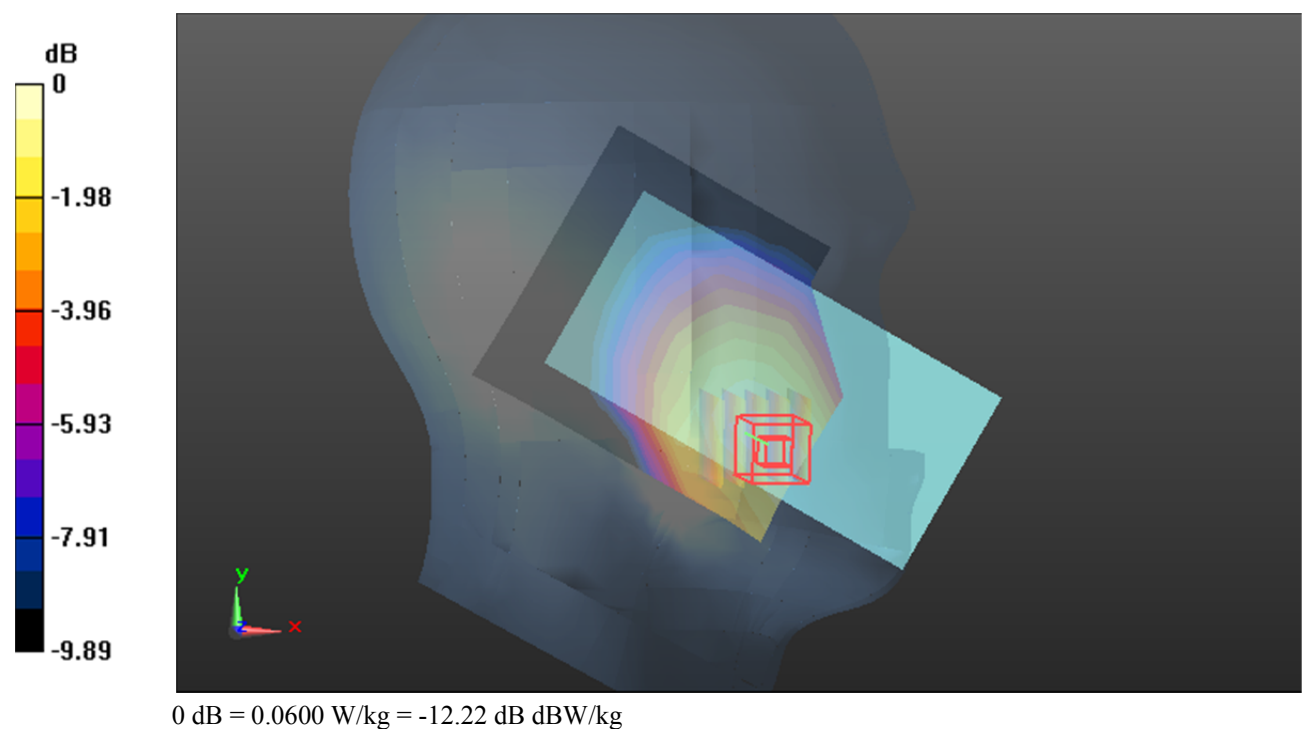

Test Plot*#: LTE Band 12_Head Left Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0498 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.134 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0514 W/kg

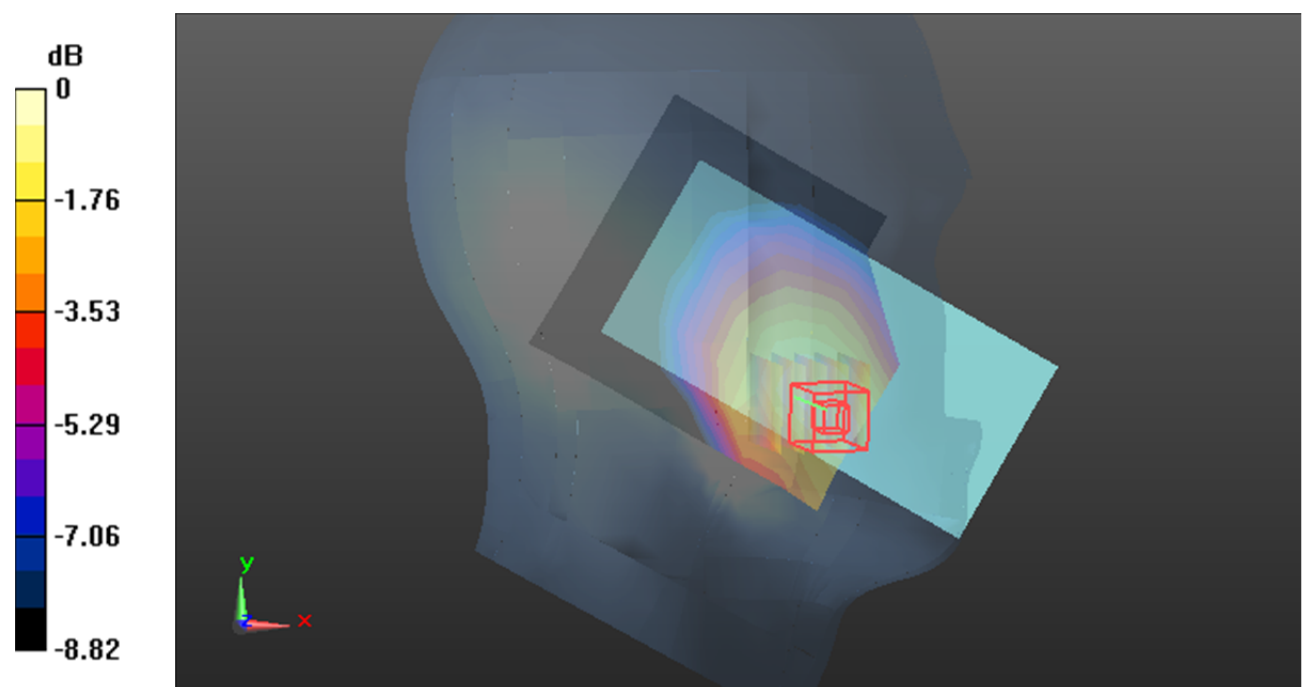

Test Plot*#: LTE Band 12_Head Left Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0295 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.885 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0301 W/kg

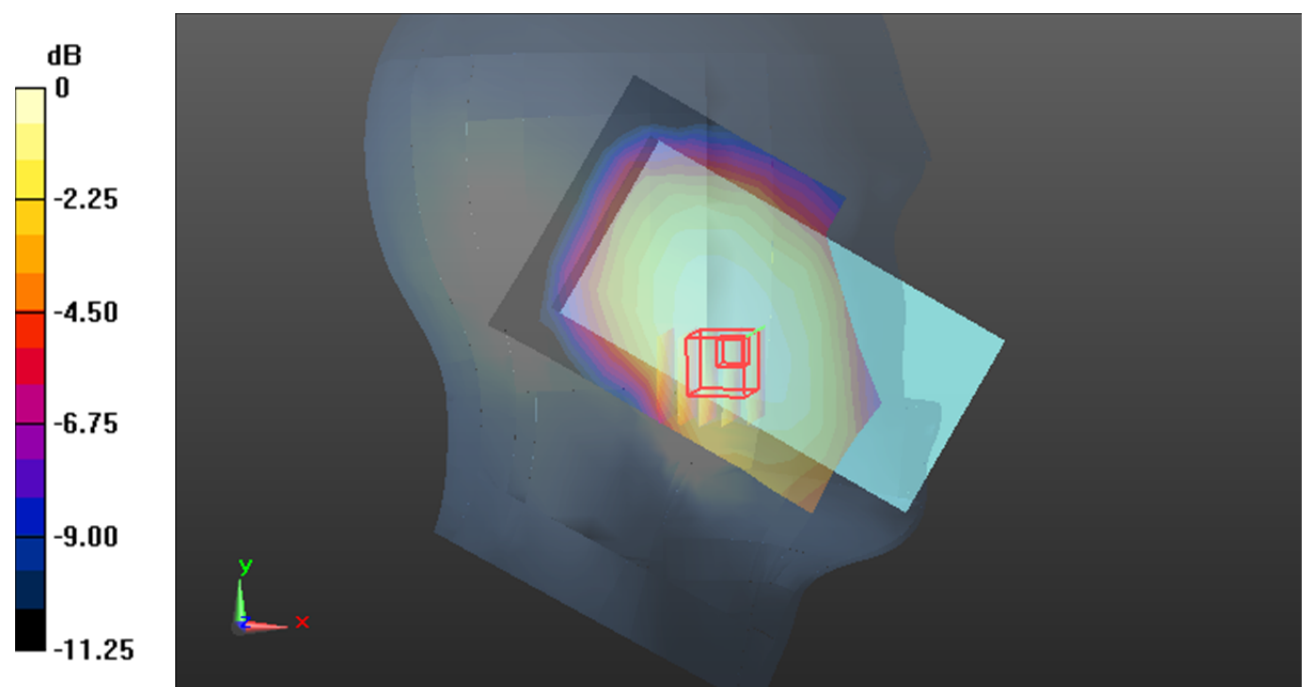

0 dB = 0.0301 W/kg = -15.21 dB dBW/kg

Test Plot*#: LTE Band 12_Head Left Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0245 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.405 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0253 W/kg

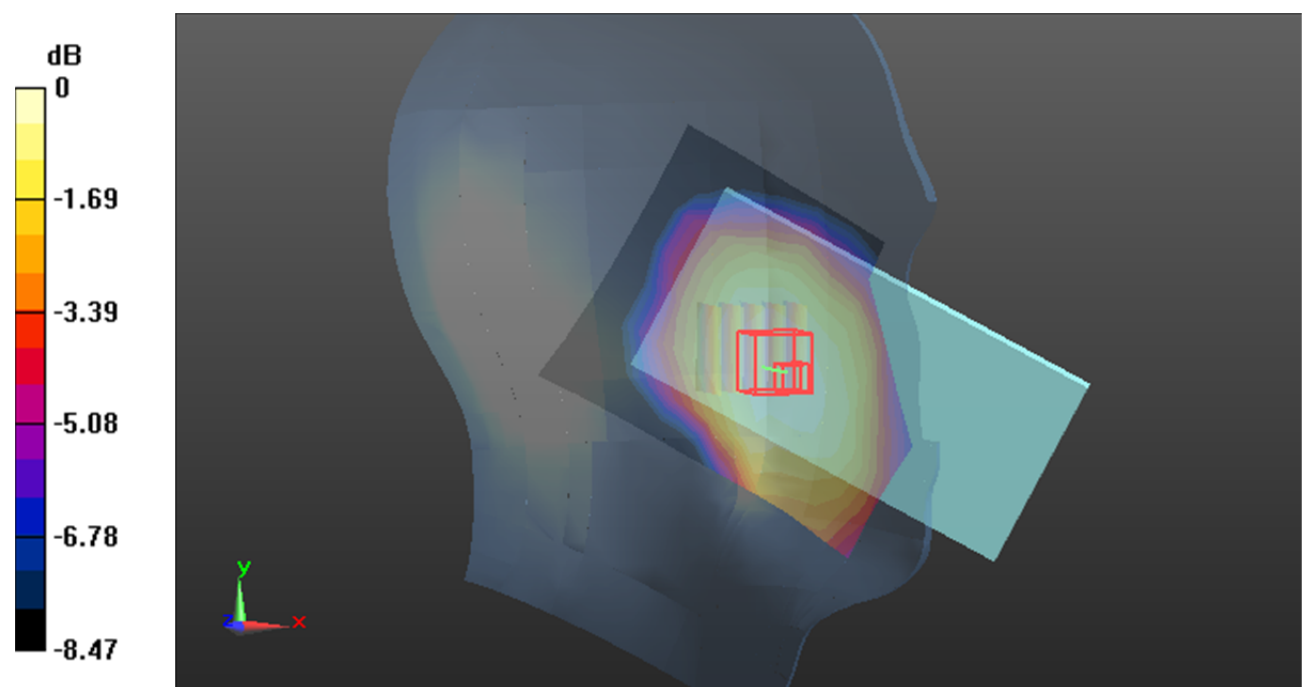

0 dB = 0.0253 W/kg = -15.97 dB dBW/kg

Test Plot*#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0342 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.272 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0347 W/kg

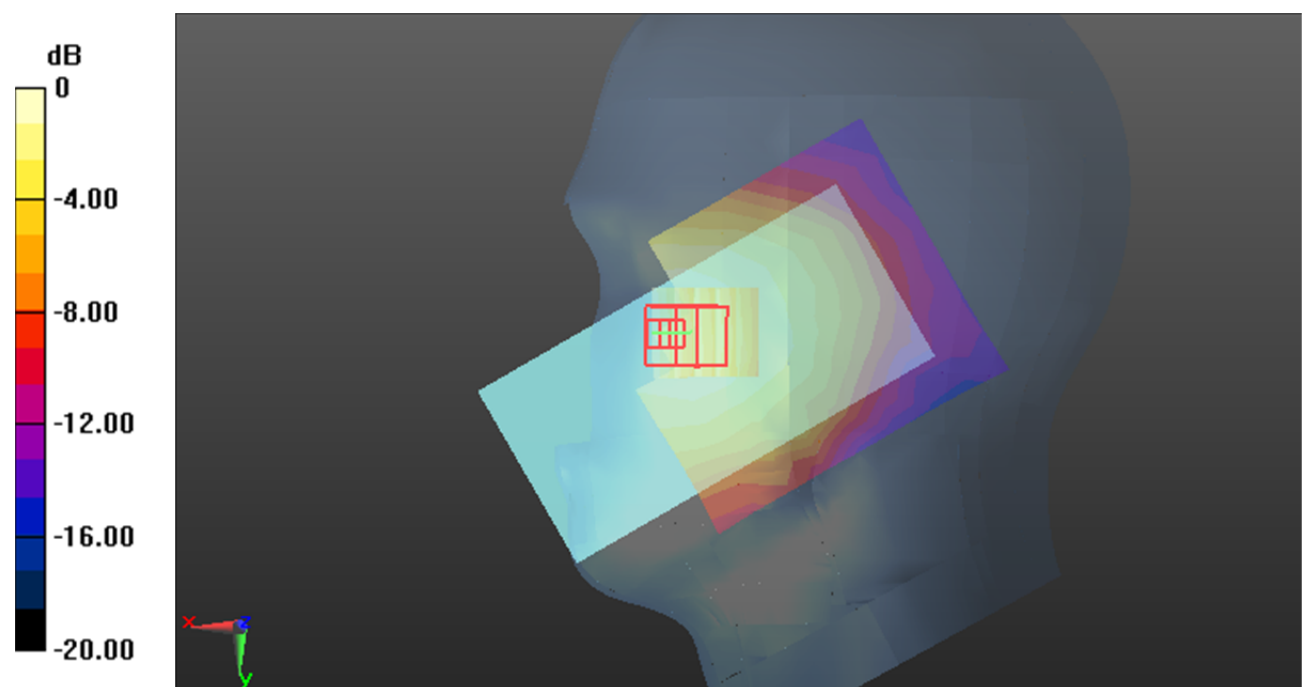

0 dB = 0.0347 W/kg = -14.60 dB dBW/kg

Test Plot*#: LTE Band 12_Head Right Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0303 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.028 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0305 W/kg

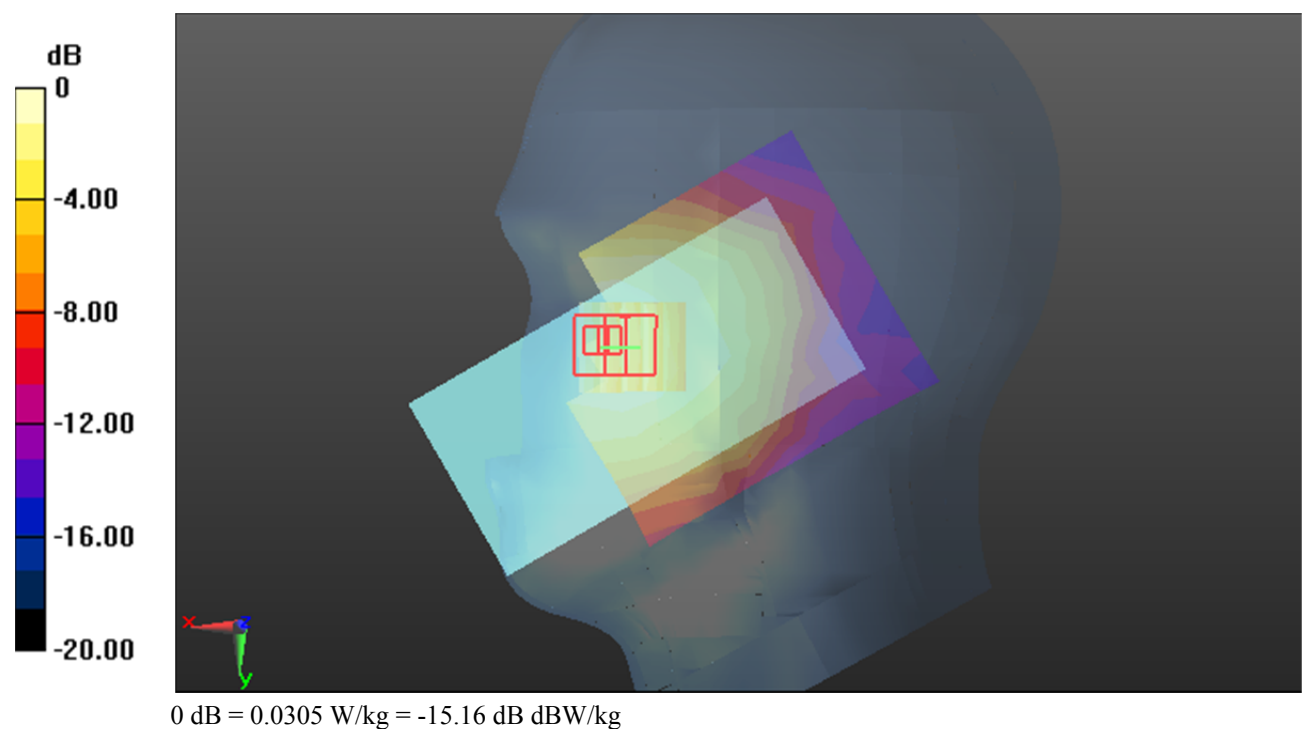

Test Plot*#: LTE Band 12_Head Right Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0190 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.984 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0186 W/kg

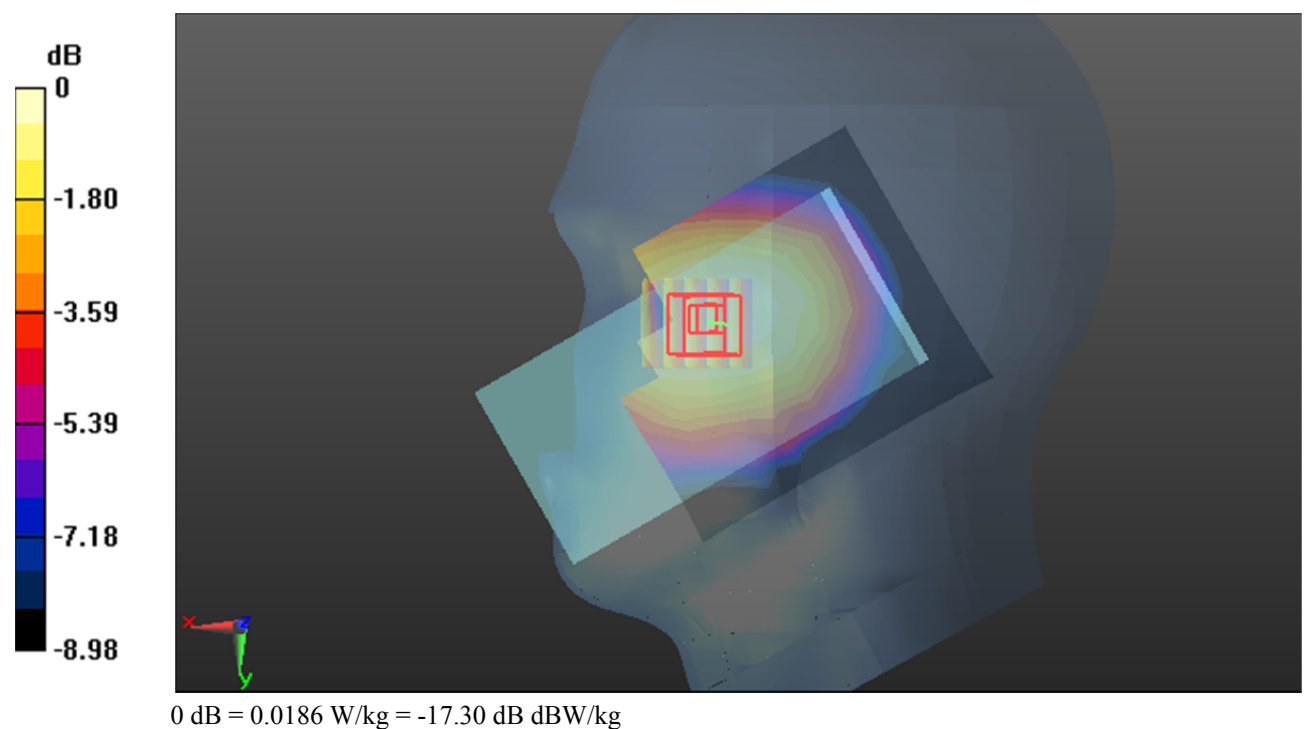

Test Plot*#: LTE Band 12_Head Right Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0154 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.423 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0164 W/kg

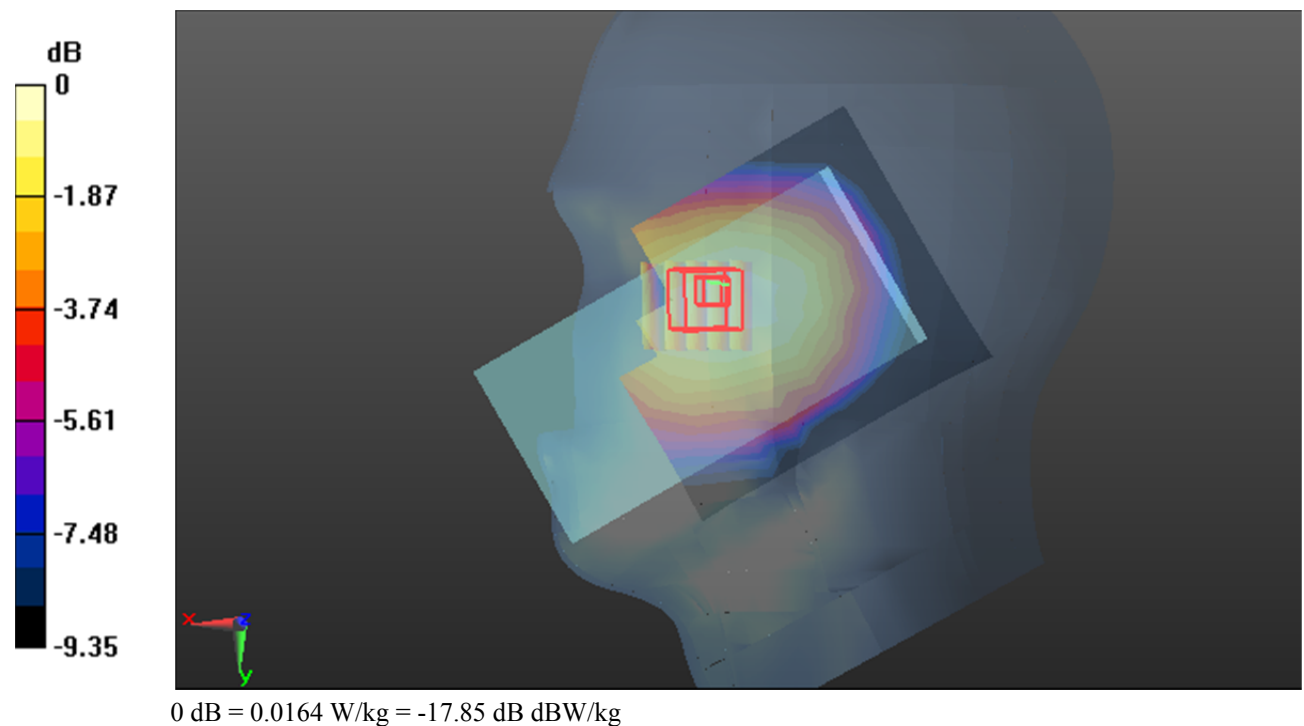

Test Plot*#: LTE Band 12_Body Front_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.176 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.206 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

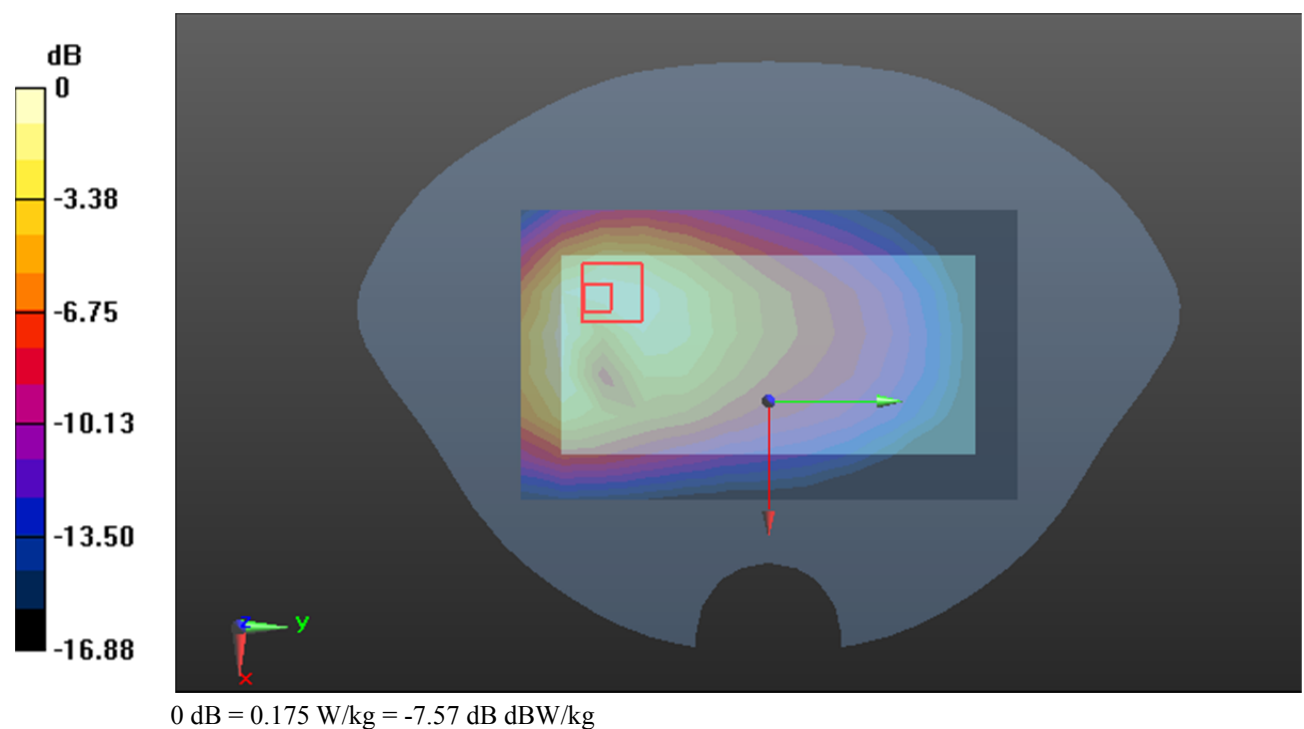

Test Plot*#: LTE Band 12_Body Front_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.341 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

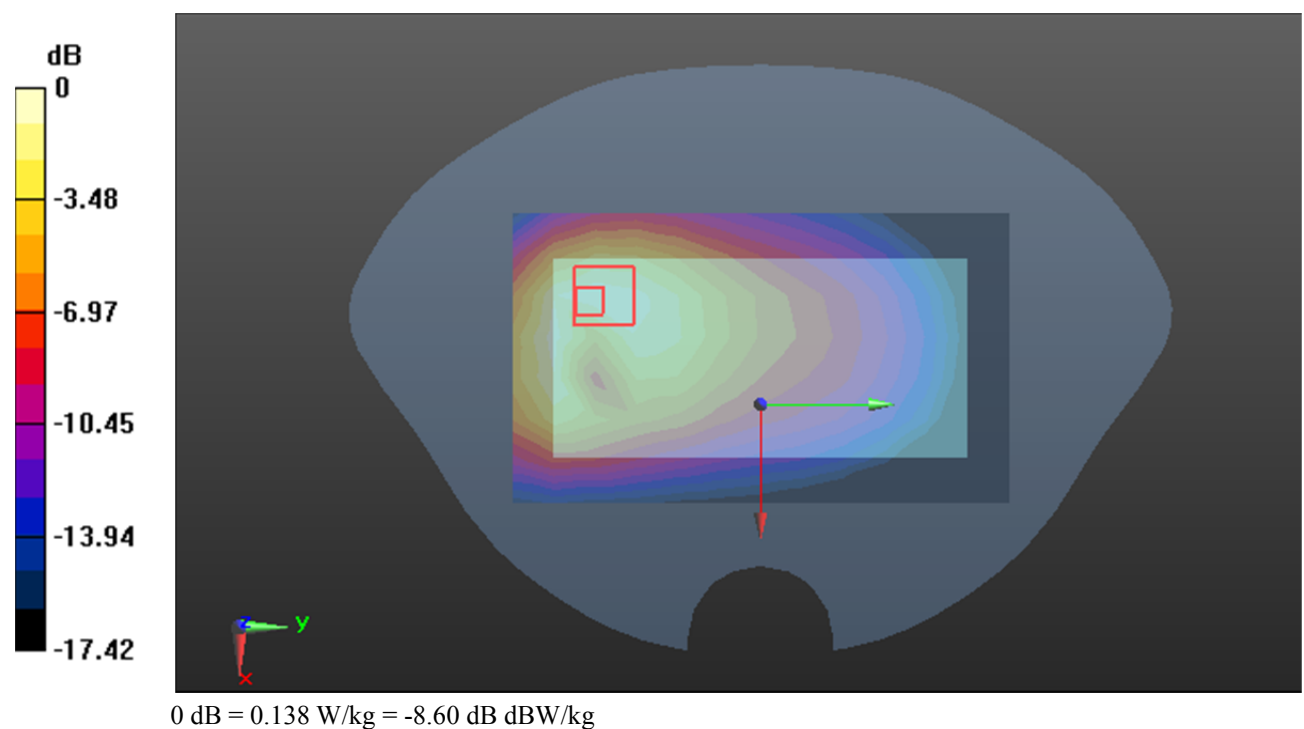

Test Plot*#: LTE Band 12_Body Back_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.135 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.266 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

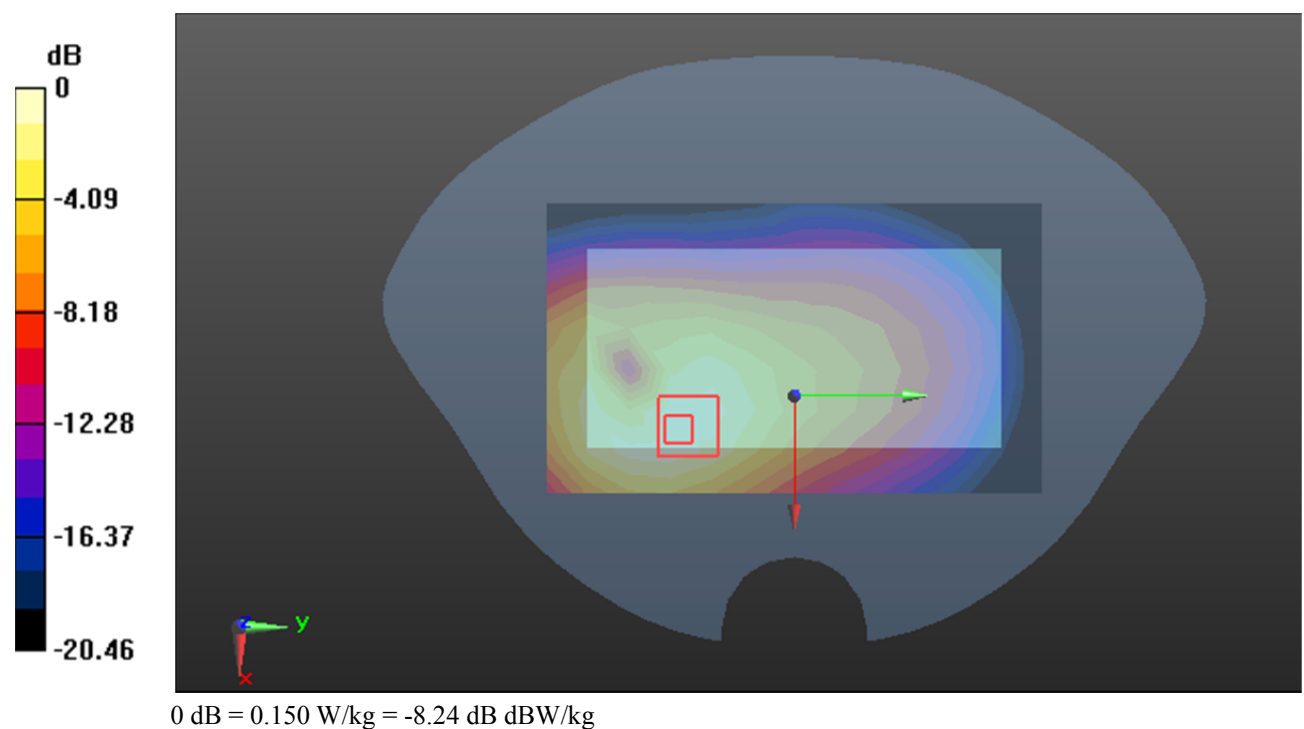

Test Plot*#: LTE Band 12_Body Back_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.151$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.304 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

