



SASKEN

Silicon Labs Antenna Measurements


Aki Myllymäki

16-Aug-2022


Introduction

- In this document, measurement results are presented for the embedded integral antenna of a radio module soldered to a validation and certification board received from Silicon Laboratories:
 - Module 1 → B GM240S22A
 - Module 2 → MGM240S22A
- Parameters measured
 - Efficiency (dB)
 - Peak gain (dB)
 - 3D radiation pattern
 - 1D radiation pattern (dB), Polar Mode, Phi 0, Phi 90 and Theta 90 cuts
- Measurement frequencies:
 - Gain patterns: 2402, 2440, 2480MHz
 - Gain/Efficiency over frequency 2400 - 2500 MHz
- In all measurements, module was placed in the same position and orientation as shown in the picture on right.
- Antenna type: loop type ground radiation antenna


Module is placed on this side of the printed circuit board

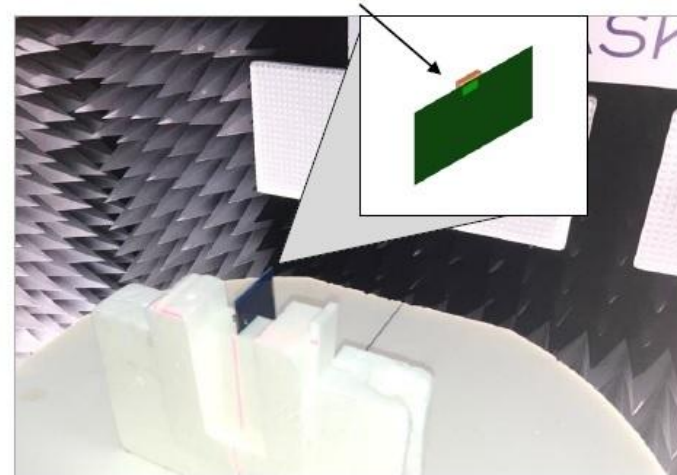

Modules

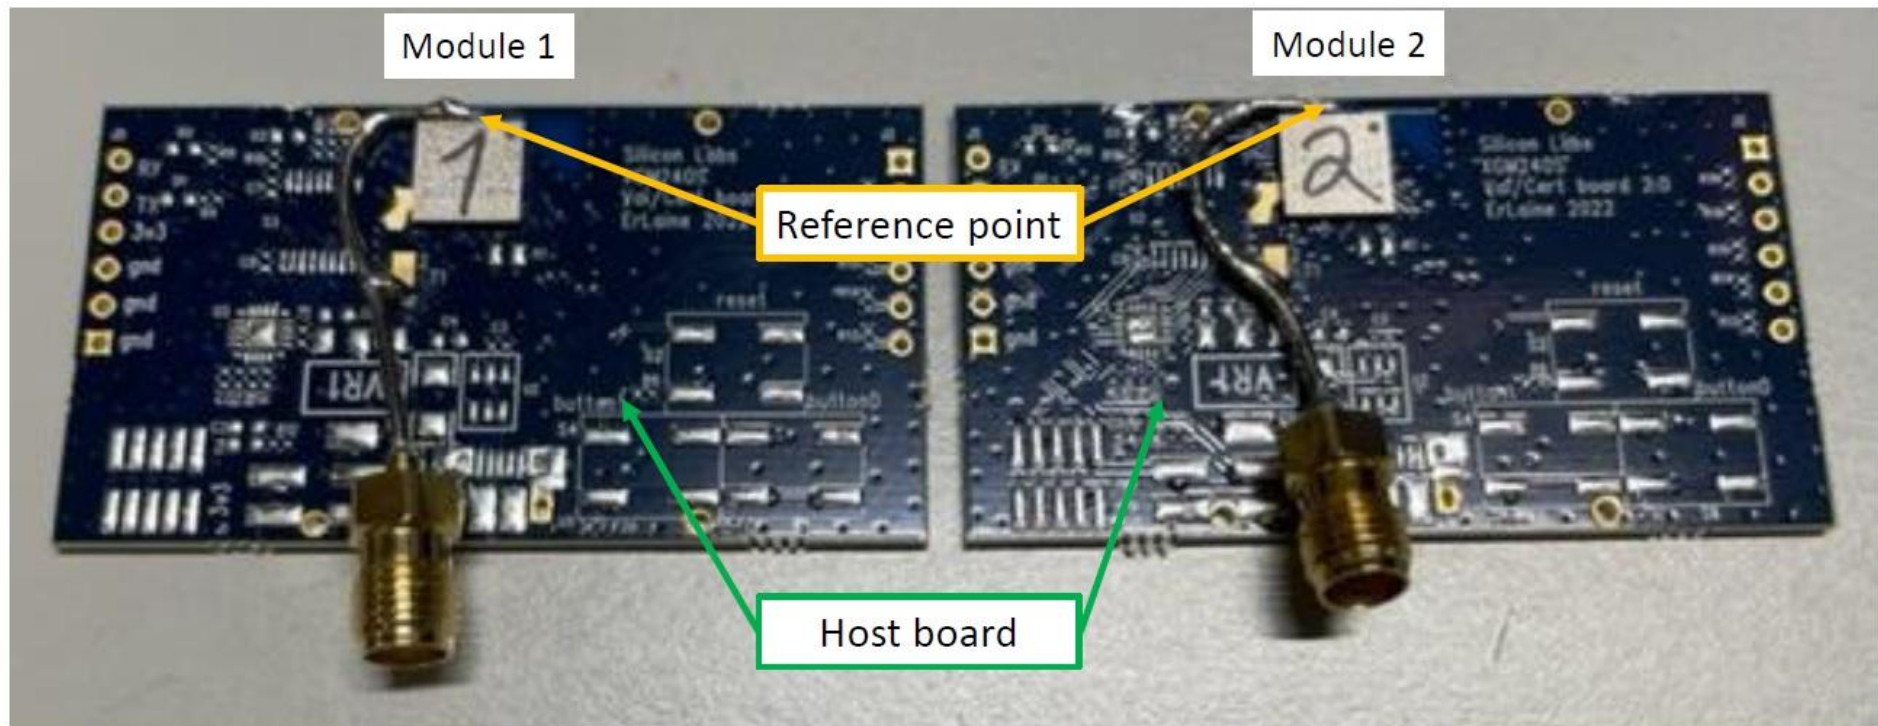


Sasken coordinate system

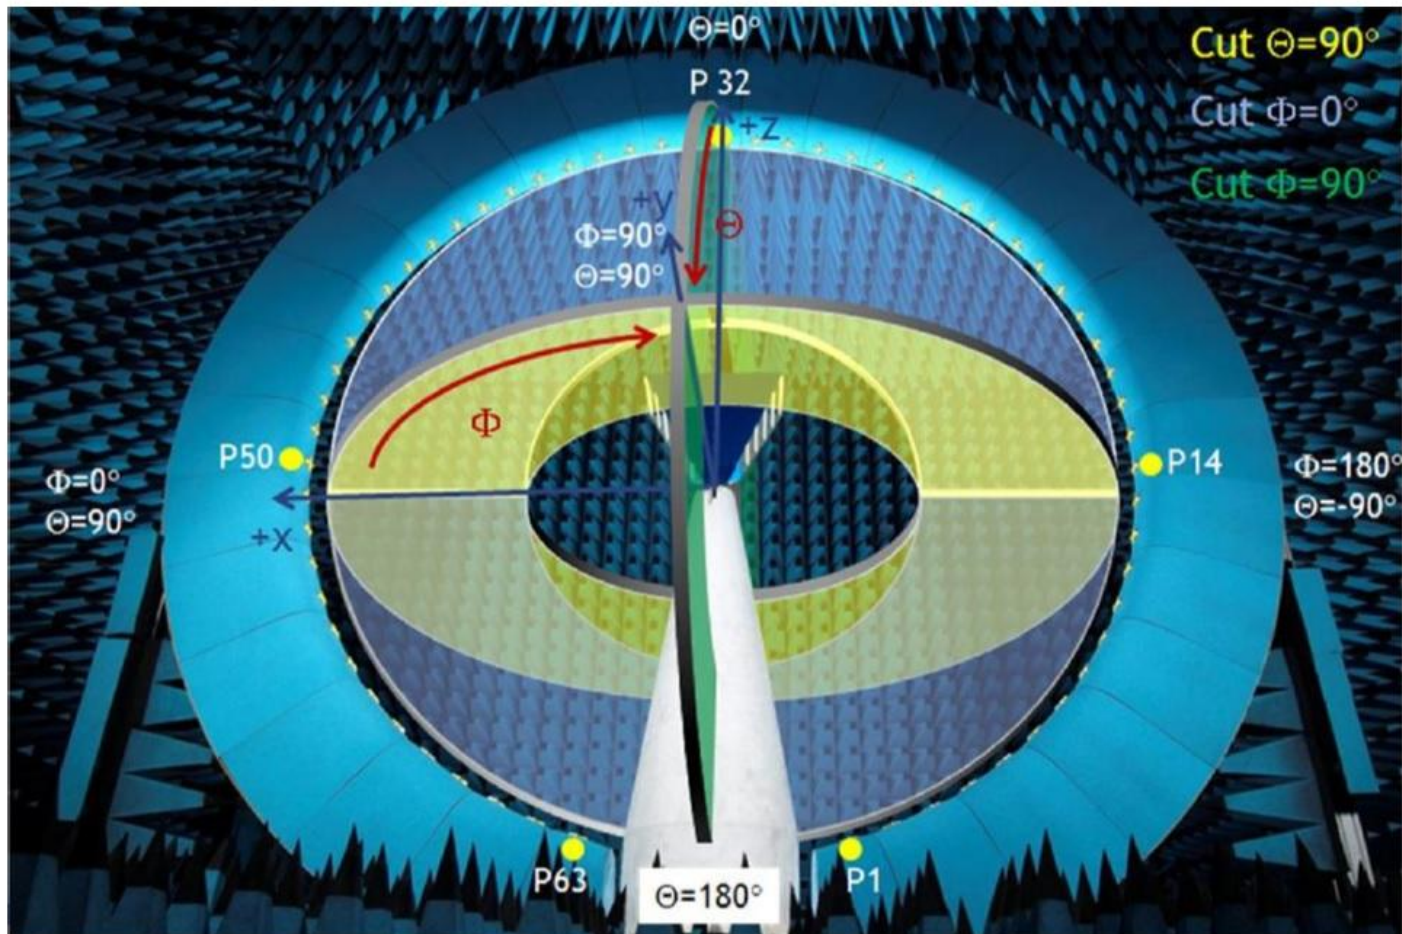


Satimo SG64 Setup

- SG64 has been developed to measure stand alone antennas or antennas integrated in subsystem. It is also ideal for CTIA certifiable measurement facilities.
- SG system can switch between the Probe Array Controller (PAC) for passive measurements and the Radio Communication Tester for active measurements.
 - For passive measurements it uses Analog RF Signal Generators for emitting from the probe array to the Antenna Under Test or from the Antenna Under Test to the probe array. The PAC is also a RF receiver for antenna measurements. The PAC controls as well the electronic scanning of the probe array. The Amplification Unit has RF amplifiers for both RX and TX channels.
 - For active measurements, the test is performed with a Multi-protocol Radio Communication Tester. It is used to communicate with the DUT and to measure the Total Radiated Power (TRP) and Total Isotropic Sensitivity (TIS).

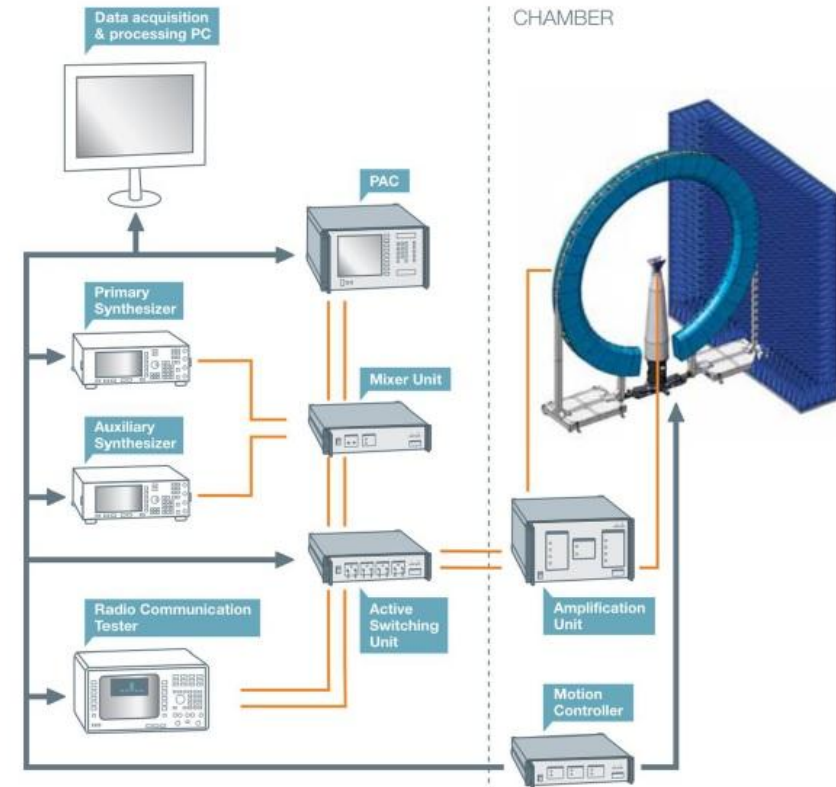

Passive Measurement Setup

- All antenna measurements were done using Satimo SG64 Passive Measurement Setup.
- Setup:
 - DUT is prepared with coaxial probe cable to be connected with antenna feed cable coming from the antenna mast on the turntable.
 - Satimo test system feeds the signal on specified frequencies through the antenna feed cable to DUT
 - The DUT is then rotated with turntable and the Satimo probe array will measure the signal from all directions for all rotation steps to get a 3D radiation pattern.
 - Near-field to far-field transformation will be then done to the measurement data.
- Calibration
 - System is calibrated to the reference point that is in the end of antenna feed cable on the antenna mast.
 - System calibration is done yearly by Satimo
 - last system calibration was done on week 37/2020
 - Measurement calibration is done with reference antennas.
 - Dual-Ridge Horn antenna SH400/S#0040 (0.4 - 6GHz)

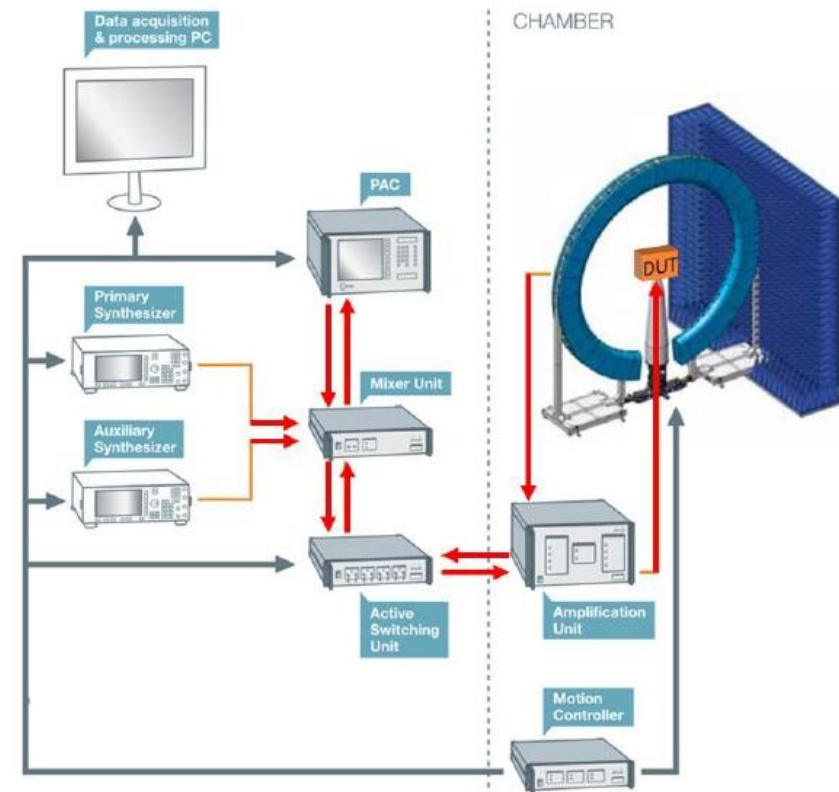

Module 1


Measurement results



SASKEN


Efficiency (dB), max -1.36dB

Module 1

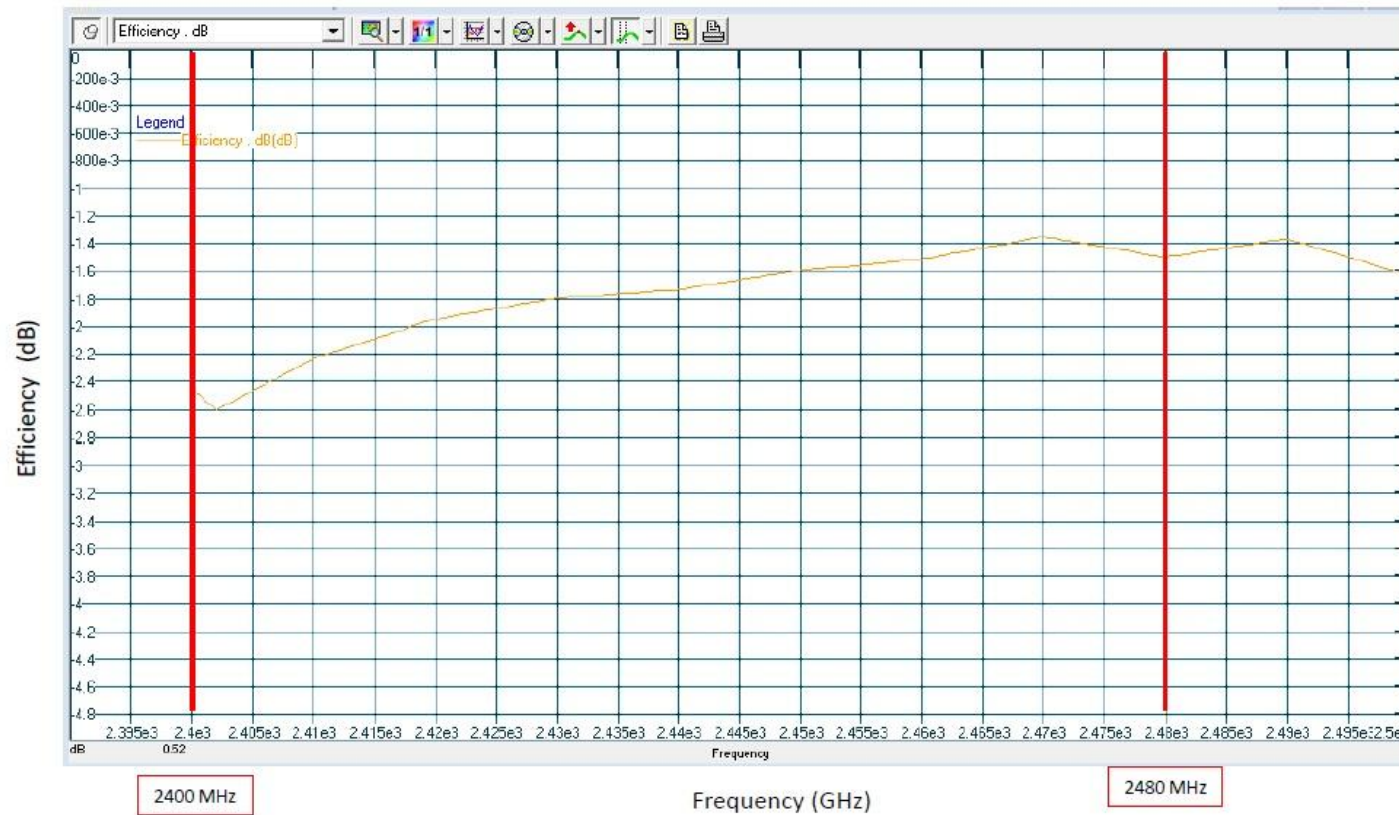



Peak Gain (dBi), max 1.48dBi

Module 1

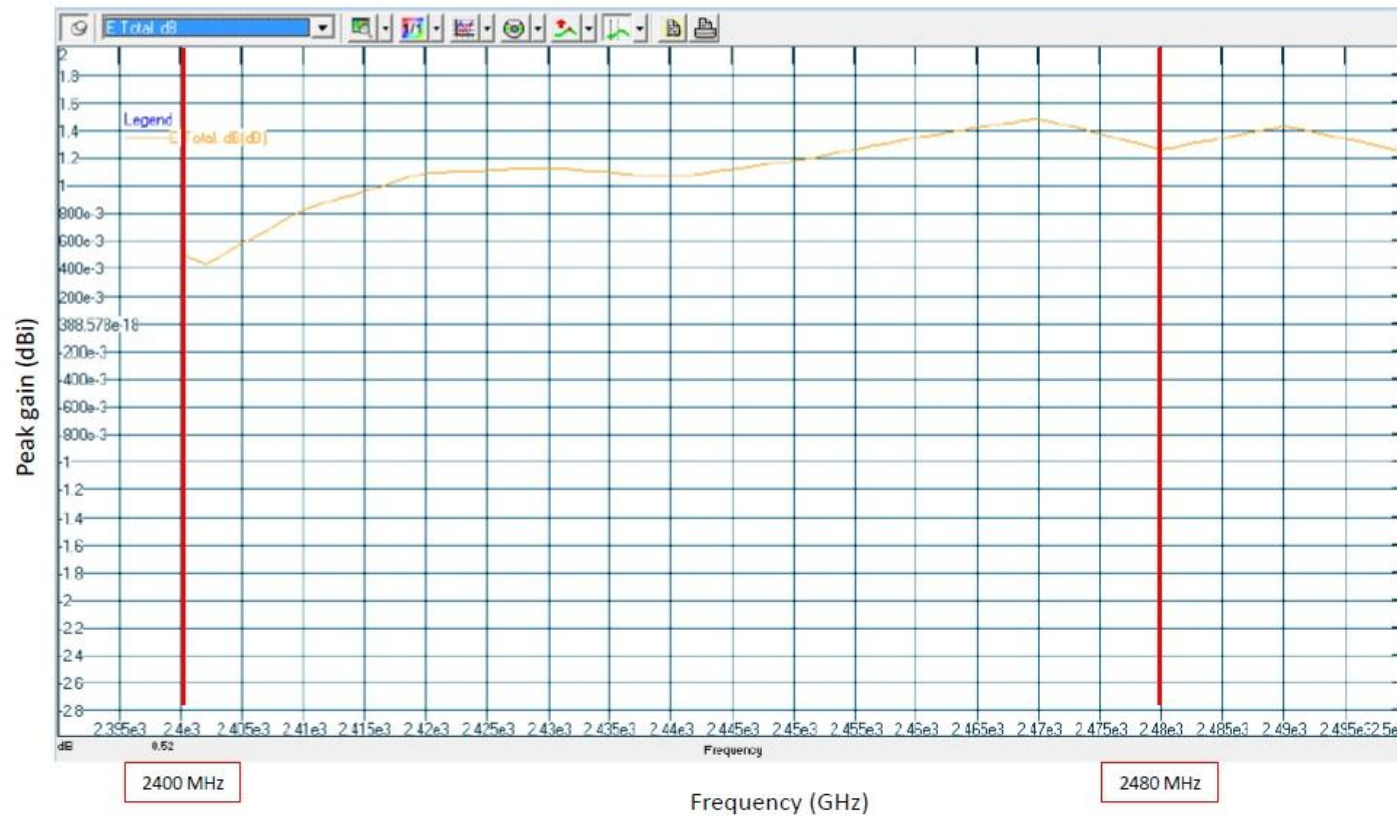



3D gain pattern @ 2402MHz, View 1

Module 1

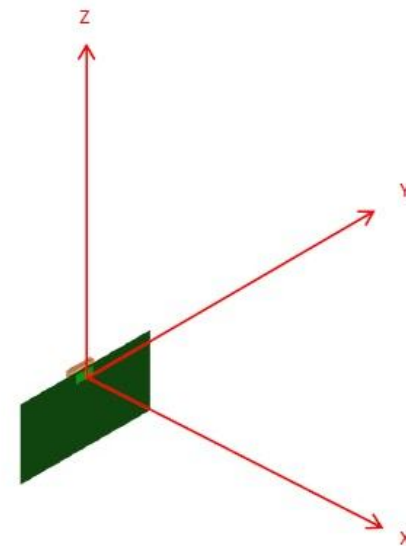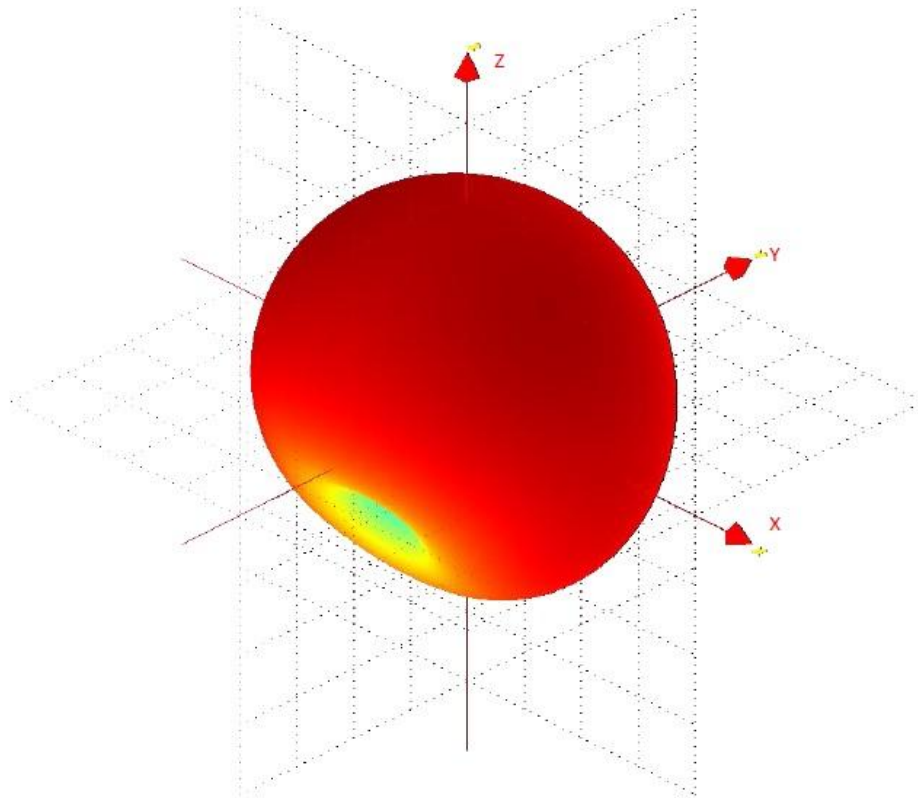



3D gain pattern @ 2402MHz, View 2

Module 1

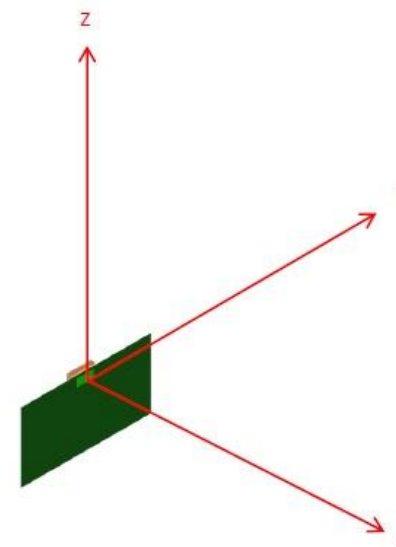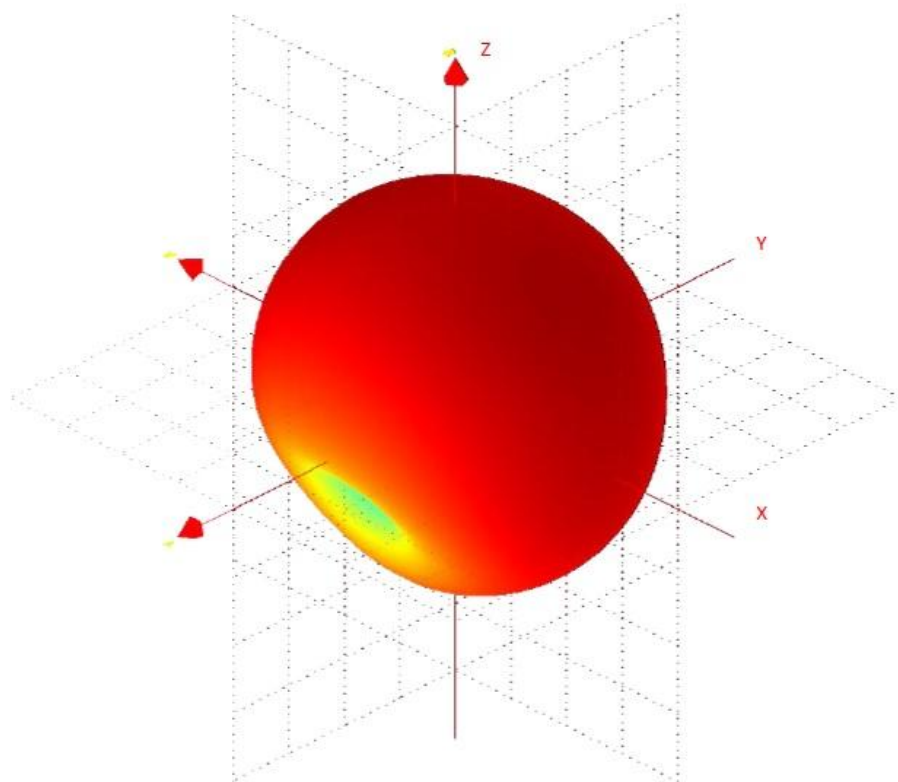



3D gain pattern @ 2440MHz, View 1

Module 1

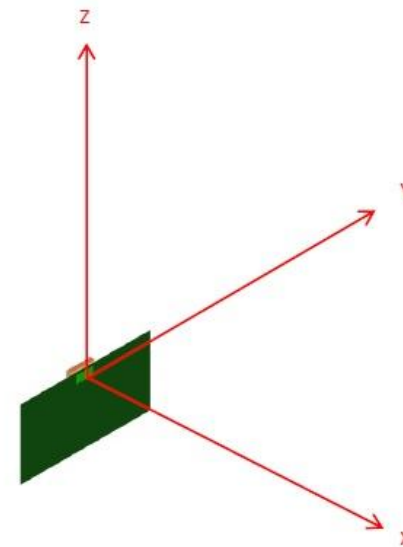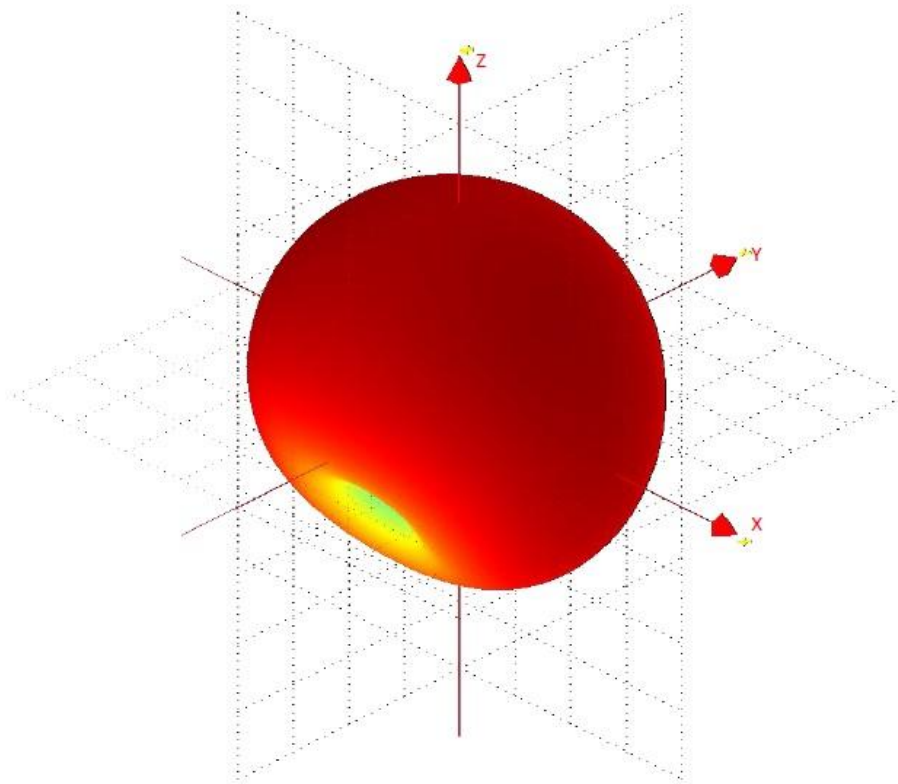



3D gain pattern @ 2440MHz, View 2

Module 1

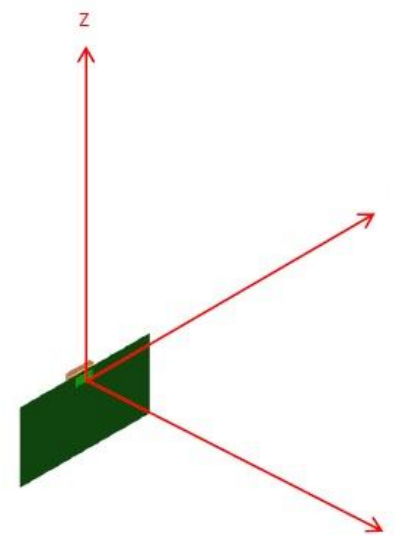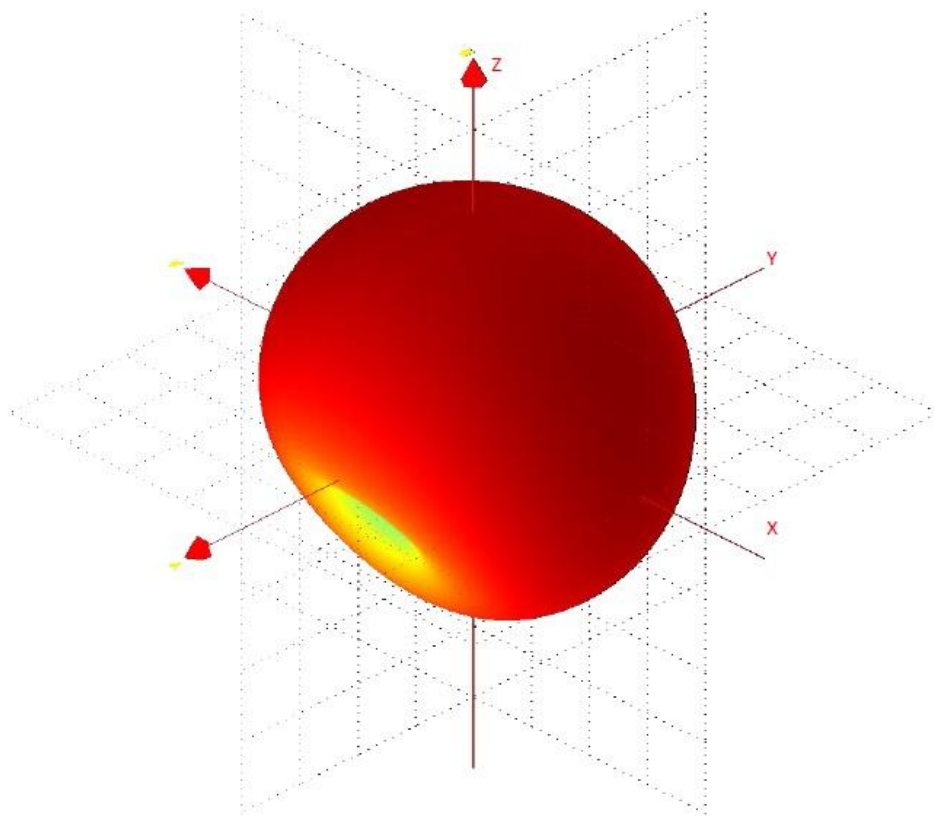



3D gain pattern @ 2480MHz, View 1

Module 1

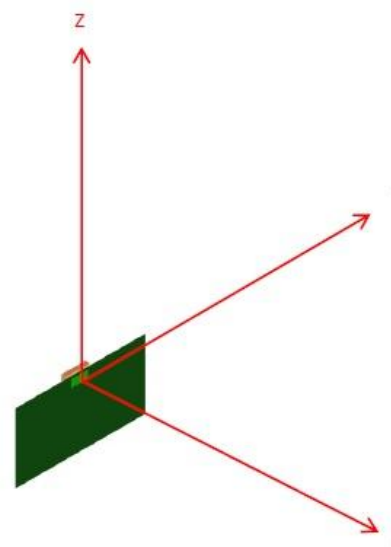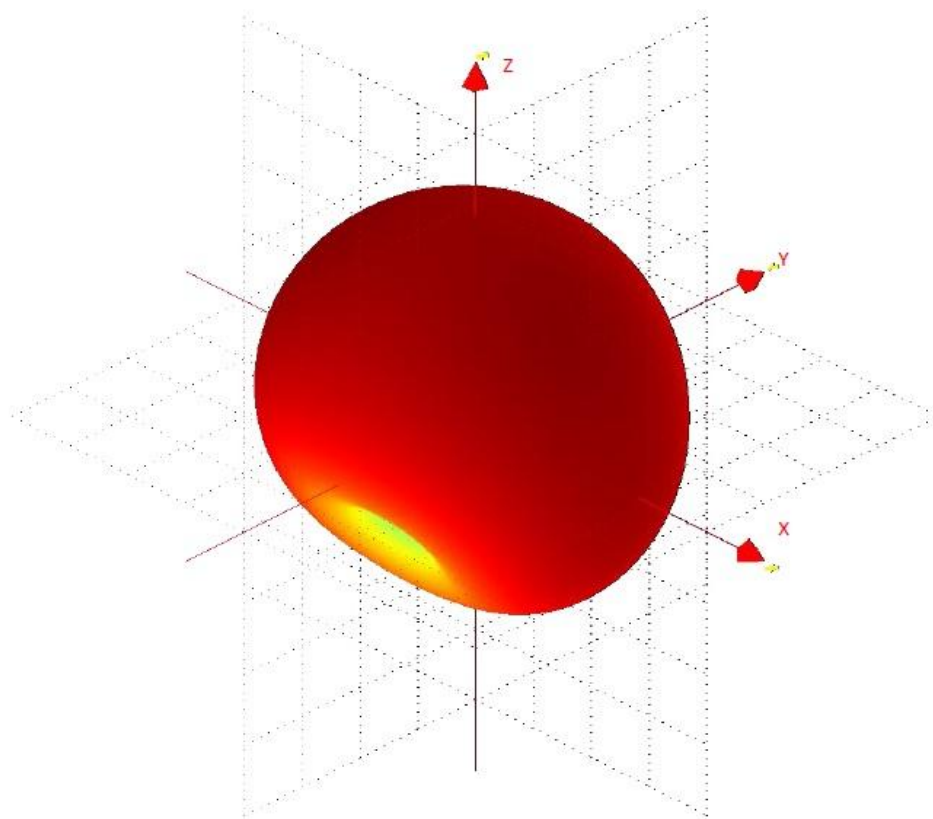


3D gain pattern @ 2480MHz, View 2

Module 1

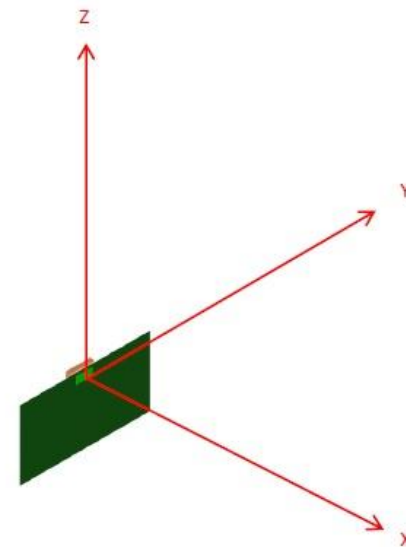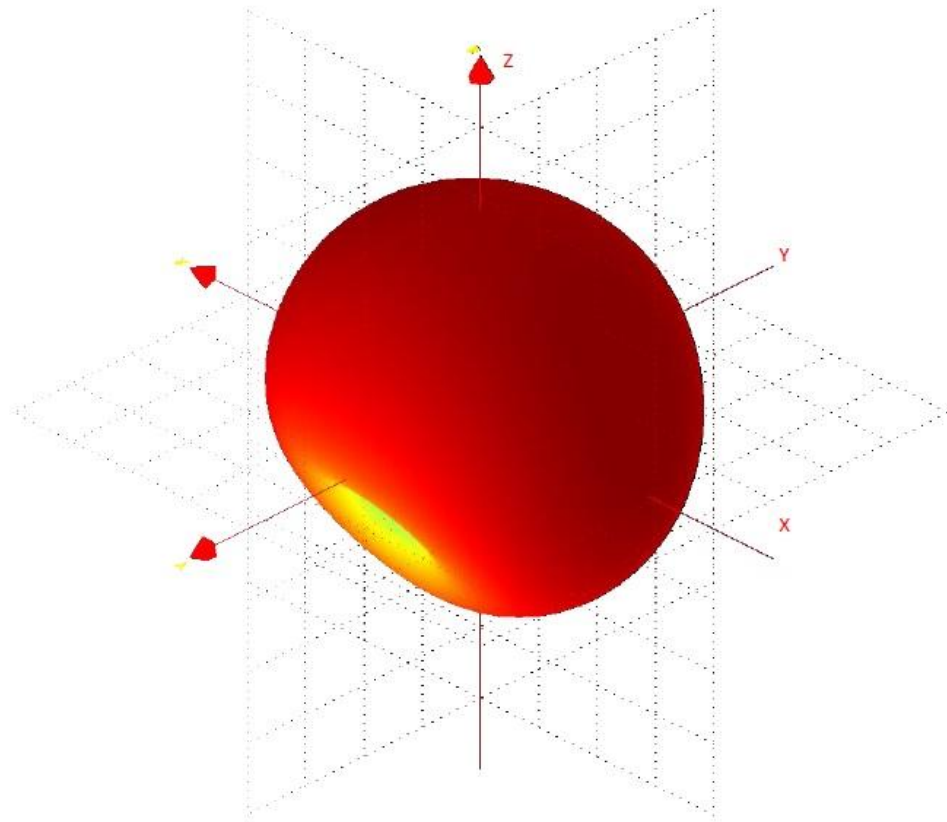


Phi0 Gain cut (dBi)

Module 1

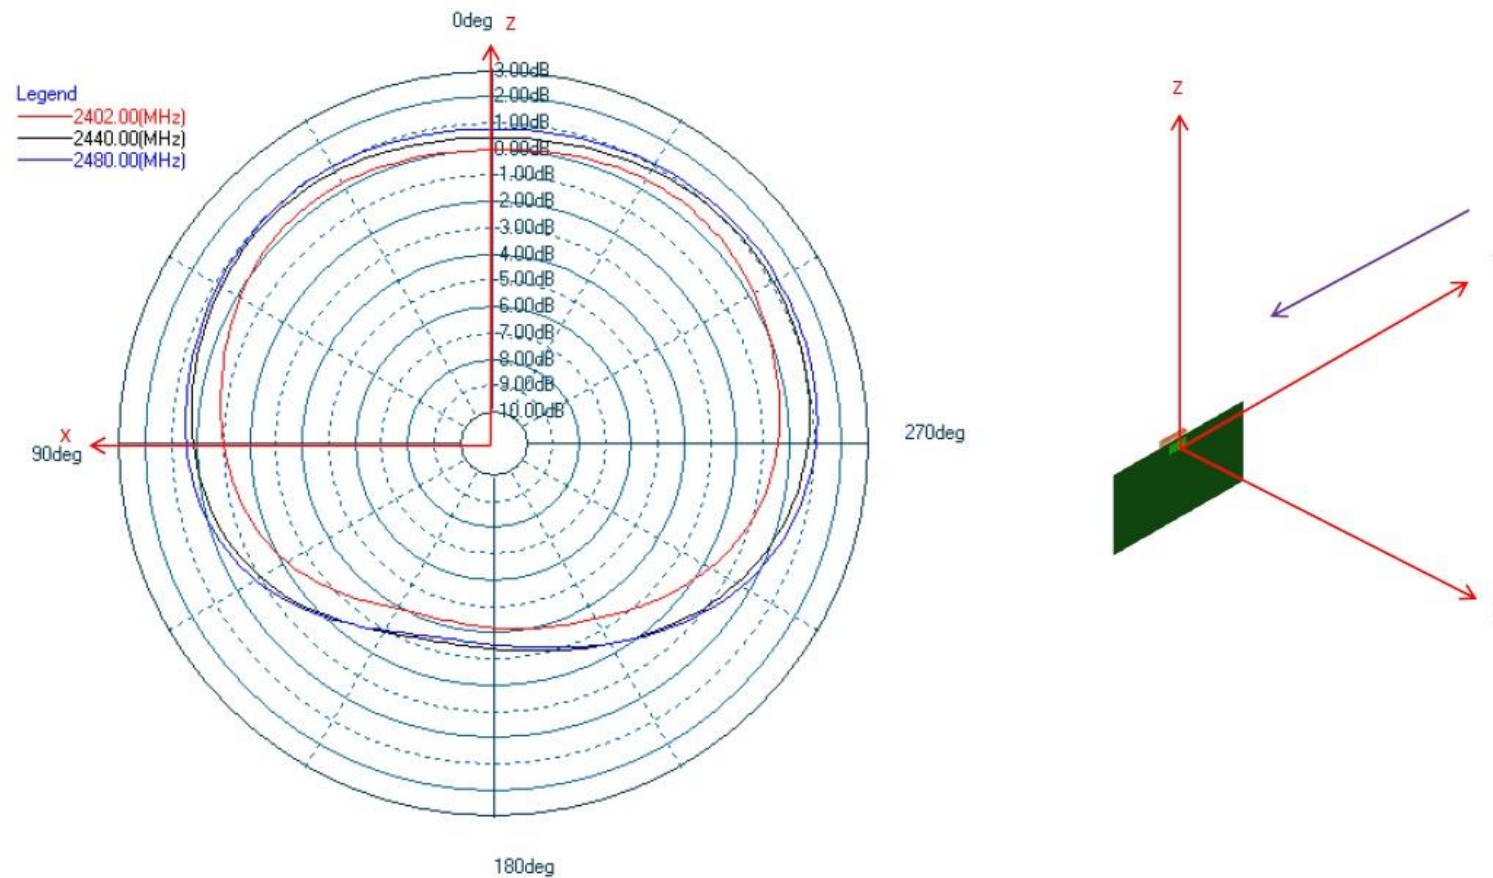



Phi90 Gain cut


Module 1

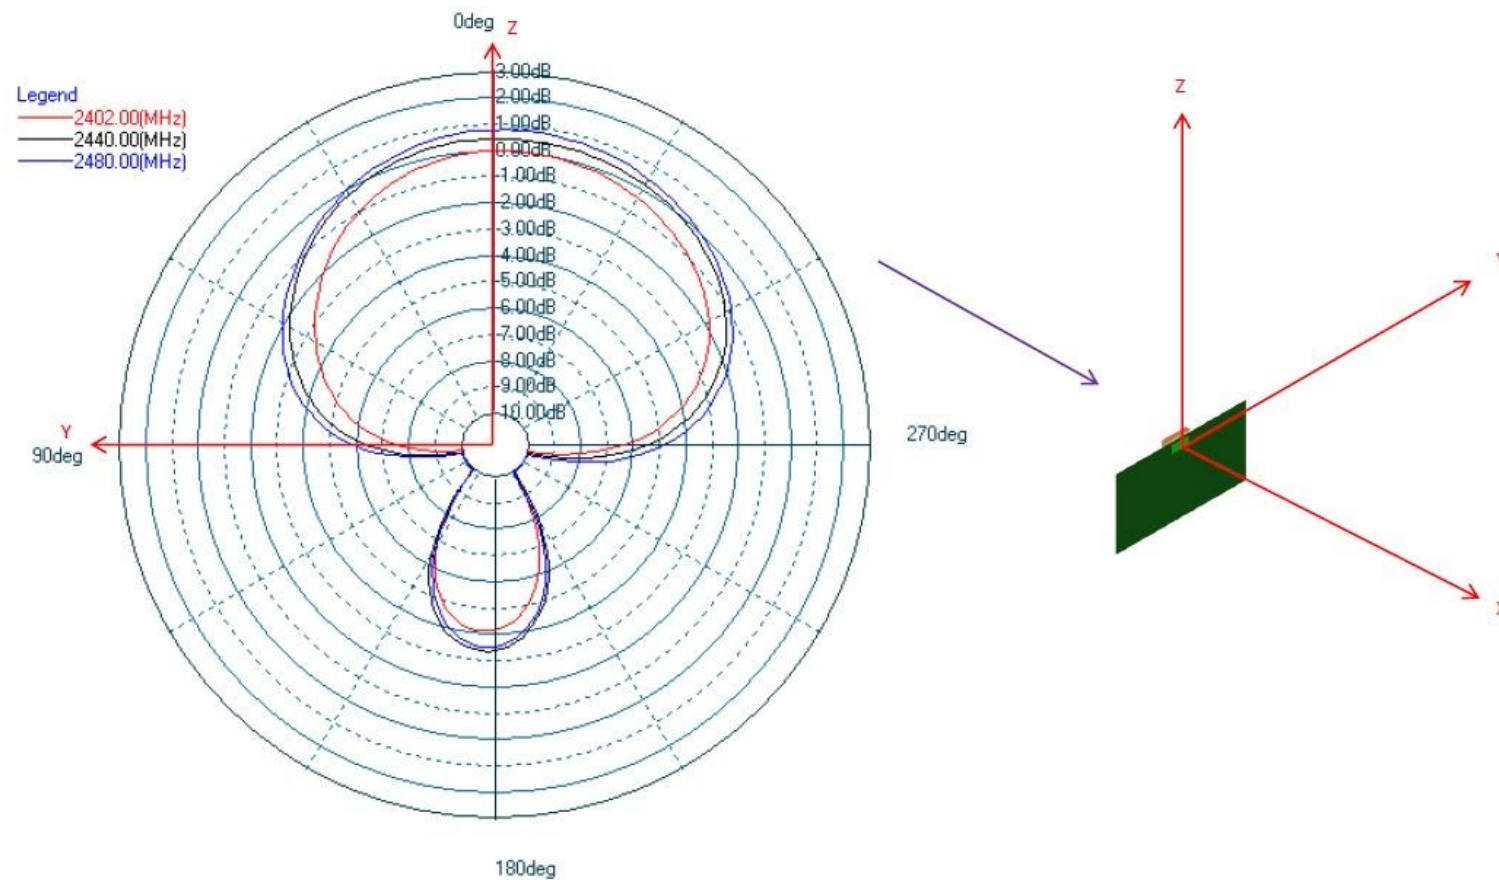

Theta90 Gain cut

Module 1

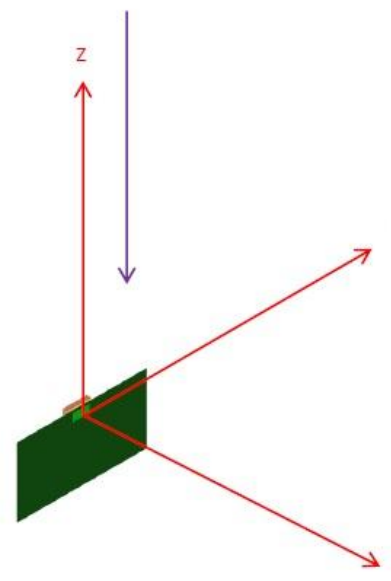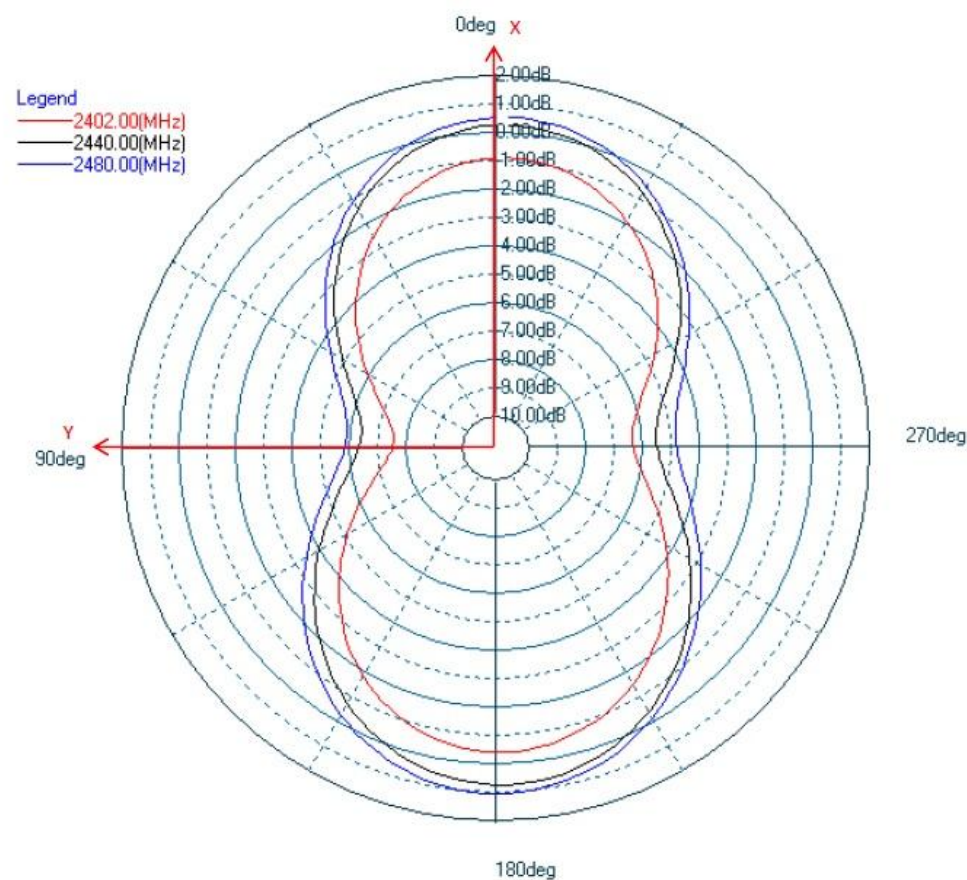

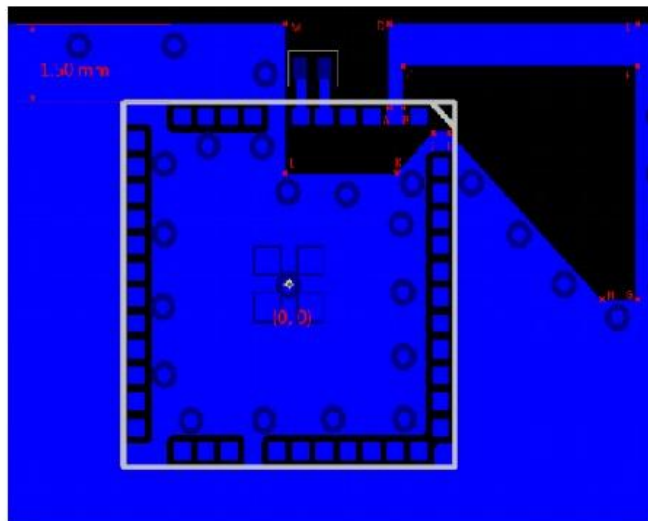

Point	Coordinate
A	(2.10, 3.30)
B	(2.40, 3.30)
C	(2.40, 4.20)
D	(2.10, 5.00)
E	(7.35, 5.00)
F	(7.35, 4.20)
G	(7.35, -0.03)
H	(6.59, -0.30)
I	(3.39, 2.90)
J	(3.05, 2.90)
K	(2.27, 2.13)
L	(-0.08, 2.13)
M	(-0.08, 5.00)

Tolerance for the coordinates is +/- 0.05 mm.




Module 2

Measurement results




SASKEN

Efficiency (dB), max -1.34dB


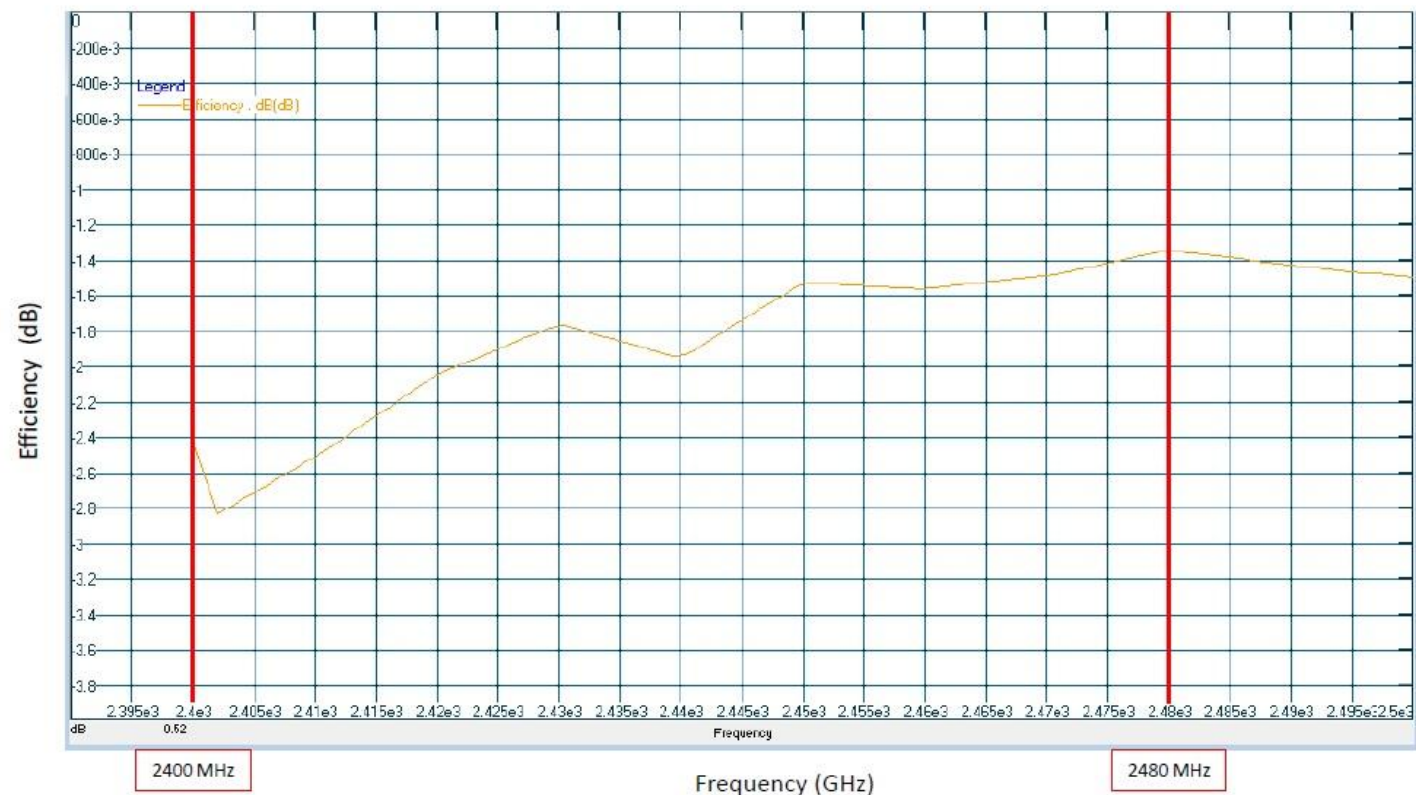


Peak Gain (dBi), max 1.33dBi

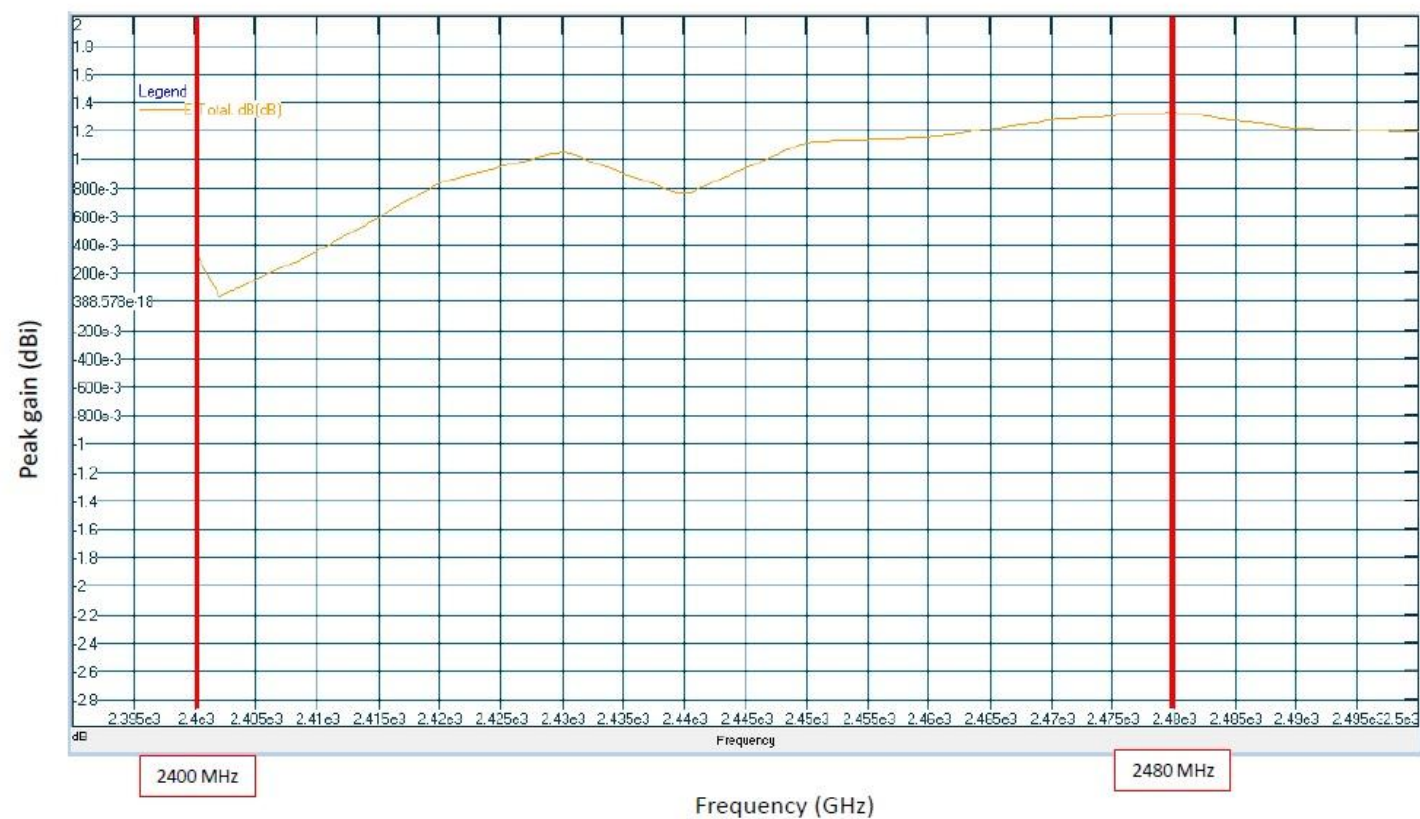



3D gain pattern @ 2402MHz, View 1

Module 2

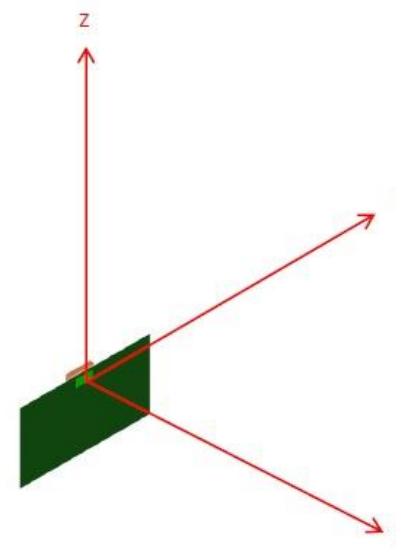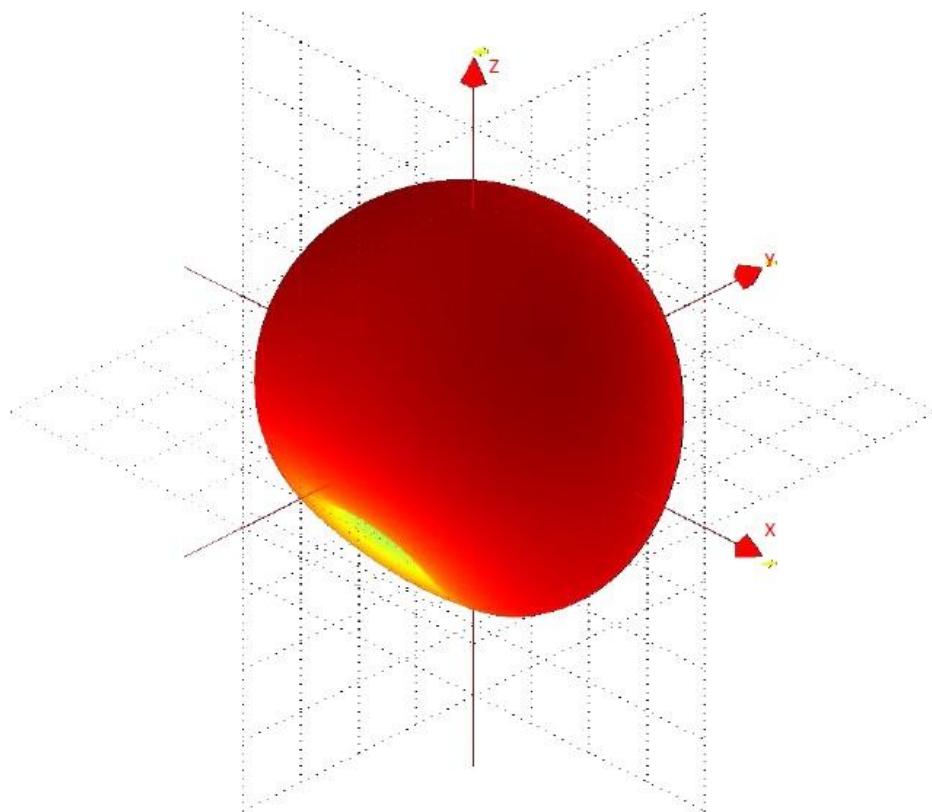



3D gain pattern @ 2402MHz, View 2

Module 2

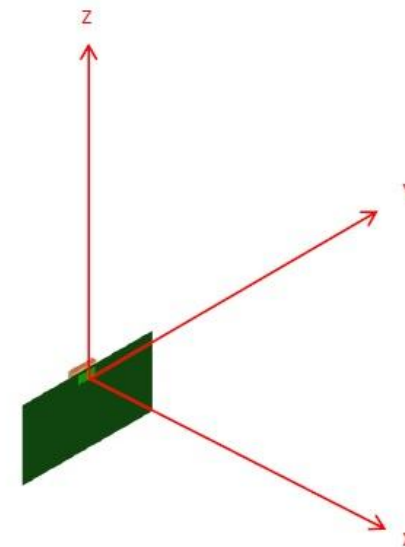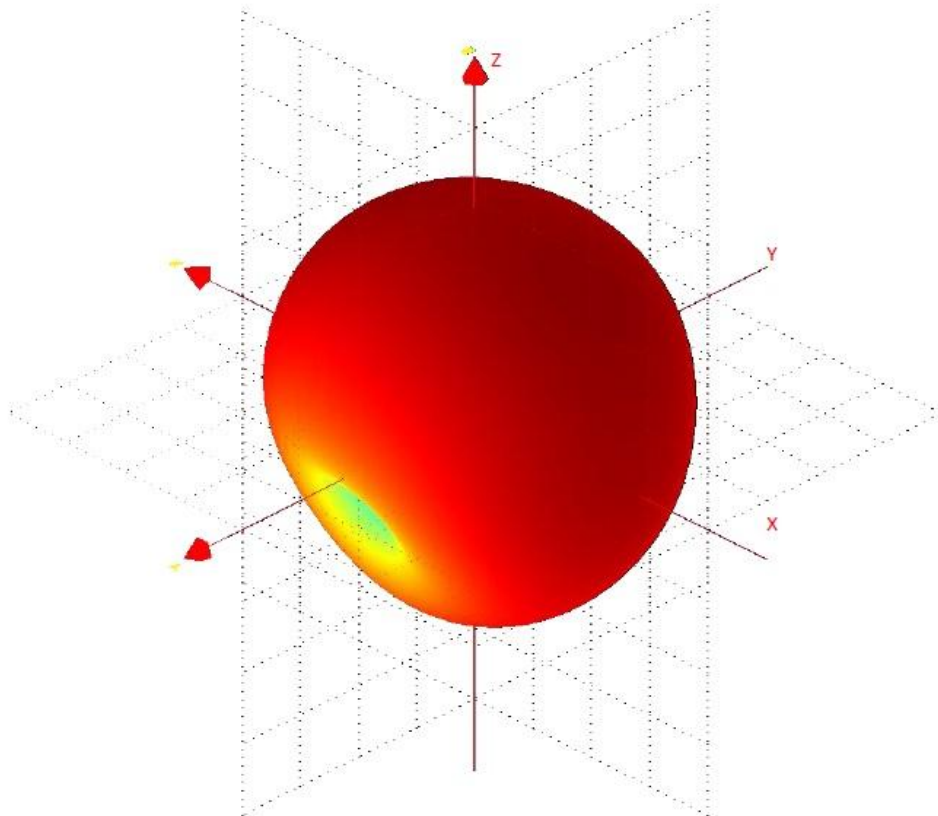



3D gain pattern @ 2440MHz, View 1

Module 2

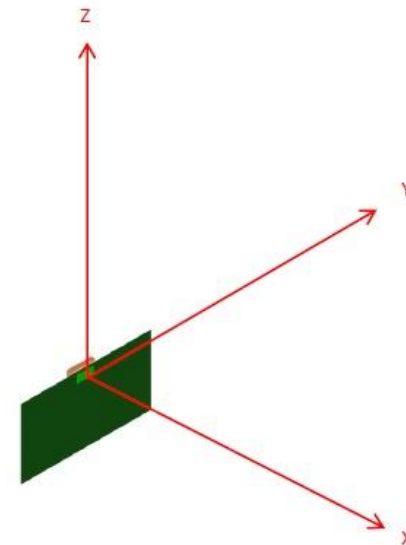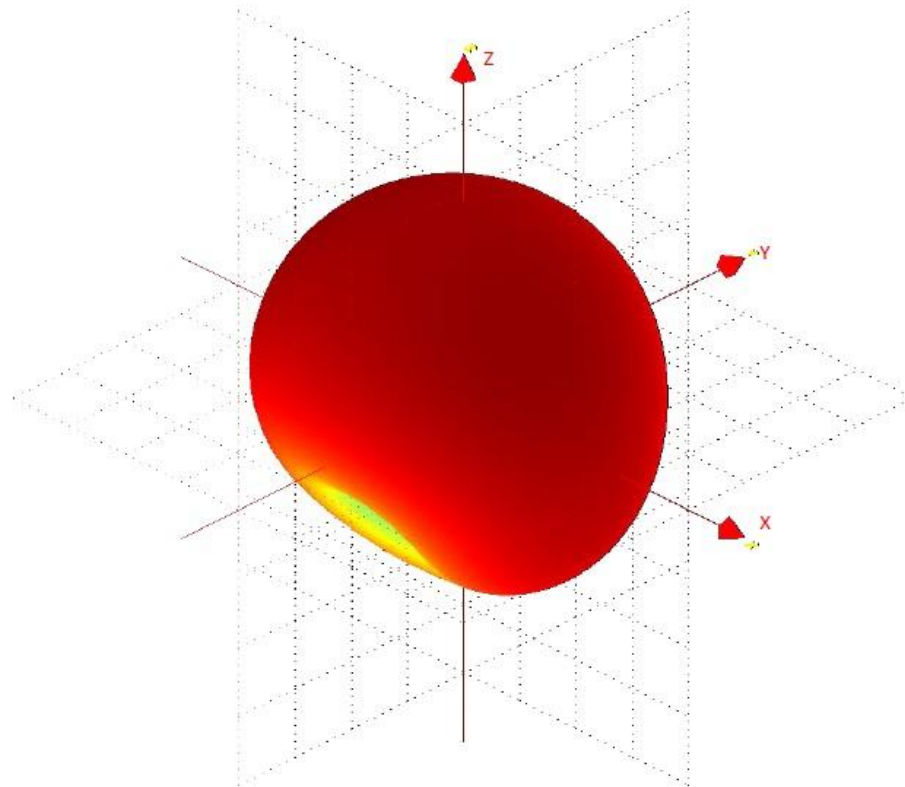



3D gain pattern @ 2440MHz, View 2

Module 2

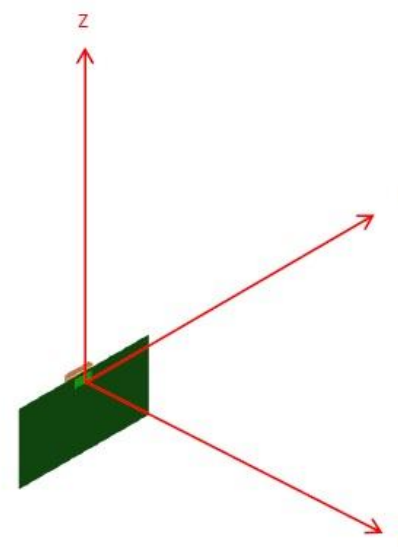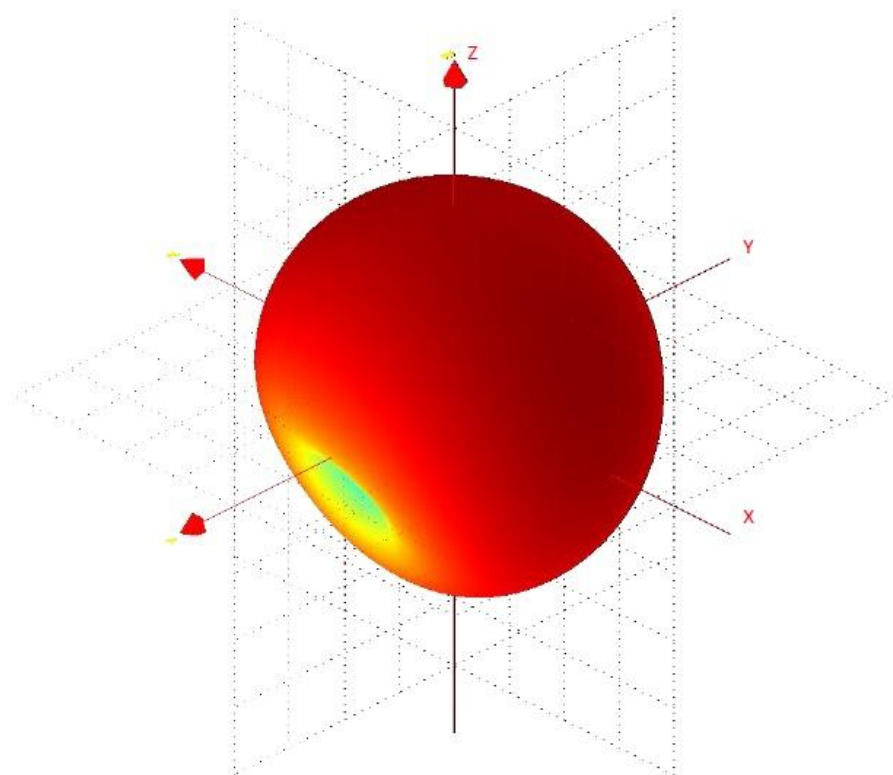



3D gain pattern @ 2480MHz, View 1

Module 2

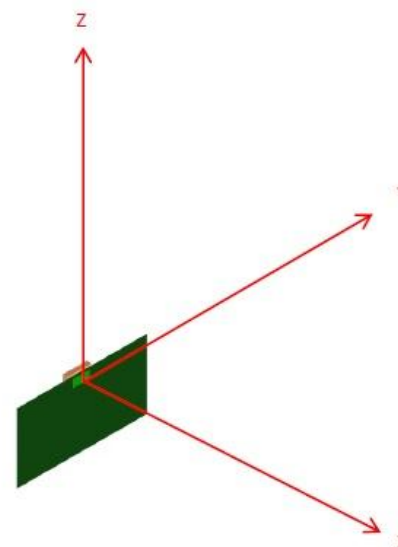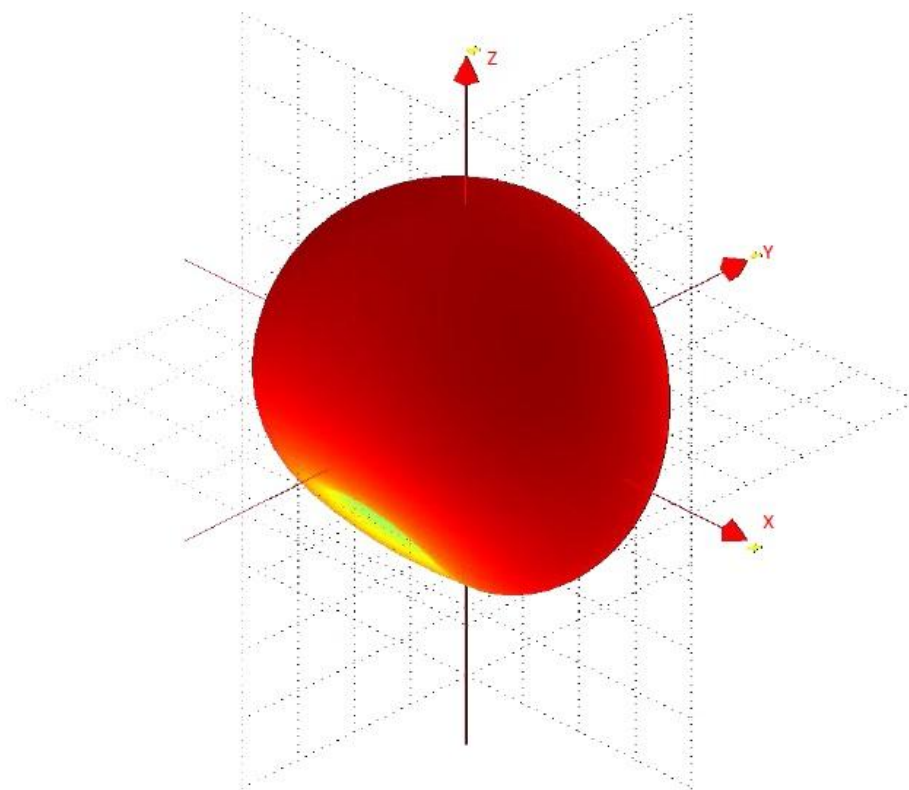


3D gain pattern @ 2480MHz, View 2

Module 2

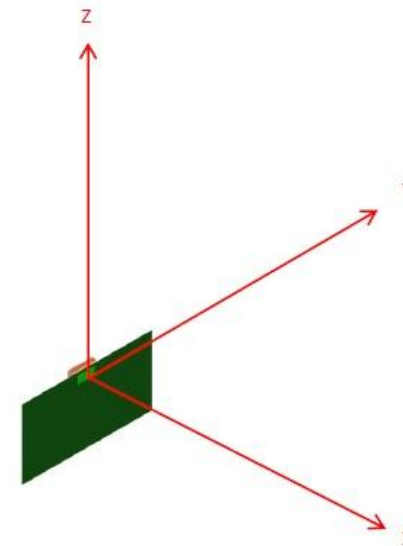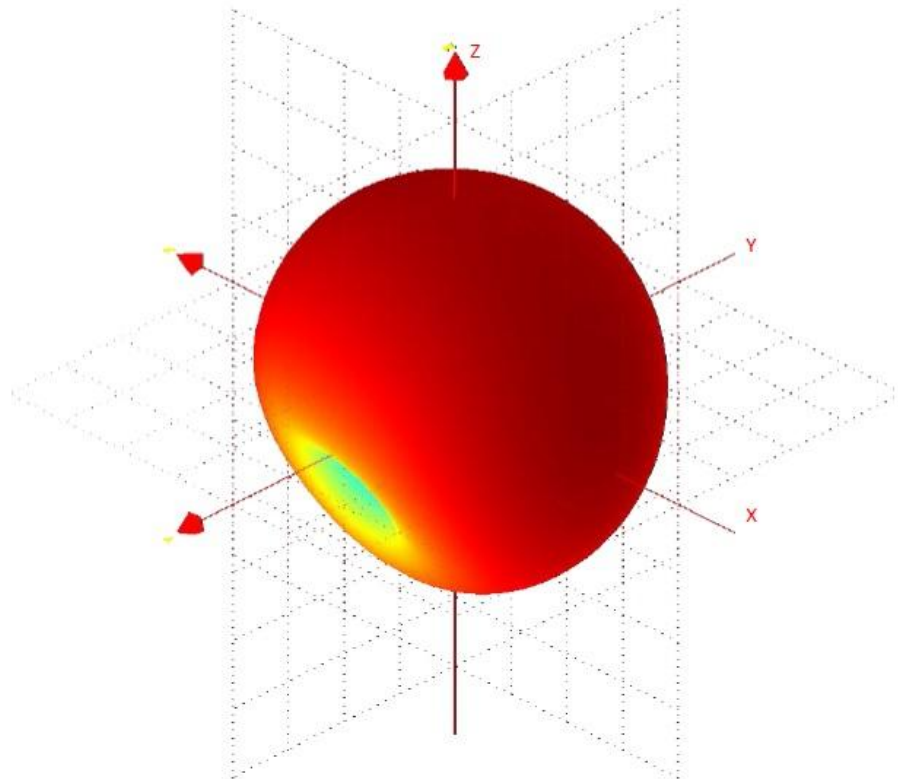


Phi0 Gain cut (dBi)

Module 2

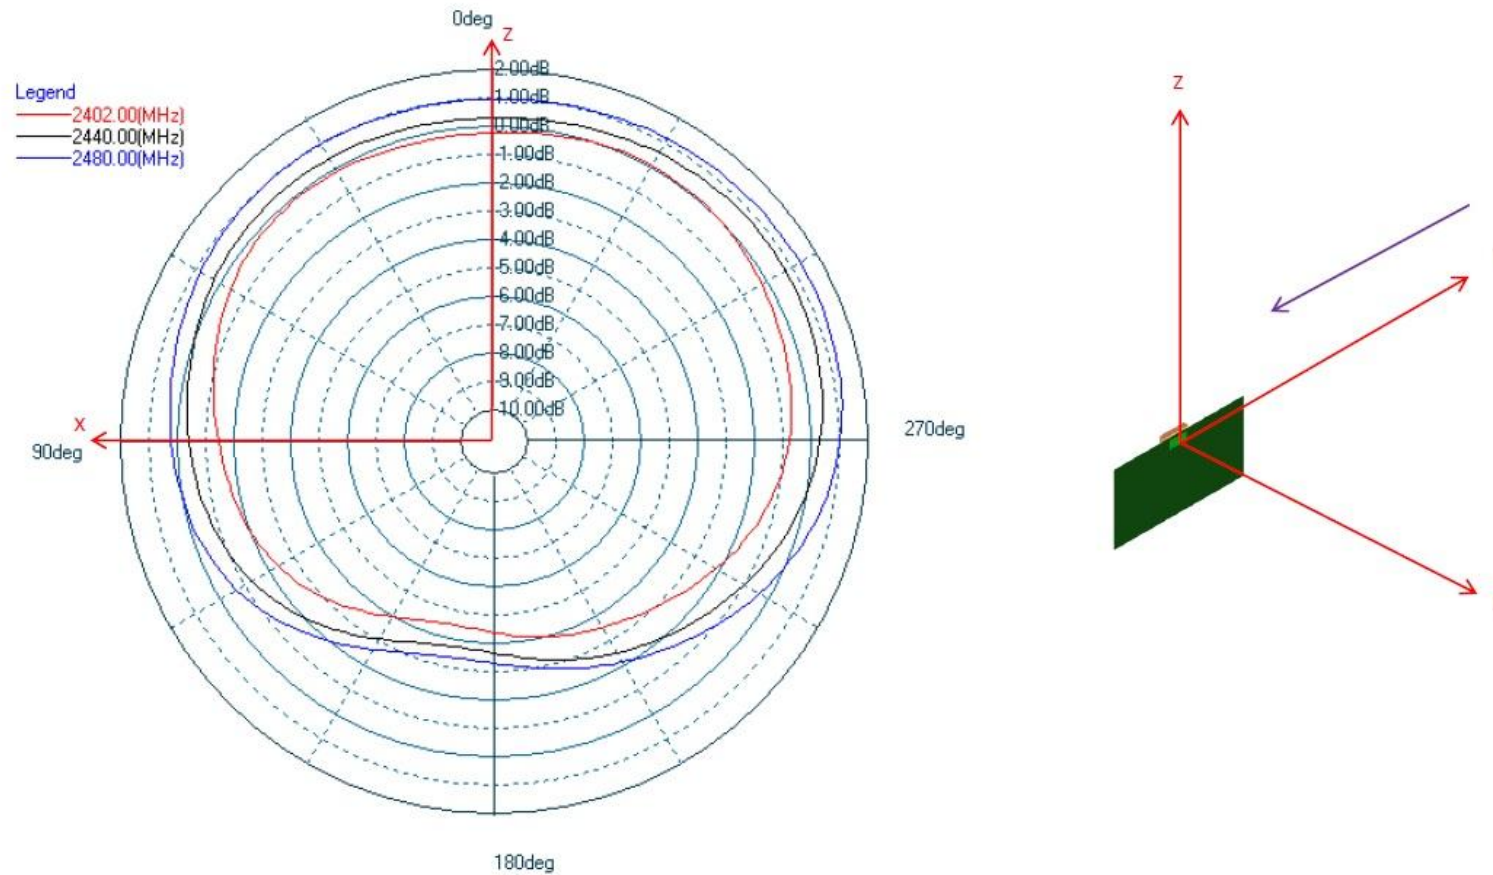

Phi90 Gain cut

Module 2

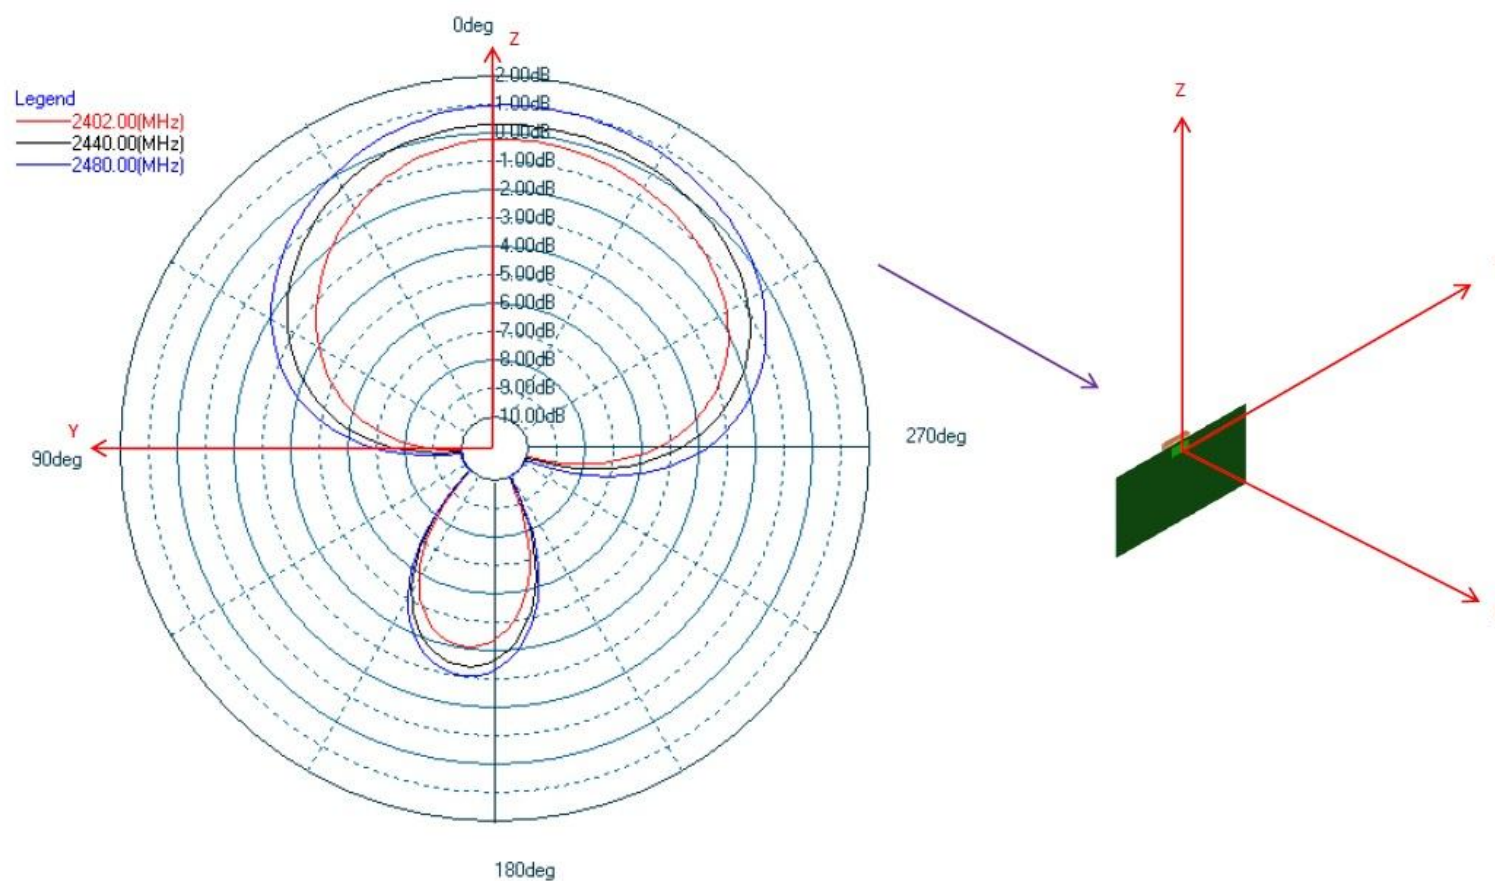

Theta90 Gain cut

Module 2

