

Appendix 2 – Highest SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: 509SH; Serial: 004401/11/585298/6

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.08, 5.08, 5.08); Calibrated: 8/12/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/23/2015
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.286 W/kg



Head/Right Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.79 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

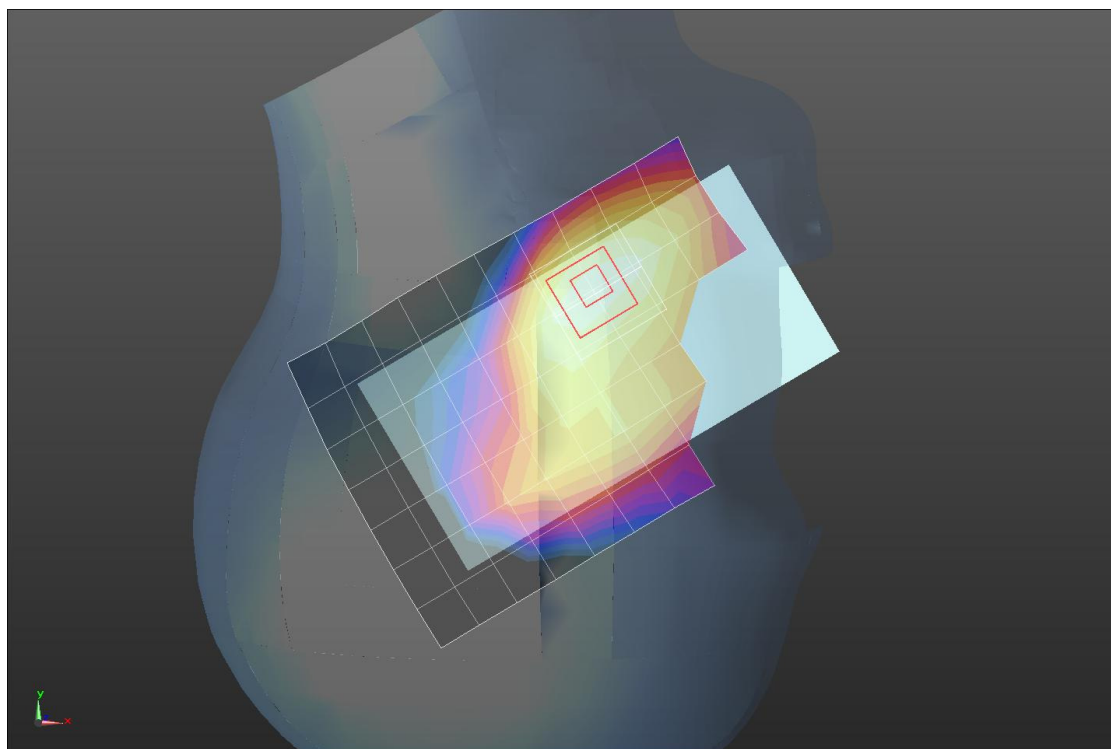

0 dB = 0.275 W/kg = -5.61 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: 509SH; Serial: 004401/11/585298/6

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 53.018$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.6, 4.6, 4.6); Calibrated: 8/12/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/23/2015
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Front/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.316 W/kg



Body/Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.17 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

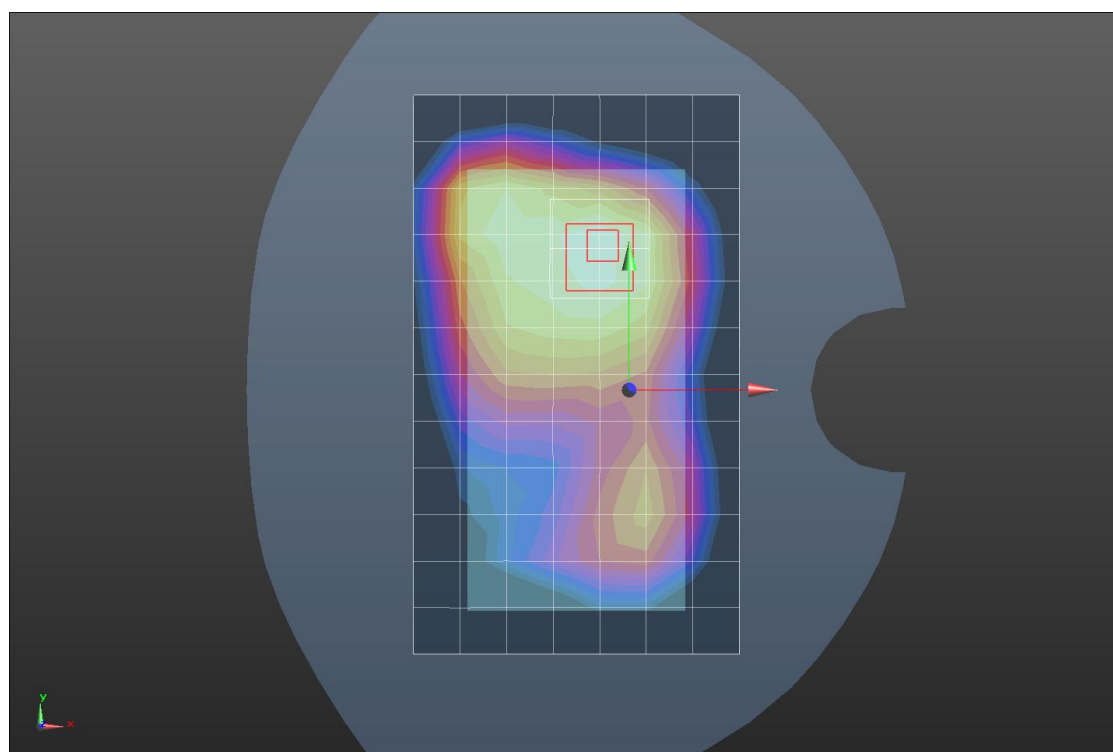

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: 509SH; Serial: 004401/11/585298/6

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7321; ConvF(7, 7, 7); Calibrated: 8/18/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/23/2015
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (14x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.493 W/kg



Head/Right Touched/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.11 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

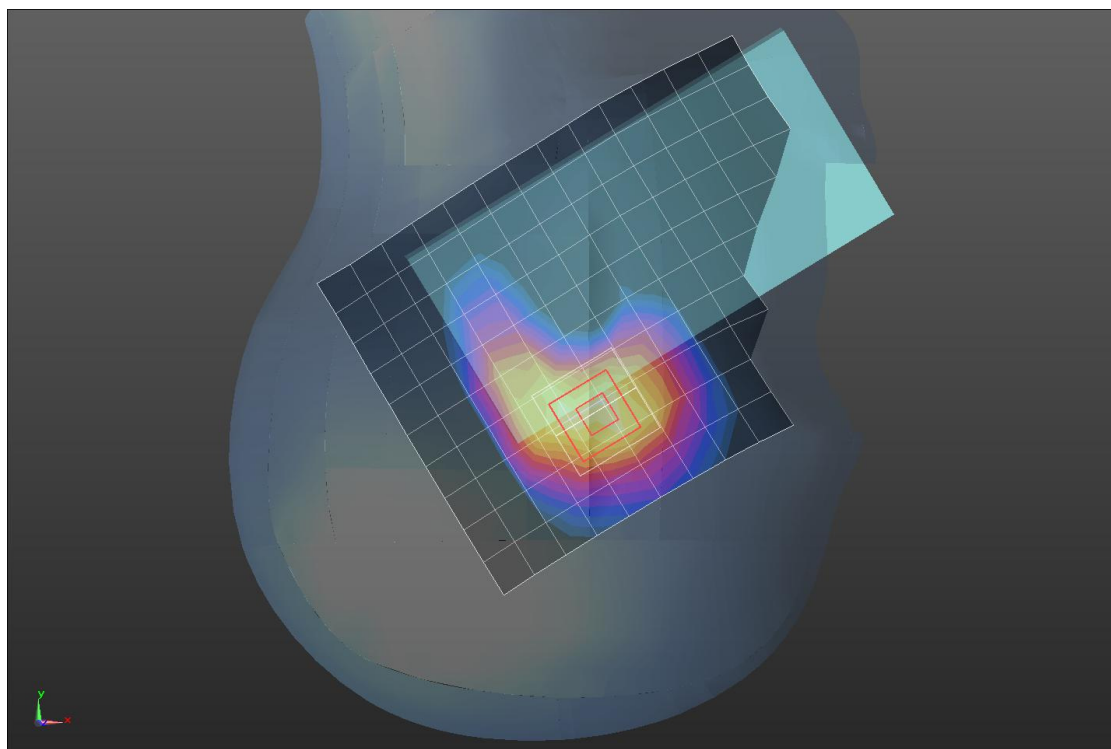

0 dB = 0.658 W/kg = -1.82 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: 509SH; Serial: 004401/11/585298/6

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7321; ConvF(7.09, 7.09, 7.09); Calibrated: 8/18/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/23/2015
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.326 W/kg



Body/Rear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

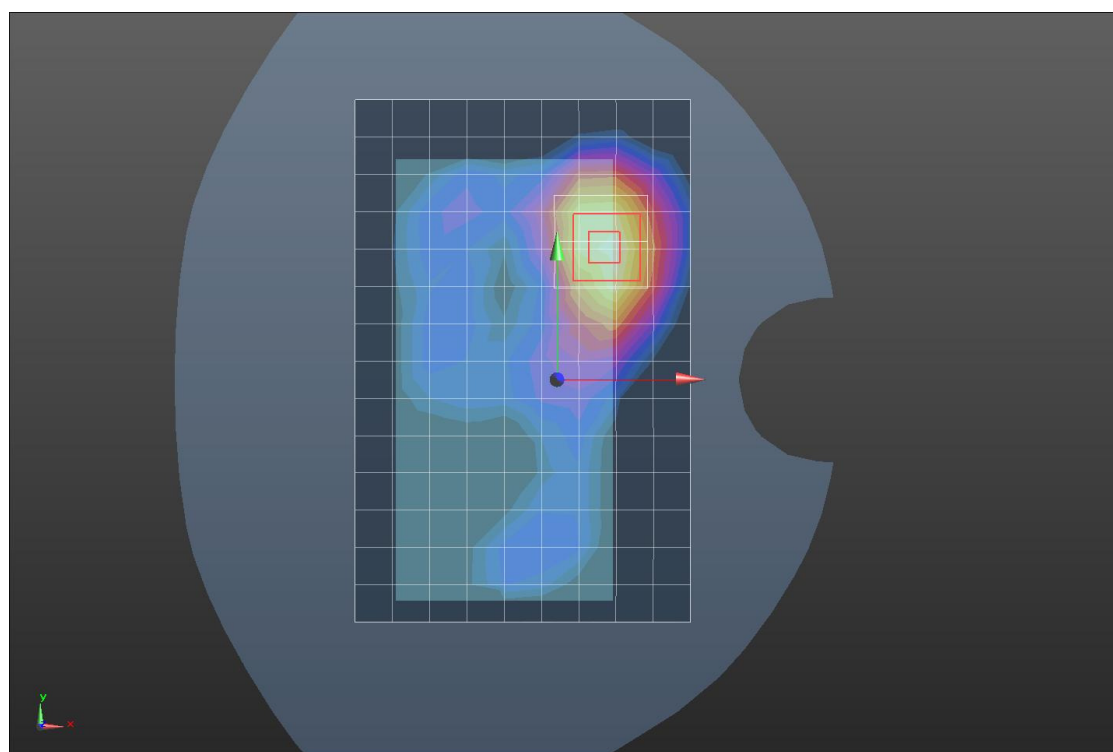

0 dB = 0.348 W/kg = -4.58 dBW/kg