



CERTIFICATION TEST REPORT

Report Number. : 12371351-E1V2

Applicant : SONY MOBILE COMMUNICATIONS INC
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU,TOKYO, 140-0002, JAPAN

FCC ID : PY7-26828G

EUT Description : GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F, H, L, and M
FCC CFR47 PART 90 SUBPART S

Date Of Issue:
JULY 23, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	7/6/2018	Initial Review	--
V2	7/23/2018	Updated Section 5.2, 7.1.1, 7.2.2, 8.3.10, 8.4, 9 and Appendix A.	Kiya Kedida

TABLE OF CONTENTS

GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC	1
1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. MAXIMUM ANTENNA GAIN	16
5.4. WORST-CASE CONFIGURATION AND MODE	17
5.5. DESCRIPTION OF TEST SETUP	18
6. TEST AND MEASUREMENT EQUIPMENT	21
7. RF OUTPUT POWER VERIFICATION	22
7.1. GSM	22
7.1.1. GSM850	23
7.1.2. GSM1900	23
7.2. WCDMA	24
7.2.1. WCDMA BAND5	28
7.2.2. WCDMA BAND2	29
7.2.3. WCDMA BAND4	30
7.3. LTE	31
7.3.1. LTE 2	33
7.3.2. LTE 5	36
7.3.3. LTE 7	38
7.3.4. LTE 12	40
7.3.5. LTE 13	42
7.3.6. LTE 26 (FCC PART 90S)	43
7.3.7. LTE 26 (FCC PART 22)	45

7.3.8.	LTE 41	48
7.3.9.	LTE 66	50
8.	CONDUCTED TEST RESULTS	53
8.1.	OCCUPIED BANDWIDTH	53
8.1.1.	GSM	58
8.1.2.	WCDMA	59
8.1.3.	LTE BAND 2	60
8.1.4.	LTE BAND 5	63
8.1.5.	LTE BAND 7	65
8.1.6.	LTE BAND 12	67
8.1.7.	LTE BAND 13	69
8.1.8.	LTE BAND 26 (FCC PART 90S)	70
8.1.9.	LTE BAND 26 (FCC PART 22)	72
8.1.10.	LTE BAND 41	74
8.1.11.	LTE BAND 66	76
8.2.	BAND EDGE AND EMISSION MASK	79
8.2.1.	GSM850	81
8.2.2.	GSM1900	82
8.2.3.	WCDMA BAND5	83
8.2.4.	WCDMA BAND2	84
8.2.5.	WCDMA BAND4	85
8.2.6.	LTE BAND 2 BANDEDGE	86
8.2.7.	LTE BAND 5 BANDEDGE	98
8.2.8.	LTE BAND 7 ADJACENT CHANNEL POWER	106
8.2.9.	LTE BAND 12 BANDEDGE	114
8.2.10.	LTE BAND 13 BANDEDGE	122
8.2.11.	LTE BAND 26 EMISSION MASK (FCC PART 90S)	125
8.2.12.	LTE BAND 26 BANDEDGE (FCC PART 22)	128
8.2.13.	LTE BAND 41 ADJACENT CHANNEL POWER	138
8.2.14.	LTE BAND 66 BANDEDGE	146
8.3.	OUT OF BAND EMISSIONS	158
8.3.1.	GSM850	159
8.3.2.	GSM1900	161
8.3.3.	WCDMA BAND5	163

8.3.4.	WCDMA BAND2	165
8.3.5.	WCDMA BAND4	167
8.3.6.	LTE BAND 2.....	169
8.3.7.	LTE BAND 5.....	175
8.3.8.	LTE BAND 7.....	179
8.3.9.	LTE BAND 12.....	183
8.3.10.	LTE BAND 13	187
8.3.11.	LTE BAND 26	189
8.3.12.	LTE BAND 41	194
8.3.13.	LTE BAND 66	198
8.4.	FREQUENCY STABILITY	204
8.5.	PEAK TO AVERAGE RATIO	212
8.5.1.	GSM.....	213
8.5.2.	WCDMA	214
8.5.3.	LTE BAND 2.....	215
8.5.4.	LTE BAND 5.....	217
8.5.5.	LTE BAND 7.....	219
8.5.6.	LTE BAND 12.....	221
8.5.7.	LTE BAND 13.....	223
8.5.8.	LTE BAND 26.....	224
8.5.9.	LTE BAND 41.....	226
8.5.10.	LTE BAND 66	228
9.	RADIATED TEST RESULTS	230
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION	230
9.1.1.	GSM.....	231
9.1.2.	WCDMA	233
9.1.3.	LTE BAND 2.....	236
9.1.4.	LTE BAND 5.....	237
9.1.5.	LTE BAND 7	238
9.1.6.	LTE BAND 12.....	239
9.1.7.	LTE BAND 13.....	240
9.1.8.	LTE BAND 26.....	241
9.1.9.	LTE BAND 41.....	242
9.1.10.	LTE BAND 66	243

10.	VERFICATION AND VALIDATION OF USING MOBILE COUNTRY CODE	244
11.	SETUP PHOTOS	245

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SONY MOBILE COMMUNICATIONS INC 4-12-3 HIGASHI-SHINAGAWA, SHINAGAWA -KU,TOKYO, 140-0002, JAPAN
FCC ID	PY7-26828G
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC
Serial Number	BH93002SD4, BH93007GD4 & BH93005JD5 (Conducted) BH93002DD4 & BH93006WD4 (Radiated)
Date Tested	JUNE 18, 2018 to JULY 05, 2018
Applicable Standards	FCC CFR 47 PART 22H, 24E, 27F,H,L,M and 90S
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For UL Verification Services Inc By: 	Reviewed By: 
Dan Corona Operations Leader UL Verification Services Inc.	Kiya Kedida Project Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90, FCC KDB 971168 D01 v3r1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☒ Chamber K (ISED: 2324A-1)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☐ Chamber L (ISED: 2324A-3)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	
	☐ Chamber G (ISED:22541-4)	
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

ISED company address codes for chambers K through L are in process, and have yet to be determined.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50, §90.635

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17

KDB 971168 D01Section 5.6

KDB 412172 D01

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

<u>Part 22 850MHz</u>							
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	GPRS	31.60	-5.40	24.05	254.1	38.5	-14.4
	EGPRS	26.70	-5.40	19.15	82.2	38.5	-19.3
<u>Part 24 1900MHz</u>							
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	GPRS	29.00	-2.10	26.90	489.8	33.0	-6.1
	EGPRS	25.70	-2.10	23.60	229.1	33.0	-9.4

WCDMA MODE

<u>Part 22 Band 5</u>							
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	REL 99	23.30	-5.40	15.75	37.6	38.5	-22.7
	HSDPA	22.60	-5.40	15.05	32.0	38.5	-23.4
<u>Part 24 Band 2</u>							
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	REL 99	20.40	-2.10	18.30	67.6	33.0	-14.7
	HSDPA	19.40	-2.10	17.30	53.7	33.0	-15.7
<u>Part 27 Band 4</u>							
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1710-1755	REL 99	20.90	-1.30	19.60	91.2	30.0	-10.4
	HSDPA	19.90	-1.30	18.60	72.4	30.0	-11.4

LTE BAND 2

Part 24						
EIRP Limit (dBm)			33.00			
Antenna Gain (dBi)			-2.10			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1850-1910	QPSK	20.2	18.1	64.6	-14.9
		16QAM	20.1	18.0	63.1	-15.0
		64QAM	20.0	17.9	61.7	-15.1
3.0		QPSK	20.5	18.4	69.2	-14.6
		16QAM	20.4	18.3	67.6	-14.7
		64QAM	20.3	18.2	66.1	-14.8
5.0		QPSK	20.5	18.4	69.2	-14.6
		16QAM	20.5	18.4	69.2	-14.6
		64QAM	20.3	18.2	66.1	-14.8
10.0		QPSK	20.5	18.4	69.2	-14.6
		16QAM	20.3	18.2	66.1	-14.8
		64QAM	20.2	18.1	64.6	-14.9
15.0		QPSK	20.4	18.3	67.6	-14.7
		16QAM	20.3	18.2	66.1	-14.8
		64QAM	20.2	18.1	64.6	-14.9
20.0		QPSK	20.5	18.4	69.2	-14.6
		16QAM	20.5	18.4	69.2	-14.6
		64QAM	20.4	18.3	67.6	-14.7

LTE BAND 5

Part 22						
ERP Limit (dBm)			38.45			
Antenna Gain (dBi)			-5.40			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	23.1	15.55	35.9	-22.9
		16QAM	23.0	15.45	35.1	-23.0
		64QAM	22.8	15.25	33.5	-23.2
3.0		QPSK	23.2	15.65	36.7	-22.8
		16QAM	23.1	15.55	35.9	-22.9
		64QAM	22.7	15.15	32.7	-23.3
5.0		QPSK	23.3	15.75	37.6	-22.7
		16QAM	23.2	15.65	36.7	-22.8
		64QAM	22.6	15.05	32.0	-23.4
10.0		QPSK	23.2	15.65	36.7	-22.8
		16QAM	23.1	15.55	35.9	-22.9
		64QAM	22.7	15.15	32.7	-23.3

LTE BAND 7

Part 27						
EIRP Limit (dBm)			33.00			
Antenna Gain (dBi)			-4.00			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2500-2570	QPSK	20.3	16.3	42.7	-16.7
		16QAM	20.1	16.1	40.7	-16.9
		64QAM	20.0	16.0	39.8	-17.0
10.0		QPSK	20.2	16.2	41.7	-16.8
		16QAM	20.1	16.1	40.7	-16.9
		64QAM	19.9	15.9	38.9	-17.1
15.0		QPSK	20.2	16.2	41.7	-16.8
		16QAM	20.1	16.1	40.7	-16.9
		64QAM	20.2	16.2	41.7	-16.8
20.0		QPSK	20.2	16.2	41.7	-16.8
		16QAM	20.2	16.2	41.7	-16.8
		64QAM	20.2	16.2	41.7	-16.8

LTE BAND 12

Part 27						
ERP Limit (dBm)			34.77			
Antenna Gain (dBi)			-6.30			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	699-716	QPSK	24.4	15.95	39.4	-18.8
		16QAM	23.3	14.85	30.5	-19.9
		64QAM	22.4	13.95	24.8	-20.8
3.0		QPSK	24.6	16.15	41.2	-18.6
		16QAM	23.5	15.05	32.0	-19.7
		64QAM	22.4	13.95	24.8	-20.8
5.0		QPSK	24.5	16.05	40.3	-18.7
		16QAM	23.5	15.05	32.0	-19.7
		64QAM	22.4	13.95	24.8	-20.8
10.0		QPSK	24.6	16.15	41.2	-18.6
		16QAM	23.5	15.05	32.0	-19.7
		64QAM	22.3	13.85	24.3	-20.9

LTE BAND 13

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-7.10				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	777-787	QPSK	24.6	15.35	34.3	-19.4
		16QAM	23.4	14.15	26.0	-20.6
		64QAM	22.4	13.15	20.7	-21.6
10.0		QPSK	24.5	15.25	33.5	-19.5
		16QAM	23.4	14.15	26.0	-20.6
		64QAM	22.2	12.95	19.7	-21.8

LTE BAND 26 (FCC Part 90S)

Part 90						
ERP Limit (dBm)			50.00			
Antenna Gain (dBi)			-5.40			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	814-824	QPSK	23.0	15.45	35.1	-34.6
		16QAM	22.8	15.25	33.5	-34.8
		64QAM	22.4	14.85	30.5	-35.2
3.0		QPSK	23.2	15.65	36.7	-34.4
		16QAM	23.1	15.55	35.9	-34.5
		64QAM	22.4	14.85	30.5	-35.2
5.0		QPSK	23.3	15.75	37.6	-34.3
		16QAM	23.1	15.55	35.9	-34.5
		64QAM	22.5	14.95	31.3	-35.1
10.0		QPSK	23.2	15.65	36.7	-34.4
		16QAM	23.1	15.55	35.9	-34.5
		64QAM	22.4	14.85	30.5	-35.2

LTE BAND 26 (FCC Part 22)

Part 22						
ERP Limit (dBm)			38.45			
Antenna Gain (dBi)			-5.40			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	23.0	15.45	35.1	-23.0
		16QAM	22.9	15.35	34.3	-23.1
		64QAM	22.5	14.95	31.3	-23.5
3.0		QPSK	23.0	15.45	35.1	-23.0
		16QAM	22.7	15.15	32.7	-23.3
		64QAM	22.4	14.85	30.5	-23.6
5.0		QPSK	23.1	15.55	35.9	-22.9
		16QAM	22.7	15.15	32.7	-23.3
		64QAM	22.3	14.75	29.9	-23.7
10.0		QPSK	23.1	15.55	35.9	-22.9
		16QAM	22.7	15.15	32.7	-23.3
		64QAM	22.5	14.95	31.3	-23.5
15.0		QPSK	23.2	15.65	36.7	-22.8
		16QAM	23.1	15.55	35.9	-22.9
		64QAM	22.8	15.25	33.5	-23.2

LTE BAND 41

Part 27						
EIRP Limit (dBm)			33.00			
Antenna Gain (dBi)			-3.10			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2496-2690	QPSK	24.1	21.0	125.9	-12.0
		16QAM	23.2	20.1	102.3	-12.9
		64QAM	22.6	19.5	89.1	-13.5
10.0		QPSK	24.2	21.1	128.8	-11.9
		16QAM	23.4	20.3	107.2	-12.7
		64QAM	22.4	19.3	85.1	-13.7
15.0		QPSK	24.3	21.2	131.8	-11.8
		16QAM	23.4	20.3	107.2	-12.7
		64QAM	22.4	19.3	85.1	-13.7
20.0		QPSK	24.4	21.3	134.9	-11.7
		16QAM	23.5	20.4	109.6	-12.6
		64QAM	22.8	19.7	93.3	-13.3

LTE BAND 66

Part 27						
EIRP Limit (dBm)		30.00				
Antenna Gain (dBi)		-1.30				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1710-1755	QPSK	20.7	19.4	87.1	-10.6
		16QAM	20.6	19.3	85.1	-10.7
		64QAM	20.6	19.3	85.1	-10.7
3.0		QPSK	20.8	19.5	89.1	-10.5
		16QAM	20.8	19.5	89.1	-10.5
		64QAM	20.6	19.3	85.1	-10.7
5.0		QPSK	20.8	19.5	89.1	-10.5
		16QAM	20.8	19.5	89.1	-10.5
		64QAM	20.7	19.4	87.1	-10.6
10.0		QPSK	20.8	19.5	89.1	-10.5
		16QAM	20.7	19.4	87.1	-10.6
		64QAM	20.6	19.3	85.1	-10.7
15.0		QPSK	20.9	19.6	91.2	-10.4
		16QAM	20.8	19.5	89.1	-10.5
		64QAM	20.7	19.4	87.1	-10.6
20.0		QPSK	20.9	19.6	91.2	-10.4
		16QAM	20.7	19.4	87.1	-10.6
		64QAM	20.6	19.3	85.1	-10.7

5.3. MAXIMUM ANTENNA GAIN

Please see table below:

Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	-5.4
GSM1900, 1850-1910MHz	-2.1
WCDMA Band 2, 1850-1910 MHz	-2.1
WCDMA Band 4, 1710-1755 MHz	-1.3
WCDMA Band 5, 824-849 MHz	-5.4
LTE BAND 2, 1850 - 1910 MHz	-2.1
LTE BAND 4, 1710 – 1755 MHz	-1.3
LTE BAND 5, 824 - 849 MHz	-5.4
LTE BAND 7, 2500 - 2570 MHz	-4.0
LTE BAND 12, 699 - 716 MHz	-6.3
LTE BAND 13, 777 - 787 MHz	-7.1
LTE BAND 17, 704 – 716 MHz	-6.3
LTE BAND 26 , 814 - 824 MHz	-5.4
LTE BAND 41, 2496 - 2690 MHz	-3.1
LTE BAND 66, 1710 - 1780 MHz	-1.3

5.4. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:

Band 2, Band 4, Band 5, Band 7, Band 12, Band 13, Band 17, Band 26, Band 41, and Band 66.

LTE Band 4 (1710-1755MHz, 1.4/3/5/10/15/20MHz bandwidth) is covered by LTE Band 66 because it is a subset of LTE band 66 and they have same output power and channel bandwidth.

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. It was found that QPSK, and 16QAM results were worst case. All testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that X-Axis with AC/DC Adapter and headset was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-Axis with AC/DC Adapter and headset orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	UCH20	3416W45305784	N/A
DC Power Supply	Ametek	XT 15-4	T463	N/A
Audio & Charging Cable	SONY	1312-8675.1B	YYWWSSPCXXXXXC	N/A
Earphone	SONY	MH750	N/A	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	USB/Headphone Jack	1	USB Type-C/Audio	Un-shielded	.2m	Audio & Charging Cable
4	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests

CONDCUTED TEST SETUP DIAGRAM

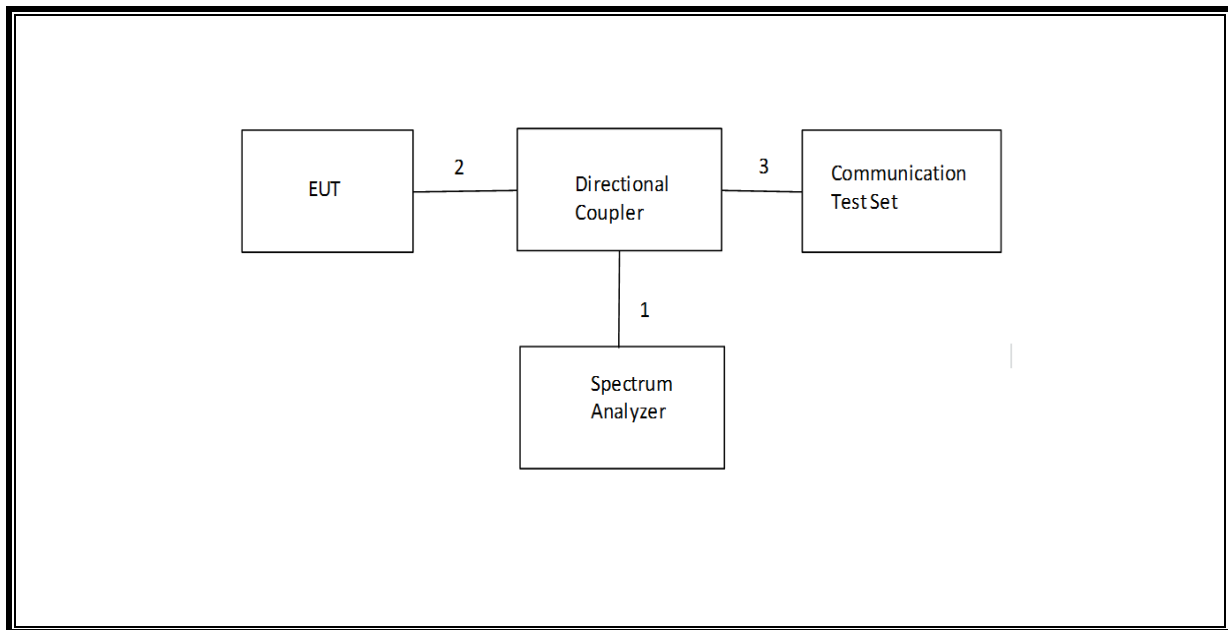

RADIATED TEST SETUP DIAGRAM

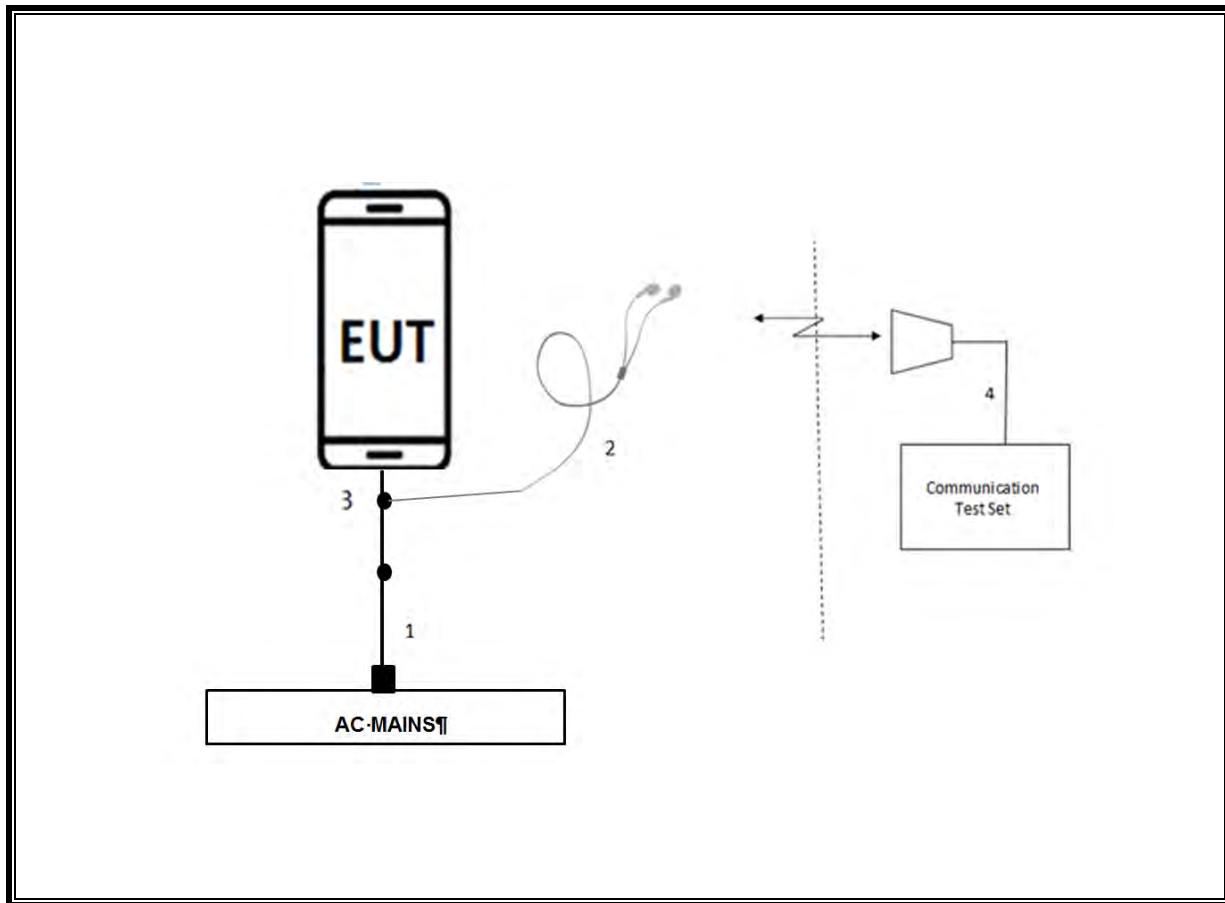

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/19	07/05/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19	02/21/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/18	07/19/17
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	04/30/19	04/30/18
RF Amplifier	AMPLICAL	AMP1G18-35	T1569	06/03/19	06/03/18
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/19	06/18/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T972	05/29/19	05/29/18
Chamber, Environmental	Thermotron	SE-600-10-10	T80	02/22/19	02/22/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4446A	T146	07/18/18	07/18/17
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/19	02/05/18
EMI TEST RECEIVER	R&S	ESW44	PRE0179367	04/25/19	04/25/18
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

NOTES:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

7. RF OUTPUT POWER VERIFICATION

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows

7.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

RESULT

7.1.1. GSM850

ID:	40814	Date:	6/19/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
850.0	128	824.2	31.5	29.5	27.5	26.6
	190	836.6	31.5	29.5	27.5	26.5
	251	848.8	31.6	29.7	27.6	26.6

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
850.0	128	824.2	26.7	24.8	23.7	21.6
	190	836.6	26.7	24.8	23.7	21.7
	251	848.8	26.7	24.8	23.7	21.8

7.1.2. GSM1900

ID:	40814	Date:	6/19/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
1900.0	512	1850.2	29.0	27.0	25.0	24.1
	661	1880.0	29.0	26.9	24.9	24.0
	810	1909.8	29.0	27.0	24.9	24.0

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
1900.0	512	1850.2	25.7	23.7	22.6	21.6
	661	1880.0	25.7	23.6	22.5	21.7
	810	1909.8	25.6	23.6	22.5	21.5

7.2. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	Bc	2/15	11/15	15/15	15/15
	Bd	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	Bhs	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D _{ACK}	8			
	D _{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	A _{hs} = β_{hs}/β_c	30/15			

HSPA REL 6 (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
HSDPA Specific Settings	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DUAL CARRIER HSDPA (DC-HSDPA (REL 8, CAT 24))

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

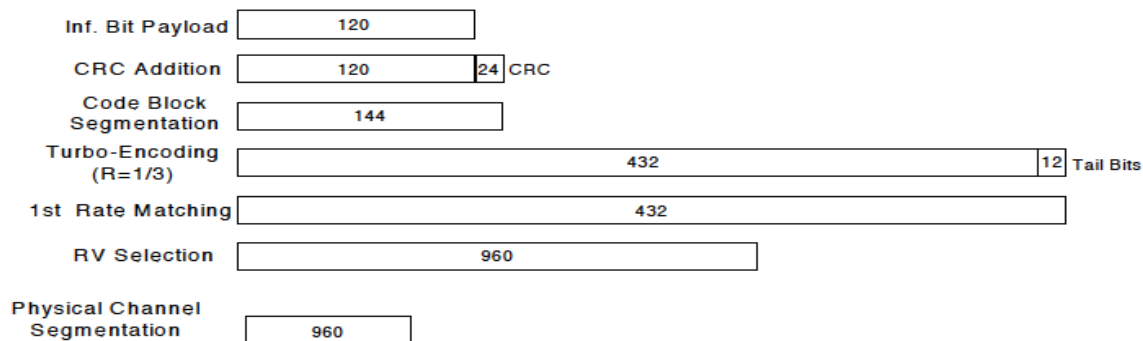


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{hs} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

RESULT

7.2.1. WCDMA BAND5

ID:	40814	Date:	6/19/18
------------	-------	--------------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.3
			4183	836.6	N/A	23.2
			4233	846.6	N/A	23.2
	HSDPA	Subtest 1	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.6
		Subtest 2	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.2
		Subtest 3	4132	826.4	0.5	21.8
			4183	836.6	0.5	21.7
			4233	846.6	0.5	21.7
		Subtest 4	4132	826.4	0.5	21.8
			4183	836.6	0.5	21.7
			4233	846.6	0.5	21.7
	HSPA (HSDPA & HSUPA)	Subtest 1	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.2
		Subtest 2	4132	826.4	2	20.3
			4183	836.6	2	20.2
			4233	846.6	2	20.2
		Subtest 3	4132	826.4	1	21.3
			4183	836.6	1	21.2
			4233	846.6	1	21.2
		Subtest 4	4132	826.4	2	20.3
			4183	836.6	2	20.2
			4233	846.6	2	20.2
		Subtest 5	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.2
	DC-HSDPA	Subtest 1	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.6
		Subtest 2	4132	826.4	0	22.3
			4183	836.6	0	22.2
			4233	846.6	0	22.2
		Subtest 3	4132	826.4	0.5	21.8
			4183	836.6	0.5	21.7
			4233	846.6	0.5	21.7
		Subtest 4	4132	826.4	0.5	21.8
			4183	836.6	0.5	21.7
			4233	846.6	0.5	21.7

7.2.2. WCDMA BAND2

ID:	40814	Date:	6/19/18
------------	-------	--------------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 2 (1900MHz)	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	20.3
			9400	1880.0	N/A	20.4
			9538	1907.6	N/A	20.4
	HSDPA	Subtest 1	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.3
		Subtest 2	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.4
		Subtest 3	9262	1852.4	0.5	18.8
			9400	1880.0	0.5	18.9
			9538	1907.6	0.5	18.9
		Subtest 4	9262	1852.4	0.5	18.8
			9400	1880.0	0.5	18.9
			9538	1907.6	0.5	18.9
	HSPA (HSDPA & HSUPA)	Subtest 1	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.4
		Subtest 2	9262	1852.4	2	17.8
			9400	1880.0	2	17.4
			9538	1907.6	2	17.4
		Subtest 3	9262	1852.4	1	18.3
			9400	1880.0	1	18.4
			9538	1907.6	1	18.4
		Subtest 4	9262	1852.4	2	17.3
			9400	1880.0	2	17.4
			9538	1907.6	2	17.3
		Subtest 5	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.4
	DC-HSDPA	Subtest 1	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.3
		Subtest 2	9262	1852.4	0	19.3
			9400	1880.0	0	19.4
			9538	1907.6	0	19.4
		Subtest 3	9262	1852.4	0.5	18.8
			9400	1880.0	0.5	18.9
			9538	1907.6	0.5	18.9
		Subtest 4	9262	1852.4	0.5	18.8
			9400	1880.0	0.5	18.9
			9538	1907.6	0.5	18.9

7.2.3. WCDMA BAND4

ID:	40814	Date:	6/19/18
-----	-------	-------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 4 (1700MHz)	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	20.8
			1413	1732.6	N/A	20.9
			1513	1752.6	N/A	20.9
	HSDPA	Subtest 1	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.9
		Subtest 2	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.9
		Subtest 3	1312	1712.4	0.5	19.3
			1413	1732.6	0.5	19.4
			1513	1752.6	0.5	19.4
		Subtest 4	1312	1712.4	0.5	19.3
			1413	1732.6	0.5	19.3
			1513	1752.6	0.5	19.4
	HSPA (HSDPA & HSUPA)	Subtest 1	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.8
		Subtest 2	1312	1712.4	2	17.7
			1413	1732.6	2	17.8
			1513	1752.6	2	17.9
		Subtest 3	1312	1712.4	1	18.8
			1413	1732.6	1	18.8
			1513	1752.6	1	18.9
		Subtest 4	1312	1712.4	2	17.8
			1413	1732.6	2	17.8
			1513	1752.6	2	17.9
		Subtest 5	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.9
	DC-HSDPA	Subtest 1	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.9
		Subtest 2	1312	1712.4	0	19.8
			1413	1732.6	0	19.8
			1513	1752.6	0	19.9
		Subtest 3	1312	1712.4	0.5	19.3
			1413	1732.6	0.5	19.4
			1513	1752.6	0.5	19.4
		Subtest 4	1312	1712.4	0.5	19.3
			1413	1732.6	0.5	19.3
			1513	1752.6	0.5	19.4

7.3. LTE

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

MODES TESTED

- LTE 2
- LTE 5
- LTE 7
- LTE 12
- LTE 13
- LTE 26
- LTE 41
- LTE 66

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.3.1. LTE 2

ID:	40814	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 2 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18607 1850.7 MHz	18900 1880.0 MHz	19193 1909.3 MHz
1.4	QPSK	1	0	20.1	20.0	20.2
		1	2	20.2	20.1	20.2
		1	5	20.1	20.0	20.2
		3	0	20.1	20.0	20.1
		3	1	20.2	20.0	20.2
		3	2	20.2	20.0	20.2
		6	0	20.2	20.0	20.2
	16QAM	1	0	19.7	19.9	20.1
		1	2	19.8	19.9	19.8
		1	5	19.7	19.9	19.8
		3	0	19.9	19.7	19.7
		3	1	19.9	19.8	19.8
		3	2	19.9	19.7	19.8
		6	0	19.9	19.5	19.9
	64QAM	1	0	20.0	19.7	20.0
		1	2	20.0	19.8	20.0
		1	5	20.0	19.7	20.0
		3	0	19.7	19.7	20.0
		3	1	19.8	19.8	20.0
		3	2	19.8	19.8	20.0
		6	0	19.9	19.9	19.7

OUTPUT POWER FOR LTE BAND 2 (3.0 MHz)

Modulation	RB Allocation	RB Offset	Power		
			Conducted Average (dBm)		
			18615 1851.5 MHz	18900 1880.0 MHz	19185 1908.5 MHz
QPSK	1	0	20.4	20.1	20.2
	1	7	20.5	20.2	20.3
	1	14	20.3	20.1	20.2
	8	0	20.4	20.1	20.3
	8	4	20.4	20.1	20.3
	8	7	20.4	20.1	20.3
	15	0	20.4	20.1	20.3
16QAM	1	0	20.3	19.5	19.8
	1	7	20.4	19.6	19.9
	1	14	20.2	19.5	19.8
	8	0	20.0	19.8	19.9
	8	4	20.0	19.8	19.9
	8	7	20.1	19.8	19.9
	15	0	20.0	19.7	19.8
64QAM	1	0	20.2	19.9	19.8
	1	7	20.3	19.9	19.9
	1	14	20.2	19.8	19.8
	8	0	20.0	19.7	19.8
	8	4	20.0	19.7	19.9
	8	7	20.0	19.7	19.9
	15	0	19.9	19.7	19.8

OUTPUT POWER FOR LTE BAND 2 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18625	18900	19175
				1852.5 MHz	1880.0 MHz	1907.5 MHz
5.0	QPSK	1	0	20.4	20.2	20.3
		1	12	20.3	20.2	20.3
		1	24	20.4	20.2	20.4
		12	0	20.4	20.1	20.3
		12	6	20.4	20.1	20.3
		12	11	20.4	20.1	20.3
		25	0	20.5	20.1	20.3
	16QAM	1	0	20.5	19.8	19.9
		1	12	20.4	19.8	19.9
		1	24	20.5	19.8	19.9
		12	0	20.1	19.7	19.9
		12	6	20.1	19.8	19.9
		12	11	20.2	19.7	19.9
		25	0	20.1	19.7	19.8
	64QAM	1	0	20.3	19.6	19.9
		1	12	20.2	19.6	20.0
		1	24	20.3	19.6	20.1
		12	0	19.9	19.7	19.9
		12	6	19.9	19.8	19.9
		12	11	20.0	19.7	19.9
		25	0	20.0	19.7	19.8

OUTPUT POWER FOR LTE BAND 2 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18650	18900	19150
				1855.0 MHz	1880.0 MHz	1905.0 MHz
10.0	QPSK	1	0	20.4	20.1	20.3
		1	24	20.5	20.1	20.2
		1	49	20.3	20.0	20.3
		25	0	20.4	20.1	20.3
		25	12	20.5	20.1	20.4
		25	24	20.4	20.1	20.3
		50	0	20.5	20.1	20.3
	16QAM	1	0	20.3	19.6	19.8
		1	24	20.3	19.5	19.7
		1	49	20.2	19.4	19.8
		25	0	20.1	19.7	19.9
		25	12	20.1	19.7	20.0
		25	24	20.0	19.7	19.9
		50	0	20.0	19.7	19.9
	64QAM	1	0	20.1	20.0	19.9
		1	24	20.2	20.0	19.8
		1	49	20.1	19.8	19.9
		25	0	20.2	19.8	19.8
		25	12	20.2	19.8	19.9
		25	24	20.1	19.7	19.9
		50	0	20.1	19.7	19.8

OUTPUT POWER FOR LTE BAND 2 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18675	18900	19125
				1857.5 MHz	1880.0 MHz	1902.5 MHz
15.0	QPSK	1	0	20.0	20.3	20.4
		1	37	19.9	20.1	20.3
		1	74	19.9	20.1	20.3
		36	0	20.0	20.2	20.3
		36	16	20.0	20.2	20.3
		36	35	19.9	20.1	20.3
		75	0	20.0	20.1	20.3
	16QAM	1	0	19.4	20.2	20.3
		1	37	19.4	20.0	20.1
		1	74	19.4	20.0	20.2
		36	0	19.6	19.7	19.9
		36	16	19.6	19.7	19.9
		36	35	19.5	19.7	19.9
		75	0	19.6	19.7	20.0
	64QAM	1	0	20.2	20.0	20.2
		1	37	20.1	19.8	20.0
		1	74	20.2	19.8	20.1
		36	0	19.6	19.9	19.9
		36	16	19.6	19.9	19.9
		36	35	19.6	19.8	20.0
		75	0	19.7	19.8	20.0

OUTPUT POWER FOR LTE BAND 2 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18700	18900	19100
				1860.0 MHz	1880.0 MHz	1900.0 MHz
20.0	QPSK	1	0	20.1	20.3	20.3
		1	49	20.0	20.2	20.1
		1	99	20.2	20.0	20.2
		50	0	20.2	20.2	20.3
		50	24	20.1	20.2	20.2
		50	49	20.2	20.2	20.3
		100	0	20.1	20.2	20.5
	16QAM	1	0	19.9	20.5	20.1
		1	49	19.8	20.3	19.9
		1	99	20.1	20.2	20.0
		50	0	19.8	19.8	19.8
		50	24	19.7	19.8	19.8
		50	49	19.8	19.7	19.9
		100	0	19.7	19.8	19.9
	64QAM	1	0	20.3	20.1	20.1
		1	49	20.1	20.0	19.9
		1	99	20.4	19.9	20.0
		50	0	19.8	19.9	19.8
		50	24	19.7	19.8	19.8
		50	49	19.8	19.8	19.9
		100	0	19.7	19.8	19.9

7.3.2. LTE 5

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 5 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20407	20525	20643
				824.7 MHz	836.5 MHz	848.3 MHz
1.4	QPSK	1	0	23.0	23.0	22.9
		1	2	23.1	23.1	23.0
		1	5	23.0	23.1	22.9
		3	0	23.0	23.1	22.9
		3	1	23.1	23.1	22.9
		3	2	23.1	23.1	22.9
	16QAM	6	0	23.0	23.1	22.9
		1	0	22.6	23.0	22.5
		1	2	22.7	23.0	22.6
		1	5	22.7	23.0	22.5
		3	0	22.8	22.8	22.5
		3	1	22.9	22.9	22.6
	64QAM	3	2	22.9	22.9	22.6
		6	0	22.3	22.1	22.1
		1	0	22.4	22.6	22.3
		1	2	22.5	22.8	22.3
		1	5	22.4	22.6	22.3
		3	0	22.4	22.6	22.1
		3	1	22.5	22.7	22.1
		3	2	22.5	22.7	22.2
		6	0	21.6	21.3	21.2

OUTPUT POWER FOR LTE BAND 5 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20415	20525	20635
				825.5 MHz	836.5 MHz	847.5 MHz
3.0	QPSK	1	0	23.1	23.1	22.9
		1	7	23.2	23.2	23.0
		1	14	23.0	23.1	22.9
		8	0	23.1	23.1	22.9
		8	4	23.1	23.2	23.0
		8	7	23.1	23.2	23.0
	16QAM	15	0	23.1	23.2	22.9
		1	0	23.1	22.6	22.5
		1	7	23.1	22.7	22.6
		1	14	22.9	22.6	22.5
		8	0	22.3	22.3	22.0
		8	4	22.3	22.4	22.1
	64QAM	8	7	22.3	22.3	22.1
		15	0	22.3	22.3	21.9
		1	0	22.4	22.6	22.3
		1	7	22.5	22.7	22.4
		1	14	22.3	22.6	22.3
		8	0	21.4	21.4	21.1
		8	4	21.4	21.4	21.2
		8	7	21.4	21.4	21.2
		15	0	21.4	21.3	21.1

OUTPUT POWER FOR LTE BAND 5 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20425	20525	20625
				826.5 MHz	836.5 MHz	846.5 MHz
5.0	QPSK	1	0	23.1	23.3	23.0
		1	12	23.0	23.2	23.0
		1	24	22.9	23.3	23.0
		12	0	23.1	23.2	22.9
		12	6	23.2	23.2	22.9
		12	11	23.0	23.2	22.9
		25	0	23.2	23.2	22.9
	16QAM	1	0	23.2	22.9	22.7
		1	12	23.1	22.8	22.7
		1	24	23.0	22.9	22.7
		12	0	22.4	22.4	22.1
		12	6	22.4	22.3	22.1
		12	11	22.3	22.3	22.1
		25	0	22.3	22.3	22.0
	64QAM	1	0	22.6	22.3	22.4
		1	12	22.5	22.2	22.4
		1	24	22.5	22.3	22.4
		12	0	21.3	21.4	21.2
		12	6	21.3	21.4	21.2
		12	11	21.2	21.4	21.2
		25	0	21.3	21.4	21.2

OUTPUT POWER FOR LTE BAND 5 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20450	20525	20600
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0	23.2	23.1	23.1
		1	24	23.1	23.1	22.9
		1	49	22.9	23.1	22.9
		25	0	23.2	23.2	23.0
		25	12	23.1	23.1	23.0
		25	24	23.0	23.2	22.9
		50	0	23.1	23.2	23.0
	16QAM	1	0	23.1	22.6	22.7
		1	24	23.0	22.6	22.5
		1	49	22.8	22.6	22.5
		25	0	22.3	22.3	22.2
		25	12	22.2	22.3	22.2
		25	24	22.2	22.2	22.1
		50	0	22.2	22.3	22.1
	64QAM	1	0	22.4	22.6	22.5
		1	24	22.4	22.6	22.3
		1	49	22.2	22.7	22.3
		25	0	21.4	21.5	21.3
		25	12	21.4	21.5	21.3
		25	24	21.3	21.4	21.2
		50	0	21.4	21.4	21.2

7.3.3. LTE 7

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20775	21100	21425
				2502.5 MHz	2535.0 MHz	2567.5 MHz
5.0	QPSK	1	0	20.2	19.9	20.2
		1	12	20.3	20.0	20.2
		1	24	20.3	20.0	20.2
		12	0	20.2	20.1	20.1
		12	6	20.3	20.1	20.1
		12	11	20.2	20.1	20.1
		25	0	20.2	20.1	20.1
	16QAM	1	0	19.8	20.0	19.9
		1	12	19.9	20.1	19.8
		1	24	19.8	20.1	19.8
		12	0	19.8	19.8	19.8
		12	6	19.8	19.8	19.8
		12	11	19.8	19.8	19.8
		25	0	19.7	19.7	19.8
	64QAM	1	0	20.0	19.8	19.7
		1	12	20.0	19.9	19.6
		1	24	20.0	19.9	19.6
		12	0	19.9	19.6	19.8
		12	6	19.9	19.6	19.8
		12	11	19.9	19.6	19.8
		25	0	19.8	19.6	19.7

OUTPUT POWER FOR LTE BAND 7 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20800	21100	21400
				2505.0 MHz	2535.0 MHz	2565.0 MHz
10.0	QPSK	1	0	20.1	20.0	20.0
		1	24	20.1	20.0	20.1
		1	49	20.1	19.9	20.1
		25	0	20.1	20.1	20.1
		25	12	20.1	20.1	20.1
		25	24	20.1	20.0	20.1
		50	0	20.1	20.1	20.1
	16QAM	1	0	20.0	19.5	19.7
		1	24	20.0	19.5	19.7
		1	49	20.0	19.3	19.7
		25	0	19.7	19.7	19.9
		25	12	19.7	19.6	19.9
		25	24	19.7	19.6	19.8
		50	0	19.7	19.6	19.8
	64QAM	1	0	19.8	19.9	19.8
		1	24	19.8	19.9	19.8
		1	49	19.8	19.8	19.8
		25	0	19.8	19.8	19.9
		25	12	19.8	19.7	19.8
		25	24	19.7	19.7	19.8
		50	0	19.8	19.7	19.8

OUTPUT POWER FOR LTE BAND 7 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20825	21100	21375
				2507.5 MHz	2535.0 MHz	2562.5 MHz
15.0	QPSK	1	0	20.1	20.0	20.2
		1	37	20.1	20.0	20.1
		1	74	20.1	19.9	20.1
		36	0	20.2	20.1	20.1
		36	16	20.1	20.1	20.1
		36	35	20.1	20.0	20.1
		75	0	20.1	20.0	20.2
	16QAM	1	0	20.0	19.5	20.1
		1	37	20.0	19.5	20.0
		1	74	19.9	19.4	20.0
		36	0	19.8	19.7	19.6
		36	16	19.7	19.7	19.8
		36	35	19.7	19.6	19.7
		75	0	19.7	19.6	19.7
	64QAM	1	0	19.8	19.9	20.2
		1	37	19.8	19.9	20.1
		1	74	19.7	19.8	20.2
		36	0	19.8	19.7	19.7
		36	16	19.8	19.7	19.7
		36	35	19.7	19.7	19.7
		75	0	19.7	19.7	19.8

OUTPUT POWER FOR LTE BAND 7 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20850	21100	21350
				2510.0 MHz	2535.0 MHz	2560.0 MHz
20.0	QPSK	1	0	20.1	20.1	20.1
		1	49	20.0	20.0	20.0
		1	99	20.0	19.9	20.0
		50	0	20.2	20.2	20.1
		50	24	20.1	20.1	20.2
		50	49	20.1	20.1	20.1
		100	0	20.1	20.1	20.2
	16QAM	1	0	20.1	20.2	20.1
		1	49	20.0	20.1	19.9
		1	99	19.9	20.0	20.0
		50	0	19.8	19.7	19.7
		50	24	19.7	19.7	19.8
		50	49	19.7	19.6	19.7
		100	0	19.7	19.7	19.8
	64QAM	1	0	20.2	20.0	20.1
		1	49	20.2	19.9	19.8
		1	99	20.2	19.8	19.8
		50	0	19.8	19.8	19.8
		50	24	19.8	19.7	19.8
		50	49	19.7	19.7	19.8
		100	0	19.7	19.7	19.8

7.3.4. LTE 12

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 12 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23017	23095	23173
				699.7 MHz	707.5 MHz	715.3 MHz
1.4	QPSK	1	0	24.4	24.4	24.2
		1	2	24.4	24.4	24.3
		1	5	24.3	24.4	24.2
		3	0	24.4	24.3	24.3
		3	1	24.4	24.4	24.3
		3	2	24.4	24.4	24.3
		6	0	23.3	23.3	23.3
	16QAM	1	0	23.3	23.0	22.9
		1	2	23.3	23.1	22.9
		1	5	23.3	23.0	22.9
		3	0	23.1	23.0	23.1
		3	1	23.2	23.0	23.1
		3	2	23.2	23.0	23.1
		6	0	21.9	22.0	22.1
	64QAM	1	0	22.3	22.1	22.1
		1	2	22.4	22.2	22.2
		1	5	22.3	22.2	22.1
		3	0	22.2	21.9	22.1
		3	1	22.3	22.0	22.2
		3	2	22.3	22.0	22.2
		6	0	20.9	21.1	21.3

OUTPUT POWER FOR LTE BAND 12 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23025	23095	23165
				700.5 MHz	707.5 MHz	714.5 MHz
3.0	QPSK	1	0	24.6	24.5	24.4
		1	7	24.6	24.5	24.5
		1	14	24.5	24.4	24.4
		8	0	23.5	23.4	23.4
		8	4	23.5	23.4	23.5
		8	7	23.5	23.4	23.5
		15	0	23.5	23.4	23.4
	16QAM	1	0	23.5	22.9	23.0
		1	7	23.5	23.0	23.1
		1	14	23.4	22.8	23.1
		8	0	22.2	22.1	21.9
		8	4	22.2	22.1	22.1
		8	7	22.2	22.1	22.1
		15	0	22.2	22.0	21.9
	64QAM	1	0	22.2	22.3	22.2
		1	7	22.2	22.4	22.3
		1	14	22.1	22.3	22.2
		8	0	21.1	21.1	20.9
		8	4	21.1	21.1	21.1
		8	7	21.1	21.1	21.1
		15	0	21.1	21.0	21.0

OUTPUT POWER FOR LTE BAND 12 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23035	23095	23155
				701.5 MHz	707.5 MHz	713.5 MHz
5.0	QPSK	1	0	24.4	24.5	24.4
		1	12	24.4	24.5	24.3
		1	24	24.3	24.5	24.4
		12	0	23.4	23.4	23.3
		12	6	23.4	23.4	23.3
		12	11	23.4	23.4	23.3
		25	0	23.4	23.4	23.3
	16QAM	1	0	23.5	23.2	23.0
		1	12	23.5	23.1	23.0
		1	24	23.4	23.1	23.1
		12	0	22.1	22.1	22.0
		12	6	22.1	22.1	22.0
		12	11	22.1	22.1	22.0
		25	0	22.1	22.0	21.9
	64QAM	1	0	22.4	22.0	22.2
		1	12	22.3	21.9	22.2
		1	24	22.2	21.9	22.3
		12	0	21.0	21.1	21.1
		12	6	21.0	21.1	21.0
		12	11	21.0	21.1	21.0
		25	0	21.0	21.0	21.0

OUTPUT POWER FOR LTE BAND 12 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23060	23095	23130
				704.0 MHz	707.5 MHz	711.0 MHz
10.0	QPSK	1	0	24.5	24.3	24.4
		1	24	24.6	24.4	24.3
		1	49	24.5	24.4	24.4
		25	0	23.6	23.4	23.3
		25	12	23.6	23.4	23.3
		25	24	23.6	23.4	23.3
		50	0	23.6	23.4	23.3
	16QAM	1	0	23.5	22.9	22.9
		1	24	23.5	22.9	22.9
		1	49	23.4	22.9	22.9
		25	0	22.2	22.1	22.0
		25	12	22.2	22.0	22.0
		25	24	22.2	22.0	22.0
		50	0	22.2	22.0	21.9
	64QAM	1	0	22.2	22.3	22.1
		1	24	22.3	22.3	22.0
		1	49	22.3	22.3	22.1
		25	0	21.3	21.1	21.0
		25	12	21.3	21.1	21.0
		25	24	21.3	21.1	21.1
		50	0	21.3	21.1	20.9

7.3.5. LTE 13

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 13 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23207 779.5 MHz	23230 782.0 MHz	23255 784.5 MHz
5.0	QPSK	1	0	24.5	24.5	24.5
		1	12	24.4	24.5	24.4
		1	24	24.5	24.6	24.5
		12	0	23.5	23.5	23.5
		12	6	23.6	23.6	23.6
		12	11	23.6	23.6	23.6
		25	0	23.6	23.6	23.6
	16QAM	1	0	23.4	23.2	23.4
		1	12	23.4	23.2	23.4
		1	24	23.4	23.3	23.4
		12	0	22.1	22.2	22.1
		12	6	22.2	22.2	22.2
		12	11	22.2	22.2	22.2
		25	0	22.2	22.1	22.2
	64QAM	1	0	21.2	21.2	21.1
		1	12	22.3	22.3	22.2
		1	24	22.4	22.4	22.3
		12	0	21.1	21.1	21.1
		12	6	21.3	21.2	21.3
		12	11	21.3	21.2	21.2
		25	0	21.2	21.2	21.2

OUTPUT POWER FOR LTE BAND 13 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				N/A	23230 782.0 MHz	N/A
10.0	QPSK	1	0		24.5	
		1	24		24.4	
		1	49		24.5	
		25	0		23.5	
		25	12		23.6	
		25	24		23.6	
		50	0		23.6	
	16QAM	1	0		23.4	
		1	24		23.4	
		1	49		23.4	
		25	0		22.1	
		25	12		22.2	
		25	24		22.2	
		50	0		22.2	
	64QAM	1	0		22.2	
		1	24		22.2	
		1	49		22.2	
		25	0		21.2	
		25	12		21.3	
		25	24		21.3	
		50	0		21.2	

7.3.6. LTE 26 (FCC PART 90S)

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 26 (FCC PART 90S) (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26697	26740	26783
				814.7 MHz	819.0 MHz	823.3 MHz
1.4	QPSK	1	0	23.0	23.0	23.0
		1	2	23.0	23.0	23.0
		1	5	23.0	23.0	23.0
		3	0	22.9	22.8	22.9
		3	1	23.0	22.9	22.9
		3	2	23.0	22.9	22.9
		6	0	23.0	23.0	22.9
	16QAM	1	0	22.6	22.8	22.7
		1	2	22.6	22.7	22.7
		1	5	22.6	22.6	22.7
		3	0	22.7	22.7	22.7
		3	1	22.7	22.7	22.7
		3	2	22.7	22.7	22.7
		6	0	22.2	22.3	22.4
	64QAM	1	0	22.2	22.3	22.4
		1	2	22.3	22.2	22.2
		1	5	22.2	22.2	22.2
		3	0	22.2	22.2	22.2
		3	1	22.3	22.3	22.3
		3	2	22.3	22.3	22.3
		6	0	21.4	21.6	21.7

OUTPUT POWER FOR LTE BAND 26 (FCC PART 90S) (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26705	26740	26775
				815.5 MHz	819.0 MHz	822.5 MHz
3.0	QPSK	1	0	23.1	23.1	23.1
		1	7	23.2	23.1	23.1
		1	14	23.1	23.2	23.1
		8	0	23.1	23.0	23.0
		8	4	23.1	23.0	23.0
		8	7	23.2	23.0	23.0
		15	0	23.1	23.0	23.0
	16QAM	1	0	23.0	23.0	23.1
		1	7	23.1	23.1	23.1
		1	14	23.0	23.1	23.1
		8	0	22.2	22.3	22.2
		8	4	22.3	22.4	22.3
		8	7	22.3	22.2	22.2
		15	0	22.2	22.3	22.2
	64QAM	1	0	22.3	22.4	22.4
		1	7	22.4	22.3	22.4
		1	14	22.3	22.3	22.4
		8	0	21.2	21.3	21.3
		8	4	21.3	21.3	21.2
		8	7	21.3	21.3	21.3
		15	0	21.2	21.3	21.3

OUTPUT POWER FOR LTE BAND 26 (FCC PART 90S) (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26715	26740	26765
				816.5 MHz	819.0 MHz	821.5 MHz
5.0	QPSK	1	0	23.3	23.1	23.1
		1	12	23.2	23.2	23.1
		1	24	23.2	23.2	23.1
		12	0	23.1	23.2	23.2
		12	6	23.1	23.2	23.2
		12	11	23.1	23.1	23.1
		25	0	23.2	23.2	23.1
	16QAM	1	0	22.9	23.1	23.1
		1	12	22.8	23.1	23.1
		1	24	22.8	23.1	23.1
		12	0	22.2	22.3	22.4
		12	6	22.3	22.3	22.3
		12	11	22.3	22.2	22.2
		25	0	22.2	22.3	22.2
	64QAM	1	0	22.5	22.4	22.3
		1	12	22.5	22.4	22.3
		1	24	22.5	22.3	22.3
		12	0	21.2	21.4	21.3
		12	6	21.2	21.4	21.2
		12	11	21.2	21.3	21.3
		25	0	21.2	21.3	21.3

OUTPUT POWER FOR LTE BAND 26 (FCC PART 90S) (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				N/A	26740	N/A
				N/A	819.0 MHz	N/A
10.0	QPSK	1	0		23.1	
		1	24		23.2	
		1	49		23.1	
		25	0		23.1	
		25	12		23.1	
		25	24		23.2	
		50	0		23.1	
	16QAM	1	0		23.1	
		1	24		23.1	
		1	49		23.0	
		25	0		22.3	
		25	12		22.3	
		25	24		22.3	
		50	0		22.3	
	64QAM	1	0		22.4	
		1	24		22.4	
		1	49		22.3	
		25	0		21.4	
		25	12		21.4	
		25	24		21.3	
		50	0		21.3	

7.3.7. LTE 26 (FCC PART 22)

ID:	38515	Date:	6/19/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 26 (FCC PART 22) (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26797 824.7 MHz	26915 836.5 MHz	27033 848.3 MHz
1.4	QPSK	1	0	22.9	22.9	23.0
		1	2	23.0	22.9	23.0
		1	5	22.9	22.9	22.9
		3	0	22.8	22.9	22.8
		3	1	22.8	22.9	22.9
		3	2	22.8	22.9	22.9
		6	0	22.8	22.9	22.9
	16QAM	1	0	22.8	22.8	22.5
		1	2	22.8	22.9	22.6
		1	5	22.8	22.8	22.5
		3	0	22.5	22.6	22.5
		3	1	22.6	22.6	22.5
		3	2	22.6	22.6	22.5
		6	0	21.9	21.8	22.1
	64QAM	1	0	22.4	22.4	22.1
		1	2	22.5	22.5	22.2
		1	5	22.3	22.3	22.1
		3	0	22.3	22.3	21.9
		3	1	22.4	22.4	21.9
		3	2	22.4	22.3	21.9
		6	0	21.0	20.9	21.1

OUTPUT POWER FOR LTE BAND 26 (FCC PART 22) (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26805 825.5 MHz	26915 836.5 MHz	27025 847.5 MHz
3.0	QPSK	1	0	22.9	22.9	23.0
		1	7	23.0	23.0	23.0
		1	14	23.0	23.0	22.9
		8	0	22.8	23.0	23.0
		8	4	22.8	23.0	23.0
		8	7	22.7	23.0	23.0
		15	0	22.7	22.9	23.0
	16QAM	1	0	22.7	22.5	22.5
		1	7	22.5	22.5	22.6
		1	14	22.5	22.4	22.5
		8	0	22.1	22.1	22.1
		8	4	22.1	22.2	22.1
		8	7	21.9	22.2	22.1
		15	0	21.9	22.1	22.0
	64QAM	1	0	22.4	22.3	22.3
		1	7	22.2	22.4	22.3
		1	14	22.2	22.3	22.2
		8	0	21.2	21.1	21.0
		8	4	21.2	21.2	21.1
		8	7	21.0	21.2	21.1
		15	0	21.1	21.1	21.1

OUTPUT POWER FOR LTE BAND 26 (FCC PART 22) (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26815	26915	27015
				826.5 MHz	836.5 MHz	846.5 MHz
5.0	QPSK	1	0	22.9	23.1	23.1
		1	12	22.9	23.0	23.0
		1	24	22.9	23.0	23.0
		12	0	22.8	23.0	23.0
		12	6	22.8	23.0	23.0
		12	11	22.8	23.0	23.0
		25	0	22.8	23.0	23.0
	16QAM	1	0	22.6	22.7	22.7
		1	12	22.3	22.6	22.6
		1	24	22.5	22.6	22.6
		12	0	22.1	22.1	22.1
		12	6	22.1	22.1	22.1
		12	11	21.9	22.1	22.1
		25	0	21.9	22.0	22.0
	64QAM	1	0	22.3	22.0	22.3
		1	12	22.2	21.9	22.3
		1	24	22.2	21.9	22.3
		12	0	21.2	21.1	21.2
		12	6	21.1	21.1	21.2
		12	11	21.0	21.1	21.1
		25	0	21.1	21.0	21.1

OUTPUT POWER FOR LTE BAND 26 (FCC PART 22) (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26840	26915	26990
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0	23.0	23.0	23.1
		1	24	23.0	23.0	22.9
		1	49	22.9	22.8	22.9
		25	0	23.0	23.0	23.1
		25	12	22.9	23.0	23.0
		25	24	22.9	23.0	23.0
		50	0	22.9	23.0	23.0
	16QAM	1	0	22.7	22.6	22.6
		1	24	22.4	22.4	22.6
		1	49	22.5	22.4	22.4
		25	0	22.1	22.1	22.2
		25	12	22.1	22.1	22.3
		25	24	22.0	22.0	22.2
		50	0	22.0	22.0	22.1
	64QAM	1	0	22.2	22.5	22.3
		1	24	22.3	22.3	22.3
		1	49	22.3	22.3	22.1
		25	0	21.2	21.2	21.2
		25	12	21.1	21.1	21.2
		25	24	21.1	21.1	21.2
		50	0	21.1	21.1	21.2

OUTPUT POWER FOR LTE BAND 26 (FCC PART 22) (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26865	26915	26965
				831.5 MHz	836.5 MHz	841.5 MHz
15.0	QPSK	1	0	23.0	23.1	23.2
		1	37	23.0	23.0	23.2
		1	74	22.8	22.8	23.0
		36	0	23.0	23.0	23.1
		36	16	23.0	23.0	23.1
		36	35	23.0	22.9	23.1
		75	0	23.0	22.9	23.1
	16QAM	1	0	22.6	23.0	23.1
		1	37	22.4	22.9	23.1
		1	74	22.4	22.8	22.9
		36	0	22.1	22.2	22.2
		36	16	22.1	22.1	22.2
		36	35	22.0	22.1	22.2
		75	0	22.0	22.1	22.2
	64QAM	1	0	22.4	22.4	22.8
		1	37	22.4	22.4	22.8
		1	74	22.2	22.2	22.6
		36	0	21.2	21.2	21.2
		36	16	21.2	21.2	21.2
		36	35	21.1	21.1	21.3
		75	0	21.1	21.1	21.2

7.3.8. LTE 41

ID:	40814	Date:	6/20/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (FCC) (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39675 2498.5 MHz	40620 2593.0 MHz	41565 2687.5 MHz
5.0	QPSK	1	0	24.0	24.0	24.1
		1	12	23.9	24.0	24.1
		1	24	24.0	24.0	24.1
		12	0	23.6	23.6	23.7
		12	6	23.6	23.6	23.7
		12	11	23.6	23.6	23.7
	16QAM	25	0	23.6	23.5	23.6
		1	0	23.0	23.1	23.1
		1	12	23.0	23.2	23.1
		1	24	23.1	23.2	23.1
		12	0	22.1	22.2	22.2
		12	6	22.2	22.2	22.2
	64QAM	12	11	22.2	22.1	22.2
		25	0	22.2	22.1	22.2
		1	0	21.8	22.2	22.6
		1	12	21.8	22.2	22.6
		1	24	21.8	22.2	22.6
		12	0	21.1	21.1	21.3
	64QAM	12	6	21.2	21.1	21.3
		12	11	21.1	21.1	21.3
		25	0	21.2	21.0	21.2

OUTPUT POWER FOR LTE BAND 41 (FCC) (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39700 2501.0 MHz	40620 2593.0 MHz	41540 2685.0 MHz
10.0	QPSK	1	0	24.1	24.1	24.2
		1	24	24.0	24.0	24.1
		1	49	24.1	24.0	24.1
		25	0	23.6	23.6	23.7
		25	12	23.7	23.6	23.7
		25	24	23.6	23.6	23.6
	16QAM	50	0	23.6	23.6	23.7
		1	0	23.1	23.1	23.4
		1	24	23.1	23.0	23.3
		1	49	23.1	23.0	23.3
		25	0	22.1	22.1	22.3
		25	12	22.2	22.2	22.2
	64QAM	25	24	22.2	22.1	22.2
		50	0	22.2	22.1	22.3
		1	0	22.4	21.7	22.4
		1	24	22.3	21.7	22.3
		1	49	22.4	21.6	22.3
		25	0	21.1	21.2	21.2
	64QAM	25	12	21.2	21.2	21.2
		25	24	21.1	21.2	21.1
		50	0	21.2	21.1	21.2

OUTPUT POWER FOR LTE BAND 41 (FCC) (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39725	40620	41515
				2503.5 MHz	2593.0 MHz	2682.5 MHz
15.0	QPSK	1	0	24.0	24.1	24.3
		1	37	24.0	24.0	24.1
		1	74	24.1	24.0	24.1
		36	0	23.6	23.6	23.7
		36	16	23.6	23.6	23.7
		36	35	23.6	23.5	23.6
		75	0	23.6	23.6	23.7
	16QAM	1	0	23.1	23.1	23.4
		1	37	23.1	23.0	23.2
		1	74	23.1	23.1	23.2
		36	0	22.1	22.2	22.3
		36	16	22.2	22.1	22.3
		36	35	22.2	22.1	22.2
		75	0	22.2	22.1	22.2
	64QAM	1	0	22.4	21.8	22.2
		1	37	22.3	21.6	22.0
		1	74	22.4	21.7	22.0
		36	0	21.2	21.2	21.3
		36	16	21.3	21.2	21.2
		36	35	21.2	21.2	21.2
		75	0	21.2	21.1	21.3

OUTPUT POWER FOR LTE BAND 41 (FCC) (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39750	40620	41490
				2506.0 MHz	2593.0 MHz	2680.0 MHz
20.0	QPSK	1	0	24.1	24.2	24.4
		1	49	24.0	24.0	24.2
		1	99	24.1	24.1	24.1
		50	0	23.6	23.6	23.7
		50	24	23.6	23.6	23.7
		50	49	23.6	23.5	23.6
		100	0	23.6	23.5	23.7
	16QAM	1	0	23.0	23.2	23.5
		1	49	22.9	23.0	23.3
		1	99	23.0	23.1	23.2
		50	0	22.2	22.2	22.4
		50	24	22.2	22.2	22.3
		50	49	22.2	22.1	22.3
		100	0	22.2	22.1	22.3
	64QAM	1	0	22.2	22.2	22.8
		1	49	22.1	22.0	22.6
		1	99	22.2	22.1	22.5
		50	0	21.2	21.2	21.3
		50	24	21.3	21.2	21.3
		50	49	21.2	21.1	21.2
		100	0	21.3	21.2	21.3

7.3.9. LTE 66

ID:	40814	Date:	6/20/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 66 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				131979 1710.7 MHz	132322 1745.0 MHz	132665 1779.3 MHz
1.4	QPSK	1	0	20.7	20.6	20.6
		1	2	20.7	20.6	20.7
		1	5	20.6	20.5	20.6
		3	0	20.6	20.6	20.6
		3	1	20.7	20.6	20.7
		3	2	20.7	20.6	20.7
	16QAM	6	0	20.6	20.6	20.6
		1	0	20.3	20.1	20.5
		1	2	20.4	20.2	20.6
		1	5	20.3	20.1	20.5
		3	0	20.3	20.3	20.3
		3	1	20.3	20.4	20.4
	64QAM	3	2	20.3	20.3	20.4
		6	0	20.4	20.4	20.1
		1	0	20.4	20.6	20.3
		1	2	20.4	20.6	20.4
		1	5	20.3	20.5	20.3
		3	0	20.4	20.5	20.1
		3	1	20.5	20.6	20.2
		3	2	20.5	20.6	20.2
		6	0	20.6	20.2	20.2

OUTPUT POWER FOR LTE BAND 66 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				131987 1711.5 MHz	132322 1745.0 MHz	132657 1778.5 MHz
3.0	QPSK	1	0	20.7	20.7	20.6
		1	7	20.8	20.7	20.7
		1	14	20.7	20.7	20.6
		8	0	20.7	20.7	20.7
		8	4	20.7	20.7	20.7
		8	7	20.7	20.7	20.7
		15	0	20.7	20.7	20.7
	16QAM	1	0	20.7	20.1	20.3
		1	7	20.8	20.2	20.3
		1	14	20.7	20.1	20.2
		8	0	20.4	20.4	20.3
		8	4	20.4	20.4	20.3
		8	7	20.4	20.4	20.3
		15	0	20.4	20.3	20.2
	64QAM	1	0	20.4	20.6	20.5
		1	7	20.5	20.6	20.5
		1	14	20.4	20.5	20.4
		8	0	20.4	20.3	20.2
		8	4	20.4	20.4	20.3
		8	7	20.4	20.4	20.2
		15	0	20.4	20.3	20.3

OUTPUT POWER FOR LTE BAND 66 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				131997	132322	132647
				1712.5 MHz	1745.0 MHz	1777.5 MHz
5.0	QPSK	1	0	20.8	20.8	20.8
		1	12	20.7	20.8	20.7
		1	24	20.7	20.8	20.7
		12	0	20.8	20.7	20.7
		12	6	20.8	20.7	20.7
		12	11	20.7	20.7	20.7
		25	0	20.8	20.8	20.7
	16QAM	1	0	20.8	20.4	20.4
		1	12	20.8	20.4	20.3
		1	24	20.8	20.4	20.3
		12	0	20.5	20.4	20.3
		12	6	20.5	20.4	20.4
		12	11	20.5	20.4	20.4
		25	0	20.4	20.3	20.3
	64QAM	1	0	20.7	20.3	20.6
		1	12	20.6	20.2	20.5
		1	24	20.6	20.2	20.6
		12	0	20.3	20.4	20.4
		12	6	20.3	20.4	20.4
		12	11	20.3	20.4	20.3
		25	0	20.4	20.3	20.3

OUTPUT POWER FOR LTE BAND 66 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				132022	132322	132622
				1715.0 MHz	1745.0 MHz	1775.0 MHz
10.0	QPSK	1	0	20.8	20.8	20.7
		1	24	20.7	20.6	20.7
		1	49	20.7	20.7	20.6
		25	0	20.8	20.8	20.8
		25	12	20.8	20.8	20.8
		25	24	20.7	20.7	20.7
		50	0	20.7	20.8	20.7
	16QAM	1	0	20.7	20.2	20.3
		1	24	20.7	20.1	20.3
		1	49	20.6	20.1	20.2
		25	0	20.4	20.3	20.4
		25	12	20.4	20.4	20.4
		25	24	20.4	20.3	20.3
		50	0	20.4	20.3	20.3
	64QAM	1	0	20.5	20.6	20.6
		1	24	20.4	20.6	20.5
		1	49	20.5	20.6	20.5
		25	0	20.5	20.4	20.4
		25	12	20.5	20.4	20.5
		25	24	20.5	20.4	20.4
		50	0	20.5	20.4	20.4

OUTPUT POWER FOR LTE BAND 66 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				132047	132322	132597
				1717.5 MHz	1745.0 MHz	1772.5 MHz
15.0	QPSK	1	0	20.9	20.8	20.7
		1	37	20.8	20.7	20.7
		1	74	20.9	20.6	20.6
		36	0	20.8	20.8	20.7
		36	16	20.8	20.7	20.6
		36	35	20.8	20.7	20.6
		75	0	20.9	20.7	20.7
	16QAM	1	0	20.8	20.2	20.5
		1	37	20.7	20.1	20.5
		1	74	20.8	20.1	20.5
		36	0	20.5	20.3	20.3
		36	16	20.5	20.3	20.2
		36	35	20.5	20.3	20.2
		75	0	20.5	20.3	20.3
	64QAM	1	0	20.6	20.7	20.7
		1	37	20.4	20.6	20.7
		1	74	20.5	20.5	20.7
		36	0	20.5	20.4	20.3
		36	16	20.5	20.4	20.3
		36	35	20.5	20.4	20.2
		75	0	20.5	20.4	20.3

OUTPUT POWER FOR LTE BAND 66 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				132072	132322	132572
				1720.0 MHz	1745.0 MHz	1770.0 MHz
20.0	QPSK	1	0	20.9	20.9	20.9
		1	49	20.7	20.7	20.7
		1	99	20.8	20.6	20.7
		50	0	20.9	20.8	20.9
		50	24	20.9	20.8	20.8
		50	49	20.9	20.7	20.8
		100	0	20.9	20.8	20.8
	16QAM	1	0	20.6	20.6	20.7
		1	49	20.6	20.7	20.6
		1	99	20.7	20.6	20.6
		50	0	20.5	20.4	20.4
		50	24	20.6	20.4	20.4
		50	49	20.5	20.4	20.3
		100	0	20.5	20.4	20.4
	64QAM	1	0	20.6	20.6	20.6
		1	49	20.5	20.6	20.5
		1	99	20.6	20.5	20.5
		50	0	20.5	20.5	20.5
		50	24	20.5	20.4	20.4
		50	49	20.5	20.4	20.4
		100	0	20.5	20.4	20.4

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	190	836.6	246.65	322.1
	EGPRS			244.19	299.7
GSM1900	GPRS	661	1880.0	248.63	318.3
	EGPRS			248.85	314.3

WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND5	REL 99	4408	836.6	4.12	4.68
	HSDPA			4.12	4.67
BAND2	REL 99	9800	1880.0	4.13	4.69
	HSDPA			4.13	4.67
BAND4	REL 99	1638	1732.6	4.12	4.69
	HSDPA			4.12	4.69

LTE2

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 2	1.4 MHz, QPSK	6/0	1880.0	1.09	1.22
	1.4 MHz, 16QAM			1.09	1.24
	3 MHz, QPSK	15/0		2.68	2.94
	3 MHz, 16QAM			2.68	2.97
	5 MHz, QPSK	25/0		4.52	4.92
	5 MHz, 16QAM			4.50	4.93
	10 MHz, QPSK	50/0		8.94	9.64
	10 MHz, 16QAM			8.94	9.70
	15 MHz, QPSK	75/0		13.37	14.44
	15 MHz, 16QAM			13.36	14.42
	20 MHz, QPSK	100/0		17.79	19.09
	20 MHz, 16QAM			17.82	19.06
	20 MHz, 64QAM			17.83	19.34

LTE5

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 5	1.4 MHz, QPSK	6/0	836.5	1.09	1.22
	1.4 MHz, 16QAM			1.09	1.24
	3 MHz, QPSK	15/0		2.69	2.98
	3 MHz, 16QAM			2.69	2.96
	5 MHz, QPSK	25/0		4.53	4.96
	5 MHz, 16QAM			4.50	4.93
	10 MHz, QPSK	50/0		8.94	9.72
	10 MHz, 16QAM			8.95	9.66
	10 MHz, 64QAM			8.95	9.70

LTE7

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 7	5 MHz, QPSK	25/0	2535.0	4.50	4.96
	5 MHz, 16QAM			4.51	4.93
	10 MHz, QPSK	50/0		8.95	9.74
	10 MHz, 16QAM			8.94	9.59
	15 MHz, QPSK	75/0		13.39	14.32
	15 MHz, 16QAM			13.40	14.58
	20 MHz, QPSK	100/0		17.84	19.14
	20 MHz, 16QAM			17.81	19.11
	20 MHz, 64QAM			17.89	19.41

LTE12

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 12	1.4 MHz, QPSK	6/0	707.5	1.09	1.23
	1.4 MHz, 16QAM			1.09	1.24
	3 MHz, QPSK	15/0		2.70	3.01
	3 MHz, 16QAM			2.70	3.00
	5 MHz, QPSK	25/0		4.52	4.98
	5 MHz, 16QAM			4.50	4.97
	10 MHz, QPSK	50/0		8.97	9.82
	10 MHz, 16QAM			8.98	9.80
	10 MHz, 64QAM			8.97	9.79

LTE13

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 13	5 MHz, QPSK	25/0	782.0	4.52	4.97
	5 MHz, 16QAM			4.50	4.94
	10 MHz, QPSK	50/0		8.94	9.84
	10 MHz, 16QAM			8.95	9.74
	10 MHz, 64QAM			8.95	9.75

LTE26 (FCC PART 90S)

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 26	1.4 MHz, QPSK	6/0	819	1.08	1.22
	1.4 MHz, 16QAM			1.09	1.22
	3 MHz, QPSK	15/0		2.69	2.96
	3 MHz, 16QAM			2.69	2.96
	5 MHz, QPSK	25/0		4.53	4.98
	5 MHz, 16QAM			4.50	4.95
	10 MHz, QPSK	50/0		8.96	9.68
	10 MHz, 16QAM			8.93	9.66
	10 MHz, 64QAM			8.94	9.79

LTE26 (FCC PART 22)

TYPE26 (FDD) PART 22

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 26	1.4 MHz, QPSK	6/0	831.5 836.5(15MHz)	1.09	1.23
	1.4 MHz, 16QAM			1.08	1.23
	3 MHz, QPSK	15/0		2.69	2.97
	3 MHz, 16QAM			2.69	2.98
	5 MHz, QPSK	25/0		4.51	4.90
	5 MHz, 16QAM			4.51	4.91
	10 MHz, QPSK	50/0		8.95	9.60
	10 MHz, 16QAM			8.96	9.68
	15 MHz, QPSK	75/0		13.41	14.40
	15 MHz, 16QAM			13.39	14.56
	15 MHz, 64QAM			13.35	14.37


LTE41

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 41	5 MHz, QPSK	25/0	2593.0	4.47	4.89
	5 MHz, 16QAM			4.48	4.86
	10 MHz, QPSK	50/0		8.95	9.49
	10 MHz, 16QAM			8.92	9.51
	15 MHz, QPSK	75/0		13.35	14.21
	15 MHz, 16QAM			13.40	14.07
	20 MHz, QPSK	100/0		17.87	19.12
	20 MHz, 16QAM			17.85	19.23
	20 MHz, 64QAM			17.79	19.06


LTE66

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 66	1.4 MHz, QPSK	6/0	1745.0	1.08	1.22
	1.4 MHz, 16QAM			1.09	1.23
	3 MHz, QPSK	15/0		2.69	2.99
	3 MHz, 16QAM			2.68	2.97
	5 MHz, QPSK	25/0		4.49	4.88
	5 MHz, 16QAM			4.49	4.88
	10 MHz, QPSK	50/0		8.97	9.74
	10 MHz, 16QAM			8.97	9.73
	15 MHz, QPSK	75/0		13.41	14.39
	15 MHz, 16QAM			13.41	14.52
	20 MHz, QPSK	100/0		17.84	19.17
	20 MHz, 16QAM			17.85	19.15
	20 MHz, 64QAM			17.86	19.40


8.1.1. GSM

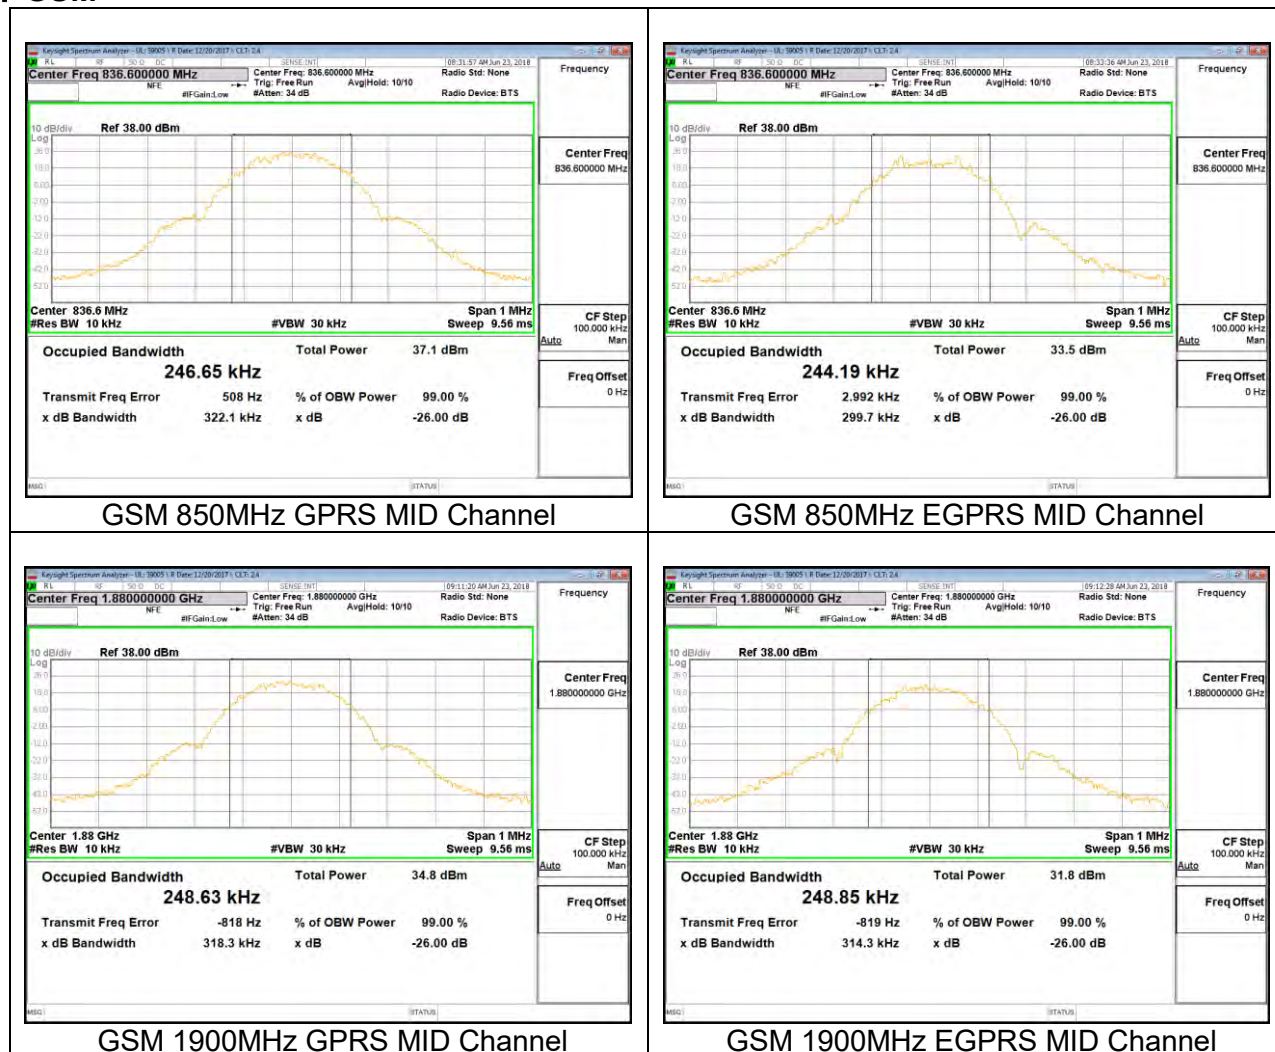



8.1.2. WCDMA

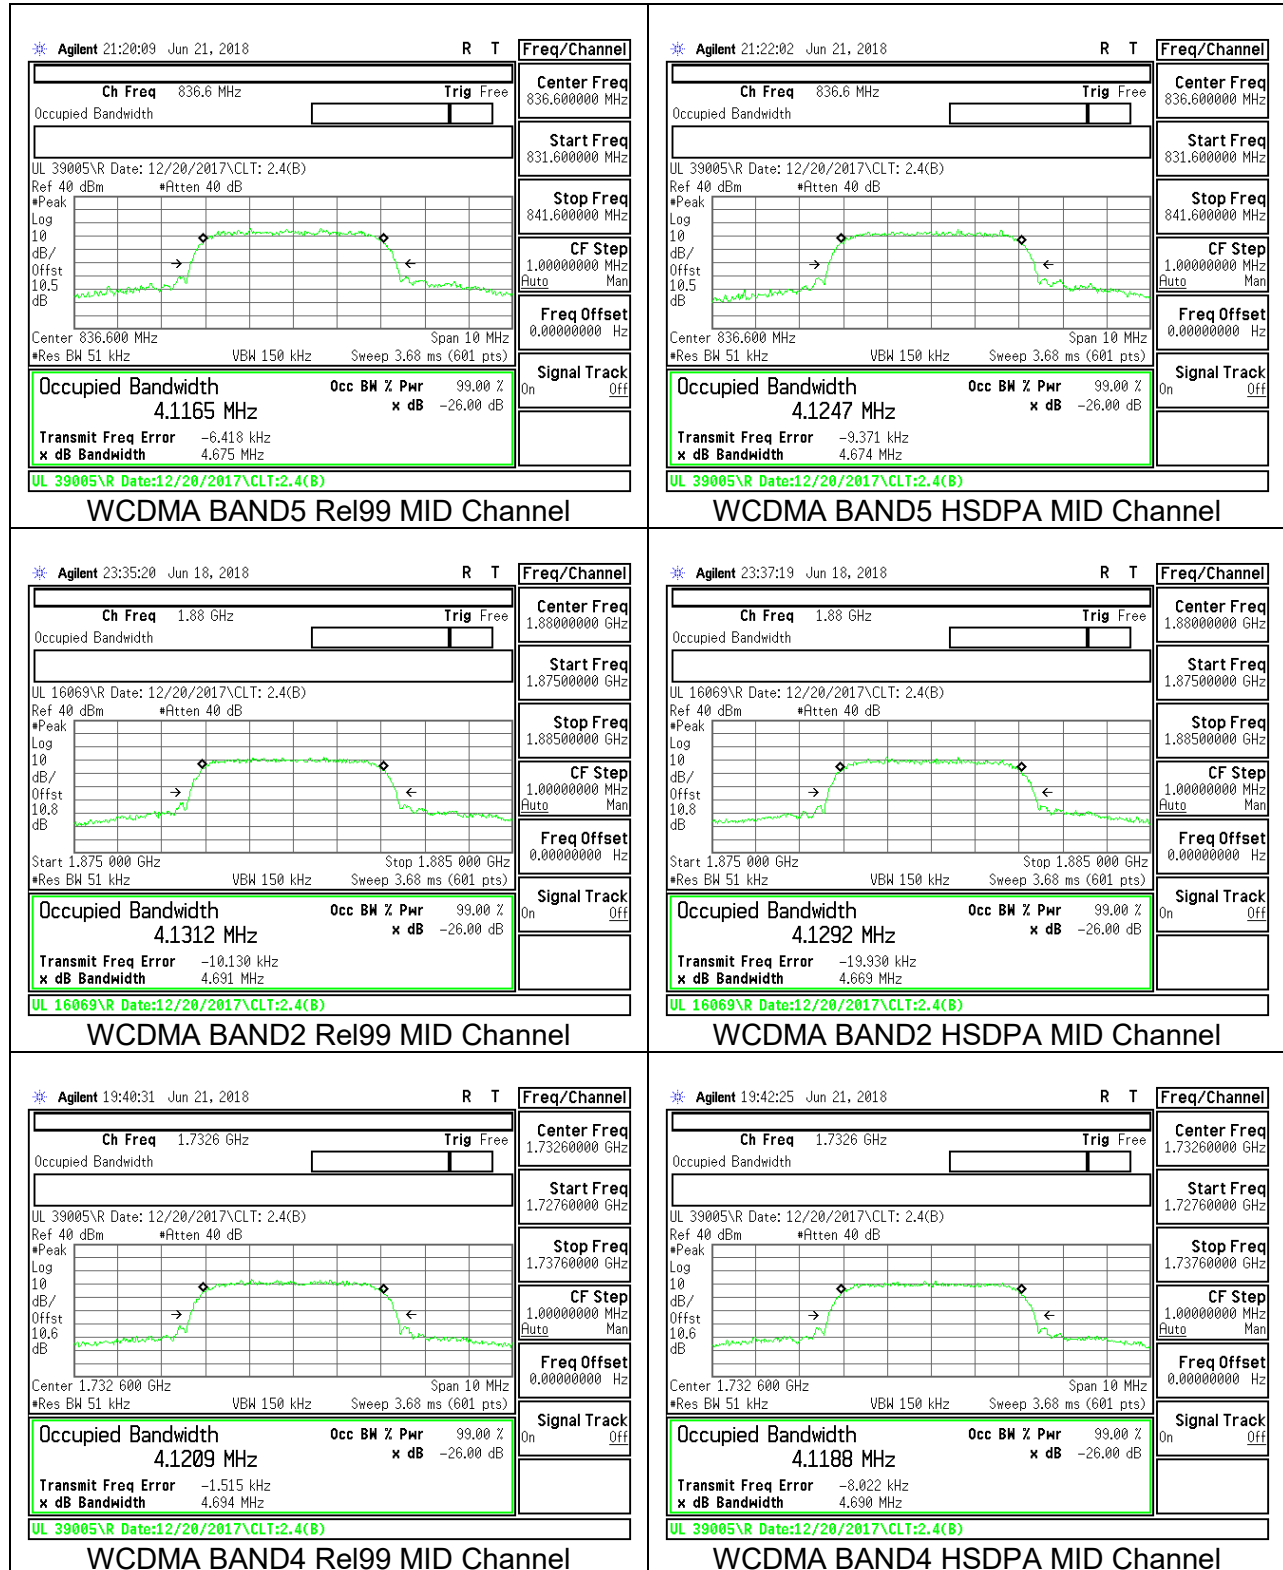


8.1.3. LTE BAND 2

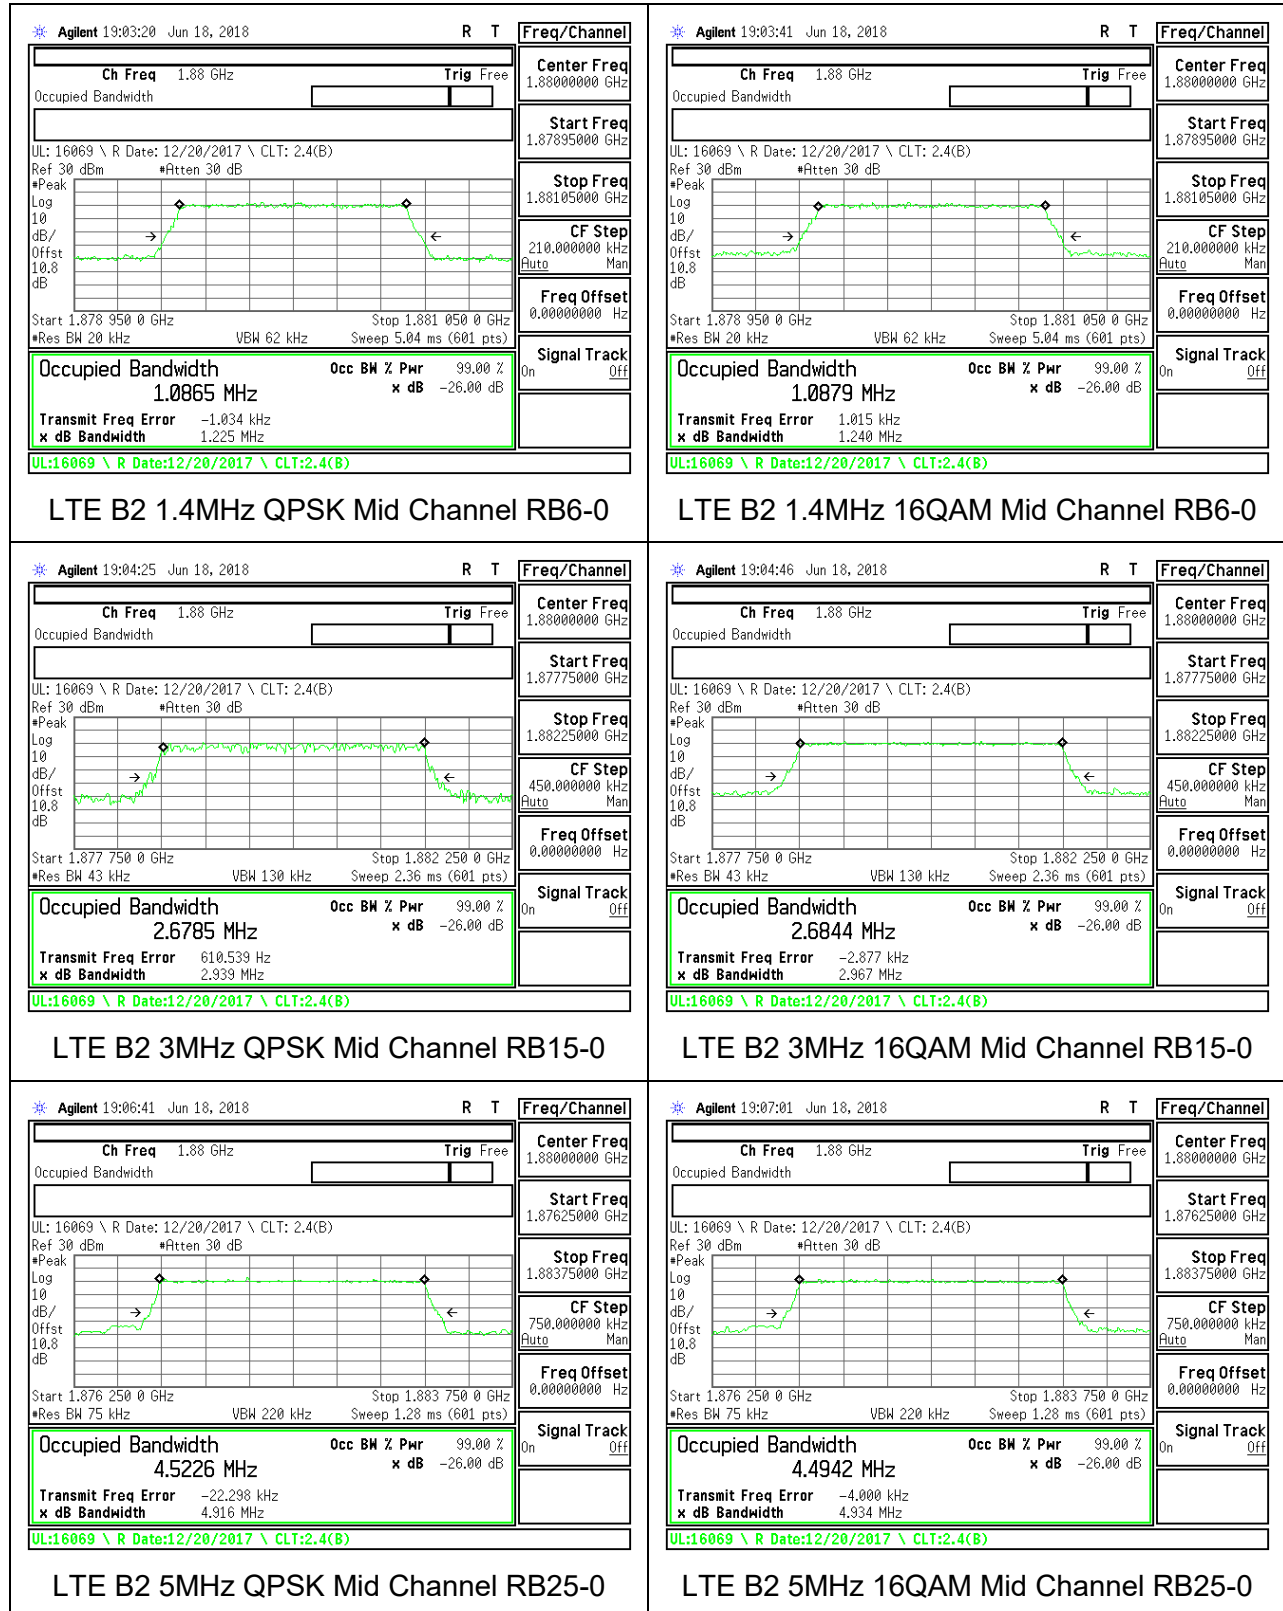


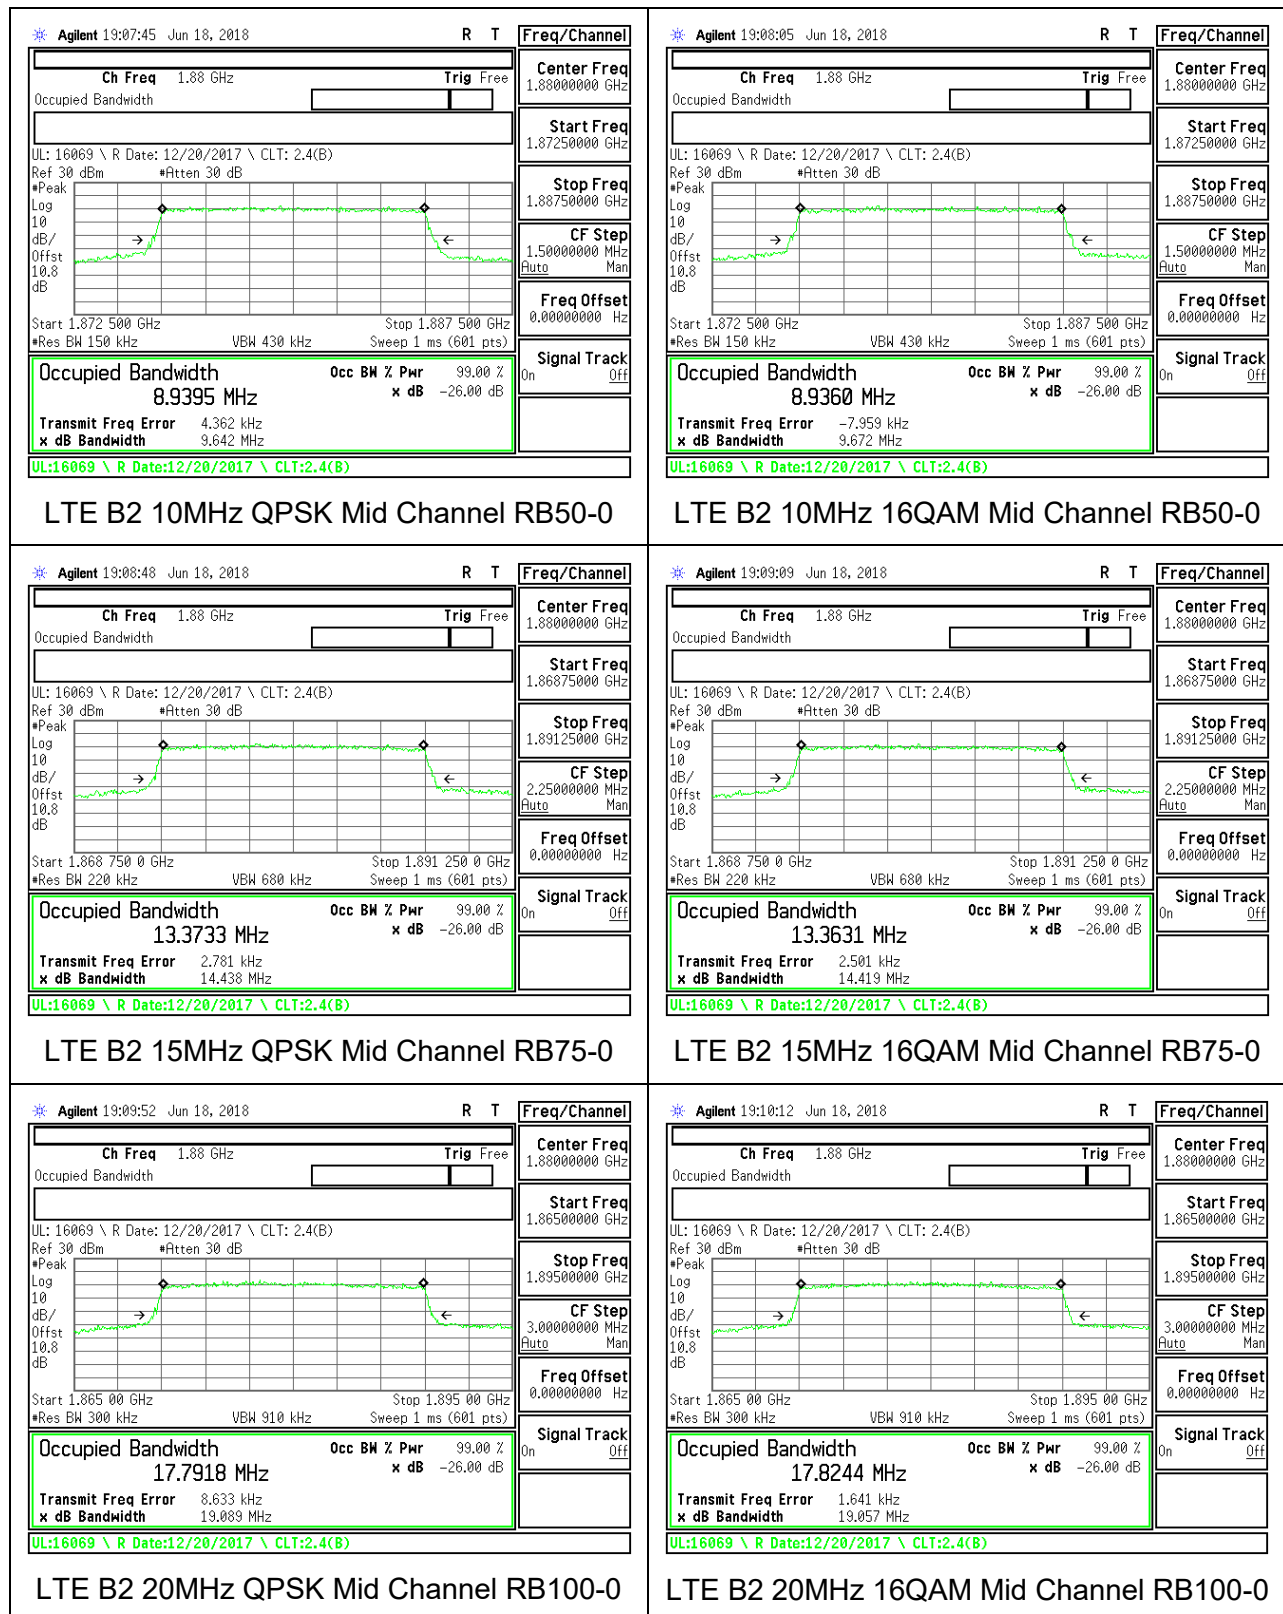

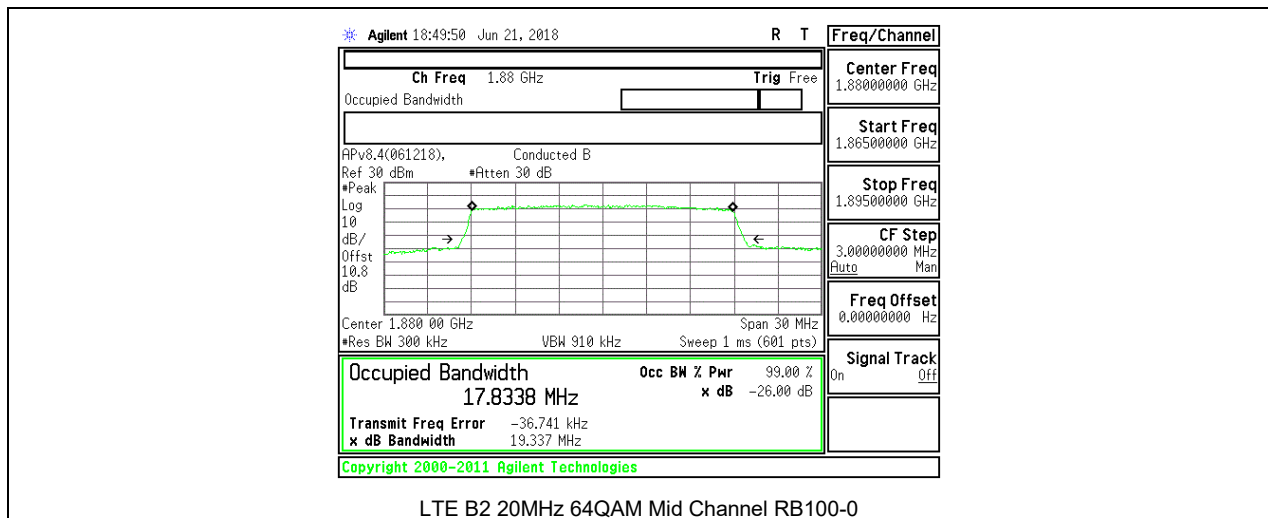



8.1.4. LTE BAND 5

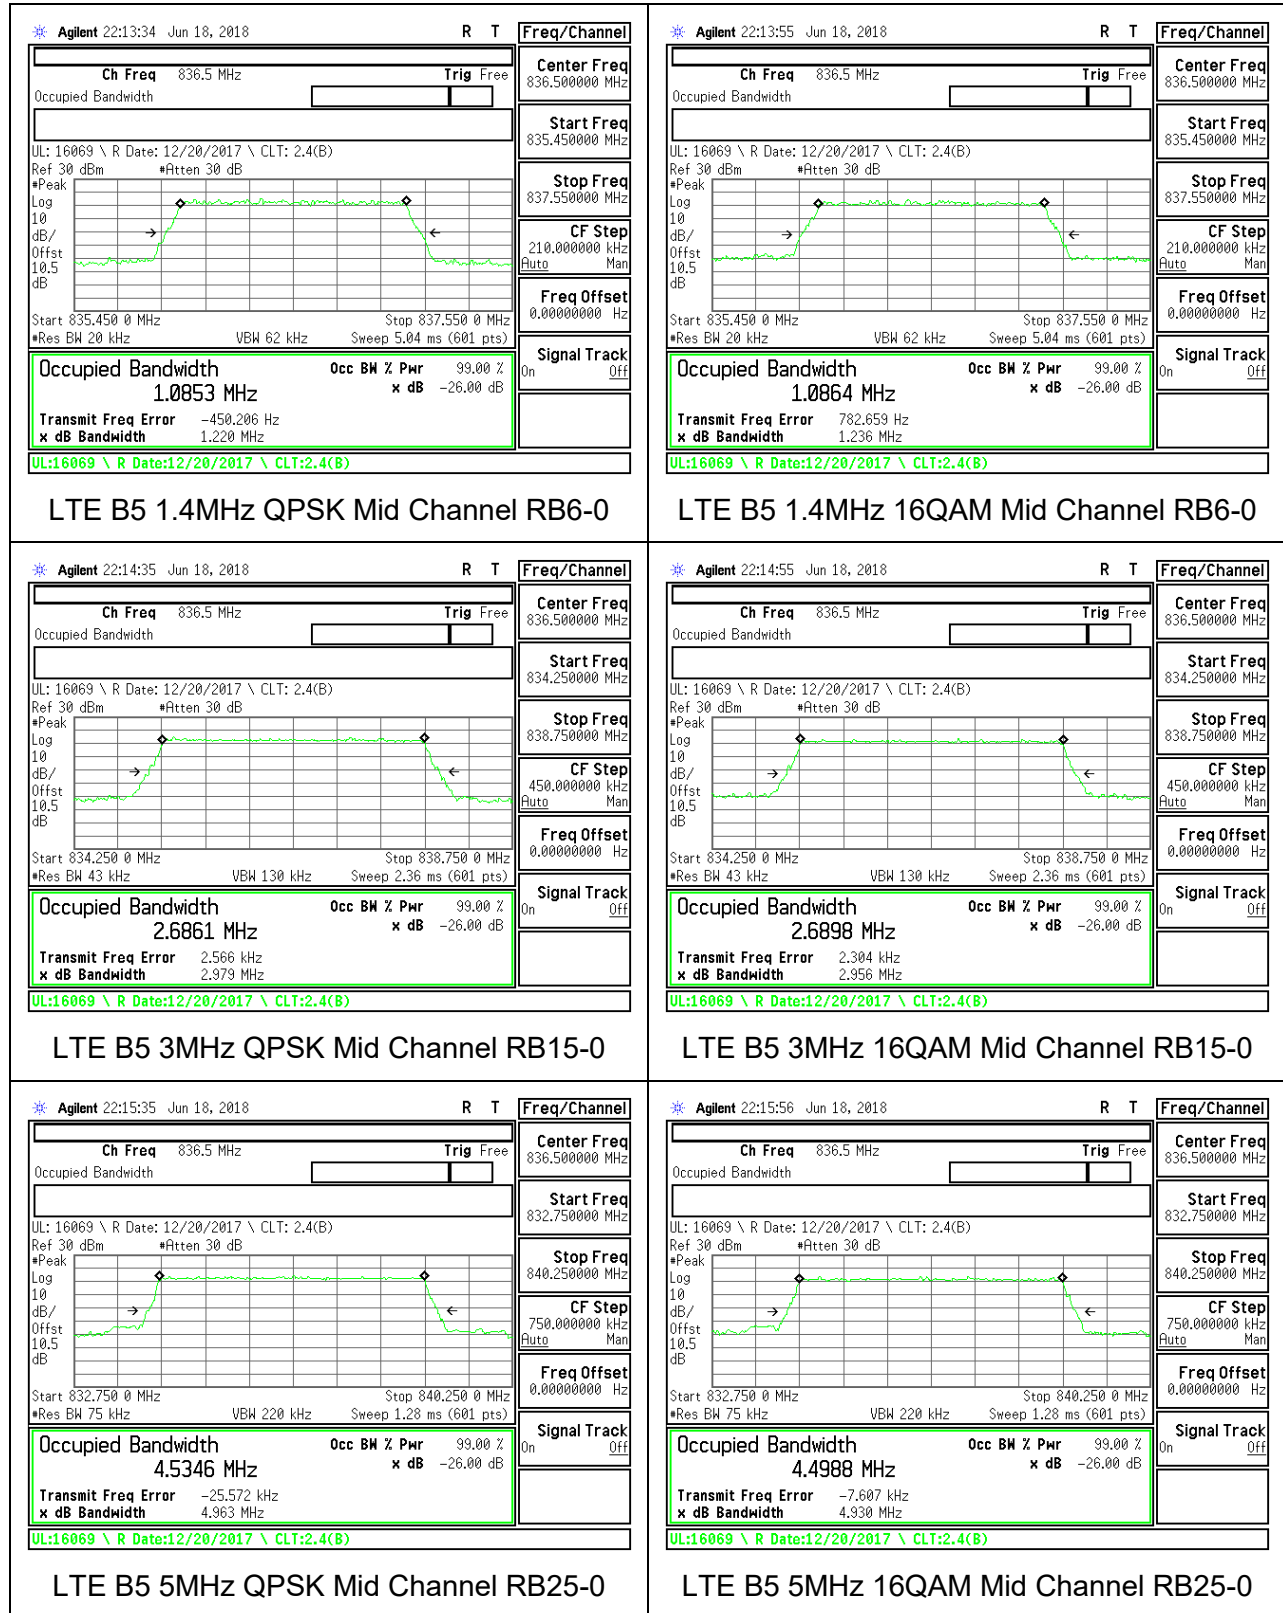

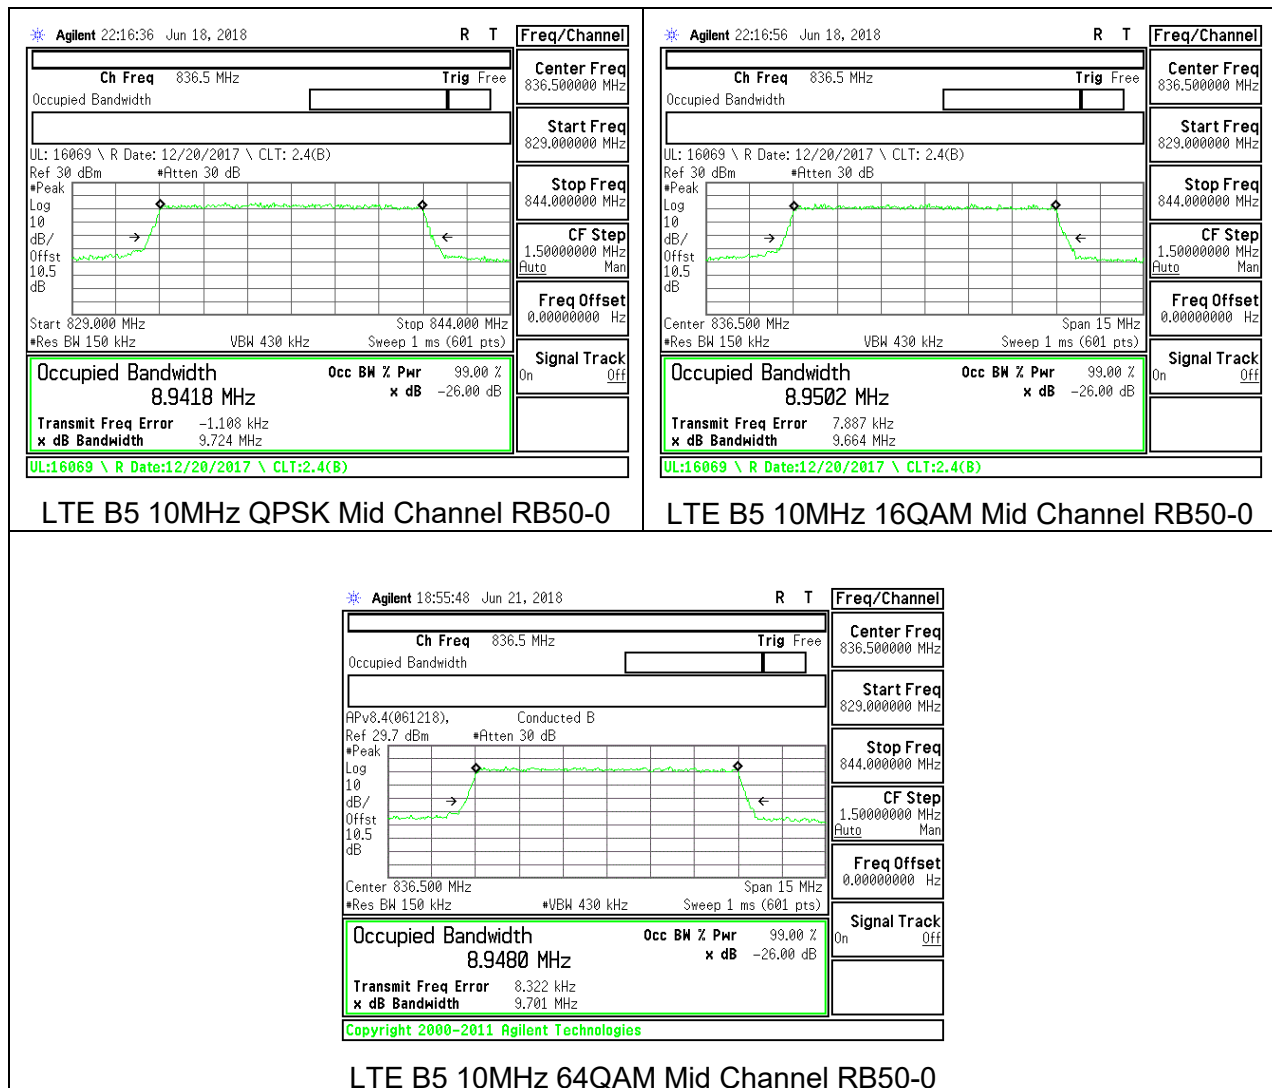


8.1.5. LTE BAND 7

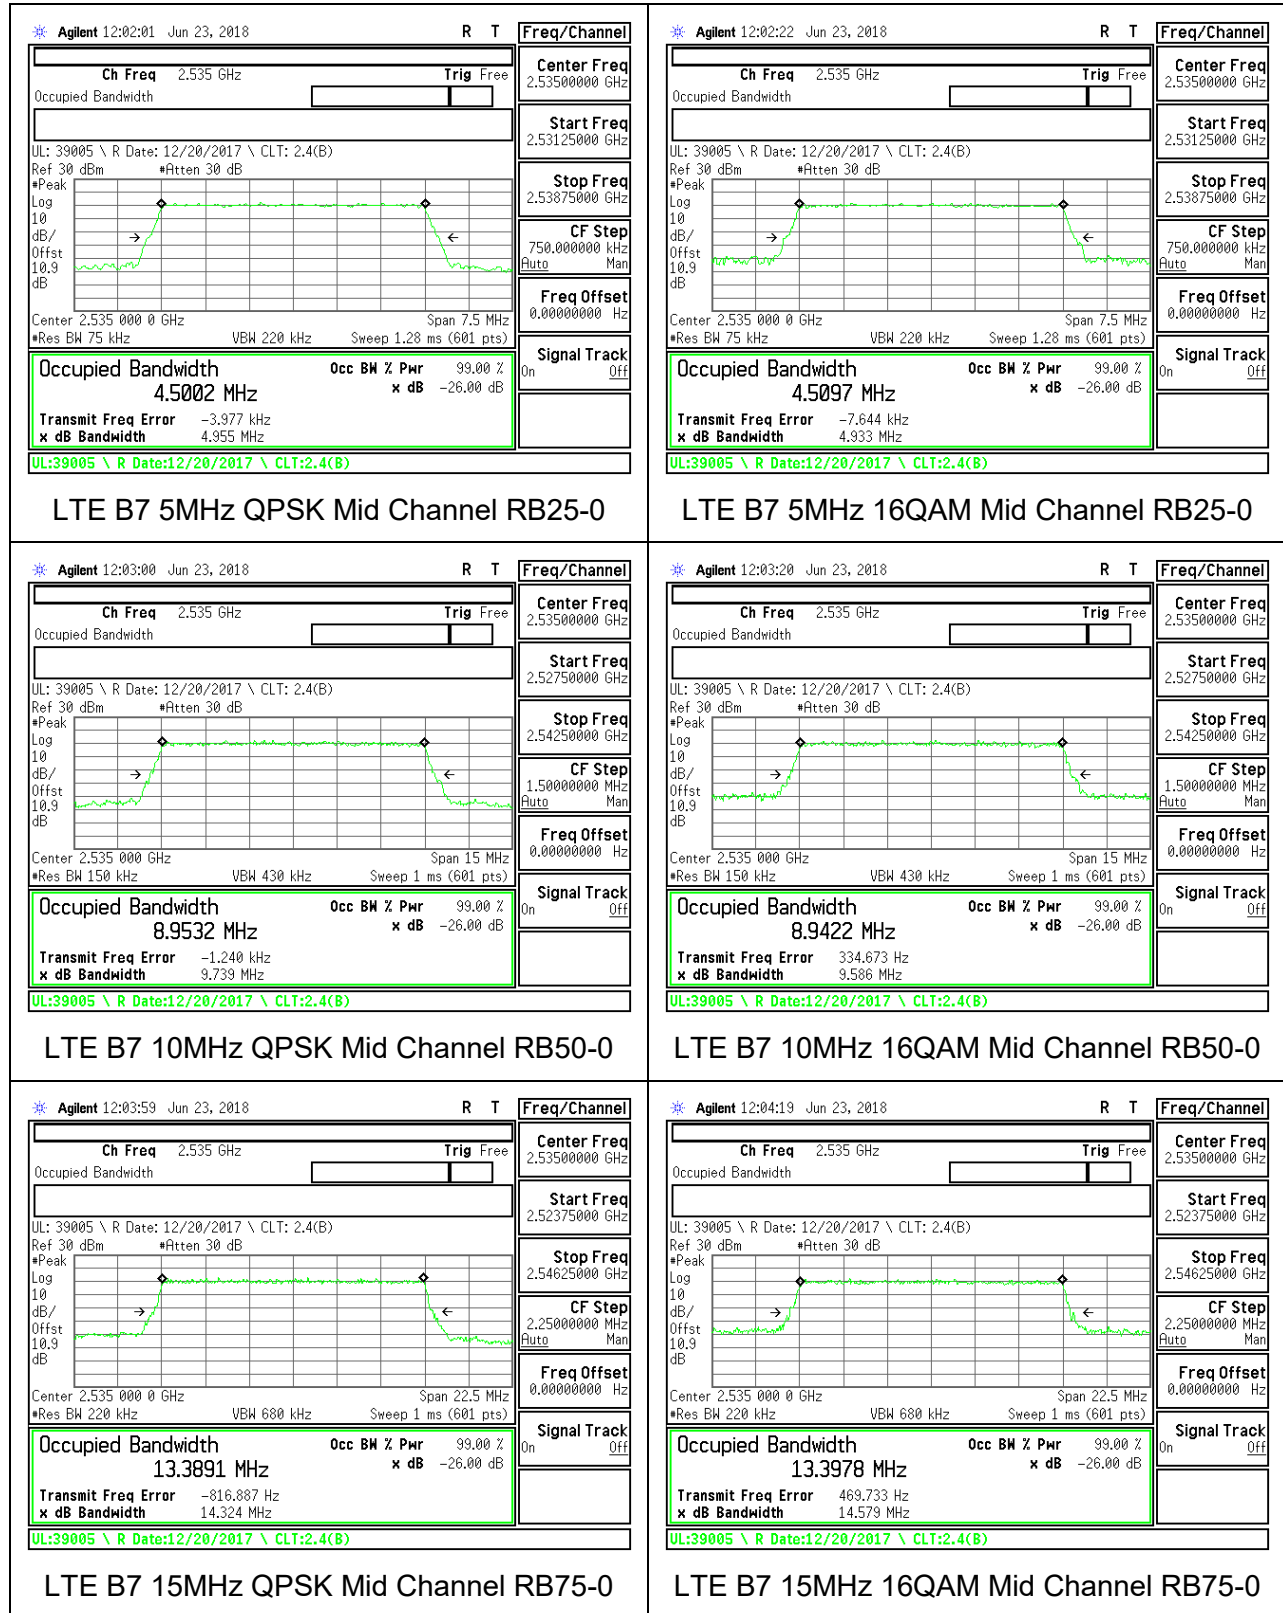


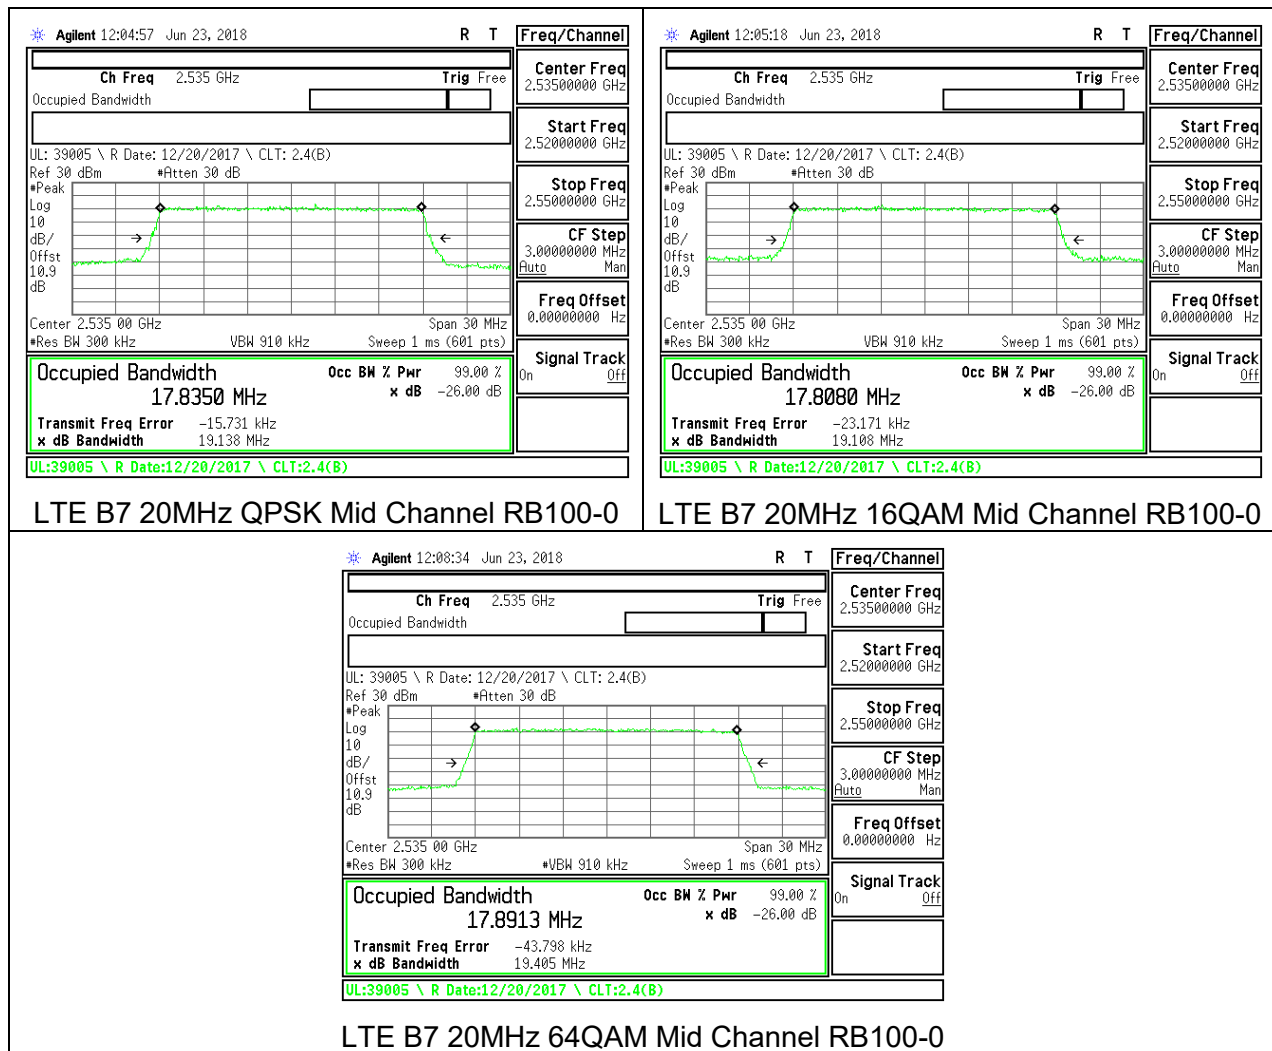


8.1.6. LTE BAND 12

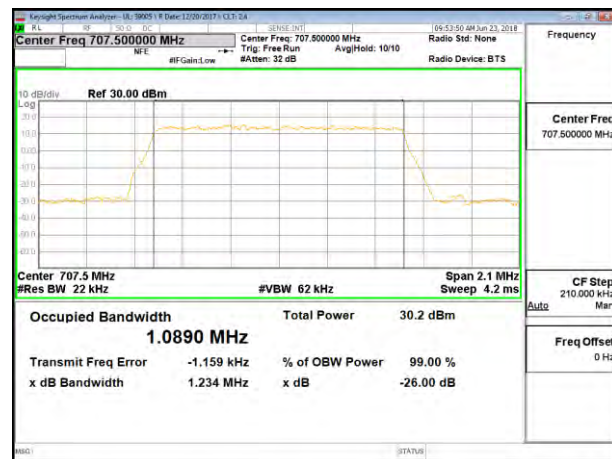


LTE B12 1.4MHz QPSK Mid Channel RB6-0

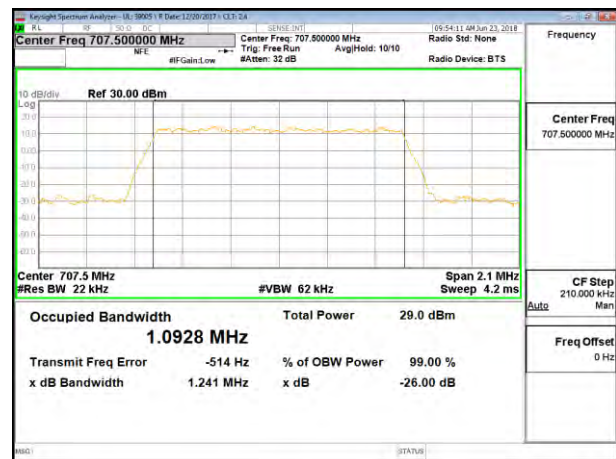


LTE B12 1.4MHz 16QAM Mid Channel RB6-0

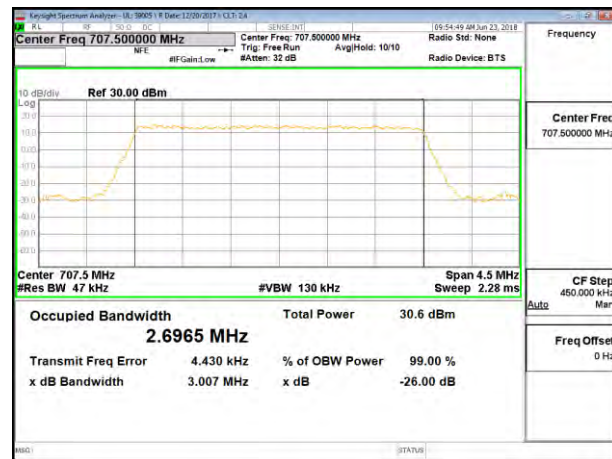


LTE B12 3MHz QPSK Mid Channel RB15-0

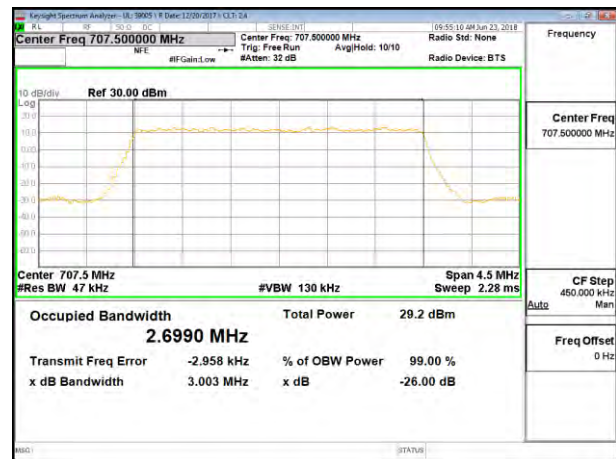


LTE B12 3MHz 16QAM Mid Channel RB15-0

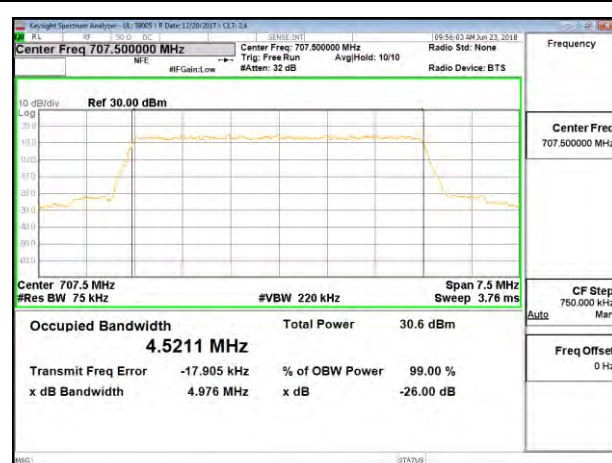


LTE B12 5MHz QPSK Mid Channel RB25-0

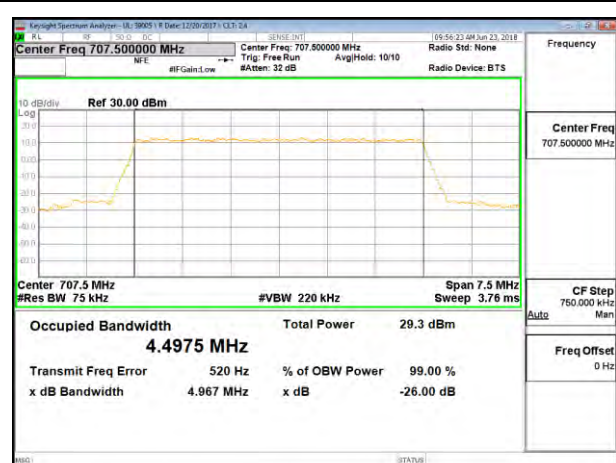


LTE B12 5MHz 16QAM Mid Channel RB25-0

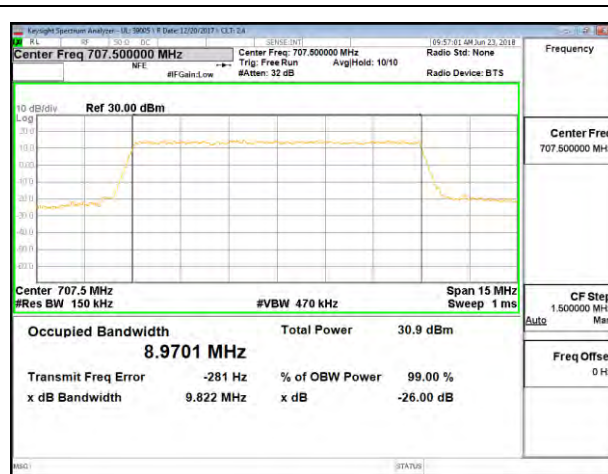

LTE B12 10MHz QPSK Mid Channel RB50-0

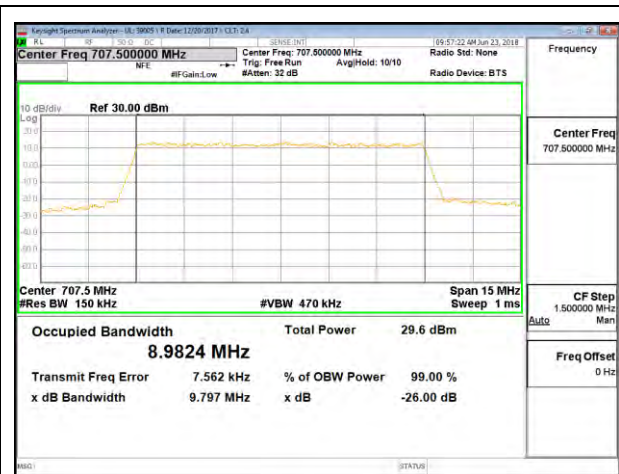


LTE B12 10MHz 16QAM Mid Channel RB50-0

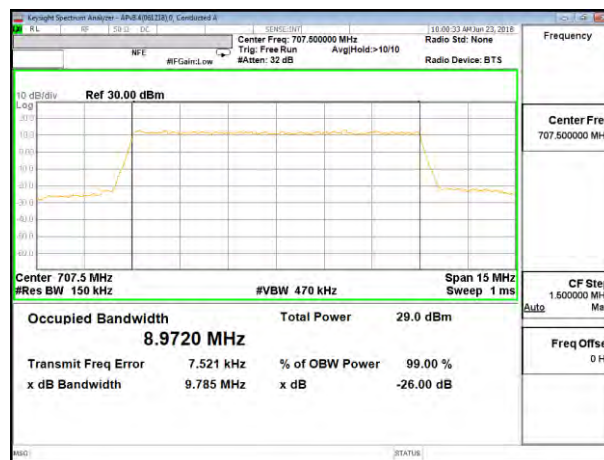


LTE B12 10MHz 64QAM Mid Channel RB50-0


8.1.7. LTE BAND 13

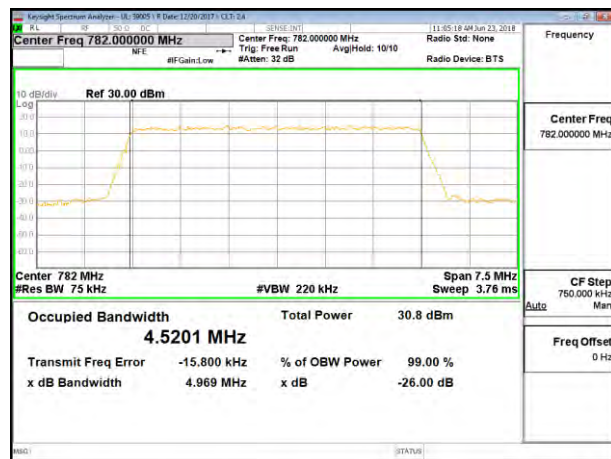


LTE B13 5MHz QPSK Mid Channel RB25-0

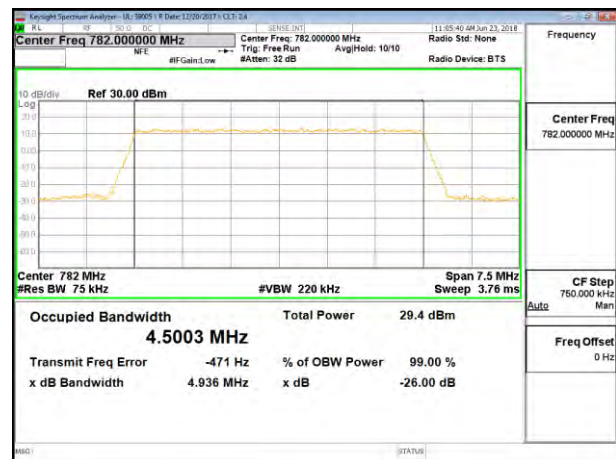


LTE B13 5MHz 16QAM Mid Channel RB25-0

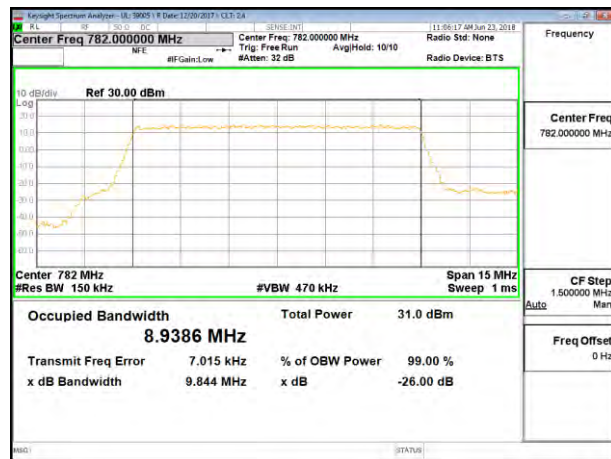

LTE B13 10MHz QPSK Mid Channel RB50-0

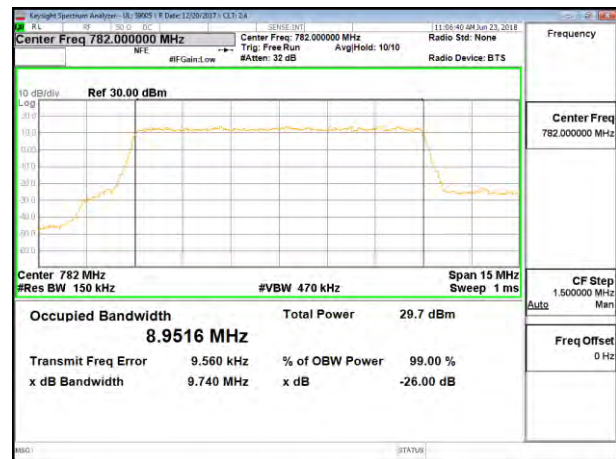



LTE B13 10MHz 16QAM Mid Channel RB50-0

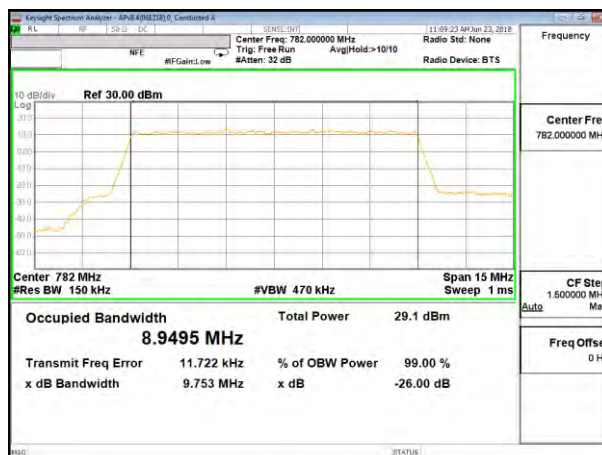


LTE B13 10MHz 64QAM Mid Channel RB50-0


8.1.8. LTE BAND 26 (FCC PART 90S)

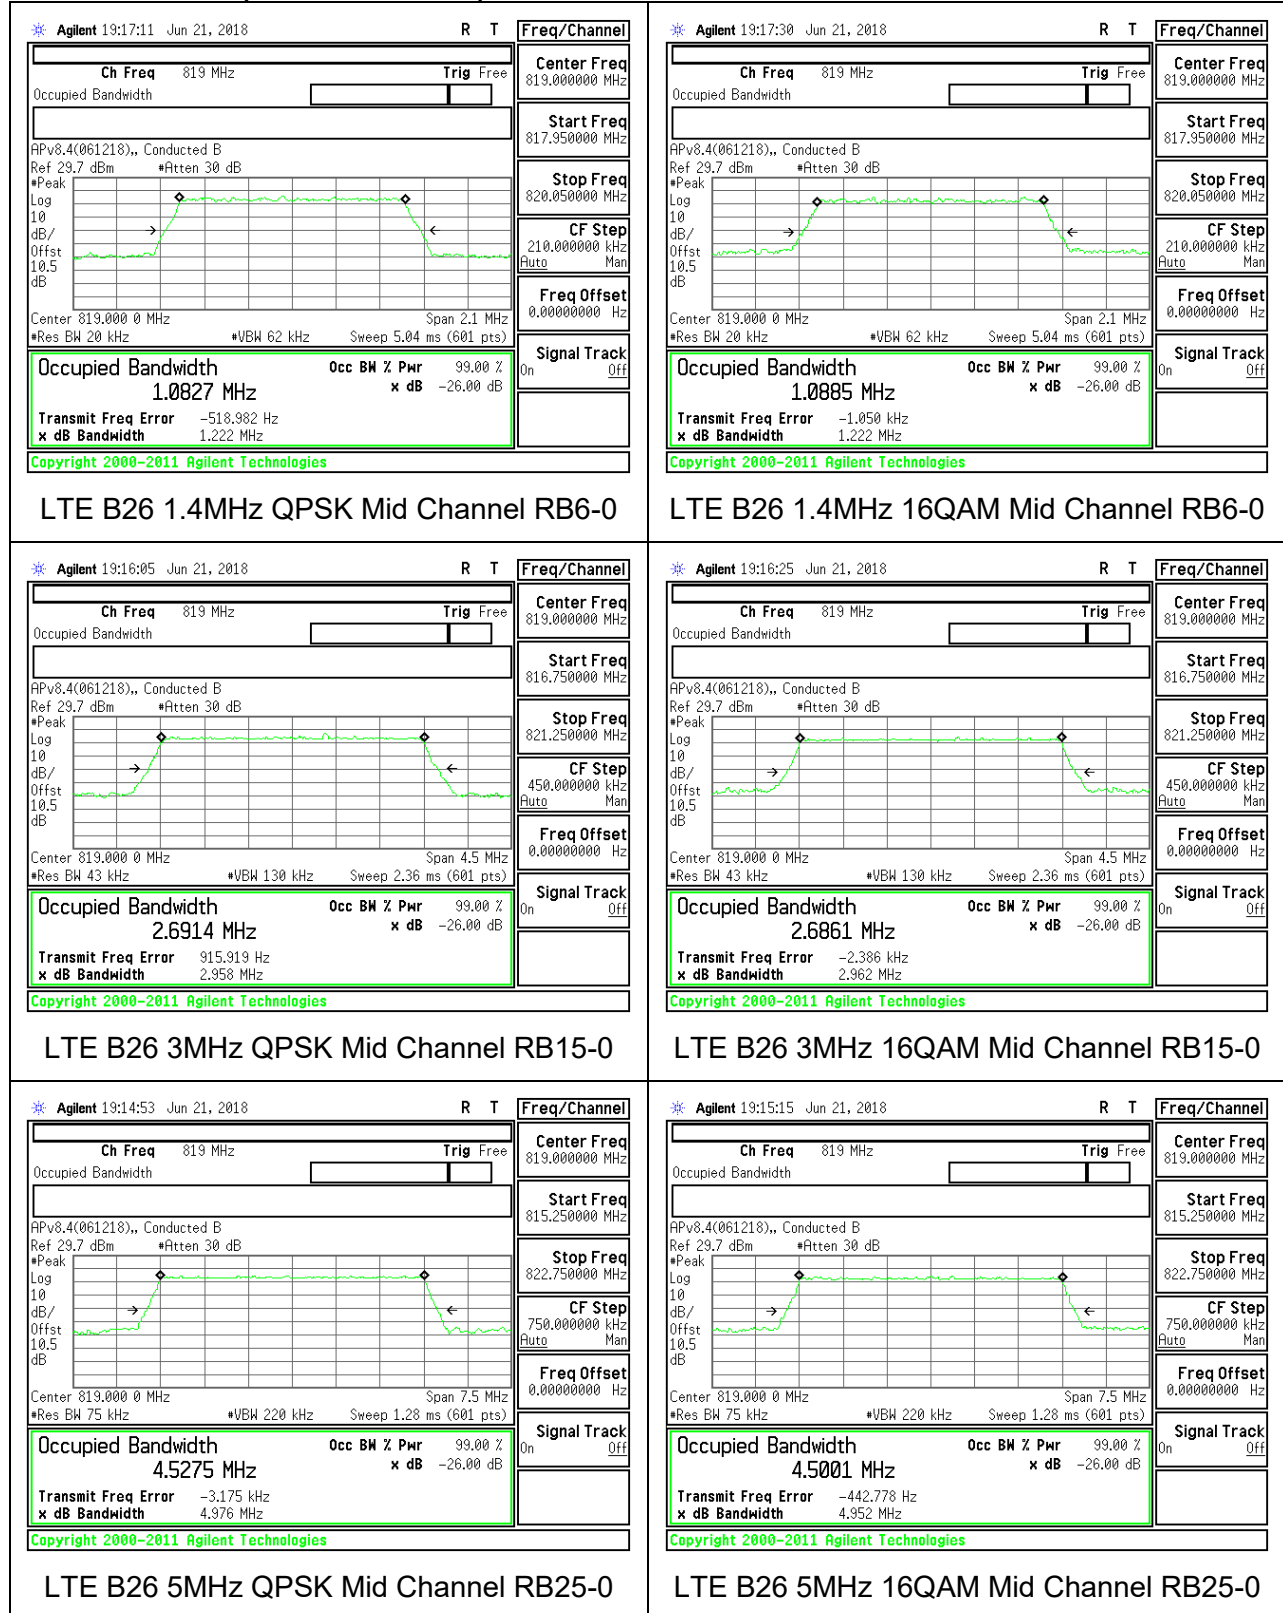

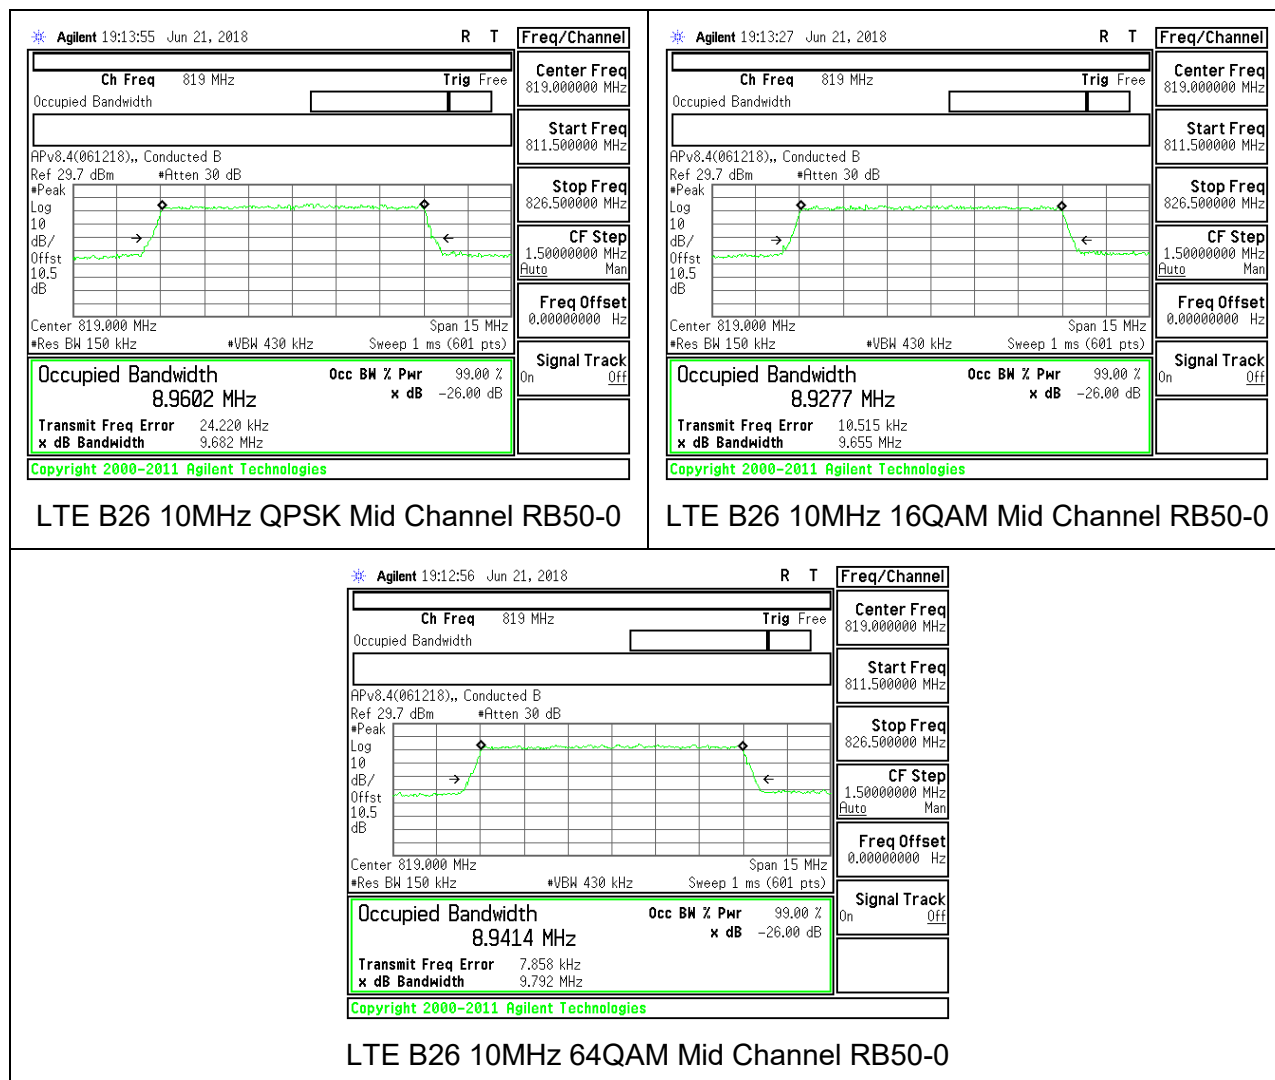



8.1.9. LTE BAND 26 (FCC PART 22)

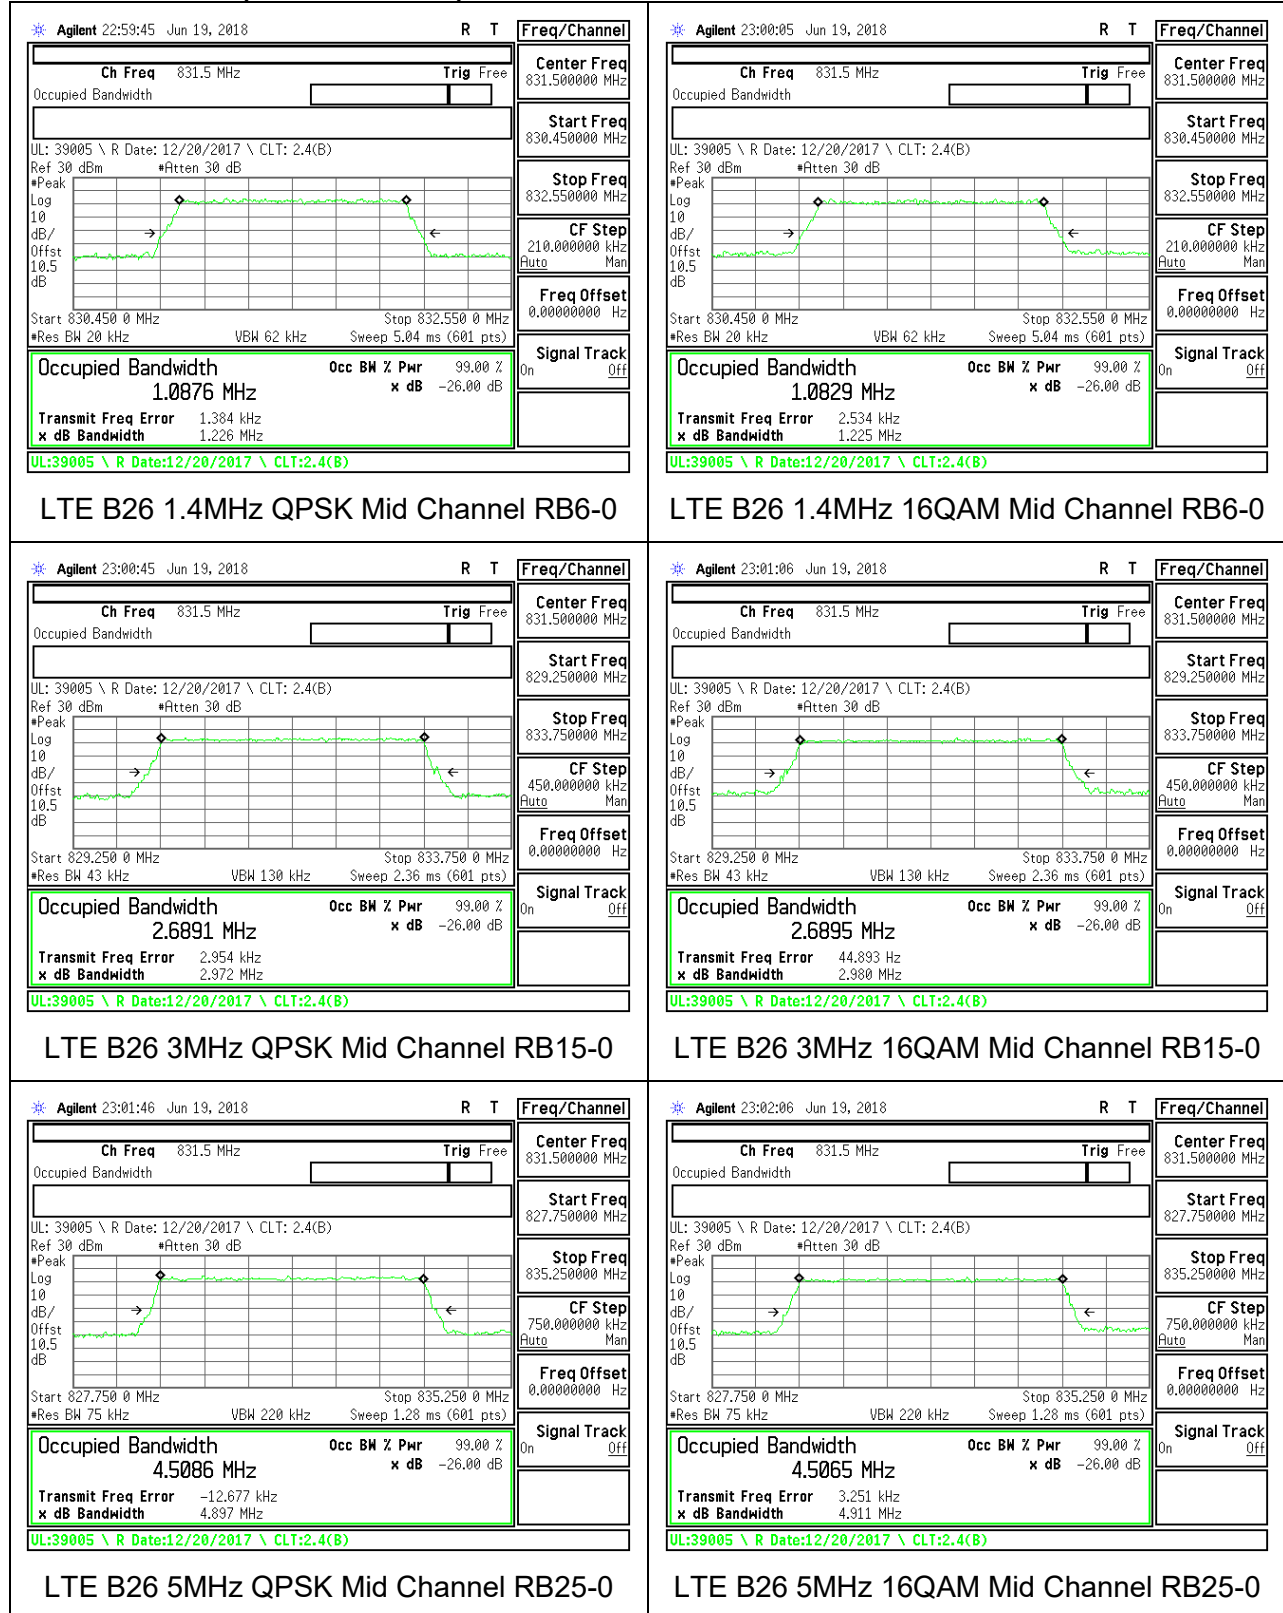

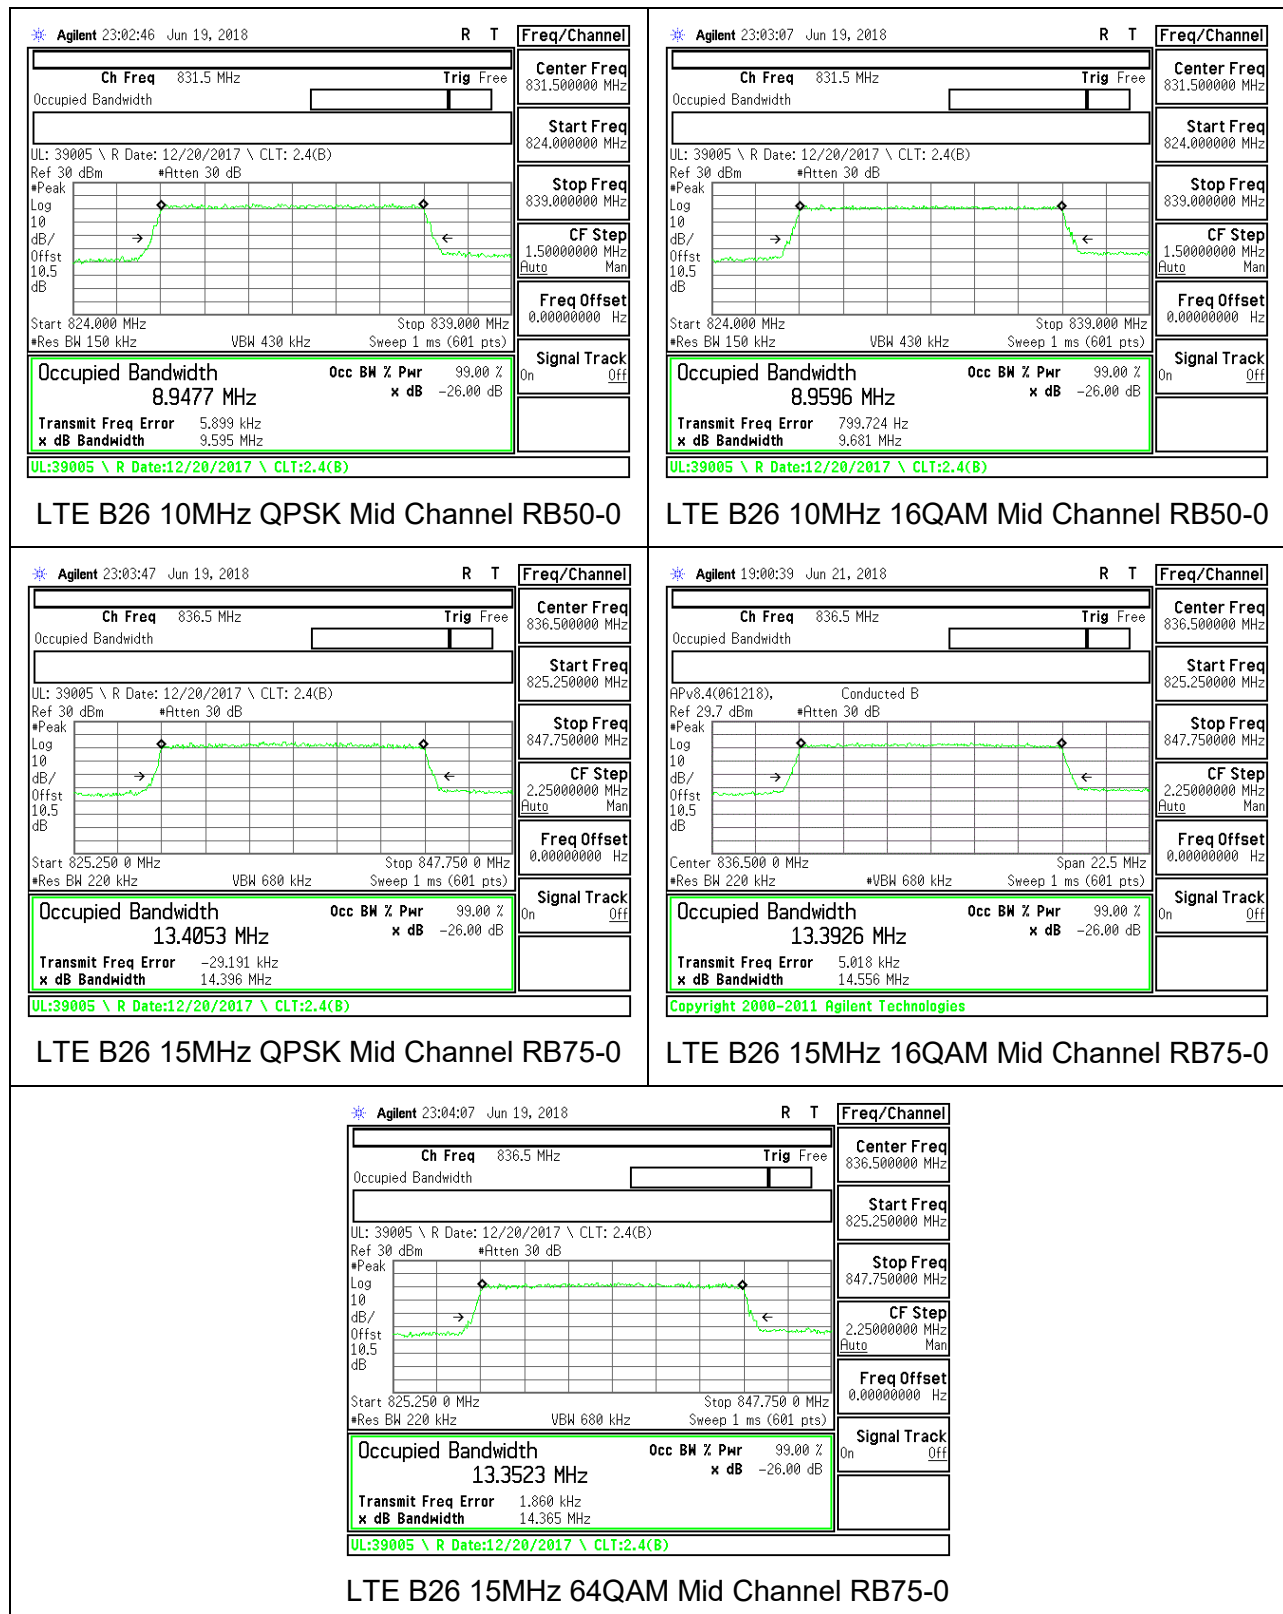



8.1.10. LTE BAND 41

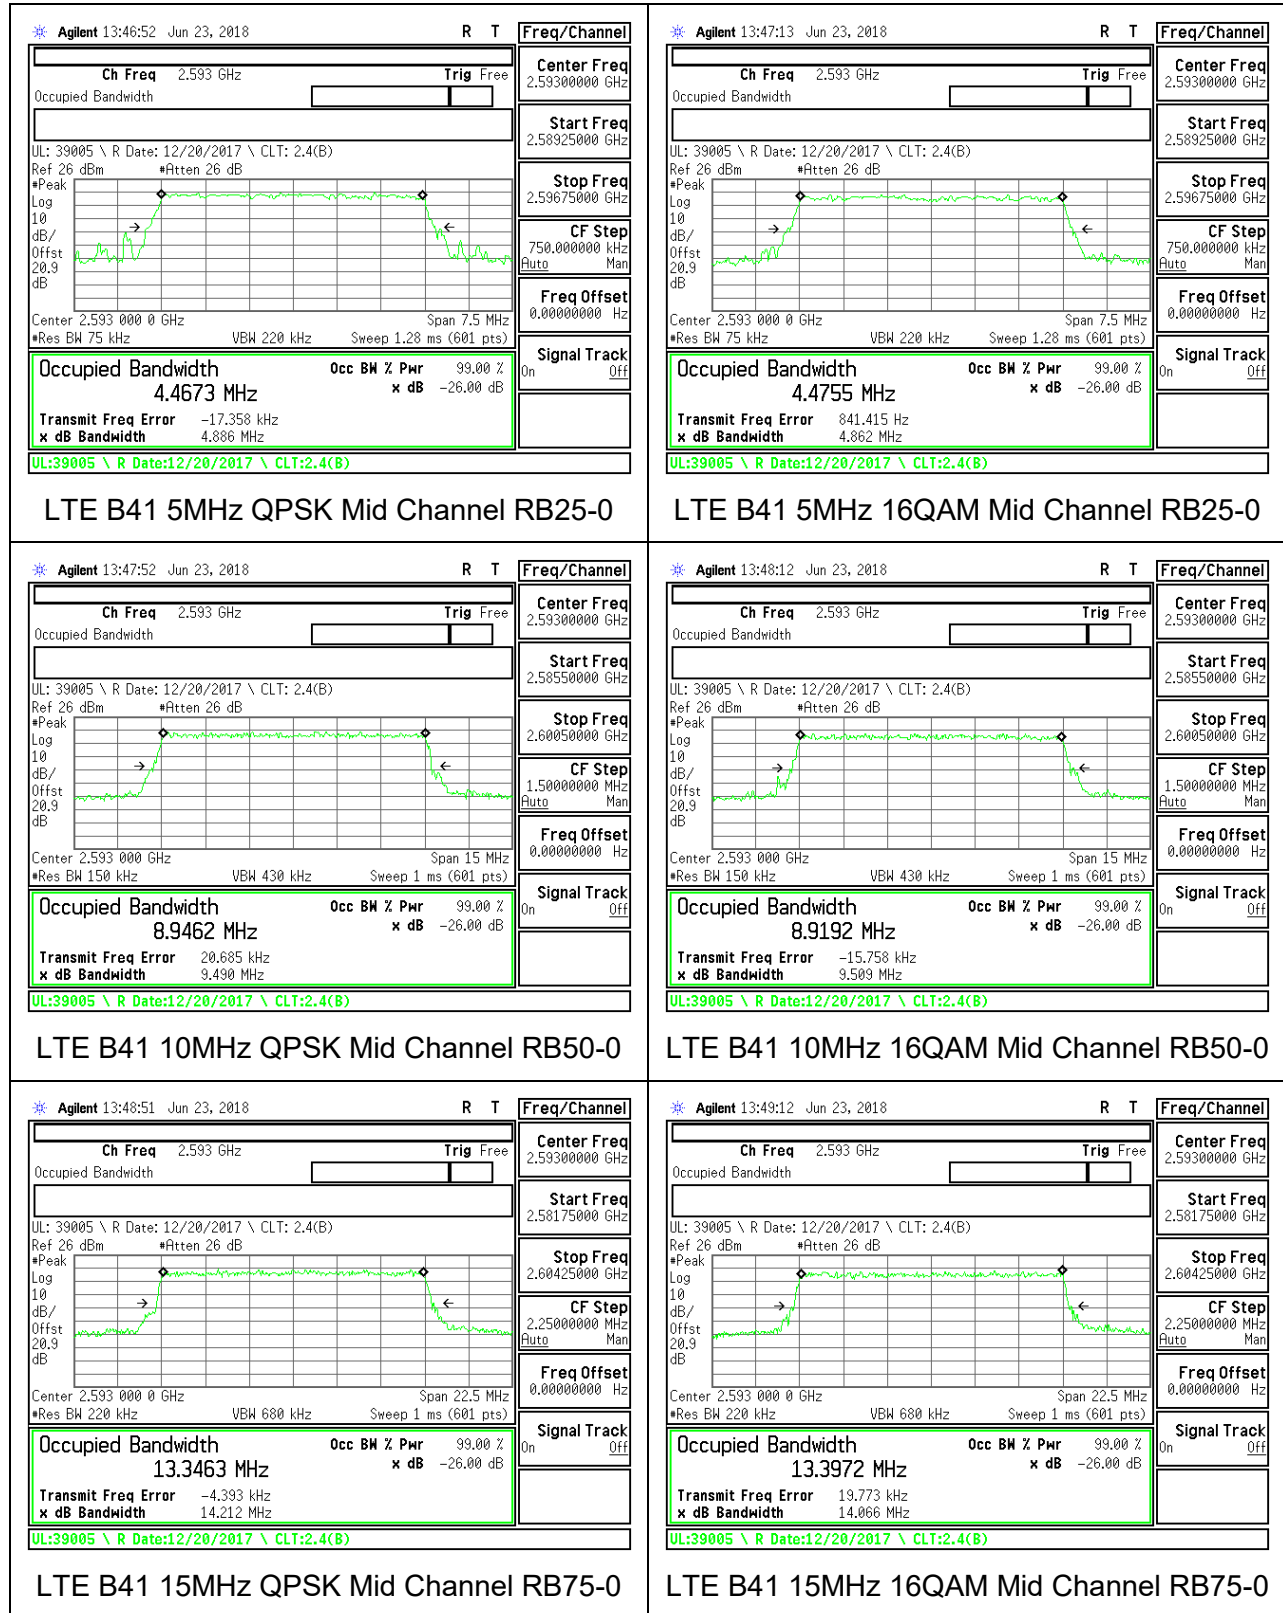

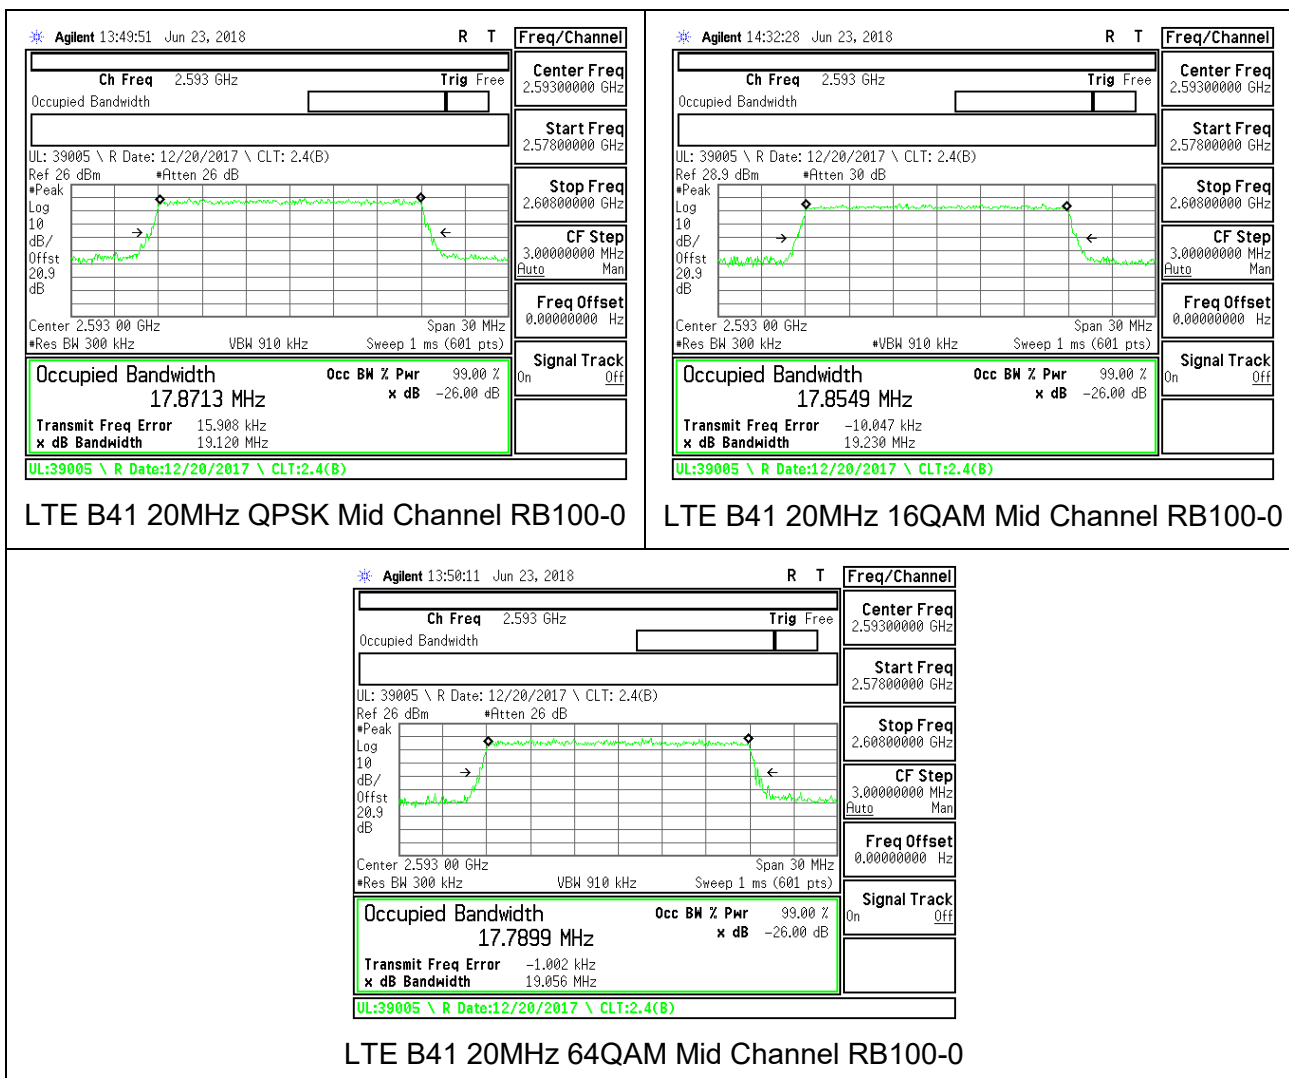


8.1.11. LTE BAND 66

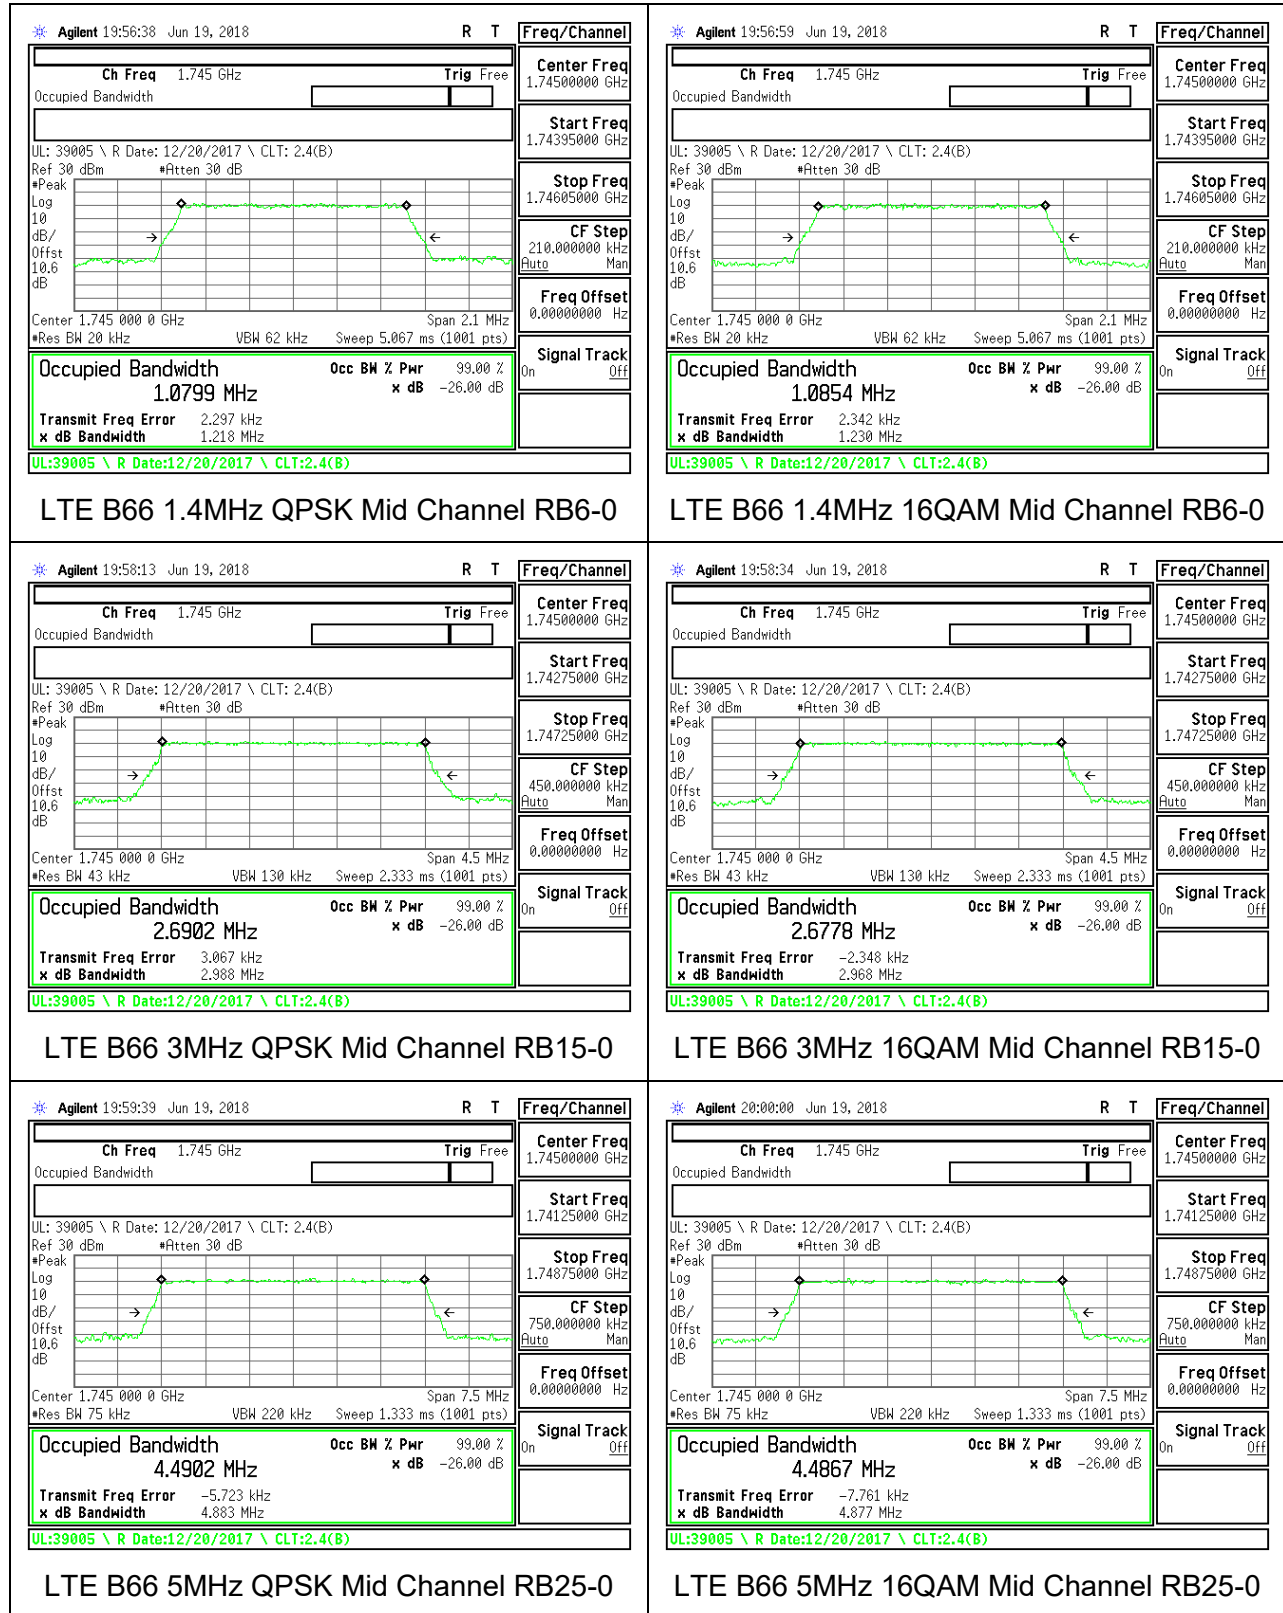


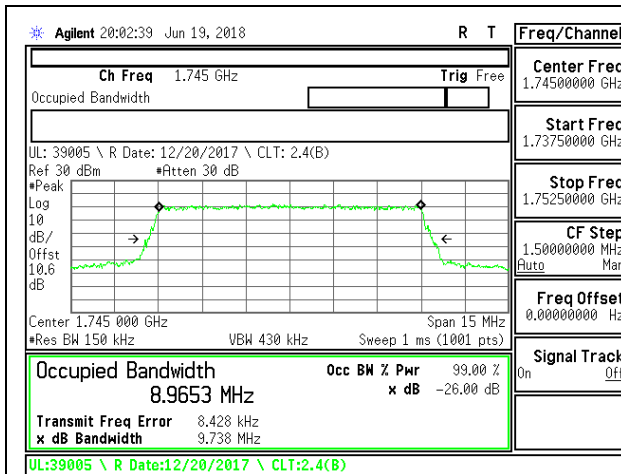


LTE B66 10MHz QPSK Mid Channel RB50-0

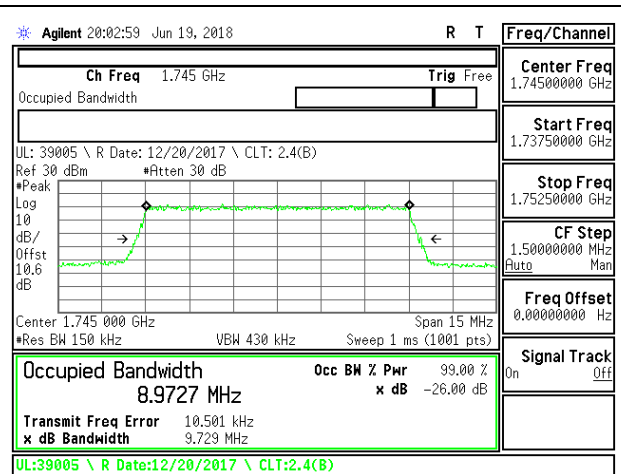


LTE B66 10MHz 16QAM Mid Channel RB50-0

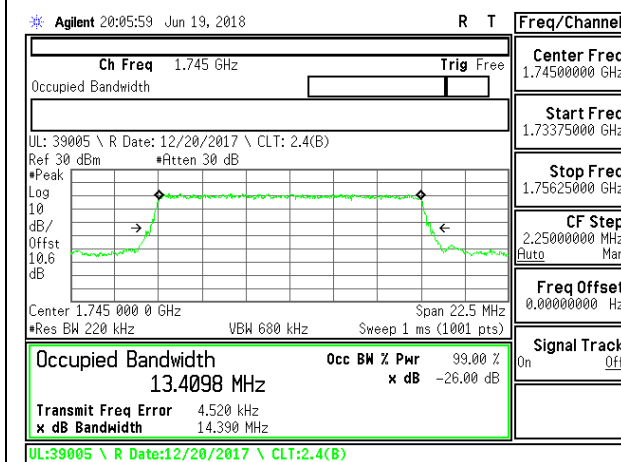


LTE B66 15MHz QPSK Mid Channel RB75-0

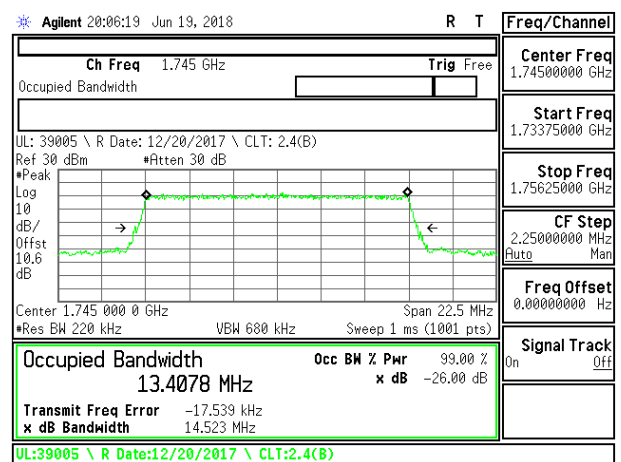


LTE B66 15MHz 16QAM Mid Channel RB75-0

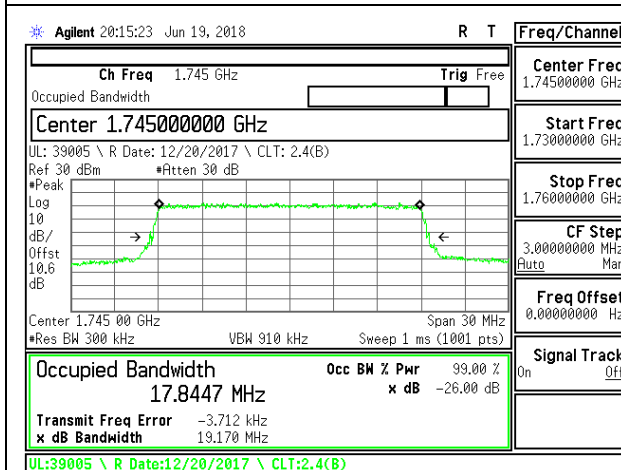

LTE B66 20MHz QPSK Mid Channel RB100-0

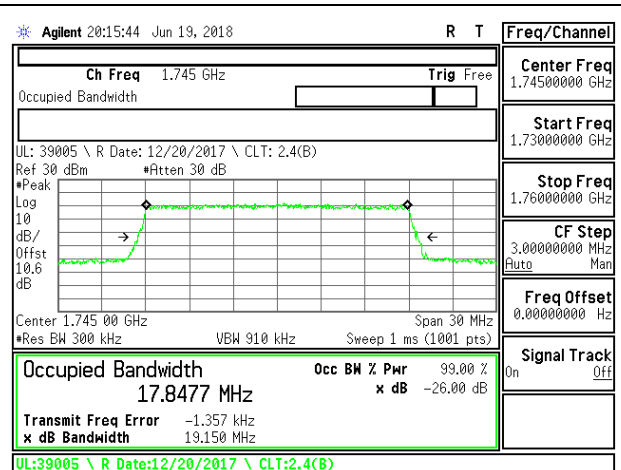

LTE B66 20MHz 16QAM Mid Channel RB100-0

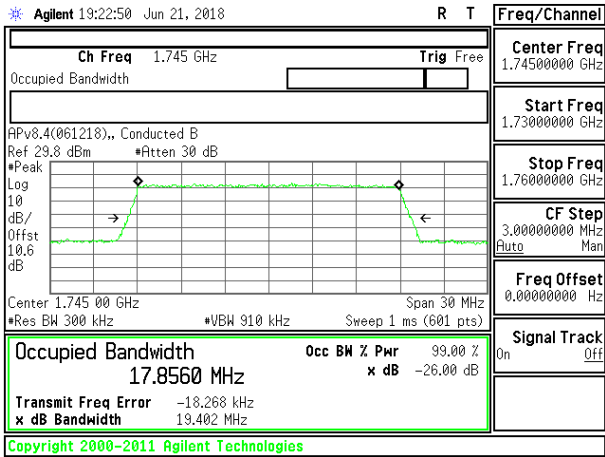

LTE B66 20MHz 64QAM Mid Channel RB100-0

8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53, §90.691

LIMITS

FCC: §22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

FCC: §27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

FCC: §27.53 (Band 12, 17)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC: §27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

1. Set the spectrum analyzer span to include the block edge frequency.
2. Set a marker to point the corresponding band edge frequency in each test case.
3. Set display line at -13 dBm
4. Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66


RESULTS

8.2.1. GSM850

GPRS




EGPRS

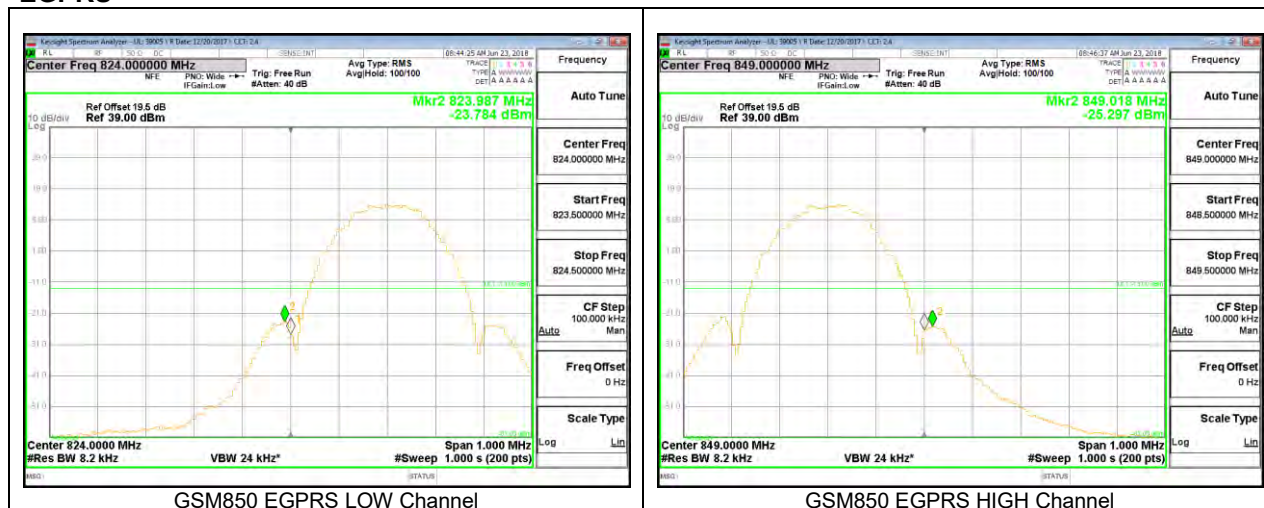


8.2.2. GSM1900

GPRS

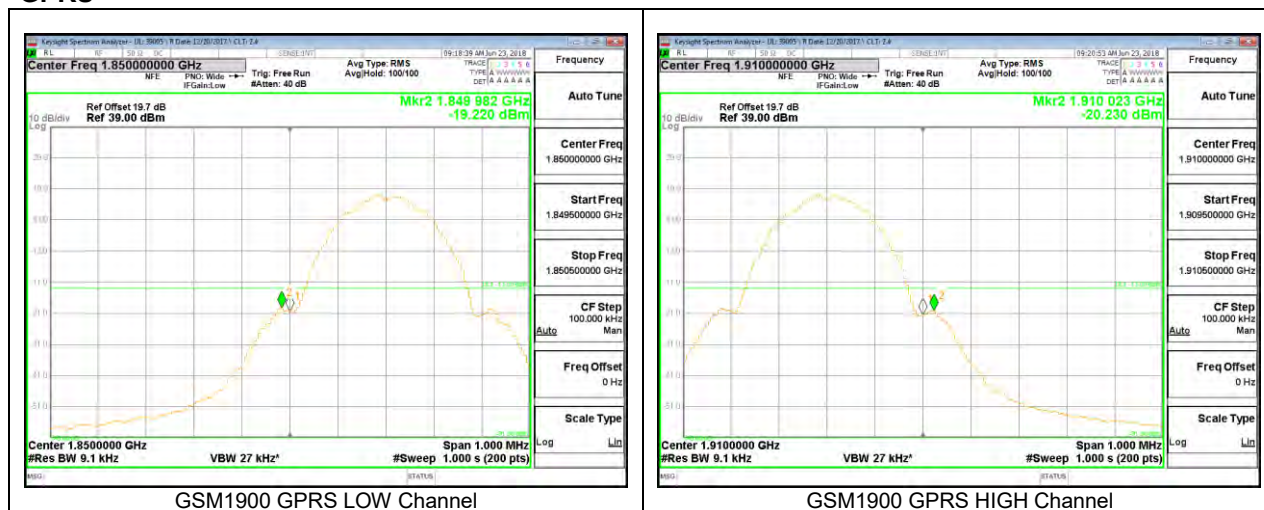


EGPRS

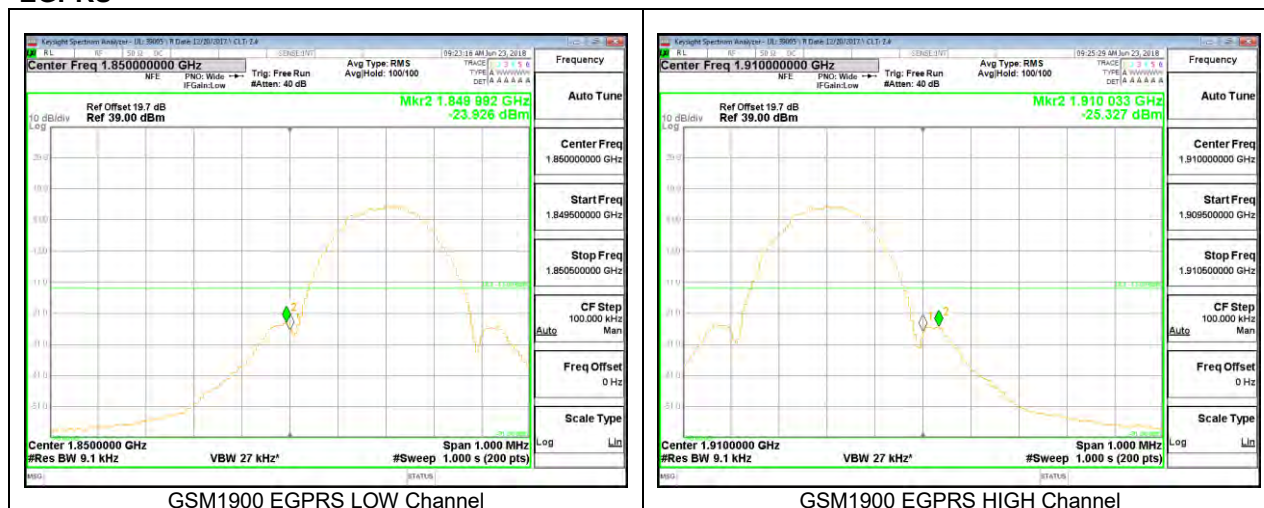


8.2.3. WCDMA BAND5

Rel99

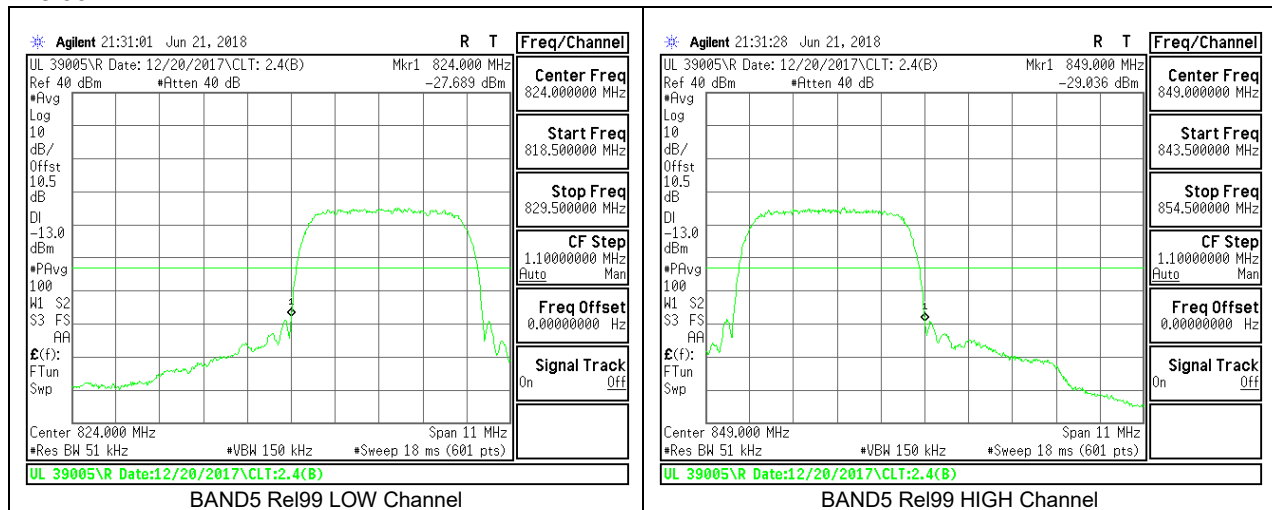


HSDPA

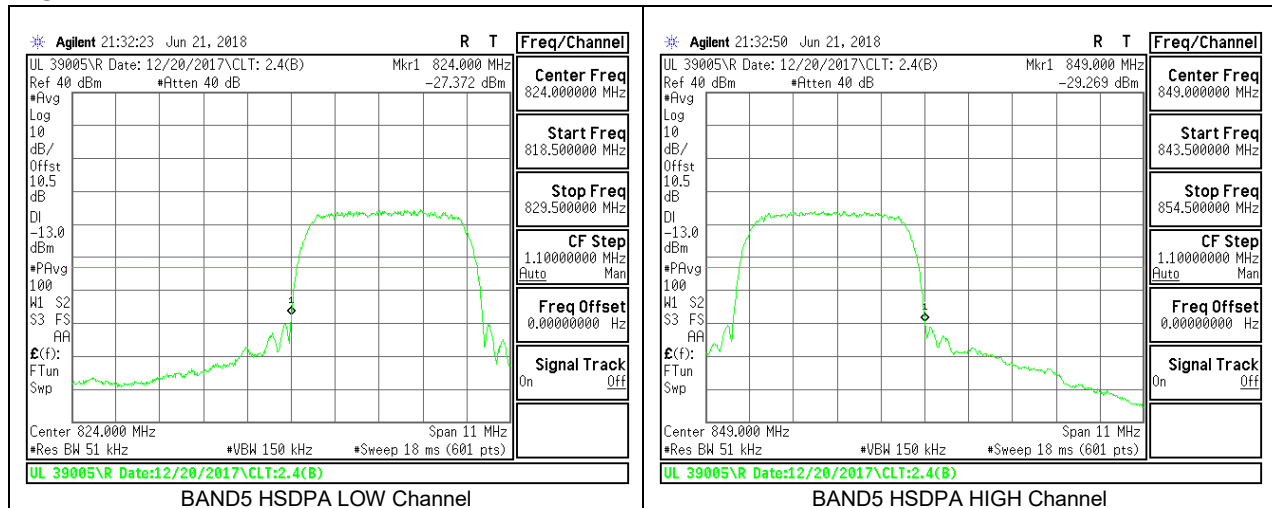


8.2.4. WCDMA BAND2

Rel99

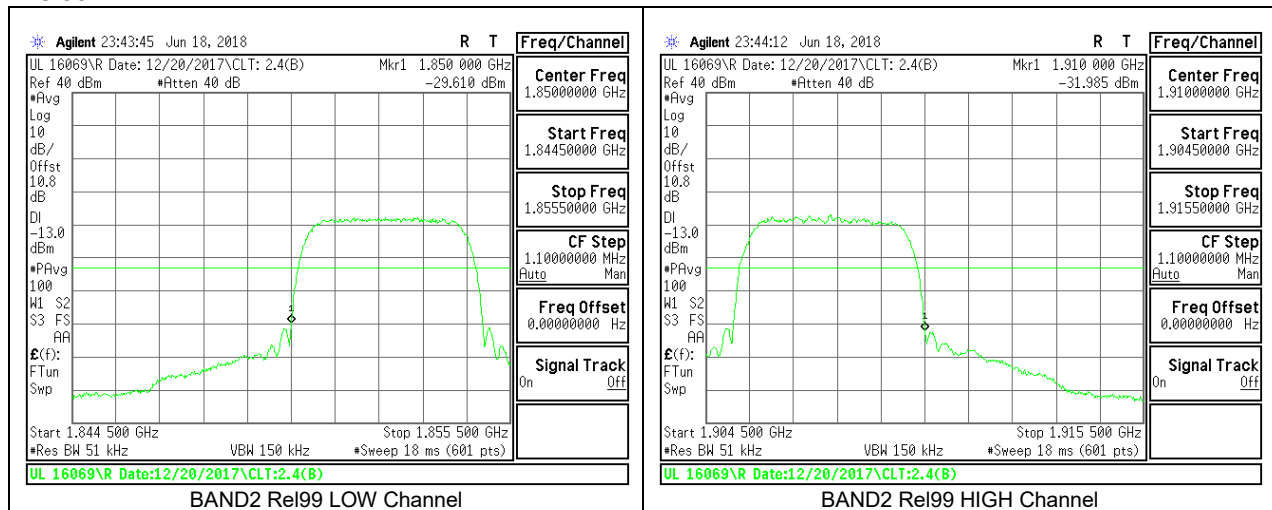


HSDPA

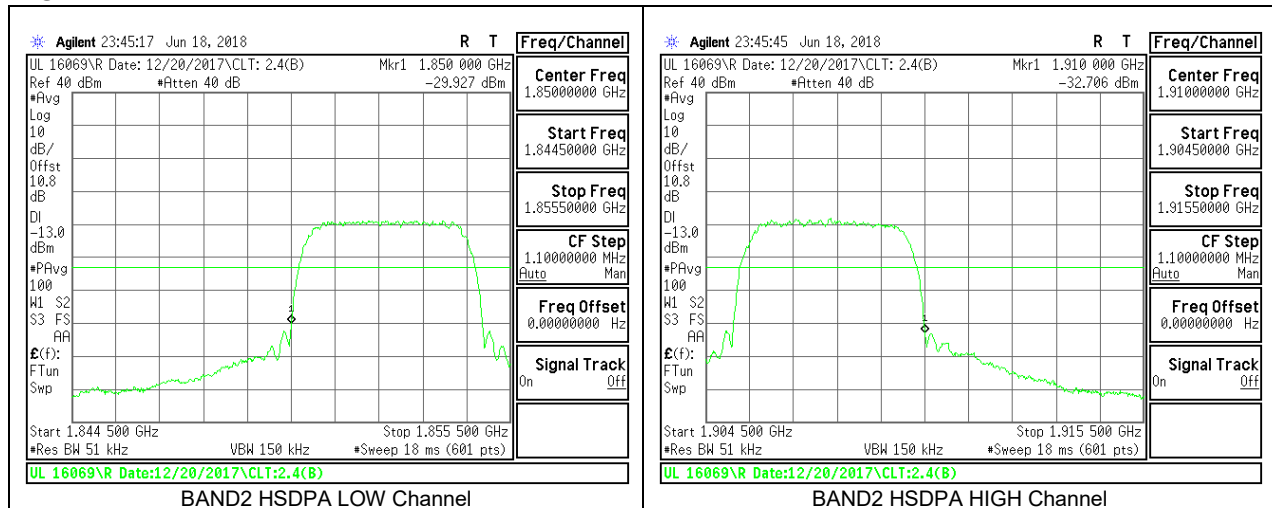


8.2.5. WCDMA BAND4


Rel99

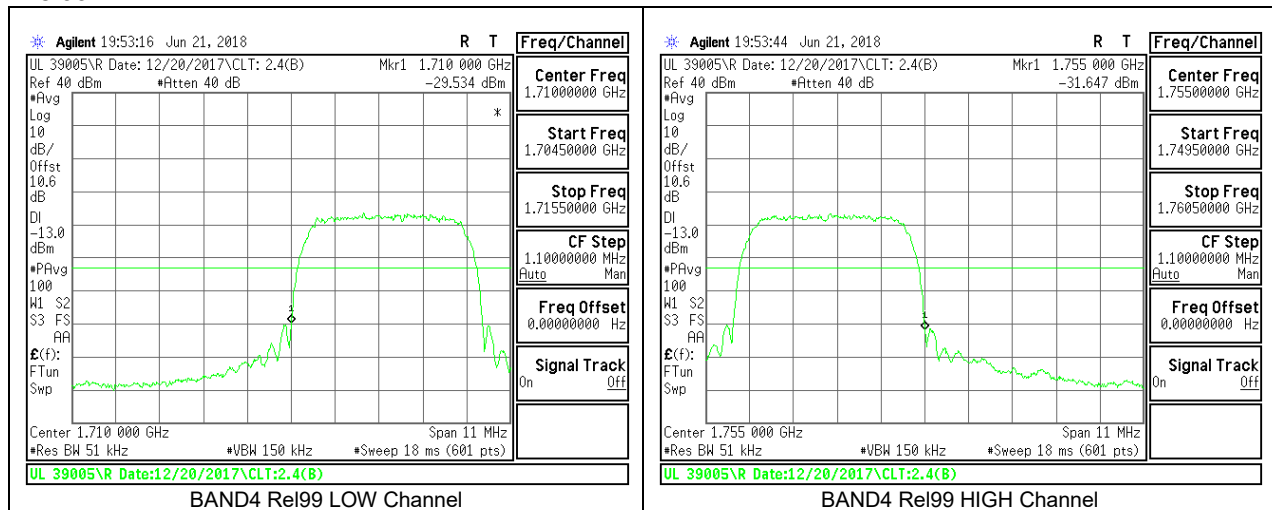



HSDPA

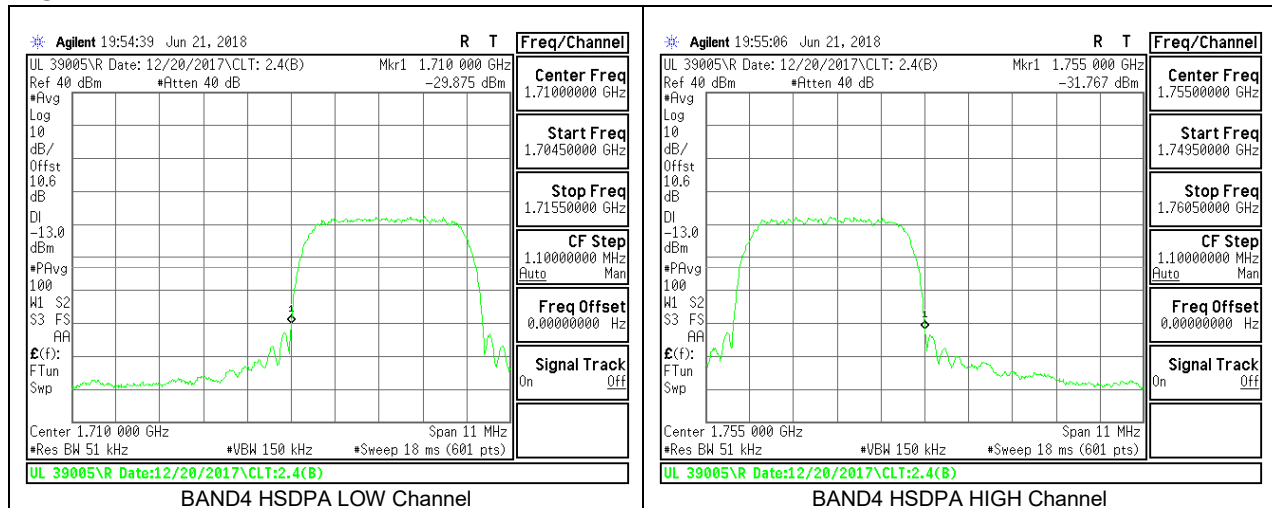



8.2.6. LTE BAND 2 BANDEDGE

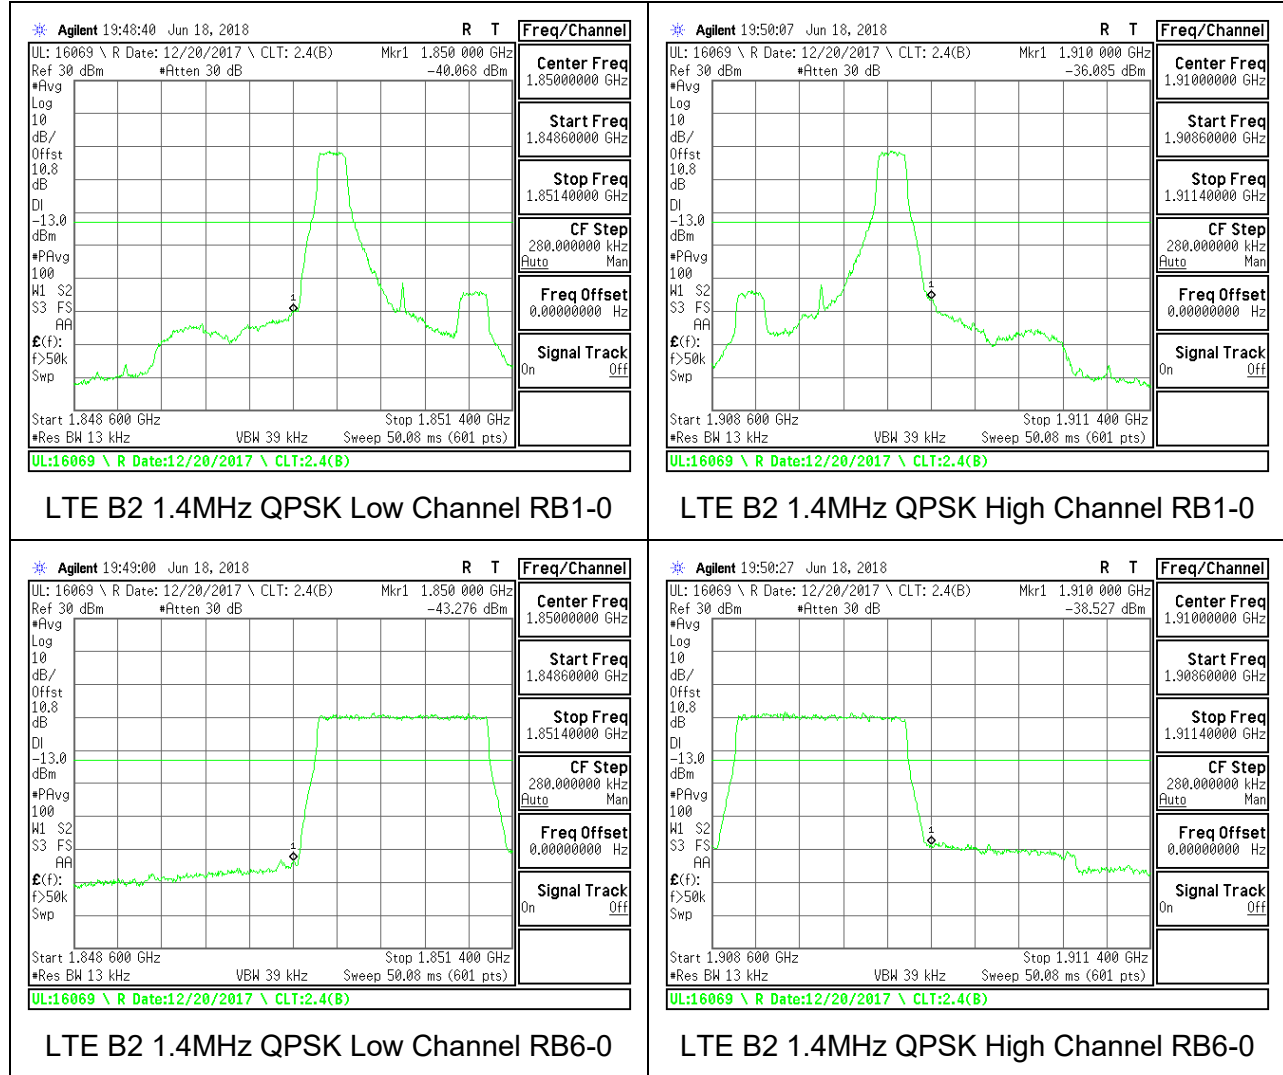


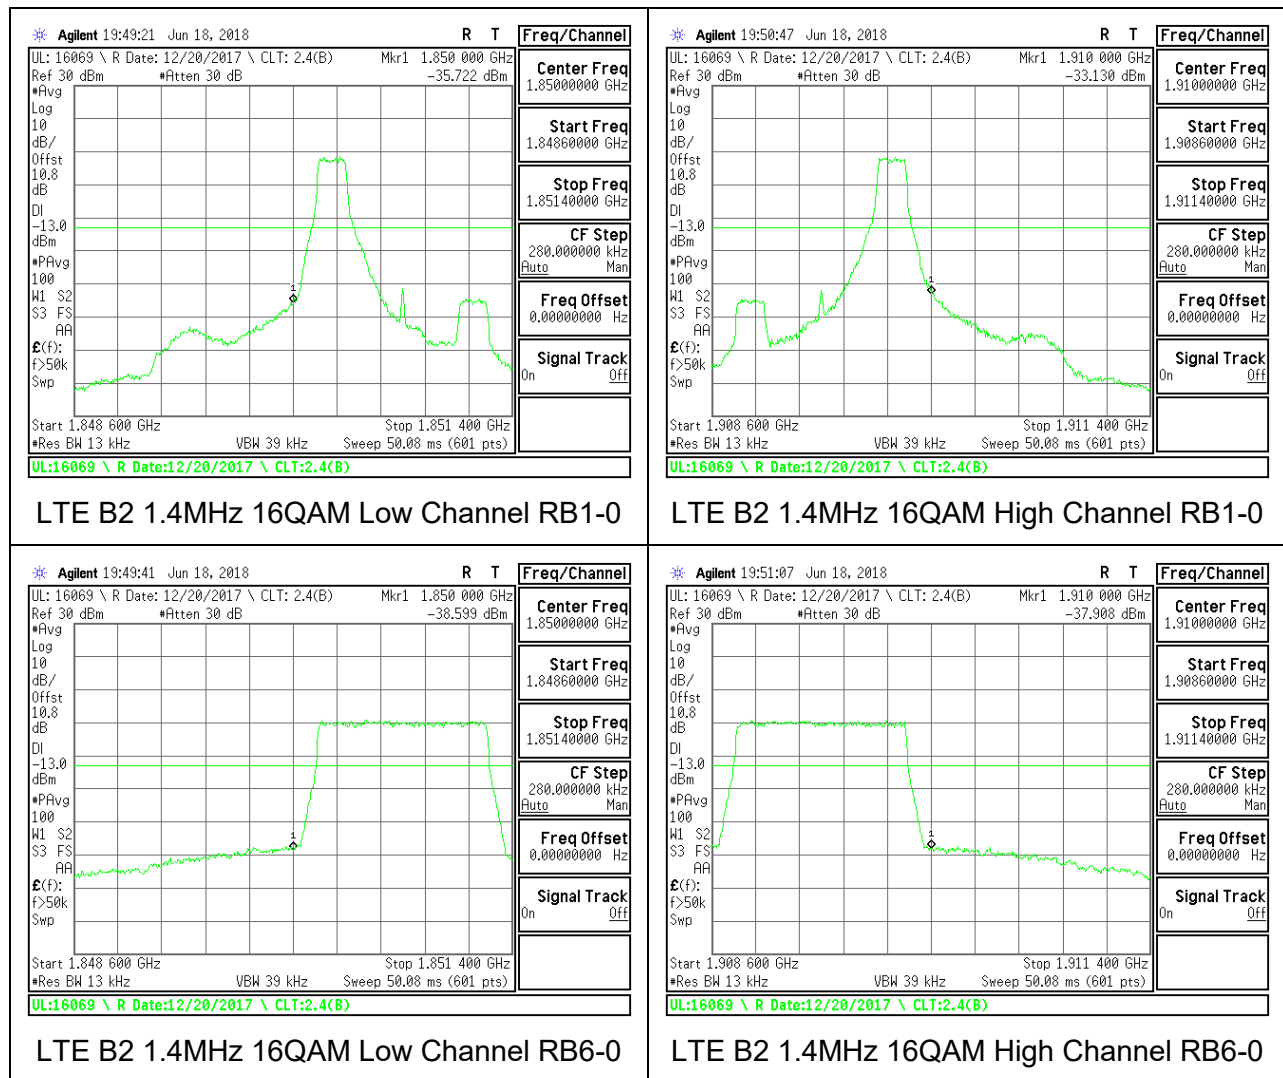

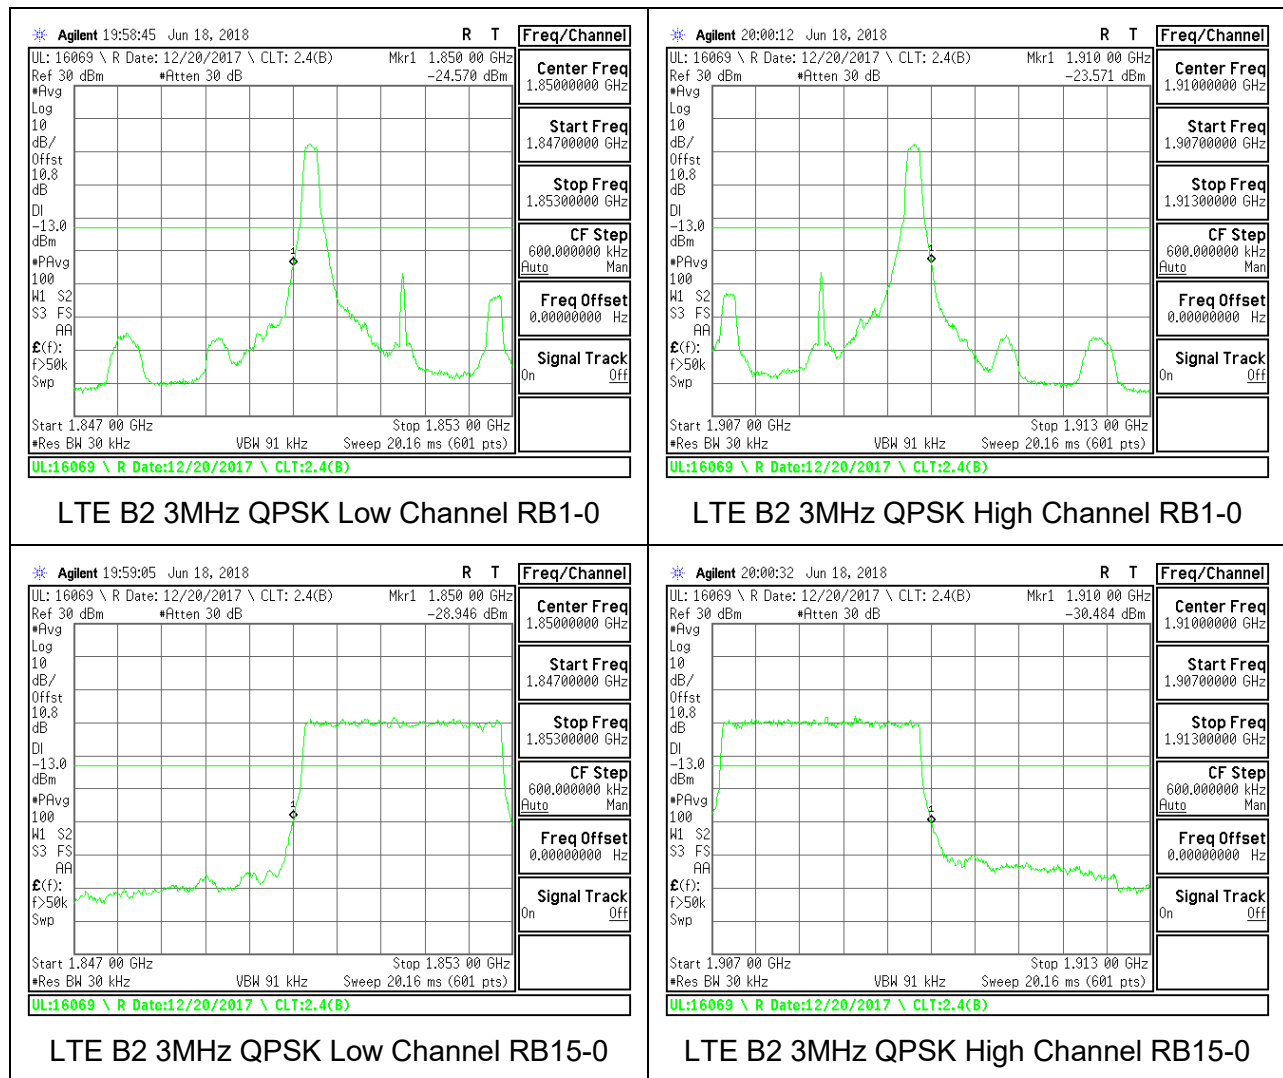


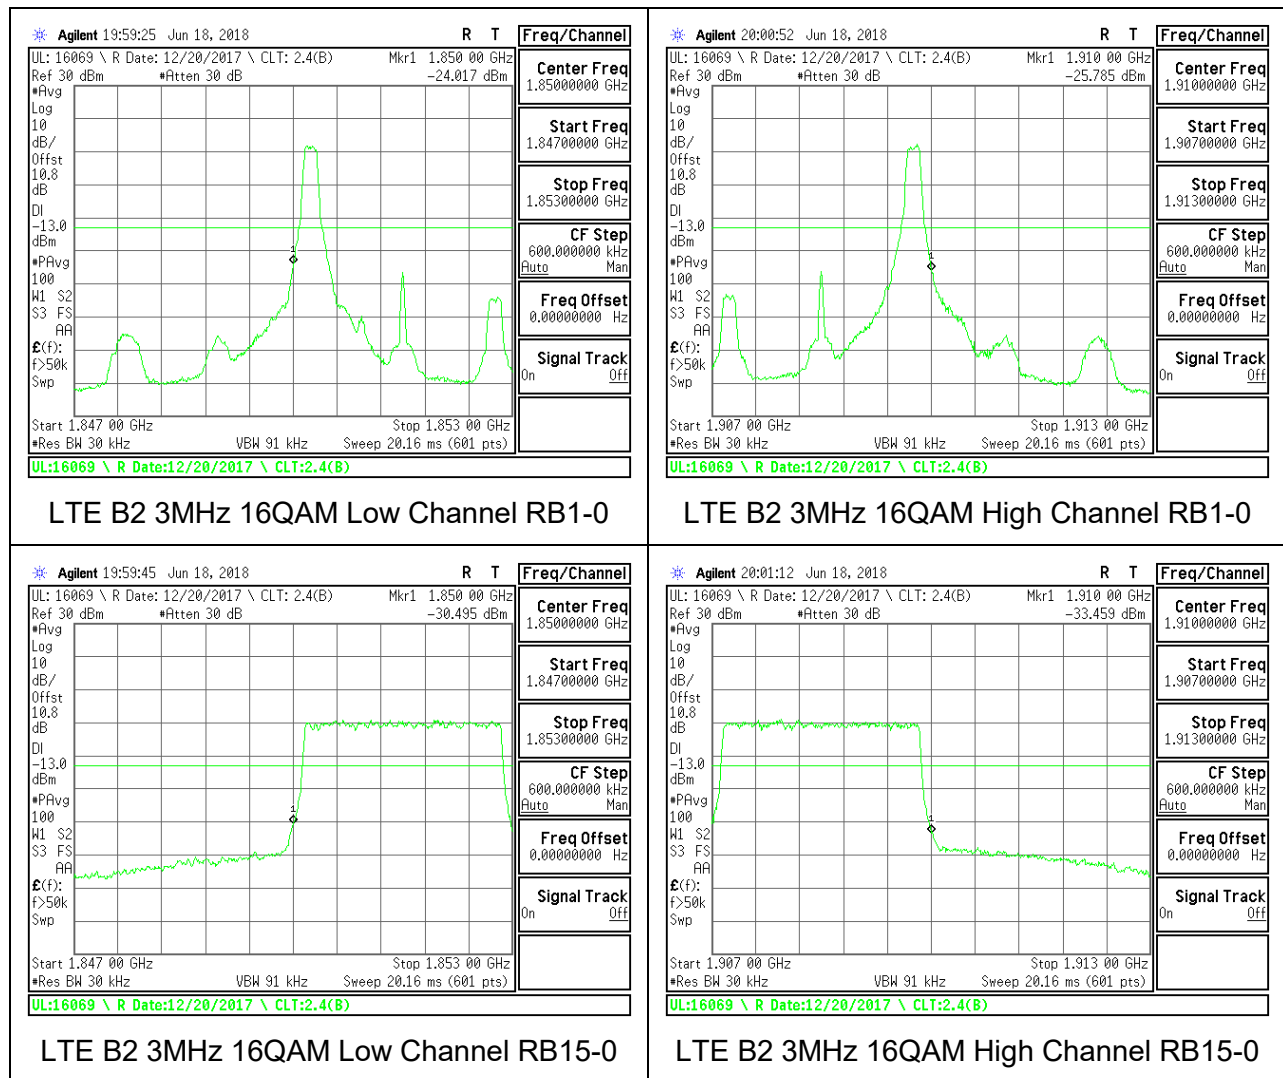

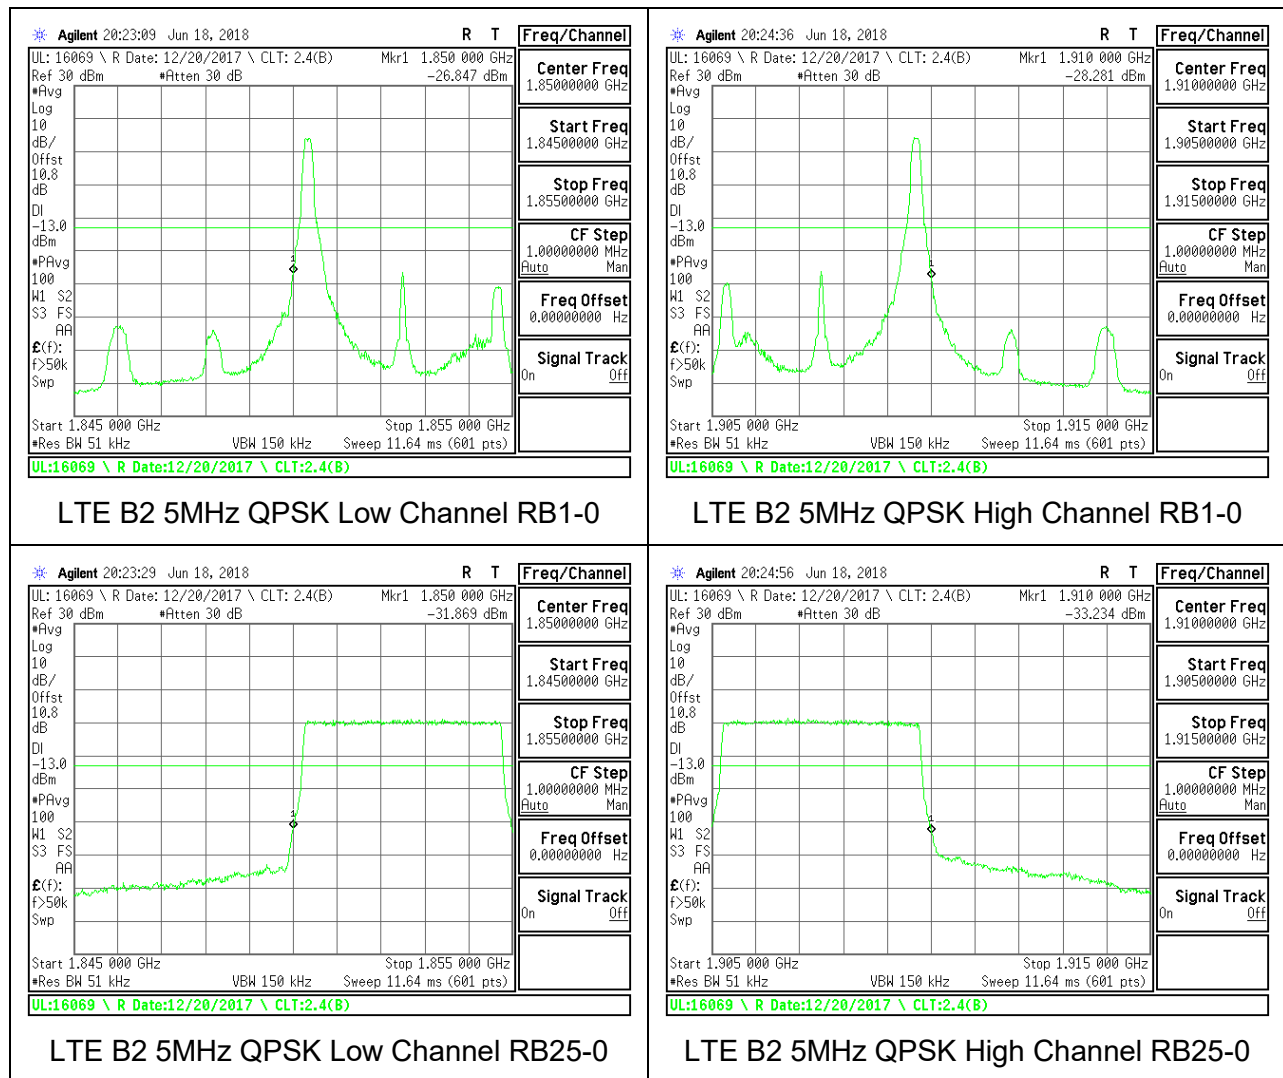


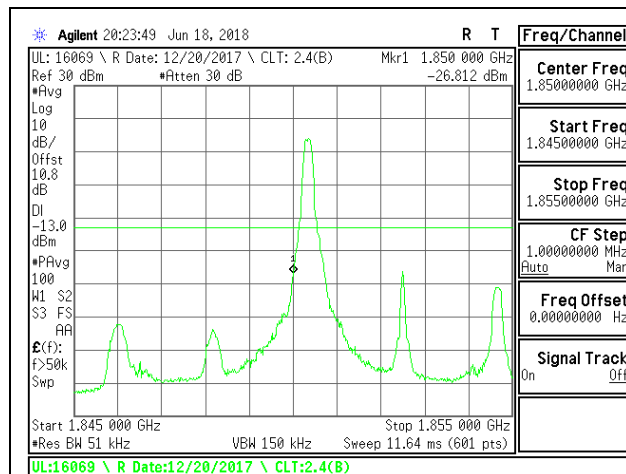


LTE B2 5MHz 16QAM Low Channel RB1-0

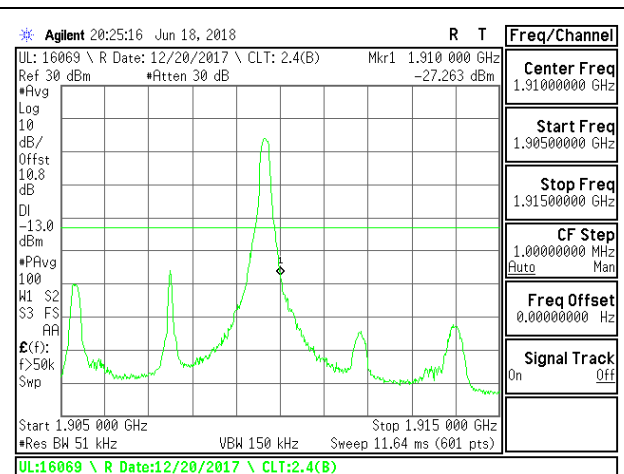


LTE B2 5MHz 16QAM High Channel RB1-0

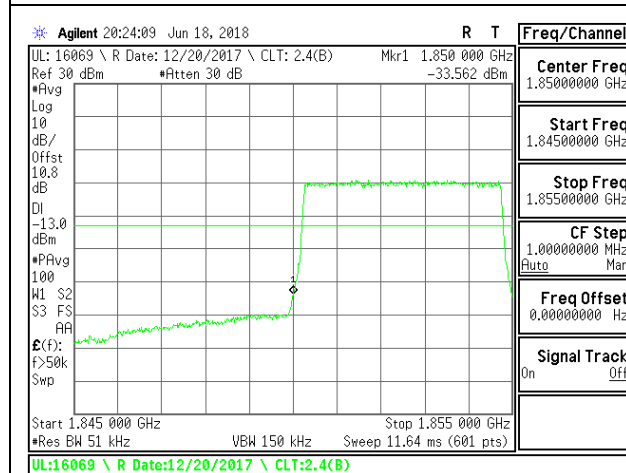



LTE B2 5MHz 16QAM Low Channel RB25-0

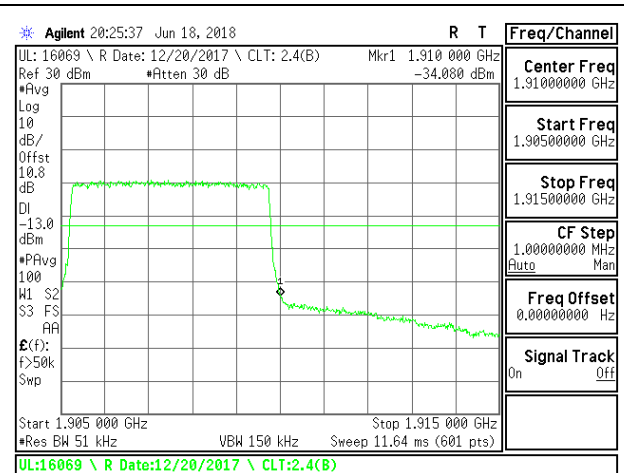



LTE B2 5MHz 16QAM High Channel RB25-0

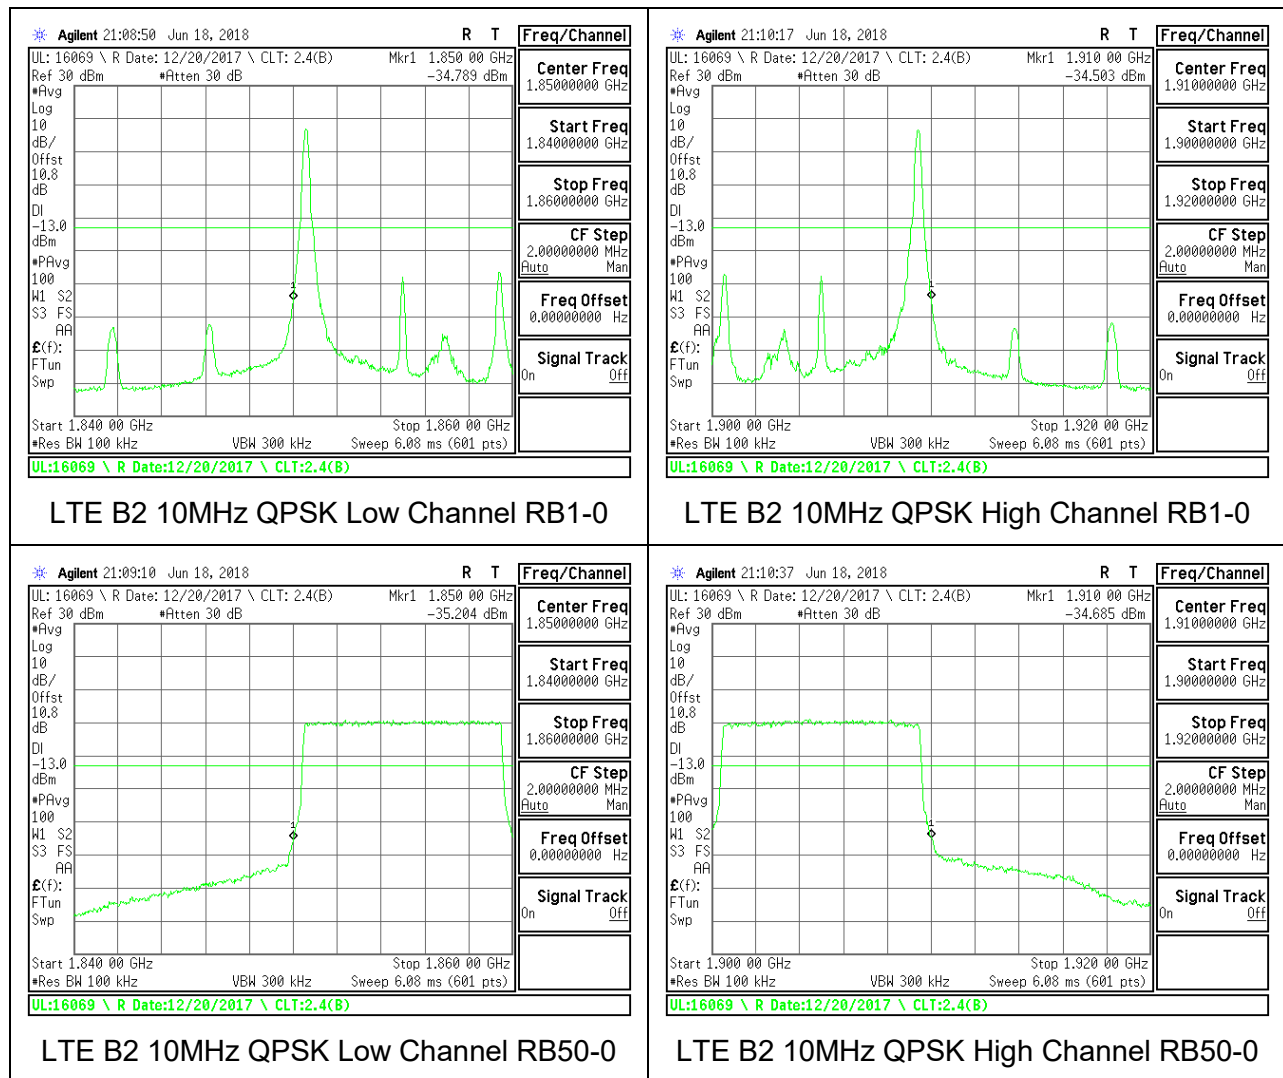

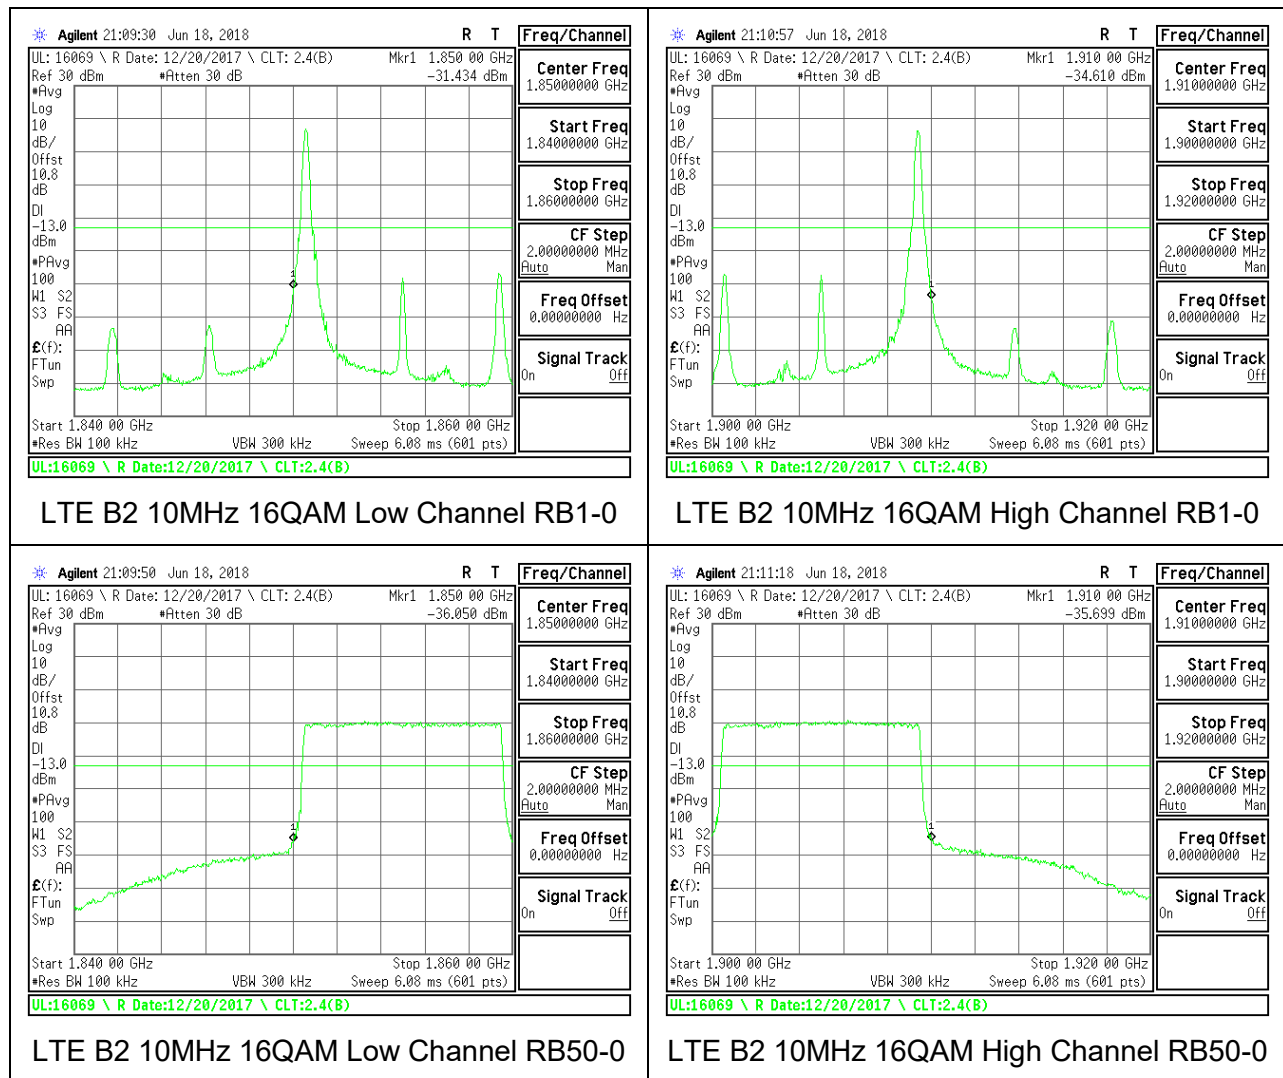


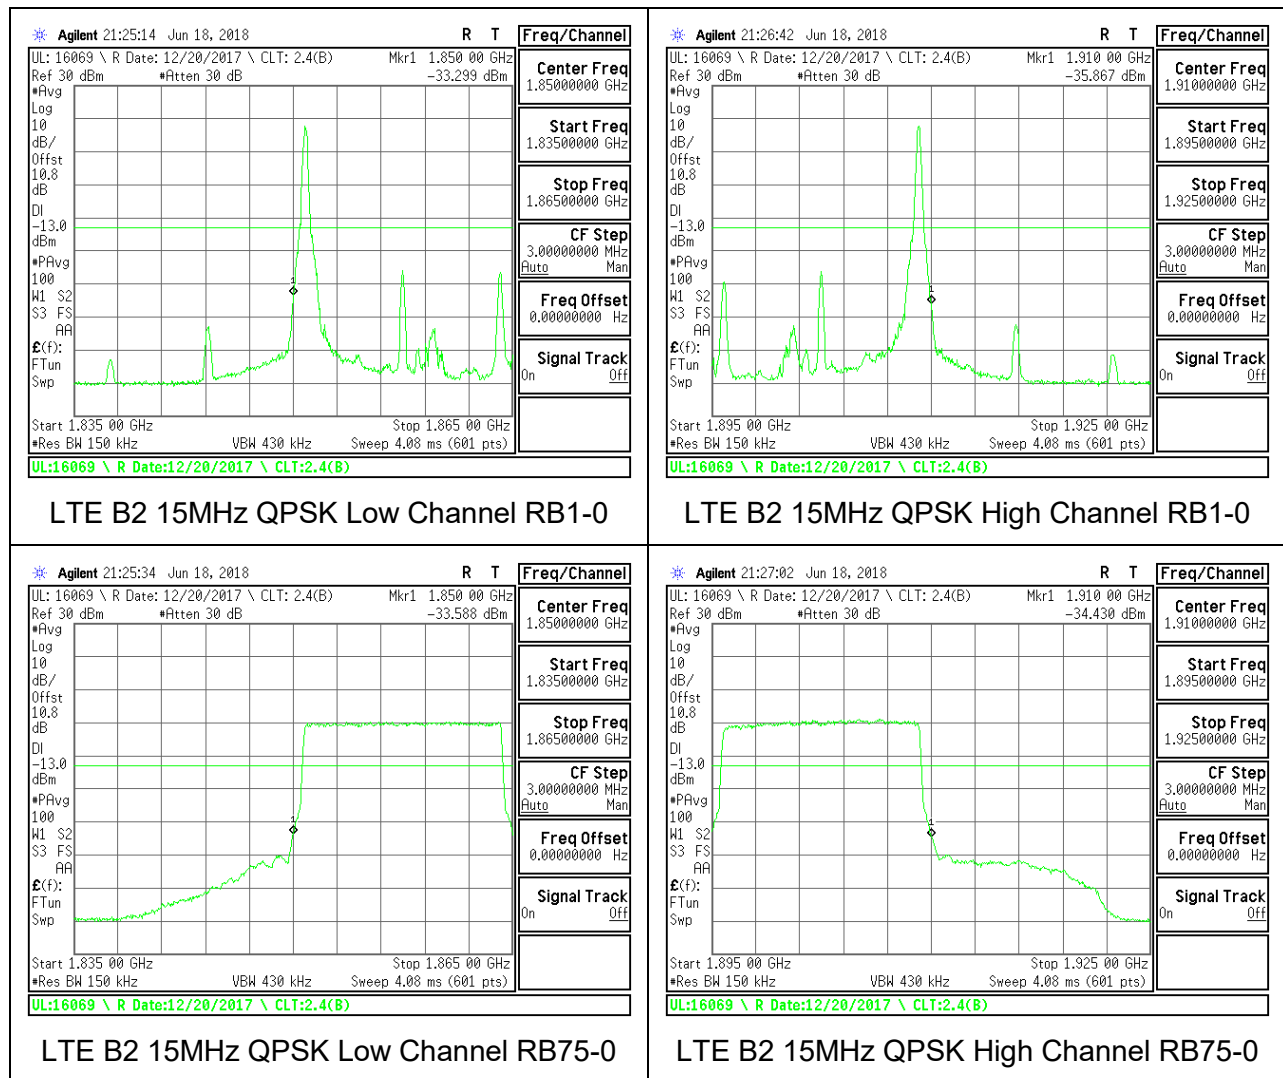

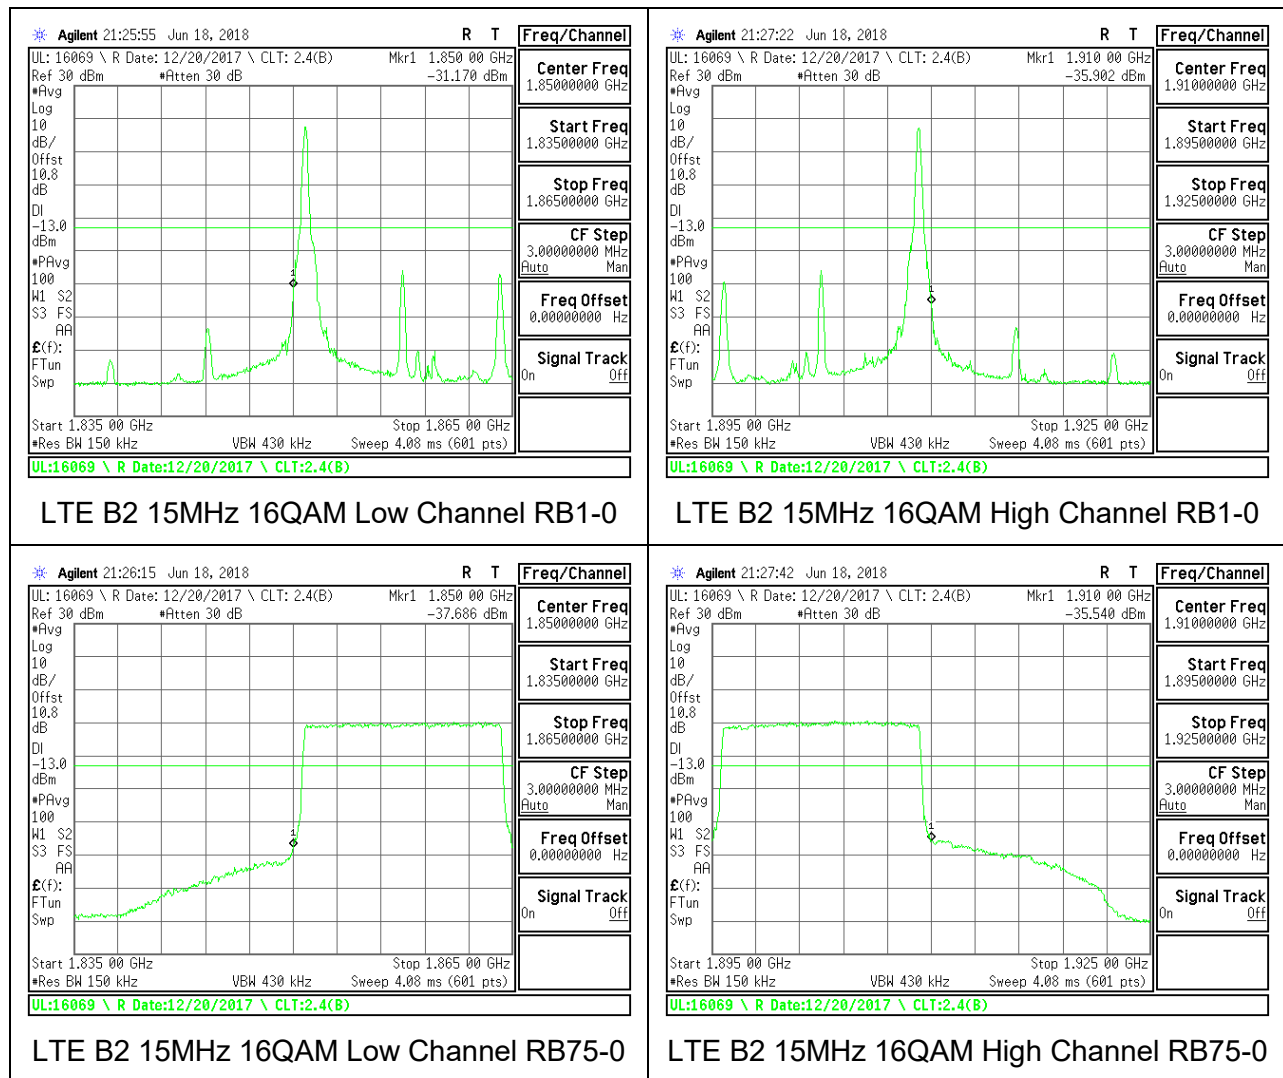


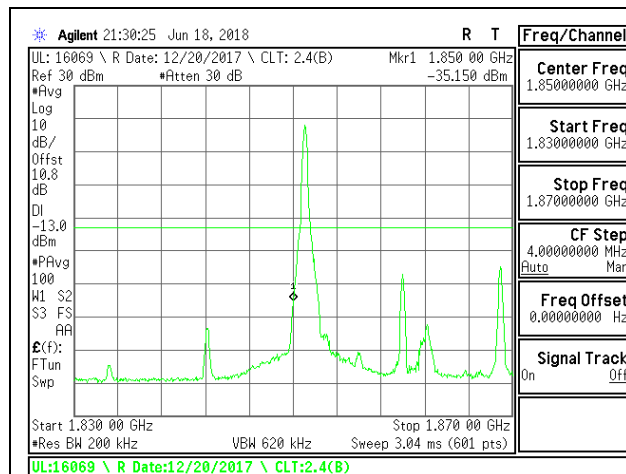


LTE B2 20MHz QPSK Low Channel RB1-0

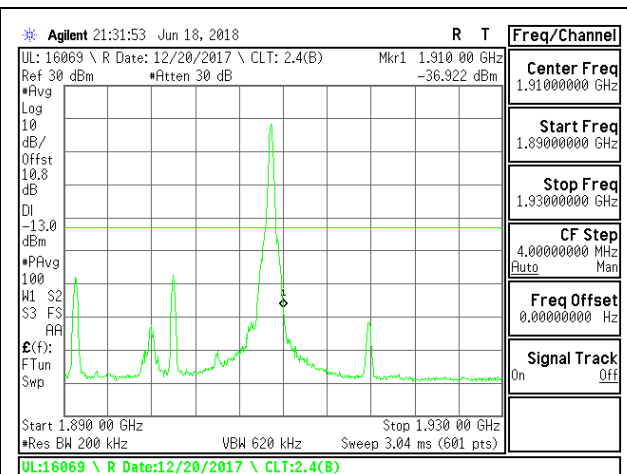


LTE B2 20MHz QPSK High Channel RB1-0

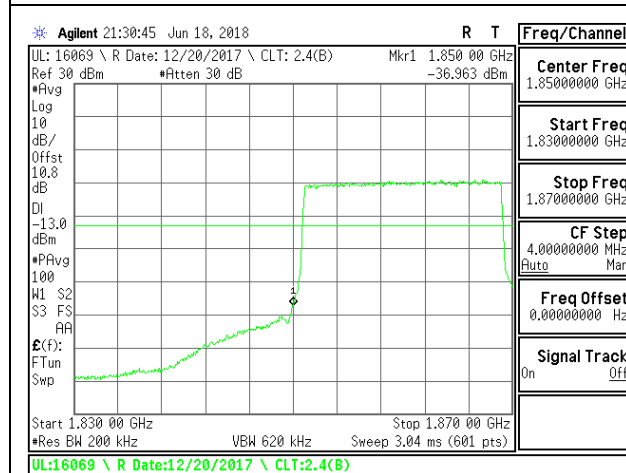


LTE B2 20MHz QPSK Low Channel RB100-0

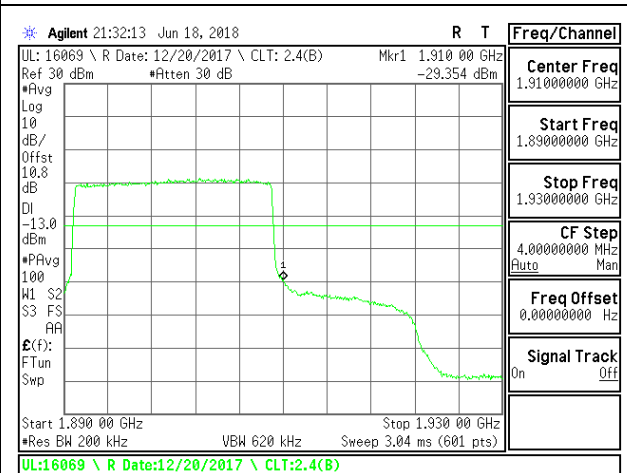


LTE B2 20MHz QPSK High Channel RB100-0

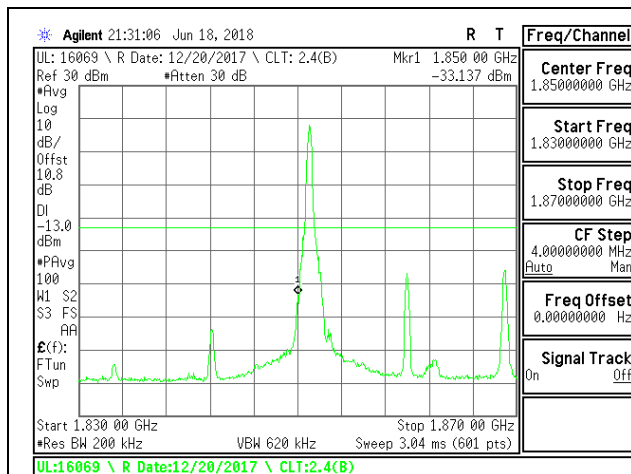


LTE B2 20MHz 16QAM Low Channel RB1-0

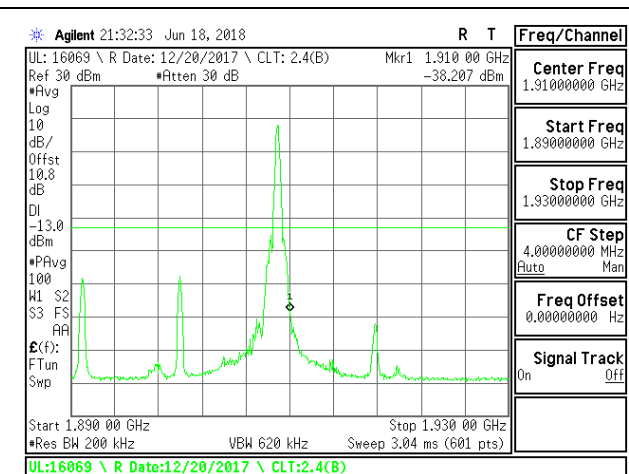

LTE B2 20MHz 16QAM High Channel RB1-0

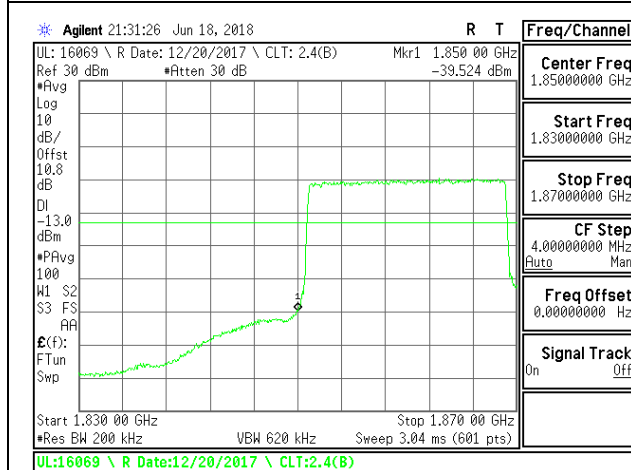



LTE B2 20MHz 16QAM Low Channel RB100-0

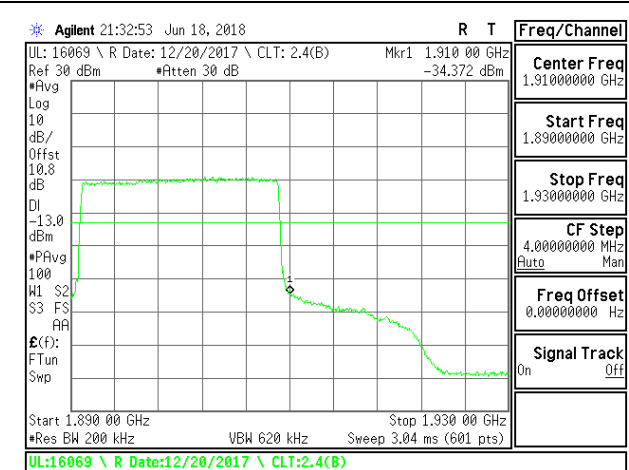



LTE B2 20MHz 16QAM High Channel RB100-0


8.2.7. LTE BAND 5 BANDEDGE

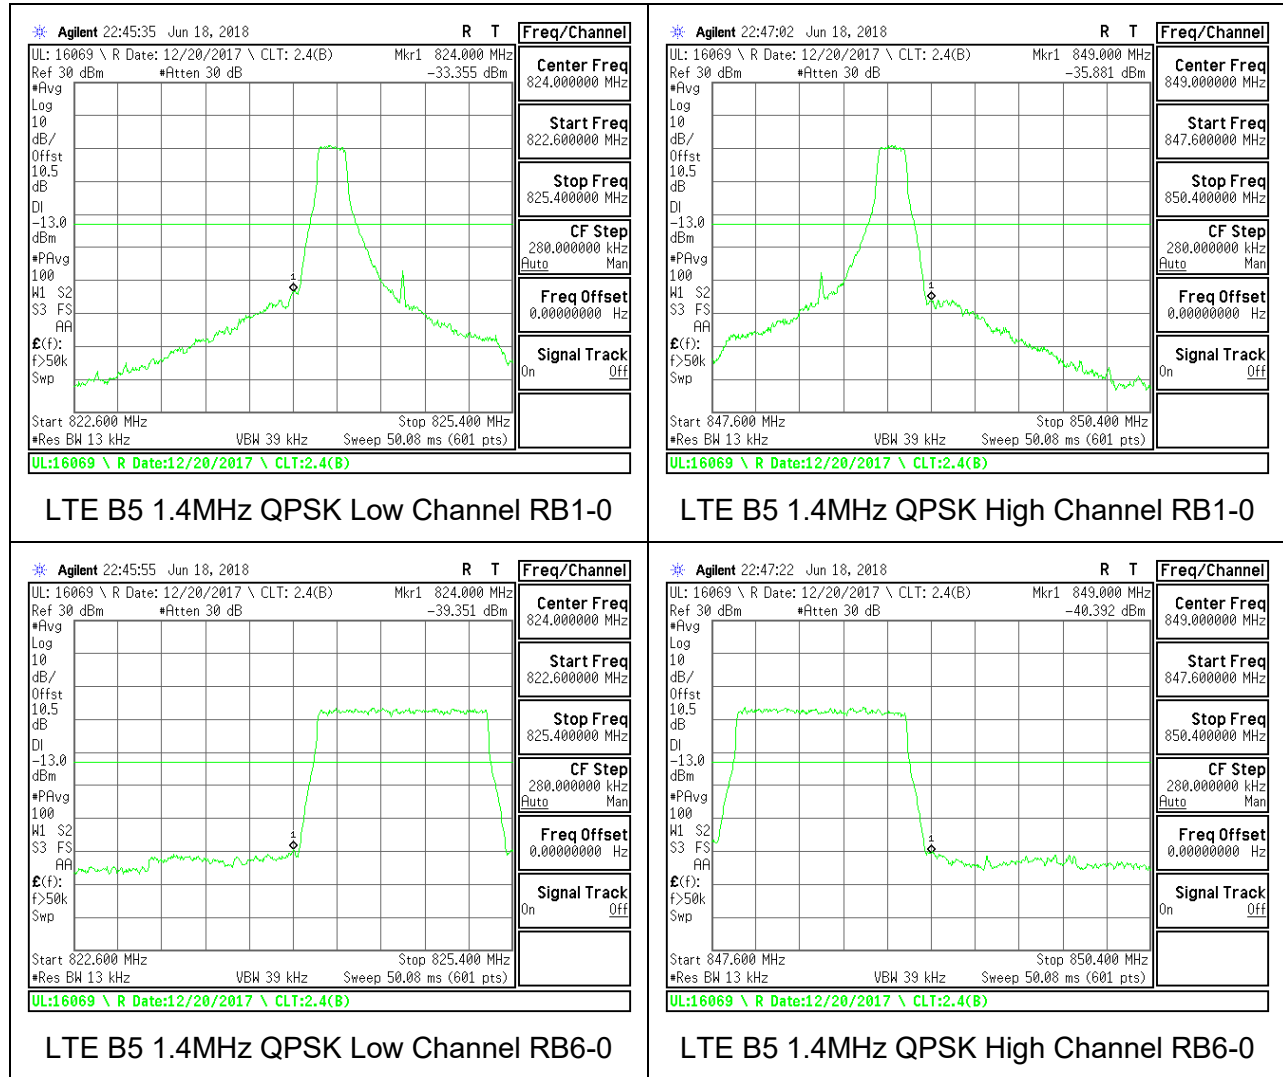

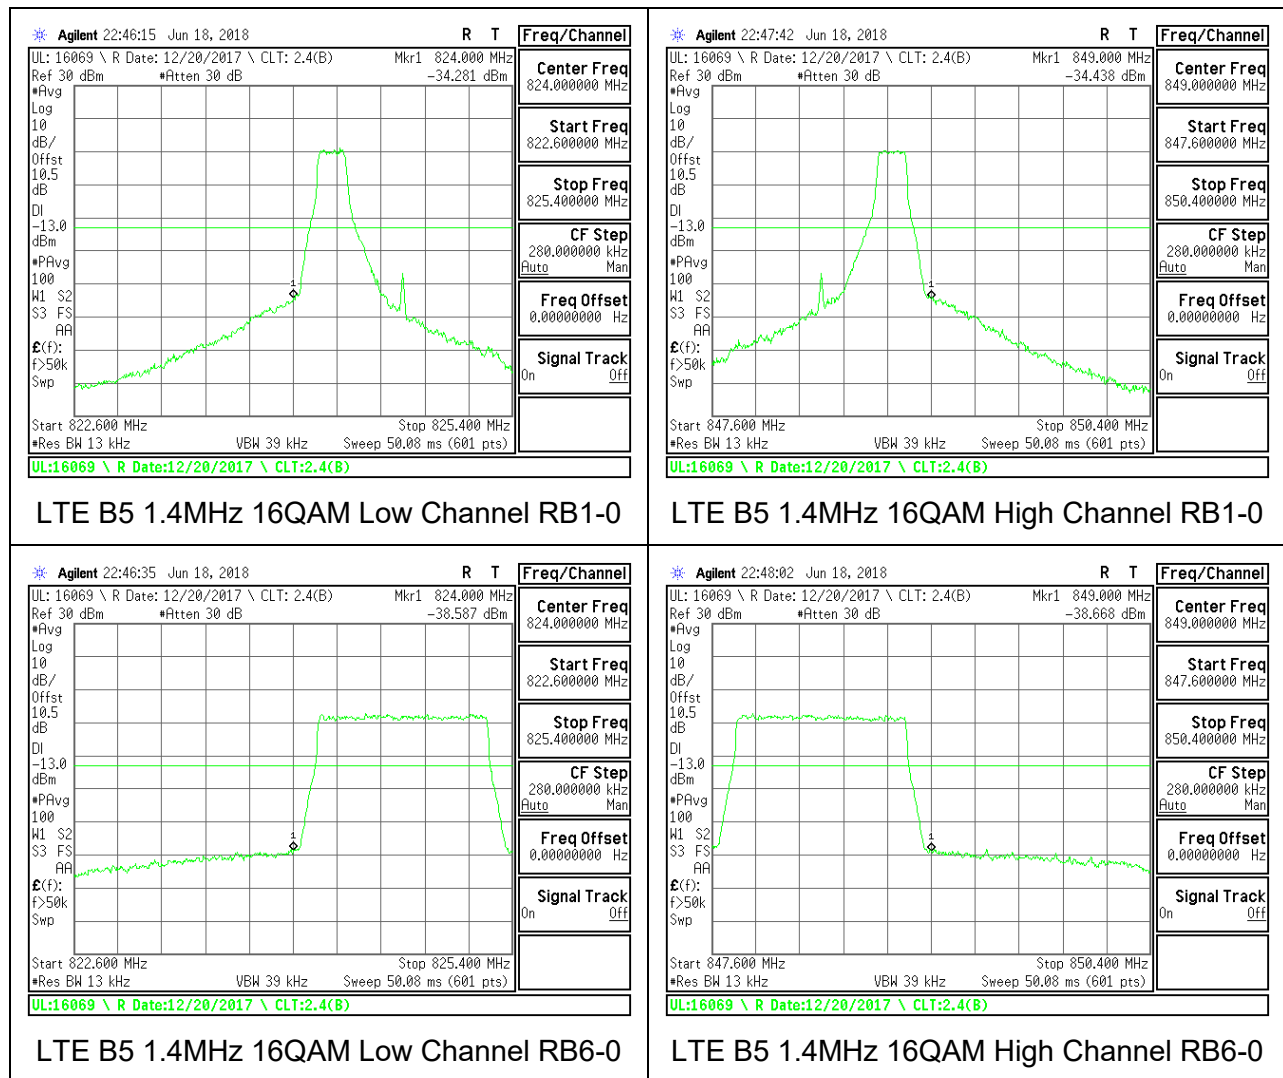


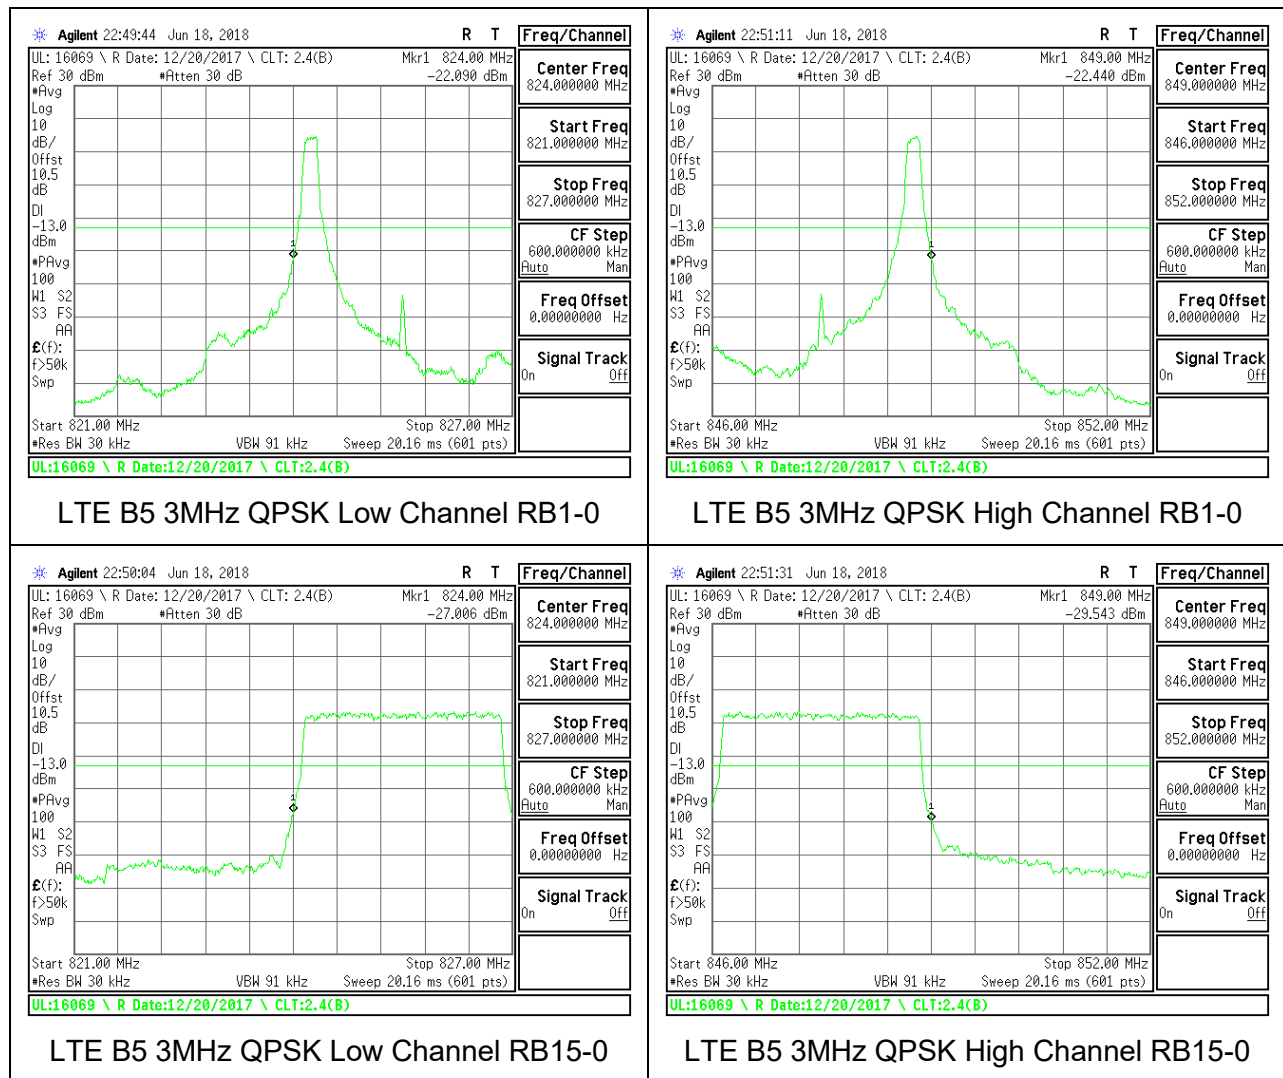

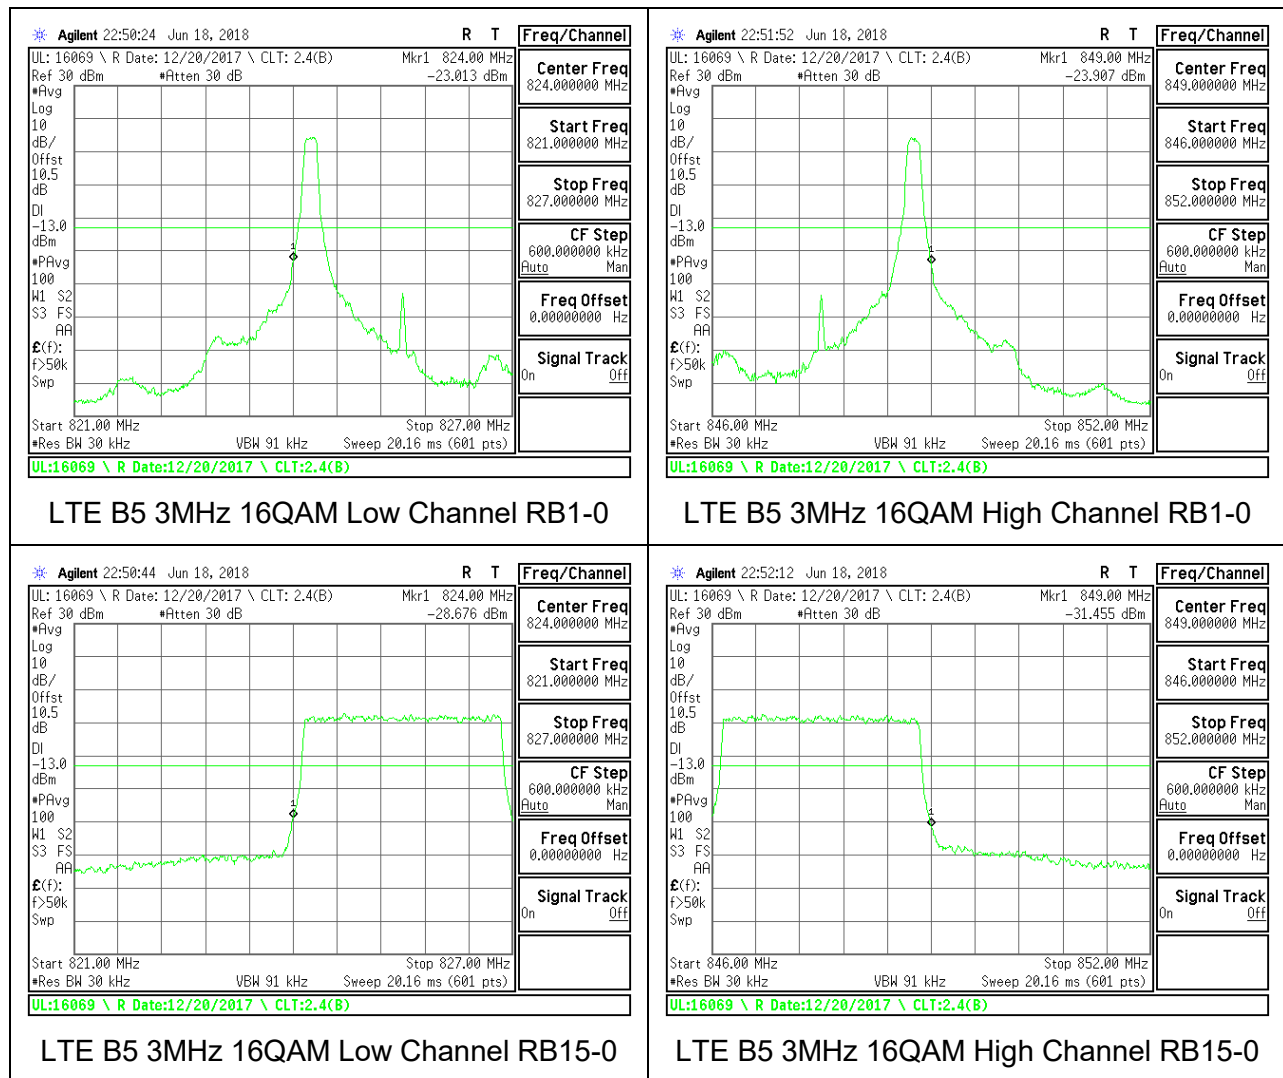


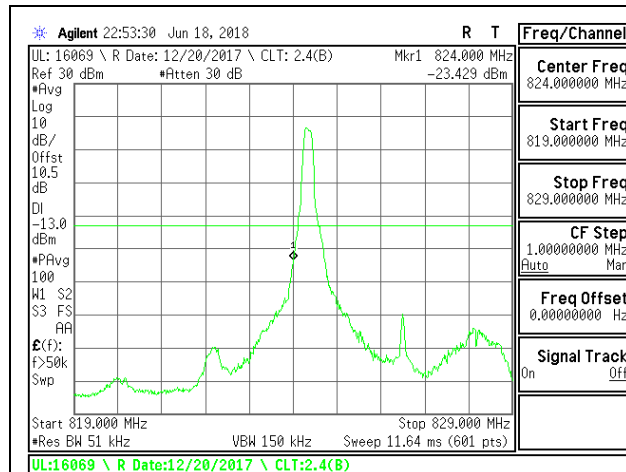


LTE B5 5MHz QPSK Low Channel RB1-0

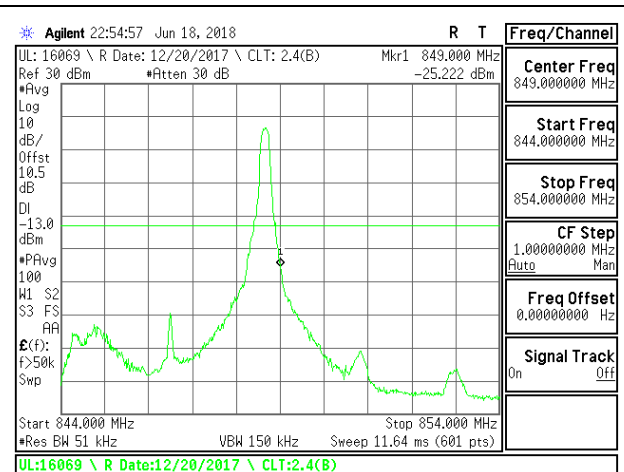


LTE B5 5MHz QPSK High Channel RB1-0

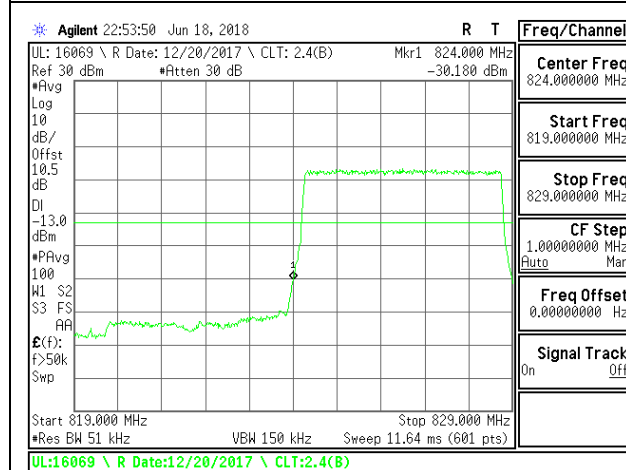


LTE B5 5MHz QPSK Low Channel RB25-0

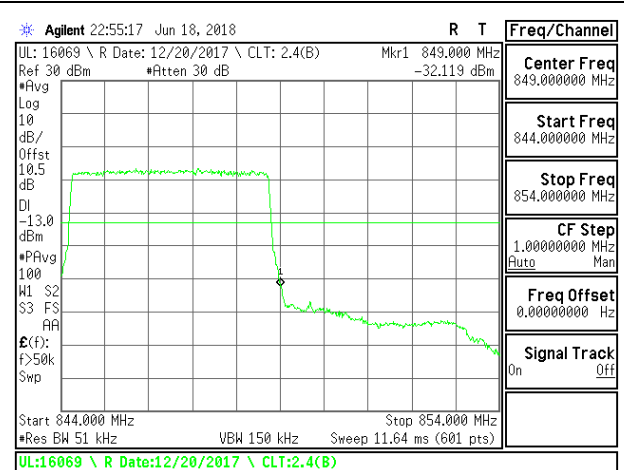


LTE B5 5MHz QPSK High Channel RB25-0

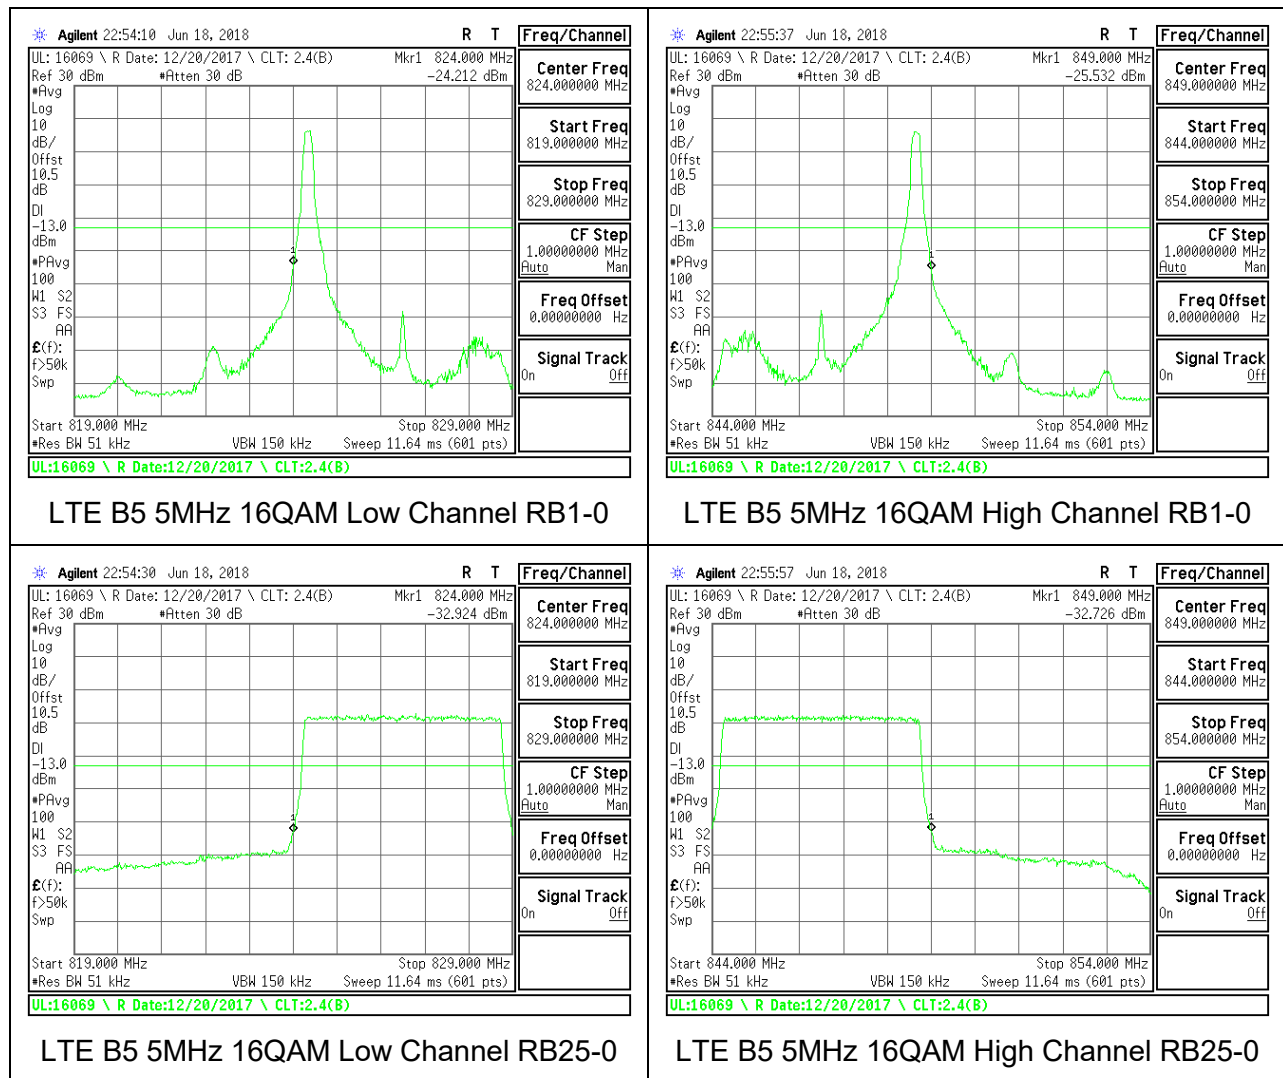


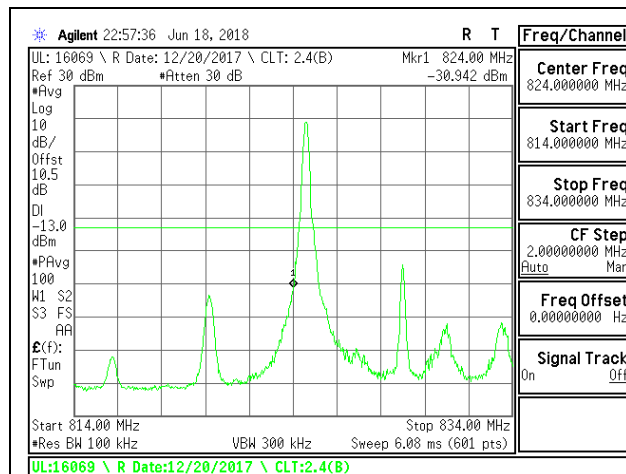


LTE B5 10MHz QPSK Low Channel RB1-0

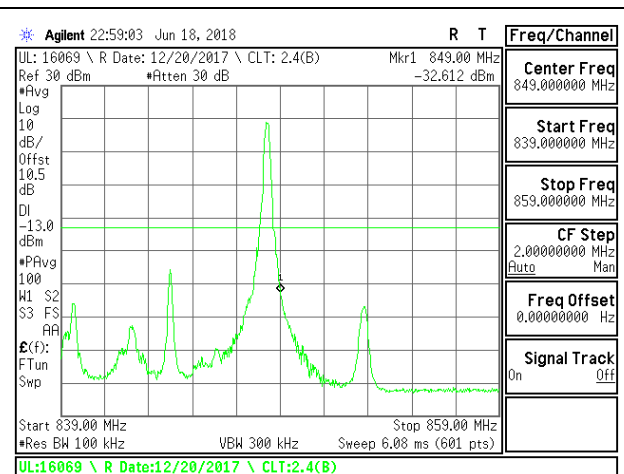


LTE B5 10MHz QPSK High Channel RB1-0

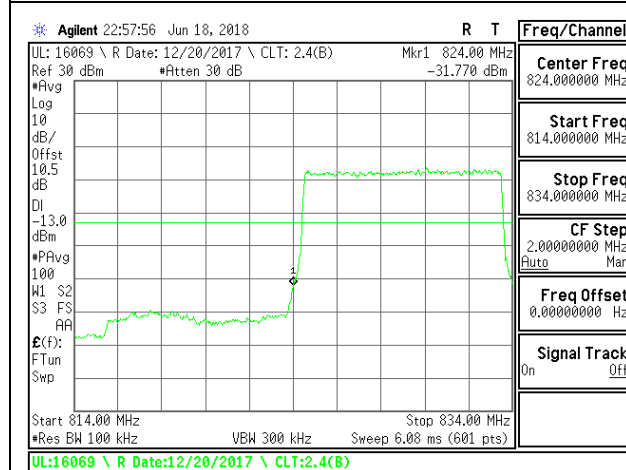


LTE B5 10MHz QPSK Low Channel RB50-0

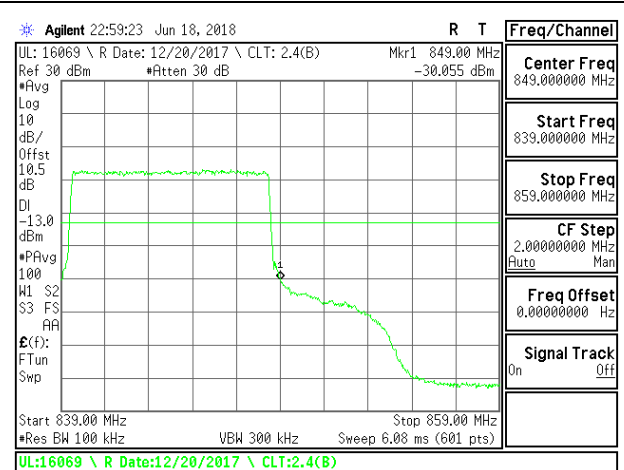


LTE B5 10MHz QPSK High Channel RB50-0

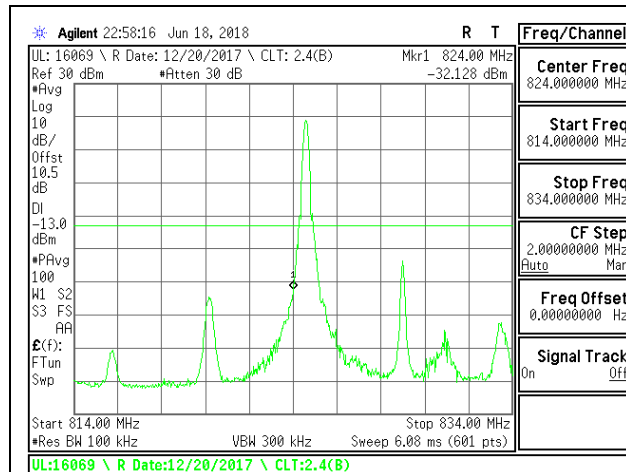


LTE B5 10MHz 16QAM Low Channel RB1-0

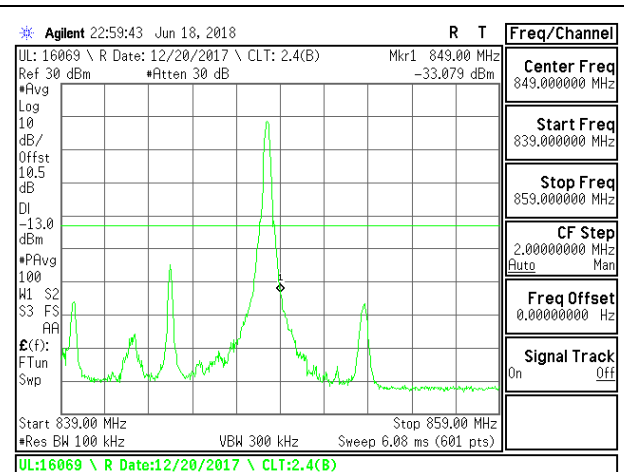

LTE B5 10MHz 16QAM High Channel RB1-0

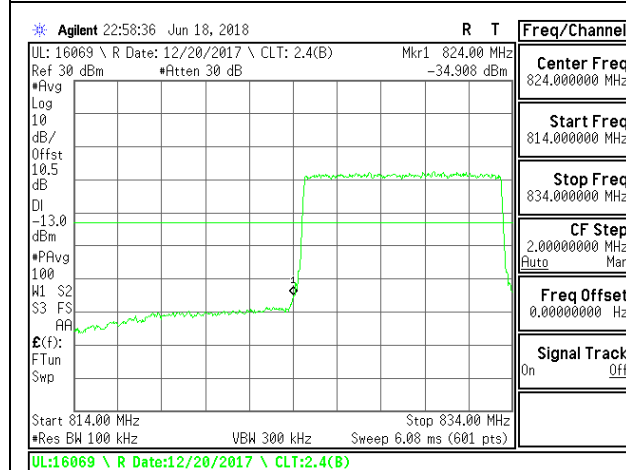



LTE B5 10MHz 16QAM Low Channel RB50-0

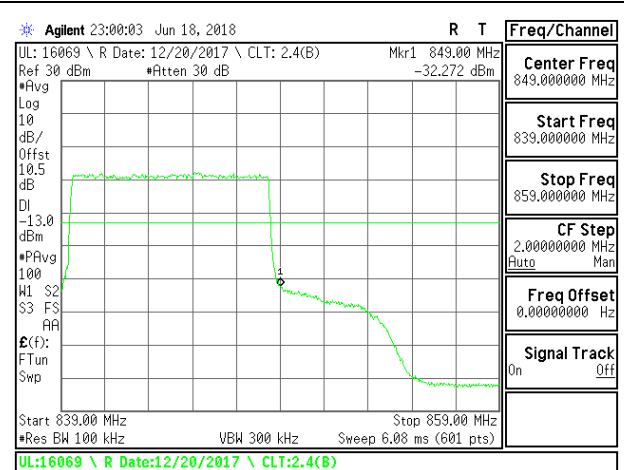



LTE B5 10MHz 16QAM High Channel RB50-0


8.2.8. LTE BAND 7 ADJACENT CHANNEL POWER

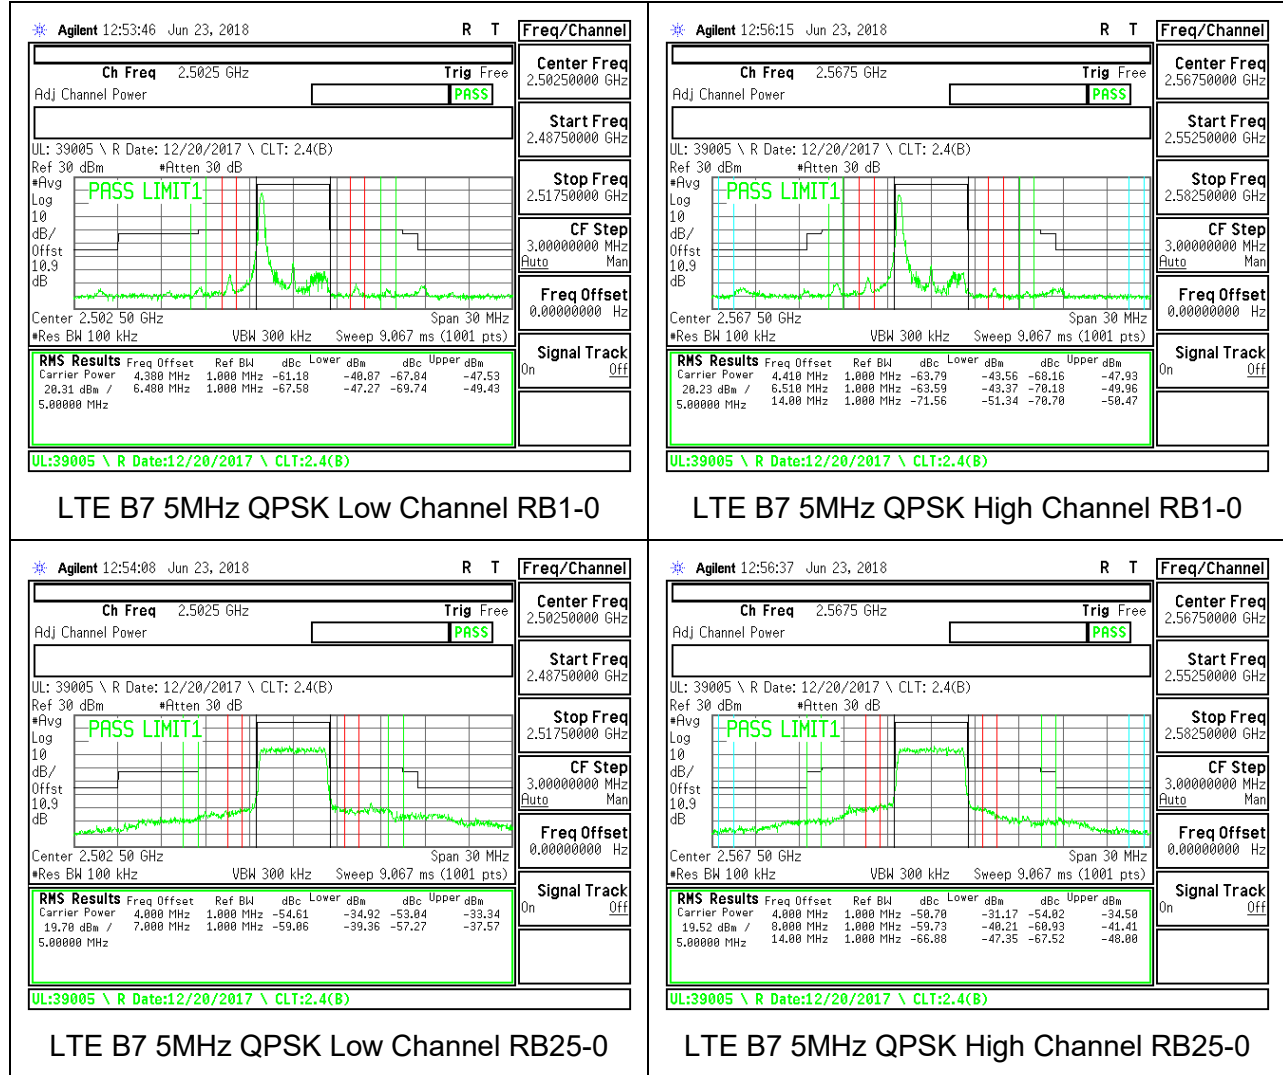


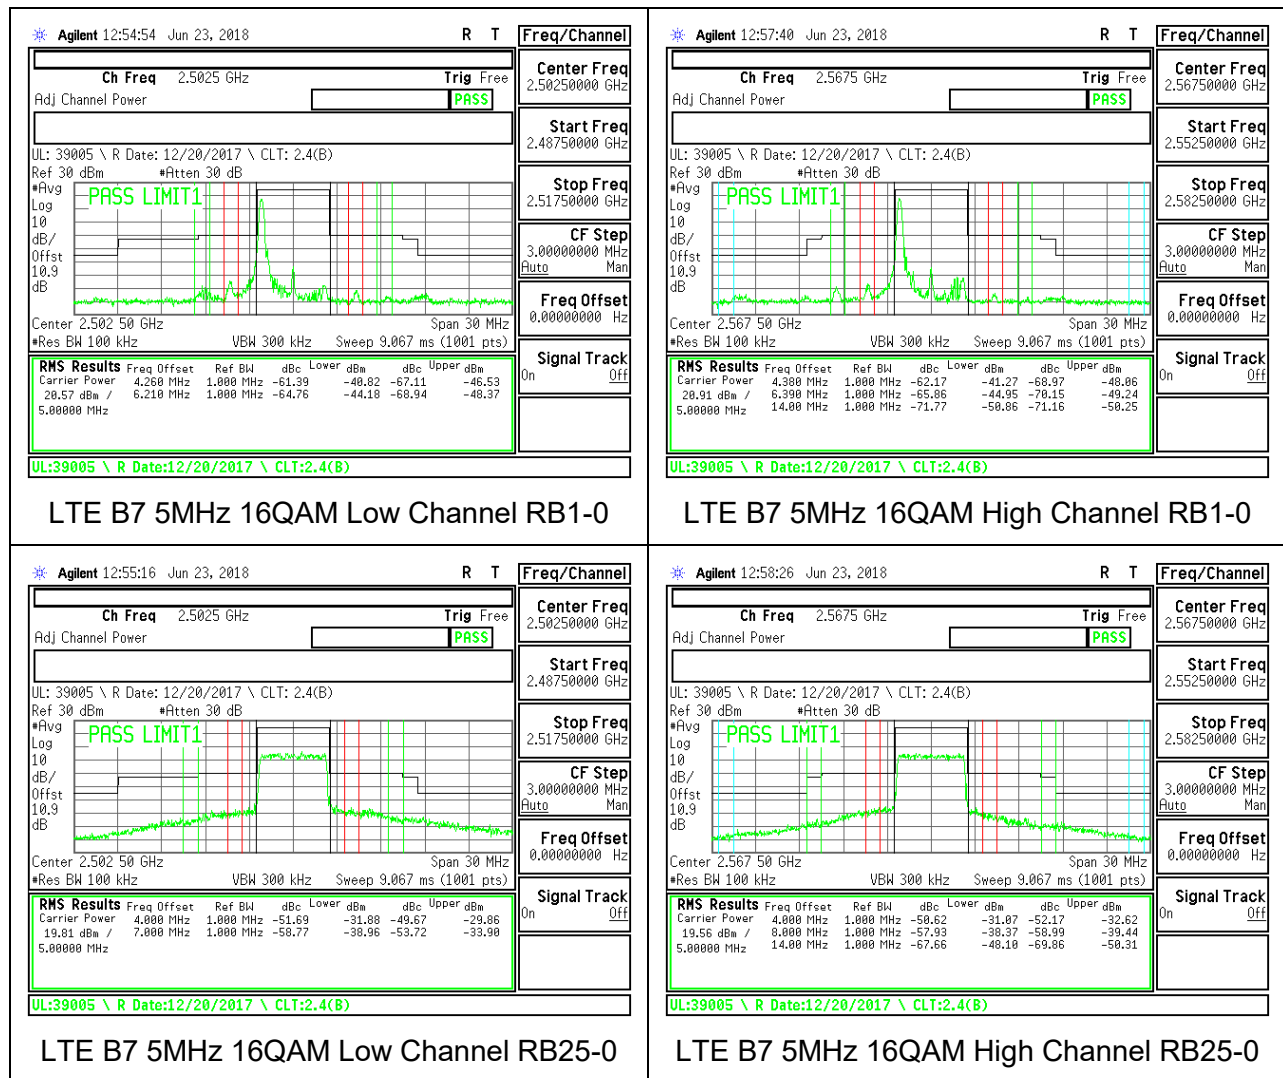


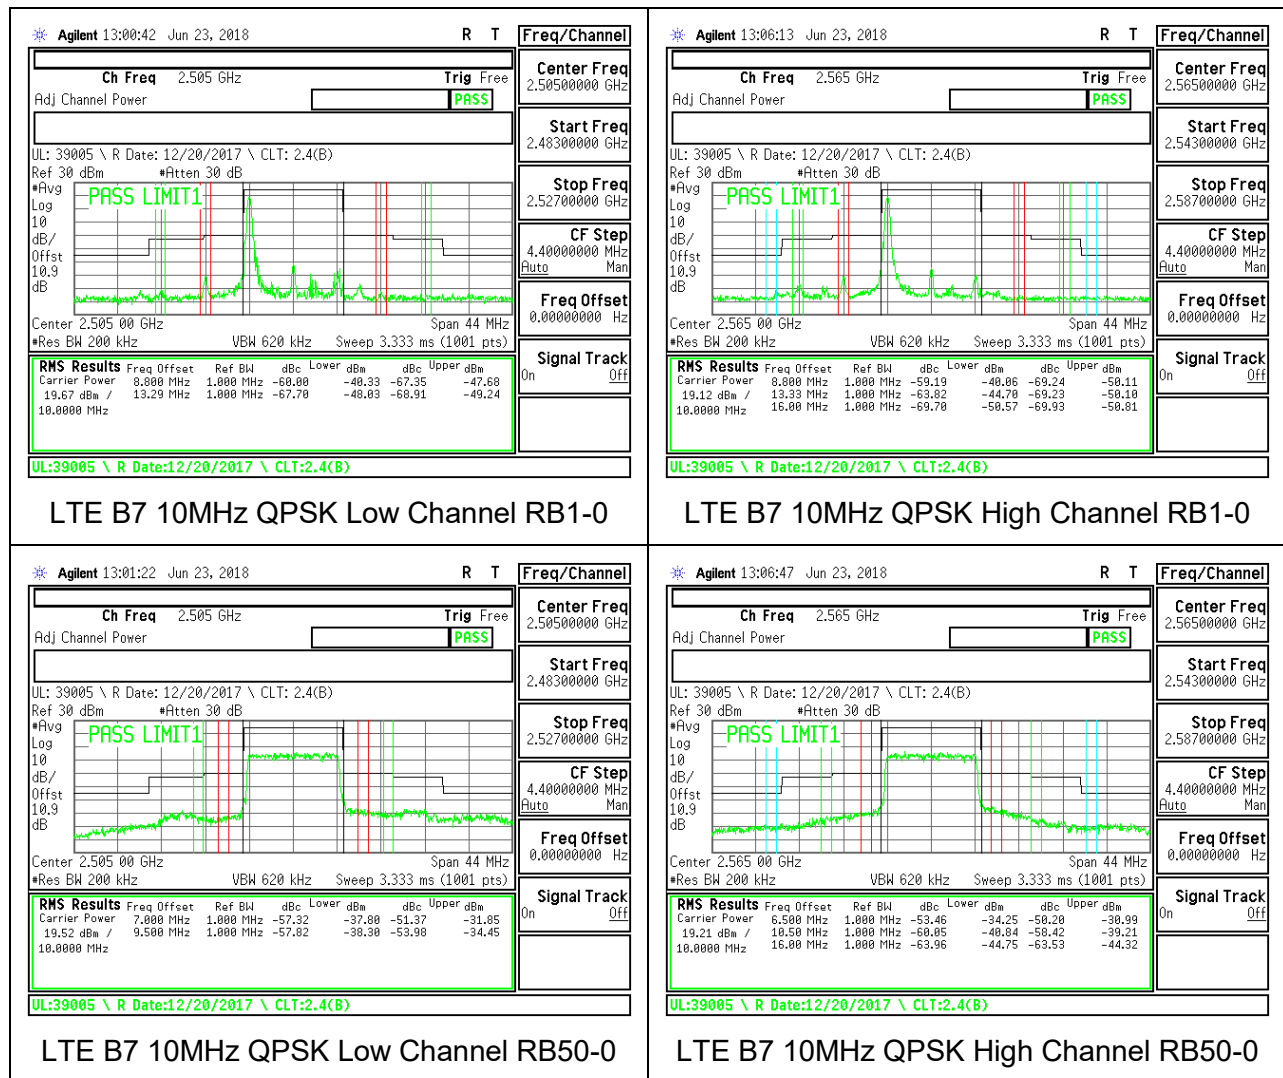


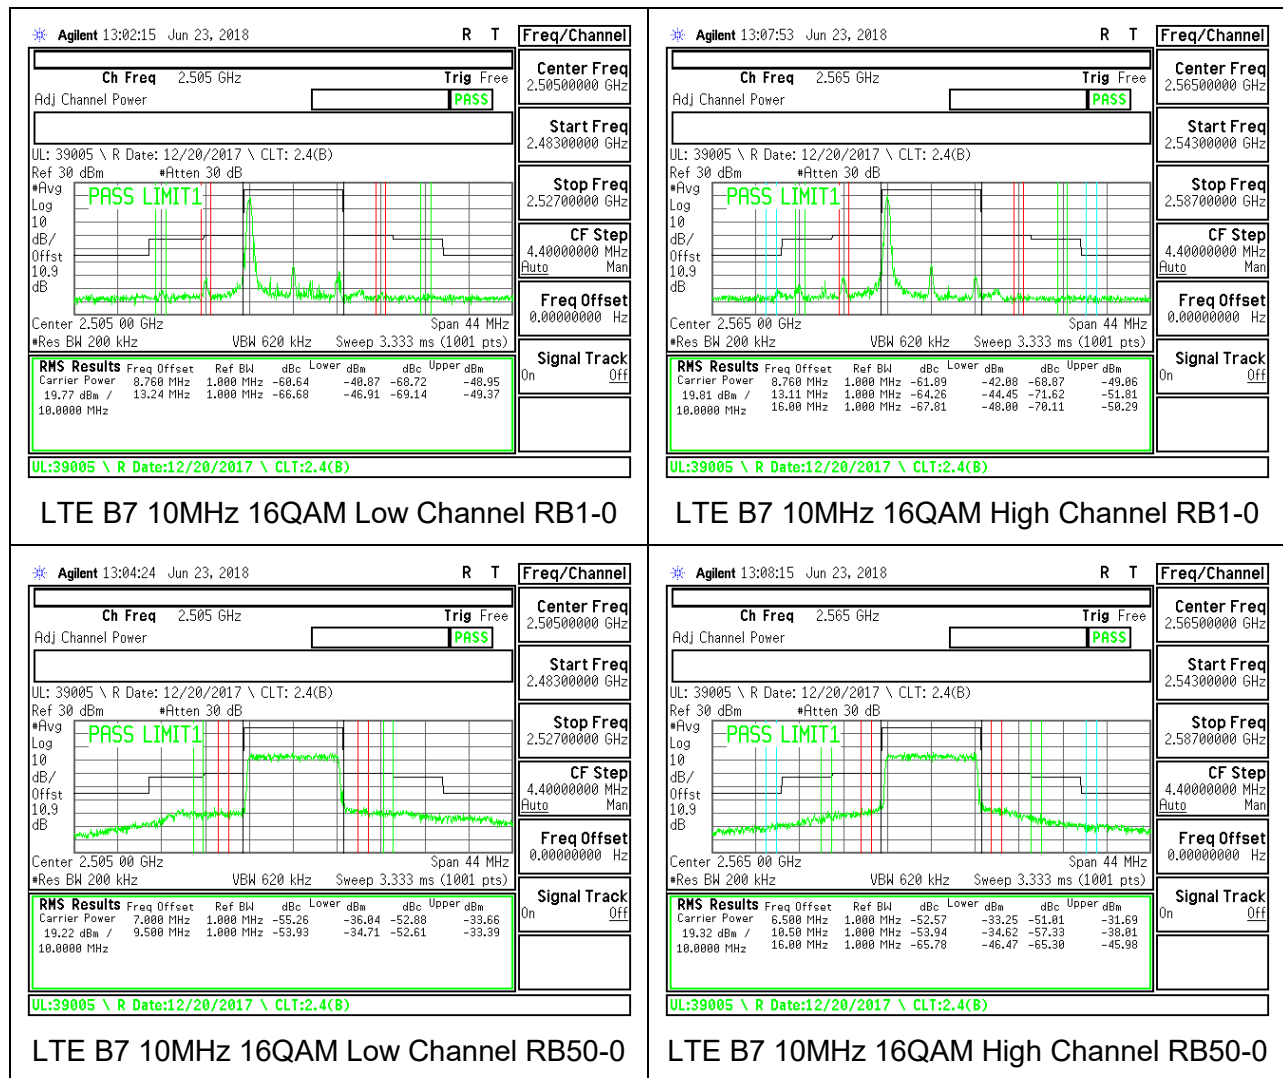

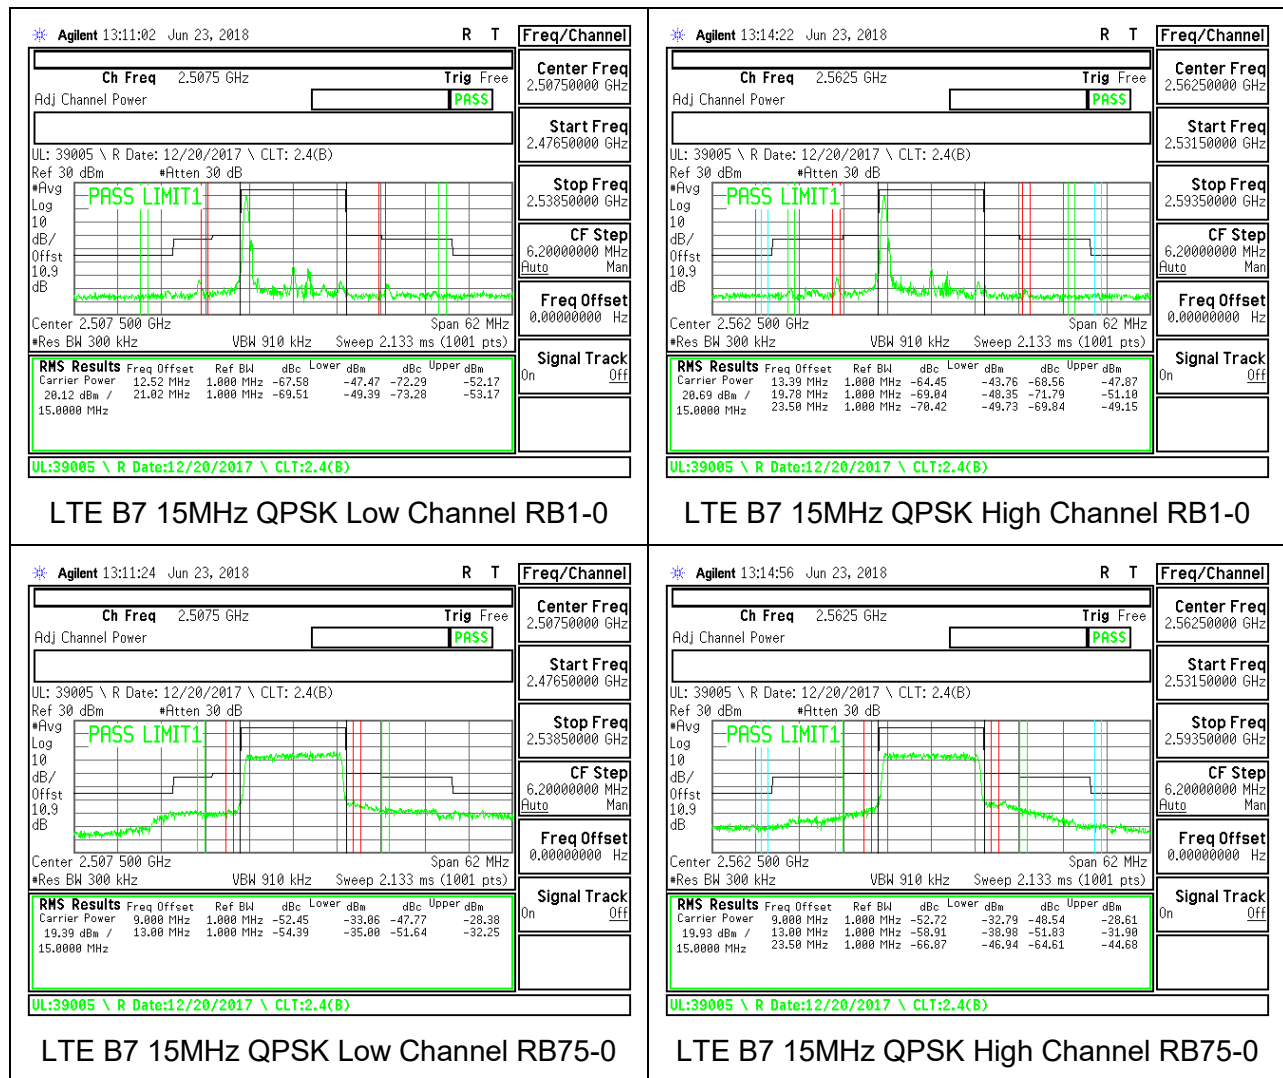


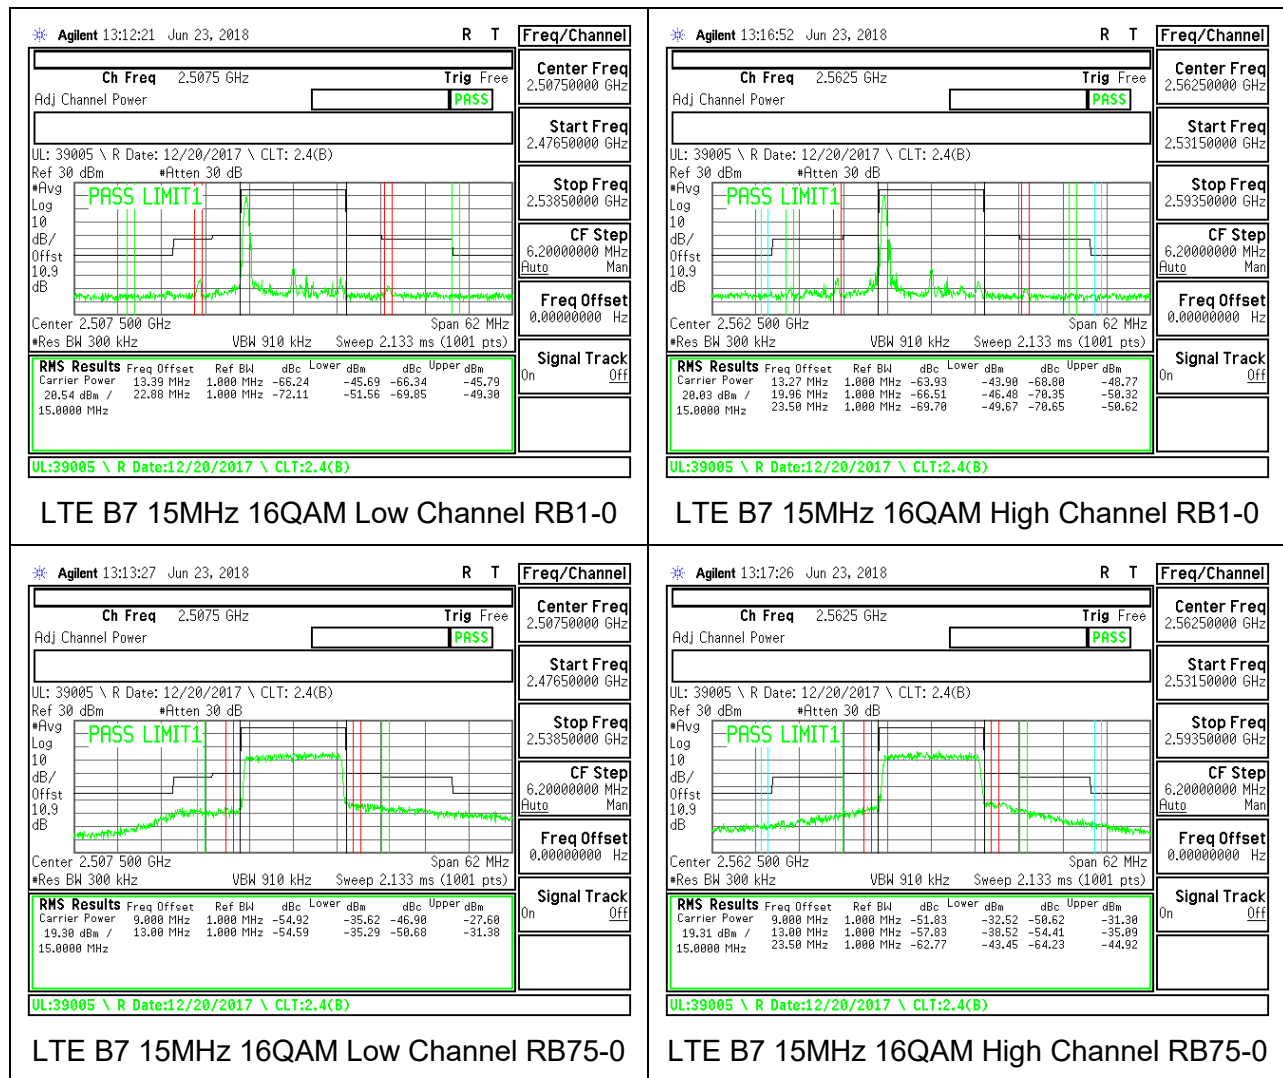

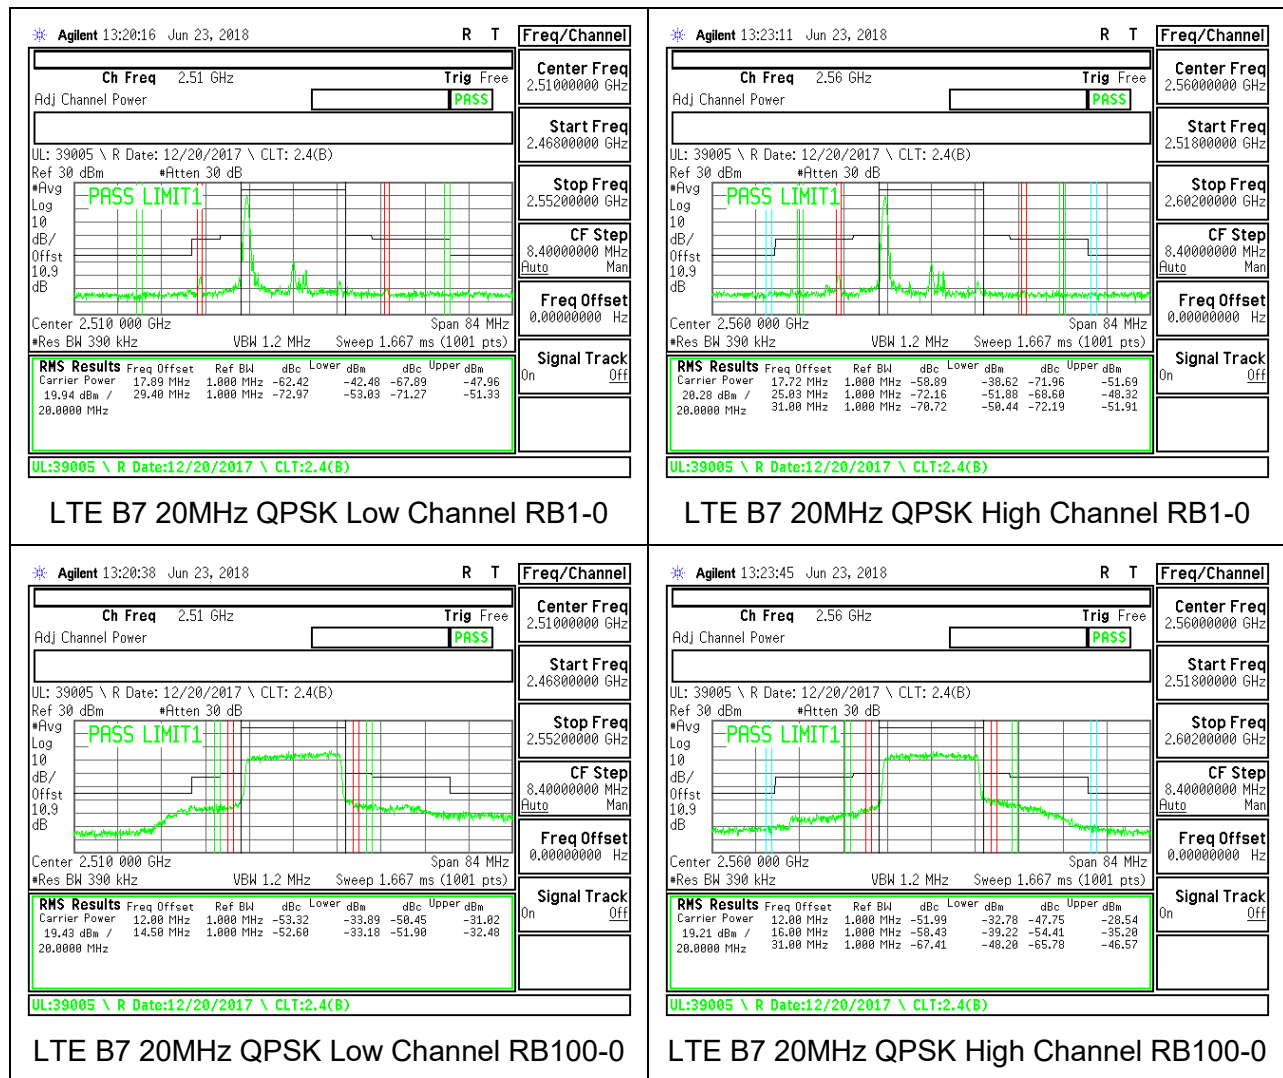

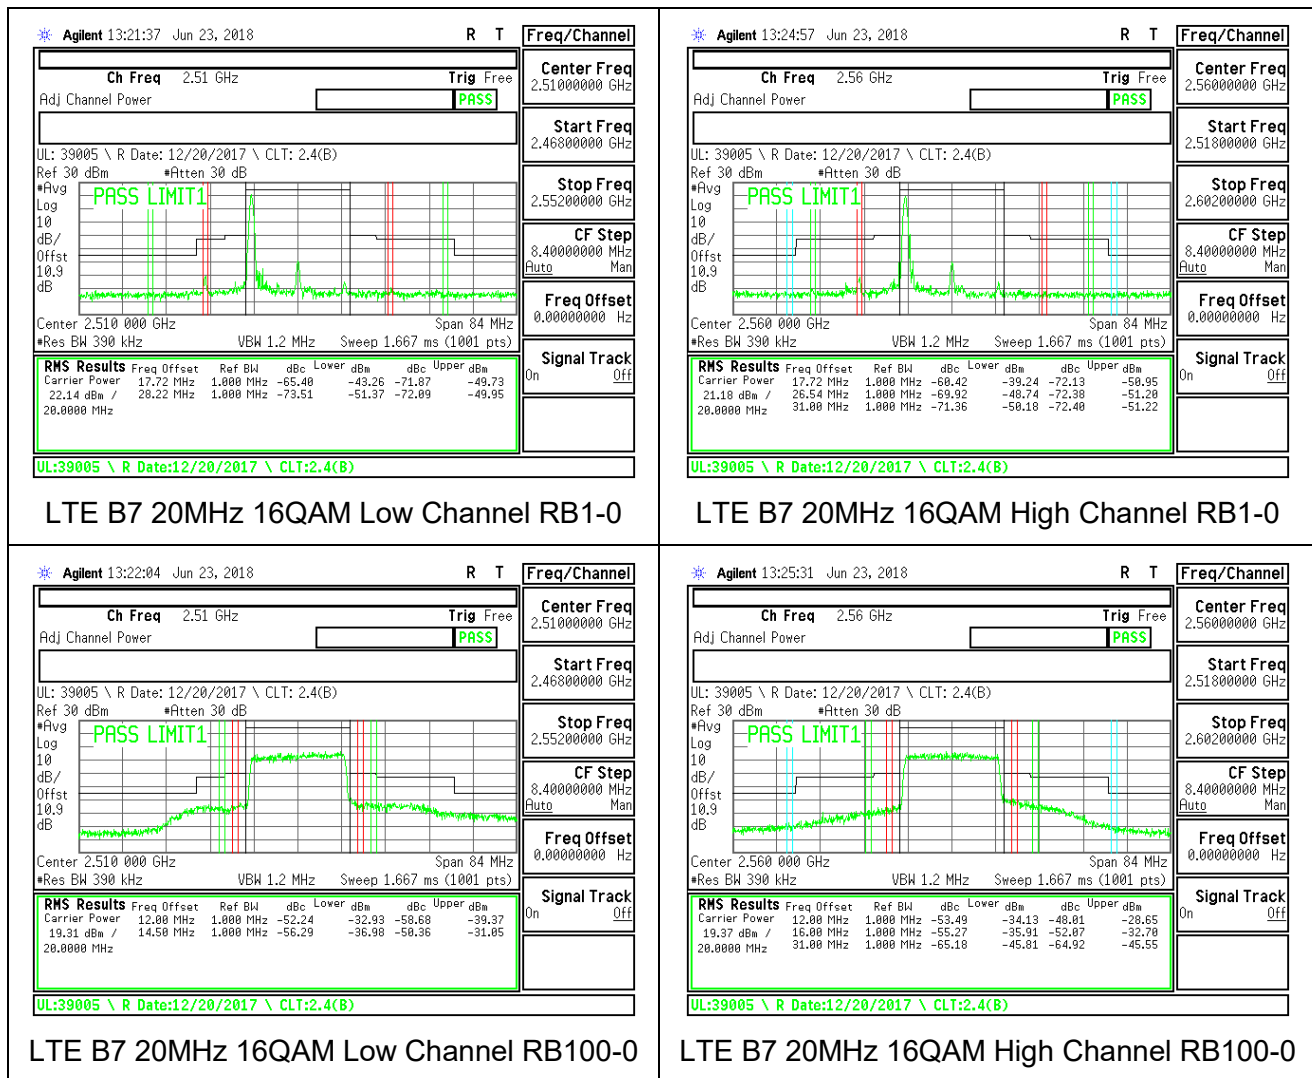

8.2.9. LTE BAND 12 BANDEDGE

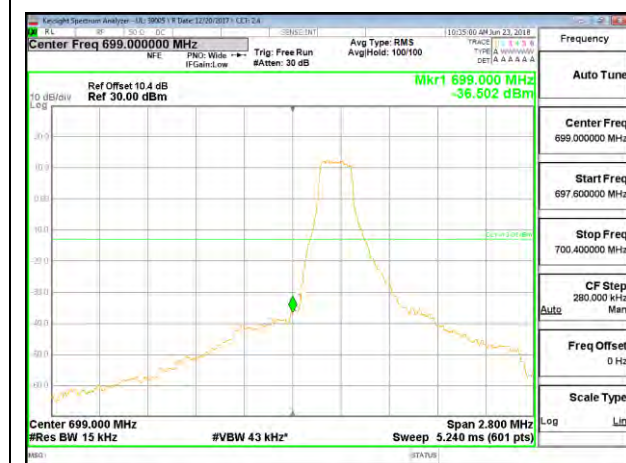

LTE B12 1.4MHz QPSK Low Channel RB1-0




LTE B12 1.4MHz QPSK High Channel RB1-0



LTE B12 1.4MHz QPSK Low Channel RB6-0



LTE B12 1.4MHz QPSK High Channel RB6-0

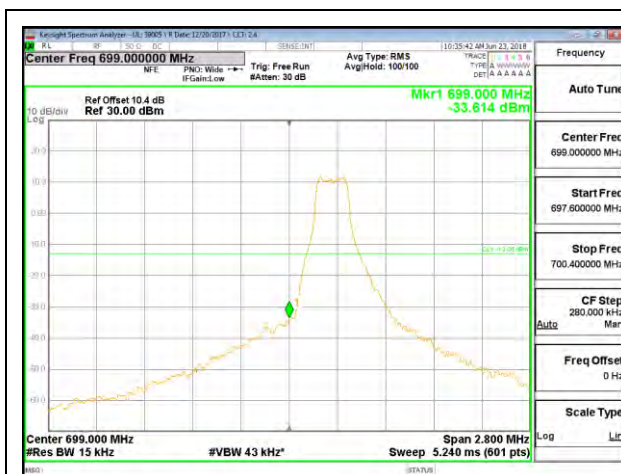

LTE B12 1.4MHz 16QAM Low Channel RB1-0



LTE B12 1.4MHz 16QAM High Channel RB1-0



LTE B12 1.4MHz 16QAM Low Channel RB6-0



LTE B12 1.4MHz 16QAM High Channel RB6-0