



Test Report Serial Number:	45461808 R1.0
Test Report Date:	1 March 2023
Project Number:	1619

## EMC Test Report - New Certification

Applicant:



**Garmin International Inc.**  
**1200 East 151 St**  
**Olathe, KS, 66062**  
**USA**

FCC ID:

**IPH-A04596**

Product Model Number / HVIN

**A04596**

IC Registration Number

-

Product Marketing Name / PMN

**A04596**

In Accordance With:

**CFR Title 47, Part 15 Subpart C (§15.247), Part 15 Subpart B**  
Digital Transmission System (DTS)

Approved By:

**Ben Hewson, President**  
Celltech Labs Inc.  
21-364 Lougheed Rd.  
Kelowna, BC, V1X 7R8  
Canada



Test Lab Certificate: 2470.01



**Industry  
Canada**

IC Registration 3874A



FCC Registration: CA3874

**This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.**

© 2023 Celltech Labs Inc,

## Table of Contents

1.0 REVISION HISTORY .....	5
2.0 CLIENT AND DUT INFORMATION .....	6
3.0 SCOPE .....	7
4.0 TEST SUMMARY .....	8
5.0 NORMATIVE REFERENCES .....	10
6.0 FACILITIES AND ACCREDITATIONS .....	11
7.0 OCCUPIED BANDWIDTH .....	12
8.0 DTS BANDWIDTH .....	21
9.0 ANTENNA PORT CONDUCTED POWER, (DTS) .....	30
10.0 ANTENNA PORT CONDUCTED POWER, (DSS) .....	32
11.0 POWER SPECTRAL DENSITY .....	34
12.0 FHSS NUMBER OF HOPPING CHANNELS .....	43
13.0 FHSS CHANNEL SEPARATION .....	49
14.0 FHSS TIME OF OCCUPANCY .....	55
15.0 CONDUCTED SPURIOUS EMISSIONS -BAND EDGE .....	67
16.0 CONDUCTED SPURIOUS EMISSIONS .....	82
17.0 RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND .....	84
18.0 RADIATED RX SPURIOUS EMISSIONS .....	88
19.0 POWER LINE CONDUCTED EMISSIONS .....	91
APPENDIX A – TEST SETUP DRAWINGS .....	96
APPENDIX B – EQUIPMENT LIST AND CALIBRATION .....	101
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY .....	102
END OF REPORT .....	102
APPENDIX D – CONDUCTED POWER MEASUREMENT PLOTS .....	103
APPENDIX E – CONDUCTED SPURIOUS EMISSIONS MEASUREMENT PLOTS .....	103
APPENDIX F – RADIATED TX EMISSIONS MEASUREMENT PLOTS .....	103
APPENDIX G – RADIATED RX EMISSIONS MEASUREMENT PLOTS .....	103

## Table of Figures

Figure A.1 – Test Setup – Conducted Measurements .....	96
Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz .....	97
Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz .....	98
Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution .....	98
Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz, .....	99
Figure A.6 – Test Setup Radiated Measurements 18 – 26.5GHz, .....	99
Figure A.7 – Test Setup Conducted Emissions Measurements .....	100

## Table of Plots

Plot 7.1 – Occupied Bandwidth, 802.11b .....	13
Plot 7.2 – Occupied Bandwidth, 802.11g .....	14
Plot 7.3 – Occupied Bandwidth, 802.11n .....	15
Plot 7.4 – Occupied Bandwidth, BT BR .....	17
Plot 7.5 – Occupied Bandwidth, BT 2EDR .....	18
Plot 7.6 – Occupied Bandwidth, BT 3EDR .....	19
Plot 8.1 – 6dB DTS Bandwidth 802.11b .....	22
Plot 8.2 – 6dB DTS Bandwidth 802.11g .....	23
Plot 8.3 – 6dB DTS Bandwidth 802.11n .....	24
Plot 8.4 – 6dB DTS Bandwidth, BT BR .....	26
Plot 8.5 – 6dB DTS Bandwidth, BT 2EDR .....	27
Plot 8.6 – 6dB DTS Bandwidth, BT 3EDR .....	28
Plot 11.1 – Power Spectral Density, 802.11b .....	35
Plot 11.2 – Power Spectral Density, 802.11g .....	36
Plot 11.3 – Power Spectral Density, 802.11n .....	37
Plot 11.4 – Power Spectral Density, BT BR .....	39
Plot 11.5 – Power Spectral Density, BT 2EDR .....	40
Plot 11.6 – Power Spectral Density, BT 3EDR .....	41
Plot 12.1 – Number of Hopping Channels, BT BR .....	44
Plot 12.2 – Number of Hopping Channels, BT BR .....	45
Plot 12.3 – Number of Hopping Channels, BT 2EDR .....	46
Plot 12.4 – Number of Hopping Channels, BT 2EDR .....	47
Plot 13.1 – 20dB BW, BT BR .....	50
Plot 13.2 – FHSS Channel Separation, BT BR .....	51
Plot 13.3 – 20dB BW, BT 2EDR .....	52
Plot 13.4 – FHSS Channel Separation, BT 2EDR .....	53
Plot 14.1 – Time of Occupancy, DH1, 2-DH1, 3-DH1, DM1 .....	56
Plot 14.2 – Time of Occupancy, DH1, 2-DH1, 3-DH1, DM1 .....	57
Plot 14.3 – Time of Occupancy, DH3, 2-DH3, 3-DH3, DM3 .....	58
Plot 14.4 – Time of Occupancy, DH3, 2-DH3, 3-DH3, DM3 .....	59
Plot 14.5 – Time of Occupancy, DH5, 2-DH5, 3-DH5, DM5 .....	60
Plot 14.6 – Time of Occupancy, DH5, 2-DH5, 3-DH5, DM5 .....	61
Plot 14.7 – Time of Occupancy, EV4 .....	62
Plot 14.8 – Time of Occupancy, EV4 .....	63
Plot 14.9 – Time of Occupancy, EV5 .....	64
Plot 14.10 – Time of Occupancy, EV5 .....	65
Plot 15.1 – Band Edge, 802.11b .....	68
Plot 15.2 – Band Edge, 802.11b .....	69
Plot 15.3 – Band Edge, 802.11g .....	70
Plot 15.4 – Band Edge, 802.11g .....	71
Plot 15.5 – Band Edge, 802.11n .....	72
Plot 15.6 – Band Edge, 802.11n .....	73
Plot 15.7 – Band Edge, BT BR .....	75
Plot 15.8 – Band Edge, BT BR .....	76
Plot 15.9 – Band Edge, BT 2EDR .....	77
Plot 15.10 – Band Edge, BT 2EDR .....	78
Plot 15.11 – Band Edge, BT 3EDR .....	79
Plot 15.12 – Band Edge, BT 3EDR .....	80
Plot 19.1 – Power Line Conducted Emissions, Line 1 .....	92
Plot 19.2 – Power Line Conducted Emissions, Line 2 .....	93

## Table of Tables

Table 7.1 – Summary of Occupied Bandwidth Measurements, (DTS).....	16
Table 7.2 – Summary of Occupied Bandwidth Measurements (DSS).....	20
Table 8.1 – Summary of 6dB DTS Bandwidth Measurements, (DTS).....	25
Table 8.2 – Summary of 6dB DTS Bandwidth Measurements, (DSS) .....	29
Table 9.1 – Summary of Conducted Power Measurements, (DTS) .....	31
Table 10.1 – Summary of Conducted Power Measurements, (DSS) .....	33
Table 11.1 – Summary of Power Spectral Density Measurements, (DTS) .....	38
Table 11.2 – Summary of Power Spectral Density Measurements, (DSS) .....	42
Table 12.2 – Summary of FHSS Number of Hopping Channels .....	48
Table 13.1 – Summary of FHSS Channel Separation .....	54
Table 14.1 – Summary of FHSS Time of Occupancy.....	66
Table 15.1 – Summary of Spurious Emission Measurements – Band Edge, (DTS) .....	74
Table 15.2 – Summary of Spurious Emission Measurements – Band Edge, DSS .....	81
Table 16.1 – Summary of Conducted Spurious Emissions, (DTS).....	83
Table 16.2 – Summary of Conducted Spurious Emissions, (DSS).....	83
Table 17.1 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (DTS).....	85
Table 17.2 – Summary of Radiated Tx Spurious Emissions, (DTS).....	86
Table 17.2 – Summary of Radiated Tx Spurious Emissions, (DTS).....	87
Table 18.1 – Summary of Radiated Rx Spurious Emissions, DTS).....	89
Table 18.1 – Summary of Radiated Rx Spurious Emissions, DTS).....	90
Table 18.2 – Summary of Radiated Rx Spurious Emissions, DSS) .....	<b>Error! Bookmark not defined.</b>
Table 19.1 – Summary of Power Line Conducted Emissions – L1.....	94
Table 19.1 – Summary of Power Line Conducted Emissions – L2.....	95
Table A.1 – Conducted Measurement Setup.....	96
Table A.2 – Radiated Emissions Measurement Equipment .....	97
Table A.3 – Setup – Conducted Emissions Equipment List .....	100

## 1.0 REVISION HISTORY

Revision History					
Samples Tested By:		Art Voss, P.Eng.	Date(s) of Evaluation:		15 January - 13 February, 2023
Report Prepared By:		Art Voss, P.Eng.	Report Reviewed By:		Ben Hewson
Report Revision	Description of Revision		Revised Section	Revised By	Revision Date
0.1	Draft		n/a	Art Voss	14 February 2023
1.0	Initial Release		n/a	Art Voss	1 March 2023

## 2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St
	Olathe, KS, 66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: <b>IPH-A04596</b>
Device Model(s) / HVIN:	A04596
Device Marketing Name / PMN:	A04596
Test Sample Serial No.:	3430501782 - Conducted, 3430501693 - OTA
Device Type:	Extremity Worn Digital Transceiver
Equipment Class:	Digital Transmission Systems (DTS)
	Spread Spectrum Transmitter (DSS)
	Low Power Communication Device (DXX)
	Global Navigation Satellite System (GNSS) Receivers
	NFC - Low Power Communication Device Transmitter (DXX)
Transmit Frequency Range:	WiFi (DTS): 2412-2462MHz
	BT/BLE/ANT: 2402-2480MHz
	NFC: 13.56MHz
Manuf. Max. Rated Output Power:	WiFi - Digital Transmission System (DTS): 18.25dBm
	BlueTooth - Spread Spectrum Transmitter (DSS): 11.11dBm
	BLE/ANT - Low Power Communication Device Transmitter (DXX): 2.10dBm
	NFC - Low Power Communication Device Transmitter (DXX): 55.19dBuV/m
Antenna Type and Gain:	-4.72dBi Max
Modulation:	WiFi: DSSS, OFDM, CCK, MCS0-7
	BT BR: GFSK
	BT EDR: Pi/4-DQPSK, 8DPSK
	BLE: GMSK
	ANT: GFSK
	NFC: ASK
DUT Power Source:	3VDC Rechargeable Li-Ion
DUT Dimensions [LxWxH]	H x W x D: 42mm dia x 4.5mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

### 3.0 SCOPE

#### Preface:

This Certification Report was prepared on behalf of:

**Garmin International Inc.**

,(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

#### Device:

The Garmin Model/HVIN: A04596 is an extremity worn digital transceiver device consisting of a WiFi, Bluetooth (BT), Bluetooth Low Energy (BLE), Adaptive Network Topology (ANT) and Near Field Communication (NFC) transceivers. The WiFi and BT/BLE/ANT transceivers share the same antenna and cannot simultaneously transmit.

#### Requirement:

The transceivers of this *equipment* are subject to emissions evaluation in accordance with FCC: 47 CFR 2, 15C. As per FCC 47 CFR §2.1093, an RF Exposure (SAR) evaluation is required for this *Equipment* and the results of the RF Exposure (SAR) evaluation appear in a separate report.

#### Application:

This is an application for a New Certification.

#### Scope:

The scope of this investigation is limited to the evaluation and reporting of the wanted and spurious emissions in accordance with the rule parts cited in Normative References section of this report.

#### 4.0 TEST SUMMARY

TEST SUMMARY					
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Test Date	Result
7.0	Occupied Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§2.1049	15, 21 Jan 2023	Pass
8.0	DTS Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§15.247(a)(2)	22 Jan 2023	Pass
9.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(3)	15 Jan, 8 Feb 2023	Pass
10.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(1)	15 Jan, 8 Feb 2023	Pass
11.0	Power Spectral Density	ANSI C63.10-2013 KDB 558074 D01v05	§15.247(e)	19, 23 Jan 2023	Pass
12.0	FHSS Hopping Characteristics	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)(iii)	20 Jan, 9 Feb 2023	Pass
13.0	FHSS Channel Separation	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)	20 Jan, 9 Feb 2023	Pass
14.0	FHSS Time of Occupancy	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)(iii)	20 Jan, 9 Feb 2023	Pass
15.0	Conducted Tx Spurious Emissions Band Edge	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	20 Jan, 13 Feb 2023	Pass
16.0	Conducted Tx Spurious Emissions	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	22 Jan 2023	Pass
17.0	Radiated Tx Spurious Emissions And Restricted Band	ANSI C63.4-2014 KDB 558074 D01v05	§15.109 §15.247(d)	31 Jan 2023	Pass
18.0	Radiated Rx Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109	31 Jan 2023	Pass
19.0	Power Line Conducted Emissions	ANSI C63.4-2014	§15.107	25 Jan 2023	Pass



Test Station Day Log					
Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
15 Jan 2023	21.6	17	101.6	EMC	7, 9, 10,
19 Jan 2023	22.1	18	101.2	EMC	11
20 Jan 2023	22.6	16	101.5	EMC	12, 13, 14, 15
21 Jan 2023	21.9	18	101.4	EMC	7
22 Jan 2023	22.1	18	101.3	EMC	8, 16
23 Jan 2023	22.5	17	101.1	EMC	11
25 Jan 2023	17.2	52	102.1	LISN	19
31 Jan 2023	0.0	87	101.5	OATS	17, 18
8 Feb 2023	22.5	16	101.0	EMC	9
9 Feb 2023	22.1	17	101.4	EMC	12, 13, 14
13 Feb 2023	21.9	18	102.4	EMC	15

**EMC** - EMC Test Bench

**OATS** - Open Area Test Site

**LISN** - LISN Test Area

**IMM** - Immunity Test Area

**SAC** - Semi-Anechoic Chamber

**TC** - Temperature Chamber

**ESD** - ESD Test Bench

**RI** - Radiated Immunity Chamber


I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.  
Technical Manager  
Celltech Labs Inc.

14 February 2023

Date




## 5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.4-2014	American National Standard of Procedures for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electric and Electronic Equipment in the Range of 9kHz to 40GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.247) Intentional Radiators
FCC KDB 558074 D01v05r02	OET Major Guidance Publications, Knowledge Data Base Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

## 6.0 FACILITIES AND ACCREDITATIONS

### Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Innovation, Science and Economic Development Canada under Test Site File Number ISED 3874A. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

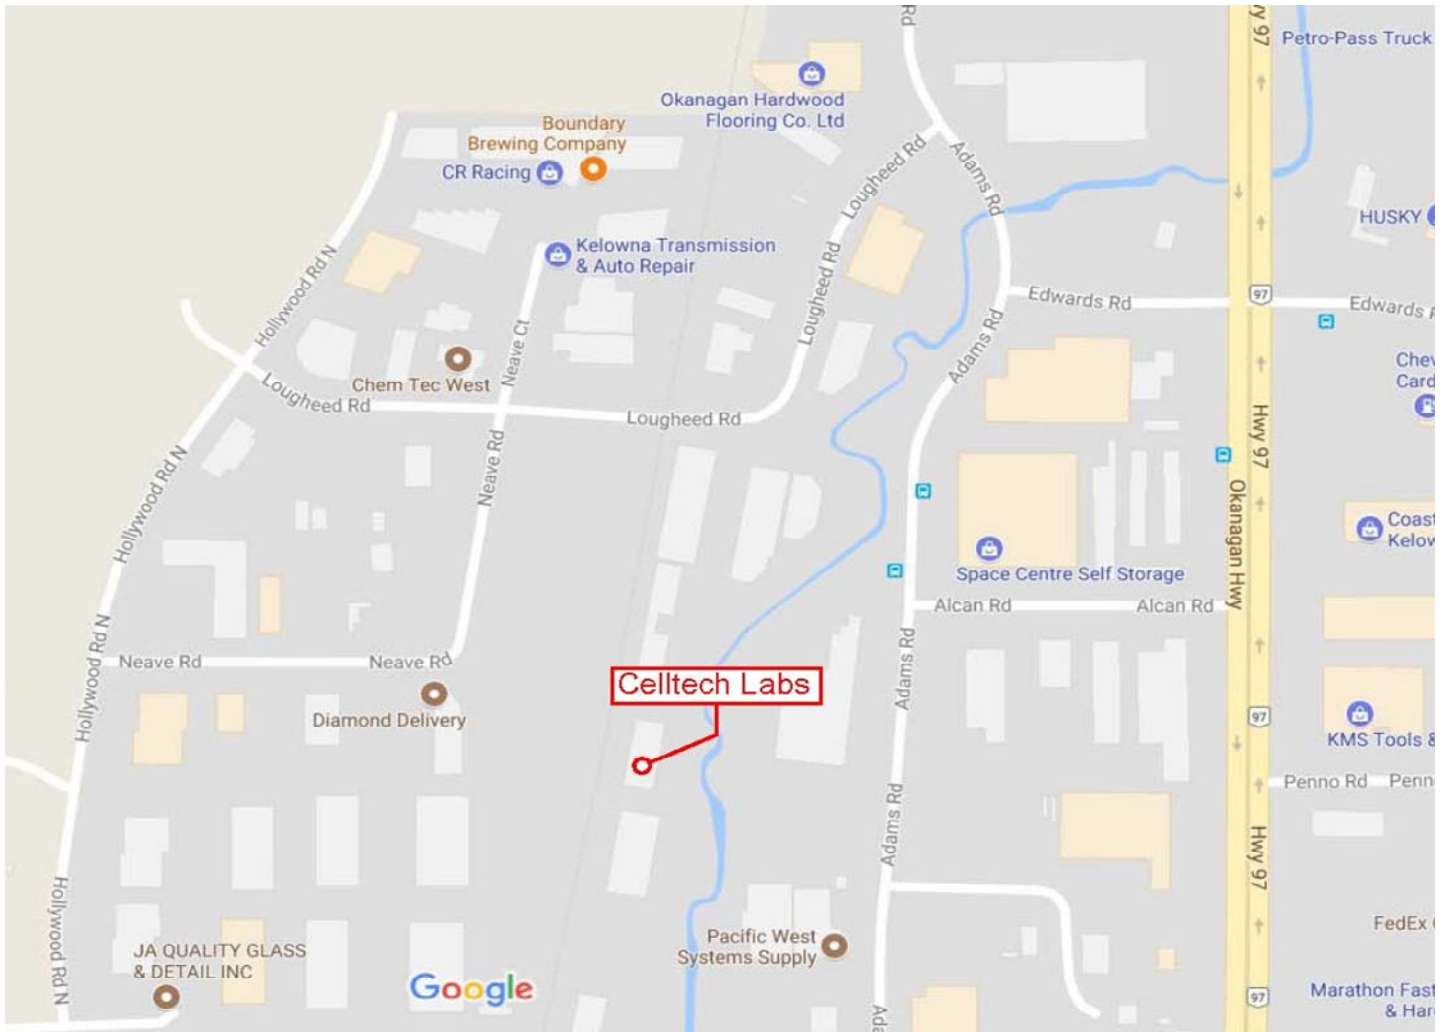

## 7.0 OCCUPIED BANDWIDTH

### Test Procedure

<b>Normative</b>	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d),
<b>Reference</b>	KDB 558074 (8.3.2.1), ANSI C63.10 (6.9.3)

### General Procedure

KDB 558074 (8.3.2.1)	<p><b>8.3.2.1 General</b></p> <p>Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.</p>
C63.10 (6.9.3)	<p><b>6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure</b></p> <p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ol style="list-style-type: none"> <li>The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.</li> <li>The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.</li> <li>Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than <math>[10 \log (OBW/RBW)]</math> below the reference level. Specific guidance is given in 4.1.5.2.</li> <li>Step a) through step c) might require iteration to adjust within the specified range.</li> <li>Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</li> <li>Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.</li> </ol>


### Test Setup

**Appendix A - Figure A.1**

### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above using the 99% Occupied Bandwidth function. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The 99% Occupied Bandwidth was measured and recorded and used for the basis for measuring the Conducted Output Power (See Section 10.0) and Power Spectral Density (See Section 11.0).


Plot 7.1 – Occupied Bandwidth, 802.11b

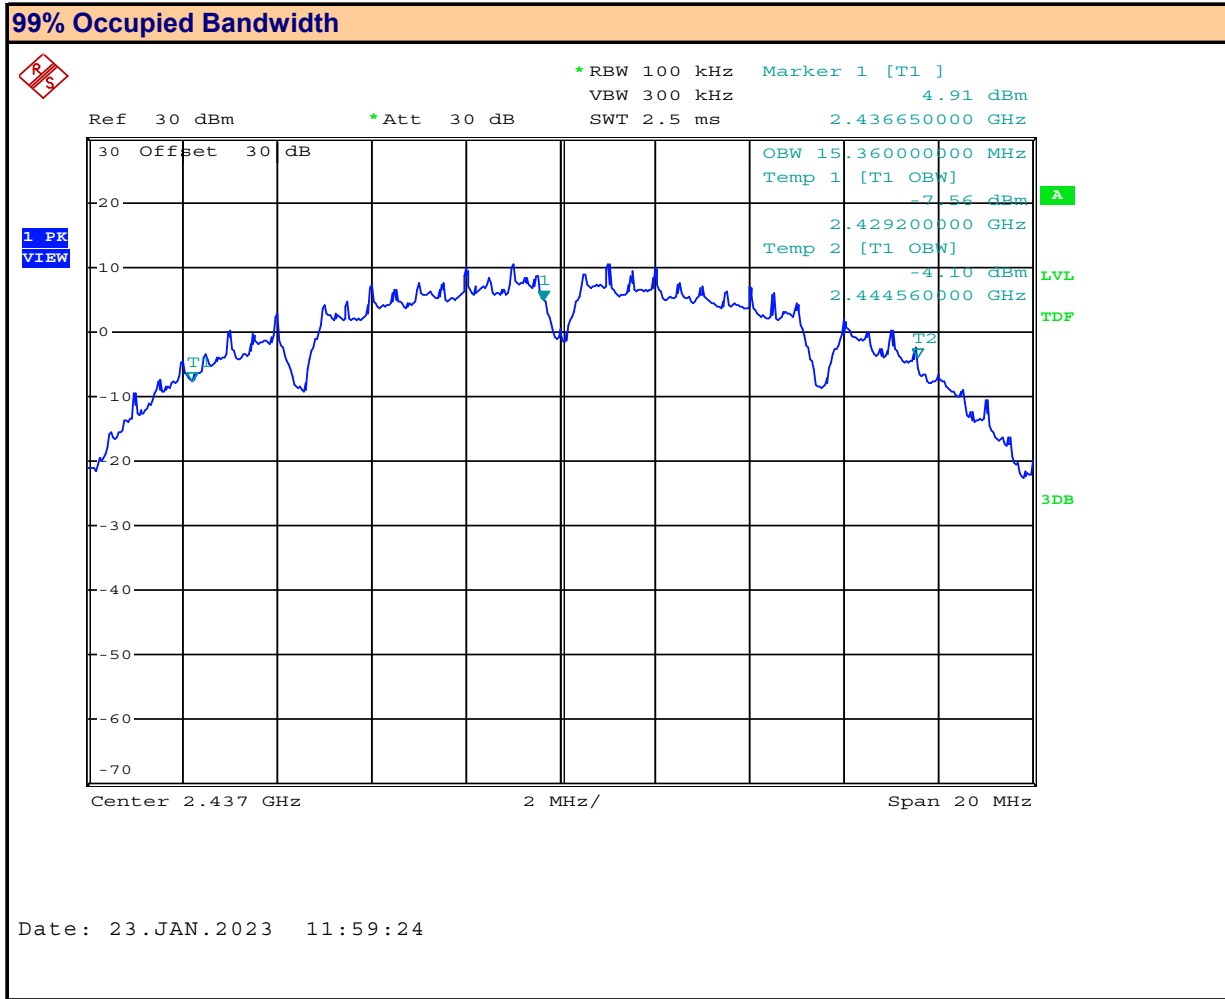

Channel: **6**  
Mode: **802.11b**

Channel Frequency: **2437** MHz  
Modulation: **DSSS 5.5**  
Measured Occupied Bandwidth: **15.36** MHz


## Plot 7.2 – Occupied Bandwidth, 802.11g

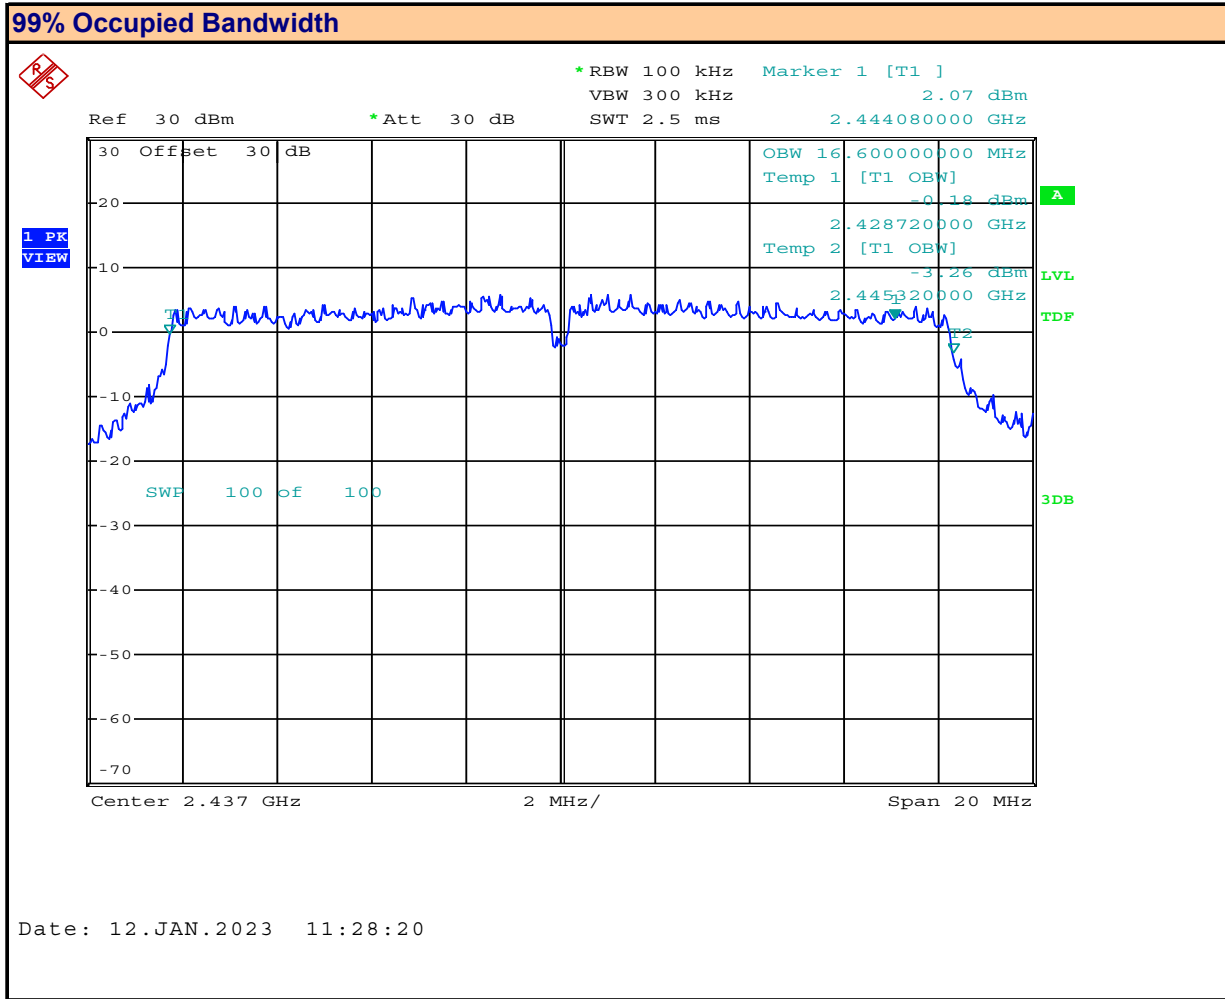

Channel: **6**  
Mode: **802.11g**

Channel Frequency: **2437** MHz  
Modulation: **OFDM12**  
Measured Occupied Bandwidth: **16.6** MHz

### Plot 7.3 – Occupied Bandwidth, 802.11n

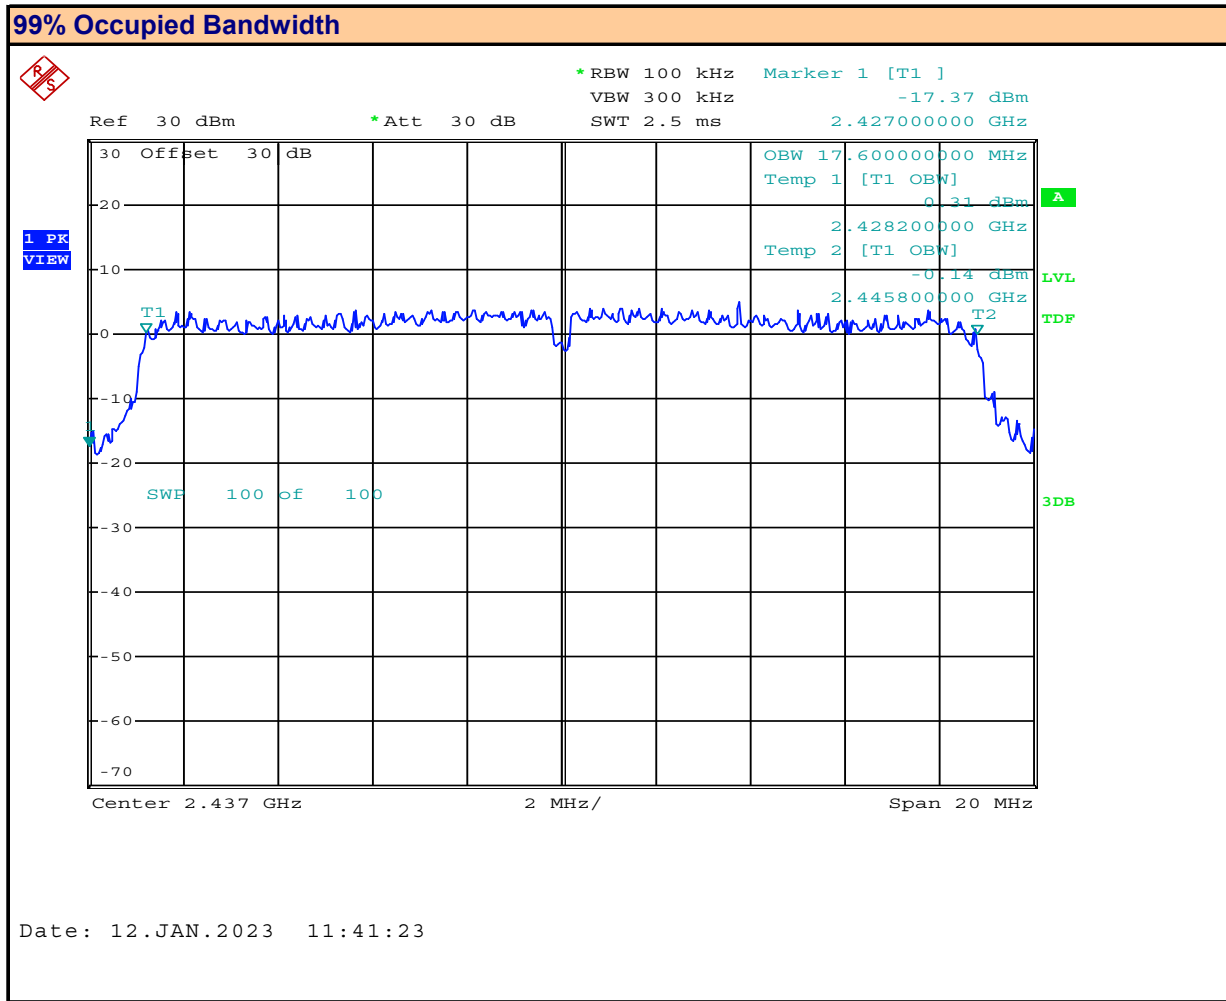

Channel: **6**  
Mode: **802.11n**


Channel Frequency: **2437** MHz  
Modulation: **MCS0**  
Measured Occupied Bandwidth: **17.6** MHz

Table 7.1 – Summary of Occupied Bandwidth Measurements, (DTS)

99% Occupied Bandwidth Results:					
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured Occupied Bandwidth (MHz)	Emission Designator
6	2437.0	802.11b	DSSS 5.5	15.4	15M4D1D
6	2437.0	802.11g	OFDM12	16.6	16M6D1D
6	2437.0	802.11n	MCS0	17.6	17M6D1D
Result:				Complies	



## Plot 7.4 – Occupied Bandwidth, BT BR

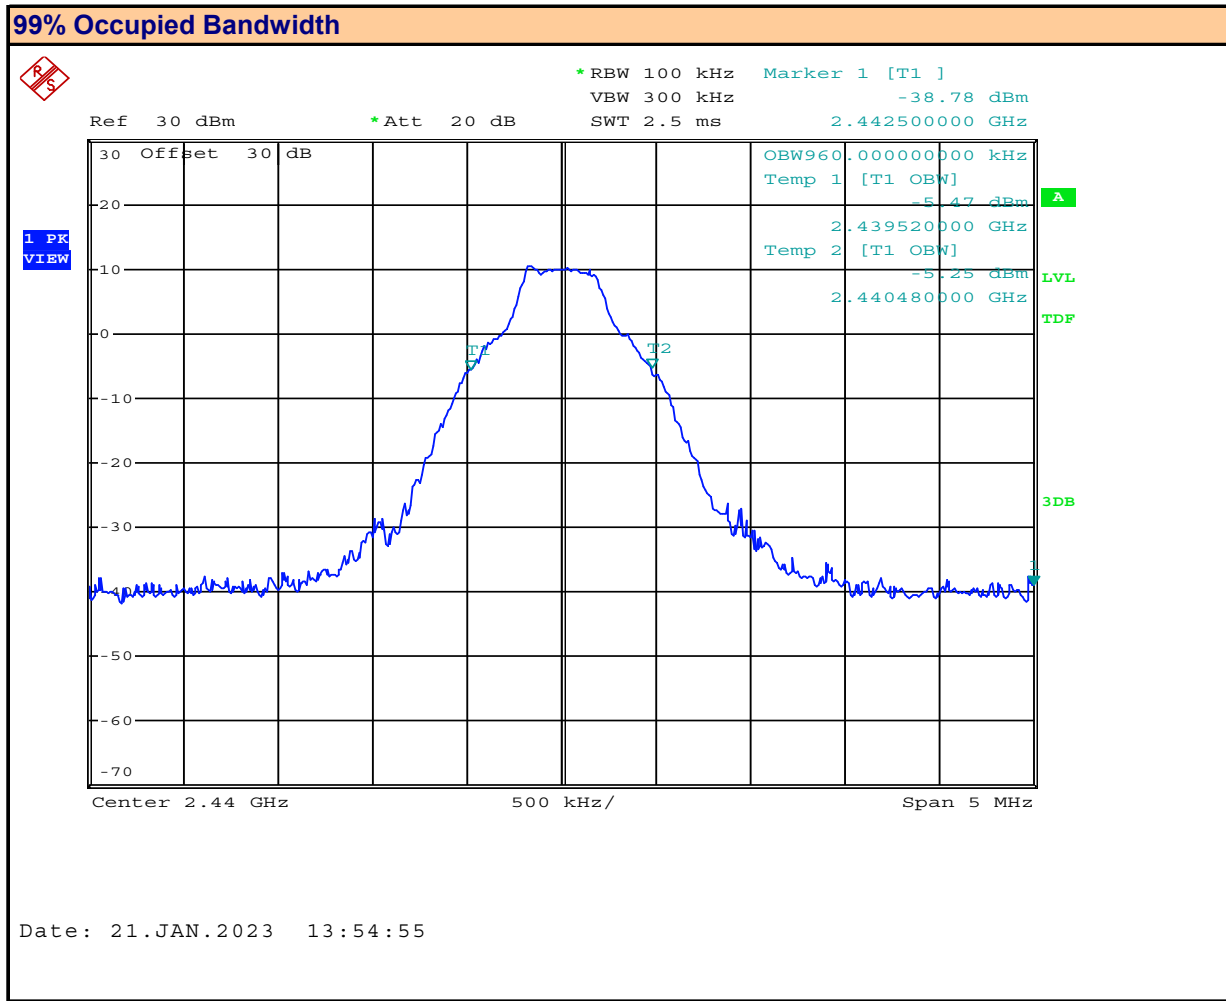


Channel: **38**  
Mode: **BT BR**

Channel Frequency: **2440** MHz  
Modulation: **GFSK**

Measured Occupied Bandwidth: **0.96** MHz


## Plot 7.5 – Occupied Bandwidth, BT 2EDR

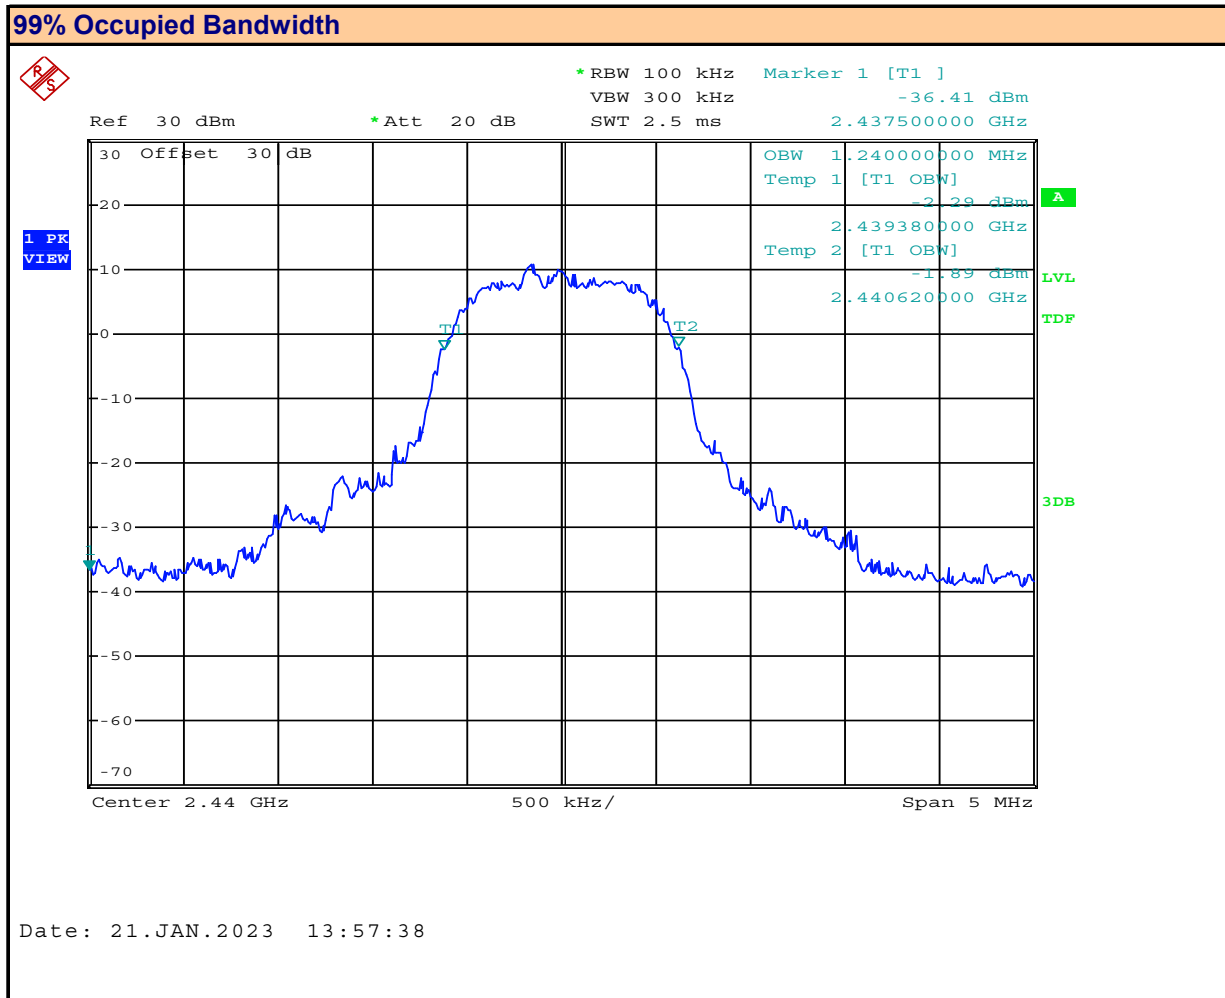

Channel: **38**  
Mode: **BT 2EDR**

Channel Frequency: **2440** MHz  
Modulation: **Pi/4-DQPSK**  
Measured Occupied Bandwidth: **1.24** MHz

## Plot 7.6 – Occupied Bandwidth, BT 3EDR

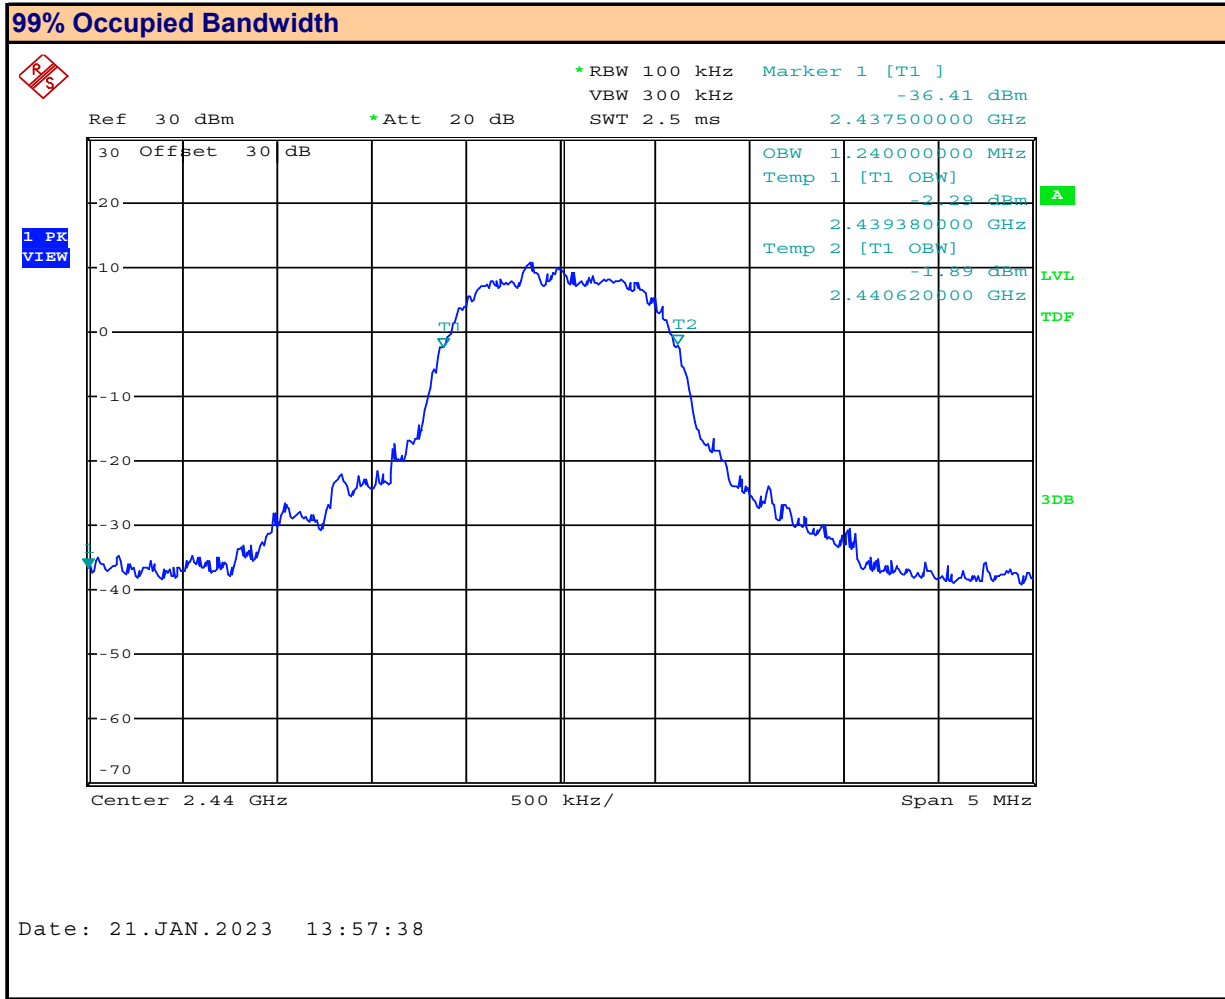

Channel: **38**  
Mode: **BT 3EDR**

Channel Frequency: **2440** MHz  
Modulation: **8-DSPK**  
Measured Occupied Bandwidth: **1.24** MHz

**Table 7.2 – Summary of Occupied Bandwidth Measurements (DSS)**

<b>99% Occupied Bandwidth Results:</b>					
<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>Mode</b>	<b>Modulation</b>	<b>Measured Occupied Bandwidth (MHz)</b>	<b>Emission Designator</b>
38	2440.0	BT BR	GFSK	0.960	960KF1D
38	2440.0	BT 2EDR	Pi/4-DQPSK	1.240	1M24G1D
38	2440.0	BT 3EDR	8-DSPK	1.240	1M24G1D
<b>Result:</b>					<b>Complies</b>

## 8.0 DTS BANDWIDTH

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1049, §15.247(a)(2), RSS-Gen (6.7), RSS-247 (5.2)(a), KDB 558074 (8.2), ANSI C63.10 (11.8.2)
----------------------------	---

### Limits


47 CFR §15.247(a)(2)	(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
RSS-247 (5.2)(a)	5.2 Digital transmission systems DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400 - 2483.5 MHz: a) The minimum 6 dB bandwidth shall be 500 kHz.
KDB 558074 (8.2) C63.10 (11.8.2)	<b>8.2 Option 2</b> The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

<b>Test Setup</b>	<b>Appendix A</b> <b>Figure A.1</b>
-------------------	-------------------------------------

### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle.


Plot 8.1 – 6dB DTS Bandwidth 802.11b

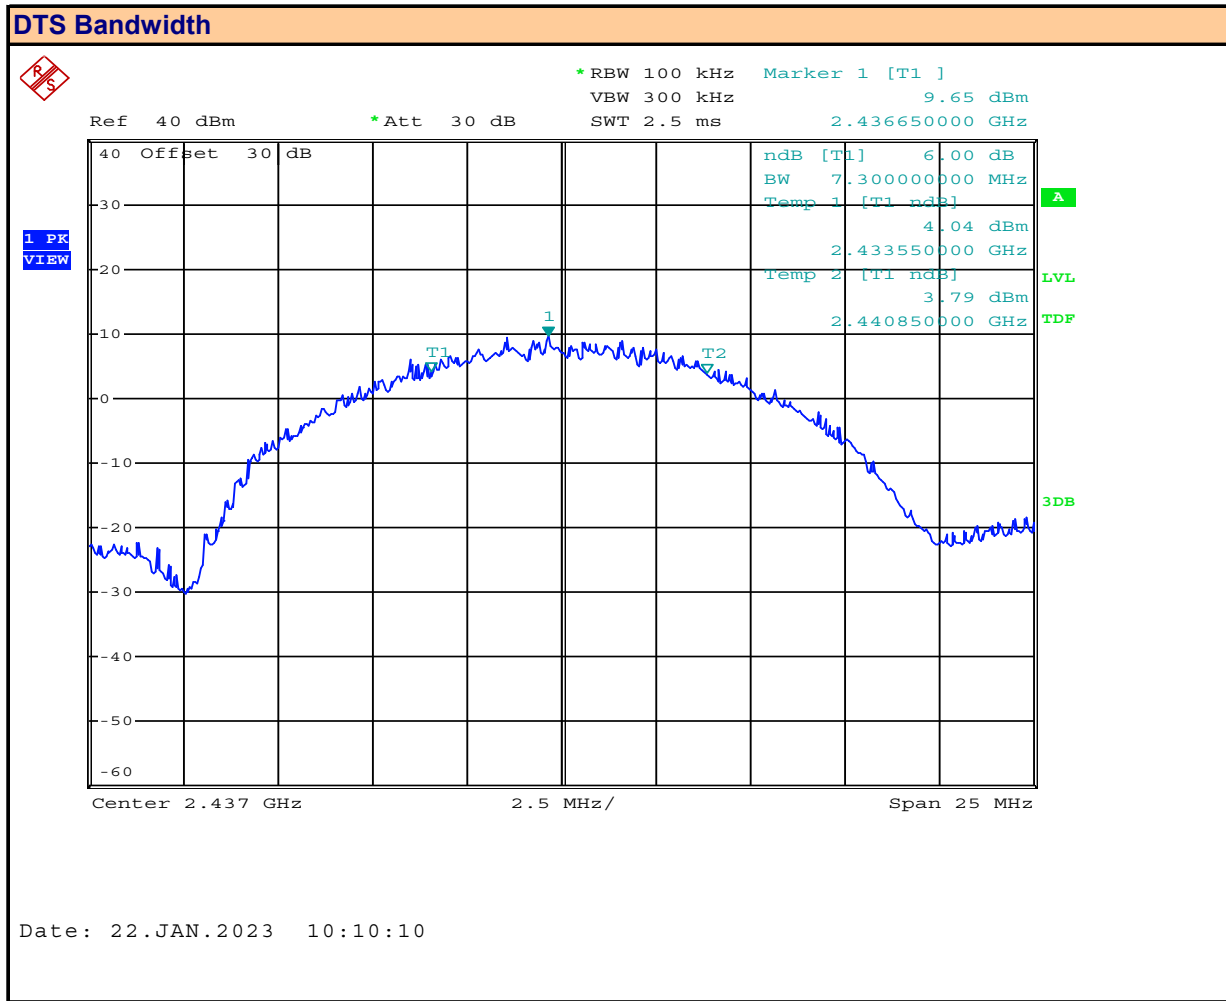

Channel: **6**  
Mode: **802.11b**

Channel Frequency: **2437** MHz  
Modulation: **DSSS 5.5**  
Measured DTS Bandwidth: **7.3** MHz


Plot 8.2 – 6dB DTS Bandwidth 802.11g

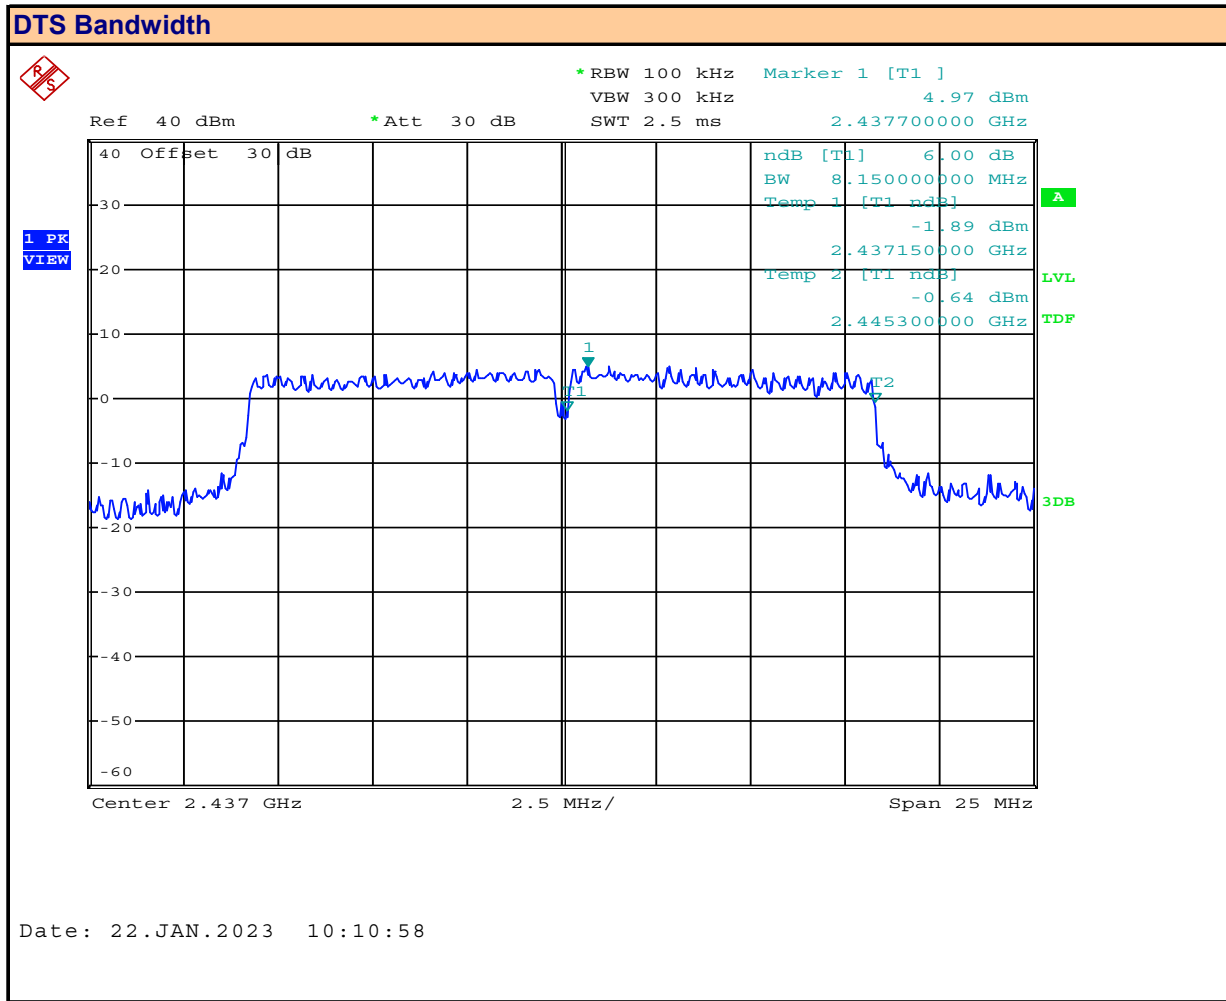

Channel: **6**  
Mode: **802.11g**

Channel Frequency: **2437** MHz  
Modulation: **OFDM12**  
Measured DTS Bandwidth: **16.3** MHz

Plot 8.3 – 6dB DTS Bandwidth 802.11n

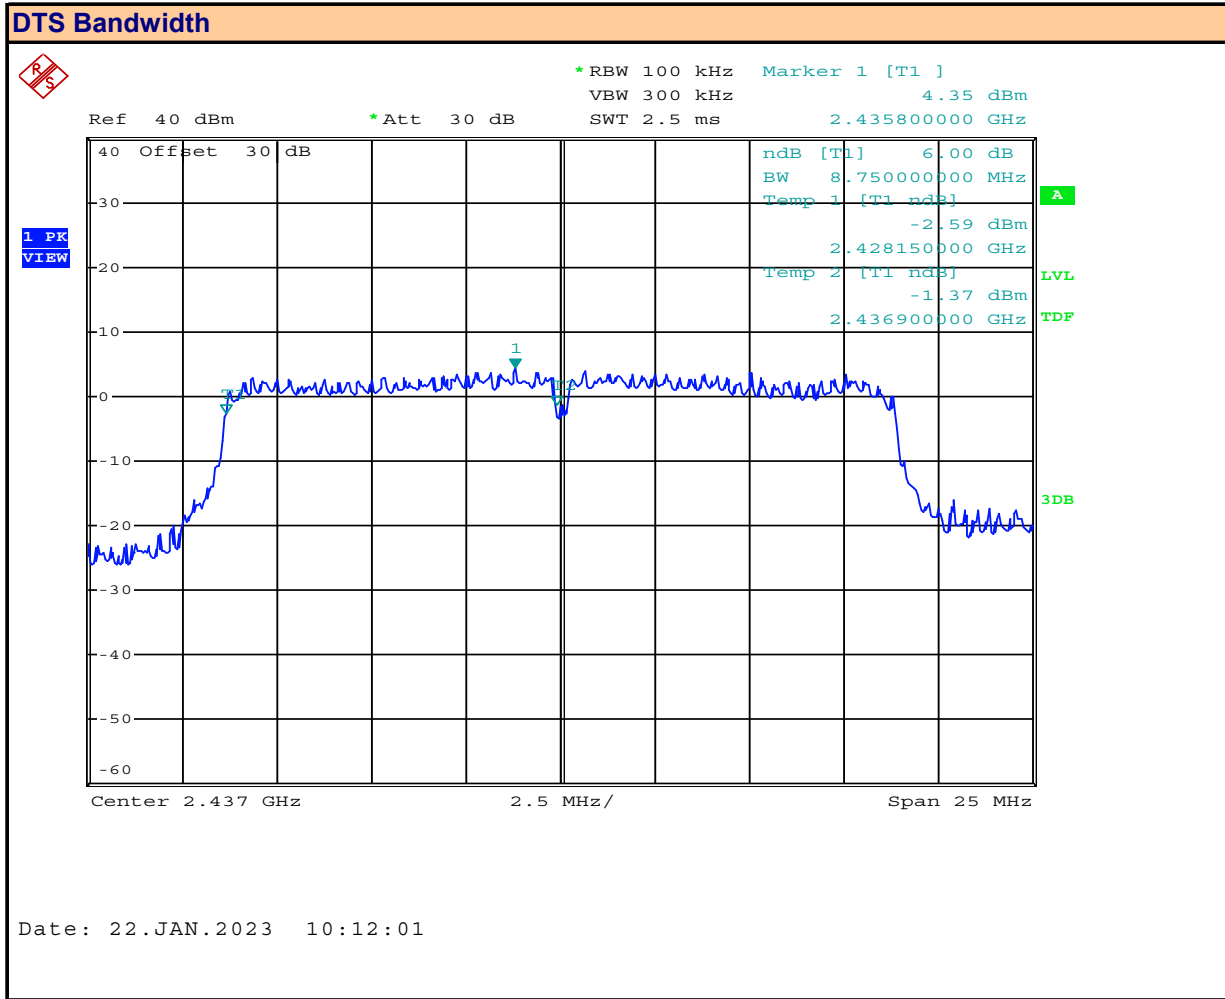

Channel: **6**  
Mode: **802.11n**


Channel Frequency: **2437** MHz  
Modulation: **MCS0**  
Measured DTS Bandwidth: **17.5** MHz



Table 8.1 – Summary of 6dB DTS Bandwidth Measurements, (DTS

DTS Bandwidth Results:						
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured DTS Bandwidth (MHz)	Minimum DTS Bandwidth (MHz)	Margin (MHz)
6	2437.0	802.11b	DSSS 5.5	7.3	0.50	6.8
6	2437.0	802.11g	OFDM12	16.3		15.8
6	2437.0	802.11n	MCS0	17.5		17.0
Result:					Complies	


Plot 8.4 – 6dB DTS Bandwidth, BT BR

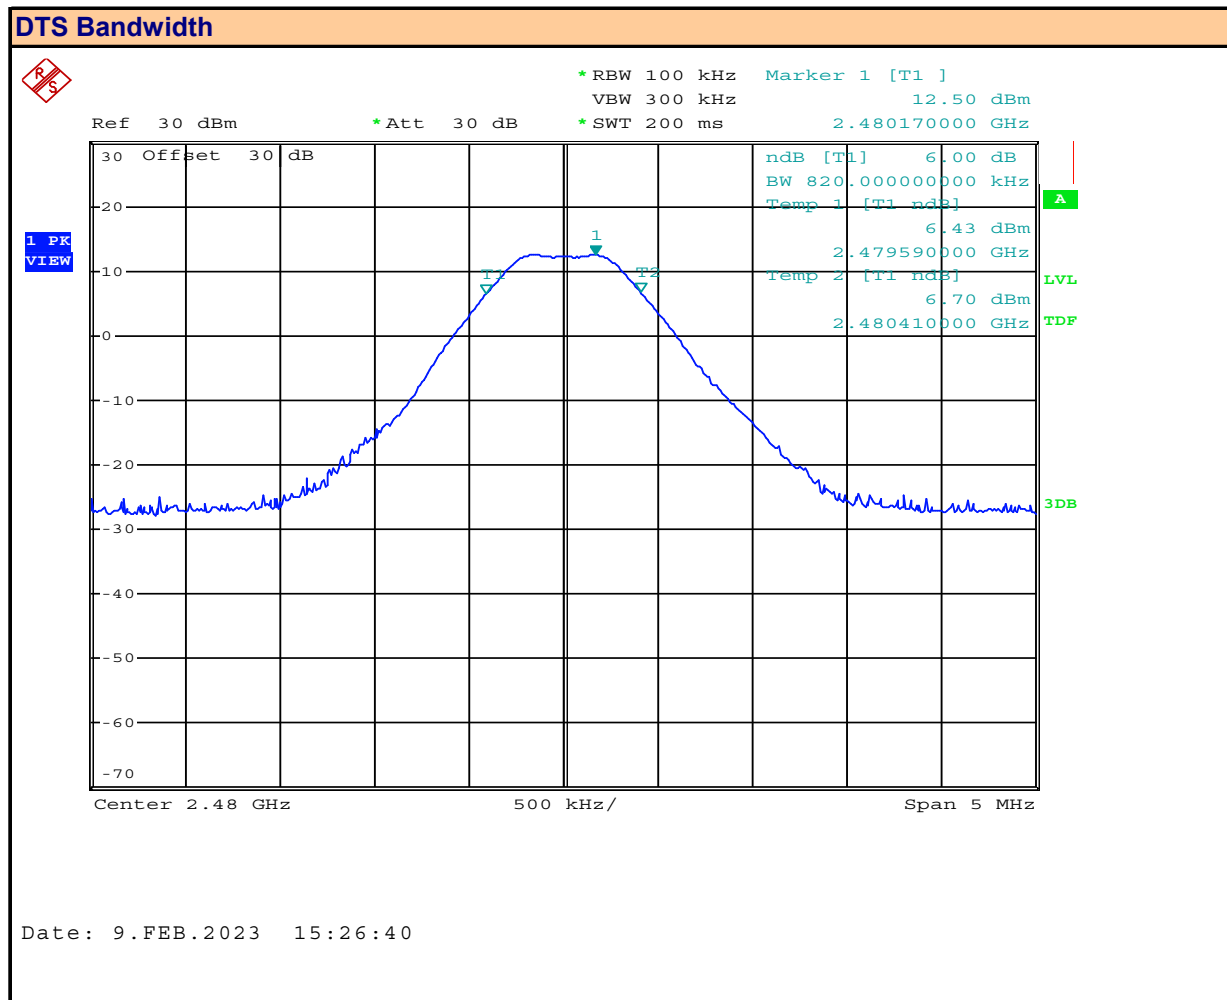

Channel: **78**  
Mode: **BT BR**

Channel Frequency: **2480** MHz  
Modulation: **GFSK**  
Measured DTS Bandwidth: **0.82** MHz


### Plot 8.5 – 6dB DTS Bandwidth, BT 2EDR

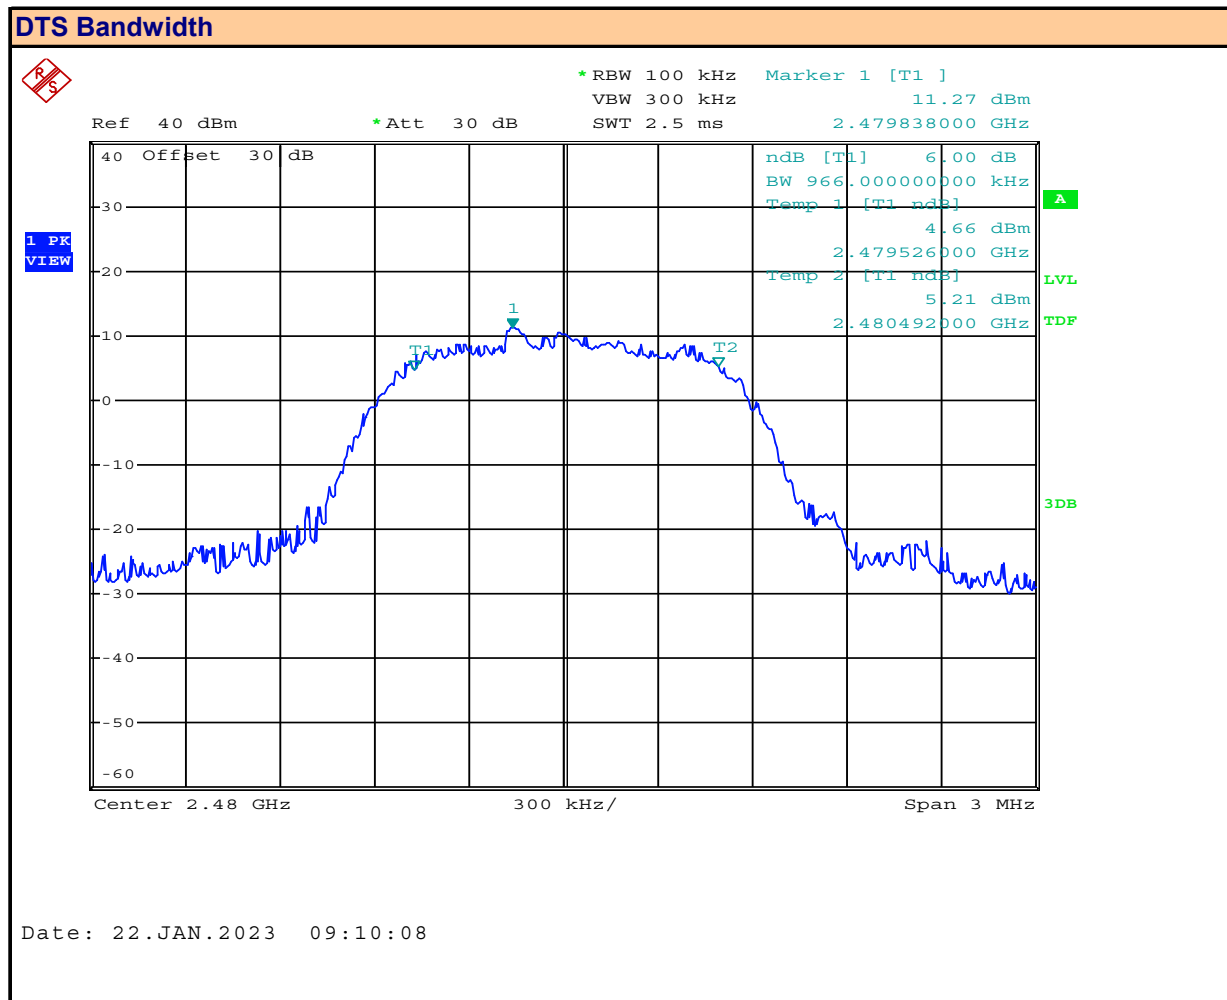

Channel: **78**  
Mode: **BT 2EDR**

Channel Frequency: **2480** MHz  
Modulation: **Pi/4-DQPSK**  
Measured DTS Bandwidth: **0.966** MHz

Plot 8.6 – 6dB DTS Bandwidth, BT 3EDR

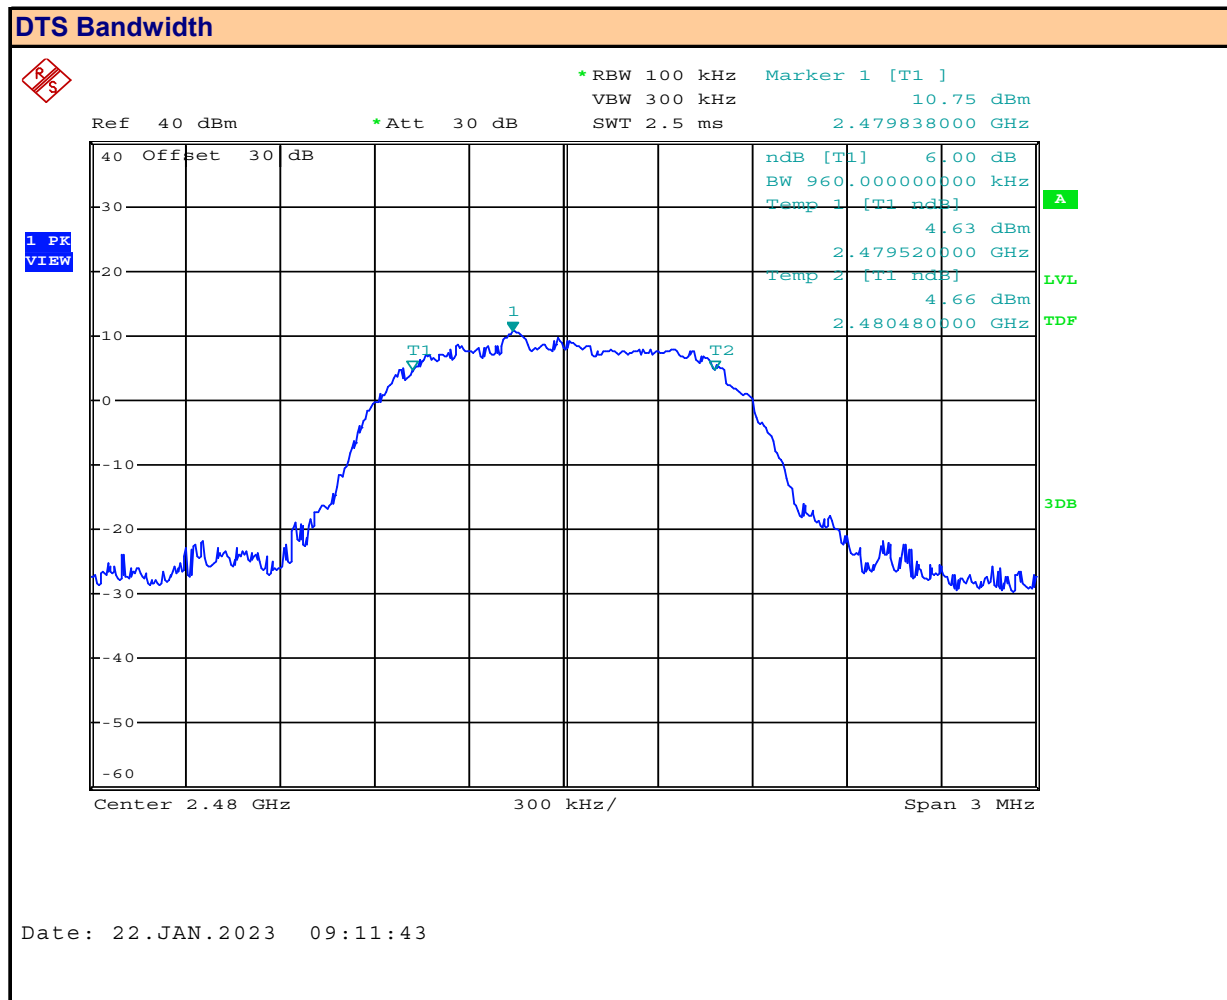

Channel: **78**  
Mode: **BT 3EDR**

Channel Frequency: **2480** MHz  
Modulation: **8-DPSK**  
Measured DTS Bandwidth: **0.96** MHz

**Table 8.2 – Summary of 6dB DTS Bandwidth Measurements, (DSS)**

<b>DTS Bandwidth Results:</b>						
<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>Mode</b>	<b>Modulation</b>	<b>Measured DTS Bandwidth (MHz)</b>	<b>Minimum DTS Bandwidth (MHz)</b>	<b>Margin (MHz)</b>
78	2480.0	BT BR	GFSK	0.468	0.500	0.820
78	2480.0	BT 2EDR	Pi/4-DQPSK	0.966		0.466
78	2480.0	BT 3EDR	8-DPSK	0.960		0.460
					<b>Result:</b>	<b>Complies</b>

## 9.0 ANTENNA PORT CONDUCTED POWER, (DTS)

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)
----------------------------	---

### Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	<b>5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.)</b> Devices shall comply with the following requirements, where applicable: d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

**Table 9.1 – Summary of Conducted Power Measurements, (DTS)**

See Appendix D for Measurement Plots

Conducted Power Measurement Results:												
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured Power [P <sub>Meas</sub> ] (dBm)	Measured Power (W)	Conducted Limit [P <sub>Lim</sub> ] (dBm)	Conducted Margin (dB)	Antenna Gain (dBi)	EIRP [E <sub>Meas</sub> ] (dBm)	EIRP (W)	EIRP Limit [E <sub>Lim</sub> ] (dBm)	EIRP Margin (dB)
6	2437.00	802.11b	CCK 1MB	18.21	0.0662	30.00	11.8	-3.21	15.00	0.0316	36	21.0
6	2437.00		CCK 2MB	18.14	0.0652		11.9		14.93	0.0311		21.1
6	2437.00		DSSS 5.5	18.25	0.0668		11.8		15.04	0.0319		21.0
6	2437.00		DSSS 11	18.04	0.0637		12.0		14.83	0.0304		21.2
1	2412.00		DSSS 5.5	17.74	0.0594		12.3		14.53	0.0284		21.5
11	2462.00		DSSS 5.5	18.14	0.0652		11.9		14.93	0.0311		21.1
1	2412.00	802.11g	OFDM12	12.23	0.0167		17.8		9.02	0.0080		27.0
6	2437.00			18.24	0.0667		11.8		15.03	0.0318		21.0
11	2462.00			13.77	0.0238		16.2		10.56	0.0114		25.4
1	2412.00	802.11n	MCS0	14.34	0.0272		15.7		11.13	0.0130		24.9
6	2437.00			15.91	0.0390		14.1		12.70	0.0186		23.3
11	2462.00			13.68	0.0233		16.3		10.47	0.0111		25.5
Result:											Complies	

Conducted Margin =  $P_{\text{Limit}} - P_{\text{Meas}}$

## 10.0 ANTENNA PORT CONDUCTED POWER, (DSS)

### Test Procedure

<b>Normative</b>	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d),
<b>Reference</b>	KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)

### Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	<b>5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.)</b> Devices shall comply with the following requirements, where applicable: d) For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.



**Table 10.1 – Summary of Conducted Power Measurements, (DSS)**

See Appendix D for Measurement Plots

Conducted Power Measurement Results:												
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured Power [P <sub>Meas</sub> ] (dBm)	Measured Power (W)	Conducted Limit [P <sub>Lim</sub> ] (dBm)	Conducted Margin (dB)	Antenna Gain (dBi)	EIRP [E <sub>Meas</sub> ] (dBm)	EIRP (W)	EIRP Limit [E <sub>Lim</sub> ] (dBm)	EIRP Margin (dB)
0	2402.00	BT BR	GFSK	11.04	0.0127	30.00	19.0	-4.72	6.32	0.0043	36	29.7
38	2440.00			11.11	0.0129		18.9		6.39	0.0044		29.6
78	2480.00			11.13	0.0130		18.9		6.41	0.0044		29.6
0	2402.00	BT EDR2	Pi/4-DQPSK	10.11	0.0103		19.9		5.39	0.0035		30.6
38	2440.00			10.21	0.0105		19.8		5.49	0.0035		30.5
78	2480.00			10.23	0.0105		19.8		5.51	0.0036		30.5
0	2402.00	BT EDR3	8-DPSK	10.11	0.0103		19.9		5.39	0.0035		30.6
38	2440.00			10.11	0.0103		19.9		5.39	0.0035		30.6
78	2480.00			10.12	0.0103		19.9		5.40	0.0035		30.6
Result:												Complies

Conducted Margin =  $P_{Lim} - P_{Meas}$

Conducted Margin =  $E_{Lim} - E_{Meas}$

## 11.0 POWER SPECTRAL DENSITY

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §15.247(e), RSS-247 (5.2)(b), KDB 558074 (10.3), ANSI C63.10 (11.10.3)
----------------------------	--

### Limits


47 CFR §15.247(e)	(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
RSS-247 (5.2)(b)	b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).
KDB 558074 (10.3) C63.10 (11.10.3)	<p><b>Method AVGPS-1</b> (trace averaging with EUT transmitting at full power throughout each sweep)</p> <p>This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle <math>\geq 98\%</math>); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).</p> <ul style="list-style-type: none"> <li>a) Set instrument center frequency to DTS channel center frequency.</li> <li>b) Set span to at least <math>1.5 \times \text{OBW}</math>.</li> <li>c) Set RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>d) Set VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>e) Detector = RMS</li> <li>f) Ensure that the number of measurement points in the sweep <math>\geq 2 \times \text{span/RBW}</math>.</li> <li>g) Sweep time = auto couple.</li> <li>h) Employ trace averaging (RMS) mode over a minimum of 100 traces.</li> <li>i) Use the peak marker function to determine the maximum amplitude level.</li> <li>j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).</li> </ul>

<b>Test Setup</b>	<b>Appendix A</b> <b>Figure A.1</b>
-------------------	-------------------------------------

### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. Number of Sweep Points  $\geq 2 \times \text{Span} / \text{RBW} = 2 \times (1.5\text{MHz} / 3\text{kHz}) = 1000$ , the SA was configured for 1001 Points. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle. The Power Spectral Density was measured and recorded.


Plot 11.1 – Power Spectral Density, 802.11b

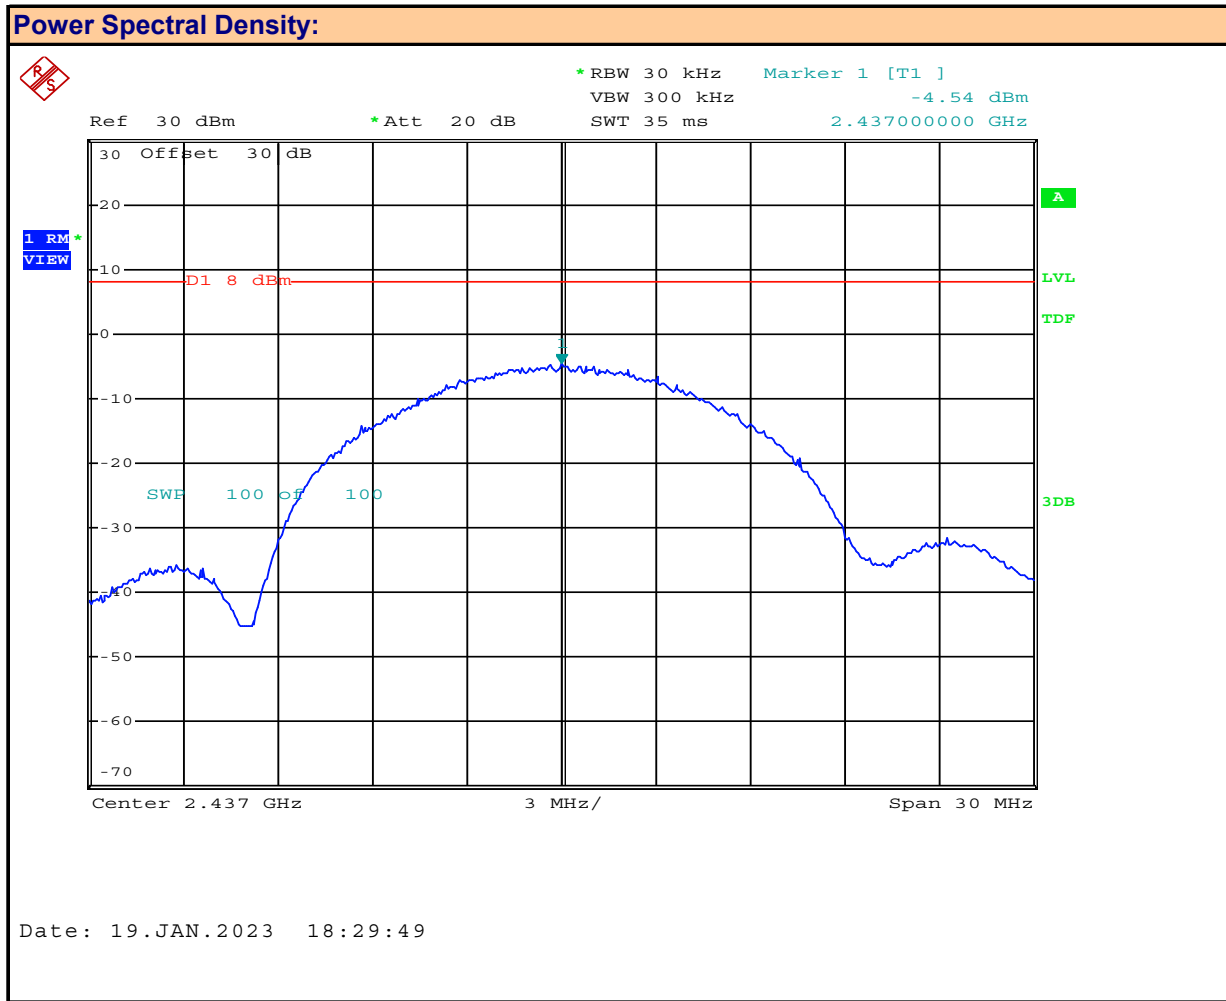

Channel: **6**  
Mode: **802.11b**

Channel Frequency: **2437** MHz  
Modulation: **DSSS 5.5**  
Measured PSD: **-4.54** dBm

Plot 11.2 – Power Spectral Density, 802.11g

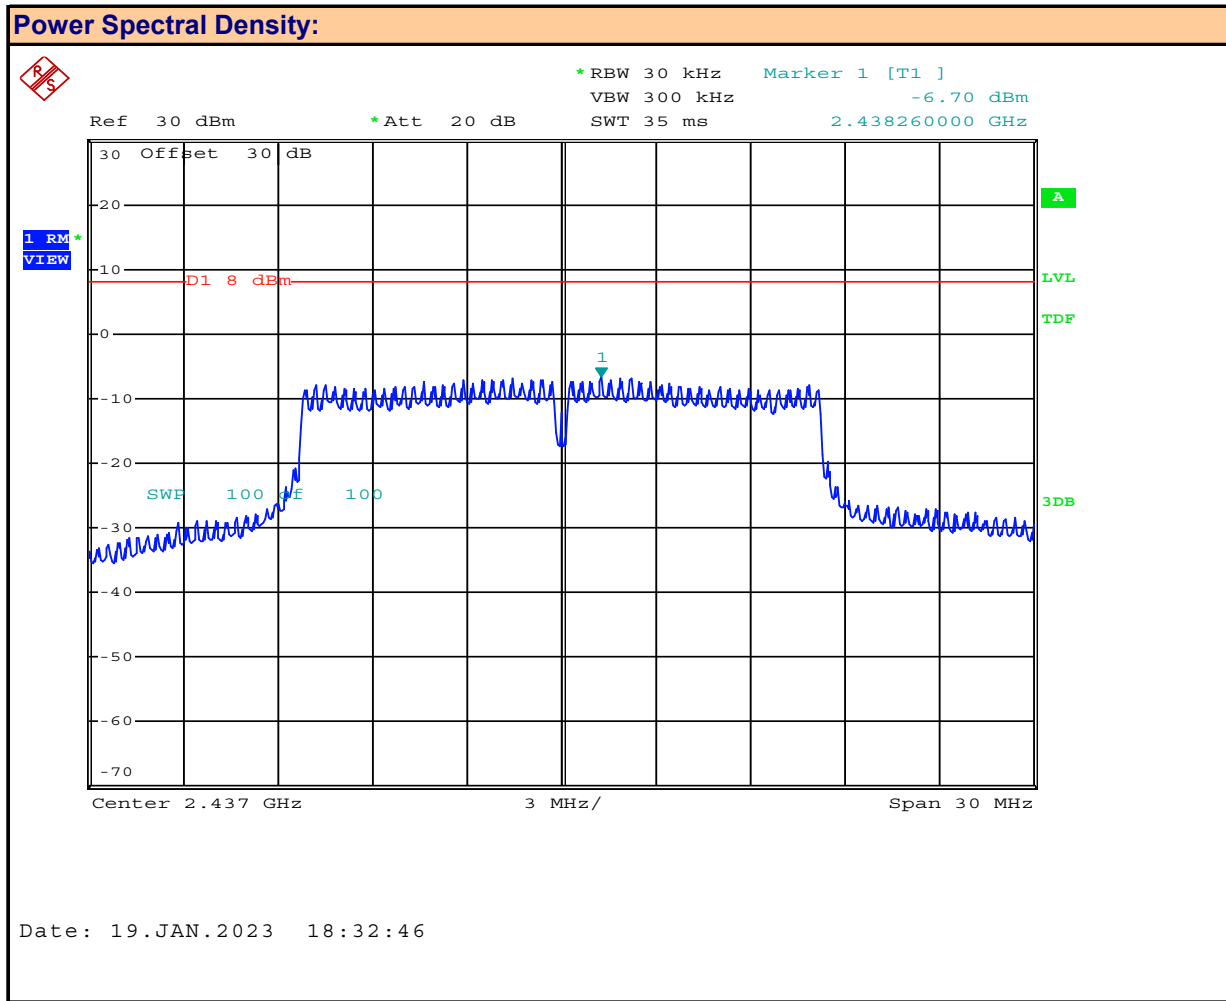

Channel: **6**  
Mode: **802.11g**

Channel Frequency: **2437** MHz  
Modulation: **OFDM 12**  
Measured PSD: **-6.7** dBm

**Power Spectral Density:**

Ref 30 dBm      \*Att 20 dB      SWT 35 ms      Marker 1 [T1]      -8.06 dBm      2.438260000 GHz

The plot displays the Power Spectral Density (PSD) of a signal. The vertical axis represents power in dBm, ranging from -70 to 30. The horizontal axis represents frequency in GHz, with a center frequency of 2.437 GHz and a span of 30 MHz. A blue trace shows the signal spectrum, which is relatively flat around -10 dBm with some noise. A red horizontal line is drawn at 8 dBm, labeled 'D1 8 dBm'. A green arrow points to a peak in the signal, labeled '1' and 'Marker 1 [T1]'. The peak value is -8.06 dBm. Other parameters shown include RBW 30 kHz, VBW 300 kHz, and Att 20 dB. The plot also shows a 3dB bandwidth of 100 MHz and a 100 MHz span.

1 RM VIEW

30 Offset 30 dB

D1 8 dBm

1

SWF 100 of 100

3dB

Center 2.437 GHz      3 MHz/      Span 30 MHz


Channel Frequency:	2437	MHz
Modulation:	MCS0	
Measured PSD:	-8.06	dBm

Table 11.1 – Summary of Power Spectral Density Measurements, (DTS)

Conducted Power Measurement Results:						
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured PSD [P <sub>Meas</sub> ] (dBm)	Conducted Limit [P <sub>Lim</sub> ] (dBm)	Margin (dB)
6	2437.00	802.11b	DSSS 5.5	-4.54	8.00	12.5
6	2437.00	802.11g	OFDM 12	-6.70		14.7
6	2437.00	802.11n	MCS0	-8.06		16.1
					Result:	Complies

Conducted Margin =  $P_{Limit} - P_{Meas}$


Plot 11.4 – Power Spectral Density, BT BR

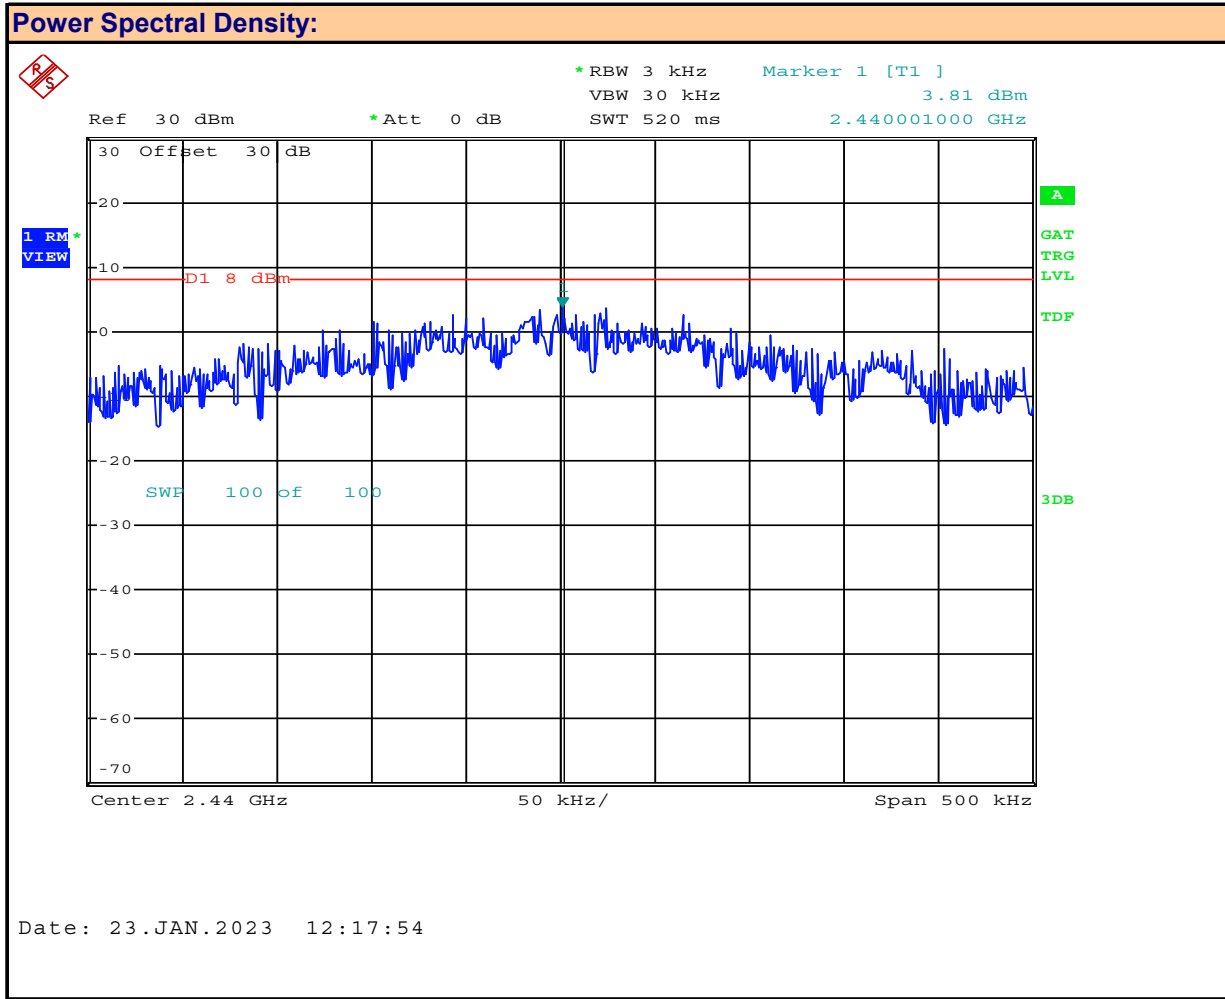

Channel: **38**  
Mode: **BT BR**

Channel Frequency: **2440** MHz  
Modulation: **GFSK**  
Measured PSD: **3.81** dBm

## Plot 11.5 – Power Spectral Density, BT 2EDR

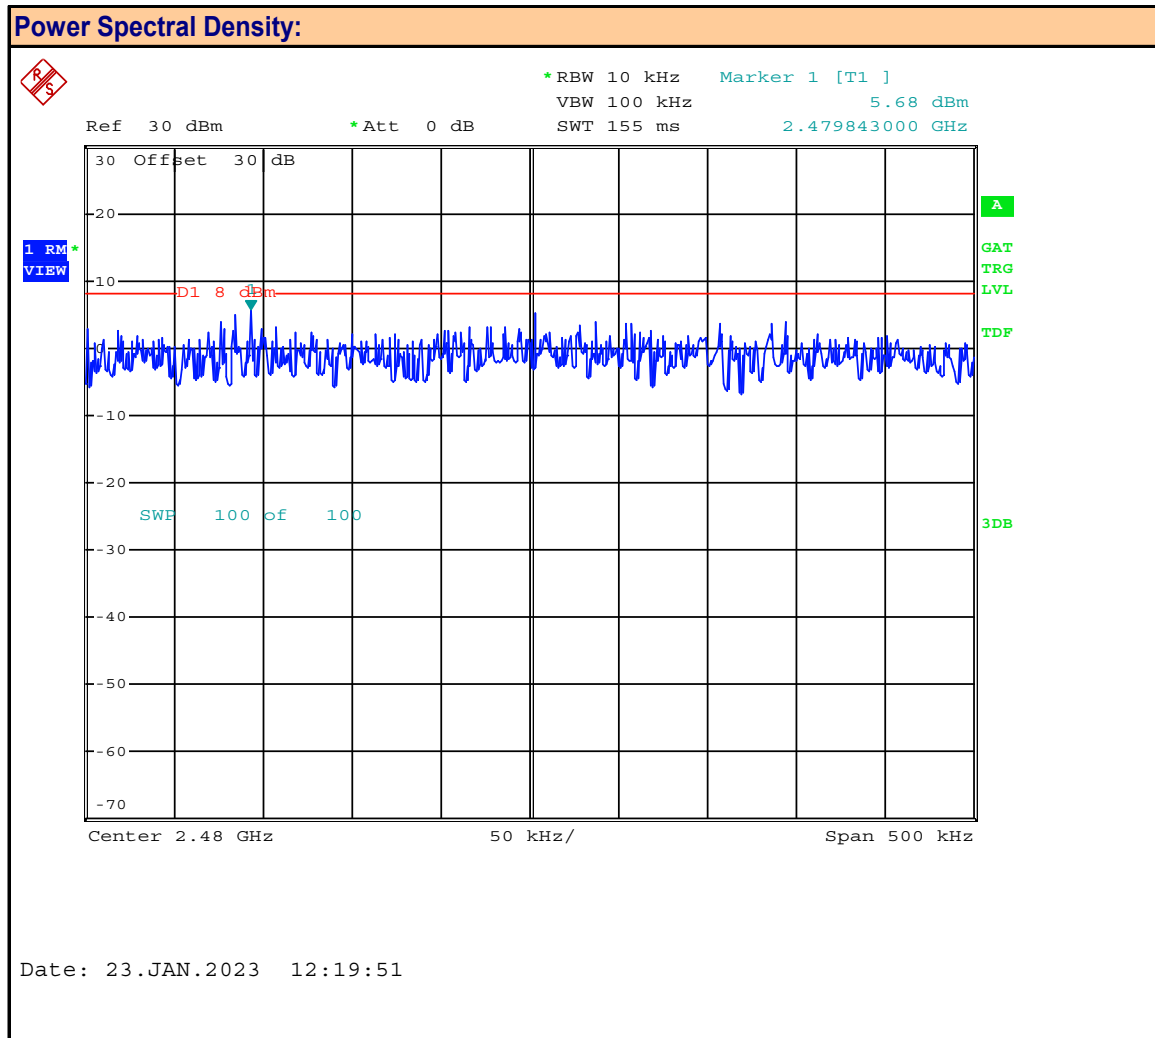


Channel: **78**  
Mode: **BT 2EDR**

Channel Frequency: **2480** MHz  
Modulation: **pi/4-DQPSK**  
Measured PSD: **5.68** dBm



## Plot 11.6 – Power Spectral Density, BT 3EDR

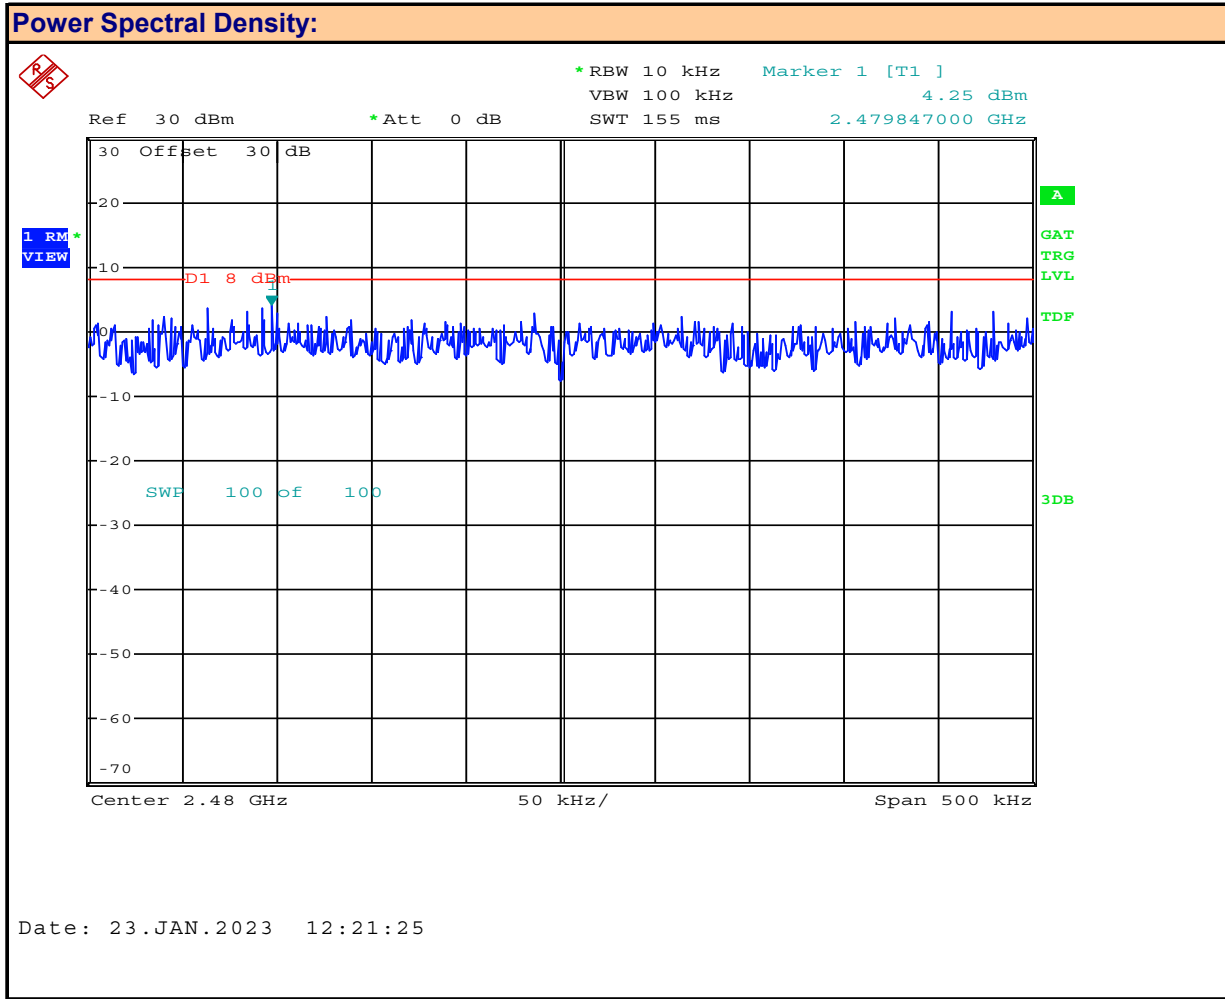

Channel: **78**  
Mode: **BT 3EDR**

Channel Frequency: **2480** MHz  
Modulation: **8-DPSK**  
Measured PSD: **4.25** dBm

Table 11.2 – Summary of Power Spectral Density Measurements, (DSS)

Conducted Power Measurement Results:						
Channel Number	Channel Frequency (MHz)	Mode	Modulation	Measured PSD [P <sub>Meas</sub> ] (dBm)	Conducted Limit [P <sub>Lim</sub> ] (dBm)	Margin (dB)
38	2440.00	BT BR	GFSK	3.81	8.00	4.2
78	2480.00	BT 2EDR	pi/4-DQPSK	5.68		2.3
78	2480.00	BT 3EDR	8-DPSK	4.25		3.8
Result:						Complies

Conducted Margin =  $P_{Limit} - P_{Meas}$

## 12.0 FHSS NUMBER OF HOPPING CHANNELS


### Test Procedure

<b>Normative</b>	<b>FCC 47 CFR §15.247, RSS-247</b>
<b>Reference</b>	<b>KDB 558074, ANSI C63.10</b>

### Limits

47 CFR §15.247(a)(1)	(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
RSS-247 (5.1)(d)	<b>5.1 Frequency hopping systems (FHS)</b> The following applies to FHSs in each of the three bands: FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.


Plot 12.1 – Number of Hopping Channels, BT BR

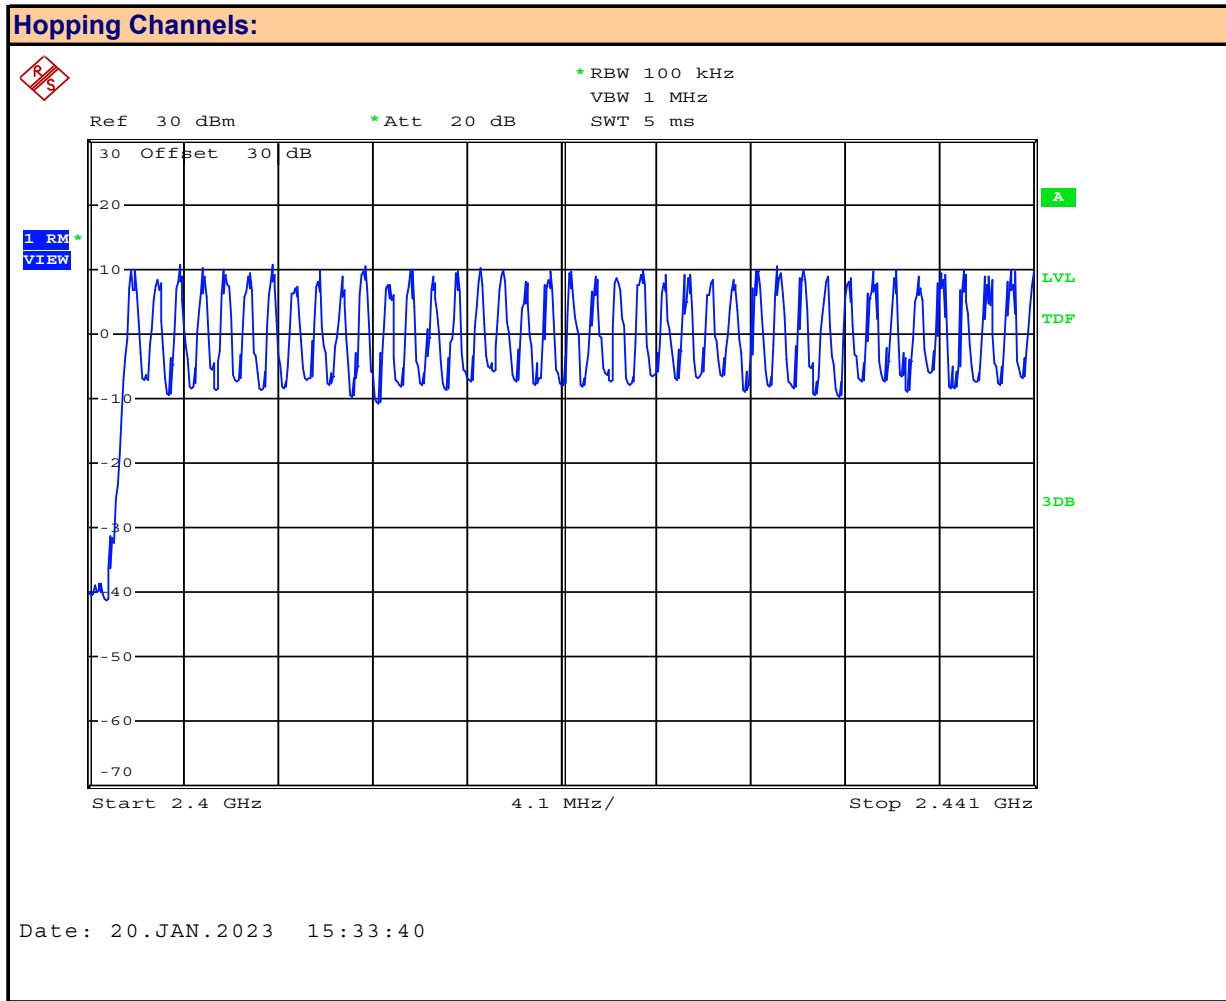

Channel:   
Mode:

Channel Frequency:  MHz  
Modulation:   
Number of Hopping Channels


Plot 12.2 – Number of Hopping Channels, BT BR

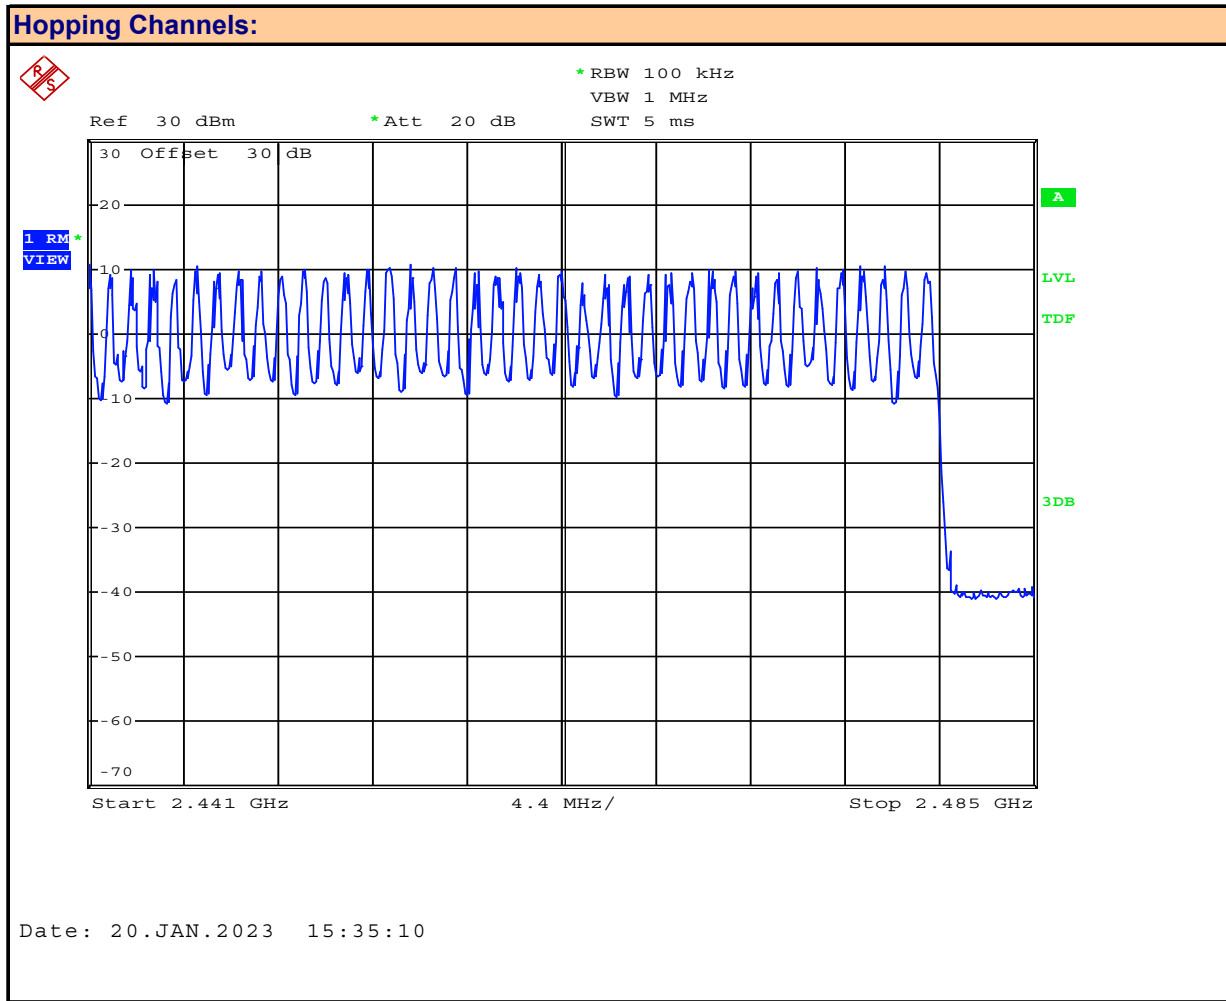

Channel:   
Mode:

Channel Frequency:  MHz  
Modulation:   
Number of Hopping Channels

### Plot 12.3 – Number of Hopping Channels, BT 2EDR

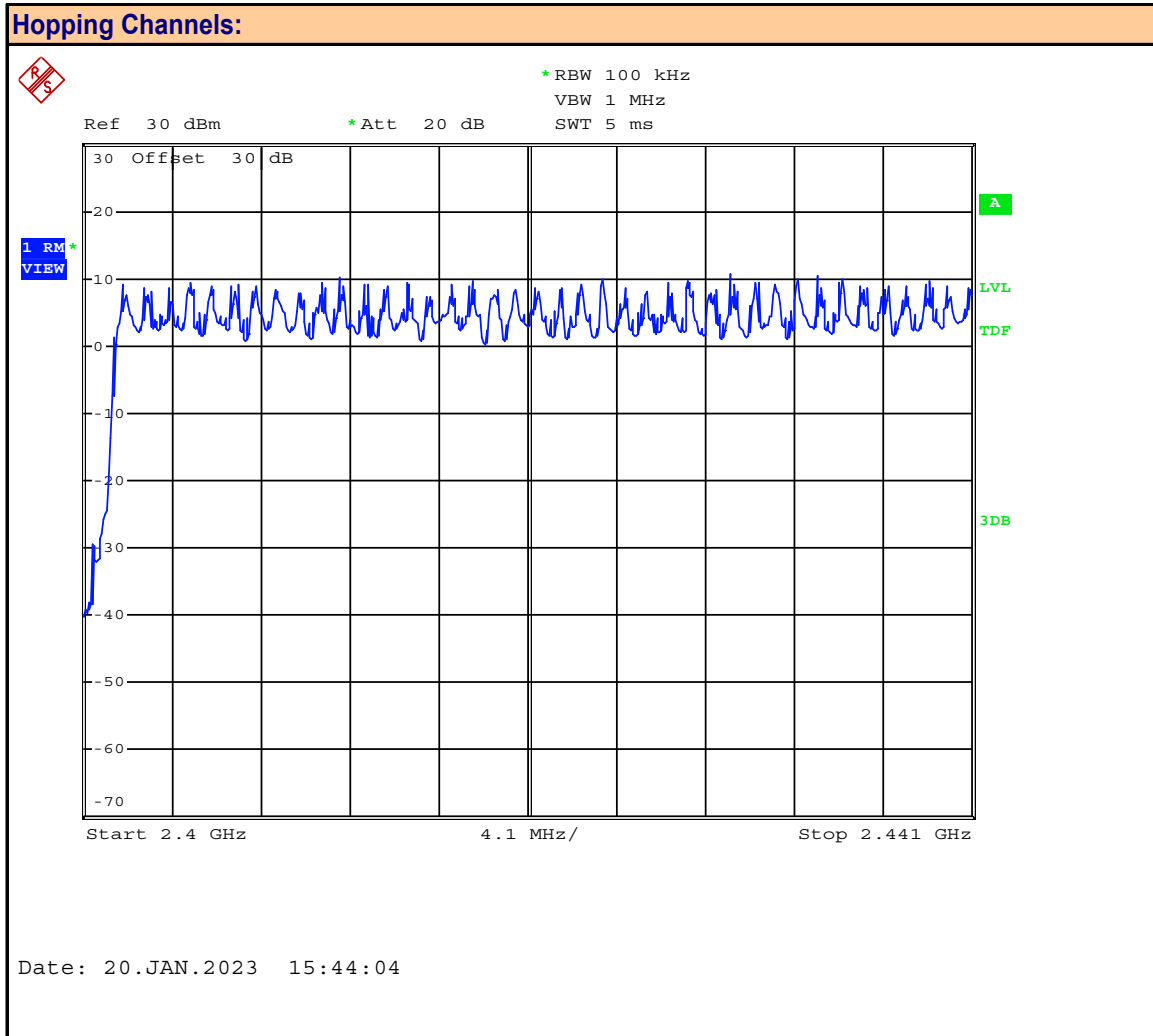

Channel:


Channel Frequency:  MHz

Mode:

Modulation:

Number of Hopping Channels

Plot 12.4 – Number of Hopping Channels, BT 2EDR

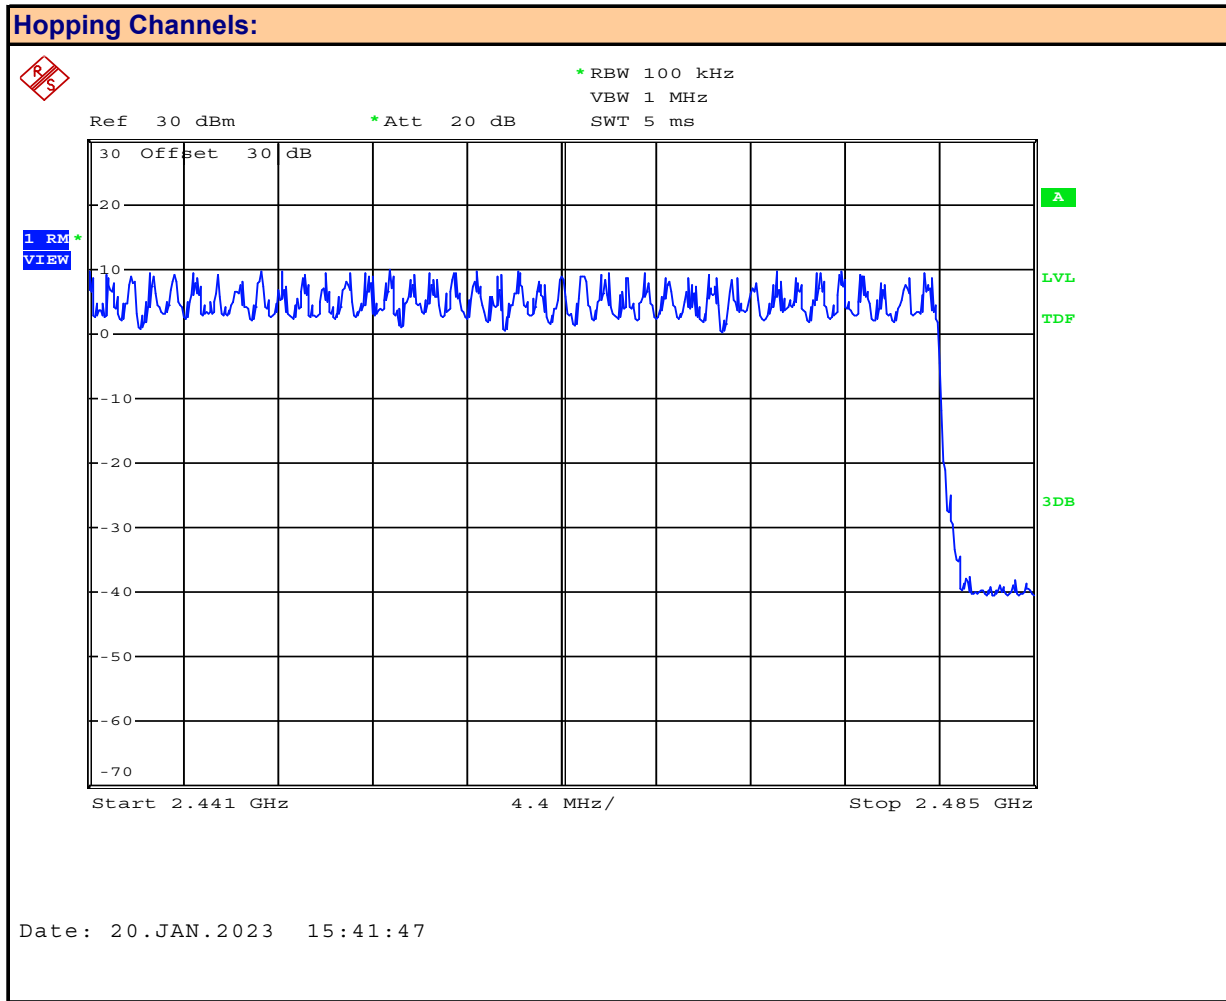

Channel:

Mode:

Channel Frequency:  MHz

Modulation:

Number of Hopping Channels

Table 12.2 – Summary of FHSS Number of Hopping Channels

Hopping Channel Results DSS		
Frequency Range (MHz)	Modulation	Number of Hopping Channels
2400-2441	Pi/4-DQPSK	40
2441-2485	Pi/4-DQPSK	39
Total:		79
2400-2441	GFSK	40
2441-2485	GFSK	39
Total:		79
Result:		Complies



### 13.0 FHSS CHANNEL SEPARATION

#### Test Procedure


<b>Normative</b>	<b>FCC 47 CFR §15.247, RSS-247</b>
<b>Reference</b>	<b>KDB 558074, ANSI C63.10</b>

#### Limits

47 CFR §15.247(a)(1)	(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400- 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
RSS-247 (5.1)(db)	<b>5.1 Frequency hopping systems (FHS)</b> The following applies to FHSs in each of the three bands: FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Plot 13.1 – 20dB BW, BT BR


**FHSS 20 dB Bandwidth:**

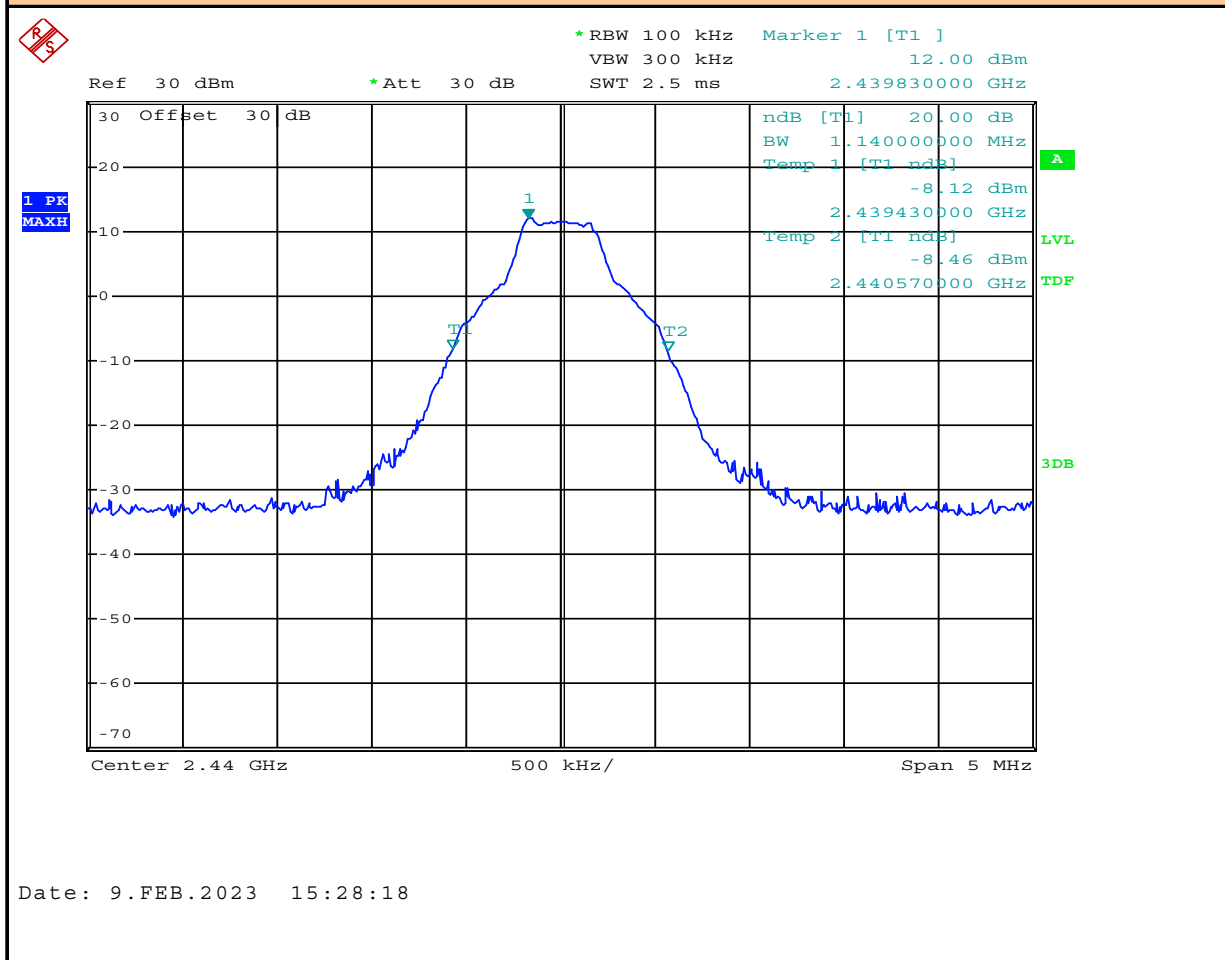

Channel: **38**  
Mode: **BT BR**

Channel Frequency: **2440** MHz  
Modulation: **GFSK**  
Measured 20dB Bandwidth: **1.14** MHz

### Plot 13.2 – FHSS Channel Separation, BT BR

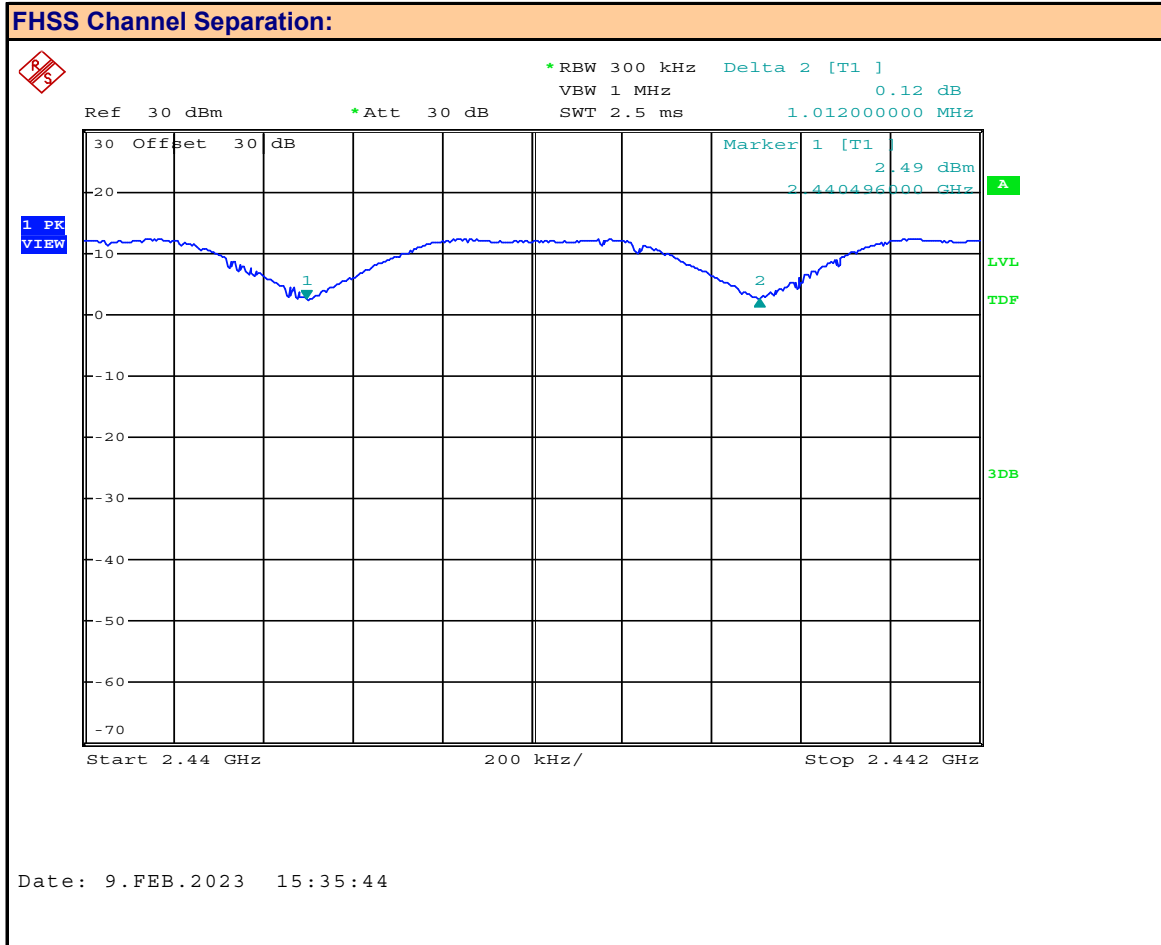

Channel:


Mode:

Channel Frequency:  MHz

Modulation:

Measured Channel Separation:  MHz


Plot 13.3 – 20dB BW, BT 2EDR

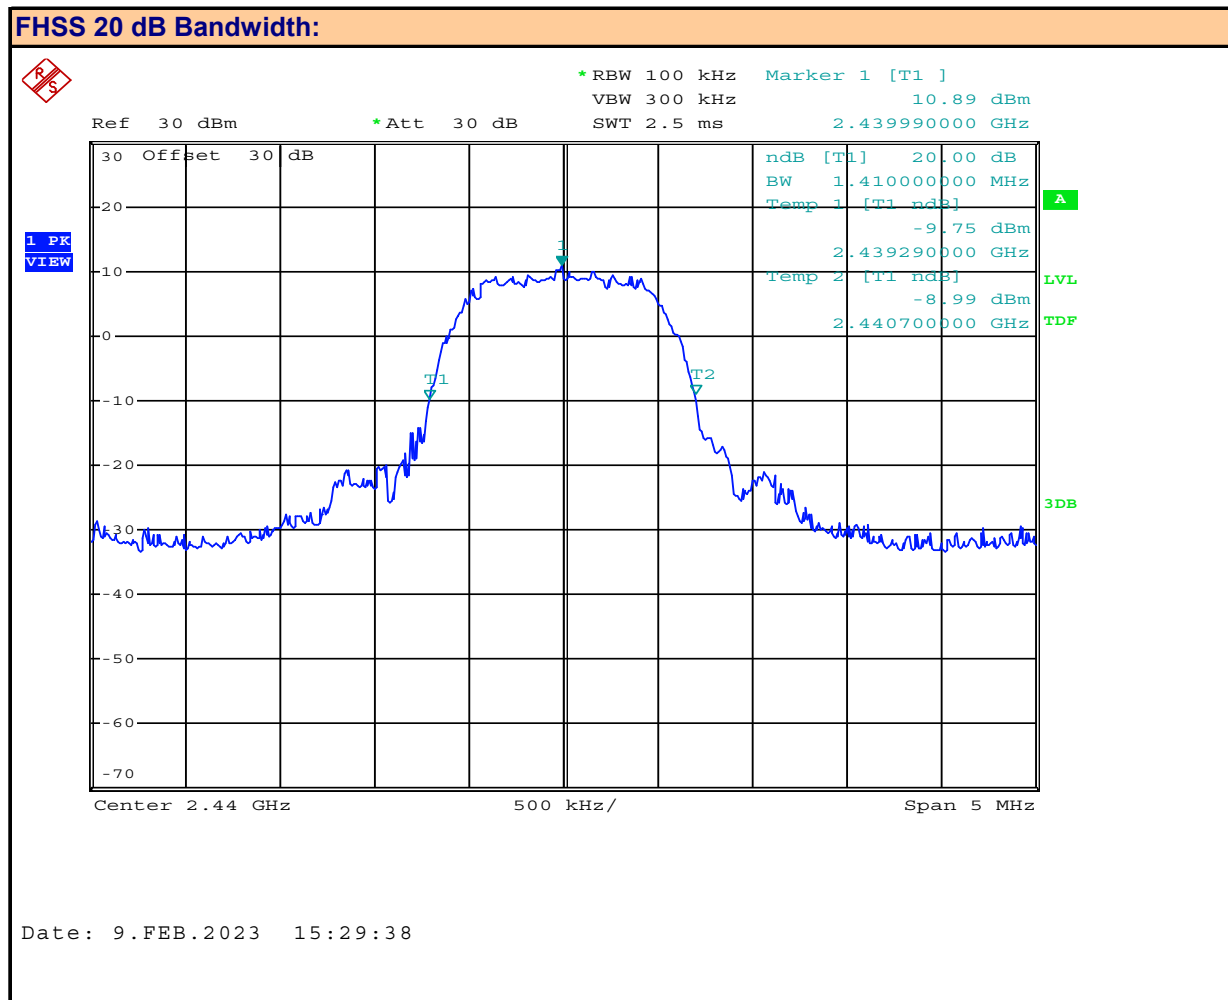

Channel: **38**  
Mode: **BT EDR**

Channel Frequency: **2440** MHz  
Modulation: **Pi/4-DQPSK**  
Measured 20dB Bandwidth: **1.41** MHz

### Plot 13.4 – FHSS Channel Separation, BT 2EDR

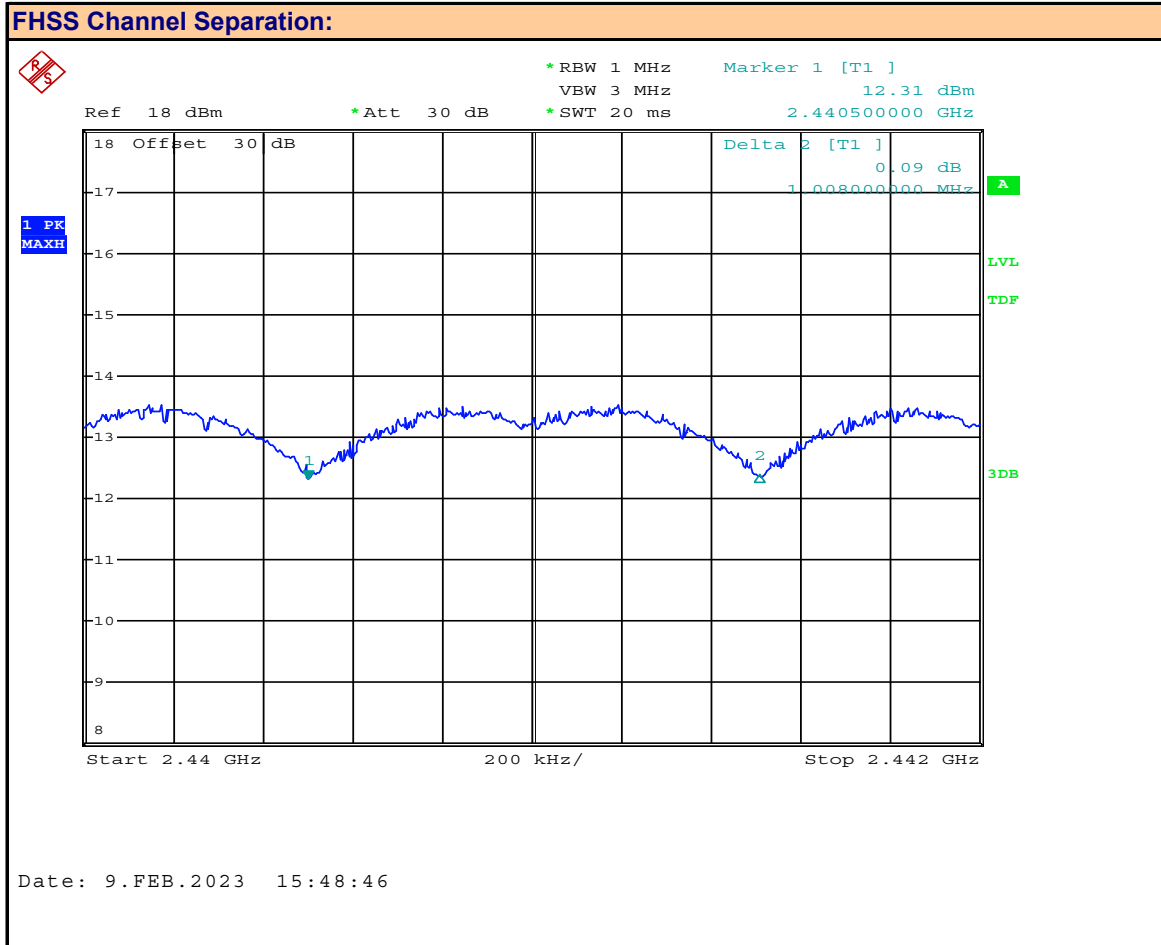

Channel:   
Mode:

Channel Frequency:  MHz  
Modulation:   
Measured Channel Separation:  MHz

Table 13.1 – Summary of FHSS Channel Separation

Hopping Channel Separation Results DSS				
Modulation	20dB BW (MHz)	Channel Separation (MHz)	Minimum Bandwidth (MHz)	Margin (MHz)
8-DPSK	1.14	1.012	0.760	0.252
Pi/4-DQPSK	1.41	1.008	0.940	0.068
Result:				<b>Complies</b>

Minimum Bandwidth = 20dB BW X 2/3

Margin = Channel Separation - Minimum Bandwidth

#### 14.0 FHSS TIME OF OCCUPANCY


##### Test Procedure

<b>Normative</b>	FCC 47 CFR §15.247, RSS-247
<b>Reference</b>	KDB 558074, ANSI C63.10

##### Limits

47 CFR §15.247(a)(1)	(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
RSS-247 (5.1)(d)	<b>5.1 Frequency hopping systems (FHS)</b> FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Plot 14.1 – Time of Occupancy, DH1, 2-DH1, 3-DH1, DM1

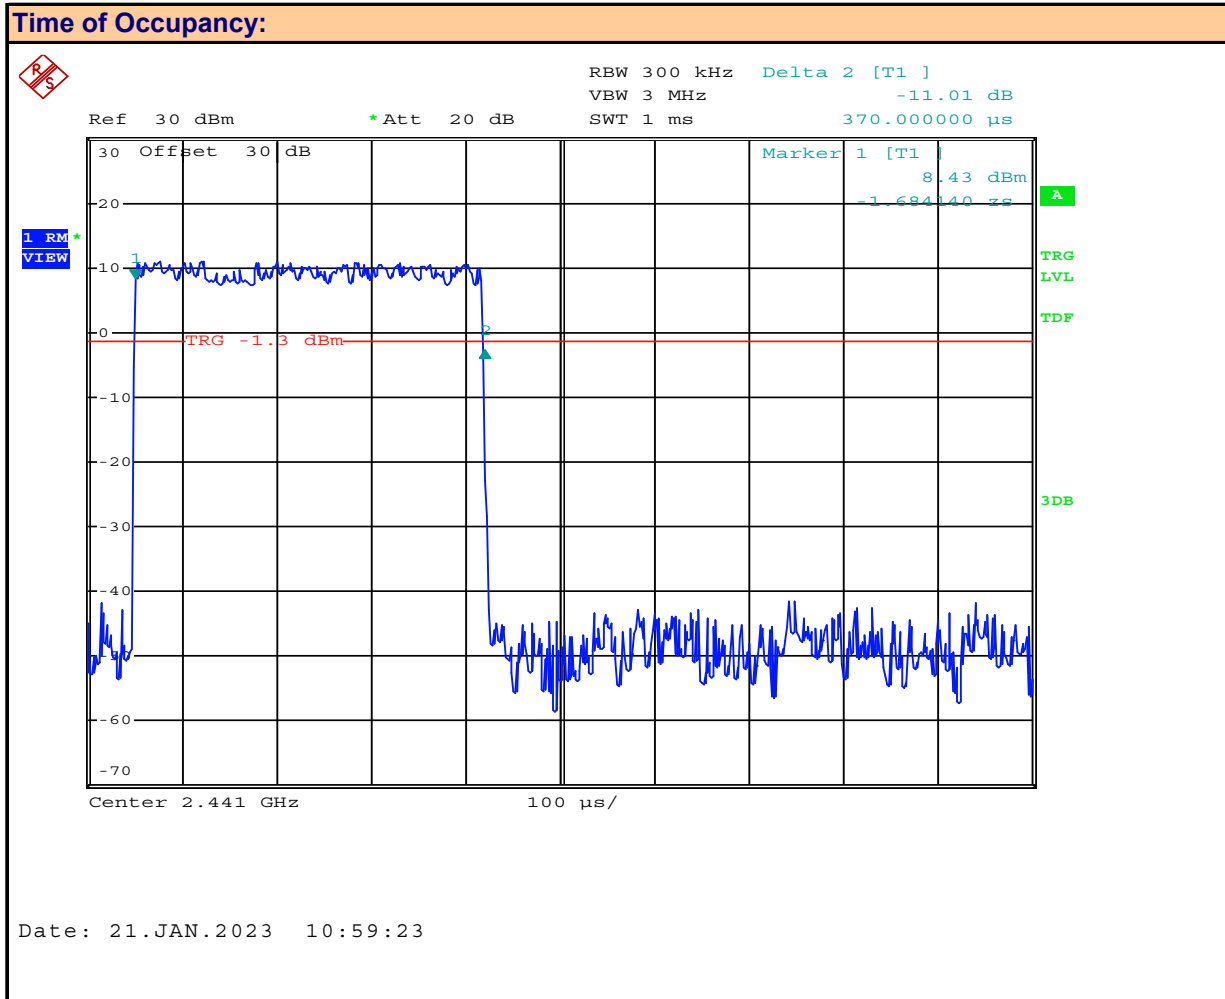


Packet: **DH1, DM1, 2-DH1, 3-DH1**

Measured On-Time: **370** µSec




Plot 14.2 – Time of Occupancy, DH1, 2-DH1, 3-DH1, DM1

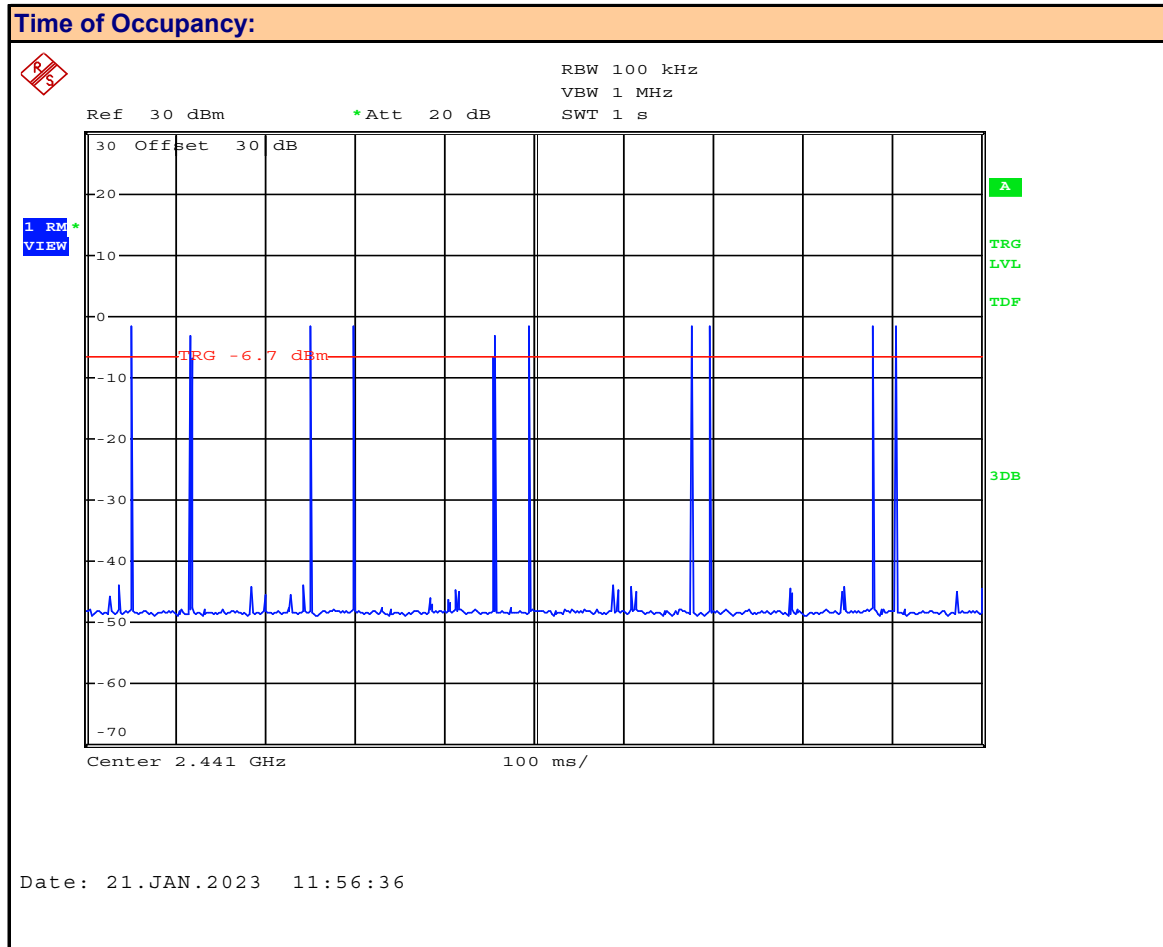

Packet: **DH1, DM1, 2-DH1, 3-DH1**

Transmit Count **10** /1000mSec


Plot 14.3 – Time of Occupancy, DH3, 2-DH3, 3-DH3, DM3

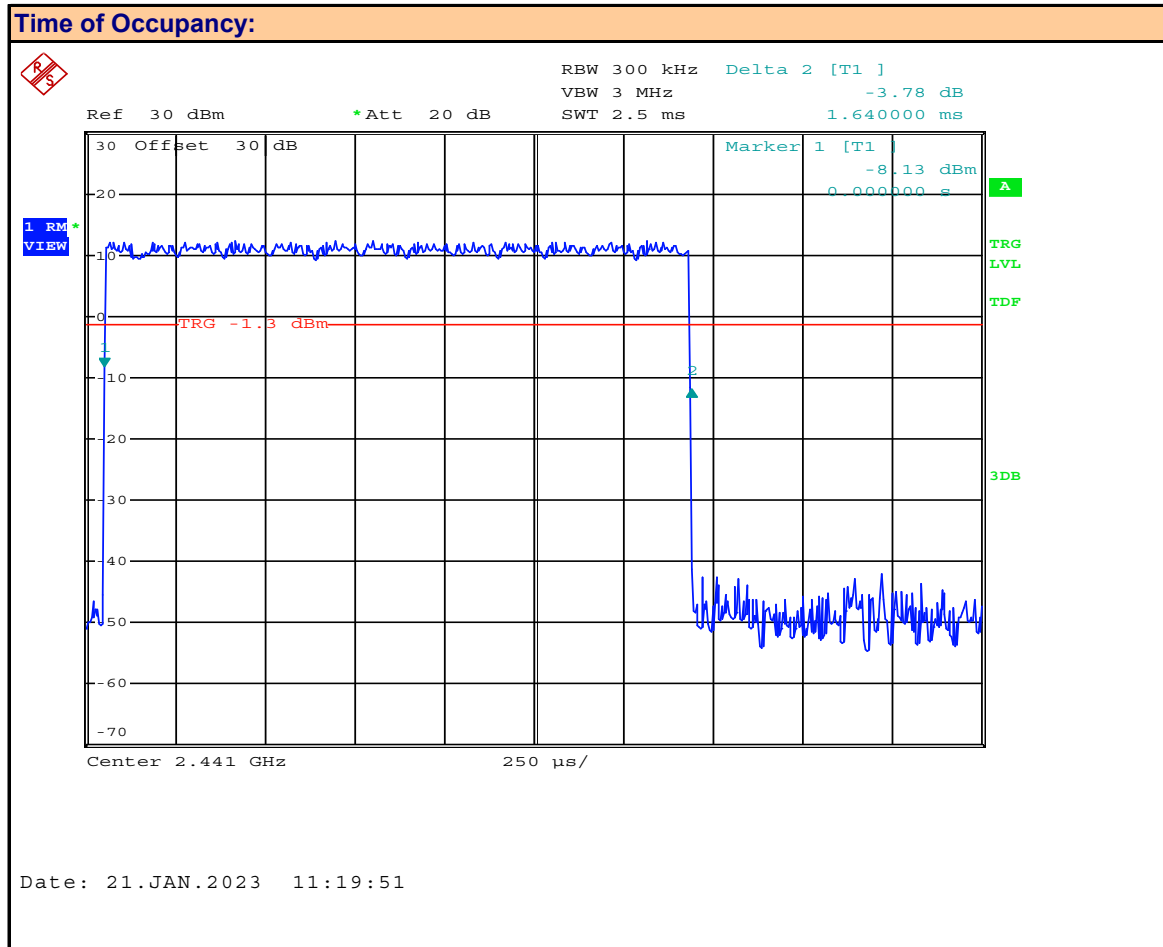

Packet: **DH3, DM3, 2-DH3, 3-DH3**

Measured On-Time: **1.64** mSec


Plot 14.4 – Time of Occupancy, DH3, 2-DH3, 3-DH3, DM3

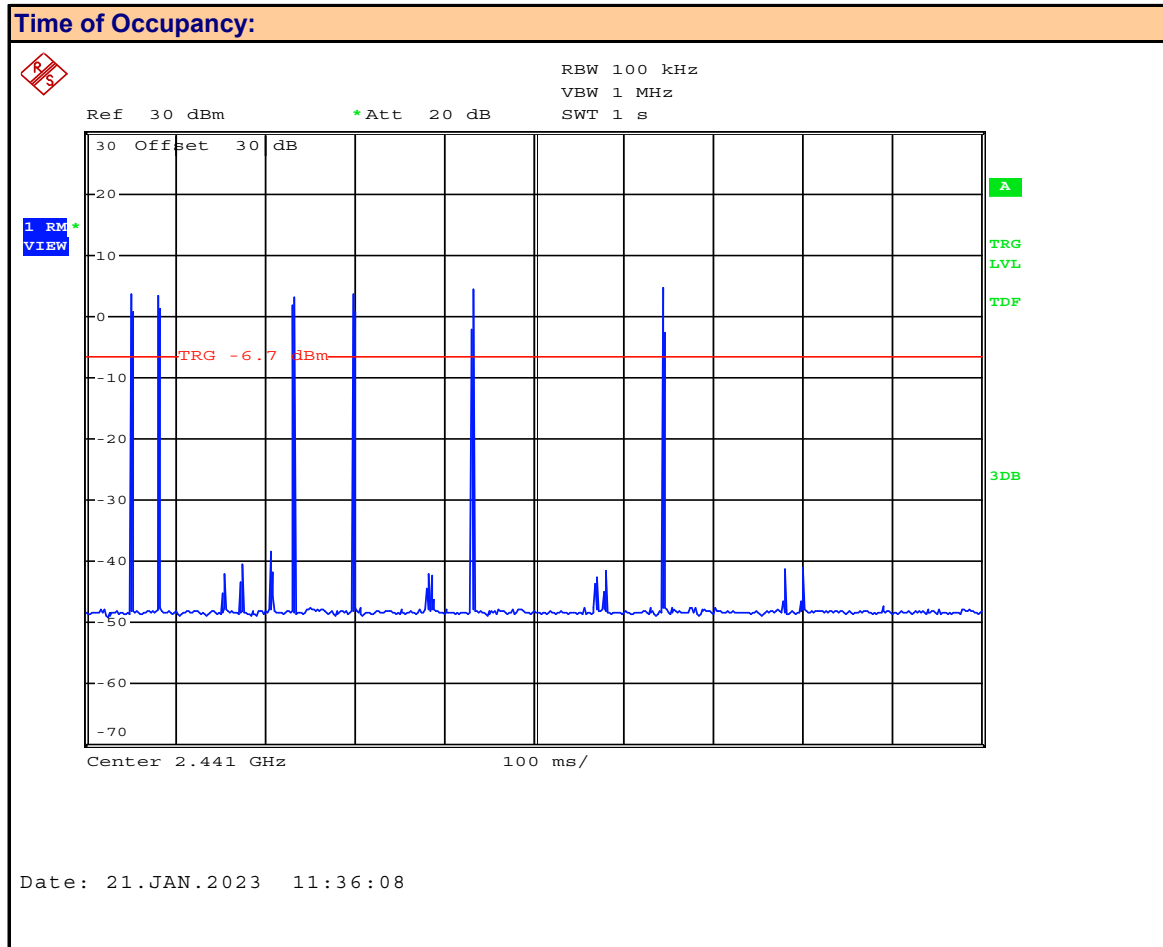

Packet: **DH3, DM3, 2-DH3, 3-DH3**

Transmit Count **6** /1000mSec


Plot 14.5 – Time of Occupancy, DH5, 2-DH5, 3-DH5, DM5

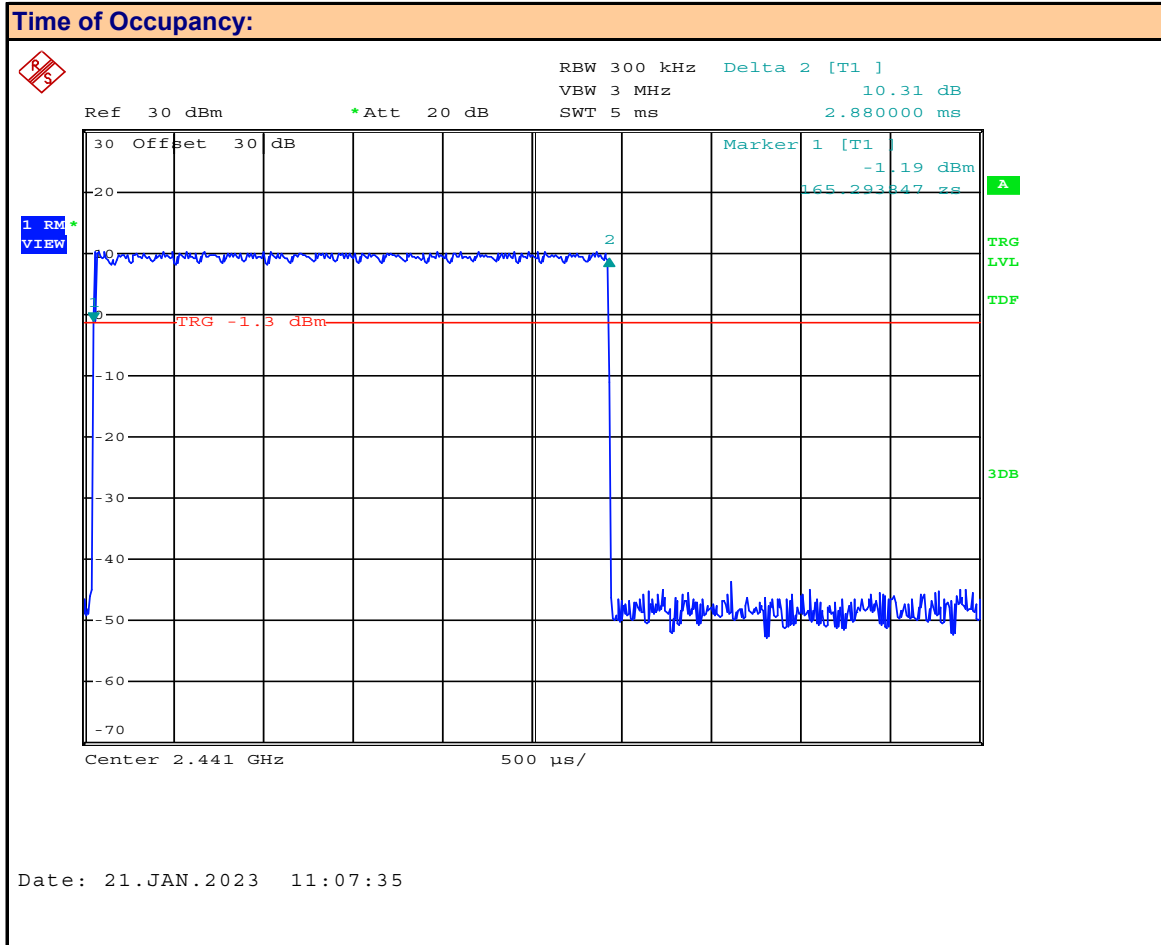

Packet: **DH5, DM5, 2-DH5, 3-DH5**

Measured On-Time: **2.88** mSec


Plot 14.6 – Time of Occupancy, DH5, 2-DH5, 3-DH5, DM5

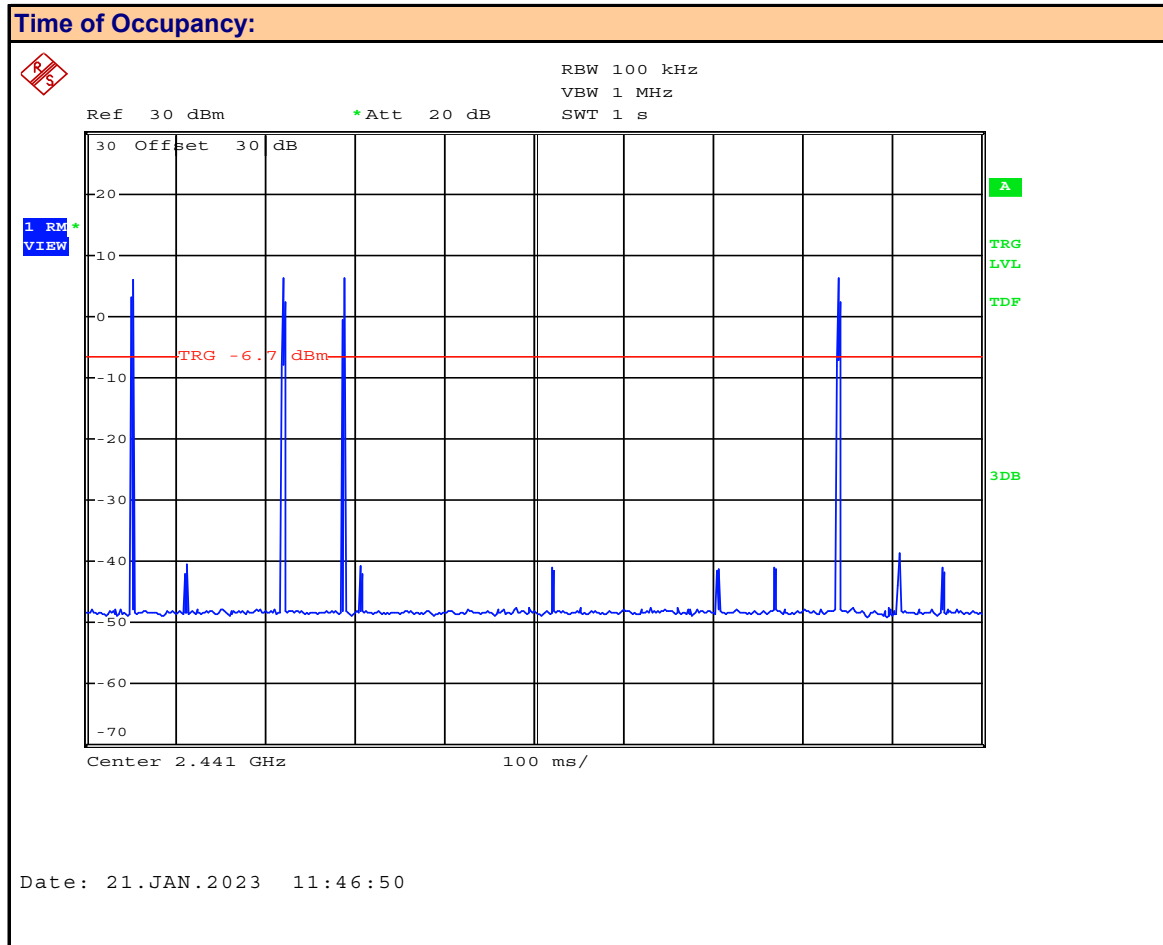

Packet: **DH5, DM5, 2-DH5, 3-DH5**

Transmit Count **4** /1000mSec


Plot 14.7 – Time of Occupancy, EV4

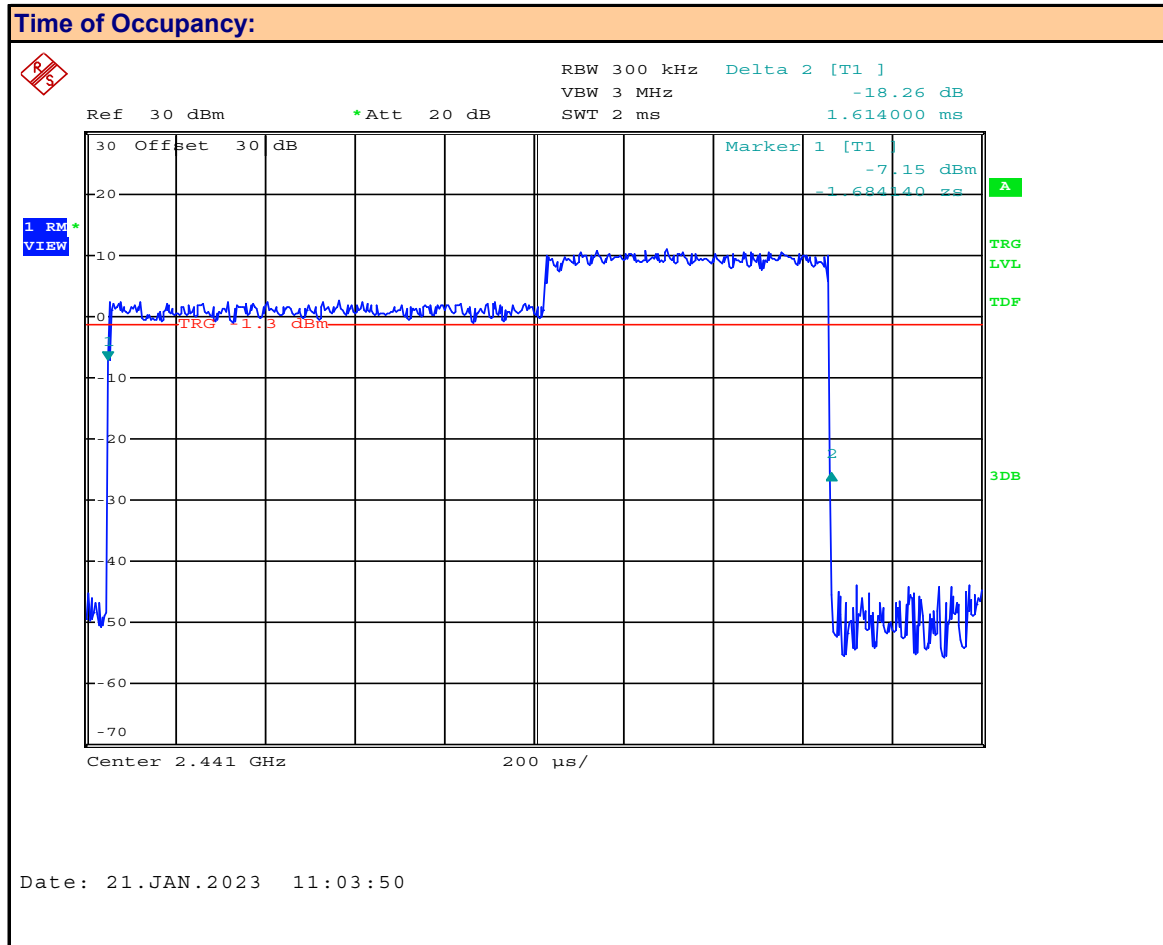

Packet: **EV4**

Measured On-Time: **1.614** mSec


## Plot 14.8 – Time of Occupancy, EV4

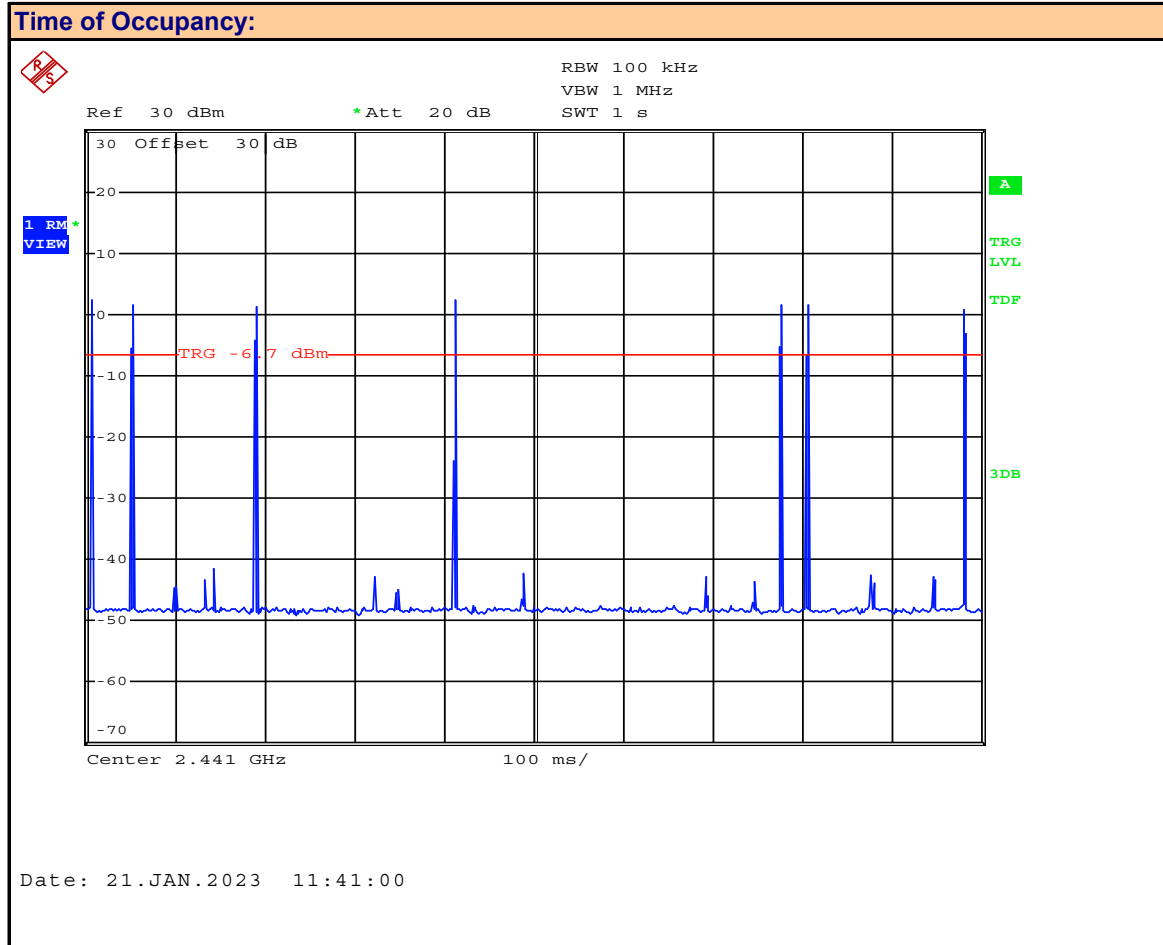

Packet: **EV4**

Transmit Count **7** /1000mSec

Plot 14.9 – Time of Occupancy, EV5

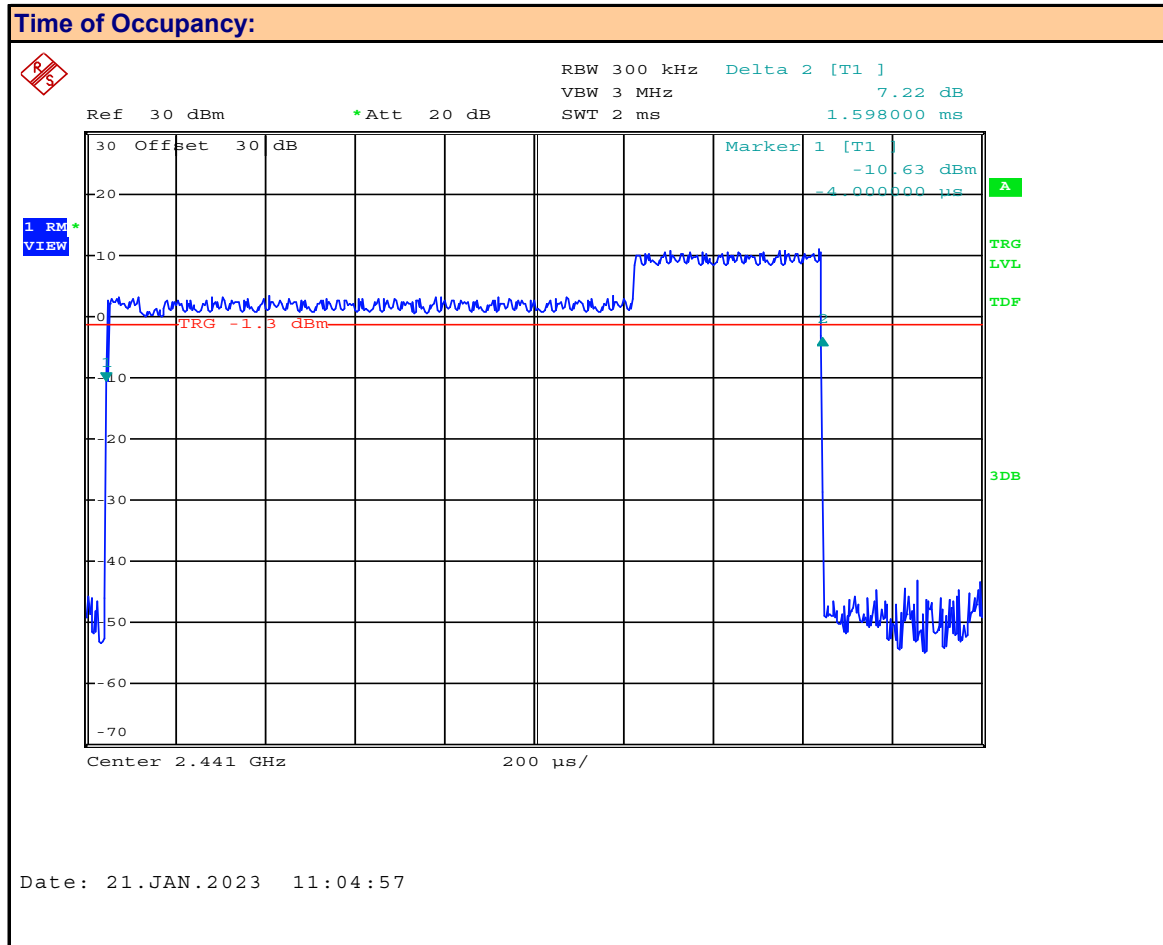


Packet: **EV5**

Measured On-Time: **1.598** mSec



Plot 14.10 – Time of Occupancy, EV5

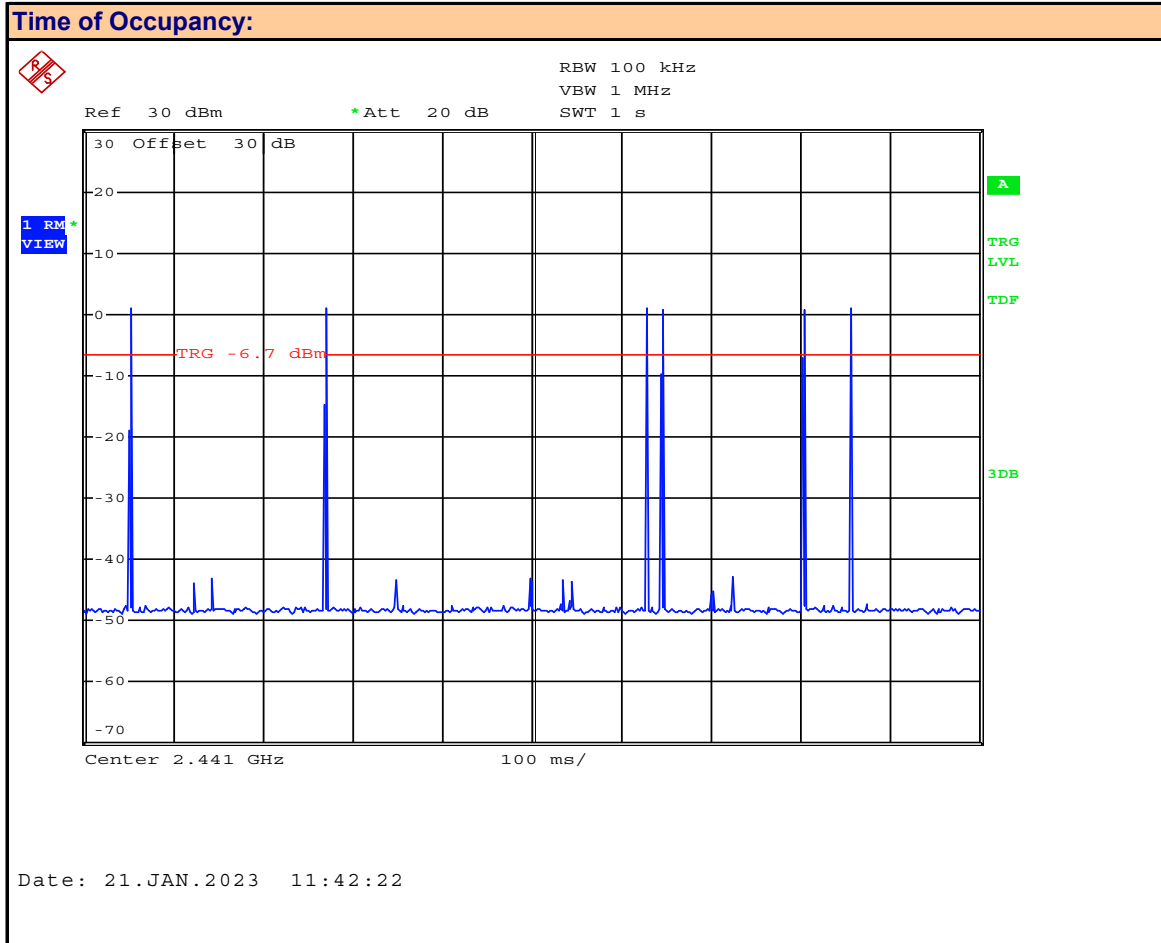

Packet: **EV5**

Transmit Count: **6** /1000mSec

Table 14.1 – Summary of FHSS Time of Occupancy

Accumulated Time of Occupancy										
Channel Frequency (MHz)	Packet	Channel On Time [t <sub>on</sub> ] (mSec)	Number of Transmits per Period [N <sub>Tx</sub> ]	Time of Period Occupancy [T <sub>Occ</sub> ] (mSec)	Observation Period [T <sub>P</sub> ] (mSec)	Number of Hopping Channels [N <sub>Hop</sub> ]	Required Observation Period [T <sub>Rqd</sub> ] (mSec)	Accumulated Time of Occupancy [T <sub>Acc</sub> ] (mSec)	Limit [Limit] (mSec)	Margin (mSec)
2441	DH1	0.370	10	3.700	1000	79	31600	116.92	400	283
	DH3	1.640	6	9.840				310.94		89
	DH5	2.880	4	11.520				364.03		36
	EV4	1.614	7	11.298				357.02		43
	DH5	1.598	6	9.588				302.98		97
Result:									Complies	

Time of Period Occupancy [T<sub>POcc</sub>] = Channel On Time [t<sub>on</sub>] x Number of Transmits per Period [N<sub>Tx</sub>]

Required Observation Period [T<sub>Rqd</sub>] = Number of Hopping Channels [N<sub>Hop</sub>] x 0.4Sec (400mSec)

Accumulated Time of Occupancy [T<sub>Acc</sub>] = Time of Period Occupancy [T<sub>Occ</sub>] x Required Observation Period [T<sub>Rqd</sub>] / Observation Period [T<sub>P</sub>]

Margin = Limit - [T<sub>Acc</sub>]

## 15.0 CONDUCTED SPURIOUS EMISSIONS -BAND EDGE


### Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5),
	KDB 558074 (11.3), ANSI C63.10 (11.11.3)

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
KDB 558074 (11.3) C63.10 (11.11.3)	<p><b>11.1 General</b></p> <p>The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:</p> <p>b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p><b>11.2 Reference level measurement</b></p> <p>a) Set instrument center frequency to DTS channel center frequency.</p> <p>b) Set the span to <math>\geq 1.5 \times DTS \text{ bandwidth}</math>.</p> <p>c) Set the RBW = 100 kHz.</p> <p>d) Set the VBW <math>\geq 3 \times RBW</math>.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum PSD level.</p> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference</p>


Plot 15.1 – Band Edge, 802.11b

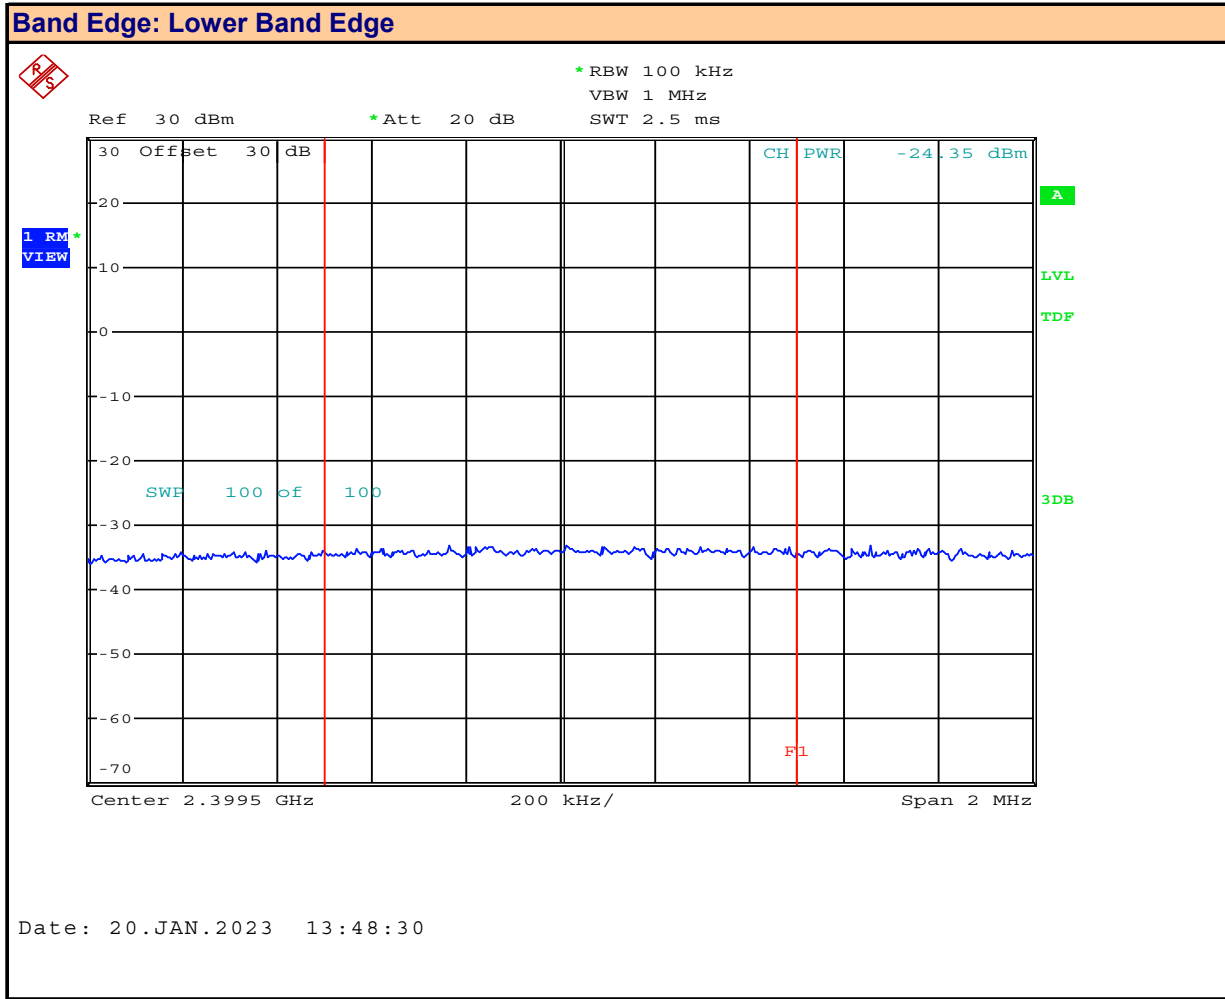

Channel: **1**  
Mode: **802.11b**

Channel Frequency: **2402** MHz  
Modulation: **DSSS 5.5**  
Emission Power: **-24.35** dBm


Plot 15.2 – Band Edge, 802.11b

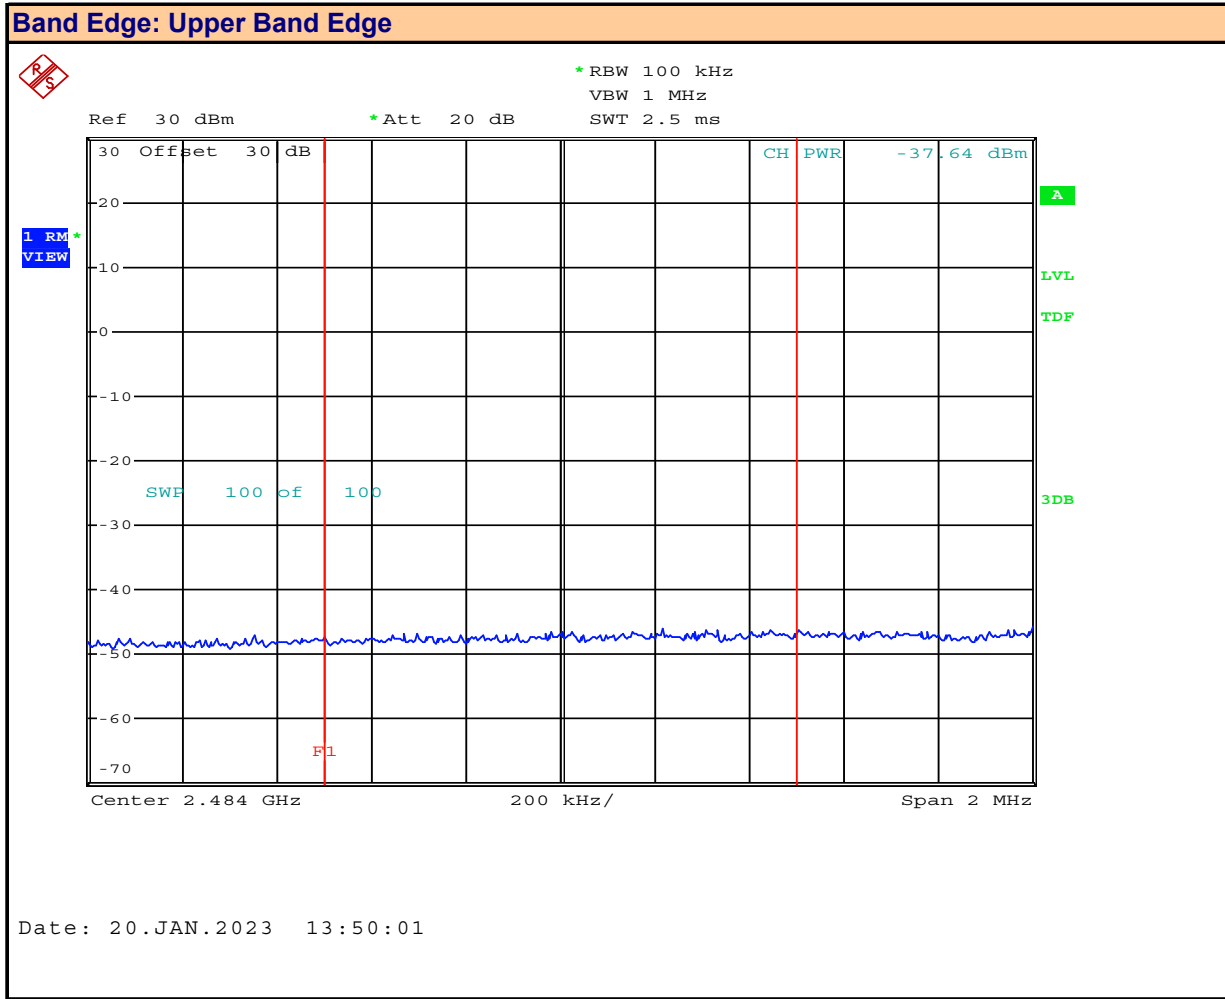

Channel: **11**  
Mode: **802.11b**

Channel Frequency: **2462** MHz  
Modulation: **DSSS 5.5**  
Emission Power: **-37.64** dBm

Plot 15.3 – Band Edge, 802.11g

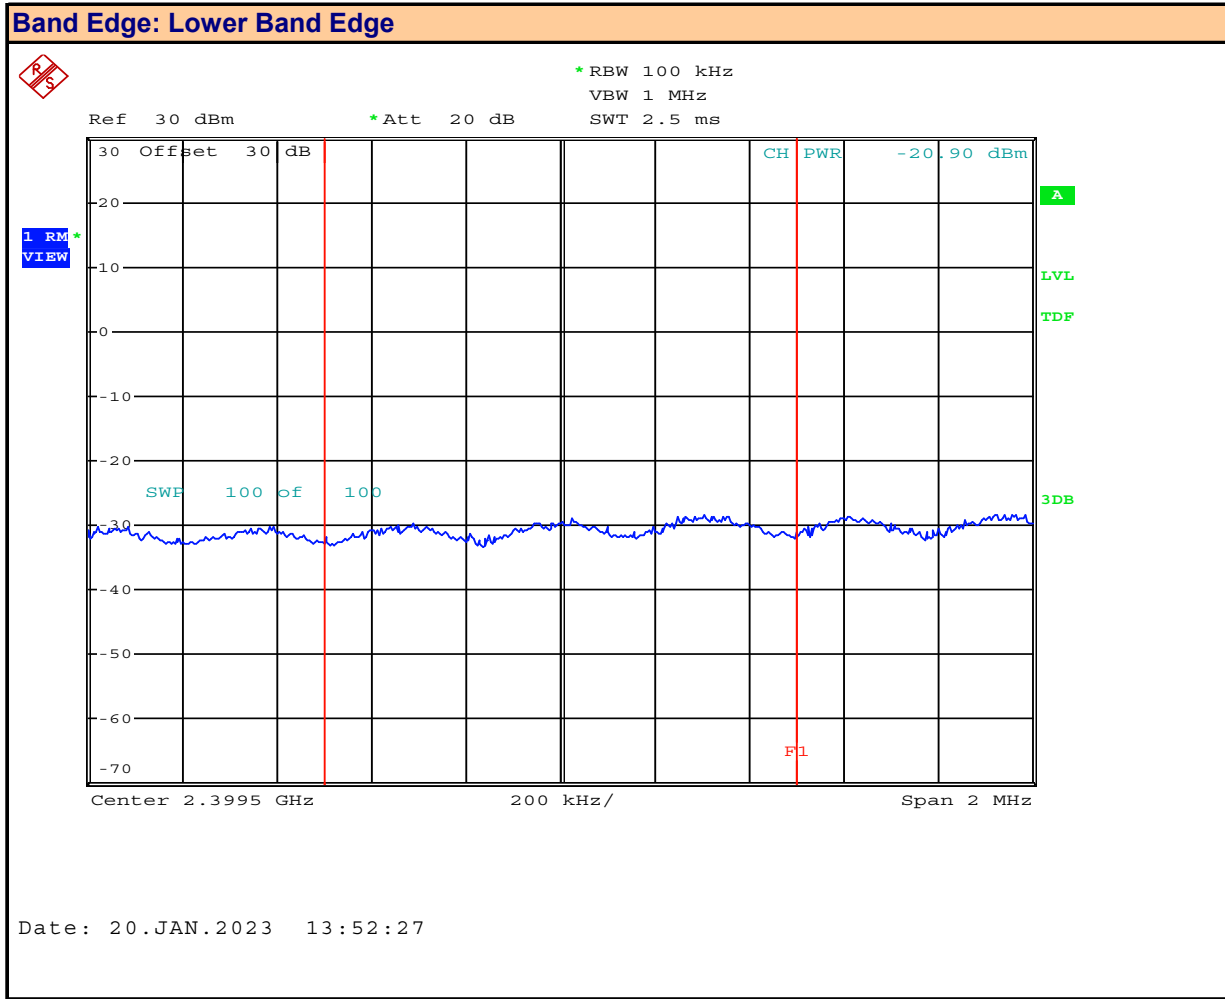

Channel: **1**  
Mode: **802.11g**

Channel Frequency: **2402** MHz  
Modulation: **OFDM12**  
Emission Power: **-20.9** dBm

Plot 15.4 – Band Edge, 802.11g



Channel: **11**  
Mode: **802.11g**

Channel Frequency: **2462** MHz  
Modulation: **OFDM12**  
Emission Power: **-24.4** dBm

Plot 15.5 – Band Edge, 802.11n




Channel: **1**  
Mode: **802.11n**

Channel Frequency: **2402** MHz  
Modulation: **MCS0**  
Emission Power: **-26.45** dBm



Plot 15.6 – Band Edge, 802.11n

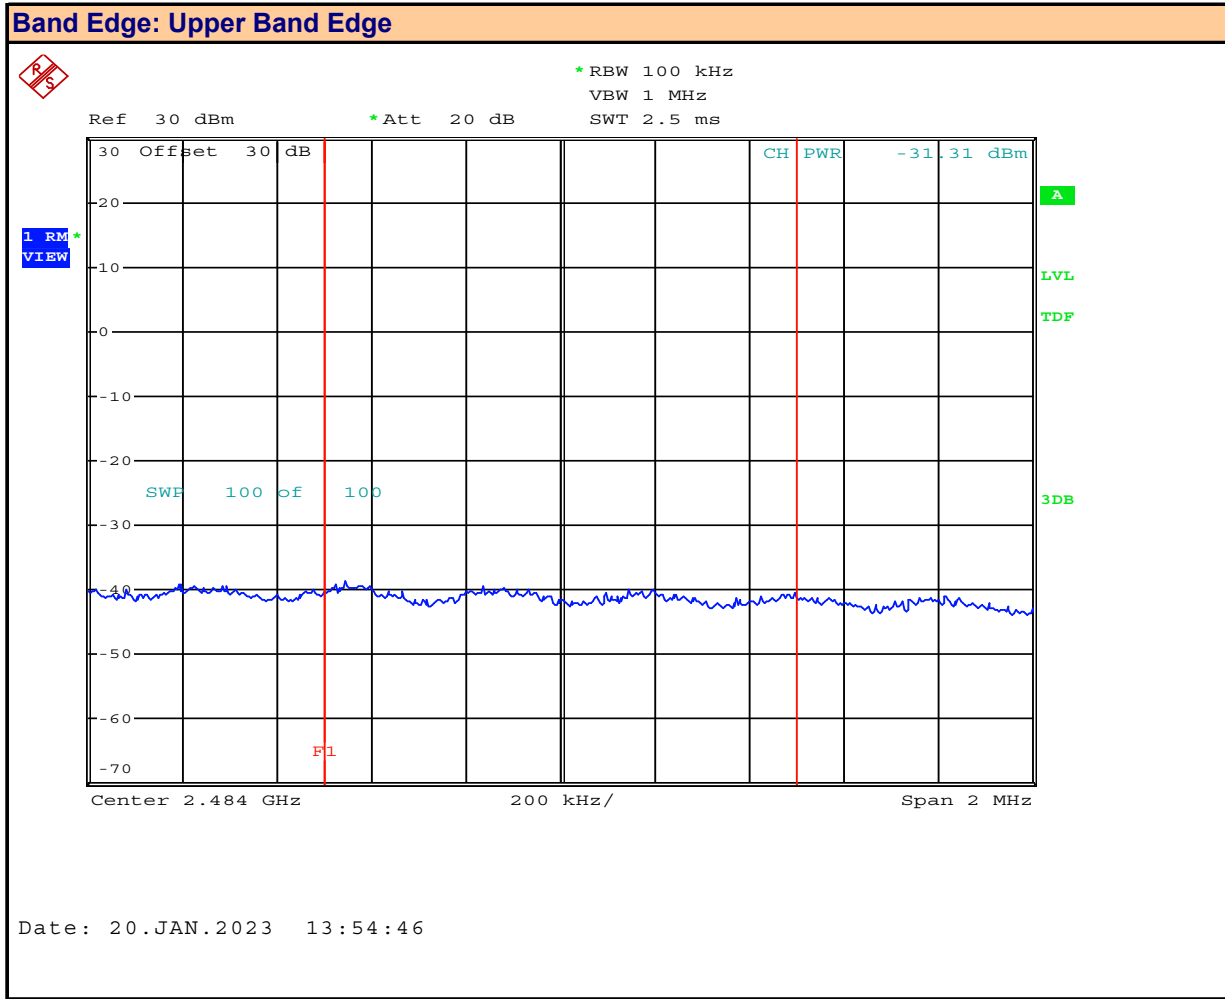

Channel: **11**  
Mode: **802.11n**

Channel Frequency: **2462** MHz  
Modulation: **MCS0**  
Emission Power: **-31.31** dBm

Table 15.1 – Summary of Spurious Emission Measurements – Band Edge, (DTS)

Band Edge Measurement Results: 802.11											
Mode	Channel Number	Frequency (MHz)	Modulation	Emission Power [P <sub>Em</sub> ] (dBm)	Antenna Gain [G <sub>T</sub> ] (dBi)	Emission EIRP [E <sub>Em</sub> ] (dBm)	Fundamental Power [P <sub>Fund</sub> ] (dBm)	Fundamental EIRP [E <sub>Fund</sub> ] (dBm)	Attenuation [Atten] (dB)	Limit (dB)	Margin (dB)
802.11b	1	2402.00	DSSS 5.5	-24.35	-3.21	-27.56	18.25	15.04	42.60	30	12.6
	11	2462.00		-37.64		-40.85		15.04	55.89		25.9
802.11g	1	2402.00	OFDM12	-20.90		-24.11	18.24	15.03	39.14		9.1
	11	2462.00		-24.40		-27.61		15.03	42.64		12.6
802.11n	1	2402.00	MCS0	-26.45		-29.66	15.91	12.70	42.36		12.4
	11	2462.00		-31.31		-34.52		12.70	47.22		17.2
Result:										Complies	


Emission [E<sub>Em</sub>] = [P<sub>Em</sub>] + [G<sub>T</sub>]

Fundamental EIRP [E<sub>Fund</sub>] = [P<sub>Fund</sub>] + [G<sub>T</sub>]

Attenuation [Atten] = [E<sub>Fund</sub>] - [E<sub>Em</sub>]

Margin = Attenuation - Limit


Plot 15.7 – Band Edge, BT BR

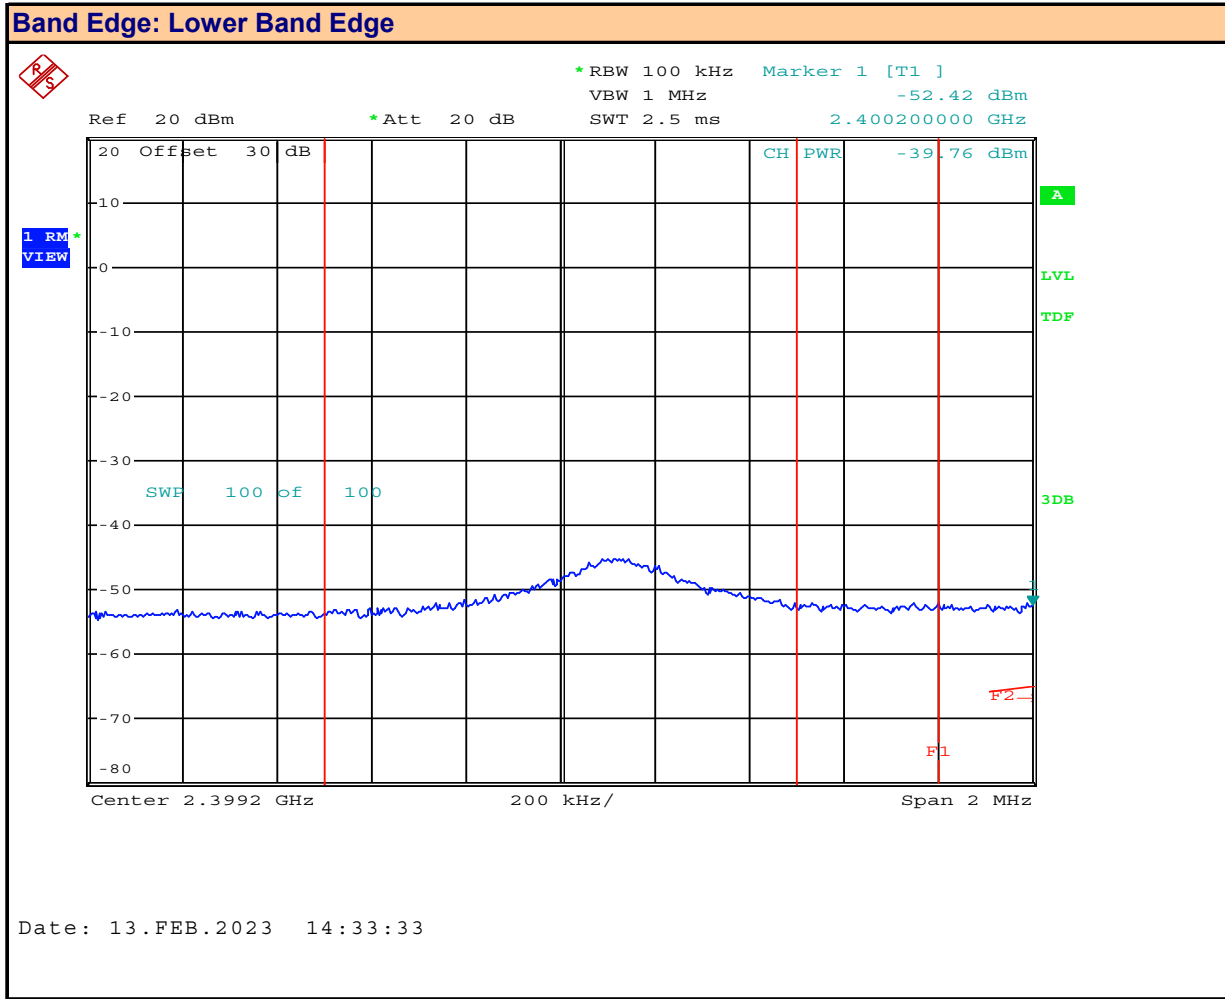

Channel: **0**  
Mode: **BT BR**

Channel Frequency: **2402** MHz  
Modulation: **GFSK**  
Emission Power: **-39.76** dBm


Plot 15.8 – Band Edge, BT BR

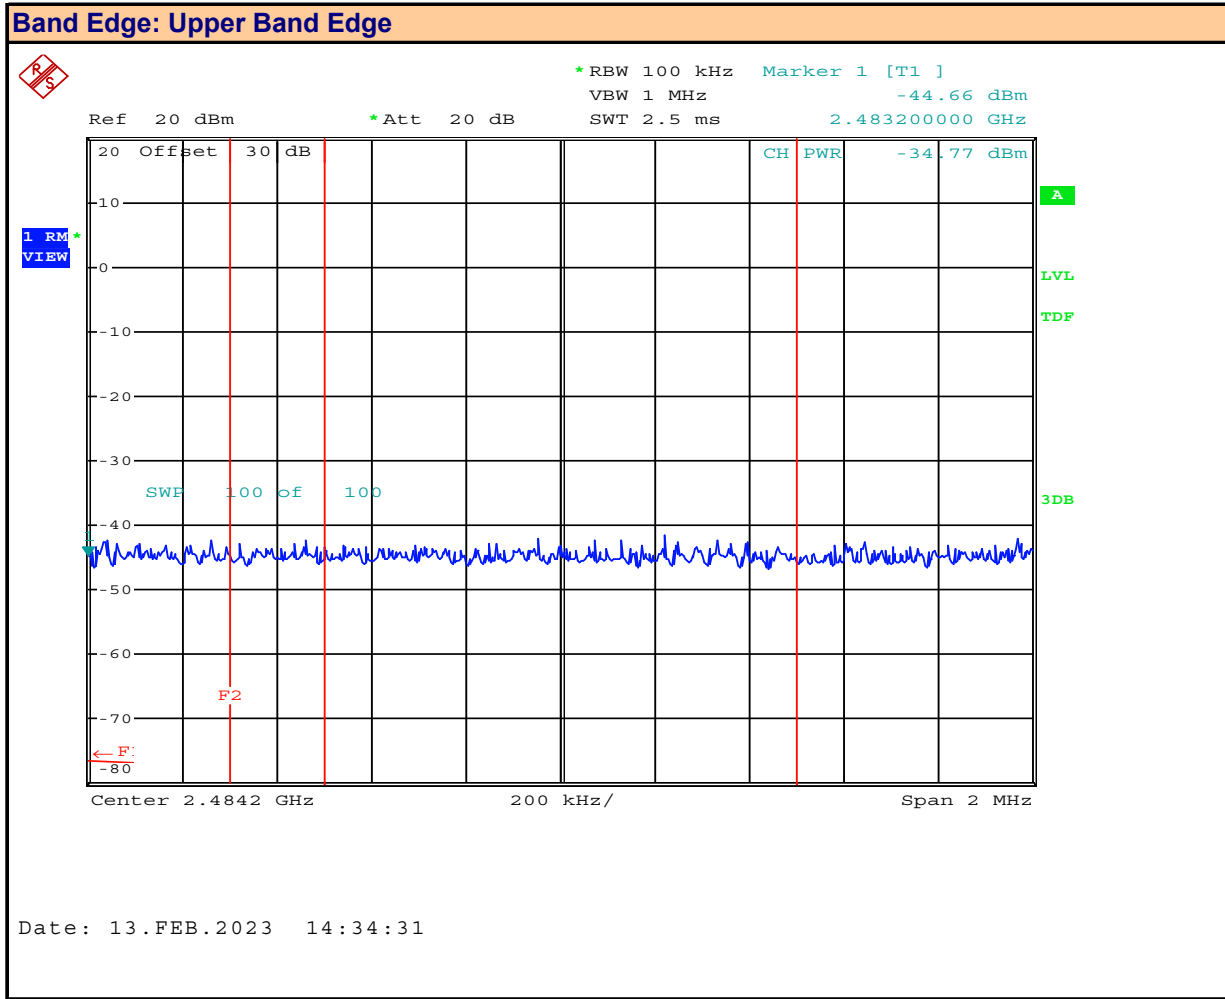

Channel: **78**  
Mode: **BT BR**

Channel Frequency: **2480** MHz  
Modulation: **GFSK**  
Emission Power: **-34.77** dBm

Plot 15.9 – Band Edge, BT 2EDR

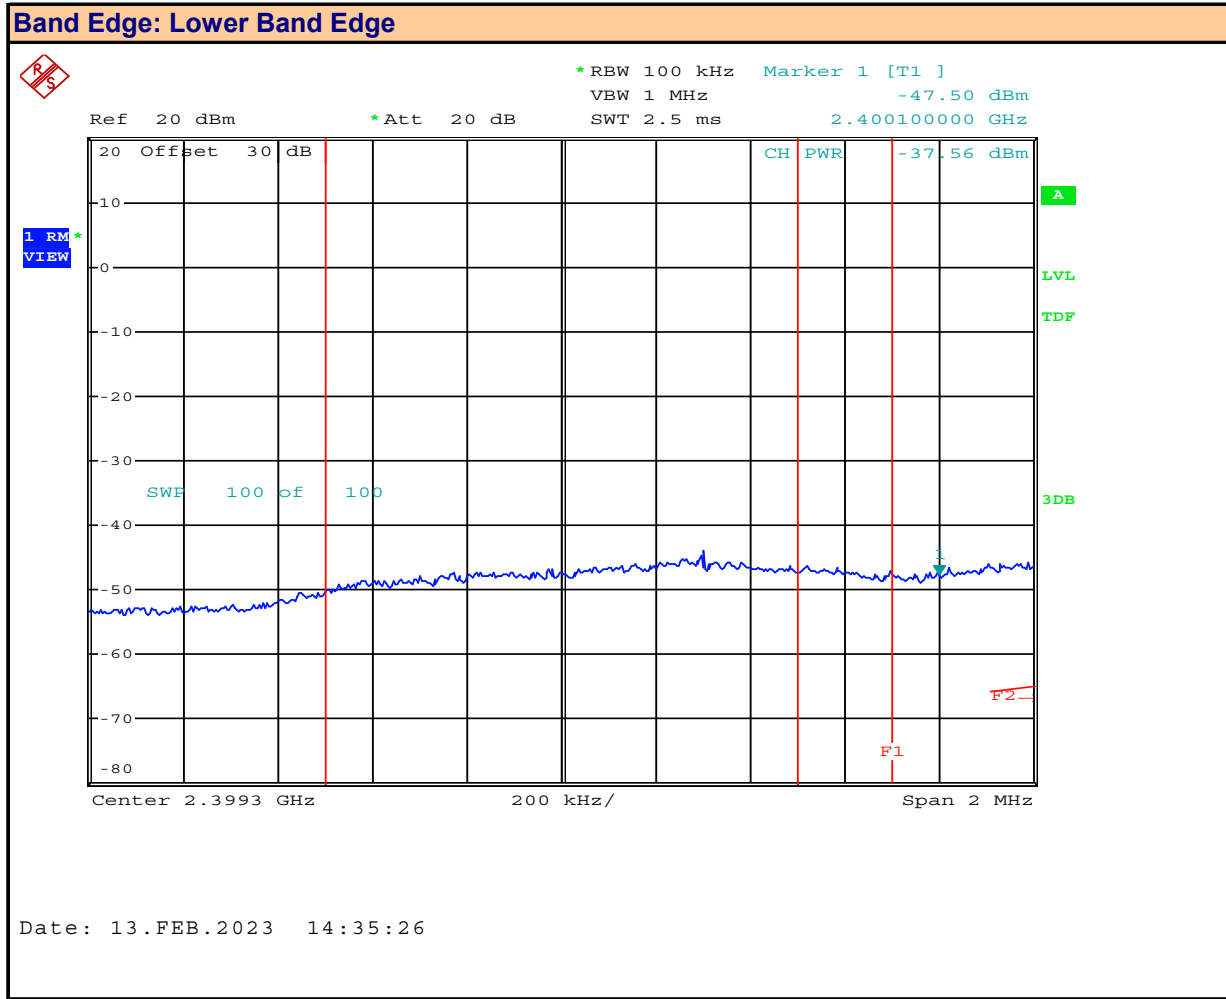

Channel: **0**  
Mode: **BT 2EDR**

Channel Frequency: **2402** MHz  
Modulation: **pi/4-DQPSK**  
Emission Power: **-37.56** dBm

**Band Edge: Upper Band Edge**

Ref 20 dBm      \*Att 20 dB      SWT 2.5 ms      2.483200000 GHz

\*RBW 100 kHz      Marker 1 [T1]      -54.04 dBm

VBW 1 MHz

1 RM VIEW

CH PWR -43.82 dBm

SWF 100 of 100

3DB

F2


F1

Center 2.4842 GHz      200 kHz/      Span 2 MHz

Date: 13.FEB.2023 14:36:13

Channel Frequency:	2480	MHz
Modulation:	PI/4-DQPSK	
Emission Power:	-43.82	dBm


Plot 15.11 – Band Edge, BT 3EDR

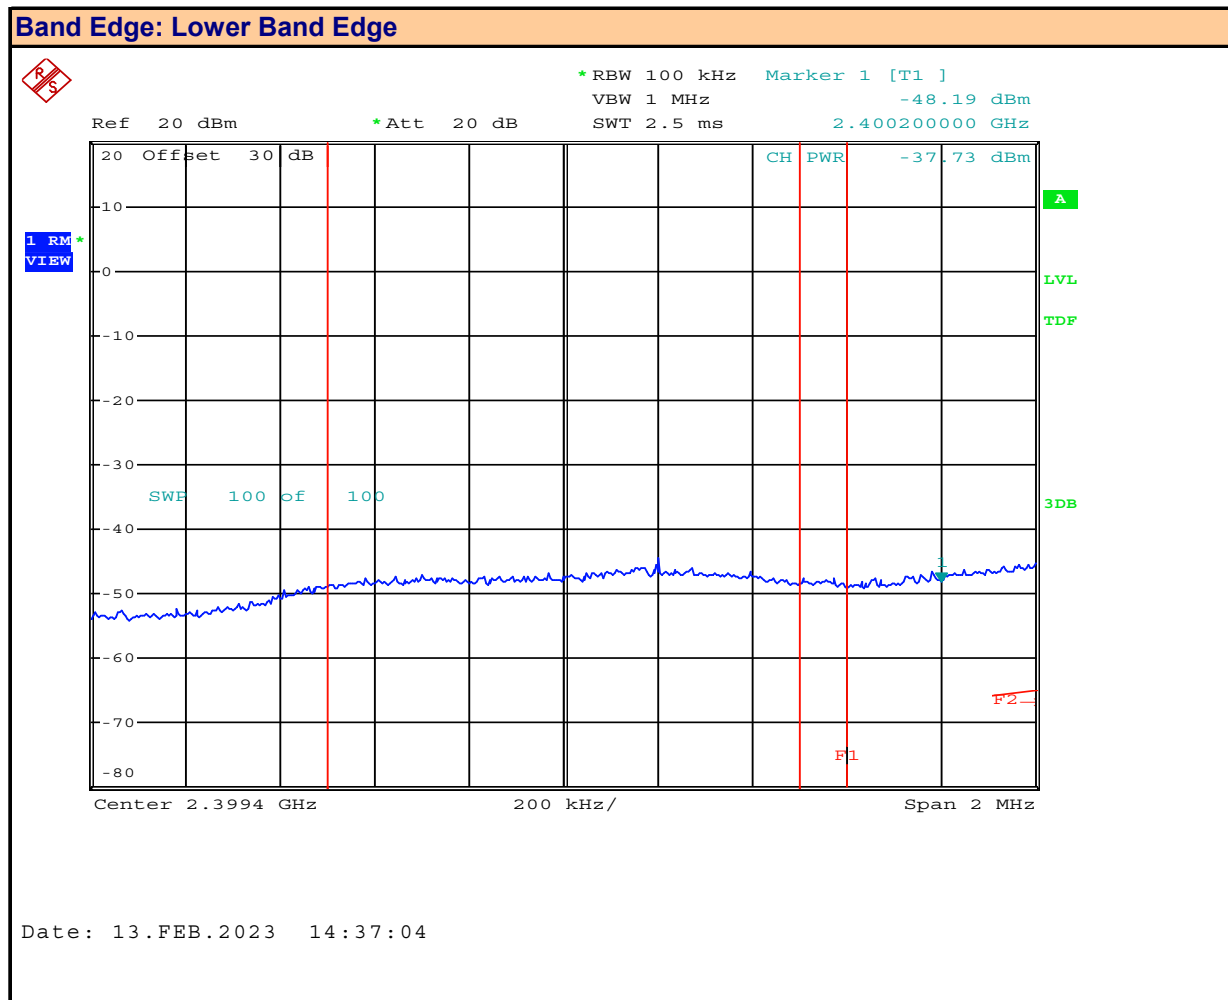

Channel: **0**  
Mode: **BT 3EDR**

Channel Frequency: **2402** MHz  
Modulation: **8-DPSK**  
Emission Power: **-37.73** dBm

Plot 15.12 – Band Edge, BT 3EDR

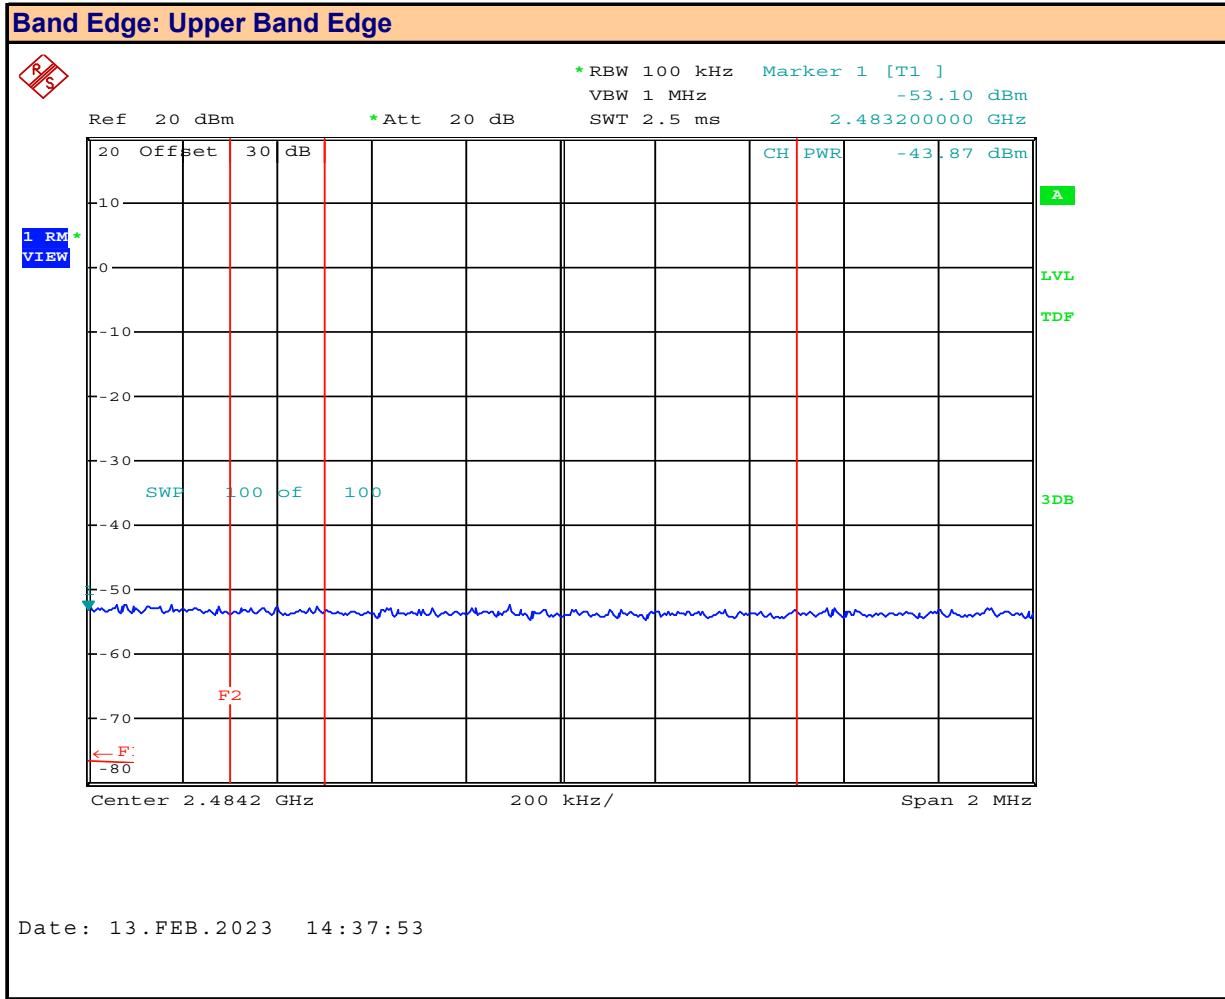

Channel: **78**  
Mode: **BT 3EDR**

Channel Frequency: **2480** MHz  
Modulation: **8-DPSK**  
Emission Power: **-43.87** dBm



Table 15.2 – Summary of Spurious Emission Measurements – Band Edge, DSS

Band Edge Measurement Results: 802.11											
Mode	Channel Number	Frequency  (MHz)	Modulation	Emission Power [P <sub>Em</sub> ] (dBm)	Antenna Gain [G <sub>T</sub> ] (dBi)	Emission EIRP [E <sub>Em</sub> ] (dBm)	Fundamental Power [P <sub>Fund</sub> ] (dBm)	Fundamental EIRP [E <sub>Fund</sub> ] (dBm)	Attenuation  [Atten] (dB)	Limit  (dB)	Margin  (dB)
BT BR	0	2402.00	GFSK	-39.76	-4.72	-44.48	11.04	6.32	50.80	30	20.8
	78	2480.00		-34.77		-39.49	11.13	6.41	45.90		15.9
BT 2EDR	0	2402.00	Pi/4-DQPSK	-37.56		-42.28	10.11	5.39	47.67		17.7
	78	2480.00		-43.82		-48.54	10.23	5.51	54.05		24.1
BT 3EDR	0	2402.00	8-DPSK	-37.73		-42.45	10.11	5.39	47.84		17.8
	78	2480.00		-43.87		-48.59	10.12	5.40	53.99		24.0
Result:										Complies	

$$\text{Emission } [E_{Em}] = [P_{Em}] + [G_T]$$

$$\text{Fundamental EIRP } [E_{Fund}] = [P_{Fund}] + [G_T]$$

$$\text{Attenuation } [Atten] = [E_{Fund}] - [E_{Em}]$$

$$\text{Margin} = \text{Attenuation} - \text{Limit}$$

## 16.0 CONDUCTED SPURIOUS EMISSIONS

### Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5),
	KDB 558074 (11.3), ANSI C63.10 (11.11.3)

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
KDB 558074 (11.3) C63.10 (11.11.3)	<p><b>11.1 General</b></p> <p>The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:</p> <p>b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p><b>11.2 Reference level measurement</b></p> <p>a) Set instrument center frequency to DTS channel center frequency.</p> <p>b) Set the span to <math>\geq 1.5 \times DTS \text{ bandwidth}</math>.</p> <p>c) Set the RBW = 100 kHz.</p> <p>d) Set the VBW <math>\geq 3 \times RBW</math>.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum PSD level.</p> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference</p>

**Table 16.1 – Summary of Conducted Spurious Emissions, (DTS)**

See Appendix E for Measurement Plots

Conducted Spurious Emissions Measurement Results:									
Mode	Channel Number	Frequency (MHz)	Modulation	Emission Power [P <sub>Em</sub> ] (dBm)	Emission Frequency (MHz)	Reference Measurement [P <sub>Fund</sub> ] (dBm)	Attenuation [Atten] (dB)	Limit (dB)	Margin (dB)
802.11b	6	2437.00	DSSS 5.5	-32.30	167.4	10.47	42.77	30	12.8
				-32.44	365.6		42.91		12.9
				-31.94	537.2		42.41		12.4
				-32.11	701.2		42.58		12.6
				-32.10	828.4		42.57		12.6
Result:								Complies	

$$\text{Attenuation [Atten]} = [P_{\text{Fund}}] - [P_{\text{Em}}]$$

$$\text{Margin} = \text{Attenuation} - \text{Limit}$$

ND = None Detected

**Table 16.2 – Summary of Conducted Spurious Emissions, (DSS)**

See Appendix E for Measurement Plots

Conducted Spurious Emissions Measurement Results:									
Mode	Channel Number	Frequency (MHz)	Modulation	Emission Power [P <sub>Em</sub> ] (dBm)	Emission Frequency (MHz)	Reference Measurement [P <sub>Fund</sub> ] (dBm)	Attenuation [Atten] (dB)	Limit (dB)	Margin (dB)
BT BR	78	2480.00	GFSK	-31.95	189.12	9.93	41.88	30	11.9
				-31.89	394		41.82		11.8
				-31.99	467.2		41.92		11.9
				-31.63	754.4		41.56		11.6
				-31.90	996.8		41.83		11.8
Result:								Complies	

$$\text{Attenuation [Atten]} = [P_{\text{Fund}}] - [P_{\text{Em}}]$$

$$\text{Margin} = \text{Attenuation} - \text{Limit}$$

ND = None Detected

## 17.0 RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND

### Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a)
	KDB 558074 (8.6), ANSI C63.10 (11.12)

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
47 CFR §15.209(a)	<p><b>§15.209 Radiated emission limits; general requirements.</b></p> <p>(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table> <tr> <th>Frequency (MHz)</th><th>Field Strength (microvolts/meter)</th></tr> <tr> <td>0.009 - 0.490</td><td>2400/F (kHz) @300m</td></tr> <tr> <td>0.490 - 1.705</td><td>24000/F (kHz) @30m</td></tr> <tr> <td>1.705 - 30</td><td>30 @ 30m</td></tr> <tr> <td>30 - 88</td><td>100 @3m</td></tr> <tr> <td>88 - 216</td><td>150 @3m</td></tr> <tr> <td>216 - 960</td><td>200 @3m</td></tr> <tr> <td>Above 960</td><td>500 @3m</td></tr> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	0.009 - 0.490	2400/F (kHz) @300m	0.490 - 1.705	24000/F (kHz) @30m	1.705 - 30	30 @ 30m	30 - 88	100 @3m	88 - 216	150 @3m	216 - 960	200 @3m	Above 960	500 @3m
Frequency (MHz)	Field Strength (microvolts/meter)																
0.009 - 0.490	2400/F (kHz) @300m																
0.490 - 1.705	24000/F (kHz) @30m																
1.705 - 30	30 @ 30m																
30 - 88	100 @3m																
88 - 216	150 @3m																
216 - 960	200 @3m																
Above 960	500 @3m																

Table 17.1 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (DTS)

Summary of Radiated Tx (Restricted Band) Measurements											
Mode	Modulation	Channel	Frequency (MHz)	Polarity	Emission Frequency (MHz)	Avg Power (dBuV/m)	Limit		Peak Power (dBuV/m)	Limit	
							Avg (dBuV/m)	Margin (dB)		Peak (dBuV/m)	Margin (dB)
802.11b	DSSS 5.5	1	2412	H	2390	50.49	54.00	3.51	60.73	74.00	13.27
				V		50.04	54.00	3.96	60.24	74.00	13.76
		11	2462	H	2483.5	50.63	54.00	3.37	60.95	74.00	13.05
				V		50.92	54.00	3.08	60.83	74.00	13.17
802.11g	OFDM12	1	2412	H	2390	52.00	54.00	2.00	63.38	74.00	10.62
				V		51.57	54.00	2.43	61.43	74.00	12.57
		2	2417	H		51.88	54.00	2.12	62.99	74.00	11.01
				V		52.53	54.00	1.47	63.75	74.00	10.25
		3	2422	H		51.20	54.00	2.80	61.40	74.00	12.60
				V		51.87	54.00	2.13	62.65	74.00	11.35
		4	2427	H		51.03	54.00	2.97	65.34	74.00	8.66
				V		52.60	54.00	1.40	65.31	74.00	8.69
		8	2447	H	2483.5	50.45	54.00	3.55	61.10	74.00	12.90
				V		51.41	54.00	2.59	64.37	74.00	9.63
		9	2452	H		50.39	54.00	3.61	60.34	74.00	13.66
				V		51.91	54.00	2.09	65.22	74.00	8.78
		10	2457	H		50.59	54.00	3.41	62.41	74.00	11.59
				V		51.14	54.00	2.86	61.28	74.00	12.72
		11	2462	H		50.71	54.00	3.29	60.54	74.00	13.46
				V		53.25	54.00	0.75	69.00	74.00	5.00
802.11n	MCS0	1	2412	H	2390	53.48	54.00	0.52	65.03	74.00	8.97
				V		52.15	54.00	1.85	61.83	74.00	12.17
		2	2417	H		52.92	54.00	1.08	65.98	74.00	8.02
				V		51.84	54.00	2.16	63.50	74.00	10.50
		3	2422	H		53.61	54.00	0.39	66.34	74.00	7.66
				V		51.82	54.00	2.18	63.11	74.00	10.89
		4	2427	H		51.57	54.00	2.43	68.86	74.00	5.14
				V		50.44	54.00	3.56	61.58	74.00	12.42
		8	2447	H	2483.5	50.69	54.00	3.31	61.53	74.00	12.47
				V		50.88	54.00	3.12	59.30	74.00	14.70
		9	2452	H		51.52	54.00	2.48	62.11	74.00	11.89
				V		52.40	54.00	1.60	51.77	74.00	22.23
		10	2457	H		51.19	54.00	2.81	61.71	74.00	12.29
				V		51.76	54.00	2.24	62.41	74.00	11.59
		11	2462	H		51.16	54.00	2.84	61.56	74.00	12.44
				V		51.20	54.00	2.80	62.72	74.00	11.28

**Table 17.2 – Summary of Radiated Tx Spurious Emissions, (DTS)**

See Appendix F for Measurement Plots

Summary of Radiated Tx Emissions											
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency (MHz)	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000MHz	2412.0	Horizontal	47.01	9.24	14.60	0.75	0.00 (3)	24.6 (2)	40.0	15.4	
30-1000MHz	2412.0	Horizontal	56.73	7.81	10.95	0.80	0.00 (3)	19.6 (2)	40.0	20.4	
30-1000MHz	2412.0	Horizontal	57.27	8.03	10.87	0.80	0.00 (3)	19.7 (2)	40.0	20.3	
30-1000MHz	2412.0	Horizontal	60.24	7.95	10.70	0.81	0.00 (3)	19.5 (2)	40.0	20.5	
30-1000MHz	2412.0	Horizontal	843.20	9.19	29.58	2.84	0.00 (3)	41.6 (2)	46.0	4.4	
30-1000MHz	2412.0	Vertical	908.30	8.76	29.50	2.94	0.00 (3)	41.2 (2)	46.0	4.8	
30-1000MHz	2412.0	Vertical	911.10	8.60	29.41	2.95	0.00 (3)	41.0 (2)	46.0	5.1	
1 - 3GHz	2412.0	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
1 - 3GHz	2412.0	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
3-13GHz	2412.0	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
3-13GHz	2412.0	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
13-18GHz	2412.0	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
13-18GHz	2412.0	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
18-26GHz	2412.0	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
18-26GHz	2412.0	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
Results:									Complies		

- (1) No Emissions Detected (ND) above ambient or within 20dB of the limit  
 (2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor  
 (3) External Amplifier not used  

$$E_{Corr} = E_{Meas} + ACF + L_C - G_A$$

**Table 17.2 – Summary of Radiated Tx Spurious Emissions, (DSS)**

See Appendix F for Measurement Plots

Summary of Radiated Rx Emissions											
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000MHz	-	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	46.0	n/a	
30-1000MHz	-	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	43.5	n/a	
1 - 3GHz	-	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
1 - 3GHz	-	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
18-26GHz	-	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
18-26GHz	-	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
<b>Results:</b>									<b>Complies</b>		

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + ACF + L_C - G_A$$

## 18.0 RADIATED RX SPURIOUS EMISSIONS

### Test Procedure

**Normative Reference** FCC 47 CFR §15.109, ICES-003(6.2)  
ANSI C63.4:2014

### Limits

47 CFR §15.109	(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: 30-88MHz: 40dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46dBuV/m > 960MHz: 54dBuV/m
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 5 determined at a distance of 3 metres. 30-88MHz: 40dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46dBuV/m > 960MHz: 54dBuV/m

**Test Setup** Appendix A Figure A.2

### Measurement Procedure

The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.



**Table 18.1 – Summary of Radiated Rx Spurious Emissions, (DTS)**

See Appendix G Measurement Plots

Summary of Radiated Rx Emissions											
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000MHz	-	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	46.0	n/a	
30-1000MHz	-	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	43.5	n/a	
1 - 3GHz	-	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
1 - 3GHz	-	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
18-26GHz	-	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
18-26GHz	-	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
Results:									Complies		

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_{\text{C}} - G_{\text{A}}$$

**Table 18.2 – Summary of Radiated Rx Spurious Emissions, (DSS)**

See Appendix G Measurement Plots

Summary of Radiated Rx Emissions											
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000MHz	-	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	46.0	n/a	
30-1000MHz	-	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	43.5	n/a	
1 - 3GHz	-	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
1 - 3GHz	-	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
3-13GHz	-	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
13-18GHz	-	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a	
18-26GHz	-	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
18-26GHz	-	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a	
Results:									Complies		

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_{\text{C}} - G_{\text{A}}$$

## 19.0 POWER LINE CONDUCTED EMISSIONS

### Test Procedure


<b>Normative Reference</b>	FCC 47 CFR §15.107, ICES-003(6.1) ANSI C63.4-2014
----------------------------	--

### Limits

47 CFR §15.107	<p>(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 <math>\mu</math>H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.</p> <p>0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the frequency</p> <p>0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average</p> <p>5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average</p>
ICES-003(6.1)	<p>6.1 - AC Power Line Conducted Emissions Limits</p> <p>Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 2.</p> <p>0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the frequency</p> <p>0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average</p> <p>5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average</p>

<b>Test Setup</b>	<b>Appendix A</b> <b>Figure A.7</b>
-------------------	-------------------------------------


Plot 19.1 – Power Line Conducted Emissions, Line 1

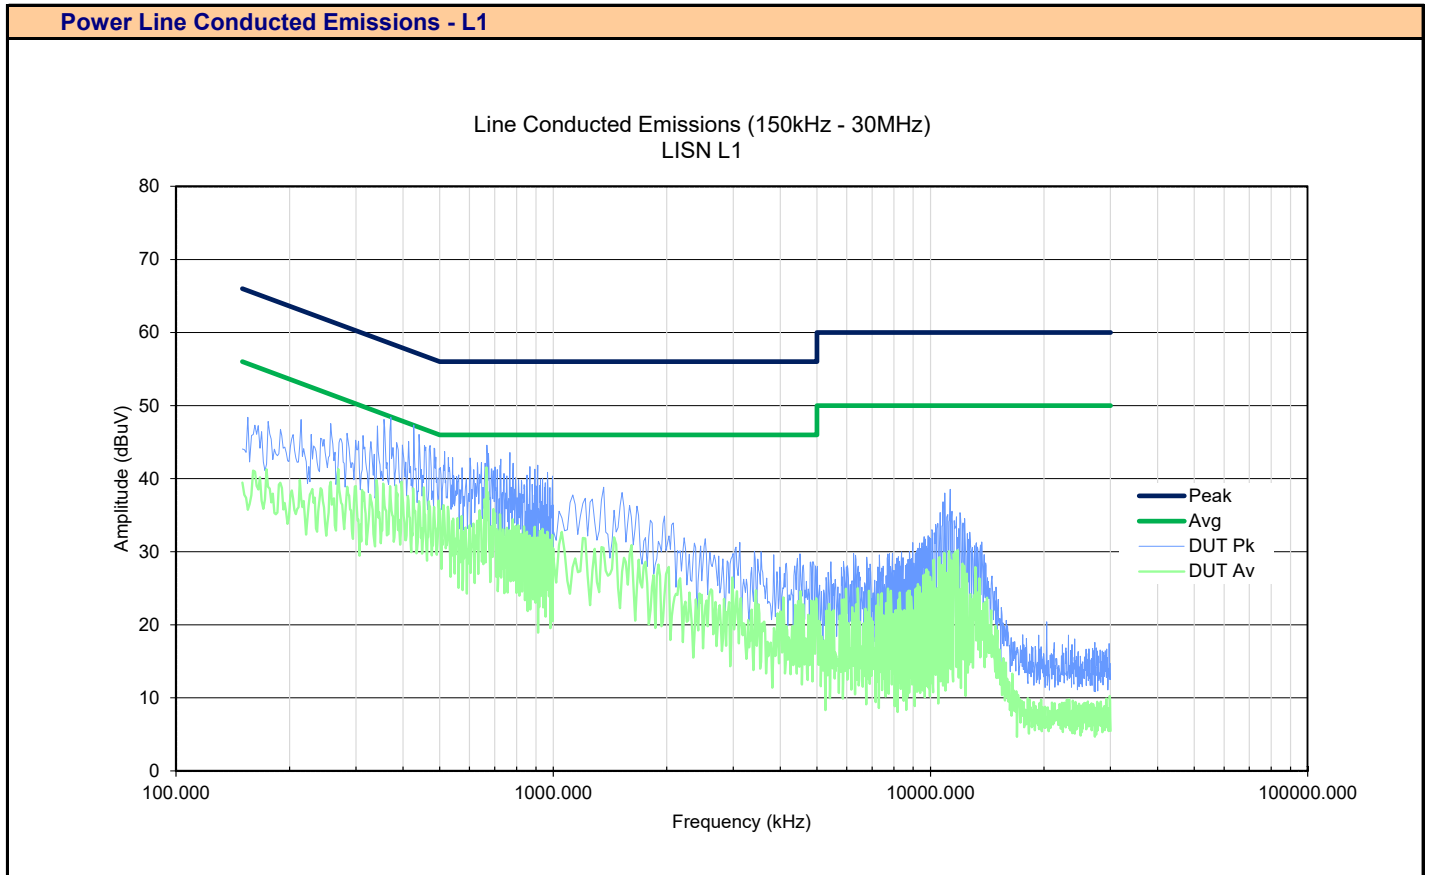

Channel: **6**  
Mode: **802.11b**  
Emission Frequency: **371kHz**

Channel Frequency: **2437** MHz  
Modulation: **CCK 1MB**  
Measured Channel Power: **48.38** dBuV

Plot 19.2 – Power Line Conducted Emissions, Line 2

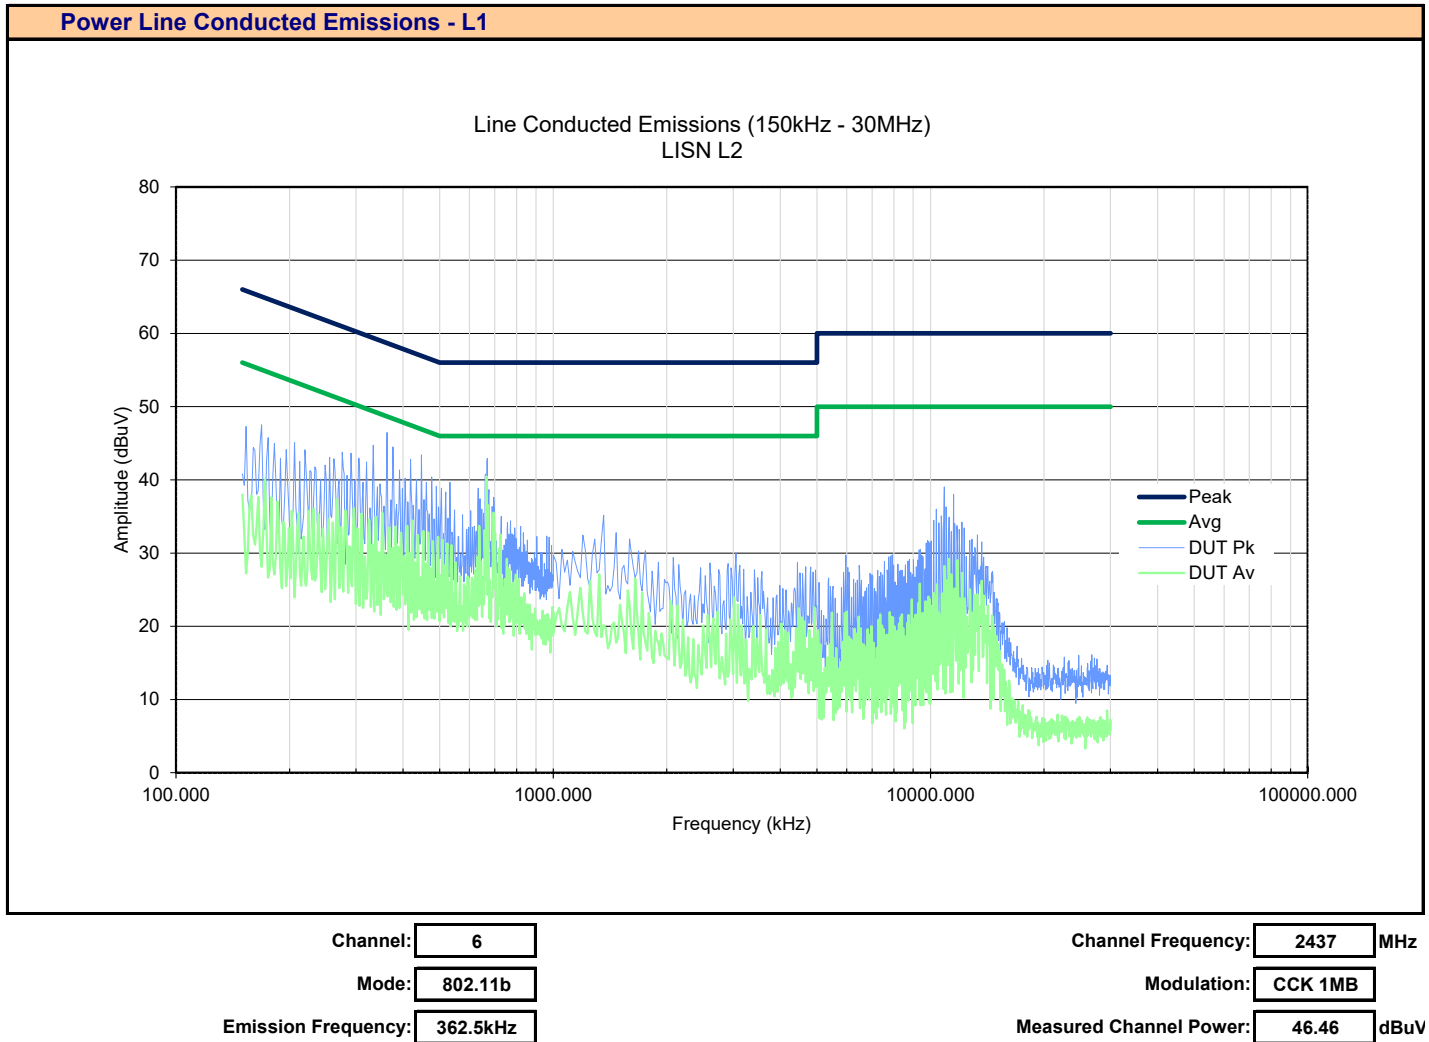

**Table 19.1 – Summary of Power Line Conducted Emissions – L1**

Summary of Power Line Conducted Tx Emissions											
Measured Frequency Range (MHz)	Channel Frequency (MHz)	LISN Port	Emission Frequency [f <sub>Emm</sub> ] (kHz)	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Detector*	Insertion Loss [L <sub>LISN</sub> ] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV)	Limit (dBuV)	Margin (dB)
150kHz - 30MHz	2437.0	L1	371.00 kHz	48.38	Peak	0.30	0.26	0.00 (3)	48.94 (2)	58.0	9.1
<b>Results:</b>										<b>Complies</b>	

\* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_C - G_A$$

Class B QP Limit = 56 - 20Log (f<sub>Emm</sub>/500) for f<sub>Emm</sub> = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f<sub>Emm</sub>/500) for f<sub>Emm</sub> = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f<sub>Emm</sub> = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f<sub>Emm</sub> = 150kHz to 500kHz

$$\text{Margin} = \text{Limit} - E_{Corr}$$

Table 19.1 – Summary of Power Line Conducted Emissions – L2

Summary of Power Line Conducted Tx Emissions											
Measured Frequency Range (MHz)	Channel Frequency (MHz)	LISN Port	Emission Frequency [f <sub>Emm</sub> ] (kHz)	Measured Emission [E <sub>Meas</sub> ] (dBuV)	Detector*	Insertion Loss [L <sub>LISN</sub> ] (dB)	Cable Loss [L <sub>C</sub> ] (dB)	Amplifier Gain [G <sub>A</sub> ] (dB)	Corrected Emission [E <sub>Corr</sub> ] (dBuV)	Limit (dBuV)	Margin (dB)
150kHz - 30MHz	2437.0	L2	362.50 kHz	46.46	Peak	0.30	0.26	0.00 (3)	47.02 (2)	58.6	11.6
Results:										Complies	

\* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_C - G_A$$

Class B QP Limit = 56 - 20Log (f<sub>Emm</sub>/500) for f<sub>Emm</sub> = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f<sub>Emm</sub>/500) for f<sub>Emm</sub> = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f<sub>Emm</sub> = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f<sub>Emm</sub> = 150kHz to 500kHz


$$\text{Margin} = \text{Limit} - E_{Corr}$$

## APPENDIX A – TEST SETUP DRAWINGS

Table A.1 – Conducted Measurement Setup

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00241	R&S	FSU40	100500	Spectrum Analyzer
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable

Figure A.1 – Test Setup – Conducted Measurements

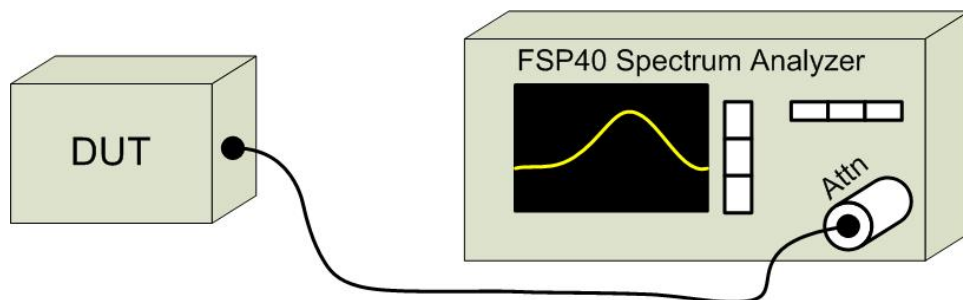





**Table A.2 – Radiated Emissions Measurement Equipment**

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00050	Chase	CBL-6111A	1607	Bilog Antenna
00034	ETS	3115	6267	Double Ridged Guide Horn
00035	ETS	3115	6276	Double Ridged Guide Horn
00085	EMCO	6502	9203-2724	Loop Antenna
00161	Waveline Inc.	889		Standard Gain Horn 18-26GHz
00162	Waveline Inc.	889		Standard Gain Horn 18-26GHz
00165	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz
00166	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz
00333	HP	85685A	3010A01095	RF Preselector
00049	HP	85650A	2043A00162	Quasi-peak Adapter
00051	HP	8566B	2747A05510	Spectrum Analyzer
00241	R&S	FSU40	100500	Spectrum Analyzer
00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier
00071	EMCO	2090	9912-1484	Multi-Device Controller
00072	EMCO	2075	0001-2277	Mini-mast
00073	EMCO	2080	0002-1002	Turn Table
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable
00275	TMS	LMR400	n/a	25m Cable
00278	TILE	34G3	n/a	TILE Test Software


**Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz**

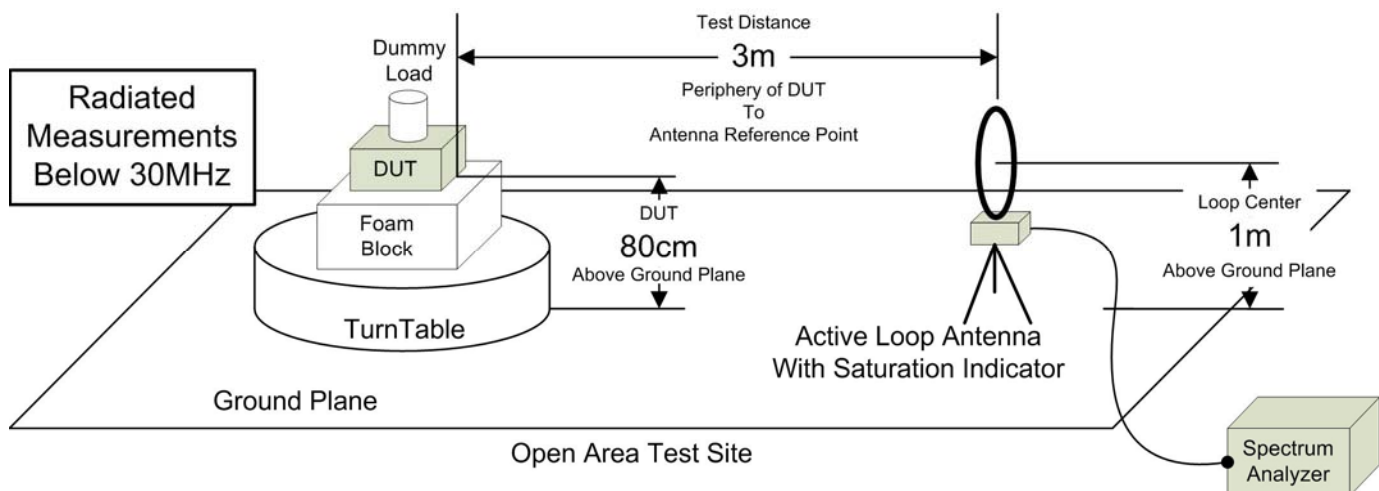


**Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz**

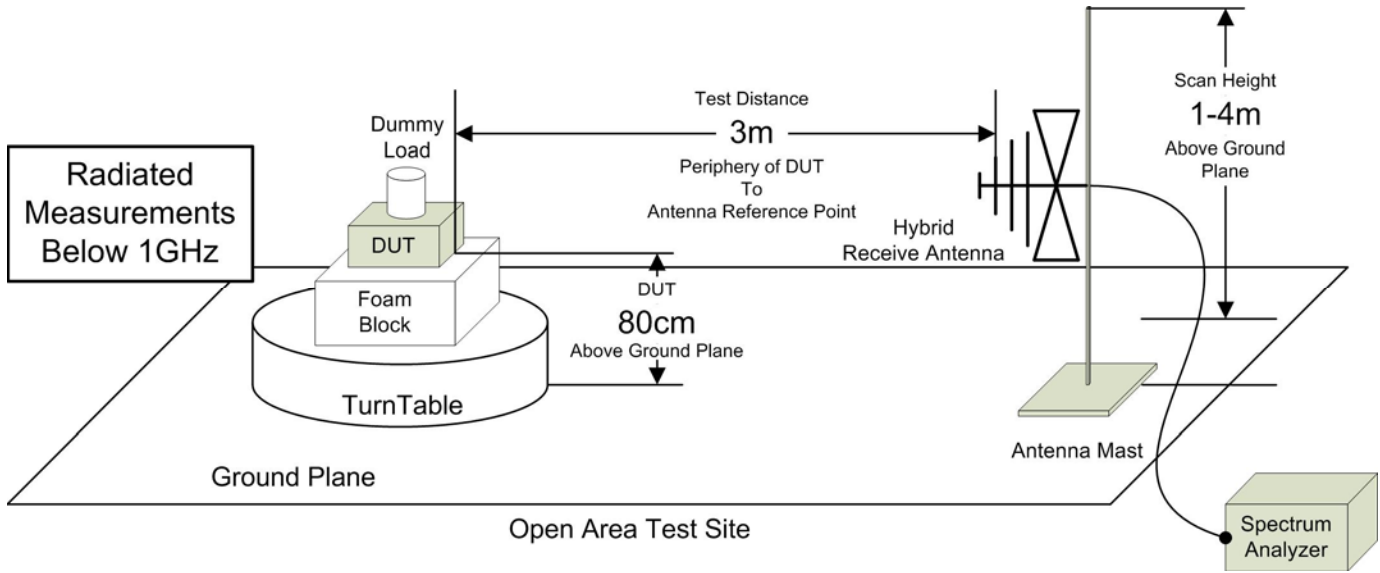


**Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution**

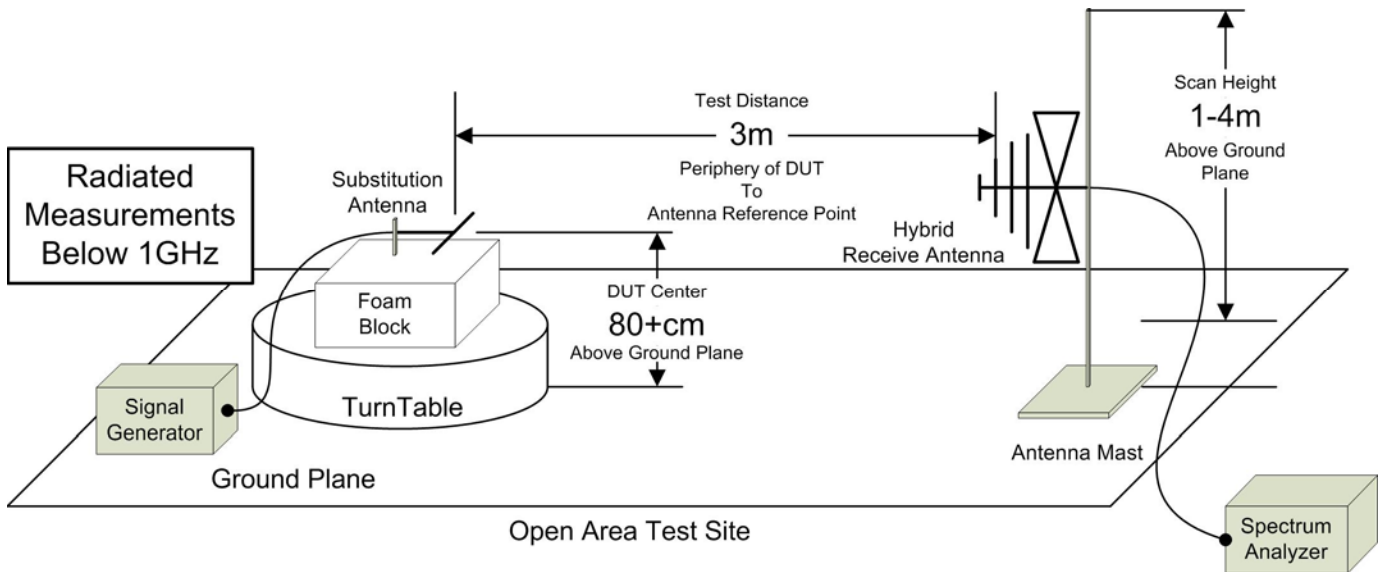

**Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz,**

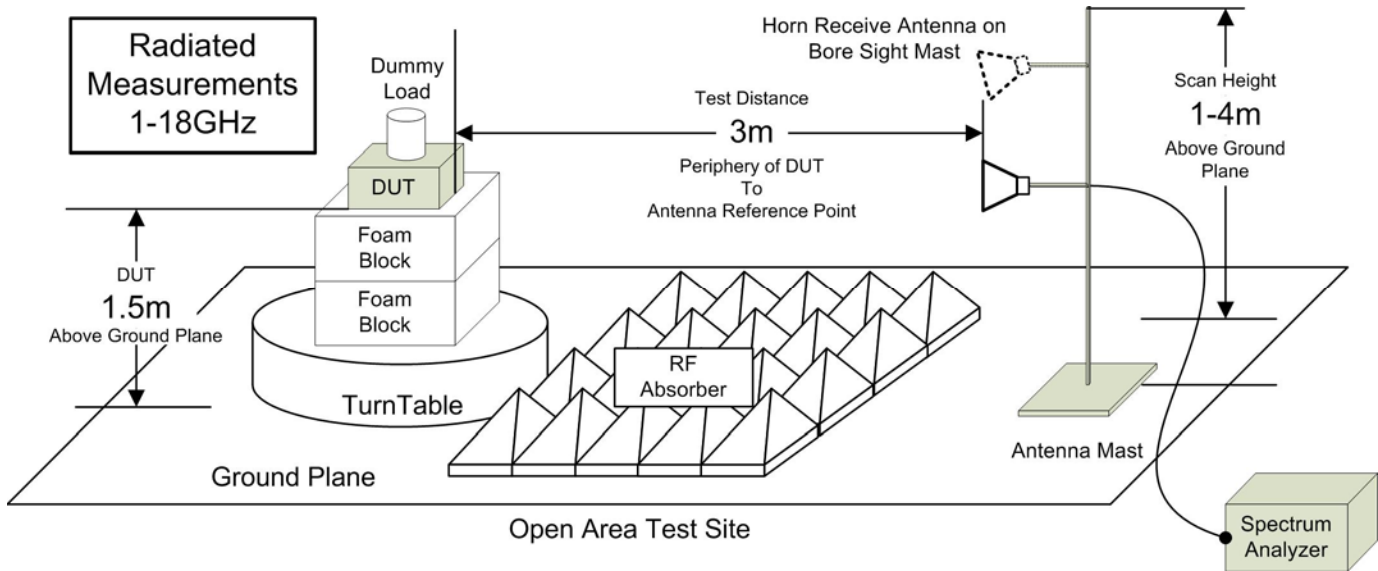


**Figure A.6 – Test Setup Radiated Measurements 18 – 26.5GHz,**

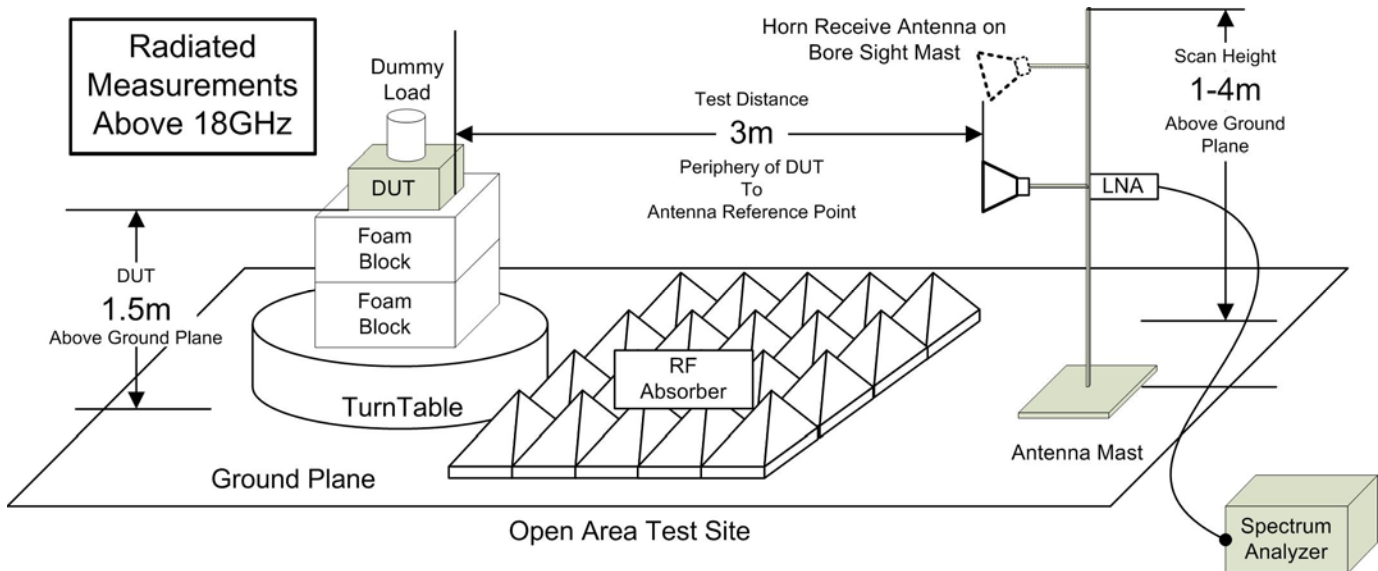

**Table A.3 – Setup – Conducted Emissions Equipment List**

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00333	HP	85685A	3010A01095	RF Preselector
00049	HP	85650A	2043A00162	Quasi-peak Adapter
00051	HP	8566B	2747A05510	Spectrum Analyzer
00223	HP	8901A	3749A07154	Modulation Analyzer
00257	Com-Power	LI-215A	191934	LISN
00276	TMS	LMR400	n/a	4m Cable

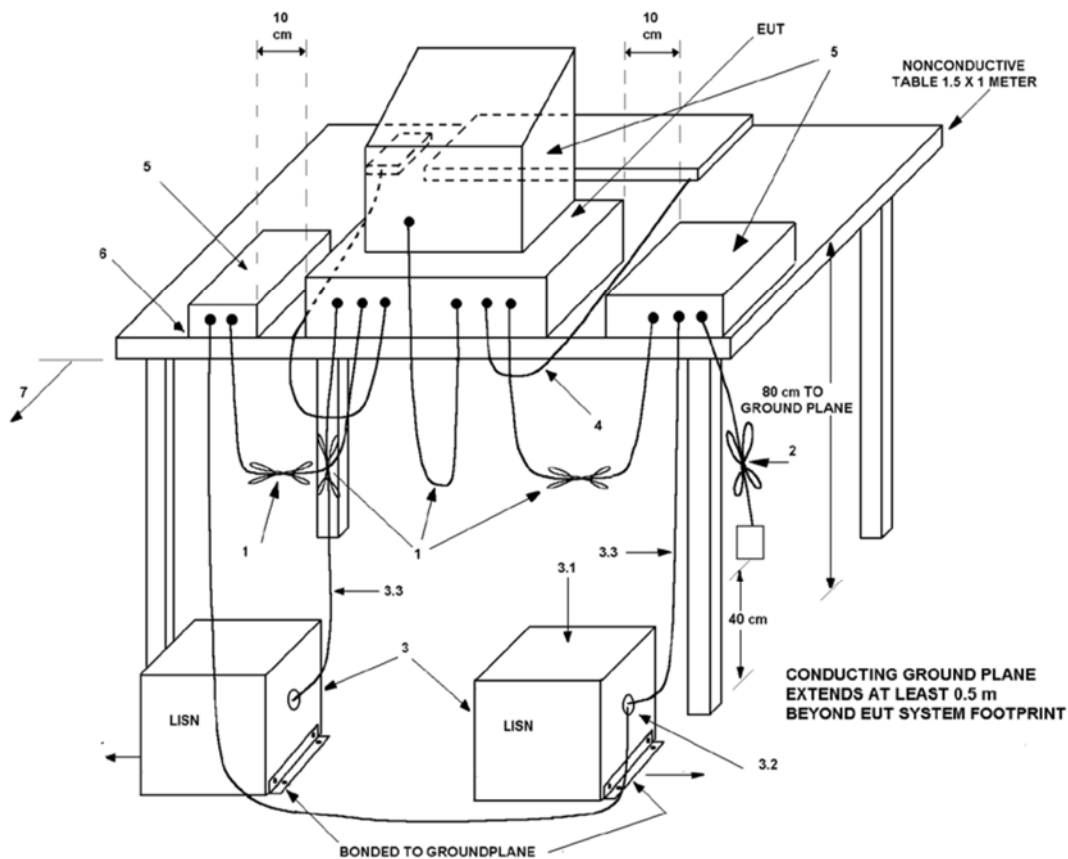

**Figure A.7 – Test Setup Conducted Emissions Measurements**

## APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List							
Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
00050	Chase	CBL-6111A	1607	Bilog Antenna	16 Nov 2020	Triennial	16 Nov 2023
00035	ETS	3115	6276	Double Ridged Guide Horn	4 Mar 2022	Triennial	4 Mar 2025
00085	EMCO	6502	9203-2724	Loop Antenna	6 Sep 2022	Triennial	6 Sep 2025
00333	HP	85685A	3010A01095	RF Preselector	23 Jun 2020	Triennial	30 Jun 2023
00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2020	Triennial	23 Jun 2023
00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2020	Triennial	23 Jun 2023
00241	R&S	FSU40	100500	Spectrum Analyzer	10 Aug 2021	Triennial	10 Aug 2024
00005	HP	8648D	3847A00611	Signal Generator	23 Jun 2020	Triennial	23 Jun 2023
00003	HP	53181A	3736A05175	Frequency Counter	23 Jun 2020	Triennial	23 Jun 2023
00257	Com-Power	LI-215A	191934	LISN	27 Dec 2021	Triennial	27 Dec 2024
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	NCR	n/a	CNR
00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial	New
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00264	Koaxis	KP10-7.00M-TD	264	7m Armoured Cable	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00276	TMS	LMR400	n/a	4m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required

COU: Calibrate On Use

## APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

### CISPR 16-4 Measurement Uncertainty ( $U_{LAB}$ )

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of  $k=2$

#### Radiated Emissions 30MHz - 200MHz

$U_{LAB} = 5.14\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

#### Radiated Emissions 200MHz - 1000MHz

$U_{LAB} = 5.90\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

#### Radiated Emissions 1GHz - 6GHz

$U_{LAB} = 4.80\text{dB}$     $U_{CISPR} = 5.2\text{dB}$

#### Radiated Emissions 6GHz - 18GHz

$U_{LAB} = 5.1\text{dB}$     $U_{CISPR} = 5.5\text{dB}$

#### Power Line Conducted Emissions 9kHz to 150kHz

$U_{LAB} = 2.96\text{dB}$     $U_{CISPR} = 3.8\text{dB}$

#### Power Line Conducted Emissions 150kHz to 30MHz

$U_{LAB} = 3.12\text{dB}$     $U_{CISPR} = 3.4\text{dB}$

If the calculated uncertainty  $U_{lab}$  is **less** than  $U_{CISPR}$  then:

- |   |   |
|---|---|
| 1 | Compliance is deemed to occur if <b>NO</b> measured disturbance exceeds the disturbance limit             |
| 2 | Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance <b>EXCEEDS</b> the disturbance limit |

If the calculated uncertainty  $U_{lab}$  is **greater** than  $U_{CISPR}$  then:

- |   |  |
|---|--|
| 3 | Compliance is deemed to occur if <b>NO</b> measured disturbance, increased by ( $U_{lab} - U_{CISPR}$ ), exceeds the disturbance limit             |
| 4 | Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance, increased by ( $U_{lab} - U_{CISPR}$ ), <b>EXCEEDS</b> the disturbance limit |

### Other Measurement Uncertainties ( $U_{LAB}$ )

#### RF Conducted Emissions 9kHz - 40GHz

$U_{LAB} = 1.0\text{dB}$     $U_{CISPR} = \text{n/a}$

#### Frequency/Bandwidth 9kHz - 40GHz

$U_{LAB} = 0.1\text{ppm}$     $U_{CISPR} = \text{n/a}$

#### Temperature

$U_{LAB} = 1^{\circ}\text{C}$     $U_{CISPR} = \text{n/a}$

## END OF REPORT

**APPENDIX D – CONDUCTED POWER MEASUREMENT PLOTS**

**APPENDIX E – CONDUCTED SPURIOUS EMISSIONS MEASUREMENT PLOTS**

**APPENDIX F – RADIATED TX EMISSIONS MEASUREMENT PLOTS**

**APPENDIX G – RADIATED RX EMISSIONS MEASUREMENT PLOTS**