



Radiation testing


Test Mode: IEEE 802.11b-Low

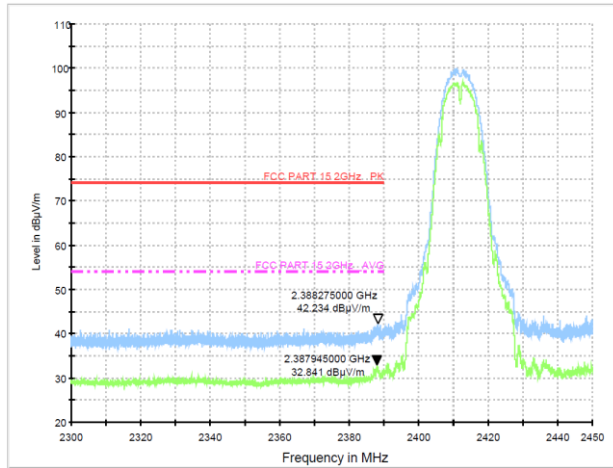


Test Mode: IEEE 802.11b-High

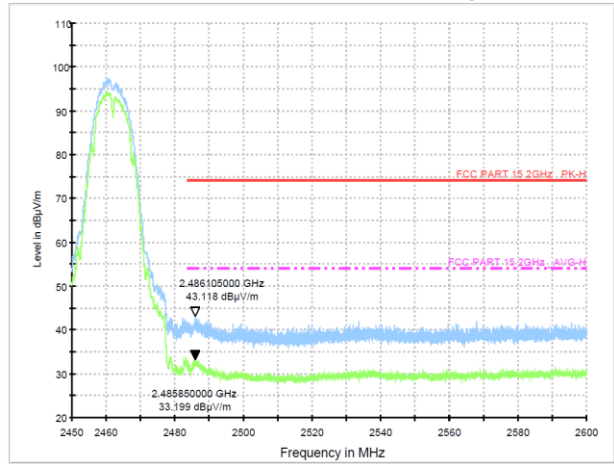


Test Mode: IEEE 802.11g-Low

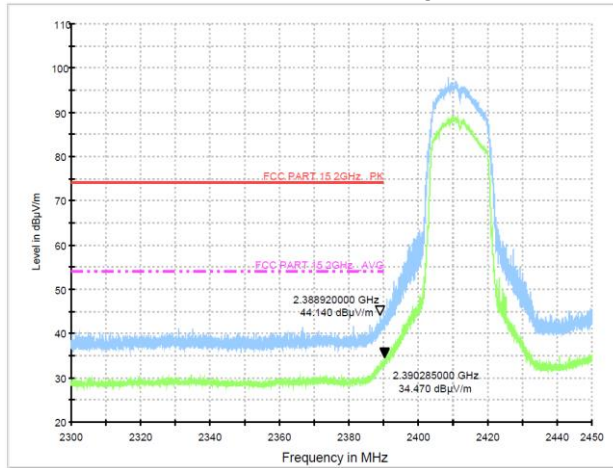


Test Mode: IEEE 802.11g-High

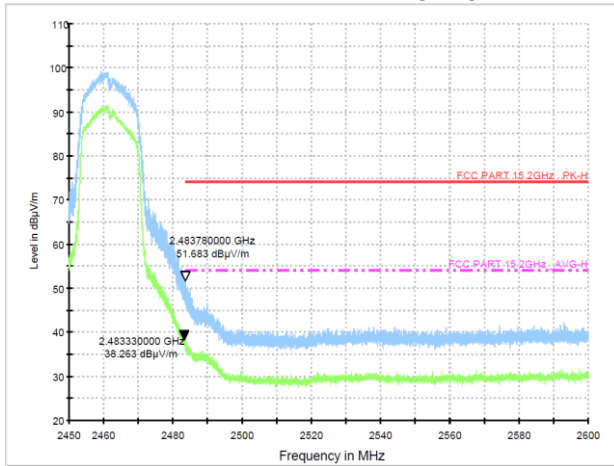


Test Mode: IEEE 802.11n20-Low

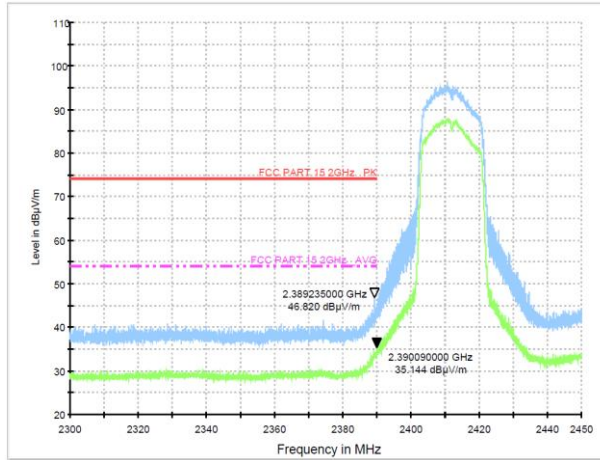


Test Mode: IEEE 802.11n20-High

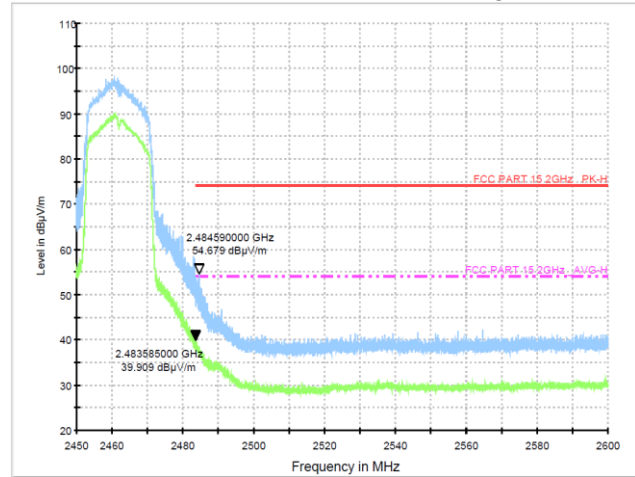

Test Mode: IEEE 802.11n40-Low

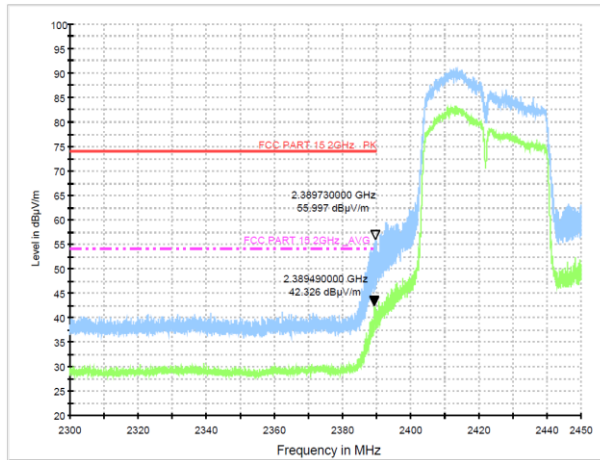


Test Mode: IEEE 802.11n40-High

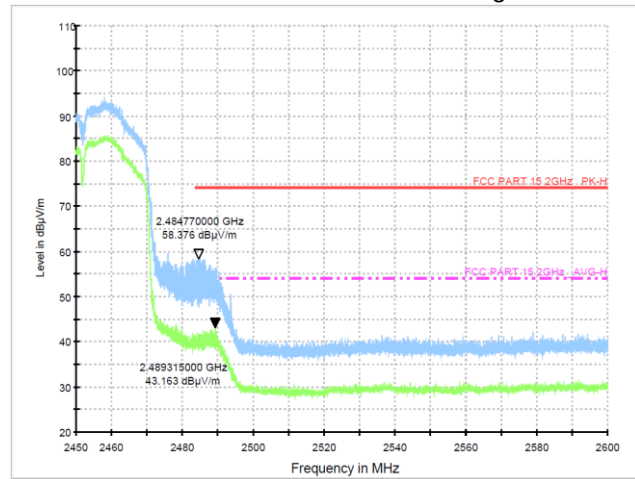


Conduction method testing

Band Edge NVNT b 2412MHz Ant1 Ref

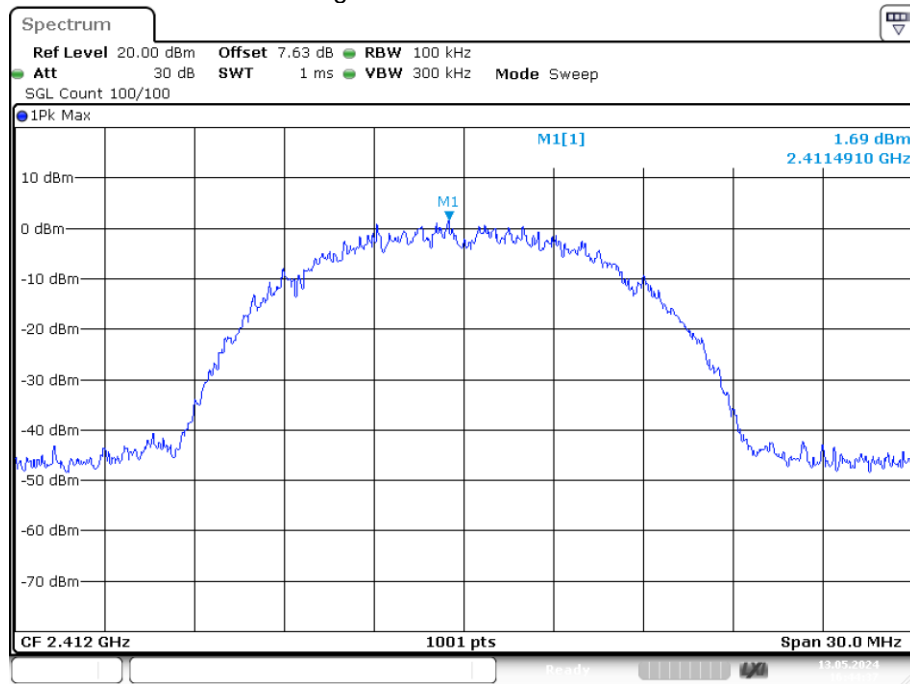


Date: 13.MAY.2024 16:44:37

Band Edge NVNT b 2412MHz Ant1 Emission

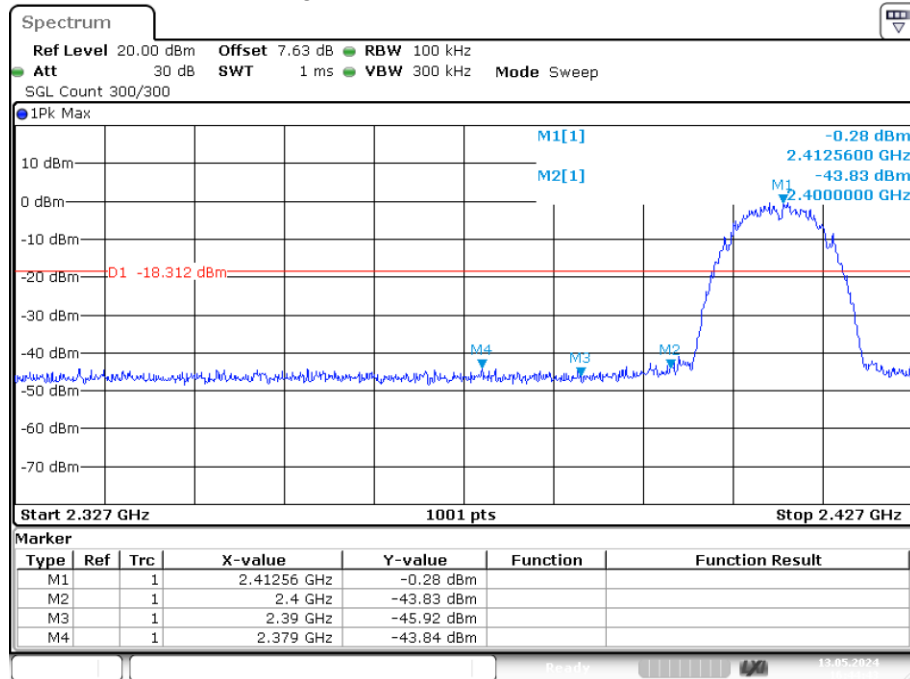


Date: 13.MAY.2024 16:44:43

Band Edge NVNT b 2462MHz Ant1 Ref

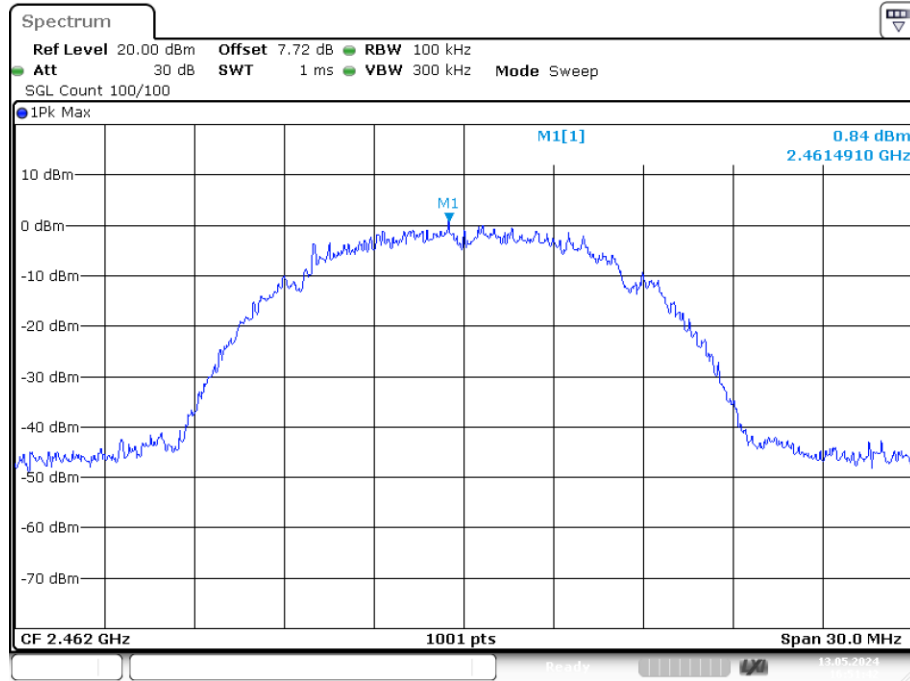


Date: 13.MAY.2024 16:51:42

Band Edge NVNT b 2462MHz Ant1 Emission

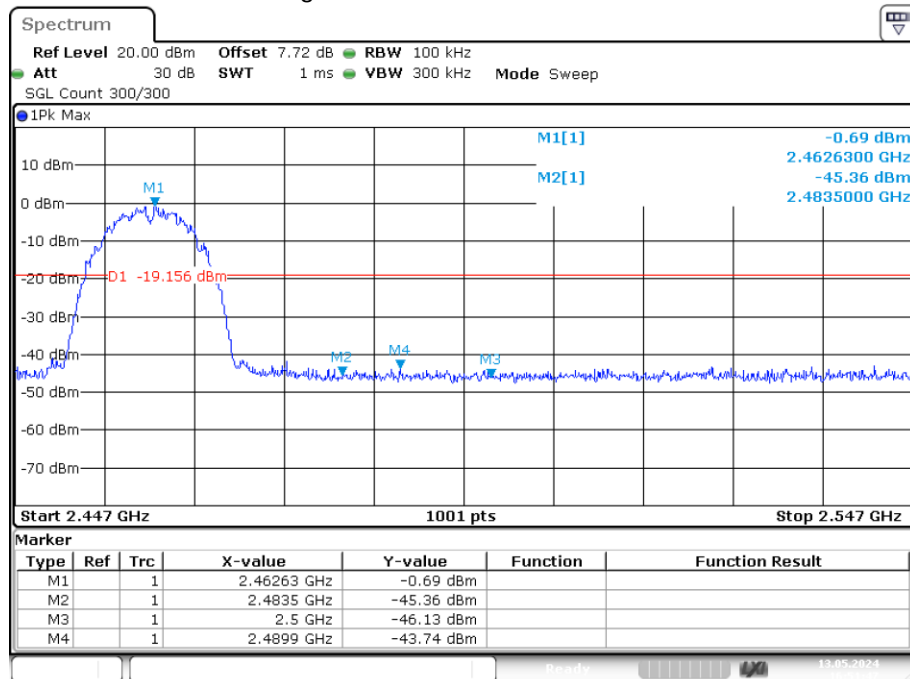


Date: 13.MAY.2024 16:51:46

Band Edge NVNT g 2412MHz Ant1 Ref

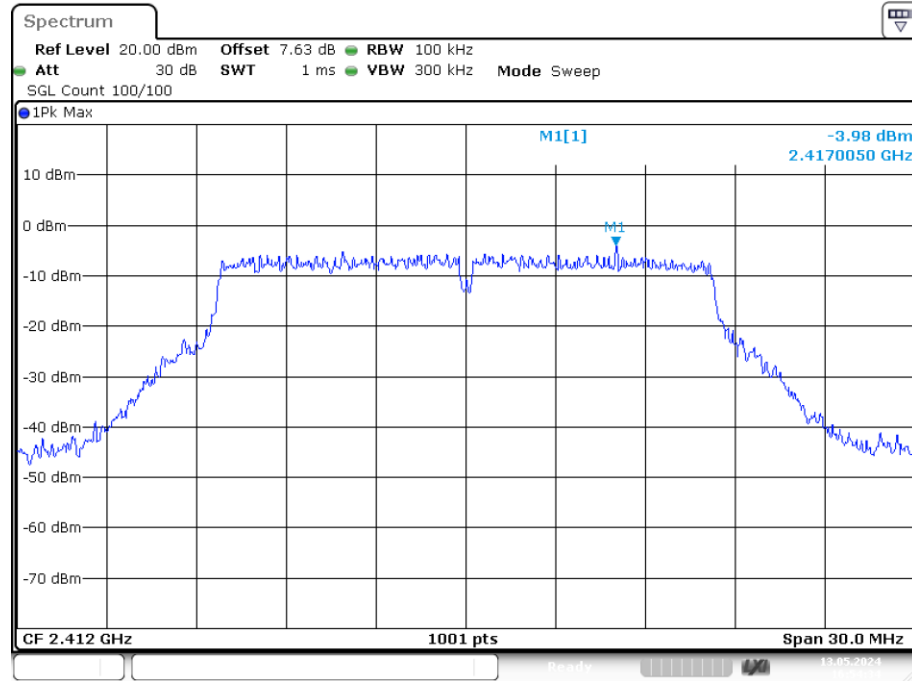


Date: 13.MAY.2024 16:54:34

Band Edge NVNT g 2412MHz Ant1 Emission

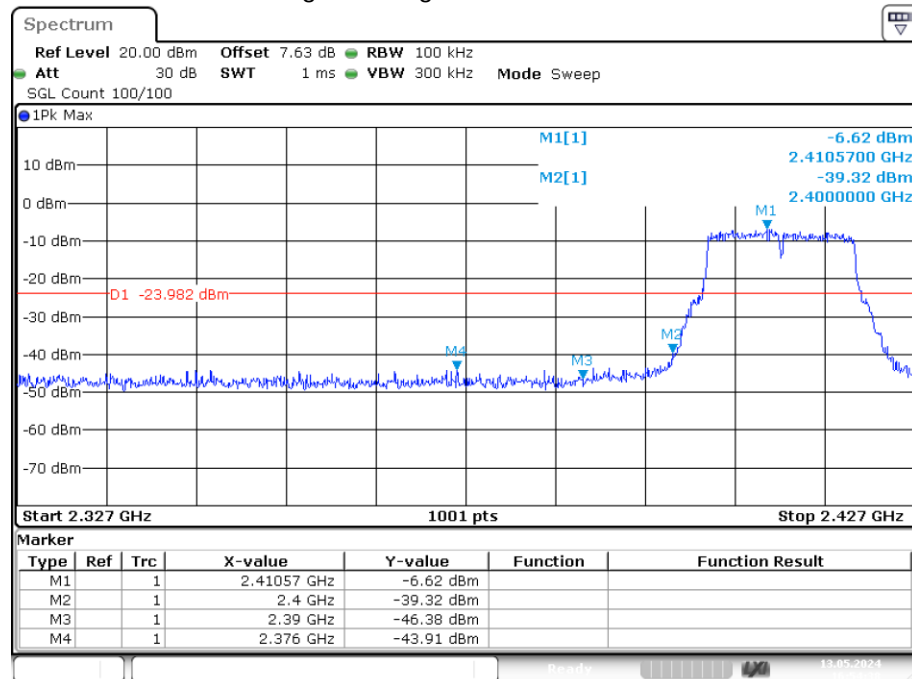


Date: 13.MAY.2024 16:54:38

Band Edge NVNT g 2462MHz Ant1 Ref

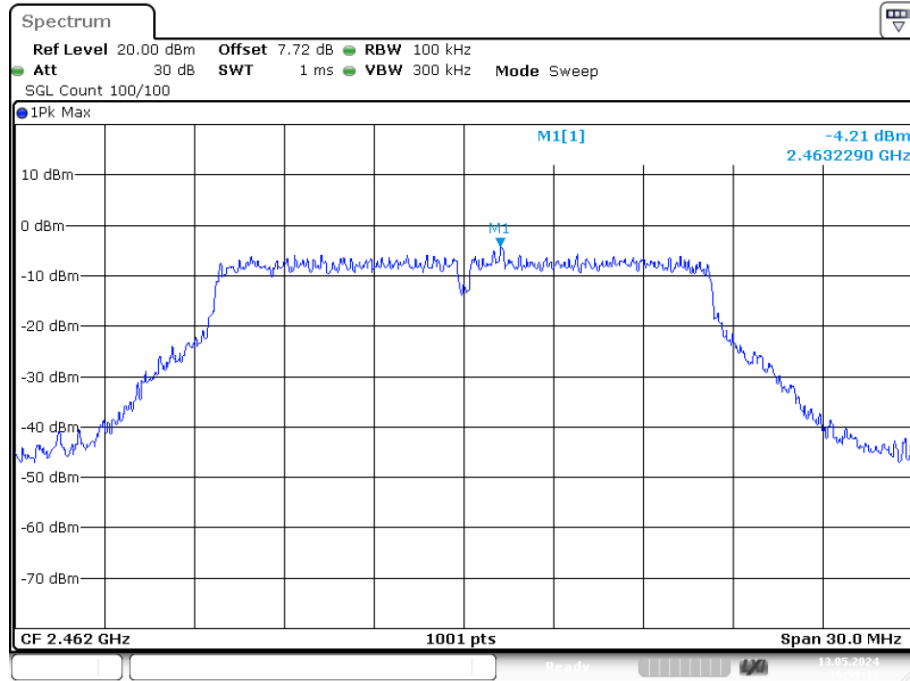


Date: 13.MAY.2024 16:59:32

Band Edge NVNT g 2462MHz Ant1 Emission

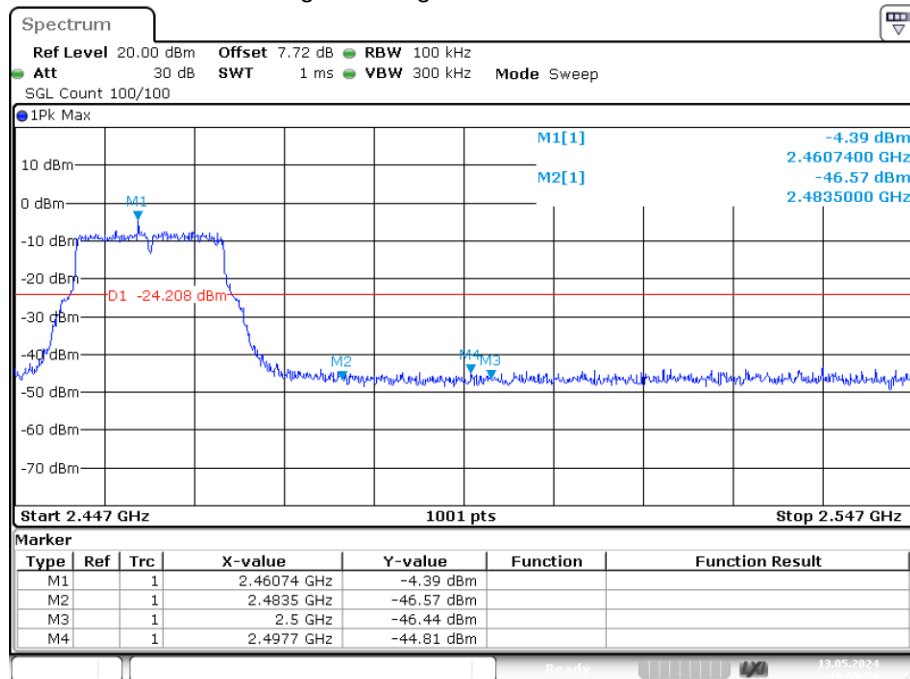


Date: 13.MAY.2024 16:59:36

Band Edge NVNT n20 2412MHz Ant1 Ref

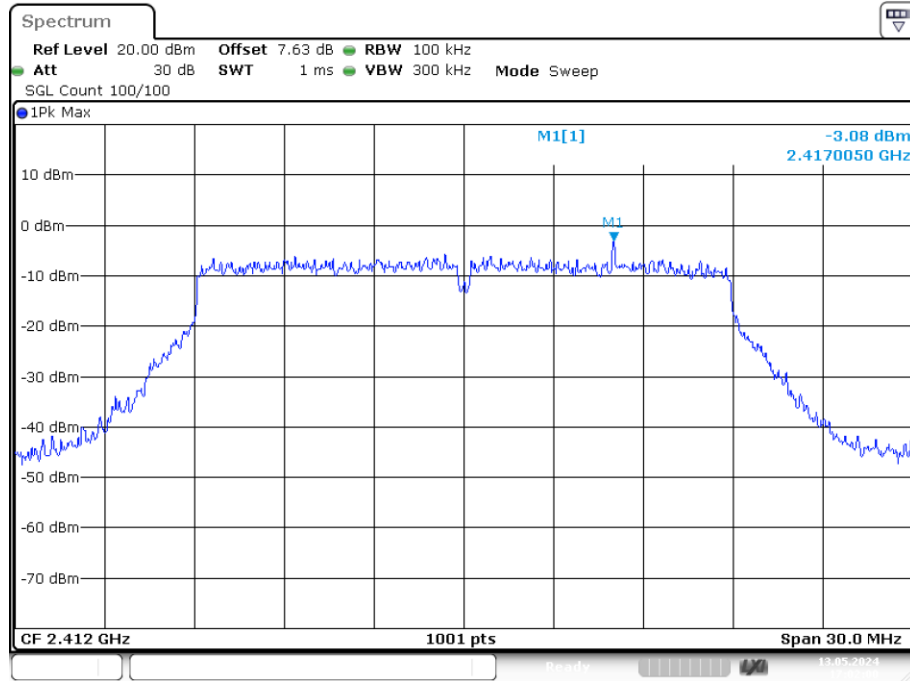


Date: 13.MAY.2024 17:01:59

Band Edge NVNT n20 2412MHz Ant1 Emission

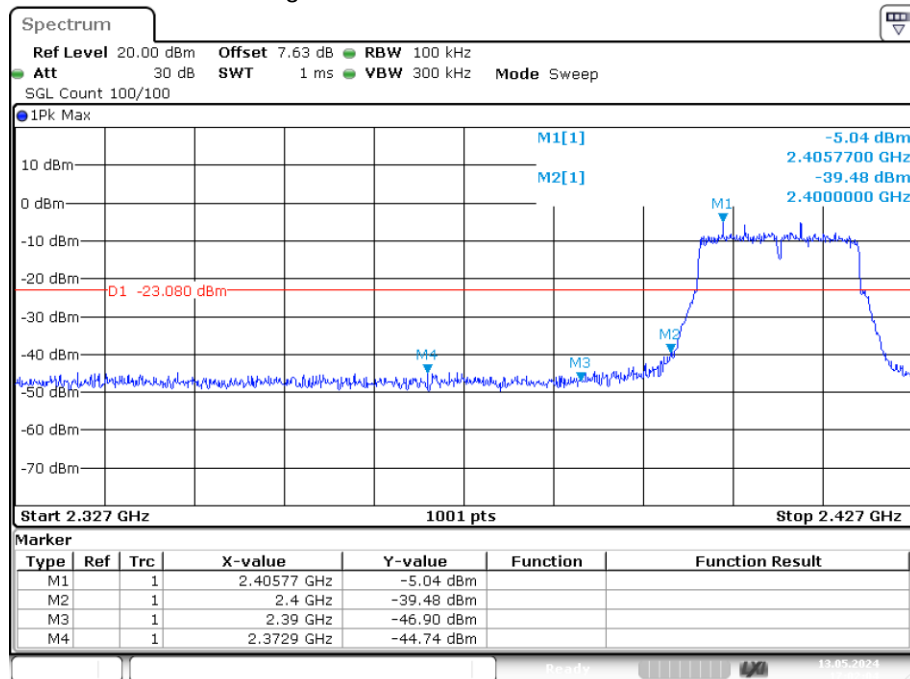


Date: 13.MAY.2024 17:02:04

Band Edge NVNT n20 2462MHz Ant1 Ref

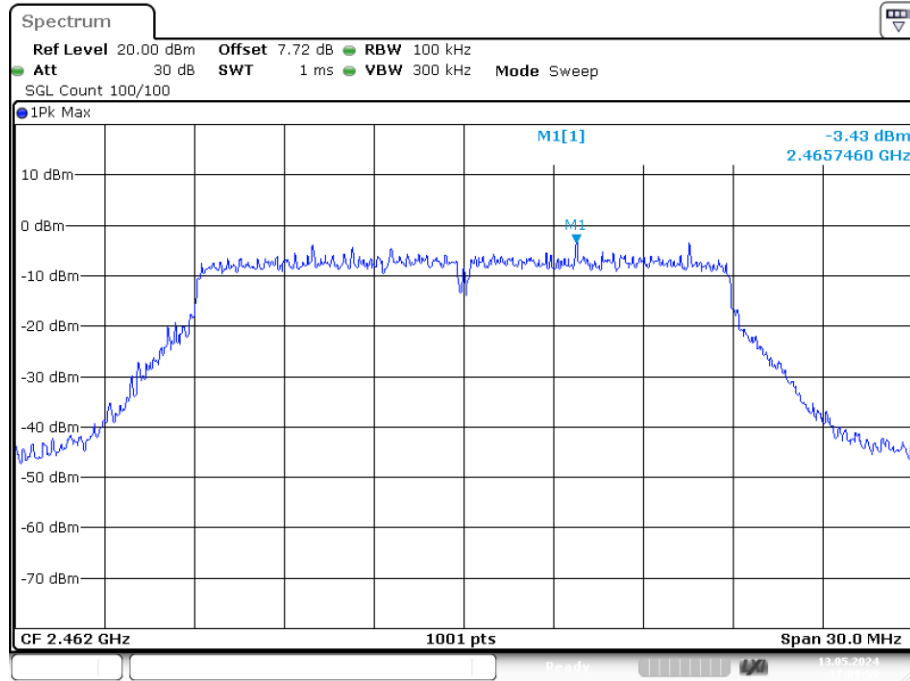


Date: 13.MAY.2024 17:09:59

Band Edge NVNT n20 2462MHz Ant1 Emission

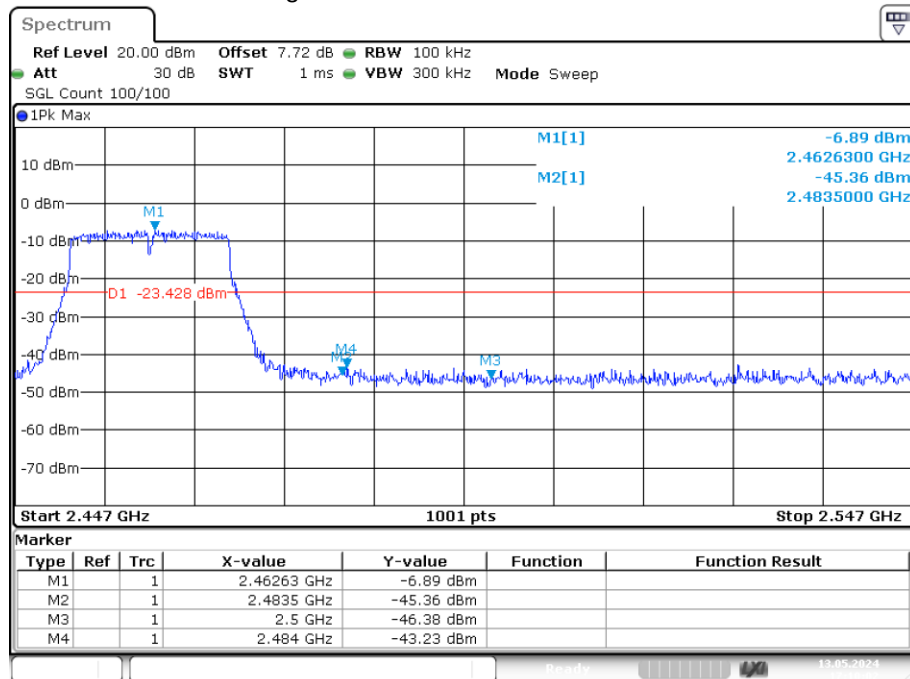


Date: 13.MAY.2024 17:10:02

Band Edge NVNT n40 2422MHz Ant1 Ref

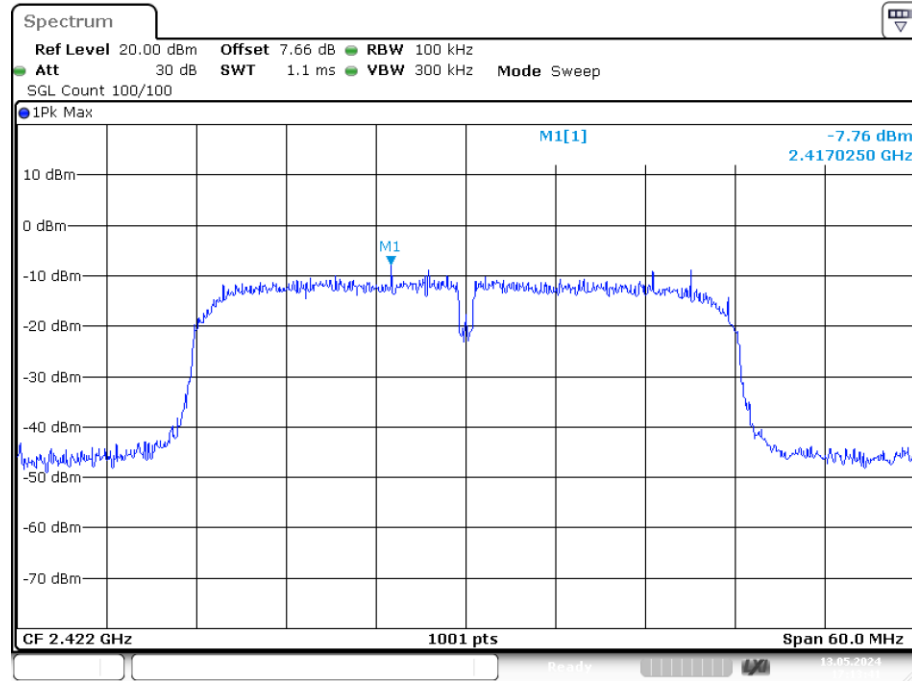


Date: 13.MAY.2024 17:13:42

Band Edge NVNT n40 2422MHz Ant1 Emission

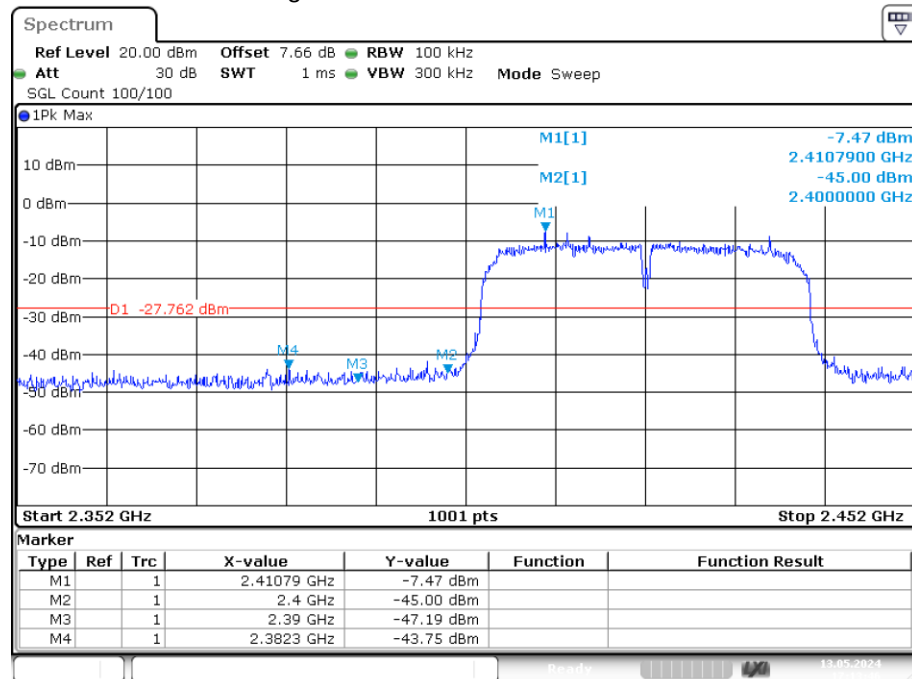


Date: 13.MAY.2024 17:13:46

Band Edge NVNT n40 2452MHz Ant1 Ref

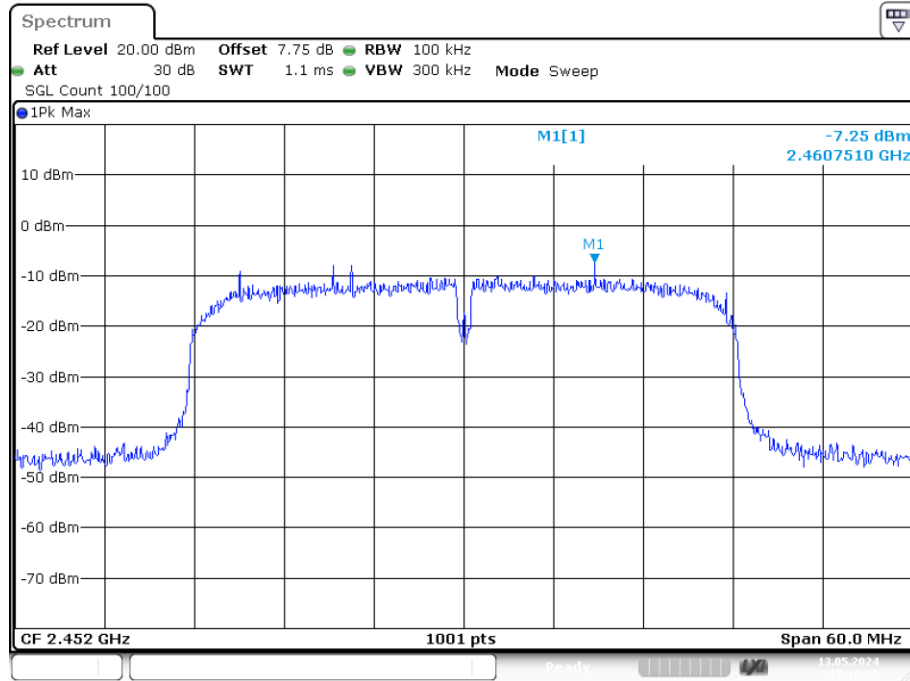

Date: 13.MAY.2024 17:19:10

Band Edge NVNT n40 2452MHz Ant1 Emission

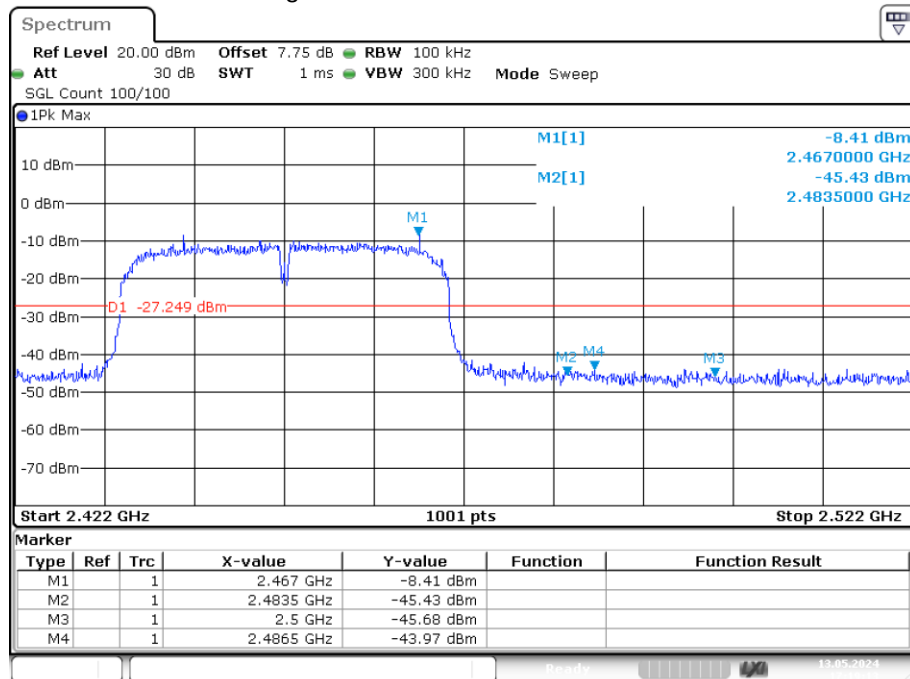

Date: 13.MAY.2024 17:19:13

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction

The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results

The EUT antenna is internal Antenna. It complies with the standard requirement.

-----END OF REPORT-----