



Laird Connectivity is unmatched in offering multiple pre-certified antenna options for each wireless module. Pairing Laird Connectivity's embedded modules with a pre-certified RF antenna saves both certification time and costs. The new, exclusive, flexible antenna solutions from Laird Connectivity, provide unmatched flexibility to help you solve your real-world design challenges.

ELECTRICAL SPECIFICATIONS	
Model Name	Delete
Number of Ports	Merge
Operating Frequency (MHz)	2400–2500
VSWR – Max	≤2.5:1
Peak Gain (dBi)	+2.0 dBi
Nominal Impedance (Ohms)	50
Polarization	Linear vertical


MECHANICAL SPECIFICATIONS	
Dimensions – mm (inches)	105 x 10 (4.13 x 0.39)
Weight – g (lbs.)	13 (0.46)
Antenna Color	Black

ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature – °C (°F)	-20 to +65°C (-4 to +149°F)
UL Rating	UL 94HB
Ingress Protection Rating	IP67

CONFIGURATION

PART NUMBER	DESCRIPTION
001-0001	2.4 GHz dipole antenna for reverse polarity SMA connector
080-0001	U.FL to reverse polarity SMA cable, 105 mm

MECHANICAL DRAWING





TYPICAL ANTENNA REFLECTION PERFORMANCE

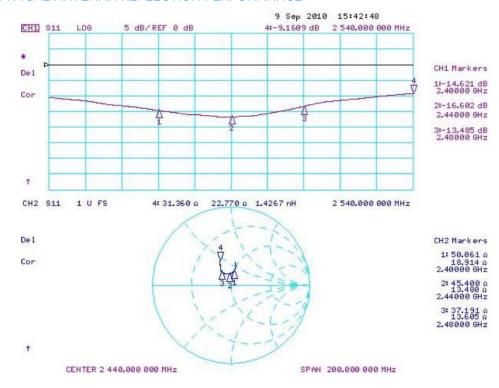


Figure 1: Reflection parameters for extended configuration (S11)


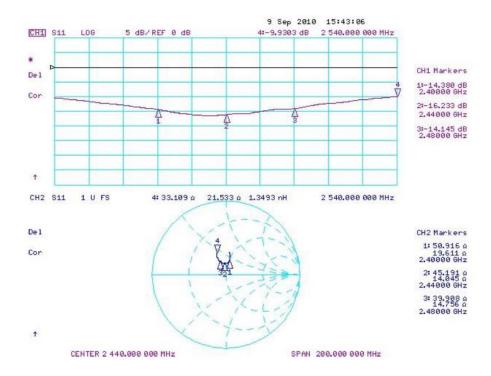


Figure 2: Reflection parameters for folded configuration (S11)




RADIATION PATTERNS

Antenna Straight 2405 MHz



------ Horizontal Polarization Gain (dBi) min: -29.7 max: -11.2 avg: -17.7


Antenna Straight 2440 MHz



____Vertical Polarization Gain (dBi)

------ Horizontal Polarization Gain (dBi) min: -29.8 max: -11.2 avg: -17.5

Antenna Straight 2480 MHz




Vertical Polarization Gain (dBi)

----- Horizontal Polarization Gain (dBi) min: -26.0 max: -11.1 avg: -17.7




RADIATION PATTERNS

Antenna Bent 2405




_____Vertical Polarization Gain (dBi)
------ Horizontal Polarization Gain (dBi) min: -26.2 max: -2.1 avg: -8.6

Antenna Bent 2440 MHz



____Vertical Polarization Gain (dBi)
------ Horizontal Polarization Gain (dBi) min: -22.8 max: +0.6 avg: -7.1

Antenna Bent 2480



____Vertical Polarization Gain (dBi)

----- Horizontal Polarization Gain (dBi) min: -24.7 max: +1.4 avg: -5.7



Laird Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird Connectivity product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials rests with the end user, since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to the fitness, merchantability or suitability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2021 Laird Connectivity All Rights Reserved. Laird Connectivity, the Laird Connectivity logo, and other marks are trademarks or registered trademarks of Laird Connectivity or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property rights.

sales@lairdconnect.com support@lairdconnect.com www.lairdconnect.com