

**Test Plot 1#: PTT\_FM 12.5kHz\_Face Up\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

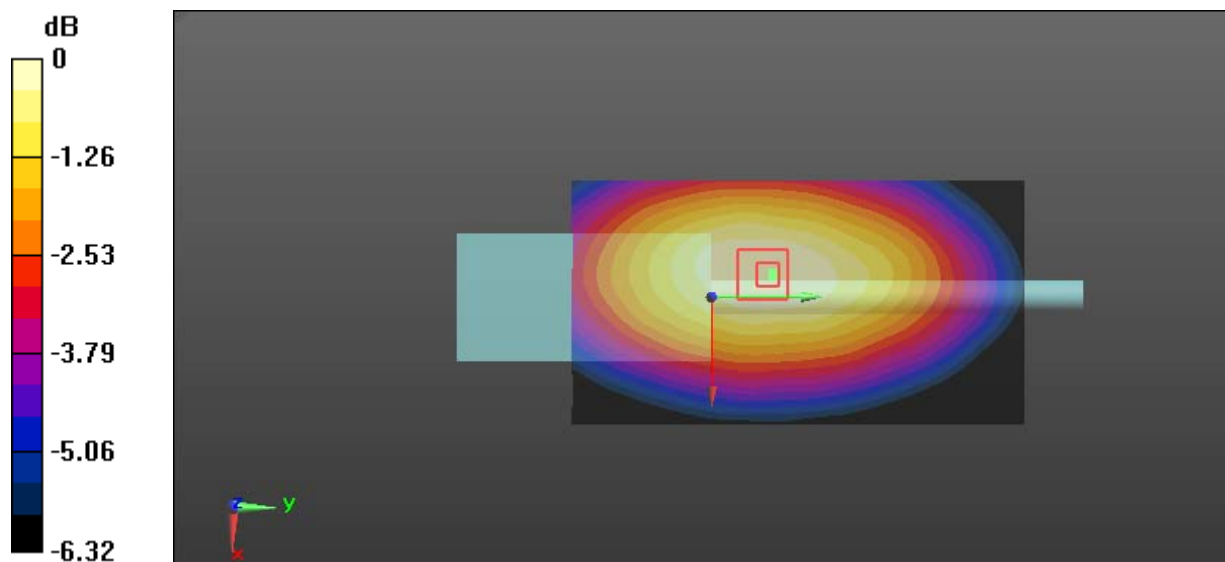
Communication System: FM; Frequency: 435 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 435 \text{ MHz}$ ;  $\sigma = 0.849 \text{ S/m}$ ;  $\epsilon_r = 45.182$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.97, 10.97, 10.97); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $7.89 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $85.93 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$ Peak SAR (extrapolated) =  $8.56 \text{ W/kg}$ **SAR(1 g) =  $6.3 \text{ W/kg}$ ; SAR(10 g) =  $4.87 \text{ W/kg}$** Maximum value of SAR (measured) =  $7.72 \text{ W/kg}$  $0 \text{ dB} = 7.72 \text{ W/kg} = 8.88 \text{ dBW/kg}$

**Test Plot 2#: PTT\_FM 25kHz\_Face Up\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

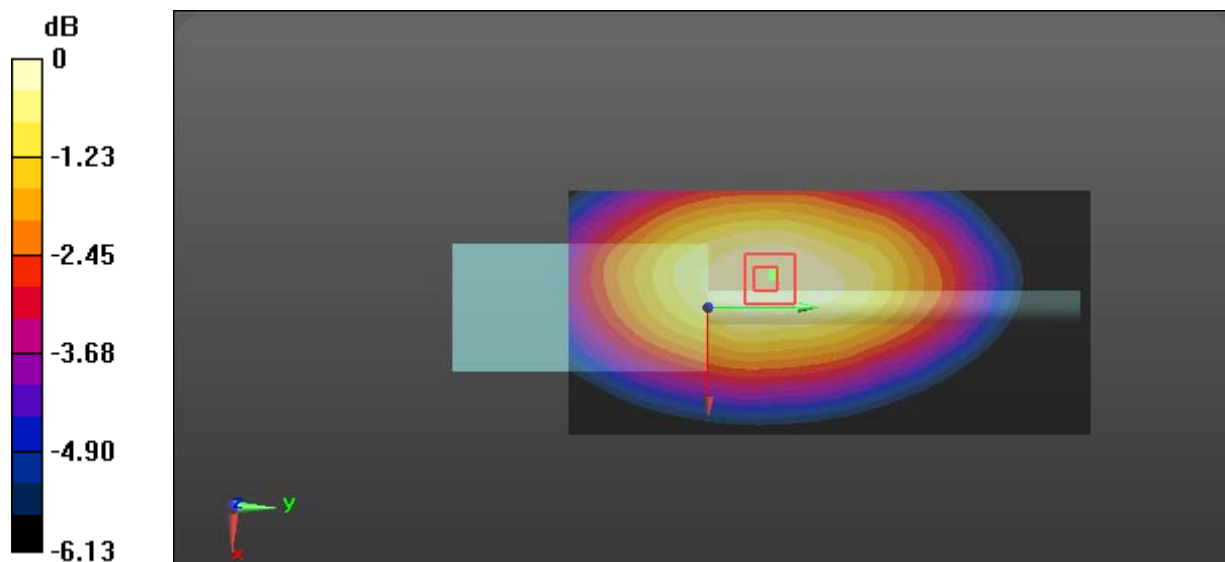
Communication System: FM; Frequency: 435 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 435 \text{ MHz}$ ;  $\sigma = 0.849 \text{ S/m}$ ;  $\epsilon_r = 45.182$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.97, 10.97, 10.97); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $8.23 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $91.19 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$ Peak SAR (extrapolated) =  $9.25 \text{ W/kg}$ **SAR(1 g) =  $6.55 \text{ W/kg}$ ; SAR(10 g) =  $5.06 \text{ W/kg}$** Maximum value of SAR (measured) =  $8.15 \text{ W/kg}$  $0 \text{ dB} = 8.15 \text{ W/kg} = 9.11 \text{ dBW/kg}$

**Test Plot 3#: PTT\_4FSK 12.5kHz\_Face Up\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: 4FSK; Frequency: 435 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 435$  MHz;  $\sigma = 0.849$  S/m;  $\epsilon_r = 45.182$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.97, 10.97, 10.97); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 4.37 W/kg

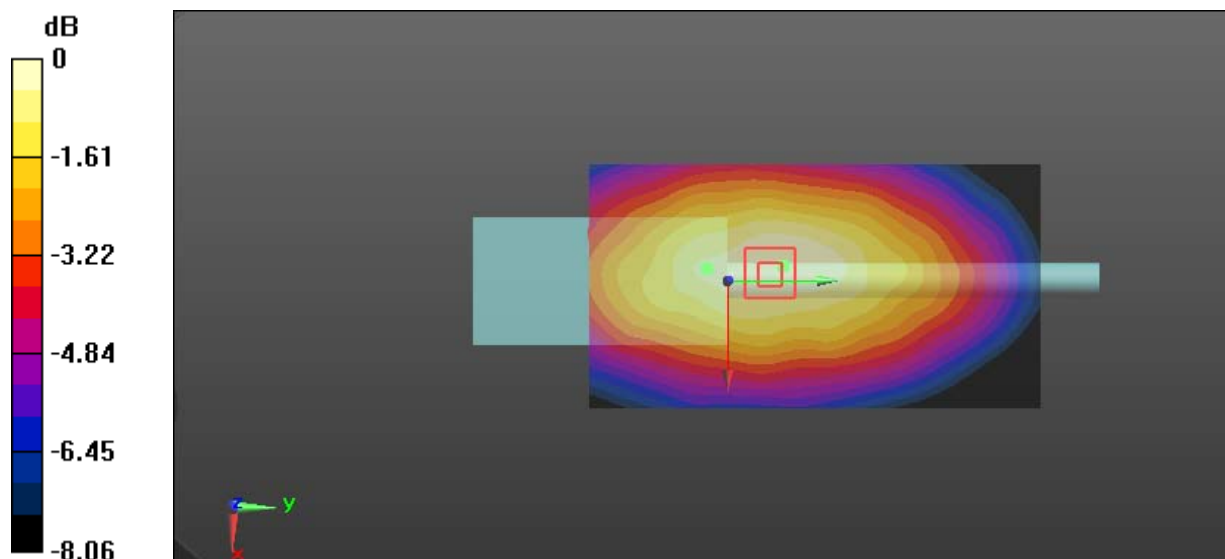
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 63.57 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 5.02 W/kg

**SAR(1 g) = 3.44 W/kg; SAR(10 g) = 2.56 W/kg**

Maximum value of SAR (measured) = 4.39 W/kg



0 dB = 4.39 W/kg = 6.42 dBW/kg

**Test Plot 4#: PTT\_FM 12.5kHz\_Body Back\_400.0125 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: FM; Frequency: 400.012 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 400.012$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 10.1 W/kg

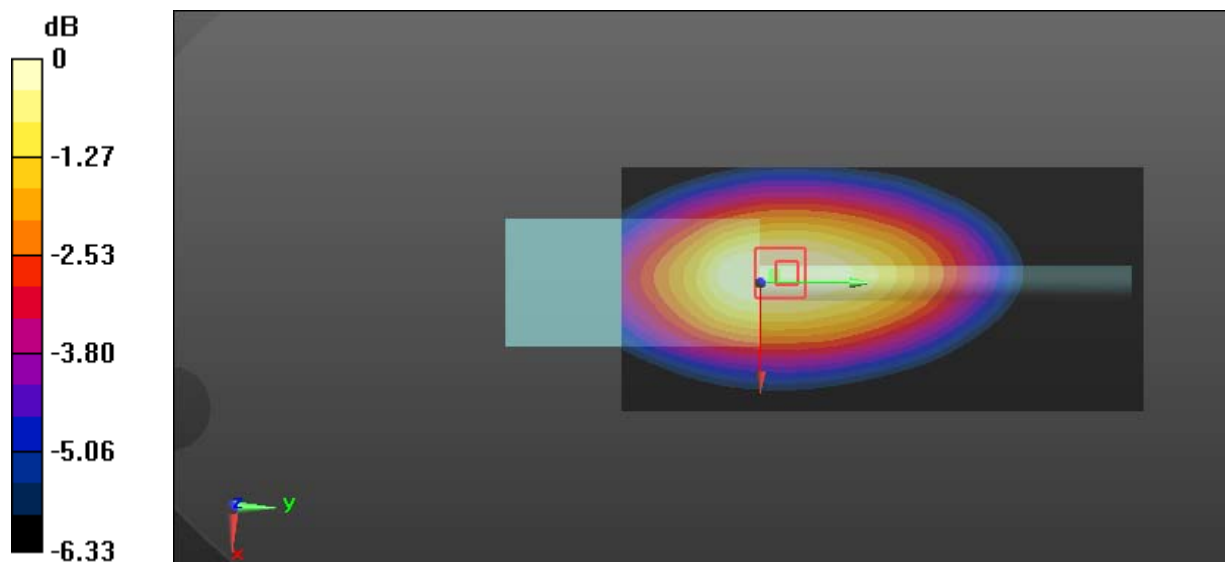
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 101.5 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 11.1 W/kg

**SAR(1 g) = 8.06 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 9.92 W/kg



0 dB = 9.92 W/kg = 9.97 dBW/kg

**Test Plot 5#: PTT\_FM 12.5kHz\_Body Back\_417 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: FM; Frequency: 417 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 417$  MHz;  $\sigma = 0.945$  S/m;  $\epsilon_r = 57.62$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 12.7 W/kg

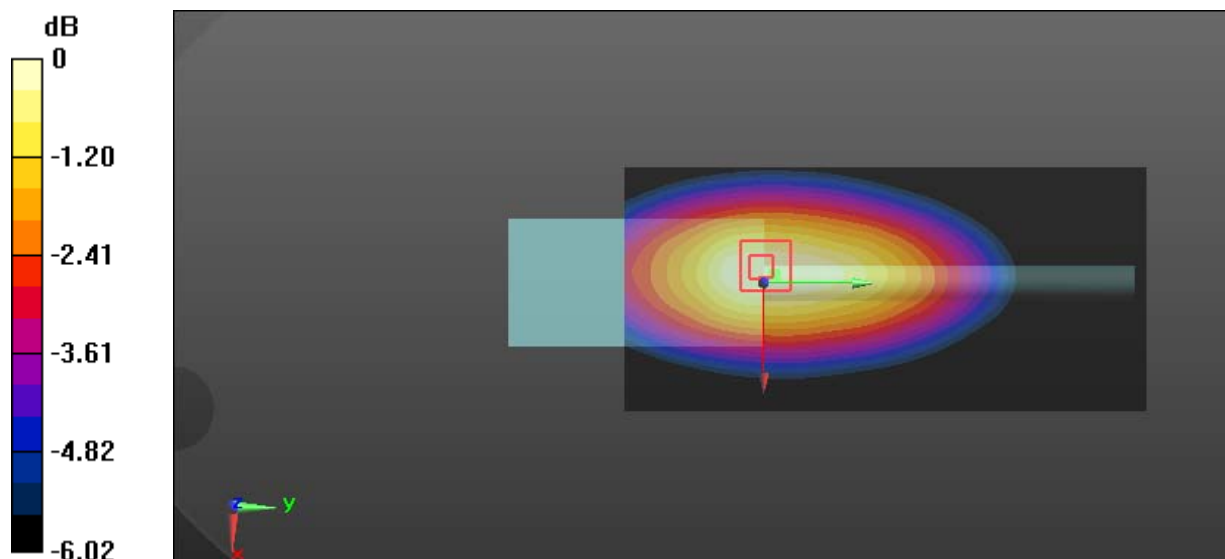
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 113.4 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 14.2 W/kg

**SAR(1 g) = 11.1 W/kg; SAR(10 g) = 8.95 W/kg**

Maximum value of SAR (measured) = 12.8 W/kg



0 dB = 12.8 W/kg = 11.07 dBW/kg

**Test Plot 6#: PTT\_FM 12.5kHz\_Body Back\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

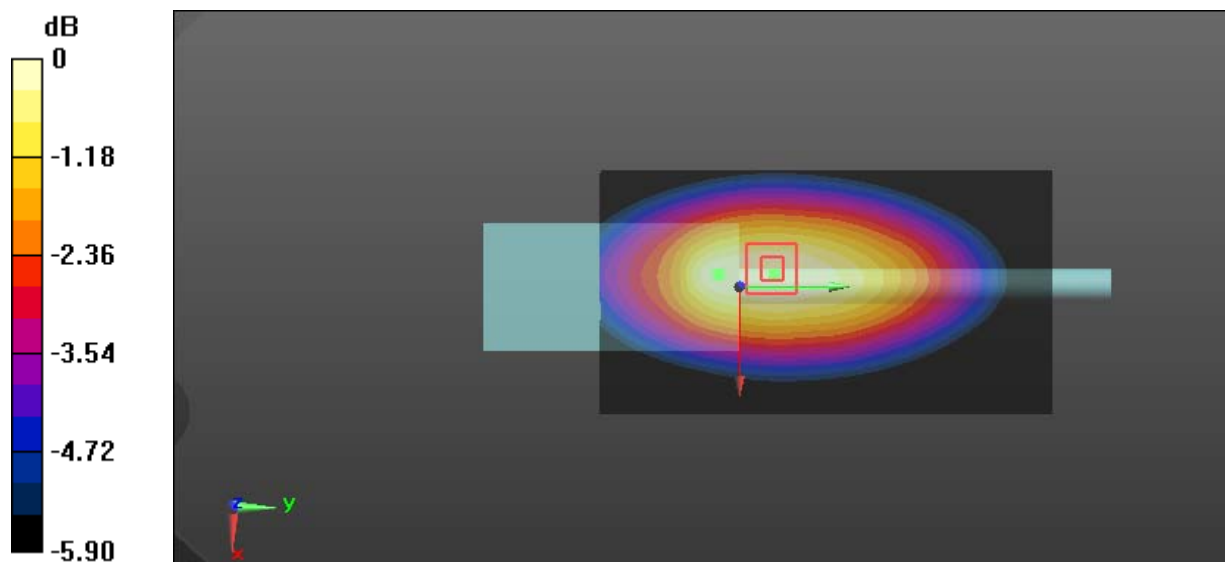
Communication System: FM; Frequency: 435 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 435 \text{ MHz}$ ;  $\sigma = 0.946 \text{ S/m}$ ;  $\epsilon_r = 57.531$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $15.3 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $118.0 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$ Peak SAR (extrapolated) =  $16.4 \text{ W/kg}$ **SAR(1 g) =  $12.6 \text{ W/kg}$ ; SAR(10 g) =  $10.2 \text{ W/kg}$** Maximum value of SAR (measured) =  $14.9 \text{ W/kg}$  $0 \text{ dB} = 14.9 \text{ W/kg} = 11.73 \text{ dBW/kg}$

**Test Plot 7#: PTT\_FM 12.5kHz\_Body Back\_452 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

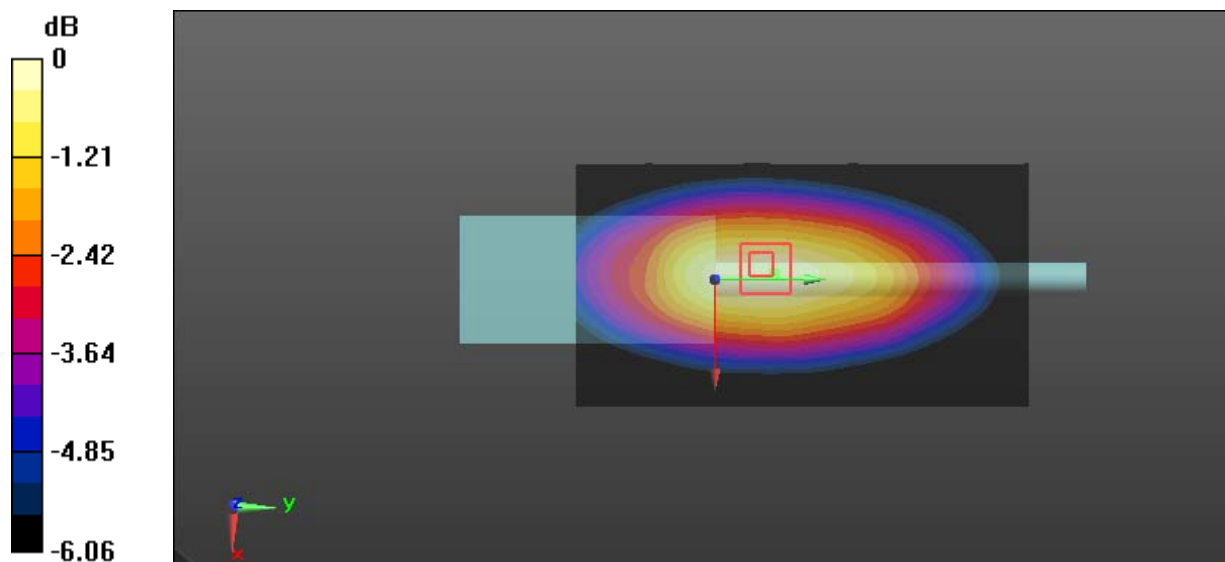
Communication System: FM; Frequency: 452 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 452 \text{ MHz}$ ;  $\sigma = 0.949 \text{ S/m}$ ;  $\epsilon_r = 57.429$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $13.6 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $107.3 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$ Peak SAR (extrapolated) =  $15.7 \text{ W/kg}$ **SAR(1 g) =  $11.1 \text{ W/kg}$ ; SAR(10 g) =  $8.77 \text{ W/kg}$** Maximum value of SAR (measured) =  $13.6 \text{ W/kg}$  $0 \text{ dB} = 13.6 \text{ W/kg} = 11.34 \text{ dBW/kg}$

**Test Plot 8#: PTT\_FM 12.5kHz\_Body Back\_469.9875 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: FM; Frequency: 469.988 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 469.988$  MHz;  $\sigma = 0.954$  S/m;  $\epsilon_r = 57.387$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.2 W/kg

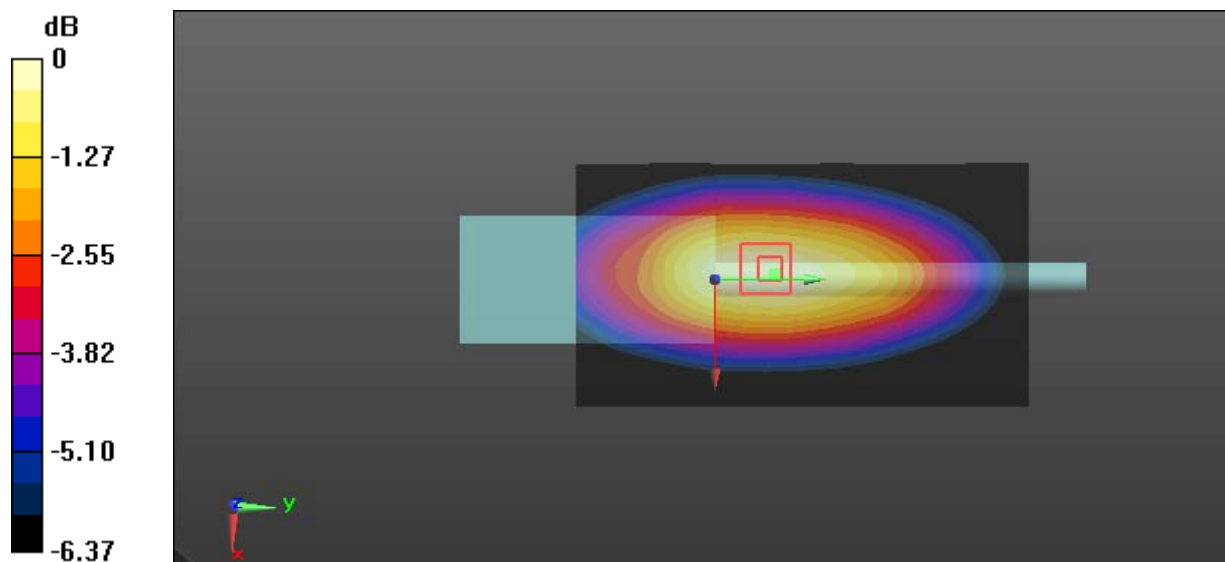
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 105.7 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 15.6 W/kg

**SAR(1 g) = 10.4 W/kg; SAR(10 g) = 7.94 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg



0 dB = 13.2 W/kg = 11.21 dBW/kg

**Test Plot 9#: PTT\_FM 25kHz\_Body Back\_400.0125 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: FM; Frequency: 400.012 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 400.012$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 57.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 9.45 W/kg

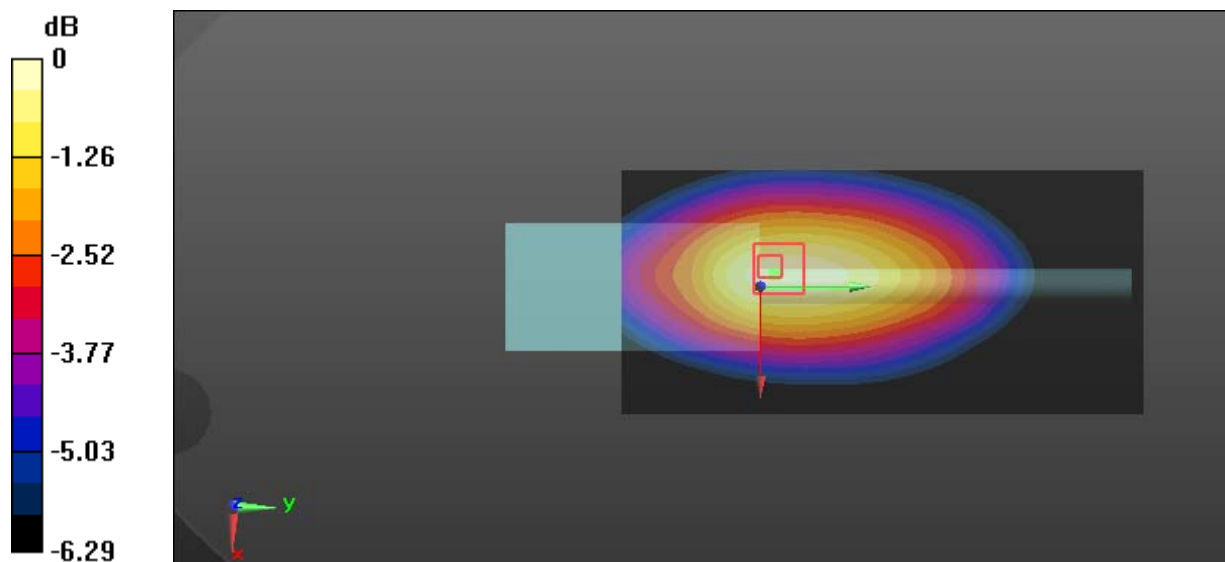
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 92.50 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 10.7 W/kg

**SAR(1 g) = 8.21 W/kg; SAR(10 g) = 6.61 W/kg**

Maximum value of SAR (measured) = 9.74 W/kg



0 dB = 9.74 W/kg = 9.89 dBW/kg

**Test Plot 10#: PTT\_FM 25kHz\_Body Back\_417 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

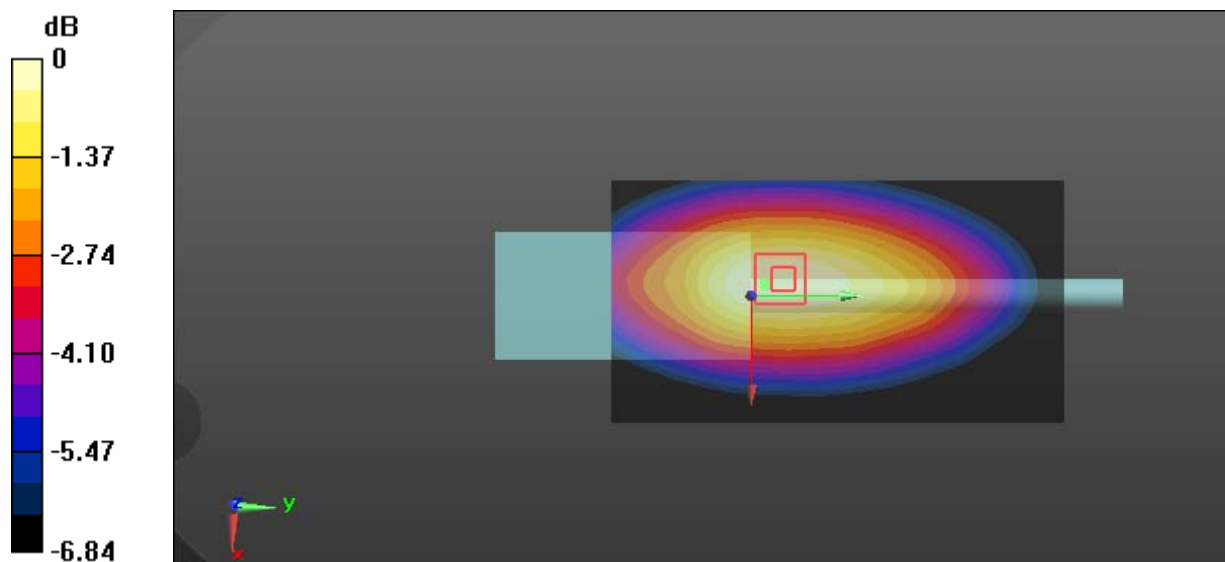
Communication System: FM; Frequency: 417 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 417 \text{ MHz}$ ;  $\sigma = 0.945 \text{ S/m}$ ;  $\epsilon_r = 57.62$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $12.9 \text{ W/kg}$ **Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $105.2 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$ Peak SAR (extrapolated) =  $14.3 \text{ W/kg}$ **SAR(1 g) =  $10.5 \text{ W/kg}$ ; SAR(10 g) =  $8.41 \text{ W/kg}$** Maximum value of SAR (measured) =  $12.7 \text{ W/kg}$  $0 \text{ dB} = 12.7 \text{ W/kg} = 11.04 \text{ dBW/kg}$

**Test Plot 11#: PTT\_FM 25kHz\_Body Back\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

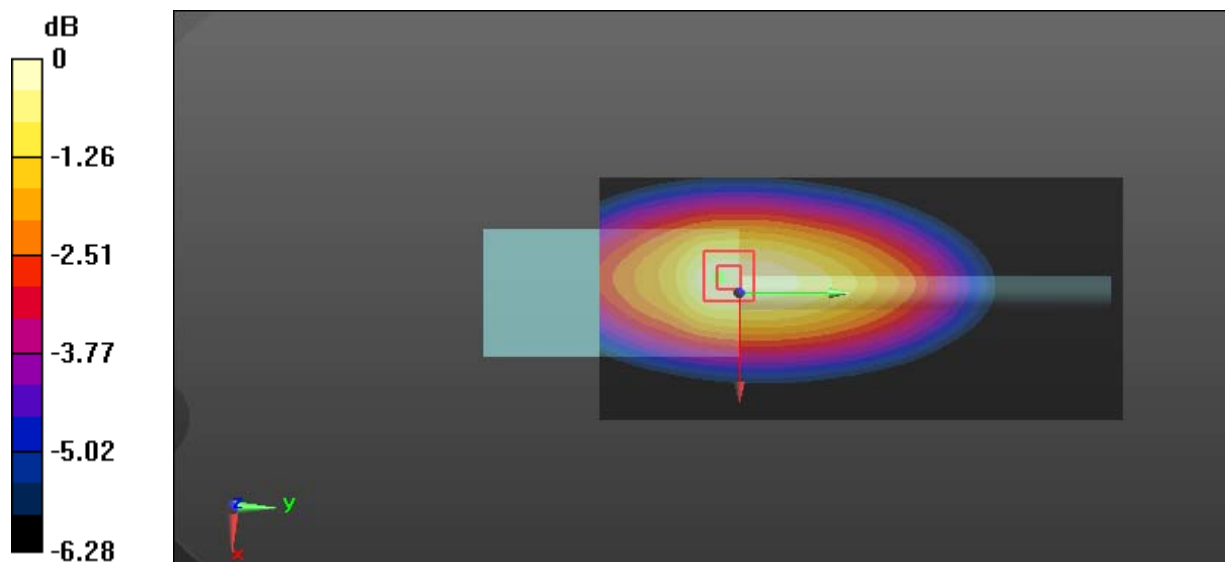
Communication System: FM; Frequency: 435 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 435 \text{ MHz}$ ;  $\sigma = 0.946 \text{ S/m}$ ;  $\epsilon_r = 57.531$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $13.2 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $114.5 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$ Peak SAR (extrapolated) =  $14.9 \text{ W/kg}$ **SAR(1 g) =  $11.1 \text{ W/kg}$ ; SAR(10 g) =  $8.81 \text{ W/kg}$** Maximum value of SAR (measured) =  $13.4 \text{ W/kg}$ 0 dB =  $13.4 \text{ W/kg}$  =  $11.27 \text{ dBW/kg}$

**Test Plot 12#: PTT\_FM 25kHz\_Body Back\_452 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

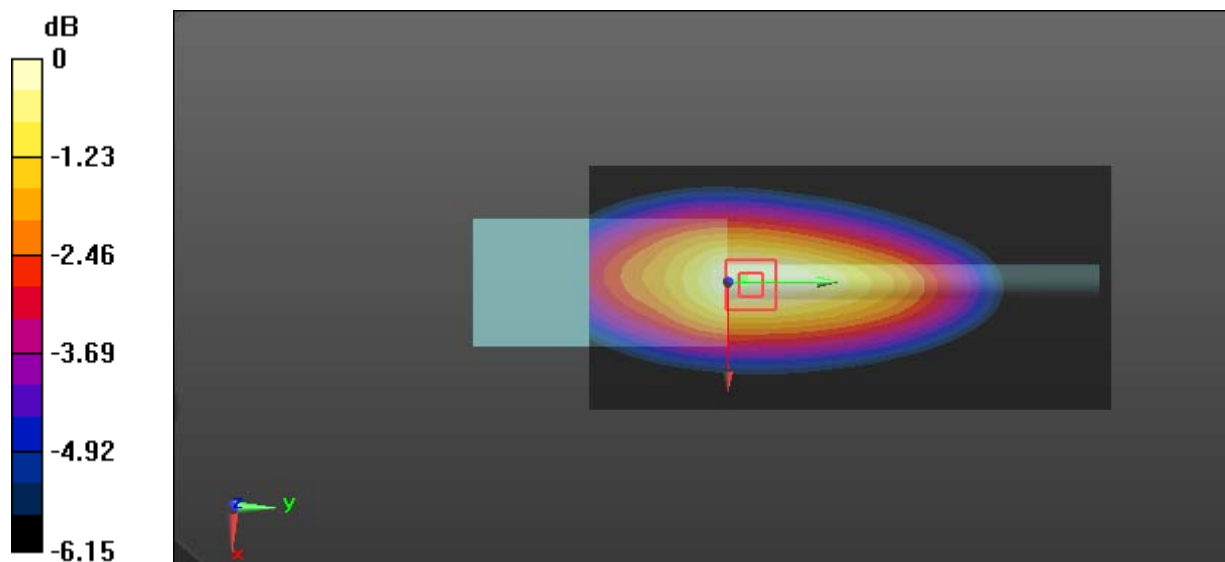
Communication System: FM; Frequency: 452 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 452 \text{ MHz}$ ;  $\sigma = 0.949 \text{ S/m}$ ;  $\epsilon_r = 57.429$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $12.2 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $109.2 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$ Peak SAR (extrapolated) =  $13.7 \text{ W/kg}$ **SAR(1 g) =  $9.74 \text{ W/kg}$ ; SAR(10 g) =  $7.64 \text{ W/kg}$** Maximum value of SAR (measured) =  $12.0 \text{ W/kg}$  $0 \text{ dB} = 12.0 \text{ W/kg} = 10.79 \text{ dBW/kg}$

**Test Plot 13#: PTT\_FM 25kHz\_Body Back\_469.9875 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

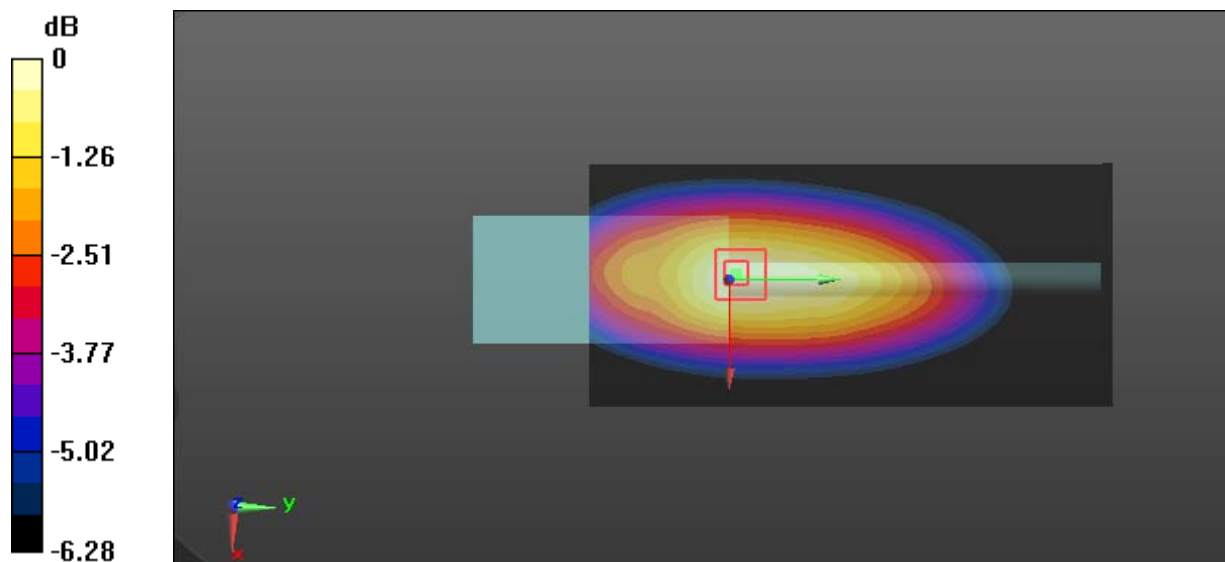
Communication System: FM; Frequency: 469.988 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 469.988 \text{ MHz}$ ;  $\sigma = 0.954 \text{ S/m}$ ;  $\epsilon_r = 57.387$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x151x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $10.2 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $99.03 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$ Peak SAR (extrapolated) =  $11.2 \text{ W/kg}$ **SAR(1 g) =  $7.91 \text{ W/kg}$ ; SAR(10 g) =  $6.06 \text{ W/kg}$** Maximum value of SAR (measured) =  $9.88 \text{ W/kg}$  $0 \text{ dB} = 9.88 \text{ W/kg} = 9.95 \text{ dBW/kg}$

**Test Plot 14#: PTT\_4FSK 12.5kHz\_Body Back\_435 MHz****DUT: Digital Poratable Radio; Type: PD402i U(1); Serial: 17122000520**

Communication System: 4FSK; Frequency: 435 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 435$  MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 57.531$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2017/9/15
- Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 6.42 W/kg

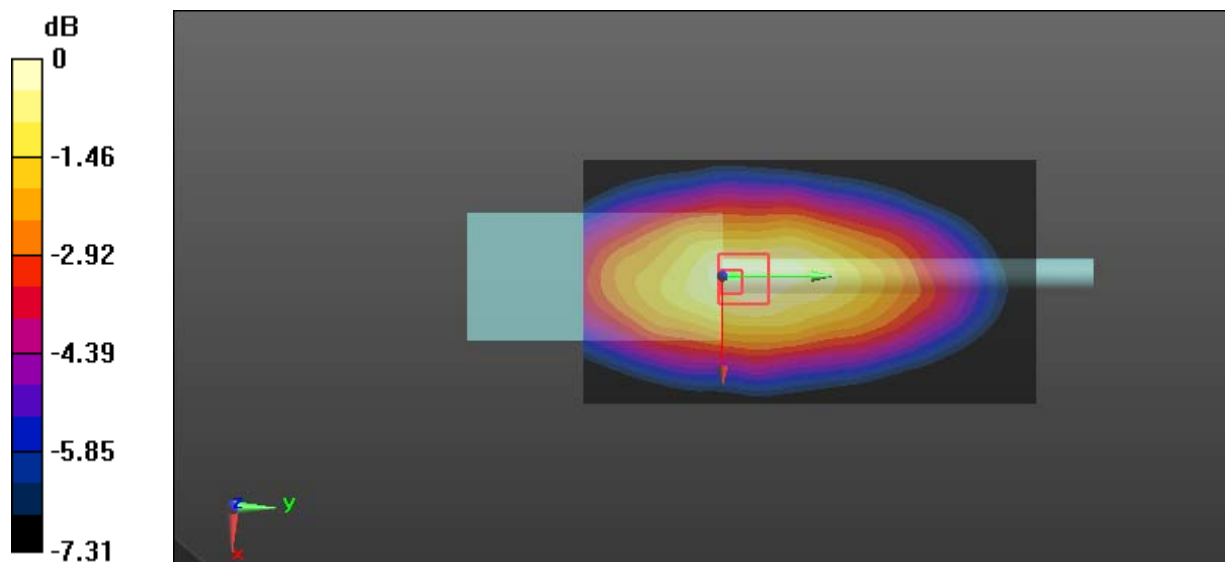
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 75.27 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 7.69 W/kg

**SAR(1 g) = 5.05 W/kg; SAR(10 g) = 3.73 W/kg**

Maximum value of SAR (measured) = 6.67 W/kg



0 dB = 6.67 W/kg = 8.24 dBW/kg