

EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874.000	56.41	0.14	56.55	74	-17.45	peak
4874.000	45.95	0.14	46.09	54	-7.91	AVG
7311.000	51.02	2.36	53.38	74	-20.62	peak
7311.000	40.29	2.36	42.65	54	-11.35	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.33	0.14	55.47	74	-18.53	peak
4874.000	46.22	0.14	46.36	54	-7.64	AVG
7311.000	50.26	2.36	52.62	74	-21.38	peak
7311.000	40.38	2.36	42.74	54	-11.26	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4924.000	54.39	0.22	54.61	74	-19.39	peak
4924.000	43.26	0.22	43.48	54	-10.52	AVG
7386.000	49.22	2.64	51.86	74	-22.14	peak
7386.000	40.07	2.64	42.71	54	-11.29	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

IMILAB EC3 Lite Outdoor EUT **Model Name** CMSXJ40A Camera **Temperature** 22°C **Relative Humidity** 54% 960hPa **Test Voltage** Normal Voltage Pressure 802.11b with date rate 1 **Test Mode** Antenna Vertical 2462MHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.35	0.22	56.57	74	-17.43	peak
4924.000	45.15	0.22	45.37	54	-8.63	AVG
7386.000	51.07	2.64	53.71	74	-20.29	peak
7386.000	42.38	2.64	45.02	54	-8.98	AVG
emark:						
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Test result for band edge emission at restricted bands

EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Frequency enter Freq 2.399500000 GHz Avg Type: Log-Pw Avg|Hold: 100/100 PNO: Fast +++ Trig: Free Run IFGain:Low #Atten: 30 dB Auto Tune Ref 126.99 dBµV/m Center Freq \Diamond^1 2.399500000 GHz Start Freq 2.370000000 GHz TIT PHYME a the second Stop Freq 2.429000000 GH Stop 2.42900 GHz Sweep 1.066 ms (1000 pts) Start 2.37000 GHz #Res BW 1.0 MHz CF Step 5.900000 MHz #VBW 3.0 MHz ۹uto Mar 2.413 29 GHz 99.243 dBu 2.390 00 GHz 50.246 dBu Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

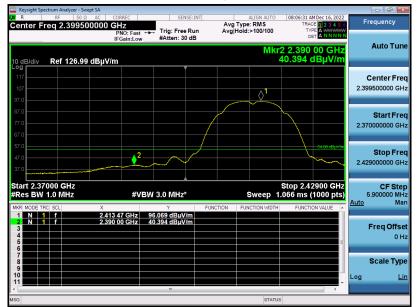

RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Frequency enter Freq 2.472500000 GHz PN0: Fast ++ IFGain:Low #Atten: 30 dB Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq 2.472500000 GHz Start Freq 2.445000000 GHz **M** 1 Jule Stop Freq 2.50000000 GH Start 2.44500 GHz #Res BW 1.0 MHz Stop 2.50000 GHz Sweep 1.066 ms (1000 pts) CF Step 5.500000 MHz #VBW 3.0 MHz ۹uto Mar 2.460 58 GHz 103.276 dBuy 2.483 50 GHz 54.104 dBuy Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement



RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Frequency enter Freq 2.472500000 GHz PN0: Fast ++ IFGain:Low #Atten: 30 dB Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq 2.472500000 GHz Start Freq 2.445000000 GHz Thur we have Stop Freq 2.50000000 GH Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.44500 GHz #Res BW 1.0 MHz CF Step 5.500000 MHz #VBW 3.0 MHz Sweep ۹uto Mar 2.460 64 GHz 99.911 dBµV 2.483 50 GHz 50.997 dBuV Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

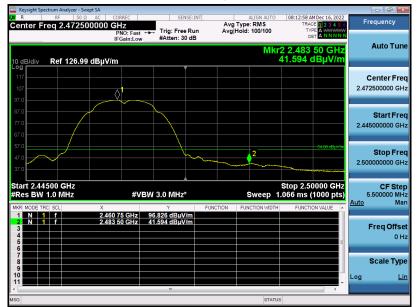


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal



Test Graph for Average Measurement

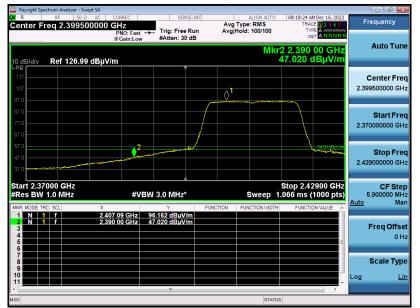


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical



Test Graph for Average Measurement

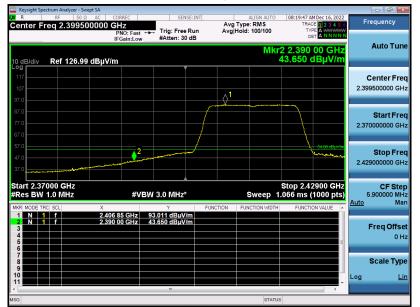

RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Frequency enter Freq 2.472500000 GHz PN0: Fast ++ IFGain:Low #Atten: 30 dB Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq \Diamond^1 2.472500000 GHz Start Freq . t. t. 2.445000000 GHz Stop Freq 2.50000000 GH Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.44500 GHz #Res BW 1.0 MHz CF Step 5.500000 MHz #VBW 3.0 MHz Sweep ۹uto Mar 2.465 76 GHz 105.237 dBuy 2.483 50 GHz 66.905 dBuy Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

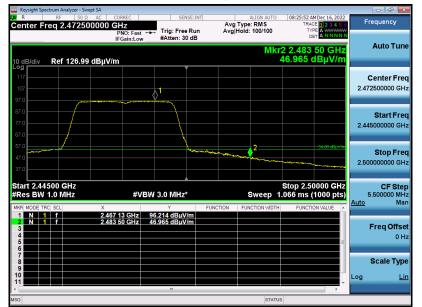

RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Frequency enter Freq 2.472500000 GHz PN0: Fast ↔ IFGain:Low #Atten: 30 dB Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq ∂^1 2.472500000 GHz Start Freq 2.445000000 GHz Mash M. John www. Stop Freq 2.50000000 GH Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.44500 GHz #Res BW 1.0 MHz CF Step 5.500000 MHz #VBW 3.0 MHz Sweep ۹uto Mar Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

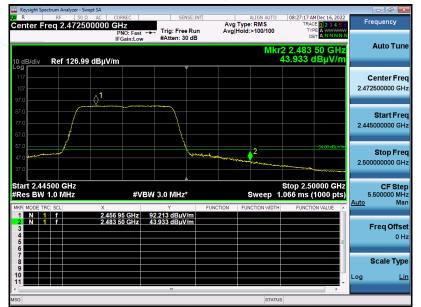


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal



Test Graph for Average Measurement

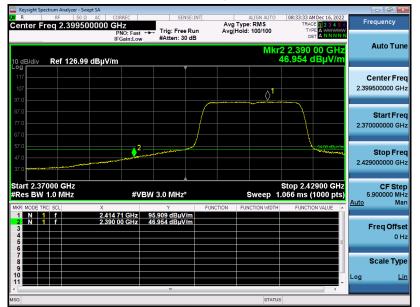


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical




Test Graph for Average Measurement

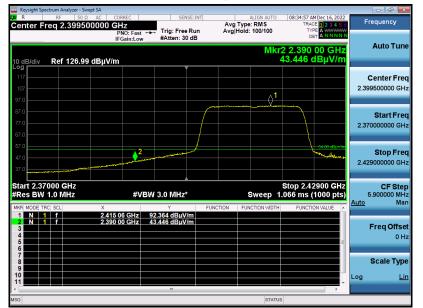


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

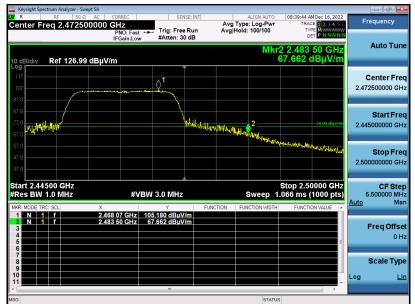


Test Graph for Average Measurement

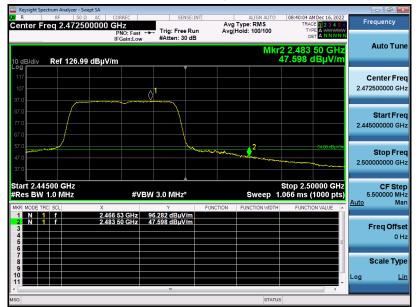


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

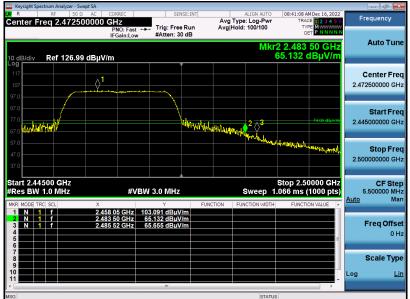


Test Graph for Average Measurement

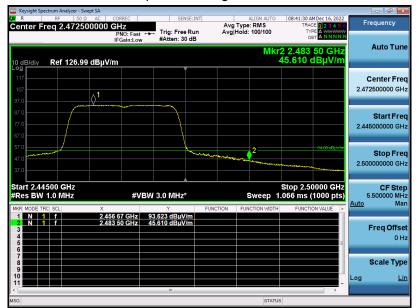


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

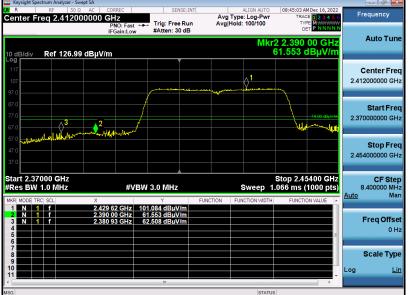

Test Graph for Average Measurement

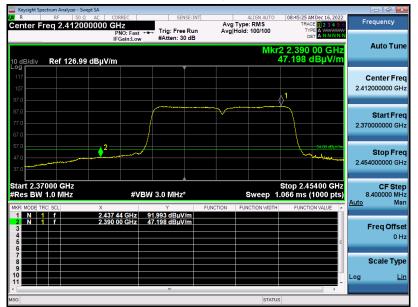


RESULT: PASS



EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical



Test Graph for Average Measurement

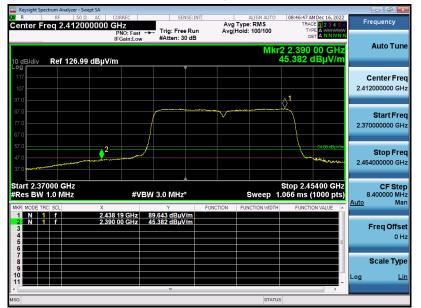

RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Frequency enter Freq 2.460000000 GHz PN0: Fast ++ IFGain:Low #Atten: 30 dB Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq 2.46000000 GHz Start Freq 2.420000000 GHz And believer and the A . Link Stop Freq 2.50000000 GH Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.42000 GHz #Res BW 1.0 MHz CF Step 8.000000 MHz #VBW 3.0 MHz Sweep ۹uto Mar Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

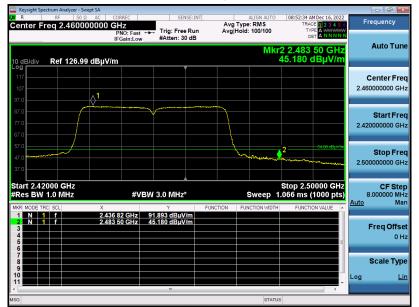

RESULT: PASS




EUT	IMILAB EC3 Lite Outdoor Camera	Model Name	CMSXJ40A
Temperature	22°C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Frequency Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Ref 126.99 dBµV/m Center Freq 2.460000000 GHz Start Freq 2.420000000 GHz un Mundallan Stop Freq 2.50000000 GH Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.42000 GHz Res BW 1.0 MHz CF Step 8.000000 MHz #VBW 3.0 MHz Sweep ۹uto Mar Freq Offse 0 Hz Scale Type og Lir

Test Graph for Peak Measurement

Test Graph for Average Measurement

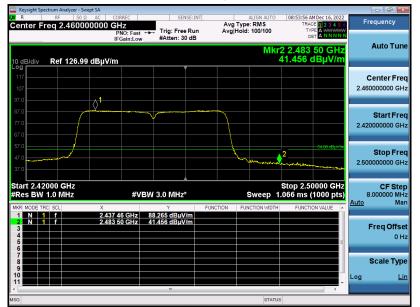

RESULT: PASS



12. LINE CONDUCTED EMISSION TEST

12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frequency	Maximum RF Line Voltage		
Frequency	Q.P (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

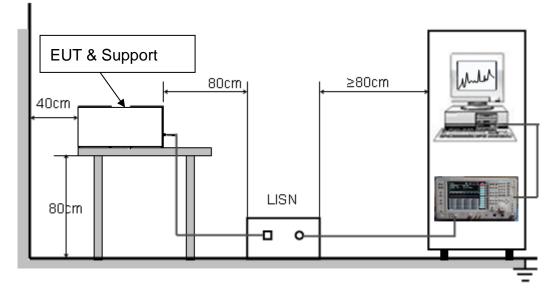



12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

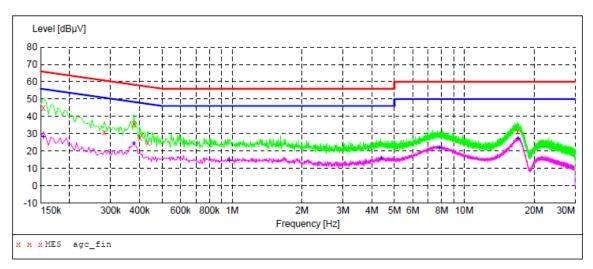

Line Conducted Emission Test Line 1-L- The first sample

MEASUREMENT RESULT: "agc_fin"

2022/12/20 11:37


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.282000 0.378000 0.402000 0.434000 16.990000	44.80 31.00 35.80 27.50 24.70 31.20	6.9 6.1 5.8 5.7 5.6 8.5	66 61 58 58 57 60	21.0 29.8 22.5 30.3 32.5 28.8	QP QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc_fin2"

2022/12/20 11	:37					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.378000 0.974000 4.390000 7.814000 17.034000	27.90 24.30 14.50 15.60 21.90 27.00	6.9 5.8 5.4 6.5 6.8 8.5	56 48 46 50 50	27.9 24.0 31.5 30.4 28.1 23.0	AV AV AV	L1 L1 L1 L1 L1 L1





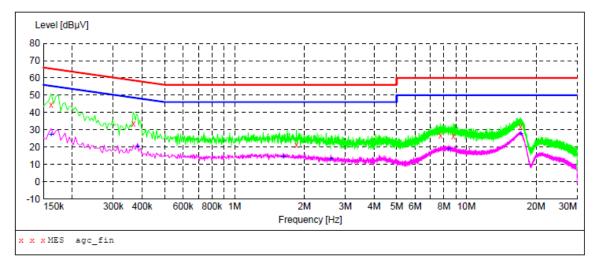

MEASUREMENT RESULT: "agc_fin"


2022/12/20 11:30

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.162000	44.30	6.8	65	21.1	QP	N
0.366000	33.30	5.8	59	25.3	QP	N
1.850000	21.00	6.4	56	35.0	QP	N
7.722000	26.80	6.8	60	33.2	QP	N
8.770000	26.20	6.8	60	33.8	QP	N
17.082000	31.70	8.5	60	28.3	QP	N


MEASUREMENT RESULT: "agc_fin2"

2022/12/20 11	L:30					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.162000	27.40	6.8	55	28.0	AV	N
0.382000	20.10	5.7	48	28.1	AV	N
1.622000	14.60	6.2	46	31.4	AV	N
2.602000	12.80	6.5	46	33.2	AV	N
8.374000	18.80	6.8	50	31.2	AV	N
17.174000	27.70	8.5	50	22.3	AV	N

RESULT: PASS





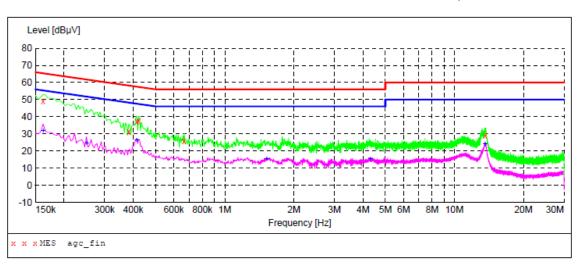

Line Conducted Emission Test Line 1-L- The second sample

MEASUREMENT RESULT: "agc_fin"

2022/12/20 13:47


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.162000 0.382000 0.414000 0.422000	49.00 31.20 37.30 37.70	6.8 5.7 5.6 5.6	65 58 58 57	16.4 27.0 20.3 19.7	QP QP	L1 L1 L1 L1
0.666000 13.606000	25.90 29.20	5.4 8.0	56 60	30.1 30.8	QP QP	L1 L1

MEASUREMENT RESULT: "agc fin2"

2022/12/20 1	3:47					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.162000 0.250000 0.414000 1.522000 4.306000	31.70 24.60 26.20 15.20 15.10	6.8 6.3 5.6 6.1 6.5	55 52 48 46 46	23.7 27.2 21.4 30.8 30.9	AV	L1 L1 L1 L1 L1
13.606000	24.00	8.0	50	26.0	AV	ь1



Line Conducted Emission Test Line 2-N

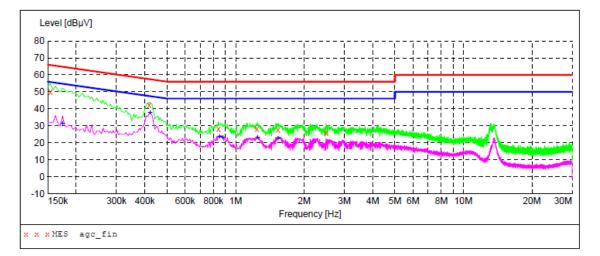

MEASUREMENT RESULT: "agc fin"

2022/12/20 13:40

Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.154000	50.10	6.9	66	15.7	QP	N
0.418000	42.20	5.6	58	15.3	QP	N
0.842000	28.20	5.4	56	27.8	QP	N
1.242000	27.90	5.8	56	28.1	QP	N
1.538000	27.80	6.1	56	28.2	QP	N
2.494000	25.90	6.5	56	30.1	QP	N

MEASUREMENT RESULT: "agc fin2"

2022/12/20	13:40					
Frequency MH:	-	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.174000	31.10	6.7	55	23.7	AV	N
0.422000	37.60	5.6	47	9.8	AV	N
0.850000	23.60	5.4	46	22.4	AV	N
0.878000	23.20	5.4	46	22.8	AV	N
1.246000	23.00	5.8	46	23.0	AV	N
1.534000	0 22.70	6.1	46	23.3	AV	Ν

RESULT: PASS



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC05877221202AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC05877221202AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.