## **Antenna specification**

# **Antenna Sample Confirmation From**

Name of supplier	ShenZhen Aihui Technology Co., Ltd				
Customer name	Yun gu				
Sample name		CJ01133			
model					
Sample size	Wire length: 50mm 3rd generation terminals				
	Performance	Visual	Structure	In the	Test
Inspection	test	inspection	otractare	news	results
item	test	inspection	- Suracture	news	results
	test	inspection		news	results
item	test	Project Audit		Business confirm ation	results

Customer	
feedback	
Customer	
signature/seal	data:

# **Antenna Test Report**

Test Unit: Shenzhen Aihui Technology Co., Ltd.			
Materials	FPC		
Antenna form	PIFA	Polarization mode	Linear
Application	Wifi/BT		

scenario			
Working band	2400Mhz-2500Mhz 5100Mhz-5850Mhz	VSWR	≤2
Power	Max: 2W	Impedance	50Ω
dBi	≥		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		

#### **Antenna Description::**

- 1. Grounding processing and picture description: no
- 2. Need to change the motherboard to match: no
  - Test voltage: 3.6V, check the antenna contact is good before testing.
  - The RF cable of the integrated tester is kept in a natural state and can not be curled.

Specification:test the specified power level, all indicators must conform to the specifications.

- 1. Project Image
- 2. Test Fixture
- 3. Antenna matching circuit
- 4.S11 test
- 5. Antenna passive efficiency and gain
- 6. Darkroom test equipment and data
- 7. Schematic diagram of antenna assembly
- 8. Antenna environment handling
- 9. Antenna mass production index
- 10.Structural drawing


## 1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

#### 2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole), and the other end is connected to the SMA joint. The diagram is as follows:

## 3. Antenna matching circuit

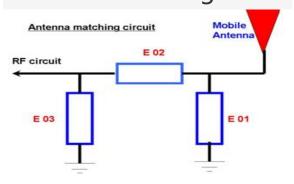


#### **Modify**

E01	E02	E03
No	No	No


Note: The match is unmodified.


#### 4.S11 test


4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

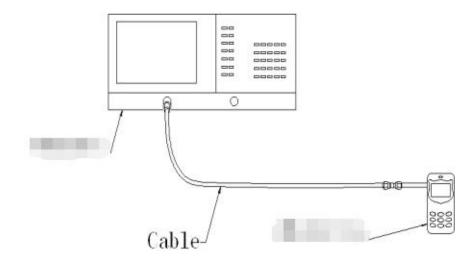

#### 5.SWR

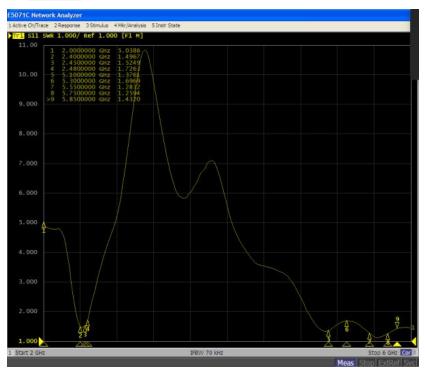

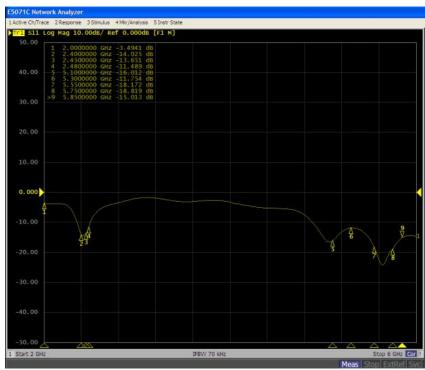

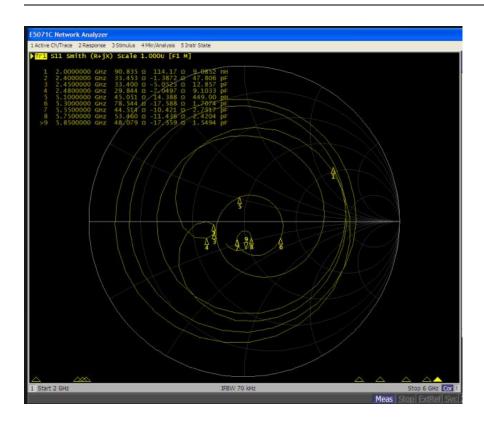

## 6.Test Equipment

Test system: shielded darkroom

The temperature was 22  $^{\circ}$  C  $\pm$  3  $^{\circ}$  C and the humidity was 50%  $\pm$  15%

Test equipment: when testing passive data, use the Network analyzer AGILENTE5071C to test active data, use the omnibus CMW500











nce and Shenzhen

#### 7. Active antenna test data


Test data WIFI 2400-2500Mhz		
2400	55.45	1.56
2410	56.32	1.59
2420	57.22	1.44
2430	54.21	1.25
2440	54.26	1.30
2450	51.55	1.44
2460	54.30	1.06
2470	56.30	1.11
2480	54.15	1.23
2490	55.45	1.56
2500	56.32	1.59

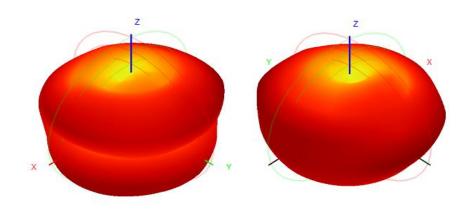

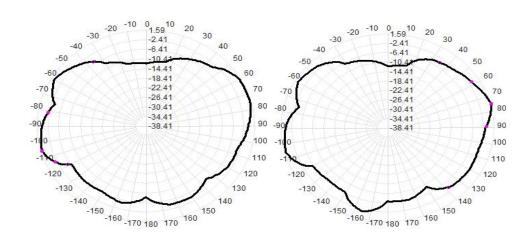

Test data:			
WIFI 5.8G			
Freq(MHz)	Efficiency (%)	Gain (dBi)	
5000	57.55	1.40	
5100	58.65	1.55	
5200	59.14	1.68	

5300	57.25	1.54
5400	55.25	1.28
5500	56.25	1.47
5600	54.15	1.32
5700	57.25	1.47
5800	59.63	1.58
5850	54.12	1.60

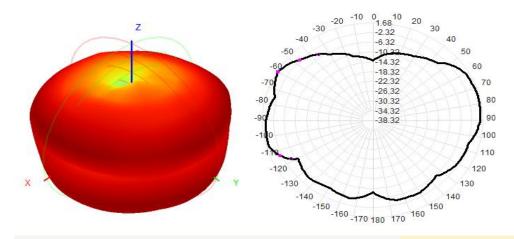

8. Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

# Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5
5100 MHZ -5850MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

# 9.Structural drawings

